MAP NO.	ASSESSMENT REPORT	X	DOCUMENT NO.:	092649
	PROSPECTUS		MINING DISTRICT:	WATSON LAKE
	CONFIDENTIAL	X	TYPE OF WORK:	GEOPHYSICAl, RECONNAISSANCE
105 F 15, 16	OPEN FILE			GEOLOGICAL and GEOCHEMICAL

REPORT FILED UNDER: Welcome North Mines Ltd.

DATE PERFORMED: April 23-27, July 7, 1988 DATE FILED: December 16, 1988

LOCATION: LAT.: 61°51'N AREA: Ketza River

LONG.: 132°27'W VALUE $: 6000.00

CLAIM NAME & NO.: WLN 16-75 YB10624-YB10683

WORK DONE BY: R.G. Potter

WORK DONE FOR: Welcome North Mines Ltd.

DATE TO GOOD STANDING		REMARKS:
		#92 ANGIE From helicopter borne magnetic, electro-
		magnetic and VLF-EM surveys, a magnetic anomaly parallels the
		Tintina Fault, likely a structure with associated mafic volcanic
		rocks. Follow-up reconnaissance geology and geochemistry showed
		no anomalous gold, silver, nor arsenic in soil, silt and rock.

092649

EXPLORATION REPORT

ON THE

WLN CLAIMS

N.T.S. 105F/15 & 16

LATITUDE: 61°51'N
LONGITUDE: 132°27'W

WLN 16-75

WATSON LAKE MINING DISTRICT

FOR

WELCOME NORTH MINES LTD.
15th FL., 675 W. HASTINGS STREET
VANCOUVER, B.C.
CANADA
V6B 1N2

RECEIVED
16 DEC 1988
MINING RECORDER
WATSON LAKE, Y.T.
LA. & N.D.

BY

R.G. Potter, P.Eng.

NOVEMBER, 1988

(WORK DONE DURING APRIL 23 to 27, AND JULY 7, 1988)

092649

This report has been examined by the Geological Evaluation Unit under Section 53 (4) Yukon Quartz Mining Act and is allowed as representation work in the amount of $ 6 000.00.

D L Emond

for Regional Manager, Exploration and Geological Services for Commissioner of Yukon Territory.

TABLE OF CONTENTS

		PAGE
I	SUMMARY AND RECOMMENDATIONS	1
II	INTRODUCTION	4
III	PROPERTY, ACCESS AND LOCATION	4
IV	HISTORY	5
V	GEOLOGICAL SETTING	6
VI	1988 PROGRAM	8
VII	PROPERTY GEOLOGY	8
VIII	GEOCHEMISTRY	9
IX	GEOPHYSICS	9

APPENDICES

I	ANALYTICAL PROCEDURES
II	ANALYTICAL PROCEDURES
III	SUMMARY OF EXPENDITURES
IV	ENGINEER'S CERTIFICATE
V	REFERENCES
VI	PERSONNEL

ILLUSTRATIONS

FIGURES

1	LOCATION AND CLAIMS	2
2	REGIONAL GEOLOGY	3
3	COMPILATION MAP	In Pocket
4	TOTAL FIELD MAGNETIC CONTOURS	10

1. SUMMARY AND RECOMMENDATIONS

The WLN claims lie along the Tintina Trench 35 kilometers southeast of Grew Creek. The area is prospective for Tertiary-age felsic volcanic rocks of the type which hosts epithermal gold mineralization at Grew Creek.

The 1988 program on the WLN claims consisted of a helicopter borne magnetic, electromagnetic and VLF-EM survey followed up by reconnaissance geology and geochemistry.

Most of the claim area is covered by surficial deposits. Sparse bedrock exposure is entirely of Lower Paleozoic metasediments including phyllite, slate, limestone, and quartzite. Very limited soil, silt and rock sampling has shown no anomalous values in gold, silver or arsenic.

The claims are thought to lie to the south of the main Tintina Fault, but magnetic evidence strongly suggests that a parallel structure exists on the property which has been invaded by mafic volcanic rocks. The same structure could also host felsic volcanics.

A program of reverse circulation drilling designed to test the nature of the volcanic rocks on the WLN is recommended. This program could be carried out in winter when access to and within this low swampy area would be at its best.

Respectfully submitted

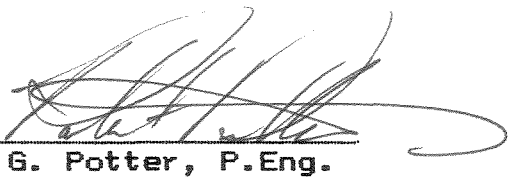

Robert G. Potter, P.Eng.

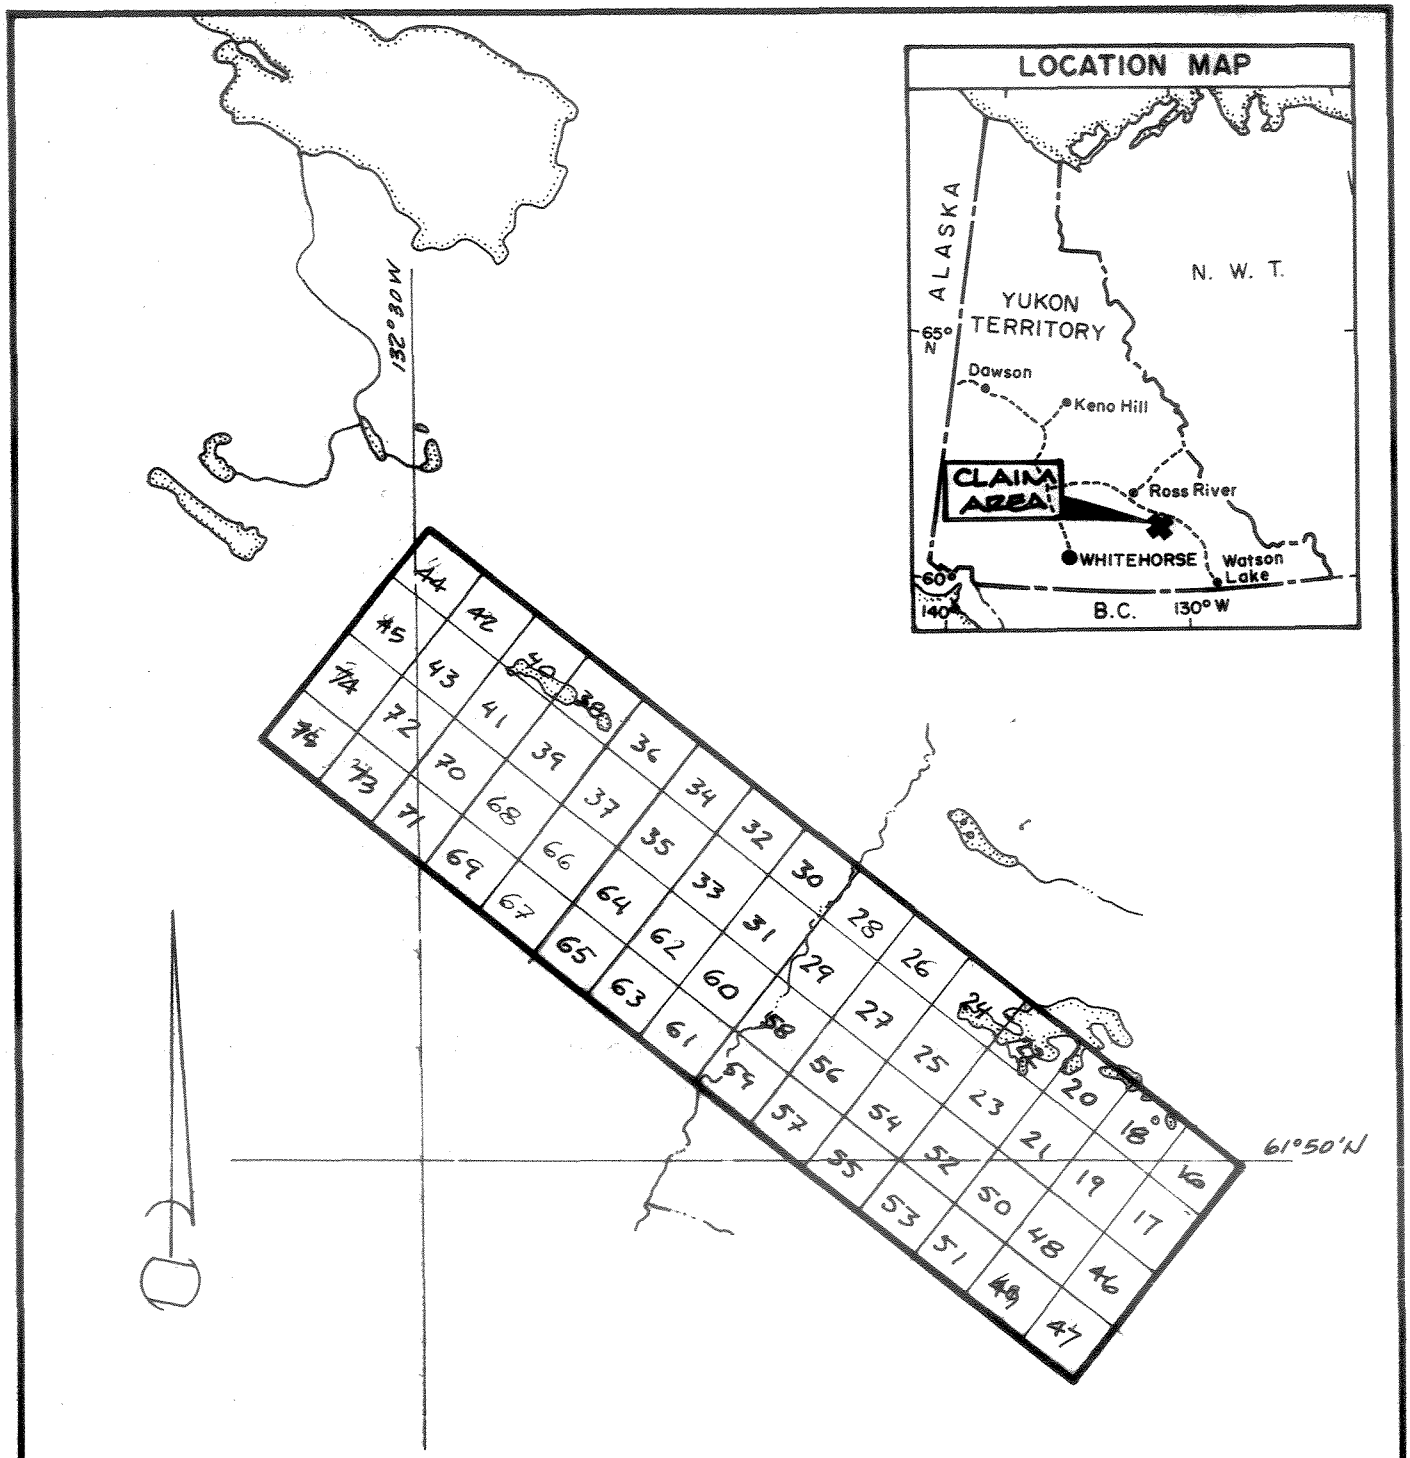

WELCOME NORTH MINES LTD. VANCOUVER, BRITISH COLUMBIA	
WLN CLAIMS	
FIG 1 LOCATION MAP YUKON TERRITORY	
Work by : R. Potter	N.T.S. : 105F/9
Drawn by: Valri Hutchings	Scale 1:50,000
Date : Sept 1988	Figure :

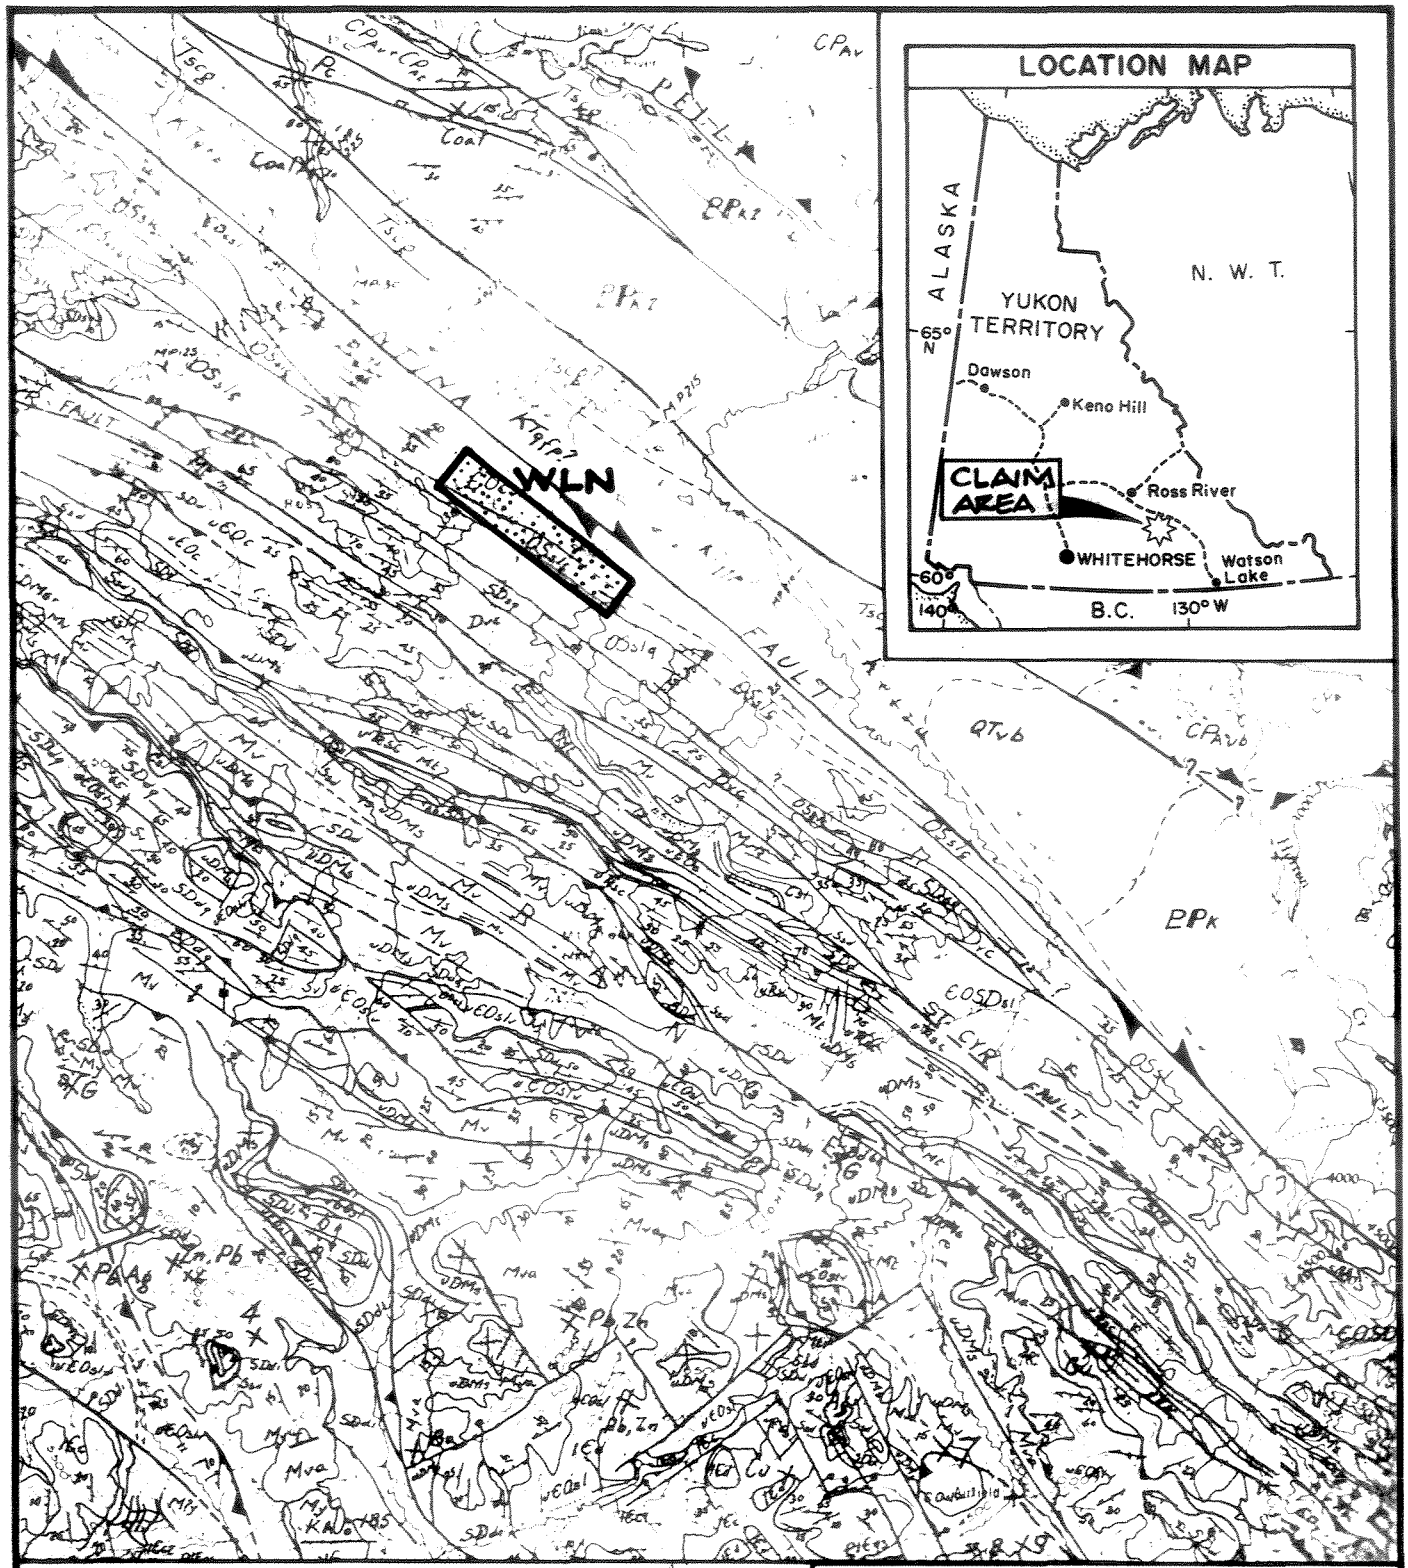

LEGEND

CRETACEOUS & TERTIARY

- QTvb — Basalt
- Ksfp — Rhyolite tuffs & breccia

CARBONIFEROUS & PERMIAN (Anvil - Campbell Allochthon)

- CPAvb — Dunite, peridotite & serpentine

ORDOVICIAN & SILURIAN

- OSsl — Slate, quartzite limestone

AGE UNKNOWN - KLONDIKE SCHIST

- PPkz — Shist, Phyllite, Gneiss

TINTINA FAULT

WELCOME NORTH MINES LTD.
VANCOUVER, BRITISH COLUMBIA

WLN CLAIMS

FIG 2

REGIONAL GEOLOGY

YUKON TERRITORY

Work by : Robert Potter	N.T.S. : 105G
Drawn by: Yuri Hutchings	Scale 1:250,000
Date : Sept 1988	Figure :

II. INTRODUCTION

In April of 1988, Welcome North Mines Ltd. commissioned a helicopter-borne magnetic, electromagnetic and VLF-EM survey to cover a section of the Tintina Trench between Lapie and Hoole Rivers. The WLN claims lie within this area.

The airborne program was followed up by surface reconnaissance including geology prospecting and soil sampling. A total of 51 soil samples were collected for gold and silver analyses by Min-En Laboratories Ltd. of North Vancouver, B.C.

Details of the results of the geophysical survey are described in a report by R.J. de Carle, consulting geophysicist, dated August 31, 1988. A discussion of the results of the airborne work is included herein as is a presentation of the surface investigation. De Carle's report is also submitted in support of assessment claims for WLN and other Welcome North properties along the Tintina Trench.

III. PROPERTY, ACCESS AND LOCATION (Fig. 1)

The WLN property consists of 60 full sized mineral claims. All claims are currently registered in the name of Welcome North Mines Ltd. in the Watson Lake Mining District as follows:

Claim Name	Grant No.	Record Date
WLN 16 to 75	YB10624-YB10683	December 03, 1987

The property is located on the Tintina Trench 14 kilometers southeast of Ross River and 35 kilometers southeast of Noranda's Grew Creek epithermal gold discovery (N.T.S. 105F/9 & 16). Access is by helicopter from Ross River or by the Robert Campbell Highway which at its nearest point is 5 kilometers north of the WLN. Ross River is reached by all weather road from Whitehorse via Carmacks and is also served by daily scheduled flights from Whitehorse.

The claims cover the steep Pelly Mountain front and the lowlands immediately to the northeast. Elevations range from 2800 to 5000 feet ASL. Several small lakes and open swampy areas occupy a depression which parallels the base of the mountain front. The area drains to the northeast via a small tributary of the Ketza River. Sparse tree cover includes spruce, fir and birch.

IV. HISTORY

The WLN claims lie within an extensive claim block (Tom claims) which was explored by St. Joe Explorations Ltd. in 1978. St. Joe carried out a program of geological mapping, and rock silt and soil sampling. Geochemical samples were run for lead, zinc and copper. This work is documented in a report by D.A.R. Hendry and D.C. Miller dated October 10, 1978.

V. GEOLOGICAL SETTING (Fig. 2)

The subject property is located along the Tintina Trench. This major northwest trending feature is the locus of about 450 kilometers of dextral offset which occurred during the Mid and Late Cretaceous (Roddick 1967, Templeman-Kluit 1979).

The area northeast of Tintina is that of the Selwyn Fold Belt which comprises a diverse assemblage of clastic, carbonate, volcanic, ultramafic, and granitic rocks of Hadrynian to Tertiary-age. Superimposed on this terrain are remnants of pre-Mid Cretaceous thrust sheets which include basic volcanics and ultramafics (Anvil Allochthon).

To the southwest of Tintina lies the Pelly-Cassiar Platform which comprises thrust wedges of Lower Paleozoic clastic and carbonate metasediments.

Basalts, rhyolites, and derived sediments of Eocene-age occur in structural basins along the Tintina Trench. At Grew Creek felsic volcanic and volcaniclastic rocks are preserved in a northwesterly trending graben. Epithermal gold mineralization is found here associated with silicic and acid sulphate alteration of the host rocks. Mineralized zones are also anomalous in arsenic and silver.

VI. 1988 PROGRAM

The 1988 exploration program on the WLN was structured to assess its potential for "Grew Creek type" mineralization or that related to subsidiary structures of the Tintina Fault system. In April of 1988, Aerodate Limited of Toronto conducted a helicopter-borne magnetic, electromagnetic, and VLF-EM survey of three blocks of ground southeast of Ross River. Included in the area covered were the WLN claims.

Flights were made between April 23 and 27, along lines oriented at an azimuth of 045-225° at a nominal line spacing of 200 meters and mean terrain clearance of 60 meters. Equipment operated included a three frequency electromagnetic system, a cesium vapor magnetometer, a two frequency VLF-EM system, a film tracking camera, a radar positioning system, and an altimeter.

Ground follow-up to the airborne survey included reconnaissance geology, geochemistry and prospecting. Ground work was carried out by one geologist, one prospector and two soil samplers on July 7. The crew was mobilized from Ross River by helicopter.

VII. PROPERTY GEOLOGY (Fig. 4)

Mapping by St. Joe in 1978 shows the WLN claims to be underlain by Lower Paleozoic metasediments. The steep ground of the Pelly Mountain front exposes Ordovician-Silurian limestone, quartzite and slate. Traverses by the writer covered the topographic depression at the base of the front and the low ridge which extends along the northern edge of the claim block. No rock exposures were seen within the topographic low. Along the ridge brown weathering phyllite is sporadically exposed. Foliation in these rocks strikes northwesterly and dips to the southwest.

Magnetic data from the airborne survey strongly suggests that basaltic rocks underlie the central low area on the property. The magnetic feature appears to be a steeply dipping tabular body which strikes along the axis of the claims.

VIII. GEOCHEMISTRY

A total of 51 soils, 4 rocks and 3 silt samples were collected on the WLN. Soils and silts were packed in kraft envelopes and field dried. All samples were shipped to Min-En Laboratories of North Vancouver, B.C., for preparation and anlayses according to the procedures described in Appendix I.

Sample locations and results are shown in Figure 3. No anomalously high values of gold, silver or arsenic were detected in any of the samples.

IX. GEOPHYSICS

The total field magnetic map of WLN (4-J8843) shows a pronounced ridge which extends along the central axis of the claim block. The intensity of this feature is in sharp contrast to the flat magnetic terrain on its flanks which is known to be underlain by Paleozoic metasediments. The magnetic ridge is likely to be reflecting rocks of high susceptibility similar to Tertiary basaltic rocks which outcrop to the southeast of the WLN. The local magnetic feature appears to have a tabular form which dips steeply to the southwest. A major structure, related to the Tintina Fault system is implied.

Electromagnetic mapping (3-J8843) shows numerous northwest trending conductors which are parallel to bedding and considered to be graphitic horizons or structural breaks. VLF-EM (7-J8843) shows no clear response.

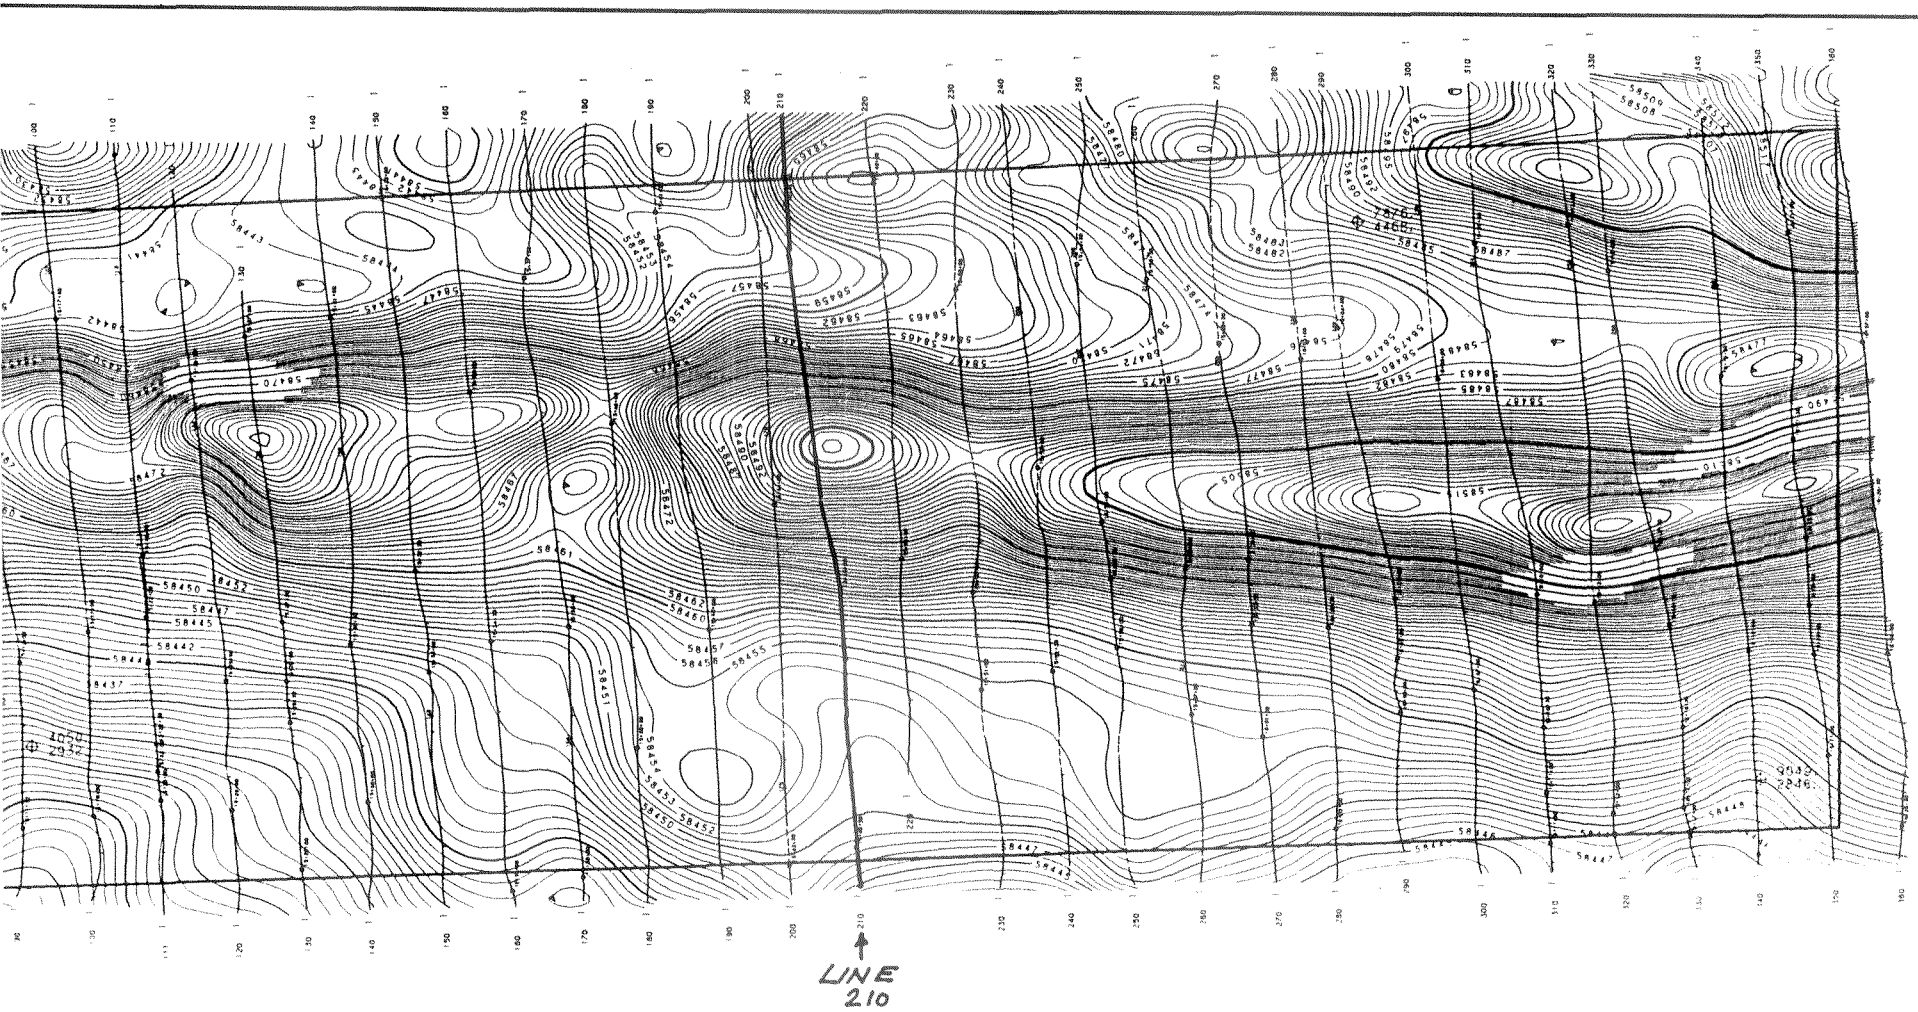

Magnetics

Total Field Magnetic Intensity Contours in nT.

Cesium high sensitivity magnetometer.

Sensor elevation 45m

Map contours are multiples of those listed below

- 1 nT
- 5 nT
- 20 nT
- 100 nT
- 500 nT

Fig 4

WELCOME NORTH MINES LTD.

TOTAL FIELD MAGNETIC CONTOURS

WLN

YUKON TERRITORY

SCALE 1:10,000

0 330 660 1320 1/2 MILE

0 100 200 500 1 KILOMETRE

AERODAT LIMITED

DATE: APRIL 1988

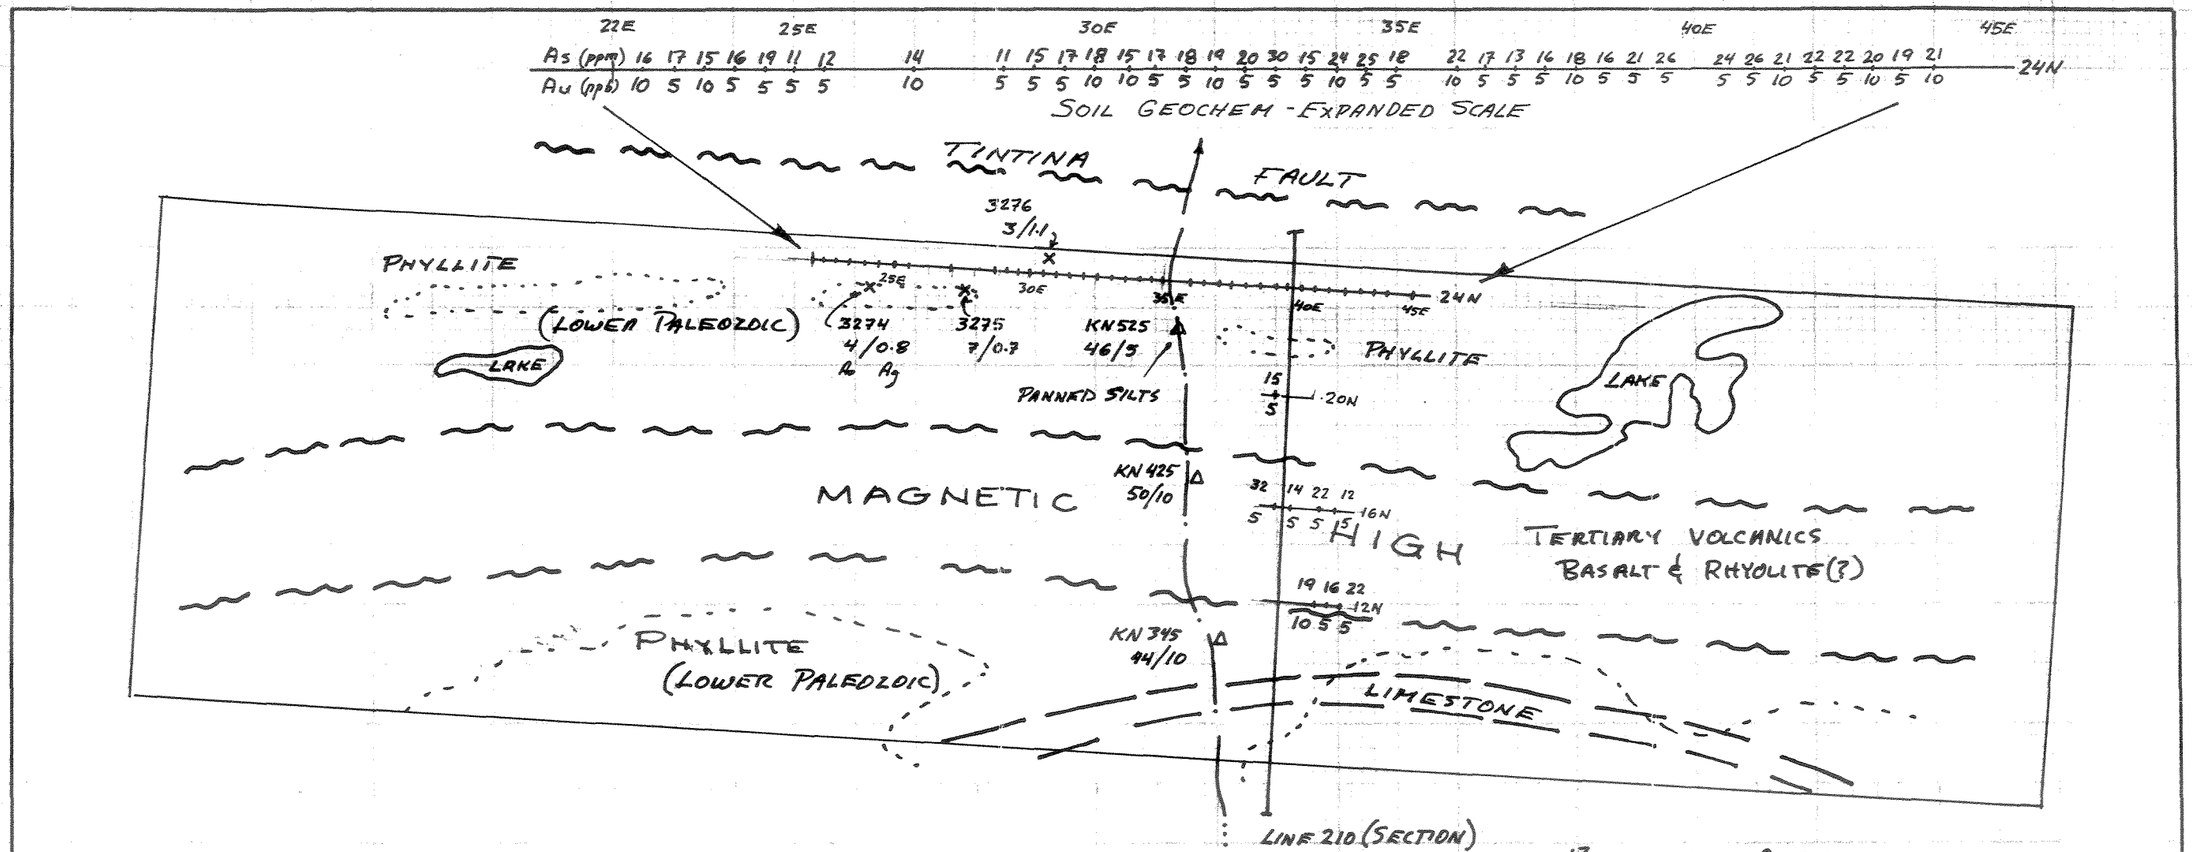

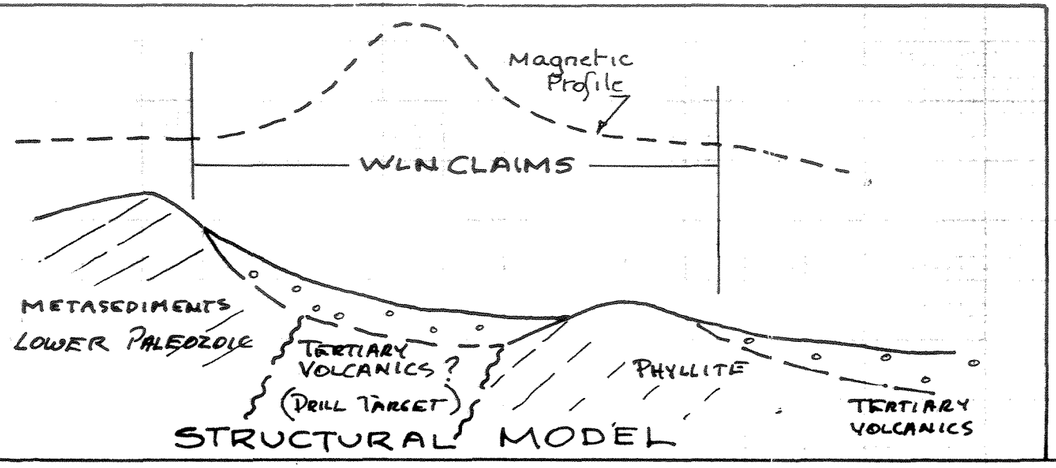

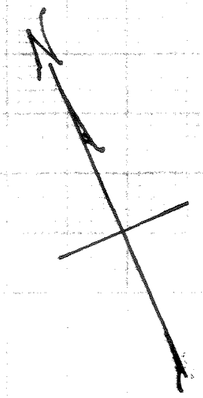

FIG 3
WLN CLAIMS
COMPILATION MAP

0 500 1000M

APPENDIX I

ANALYTICAL PROCEDURES

PHONE 980-5814

MIN-EN Laboratories Ltd.

Specialists in Mineral Environments

Corner 15th Street and Bewicke
705 WEST 15TH STREET
NORTH VANCOUVER, B.C.
CANADA V7M 1T2

GOLD GEOCHEMICAL ANALYSIS BY MIN-EN LABORATORIES LTD.

Geochemical samples for Gold processed by Min-En Laboratories Ltd., at 705 W. 15th St., North Vancouver Laboratory employing the following procedures.

After drying the samples at 95°C soil and stream sediment samples are screened by 80 mesh sieve to obtain the minus 80 mesh fraction for analysis. The rock samples are crushed and pulverized by ceramic plated pulverizer.

A suitable sample weight 5.0 or 10.0 grams are pretreated with HNO_3 and $HClO_4$ mixture.

After pretreatments the samples are digested with Aqua Regia solution, and after digestion the samples are taken up with 25% HCl to suitable volume.

Further oxidation and treatment of at least 75% of the original sample solutions are made suitable for extraction of gold with Methyl Iso-Butyl Ketone.

With a set of suitable standard solution gold is analysed by Atomic Absorption instruments. The obtained detection limit is 0.005 ppm (5ppb).

PHONE 980-5814

MIN-EN Laboratories Ltd.
Specialists in Mineral Environments
Corner 15th Street and Bewicke
705 WEST 15th STREET
NORTH VANCOUVER, B.C.
CANADA

ANALYTICAL PROCEDURE REPORTS FOR ASSESSMENT WORK.

PROCEDURES FOR, Cu, Mo, Cd, Pb, Mn, Ni, Ag, Zn.

Samples are processed by Min-En Laboratories Ltd. at 705 W. 15th St., North Vancouver Laboratory employing the following procedures.

After drying the samples at 95°C soil and stream sediment samples are screened by 80 mesh sieve to obtain the minus 80 mesh fraction for analysis. The rock samples are crushed by jaw crusher and pulverized by ceramic plated pulverizer.

1.0 gram of the samples are digested for 6 hours with HNO_3 and $HClO_4$ mixture.

After cooling samples are diluted to standard volume. The solutions are analysed by Atomic Absorption Spectrophotometers.

Copper, lead, zinc, silver, cadmium, cobalt, nickel and manganese are analysed using the CH_2H_2-Air flame combination but the molybdenum determination is carried out by C_2H_2-N_2O gas mixture directly or indirectly (depending on the sensitivity and detection limit required) on these sample solutions.

Background corrections for Pb, Ag, Cd upon request are completed.

PHONE: (604) 980-5814 or 988-4524

TELEX: 04-352828

MIN-EN Laboratories Ltd.

Specialists in Mineral Environments

Corner 15th Street and Bewicke
705 WEST 15TH STREET
NORTH VANCOUVER, B.C.
CANADA V7M 1T2

Analytical Procedure Report for Assessment Work

31 Element ICP

Ag, Al, As, B, Ba, Be, Bi, Ca, Cd, Co, Cu, Fe, K, Li, Mg, Mn, Mo, Na, Ni, P, Pb, Sb, Sr, Th, U, V, Zn, Ga, Sn, W, Cr

Samples are processed by Min-En Laboratories Ltd., at 705 West 15th Street, North Vancouver, employing the following procedures.

After drying the samples at 95°C soil and stream sediment samples are screened by 80 mesh sieve to obtain the minus 80 mesh fraction for analysis. The rock samples are crushed by a jaw crusher and pulverized by ceramic plated pulverizer or ring mill pulverizer.

1.0 gram of the sample is digested for 4 hours with an aqua regia $HClO_4$ mixture.

After cooling samples are diluted to standard volume. The solutions are analysed by computer operated Jarrall Ash 9000 ICAP or Jobin Yvon 70 Type II Inductively Coupled Plasma Spectrometers. Reports are formatted and printed using a dot-matrix printer.

PHONE: (604) 980-5814 or 988-4524

TELEX: 04-352828

MIN-EN Laboratories Ltd.

Specialists in Mineral Environments

Corner 15th Street and Bewicke
705 WEST 15TH STREET
NORTH VANCOUVER, B.C.
CANADA V7M 1T2

ANALYTICAL PROCEDURE REPORT FOR ASSESSMENT WORK

PROCEDURE FOR ARSENIC:

Samples are processed by Min-En Laboratories Ltd., at 705 West 15th St., North Vancouver Laboratory employing the following procedures.

After drying the samples at 95°C soil and stream sediment samples are screened by 80 mesh sieve to obtain the minus 80 mesh fraction for analysis. The rock samples are crushed by a jaw crusher and pulverized by ceramic plated pulverizer.

1.0 gram of the samples are digested for 6 hours with HN03 and HC104 mixture.

After cooling samples are diluted to standard volume. A suitable aliquote is taken from the above 1 gram sample solution and the test is carried out by Gutzit method using Ag $CS_2N(C_2H_5)_2$ as a reagent. The detection limit obtained is 1. ppm.

PHONE: (604) 980-5814 or 988-4524

TELEX: 04-352828

MIN-EN Laboratories Ltd.

Specialists in Mineral Environments

Corner 15th Street and Bewicke
705 WEST 15TH STREET
NORTH VANCOUVER, B.C.
CANADA V7M 1T2

ASSESSMENT REPORT FOR:

HEAVY MINERAL SAMPLING AND CONCENTRATIONS

A large sample is collected from stream sediments or soils big enough to yield a minimum of 0.5 kg of the desired minus fraction. After sieving through any of the sieve mesh sizes they are adapted for the survey. After seiving the samples, the minus fraction is grinded to -80 mesh.

Then 0.4 kg of sample is weighed into a suitable centrifuge containers. The prepared concentrations of liquids are added to obtain a 3.1 specific gravity flotation.

The heavy fractions are then washed cleaned and dried. After drying the samples they are separated . The sink float Heavy Minerals are separated into Magnetic and Non Magnetic fractions and both fractions are weighed. The percent of the Magnetic and non Magnetic fractions are calculated and reported with the analytical data.

The analysis are than carried out in the ususal analytical manner by I.C.P. or A.A. method.

PHONE: (604) 980-5814 or 988-4524

TELEX: 04-35282

MIN-EN Laboratories Ltd.

Specialists in Mineral Environments

Corner 15th Street and Bewicke
705 WEST 15TH STREET
NORTH VANCOUVER, B.C.
CANADA V7M 1T2

FIRE GOLD GEOCHEMICAL ANALYSIS BY MIN-EN LABORATORIES LTD.

Geochemical samples for Fire Gold processed by Min-En Laboratories Ltd., at 705 W. 15th St., North Vancouver Laboratory employing the following procedures.

After drying the samples at 95°C soil and stream sediment samples are screened by 80 mesh sieve to obtain the minus 80 mesh fraction for analysis. The rock samples are crushed and pulverized by ceramic plated pulverizer.

A suitable sample weight 15.00 or 30.00 grams are fire assay preconcentrated.

After pretreatments the samples are digested with Aqua Regia solution, and after digestion the samples are taken up with 25% HCl to suitable volume.

Further oxidation and treatment of at least 75% of the original sample solutions are made suitable for extraction of gold with Methyl Iso-Butyl Ketone.

With a set of suitable standard solution gold is analysed by Atomic Absorption instruments. The obtained detection limit is 1 ppb.

APPENDIX II

ANALYTICAL CERTIFICATES

MIN-EN LABORATORIES LTD.

SPECIALISTS IN MINERAL ENVIRONMENTS
CHEMISTS • ASSAYERS • ANALYSTS • GEOCHEMISTS

VANCOUVER OFFICE:
705 WEST 15TH STREET
NORTH VANCOUVER, B.C. CANADA V7M 1T2
TELEPHONE (604) 980-5814 OR (604) 988-4524
TELEX: VIA U.S.A. 7601067 • FAX (604) 980-9621

TIMMINS OFFICE:
33 EAST IROQUOIS ROAD
P.O. BOX 867
TIMMINS, ONTARIO CANADA P4N 7G7
TELEPHONE: (705) 264-9996

AUG 3 1988

Certificate of GEOCHEM

Company: WELCOME NORTH MINES
Project: FINTIN AREA
Attention: J.BROCK/R.POTTER

File: 8-1007/P1
Date: JULY 29/88
Type: SOIL GEOCHEM

We hereby certify the following results for samples submitted.

Sample Number	AS PPM	AU-WET PPB
W 3325	20	10
W KN 525	46	5
W KN 425	50	10
W KN 345	44	10
W 39E 20N	15	5
W 12N 4100E	19	10
W 12N 4150E	16	5
W 12N 4200E	22	5
W 16N 3950E	32	5
W 16N 4000E	14	5
W 16N 4100E	22	5
W 16N 4150E	12	5
W 24N 4000E	20	10
W 24N 4050E	21	5
W 24N 4100E	7	5
W 24N 4150E	19	5
W 24N 2250E	16	10
W 24N 2300E	17	5
W 24N 2350E	15	10
W 24N 2400E	16	5
W 24N 2450E	19	5
W 24N 2500E	11	5
W 24N 2550E	12	5
W 24N 2700E	14	10
W 24N 2850E	11	5
W 24N 2900E	15	5
W 24N 2950E	17	5
W 24N 3000E	18	10
W 24N 3050E	15	10
W 24N 3100E	17	5

Certified by _____

MIN-EN LABORATORIES LTD.

MIN-EN LABORATORIES LTD.

SPECIALISTS IN MINERAL ENVIRONMENTS
CHEMISTS • ASSAYERS • ANALYSTS • GEOCHEMISTS

VANCOUVER OFFICE:
705 WEST 15TH STREET
NORTH VANCOUVER, B.C. CANADA V7M 1T2
TELEPHONE (604) 980-5814 OR (604) 988-4524
TELEX: VIA U.S.A. 7601067 • FAX (604) 980-9621

TIMMINS OFFICE:
33 EAST IROQUOIS ROAD
P.O. BOX 867
TIMMINS, ONTARIO CANADA P4N 7G7
TELEPHONE: (705) 264-9996

Certificate of Geochem

Company: WELCOME NORTH MINES
Project: ~~TINTINA~~ -WLN
Attention: J.BROCK/R.POTTER

File: 8-1007/P2
Date: JULY 29/88
Type: SOIL GEOCHEM

We hereby certify the following results for samples submitted.

Sample Number	AS PPM	AU-WET PPB
W 24N 3150E	18	5
W 24N 3200E	19	10
W 24N 3250E	20	5
W 24N 3300E	30	5
W 24N 3350E	15	5
W 24N 3400E	24	10
W 24N 3450E	25	5
W 24N 3500E	18	5
W 24N 3550E N/S		
W 24N 3600E	22	10
W 24N 3650E	17	5
W 24N 3700E	13	5
W 24N 3750E	16	5
W 24N 3800E	18	10
W 24N 3850E	16	5
W 24N 3900E	21	5
W 24N 3950E	26	5
W 24N 4050E	24	5
W 24N 4100E	26	5
W 24N 4150E	21	10
W 24N 4200E	22	5
W 24N 4250E	20	5
W 24N 4300E	20	10
W 24N 4350E	19	5
W 24N 4400E	21	10

Certified by _____

MIN-EN LABORATORIES LTD.

MIN-EN LABORATORIES LTD.

SPECIALISTS IN MINERAL ENVIRONMENTS
CHEMISTS • ASSAYERS • ANALYSTS • GEOCHEMISTS

VANCOUVER OFFICE:
705 WEST 15TH STREET
NORTH VANCOUVER, B.C. CANADA V7M 1T2
TELEPHONE (604) 980-5814 OR (604) 988-4524
TELEX: VIA U.S.A. 7601067 • FAX (604) 980-9621

TIMMINS OFFICE:
33 EAST IROQUOIS ROAD
P.O. BOX 867
TIMMINS, ONTARIO CANADA P4N 7G7
TELEPHONE: (705) 264-9996

Certificate of GEOCHEM

Company: WELCOME NORTH MINES
Project: TINTINA + WLN
Attention: J. BROCK

File: B-1007/P1
Date: JULY 25/88
Type: ROCK GEOCHEM

We hereby certify the following results for samples submitted.

Sample Number	AG PPM	AU-FIRE PPB
3271	0.9	4
3272	1.2	6
3273	1.0	2
3274	0.8	4
3275	0.7	7
3276	1.1	3

Certified by: [signature]

MIN-EN LABORATORIES LTD.

APPENDIX III

SUMMARY OF EXPENDITURES

WLN

1988 STATEMENT OF COSTS

		$
Salaries and Wages		466
Geological Consulting		300
Camp Costs - 5 man days @ $40/day		200
Field Supplies - flagging, thread, sample bags, etc.		50
Mobilization		240
Vehicle - rentals & fuel		143
Helicopter - .7 hrs. @ $475/hr.	332.50	
- fuel 100 litres @ $0.63/litres	44.10	377
Geophysics - Airborne (Aerodat) 60/756 x 55,500		4,405
Analyses - Min-En Laboratories		
- Soils - 51 (As/Au) @ $ 9.50/sample	484.50	
- Silts - 3 (As/Au) @ $ 9.50/sample	28.50	
- Rocks - 4 (Au/Ag) @ $12.75/sample	51.00	564
Project Management - Planning, field management, reporting		718
Total:		7,463

APPENDIX IV

ENGINEER'S CERTIFICATE

I, Robert G. Potter of 150 Andrew Place, Fulford Harbour, in the Province of British Columbia, Canada, DO HEREBY CERTIFY that:

1. I am a consulting Geological Engineer.

2. I am a graduate of the University of British Columbia (B.A.Sc. 1961) and of McGill University (M.Sc. Applied 1972).

3. I am a member in good standing of the Association of Professional Engineers of British Columbia.

4. This report is based on the results of work carried on under my direct supervision and on available published data.

5. I have no interest in the WLN property or in other properties or securities of Welcome North Mines Ltd. nor do I expect to receive any.

Dated at Vancouver, British Columbia this 9th day of December, 1988.

Robert G. Potter, P.Eng.

APPENDIX V

REFERENCES

Archer Cathro and Associates: Northern Cordilleran Mineral Inventory.

Boyle, R.W., 1979: The Geochemistry of Gold and Its Deposits. G.S.C. Bull. 280.

Buisson, G., and LeBlanc, M., 1986: Gold-bearing Listwaenites (carbonatized ultramafic rocks) in Ophiolite Complexes, in Metallogeny of basic and ultrabasic rocks: London Institute Mining Metallurgy, p. 121-132.

Duke, J.L., and Godwin, C.I., 1986: Geology and Alteration of the Grew epithermal gold-silver prospect, south-central Yukon, in Yukon Geology Vol. I, D.I.A.N.D.

Fisher, R.V., and Schmincke, H., 1984: Pyroclastic Rocks: Springer - Verlag.

Jackson, L.E., et al 1986: Bimodal Paleogene Volcanics near Tintina Fault, East-central Yukon and Their Possible Relationship to Placer Gold, in Yukon Geology Vol. I, D.I.A.N.D.

Templeman-Kluit, D., et al, 1977: Compilation of the Geology of Quiet Lake (105F) and Finlayson Lake (105G). G.S.C. Open File 486.

APPENDIX VI

LIST OF PERSONNEL

(WLN CLAIMS)

Jeff Franke (Soil Sampler), 320-192 Street, Surrey, B.C.
Period Worked: July 7, 1988

Mike Heino (Prospector), 43 Jean Street, Sudbury, Ontario
Period Worked: July 7, 1988

Naomi Potter (Cook), R.R. 1, Fulford Harbour, B.C.
Period Worked: July 7, 1988

Robert Potter (Geologist & Proj. Mgr.), R.R. 1, Fulford Harbour, B.C.
Period Worked: July 7, 1988

Bruce Williams (Prospector), R.R 1, Fulford Harbour, B.C.
Period Worked: July 7, 1988