

MAYO LAKE MINERALS INC.
P.O. BOX 158, 3232 CARP ROAD,
CARP, ONTARIO
K0A 1L0

Assessment Report

On the

Cascade Claim Group

Cas1-Cas52

Describing an

Airborne Geophysical Survey

105M 10

Latitude 63.6567N, Longitude 134.6954E

In the

Mayo Mining District
Yukon Territory

By

T. Sutherland, B.Sc.,
and V. Rampton, Ph.D., P.Eng

October 2, 2012

Contents

Introduction	1
Location and Access	1
Previous Work.....	4
Geomorphology	4
Regional Geology and Mineralization	5
Property Geology	8
Stratigraphy.....	8
Intrusions	8
Structure	9
Mineralization	9
Geophysics	9
Survey Specifications:	10
Magnetic Surveying:	11
Survey Operations:.....	11
Base Station Details:	11
Equipment:.....	12
AGIS:.....	12
Magnetometer:.....	12
Base Station:	12
Laser Altimeter:.....	13
Data Acquisition Magnetometer Checks:	13
Compensation Flight Test:	13
Lag Test:	13
Heading Error Test:	13
Data Processing:.....	13
Magnetic Processing	13
Final Data Format.....	15
Results	15
Discussion and Conclusions	16
References	17
Appendix A.....	19

Appendix B	20
Appendix C	22
Digital geophysical data: Grids and XYZ data	In pocket
Figure 1 Cascade property and survey location.....	2
Figure 2 Location of claims	Error! Bookmark not defined.
Figure 3 Regional geology	7
Figure 4 Cascade property and local geology	8
Figure 5 Flight lines from Precision Geosurveys Inc.	10
Figure 6 Total agnetic intensity map from survey Block D,	15

Introduction

The Cascade Claim Group (the “Property”), wholly owned by Mayo Lake Minerals Inc., is located east of Mayo (**Figure 1**) to the south of the Keno Hill District, which produced over 200 million ounces of silver from veins cutting Mississippian quartzite and schist. The Property lies in the northeastern portion of the Tintina Gold Belt, a loosely defined 2100 km long zone of gold and silver deposits extending across central Alaska and Yukon. Nearby deposits include Dublin Gulch (6.4Moz Au), Keno Hill (242Moz Ag), Red Mountain (1.3Moz Au) and Marge (Au, Ag, Cu, Pb, and Zn).

This report outlines the survey operations, data processing activities and initial interpretation related to an airborne geophysical survey flown between March 13, 2012 and March 14, 2012 over the Property. The airborne geophysical survey, which was flown by Precision GeoSurveys Inc. for Mayo Lake Minerals Inc., resulted in the acquisition of high resolution magnetic data.

Location and Access

The Property consists of 52 contiguous claims located approximately 60 kilometers east of Mayo, Yukon, Canada on NTS map sheet 105M 10. The claims are registered in the Mayo Mining district under the name of Mayo Lake Minerals Inc. The claims are listed in **Table 1** below with the location of the claims shown in **Figure 1 & Figure 2**.

Grant number	Claim Name	Map sheet	Group Name
YE45801-YE45850	Cas1-Cas50	105M 10	Cascade
YD132391-YD132392	Cas51-Cas52	105M 10	Cascade

Table 1 Claims comprising the Cascade Claim Group

This claim group is accessed by helicopter, though alternatively it could be accessed by Mayo Lake from the boat launch at the Mayo Lake Dam which is connected by a government-maintained, gravel road (Mayo Lake Road) to the Yukon's paved or chip-sealed highway network at Mayo (**Figure 1**).

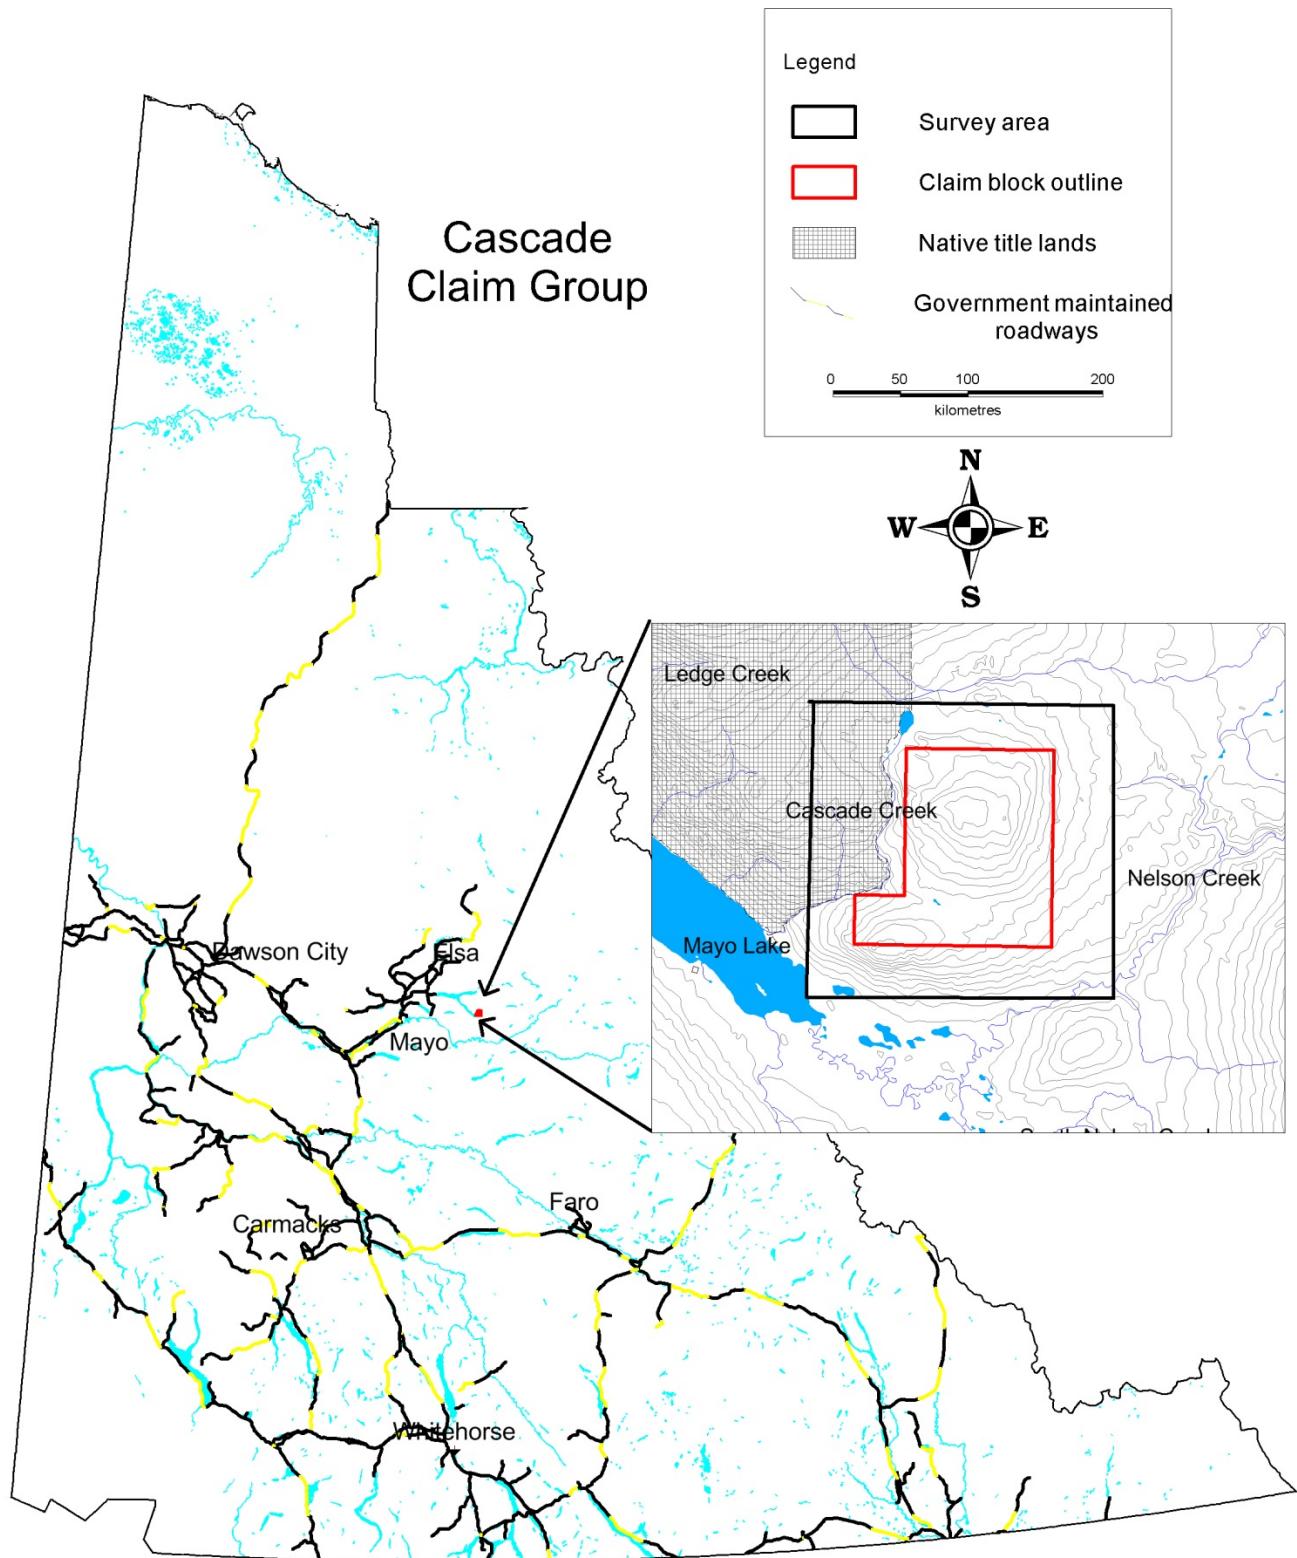


Figure 1 Cascade property and survey location

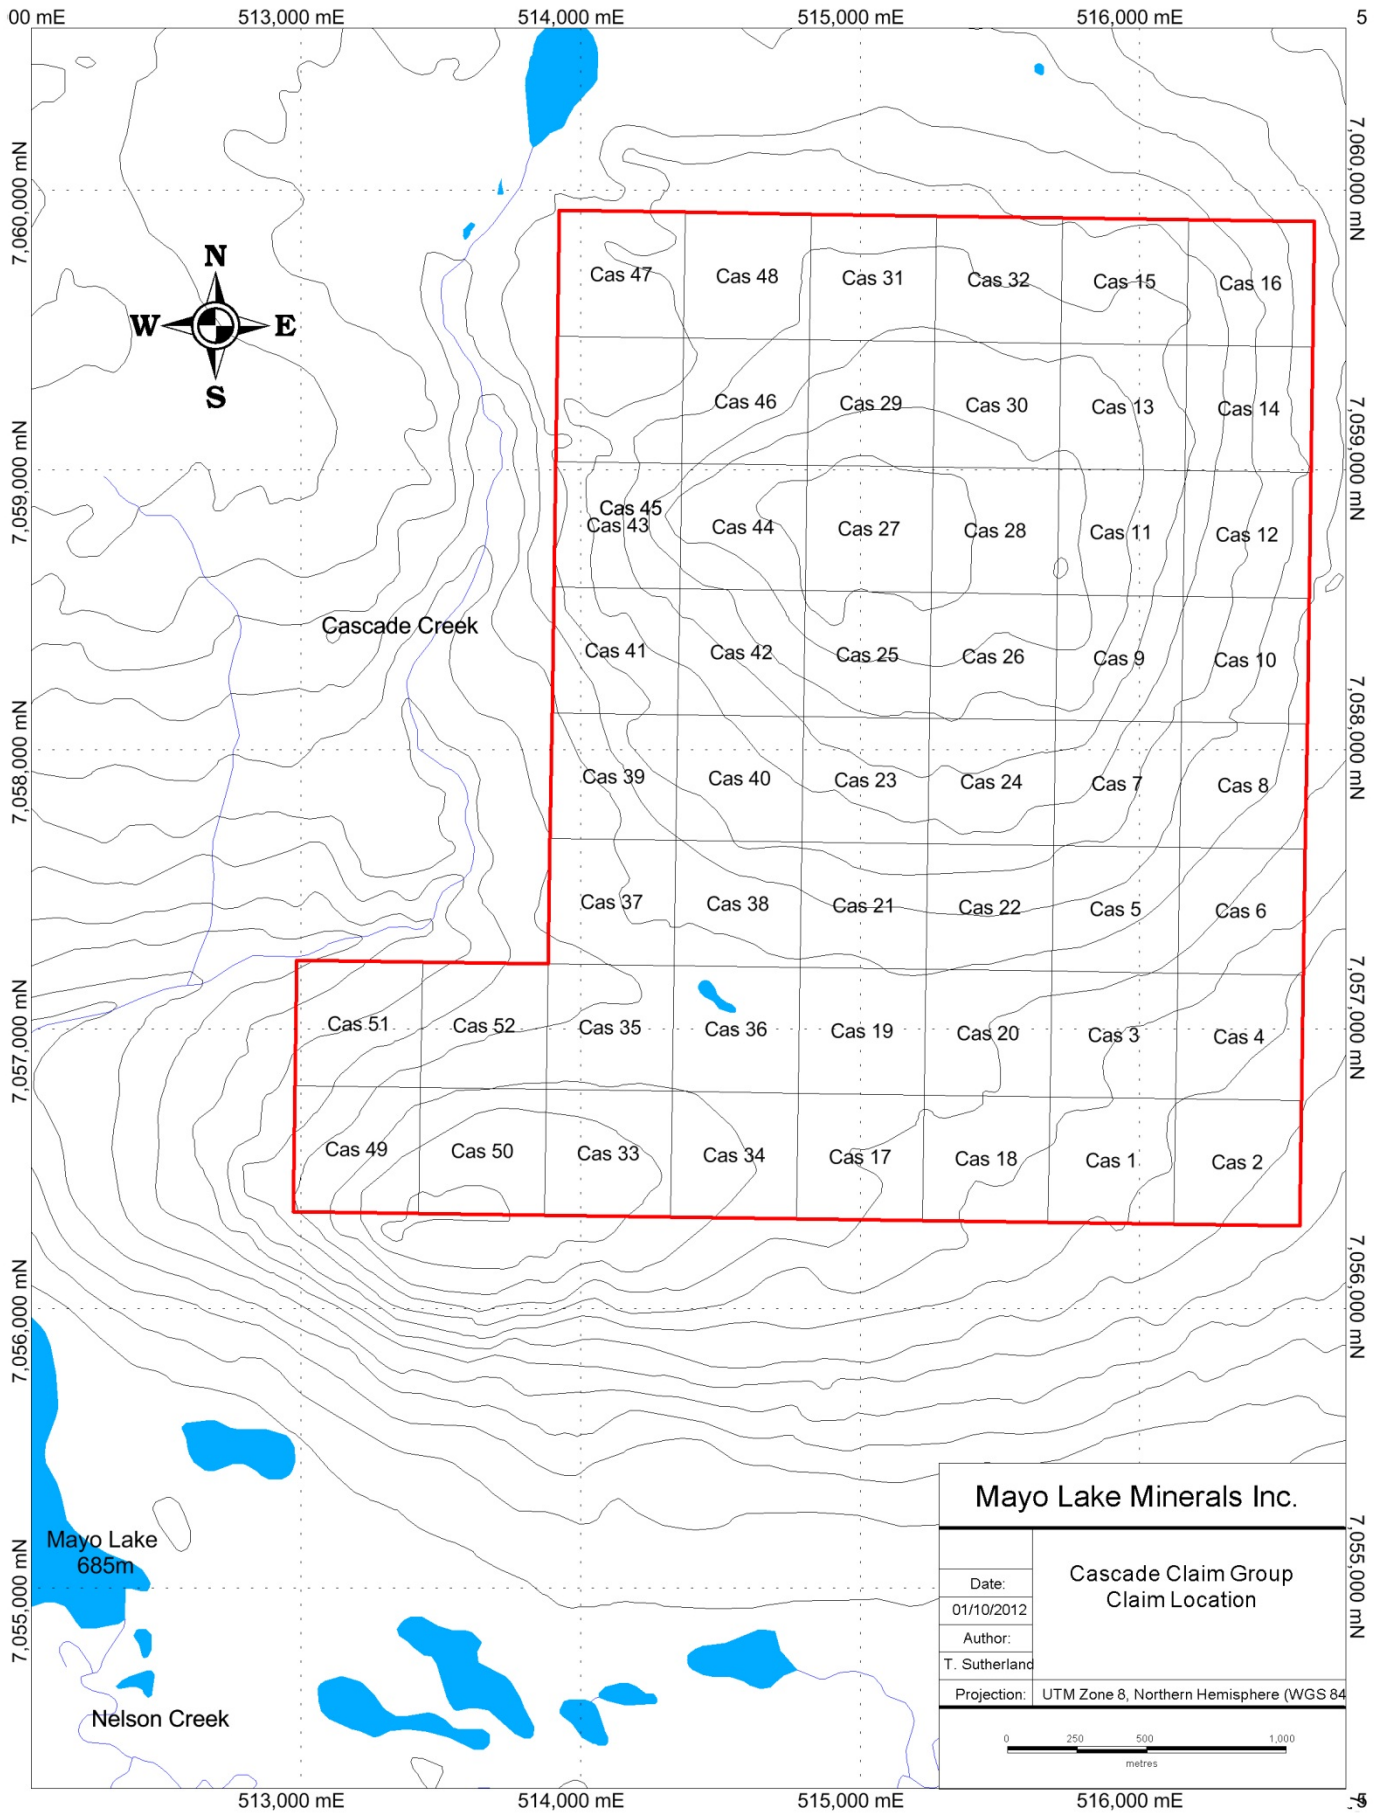


Figure 2 Location of claims in the Cascade Claim Group

Previous Work

The majority of previous work consists of placer mining focused on Cascade Creek. Well documented exploration consists of a regional government stream sediment sampling program.

Project Keno Hill headed by Chris Gleeson of the Geologic Survey of Canada was completed in 1968. It covered creeks north of the property with stream sediment, water, and heavy mineral sampling programs (Gleeson et al. 1965-1968, Gleeson & Boyle 1972, Gleeson 1980a, Gleeson 1980b). This program was systematic for some elements and indicated the presence of several anomalies in all media; unfortunately this program was focused north of this claim group and does not provide coverage to make specific conclusions regarding these claims.

Stream sediment sampling was again completed by the Geologic Survey of Canada in 1987; however this survey also provided insufficient coverage to make any sound interpretation regarding mineralization.

Interest in the area was prompted by productive placer operations along Cascade Creek.

Geomorphology

The Property covers the highlands between Cascade and Nelson Creeks (**Figure 1**), centered approximately 3km east of the Nelson Arm of Mayo Lake. The large lake filled valleys, are broad and U-shaped due to glacier ice being funneled down them from east to west during Pleistocene glaciations. Most tributaries to the large valleys are narrow and confined by moderate to steep slopes. Uplands generally have moderate slopes. Streams draining the property are all part of the Yukon River watershed.

The Property has been subjected to multiple glaciations (Hughes 1982). The youngest Pleistocene McConnell Glaciation was confined to the trunk valleys occupied by Mayo, Janet and Williamson lakes (Bond 1999). These valleys were filled with fast flowing ice that scoured their bottoms and sides. The upper limit of the McConnell Glaciation is marked by lateral moraines and kame terraces along the sides of these trunk valleys. The upland forming the central part of the claim group was covered by glacial ice during the older Reid Glaciation. Due to the elevation of the upland, the ice was probably cold-based and transport of rock and debris was minimal as is evidenced by landforms.

During deglaciation, the trunk valleys were filled by proglacial outwash in some areas. Subsequently, streams have carved terraces and floodplains into the valley fills. The alluvium is a mixture of gravel, sand, silt and organics, generally fining upward.

Outcrop is sparse on the property, rarely exceeding 5% in any area. Soil development is immature with Pleistocene glaciation having scoured some areas and deposited variable thicknesses of till on others.

Vegetation is predominantly black spruce with willow and alder understorey. Lowlands and north facing slopes exhibit a thick cover of organic matter, moss and Labrador tea. Southern slopes are similarly vegetated but also include balsam and poplar groves. Permafrost is likely pervasive on north facing slopes but discontinuous on south facing slopes.

Regional Geology and Mineralization

Mapping in this region was done by C.F Roots who integrated numerous geological publications dating from 1920 to 1995. His work resulted in a regional map at 1:250,000 scale (Roots 1997).

The Property is located within the Selwyn Basin and lies within the Tintina Gold Belt. Simplified regional geology as shown on **Figure 3** depicts Upper Proterozoic to Lower Cambrian Hyland Group stratigraphy, in contact with Paleozoic metasedimentary units of the Ern Group and Keno Hill Quartzite along the Robert Service Thrust. Mid-Triassic mafic sills and greenstones are common in the Keno Hill Quartzite and Ern Group, but are rarely encountered in other units. All stratigraphic units have been intruded by the Mid-Cretaceous age Tombstone Plutonic Suite, which host several known gold deposits including Dublin Gulch. The 100km² Rook Pluton, west of the Keno Hill Camp, is the largest member of the Tombstone Plutonic Suite and probably drove hydrothermal circulation leading to the mineralization at Keno Hill as noted by references cited by Roots (1997).


The dominant structural features in the area are a series of imbricated thrust sheets that collectively make up the Robert Service Thrust. These thrusts are commonly difficult to distinguish due to subsequent intense folding of faults and contacts and a strong penetrative structural fabric imparted by the Tombstone Thrust; the area deformed during this event is often referred to as the Tombstone Strain Zone. Intense folding is especially evident in units immediately around Keno Hill. Large open folds, McQueston Antiform (E-W) and Mayo Lake Antiform (NW-SE), and several inferred brittle faults were developed after the large thrusting events (Roots 1997)

Abundant historical work focused in and around Keno Hill led to a separate nomenclature in which the Hyland Group was deemed the Upper Schist and the Ern Group was deemed the Lower Schist (Green, 1971). This coincides with early inferences that the Upper Schist (Hyland Group) was younger than the Lower Schist (Ern Group). The term “Keno Hill Quartzite” is well developed in literature, though internal folding and imbrication have prevented the description of a type section or measurement of unit thickness thus far, therefore the formation status of the unit remains informal. Stratigraphically it lies immediately above Ern group. Green, 1971, includes meta-volcanic units in the Keno Hill Quartzite; this is likely the topmost unit of the Ern group (Murphy 1997, Roots 1997) though Roots 1997 includes this as the basal unit of the Keno Hill Quartzite at Keno Hill instead.

The Keno Hill silver camp has produced over two hundred million ounces of silver since 1921. Productive veins occur in the Keno Hill Quartzite and underlying Lower Schist. Although faults with associated mineralization (“mineralized faults”) are believed to cut through the Robert Service Thrust and continue into the Hyland Group, no significant silver mineralization has been discovered above the thrust. Ore shoots within the veins typically consist of galena, sphalerite and tetrahedrite with siderite or quartz gangue. The mineralized faults trend northeast and dip steeply to the southeast with left lateral offsets ranging from a few metres to over a hundred metres (Boyle 1965). Cross faults offsetting the mineralized faults trend perpendicular to them and dip 20° to 30° to the southwest.

Three major gold occurrences are located within 70 km of the Property. Dublin Gulch and Gold Dome, formerly scheelite dome, are intrusions of the Tombstone Plutonic Suite hosting high tonnage low grade

gold mineralization in sheeted veins primarily in the stock but penetrating short distances into surrounding Hyland Group metasedimentary rocks. The 160km Rau-Nadaleen Trend is a newly discovered belt of Carlin Type mineralization in carbonate sediments of the Bouvette Formation. The most advanced project is Dublin Gulch where a definitive feasibility study has been completed; it hosts an open pit resource containing 6.4 million ounces of gold at a grade of 0.67g/t.

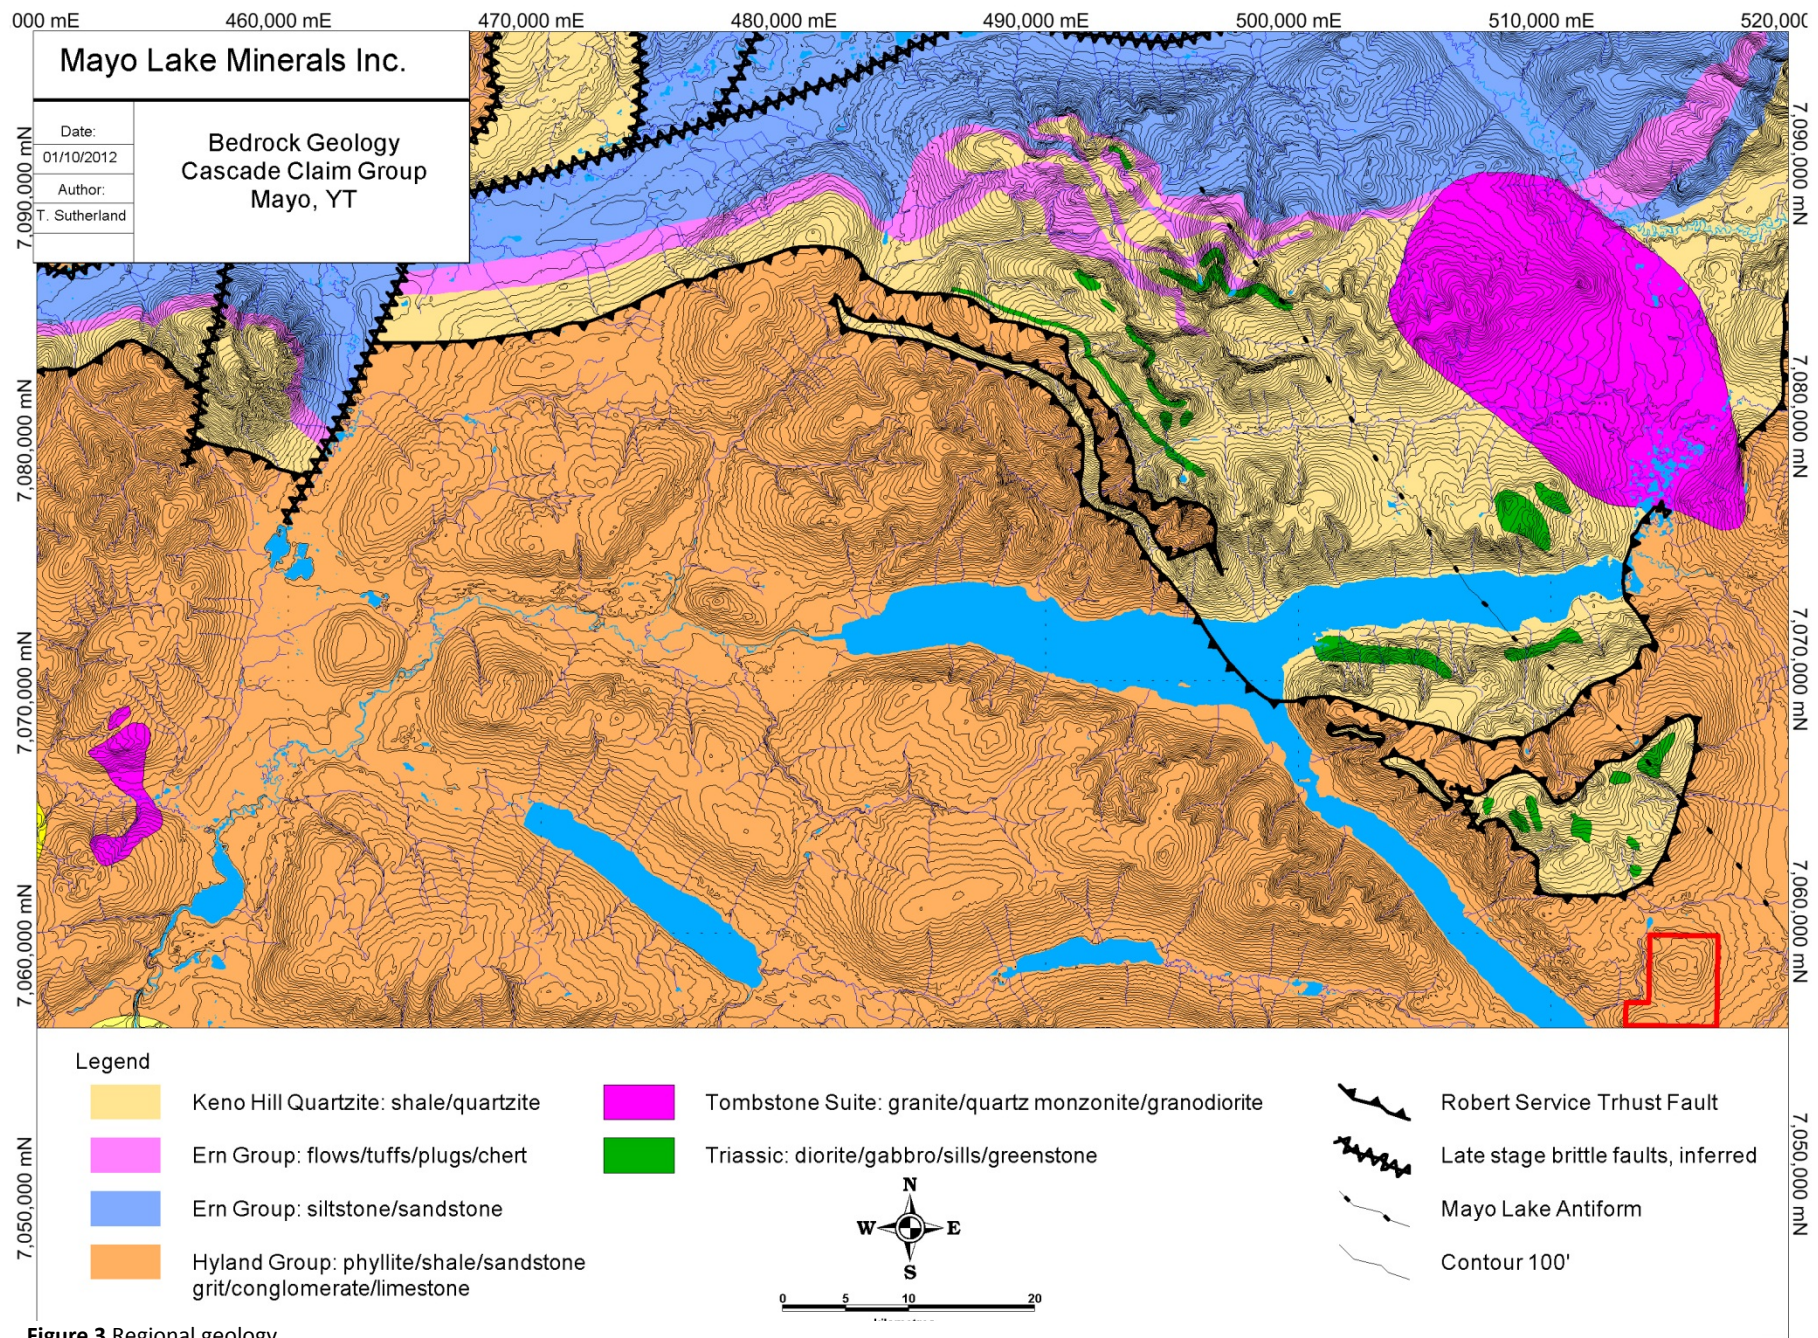

Property Geology

The Property's geology is shown on **Figure 4**. The Cascade Property is underlain by the Hyland Group metasediments south of the Robert service thrust. Most stratigraphy has bedding parallel to foliation, which strikes southeast to southwest (Roots 1997) and dips between 10° and 30° to the south.

Stratigraphy

Hyland Group is locally mapped as the Yusezyu Formation and consists of compositionally layered medium to coarse-grained micaceous quartzose phyllite; muscovite-chlorite gritty phyllite; green and grey impure quartzite; metaconglomerate; and rare calcsilicate (Roots 1997).

Intrusions

Cretaceous Tombstone Suite intrusions are described as buff to grey weathering dykes, sills and small plugs with aplitic or granitic textures. Some of these bodies are locally quartz and feldspar phyrlic and mineralized with disseminated arsenopyrite (Becker 2000).

Although none have been mapped in the area to date, small dykes or plugs can be found throughout the Hyland group.

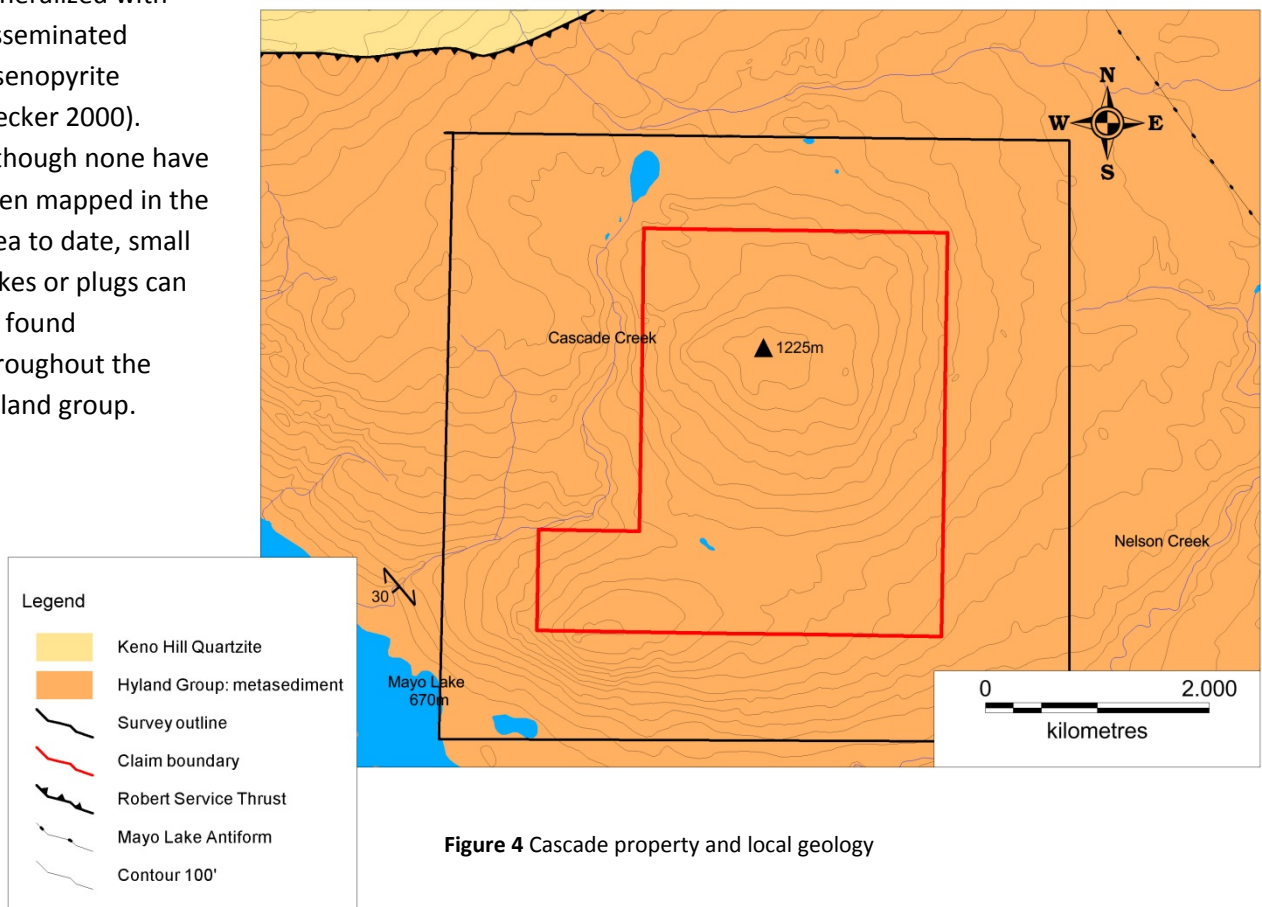


Figure 4 Cascade property and local geology

Triassic metadiorite sills which may be present are dark green, foliated, fine to medium grained and weather in a blocky fashion. The main mineral assemblage consists of amphibole, chlorite and plagioclase. Sills are common in the Keno Hill Quartzite and Ern Group, but are also known within the Hyland group.

Structure

Deformation on the property is typical of that seen elsewhere in the Tombstone Strain zone, including a strong penetrative fabric and a large scale recumbent fold of the Robert Service Thrust west of the claims (Roots 1997). The Robert Service Thrust marks the contact between the Hyland Group and the Keno Hill Quartzite; often intricately folded this structure is up to several hundred meters wide with a complex internal structure. The Robert Service thrust dips shallowly to the south and Keno Hill Quartzite may underlie the Property at a shallow level. Broad post-metamorphic folding is also present and is indicated by variable dips, notably the Mayo Lake Antiform which trends southeast through the property, parallel to the long axis of the Roop Pluton. Any relationship between the intrusion of the Roop Pluton and Mayo Lake Antiform is speculative (Roots 1997). A large erosional window to the north is likely due to the interaction of the large recumbent fold to the west being deformed by the late Mayo Lake Antiform.

Mineralization



The Property is a prospective host to, a variety of gold deposit styles related to the complex Mesozoic and Cenozoic metamorphic, plutonic and volcanic history associated with the formation of the northern Canadian Cordilleran orogeny. The most attractive of these are:

- Polymetallic veins of the Keno Hill Type that are typically high in silver, lead, and zinc and are related to the intrusion of the Tombstone Plutonic Suite.
- Reduced Intrusion Related gold ores related to post-orogenic, mid-Cretaceous plutons that intruded Selwyn Basin sedimentary rocks.
- Orogenic gold veins, Jurassic in age, which formed after peak metamorphism of the Yukon-Tanana Terrane; their erosion likely contributed to the Klondike placer deposits.
- Indications of Carlin-like gold mineralization are present in the area (Lynch 2006) though the local geology may limit the presence of this type of mineralization.

There is also good potential to host tungsten skarns similar to the Ray Gulch Tungsten Skarn at Dublin Gulch and a nearby showing southeast of the Roop Pluton.

Geophysics

The Property was designated Block D for the duration of the survey. The total block is approximately 5.5 km by 5.6 km, including a buffer zone of ~1km around the outside of the claims to dampen edge effect. The survey area in relation to the claims can be observed on **Figure 1**. A total of 221.17 line kilometers of magnetic data were flown for this survey, including tie lines. The survey lines were flown at 150 meter spacings, at a 090°/270° heading; the tie lines were flown at 1500 m spacings, at a heading of 000°/180° (**Figure 5**).

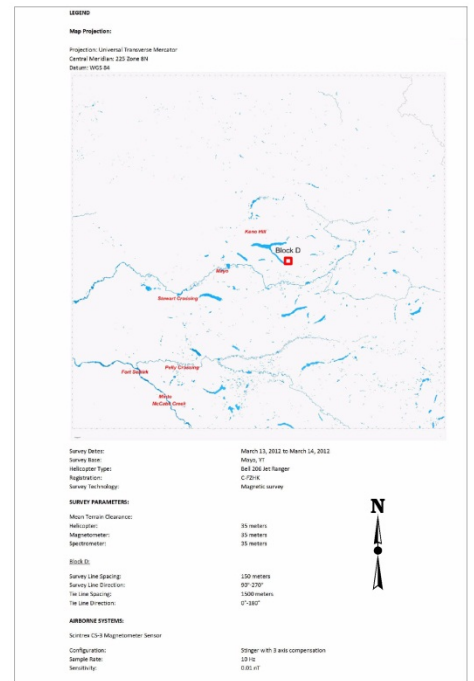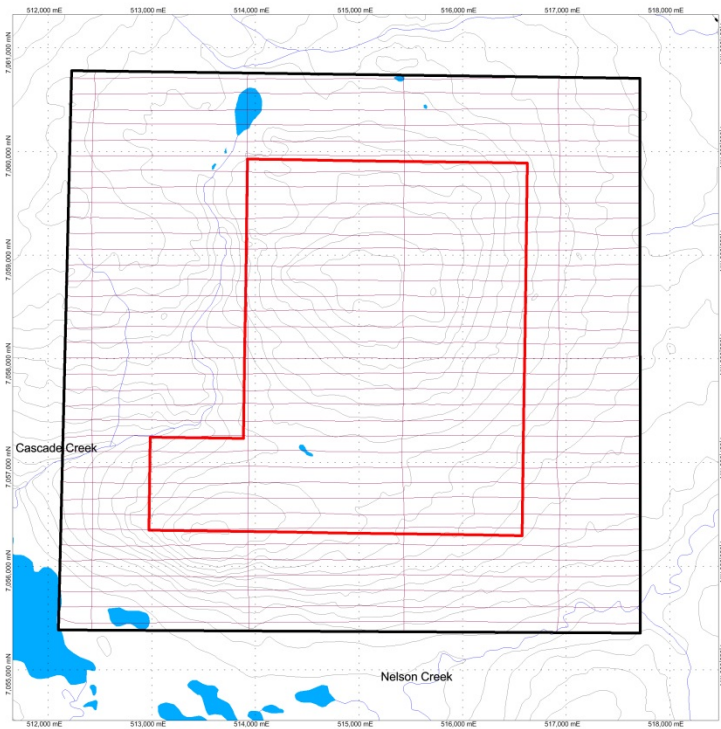

Mayo Lake Minerals Inc.

Flight Bath Block D



Figure 5 Flight lines; The Cascade property was designated Block D for the duration of the survey. A larger version of this figure is also included in Appendix C

Survey Specifications:

The geodetic system used for this survey is WGS 84 and the area is contained in zone 8N. The survey data acquisition specifications and coordinates for Block D are specified in **Tables 2&3**

Survey block	Line Spacing m	Planned Survey Line km	Planned Tie Line km	Total Planned Line km	Total Actual Flown km	Survey Line Orientation	Nominal Survey Height m
D	150	199.8	21.5	221.3	221.2	090°/270°	35

Table 2 Cascade Block survey acquisition specifications

Longitude	Latitude	Easting	Northing
134.6421	63.67374	517711	7060708
134.6426	63.6257	517714.4	7055356
134.7559	63.62619	512098.2	7055384
134.7529	63.67464	512227	7060783

Table 3 Mayo Lake Block D survey polygon coordinates using WGS 84 in zone 8N.

Magnetic Surveying:

Magnetic surveying is the most common airborne survey to be conducted for both mineral and hydrocarbon exploration. The type of survey specifications, instrumentation, and interpretation procedures, depend on the objectives of the survey. Typically magnetic surveys are performed for:

- Geological Mapping, 1) to aid mapping of lithology, structure and alteration in both hard rock environments, 2) to map basement lithology, structure and alteration in sedimentary basins or 3) regional tectonic studies.
- Depth to Basement mapping for exploration in sedimentary basins or mineralization associated with the basement surface.

Survey Operations:

Precision GeoSurveys flew the Property using a Bell 206 BIII Jet Ranger. The survey lines were flown at a nominal line spacing of one hundred and fifty (150) meters and the tie lines were flown at 1500 m spacing for the magnetometer. The average survey elevation was 34.6 meters vertically above ground for Block D. The experience of the pilot helped to ensure that the data quality objectives were met and that the safety of the flight crew was never compromised given the potential risks involved in airborne surveying.

The base of operations for this survey was in Mayo, YT, Canada. The Precision crew consisted of three members:

Ola Vaage - Pilot

Stian Vaage - Operator

Shawn Walker - On-site Geophysicist

The survey was started March 13, 2012 and completed March 14, 2012.

Base Station Details:

Magnetic base stations are set up before every flight to ensure that diurnal activity are recorded during the survey flights. In this case, two base stations were plotted: Gem 4 was located in bush north east of Janet Lake and Gem 5 was located in bush on the south side of Mayo airport (**Table 4**).

Station Name	Easting/Northing	Longitude/Latitude	Datum/Projection
GEM4	476735E 7061033N	-135.470E 63.676N	8N
GEM5	456420E 7054452N	-135.879E 63.615N	8N

Table 4 Base station details

Base station readings were reviewed at regular intervals to ensure that no data was collected during periods with high diurnal activity (greater than 5 nT per minute). The base station was installed at a magnetically noise-free area, away from metallic items such as steel objects, vehicles, or power lines. The magnetic variations recorded from the stationary base station are removed from the magnetic data recorded in flight to ensure that the anomalies seen are real and not due to solar activity.

Equipment:

For this survey, a magnetometer, base station, laser altimeter, and a data acquisition system were required to carry out the survey and collect quality, high resolution magnetic data. The survey magnetometer is carried in an approved “stinger” configuration to enhance flight safety and improve data quality in this hilly terrain.

AGIS:

The Airborne Geophysical Information System, AGIS, is the main computer used in data recording, data synchronizing, displaying real-time QC data for the geophysical operator, and to generate navigation information for the pilot display system. The AGIS was manufactured by Pico Envirotec; therefore the system uses standardized Pico software and external sensors that are connected to the system via RS-232 serial communication cables. The AGIS data format is easily converted into Geosoft or ASCII file formats by a supplied conversion program called PEIView. Additional Pico software allows for post real time magnetic compensation and survey quality control procedures.

Magnetometer:

The magnetometer used by Precision GeoSurveys is a Scintrex cesium vapor CS-3 magnetometer. The system was housed in a front mounted “stinger”. The CS-3 is a high sensitivity/low noise magnetometer with automatic hemisphere switching and a wide voltage range, the static noise rating for the unit is +/- 0.01 nT. On the AGIS screen the operator can view the raw magnetic response, the magnetic fourth difference and the survey altitude for immediate QC of the magnetic data. The magnetic data is recorded at 10 Hz. A magnetic compensator is also used to remove noise created by the movement of the helicopter as it pitches, rolls and yaws within the Earth’s geomagnetic field.

Base Station:

For monitoring and recording of the Earth’s diurnal magnetic field variation, Precision GeoSurveys operates two GEM GSM-19T magnetometer base stations continuously throughout the airborne data acquisition survey. The base station is mounted as close to the survey blocks, and in an area with low magnetic gradient, as possible to give accurate magnetic field data. It is also mounted in an area away from electric transmission power lines and moving ferrous objects, such as aircraft and motor vehicles. The GEM GSM-19T magnetometer with GPS (Figure 9) uses the proton precession technology sampling at a rate of 0.5 Hz. The GSM-19T has an accuracy of +/- 0.2 nT at 1 Hz. Base station data recorded in the solid-state memory of the base station, are downloaded onto a field laptop using GEMLink 5.0 software. Profile plots of the base station readings are generated and updated at the end of each survey day.

Laser Altimeter:

The pilot is provided with terrain guidance and clearance with an Acuity AccuRange AR3000 laser altimeter. This is attached at the aft end of the magnetometer boom. The AR3000 sensor is a time-of-flight sensor that measures distance by a rapidly modulated and collimated laser beam that creates a dot on the target surface. The maximum range of the laser altimeter is 300 m off of natural surfaces with 90% reflectance and 3 km off special reflectors. Within the sensor unit, reflected signal light is collected by the lens and focused onto a photodiode. Through serial communications and analog outputs, the distance data are transmitted and collected by the AGIS at 10 Hz.

Data Acquisition Magnetometer Checks:

At the start of the survey, airborne magnetometer system tests were conducted. The three tests conducted were the compensation flight test, heading error test, and the lag test.

Compensation Flight Test:

During aeromagnetic surveying, noise is introduced to the magnetic data by the aircraft itself. Movement in the aircraft (roll, pitch and yaw) and the permanent magnetization of the aircraft parts (engine and other ferric objects) are large contributing factors to this noise. To remove this noise a process called magnetic compensation is implemented. The magnetic compensation process starts with a test flight at the beginning of the survey where the aircraft flies in the four orthogonal headings required for the survey ($066^{\circ}/246^{\circ}$ and $156^{\circ}/336^{\circ}$ in the case of this survey) at an altitude where there is no ground effect in the magnetic data. In each heading, three specified roll, pitch, and yaw maneuvers are performed by the pilot; these maneuvers provide the data that is required to calculate the necessary parameters for compensating the magnetic data.

Lag Test:

Followed by the compensation flight, a lag test is conducted. This is performed to determine the relationship between the time the digital reading was recorded by the instrument and the time for the position fix for fiducial of the reading was obtained by the GPS system. The test was flown in the four orthogonal headings over an identifiable magnetic anomaly (ie. truck, trailer, etc.) at survey speed and height. A lag of 5 fiducials (0.5 seconds) was determined from the lag test.

Heading Error Test:

To determine the magnetic heading effect a cloverleaf pattern flight test is conducted. The cloverleaf test is flown in the same heading as the survey and tie lines. For each direction, it must fly over a recognizable feature on the ground in order to estimate the heading error.

Data Processing:

After a survey flight all of the data is collected and several procedures are undertaken to ensure that the data meets a high standard of quality. All data was processed using Pico Envirotec software and Geosoft Oasis Montaj geophysical processing software.

Magnetic Processing:

Before any processing and editing of the raw magnetic data, the data obtained from the compensation flight test must first be applied to the raw magnetic data. A computer program called PEIComp is used to

create a model from the compensation flight test for each survey to remove the noise induced by aircraft movement; this model is applied to each survey flight so the data can be further processed. Filtering is applied to the laser altimeter data to remove vegetation clutter and to show the actual ground clearance. To remove vegetation clutter a Rolling Statistic filter is applied to the laser altimeter data and a low pass filter is used to smooth out the laser altimeter profile to remove isolated noise. As a result, filtering the data will yield a more uniform surface in close conformance with the actual terrain. The processing of the magnetic data involved the correction for diurnal variations. The base station data collected is edited, plotted and merged into a Geosoft (.gdb) database daily. The airborne magnetic data is corrected for diurnal variations by subtracting the observed magnetic base station deviations. Following the diurnal correction was a lag correction. A lag correction of 0.5 seconds was applied to the total magnetic field data to compensate for the lag in the recording system as the magnetometer sensor flies 5.70 m ahead of the GPS antenna. Lastly, a heading correction was applied to the data. Some filtering of the magnetic data is also required. A non-linear filter was used for spike removal. The 1D Non Linear Filter is ideal for removing very short wavelength, but high amplitude features from data. It is often thought of as a noise spike-rejection filter, but it can also be effective for removing short wavelength geological features, such as signals from surficial features. The 1D Non Linear Filter is used to locate and remove data that is recognized as noise. The algorithm is 'non-linear' because it looks at each data point and decides if that datum is noise or a valid signal. If the point is noise, it is simply removed and replaced by an estimate based on surrounding data points. Parts of the data that are not considered noise are not modified. The combination of a non-linear filter for noise removal and a low pass trend enhancement filter resulted in level data as indicated in the results section of this report. The low pass filter smoothes out the magnetic profile to remove isolated noise. The corrected magnetic data from the survey and tie lines was used to level the data all together. Two forms of levelling are applied to the corrected data: conventional levelling and micro-levelling. There are two components to conventional levelling; the first involves statistical levelling of magnetic data to correct miss ties (intersection errors) followed by specific patterns or trends. For the second component, tie lines are brought to a common regional base value, using the mean value of the cross-level error. To obtain the best possible levelled data, individual corrections are edited at selected intersections. Lastly, micro-levelling is applied to the corrected conventional levelled data. This will remove any residual line-direction-related noise, and any low amplitude component of flight line noise that still remains in the data after tie line levelling.

Final Data Format

Abbreviations used in the GDB files are listed in **table 5**:

Channel	Units	Description
X	M	UTM Easting - WGS84 Zone8 North
Y	M	UTM Northing - WGS84 Zone 8 North
Galt	M	GPS height - WGS84 Zone 8 North
DTM	M	Digital Terrain Model
Lalt	M	Laser Altimeter readings
GPStime	Hours:min:secs	GPS time
Basemag	nT	Base station diurnal data
Mag	nT	Total Magnetic Intensity

Table 5 Mayo Lake Block D survey channel abbreviations

The files are provided in two (2) formats, the first is a .GDB file for use in Geosoft Oasis Montaj, and the second is a text format .XYZ file. A complete file, provided in each format will contain raw magnetic data.

Results

A review of print-outs of the total magnetic intensity (**Figure 6**) and the calculated vertical gradient show numerous features that suggest NW and N trending structures (faults), intrusions and magnetic lows (alteration zones). The data requires further interpretation to better understand the precise nature and location of the above defined features. Hard copies of the data collected and flight lines are included in Appendix C.

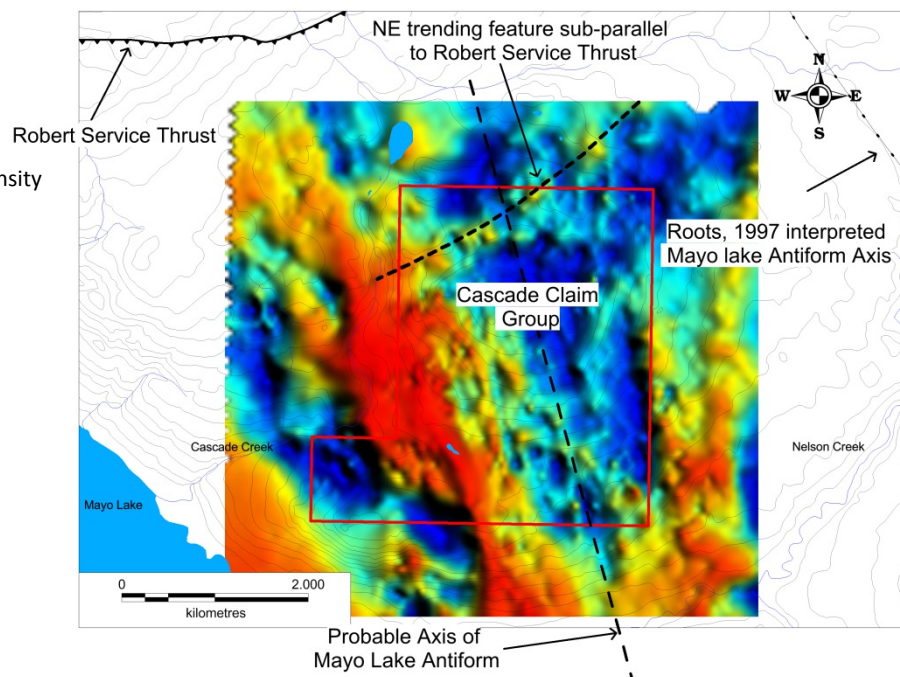


Figure 6 Total magnetic intensity map from survey Block D

Discussion and Conclusions

The Tintina Gold Belt, in which the Property lies, extends for more than 2100 km along the length of the North American Cordillera in Alaska and Yukon. It contains gold and silver deposits that are spatially and temporally associated with Cretaceous age plutonism. In general, bismuth-tungsten-tellurium signatures characterize deposits hosted by granitoid rocks while those hosted by sedimentary rocks and dyke systems characteristically have arsenic-antimony signatures (Goldfarb et al. 2000). Significant differences in structural styles, levels of deposit emplacement, ore-fluid chemistry and gold grades suggest that the prospects represent a broad range of depositional environments.

Several features make deposits in the Tintina Gold Belt desirable exploration and mining targets. The deposits have good size potential, for example Dublin Gulch is reported to contain 6.4 million ounces gold at a grade of 0.62 g/t and Brewery Creek is reported to contain 825,000 ounces gold at a grade of 1.36 g/t prior to production. The Fort Knox deposit is reported to contain 7 million ounces gold, at a grade of 0.9 g/t and POGO, an orogenic vein deposit, contains approximately 4 million ounces gold at a grade of 16 g/t.

The Property is most likely to host deposits related to the Tombstone Plutonic Suite. Mineralization would be late peripheral silver-lead-zinc veins (Keno Hill Type), or steeply dipping sheeted gold veins and stockworks (Reduced Intrusion Related Gold) within both intrusive and metasedimentary host rocks. If carbonate horizons are present they may react with mineralizing fluids and host either gold-arsenic-copper-bismuth-tungsten skarn or Carlin-type mineralization. The high quality aeromagnetics discussed in this report have outlined structural and alteration targets, which in combination with the location of placer deposits, can guide further exploration for gold and silver deposits.

In the immediate area the Mayo Lake Antiform is poorly constrained and interpretation of the total magnetic intensity clearly shows a magnetic feature wrapping around the southern portion of the property. This indicates that the Mayo Lake Antiform may trend NNW-SSE through the property. Also a break in the major trends at the north end of the property is likely the limit of one of the multiple thrusts comprising the Robert Service Thrust Sheet. Work is currently being undertaken by an independent geophysicist to provide greater interpolation of geophysical data. Further exploration should involve geochemical soil and stream sediment sampling to investigate potential structures, alteration and intrusions defined by the airborne magnetics. Prospecting and detailed mapping of the anomalies will also be required to define the extent of intrusions, alteration and potential mineralization.

References

Boyle, R.W.

1965 Geology, Geochemistry and Origin of the Lead-Zinc-Silver Deposits of the Keno Hill-Galena Hill Area, Yukon Territory. Geological Survey of Canada Bulletin 111

Becker, T.C.

2000 Assessment Report 094179, on the Black Property, Black Creek, Mayo Mining District, Yukon Territory for Archer, Cathro & Associates (1981) Limited, October, 2000.

Bond, J.D.

1999. Glacial limits and ice-flow map, Mayo area, central Yukon (1:250,000 scale) Exploration and Geological Services Division, Yukon, Indian and Northern Affairs Canada, Open File 1999-13.

Gleeson, C.F., Boyle, R.W.

1980a Minor and Trace Element Distribution in the Heavy Minerals of the Rivers and Streams of the Keno Hill District Yukon Territory. Geological Survey of Canada Paper 76-31.

Gleeson, C.F., Boyle, R.W.

1980b The Litho-geochemistry of the Keno Hill District Yukon Territory. Geological Survey of Canada Paper 77-31.

Gleeson, C.F. et. Al. (9 Maps)

1965 (Ag, As, B, Cu, Ni, Pb, Sb, W+Sn, Zn) Content of Stream and Spring sediments, Keno Hill Area, Yukon Territory; Geol. Surv. Can., Map 45- 50, 52-53, 56-1965

Gleeson, C.F., Boyle, R.W.

1972 Gold in Heavy Mineral Concentrates of stream Sediments, Keno Hill Area, Yukon Territory. Geological Survey of Canada Paper 71-51.

Goldfarb, R., Hart, C., Miller, M., Miller, L., Farmer, G.L. and Groves, D.

2000 The Tintina Gold Belt - A Global Perspective *in* The Tintina Gold Belt: Concepts Exploration and Discoveries, Special Volume 2, British Columbia and Yukon Chamber of Mines Cordilleran Roundup, January 2000.

Green, L.H.

1971. Geology of Mayo Lake, Scougale Creek and McQuesten Lake map areas, Yukon Territory (105M/IS, 1060/2, 106 D/3). Geological Survey of Canada, Memoir 357,72 p.

Hughes, O.L.,

1983 Surficial geology and geomorphology, Mount Edwards, Yukon Territory; Geological Survey of Canada, Map5-1982 (1:100,000)

Lynch, G.

2006 Sediment-hosted disseminated gold occurrence, northeast Mayo Lake area. *in* Yukon Exploration and Geology 2005, D.S. Emond, G.D. Bradshaw, L.L. Lewis and L.H. Weston (eds.), Yukon Geological Survey, p. 327-339.

Murphy, D.C.

1997 Geology of the McQuesten River Region, Northern McQuesten and Mayo Map Areas, Yukon Territory (105P/14, 15, 16; 105M/B, 14); Exploration and Geological Services Division, Indian and Northern Affairs Canada; Bulletin 6, p. 122.

Murphy, D.C. and Roots, C.F.

1996 Geological map of the Keno Hill area, Central Yukon (105M/14). Exploration and Geological Services Division, Indian and Northern Affairs Canada, Map 1996-1, scale 1:50000

Roots, C. F.

1997. Geology of the Mayo }-hp Area, Yukon Territory (105M). Exploration and Geological Services Division, Yukon, Indian and Northern Affairs Canada, Bulletin 7, 82 p.

Appendix A

Statement of Expenditures

Cost per km: \$67.89

Number of Km: 221.2km

Total Expenditure: \$15017.27

Number of Claims: 52

Expenditure per claim: \$288.79

This survey was completed as part of a larger geophysics program that covered six additional nearby claim blocks.

Appendix B

Statement of Qualifications

Dr. V.N. Rampton, P.Eng.

Rampton Resources Group Inc.

P.O. Box 158, 3226 Carp Road

Carp, Ontario. K0A 1L0

Tel: (613) 836-2594; E-mail: vrampton@rogers.com

I, V.N. Rampton, Ph.D., P.Eng., do hereby certify that

1. I am President of Rampton Resource Group Inc. and President and CEO of Mayo Lake Minerals Inc.
2. I graduated with a B.Sc. Eng. (Geology) from University of Manitoba in 1962 and with a Ph.D. (Geology) from University of Minnesota in 1969.
3. I am a member of the Professional Engineers of Ontario.
4. I have worked as a geologist for over 50 years, specifically in mineral exploration for the last 40 years, in Canada, Slovakia, Finland, Spain, Burkina Faso, Jamaica and the United States of America.
5. By reason of my education, affiliation with a professional organization (as defined in N.I. 43-101) and past relevant work experience, I fulfill the requirements of a "qualified person" for the purposes of N.I. 43-101.
6. By reason of my being CEO, President and a Director and my share holdings in Mayo Lake Minerals Inc., I am not an "independent qualified person" for the purposes of N.I. 43-101.
7. I am senior author and bare total responsibility for the preparation of the technical report titled "Assessment report on the Cascade Claim Group Geophysical Survey". The technical information contained within the report was collected for us by Precision Geosurveys Inc.

Dated the 2nd day of October, 2012.



Vernon Neil Rampton

Statement of Qualifications

Tyrell Sutherland B.Sc.

Mayo Lake Minerals Inc.

P.O. Box 158, 3226 Carp Road

Carp, Ontario. K0A 1L0

Tel: (613) 884-8332; E-mail: tyrellsutherland@hotmail.com

I, T.B. Sutherland, B.Sc., do hereby certify that

1. I am an authorized agent of Mayo Lake Minerals Inc.
2. I graduated with a B.Sc. Honors Specialization Geology, from University of Ottawa in 2009
3. I am a member of the Prospectors and Developers Association of Canada.
4. I have worked as a geologist for approximately 3 years, specifically in mineral exploration, in Canada, Australia, Jamaica and China.
5. I do not fulfill the requirements of a "qualified person" for the purposes of N.I. 43-101.
6. I am a co-author and to the best of my knowledge all data used in the preparation of the technical report titled "Assessment report on the Cascade Claim Group Geophysical Survey" is correct and of good quality. The technical information contained within the report was collected for us by Precision Geosurveys Inc.

Dated the 2nd day of October, 2012.



Tyrell Brodie Sutherland


Appendix C
Geophysical Data



LEGEND

Map Projection:

Projection: Universal Transverse Mercator
 Central Meridian: 225 Zone 8N
 Datum: WGS 84

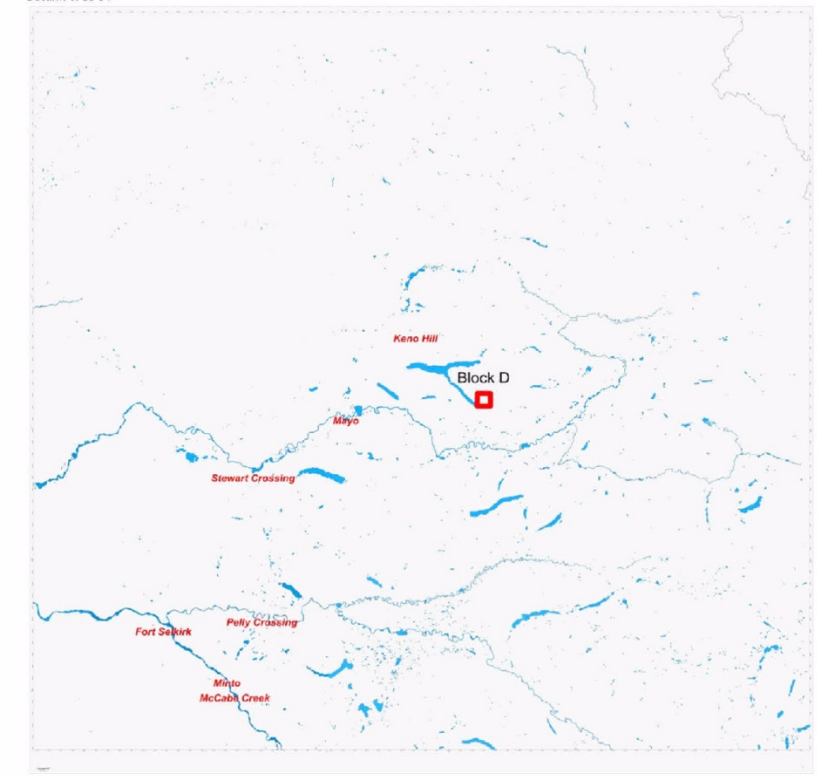

Survey Dates: March 13, 2012 to March 14, 2012
 Survey Base: Mayo, YT
 Helicopter Type: Bell 206 Jet Ranger
 Registration: C-FZHK
 Survey Technology: Magnetic survey

SURVEY PARAMETERS:

Mean Terrain Clearance: 35 meters
 Helicopter: 35 meters
 Magnetometer: 35 meters
 Spectrometer: 35 meters

Block D:

Survey Line Spacing: 150 meters
 Survey Line Direction: 90°-270°
 Tie Line Spacing: 1500 meters
 Tie Line Direction: 0°-180°


AIRBORNE SYSTEMS:

Scintrex CS-3 Magnetometer Sensor
 Configuration: Stinger with 3 axis compensation
 Sample Rate: 10 Hz
 Sensitivity: 0.01 nT



Mayo Lake Minerals Inc.

Flight Bath Block D






LEGEND

Map Projection:

Projection: Universal Transverse Mercator
 Central Meridian: 225 Zone 8N
 Datum: WGS 84

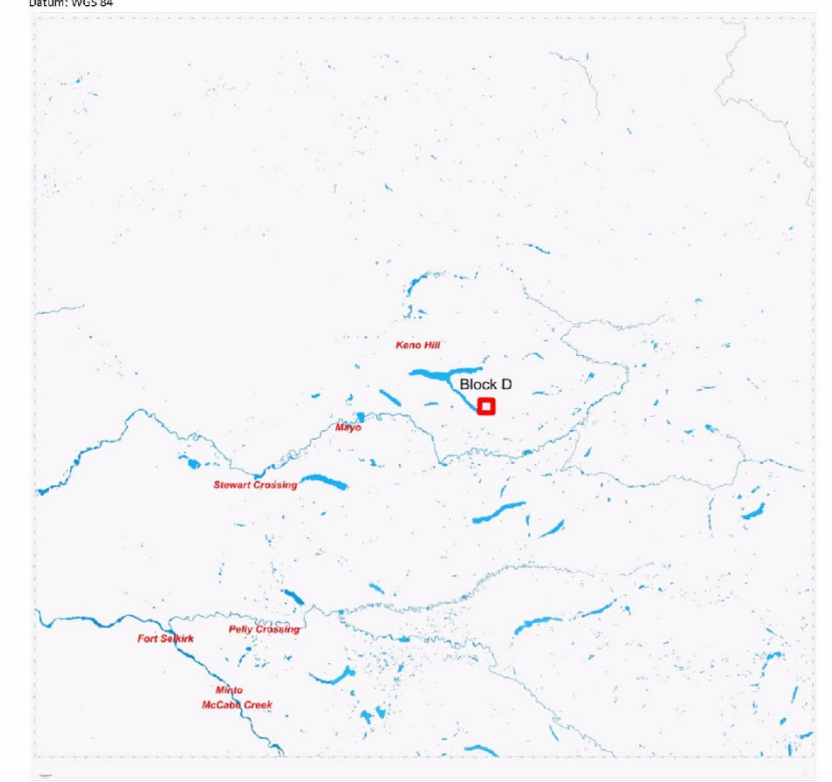

Survey Dates: March 13, 2012 to March 14, 2012
Survey Base: Mayo, YT
Helicopter Type: Bell 206 Jet Ranger
Registration: C-FZHK
Survey Technology: Magnetic survey

SURVEY PARAMETERS:

Mean Terrain Clearance:
 Helicopter: 35 meters
 Magnetometer: 35 meters
 Spectrometer: 35 meters

Block D:

Survey Line Spacing: 150 meters
Survey Line Direction: 90°-270°
Tie Line Spacing: 1500 meters
Tie Line Direction: 0°-180°


AIRBORNE SYSTEMS:


Scintrex CS-3 Magnetometer Sensor:
Configuration: Stinger with 3 axis compensation
Sample Rate: 10 Hz
Sensitivity: 0.01 nT



Mayo Lake Minerals Inc.

Digital Terrain Model Block D



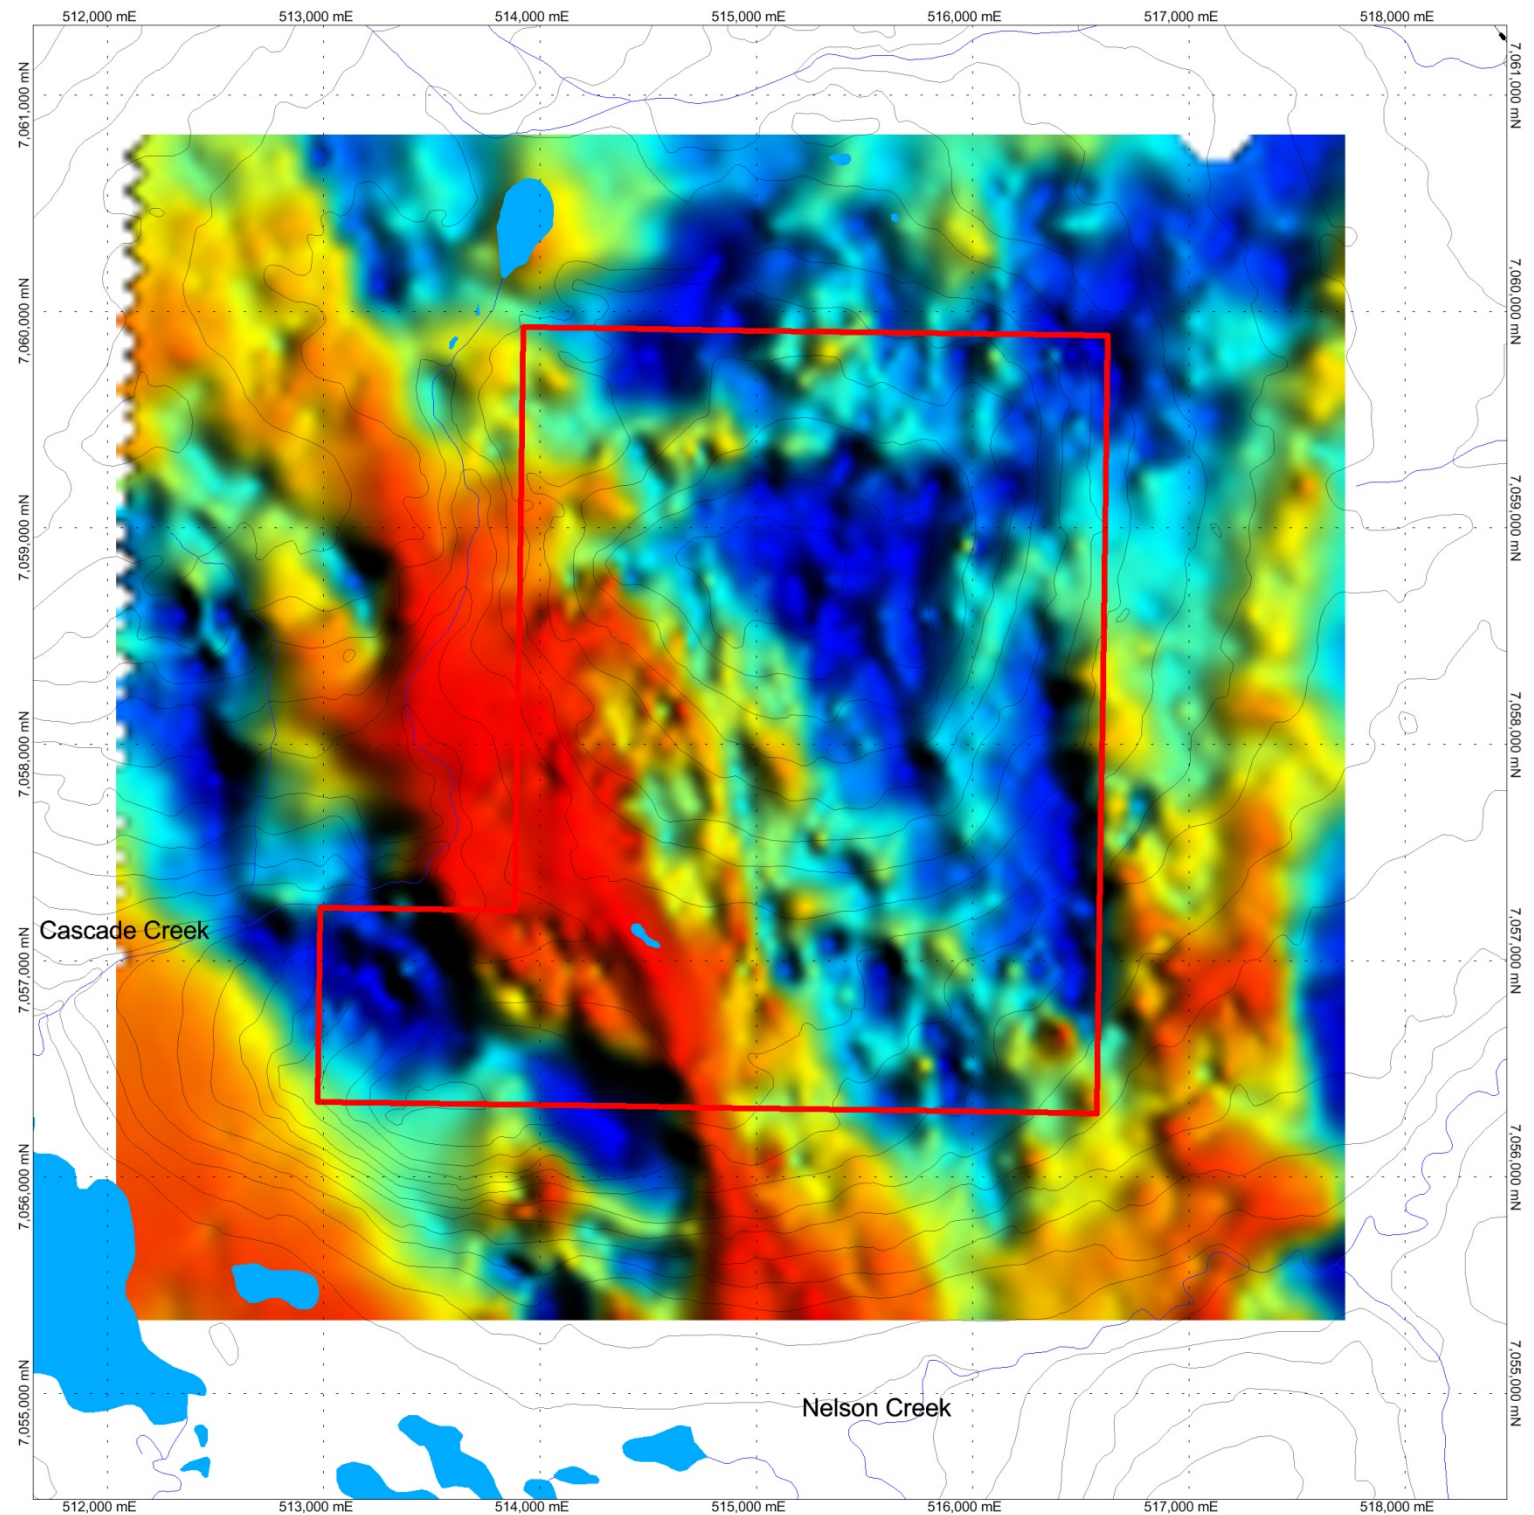

LEGEND

Map Projection:

Projection: Universal Transverse Mercator
Central Meridian: 225 Zone BN
Datum: WGS 84



Survey Dates: March 13, 2012 to March 14, 2012
Survey Base: Mayo, YT
Helicopter Type: Bell 206 Jet Ranger
Registration: C-FZHK
Survey Technology: Magnetic survey

SURVEY PARAMETERS:

Mean Terrain Clearance: 35 meters
Helicopter: 35 meters
Magnetometer: 35 meters
Spectrometer: 35 meters

Block D:

Survey Line Spacing: 150 meters
Survey Line Direction: 90°-270°
Tie Line Spacing: 1500 meters
Tie Line Direction: 0°-180°


AIRBORNE SYSTEMS:


Scintrex CS-3 Magnetometer Sensor
Configuration: Stinger with 3 axis compensation
Sample Rate: 10 Hz
Sensitivity: 0.01 nT



Mayo Lake Minerals Inc.

Total Magnetic Intensity Block D



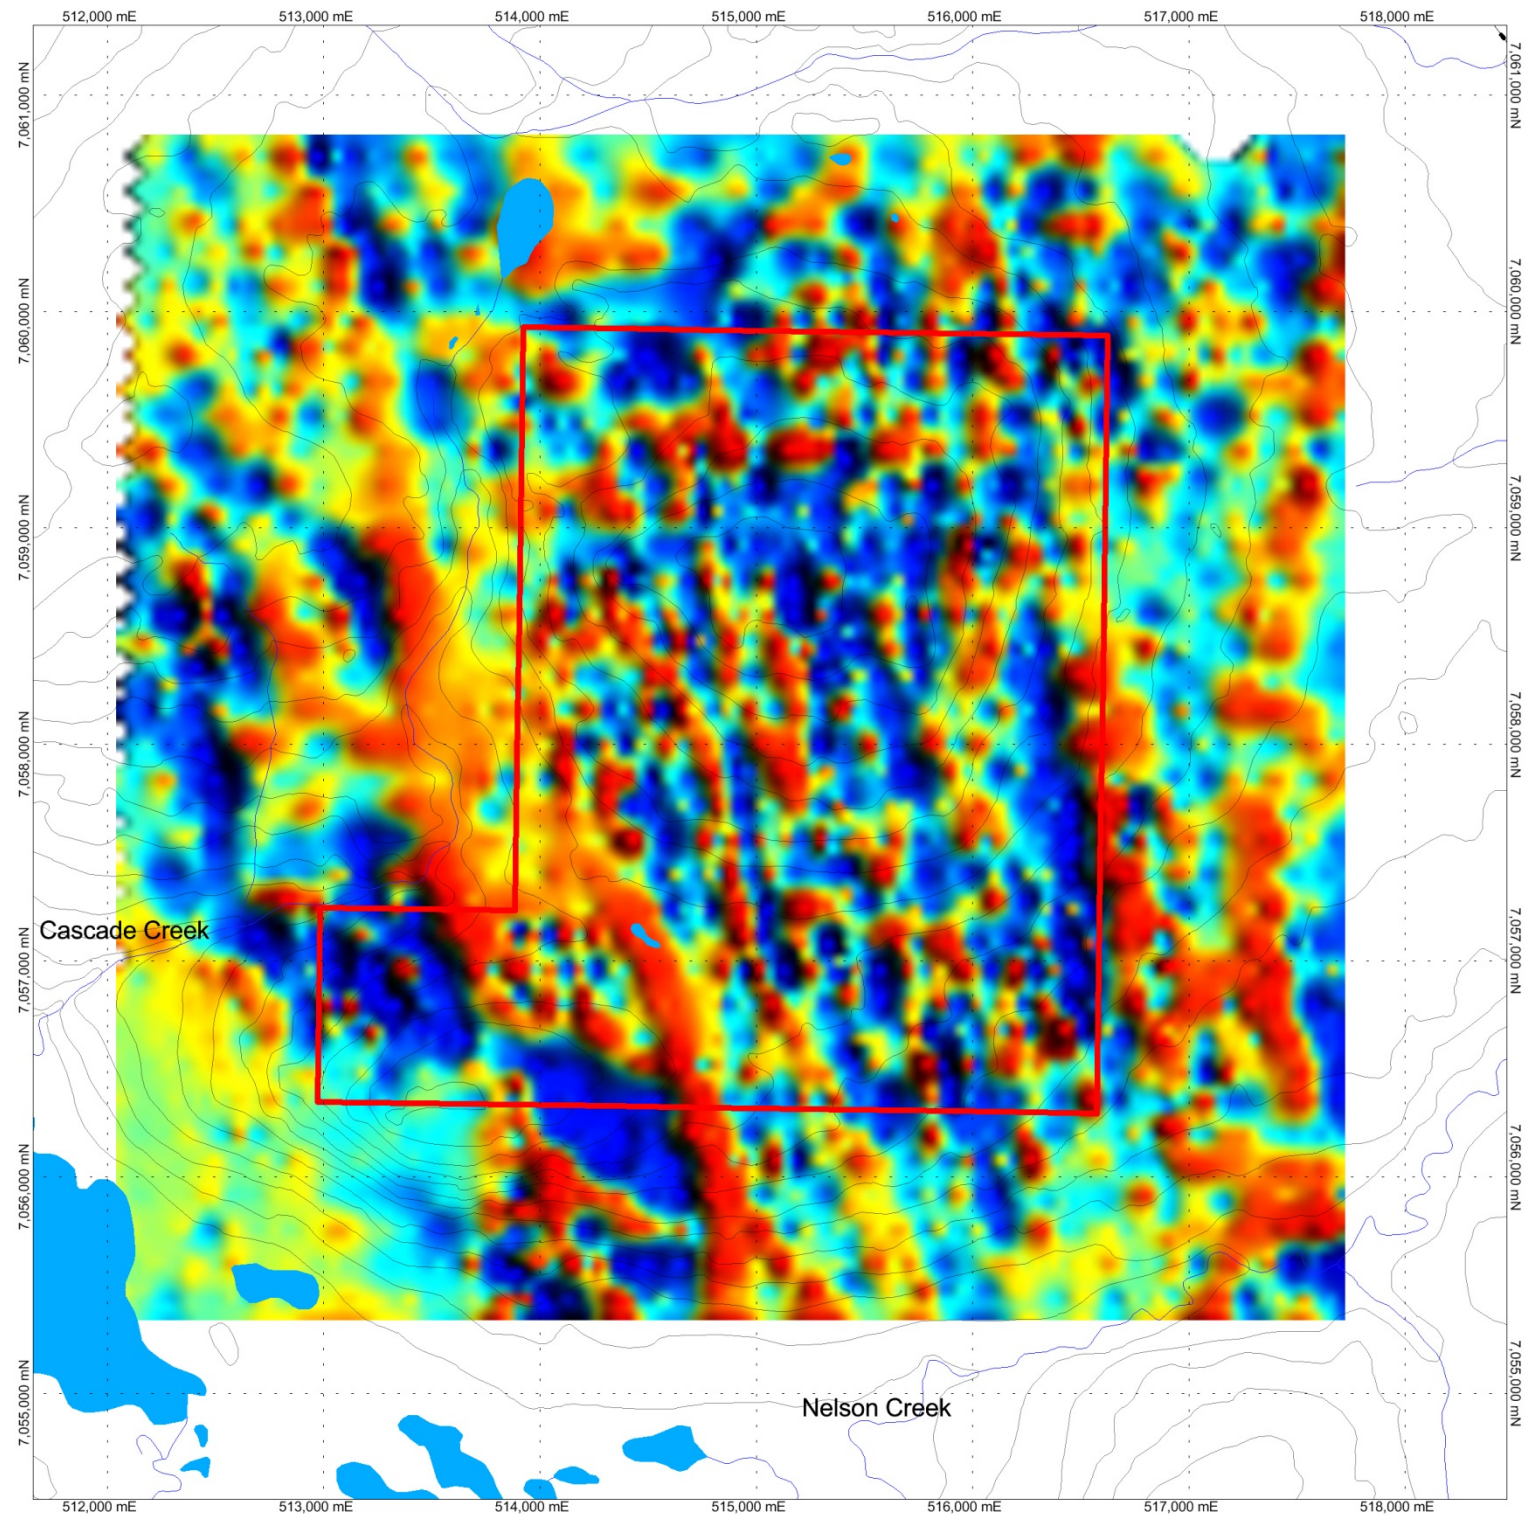

LEGEND

Map Projection:
 Projection: Universal Transverse Mercator
 Central Meridian: 225 Zone BN
 Datum: WGS 84

Survey Dates:	March 13, 2012 to March 14, 2012
Survey Base:	Mayo, YT
Helicopter Type:	Bell 206 Jet Ranger
Registration:	C-FZHK
Survey Technology:	Magnetic survey

SURVEY PARAMETERS:

Mean Terrain Clearance:	35 meters
Helicopter:	35 meters
Magnetometer:	35 meters
Spectrometer:	35 meters

Block D:

Survey Line Spacing:	150 meters
Survey Line Direction:	90°-270°
Tie Line Spacing:	1500 meters
Tie Line Direction:	0°-180°

AIRBORNE SYSTEMS:

Scintrex CS-3 Magnetometer Sensor	
Configuration:	Stinger with 3 axis compensation
Sample Rate:	10 Hz
Sensitivity:	0.01 nT

Mayo Lake Minerals Inc.

Calculated Vertical Gradient Block D

