



SURVEY SPECIFICATIONS:
 Survey Date: April 23rd - July 31st, 2016
 Survey Base: K2X Camp, Yukon
 Aircraft: Aerospacelab A-star 350 B3 C-GTNI / C-FVTM
 Survey Line Spacing: 150 metres
 Tie Line Spacing: 1500 metres
 Tie Line Direction: N 48° E / N 228° E
 Transmitter Loop: Diameter 26 Meters
 Dipole Moment: 401,382 nA
 Transmitter Waveform: Trapezoid, Pulse Width 7.34 ms, Base Frequency 30 Hz
 Geometrics High Sensitivity Magnetics Sensors
 Magnetic Resolution: 0.02 nT at (10Hz)
MAP PROJECTION
 Datum: NAD83
 Projection: Universal Transverse Mercator zone 9N
 Central Meridian: 129°W
 Central Scale Factor: 0.9996
 False Easting/Northing: 500,000m/0m
 Major Axis: 6378137
 Inverse Flattening: 298.25722
 NTS: 105608

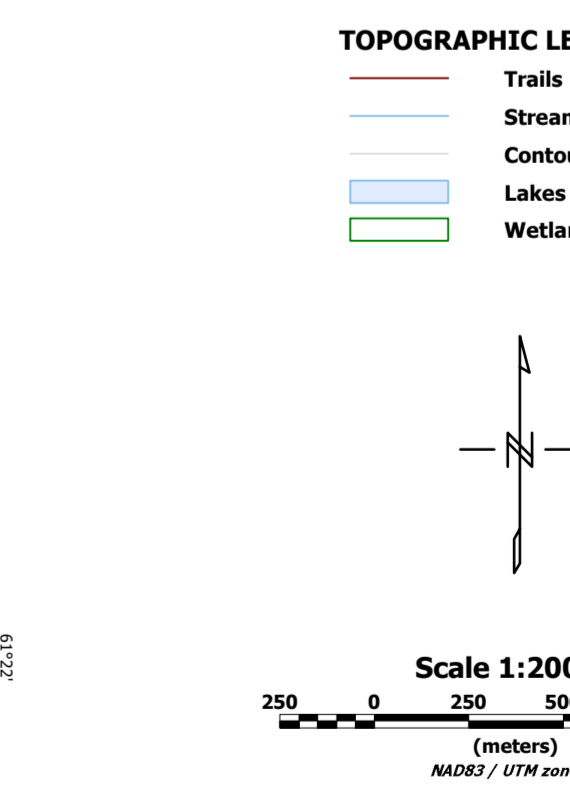

The topographic data base was derived from 1:50,000 NRC (Natural Resources Canada) NTDB data (www.geobase.ca).
 Background shading is derived from NASA SRTM (Shuttle Radar Topographic Mission) data (raw data derived from Geocommities 1:250,000 (www.geocomm.com))
 and Natural Earth 1:10,000,000 database (www.naturalearthdata.com/downloads).

BMC Minerals (No.1) Ltd
Pelly
Wolverine Lake, Yukon
 Geotech VTEM System
VTEM B-Field Z Component
Channel 36
Time Gate 2.021 ms
Flown and processed by Geotech Ltd.
245 Industrial Parkway North,
Aurora, Ontario, Canada L4G 4C4
 www.geotech.ca
October 2016

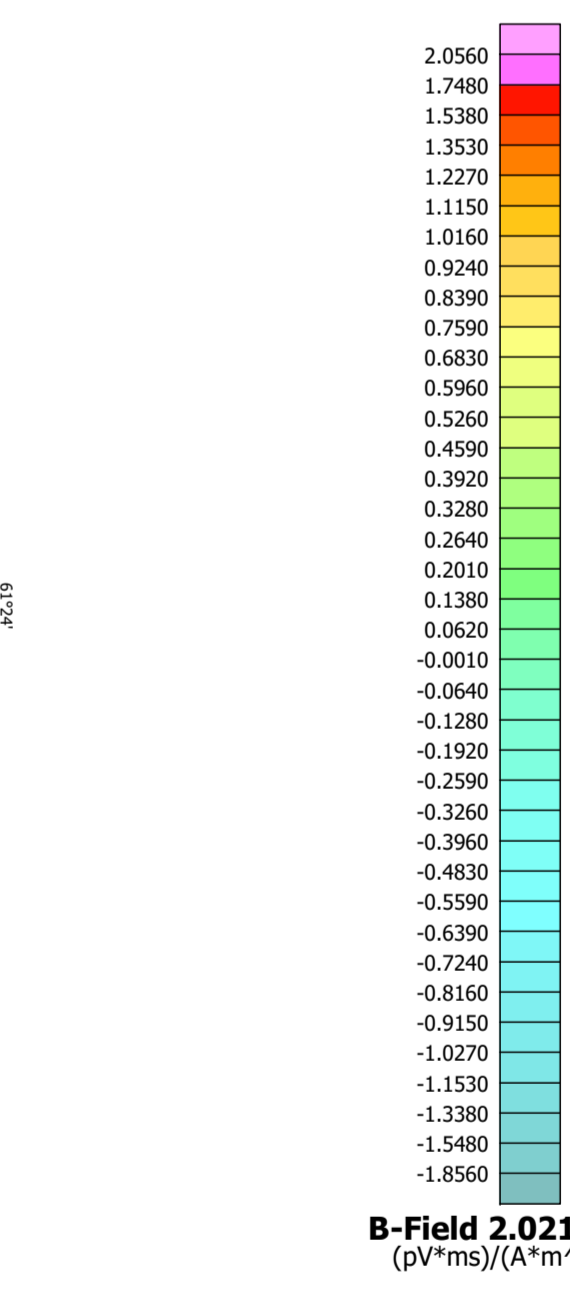