
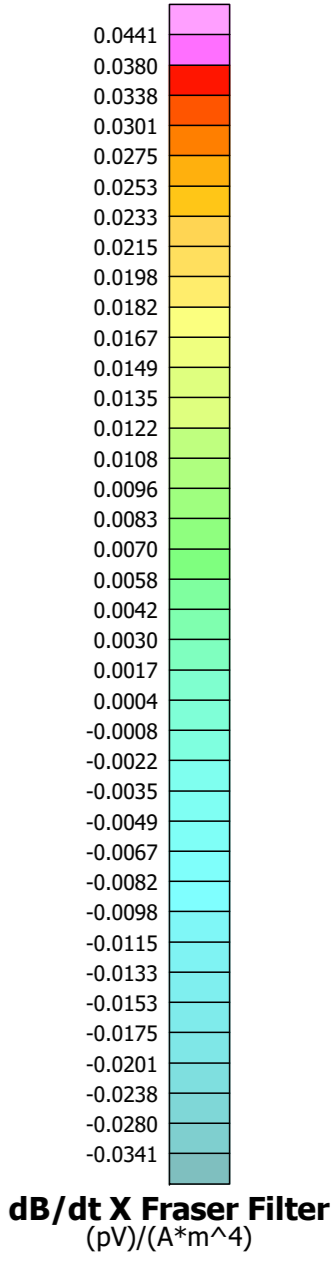



**SURVEY SPECIFICATIONS:**  
 Survey Date: April 23rd - July 31st, 2016  
 Survey Base: KCM Camp, Yukon  
 Aircraft: Aerospaciale A-star 350 B3 C-GTNI / C-PVTM  
 Survey Line Spacing: 150 metres  
 Survey Line Direction: N 01° E / N 180° E  
 Tie Line Spacing: 1500 metres  
 Tie Line Direction: N 90° E / N 270° E  
 Average Aircraft Terrain Clearance: 147 metres  
 EM Transmitter Loop: Towed at an average terrain clearance of 31 metres below the helicopter  
 2 Magnetic Sensors: Towed at an average terrain clearance of 21 metres below the helicopter

**INSTRUMENTS:**  
 Geotech Time Domain Electromagnetic System (VTEM)  
 Concentric Rx/Tx Geometry  
 X-Coil Diameter: 0.32m  
 Z-Coil Diameter: 1.2m  
 Transmitter Loop: Diameter 26 Metres  
 Dipole Moment: 40,182 nA  
 Transmitter Waveform: Trapezoid, Pulse Width 7.34 ms, Base Frequency 30 Hz  
 Geometrics High Sensitivity Cesium Magnetic Sensors  
 Magnetic Resolution: 0.02 nT at (10Hz)

**MAP PROJECTION:**  
 Datum: NAD83  
 Projection: Universal Transverse Mercator zone 9N  
 Central Meridian: 129°W  
 Central Scale Factor: 0.9996  
 False Easting/Northing: 500,000m/0m  
 Major Axis: 6378137  
 Inverse Flattening: 298.25722  
 NTS: 105055, 105006

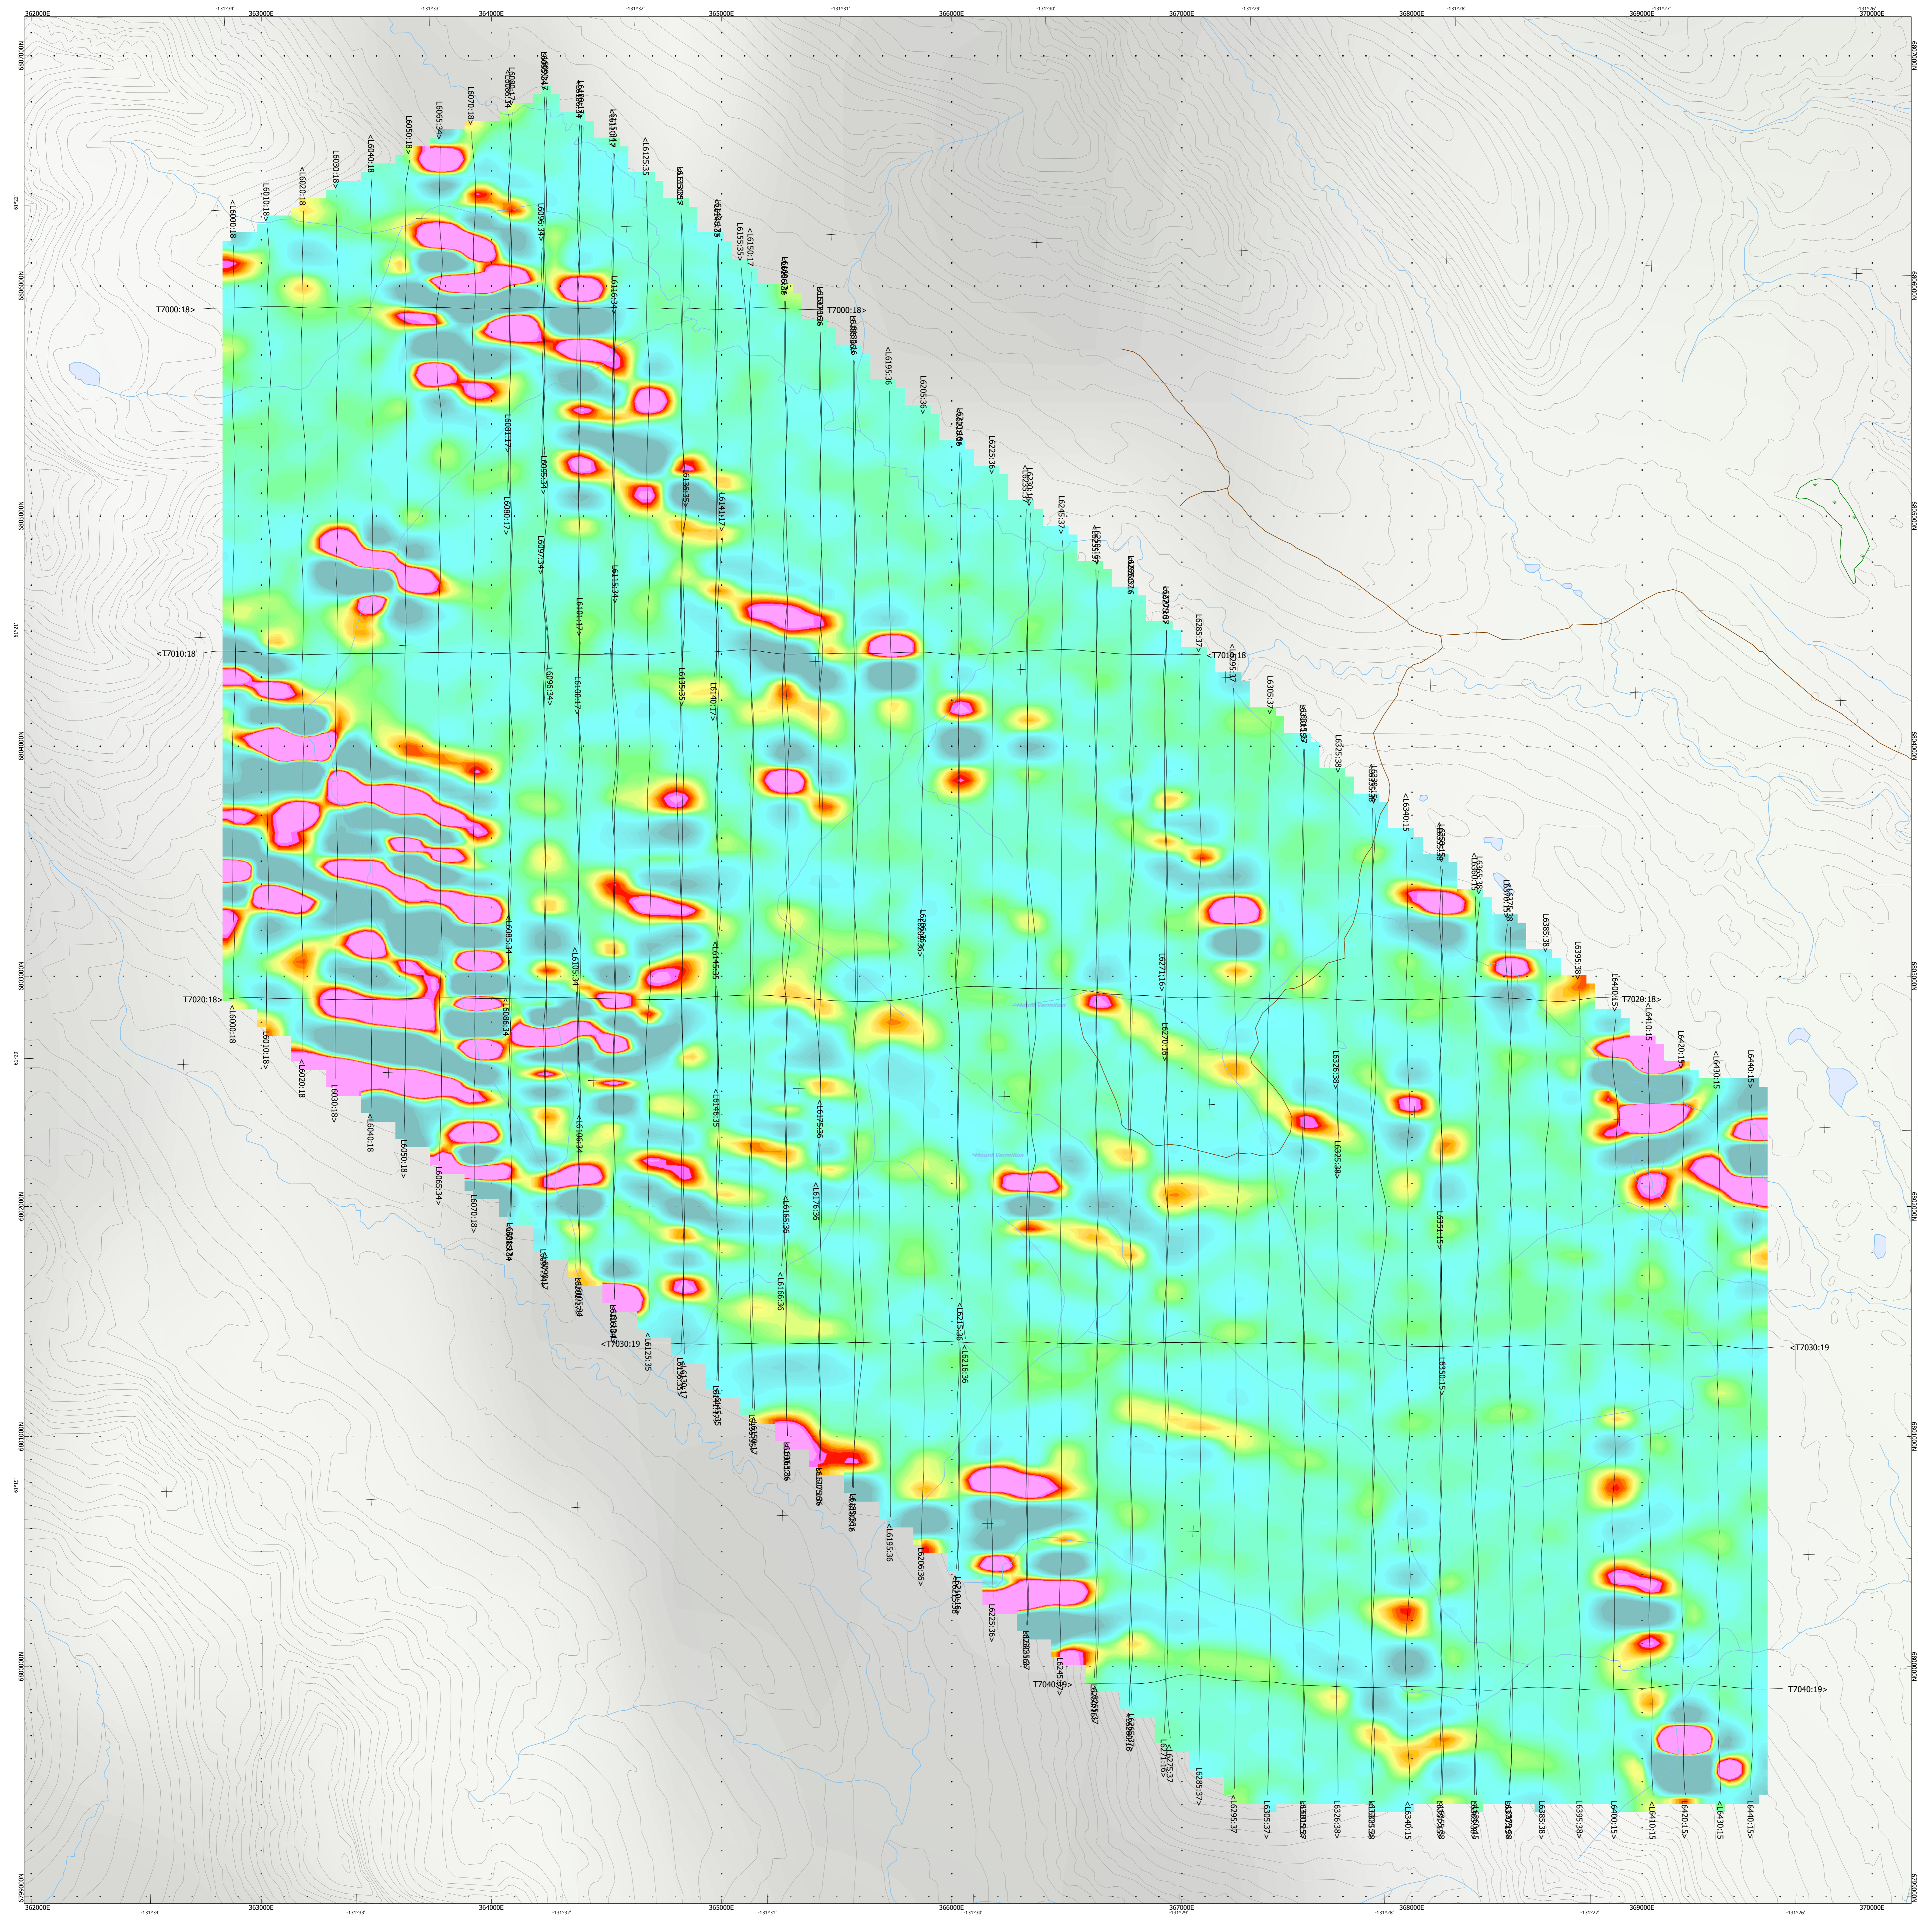

**TOPOGRAPHIC LEGEND:**  
 Trails  
 Streams / Rivers  
 Contours  
 Lakes / Ponds  
 Wetlands

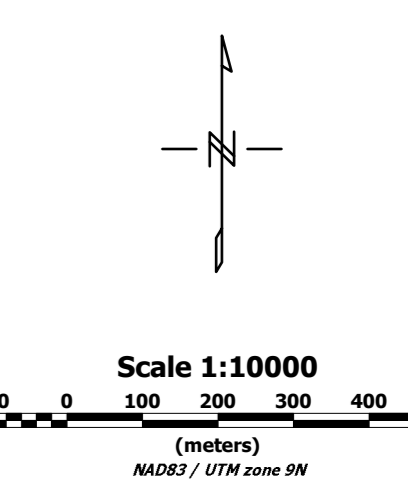

The topographic data base was derived from 1:50,000 NRC (Natural Resources Canada) NTDB data (www.geogov.gc.ca)  
 Background shading is derived from NASA SRTM ( Shuttle Radar Topographic Mission) data  
 Inset data derived from Geogov (www.nrc.ca/geogov) and Natural Earth 1:10,000,000 database (www.naturalearthdata.com/downloads).

**BMC Minerals (No.1) Ltd**  
**Wolf**  
**Wolverine Lake, Yukon**  
 Geotech VTEM System  
 VTEM dB/dt X Component  
 Fraser Filter Channel 20  
 Time Gate 0.220 ms  
 Flown and processed by Geotech Ltd.  
 245 Industrial Parkway North,  
 Aurora, Ontario, Canada L4G 4C4  
 www.geotech.ca  
**September 2016**