

TABLE OF CONTENTS

	<u>PAGE</u>
Introduction and Summary	1
Location and Access	1
Personnel	2
Claim Ownership	5
Geology	5
The Induced Polarization Method	6
Collection of Data and Instrumentation	11
the Survey Grid	16
Discussion of Results	16
Conclusions and Recommendations	18


APPENDICES

Location Map	21
Record of Claims	22
Record of Expenditures	23
Distribution of Expenditures	24

PLATES


Plate 1	Of Claims	I.P. Survey,	Chargeability
Plate 2	Of Claims	I.P. Survey,	Conductivity



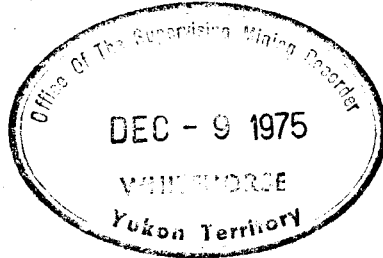


This report has been examined by the Geological Evaluation Unit and is recommended to the Commission to be considered as representation work for a sum of

\$66,75.00


R. J. Craig
Mining Engineer

Considered as representation work under Section 53 (4) Yukon Quartz Mining Act.


R. BAXTER
Supervising Mining Recorder
per Commissioner of Yukon Territory

INTRODUCTION AND SUMMARY

During the summer months of 1974, Hudson Bay Exploration and Development Company Limited, conducted a reconnaissance geochemical and prospecting program over the Proterzoic formation which is centered 50 miles north of Dawson City, Yukon Territory. A base camp was established on the Dempster Highway near the north end of Chapman Lake and two-man parties worked from fly camps with full time helicopter support.

On investigating anomalous silt sample values, minor galena and sphalerite mineralization was found and 72 O_g Claims were staked over the area of interest. In 1975 geological studies have been carried out in the claim area and a grid 6400' by 5000' was located. The induced polarization survey was completed during the period July 13th to August 5th, by Geotrex Limited of Ottawa, Ontario. The expenditure of \$6,675.00 on this program is being applied towards assessment on O_g 1 - 49 inclusive, 51, 53, 57 and 59.

LOCATION AND ACCESS

The O_g Claims are located in the Dawson Mining Division at 140°00'/64°50', on the boundary of claim sheets 116B13 and 116C16. The group is situated on a tributary of Coal Creek approximately 50

miles north of Dawson City, Yukon Territory.

The claim area is readily accessible only by Helicopter.

PERSONNEL

The induced polarization survey on the Og claims which is the subject of this report was carried out by P. Gudjuris, B. Luffman and two helpers. Field supervision was provided by E. W. Yarrow and overall supervision was provided by E. T. McIntosh.

The following details the qualifications of these personnel:

E. T. McIntosh

- B.Sc graduate in geology, University of Manitoba, 1933
- continually employed in all phases of mineral exploration since 1933 in central Canada and the Yukon
- has been the Resident Geologist in charge of exploration progress in the Yukon Territory and adjoining Northwest Territory for Hudson Bay Exploration and Development Company Limited since 1965
- Home address: 62 Klondike Road
Whitehorse, Yukon Territories
- member of Geological Association of Canada

Geoterrex Ltd., October 1972

CURRICULUM VITAE

NAME: GUDJURGIS, Paul

POSITION: Geophysicist (specialist-induced polarization)

BIRTH DATE: 15th May 1945

BIRTHPLACE: HAMBURG, Germany, Entered Canada in 1949

NATIONALITY: Canadian Citizen
Canadian Passport

EXPERIENCE: Mr. Gudjurgis received his high school education in Edmonton, Canada graduating from St. Francis Xavier High School in 1962. He enrolled in an Honors Physics programme at the University of Alberta in Edmonton and was awarded a degree in Honors Physics in 1966. Subsequently, he spent a year as a special student in geology. Following a year and half's work experience in Exploration Geophysics, he commenced a research program at the University of Alberta in Lead Isotope studies which lead to a M.Sc. in Geophysics in 1971.

Mr. Gudjurgis joined Geoterrex Limited as a staff geophysicist in October 1972 and has acted as a project manager mostly on induced polarization surveys since that time in various parts of North America and Australia where he spent almost two years.

With over five years total experience in the application, operation and interpretation of the induced polarization method Mr. Gudjurgis is well qualified and considered as a senior field geophysicist with Geoterrex Limited.

E. W. Yarrow

- B. Sc graduate in geology, University of British Columbia, 1970
- 1970 - 1972 employed by American Smelting and Refining Company (ASARCO) in Ireland and British Columbia
- employed by Hudson Bay Exploration and Development Company Limited in B. C. and Yukon since 1973
- field supervision of 1975 program in Ogilvie Mountains area including program on Og claims
- home address: 15387 - 20A Avenue
Surrey, B.C.

Brad Luffman, Geophysical Operator

- age 23
- Mr. Luffman joined Geotrex Limited in May 1974 as a geophysical operator and since then has been involved in constant field operations in many parts of Canada and the U. S. A.
- Mr. Luffman is an experienced operator having received special training to conduct magnetic surveys and vertical loop and horizontal loop electromagnetic surveys. Also, as on the present project, he has often acted as a transmitter operator on induced polarization surveys and assisted the project geophysicist with running the survey crew and with the compilation and reduction of the field results.

CLAIM OWNERSHIP

Details concerning the staking, recording, and status of the Og claims is presented in the claim record on page 26 of this report. These claims were transferred (100%) to Hudson Bay Exploration and Development Company Limited, 1695-555 Burrard Street, Vancouver, B.C., on August 27, September 5, 6, 1974 and January 6, 1975.

Of the 72 Og claims original staked assessment is being applied on 54 claims in four groups as follows:

Group A - Og 1, 2, 13, 14, 35, 36, 47, 48, 57, 59.

Group B - Og 3, 4, 15, 16, 33, 34, 38, 40, 42, 44, 45,
46, 49, 51, 53, 55

Group C - Og 5, 6, 17, 18, 25-32 inclusive, 37, 39, 41, 43.

Group D - Og 7 - 12 and 19 - 24 inclusive.

Two years of assessment work is being applied on the claims in Group A and one year of assessment is being applied on the claims in Group B, C, and D.

GEOLOGY

The geology of the Og claims area is shown in Memoir 364 by L.H. Green of the Geological Survey of Canada. The group is situated within the Coal Creek Dome, an east - west trending structure underlain by rocks of Proterozoic age. Dark weathering shale and quartzite (1) are the oldest rocks exposed and these grade upwards into a thick sequence comprised principally of fine

grained arenaceous dolomite of clastic origin. Both Units 1 and 2 have undergone considerable folding and faulting during the Hackeln Orogeny.

The claim group itself is underlain by Green's unit 2b, a conglomerate containing pebbles of jasper, chert, and quartzite grading upwards into finer grained rocks, principally buff weathering dolomite but including some shale and argillite. Due to the lateness of the season in 1974 the area was not examined in detail. Work was concentrated at the southern end of the claims where silt samples collected during the reconnaissance survey contained anomalous values of lead and zinc. Much of the area is overburden covered and an induced polarization was proposed to locate the source of the anomalous silt values.

THE INDUCED POLARIZATION METHOD

The Induced Polarization method is based on the electro-chemical phenomenon of "over-voltage", that is, on the establishment and detection of double layers of electrical charge at the interface between ionic and electronic conducting material when an electrical current is caused to pass across the interface.

All naturally occurring sulphides of metallic lustre, some oxides and graphite, give marked induced polarization responses when


present in sufficient volume even when such materials occur in low concentrations and in the form of discrete unconnected particles. Thus induced polarization is the only method available which has general application to the direct detection of disseminated sulphide deposits.

Each rock and soil type exhibits appreciable induced polarization response, usually confined to a relatively low amplitude range, which is characteristic of the mineral or soil. However certain clays and "lamellar" minerals including serpentine, sericite and chlorite may give rise to anomalous response. These effects are attributed largely to "membrane" polarization.

In order to measure I.P. effects in a volume of rock a current is caused to flow through it via two current electrode contact points and resulting potential differences are measured across two potential electrode contact points.


In practice two different techniques are used, namely "Time Domain" and "Frequency Domain". In the Time Domain technique which was employed for this survey a direct current is allowed to flow for several seconds and then cut off. The decay of the polarization voltages built up, during the passage of the current is then studied after the current is switched off. In the Frequency Domain technique

a Sine wave current **form** of two low but well separated frequencies is used. Since polarization effects take an appreciable time to build up the response at the lower frequency will be greater so that apparent resistivities or transfer impedances between the current and measuring circuits will be larger at that lower frequency.

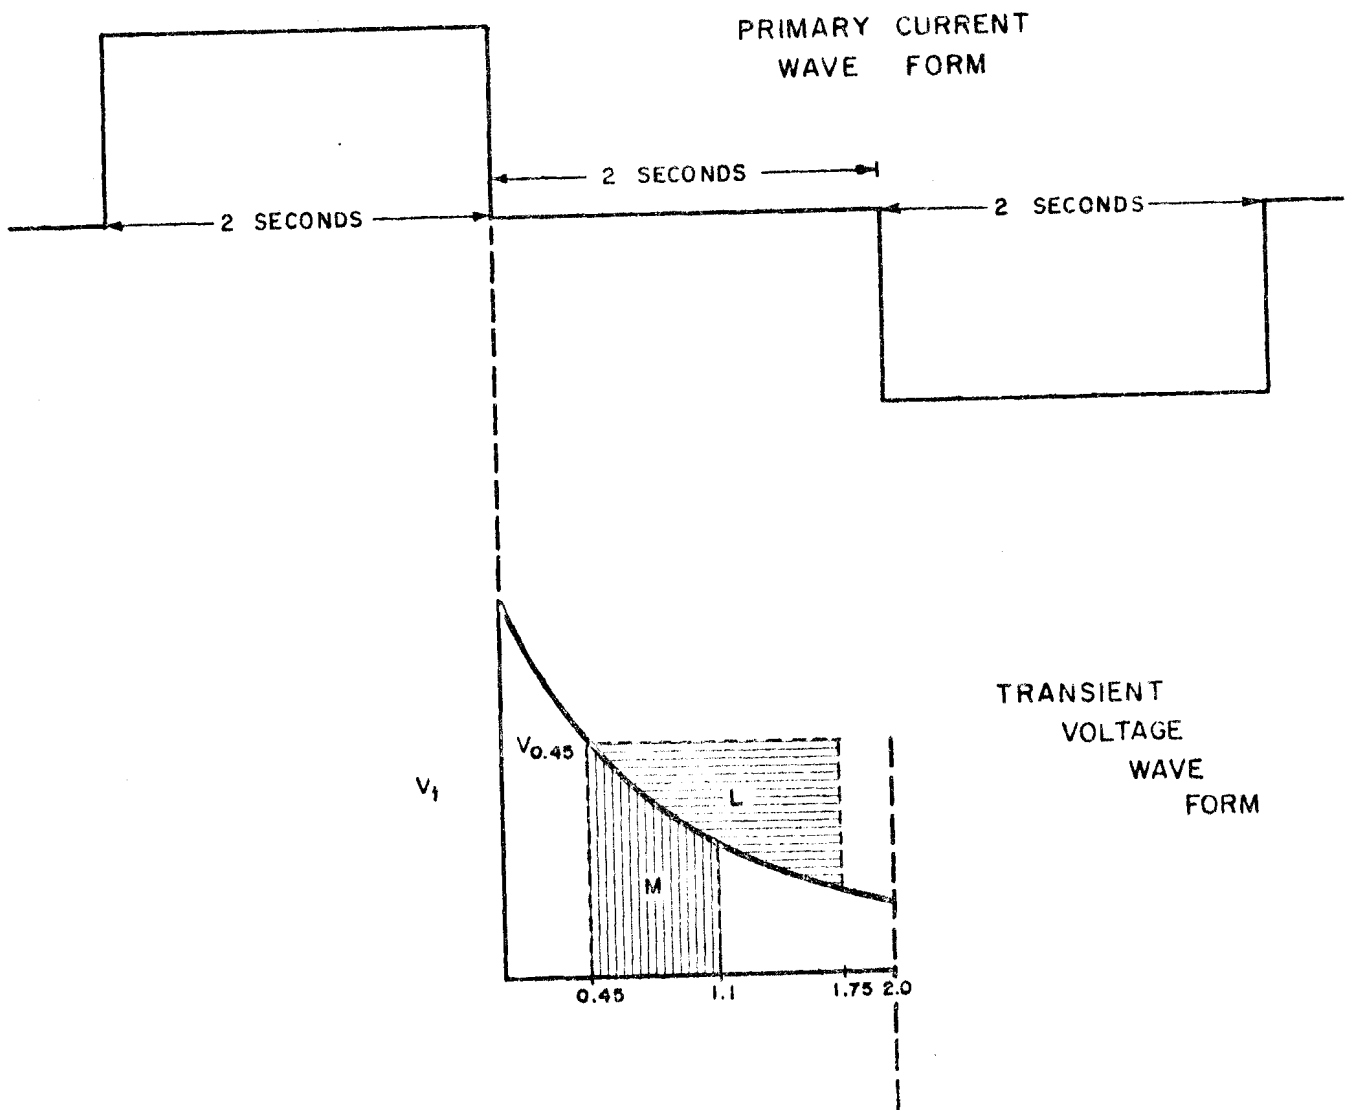


NEWMONT - TYPE TIME DOMAIN WAVE FORMS
AND QUANTITIES MEASURED

POLE-DIPOLE ELECTRODE ARRAY

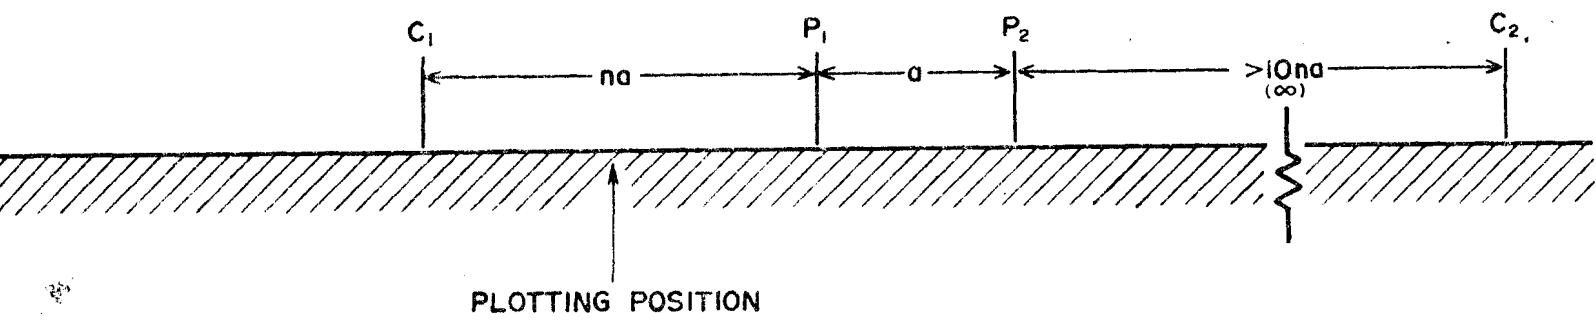

- P₁ P₂ POTENTIAL ELECTRODES
- C₁ C₂ CURRENT ELECTRODES
- a DIPOLE LENGTH
- n = 1, 2, 3, 4,

EQUISPACED THREE ELECTRODE ARRAY

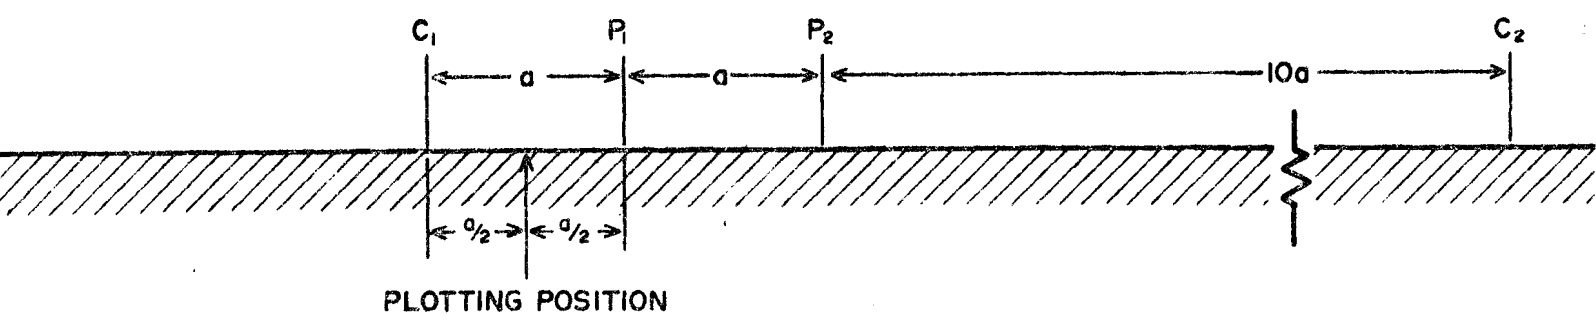

POLE-DIPOLE ELECTRODE CONFIGURATIONS.

COLLECTION OF DATA AND INSTRUMENTATION

DATA OBSERVED

The field measurements taken are as follows:

- (i) The applied current, I_a , flowing through the two current electrodes.
- (ii) The primary voltage, V_p , existing between the potential electrodes while the current is flowing.
- (iii) The apparent chargeability, M_a , which is the observed I.P. effect for one complete cycle, i.e. for two current pulses in opposite directions.

DATA REDUCTION

The apparent chargeability, M_a , in milliseconds or millivolt seconds per volt is read directly on the Newmont type I.P. receiver. It is noted for a cycle rather than a single pulse as described in section (iii) above.

From the observations of the primary voltage, V_p , and the applied current, I_a , the apparent resistivity is calculated at each station as follows:

$$\rho_a = \frac{V_p}{I_a} \quad .K$$

where P_a = apparent resistivity in ohm. metres

V_p = primary voltage in volts

I_a = applied current in amps.

K = constant depending on array geometry

Note: for the pole-dipole array

$$K = 2 a (n) (n+1)$$

where a is the dipole length and $n=1, 2, 3$ etc., na is the distance between the potential dipole and the moving current electrode.

As shown on Plate 2, the resistivity data has been converted to conductivity readings as follows:

$$\frac{\text{Resistivity}}{\text{Conductivity}} = \frac{2000}{P_a}$$

IPR-7 NEWMONT TYPE RECEIVER SPECIFICATIONS

Electrical:

Primary Voltage Range	300 microvolts to 30V Accuracy $\pm 3\%$
Input Impedance	300 K ohms
Chargeability (M) Reading Range	0-100 and 0-3-- milliseconds Accuracy $\pm 5\%$
Curve Factor (L) Reading Range	0-100 and 0-300 milliseconds Accuracy $\pm 5\%$
Delay Time Before Integration	0.45 seconds
SP and VLF Noise Compensation	Manual: ± 1.5 millivolts Automatic: 1mV range ± 10 mV total 30 mV range ± 1 V total
Power Supply	Internal rechargeable nickel cadmium batteries. Rated life 45 hours/charge.
Temperature Range	-20 ^o to 30 ^o F (-29 ^o C to +55 ^o C)
Humidity Range	to 100% non-condensing

Mechanical:

Weight	13 $\frac{1}{2}$ lb. (6.1 kg) including batteries
Dimensions	14"x11"x6 $\frac{1}{2}$ " (35.5 cm x 28 cm x 16.5 cm)

ELLIOTT GEOPHYSICAL COMPANY

1.5 KW I.P. TRANSMITTER

SPECIFICATIONS:

INPUT POWER	120 volt 400 Hz single phase at 1800 VA, relatively insensi- tive to input voltage/frequency regulation
OUTPUT POWER	1500 watts
OUTPUT VOLTAGE	200 to 3000 volts in 12 switch selected steps
OUTPUT CURRENT	5 amp. maximum
OUTPUT IMPEDANCE DRIVE	40 ohms to over 10,000 ohms
TIME CYCLE	On/off periods (symmetrical) adjustable at factory from 0.5 to 10 seconds
TEMPERATURE RANGE (AMBIENT)	-15°C to +60°C (+5°F to 140°F)
WEIGHT, COMPLETE WITH CASE	45 pounds
DIMENSIONS, INCASE	10.5 inches high by 16 inches wide by 11.5 inches deep

1.5 KW I.P. GENERATOR

SPECIFICATION SHEET

Model P-15A

OUTPUT:	120 volts
PHASE:	single
FREQUENCY:	400 Hz
POWER:	2 KVA
ENGINE:	Briggs & Stratton type 100232
FUEL:	gasoline
POWER RATING:	4 H.P.
STARTER:	recoil
ALTERNATOR:	Alleco Brushless
COOLING:	none
OVERALL DIMENSIONS:	height 17 inches length 25 inches width 18 inches
NOMINAL WEIGHT:	72 pounds

THE SURVEY GRID

The configuration and orientation of the survey grid is shown on Plate 1 and 2. A central base line (50 + 000 N) was established by transit and extends from 46 + 600 E to 53 + 000 E. Section lines normal to the base line were located by chain and compass at 200 and 400 foot intervals. A total of 26 section lines were chained for a total 14 line-miles of grid.

DISCUSSION OF RESULTS

The chargeability and conductivity data are presented in plan form on Plates 1 and 2 respectively. The horizontal scale is 1 inch = 200 feet.

CHARGEABILITY DATA

The chargeabilities within the area range from 7 to 105 milliseconds. Two main regions of anomalous chargeability were observed.

The most obvious anomaly extends in an east - west direction at approximately 50 + 200 N from L - 48 + 000 E to L - 52 + 200 E and it is open at the east end of the grid. The millisecond readings along this anomaly vary considerable from a low of 53 milliseconds on L - 50 + 800 E to a high of 105 milliseconds on L - 48 + 800 E. On L + 50 + 400 E anomalous readings extend north from the main zone but it is felt the high readings are

probably spurious because of poor electrode contact.

A lesser chargeability anomaly is located 1600 feet south also extends in an east - west direction from L - 48 + 800 E to L - 50 + 800 E ranging from a low of 50 milliseconds to a high of 92 milliseconds. At the west side of the grid additional high chargeability readings were encountered but except for a small anomaly centered at 47 + 500 E - 50 + 400 N the values are quite erratic.

CONDUCTIVITY DATA

The conductivity data shown on Plate 2 was originally plotted as resistivity (ohm-meters) but it was later recalculated by Hudson Bay personnel to be shown as conductivity (mhos-meter). One unit of conductivity on Plate 2 = .0005 mhos/meter.

The two main chargeability anomalies can also be seen on the conducting data. The east - west trend on 50 + 200 N is particularly strong between L - 49 + 800 E and L - 50 + 400 E but drops considerably to the east; however it is still open on the east side of the grid. The lower strength anomaly to the south (48 + 60) is also evident but it is much less apparent when shown by conductivity.

Two local but intense conductivity anomalies are located

on the west side of the Og grid. One is centered at L - 47 + 300 E and 50 + 400 N and may trend N-5 (grid direction). The second anomaly trends NE-SW (grid) and is centered at L - 47 + 400 E and 49 + 000 N. It is still open to the west.

CONCLUSIONS AND RECOMMENDATIONS

The induced polarization survey produced two significant anomalous trends both of which are parallel to the strike of the bedding in the grid area and can be seen on the chargeability and conductivity plots. The northern anomaly is located along 52 + 200 N, has a strike length of 4600 feet and is open to the east. Particouлары good results were obtained between L - 48 + 200 E and L - 50 + 400 E. The second anomaly is located along 48 + 600 N and has a strike length of approximately 2000 feet. Both of these trends provide good drill targets.


In addition to the above targets scattered chargeability highs are located at the west end of the grid. The conductivity plot (Plate 2) shows more specific anomalies in these areas and there should also be tested by drilling but they are secondary in importance to the east - west trends.


R. T. McIntosh, B.Sc F.G.A.C.



Resident Geologist

APPENDICES

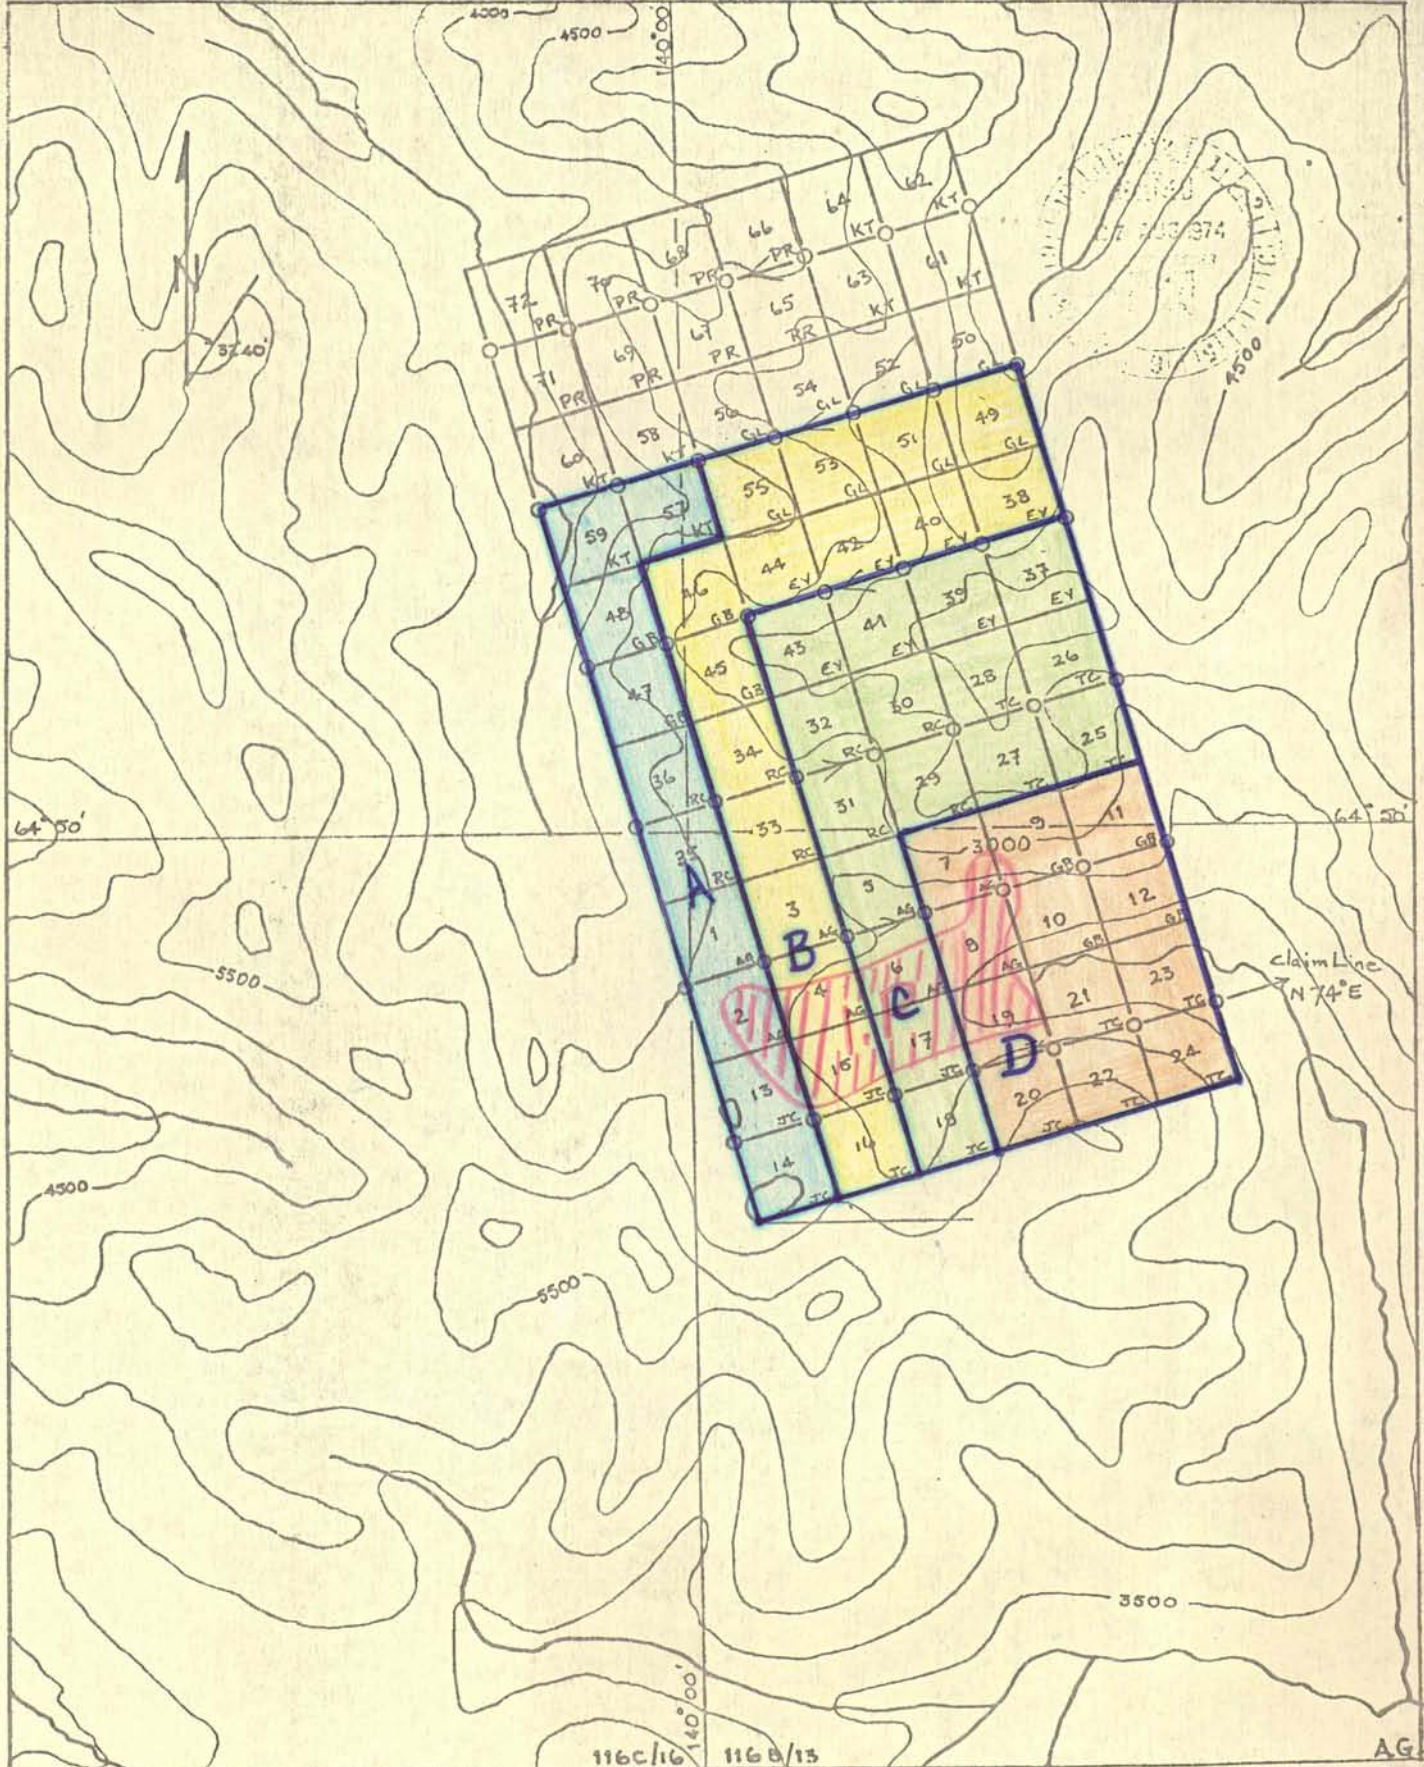

LOCATION MAP: OG CLAIM GP.
 Scale 1" =  (approx.)
 3500'

AG

UNPATENTED MINERAL CLAIMS

LOCATION Mt. Harper (116B13) Dawson M.D.

PROPERTY Og Claims

NAME	TAG NUMBER	DATE STAKED	DATE RECORDED	STAKED BY	DATE OF TRANSFER	TRANSFeree	DATE REGISTERED	EXPIRY	ASSESSMENT					
								MONTH	75	76	77	78	79	
OG - 1	89914	Aug 8/74	Aug 14/74	A.Groome	Sept.5/74	H. B. E. D.	Sept.6/74	August	x					
- 2	89915	"	"	"	"	"	"	"	x					
- 3	89916	"	"	"	"	"	"	"	x					
- 4	89917	"	"	"	"	"	"	"	x					
- 5	89918	"	"	"	"	"	"	"	x					
- 6	89919	"	"	"	"	"	"	"	x					
- 7	89920	"	"	"	"	"	"	"	x					
- 8	89921	"	"	"	"	"	"	"	x					
- 9	90079	Aug.9/74	Sept.6/74	G.E.Bidwell	Sept.6/74	"	"	September	x					
- 10	90080	"	"	"	"	"	"	"	x					
- 11	90081	"	"	"	"	"	"	"	x					
- 12	90082	"	"	"	"	"	"	"	x					
- 13	90013	Aug. 8/74	Aug. 27/74	J. Chapman	Aug.27/74	"	Aug.27/74	August	x					
- 14	90014	"	"	"	"	"	"	"	x					
- 15	90015	"	"	"	"	"	"	"	x					
- 16	90016	"	"	"	"	"	"	"	x					
- 17	90017	"	"	"	"	"	"	"	x					
- 18	90018	"	"	"	"	"	"	"	x					
- 19	90019	"	"	"	"	"	"	"	x					
- 20	90020	"	"	"	"	"	"	"	x					
- 21	89922	"	Aug.14/74	P.T.Coyle	Jan 6/75	"	"	"	x					
- 22	89923	"	"	"	"	"	"	"	x					
- 23	89924	"	"	"	"	"	"	"	x					
- 24	89925	"	"	"	"	"	"	"	x					

08-89

UNPATENTED MINERAL CLAIMS

LOCATION Mt. Harper (116B13) Dawson M.D.

PROPERTY Og Claims

NAME	TAG NUMBER	DATE STAKED	DATE RECORDED	STAKED BY	DATE OF TRANSFER	TRANSFeree	DATE REGISTERED	EXPIRY	ASSESSMENT					
								MONTH	75	76	77	78	79	
Og - 25	89926	Aug.10/74	Aug.14/74	P.T.Coyle	Jan.6/75	H. B. E. D.		August	x					
- 26	89927	"	"	"	"	"		"	x					
- 27	89928	"	"	"	"	"		"	x					
- 28	89929	"	"	"	"	"		"	x					
- 29	90021	Aug.16/74	Aug.27/74	R. Cann	Aug.27/74	"	Aug.27/74	"	x					
- 30	90022	"	"	"	"	"	"	"	x					
- 31	90023	"	"	"	"	"	"	"	x					
- 32	90024	"	"	"	"	"	"	"	x					
- 33	90025	"	"	"	"	"	"	"	x					
- 34	90026	"	"	"	"	"	"	"	x					
- 35	90027	"	"	"	"	"	"	"	x					
- 36	90028	"	"	"	"	"	"	"	x					
- 37	90029	"	"	E.W.Yarrow	"	"	"	"	x					
- 38	90030	"	"	"	"	"	"	"	x					
- 39	90031	"	"	"	"	"	"	"	x					
- 40	90032	"	"	"	"	"	"	"	x					
- 41	90033	"	"	"	"	"	"	"	x					
- 42	90034	"	"	"	"	"	"	"	x					
- 43	90035	"	"	"	"	"	"	"	x					
- 44	90036	"	"	"	"	"	"	"	x					
- 45	90083	"	Sept.6/74	G.E.Bidwell	Sept.6/74	"	Sept.6/74	September	x					
- 46	90084	"	"	"	"	"	"	"	x					
- 47	90085	"	"	"	"	"	"	"	x					
- 48	90086	"	"	"	"	"	"	"	x					

- 89 - 91

UNPATENTED MINERAL CLAIMS

LOCATION Mt. Harper (116B13) Dawson M.D.

PROPERTY Og Claims

NAME	TAG NUMBER	DATE STAKED	DATE RECORDED	STAKED BY	DATE OF TRANSFER	TRANSFEREE	DATE REGISTERED	EXPIRY MONTH	ASSESSMENT					
									75	76	77	78	79	
OG - 49	90037	Aug.16/74	Aug.27/74	G.Little	Aug. 27/74	H. B. E. D.	Aug.27/74	August	x					
- 50	90038	"	"	"	"	"	"	"	x					
- 51	90039	"	"	"	"	"	"	"	x					
- 52	90040	"	"	"	"	"	"	"	x					
- 53	90041	"	"	"	"	"	"	"	x					
- 54	90042	"	"	"	"	"	"	"	x					
- 55	90043	"	"	"	"	"	"	"	x					
- 56	90044	"	"	"	"	"	"	"	x					
- 57	90087	"	Sept.6/74	K.J.Taylor	Sept.6/74	"	Sept.6/74	September	x					
- 58	90088	"	"	"	"	"	"	"	x					
- 59	90089	"	"	"	"	"	"	"	x					
- 60	90090	"	"	"	"	"	"	"	x					
- 61	90091	"	"	"	"	"	"	"	x					
- 62	90092	"	"	"	"	"	"	"	x					
- 63	90093	"	"	"	"	"	"	"	x					
- 64	90094	"	"	"	"	"	"	"	x					
- 65	90045	Aug.24/74	Aug.27/74	P.Robbins	Aug.27/74	"	Aug.27/74	August	x					
- 66	90046	"	"	"	"	"	"	"	x					
- 67	90047	"	"	"	"	"	"	"	x					
- 68	90048	"	"	"	"	"	"	"	x					
- 69	90049	"	"	"	"	"	"	"	x					
- 70	90050	"	"	"	"	"	"	"	x					
- 71	90051	"	"	"	"	"	"	"	x					
- 72	90052	"	"	"	"	"	"	"	x					

88-10-59

RECORD OF EXPENDITURES

Geotrex contract for I.P. survey (invoice attached) \$6675.00

I R. T. McIntosh hereby certify the above to be correct.

H. I. McIntosh, B.Sc F.G.A.C.

A handwritten signature in cursive script, appearing to read 'H. I. McIntosh', written in dark ink.

Resident Geologist

DISTRIBUTION OF EXPENDITURES

6675.00

Group A (Og 1, 2, 13, 14, 35, 36, 47, 48, 57 & 59)

10 Claims x 2 year's assessment = 10 x 200.00 = 2000.00

BALANCE: 4675.00

Group B (Og 3, 4, 15, 16, 33, 34, 38, 40, 42, 44-46, 49, 51, 53, & 55)

16 Claims x 1 year's assessment = 16 x 100.00 = 1600.00

BALANCE: 3075.00

Group C (Og 5, 6, 17, 18, 25-32, 37, 39, 41, & 43)

16 Claims x 1 year assessment = 16 x 100.00 = 1600.00

BALANCE: 1475.00

Group D (Og 7 - 12 and 19 - 24)

12 Claims x 1 year assessment = 12 x 100.00 = 1200.00

BALANCE: 275.00

2060 WALKLEY RD.,
C WA, ONT. K1G 3P5
area code (613) - 731-9571
cable address GEOTERREX

Hudson Bay Exploration and
Development Co. Ltd.,
TO: P.O. Box 4007,
WHITEHORSE, Yukon Territory,
Y1A 3S9.

4248

DETAILS

August 25, 1975.

In accordance with the terms of the agreement dated May 30, 1975 between Hudson Bay Exploration and Development Co. Ltd., and Geoterrex Limited the following charges apply with respect to the induced polarization survey completed on the OG claim group in the Yukon Territory in the period from July 13 to August 15, 1975:

Mobilization- 4 days standby @ \$275.00	\$ 1,100.00
Survey Charge- 15 days @ \$335.00	5,025.00
Weather Standby Charge-	
2 days @ \$275.00	<u>550.00</u>
	\$ 6,675.00
	=====

85-380

85-380

Prices O.K.
Q. O.K.
Quantity Checked
Charge No.
Approved

[Handwritten signature]



POLE - DIPOLE ARRAY
 'a' - spacing = 200'

HUDSON BAY EXPLORATION COMPANY LIMITED
 VANCOUVER, B. C.

I. P. SURVEY, CHARGEABILITY
 GEOTERREX LIMITED, OTTAWA, ONTARIO
 'OG' CLAIMS
 DAWSON MINING DISTRICT

MAP 116B/13

DATE DRAWN: AUG. 1978	REVISED:	DRAWN BY: C. J.	DRAWING No.:
--------------------------	----------	--------------------	--------------

scale in feet

52+000 N

51+000 N

50+000 N

49+000 N

48+000 N

47+000 E

48+000 E


49+000 E

50+000 E

51+000 E

52+000 E

53+000 E

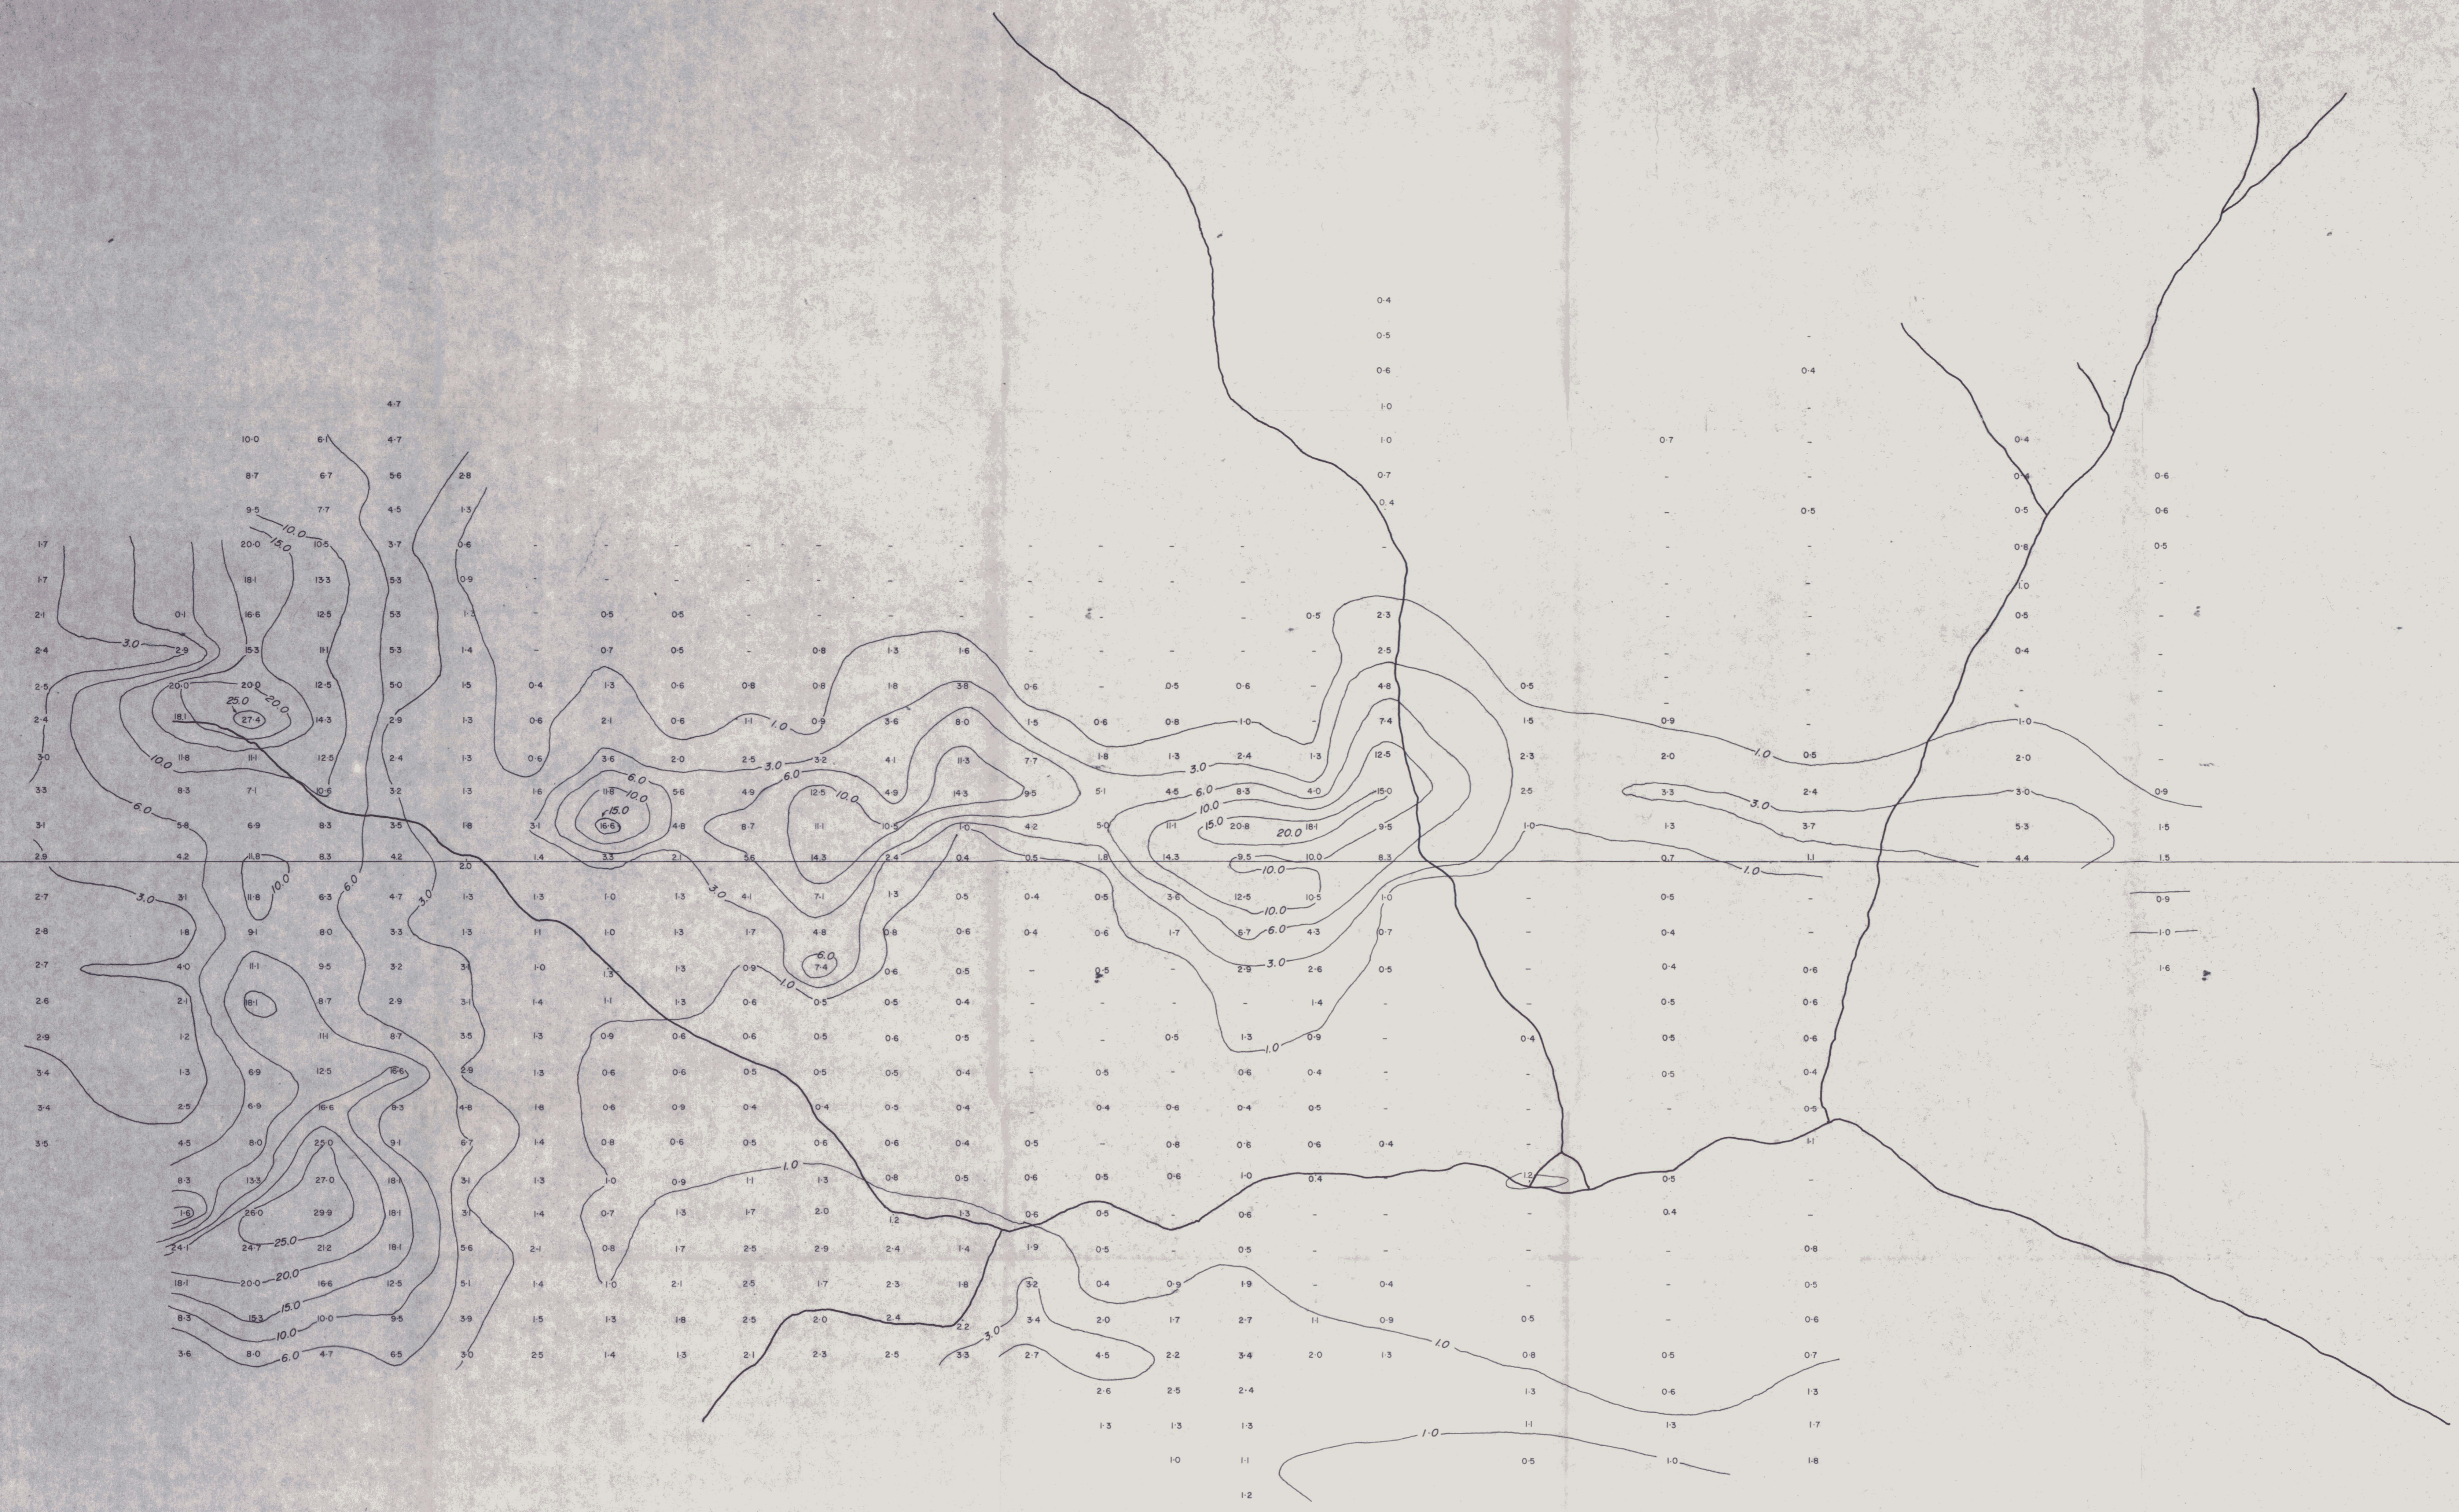

POLE-DIPOLE ARRAY
 'a'-spacing = 200'

HUDSON BAY EXPLORATION COMPANY LIMITED
 VANCOUVER, B. C.

I. P. SURVEY, CONDUCTIVITY -
 GEOTERREX LIMITED, OTTAWA, ONTARIO

'OG' CLAIMS
 DAWSON MINING DISTRICT

MAP 1168/13

DATE DRAWN: AUG 1975	REVISED:	DRAWN BY: S. U.	DRAWING No.
-------------------------	----------	--------------------	-------------

Scale in feet: 0 200 400 600