Geochemical and Prospecting Report
On
Metals Creek Resources
2011 Field Program
In
West Central Yukon

Dawson Mining District

NTS:
115N08/10
115O05

Squid West 1-66	**511560mE 7045970mN**
Squid East 1-36	**519120mE 7049130mN**
Change 1-40	**562590mE 7032210mN**
Fogo 1-54	**527900mE 7032390mN**

Worked performed between June 29 and July 9, 2011

For

Metals Creek Resources
945 Cobalt Cresent
Thunder Bay, Ontario
P7B 5Z4

By

Don Heerema, PGeo

January 2012

Summary

Metals Creek Resources (MEK) staked 100% interest in four separate claim blocks totaling196 claims located in the Tintina Gold belt between the new discoveries in the White Gold District and the Alaska border. The claim blocks vary from 36 to 66 units in size and are located 70 to 90km south-southwest of Dawson City. The claims were staked based on historic data and regional geochem/geophysical data bases. Two of the blocks, Squid East and Squid West are located in the Matson Creek/North Ladue River drainage area immediately up-stream from two placer gold operations. Fogo is located at the headwaters of existing placer claims and covers the PAX Porphyry Cu-Mo-Au anomaly (MINFILE # 115N 029). The fourth block staked is Change that lies 4km west of the Yukon River on Excelsior Creek.

Initial field work in June-July 2011 was carried out to help focus and generate targets for more detailed follow-up. The work consisted mainly of geochemical soil sampling on recce lines laid out depending on topography and perma frost limitations. The soil traverses tried to get full claim block coverage by either following topographic highs (ridge and spur), contouring along lines of equal elevation or strait line traverses across stratigraphy. Sample separation was a consistent 50 meters.

The company collected 920 soil, 24 silt and 35 rock samples collectively from the four claim blocks which identified a number of multi element anomalies with values up to 178 ppb gold, 235 ppm Cu, 771 ppm Zn and 970.9 ppm Pb.

Table of Contents

Introduction……..……..……3
Property Locations and Access……..……3
Property Geomorphology…….4
Regional Geology……..……5
Property Geology…….5
Land Tenure…….8
Area History and Previous Work……..……8
2011 Exploration Program……..……..…9
Conclusions……11
Recommendations……..……..…12
Expenditures……..……13
Statement of Qualifications……..……14
References……..……15

Tables

Table 1: Claim Disposition…….……7
Table 2: Field Dates and Personel……..……..8
Table 3: Samples by Claim Group……..……10

Figures

Figure 1: General Location Map…….....1
Figure 2: West Central Location Map……2
Figure 3: Tintina Gold Belt Map……..……5
Figure 4: General Geology Map……..…7

Appendices

I Squid West soil and rock sample spreadsheets
II Squid East soil sample spreadsheets
III Fogo soil, silt and rock sample spreadsheets
IV Change soil and silt sample spreadsheets
V Analytical Certificates

VI Squid West maps pocket 1
- Sample location map (1:10000)
- Au in soil thematic map (1:10000)
- Cu in soil thematic map (1:10000)
- Pb in soil thematic map (1:10000)
- Zn in soil thematic map (1:10000)

VII Squid East maps pocket 2
- Sample location map (1:10000)
- Au in soil thematic map (1:10000)
- Cu in soil thematic map (1:10000)
- Pb in soil thematic map (1:10000)
- Zn in soil thematic map (1:10000)

VIII Fogo maps pocket 3
- Sample location map (1:10000)
- Au in soil, silt and rock thematic map (1:10000)
- Cu in soil, silt and rock thematic map (1:10000)
- Pb in soil, silt and rock thematic map (1:10000)
- Zn in soil, silt and rock thematic map (1:10000)

IX Change maps pocket 4
- Sample location map (1:7500)
- Au in soil/silt thematic map (1:7500)
- Cu in soil/silt thematic map (1:7500)
- Zn in soil/silt thematic map (1:7500)

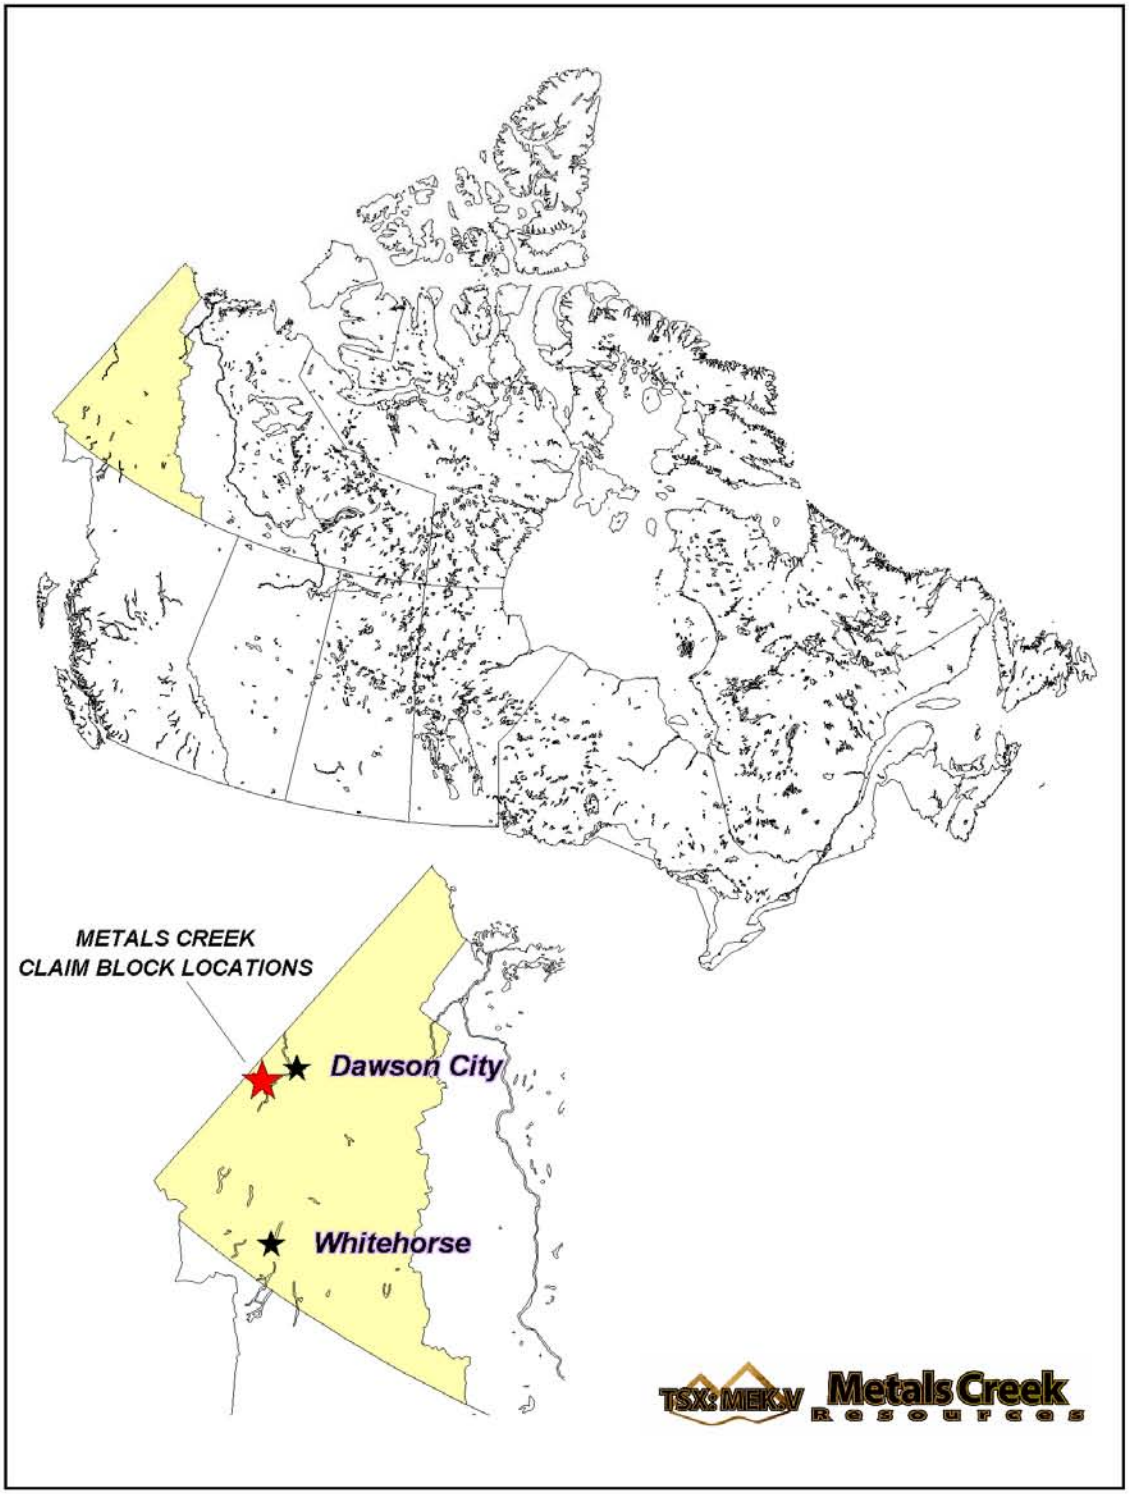
METALS CREEK
CLAIM BLOCK LOCATIONS
Dawson City
Whitehorse
TSX: MEK.V
Metals Creek
Resources

Figure 1

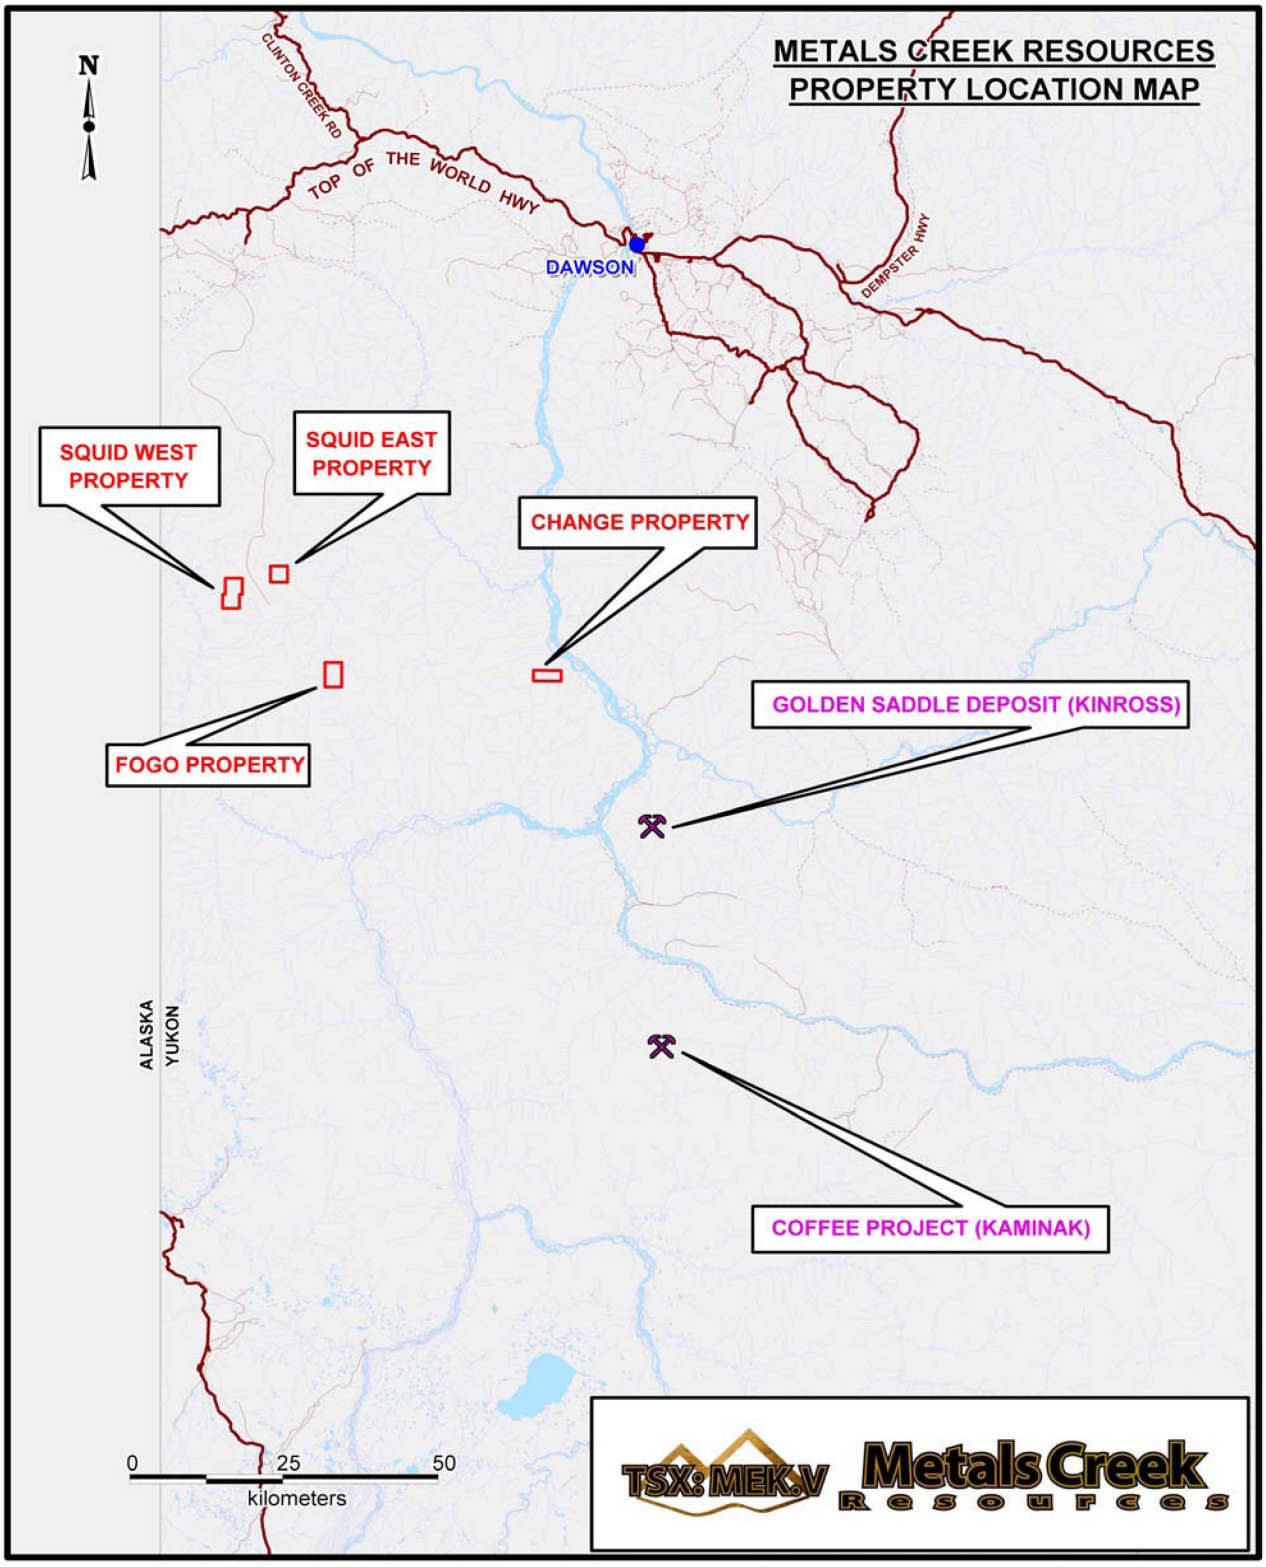
METALS CREEK RESOURCES
PROPERTY LOCATION MAP
N
CLINTON CREEK RD
TOP OF THE WORLD HWY
DAWSON
DEMPSTER HWY
SQUID WEST PROPERTY
SQUID EAST PROPERTY
CHANGE PROPERTY
FOGO PROPERTY
GOLDEN SADDLE DEPOSIT (KINROSS)
COFFEE PROJECT (KAMINAK)
ALASKA
YUKON
0
25
50
kilometers
TSX: MEK.V
Metals Creek
Resources

Figure 2

Introduction

Metals Creek Resources (MEK) staked 100% interest in four separate claim blocks totaling196 claims located in west-central Yukon. The claim blocks vary from 36 to 66 units in size and are located 70 to 90km south-southwest of Dawson City. The claims were staked based on historic data and regional geochem/geophysical data bases. Two of the blocks, Squid East and Squid West are located in the Matson Creek/North Ladue River drainage area immediately up-stream from two placer gold operations. Fogo is located at the headwaters of existing placer claims and covers the PAX Porphyry Cu-Mo-Au anomaly (MINFILE # 115N 029). The fourth block staked is Change that lies 4km west of the Yukon River on Excelsior Creek.

From June 29th to July 9th a 5-6 person field crew spent 11 days in the field conducting recce soil sampling along with minor prospecting and silt sampling on the four claim blocks. A total of 920 soil, 24 silt and 35 rock samples were collected. The purpose of the recce geochemical sampling was to generate anomalous target areas for further follow up work. All work on the blocks was done utilizing a helicopter for access.

Property Locations and Access

The four claim blocks are located in west-central Yukon between the Alaska border and the new discoveries of the White Gold District. The blocks are 70 -90km south-southwest of Dawson City. All four block are fairly remote and helicopter is the only means of access for three of the four. Below is a breakdown by claim block.

Squid West- This is the most westerly block consisting of 66 claims located approximately 12km east of the Alaska border and 90km southwest of Dawson City on NTS sheet 115N10. The center of the property has a UTM coordinate of 511560mE and 7045970mN (NAD83 Zone 7). This is the only claim block that can be accessed by other means than a helicopter. A four-wheel drive road network has been established between the Ladue River placer operation and the Matson Creek placer operation the cuts across this claim block. Road access from Sixty-Mile to the property is an option. Air strips are established at both placer operations also that allows for small fixed wing aircrafts also.

Squid East- This 36 unit block is located only 4.5km east-northest of Squid West but remains remote and helicopter access is the best option. The closest road is approximately 2.4km southwest of the block. The center of the block is at UTM coordinate 519120mE and 7049130mN on NTS sheet 115N10.

Fogo- This 54 unit block is on NTS map sheet 115N08 with a central UTM point of 527900mE and 7032390mN. The block is extremely remote and helicopter is the only viable option for access.

Change- This is the most easterly claim block consisting of 40 claims on NTS map sheet 115O05. The block is extremely remote and sits 4km west of the Yukon River on Excelsior Creek. A central UTM coordinate for this block is 562590mE and 7032210mN.

Property Geomorphology

Squid West- This claim block sits along a linear rounded ridge crest above the treeline with small shrubby vegetation and 5-10% weathered bedrock. The sides of the ridge are moderate to locally steep with light to moderate secondary growth up to 12 feet in height. Elevations on the property range from 950m to 1225m. Overburden is generally thin <1m consisting of brown to grey micacous soils and weathered rock chips. Permafrost exists on the property encountered mainly on north and east facing slopes with patches on south to west facing slopes.

Squid East- This claim block sits within a shallow valley with variable vegetation of dense conifer forest to the south, open and lumpy grass swamp in the center and mixed forest to the northern half of the block. Borden Creek cuts through the claim block. Permafrost is patchy to prevalent on a north facing slope near the south end of the block. Permafrost was also present in the low grassy lands surrounding Borden Creek. Elevations vary from 715 to 962m.

Fogo- This claim block covers a very large ridge crest of weathered Porphyry with a rounded top and moderate to mature mixed vegetation. The sides of the ridge are steep and often talus. The lower valleys are dense and mature Spruce trees with some mixed scrub brush. Permafrost is pervasive in the valleys and patchy on the hill sides. Overburden on the hill sides is generally thin with a brown soil horizon atop a grey micacous soil. Elevations vary from 768 to 1140m.

Change- This block is underlain by large gentle sloping ridges and spurs with mossy and grassy valleys. No outcrop was encountered anywhere. Encountered on the hills are old burns with young poplar regrowth approximately 15-20 feet in height. Other hills are dominated by mature mixed forest consisting of Birch, Poplar and Spruce. Permafrost present in the lower elevations. Elevations range from 391 to 702m.

Regional Geology

The geology description and lithological codes are interpreted from the Stewert River map sheet 115N-O.

The MEK claims are located in the Dawson Range, a non-glaciated region within the Tintina Gold Belt metallogenic province. This Belt includes a number of large gold deposits in Alaska (Fort Knox, Pogo, Donlin Creek), the Klondike placer deposits which have produced in excess of 20 million oz gold and the new discoveries in the White Gold District (Golden Saddle, JP Ross, Coffee).
The underlying geology of the Yukon-Tanana Terrain characterized by a broad zone of Devonian-Mississippian metamorphic orthogneisses (DMog), amphibolites (DMa) and metasediments (DMps) as well as slightly younger Paleozoic rocks such as the Klondike Schist (Pka) and younger orthogneisses (Pog).

The above units are interpreted as older assemblages that have been intruded by Mesozoic plugs and stocks of granodiorite (EJgd) and Cretaceous granite/granodiorite (Kg/Kgd) thought to be related to the gold mineralization. All lithologies are unconformably overlain by massive andesite flows and breccias of the Late Cretaceous Carmacks Group (uVk) with local areas of early Early Cretaceous coarse clastic sedimentary rocks (IKcg) at the base of the sequence (Pautler 2010). All above lithologies are intruded by Cenozoic quartz/quartz-feldspar porphyries (Er).

Large NW-SE regional-scale faults are present trending parallel to regional geology and direction of the Tintina belt.

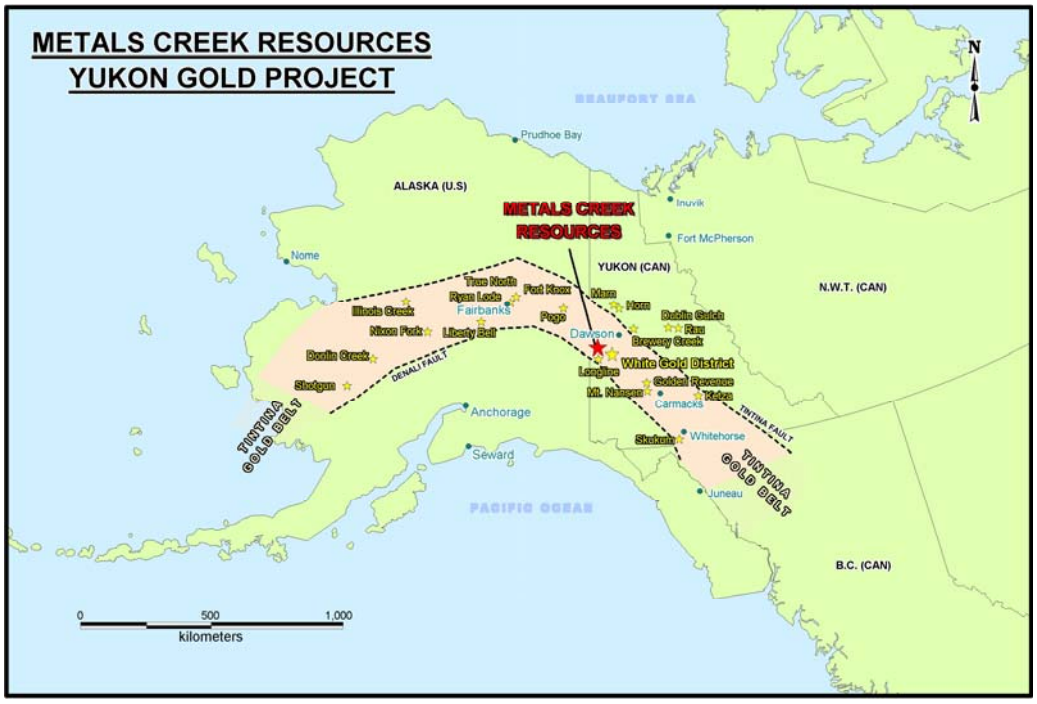

Figure 3

Property Geology

Squid West and East- These claim blocks are underlain by Late Permian Klondike Schist (Pka) that is composed mainly of muscovite, sericite and chlorite. Evidence of weathered pyrite grains are present at surface on the south end of the Squid West block.

Fogo- The geology underlying this claim block is interpreted and mapped as the south end of a Cenozoic porphyry (Er) in contact with Klondike Schist (Pka) and Quartz-Mica Schist (DMps). In the field the porphyry was present in outcrop as bleached and weathered quartz-feldpsar porphyry. The sediments are finely bedded and siliceous siltstone with narrow 1-10cm white quartz veins striking north. The Klondike Schist was observed on the west side of the property as muscovite/sercite schist. Small quartz boulders were found in the creek on the western side of the claims. No evident sulphide.

Change- No outcrop was found on the property, but is interpreted on the Stewart River Area geological map by Gordey and Ryan in 2005 as pink to orange potassium-feldspar rich granitic orthogneiss; commonly with biotite and often banded to layered (DMogg).

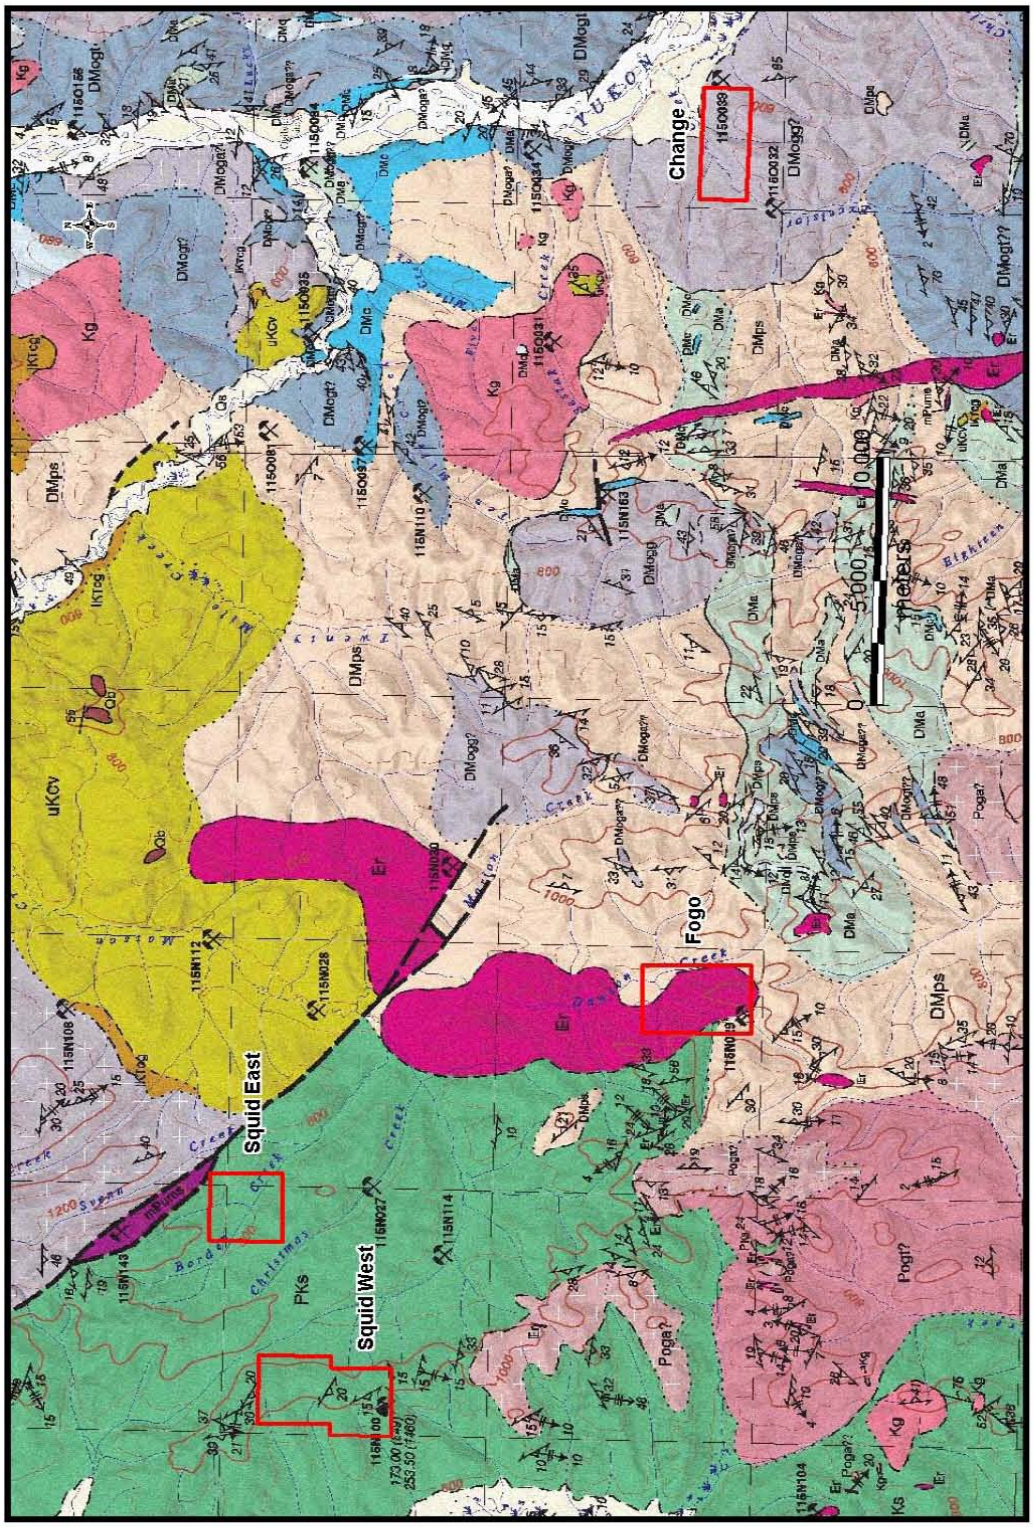

Figure 4

Land Tenure

Metals Creek Resources claims are located in the Dawson Mining District and consist of four non-contiguous claim groups totaling 196 claims. The claim blocks are Squid West (NTS sheet 115N10), Squid East (NTS sheet 115N10), Fogo (NTS sheet 115N08) and Change (NTS sheet 115O05).

Table 1

Claims	Grant Numbers	No. of Claims	Area (ha)	Expiry Date	District
Change 1-40	YE26757 - YE26796	40	830.8	March 30, 2012	Dawson
Fogo 1-54	YE26901 - YE26954	54	1121.6	March 31, 2012	Dawson
Squid East 1-36	YE26991 - YE27026	36	747.7	March 30, 2012	Dawson
Squid West 1-36	YE26955 - YE26990	36	747.7	March 30, 2012	Dawson
Squid West 37-66	YE27237 - YE27266	30	623.1	March 30, 2012	Dawson
Total		196	4070.9		

Area History and Previous Work

The historic work and anomalies in close proximity to the MEK claim blocks are broken out by claim block below.

Squid West-
1977-1978: had mapping, geophysical and geochemical surveys conducted to the southwest and on the southern boundary of the present claim block by a joint venture between American Copper, Nickel Company Inc and Kennecott Copper Corp. Base metal anomalies were generated
1979: additional geochemical surveying conducted to the immediately west of the 77-78' surveying by Ocean Home Exploration Co Ltd.
1990: YGC staked and conducted soils to confirm the anomalies generated by the 70's surveying
1991: YGC carried out detailed geochemical surveying immediately west of the 79' geochemical surveying
1992: YGC conducted road building, line-cutting, geochemical sampling, mapping, prospecting, a Max-Min 1-9 HLEM survey and diamond drilling.
Five holes were drilled totaling 796m, resulting in weakly anomalous base metals values.
Presently: placer operations exist west and southeast of the current claims on Ladue River and Matson Creek respectively.

Squid East- Santa showing (MINFILE 115N027) is located 3.5km to the south of this block. The showing is polymetallic Ag-Pb-Zn+/-Au veins in Klondike Schist. No historic assessment work was found for this area.

Fogo- PAX anomaly (MINFILE 115N029) lies in the southwest quadrant of the Fogo block along the contact of a porphyry and metasediments. The anomaly is

mapped as a porphyry Kuroko Massive Sulphide Cu-Mo-Au anomaly. No historical assessment work was found for this area.

Change- The Goldike unknown anomaly (MINFILE 115O033) lies 350m east of the claim block. An unknown anomaly named Excelsior lies 1.1km south of the southwest corner of the block. No historic assessment work was found for this area.

2011 Exploration Program

Scope of Work

The 2011 exploration program took place from June 29th to July 9th utilizing a 5-6 person field crew. The field work consisted mainly of recce soil sampling along with minor prospecting and silt sampling on all four claim blocks. The recce lines were designed to follow ridges and spurs, contour elevations or to cut across stratigraphy in order to achieve full claim block coverage. Silts were collected in streams where water levels allowed for sampling and soils were not possible due to permafrost. Minor prospecting work was done on the Squid West and Fogo claim blocks where bedrock or rubble-crop was encountered (ridge tops). All work was done utilizing a helicopter for access from Dawson City.

Table 2.0

Field Date	Claim Group	Personal in Field
June 29, 2011	Fogo	Don Heerema, Shane Stares, Rick Crocker, Alexander Stares, Wayne Reid
June 30, 2011	Squid West	Don Heerema, Shane Stares, Rick Crocker, Alexander Stares, Wayne Reid
July 1, 2011	Squid West	Don Heerema, Shane Stares, Rick Crocker, Alexander Stares, Wayne Reid
July 2, 2011	Squid West	Don Heerema, Shane Stares, Rick Crocker, Mike MacIsaac
July 3, 2011	Squid West	Don Heerema, Shane Stares, Rick Crocker, Mike MacIsaac
July 4, 2011	Squid East	Don Heerema, Shane Stares, Rick Crocker, Mike MacIsaac
July 5, 2011	Fogo	Don Heerema, Shane Stares, Rick Crocker, Mike MacIsaac
July 6, 2011	Change	Don Heerema, Shane Stares, Rick Crocker, Mike MacIsaac
July 7, 2011	Change	Don Heerema, Shane Stares, Rick Crocker, Mike MacIsaac
July 8, 2011	Fogo	Don Heerema, Shane Stares, Rick Crocker, Mike MacIsaac
July 9, 2011	Squid East	Don Heerema, Shane Stares, Rick Crocker

Sampling

Soil samples were collected at consistent 50m intervals along traverse lines using a screw-type soil auger. The auger allowed penetration to 1.5m if needed to reach the coarser C-horizon. Soils and silts were collected in Kraft soil bags and each location GPS'd for accuracy. Flagging with sample numbers were affixed to trees or rocks etc at each sample location for future reference if needed.

Table 3.0

Claim Group	Soils	Silts	Rock
Squid West	449	0	21
Squid East	117	0	0
Fogo	176	14	14
Change	178	10	0
Totals	920	24	35

Analytical Procedures

MEK personal bagged the soil, silt and rock samples into large fibre bags and delivered the samples to the ACME Prep Lab in Dawson City. From there, the samples were shipped to ACME Analytical Laboratory located in Whitehorse, YK for drying and sieving before being shipped to ACME Analytical Laboratory in Vancouver for analysis. The silts and soils were dried at 60C, sieved to -80 mesh and analyzed using ICP-MS. Rock samples were crushed, split then pulverized to 200 mesh and analyzed using a Fire assay fusion by ICP-ES.

Geochemical Results

Squid West: A total of 449 soils were collected mainly from the north south trending ridge and semi-perpendicular spurs over a period of 4 days. Nine (9) anomalous gold samples (greater than 10 ppb with a high of 57.8 ppb) are found in five separate areas. Anomalous base metal values are also present; Zn (up to 771 ppm), Pb (up to 970.9 ppm) and Cu (up to 235 ppm). A weak to moderate correlation exists between anomalous Zn and Pb soils. No correlation exists between Au and base metals. Rock samples of muscovite-sericite bearing Klondike Schist returned no significant results.

Squid East: A total of 117 soils were collected on three north-south recce lines. Of the 125 soils collected, six (or 5.1%) are anomalous in gold over 10 ppb up to 178 ppb. Two gold anomalies of 177.4 ppb and 178 ppb lie 875m apart, parallel to regional schistosity with no sampling between. A gold anomaly is located in the north-west corner of the claims. Base metal anomalies also exist; Zn (up to 405 ppm) and Pb (up to 215.7 ppm).

Fogo: A total of 176 soil, 14 silt and 14 rock samples were taken. The highest gold value achieved is 19.2 ppb Au in a soil. Four soils are greater than 10 ppb. One individual sample (F011) is anomalous in both Pb and Zn at 121.6 ppm and 158 ppm respectively. The silt and rock samples have no significant assays.

Change: A total of 178 soils and 10 silts were taken. Three soil samples are greater than 10ppb up to 23.8 ppb. One anomalous base metal sample (C009) was also achieved that is well above background levels for Zn (up to 293 ppm) and Cu (up to 108.8 ppm).

Conclusions

From the field work conducted in 2011 by MEK, it can be concluded that there was some success in identifying anomalous targets that warrant further follow up. The fact that geological and geomorphological settings of the Squid West and East gold anomalies lie in close proximity to placer operations is very encouraging. The anomalies lie in higher elevations or in areas of headwaters to the placer operations. A total of 920 soils, 24 silts and 35 rock samples were collected over 11 field days.

Squid West Au anomalies are located on both the east and west flanks of the north-south oriented ridge. An anomaly of 57.8 ppb is located near the western boundary of the claim block. The 47.8 ppb Au anomaly is located near the eastern claim boundary, north-east of the 57.8 ppb anomaly. Both are to be further investigated. Base metal soil anomalies are present in the southern half of the claim block. Values up to 77i ppm Zn, 235 ppm Cu and 970.9 ppm Pb were attained.

Squid East has the two highest Au anomalies of the 2011 geochemical surveys. The anomalies lie on a north facing slope collected from the central and eastern traverse lines approx 875m apart. The central and eastern anomalies are 177.4 ppb and 178 ppb Au respectively. At the northwest corner of the claim block lies another gold anomaly of 47.7 ppb. All of these anomalies require follow up.

Recommendations

Results from the recce soil sampling survey include five anomalies on Squid West and East that are recommended for detailed soil sampling and are described below with more detail. Additionally, an airborne magnetic and radiometrics survey is recommended on all four blocks to provide a base data set to help with the bedrock interpretation and target generation. The mag would help define felsic plugs and alteration systems. Prospecting would be carried out in conjunction with the geochemistry surveying.

Squid West- located on the western part of the claim is the highest Au value on this claim block at 57.8 ppb. Four north-south lines are proposed to detail this value.
On the eastern side of Squid West block is a Au value of 47.4 ppb that should be followed up with 4 north-south lines. A cluster of anomalous gold up to 14.9 ppb is found on two lines over an area of 500m by 200m located 700m to the southwest and may be a continuation of the 47.4 ppb sample.

Squid East- The two high gold soil values of 177.4 ppb and 178 ppb are the highest in the survey and are separated by 875 meters. Additional anomalous Mo and As are associated with this target. Ten north-south lines spaced 100 meters apart are recommended for follow-up.
Located in the northwest part of the claim and is a value of 47.7 ppb Au taken at the end of a traverse line. Follow-up soils would need a minimum of five north-south traverse lines with tighter soil sampling density.

No additional field work is recommended for the Fogo or Change blocks until detailed mag/radiometric data is reviewed.

2011 Expenditures

Squid West		
Helicopter	4 days	$19,702.00
Field Labour	4 days	$7,550.00
Accomodations		$2,315.35
Food		$1,357.02
Assays		$8,264.12
Compilation and report writing	2 days	$700.00
Field Supples		$390.31
Ground Transportation		$1,510.27
Total		**$41,789.07**

Fogo		
Helicopter	3 days	$12,054.50
Field Labour	3 days	$5,400.00
Accomodations		$1,737.15
Food		$1,018.14
Assays		$3,612.48
Compilation and report writing	2 days	$700.00
Field Supples		$292.84
Ground Transportation		$1,133.12
Total		**$25,948.23**

Squid East		
Helicopter	2 days	$7,588.00
Field Labour	2 days	$2,775.00
Accomodations		$1,157.68
Food		$678.52
Assays		$2,029.95
Compilation and report writing	2 days	$700.00
Field Supples		$195.17
Ground Transportation		$755.13
Total		**$15,879.45**

Change		
Helicopter	2 days	$10,032.50
Field Labour	2 days	$3,250.00
Accomodations		$1,157.68
Food		$678.52
Assays		$3,261.80
Compilation and report writing	2 days	$700.00
Field Supples		$195.17
Ground Transportation		$755.13
Total		**$20,030.80**

Statement of Qualifications

I, Don Heerema Jr., hereby certify that:

1. I am a practicing geologist in Thunder Bay, Ontario and reside at 26 Burriss St., Thunder Bay, Ontario, P7A 3C9.
2. I am a graduate of Lakehead University with a HBSc. (2002) in Geology.
3. I am a Canadian Citizen.
4. I have practiced my profession continually since graduation in 2002.
5. I am a practicing member of the Association of Professional Geoscientists of Ontario. (Registration #1528)
6. I do not have, nor do I expect to receive, directly or indirectly, any interest in the properties of Metals Creek Resources.

Signature:

Date: 01/19/2012

References

Mortensen, J.K, Chapman, R., LeBarge, W. and Jackson, L., (2005). Application of placer and lode gold geochemistry to gold exploration in Western Yukon.

Paulter, J., (2010). Technical report on the Fifty Mile Project

Reid, W., (2011). Project Description, Yukon Gold Properties (MEK Internal Document)

Appendix I

Squid West

Sample	Easting	Northing	Elevation	Type	Zone	Mo ppm	Cu ppm	Pb ppm	Zn ppm	Ag ppm	Ni ppm	Co ppm	Mn ppm	Fe %	As ppm	Au ppb	Th ppm	Sr ppm	Cd ppm	Sb ppm	Bi ppm	V ppm	Ca %	P %	La ppm	Cr ppm	Mg %	Ba ppm	Ti %	B ppm	Al %	Na %	K %	W ppm	Hg ppm	Sc ppm	Ti ppm	S %	Ga ppm	Se ppm	Te ppm
932729	512161	7043582	1110	Soil	7	1.6	19	21.4	38	0.1	14.3	5.9	160	2.37	7.8	1.7	10.7	13	0.1	0.3	0.3	56	0.12	0.02	11	23	0.3	154	0.062	<20	1.74	0.007	0.05	<0.1	0.03	2.4	<0.1	<0.05	6	<0.5	<0.2
932730	512137	7043628	1099	Soil	7	1.2	9.7	31.7	23	<0.1	3.7	1.8	82	0.98	2.9	1.5	2.2	7	0.1	0.2	0.3	30	0.05	0.02	13	8	0.1	72	0.03	<20	0.75	0.008	0.04	<0.1	0.02	0.7	<0.1	<0.05	4	<0.5	<0.2
932731	512114	7043672	1097	Soil	7	1.3	12.8	48.7	33	0.3	7.2	4	273	1.53	4.9	3.8	7.9	16	0.1	0.2	0.5	30	0.13	0.045	48	13	0.24	167	0.025	<20	1.03	0.01	0.06	<0.1	0.06	1.3	<0.1	<0.05	4	<0.5	<0.2
932732	512095	7043720	1098	Soil	7	3.5	18.1	35.2	49	0.2	10.1	6.4	309	2.53	5.4	3.6	10.2	13	0.1	0.2	1	31	0.1	0.024	31	15	0.27	121	0.026	<20	0.96	0.005	0.1	<0.1	0.03	1.7	<0.1	<0.05	3	<0.5	0.3
932733	512080	7043768	1099	Soil	7	0.9	27	25	74	<0.1	10.3	8.3	514	2.53	2.9	2.2	14.2	11	<0.1	0.2	0.7	37	0.08	0.023	28	14	0.75	108	0.035	<20	1.37	0.004	0.16	<0.1	0.02	3.1	0.2	<0.05	4	<0.5	<0.2
932734	512060	7043815	1103	Soil	7	2	11.1	58.6	37	0.2	6.2	3.6	175	2.08	5.8	5.2	15.6	12	0.1	0.4	0.9	26	0.06	0.017	24	11	0.46	86	0.05	<20	0.83	0.008	0.15	<0.1	0.02	2.3	0.1	0.05	3	<0.5	0.2
932735	512028	7043853	1104	Soil	7	3.7	16.5	94.4	40	0.3	11.7	5.6	159	2.4	13.6	3.3	10.5	10	0.1	0.4	0.4	43	0.08	0.021	10	19	0.27	101	0.047	<20	1.47	0.015	0.1	<0.1	0.06	1.7	<0.1	0.07	4	<0.5	<0.2
932736	511986	7043888	1101	Soil	7	0.9	74.2	45.9	81	0.3	13	13.2	664	2.66	8.5	2.7	1.7	14	0.2	0.2	0.3	39	0.15	0.034	9	21	0.98	92	0.045	<20	1.67	0.006	0.05	<0.1	0.03	2.6	0.1	<0.05	5	<0.5	<0.2
932737	511941	7043915	1101	Soil	7	0.8	71.9	85.5	173	0.4	17	16.4	574	2.87	9.9	3.9	3.3	18	0.2	0.2	0.7	51	0.14	0.028	11	21	1.13	121	0.07	<20	1.92	0.007	0.08	<0.1	0.03	3.2	0.2	<0.05	6	<0.5	<0.2
932738	511896	7043935	1094	Soil	7	0.8	65.6	21.8	248	0.5	11.7	12.9	668	3	7.9	1.8	1.8	13	0.4	0.2	0.5	49	0.11	0.027	6	12	1.3	76	0.106	<20	1.79	0.005	0.34	<0.1	0.02	1.8	0.4	<0.05	5	<0.5	<0.2
932739	511845	7043963	1093	Soil	7	0.8	60.5	73.2	183	0.6	8.9	9.6	388	1.98	7.9	1.8	1.8	11	0.6	0.1	1.3	35	0.11	0.028	7	11	0.76	59	0.054	<20	1.26	0.006	0.09	<0.1	0.03	1.3	0.2	<0.05	4	<0.5	<0.2
932740	511795	7043986	1091	Soil	7	0.8	104.2	114.6	403	1	12.9	13.9	694	2.37	6.3	2	0.7	17	0.5	0.1	1.8	35	0.26	0.039	5	13	1.01	106	0.042	<20	1.65	0.007	0.05	<0.1	0.05	1.6	0.2	<0.05	4	<0.5	<0.2
932741	511748	7043999	1091	Soil	7	0.9	87.6	125.6	434	1	10.7	10.2	772	3.54	14.3	3.3	1.2	17	0.4	0.1	2	42	0.22	0.027	4	9	1.33	79	0.12	<20	1.8	0.004	0.31	<0.1	0.06	1.8	0.4	<0.05	5	<0.5	<0.2
932742	511707	7044026	1100	Soil	7	1.3	75.2	162.3	453	0.9	10.6	12.5	839	3.85	16.2	2	3.2	17	0.6	0.2	1.9	55	0.14	0.035	6	12	1.52	95	0.133	<20	1.99	0.005	0.43	<0.1	0.05	2.4	0.5	<0.05	6	<0.5	<0.2
932743	511659	7044045	1104	Soil	7	1.1	44.5	131.9	223	0.7	11.2	12.9	676	2.61	12	3.7	16.8	18	0.4	0.2	4.1	37	0.1	0.031	32	12	0.83	89	0.102	<20	1.59	0.006	0.28	<0.1	0.02	2.2	0.4	<0.05	5	<0.5	0.2
932744	511610	7044032	1100	Soil	7	0.6	91.1	38.8	134	0.2	12.1	14.1	636	2.62	6.5	2.7	3.6	19	0.2	0.2	0.6	37	0.17	0.022	6	12	1.06	83	0.067	<20	1.65	0.005	0.12	<0.1	0.02	1.9	0.3	<0.05	4	<0.5	<0.2
932745	511559	7044022	1098	Soil	7	1.4	67.2	51.1	168	0.2	10.5	17.5	1269	2.54	8.2	0.7	12.1	22	0.3	0.1	1	35	0.16	0.023	13	9	1.18	124	0.085	<20	1.64	0.005	0.28	<0.1	0.02	1.9	0.2	<0.05	4	<0.5	<0.2
932746	511510	7044041	1101	Soil	7	0.9	77.4	24.8	88	0.2	18.3	11.6	467	2.74	7.3	2.7	2	20	0.2	0.2	0.4	52	0.23	0.029	10	22	0.85	135	0.077	<20	1.95	0.009	0.07	0.6	0.03	2.5	0.2	<0.05	5	<0.5	<0.2
932747	511463	7044057	1105	Soil	7	0.8	41.6	34.5	77	0.2	19.8	11.9	426	2.34	8.3	6.3	13.1	12	0.3	0.3	0.3	38	0.12	0.018	12	21	0.56	109	0.061	<20	1.66	0.009	0.08	<0.1	0.04	1.9	0.1	<0.05	4	<0.5	<0.2
932748	511426	7044095	1105	Soil	7	0.5	69.1	10.6	102	<0.1	18.1	17.7	682	4.05	8.2	<0.5	1.6	18	0.1	0.2	0.2	66	0.16	0.021	4	20	1.65	118	0.141	<20	2.44	0.007	0.34	<0.1	0.03	2.1	0.5	<0.05	6	<0.5	<0.2
932749	511401	7044143	1103	Soil	7	0.9	69	40.9	140	0.5	14.7	12.1	676	3.21	8.5	<0.5	1.1	15	0.2	0.2	0.6	53	0.17	0.03	5	18	1.08	101	0.084	<20	1.85	0.007	0.13	<0.1	0.03	2.1	0.2	<0.05	6	<0.5	<0.2
932750	511390	7044196	1103	Soil	7	0.6	31.4	18.8	110	0.2	12	13	739	2.99	4.4	<0.5	1.8	26	0.1	0.1	0.3	61	0.2	0.039	6	14	1.01	160	0.104	<20	1.65	0.006	0.29	<0.1	0.01	2.1	0.2	<0.05	6	<0.5	<0.2
932851	511931	7048434	1190	Soil	7	0.4	15.6	17.3	38	<0.1	15	11.4	326	2.51	5.8	1.9	9.9	21	<0.1	0.2	0.3	39	0.26	0.045	20	22	0.62	168	0.062	<20	1.71	0.009	0.11	<0.1	0.02	2.7	0.2	<0.05	5	<0.5	<0.2
932852	511904	7048390	1191	Soil	7	0.5	18.5	10.3	45	<0.1	20.3	11.8	280	2.76	3.9	<0.5	4.8	21	<0.1	0.2	0.2	39	0.3	0.074	17	36	0.99	151	0.058	<20	1.82	0.006	0.12	<0.1	0.02	2.6	0.2	<0.05	6	<0.5	<0.2
932853	511880	7048344	1196	Soil	7	0.3	4.9	7.7	47	<0.1	16	10.8	497	2.31	2.1	<0.5	6	24	<0.1	0.2	0.1	23	0.49	0.12	18	14	1.17	135	0.073	<20	1.54	0.007	0.17	<0.1	0.03	1.8	0.3	<0.05	5	<0.5	<0.2
932854	511866	7048295	1196	Soil	7	0.9	11	9.9	55	<0.1	19.4	6.9	175	2.27	2.4	3	2.7	20	<0.1	0.1	0.2	31	0.27	0.074	9	36	1.08	95	0.076	<20	1.48	0.008	0.14	<0.1	0.06	1.8	0.2	<0.05	6	<0.5	<0.2
932855	511869	7048245	1199	Soil	7	1	77.4	17.4	69	<0.1	27.5	21.9	356	3.55	9.1	1.3	2.7	16	<0.1	0.3	0.3	70	0.24	0.032	6	46	1.64	110	0.148	<20	2.05	0.007	0.35	<0.1	<0.01	3.4	0.3	<0.05	6	<0.5	<0.2
932856	511876	7048193	1199	Soil	7	1.4	235	29.6	118	0.3	39.5	30.2	786	4.38	12.1	3.7	2.6	15	0.2	0.2	0.3	53	0.32	0.042	4	92	2.17	147	0.17	<20	2.47	0.005	0.57	<0.1	0.01	2.7	0.5	<0.05	6	1.2	<0.2
932857	511851	7048148	1203	Soil	7	0.5	20.7	13.9	78	0.1	25	11.9	448	2.96	3.3	2.4	3.8	23	<0.1	0.3	0.3	38	0.47	0.06	14	45	1.61	191	0.117	<20	2.12	0.007	0.42	<0.1	0.02	3.3	0.3	<0.05	7	<0.5	<0.2
932858	511826	7048105	1204	Soil	7	0.7	12	32.7	77	0.1	20.3	12.9	472	2.95	4.1	2.1	7.4	24	<0.1	0.2	0.4	37	0.4	0.089	16	30	1.28	150	0.116	<20	1.92	0.007	0.47	<0.1	0.01	2.2	0.4	<0.05	6	<0.5	<0.2
932859	511795	7048065	1207	Soil	7	0.9	18.9	12.3	117	0.1	45.3	22.8	754	4.38	6.5	2.2	7.6	22	<0.1	0.3	0.6	67	0.4	0.073	15	127	2.48	205	0.15	<20	2.92	0.009	0.71	0.1	0.01	3.5	0.6	<0.05	9	0.9	<0.2
932860	511776	7048017	1205	Soil	7	2	34	108	97	0.4	19.4	11.7	495	3.06	7.3	4.2	27.9	20	0.2	1.1	1.2	49	0.25	0.032	92	38	1.14	208	0.105	<20	1.93	0.014	0.42	<0.1	0.08	4.5	0.3	<0.05	6	0.7	<0.2
932861	511750	7047974	1206	Soil	7	0.8	17.5	16.7	41	<0.1	13.3	5.2	229	1.78	4.4	2.1	17.8	17	<0.1	0.4	0.7	38	0.19	0.024	61	23	0.41	133	0.063	<20	1.28	0.01	0.07	<0.1	0.02	3.1	<0.1	<0.05	4	0.8	<0.2
932862	511733	7047925	1201	Soil	7	0.7	15.4	29.6	36	<0.1	13.2	7.2	249	1.97	5.4	3.5	17.6	21	<0.1	0.5	0.7	41	0.24	0.031	77	25	0.37	126	0.055	<20	1.45	0.011	0.07	<0.1	0.03	3.3	<0.1	<0.05	4	0.7	<0.2
932863	511685	7047900	1202	Soil	7	0.8	23.1	20.8	48	0.1	21.8	10.4	305	2.59	7.6	3.5	14.9	14	0.2	0.4	0.5	56	0.16	0.028	26	31	0.5	120	0.087	<20	2.3	0.01	0.08	<0.1	0.02	3.7	0.1	<0.05	6	<0.5	<0.2
932864	511632	7047896	1203	Soil	7	2.5	22.3	62.2	70	0.1	18.9	6.5	373	3.39	9.6	3.5	22.4	11	0.2	0.6	1.1	55	0.09	0.031	44	31	0.41	151	0.027	<20	2.57	0.012	0.11	0.1	0.04	3.5	0.1	<0.05	7	<0.5	<0.2
932865	511752	7047864	1190	Soil	7	1.1	8.7	41.6	42	<0.1	12.2	5.9	254	2.43	4.9	3	9	14	0.2	0.4	0.7	38	0.11	0.026	28	19	0.28	150	0.033	<20	1.7	0.007	0.08	<0.1	0.04	1.7	0.1	<0.05	5	<0.5	<0.2
932866	511797	7047831	1185	Soil	7	1.2	9.7	29.9	37	0.3	9.4	4.3	193	2.2	4.7	2.8	8	15	<0.1	0.5	0.8	37	0.15	0.029	33	22	0.3	126	0.041	<20	1.31	0.007	0.1	<0.1	0.05	1.9	<0.1	<0.05	4	<0.5	<0.2
932867	511817	7047782	1179	Soil	7	1.1	8.1	26	29	<0.1	8.8	3.7	139	2.1	5.4	0.7	9.5	8	0.2	0.3	0.7	45	0.06	0.017	24	17	0.22	70	0.044	<20	1.33	0.005	0.05	<0.1	0.02	1.5	<0.1	<0.05	5	<0.5	<0.2
932868	511842	7047739	1171	Soil	7	1.1	14.7	23.5	50	<0.1	19.8	9.6	327	3.1	9.7	5.3	7.8	16	0.1	0.4	0.4	61	0.15	0.029	13	30	0.43	144	0.071	<20	2.2	0.011	0.07	0.1	0.12	2.8	<0.1	<0.05	6	<0.5	<0.2
932869	511881	7047705	1161	Soil	7	1	14.9	61.7	58	<0.1	10.9	4.9	259	1.87	5.4	2.2	13.1	12	0.2	0.5	0.9	45	0.12	0.019	28	20	0.27	85	0.056	<20	1.21	0.009	0.06	<0.1	0.03	2.2	<0.1	<0.05	4	<0.5	<0.2
932870	511914	7047666	1157	Soil	7	1.6	13.9	34.6	52	<0.1	14.2	8.4	688	3.24	9.2	1.1	8.8	12	0.2	0.4	0.6	70	0.11	0.017	15	27	0.31	143	0.077	<20	1.5	0.007	0.07	<0.1	0.03	2.4	<0.1	<0.05	8	<0.5	<0.2
932871	511932	7047619	1148	Soil	7	2.1	15	35.1	53	<0.1	13.9	5.3	252	2.43	6.5	2.2	27.4	9	0.2	0.4	0.9	37	0.08	0.018	50	21	0.3	87	0.043	<20	1.53	0.006	0.08	<0.1	0.03	2.4	0.1	<0.05	4	<0.5	<0.2
932872	511953	7047569	1144	Soil	7	1.3	14.1	80.4	65	0.3	10.1	4.8	162	1.72	4.5	1.8	22.9	16	0.1	0.5	0.9	27	0.12	0.022	75	20	0.3	131	0.05	<20	1	0.007	0.13	<0.1	0.05	2.8	0.1	<0.05	3	<0.5	<0.2
932873	511863	7047516	1141	Soil	7	1.7	36.9	114.1	123	0.3	20.4	20	906	3.58	12.7	3.4	10	21	0.4	1	0.8	39	0.28	0.034	30	24	0.3	207	0.042	<20	1.17	0.009	0.11	<0.1	0.1	4.4	<0.1	<0.05	3	<0.5	<0.2
932874	511982	7047464	1143	Soil	7	0.5	11.4	22.6	52	<0.1	13.3	8	354	2.06	2.9	<0.5	8.4	25	<0.1	<0.1	0.2	26	0.26	0.033	22	17	0.73	100	0.096	<20	1.27	0.007	0.17	<0.1	0.02	1.2	0.2	<0.05	5	<0.5	<0.2
932875	512003	7047420	1146	Soil	7	0.3	36.6	14.1	55	<0.1	37.6	18.2	233	2.71	4.3	1.9	3.2	27	<0.1	0.1	0.2	43	0.37	0.041	13	78	1.43	107	0.098	<20	1.91	0.01	0.1	<0.1	0.03	3.7	0.3	<0.05	6	<0.5	<0.2
932876	512032	7047379	1147	Soil	7	0.8	19.1	39.7	84	<0.1	40.7	20.8	1627	2.9	4.2	1.2	3.7	26	<0.1	0.1	0.5	49	0.4	0.061	14	104	1.52	147	0.043	<20	1.95	0.009	0.08	<0.1	0.03	3.9	0.1	<0.05	6	<0.5	<0.2
932877	512053	7047333	1149	Soil	7	0.5	35	30.9	71	0.1	28.4	14.8	920	2.75	4.9	1.5	7.3	25	0.1	0.2	0.3	53	0.49	0.055	24	122	1.75	124	0.092	<20	1.86	0.014	0.21	<0.1	0.03	6	0.4	<0.05	6	<0.5	<0.2
932878	512090	7047296	1147	Soil	7	0.3	16.4	32.8	90	<0.1	49.4	24.9	1149	3.48	3.2	1.3	6.3	23	<0.1	<0.1	0.2	66	0.55	0.072	17	307	3.46	133	0.125	<20	2.75	0.006	0.32	<0.1	0.01	5.1	0.3	<0.05	8	<0.5	<0.2
932879	512123	7047255	1150	Soil	7	0.6	26.2	29.6	87	0.2	33.7	14.9	826	3.01	5	2.9	7.9	33	0.1	0.2	0.4	47	0.45	0.047	33	107	1.41	167	0.104	<20	1.88	0.012	0.26	<0.1	0.04	4.4	0.4	<0.05	6	<0.5	<0.2
932880	512165	7047226	1151	Soil	7	0.5	17.7	35.4	83	0.1	51.5	20	563	3.7	3.1	1.4	11.7	20	<0.1	0.1	0.2	41	0.37	0.049	30	147	1.39	84	0.07	<20	1.71	0.005	0.17	<0.1	0.02	4.9	0.4	<0.05	6	0.5	<0.2
932881	512201	7047188	1152	Soil	7	0.3	19.7	25.5	90	0.2	39.9	15.2	785	3.33	3.9	1	14.6	24	<0.1	<0.1	0.2	46	0.46	0.037	44	116	2.1	149	0.133	<20	2.44	0.007	0.47	<0.1	<0.01	5.4	0.7	<0.05	7	0.8	<0.2
932882	512233	7047146	1148	Soil	7	0.5	10.5	39.2	59	0.2	32.9	13.1	950	2.32	2	2.8	26.7	16	<0.1	<0.1	0.3	43	0.37	0.031	32	174	1.46	109	0.066	<20	1.59	0.005	0.11	<0.1	0.02	5.8	0.3	<0.05	4	<0.5	<0.2
932883	512241	7047093	1154	Soil	7	0.9	11.8	21.8	63	0.1	22.9	11.8	353	3.07	6.6	4.1	5.6	17	<0.1	0.2	0.2	61	0.21	0.023	13	74	0.7	120	0.067	<20	1.78	0.009	0.12	<0.1	0.03	3.5	0.2	<0.05	6	0.6	<0.2
932884	512231	7047037	1153	Soil	7	2	21.3	37.6	146	0.3	90.2	30.7	1636	5.05	11.5	3.7	9.2	31	<0.1	<0.1	0.6	112	0.84	0.054	21	412	5.13	424	0.22	<20	3.84	0.008	1.29	<0.1	0.02	13	1	0.24	13	1	<0.2
932885	512223	7046986	1153	Soil	7	0.9	17.5	19.8	116	0.3	60.9	13.3	952	3.9	16.3	2.9	12.1	20	<0.1	<0.1	0.4	68	0.46	0.057	31	244	3.42	187	0.112	<20	2.88	0.004	0.56	<0.1	0.02	8.2	0.4	0.09	9	1.3	<0.2
932886	512221	7046937	1152	Soil	7	1.2	36.1	40.1	129	0.3	47.1	21.4	725	3.96	15.5	7.6	9.9	13	0.1	0.1	1	58	0.27	0.043	28	195	2.54	139	0.041	<20	2.58	0.005	0.17	<0.1	<0.01	8.7	0.2	<0.05	7	0.8	0.2
932887	512223	7046885	1152	Soil	7	0.9	21	65	88	0.3	34.8	10.1	658	2.87	7.8	1.5	18.1	15	<0.1	0.1	0.9	51	0.21	0.027	67	129	1.96	94	0.116	<20	2.21	0.011	0.48	<0.1	0.02	5.7	0.6	0.05	7	<0.5	<0.2
932888	512232	7046832	1152	Soil	7	1.3	18.3	18.3	54	<0.1	37.1	12.7	350	2.45	6.1	3	2	12	<0.1	0.4	0.5	47	0.13	0.019	10	66	0.98	65	0.058	<20	1.43	0.003	0.06	<0.1	0.01	2.5	0.2	<0.05	7	0.6	<0.2
932889	512241	7046781	1151	Soil	7	0.6	37.9	32.2	58	0.6	63.6	15.9	443	2.51	4.7	2.8	8.2	21	<0.1	0.2	0.4	36	0.36	0.052	27	86	1.45	94	0.076	<20	1.79	0.006	0.17	<0.1	0.02	2.9	0.4	<0.05	5	0.6	<0.2
932890	512230	7046728	1151	Soil	7	0.6	47.7	24.2	76	0.2	11.1	16.5	749	4.2	6.4	6.1	7.2	9	0.2	0.2	0.5	54	0.18	0.017	11	13	0.37	178	0.017	<20	1.27	0.003	0.13	<0.1	<0.01	6.5	0.2	0.03	3	0.6	0.3
932891	512238	7046675	1151	Soil	7	2	78.5	35.4	51	1.2	15.5	10.6	2026	3.54	6.5	14.9	12	22	<0.1	0.3	0.8	31	0.43	0.106	101	19	0.24	256	0.013	<20	1.75	0.012	0.15	<0.1	0.14	7	0.2	0.16	4	1.9	0.3
932892	512237	7046622	1155	Soil	7	1.4	12.2	25.1	31	<0.1	10	5.1	246	2.15	5.8	2.7	14.4	14	0.1	0.2	0.2	45	0.09	0.024	36	17	0.2	63	0.036	<20	1.13	0.004	0.07	<0.1	0.01	1.8	0.1	<0.05	4	0.7	<0.2
932893	512237	7046570	1153	Soil	7	1.3	14	44	37	<0.1	13	7.7	339	2.35	5.3	2.9	11.3	14	0.2	0.2	0.3	43	0.12	0.027	25	20	0.28	139	0.039	<20	1.39	0.006	0.08	<0.1	0.02	2.1	0.1	<0.05	5	0.7	<0.2
932894	512212	7046525	1152	Soil	7	1.6	11.3	30.9	30	0.3	9.5	3.3	147	2.04	4.3	1.8	9.6	17	<0.1	0.2	0.4	38	0.12	0.028	29	17	0.2	193	0.046	<20	0.85	0.004	0.08	<0.1	0.04	1.5	0.1	<0.05	4	0.5	<0.2
932895	512185	7046479	1152	Soil	7	1.2	18.6	38.6	47	<0.1	22.7	11.5	257	3.05	8.1	4.4	11.8	13	0.1	0.3	0.3	48	0.11	0.027	22	32	0.39	155	0.039	<20	2.84	0.006	0.08	<0.1	0.02	2.8	0.1	<0.05	5	0.8	<0.2
932896	512174	7046429	1149	Soil	7	1.4	14.3	38	39	0.1	14	7	208	2.82	7.7	3.3	5.2	14	0.1	0.3	0.2	69	0.12	0.025	14	27	0.3	133	0.051	<20	2.17	0.006	0.05	<0.1	0.05	2.7	0.2	<0.05	7	0.9	0.2
932897	512170	7046381	1146	Soil	7	1.1	20.5	53.4	46	0.2	20	9.4	246	2.6	8.1	8	12.3	14	0.1	0.3	0.2	50	0.11	0.022	19	20	0.41	170	0.049	<20	2.39	0.008	0.06	<0.1	0.07	3	0.1	<0.05	5	<0.5	<0.2
932898	512163	7046331

Sample	Easting	Northing	Elevation	Type	Zone	Mo ppm	Cu ppm	Pb ppm	Zn ppm	Ag ppm	Ni ppm	Co ppm	Mn ppm	Fe %	As ppm	Au ppb	Th ppm	Sr ppm	Cd ppm	Sb ppm	Bi ppm	V ppm	Ca %	P %	La ppm	Cr ppm	Mg %	Ba ppm	Ti %	B ppm	Al %	Na %	K %	W ppm	Hg ppm	Sc ppm	Ti ppm	S %	Ga ppm	Se ppm	Te ppm
933009	511513	7047682	1129	Soil	7	1	14.6	17.8	40	<0.1	17.4	6.7	308	1.93	5.3	1.8	9	14	<0.1	0.2	0.3	45	0.17	0.026	38	27	0.35	137	0.055	<20	1.29	0.007	0.06	<0.1	0.02	2.2	<0.1	<0.05	4	<0.5	<0.2
933010	511545	7047645	1125	Soil	7	1.6	25.2	30	51	0.3	21.5	10	350	3.03	8.2	5.5	4.6	23	0.1	0.3	0.6	57	0.2	0.059	84	33	0.38	293	0.044	<20	2.31	0.01	0.08	<0.1	0.06	3.2	0.1	<0.05	6	<0.5	<0.2
933011	511574	7047604	1126	Soil	7	1.8	22.6	23.3	63	0.2	21.8	8.1	340	2.87	8.9	6.1	9.5	19	0.2	0.2	0.5	64	0.2	0.053	59	33	0.49	271	0.054	<20	2.31	0.011	0.09	<0.1	0.02	4	0.1	0.08	7	0.9	<0.2
933012	511596	7047557	1124	Soil	7	1.1	6.2	10.4	24	<0.1	6.8	3.3	114	1.83	4.4	2.8	2.3	9	<0.1	0.2	0.2	48	0.07	0.018	6	14	0.15	79	0.052	<20	0.98	0.012	0.03	<0.1	0.02	1.2	<0.1	<0.05	5	<0.5	<0.2
933013	511621	7047513	1121	Soil	7	1.6	18.8	43.3	66	0.1	19	8.3	244	2.38	6.8	7.5	10.3	13	0.2	0.4	0.4	47	0.17	0.031	16	27	0.38	156	0.053	<20	2.25	0.007	0.08	<0.1	0.04	2.6	0.1	<0.05	5	<0.5	<0.2
933014	511636	7047466	1120	Soil	7	1.1	17.4	57.2	54	0.2	14.3	7.5	137	1.87	5	2.2	15	16	0.2	0.6	0.5	41	0.19	0.029	43	25	0.33	140	0.055	<20	1.41	0.008	0.07	<0.1	0.06	3.1	<0.1	<0.05	4	<0.5	<0.2
933015	511667	7047421	1120	Soil	7	1.9	15.4	61.9	67	0.1	9.9	11.9	591	2.2	7	5.2	4.9	13	0.3	0.6	0.6	51	0.14	0.034	18	23	0.28	123	0.047	<20	1.42	0.004	0.07	<0.1	0.03	2.1	0.1	0.08	5	<0.5	<0.2
933016	511682	7047375	1121	Soil	7	1	22.2	121.1	168	0.2	12	8.2	281	3.32	11.8	4.4	5.1	12	0.2	0.4	0.6	50	0.18	0.038	9	18	0.61	89	0.023	<20	1.61	0.005	0.07	<0.1	0.05	3.7	0.2	<0.05	4	1.1	<0.2
933017	511719	7047342	1123	Soil	7	0.8	33.6	23	76	0.2	11.7	9.4	395	3.49	6.8	2.7	2.7	19	0.2	0.5	0.4	57	0.5	0.053	13	14	0.49	132	0.019	<20	1.28	0.004	0.09	<0.1	0.05	4.7	0.1	<0.05	4	0.6	<0.2
933018	511721	7047292	1121	Soil	7	0.5	26.1	37.7	84	0.2	29.9	16.9	383	3.03	6.3	3.3	6.1	29	0.2	0.2	0.5	52	0.51	0.053	27	111	1.48	124	0.087	<20	1.92	0.011	0.08	<0.1	0.04	4.7	0.3	<0.05	6	<0.5	<0.2
933019	511738	7047246	1120	Soil	7	0.6	39.6	17.2	79	<0.1	15.3	15.3	691	3.11	5	<0.5	1.7	24	<0.1	0.1	0.3	62	0.4	0.039	8	22	0.85	163	0.033	<20	1.98	0.009	0.06	<0.1	0.03	4.6	0.2	<0.05	6	<0.5	<0.2
933020	511752	7047201	1116	Soil	7	0.4	29.6	18.2	67	0.1	29.2	13.8	726	2.55	4.5	0.6	2.2	37	<0.1	0.2	0.2	47	0.62	0.06	19	79	1.31	175	0.075	<20	2.07	0.012	0.07	<0.1	0.06	3.9	0.3	<0.05	6	<0.5	<0.2
933021	511782	7047160	1115	Soil	7	0.3	29.1	28.5	71	0.1	34	13.7	377	2.55	3.9	1.8	4.4	33	0.1	0.2	0.2	45	0.58	0.055	19	108	1.34	129	0.076	<20	1.88	0.011	0.08	<0.1	0.12	4.7	0.2	0.07	6	<0.5	<0.2
933022	511821	7047125	1118	Soil	7	0.7	20.5	31.1	49	<0.1	22.2	11.3	441	2.41	5.6	1.8	3.4	31	0.1	0.2	0.4	49	0.43	0.028	11	75	0.99	129	0.05	<20	1.49	0.007	0.05	<0.1	0.01	2.2	0.2	<0.05	5	<0.5	<0.2
933023	511849	7047082	1121	Soil	7	0.4	33.9	17.2	64	0.1	50	12	505	2	3	1.7	3	50	0.2	0.2	0.3	36	0.83	0.071	25	88	1.23	155	0.066	<20	1.54	0.012	0.13	<0.1	0.04	3.2	0.3	0.07	5	<0.5	<0.2
933024	511859	7047032	1120	Soil	7	0.5	15.5	14.1	102	<0.1	33	15.9	1089	3.74	7.2	1.1	10.1	32	<0.1	<0.1	0.2	61	0.64	0.05	34	92	2.19	165	0.19	<20	2.48	0.008	0.64	<0.1	0.02	6.2	0.7	<0.05	9	<0.5	<0.2
933025	511881	7046984	1118	Soil	7	0.8	24.8	36.1	103	0.1	64.3	28.3	1478	3.97	11.6	<0.5	4.5	36	0.1	0.1	0.5	85	0.79	0.05	20	293	2.94	177	0.133	<20	2.56	0.008	0.34	<0.1	0.02	8.4	0.6	0.14	8	<0.5	<0.2
933026	511891	7046933	1120	Soil	7	1.8	36	241.7	235	2.1	83	25.6	1352	3.27	20.9	6	10.4	29	0.7	0.1	7.2	52	0.61	0.087	38	158	2.69	214	0.122	<20	2.09	0.006	0.69	<0.1	0.06	7.2	0.4	0.12	7	0.8	1
933027	511888	7046882	1117	Soil	7	1	29.4	38.2	98	0.2	65.3	38.4	2406	4.27	32.5	3.1	6.5	28	0.1	0.1	1.3	69	0.56	0.077	19	208	2.5	166	0.137	<20	2.16	0.005	0.44	<0.1	0.03	6.2	0.5	0.18	7	0.7	0.3
933028	511890	7046832	1119	Soil	7	1.1	11	22.1	104	0.2	30.2	25.5	2315	4.27	16.5	1.5	6.4	29	<0.1	0.2	1.2	71	0.57	0.068	15	118	2.55	153	0.169	<20	2.28	0.007	0.74	<0.1	0.02	5.9	0.5	0.1	9	<0.5	<0.2
933029	511885	7046777	1118	Soil	7	0.6	47.5	13.5	65	0.2	18.1	15.8	296	2.82	7.9	4	2.6	20	0.1	0.3	0.3	52	0.41	0.048	7	23	0.76	126	0.073	<20	1.59	0.008	0.09	<0.1	0.04	2.9	0.2	<0.05	5	<0.5	<0.2
933030	511876	7046727	1121	Soil	7	0.8	106.7	25.4	83	0.3	14.7	14.3	424	3.41	8.2	1.2	2.6	14	0.2	0.2	0.3	55	0.34	0.036	10	17	0.92	106	0.04	<20	1.68	0.005	0.07	<0.1	0.03	4	0.2	<0.05	4	<0.5	<0.2
933031	511879	7046678	1122	Soil	7	0.7	22.6	20.8	78	0.1	10.2	9.2	362	3.02	7	0.8	2.7	17	<0.1	0.2	0.3	53	0.36	0.04	7	16	0.5	122	0.016	<20	1.2	0.006	0.04	<0.1	0.02	2.8	0.1	<0.05	4	<0.5	<0.2
933032	511878	7046627	1123	Soil	7	0.5	29	19.8	53	0.1	10.7	10.9	466	3	7.8	1.6	3.2	14	<0.1	0.2	0.4	58	0.28	0.039	8	17	0.66	108	0.013	<20	1.55	0.005	0.05	<0.1	0.03	3.4	0.1	<0.05	4	<0.5	<0.2
933033	511868	7046577	1121	Soil	7	0.9	34.4	55.9	49	0.2	13	9	303	2.53	6.5	1.5	10.6	17	<0.1	0.3	0.5	45	0.33	0.031	20	20	0.6	162	0.021	<20	1.62	0.005	0.09	<0.1	0.04	3.4	0.1	<0.05	4	<0.5	<0.2
933034	511858	7046526	1120	Soil	7	1.1	22	39.4	54	0.2	15.1	11.9	675	2.52	7	1.2	2.9	27	0.2	0.4	0.4	46	0.4	0.051	13	19	0.46	251	0.031	<20	1.36	0.008	0.06	<0.1	0.05	2.5	<0.1	<0.05	4	<0.5	<0.2
933035	511831	7046428	1114	Soil	7	2.8	13.5	132.1	31	0.2	7.6	4.1	211	1.58	5.5	2.8	7.2	16	0.2	0.8	0.5	30	0.1	0.031	28	14	0.21	123	0.025	<20	0.77	0.004	0.06	<0.1	0.04	1	<0.1	<0.05	3	<0.5	<0.2
933036	511810	7046382	1118	Soil	7	1.3	15.4	59	28	0.2	6.8	3.4	127	1.6	5.6	1	2.3	11	0.1	0.6	0.4	37	0.04	0.03	24	15	0.17	73	0.023	<20	0.84	0.004	0.05	<0.1	0.04	1	<0.1	<0.05	4	<0.5	<0.2
933037	511792	7046332	1118	Soil	7	1.6	8.4	43.2	25	0.2	3.6	2	74	1.27	4.8	3.1	7.9	15	<0.1	1	0.4	18	0.06	0.034	42	8	0.12	91	0.012	<20	0.51	0.004	0.06	<0.1	0.04	0.8	<0.1	<0.05	2	<0.5	<0.2
933038	511769	7046285	1116	Soil	7	2	18.1	96.7	34	0.3	7.1	4.8	150	1.84	6.7	7.3	17.5	14	0.4	1.4	0.9	21	0.08	0.025	39	12	0.19	75	0.014	<20	0.97	0.002	0.07	<0.1	0.07	1.5	<0.1	<0.05	2	0.5	<0.2
933039	511741	7046244	1113	Soil	7	1.2	24.1	78.9	75	0.2	12.8	6.6	220	1.96	6.2	2	13.9	20	0.4	0.8	0.6	38	0.22	0.046	28	19	0.42	218	0.053	<20	1.14	0.01	0.09	0.3	0.04	2.9	0.1	<0.05	3	<0.5	<0.2
933040	511709	7046207	1110	Soil	7	1	43.3	116.6	250	0.6	13.1	12.5	512	3.67	12.7	4.4	7.4	14	0.6	0.4	1	58	0.18	0.036	16	15	1.04	122	0.088	<20	1.8	0.005	0.26	<0.1	0.05	3.7	0.3	<0.05	6	0.6	0.4
933041	512096	7046704	1161	Soil	7	1.3	31.9	71.9	78	0.5	5.1	5.6	801	1.94	6.7	0.6	24.7	6	<0.1	0.2	1.4	27	0.02	0.019	33	8	0.21	61	0.032	<20	0.9	0.003	0.08	<0.1	0.02	1	0.2	<0.05	4	0.7	0.4
933042	512107	7046655	1164	Soil	7	1.3	28.6	85.8	44	0.3	9.9	5.4	258	2.69	7	2.6	29.2	8	<0.1	0.3	0.8	25	0.05	0.026	31	12	0.25	50	0.025	<20	1.39	0.002	0.08	<0.1	0.06	1	<0.1	<0.05	4	<0.5	<0.2
933043	512108	7046606	1165	Soil	7	0.6	65	18.9	95	0.2	13.1	20.1	967	4.85	4.2	1.1	3.7	7	0.1	0.2	0.3	66	0.09	0.032	5	10	1.38	116	0.013	<20	2.81	0.001	0.15	<0.1	0.02	5.9	0.1	<0.05	6	0.5	<0.2
933044	512097	7046557	1164	Soil	7	1.1	9.7	27.4	26	<0.1	7	6.1	240	2.14	4.9	11.8	11.1	13	0.1	0.2	0.4	20	0.07	0.047	56	11	0.17	72	0.016	<20	1	0.004	0.1	<0.1	0.02	1.3	<0.1	<0.05	2	<0.5	<0.2
933045	512065	7046517	1164	Soil	7	1.1	11.3	24.2	31	<0.1	10.7	5.7	178	2.06	5.1	0.6	10.3	12	<0.1	0.3	0.5	29	0.07	0.032	34	14	0.29	80	0.039	<20	1.26	0.005	0.1	<0.1	0.01	1.6	0.1	<0.05	3	<0.5	<0.2
933046	512039	7046474	1163	Soil	7	2.7	18.2	169.8	38	<0.1	14.4	7.1	263	1.89	6	1.9	12.9	16	0.2	0.4	0.3	35	0.11	0.031	31	18	0.32	88	0.051	<20	1.22	0.007	0.07	<0.1	0.03	1.8	<0.1	<0.05	3	<0.5	<0.2
933047	512024	7046425	1160	Soil	7	21.2	55.3	617.7	29	<0.1	11.6	6.3	315	1.75	8.7	8.4	15	14	0.2	0.6	0.3	27	0.09	0.03	27	14	0.25	68	0.033	<20	1.04	0.004	0.08	<0.1	0.03	1.4	<0.1	<0.05	2	0.8	0.3
933048	512018	7046374	1155	Soil	7	3.7	40.5	314.1	47	0.3	14.7	11.8	678	2.32	8	10.7	14.7	16	0.2	0.4	0.3	33	0.13	0.047	24	19	0.36	138	0.04	<20	1.4	0.006	0.08	0.3	0.05	2.2	<0.1	<0.05	4	0.6	0.2
933049	512000	7046326	1156	Soil	7	1.5	10.7	51	25	<0.1	7.5	3.2	135	2.07	8	1.8	3	13	<0.1	0.4	0.4	95	0.1	0.015	11	17	0.15	151	0.105	<20	0.89	0.005	0.04	<0.1	0.02	1.5	<0.1	<0.05	10	0.9	<0.2
933050	511978	7046276	1155	Soil	7	1.8	11.7	100.1	30	0.1	9.3	4.9	193	3.17	10.2	3.2	8.2	11	0.1	0.5	0.5	65	0.09	0.029	12	26	0.21	74	0.068	<20	1.93	0.005	0.05	0.1	0.06	2.3	<0.1	0.06	7	<0.5	<0.2
933051	512590	7043840	1144	Soil	7	1.1	13.9	82.4	54	<0.1	7.9	4	372	1.64	6.4	1.4	15.9	12	0.2	0.3	0.7	37	0.1	0.021	41	13	0.21	87	0.04	<20	0.73	0.005	0.07	<0.1	<0.01	1.2	<0.1	<0.05	4	<0.5	<0.2
933052	512561	7043882	1149	Soil	7	1.4	27.3	71.8	77	0.3	11.4	8.2	748	2.03	4.3	2.1	27.3	14	0.2	0.1	0.7	29	0.1	0.023	78	16	0.69	166	0.046	<20	1.29	0.006	0.23	<0.1	0.02	2.6	0.2	<0.05	3	<0.5	<0.2
933053	512524	7043918	1152	Soil	7	1.9	29.9	43.5	68	0.1	9.6	9	517	2.1	3.8	1.1	22.2	19	<0.1	0.1	0.6	32	0.14	0.026	45	15	0.89	205	0.062	<20	1.3	0.006	0.26	<0.1	0.01	2.4	0.2	<0.05	4	<0.5	<0.2
933054	512486	7043953	1151	Soil	7	1.4	21.9	74	78	0.2	10.1	6.4	464	1.95	4.2	1.4	15.9	16	0.2	0.2	0.5	30	0.11	0.03	44	16	0.51	143	0.062	<20	1.09	0.008	0.19	<0.1	0.03	1.7	0.2	<0.05	4	<0.5	<0.2
933055	512455	7043993	1148	Soil	7	2.4	15.7	35.9	54	0.3	6.2	4.8	193	2.66	3.4	2.3	11.3	19	<0.1	0.1	0.8	31	0.13	0.024	30	3	0.58	149	0.038	<20	1.14	0.003	0.21	<0.1	0.04	2.6	0.2	<0.05	4	<0.5	<0.2
933056	512428	7044037	1145	Soil	7	3.7	18.6	111.2	40	0.5	4.8	2.9	184	2.18	12.1	2.3	16.5	22	<0.1	0.2	1	19	0.05	0.028	32	10	0.16	104	0.024	<20	0.78	0.013	0.14	<0.1	0.04	0.9	<0.1	0.18	3	<0.5	<0.2
933057	512401	7044079	1140	Soil	7	2.2	40	132.8	144	0.4	11.5	5.8	356	2.28	13.6	3.2	27.4	24	0.3	0.2	0.8	21	0.14	0.026	35	21	0.63	80	0.058	<20	0.99	0.008	0.25	<0.1	0.04	1.9	0.3	0.07	3	<0.5	<0.2
933058	512366	7044120	1142	Soil	7	1.1	25	177.7	419	0.4	14.4	10.8	923	2.96	11	1.8	19.9	18	0.4	0.1	1.3	24	0.23	0.057	27	25	2.15	136	0.132	<20	1.94	0.004	0.64	<0.1	0.03	2.7	0.5	<0.05	6	<0.5	<0.2
933059	512342	7044167	1144	Soil	7	0.7	63.7	102	242	0.6	19.6	13	577	3.23	9.3	2.3	9.8	17	0.4	0.2	1	52	0.22	0.05	19	32	1.61	115	0.094	<20	2.21	0.007	0.24	<0.1	0.04	4.4	0.4	<0.05	6	<0.5	<0.2
933060	512314	7044210	1146	Soil	7	0.6	60	66.6	284	0.4	9.8	17	806	2.76	8.8	2.4	3.9	15	0.4	0.1	0.8	41	0.29	0.041	6	7	1.61	62	0.065	<20	1.79	0.003	0.17	<0.1	0.01	3.1	0.3	<0.05	4	<0.5	<0.2
933061	512285	7044253	1142	Soil	7	0.8	73.3	128.7	227	0.3	7.4	14.2	481	4.04	9.8	0.9	13.3	19	0.3	0.1	1.3	35	0.12	0.031	22	6	0.34	69	0.002	<20	0.77	0.003	0.14	<0.1	0.05	4.7	0.1	<0.05	2	<0.5	<0.2
933062	512258	7044298	1142	Soil	7	1.6	20.7	123.6	79	0.2	9	5.5	352	3.13	17.9	0.9	11.5	11	0.1	0.4	1	46	0.06	0.024	11	14	0.25	76	0.051	<20	0.96	0.009	0.09	<0.1	0.01	1.6	0.1	0.08	5	<0.5	<0.2
933063	512227	7044338	1141	Soil	7	2.3	54.6	223.7	93	0.6	11	10.3	420	3.36	28.4	4.2	13.7	23	0.2	0.4	1	36	0.09	0.028	21	12	0.45	135	0.062	<20	1.19	0.023	0.24	<0.1	0.04	3.2	0.2	0.36	3	<0.5	0.9
933064	512184	7044365	1139	Soil	7	1.1	101.9	119.6	90	0.4	10.7	18.6	1036	3.44	14.4	2.9	3.6	11	0.2	0.2	0.8	41	0.11	0.043	13	13	0.79	69	0.059	<20	1.49	0.006	0.09	<0.1	0.03	2.8	0.2	0.06	5	<0.5	<0.2
933065	512135	7044369	1146	Soil	7	1.3	77.8	129.6	211	0.3	18.6	28.2	2060	4.32	14.4	<0.5	9.1	28	0.5	0.1	0.7	56	0.25	0.053	18	23	1.5	153	0.163	<20	2.12	0.009	0.38	<0.1	0.06	4.6	0.5	0.1	6	<0.5	0.3
933066	512084	7044379	1145	Soil	7	1.5	78.2	127.3	347	0.8	14.3	10.6	854	3.39	14.7	0.7	7.9	20	0.4	0.1	3	46	0.36	0.073	11	15	1.4	68	0.079	<20	1.65	0.004	0.19	<0.1	0.03	3.8	0.4	<0.05	5	<0.5	0.6
933067	512036	7044397	1144	Soil	7	0.8	78.9	96.8	369	0.9	25.5	14.5	898	3.56	13	0.8	5.3	22	0.2	0.2	2	56	0.31	0.052	10	51	1.93	81	0.109	<20	2.28	0.006	0.21	<0.1	0.04	3.7	0.4	<0.05	7	<0.5	<0.2
933068	511985	7044399	1143	Soil	7	1.3	103	162.9	446	1.3	21.6	11.1	782	3.39	25.6	1.9	5.6	20	0.3	0.1	2.7	46	0.32	0.046	12	35	1.62	67	0.091	<20	1.98	0.006	0.21	<0.1	0.05	3.2	0.3	<0.05	6	<0.5	<0.2
933069	511933	7044408	1146	Soil	7	1.4	49.6	60.3	291	0.9	22.1	10.9	771	3.65	22	1.8	3.1	18	0.1	0.2	2.3	49	0.23	0.032	7	32	1.59	77	0.098	<20	2.09	0.003	0.11	<0.1	0.04	2.6	0.2	<0.05	6	<0.5	<0.2
933070	511884	7044424	1146	Soil	7	1.4	78.5	79.6	278	1.3	19.1	18.5	728	3.88	23.5	2.9	5.9	15	0.2	0.3	2.4	58	0.23	0.049	9	29	1.88	120	0.102	<20	2.42	0.004	0.35	<0.1	0.06	3.5	0.5	0.09	6	<0.5	<0.2
933071	511838	7044447	1145	Soil	7	1.1	52.1	107.8	370	0.9	12.5	27.3	1677	3.72	11.3	<0.5	5.9	22	0.3	<0.1	3.7	48	0.35	0.041	5	10	1.94	95	0.082	<20	2.05	0.005	0.49	<0.1	0.02	2.7	0.4	0.07	5	<0.5	0.3
933072	511796	7044478	1141	Soil	7	1.6	35.4	81.5	132	1.7	12.4	4.5	356	2.02	8	<0.5	1.4	24	0.4	0.1	5.4	34	0.35	0.047	10	23	0.87	79	0.056	<20	1.13	0.011	0.15	<0.1	0.07	1.5	0.2	0.06	4	<0.5	0.6
933073	511758	7044512	1139	Soil	7	1.2	47	84.9	255	1.9	16.7	8.3	722	3.5	18.4	1.5	2	17	0.2	0.1	3.1	63	0.34	0.056	5	25	1.7	65	0.059	<20	1.91	0.005	0.21	<0.1	0.04	2.6	0.3	0.07	5	<0.5	0.4
933074	511737	7044560	1133	Soil	7	1.2	16	23.6	49	0.2	15.9	6.1	227	2.22	5.1	0.6	11.3	12	0.2	0.4	0.5	53	0.14	0.034	43	25	0.31	77	0.073	<20	1.33	0.008	0.06	<0.1	0.07	2.4	<0.1	<0.05	5	<0.5	<0.2
933075	511720	7044607	1125	Soil	7	1	11.8	38	135	0.6	40.5	9.5	600	2.18	9.9	1.1	3.3	19	<0.1	<0.1	0.9	33	0.28	0.069	10	99	1.35	64	0.094	<20	1.46	0.003	0.32	<0.1	0.05	1.8	0.3	<0.05	5	<0.5	<0.2
933076	511710	7044658	1121	Soil	7	0.7	42.5	108.5	310	0.6	49.7	18.2	902	3.77	6.5	1.9	2.7	23	0.5	0.1	0.9	75	0.34	0.044	9	178	2.73	147	0.121	<20	2.98	0.009	0.24	<0.1	0.06	5.4	0.3	<0.05	8	<0.5	<0.2
933077	511702	7044709	1114	Soil	7	1.5	95.3	77.5	167	0.2	31.8	21.4	684	4.7	16.2	0.9	4.6	21	0.3	0.1	0.7	106	0.43	0.047	13	91	2.64	96	0.101	<20	2.92	0.003	0.34	<0.1	0.02	4.5	0.3	<0.05	7	<0.5	<0.2
933078	511689	7044759	1111	Soil	7	1	123

Sample	Easting	Northing	Elevation	Type	Zone	Mo ppm	Cu ppm	Pb ppm	Zn ppm	Ag ppm	Ni ppm	Co ppm	Mn ppm	Fe %	As ppm	Au ppb	Th ppm	Sr ppm	Cd ppm	Sb ppm	Bi ppm	V ppm	Ca %	P %	La ppm	Cr ppm	Mg %	Ba ppm	Ti %	B ppm	Al %	Na %	K %	W ppm	Hg ppm	Sc ppm	Ti ppm	S %	Ga ppm	Se ppm	Te ppm
933191	511648	7048104	1214	Soil	7	1.1	17.9	47.1	77	0.1	18.5	10	457	3.53	6.6	1.2	5.9	12	0.1	0.5	1.1	58	0.16	0.063	14	54	1.07	79	0.096	<20	1.97	0.005	0.27	<0.1	0.04	2	0.2	<0.05	7	<0.5	<0.2
933192	511658	7048152	1215	Soil	7	0.6	8.2	13.9	122	<0.1	37.9	23.4	826	3.96	4	1.1	4.4	24	<0.1	<0.1	0.1	38	0.43	0.141	12	49	2.25	227	0.196	<20	2.49	0.004	1.06	<0.1	0.01	1.3	0.6	<0.05	7	<0.5	<0.2
933193	511672	7048205	1213	Soil	7	0.8	21.9	147.2	141	0.2	28.9	14.3	972	2.79	4.7	2.1	11.7	15	0.3	0.2	1	34	0.15	0.034	31	31	0.76	142	0.078	<20	1.5	0.006	0.21	<0.1	0.03	3.4	0.4	<0.05	4	<0.5	<0.2
933194	511690	7048251	1212	Soil	7	1	88	11.8	41	0.2	26.7	19	267	3.02	6.5	2.5	1.1	13	<0.1	0.2	0.2	50	0.2	0.055	6	36	1.24	111	0.099	<20	1.62	0.006	0.18	<0.1	0.03	2.3	0.2	<0.05	5	<0.5	<0.2
933195	511692	7048298	1214	Soil	7	0.5	127.8	4.5	47	<0.1	22.8	28.1	383	3.68	2.5	1.2	0.6	10	<0.1	0.1	0.2	79	0.11	0.034	1	19	2.01	81	0.159	<20	2.21	0.004	0.75	<0.1	<0.01	2.4	0.5	<0.05	5	<0.5	<0.2
933196	511697	7048347	1212	Soil	7	0.8	21.8	12.6	87	<0.1	18.4	10.3	337	3.14	2.1	1.7	2.6	35	<0.1	<0.1	0.1	28	0.3	0.092	7	20	1.58	139	0.17	<20	1.71	0.005	0.69	<0.1	0.01	1	0.5	0.11	6	<0.5	<0.2
933197	511700	7048397	1216	Soil	7	1.4	14.2	14.9	36	<0.1	15.3	7	218	3.61	10.8	3.5	2.6	11	<0.1	0.4	0.2	67	0.09	0.04	7	27	0.35	110	0.098	<20	1.62	0.006	0.05	0.3	0.06	2	<0.1	<0.05	7	<0.5	<0.2
933198	511701	7048447	1217	Soil	7	0.6	12.2	9	50	<0.1	25.5	15.1	327	2.87	3.9	1.6	7.2	23	<0.1	0.2	0.1	38	0.35	0.061	16	34	1.42	111	0.118	<20	1.82	0.008	0.31	<0.1	0.02	2.4	0.4	<0.05	6	<0.5	<0.2
933199	511698	7048486	1221	Soil	7	0.7	18.3	10.8	48	<0.1	24.9	14	467	2.62	6.7	1.8	3.5	19	<0.1	0.3	0.2	45	0.22	0.053	11	25	0.72	136	0.079	<20	1.59	0.008	0.07	0.1	0.02	2.2	0.2	<0.05	5	<0.5	<0.2
933200	509961	7045422	958	Soil	7	1.7	24.5	94.5	96	0.1	47.9	15.3	496	3.89	9.7	1.4	5.4	10	<0.1	0.2	0.4	63	0.12	0.037	13	43	0.55	156	0.043	<20	2.19	0.008	0.06	<0.1	0.02	3.3	0.1	<0.05	7	<0.5	<0.2
935046	512965	7045931	958	Soil	7	0.8	23.6	33.1	59	0.1	13.4	9	267	2.15	5.4	1.6	3.8	17	<0.1	0.2	0.5	43	0.18	0.032	15	25	0.39	208	0.042	<20	1.69	0.009	0.06	0.1	0.04	2.6	0.3	<0.05	4	<0.5	<0.2
935047	513017	7045942	950	Soil	7	0.8	18.6	32.9	51	0.2	15	9	330	2.24	5.3	1.5	3.3	22	<0.1	0.1	0.3	46	0.25	0.038	16	25	0.4	244	0.043	<20	1.78	0.009	0.06	<0.1	0.05	2.6	<0.1	<0.05	4	<0.5	<0.2
935064	512464	7043459	1129	Soil	7	1.4	15.4	25	31	0.1	5.1	2.2	86	1.68	6.3	1.3	14.1	9	0.1	0.2	0.3	34	0.07	0.019	29	11	0.14	74	0.024	<20	0.86	0.004	0.07	<0.1	0.01	0.9	<0.1	<0.05	4	<0.5	<0.2
935065	512496	7043498	1133	Soil	7	1.6	38.2	60.8	72	0.1	12.7	6.8	207	2.32	7	1.6	22.2	13	0.3	0.2	0.3	36	0.09	0.022	32	18	0.31	115	0.048	<20	1.46	0.007	0.11	<0.1	0.04	1.8	0.1	<0.05	4	<0.5	<0.2
935066	512537	7043531	1127	Soil	7	1.7	27.6	50.6	75	0.1	12.4	8.5	401	2.51	6.8	4.1	9.3	11	0.2	0.2	0.4	46	0.1	0.033	27	21	0.34	152	0.055	<20	1.55	0.007	0.07	<0.1	0.02	2.1	0.1	<0.05	6	<0.5	<0.2
935067	512568	7043571	1128	Soil	7	1.7	38.3	42	68	0.2	15.3	8	242	2.5	7.1	2.2	15.8	12	0.2	0.3	0.3	50	0.08	0.023	33	22	0.37	202	0.06	<20	1.88	0.01	0.06	<0.1	0.02	2.4	0.1	<0.05	6	0.6	<0.2
935068	512595	7043614	1132	Soil	7	1.3	29.8	28.6	65	<0.1	19.3	9.5	324	2.72	8.3	1.6	12.7	13	0.2	0.3	0.3	60	0.12	0.023	27	29	0.48	187	0.083	<20	2.17	0.011	0.06	<0.1	0.02	3.8	<0.1	<0.05	6	0.8	<0.2
935069	512625	7043652	1133	Soil	7	2.3	15.3	25.6	44	0.1	11.7	5.3	200	2.23	5.9	1.4	11.9	12	0.1	0.2	0.4	53	0.1	0.02	17	21	0.28	161	0.06	<20	1.72	0.01	0.06	<0.1	0.01	2	0.1	<0.05	7	0.6	<0.2
935070	512650	7043699	1129	Soil	7	1	14.2	21.3	37	<0.1	11	4.7	138	2.47	6.6	1.5	6.3	12	0.1	0.2	0.3	66	0.11	0.018	13	21	0.28	148	0.056	<20	1.74	0.009	0.04	<0.1	0.02	2.2	0.1	<0.05	8	<0.5	<0.2
935071	512638	7043750	1136	Soil	7	0.9	10.2	42.6	30	<0.1	8.7	3.9	179	1.5	4.2	<0.5	11.6	8	<0.1	0.2	0.5	36	0.08	0.025	17	14	0.25	69	0.044	<20	0.9	0.007	0.05	<0.1	0.02	1.2	<0.1	<0.05	4	0.5	<0.2
935072	512617	7043797	1141	Soil	7	1.2	13.3	74.3	73	<0.1	11.1	5	279	2.08	6.1	1.1	27.3	10	0.3	0.2	1.6	40	0.09	0.026	58	12	0.28	87	0.048	<20	1.36	0.007	0.07	<0.1	0.04	1.8	0.1	<0.05	4	0.6	<0.2
935073	512095	7046807	1165	Soil	7	0.8	101.6	9.2	54	<0.1	12.1	14.9	546	4.87	6.8	1.3	1.3	11	0.2	0.4	0.2	84	0.15	0.024	4	20	1.72	73	0.151	<20	2.7	0.005	0.15	<0.1	0.01	3.7	0.3	<0.05	7	<0.5	<0.2
935074	512096	7046859	1160	Soil	7	1.6	11.8	26.5	27	<0.1	6.8	3.5	155	2.34	8.2	1.9	5.8	7	0.3	0.5	0.6	52	0.05	0.025	30	16	0.11	50	0.055	<20	0.92	0.005	0.07	0.1	0.03	0.9	0.1	<0.05	6	0.7	<0.2
935075	512098	7046911	1155	Soil	7	0.7	35	19	95	0.1	36.5	15.7	807	3.76	11.4	5.3	9.9	25	0.2	0.1	0.6	54	0.24	0.047	26	111	2.53	591	0.144	<20	2.58	0.01	0.81	<0.1	0.03	8.5	0.5	0.16	7	1.3	<0.2
935076	512090	7046965	1154	Soil	7	1.3	32.7	197.6	268	0.7	62.7	36.6	1135	5.13	24.1	4.8	10.4	18	0.4	0.3	1.7	52	0.33	0.066	34	111	1.8	151	0.084	<20	2.12	0.008	0.39	<0.1	0.07	6.3	0.4	<0.05	6	1.6	0.4
935077	512091	7047016	1157	Soil	7	0.9	31.7	38.8	81	0.3	48.7	21.4	626	3.49	9.7	3.4	6.5	23	0.2	0.2	0.7	67	0.44	0.041	21	181	2.24	399	0.14	<20	2.45	0.013	0.37	<0.1	0.06	8.7	0.4	0.08	6	1	<0.2
935078	512101	7047066	1163	Soil	7	0.4	22.4	47.3	62	<0.1	41.2	23.4	639	3.31	5.8	<0.5	6.1	12	<0.1	0.1	0.2	53	0.21	0.044	22	208	1.5	76	0.035	<20	1.95	0.002	0.16	<0.1	0.01	5.9	0.4	<0.05	4	<0.5	<0.2
935079	512094	7047118	1165	Soil	7	0.2	17	25.4	148	<0.1	97.5	22.4	1169	3.8	2.5	1.1	18.2	23	0.2	<0.1	0.2	46	0.37	0.073	53	161	3.21	285	0.148	<20	2.97	0.005	0.95	<0.1	0.03	6.2	0.7	<0.05	9	<0.5	<0.2
935080	511686	7044309	1173	Soil	7	1.1	77.9	232.5	464	0.7	12.7	7.3	958	4.33	22.2	1.8	1.4	27	0.3	0.2	3.3	59	0.07	0.044	3	11	1.9	155	0.243	<20	2.39	0.005	0.72	<0.1	0.03	1.9	0.4	0.37	6	<0.5	<0.2
935081	511650	7044273	1167	Soil	7	0.8	45.7	40.8	107	0.2	20.3	14.7	650	3.12	9.4	1.9	3.1	17	0.1	0.3	0.5	61	0.16	0.023	8	22	0.94	129	0.099	<20	1.92	0.009	0.08	0.1	0.03	2.8	0.2	<0.05	5	<0.5	<0.2
935082	511613	7044238	1156	Soil	7	0.5	71.5	27.1	206	0.1	19	23.7	1190	5.09	4.9	0.8	1.3	14	<0.1	<0.1	0.5	135	0.17	0.023	3	29	2.62	164	0.216	<20	3.13	0.005	0.7	<0.1	<0.01	4	0.7	<0.05	8	<0.5	<0.2
935083	511590	7044194	1144	Soil	7	0.6	80.9	23.6	88	0.3	15.5	9.6	391	2.75	8.1	1	0.9	16	0.1	0.2	0.4	54	0.19	0.034	8	21	0.76	125	0.078	<20	1.74	0.006	0.1	<0.1	0.02	2.2	0.2	<0.05	6	<0.5	<0.2
935084	511568	7044149	1133	Soil	7	1.1	93.9	54.7	121	0.4	19.3	14.6	542	3.51	12.8	3.4	2	19	0.2	0.2	0.4	60	0.21	0.028	6	24	0.97	134	0.092	<20	1.96	0.009	0.07	<0.1	0.02	2.5	0.2	<0.05	6	<0.5	<0.2
935085	511535	7044113	1121	Soil	7	0.6	78.4	42.8	79	0.2	10.5	21.3	931	3.06	2.5	0.8	3.1	17	0.1	<0.1	0.9	39	0.15	0.022	6	7	1.38	56	0.096	<20	1.78	0.002	0.24	<0.1	<0.01	1	0.3	<0.05	3	<0.5	<0.2
935086	511492	7044085	1112	Soil	7	0.5	83.1	14.7	210	0.1	19.2	20.3	691	2.7	6.5	2.1	3.2	31	0.2	0.3	0.2	46	0.25	0.021	11	19	1.27	138	0.114	<20	1.75	0.009	0.13	0.1	0.06	2.5	0.3	<0.05	4	<0.5	<0.2
935087	511443	7044063	1104	Soil	7	0.7	34.2	11.7	54	0.1	16.9	10.5	287	2.17	5.9	2.1	1.6	15	0.2	0.2	0.2	46	0.15	0.025	8	20	0.64	113	0.069	<20	1.65	0.008	0.05	<0.1	0.02	1.9	0.1	<0.05	4	<0.5	<0.2
935088	511397	7044034	1099	Soil	7	1.1	35.2	108.5	472	1.2	20.3	19.4	831	3.79	8.8	1	2.7	11	0.5	0.3	1.4	57	0.1	0.031	5	23	1.81	69	0.066	<20	3.3	0.005	0.06	<0.1	0.07	2.4	0.2	<0.05	7	<0.5	<0.2
935089	511358	7044002	1089	Soil	7	0.3	140.5	275	361	0.8	19.7	24.8	1080	3.65	4.6	0.8	3.8	15	0.4	<0.1	0.1	59	0.14	0.036	7	17	2.61	34	0.079	<20	2.61	0.002	0.1	<0.1	0.01	3.5	0.2	<0.05	6	<0.5	<0.2
935090	511324	7043966	1078	Soil	7	1.1	51.7	106.5	228	0.1	51.3	16.9	613	4.47	17.7	1.7	13.9	22	0.2	0.2	2.2	58	0.14	0.044	29	110	1.74	130	0.136	<20	2.57	0.005	0.3	<0.1	<0.01	3.2	0.4	0.08	8	0.9	0.3
935091	511285	7043934	1070	Soil	7	0.6	35.8	15.4	215	0.1	35.5	16.3	841	4.49	6	1.4	7.4	18	0.1	0.1	0.3	69	0.19	0.034	22	105	2.47	170	0.19	<20	2.8	0.007	0.68	<0.1	0.01	5.2	0.9	<0.05	9	<0.5	<0.2
935092	511247	7043899	1058	Soil	7	1	41.4	17.6	72	0.5	17.4	13.1	389	4.04	9.9	0.8	1.7	13	0.4	0.3	0.2	79	0.12	0.03	5	23	0.82	108	0.091	<20	2.22	0.005	0.07	<0.1	0.03	2.8	0.1	<0.05	7	<0.5	<0.2
935093	511203	7043877	1049	Soil	7	1	56	34.3	88	0.2	18.8	13.5	529	3.69	10.1	1.4	4.1	16	0.1	0.2	0.3	60	0.14	0.028	9	39	1.06	125	0.068	<20	2.32	0.007	0.07	<0.1	0.02	3.6	0.1	0.05	6	<0.5	<0.2
935094	511163	7043845	1041	Soil	7	0.8	30.1	38.2	110	<0.1	39.6	17.7	1087	3.08	3.9	0.7	16.4	29	0.1	<0.1	0.2	27	0.25	0.026	23	83	2.08	72	0.157	<20	2.16	0.003	0.19	<0.1	<0.01	2.8	0.4	<0.05	7	<0.5	<0.2
935095	511125	7043813	1028	Soil	7	0.8	49.8	55.1	49	<0.1	4.1	10.7	962	2.29	1.6	1	10.6	11	<0.1	<0.1	0.4	5	0.2	0.1	15	5	0.19	51	0.005	<20	0.92	<0.001	0.08	<0.1	<0.01	4.7	0.2	<0.05	2	<0.5	<0.2
935096	511085	7043780	1021	Soil	7	1.4	19.5	52.4	46	0.2	8.1	6.2	231	2.33	5.9	1.4	10.9	15	0.1	0.1	0.5	31	0.08	0.018	24	13	0.33	108	0.021	<20	1.07	0.005	0.07	<0.1	0.02	2	<0.1	<0.05	4	<0.5	<0.2
935097	511043	7043750	1018	Soil	7	2.2	49.6	18.7	67	0.1	11.9	8	231	3.81	9.9	2.7	4.3	12	0.1	0.2	0.4	60	0.08	0.024	12	24	0.31	143	0.036	<20	1.87	0.009	0.07	<0.1	0.02	3.2	0.2	<0.05	6	<0.5	0.4
935098	510990	7043732	1013	Soil	7	0.8	43.7	46.8	128	0.2	19.5	11.4	622	2.98	6.1	2	5.9	18	0.1	0.2	0.4	50	0.15	0.024	16	42	1.22	121	0.097	<20	1.91	0.007	0.26	<0.1	0.02	3.1	0.3	<0.05	6	<0.5	<0.2
935099	510945	7043702	1012	Soil	7	1.4	31.9	20.5	59	0.7	26.9	14.5	382	3.25	11	2.5	9.4	17	0.5	0.4	0.3	76	0.11	0.02	22	41	0.51	280	0.104	<20	2.94	0.01	0.06	<0.1	0.04	6.3	<0.1	<0.05	6	<0.5	<0.2
935100	510899	7043679	1008	Soil	7	1.1	20.5	29.9	54	0.1	18.5	8.2	219	2.82	9.2	14.9	11.6	13	0.3	0.3	0.3	57	0.08	0.021	14	29	0.4	208	0.059	<20	2.48	0.007	0.05	<0.1	0.05	2.6	0.1	<0.05	5	<0.5	<0.2
SQ001	510436	7047624	1015	Soil	7	0.8	17.2	16.8	41	<0.1	18.7	8.4	190	2.55	8.7	1.8	11.9	12	0.1	0.4	0.4	51	0.1	0.025	11	27	0.37	135	0.058	<20	2.45	0.011	0.05	<0.1	0.01	2.9	0.1	<0.05	6	<0.5	<0.2
SQ002	510490	7047626	1022	Soil	7	0.9	7.6	8.2	20	<0.1	4.6	2.4	111	1.55	4.4	1.2	3.8	8	<0.1	0.3	0.3	40	0.05	0.014	7	11	0.13	59	0.039	<20	0.92	0.013	0.03	<0.1	0.01	1.2	<0.1	<0.05	6	<0.5	<0.2
SQ003	510539	7047634	1030	Soil	7	1.3	13.5	15.6	61	0.1	17.9	9.7	266	2.92	9.2	1.8	6.9	15	0.1	0.3	0.5	67	0.13	0.033	10	28	0.36	202	0.063	<20	2.73	0.009	0.06	<0.1	0.02	2.7	0.1	<0.05	8	<0.5	<0.2
SQ004	510587	7047651	1031	Soil	7	1.5	10.7	32.3	32	0.2	9.5	4.4	171	3.38	9.6	1.8	3.8	10	0.1	0.4	0.6	92	0.09	0.027	9	21	0.24	106	0.081	<20	1.38	0.005	0.04	<0.1	0.02	1.9	0.2	<0.05	10	<0.5	<0.2
SQ005	510632	7047671	1035	Soil	7	1.3	16.3	58.5	34	0.1	13.1	4.6	226	1.77	5	2.1	26.2	17	<0.1	0.4	1.5	33	0.18	0.017	67	21	0.33	141	0.048	<20	1.22	0.011	0.08	<0.1	0.01	3.5	<0.1	<0.05	4	0.7	<0.2
SQ006	510676	7047698	1037	Soil	7	1.3	15.4	18.1	46	0.3	16.1	6.9	216	2.41	8.1	1.9	8.4	14	0.2	0.4	0.5	55	0.14	0.037	18	24	0.31	109	0.048	<20	2.03	0.009	0.07	<0.1	0.04	2.3	<0.1	<0.05	6	<0.5	<0.2
SQ007	510719	7047719	1041	Soil	7	1.6	12.8	17.9	47	0.2	16.2	6.2	191	3.92	12.1	0.6	4.9	13	0.2	0.5	0.4	94	0.11	0.034	11	32	0.33	104	0.07	<20	2.2	0.007	0.05	<0.1	0.06	2.5	0.1	<0.05	9	<0.5	<0.2
SQ008	510769	7047731	1049	Soil	7	0.8	6.4	4.6	17	<0.1	3.8	1.1	82	0.67	1.9	0.7	0.8	7	<0.1	0.2	0.3	26	0.06	0.019	7	9	0.06	62	0.025	<20	0.51	0.008	0.04	<0.1	0.03	0.6	<0.1	<0.05	4	<0.5	<0.2
SQ009	510818	7047749	1049	Soil	7	1	24.2	15.3	43	<0.1	18.1	7	240	2.42	8	2.8	17.3	23	<0.1	0.4	0.4	54	0.16	0.012	58	29	0.42	217	0.056	<20	1.86	0.008	0.07	<0.1	0.03	4.5	0.1	<0.05	6	<0.5	<0.2
SQ010	510865	7047768	1057	Soil	7	1.2	23.2	20.5	53	0.5	24.6	10.7	249	2.91	10	2.8	14.1	17	0.2	0.3	0.4	59	0.14	0.018	30	32	0.48	162	0.063	<20	2.69	0.01	0.07	<0.1	0.04	3.5	0.1	<0.05	6	<0.5	<0.2
SQ011	510913	7047782	1063	Soil	7	1.1	19.1	22	57	0.1	17.1	7.1	558	2.39	6.8	2	13.9	21	0.2	0.4	0.5	51	0.21	0.032	97	30	0.47	187	0.067	<20	1.73	0.011	0.09	<0.1	0.02	3.5	<0.1	<0.05	5	<0.5	<0.2
SQ012	510961	7047788	1071	Soil	7	1	18.5	21.8	46	0.1	17.2	7.2	271	2.6	7.6	1.7	9.9	22	0.1	0.4	0.4	57	0.19	0.019	29	28	0.43	167	0.057	<20	1.93	0.01	0.07	<0.1	0.02	3.3	0.1	<0.05	6	<0.5	<0.2
SQ013	511008	7047804	1078	Soil	7	1.7	20.7	28.4	72	0.2	19.2	11.2	725	3.46	11.8	1.4	6.9	17	0.1	0.4	0.5	78	0.16	0.039	19	32	0.46	194	0.063	<20	2.2	0.009	0.11	<0.1	0.04	3.2	0.1	<0.05	8	<0.5	<0.2
SQ014	511059	7047823	1090	Soil	7	0.8	19.5	23.4	48	<0.1	16.3	6.9	392	2.15	6.2	1.5	11.1	21	<0.1	0.4	0.3	47	0.21	0.022	47	27	0.45	207	0.061	<20	1.48	0.009	0.07	<0.1	0.03	3.6	<0.1	<0.05	4	<0.5	<0.2
SQ015	511884	7047786	1169	Soil	7	1.6	14.3	27.7	49	0.1	14.6	6.6	279	3.58	9.2	1	11.9	17	0.2	0.3	0.6	71	0.13	0.032	17	28	0.33	148	0.038	<20	2.68	0.008	0.07	<0.1	0.07	2.8	0.2	<0.05	9	<0.5	<0.2
SQ016	511933	7047769	1160	Soil	7	1	11.6	27.4	37	<0.1	13.5	5.9	274	2.2	5.4	1.2	15.8	12	0.2	0.4	0.5	41	0.12	0.019	54	22	0.32	129	0.047	<20	1.77	0.007	0.06	<0.1	0.03	2.2	0.1	<0.05	5	<0.5	<0.2
SQ017	511980	7047750	1151	Soil	7	1	16.6	28.1	37	0.1	12.5	6.1	225	1.99	5.1	1.9	18.9	15	0.1	0.4	0.6	40	0.14	0.024	113	26	0.32	165	0.058	<20	1.38	0.012	0.07	<0.1	0.03	3.8	<0.1	<0.05	4	<0.5	<0.2
SQ018	512022	7047724	1140	Soil	7	2.7	25.3	54.3	68	0.4	21.3	9.5	808	3.33	10.2	6	31	27	0.1	0.4	1.2	54	0.22	0.057	413	38	0.44	453	0.038	<20	2.61	0.01	0.12	<0.1	0.08	7.4	0.2	<0.05	7	1.1	<0.2
SQ019	512069	7047698	1129	Soil	7	2	19.5	38.8	51	0.2	15.9	5.9	306	2.38	6.9	3.1	24.8	17	<0.1	0.4	0.9	43	0.16	0.028	102	31	0.33	214	0.052	<20	1.72	0.008	0.1	<0.1	0.06	5.5	<0.1	<0.05	5	<0.5	<0.2
SQ020	512113	7047675	1121	Soil	7	1.2	14.7	29.9	43	0.1	13	6.1	318	1.86	5.4	1.8	13.3	16	0.2	0.4	0.5	41	0.17	0.027	42	26	0.32	142	0.062	<20	1.3	0.009	0.07	<0.1	0.04	3.4

Sample	Easting	Northing	Elevation	Zone	Type	Description	Au g/t
K935011	511472	7044082	1108	7V	Rock	quartz rubble, white with occasional clot of muscovite schist	<0.005
K935012	511572	7045700	1178	7V	Rock	massive quartz with minor muscovite and carbonate along fractures	<0.005
K932801	512637	7043755	1135	7V	Rock	sercite-muscovite-biotite schist	<0.005
K932802	512374	7044010	1152	7V	Rock	quartz with minor rust and trace muscovite	<0.005
K932803	512271	7044276	1143	7V	Rock	quartz-sercite-muscovite schist	<0.005
K932804	512206	7044350	1160	7V	Rock	weakly folded quartz/sericite schist with minor rusty weathering and 1% py	<0.005
K932805	511741	7045874	1171	7V	Rock	extremely rusty coloured quartz vein, trace pyrite	<0.005
K932806	511741	7045874	1171	7V	Rock	extremely rusty coloured quartz vein, trace pyrite	<0.005
K932807	511852	7048139	1206	7V	Rock	quartz with trace muscovite and cubic pyrite	<0.005
K932808	511852	7048138	1203	7V	Rock	muscovite schist, approx 30-35% muscovite	<0.005
K932809	511728	7047926	1203	7V	Rock	quartz with trace carbonate	<0.005
K932810	511728	7047927	1204	7V	Rock	muscovite-biotite schist	<0.005
K932811	511869	7047719	1164	7V	Rock	white to weakly rusty quartz vein	<0.005
K932812	511869	7047719	1164	7V	Rock	massive carbonate altered porphyry? Bleached white (clay mineral?) black metallic mineral	<0.005
K932813	511868	7047718	1162	7V	Rock	white to weakly rusty quartz vein	<0.005
K932814	511868	7047716	1162	7V	Rock	massive carbonate altered porphyry? Bleached white (clay mineral?)	<0.005
K932815	511953	7047564	1144	7V	Rock	strong carbonate altered schist? Abundant muscovite	<0.005
K932816	512000	7046376	1159	7V	Rock	bleached and clay altered porphyry/schist? Minor carb	<0.005
K935013	511348	7048056	1164	7V	Rock	strong carb altered porphyry/schist, minor quartz	<0.005
K935014	511342	7048059	1164	7V	Rock	white to semi-transparent quartz, trace carb on fractures, trace pyrite	<0.005
K932817	510620	7043467	1008	7V	Rock	white quartz with trace shards of muscovite schist	<0.005

Appendix II

Squid East

Sample	Easting	Northing	Elevation	Type	Zone	Mo ppm	Cu ppm	Pb ppm	Zn ppm	Ag ppm	Ni ppm	Co ppm	Mn ppm	Fe %	As ppm	Au ppb	Th ppm	Sr ppm	Cd ppm	Sb ppm	Bi ppm	V ppm	Ca %	P %	La ppm	Cr ppm	Mg %	Ba ppm	Ti %	B ppm	Al %	Na %	K %	W ppm	Hg ppm	Sc ppm	Tl ppm	S %	Ga ppm	Se ppm	Te ppm
SQ039	518712	7047797	877	Soil	7	3.4	45.7	16.3	110	0.4	41.8	11.3	424	2.7	11.3	4.3	3.6	60	0.7	0.4	0.2	47	0.83	0.055	16	32	0.51	550	0.042	<20	1.45	0.018	0.05	0.1	0.07	3.8	<0.1	<0.05	4	2	<0.2
SQ040	518740	7047862	880	Soil	7	3.2	36.3	29.2	96	0.3	36.9	11.4	713	2.43	8.2	4.1	2.8	54	0.6	0.3	0.2	46	1.05	0.049	12	38	0.62	543	0.048	<20	1.35	0.018	0.06	<0.1	0.04	3.1	<0.1	<0.05	4	2.1	<0.2
SQ041	518744	7047922	894	Soil	7	4.4	70.3	152.3	263	0.3	55.5	14	543	3.45	30.2	4.5	7.7	34	0.8	0.3	0.3	58	0.56	0.043	25	62	0.99	253	0.069	<20	2.07	0.015	0.11	0.2	0.09	6.1	0.2	<0.05	5	0.9	<0.2
SQ042	518758	7047975	899	Soil	7	1.6	63.9	179.9	405	0.5	38.8	11	507	2.71	6.6	2.7	6.6	44	1.2	0.3	0.4	46	0.87	0.039	20	52	0.88	210	0.052	<20	1.8	0.013	0.1	<0.1	0.09	4.4	0.2	<0.05	5	1.1	<0.2
SQ043	518759	7048053	910	Soil	7	5.3	69.7	50.4	117	0.3	94.3	20.8	708	3.94	19.1	0.7	7.7	29	0.6	0.3	0.3	67	0.66	0.053	26	100	1.55	139	0.045	<20	2.14	0.011	0.08	<0.1	0.03	6.4	0.2	<0.05	6	1.1	<0.2
SQ044	518777	7048103	915	Soil	7	7.7	55.1	58.7	121	0.2	58.9	14.2	634	3.44	7	2	10.2	31	0.6	0.3	0.3	56	0.52	0.05	25	51	0.74	185	0.044	<20	1.69	0.017	0.07	<0.1	0.03	4.6	0.1	<0.05	5	1.2	<0.2
SQ045	518782	7048174	918	Soil	7	1.8	39.3	34.7	69	0.1	47.7	15.2	414	3.31	5.4	177.4	5.4	33	0.2	0.2	0.3	69	0.54	0.023	17	72	1.18	204	0.067	<20	2.4	0.018	0.07	<0.1	0.02	5.8	0.1	<0.05	7	<0.5	<0.2
SQ046	518754	7048220	926	Soil	7	2.1	46.3	33.6	59	0.1	51.2	15.3	435	3.42	6.6	2.1	6.6	32	0.1	0.2	0.3	71	0.48	0.02	20	77	1.16	176	0.084	<20	2.37	0.013	0.08	<0.1	0.02	6	0.2	<0.05	7	<0.5	<0.2
SQ047	518766	7048272	926	Soil	7	1.5	38.1	21.2	46	0.2	38.1	12.3	372	2.98	6.2	2.5	6.2	22	<0.1	0.2	0.2	63	0.32	0.034	23	51	0.89	228	0.047	<20	2.06	0.01	0.05	<0.1	0.03	5.5	<0.1	<0.05	6	<0.5	<0.2
SQ048	518766	7048324	921	Soil	7	10.7	55.2	34.1	116	0.2	55.9	14.8	335	3.27	4.1	2.2	7.7	13	0.5	0.3	0.3	48	0.17	0.054	23	27	0.47	105	0.018	<20	1.34	0.006	0.07	<0.1	0.03	3	0.1	<0.05	5	2.1	<0.2
SQ049	518758	7048373	918	Soil	7	4.8	48.3	22.5	80	0.3	43.8	13.9	470	2.87	5.2	2.6	9.1	21	0.3	0.3	0.2	53	0.27	0.049	36	41	0.71	254	0.043	<20	1.75	0.011	0.06	<0.1	0.03	4.7	0.1	<0.05	5	0.7	<0.2
SQ050	518709	7048412	914	Soil	7	1.1	17.6	35.8	54	0.1	18.5	8.1	385	2.23	2.8	2.4	19.9	24	0.1	0.1	0.3	31	0.36	0.024	47	21	0.58	149	0.04	<20	1.4	0.01	0.14	<0.1	0.02	2.5	0.2	<0.05	4	<0.5	<0.2
SQ051	518704	7048466	907	Soil	7	0.4	11	6.5	43	<0.1	9.8	8.7	274	1.91	3.6	4.4	2.3	23	0.1	0.1	0.1	36	0.33	0.032	15	16	1.27	224	0.031	<20	1.67	0.005	0.04	<0.1	0.03	2.7	<0.1	<0.05	6	<0.5	<0.2
SQ052	518712	7048515	900	Soil	7	0.5	17.4	7.9	53	<0.1	13.6	16.6	825	2.25	5.8	7	3	29	0.3	0.2	0.1	39	0.68	0.078	20	15	1.25	344	0.025	<20	1.74	0.009	0.05	<0.1	0.03	3.7	<0.1	0.06	4	0.5	<0.2
SQ053	518711	7048566	890	Soil	7	1.5	13.7	7.6	43	0.1	10.8	11.7	1166	1.79	3.5	2.8	0.6	48	0.3	0.1	0.1	32	0.85	0.083	10	11	1.01	283	0.019	<20	1.32	0.01	0.03	<0.1	0.05	2.2	<0.1	0.06	4	<0.5	<0.2
SQ054	518682	7048722	848	Soil	7	3.9	38.8	17.6	88	0.2	25	17	940	3.73	7.9	3.1	4.3	35	0.4	0.2	0.3	49	0.69	0.101	18	23	1.22	224	0.024	<20	1.81	0.008	0.06	0.1	0.04	3.8	<0.1	<0.05	5	0.8	<0.2
SQ055	518682	7048929	792	Soil	7	3.2	32.1	17.9	83	0.3	28.3	15.8	1399	3.04	6.6	2.2	3.9	32	0.4	0.2	0.2	45	0.61	0.057	22	28	0.8	323	0.021	<20	1.53	0.01	0.05	0.1	0.04	3.4	0.1	<0.05	4	0.9	<0.2
SQ056	518657	7048969	780	Soil	7	3	20.8	26.1	85	0.2	23	17.2	1304	3.24	7.5	<0.5	4.2	24	0.4	0.2	0.3	50	0.39	0.073	19	24	0.98	249	0.029	<20	1.68	0.009	0.06	<0.1	0.03	2.6	0.1	<0.05	5	<0.5	<0.2
SQ057	518664	7049035	764	Soil	7	2.7	39.4	20.6	128	0.2	27.7	16.7	559	4.04	6.5	1.1	6.1	31	0.3	0.2	0.2	66	0.54	0.093	27	24	1.53	355	0.085	<20	2.21	0.011	0.23	<0.1	0.04	4.7	0.3	<0.05	6	1.3	<0.2
SQ058	518678	7049085	755	Soil	7	3.5	43.6	31.4	98	0.2	23.8	11.4	334	4.58	20	3.8	14.3	20	0.3	0.3	0.4	63	0.3	0.055	34	29	1.21	221	0.033	<20	2	0.007	0.07	<0.1	0.05	4.5	0.2	<0.05	5	2.3	<0.2
SQ059	518705	7049124	746	Soil	7	0.7	26.4	10.7	63	<0.1	19.2	9.6	325	2.36	7.8	3.5	3.6	32	0.2	0.4	0.2	52	0.46	0.072	13	26	0.56	209	0.074	<20	1.24	0.026	0.05	0.2	0.03	3.2	<0.1	<0.05	3	<0.5	<0.2
SQ062	518721	7049320	750	Soil	7	0.7	19.1	8.2	51	<0.1	17.1	9	264	2.08	4.8	1.1	3.1	34	0.2	0.3	0.2	44	0.48	0.061	11	26	0.46	201	0.084	<20	1.44	0.027	0.05	0.1	0.04	3.4	<0.1	<0.05	4	<0.5	<0.2
SQ063	518721	7049383	755	Soil	7	0.6	21.8	8.5	47	<0.1	16.5	8.2	295	1.99	6	2	1.6	34	0.1	0.3	0.2	47	0.44	0.056	10	25	0.4	213	0.059	<20	1.31	0.018	0.04	0.2	0.04	2.6	<0.1	<0.05	4	<0.5	<0.2
SQ065	518701	7049699	776	Soil	7	1.3	30.3	12.9	51	0.1	24.7	9.4	334	2.5	7.4	1.2	5.2	38	0.1	0.3	0.3	52	0.47	0.045	17	35	0.45	265	0.09	<20	1.72	0.022	0.05	<0.1	0.04	4.5	<0.1	<0.05	5	<0.5	<0.2
SQ066	518701	7049754	780	Soil	7	1.2	22	12.8	47	<0.1	22.1	8.5	234	2.44	7	3.6	4.5	32	0.2	0.3	0.2	54	0.43	0.044	13	34	0.43	213	0.073	<20	1.67	0.017	0.04	<0.1	0.04	3.7	<0.1	<0.05	5	<0.5	<0.2
SQ068	518690	7050070	817	Soil	7	1.7	29.7	12	52	0.1	31.8	10.2	395	2.54	7	3.2	4.1	39	0.1	0.4	0.2	55	0.55	0.046	15	44	0.51	280	0.085	<20	1.72	0.024	0.05	0.1	0.04	4.4	<0.1	<0.05	5	<0.5	<0.2
SQ069	518677	7050132	826	Soil	7	1.3	30.6	11	55	<0.1	26.5	9.6	386	2.55	7.5	2.9	4.4	38	0.2	0.4	0.3	53	0.54	0.051	15	36	0.51	273	0.087	<20	1.72	0.028	0.06	0.1	0.03	4.4	<0.1	<0.05	5	<0.5	<0.2
SQ070	518663	7050183	836	Soil	7	1.4	21.7	10.4	55	<0.1	23.9	8.2	270	2.6	7.6	1.7	4.1	38	0.1	0.3	0.2	56	0.48	0.047	12	36	0.54	241	0.093	<20	1.61	0.023	0.06	<0.1	0.02	3.9	<0.1	<0.05	5	<0.5	<0.2
SQ071	518634	7050246	848	Soil	7	0.7	20.2	9.6	54	<0.1	20.5	8.5	246	2.7	8.3	0.7	3.8	30	0.1	0.4	0.2	61	0.33	0.034	11	32	0.54	211	0.086	<20	1.83	0.02	0.05	<0.1	0.03	3.4	<0.1	<0.05	5	<0.5	<0.2
SQ072	518638	7050298	862	Soil	7	0.9	18.4	9.4	53	<0.1	15.9	8.7	286	2.46	7.5	1.5	5.4	24	<0.1	0.3	0.3	56	0.3	0.032	15	31	0.47	201	0.088	<20	1.65	0.015	0.05	<0.1	<0.01	3	<0.1	<0.05	5	<0.5	<0.2
SQ073	518629	7050360	867	Soil	7	1	20.7	10.7	50	0.1	18.7	10.2	364	2.87	8.3	3	5	24	<0.1	0.3	0.4	63	0.24	0.029	13	31	0.47	180	0.088	<20	2.03	0.013	0.05	<0.1	0.01	2.3	<0.1	<0.05	6	<0.5	<0.2
SQ074	518613	7050414	877	Soil	7	1.3	24.1	11.3	39	0.2	14.8	6.6	152	2.27	6.3	1.5	2.6	25	0.1	0.2	0.4	48	0.23	0.035	15	24	0.31	179	0.069	<20	1.92	0.011	0.07	<0.1	0.03	2.3	<0.1	<0.05	7	<0.5	<0.2
SQ075	518609	7050466	884	Soil	7	1.2	27.5	12.2	47	0.2	17.3	10.1	346	2.89	8.6	3	4	23	<0.1	0.2	0.3	61	0.21	0.026	15	28	0.35	237	0.07	<20	2.28	0.014	0.07	<0.1	0.03	2.8	<0.1	<0.05	7	<0.5	<0.2
SQE001	519616	7047925	806	Soil	7	1.8	29.7	15.2	70	0.2	28.4	11.4	267	2.52	6.3	2	2.3	25	<0.1	0.2	0.2	48	0.46	0.067	11	34	1.07	230	0.047	<20	1.84	0.011	0.03	0.1	0.03	2.9	<0.1	<0.05	4	<0.5	<0.2
SQE002	519615	7047978	796	Soil	7	2.3	18	11.5	64	<0.1	28.5	16	1256	2.34	4.5	2	1.3	26	0.1	0.2	0.2	40	0.53	0.093	8	36	1.18	205	0.039	<20	1.47	0.01	0.04	0.1	0.03	2.5	<0.1	<0.05	4	<0.5	<0.2
SQE003	519619	7048034	787	Soil	7	1.2	23.5	11.5	69	<0.1	22.6	13.3	319	2.43	5.1	6.8	2	27	0.2	0.2	0.2	44	0.58	0.082	13	26	0.92	288	0.044	<20	1.54	0.012	0.04	0.1	0.03	2.9	<0.1	<0.05	4	0.5	<0.2
SQE004	519646	7048082	777	Soil	7	0.7	17.8	12.6	68	<0.1	18.9	10.5	300	2.22	4.4	3.1	2.6	23	0.1	0.2	0.2	48	0.52	0.074	11	25	0.92	203	0.052	<20	1.66	0.012	0.04	0.1	0.04	3.2	<0.1	<0.05	5	<0.5	<0.2
SQE005	519662	7048137	764	Soil	7	0.9	5.1	5.3	76	<0.1	10	19.2	767	2.56	10.5	178	2.4	17	0.1	0.1	<0.1	40	0.67	0.153	8	9	2.21	133	0.045	<20	1.99	0.005	0.07	0.2	<0.01	2.5	<0.1	<0.05	5	<0.5	<0.2
SQE006	519678	7048182	753	Soil	7	1	10.3	9.9	70	<0.1	13.6	12.6	917	2.44	10.3	1.6	2.2	25	0.2	0.2	0.1	46	0.67	0.146	10	17	1.27	190	0.049	<20	1.72	0.012	0.05	0.2	0.03	3	<0.1	<0.05	4	0.5	<0.2
SQE007	519701	7048243	738	Soil	7	1.4	27.9	12.2	72	0.1	25.6	11.6	431	2.52	9.1	1.2	2.7	46	0.2	0.4	0.2	53	0.72	0.072	14	29	0.59	263	0.074	<20	1.41	0.03	0.06	0.1	0.03	3.6	<0.1	<0.05	4	<0.5	<0.2
SQE008	519713	7048296	744	Soil	7	3.1	34.9	15.8	81	0.2	30.6	11.1	368	2.79	8.5	1.7	4.1	34	0.4	0.4	0.3	51	0.44	0.064	14	36	0.5	246	0.076	<20	1.61	0.018	0.06	0.2	0.02	3.6	<0.1	<0.05	5	1	<0.2
SQE009	519736	7048345	744	Soil	7	2.1	33.6	14	74	<0.1	28.6	13.2	448	2.85	4.7	2.1	6.8	24	0.2	0.2	0.2	46	0.38	0.057	18	33	0.86	214	0.06	<20	1.81	0.012	0.09	<0.1	0.02	4.4	<0.1	<0.05	5	<0.5	<0.2
SQE010	519733	7048396	738	Soil	7	4.6	58.2	24.2	129	0.3	48.2	12.9	453	3.18	4.5	0.9	10	17	0.6	0.2	0.3	51	0.52	0.059	28	47	1.02	178	0.045	<20	1.98	0.012	0.11	<0.1	0.02	5	<0.1	<0.05	5	1.9	<0.2
SQE011	519742	7048445	728	Soil	7	3.2	51.4	17	107	0.2	38.8	12.4	471	3.01	5.1	2.2	6.7	27	0.3	0.2	0.3	46	0.7	0.065	24	41	0.97	203	0.046	<20	1.77	0.014	0.1	<0.1	0.02	4.9	<0.1	<0.05	5	1.2	<0.2
SQE012	519762	7048518	715	Soil	7	0.8	23.1	12.7	64	<0.1	38.7	12.7	584	2.59	7.5	1.4	3.4	39	<0.1	0.3	0.2	47	0.55	0.062	17	33	0.64	232	0.068	<20	1.39	0.023	0.06	0.1	0.03	3.9	<0.1	<0.05	4	<0.5	<0.2
SQE013	519889	7048796	733	Soil	7	1.3	40	11.4	77	0.1	32.7	11.7	436	3.08	10.2	3.1	5.1	48	0.3	0.5	0.3	63	0.92	0.076	16	36	0.63	258	0.112	<20	1.61	0.037	0.11	0.1	0.02	5.3	<0.1	<0.05	5	<0.5	<0.2
SQE014	519893	7048848	738	Soil	7	0.8	31.5	9.4	49	<0.1	25.4	12.1	583	2.55	10.1	11.8	3.3	47	0.4	0.5	0.2	49	0.73	0.057	14	26	0.41	226	0.056	<20	1.36	0.016	0.05	0.1	0.04	3.8	<0.1	0.08	4	<0.5	<0.2
SQE015	519879	7048900	741	Soil	7	0.5	27	11.3	45	<0.1	20.8	10.9	294	2.87	9	4.1	4.7	36	<0.1	0.4	0.3	55	0.53	0.044	15	29	0.47	237	0.05	<20	1.73	0.015	0.05	<0.1	0.04	4.1	<0.1	<0.05	4	<0.5	<0.2
SQE016	519893	7048949	747	Soil	7	0.7	33.2	11.6	52	0.1	25.9	12.6	393	2.99	10.5	7.1	4	43	0.1	0.5	0.3	54	0.66	0.053	16	30	0.47	264	0.051	<20	1.63	0.014	0.06	<0.1	0.04	4.7	<0.1	<0.05	5	<0.5	<0.2
SQE017	519895	7049001	755	Soil	7	0.9	30.6	9.7	54	0.1	24.8	10.4	333	2.72	10.2	3.8	3.8	36	<0.1	0.5	0.3	54	0.58	0.052	14	30	0.47	244	0.056	<20	1.49	0.017	0.05	0.1	0.18	4	0.1	<0.05	4	<0.5	<0.2
SQE018	519914	7049049	759	Soil	7	1.4	35.4	12.4	58	0.1	28.7	11.6	404	2.88	11	3	3.8	43	0.1	0.4	0.3	55	0.62	0.058	16	33	0.51	259	0.063	<20	1.6	0.02	0.05	0.2	0.04	4.7	<0.1	<0.05	4	<0.5	<0.2
SQE019	519928	7049099	766	Soil	7	1.5	34.7	13.4	59	0.1	30.8	14.4	519	3.5	14.1	2.5	4.8	38	0.1	0.4	0.3	51	0.59	0.05	16	28	0.43	250	0.051	<20	1.48	0.018	0.05	0.2	0.04	4.2	<0.1	<0.05	4	0.8	<0.2
SQE020	519938	7049151	771	Soil	7	1.3	34.3	11.8	58	0.1	29.9	12.8	714	2.73	9.2	2.5	2.9	53	0.2	0.5	0.3	40	0.82	0.057	16	23	0.43	271	0.039	<20	1.32	0.019	0.06	0.1	0.05	3.4	<0.1	<0.05	4	0.8	<0.2
SQE021	519942	7049206	776	Soil	7	1.2	28.6	9.7	67	<0.1	30.2	11.2	227	3.09	4.4	3.5	12.4	22	<0.1	0.2	0.4	30	0.34	0.053	37	23	0.42	138	0.04	<20	1.07	0.011	0.11	<0.1	0.01	3.7	0.2	<0.05	3	0.7	<0.2
SQE022	519932	7049257	778	Soil	7	2	35.8	17.4	69	<0.1	35.1	13.6	508	3.18	14.6	6.5	12.1	25	<0.1	0.2	0.4	23	0.34	0.053	44	18	0.24	277	0.008	<20	0.91	0.007	0.07	0.2	0.02	4.3	<0.1	<0.05	2	0.8	<0.2
SQE023	519939	7049310	788	Soil	7	0.8	15	9.5	40	<0.1	16.9	7.2	219	2.29	6.2	3.4	6.5	22	<0.1	0.1	0.2	36	0.3	0.041	22	20	0.39	140	0.034	<20	1	0.011	0.05	<0.1	<0.01	2.1	<0.1	<0.05	3	<0.5	<0.2
SQE024	519952	7049362	793	Soil	7	1.1	25.3	10.8	58	<0.1	25.4	10.2	274	2.96	4.1	0.7	10.8	24	<0.1	0.1	0.3	34	0.29	0.031	32	22	0.37	149	0.022	<20	1.01	0.009	0.05	<0.1	0.01	3.4	<0.1	<0.05	3	<0.5	<0.2
SQE025	519959	7049413	802	Soil	7	1.6	32.4	13	52	0.1	22.4	11.9	486	2.75	6.9	1.6	4.9	46	0.2	0.2	0.3	44	0.63	0.045	20	27	0.52	293	0.034	<20	1.44	0.015	0.06	<0.1	0.03	4.1	<0.1	<0.05	4	<0.5	<0.2
SQE026	519952	7049466	804	Soil	7	1.3	23.7	12.6	55	<0.1	20.5	8.9	326	2.7	6.6	3.1	7.5	25	<0.1	0.2	0.3	47	0.36	0.029	22	29	0.47	247	0.044	<20	1.44	0.013	0.05	<0.1	<0.01	3.7	<0.1	<0.05	4	<0.5	<0.2
SQE027	519960	7049518	811	Soil	7	1.9	36.3	20.1	68	0.2	28.6	11.8	371	3.18	7.5	2.6	7.8	37	<0.1	0.2	0.7	47	0.53	0.043	24	32	0.52	306	0.044	<20	1.57	0.015	0.07	<0.1	0.03	5.5	0.1	<0.05	4	<0.5	<0.2
SQE028	519970	7049572	813	Soil	7	1.2	28.3	15.9	58	<0.1	17.4	10.2	366	3.14	6	1.8	4.6	28	<0.1	0.2	0.3	50	0.39	0.039	15	26	0.56	238	0.034	<20	1.56	0.013	0.05	<0.1	0.03	4.8	<0.1	<0.05	4	<0.5	<0.2
SQE029	519978	7049628	818	Soil	7	0.9	25.5	15.8	59	<0.1	18.3	11.1	328	3.05	4.1	1.6	5.1	26	<0.1	0.1	0.3	52	0.41	0.044	19	29	0.75	273	0.04	<20	1.87	0.012	0.06	<0.1	0.02	4.6	<0.1	<0.05	5	0.6	<0.2
SQE030	519991	7049677	819	Soil	7	2.2	31.6	19	62	0.1	25.6	12.3	754	3.05	6	1.5	4.2	33	0.1	0.2	0.3	51	0.49	0.053	17	41	0.65	275	0.041	<20	1.71	0.017	0.06	<0.1	0.02	4.7	<0.1	<0.05	5	<0.5	<0.2
SQE031	519996	7049729	815	Soil	7	1	38.1	14.5	67	0.1	25.3	12.8	479	3.24	8.7	2.8	4.6	35	0.1	0.3	0.4	54	0.53	0.057	16	30	0.58	348	0.035	<20	1.51	0.014	0.05	<0.1	0.04	4.5	<0.1	0.05	4	<0.5	<0.2
SQE032	519989	7049784	812	Soil	7	1.1	27.7	15.5	60	0.1	22.5	11.7	417	2.91	8	3.4	4.2	48	0.2	0.3	0.3	51	0.7	0.047	17	31	0.57	275	0.051	<20	1.74	0.018	0.06	<0.1	0.03	4.4	<0.1	<0.05	5	<0.5	<0.2
SQE033	519983	7049836	807	Soil	7	1	33	19.1	69	0.1	17.7	11.1	466	2.74	7.7	2	3.1	34	<0.1	0.3	0.3	53	0.47	0.054	16	26	0.59	235	0.043	<20	1.69	0.015	0.05	<0.1	0.04	3.8	<0.1	<0.05	5	<0.5	<0.2
SQE034	519955	7049931	799	Soil	7	1	17.4	13.6	56	<0.1	20.6	8.9	260	2.55	5.5	1.1	5.4	37	<0.1	0.1	0.3	60	0.32	0.043	16	36	0.56	341	0.06	<20	2.16	0.012	0.09	<0.1	0.02	4.3	0.2	<0.05	6	<0.5	<0.2
SQE035	519941	7049985	791	Soil	7	0.7	23.9	12.7	58	0.1	20.6	10.4	641	2.48	6.3	3.7	3.9	84	0.1	0.2	0.2	59	0.61	0.063	19	32	0.71	624	0.034	<20	1.87	0.015	0.11	<0.1	0.04	5.6	0.2	<0.05	6	<0.5	<0.2
SQE036	519938	7050036	790	Soil	7	0.5	24.8	9.7	46	<0.1	19.9	8.9	258	2.65	7.8	6.9	4.3	42	0.3	0.4	0.2	64	0.52	0.058	16	35	0.38	271	0.034	<20	1.78	0.013	0.04	<0.1	0.07	4.7	<0.1	<0.05	6	<0.5	<0.2
S

Appendix III

Fogo

Sample	Easting	Northing	Elevation	Type	Zone	Mo ppm	Cu ppm	Pb ppm	Zn ppm	Ag ppm	Ni ppm	Co ppm	Mn ppm	Fe %	As ppm	Au ppb	Th ppm	Sr ppm	Cd ppm	Sb ppm	Bi ppm	V ppm	Ca %	P %	La ppm	Cr ppm	Mg %	Ba ppm	Ti %	B ppm	Al %	Na %	K %	W ppm	Hg ppm	Sc ppm	Tl ppm	S %	Ga ppm	Se ppm	Te ppm
932703	527543	7030781	974	Soil	7	1.8	24.2	36.2	90	0.3	28.8	8.5	275	2.35	8.7	4.3	9.5	29	0.2	0.4	0.2	51	0.34	0.039	24	41	0.57	166	0.06	<20	1.77	0.017	0.05	0.1	0.04	3.9	0.2	<0.05	7	0.7	<0.2
932704	527543	7030835	960	Soil	7	17.4	16.1	60.8	44	0.6	8	2.4	94	1.56	7.2	1.4	3.1	12	0.3	0.4	0.4	31	0.1	0.022	34	15	0.11	67	0.02	<20	0.85	0.009	0.12	0.2	0.02	0.8	0.2	0.13	5	<0.5	<0.2
932705	527541	7030886	957	Soil	7	8.2	9.1	44.2	65	0.2	8.3	3.1	121	1.43	4.8	1.2	15.9	14	<0.1	0.3	0.4	35	0.22	0.022	28	16	0.23	46	0.073	<20	0.68	0.009	0.11	0.2	0.02	1.5	0.2	<0.05	3	1.3	<0.2
932706	527543	7030946	965	Soil	7	24.5	11.4	31.7	36	0.5	13.1	4	132	1.65	7	2.1	3.5	12	0.2	0.5	0.2	38	0.12	0.02	11	20	0.22	59	0.048	<20	0.71	0.01	0.09	0.1	0.03	1	0.2	0.08	4	<0.5	<0.2
932707	527542	7031003	973	Soil	7	24.2	11.2	30.5	38	0.5	10.7	4.7	157	2.26	9.2	7.5	5.2	12	0.1	0.3	0.2	54	0.13	0.015	12	19	0.32	84	0.029	<20	1.47	0.009	0.08	<0.1	0.01	1.7	0.2	<0.05	6	0.7	<0.2
932708	527536	7031053	971	Soil	7	18.8	11.1	20.2	39	0.7	11.6	4.8	177	2.07	7.3	6.4	3.1	13	0.1	0.3	0.2	54	0.13	0.015	9	20	0.33	80	0.04	<20	1.21	0.01	0.07	<0.1	0.01	1.5	0.2	<0.05	5	<0.5	<0.2
932709	527543	7031113	977	Soil	7	12.4	12.4	16.7	46	0.3	13	5.9	221	2.54	8.5	3.6	2.7	10	0.4	0.3	0.2	68	0.09	0.033	7	22	0.32	75	0.035	<20	1.32	0.008	0.06	<0.1	0.01	1.6	0.2	<0.05	7	<0.5	<0.2
932710	527542	7031164	968	Soil	7	12.6	16.3	22.9	46	0.2	15.8	7.1	244	2.29	7.3	1.3	5.6	18	<0.1	0.3	0.2	52	0.19	0.022	11	24	0.44	94	0.049	<20	1.44	0.011	0.08	0.1	<0.01	2.1	0.2	<0.05	5	<0.5	<0.2
932711	527543	7031216	952	Soil	7	9.9	13.4	36.7	50	0.3	12.3	5.6	218	1.95	6.3	4.6	8.2	16	0.1	0.3	0.3	41	0.19	0.027	16	20	0.34	75	0.06	<20	0.98	0.01	0.13	0.2	0.02	1.9	0.2	0.07	4	1	<0.2
932712	527543	7031271	931	Soil	7	7.2	13.6	31.4	51	0.5	10.1	3.9	141	1.84	6.3	3.5	3.8	16	<0.1	0.3	0.4	29	0.16	0.039	35	19	0.29	95	0.015	<20	1.27	0.007	0.13	0.2	0.04	1.3	0.2	0.09	4	<0.5	<0.2
932713	527541	7031322	911	Soil	7	10.6	10.7	29	33	0.5	7.2	2.8	100	1.44	6.3	5.9	3.3	11	<0.1	0.2	0.3	25	0.11	0.032	23	15	0.21	54	0.013	<20	0.91	0.005	0.11	0.2	0.05	1	0.2	<0.05	4	<0.5	<0.2
932714	527545	7031375	891	Soil	7	1.9	13.4	31	58	<0.1	11.4	7.5	269	1.89	5.7	4.4	8.2	21	0.1	0.3	0.2	38	0.29	0.033	25	22	0.37	84	0.046	<20	1.25	0.014	0.12	0.1	0.03	2.3	0.2	<0.05	4	<0.5	<0.2
932715	527538	7031430	889	Soil	7	1.9	5.9	26.1	34	<0.1	9	2.8	123	1.18	3.5	2.4	7.5	12	<0.1	0.1	0.2	26	0.12	0.018	9	15	0.2	43	0.026	<20	0.82	0.009	0.1	0.1	0.03	1	<0.1	<0.05	3	<0.5	<0.2
932716	527540	7031484	892	Soil	7	4.9	7.6	38.8	34	<0.1	22.7	4.1	148	1.4	4	1.3	7.9	11	<0.1	0.2	0.1	36	0.12	0.012	13	40	0.27	50	0.049	<20	0.88	0.009	0.09	0.1	0.02	1.2	<0.1	<0.05	3	0.9	<0.2
932717	527530	7031539	907	Soil	7	2.1	6.3	18.6	23	<0.1	7.8	3	84	1.25	3	1.7	5.1	10	<0.1	0.1	0.1	34	0.09	0.009	5	14	0.19	50	0.045	<20	0.81	0.01	0.06	<0.1	0.02	1	<0.1	<0.05	3	1.3	<0.2
932718	527534	7031590	899	Soil	7	5.6	11.8	55.3	53	0.2	22.5	4.4	152	1.86	6.6	2.3	12.4	20	<0.1	0.2	0.5	40	0.17	0.019	54	41	0.3	87	0.036	<20	1.36	0.013	0.14	<0.1	0.03	2	0.2	<0.05	5	1.4	<0.2
932719	527531	7031638	905	Soil	7	1.4	5.8	12.7	39	0.2	6.5	2.6	196	1.13	2.3	0.6	2.1	13	<0.1	0.1	0.2	35	0.11	0.009	6	10	0.12	95	0.047	<20	0.57	0.016	0.04	<0.1	0.02	0.8	<0.1	<0.05	4	0.8	<0.2
932720	527526	7031693	905	Soil	7	3	6.8	43	25	0.1	13.4	1.9	76	0.75	2.6	1.1	15.1	13	<0.1	<0.1	<0.1	17	0.15	0.014	49	25	0.15	34	0.018	<20	0.59	0.007	0.12	0.1	0.02	1	<0.1	<0.05	2	1.3	<0.2
932721	527526	7031745	886	Soil	7	1.5	10.5	19.6	50	0.1	11	4.5	136	1.95	5.3	3.1	5.1	10	<0.1	0.1	0.1	50	0.1	0.017	6	10	0.27	61	0.021	<20	1.52	0.01	0.05	<0.1	0.03	1.7	<0.1	<0.05	5	0.7	<0.2
932722	527497	7032037	797	Soil	7	2.6	13.2	42.2	63	0.2	18.3	6.7	294	1.74	5	1.4	11	21	0.3	0.1	0.3	41	0.27	0.038	67	31	0.33	94	0.048	<20	1.19	0.017	0.14	0.1	0.04	2.1	0.2	0.06	5	1.3	<0.2
932751	527879	7030520	1096	Soil	7	4.2	17	34.5	61	0.4	20.2	8.3	224	2.8	10.7	8.4	7.6	25	0.1	0.2	0.2	67	0.27	0.025	13	32	0.49	133	0.062	<20	1.99	0.011	0.08	<0.1	0.02	2.7	0.1	<0.05	6	0.9	<0.2
932752	527857	7030565	1103	Soil	7	3.3	18.3	48.7	73	0.1	19.7	7.8	283	2.53	8.3	1.1	14.4	24	0.1	0.1	0.1	65	0.23	0.021	28	34	0.5	158	0.05	<20	2.07	0.012	0.06	<0.1	0.02	3	0.2	<0.05	7	1.3	<0.2
932753	527832	7030609	1105	Soil	7	4.4	16.3	21.8	100	0.2	16.1	7.3	432	2.98	8.8	0.8	2.7	25	0.4	0.2	0.2	77	0.24	0.027	9	28	0.38	229	0.061	<20	1.79	0.011	0.06	<0.1	0.02	2.6	0.1	<0.05	8	0.8	<0.2
932754	527844	7030660	1110	Soil	7	3.6	26.7	32.4	61	0.4	27.7	12.3	308	3.25	11.2	2.6	9.8	30	0.2	0.2	0.2	78	0.28	0.023	24	42	0.58	248	0.082	<20	2.95	0.015	0.08	<0.1	0.04	4.6	0.1	<0.05	7	0.6	<0.2
932755	527868	7030707	1110	Soil	7	2.5	19	22.5	77	0.6	18.4	8	312	2.85	10.6	2	2.5	12	0.5	0.3	0.2	66	0.11	0.039	12	26	0.4	113	0.053	<20	2.08	0.013	0.06	<0.1	0.06	2.3	0.2	<0.05	7	<0.5	<0.2
932756	527888	7030755	1110	Soil	7	3.3	8.3	21.4	30	0.3	5	2.1	87	1.16	3.7	1.8	2.5	8	<0.1	0.1	0.3	27	0.07	0.018	7	9	0.11	47	0.016	<20	0.9	0.009	0.06	<0.1	0.04	0.8	0.2	<0.05	4	1.1	<0.2
932757	527891	7030806	1111	Soil	7	1.7	12.8	21.7	60	0.2	14	5.8	245	2.29	5.5	1.5	5.6	19	0.2	0.2	0.3	57	0.18	0.013	10	23	0.34	129	0.039	<20	1.52	0.013	0.04	<0.1	0.02	1.9	0.2	<0.05	6	<0.5	<0.2
932758	527898	7030859	1125	Soil	7	2	19	20.3	68	0.2	18.6	7.6	290	2.63	9.5	<0.5	4.5	14	0.4	0.2	0.3	60	0.17	0.023	11	29	0.44	102	0.032	<20	2.18	0.009	0.06	0.1	0.05	1.9	0.2	<0.05	6	<0.5	<0.2
932760	527949	7030941	1137	Soil	7	1.2	14.2	53	69	0.2	17.5	7.8	243	2.11	7.3	1.7	12.7	16	0.2	0.2	0.2	46	0.29	0.039	16	25	0.39	96	0.029	<20	2.04	0.013	0.1	0.2	0.06	2.4	0.2	<0.05	5	1.6	<0.2
932761	527988	7030973	1131	Soil	7	1.6	14.6	24.9	58	0.2	12.8	4	286	1.6	3.8	3.8	1.4	12	0.4	0.2	0.2	39	0.13	0.036	9	19	0.21	78	0.022	<20	1.09	0.014	0.05	<0.1	0.07	1	0.1	<0.05	5	1	<0.2
932762	528024	7031007	1133	Soil	7	0.5	5.3	14.6	36	0.1	4.3	1.7	78	0.91	2.2	1.3	0.7	8	0.2	<0.1	0.1	23	0.07	0.022	8	8	0.09	48	0.015	<20	0.63	0.014	0.04	<0.1	0.02	0.6	0.1	<0.05	4	0.7	<0.2
932763	528053	7031048	1132	Soil	7	1.1	10.6	19.9	53	<0.1	11.9	4.8	161	2.39	6.8	1.6	7.2	12	0.4	0.2	0.2	55	0.12	0.017	7	20	0.3	77	0.036	<20	1.49	0.008	0.07	<0.1	0.02	1.8	0.1	<0.05	7	0.8	<0.2
932764	528065	7031097	1129	Soil	7	1.2	19.8	75.9	71	0.3	14.9	6.1	354	2.73	8.1	4.7	18.6	13	1.4	<0.1	0.5	59	0.15	0.035	95	27	0.31	115	0.015	<20	2.72	0.011	0.11	0.1	0.05	2.7	0.3	<0.05	10	1.9	<0.2
932765	528068	7031147	1129	Soil	7	1	13.6	34.4	63	0.1	16.4	6.5	372	2.33	6	2.9	10.5	19	0.3	0.2	0.3	56	0.26	0.016	30	25	0.4	107	0.031	<20	1.41	0.009	0.06	0.1	0.01	1.8	0.1	<0.05	6	<0.5	<0.2
932766	528080	7031198	1128	Soil	7	1.2	12.1	35.7	71	<0.1	18	6.1	239	2.34	6.4	0.9	17	13	0.9	0.1	0.2	51	0.19	0.016	22	29	0.39	74	0.023	<20	2.2	0.006	0.1	0.1	0.02	2	0.2	<0.05	8	<0.5	<0.2
932767	528097	7031244	1124	Soil	7	3.9	13.7	27.7	94	0.2	19.3	7.7	285	3.03	8.2	<0.5	10.9	15	0.3	0.2	0.2	70	0.18	0.017	15	34	0.39	96	0.036	<20	2.17	0.01	0.08	<0.1	0.03	2.7	0.2	<0.05	7	<0.5	<0.2
932768	528120	7031290	1120	Soil	7	14.2	12.9	40.7	70	0.1	13.8	5.6	248	2.62	7.9	<0.5	5.9	12	0.1	0.2	0.2	59	0.14	0.017	8	23	0.3	69	0.017	<20	1.83	0.008	0.08	<0.1	0.02	1.7	0.3	<0.05	7	<0.5	<0.2
932769	528133	7031339	1116	Soil	7	4.3	10.1	35.7	59	0.1	11	4.7	222	2.36	11.2	<0.5	8.6	9	0.1	0.1	0.8	46	0.08	0.024	16	21	0.24	82	0.014	<20	1.71	0.006	0.12	<0.1	0.01	1.5	0.2	0.08	7	<0.5	<0.2
932770	528118	7031388	1112	Soil	7	1.9	15.2	17.8	69	0.2	15.4	6.9	222	2.91	6.9	11.1	4.7	12	0.2	0.2	0.2	72	0.12	0.02	7	25	0.29	119	0.034	<20	1.95	0.011	0.04	<0.1	0.09	1.8	0.1	<0.05	8	<0.5	<0.2
932771	528097	7031436	1101	Soil	7	3.7	11.2	34.5	49	<0.1	15.3	5.8	184	2.23	6	<0.5	6.2	14	0.1	0.2	0.1	51	0.16	0.017	8	23	0.34	80	0.036	<20	1.43	0.009	0.08	<0.1	0.02	1.6	0.2	<0.05	5	<0.5	<0.2
932772	528089	7031487	1096	Soil	7	2.2	12.1	23.3	95	0.1	11.4	5.8	259	2.53	5.8	<0.5	5.2	10	0.5	0.2	0.2	61	0.1	0.022	7	21	0.24	96	0.037	<20	1.62	0.008	0.04	<0.1	0.03	1.5	<0.1	<0.05	7	<0.5	<0.2
932773	528065	7031533	1088	Soil	7	1	9.3	23.3	56	0.3	13.9	5.8	197	2.28	5.3	<0.5	7.8	11	0.2	0.2	0.1	59	0.14	0.013	7	25	0.31	97	0.045	<20	1.81	0.007	0.05	<0.1	0.02	1.7	<0.1	<0.05	7	<0.5	<0.2
932774	528044	7031581	1078	Soil	7	1.3	19.2	21.7	50	<0.1	20.5	9.1	231	3.04	8.6	3.3	9.6	14	0.2	0.3	0.2	69	0.14	0.02	11	32	0.39	140	0.07	<20	2.58	0.01	0.05	<0.1	0.02	3	0.1	<0.05	7	<0.5	<0.2
932775	528023	7031627	1060	Soil	7	0.8	16.8	37.3	39	0.2	13.3	6.1	128	2.84	7.4	1.5	13.1	12	0.2	0.2	0.2	60	0.12	0.039	19	31	0.27	107	0.054	<20	3.28	0.014	0.05	0.1	0.03	3.1	0.1	<0.05	8	<0.5	<0.2
932776	527999	7031675	1050	Soil	7	0.9	11.9	27	45	<0.1	12.5	4.9	179	1.66	4.5	<0.5	12.1	16	<0.1	0.2	<0.1	45	0.21	0.022	32	21	0.3	85	0.071	<20	1.18	0.009	0.06	<0.1	0.01	2.1	<0.1	<0.05	5	<0.5	<0.2
932777	527982	7031724	1048	Soil	7	1.2	13.2	15.5	63	0.3	15.5	6.9	180	2.87	7.5	1.4	5.1	14	0.3	0.2	0.2	70	0.12	0.037	7	25	0.31	138	0.051	<20	2.04	0.01	0.04	<0.1	0.03	2.1	0.1	<0.05	8	<0.5	<0.2
932778	527972	7031775	1044	Soil	7	1.3	9.6	16	39	<0.1	9.3	3.8	174	1.91	4.4	<0.5	4.1	10	0.2	0.2	0.1	57	0.08	0.012	5	17	0.18	73	0.052	<20	1.15	0.008	0.03	<0.1	0.01	1.3	<0.1	<0.05	6	<0.5	<0.2
932779	527960	7031823	1044	Soil	7	0.9	13.4	9.7	88	0.2	7.6	7.3	2055	1.52	2.8	<0.5	1	11	1.3	0.2	0.2	41	0.09	0.02	5	12	0.14	148	0.049	<20	0.93	0.017	0.03	<0.1	0.02	1.1	0.1	<0.05	4	<0.5	<0.2
932780	527959	7031878	1042	Soil	7	1.4	16.7	21.3	74	0.1	17.1	7.5	350	3.15	9.5	<0.5	4.6	14	0.8	0.3	0.2	82	0.14	0.024	9	28	0.32	145	0.072	<20	1.85	0.008	0.05	<0.1	0.01	2.2	0.1	<0.05	9	<0.5	<0.2
932781	527962	7031931	1036	Soil	7	1.4	9.6	14.1	67	<0.1	6.6	4.6	482	2.19	4.6	<0.5	1.7	9	0.3	0.2	0.2	67	0.07	0.023	6	16	0.14	91	0.062	<20	1.09	0.009	0.02	<0.1	0.02	1.2	<0.1	<0.05	7	<0.5	<0.2
932782	527949	7031982	1028	Soil	7	1.3	16.7	42.1	73	<0.1	22.3	8.8	241	2.92	8.1	<0.5	11.6	20	0.2	0.2	0.2	71	0.24	0.017	24	38	0.44	150	0.052	<20	2.44	0.007	0.06	0.1	0.02	2.5	0.2	<0.05	7	<0.5	<0.2
932783	527952	7032033	1028	Soil	7	1.1	16.1	21.3	62	0.2	19.3	8.4	249	2.81	8.7	<0.5	8.3	14	0.2	0.2	0.2	70	0.16	0.013	13	32	0.41	121	0.059	<20	2.33	0.008	0.06	<0.1	0.01	2.3	0.1	<0.05	7	<0.5	<0.2
932784	527960	7032083	1023	Soil	7	1	11.1	21.7	60	<0.1	13.4	6	184	2.56	6.4	<0.5	4.3	13	0.2	0.2	0.2	65	0.13	0.023	16	22	0.27	110	0.052	<20	1.67	0.01	0.05	<0.1	0.02	1.5	<0.1	<0.05	7	<0.5	<0.2
932785	527962	7032135	1015	Soil	7	0.8	7.9	27	46	<0.1	10.4	4.2	167	1.3	3.3	1.6	6	15	0.2	0.1	0.2	35	0.24	0.015	18	18	0.25	73	0.05	<20	1.03	0.01	0.05	0.1	0.01	1.3	0.1	<0.05	4	<0.5	<0.2
932786	527953	7032185	1018	Soil	7	0.3	2.4	43.5	47	<0.1	1.9	0.6	29	0.28	1.1	<0.5	40.6	13	<0.1	<0.1	<0.1	5	0.95	0.006	50	3	0.05	18	0.012	<20	1.64	0.025	0.08	0.6	<0.01	0.5	<0.1	<0.05	2	0.5	<0.2
932787	527914	7032221	1022	Soil	7	0.9	17	12	108	0.1	18.1	12.7	1362	2.56	4.7	<0.5	1.9	15	0.4	0.2	0.2	62	0.13	0.022	8	26	0.35	283	0.068	<20	1.97	0.012	0.02	<0.1	0.02	2.2	0.1	<0.05	6	<0.5	<0.2
932788	527923	7032278	1029	Soil	7	0.6	22.6	18.1	52	<0.1	20.9	9.8	296	2.64	8	<0.5	18.2	20	<0.1	0.2	0.1	69	0.22	0.018	37	38	0.45	136	0.087	<20	2.43	0.008	0.06	<0.1	<0.01	3.9	<0.1	<0.05	6	<0.5	<0.2
932789	527936	7032330	1028	Soil	7	1.2	20.8	22.5	54	0.1	24.2	10.7	410	3.11	11.7	1.5	6	15	0.4	0.3	0.2	74	0.15	0.044	7	31	0.42	210	0.061	<20	3.08	0.007	0.04	0.1	0.05	2.1	0.1	<0.05	8	<0.5	<0.2
932790	527938	7032383	1021	Soil	7	1.2	11.4	21.6	38	0.1	11.1	4.6	162	2.5	7.3	4.6	5	10	0.4	0.3	0.3	62	0.09	0.026	6	20	0.19	106	0.05	<20	1.87	0.01	0.02	<0.1	0.02	1.4	<0.1	<0.05	7	<0.5	<0.2
932791	527963	7032426	1017	Soil	7	1.3	14.8	18.2	56	<0.1	13.2	5.6	273	2.99	7.4	0.9	3.6	14	0.2	0.4	0.2	73	0.11	0.025	5	21	0.24	180	0.057	<20	1.8	0.01	0.03	<0.1	0.04	1.4	<0.1	<0.05	8	<0.5	<0.2
932792	527979	7032474	1013	Soil	7	1.5	24.6	17.9	56	0.1	23.6	9.9	322	3.14	10.2	2.4	8.7	21	0.2	0.3	0.2	76	0.17	0.021	14	38	0.45	228	0.073	<20	2.82	0.009	0.05	<0.1	0.03	3.2	0.1	<0.05	7	<0.5	<0.2
932793	527960	7032524	1016	Soil	7	1.2	12.4	18	48	<0.1	11	5.1	350	2.26	4	<0.5	3.6	10	0.3	0.3	0.2	54	0.1	0.027	6	17	0.22	93	0.048	<20	1.37	0.013	0.04	<0.1	0.05	1.1	<0.1	<0.05	7	<0.5	<0.2
932794	527989	7032577	1013	Soil	7	0.9	8.2	15.9	45	<0.1	9.3	3.6	154	1.76	4.1	1.1	3.2	12	0.2	0.1	0.2	49	0.11	0.012	6	16	0.22	74	0.031	<20	1.05	0.007	0.03	<0.1	<0.01	1.2	<0.1	<0.05	5	<0.5	<0.2
932795	527989	7032630	1018	Soil	7	1.4	12.8	16.5	49	<0.1	13.7	6	307	2.65	6.6	<0.5	5.5	17	0.1	0.2	0.2	70	0.15	0.014	10	22	0.31	166	0.05	<20	1.69	0.009	0.04	<0.1	0.02	1.7	<0.1	<0.05	7	<0.5	<0.2
932796	527991	7032682	1012	Soil	7	1.1	11.2	17.7	47	<0.1	12.2	4.7	182	2.38	6	1.3	5.3	12	0.1	0.2	0.2	61	0.11	0.014	12	22	0.29	121	0.044	<20	1.45	0.009	0.04	<0.1	0.02	1.5	<0.1	<0.05	7	<0.5	<0.2
932797	528017	7032726	1008	Soil	7	1.2	11.3	17.1	51	0.1	17.1	7.6	308	2.67	8	1.2	6.2	10	0.3	0.3	0.2	67	0.1	0.025	7	25	0.36	159	0.061	<20	2	0.008	0.04	<0.1	0.04	1.7	<0.1	<0.05	7	<0.5	<0.2
932798	528052	7032766	998	Soil	7	1	18.4	18.5	58	0.4	23.6	9.3	255	3.13	9	6.8	7.4	13	0.4	0.3	0.3	72	0.12	0.025	13	31	0.45	161	0.079	<20	2.78	0.009	0.04	0.1	0.05	2.4	<0.1	<0.05	7	<0.5	<0.2
932799	528132	7032803	990	Soil	7	1.3	11.3	17.4	56	<0.1	13.4	5.5	192	2.66	6.6	10	4.6	8	0.2	0.2	0.2	66	0.08	0.017	7	22	0.3	94	0.08	<20	1.42	0.008	0.03	<0.1	0.02	1.5	<0.1	<0.05	6	<0.5	<0.2
932800	528173	7032850	981	Soil	7	1	17.7	11.7	54	0.1	17.7	7.4	214	2.73	7.2	1.6	3.3	14	0.2	0.3	0.2	66	0.12	0.016	10	29	0.36	143	0.061	<20	1.99	0.009	0.02	<0.1	0.04	1.9	<0.1	<0.05	6	<0.5	<0.2
935051	528174	7032900	960	Soil	7	1.1

Sample	Easting	Northing	Elevation	Type	Zone	Mo ppm	Cu ppm	Pb ppm	Zn ppm	Ag ppm	Ni ppm	Co ppm	Mn ppm	Fe %	As ppm	Au ppb	Th ppm	Sr ppm	Cd ppm	Sb ppm	Bi ppm	V ppm	Ca %	P %	La ppm	Cr ppm	Mg %	Ba ppm	Ti %	B ppm	Al %	Na %	K %	W ppm	Hg ppm	Sc ppm	Tl ppm	S %	Ga ppm	Se pm	Te ppm
K932723	527379	7032122	793	Silt	7	1.2	18	28.5	110	0.1	13.6	8.6	658	1.73	3.8	2.8	4.1	24	0.9	<0.1	0.2	36	0.33	0.048	14	19	0.38	88	0.041	<20	1.01	0.007	0.06	0.4	0.01	1.9	0.1	<0.05	3	<0.5	<0.2
K932726	527481	7032499	790	Silt	7	2.1	28.3	39.1	143	0.2	18.4	11.3	1056	2.17	5.2	1.5	3.7	31	1.4	0.1	0.3	43	0.42	0.045	18	28	0.45	132	0.042	<20	1.33	0.008	0.07	0.2	0.03	2.6	0.2	<0.05	4	0.8	<0.2
K932727	527553	7032580	793	Silt	7	1.8	18	32.1	101	0.1	12	9.7	732	1.77	4.8	3	6.5	21	0.7	<0.1	0.2	32	0.26	0.045	16	18	0.39	83	0.032	<20	0.97	0.007	0.07	0.2	0.02	1.6	0.1	<0.05	3	<0.5	<0.2
K932728	527614	7032757	789	Silt	7	1.3	17.5	28	98	0.1	13.1	7.8	532	1.6	3.5	1.3	3.9	23	0.8	<0.1	0.2	36	0.33	0.048	15	18	0.39	93	0.043	<20	1.06	0.008	0.06	<0.1	0.03	1.9	0.2	<0.05	3	<0.5	<0.2
K935062	528097	7033589	759	Silt	7	1.5	21.6	28.7	112	<0.1	28.4	11.1	1094	1.62	4	0.7	6	46	1.2	<0.1	0.2	29	0.28	0.044	15	11	0.4	248	0.03	<20	0.89	0.007	0.11	0.2	0.01	1.6	0.2	<0.05	3	0.6	<0.2
K935063	528255	7033730	750	Silt	7	0.9	14.3	21.9	80	<0.1	13.7	7.9	582	1.5	3.3	3	4.3	27	0.7	<0.1	0.2	37	0.34	0.048	17	18	0.33	129	0.039	<20	0.91	0.008	0.06	0.4	0.02	2	<0.1	<0.05	3	<0.5	<0.2
F066	528043	7033753	762	Silt	7	0.4	9	12	52	<0.1	9.8	5.4	217	1.4	3.4	2.5	3.9	17	<0.1	<0.1	<0.1	31	0.31	0.043	15	15	0.33	88	0.036	<20	0.89	0.01	0.05	0.3	0.02	2	<0.1	<0.05	3	<0.5	<0.2
F067	561594	7077016	729	Silt	7	0.8	16.5	2.9	45	<0.1	20.9	8.2	407	1.97	4.8	2.6	1.6	80	0.3	0.3	<0.1	46	4.36	0.08	9	19	1	119	0.055	<20	0.78	0.035	0.07	<0.1	0.04	2.5	<0.1	<0.05	2	<0.5	<0.2
F0-16	529229	7032068	793	Silt	7	0.7	17	7.2	67	<0.1	16	9.1	337	2.04	4.8	2.4	2	25	0.1	0.1	<0.1	50	0.42	0.051	9	33	0.67	119	0.051	<20	1.29	0.012	0.06	0.1	0.02	2.7	<0.1	<0.05	4	<0.5	<0.2
F0-17	529193	7032085	784	Silt	7	0.6	9.7	13.1	50	<0.1	11.3	5.5	248	1.65	4	1.3	3.7	22	0.2	<0.1	0.1	34	0.33	0.044	19	18	0.25	140	0.036	<20	1.35	0.01	0.06	0.1	0.04	2.3	<0.1	<0.05	4	0.5	<0.2
F0-34	528162	7033669	750	Silt	7	1.1	18.2	25.3	102	0.1	18.3	8.3	595	1.55	3.6	3	4.5	32	0.7	<0.1	0.2	32	0.33	0.041	16	19	0.38	113	0.039	<20	1	0.008	0.08	0.2	0.02	2	0.1	<0.05	3	<0.5	<0.2
F0-35	528618	7033993	741	Silt	7	0.6	16	5.9	65	<0.1	15.7	9.8	345	2.16	5.5	2.8	1.9	25	0.2	0.1	<0.1	48	0.41	0.057	9	25	0.62	133	0.05	<20	1.28	0.013	0.07	0.1	0.01	3	<0.1	<0.05	4	<0.5	<0.2
F0-36	528520	7033979	741	Silt	7	1.4	14.7	22.8	87	<0.1	19.9	9.6	797	1.6	5.8	2.5	6.8	19	0.6	<0.1	0.2	25	0.18	0.039	15	14	0.29	99	0.014	<20	0.71	0.005	0.1	0.2	<0.01	1.3	0.1	<0.05	2	0.6	<0.2
F0-37	528631	7034098	739	Silt	7	0.7	18	11.6	75	<0.1	16.2	9	397	1.98	5.3	2.8	2.4	30	0.3	0.1	0.1	44	0.46	0.055	12	24	0.63	138	0.05	<20	1.31	0.014	0.07	0.2	0.02	2.7	<0.1	<0.05	4	<0.5	<0.2

Sample	Easting	Northing	Elevation	Zone	Type	Description	Au g/t
K935001	527895	7030720	1109	7V	Rock	outcrop of quartz porphyry, fine-grained bleached white feldspar with 5-10% quartz eyes	0.006
K935002	527508	7030682	999	7V	Rock	dark black siltstone with discontinuous quartz stringers, resembles an iron-formation	<0.005
K935003	527468	7030696	998	7V	Rock	10cm quartz vein within muscovite-sericite schist, minor black chlorite in quartz	<0.005
K935004	527338	7030681	991	7V	Rock	rubblecrop of white quartz, minor carb along fractures	<0.005
K935005	527338	7030678	991	7V	Rock	massive white quartz rubblecrop with minor carb along fractures	<0.005
K935006	527382	7030808	973	7V	Rock	white quartz with shards of muscovite bearing schist at 10%	<0.005
K935007	527542	7031798	879	7V	Rock	quartz porphyry rubble from talus slope	<0.005
K935008	527365	7032150	790	7V	Rock	quartz boulder in creek off massive white quartz and minor fine-grained galena	<0.005
K935009	527370	7032354	784	7V	Rock	semi-transparent to white quartz with trace pyrite and minor muscovite	<0.005
K935010	527481	7032501	784	7V	Rock	quartz stringers in a muscovite bearing schist, 55% quartz, minor galena	<0.005
K935015	527377	7030785	981	7V	Rock	sediments, banded and resemble a fine clastic sed	<0.005
K935016	527119	7030784	886	7V	Rock	Klondike schist, darker grey colouration	<0.005
K935017	527082	7030790	863	7V	Rock	bleached and foliated porphyry	<0.005
K935018	527035	7030791	832	7V	Rock	quartz vein striking 040 degrees	<0.005

Appendix IV

Change

Sample	Easting	Northing	Elevation	Analyte	Mo ppm	Cu ppm	Pb ppm	Zn ppm	Ag ppm	Ni ppm	Co ppm	Mn ppm	Fe %	As ppm	Au ppb	Th ppm	Sr ppm	Cd ppm	Sb ppm	Bi ppm	V ppm	Ca %	P %	La ppm	Cr ppm	Mg %	Ba ppm	Ti %	B ppm	Al %	Na %	K %	W ppm	Hg ppm	Sc ppm	Tl ppm	S %	Ga ppm	Se ppm	Te ppm
CH001	561666	7032612	416	Soil	1	12.3	10.7	83	<0.1	14.4	9.2	394	2.31	4.4	<0.5	3.2	23	0.3	0.2	0.1	46	0.36	0.074	8	26	0.48	290	0.071	<20	1.35	0.011	0.2	<0.1	0.01	3.1	<0.1	<0.05	4	<0.5	<0.2
CH002	561624	7032642	420	Soil	1.2	28.7	9	47	<0.1	25.3	8.1	284	2.33	9.6	1.8	4.6	37	<0.1	0.4	0.2	49	0.48	0.048	12	29	0.57	264	0.078	<20	1.44	0.025	0.06	<0.1	0.02	3.6	<0.1	<0.05	4	<0.5	<0.2
CH003	561584	7032679	424	Soil	1	32.9	9.7	50	0.1	23.8	9.2	382	2.32	8.2	2.2	3.9	37	0.2	0.5	0.2	53	0.52	0.038	14	28	0.52	380	0.062	<20	1.49	0.022	0.04	0.1	0.03	3.7	<0.1	<0.05	4	<0.5	<0.2
CH004	561546	7032716	427	Soil	0.7	26.6	10.3	52	<0.1	17.2	6.4	211	2	5.8	0.6	4.6	31	<0.1	0.4	0.1	47	0.37	0.045	14	25	0.47	269	0.079	<20	1.31	0.025	0.07	<0.1	0.03	3.4	<0.1	<0.05	4	<0.5	<0.2
CH005	561492	7032738	430	Soil	0.9	20.3	9.4	52	<0.1	19.5	9.1	230	2.34	7.8	2.3	3.4	29	0.2	0.4	0.2	52	0.33	0.031	9	28	0.46	275	0.06	<20	1.47	0.012	0.11	<0.1	0.02	3	<0.1	<0.05	4	<0.5	<0.2
CH006	561427	7032762	438	Soil	1	15.5	10.3	76	<0.1	15.1	8	697	2.25	6.6	<0.5	2.5	37	0.3	0.3	0.2	48	0.57	0.063	8	22	0.46	279	0.058	<20	1.38	0.022	0.17	<0.1	<0.01	2.2	<0.1	<0.05	5	<0.5	<0.2
CH007	561377	7032766	442	Soil	1.4	25.5	8.3	56	<0.1	22.6	8.2	324	2.3	7.6	0.7	3.3	45	0.2	0.4	0.2	45	0.58	0.054	12	22	0.5	326	0.08	<20	1.61	0.025	0.07	<0.1	0.05	3.4	0.1	<0.05	4	<0.5	<0.2
CH008	561316	7032765	444	Soil	0.8	36.4	11.1	68	0.1	28.8	11.1	383	2.63	10.4	1.8	4.7	50	0.2	0.6	0.2	53	0.79	0.055	14	30	0.61	392	0.083	<20	1.69	0.032	0.1	<0.1	0.03	4.1	<0.1	<0.05	5	<0.5	<0.2
CH009	561217	7032807	449	Soil	0.6	33.4	10.9	66	0.1	25.8	11.2	347	2.68	10.9	2.1	5.2	49	0.2	0.5	0.2	55	0.71	0.065	15	28	0.59	378	0.1	<20	1.54	0.035	0.11	0.1	0.04	4	<0.1	<0.05	5	<0.5	<0.2
CH010	561166	7032825	452	Soil	0.9	25	10.9	64	<0.1	18.1	10.2	271	2.49	7.9	0.8	5	25	0.1	0.3	0.1	52	0.34	0.039	14	26	0.55	297	0.078	<20	1.44	0.015	0.15	<0.1	0.02	3.6	<0.1	<0.05	5	<0.5	<0.2
CH011	561124	7032791	455	Soil	1.2	26.8	12.2	54	0.1	22	11.1	599	2.45	9.5	<0.5	3.9	34	0.3	0.5	0.2	51	0.43	0.042	14	28	0.47	354	0.059	<20	1.51	0.015	0.09	<0.1	0.02	3.4	<0.1	<0.05	4	<0.5	<0.2
CH012	561069	7032780	463	Soil	0.8	36.5	10.6	59	0.1	27.5	11.3	431	2.58	10.5	<0.5	3.9	52	0.2	0.6	0.2	56	0.73	0.048	15	31	0.56	369	0.074	<20	1.59	0.022	0.07	<0.1	0.02	3.7	<0.1	<0.05	5	<0.5	<0.2
CH013	561019	7032773	466	Soil	0.8	30.5	9.9	63	0.1	24.8	10.4	422	2.41	10	0.9	4	53	0.3	0.6	0.2	52	1.23	0.064	13	25	0.62	372	0.081	<20	1.28	0.027	0.1	<0.1	0.04	3.4	<0.1	<0.05	4	<0.5	<0.2
CH014	560964	7032778	472	Soil	0.8	32.2	9.3	59	0.1	24.2	10	440	2.43	9	1.4	3.7	42	0.3	0.6	0.2	53	0.62	0.052	13	27	0.55	360	0.082	<20	1.46	0.024	0.07	<0.1	0.04	3.4	<0.1	<0.05	4	<0.5	<0.2
CH015	560903	7032762	479	Soil	0.8	32.3	10.6	57	0.2	26	10	413	2.46	10	1.1	3.8	43	0.2	0.5	0.2	54	0.62	0.051	13	29	0.58	345	0.079	<20	1.47	0.025	0.06	0.1	0.03	3.7	<0.1	<0.05	4	<0.5	<0.2
CH016	560853	7032751	485	Soil	0.8	34.5	9.5	66	0.1	25.8	9.3	367	2.54	10.4	2.4	3.6	47	0.2	0.7	0.2	52	0.73	0.067	14	28	0.59	332	0.077	<20	1.35	0.027	0.08	<0.1	0.06	3.5	<0.1	<0.05	4	<0.5	<0.2
CH017	560795	7032756	494	Soil	0.7	40.9	10	72	0.1	29.6	12.2	448	2.83	10.7	1.4	3.6	68	0.4	0.6	0.2	63	1.65	0.067	13	29	0.7	338	0.102	<20	1.65	0.037	0.13	<0.1	0.04	3.9	<0.1	<0.05	5	<0.5	<0.2
CH018	560739	7032741	498	Soil	0.4	27.9	8.1	44	<0.1	19	4.7	254	2.48	5.4	0.7	7	31	<0.1	0.3	0.2	40	0.38	0.028	20	<1	0.57	298	0.116	<20	1.66	0.018	0.29	<0.1	0.04	3.9	0.1	<0.05	5	<0.5	<0.2
CH019	560690	7032714	507	Soil	0.4	26.4	10.3	46	<0.1	23.2	12.3	408	3.21	6.4	1.1	14.1	22	<0.1	0.3	0.2	52	0.32	0.04	30	32	0.82	263	0.179	<20	1.97	0.014	0.59	<0.1	0.03	4.7	0.3	<0.05	7	<0.5	<0.2
CH020	560636	7032690	513	Soil	0.3	22.5	7.6	38	<0.1	15	6.9	212	1.84	4.4	0.8	5.1	25	<0.1	0.3	0.1	44	0.29	0.019	15	24	0.44	198	0.115	<20	1.28	0.019	0.18	<0.1	0.02	3	<0.1	<0.05	4	<0.5	<0.2
CH021	560581	7032694	519	Soil	0.5	15.8	7.8	42	<0.1	16.6	8.8	286	2.24	4.2	2.3	5.4	20	<0.1	0.3	0.1	50	0.21	0.01	11	29	0.55	209	0.126	<20	1.39	0.012	0.28	<0.1	0.01	2.4	0.1	<0.05	4	<0.5	<0.2
CH022	560523	7032689	529	Soil	0.8	15	9.4	74	<0.1	19.7	9.2	280	2.92	7.4	1.3	3.7	22	<0.1	0.3	0.1	63	0.31	0.032	8	47	0.76	309	0.124	<20	1.76	0.012	0.29	<0.1	0.02	3.5	0.1	<0.05	6	<0.5	<0.2
CH023	560469	7032676	535	Soil	0.7	14.6	6.1	51	<0.1	22.5	13.2	307	3.63	5.2	11.2	3.9	24	<0.1	0.2	0.1	71	0.44	0.092	7	49	1.19	374	0.193	<20	2.21	0.012	0.6	0.1	0.02	4.5	0.2	<0.05	8	<0.5	<0.2
CH024	560429	7032648	537	Soil	0.7	25.1	10.6	58	<0.1	22.9	11.4	286	4.04	5.8	<0.5	4.3	29	<0.1	0.3	0.2	89	0.41	0.03	16	33	0.77	369	0.068	<20	2.13	0.012	0.16	<0.1	0.03	7.3	<0.1	<0.05	7	<0.5	<0.2
CH025	560376	7032621	539	Soil	0.4	19.7	6.7	55	<0.1	22.1	10.1	386	2.73	4.9	<0.5	10.8	20	<0.1	0.2	0.1	42	0.33	0.053	27	31	0.78	302	0.143	<20	1.58	0.015	0.49	<0.1	0.03	3.4	0.2	<0.05	6	<0.5	<0.2
CH026	560342	7032283	506	Soil	1.1	19.9	6.4	113	<0.1	12.3	8.2	583	4.02	5.1	<0.5	5.3	29	0.3	0.3	0.1	58	0.35	0.038	18	19	0.66	579	0.132	<20	1.92	0.011	0.58	0.2	0.03	6.2	0.2	<0.05	10	<0.5	<0.2
CH027	560396	7032270	497	Soil	1.2	12.7	8.8	65	0.2	14.7	8.6	684	2.51	6	<0.5	2.6	26	0.2	0.3	0.2	49	0.33	0.028	10	26	0.39	540	0.059	<20	1.42	0.01	0.11	<0.1	0.03	3	<0.1	<0.05	5	<0.5	<0.2
CH028	560448	7032256	484	Soil	1.4	17	8.6	134	<0.1	10.8	5.9	430	3.05	4.6	<0.5	5.3	28	0.3	0.4	0.2	30	0.47	0.022	13	16	0.4	570	0.047	<20	1.49	0.009	0.29	0.1	0.04	4.6	0.1	<0.05	7	<0.5	<0.2
CH029	560504	7032256	476	Soil	0.6	49	7.7	62	0.2	26.7	10.6	739	2.55	4.4	1.3	2.7	43	0.3	0.4	0.2	45	0.91	0.055	35	27	0.55	523	0.055	<20	1.51	0.019	0.17	0.1	0.05	4.4	<0.1	0.08	5	1.3	<0.2
CH030	560558	7032254	468	Soil	1.7	19.1	7.4	69	<0.1	17.1	11.2	451	3.59	5.4	<0.5	4.6	22	<0.1	0.4	0.1	62	0.38	0.022	23	24	0.6	634	0.084	<20	1.87	0.014	0.38	<0.1	0.01	6.3	0.1	<0.05	7	1	<0.2
CH031	560670	7032242	458	Soil	0.6	39.4	8.4	57	<0.1	29.6	13.9	485	2.97	5.7	<0.5	4.4	33	0.1	0.5	0.1	65	0.84	0.034	21	57	0.8	391	0.118	<20	1.95	0.021	0.35	<0.1	0.04	4.6	0.2	<0.05	6	0.6	<0.2
CH032	560738	7032222	451	Soil	0.7	32.3	9.4	53	0.1	26.5	11.5	503	2.59	9.2	1.3	3.3	48	0.2	0.5	0.1	49	1.04	0.063	14	27	0.52	353	0.061	<20	1.39	0.017	0.14	<0.1	0.04	3.3	<0.1	<0.05	4	1.2	<0.2
CH033	560841	7032219	436	Soil	0.7	24.6	11.1	55	<0.1	15	9.4	173	2.48	8.7	<0.5	3.7	22	<0.1	0.3	0.2	47	0.49	0.041	10	23	0.47	177	0.047	<20	1.18	0.016	0.08	0.2	<0.01	3.2	<0.1	<0.05	4	<0.5	<0.2
CH034	560893	7032221	432	Soil	0.9	26.4	9.2	50	<0.1	22.5	10.9	317	3.03	6.6	3.1	4.2	37	0.1	0.3	0.1	56	0.77	0.054	15	38	0.54	249	0.099	<20	1.64	0.022	0.15	0.1	0.03	4.3	<0.1	<0.05	5	<0.5	<0.2
CH035	560946	7032214	420	Soil	0.9	19.2	8.3	55	<0.1	18.9	10.1	297	2.58	7.9	3.3	3.7	51	0.1	0.4	0.1	51	0.64	0.042	14	35	0.65	199	0.075	<20	1.4	0.018	0.14	0.1	<0.01	3.7	<0.1	<0.05	5	0.9	<0.2
CH036	561071	7032212	408	Soil	2	33.2	10.4	62	0.1	25	14.7	1230	2.91	11.4	1.9	4.1	54	0.1	0.5	0.2	54	0.74	0.052	13	29	0.6	285	0.079	<20	1.74	0.019	0.09	<0.1	0.02	4	<0.1	<0.05	5	0.8	<0.2
CH037	561208	7032320	404	Soil	0.9	23.7	8.4	62	0.1	20	9.4	435	2.5	7	5.4	3.3	42	0.1	0.3	0.1	50	0.69	0.061	14	29	0.56	316	0.069	<20	1.52	0.019	0.09	0.1	0.03	4	<0.1	<0.05	5	0.9	<0.2
CH038	561258	7032353	406	Soil	0.9	44.8	7.8	74	0.2	27.2	14.6	441	3.28	6.8	3.7	4	51	<0.1	0.3	0.2	72	0.73	0.047	24	45	1.41	449	0.151	<20	1.97	0.027	0.35	0.2	0.06	5.1	0.2	<0.05	7	0.6	<0.2
CH039	561294	7032385	407	Soil	0.9	30.5	8.7	73	0.1	24.3	9.9	331	2.7	8.2	2	3.8	39	0.2	0.4	0.2	58	0.55	0.087	13	31	0.67	323	0.085	<20	1.32	0.034	0.12	0.2	0.04	3.9	<0.1	<0.05	4	<0.5	<0.2
CH040	561350	7032402	402	Soil	1	23.2	8	58	<0.1	19.9	10.6	294	2.9	12.5	1.2	4.8	39	0.2	0.4	0.2	58	0.56	0.077	17	28	0.54	293	0.081	<20	1.27	0.018	0.09	0.1	0.04	3.5	<0.1	<0.05	4	<0.5	<0.2
CH041	561404	7032409	405	Soil	0.6	21.6	7.4	59	<0.1	17.5	7.1	232	2.12	5	1.4	3.5	37	0.2	0.4	0.1	46	0.57	0.07	15	25	0.55	258	0.088	<20	1.22	0.022	0.15	0.1	0.04	3.2	<0.1	<0.05	4	<0.5	<0.2
CH042	561462	7032417	400	Soil	0.4	14	7.4	59	<0.1	14.9	6.1	178	2.1	5.6	0.8	2.9	38	<0.1	0.3	0.1	47	0.64	0.068	13	25	0.54	232	0.076	<20	1.16	0.022	0.13	0.1	0.04	2.8	<0.1	<0.05	4	<0.5	<0.2
CH044	563383	7031322	677	Soil	3.6	54.6	12	87	<0.1	15.3	10.9	590	5.2	221.2	0.6	4.3	9	0.1	0.4	0.3	155	0.15	0.096	8	51	1.14	239	0.239	<20	2.26	0.009	0.96	<0.1	<0.01	12.8	0.5	<0.05	10	0.6	<0.2
CH045	563417	7031369	675	Soil	0.6	19.5	7.5	66	<0.1	8.8	7.9	381	3.06	4	1.8	1.3	15	0.1	0.2	0.1	62	0.25	0.073	7	17	0.73	228	0.121	<20	1.66	0.013	0.32	<0.1	0.04	5.5	0.1	<0.05	8	<0.5	<0.2
CH046	563416	7031428	670	Soil	0.9	21.4	10.8	56	<0.1	18.5	8.4	269	3.33	11.2	4.7	2.6	17	<0.1	0.3	0.2	67	0.23	0.065	8	26	0.65	199	0.089	<20	1.87	0.01	0.14	<0.1	0.01	3.4	0.1	<0.05	6	<0.5	<0.2
CH047	563394	7031479	661	Soil	0.9	21.4	9.3	52	<0.1	9	6.9	371	2.06	5.8	1.3	1.7	12	<0.1	0.1	0.1	56	0.16	0.057	9	14	0.63	161	0.147	<20	1.55	0.009	0.2	<0.1	0.02	3.6	0.1	<0.05	7	<0.5	<0.2
CH048	563370	7031535	650	Soil	0.6	71.9	9.2	40	0.2	10.2	12.9	280	3.02	2.8	2	0.9	14	<0.1	<0.1	0.2	113	0.46	0.122	5	18	1.13	309	0.205	<20	1.7	0.033	0.63	<0.1	0.01	4.2	0.1	<0.05	7	<0.5	<0.2
CH049	563336	7031588	640	Soil	0.4	45.3	18.4	33	0.1	8.6	8.1	171	2.35	3.3	1.9	1.4	14	<0.1	<0.1	0.2	84	0.3	0.082	6	13	0.78	193	0.123	<20	1.43	0.027	0.33	<0.1	0.02	3.5	0.1	<0.05	6	<0.5	<0.2
CH050	563349	7031651	631	Soil	0.8	31.7	11.2	65	<0.1	13.4	9.5	334	3.87	12.6	1.8	2	17	0.1	0.2	0.2	122	0.24	0.06	6	23	0.87	214	0.186	<20	1.81	0.011	0.43	<0.1	<0.01	6.9	0.2	<0.05	8	0.6	<0.2
CH051	563341	7031705	622	Soil	0.7	20.7	8.5	45	0.1	9.7	6.7	234	2.67	7	0.9	1.8	18	<0.1	0.2	0.1	73	0.25	0.042	7	19	0.61	211	0.093	<20	1.53	0.012	0.15	<0.1	0.03	3.9	<0.1	<0.05	6	<0.5	<0.2
CH052	563353	7031761	622	Soil	1.2	29.6	9.6	46	0.2	15.4	9.8	624	3.18	9.5	1	2.5	18	<0.1	0.3	0.1	81	0.23	0.027	8	30	0.63	253	0.113	<20	1.79	0.012	0.16	<0.1	0.02	4.3	<0.1	<0.05	6	<0.5	<0.2
CH053	563402	7031804	620	Soil	1.1	17.6	8.5	35	0.2	12.2	7.1	403	2.44	8.2	1.6	1.8	12	<0.1	0.3	0.2	61	0.13	0.054	6	24	0.37	183	0.068	<20	1.27	0.009	0.12	<0.1	0.02	2.2	<0.1	<0.05	5	<0.5	<0.2
CH054	563451	7031831	619	Soil	0.4	30.7	6.5	79	<0.1	11.9	11.4	699	4.48	4.2	<0.5	2.3	13	<0.1	0.1	<0.1	74	0.34	0.124	8	19	1.23	269	0.309	<20	2.15	0.011	0.97	<0.1	<0.01	9.3	0.2	<0.05	9	<0.5	<0.2
CH055	563449	7031882	608	Soil	0.6	57.1	5.4	72	<0.1	13.1	16.1	435	4.23	3.5	2.9	1.5	16	<0.1	0.2	<0.1	133	0.4	0.117	7	21	1.48	485	0.141	<20	2.23	0.019	0.74	<0.1	<0.01	8	0.2	<0.05	8	<0.5	<0.2
CH056	563455	7031960	598	Soil	0.6	25.4	7	54	<0.1	15.5	9.6	284	2.77	6.7	1.4	2.9	19	<0.1	0.2	0.1	62	0.28	0.062	13	26	0.72	218	0.106	<20	1.54	0.013	0.16	0.1	0.01	4.4	<0.1	<0.05	5	<0.5	<0.2
CH057	563451	7032015	593	Soil	0.6	73.6	3.6	59	<0.1	16	19.8	473	4.14	4.6	1.1	1.3	12	<0.1	0.1	<0.1	142	0.35	0.126	7	23	1.7	283	0.17	<20	2.26	0.03	0.59	0.1	<0.01	5.6	0.2	<0.05	7	0.6	<0.2
CH058	563449	7032088	587	Soil	0.8	27.2	10.1	77	0.1	9.2	13.8	766	5.19	4.8	1.2	1.7	13	<0.1	<0.1	0.2	142	0.23	0.061	7	17	1.66	371	0.31	<20	2.56	0.009	0.93	0.1	0.01	10.1	0.3	<0.05	10	<0.5	<0.2
CH059	563436	7032141	575	Soil	1.3	25	13.9	42	0.1	15.2	8.4	196	2.84	7.7	2.2	2.6	15	<0.1	0.3	0.2	84	0.19	0.034	8	25	0.63	204	0.096	<20	1.61	0.012	0.16	<0.1	0.02	4.2	0.1	<0.05	6	<0.5	<0.2
CH060	563416	7032185	566	Soil	0.9	29.6	9.3	48	0.2	19.2	9.7	275	2.8	8.9	2.8	3.4	18	0.1	0.3	0.2	64	0.23	0.043	11	27	0.59	275	0.102	<20	1.55	0.009	0.16	<0.1	0.02	3.9	<0.1	<0.05	5	<0.5	<0.2
CH061	563395	7032234	554	Soil	0.8	21.5	11.2	41	0.1	16.2	8.3	219	2.46	7.2	0.9	3.4	16	<0.1	0.3	0.2	64	0.17	0.024	9	28	0.49	274	0.104	<20	1.31	0.01	0.17	<0.1	0.02	4	<0.1	<0.05	5	0.6	<0.2
CH062	563416	7032289	549	Soil	0.9	35.2	9.5	49	0.2	25.6	10.8	232	2.71	19.9	3.5	4.6	20	<0.1	0.5	0.2	61	0.21	0.041	10	32	0.56	280	0.088	<20	1.62	0.011	0.1	0.1	0.03	4.1	<0.1	<0.05	4	<0.5	<0.2
CH063	563429	7032348	546	Soil	1.3	21.2	10.1	45	<0.1	21.2	9.6	279	2.87	13.3	2.3	3.5	19	<0.1	0.4	0.2	67	0.29	0.025	10	34	0.56	318	0.087	<20	1.59	0.014	0.15	<0.1	0.02	4.4	<0.1	<0.05	5	<0.5	<0.2
CH064	563450	7032398	539	Soil	0.8	16.5	7.1	34	<0.1	12.5	6.5	160	2.11	7.1	1.6	2.3	14	<0.1	0.3	0.1	55	0.16	0.032	7	21	0.43	179	0.077	<20	1.28	0.01	0.09	<0.1	0.02	1.9	<0.1	<0.05	5	<0.5	<0.2
CH065	563481	7032447	542	Soil	0.7	16.2	8.7	48	0.1	12.5	7.3	311	2.81	5.8	1.2	3	16	<0.1	0.3	0.1	52	0.24	0.057	14	19	0.57	231	0.127	<20	1.5	0.01	0.3	<0.1	0.03	4	<0.1	<0.05	6	<0.5	<0.2
CH066	563532	7032485	541	Soil	0.9	26.5	7.8	45	<0.1	23.7	10.8	392	2.6	9.1	2.6	3	20	<0.1	0.3	0.1	59	0.23	0.022	8	34	0.64	290	0.084	<20	1.65	0.014	0.08	<0.1	0.01	2.9	<0.1	<0.05	5	<0.5	<0.2
CH067	563591	7032536	541	Soil	0.5	33.3	4.3	86	<0.1	12.7	14.6	952	4.08	5.7	<0.5	1.5	15	0.1	0.2	<0.1	87	0.22	0.079	5	14	0.97	307	0.156	<20	1.85	0.01	0.43	<0.1	<0.01	4.3	0.1	<0.05	8	<0.5	<0.2
CH068	563583	7032589	533	Soil	0.9	15.2	7.9	41	<0.1	17	7.7	402	2.39	7.6	23.8	2.6	20	<0.1	0.3	0.1	52	0.22	0.032	9	28	0.42	290	0.063	<20	1.35	0.011	0.06	<0.1	0.02	2.5	<0.1	<0.05	5	0.7	<0.2
CH069	563614	7032635	524	Soil	0.8	25.8	5.8	55	<0.1	18.5	12.7	372	3.13	7.3	3.9	2	22	<0.1	0.3	<0.1	81	0.36	0.062	8	29	0.86	268	0.127	<20	1.62	0.013	0.22	<0.1	0.01	2.9	0.1	<0.05	6	<0.5	<0.2
CH070	563638	7032692	514	Soil	0.8	19.9	7.7	46	<0.1	22	9.7	333	2.43	7.9	2.2	3.6	21	<0.1	0.4	0.1	50	0.25	0.029	10	29	0.47	288	0.068	<20	1.4	0.012	0.08	<0.1	0.01	3.2	<0.1	<0.05	4	0.8	<0.2
CH071	563663	7032736	504	Soil	0.9	13.7	6.9	47	<0.1	14.7	9.3	391	2.33	7.5	<0.5	2.7	20	<0.1	0.3	0.1	50	0.25	0.039	8	23	0.45	281	0.078	<20	1.18	0.012	0.12	<0.1	0.02	2.8	<0.1	<0.05	4	<0.5	<0.2
CH072	563657	7032792	494	Soil	0.5	26.7	6.8	43	<0.1	18.5	9.6	485	2.42	7.6	1.7	3.1	23	<0.1	0.4	0.1	51	0.

Sample	Easting	Northing	Elevation	Type	Zone	Mo ppm	Cu ppm	Pb ppm	Zn ppm	Ag ppm	Ni ppm	Co ppm	Mn ppm	Fe %	As ppm	Au ppb	Th ppm	Sr ppm	Cd ppm	Sb ppm	Bi ppm	V ppm	Ca %	P %	La ppm	Cr ppm	Mg %	Ba ppm	Ti %	B ppm	Al %	Na %	K %	W ppm	Hg ppm	Sc ppm	Tl ppm	S %	Ga ppm	Se ppm	Te ppm
C037	562176	7032674	393	Silt	7	0.6	15.7	5.6	54	<0.1	14.3	9.9	569	2.09	5.9	23.8	2	29	0.2	0.2	<0.1	43	0.52	0.072	9	21	0.41	224	0.047	<20	0.92	0.014	0.08	0.2	0.03	2.4	<0.1	<0.05	3	0.6	<0.2
C038	562120	7032558	392	Silt	7	0.8	17	7.6	70	<0.1	17	15	902	2.63	10.4	1.8	3.2	22	0.2	0.2	<0.1	56	0.38	0.072	10	25	0.64	211	0.054	<20	1.03	0.009	0.12	0.4	<0.01	2.9	<0.1	<0.05	4	<0.5	<0.2
C039	562015	7032485	392	Silt	7	0.4	12.7	4.7	56	<0.1	14.3	7.9	274	1.8	4.1	2.2	1.8	27	0.1	0.1	<0.1	42	0.49	0.074	9	20	0.42	159	0.056	<20	1.06	0.017	0.08	<0.1	0.02	2.7	<0.1	<0.05	3	<0.5	<0.2
C040	561955	7032427	395	Silt	7	0.4	13.7	4.9	55	<0.1	14.7	8.7	308	1.85	4.8	2.4	1.7	27	<0.1	0.1	<0.1	41	0.45	0.062	8	20	0.45	155	0.052	<20	1.03	0.015	0.08	0.1	0.01	2.6	<0.1	<0.05	3	<0.5	<0.2
C041	561869	7032435	396	Silt	7	0.4	12.2	4.6	52	<0.1	13.6	7.9	291	1.8	4.2	1.7	1.9	27	0.2	0.1	<0.1	45	0.49	0.068	9	21	0.4	171	0.057	<20	1.01	0.017	0.07	0.2	0.02	2.7	<0.1	<0.05	3	<0.5	<0.2
C042	562204	7032785	389	Silt	7	0.4	15	5.2	57	<0.1	15.6	8.6	325	1.93	4.9	1.9	2	29	0.1	0.1	<0.1	45	0.51	0.067	9	21	0.42	180	0.059	<20	1.07	0.017	0.08	0.2	0.02	2.8	<0.1	<0.05	3	<0.5	<0.2
C043	562246	7032862	388	Silt	7	0.5	17.6	5.7	61	<0.1	16.3	9.6	370	2.07	5.4	2.8	1.8	32	0.1	0.1	<0.1	49	0.6	0.07	9	24	0.46	202	0.064	<20	1.19	0.018	0.09	0.2	0.02	3.1	<0.1	<0.05	4	<0.5	<0.2
C044	562094	7032707	392	Silt	7	0.5	13	4.6	44	<0.1	13.6	8.2	468	1.78	5.9	3	2.2	26	0.1	0.2	<0.1	39	0.41	0.057	9	17	0.31	210	0.047	<20	0.81	0.014	0.08	<0.1	0.02	2	<0.1	<0.05	3	<0.5	<0.2
C045	562771	7031347	496	Silt	7	0.5	22	9.6	57	<0.1	9.1	9.3	348	2.46	5.7	1.7	1.6	23	0.1	0.1	<0.1	63	0.47	0.082	7	19	0.51	300	0.062	<20	1.13	0.018	0.19	0.2	0.01	4.5	<0.1	<0.05	4	<0.5	<0.2
CH43	561603	7032371	400	Silt	7	0.5	20.2	6.2	64	<0.1	17.8	10.2	451	2.25	5.9	5.7	1.9	36	0.2	0.2	<0.1	50	0.59	0.065	9	26	0.47	221	0.059	<20	1.21	0.018	0.09	0.2	0.03	3	<0.1	0.06	4	0.7	<0.2

Appendix V

Analytical Certificates

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada

www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Submitted By: Mike MacIsaac
Receiving Lab: Canada-Whitehorse
Received: July 19, 2011
Report Date: August 16, 2011
Page: 1 of 12

CERTIFICATE OF ANALYSIS WHI11000662.1

CLIENT JOB INFORMATION

Project: FoGo
Shipment ID:
P.O. Number
Number of Samples: 304

SAMPLE DISPOSAL

DISP-PLP Dispose of Pulp After 90 days
DISP-RJT-SOIL Immediate Disposal of Soil Reject

Acme does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Method Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
Dry at 60C	304	Dry at 60C			WHI
SS80	304	Dry at 60C sieve 100g to -80 mesh			WHI
1DX1	304	1:1:1 Aqua Regia digestion ICP-MS analysis	0.5	Completed	VAN

ADDITIONAL COMMENTS

Invoice To: Metals Creek Resources
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3
Canada

CC: Don Heerema
Wayne Reid
Sandy Stares

BRITISH COLUMBIA CERTIFIED ASSAYER
CLARENCE LEONG
GENERAL MANAGER

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Acme assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
SQE014	Soil	0.8	31.5	9.4	49	<0.1	25.4	12.1	583	2.55	10.1	11.8	3.3	47	0.4	0.5	0.2	49	0.73	0.057	14
SQE015	Soil	0.5	27.0	11.3	45	<0.1	20.8	10.9	294	2.87	9.0	4.1	4.7	36	<0.1	0.4	0.3	55	0.53	0.044	15
SQE016	Soil	0.7	33.2	11.6	52	0.1	25.9	12.6	393	2.99	10.5	7.1	4.0	43	0.1	0.5	0.3	54	0.66	0.053	16
SQE017	Soil	0.9	30.6	9.7	54	0.1	24.8	10.4	333	2.72	10.2	3.8	3.8	36	<0.1	0.5	0.3	54	0.58	0.052	14
SQE035	Soil	0.7	23.9	12.7	58	0.1	20.6	10.4	641	2.48	6.3	3.7	3.9	84	0.1	0.2	0.2	59	0.61	0.063	19
SQE036	Soil	0.5	24.8	9.7	46	<0.1	19.9	8.9	258	2.65	7.8	6.9	4.3	42	0.3	0.4	0.2	64	0.52	0.058	16
SQE037	Soil	0.6	27.5	9.9	48	0.1	20.8	8.7	210	2.65	7.3	3.8	3.0	38	0.1	0.2	0.2	60	0.46	0.059	18
SQE038	Soil	0.5	27.8	9.7	49	<0.1	23.8	8.5	246	2.82	6.5	3.3	3.5	37	<0.1	0.3	0.2	52	0.41	0.048	17
SQ051	Soil	0.4	11.0	6.5	43	<0.1	9.8	8.7	274	1.91	3.6	4.4	2.3	23	0.1	0.1	0.1	36	0.33	0.032	15
SQ052	Soil	0.5	17.4	7.9	53	<0.1	13.6	16.6	825	2.25	5.8	7.0	3.0	29	0.3	0.2	0.1	39	0.68	0.078	20
SQ054	Soil	3.9	38.8	17.6	88	0.2	25.0	17.0	940	3.73	7.9	3.1	4.3	35	0.4	0.2	0.3	49	0.69	0.101	18
SQ056	Soil	3.0	20.8	26.1	85	0.2	23.0	17.2	1304	3.24	7.5	<0.5	4.2	24	0.4	0.2	0.3	50	0.39	0.073	19
SQ072	Soil	0.9	18.4	9.4	53	<0.1	15.9	8.7	286	2.46	7.5	1.5	5.4	24	<0.1	0.3	0.3	56	0.30	0.032	15
SQ073	Soil	1.0	20.7	10.7	50	0.1	18.7	10.2	364	2.87	8.3	3.0	5.0	24	<0.1	0.3	0.4	63	0.24	0.029	13
SQ074	Soil	1.3	24.1	11.3	39	0.2	14.8	6.6	152	2.27	6.3	1.5	2.6	25	0.1	0.2	0.4	48	0.23	0.035	15
SQ075	Soil	1.2	27.5	12.2	47	0.2	17.3	10.1	346	2.89	8.6	3.0	4.0	23	<0.1	0.2	0.3	61	0.21	0.026	15
933170	Soil	0.3	20.1	23.9	90	0.1	51.5	17.5	1428	3.07	3.8	0.6	10.2	27	0.1	0.1	0.2	53	0.45	0.044	28
933171	Soil	0.4	7.2	35.7	75	<0.1	11.8	10.7	723	2.48	5.3	<0.5	15.0	8	<0.1	0.1	0.1	17	0.09	0.037	31
933172	Soil	0.8	16.7	42.3	75	<0.1	35.7	16.5	672	3.51	6.9	3.7	7.8	16	0.1	0.3	0.3	57	0.17	0.045	18
933173	Soil	0.3	20.6	24.2	71	0.1	63.9	21.7	842	3.18	3.6	<0.5	4.8	28	<0.1	<0.1	0.1	58	0.50	0.053	14
933174	Soil	0.6	14.2	20.8	52	<0.1	24.5	13.8	499	2.61	4.0	<0.5	4.1	18	<0.1	0.1	0.2	36	0.26	0.031	16
933175	Soil	0.3	19.1	16.2	40	<0.1	58.3	11.5	164	1.83	1.8	1.0	3.4	22	<0.1	0.1	0.1	30	0.32	0.038	11
933176	Soil	0.3	6.3	14.3	88	<0.1	19.9	14.6	633	3.06	1.6	<0.5	7.0	29	<0.1	<0.1	0.1	40	0.54	0.075	12
933177	Soil	1.8	57.1	54.2	146	0.5	10.4	27.0	1887	5.17	3.3	2.7	7.2	14	0.4	0.2	0.4	80	0.28	0.061	25
933178	Soil	2.1	18.9	120.4	51	0.2	11.4	7.4	154	2.06	8.2	2.8	19.6	11	<0.1	1.2	1.2	40	0.12	0.017	35
933179	Soil	2.1	12.6	88.5	56	0.1	5.1	2.0	134	1.61	4.8	4.0	13.8	10	0.1	0.4	1.2	34	0.07	0.015	21
933180	Soil	2.0	14.0	56.5	46	0.2	10.2	4.4	216	1.72	4.1	2.9	21.1	14	0.1	0.6	0.7	30	0.12	0.014	67
933181	Soil	1.3	13.5	23.5	38	0.2	14.6	5.9	165	2.53	6.7	<0.5	11.5	7	0.2	0.4	0.5	46	0.09	0.036	13
933182	Soil	0.8	20.1	14.4	48	<0.1	22.2	8.0	280	2.81	7.9	2.6	5.7	19	0.2	0.4	0.3	59	0.16	0.014	10
933183	Soil	1.0	7.5	18.6	31	<0.1	7.8	3.4	134	2.22	5.8	5.7	6.4	13	0.1	0.3	0.4	54	0.13	0.017	13

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
SQE014	Soil	26	0.41	226	0.056	<20	1.36	0.016	0.05	0.1	0.04	3.8	<0.1	0.08	4	<0.5	<0.2
SQE015	Soil	29	0.47	237	0.050	<20	1.73	0.015	0.05	<0.1	0.04	4.1	<0.1	<0.05	4	<0.5	<0.2
SQE016	Soil	30	0.47	264	0.051	<20	1.63	0.014	0.06	<0.1	0.04	4.7	<0.1	<0.05	5	<0.5	<0.2
SQE017	Soil	30	0.47	244	0.056	<20	1.49	0.017	0.05	0.1	0.18	4.0	0.1	<0.05	4	<0.5	<0.2
SQE035	Soil	32	0.71	624	0.034	<20	1.87	0.015	0.11	<0.1	0.04	5.6	0.2	<0.05	6	<0.5	<0.2
SQE036	Soil	35	0.38	271	0.034	<20	1.78	0.013	0.04	<0.1	0.07	4.7	<0.1	<0.05	6	<0.5	<0.2
SQE037	Soil	34	0.41	293	0.035	<20	1.78	0.013	0.04	<0.1	0.06	4.1	<0.1	<0.05	6	<0.5	<0.2
SQE038	Soil	33	0.40	239	0.041	<20	1.66	0.012	0.05	<0.1	0.03	3.6	<0.1	<0.05	5	<0.5	<0.2
SQ051	Soil	16	1.27	224	0.031	<20	1.67	0.005	0.04	<0.1	0.03	2.7	<0.1	<0.05	6	<0.5	<0.2
SQ052	Soil	15	1.25	344	0.025	<20	1.74	0.009	0.05	<0.1	0.03	3.7	<0.1	0.06	4	0.5	<0.2
SQ054	Soil	23	1.22	224	0.024	<20	1.81	0.008	0.06	0.1	0.04	3.8	<0.1	<0.05	5	0.8	<0.2
SQ056	Soil	24	0.98	249	0.029	<20	1.68	0.009	0.06	<0.1	0.03	2.6	0.1	<0.05	5	<0.5	<0.2
SQ072	Soil	31	0.47	201	0.088	<20	1.65	0.015	0.05	<0.1	<0.01	3.0	<0.1	<0.05	5	<0.5	<0.2
SQ073	Soil	31	0.47	180	0.088	<20	2.03	0.013	0.05	<0.1	0.01	2.3	<0.1	<0.05	6	<0.5	<0.2
SQ074	Soil	24	0.31	179	0.069	<20	1.92	0.011	0.07	<0.1	0.03	2.3	<0.1	<0.05	7	<0.5	<0.2
SQ075	Soil	28	0.35	237	0.070	<20	2.28	0.014	0.07	<0.1	0.03	2.8	<0.1	<0.05	7	<0.5	<0.2
933170	Soil	154	2.11	189	0.130	<20	2.24	0.012	0.50	<0.1	0.03	4.4	0.6	<0.05	7	<0.5	<0.2
933171	Soil	13	0.96	68	0.099	<20	1.38	0.002	0.36	<0.1	0.01	0.8	0.6	<0.05	4	<0.5	<0.2
933172	Soil	80	1.24	101	0.111	<20	2.04	0.009	0.17	<0.1	0.03	2.5	0.3	<0.05	7	<0.5	<0.2
933173	Soil	276	2.90	100	0.098	<20	2.45	0.005	0.23	<0.1	0.03	4.1	0.3	<0.05	7	<0.5	<0.2
933174	Soil	54	0.97	90	0.031	<20	1.51	0.008	0.08	<0.1	0.01	2.1	0.1	<0.05	5	<0.5	<0.2
933175	Soil	102	1.10	92	0.068	<20	1.45	0.007	0.06	<0.1	0.04	1.8	0.2	<0.05	5	<0.5	<0.2
933176	Soil	98	2.18	127	0.137	<20	2.07	0.005	0.41	<0.1	<0.01	2.7	0.4	<0.05	8	<0.5	<0.2
933177	Soil	10	1.34	141	0.120	<20	1.99	0.008	0.61	<0.1	0.05	7.1	0.6	<0.05	6	<0.5	<0.2
933178	Soil	25	0.29	113	0.038	<20	1.36	0.008	0.07	<0.1	0.07	2.4	0.1	<0.05	4	<0.5	<0.2
933179	Soil	11	0.11	66	0.040	<20	0.78	0.005	0.06	<0.1	0.03	0.8	<0.1	<0.05	4	<0.5	<0.2
933180	Soil	17	0.24	124	0.051	<20	0.90	0.009	0.08	<0.1	0.03	2.2	<0.1	<0.05	3	<0.5	<0.2
933181	Soil	30	0.32	57	0.052	<20	2.25	0.005	0.06	0.1	0.08	2.3	<0.1	<0.05	4	<0.5	<0.2
933182	Soil	31	0.46	203	0.063	<20	2.03	0.010	0.06	<0.1	0.02	2.3	0.1	<0.05	6	<0.5	<0.2
933183	Soil	16	0.23	94	0.049	<20	1.33	0.007	0.05	<0.1	0.02	1.5	<0.1	<0.05	6	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

		Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
		Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
		Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
		MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
933184	Soil		0.8	17.0	28.1	42	<0.1	21.1	8.4	181	2.44	5.6	3.0	12.9	11	0.2	0.5	0.5	46	0.12	0.022	25
933185	Soil		0.8	14.5	36.2	35	<0.1	17.6	7.9	221	2.07	4.4	1.9	17.8	10	0.2	0.4	0.4	33	0.11	0.029	31
933186	Soil		1.0	12.3	22.8	34	<0.1	12.2	5.3	234	2.04	4.5	2.4	13.8	9	<0.1	0.4	0.4	46	0.09	0.015	15
933187	Soil		0.8	23.8	22.5	48	0.1	17.9	5.6	226	2.12	4.9	1.4	17.0	25	<0.1	0.5	0.6	45	0.30	0.035	97
933188	Soil		1.1	14.9	15.9	53	0.1	20.7	8.0	223	2.85	8.5	1.8	5.9	10	0.2	0.4	0.3	66	0.09	0.032	11
933189	Soil		0.8	22.5	14.9	58	<0.1	28.4	11.6	302	2.79	9.2	1.4	9.3	14	0.2	0.4	0.5	57	0.15	0.024	13
933190	Soil		1.5	14.0	12.8	57	<0.1	15.3	6.6	327	2.66	7.5	16.9	5.9	13	0.2	0.4	0.5	62	0.12	0.029	11
932932	Soil		0.3	82.1	6.7	40	0.1	14.7	16.6	411	2.88	3.1	1.7	0.7	13	<0.1	<0.1	0.1	41	0.15	0.019	2
SQ059	Soil		0.7	26.4	10.7	63	<0.1	19.2	9.6	325	2.36	7.8	3.5	3.6	32	0.2	0.4	0.2	52	0.46	0.072	13
S071	Soil		0.7	20.2	9.6	54	<0.1	20.5	8.5	246	2.70	8.3	0.7	3.8	30	0.1	0.4	0.2	61	0.33	0.034	11
CH039	Soil		0.9	30.5	8.7	73	0.1	24.3	9.9	331	2.70	8.2	2.0	3.8	39	0.2	0.4	0.2	58	0.55	0.087	13
CH040	Soil		1.0	23.2	8.0	58	<0.1	19.9	10.6	294	2.90	12.5	1.2	4.8	39	0.2	0.4	0.2	58	0.56	0.077	17
CH041	Soil		0.6	21.6	7.4	59	<0.1	17.5	7.1	232	2.12	5.0	1.4	3.5	37	0.2	0.4	0.1	46	0.57	0.070	15
CH042	Soil		0.4	14.0	7.4	59	<0.1	14.9	6.1	178	2.10	5.6	0.8	2.9	38	<0.1	0.3	0.1	47	0.64	0.068	13
CH001	Soil		1.0	12.3	10.7	83	<0.1	14.4	9.2	394	2.31	4.4	<0.5	3.2	23	0.3	0.2	0.1	46	0.36	0.074	8
CH003	Soil		1.0	32.9	9.7	50	0.1	23.8	9.2	382	2.32	8.2	2.2	3.9	37	0.2	0.5	0.2	53	0.52	0.038	14
CH004	Soil		0.7	26.6	10.3	52	<0.1	17.2	6.4	211	2.00	5.8	0.6	4.6	31	<0.1	0.4	0.1	47	0.37	0.045	14
CH007	Soil		1.4	25.5	8.3	56	<0.1	22.6	8.2	324	2.30	7.6	0.7	3.3	45	0.2	0.4	0.2	45	0.58	0.054	12
CH002	Soil		1.2	28.7	9.0	47	<0.1	25.3	8.1	284	2.33	9.6	1.8	4.6	37	<0.1	0.4	0.2	49	0.48	0.048	12
CH005	Soil		0.9	20.3	9.4	52	<0.1	19.5	9.1	230	2.34	7.8	2.3	3.4	29	0.2	0.4	0.2	52	0.33	0.031	9
CH006	Soil		1.0	15.5	10.3	76	<0.1	15.1	8.0	697	2.25	6.6	<0.5	2.5	37	0.3	0.3	0.2	48	0.57	0.063	8
CH008	Soil		0.8	36.4	11.1	68	0.1	28.8	11.1	383	2.63	10.4	1.8	4.7	50	0.2	0.6	0.2	53	0.79	0.055	14
CH009	Soil		0.6	33.4	10.9	66	0.1	25.8	11.2	347	2.68	10.9	2.1	5.2	49	0.2	0.5	0.2	55	0.71	0.065	15
CH010	Soil		0.9	25.0	10.9	64	<0.1	18.1	10.2	271	2.49	7.9	0.8	5.0	25	0.1	0.3	0.1	52	0.34	0.039	14
CH011	Soil		1.2	26.8	12.2	54	0.1	22.0	11.1	599	2.45	9.5	<0.5	3.9	34	0.3	0.5	0.2	51	0.43	0.042	14
CH012	Soil		0.8	36.5	10.6	59	0.1	27.5	11.3	431	2.58	10.5	<0.5	3.9	52	0.2	0.6	0.2	56	0.73	0.048	15
CH013	Soil		0.8	30.5	9.9	63	0.1	24.8	10.4	422	2.41	10.0	0.9	4.0	53	0.3	0.6	0.2	52	1.23	0.064	13
CH014	Soil		0.8	32.2	9.3	59	0.1	24.2	10.0	440	2.43	9.0	1.4	3.7	42	0.3	0.6	0.2	53	0.62	0.052	13
CH015	Soil		0.8	32.3	10.6	57	0.2	26.0	10.0	413	2.46	10.0	1.1	3.8	43	0.2	0.5	0.2	54	0.62	0.051	13
CH016	Soil		0.8	34.5	9.5	66	0.1	25.8	9.3	367	2.54	10.4	2.4	3.6	47	0.2	0.7	0.2	52	0.73	0.067	14

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
933184	Soil	32	0.43	107	0.058	<20	2.04	0.008	0.07	0.1	0.04	2.3	<0.1	<0.05	4	<0.5	<0.2
933185	Soil	23	0.32	84	0.039	<20	2.17	0.008	0.06	<0.1	0.02	2.1	<0.1	<0.05	3	<0.5	<0.2
933186	Soil	21	0.28	76	0.044	<20	1.58	0.007	0.05	<0.1	0.03	1.8	0.1	<0.05	5	<0.5	<0.2
933187	Soil	31	0.43	171	0.073	<20	1.32	0.015	0.07	<0.1	0.05	3.9	<0.1	<0.05	4	<0.5	<0.2
933188	Soil	31	0.34	117	0.054	<20	2.42	0.007	0.04	0.1	0.05	2.3	0.1	<0.05	7	<0.5	<0.2
933189	Soil	33	0.56	164	0.073	<20	2.55	0.010	0.06	<0.1	0.05	3.0	<0.1	<0.05	5	<0.5	<0.2
933190	Soil	24	0.35	99	0.067	<20	1.44	0.009	0.06	<0.1	0.05	1.7	0.1	<0.05	6	<0.5	<0.2
932932	Soil	13	1.43	41	0.015	<20	2.24	0.003	0.04	<0.1	0.03	1.6	0.1	<0.05	4	<0.5	<0.2
SQ059	Soil	26	0.56	209	0.074	<20	1.24	0.026	0.05	0.2	0.03	3.2	<0.1	<0.05	3	<0.5	<0.2
S071	Soil	32	0.54	211	0.086	<20	1.83	0.020	0.05	<0.1	0.03	3.4	<0.1	<0.05	5	<0.5	<0.2
CH039	Soil	31	0.67	323	0.085	<20	1.32	0.034	0.12	0.2	0.04	3.9	<0.1	<0.05	4	<0.5	<0.2
CH040	Soil	28	0.54	293	0.081	<20	1.27	0.018	0.09	0.1	0.04	3.5	<0.1	<0.05	4	<0.5	<0.2
CH041	Soil	25	0.55	258	0.088	<20	1.22	0.022	0.15	0.1	0.04	3.2	<0.1	<0.05	4	<0.5	<0.2
CH042	Soil	25	0.54	232	0.076	<20	1.16	0.022	0.13	0.1	0.04	2.8	<0.1	<0.05	4	<0.5	<0.2
CH001	Soil	26	0.48	290	0.071	<20	1.35	0.011	0.20	<0.1	0.01	3.1	<0.1	<0.05	4	<0.5	<0.2
CH003	Soil	28	0.52	380	0.062	<20	1.49	0.022	0.04	0.1	0.03	3.7	<0.1	<0.05	4	<0.5	<0.2
CH004	Soil	25	0.47	269	0.079	<20	1.31	0.025	0.07	<0.1	0.03	3.4	<0.1	<0.05	4	<0.5	<0.2
CH007	Soil	22	0.50	326	0.080	<20	1.61	0.025	0.07	<0.1	0.05	3.4	0.1	<0.05	4	<0.5	<0.2
CH002	Soil	29	0.57	264	0.078	<20	1.44	0.025	0.06	<0.1	0.02	3.6	<0.1	<0.05	4	<0.5	<0.2
CH005	Soil	28	0.46	275	0.060	<20	1.47	0.012	0.11	<0.1	0.02	3.0	<0.1	<0.05	4	<0.5	<0.2
CH006	Soil	22	0.46	279	0.058	<20	1.38	0.022	0.17	<0.1	<0.01	2.2	<0.1	<0.05	5	<0.5	<0.2
CH008	Soil	30	0.61	392	0.083	<20	1.69	0.032	0.10	<0.1	0.03	4.1	<0.1	<0.05	5	<0.5	<0.2
CH009	Soil	28	0.59	378	0.100	<20	1.54	0.035	0.11	0.1	0.04	4.0	<0.1	<0.05	5	<0.5	<0.2
CH010	Soil	26	0.55	297	0.078	<20	1.44	0.015	0.15	<0.1	0.02	3.6	<0.1	<0.05	5	<0.5	<0.2
CH011	Soil	28	0.47	354	0.059	<20	1.51	0.015	0.09	<0.1	0.02	3.4	<0.1	<0.05	4	<0.5	<0.2
CH012	Soil	31	0.56	399	0.074	<20	1.59	0.022	0.07	<0.1	0.05	3.7	<0.1	<0.05	5	<0.5	<0.2
CH013	Soil	25	0.62	372	0.081	<20	1.28	0.027	0.10	<0.1	0.04	3.4	<0.1	<0.05	4	<0.5	<0.2
CH014	Soil	27	0.55	360	0.082	<20	1.46	0.024	0.07	<0.1	0.04	3.4	<0.1	<0.05	4	<0.5	<0.2
CH015	Soil	29	0.58	345	0.079	<20	1.47	0.025	0.06	0.1	0.03	3.7	<0.1	<0.05	4	<0.5	<0.2
CH016	Soil	28	0.59	332	0.077	<20	1.35	0.027	0.08	<0.1	0.06	3.5	<0.1	<0.05	4	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
CH017	Soil	0.7	40.9	10.0	72	0.1	29.6	12.2	448	2.83	10.7	1.4	3.6	68	0.4	0.6	0.2	63	1.65	0.067	13
CH018	Soil	0.4	27.9	8.1	44	<0.1	19.0	4.7	254	2.48	5.4	0.7	7.0	31	<0.1	0.3	0.2	40	0.38	0.028	20
CH019	Soil	0.4	26.4	10.3	46	<0.1	23.2	12.3	408	3.21	6.4	1.1	14.1	22	<0.1	0.3	0.2	52	0.32	0.040	30
CH020	Soil	0.3	22.5	7.6	38	<0.1	15.0	6.9	212	1.84	4.4	0.8	5.1	25	<0.1	0.3	0.1	44	0.29	0.019	15
CH021	Soil	0.5	15.8	7.8	42	<0.1	16.6	8.8	286	2.24	4.2	2.3	5.4	20	<0.1	0.3	0.1	50	0.21	0.010	11
CH022	Soil	0.8	15.0	9.4	74	<0.1	19.7	9.2	280	2.92	7.4	1.3	3.7	22	<0.1	0.3	0.1	63	0.31	0.032	8
CH023	Soil	0.7	14.6	6.1	51	<0.1	22.5	13.2	307	3.63	5.2	11.2	3.9	24	<0.1	0.2	0.1	71	0.44	0.092	7
CH024	Soil	0.7	25.1	10.6	58	<0.1	22.9	11.4	286	4.04	5.8	<0.5	4.3	29	<0.1	0.3	0.2	89	0.41	0.030	16
CH025	Soil	0.4	19.7	6.7	55	<0.1	22.1	10.1	386	2.73	4.9	<0.5	10.8	20	<0.1	0.2	0.1	42	0.33	0.053	27
CH026	Soil	1.1	19.9	6.4	113	<0.1	12.3	8.2	583	4.02	5.1	<0.5	5.3	29	0.3	0.3	0.1	58	0.35	0.038	18
CH027	Soil	1.2	12.7	8.8	65	0.2	14.7	8.6	684	2.51	6.0	<0.5	2.6	26	0.2	0.3	0.2	49	0.33	0.028	10
CH028	Soil	1.4	17.0	8.6	134	<0.1	10.8	5.9	430	3.05	4.6	<0.5	5.3	28	0.3	0.4	0.2	30	0.47	0.022	13
CH029	Soil	0.6	49.0	7.7	62	0.2	26.7	10.6	739	2.55	4.4	1.3	2.7	43	0.3	0.4	0.2	45	0.91	0.055	35
CH030	Soil	1.7	19.1	7.4	69	<0.1	17.1	11.2	451	3.59	5.4	<0.5	4.6	22	<0.1	0.4	0.1	62	0.38	0.022	23
CH031	Soil	0.6	39.4	8.4	57	<0.1	29.6	13.9	485	2.97	5.7	<0.5	4.4	33	0.1	0.5	0.1	65	0.84	0.034	21
CH032	Soil	0.7	32.3	9.4	53	0.1	26.5	11.5	503	2.59	9.2	1.3	3.3	48	0.2	0.5	0.1	49	1.04	0.063	14
CH033	Soil	0.7	24.6	11.1	55	<0.1	15.0	9.4	173	2.48	8.7	<0.5	3.7	22	<0.1	0.3	0.2	47	0.49	0.041	10
CH034	Soil	0.9	26.4	9.2	50	<0.1	22.5	10.9	317	3.03	6.6	3.1	4.2	37	0.1	0.3	0.1	56	0.77	0.054	15
CH035	Soil	0.9	19.2	8.3	55	<0.1	18.9	10.1	297	2.58	7.9	3.3	3.7	51	0.1	0.4	0.1	51	0.64	0.042	14
CH036	Soil	2.0	33.2	10.4	62	0.1	25.0	14.7	1230	2.91	11.4	1.9	4.1	54	0.1	0.5	0.2	54	0.74	0.052	13
C001	Soil	0.6	27.8	6.7	66	0.1	21.6	13.4	356	2.88	6.2	1.3	2.0	31	<0.1	0.3	<0.1	68	0.43	0.075	8
C002	Soil	0.4	68.3	4.0	70	<0.1	9.9	23.3	582	4.24	0.7	<0.5	0.8	15	<0.1	<0.1	<0.1	152	0.37	0.062	4
C003	Soil	0.4	48.2	13.5	58	<0.1	10.9	15.1	377	3.19	2.3	<0.5	2.2	24	<0.1	<0.1	0.1	95	0.52	0.085	8
C004	Soil	0.6	29.5	8.8	53	<0.1	14.1	9.6	202	2.54	5.9	<0.5	2.1	15	<0.1	0.2	<0.1	66	0.25	0.041	8
C005	Soil	0.7	23.1	5.8	39	<0.1	9.4	9.9	160	2.13	3.9	1.5	1.9	14	0.1	0.2	<0.1	58	0.22	0.043	6
C006	Soil	0.8	40.8	7.7	67	<0.1	14.8	15.4	185	2.95	5.0	<0.5	1.5	17	0.2	0.2	0.2	82	0.25	0.030	5
C007	Soil	0.9	13.4	7.6	42	0.2	15.6	7.6	143	2.24	6.5	<0.5	2.4	15	<0.1	0.3	0.1	49	0.17	0.017	7
C008	Soil	0.9	10.2	8.1	54	0.1	14.7	8.7	498	2.07	4.5	<0.5	2.4	19	0.1	0.3	0.1	47	0.25	0.017	7
C009	Soil	0.5	108.8	18.7	293	0.1	19.2	37.7	618	5.57	4.6	1.2	1.5	29	0.3	<0.1	0.1	173	0.54	0.034	13
C010	Soil	0.9	35.0	9.2	59	0.2	19.3	11.6	456	2.95	6.3	<0.5	2.4	24	<0.1	0.3	0.1	74	0.33	0.039	7

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
CH017	Soil	29	0.70	338	0.102	<20	1.65	0.037	0.13	<0.1	0.04	3.9	<0.1	<0.05	5	<0.5	<0.2
CH018	Soil	<1	0.57	298	0.116	<20	1.66	0.018	0.29	<0.1	0.04	3.9	0.1	<0.05	5	<0.5	<0.2
CH019	Soil	32	0.82	263	0.179	<20	1.97	0.014	0.59	<0.1	0.03	4.7	0.3	<0.05	7	<0.5	<0.2
CH020	Soil	24	0.44	198	0.115	<20	1.28	0.019	0.18	<0.1	0.02	3.0	<0.1	<0.05	4	<0.5	<0.2
CH021	Soil	29	0.55	209	0.126	<20	1.39	0.012	0.28	<0.1	0.01	2.4	0.1	<0.05	4	<0.5	<0.2
CH022	Soil	47	0.76	309	0.124	<20	1.76	0.012	0.29	<0.1	0.02	3.5	0.1	<0.05	6	<0.5	<0.2
CH023	Soil	49	1.19	374	0.193	<20	2.21	0.012	0.60	0.1	0.02	4.5	0.2	<0.05	8	<0.5	<0.2
CH024	Soil	33	0.77	369	0.068	<20	2.13	0.012	0.16	<0.1	0.03	7.3	<0.1	<0.05	7	<0.5	<0.2
CH025	Soil	31	0.78	302	0.143	<20	1.58	0.015	0.49	<0.1	0.03	3.4	0.2	<0.05	6	<0.5	<0.2
CH026	Soil	19	0.66	579	0.132	<20	1.92	0.011	0.58	0.2	0.03	6.2	0.2	<0.05	10	<0.5	<0.2
CH027	Soil	26	0.39	540	0.059	<20	1.42	0.010	0.11	<0.1	0.03	3.0	<0.1	<0.05	5	<0.5	<0.2
CH028	Soil	16	0.40	570	0.047	<20	1.49	0.009	0.29	0.1	0.04	4.6	0.1	<0.05	7	<0.5	<0.2
CH029	Soil	27	0.55	523	0.055	<20	1.51	0.019	0.17	0.1	0.05	4.4	<0.1	0.08	5	1.3	<0.2
CH030	Soil	24	0.60	634	0.084	<20	1.87	0.014	0.38	<0.1	0.01	6.3	0.1	<0.05	7	1.0	<0.2
CH031	Soil	57	0.80	391	0.118	<20	1.95	0.021	0.35	<0.1	0.04	4.6	0.2	<0.05	6	0.6	<0.2
CH032	Soil	27	0.52	353	0.061	<20	1.39	0.017	0.14	<0.1	0.04	3.3	<0.1	<0.05	4	1.2	<0.2
CH033	Soil	23	0.47	177	0.047	<20	1.18	0.016	0.08	0.2	<0.01	3.2	<0.1	<0.05	4	<0.5	<0.2
CH034	Soil	38	0.54	249	0.099	<20	1.64	0.022	0.15	0.1	0.03	4.3	<0.1	<0.05	5	<0.5	<0.2
CH035	Soil	35	0.65	199	0.075	<20	1.40	0.018	0.14	0.1	<0.01	3.7	<0.1	<0.05	5	0.9	<0.2
CH036	Soil	29	0.60	285	0.079	<20	1.74	0.019	0.09	<0.1	0.02	4.0	<0.1	<0.05	5	0.8	<0.2
C001	Soil	32	0.93	223	0.113	<20	1.60	0.020	0.29	<0.1	<0.01	2.8	0.1	<0.05	5	<0.5	<0.2
C002	Soil	20	2.38	320	0.220	<20	2.93	0.022	0.62	<0.1	<0.01	4.5	<0.1	<0.05	8	<0.5	<0.2
C003	Soil	25	1.12	391	0.171	<20	2.10	0.022	0.40	<0.1	<0.01	3.6	<0.1	<0.05	7	<0.5	<0.2
C004	Soil	22	0.70	184	0.097	<20	1.51	0.011	0.13	<0.1	0.02	2.4	<0.1	<0.05	5	<0.5	<0.2
C005	Soil	17	0.66	144	0.076	<20	1.36	0.016	0.07	<0.1	<0.01	2.0	<0.1	<0.05	5	<0.5	<0.2
C006	Soil	25	0.95	255	0.121	<20	1.97	0.015	0.17	<0.1	<0.01	3.6	0.2	<0.05	6	0.8	<0.2
C007	Soil	24	0.37	228	0.053	<20	1.37	0.009	0.05	<0.1	0.01	1.6	<0.1	<0.05	4	<0.5	<0.2
C008	Soil	25	0.39	256	0.052	<20	1.25	0.009	0.07	<0.1	<0.01	1.9	<0.1	<0.05	4	<0.5	<0.2
C009	Soil	25	2.47	456	0.151	<20	3.38	0.021	0.48	<0.1	0.04	15.1	0.2	<0.05	10	1.9	<0.2
C010	Soil	29	0.88	393	0.104	<20	1.73	0.012	0.32	<0.1	<0.01	3.9	0.2	<0.05	6	1.0	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
MDL		0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
C011	Soil	0.8	10.5	7.4	45	0.1	14.7	7.4	320	2.13	5.5	1.0	2.1	16	<0.1	0.3	0.1	48	0.21	0.020	7
C012	Soil	0.8	10.6	8.8	38	<0.1	13.9	6.4	190	2.33	6.5	<0.5	2.1	13	<0.1	0.3	0.1	52	0.15	0.023	7
C013	Soil	0.8	15.1	7.9	38	<0.1	16.2	8.0	176	2.24	6.3	<0.5	2.3	17	<0.1	0.4	<0.1	50	0.20	0.016	7
C014	Soil	0.5	35.0	6.0	41	<0.1	15.3	9.8	216	2.33	5.3	<0.5	2.6	17	<0.1	0.2	<0.1	61	0.30	0.024	9
C015	Soil	0.6	24.4	5.3	80	<0.1	13.9	13.7	544	3.20	3.6	<0.5	2.0	18	<0.1	0.2	<0.1	95	0.25	0.024	6
C016	Soil	0.9	14.5	8.8	44	<0.1	17.9	9.5	219	2.72	8.3	5.4	2.9	16	<0.1	0.2	0.1	58	0.17	0.020	7
C017	Soil	0.8	27.4	7.1	37	<0.1	17.7	7.4	127	2.23	5.4	2.5	2.6	16	<0.1	0.2	<0.1	51	0.19	0.021	9
C018	Soil	0.9	11.6	8.4	47	<0.1	14.8	8.6	235	2.48	6.8	<0.5	2.3	14	<0.1	0.3	0.1	56	0.16	0.015	7
C019	Soil	0.9	32.0	7.4	71	<0.1	13.5	9.3	321	3.12	7.2	<0.5	1.7	10	<0.1	0.3	0.1	80	0.11	0.030	6
C020	Soil	0.8	13.2	8.0	58	<0.1	13.7	8.5	391	2.48	6.0	<0.5	2.2	12	<0.1	0.2	<0.1	63	0.13	0.022	7
C021	Soil	0.8	20.6	2.4	93	<0.1	3.1	11.5	304	5.36	3.0	0.6	1.3	7	<0.1	0.1	<0.1	75	0.17	0.088	4
C022	Soil	0.8	24.3	8.9	40	<0.1	16.8	8.6	162	2.71	6.2	1.5	2.9	17	<0.1	0.2	0.1	51	0.23	0.025	9
C023	Soil	0.8	12.2	8.5	60	<0.1	14.6	8.7	372	2.33	5.3	<0.5	2.2	14	<0.1	0.2	<0.1	54	0.15	0.021	7
C024	Soil	0.9	13.9	9.4	64	<0.1	17.6	8.9	496	2.40	6.2	<0.5	2.3	9	<0.1	0.3	0.1	55	0.11	0.022	7
C025	Soil	0.8	8.3	7.3	38	<0.1	23.5	7.7	246	2.46	5.6	<0.5	1.8	12	<0.1	0.1	0.1	61	0.13	0.019	6
C026	Soil	0.8	15.8	8.3	46	<0.1	10.1	7.1	314	2.79	4.3	0.8	1.2	10	<0.1	0.2	0.1	78	0.11	0.030	5
C027	Soil	0.5	22.2	6.6	73	<0.1	30.0	14.1	412	4.69	3.2	<0.5	1.6	18	<0.1	0.1	<0.1	133	0.16	0.021	6
C028	Soil	0.7	18.9	7.5	58	<0.1	12.3	9.9	308	2.98	4.3	<0.5	1.8	14	<0.1	0.3	0.1	84	0.14	0.025	5
C029	Soil	1.5	16.5	8.8	67	<0.1	21.2	3.6	154	1.58	3.9	0.7	0.7	15	0.2	<0.1	0.1	86	0.07	0.041	6
C030	Soil	0.9	20.1	37.8	60	0.2	19.5	9.9	238	3.34	9.8	4.8	2.7	15	0.1	0.3	0.5	82	0.13	0.017	7
C031	Soil	0.9	13.6	10.8	40	<0.1	9.5	5.0	137	2.46	6.8	6.5	0.9	20	<0.1	0.7	0.2	66	0.22	0.019	7
C032	Soil	1.1	19.1	14.7	48	<0.1	16.8	8.3	194	3.14	10.9	3.3	2.3	15	<0.1	0.3	0.2	70	0.16	0.024	9
C033	Soil	0.9	20.4	11.8	39	<0.1	19.3	7.7	166	3.27	9.9	3.5	3.0	13	<0.1	0.2	0.2	67	0.14	0.027	9
C034	Soil	0.6	21.4	8.8	40	<0.1	14.0	6.6	151	2.28	6.3	1.9	3.6	18	<0.1	0.4	0.1	48	0.21	0.031	11
C035	Soil	0.9	11.4	10.4	29	0.1	10.5	5.2	167	2.41	6.8	<0.5	2.5	13	<0.1	0.2	0.1	60	0.16	0.024	8
C036	Soil	1.2	17.0	10.0	40	0.1	15.1	8.6	316	2.73	8.3	2.2	2.5	10	<0.1	0.3	0.2	63	0.12	0.023	7
C037	Soil	0.9	23.7	8.4	62	0.1	20.0	9.4	435	2.50	7.0	5.4	3.3	42	0.1	0.3	0.1	50	0.69	0.061	14
932880	Soil	0.5	17.7	35.4	83	0.1	51.5	20.0	563	3.70	3.1	1.4	11.7	20	<0.1	0.1	0.2	41	0.37	0.049	30
932881	Soil	0.3	19.7	25.5	90	0.2	39.9	15.2	785	3.33	3.9	1.0	14.6	24	<0.1	<0.1	0.2	46	0.46	0.037	44
932882	Soil	0.5	10.5	39.2	59	0.2	32.9	13.1	950	2.32	2.0	2.8	26.7	16	<0.1	<0.1	0.3	43	0.37	0.031	32

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
C011	Soil	24	0.35	276	0.048	<20	1.27	0.009	0.05	<0.1	<0.01	1.3	<0.1	<0.05	4	<0.5	<0.2
C012	Soil	24	0.38	225	0.056	<20	1.32	0.009	0.05	<0.1	<0.01	1.7	<0.1	<0.05	4	<0.5	<0.2
C013	Soil	26	0.43	264	0.055	<20	1.44	0.009	0.05	<0.1	<0.01	1.8	<0.1	<0.05	4	<0.5	<0.2
C014	Soil	23	0.76	324	0.087	<20	1.60	0.020	0.13	<0.1	0.01	2.9	<0.1	<0.05	4	<0.5	<0.2
C015	Soil	26	1.51	341	0.133	<20	2.10	0.015	0.65	<0.1	<0.01	4.4	0.2	<0.05	8	<0.5	<0.2
C016	Soil	30	0.49	224	0.064	<20	1.73	0.009	0.08	<0.1	<0.01	2.0	<0.1	<0.05	5	<0.5	<0.2
C017	Soil	23	0.56	202	0.054	<20	1.42	0.010	0.06	<0.1	<0.01	3.0	<0.1	<0.05	4	0.9	<0.2
C018	Soil	28	0.46	276	0.056	<20	1.50	0.010	0.07	<0.1	<0.01	1.9	<0.1	<0.05	4	<0.5	<0.2
C019	Soil	23	0.70	234	0.072	<20	1.91	0.008	0.08	<0.1	<0.01	3.3	<0.1	<0.05	6	<0.5	<0.2
C020	Soil	24	0.41	244	0.065	<20	1.52	0.011	0.06	<0.1	<0.01	1.7	<0.1	<0.05	5	<0.5	<0.2
C021	Soil	<1	1.05	550	0.235	<20	2.39	0.013	0.79	<0.1	<0.01	6.0	0.3	0.06	8	<0.5	<0.2
C022	Soil	27	0.51	359	0.056	<20	1.87	0.009	0.06	<0.1	<0.01	2.5	<0.1	0.06	5	<0.5	<0.2
C023	Soil	25	0.35	306	0.046	<20	1.56	0.008	0.05	<0.1	<0.01	1.8	<0.1	0.06	5	<0.5	<0.2
C024	Soil	27	0.35	242	0.055	<20	1.63	0.009	0.04	<0.1	<0.01	1.7	<0.1	<0.05	5	<0.5	<0.2
C025	Soil	78	0.73	209	0.069	<20	1.50	0.010	0.04	<0.1	<0.01	1.6	<0.1	<0.05	6	<0.5	<0.2
C026	Soil	56	0.72	200	0.102	<20	1.51	0.010	0.10	<0.1	<0.01	2.3	0.1	<0.05	6	<0.5	<0.2
C027	Soil	111	1.83	378	0.178	<20	2.70	0.015	0.93	<0.1	<0.01	6.1	0.6	<0.05	11	<0.5	<0.2
C028	Soil	19	0.73	341	0.122	<20	1.62	0.012	0.23	<0.1	<0.01	2.3	0.2	<0.05	7	<0.5	<0.2
C029	Soil	21	0.43	293	0.070	<20	1.18	0.009	0.20	<0.1	0.04	1.4	0.1	<0.05	7	<0.5	<0.2
C030	Soil	30	0.64	297	0.100	<20	2.24	0.009	0.10	<0.1	<0.01	3.0	0.1	<0.05	6	0.6	<0.2
C031	Soil	18	0.45	404	0.068	<20	1.51	0.009	0.07	<0.1	0.10	4.0	<0.1	<0.05	7	0.7	<0.2
C032	Soil	31	0.49	273	0.067	<20	1.92	0.010	0.06	<0.1	0.02	3.6	0.1	<0.05	6	0.8	<0.2
C033	Soil	33	0.44	306	0.055	<20	2.01	0.009	0.05	<0.1	0.03	2.8	0.1	<0.05	6	<0.5	<0.2
C034	Soil	24	0.44	399	0.049	<20	1.51	0.010	0.05	<0.1	0.16	3.1	<0.1	<0.05	5	0.8	<0.2
C035	Soil	25	0.28	259	0.048	<20	1.47	0.008	0.04	<0.1	0.03	2.1	<0.1	<0.05	6	0.5	<0.2
C036	Soil	30	0.41	187	0.050	<20	1.80	0.007	0.04	<0.1	0.07	2.3	0.1	<0.05	6	0.6	<0.2
C037	Soil	29	0.56	316	0.069	<20	1.52	0.019	0.09	0.1	0.03	4.0	<0.1	<0.05	5	0.9	<0.2
932880	Soil	147	1.39	84	0.070	<20	1.71	0.005	0.17	<0.1	0.02	4.9	0.4	<0.05	6	0.5	<0.2
932881	Soil	116	2.10	149	0.133	<20	2.44	0.007	0.47	<0.1	<0.01	5.4	0.7	<0.05	7	0.8	<0.2
932882	Soil	174	1.46	109	0.066	<20	1.59	0.005	0.11	<0.1	0.02	5.8	0.3	<0.05	4	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

		Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
		Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
		Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
		MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
932883	Soil		0.9	11.8	21.8	63	0.1	22.9	11.8	353	3.07	6.6	4.1	5.6	17	<0.1	0.2	0.2	61	0.21	0.023	13
932884	Soil		2.0	21.3	37.6	146	0.3	90.2	30.7	1636	5.05	11.5	3.7	9.2	31	<0.1	<0.1	0.6	112	0.84	0.054	21
932885	Soil		0.9	17.5	19.8	116	0.3	60.9	13.3	952	3.90	16.3	2.9	12.1	20	<0.1	<0.1	0.4	68	0.46	0.057	31
932886	Soil		1.2	36.1	40.1	129	0.3	47.1	21.4	725	3.96	15.5	7.6	9.9	13	0.1	0.1	1.0	58	0.27	0.043	28
932887	Soil		0.9	21.0	65.0	88	0.3	34.8	10.1	658	2.87	7.8	1.5	18.1	15	<0.1	0.1	0.9	51	0.21	0.027	67
932888	Soil		1.3	18.3	18.3	54	<0.1	37.1	12.7	350	2.45	6.1	3.0	2.0	12	<0.1	0.4	0.5	47	0.13	0.019	10
932889	Soil		0.6	37.9	32.2	58	0.6	63.6	15.9	443	2.51	4.7	2.8	8.2	21	<0.1	0.2	0.4	36	0.36	0.052	27
932890	Soil		0.6	47.7	24.2	76	0.2	11.1	16.5	749	4.20	6.4	6.1	7.2	9	0.2	0.2	0.6	54	0.18	0.017	11
932891	Soil		2.0	78.5	35.4	51	1.2	15.5	10.6	2026	3.54	6.5	14.9	12.0	22	<0.1	0.3	0.8	31	0.43	0.106	101
932892	Soil		1.4	12.2	25.1	31	<0.1	10.0	5.1	246	2.15	5.8	2.7	14.4	14	0.1	0.2	0.2	45	0.09	0.024	36
932893	Soil		1.3	14.0	44.0	37	<0.1	13.0	7.7	339	2.35	5.3	2.9	11.3	14	0.2	0.2	0.3	43	0.12	0.027	25
932894	Soil		1.6	11.3	30.9	30	0.3	9.5	3.3	147	2.04	4.3	1.8	9.6	17	<0.1	0.2	0.4	38	0.12	0.028	29
932895	Soil		1.2	18.6	38.6	47	<0.1	22.7	11.5	257	3.05	8.1	4.4	11.8	13	0.1	0.3	0.3	48	0.11	0.027	22
932896	Soil		1.4	14.3	38.0	39	0.1	14.0	7.0	208	2.82	7.7	3.3	5.2	14	0.1	0.3	0.2	69	0.12	0.025	14
932897	Soil		1.1	20.5	53.4	46	0.2	20.0	9.4	246	2.60	8.1	8.0	12.3	14	0.1	0.3	0.2	50	0.11	0.022	19
932898	Soil		2.8	21.6	233.0	31	0.1	9.6	3.1	104	1.78	6.4	7.6	8.1	17	0.1	0.3	0.4	30	0.11	0.030	31
932899	Soil		2.3	23.0	139.8	53	<0.1	28.0	10.9	406	2.71	8.8	11.0	11.4	15	0.3	0.6	0.3	48	0.15	0.025	16
933004	Soil		1.2	20.5	24.8	51	<0.1	21.2	8.7	330	2.57	7.3	5.8	14.2	17	0.2	0.3	0.3	59	0.20	0.036	28
933013	Soil		1.6	18.8	43.3	66	0.1	19.0	8.3	244	2.38	6.8	7.5	10.3	13	0.2	0.4	0.4	47	0.17	0.031	16
933016	Soil		1.0	22.2	121.1	168	0.2	12.0	8.2	281	3.32	11.8	4.4	5.1	12	0.2	0.4	0.6	50	0.18	0.038	9
933011	Soil		1.8	22.6	23.3	63	0.2	21.8	8.1	340	2.87	8.9	6.1	9.5	19	0.2	0.2	0.5	64	0.20	0.053	59
933007	Soil		1.3	22.5	21.9	56	<0.1	21.4	8.1	321	2.81	8.9	3.2	13.0	17	0.2	0.2	0.4	59	0.17	0.023	44
933015	Soil		1.9	15.4	61.9	67	0.1	9.9	11.9	591	2.20	7.0	5.2	4.9	13	0.3	0.6	0.6	51	0.14	0.034	18
933001	Soil		1.4	14.5	19.1	50	<0.1	16.3	7.6	356	2.52	6.8	3.7	13.0	12	0.1	0.3	0.3	55	0.14	0.029	27
933002	Soil		1.0	17.3	15.5	47	0.1	21.6	10.2	336	2.60	6.6	2.7	10.3	16	0.2	0.3	0.2	50	0.21	0.037	26
933003	Soil		0.6	5.3	8.5	24	<0.1	3.7	2.7	87	1.46	2.0	3.1	1.2	6	<0.1	0.1	0.3	42	0.05	0.010	5
933005	Soil		1.2	13.8	20.1	37	<0.1	14.4	5.9	248	1.82	4.4	6.5	8.7	13	0.1	0.3	0.4	40	0.17	0.039	30
933006	Soil		1.0	16.8	25.0	48	<0.1	19.7	8.8	294	2.46	6.0	2.4	12.0	13	0.2	0.3	0.4	53	0.19	0.033	37
933008	Soil		1.6	18.7	26.5	41	0.4	17.5	5.2	240	1.99	5.4	1.1	9.7	13	0.2	0.3	0.8	44	0.12	0.057	113
933009	Soil		1.0	14.6	17.8	40	<0.1	17.4	6.7	308	1.93	5.3	1.8	9.0	14	<0.1	0.2	0.3	45	0.17	0.026	38

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
932883	Soil	74	0.70	120	0.067	<20	1.78	0.009	0.12	<0.1	0.03	3.5	0.2	<0.05	6	0.6	<0.2
932884	Soil	412	5.13	424	0.220	<20	3.84	0.008	1.29	<0.1	0.02	13.0	1.0	0.24	13	1.0	<0.2
932885	Soil	244	3.42	187	0.112	<20	2.88	0.004	0.56	<0.1	0.02	8.2	0.4	0.09	9	1.3	<0.2
932886	Soil	195	2.54	139	0.041	<20	2.58	0.005	0.17	<0.1	<0.01	8.7	0.2	<0.05	7	0.8	0.2
932887	Soil	129	1.96	94	0.116	<20	2.21	0.011	0.48	<0.1	0.02	5.7	0.6	0.05	7	<0.5	<0.2
932888	Soil	66	0.98	65	0.058	<20	1.43	0.003	0.06	<0.1	0.01	2.5	0.2	<0.05	7	0.6	<0.2
932889	Soil	86	1.45	94	0.076	<20	1.79	0.006	0.17	<0.1	0.02	2.9	0.4	<0.05	5	0.6	<0.2
932890	Soil	13	0.37	178	0.017	<20	1.27	0.004	0.13	<0.1	<0.01	6.5	0.2	0.06	3	0.6	0.3
932891	Soil	19	0.24	256	0.013	<20	1.75	0.012	0.15	<0.1	0.14	7.0	0.2	0.16	4	1.9	0.3
932892	Soil	17	0.20	63	0.036	<20	1.13	0.004	0.07	<0.1	0.01	1.8	0.1	<0.05	4	0.7	<0.2
932893	Soil	20	0.28	139	0.039	<20	1.39	0.006	0.08	<0.1	0.02	2.1	0.1	<0.05	5	0.7	<0.2
932894	Soil	17	0.20	193	0.046	<20	0.85	0.004	0.08	<0.1	0.04	1.5	0.1	<0.05	4	0.5	<0.2
932895	Soil	32	0.39	155	0.039	<20	2.84	0.006	0.08	<0.1	0.02	2.8	0.1	<0.05	5	0.8	<0.2
932896	Soil	27	0.30	133	0.051	<20	2.17	0.006	0.05	<0.1	0.05	2.7	0.2	<0.05	7	0.9	0.2
932897	Soil	20	0.41	170	0.049	<20	2.39	0.008	0.06	<0.1	0.07	3.0	0.1	<0.05	5	<0.5	<0.2
932898	Soil	17	0.26	136	0.018	<20	1.36	0.004	0.09	<0.1	0.03	1.4	0.1	<0.05	4	0.8	<0.2
932899	Soil	38	0.44	212	0.039	<20	2.21	0.008	0.10	<0.1	0.04	2.8	0.1	<0.05	5	0.6	<0.2
933004	Soil	30	0.40	163	0.072	<20	2.04	0.009	0.06	<0.1	<0.01	3.0	0.1	0.06	5	0.6	<0.2
933013	Soil	27	0.38	156	0.053	<20	2.25	0.007	0.08	<0.1	0.04	2.6	0.1	<0.05	5	<0.5	<0.2
933016	Soil	18	0.61	89	0.023	<20	1.61	0.005	0.07	<0.1	0.05	3.7	0.2	<0.05	4	1.1	<0.2
933011	Soil	33	0.49	271	0.054	<20	2.31	0.011	0.09	<0.1	0.02	4.0	0.1	0.08	7	0.9	<0.2
933007	Soil	33	0.51	202	0.060	<20	2.44	0.008	0.08	<0.1	0.02	3.8	0.2	0.06	6	0.7	<0.2
933015	Soil	23	0.28	123	0.047	<20	1.42	0.004	0.07	<0.1	0.03	2.1	0.1	0.08	5	<0.5	<0.2
933001	Soil	27	0.35	125	0.054	<20	1.77	0.005	0.07	<0.1	0.03	2.7	0.1	0.07	6	0.9	<0.2
933002	Soil	29	0.43	143	0.068	<20	1.87	0.009	0.06	0.1	0.05	2.6	<0.1	<0.05	4	<0.5	<0.2
933003	Soil	9	0.09	37	0.058	<20	0.48	0.011	0.03	<0.1	0.01	0.7	<0.1	<0.05	4	<0.5	<0.2
933005	Soil	21	0.33	83	0.058	<20	1.08	0.007	0.07	<0.1	0.03	1.8	<0.1	<0.05	3	<0.5	<0.2
933006	Soil	29	0.44	114	0.070	<20	1.70	0.008	0.08	<0.1	0.04	2.6	<0.1	<0.05	4	<0.5	<0.2
933008	Soil	24	0.26	233	0.039	<20	1.63	0.010	0.08	<0.1	0.03	3.2	<0.1	<0.05	5	<0.5	<0.2
933009	Soil	27	0.35	137	0.055	<20	1.29	0.007	0.06	<0.1	0.02	2.2	<0.1	<0.05	4	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
933010	Soil	1.6	25.2	30.0	51	0.3	21.5	10.0	350	3.03	8.2	5.5	4.6	23	0.1	0.3	0.6	57	0.20	0.059	84
933012	Soil	1.1	6.2	10.4	24	<0.1	6.8	3.3	114	1.83	4.4	2.8	2.3	9	<0.1	0.2	0.2	48	0.07	0.018	6
933014	Soil	1.1	17.4	57.2	54	0.2	14.3	7.5	137	1.87	5.0	2.2	15.0	16	0.2	0.6	0.5	41	0.19	0.029	43
933017	Soil	0.8	33.6	23.0	76	0.2	11.7	9.4	395	3.49	6.8	2.7	2.7	19	0.2	0.5	0.4	57	0.50	0.053	13
933141	Soil	0.5	23.3	13.4	44	<0.1	19.2	11.7	658	2.22	3.5	1.6	5.7	22	<0.1	0.2	0.2	32	0.38	0.044	19
933142	Soil	1.3	9.2	5.6	35	<0.1	13.1	7.7	169	2.78	8.2	<0.5	3.1	24	<0.1	0.2	<0.1	31	0.35	0.078	9
933144	Soil	0.7	92.0	9.1	65	0.1	25.7	21.9	547	4.64	6.5	0.6	1.0	18	<0.1	0.2	0.1	114	0.24	0.034	3
933145	Soil	0.9	50.0	18.2	86	0.2	20.1	19.1	609	3.79	10.7	1.0	2.7	18	<0.1	0.2	0.2	74	0.31	0.055	6
933146	Soil	0.5	9.9	29.9	77	<0.1	26.7	12.7	867	2.56	2.5	1.1	8.5	21	<0.1	0.2	0.4	42	0.35	0.060	17
933147	Soil	0.8	9.6	19.1	87	0.1	19.2	8.5	307	2.54	4.2	1.1	6.3	25	0.1	0.3	0.5	46	0.51	0.063	12
933148	Soil	1.5	14.6	21.3	46	0.1	16.6	6.1	214	2.12	4.8	3.9	11.4	11	0.2	0.4	0.4	52	0.13	0.033	41
933149	Soil	1.6	21.6	67.5	83	0.1	18.0	9.0	810	2.42	5.7	5.6	24.1	18	0.3	0.9	0.9	47	0.21	0.044	118
933150	Soil	1.6	17.0	24.9	70	0.2	22.5	7.7	188	2.20	4.9	3.3	12.9	17	0.1	0.5	0.9	42	0.30	0.043	43
SQ039	Soil	3.4	45.7	16.3	110	0.4	41.8	11.3	424	2.70	11.3	4.3	3.6	60	0.7	0.4	0.2	47	0.83	0.055	16
SQ040	Soil	3.2	36.3	29.2	96	0.3	36.9	11.4	713	2.43	8.2	4.1	2.8	54	0.6	0.3	0.2	46	1.05	0.049	12
SQ041	Soil	4.4	70.3	152.3	263	0.3	55.5	14.0	543	3.45	30.2	4.5	7.7	34	0.8	0.3	0.3	58	0.56	0.043	25
SQ042	Soil	1.6	63.9	179.9	405	0.5	38.8	11.0	507	2.71	6.6	2.7	6.6	44	1.2	0.3	0.4	46	0.87	0.039	20
SQ043	Soil	5.3	69.7	50.4	117	0.3	94.3	20.8	708	3.94	19.1	0.7	7.7	29	0.6	0.3	0.3	67	0.66	0.053	26
SQ044	Soil	7.7	55.1	58.7	121	0.2	58.9	14.2	634	3.44	7.0	2.0	10.2	31	0.6	0.3	0.3	56	0.52	0.050	25
SQ045	Soil	1.8	39.3	34.7	69	0.1	47.7	15.2	414	3.31	5.4	177.4	5.4	33	0.2	0.2	0.3	69	0.54	0.023	17
SQ046	Soil	2.1	46.3	33.6	59	0.1	51.2	15.3	435	3.42	6.6	2.1	6.6	32	0.1	0.2	0.3	71	0.48	0.020	20
SQ047	Soil	1.5	38.1	21.2	46	0.2	38.1	12.3	372	2.98	6.2	2.5	6.2	22	<0.1	0.2	0.2	63	0.32	0.034	23
SQ048	Soil	10.7	55.2	34.1	116	0.2	55.9	14.8	335	3.27	4.1	2.2	7.7	13	0.5	0.3	0.3	48	0.17	0.054	23
SQ049	Soil	4.8	48.3	22.5	80	0.3	43.8	13.9	470	2.87	5.2	2.6	9.1	21	0.3	0.3	0.2	53	0.27	0.049	36
SQ050	Soil	1.1	17.6	35.8	54	0.1	18.5	8.1	385	2.21	2.8	2.4	19.9	24	0.1	0.1	0.3	31	0.36	0.024	47
SQ055	Soil	3.2	32.1	17.9	83	0.3	28.3	15.8	1399	3.04	6.6	2.2	3.9	32	0.4	0.2	0.2	45	0.61	0.057	22
SQ066	Soil	1.2	22.0	12.8	47	<0.1	22.1	8.5	234	2.44	7.0	3.6	4.5	32	0.2	0.3	0.2	54	0.43	0.044	13
SQ068	Soil	1.7	29.7	12.0	52	0.1	31.8	10.2	395	2.54	7.0	3.2	4.1	39	0.1	0.4	0.2	55	0.55	0.046	15
SQ058	Soil	3.5	43.6	31.4	98	0.2	23.8	11.4	334	4.58	20.0	3.8	14.3	20	0.3	0.3	0.4	63	0.30	0.055	34
SQE005	Soil	0.9	5.1	5.3	76	<0.1	10.0	19.2	767	2.56	10.5	178.0	2.4	17	0.1	0.1	<0.1	40	0.67	0.153	8

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
933010	Soil	33	0.38	293	0.044	<20	2.31	0.010	0.08	<0.1	0.06	3.2	0.1	<0.05	6	<0.5	<0.2
933012	Soil	14	0.15	79	0.052	<20	0.98	0.012	0.03	<0.1	0.02	1.2	<0.1	<0.05	5	<0.5	<0.2
933014	Soil	25	0.33	140	0.055	<20	1.41	0.008	0.07	<0.1	0.06	3.1	<0.1	<0.05	4	<0.5	<0.2
933017	Soil	14	0.49	132	0.019	<20	1.28	0.004	0.09	<0.1	0.05	4.7	0.1	<0.05	4	0.6	<0.2
933141	Soil	27	0.78	146	0.086	<20	1.54	0.009	0.20	<0.1	0.06	3.0	0.2	<0.05	5	0.7	<0.2
933142	Soil	15	0.75	102	0.094	<20	1.27	0.004	0.15	<0.1	0.01	1.2	0.2	<0.05	4	<0.5	<0.2
933144	Soil	31	1.93	150	0.183	<20	2.50	0.005	0.78	<0.1	0.01	3.2	0.4	<0.05	7	0.5	<0.2
933145	Soil	34	1.52	114	0.124	<20	2.13	0.005	0.42	<0.1	0.03	3.4	0.4	<0.05	7	<0.5	<0.2
933146	Soil	50	1.20	132	0.081	<20	1.89	0.007	0.18	<0.1	0.03	3.0	0.3	<0.05	6	<0.5	<0.2
933147	Soil	38	1.13	116	0.102	<20	1.75	0.012	0.24	<0.1	0.03	2.5	0.2	<0.05	6	<0.5	<0.2
933148	Soil	25	0.30	69	0.066	<20	1.33	0.006	0.05	<0.1	0.02	2.1	<0.1	<0.05	4	<0.5	<0.2
933149	Soil	25	0.44	145	0.065	<20	1.40	0.010	0.09	<0.1	0.06	3.2	<0.1	<0.05	3	<0.5	<0.2
933150	Soil	40	0.69	128	0.074	<20	1.52	0.010	0.14	<0.1	0.06	2.9	0.2	<0.05	4	<0.5	<0.2
SQ039	Soil	32	0.51	550	0.042	<20	1.45	0.018	0.05	0.1	0.07	3.8	<0.1	<0.05	4	2.0	<0.2
SQ040	Soil	38	0.62	543	0.048	<20	1.35	0.018	0.06	<0.1	0.04	3.1	<0.1	<0.05	4	2.1	<0.2
SQ041	Soil	62	0.99	253	0.069	<20	2.07	0.015	0.11	0.2	0.09	6.1	0.2	<0.05	5	0.9	<0.2
SQ042	Soil	52	0.88	210	0.052	<20	1.80	0.013	0.10	<0.1	0.09	4.4	0.2	<0.05	5	1.1	<0.2
SQ043	Soil	100	1.55	139	0.045	<20	2.14	0.011	0.08	<0.1	0.03	6.4	0.2	<0.05	6	1.1	<0.2
SQ044	Soil	51	0.74	185	0.044	<20	1.69	0.017	0.07	<0.1	0.03	4.6	0.1	<0.05	5	1.2	<0.2
SQ045	Soil	72	1.18	204	0.067	<20	2.40	0.018	0.07	<0.1	0.02	5.8	0.1	<0.05	7	<0.5	<0.2
SQ046	Soil	77	1.16	176	0.084	<20	2.37	0.013	0.08	<0.1	0.02	6.0	0.2	<0.05	7	<0.5	<0.2
SQ047	Soil	51	0.89	228	0.047	<20	2.06	0.010	0.05	<0.1	0.03	5.5	<0.1	<0.05	6	<0.5	<0.2
SQ048	Soil	27	0.47	105	0.018	<20	1.34	0.006	0.07	<0.1	0.03	3.0	0.1	<0.05	5	2.1	<0.2
SQ049	Soil	41	0.71	254	0.043	<20	1.75	0.011	0.06	<0.1	0.03	4.7	0.1	<0.05	5	0.7	<0.2
SQ050	Soil	21	0.58	149	0.040	<20	1.40	0.010	0.14	<0.1	0.02	2.5	0.2	<0.05	4	<0.5	<0.2
SQ055	Soil	28	0.80	323	0.021	<20	1.53	0.010	0.05	0.1	0.04	3.4	0.1	<0.05	4	0.9	<0.2
SQ066	Soil	34	0.43	213	0.073	<20	1.67	0.017	0.04	<0.1	0.04	3.7	<0.1	<0.05	5	<0.5	<0.2
SQ068	Soil	44	0.51	280	0.085	<20	1.72	0.024	0.05	0.1	0.04	4.4	<0.1	<0.05	5	<0.5	<0.2
SQ058	Soil	29	1.21	221	0.033	<20	2.00	0.007	0.07	<0.1	0.05	4.5	0.2	<0.05	5	2.3	<0.2
SQE005	Soil	9	2.21	133	0.045	<20	1.99	0.005	0.07	0.2	<0.01	2.5	<0.1	<0.05	5	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
SQE008	Soil	3.1	34.9	15.8	81	0.2	30.6	11.1	368	2.79	8.5	1.7	4.1	34	0.4	0.4	0.3	51	0.44	0.064	14
SQE003	Soil	1.2	23.5	11.5	69	<0.1	22.6	13.3	319	2.43	5.1	6.8	2.0	27	0.2	0.2	0.2	44	0.58	0.082	13
SQE004	Soil	0.7	17.8	12.6	68	<0.1	18.9	10.5	300	2.22	4.4	3.1	2.6	23	0.1	0.2	0.2	48	0.52	0.074	11
SQE002	Soil	2.3	18.0	11.5	64	<0.1	28.5	16.0	1256	2.34	4.5	2.0	1.3	26	0.1	0.2	0.2	40	0.53	0.093	8
SQE009	Soil	2.1	33.6	14.0	74	<0.1	28.6	13.2	448	2.85	4.7	2.1	6.8	24	0.2	0.2	0.2	46	0.38	0.057	18
SQE01	Soil	3.2	51.4	17.0	107	0.2	38.8	12.4	471	3.01	5.1	2.2	6.7	27	0.3	0.2	0.3	46	0.70	0.065	24
SQE001	Soil	1.8	29.7	15.2	70	0.2	28.4	11.4	267	2.52	6.3	2.0	2.3	25	<0.1	0.2	0.2	48	0.46	0.067	11
SQ062	Soil	0.7	19.1	8.2	51	<0.1	17.1	9.0	264	2.08	4.8	1.1	3.1	34	0.2	0.3	0.2	44	0.48	0.061	11
SQ065	Soil	1.3	30.3	12.9	51	0.1	24.7	9.4	334	2.50	7.4	1.2	5.2	38	0.1	0.3	0.3	52	0.47	0.045	17
SQ069	Soil	1.3	30.6	11.0	55	<0.1	26.5	9.6	386	2.55	7.5	2.9	4.4	38	0.2	0.4	0.3	53	0.54	0.051	15
SQ070	Soil	1.4	21.7	10.4	55	<0.1	23.9	8.2	270	2.60	7.6	1.7	4.1	38	0.1	0.3	0.2	56	0.48	0.047	12
SQE012	Soil	0.8	23.1	12.7	64	<0.1	38.7	12.7	584	2.59	7.5	1.4	3.4	39	<0.1	0.3	0.2	47	0.55	0.062	17
SQE032	Soil	1.1	27.7	15.5	60	0.1	22.5	11.7	417	2.91	8.0	3.4	4.2	48	0.2	0.3	0.3	51	0.70	0.047	17
SQE006	Soil	1.0	10.3	9.9	70	<0.1	13.6	12.6	917	2.44	10.3	1.6	2.2	25	0.2	0.2	0.1	46	0.67	0.146	10
SQE041	Soil	0.7	31.3	12.0	51	0.1	23.3	8.0	215	2.63	5.1	2.7	3.3	42	0.1	0.1	0.3	49	0.38	0.052	21
SQE010	Soil	4.6	58.2	24.2	129	0.3	48.2	12.9	453	3.18	4.5	0.9	10.0	17	0.6	0.2	0.3	51	0.52	0.059	28
SQE018	Soil	1.4	35.4	12.4	58	0.1	28.7	11.6	404	2.88	11.0	3.0	3.8	43	0.1	0.4	0.3	55	0.62	0.058	16
SQE034	Soil	1.0	17.4	13.6	56	<0.1	20.6	8.9	260	2.55	5.5	1.1	5.4	37	<0.1	0.1	0.3	60	0.32	0.043	16
SQE027	Soil	1.9	36.3	20.1	68	0.2	28.6	11.8	371	3.18	7.5	2.6	7.8	37	<0.1	0.2	0.7	47	0.53	0.043	24
SQE029	Soil	0.9	25.5	16.8	59	<0.1	18.3	11.1	328	3.05	4.1	1.6	5.1	26	<0.1	0.1	0.5	52	0.41	0.044	19
SQE007	Soil	1.4	27.9	12.2	72	0.1	25.6	11.6	431	2.52	9.1	1.2	2.7	46	0.2	0.4	0.2	53	0.72	0.072	14
SQE044	Soil	1.0	31.8	14.7	58	0.1	27.7	10.1	395	2.88	6.9	2.8	5.5	40	0.2	0.2	0.3	57	0.42	0.052	32
SQE042	Soil	0.5	26.2	10.6	46	0.1	19.7	6.2	154	2.46	5.6	2.5	2.9	38	<0.1	0.2	0.2	48	0.38	0.048	20
SQE043	Soil	0.7	25.9	11.6	51	0.2	22.0	7.4	191	2.74	5.8	2.1	3.7	38	0.1	0.2	0.2	56	0.38	0.048	23
SQE024	Soil	1.1	25.3	10.8	58	<0.1	25.4	10.2	274	2.96	4.1	0.7	10.8	24	<0.1	0.1	0.3	34	0.29	0.031	32
SQE025	Soil	1.6	32.4	13.0	52	0.1	22.4	11.9	486	2.75	6.9	1.6	4.9	46	0.2	0.2	0.3	44	0.63	0.045	20
SQE026	Soil	1.3	23.7	12.6	55	<0.1	20.5	8.9	326	2.70	6.6	3.1	7.5	25	<0.1	0.2	0.3	47	0.36	0.029	22
SQE013	Soil	1.3	40.0	11.4	77	0.1	32.7	11.7	436	3.08	10.2	3.1	5.1	48	0.3	0.5	0.3	63	0.92	0.076	16
SQE030	Soil	2.2	31.6	19.0	62	0.1	25.6	12.3	754	3.05	6.0	1.5	4.2	33	0.1	0.2	0.3	51	0.49	0.053	17
933074	Soil	1.2	16.0	23.6	49	0.2	15.9	6.1	227	2.22	5.1	0.6	11.3	12	0.2	0.4	0.5	53	0.14	0.034	43

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
SQE008	Soil	36	0.50	246	0.076	<20	1.61	0.018	0.06	0.2	0.02	3.6	<0.1	<0.05	5	1.0	<0.2
SQE003	Soil	26	0.92	288	0.044	<20	1.54	0.012	0.04	0.1	0.03	2.9	<0.1	<0.05	4	0.5	<0.2
SQE004	Soil	25	0.92	203	0.052	<20	1.66	0.012	0.04	0.1	0.04	3.2	<0.1	<0.05	5	<0.5	<0.2
SQE002	Soil	36	1.18	205	0.039	<20	1.47	0.010	0.04	0.1	0.03	2.5	<0.1	<0.05	4	<0.5	<0.2
SQE009	Soil	33	0.86	214	0.060	<20	1.81	0.012	0.09	<0.1	0.02	4.4	<0.1	<0.05	5	<0.5	<0.2
SQE01	Soil	41	0.97	203	0.046	<20	1.77	0.014	0.10	<0.1	0.02	4.9	<0.1	<0.05	5	1.2	<0.2
SQE001	Soil	34	1.07	230	0.047	<20	1.84	0.011	0.03	0.1	0.03	2.9	<0.1	<0.05	4	<0.5	<0.2
SQ062	Soil	26	0.46	201	0.084	<20	1.44	0.027	0.05	0.1	0.04	3.4	<0.1	<0.05	4	<0.5	<0.2
SQ065	Soil	35	0.45	265	0.090	<20	1.72	0.022	0.05	<0.1	0.04	4.5	<0.1	<0.05	5	<0.5	<0.2
SQ069	Soil	36	0.51	273	0.087	<20	1.72	0.028	0.06	0.1	0.03	4.4	<0.1	<0.05	5	<0.5	<0.2
SQ070	Soil	36	0.54	241	0.093	<20	1.61	0.023	0.06	<0.1	0.02	3.9	<0.1	<0.05	5	<0.5	<0.2
SQE012	Soil	33	0.64	232	0.068	<20	1.39	0.023	0.06	0.1	0.03	3.9	<0.1	<0.05	4	<0.5	<0.2
SQE032	Soil	31	0.57	275	0.051	<20	1.74	0.018	0.06	<0.1	0.03	4.4	<0.1	<0.05	5	<0.5	<0.2
SQE006	Soil	17	1.27	190	0.049	<20	1.72	0.012	0.05	0.2	0.03	3.0	<0.1	<0.05	4	0.5	<0.2
SQE041	Soil	40	0.37	264	0.037	<20	2.25	0.013	0.05	<0.1	0.08	5.0	<0.1	<0.05	7	<0.5	<0.2
SQE010	Soil	47	1.02	178	0.045	<20	1.98	0.012	0.11	<0.1	0.02	5.0	<0.1	<0.05	5	1.9	<0.2
SQE018	Soil	33	0.51	259	0.063	<20	1.60	0.020	0.05	0.2	0.04	4.7	<0.1	<0.05	4	<0.5	<0.2
SQE034	Soil	36	0.56	341	0.060	<20	2.16	0.012	0.09	<0.1	0.02	4.3	0.2	<0.05	6	<0.5	<0.2
SQE027	Soil	32	0.52	306	0.044	<20	1.57	0.015	0.07	<0.1	0.03	5.5	0.1	<0.05	4	<0.5	<0.2
SQE029	Soil	29	0.75	273	0.040	<20	1.87	0.012	0.06	<0.1	0.02	4.6	<0.1	<0.05	5	0.6	<0.2
SQE007	Soil	29	0.59	263	0.074	<20	1.41	0.030	0.06	0.1	0.03	3.6	<0.1	<0.05	4	<0.5	<0.2
SQE044	Soil	41	0.51	291	0.062	<20	2.41	0.017	0.05	<0.1	0.05	5.6	<0.1	<0.05	7	<0.5	<0.2
SQE042	Soil	34	0.40	238	0.054	<20	2.20	0.015	0.04	<0.1	0.07	4.5	<0.1	<0.05	6	<0.5	<0.2
SQE043	Soil	30	0.47	289	0.067	<20	2.18	0.017	0.04	<0.1	0.05	4.8	<0.1	<0.05	7	0.5	<0.2
SQE024	Soil	22	0.37	149	0.022	<20	1.01	0.009	0.05	<0.1	0.01	3.4	<0.1	<0.05	3	<0.5	<0.2
SQE025	Soil	27	0.52	293	0.034	<20	1.44	0.015	0.06	<0.1	0.03	4.1	<0.1	<0.05	4	<0.5	<0.2
SQE026	Soil	29	0.47	247	0.044	<20	1.44	0.013	0.05	<0.1	<0.01	3.7	<0.1	<0.05	4	<0.5	<0.2
SQE013	Soil	36	0.63	258	0.112	<20	1.61	0.037	0.11	0.1	0.02	5.3	<0.1	<0.05	5	<0.5	<0.2
SQE030	Soil	41	0.65	275	0.041	<20	1.71	0.017	0.06	<0.1	0.02	4.7	<0.1	<0.05	5	<0.5	<0.2
933074	Soil	25	0.31	77	0.073	<20	1.33	0.008	0.06	<0.1	0.07	2.4	<0.1	<0.05	5	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
935051	Soil	1.1	10.9	24.4	62	0.2	9.2	3.4	148	1.87	4.7	<0.5	3.3	10	0.4	0.1	0.4	42	0.11	0.022	8
935052	Soil	0.6	6.6	7.6	26	<0.1	5.9	2.7	95	1.36	2.4	<0.5	0.9	6	0.1	<0.1	0.1	37	0.05	0.012	4
935053	Soil	1.3	15.7	17.0	53	<0.1	15.4	6.4	231	2.73	7.5	<0.5	2.6	14	0.2	0.3	0.3	68	0.13	0.030	8
935054	Soil	0.8	28.7	16.0	63	<0.1	22.7	9.5	316	2.40	6.5	1.2	10.2	29	0.1	0.3	0.2	59	0.36	0.036	27
935055	Soil	0.9	19.4	26.1	56	0.1	15.0	8.5	257	2.23	5.3	7.5	8.5	20	0.2	0.2	0.4	48	0.24	0.048	60
935056	Soil	0.5	11.4	19.5	54	0.1	13.8	5.4	133	1.88	3.9	<0.5	3.9	17	0.1	0.2	0.3	46	0.21	0.036	20
935057	Soil	1.1	17.3	17.4	59	<0.1	15.6	8.6	284	2.44	7.1	2.2	4.1	22	<0.1	0.2	0.7	60	0.20	0.024	23
935058	Soil	0.5	6.4	6.7	23	<0.1	3.3	1.8	68	0.80	2.1	2.0	0.5	7	0.1	0.1	0.2	25	0.06	0.016	5
935059	Soil	0.4	10.5	11.5	19	<0.1	3.9	1.4	54	0.62	1.4	1.1	0.3	10	0.2	0.1	0.3	18	0.06	0.016	13
935060	Soil	0.7	29.2	16.2	53	<0.1	63.0	13.5	879	2.15	5.5	1.6	2.5	63	0.4	0.1	0.3	45	0.66	0.059	24
935061	Soil	0.4	19.2	14.9	51	<0.1	30.5	8.0	282	1.76	5.0	2.9	3.0	57	0.2	0.2	0.3	43	0.81	0.052	15
932705	Soil	8.2	9.1	44.2	65	0.2	8.3	3.1	121	1.43	4.8	1.2	15.9	14	<0.1	0.3	0.4	35	0.22	0.022	28
932711	Soil	9.9	13.4	36.7	50	0.3	12.3	5.6	218	1.95	6.3	4.6	8.2	16	0.1	0.3	0.3	41	0.19	0.027	16
932715	Soil	1.9	5.9	26.1	34	<0.1	9.0	2.8	123	1.18	3.5	2.4	7.5	12	<0.1	0.1	0.2	26	0.12	0.018	9
932716	Soil	4.9	7.6	38.8	34	<0.1	22.7	4.1	148	1.40	4.0	1.3	7.9	11	<0.1	0.2	0.1	36	0.12	0.012	13
932717	Soil	2.1	6.3	18.6	23	<0.1	7.8	3.0	84	1.25	3.0	1.7	5.1	10	<0.1	0.1	0.1	34	0.09	0.009	5
932718	Soil	5.6	11.8	55.3	53	0.2	22.5	4.4	152	1.86	6.6	2.3	12.4	20	<0.1	0.2	0.5	40	0.17	0.019	54
932719	Soil	1.4	5.8	12.7	39	0.2	6.5	2.6	196	1.13	2.3	0.6	2.1	13	<0.1	0.1	0.2	35	0.11	0.009	6
932720	Soil	3.0	6.8	43.0	25	0.1	13.4	1.9	76	0.75	2.6	1.1	15.1	13	<0.1	<0.1	<0.1	17	0.15	0.014	49
932721	Soil	1.5	10.5	19.6	50	0.1	11.0	4.5	136	1.95	5.3	3.1	5.1	10	<0.1	0.1	0.1	50	0.10	0.017	6
932722	Soil	2.6	13.2	42.2	63	0.2	18.3	6.7	294	1.74	5.0	1.4	11.0	21	0.3	0.1	0.3	41	0.27	0.038	67
932760	Soil	1.2	14.2	53.0	69	0.2	17.5	7.8	243	2.11	7.3	1.7	12.7	16	0.2	0.2	0.2	46	0.29	0.039	16
932761	Soil	1.6	14.6	24.9	58	0.2	12.8	4.0	286	1.60	3.8	3.8	1.4	12	0.4	0.2	0.2	39	0.13	0.036	9
932762	Soil	0.5	5.3	14.6	36	0.1	4.3	1.7	78	0.91	2.2	1.3	0.7	8	0.2	<0.1	0.1	23	0.07	0.022	8
932763	Soil	1.1	10.6	19.9	53	<0.1	11.9	4.8	161	2.39	6.8	1.6	7.2	12	0.4	0.2	0.2	55	0.12	0.017	7
932764	Soil	1.2	19.8	75.9	71	0.3	14.9	6.1	354	2.73	8.1	4.7	18.6	13	1.4	<0.1	0.5	59	0.15	0.035	95
932751	Soil	4.2	17.0	34.5	61	0.4	20.2	8.3	224	2.80	10.7	8.4	7.6	25	0.1	0.2	0.2	67	0.27	0.025	13
932752	Soil	3.3	18.3	48.7	73	0.1	19.7	7.8	283	2.53	8.3	1.1	14.4	24	0.1	0.1	0.1	65	0.23	0.021	28
932753	Soil	4.4	16.3	21.8	100	0.2	16.1	7.3	432	2.98	8.8	0.8	2.7	25	0.4	0.2	0.2	77	0.24	0.027	9
932754	Soil	3.6	26.7	32.4	61	0.4	27.7	12.3	308	3.25	11.2	2.6	9.8	30	0.2	0.2	0.2	78	0.28	0.023	24

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
935051	Soil	16	0.20	65	0.025	<20	1.74	0.015	0.05	<0.1	0.04	1.4	0.3	<0.05	7	<0.5	<0.2
935052	Soil	10	0.13	44	0.046	<20	0.75	0.015	0.02	<0.1	<0.01	1.0	<0.1	<0.05	4	<0.5	<0.2
935053	Soil	24	0.31	113	0.065	<20	2.03	0.015	0.04	<0.1	0.03	2.1	0.1	<0.05	7	<0.5	<0.2
935054	Soil	31	0.49	213	0.096	<20	1.47	0.023	0.07	0.1	0.03	4.5	<0.1	<0.05	5	<0.5	<0.2
935055	Soil	26	0.36	162	0.058	<20	1.84	0.016	0.06	0.3	0.04	4.0	0.2	<0.05	6	1.7	<0.2
935056	Soil	26	0.38	111	0.060	<20	1.58	0.014	0.06	0.2	0.04	2.6	0.1	<0.05	6	<0.5	<0.2
935057	Soil	32	0.39	156	0.046	<20	2.11	0.013	0.05	<0.1	0.03	3.3	0.2	<0.05	6	1.2	<0.2
935058	Soil	6	0.07	36	0.038	<20	0.38	0.016	0.03	<0.1	0.03	0.6	<0.1	<0.05	3	0.9	<0.2
935059	Soil	7	0.04	36	0.018	<20	0.47	0.016	0.04	<0.1	0.03	0.6	0.1	<0.05	3	1.1	<0.2
935060	Soil	69	0.58	360	0.016	<20	1.77	0.016	0.15	<0.1	0.05	4.1	0.2	<0.05	5	0.9	<0.2
935061	Soil	39	0.43	243	0.040	<20	1.27	0.021	0.09	0.1	0.06	3.2	0.1	0.06	4	0.5	<0.2
932705	Soil	16	0.23	46	0.073	<20	0.68	0.009	0.11	0.2	0.02	1.5	0.2	<0.05	3	1.3	<0.2
932711	Soil	20	0.34	75	0.060	<20	0.98	0.010	0.13	0.2	0.02	1.9	0.2	0.07	4	1.0	<0.2
932715	Soil	15	0.20	43	0.026	<20	0.82	0.009	0.10	0.1	0.03	1.0	<0.1	<0.05	3	<0.5	<0.2
932716	Soil	40	0.27	50	0.049	<20	0.88	0.009	0.09	0.1	0.02	1.2	<0.1	<0.05	3	0.9	<0.2
932717	Soil	14	0.19	50	0.045	<20	0.81	0.010	0.06	<0.1	0.02	1.0	<0.1	<0.05	3	1.3	<0.2
932718	Soil	41	0.30	87	0.036	<20	1.36	0.013	0.14	<0.1	0.03	2.0	0.2	<0.05	5	1.4	<0.2
932719	Soil	10	0.12	95	0.047	<20	0.57	0.016	0.04	<0.1	0.02	0.8	<0.1	<0.05	4	0.8	<0.2
932720	Soil	25	0.15	34	0.018	<20	0.59	0.007	0.12	0.1	0.02	1.0	<0.1	<0.05	2	1.3	<0.2
932721	Soil	10	0.27	61	0.021	<20	1.52	0.010	0.05	<0.1	0.03	1.7	<0.1	<0.05	5	0.7	<0.2
932722	Soil	31	0.33	94	0.048	<20	1.19	0.017	0.14	0.1	0.04	2.1	0.2	0.06	5	1.3	<0.2
932760	Soil	25	0.39	96	0.029	<20	2.04	0.013	0.10	0.2	0.06	2.4	0.2	<0.05	5	1.6	<0.2
932761	Soil	19	0.21	78	0.022	<20	1.09	0.014	0.05	<0.1	0.07	1.0	0.1	<0.05	5	1.0	<0.2
932762	Soil	8	0.09	48	0.015	<20	0.63	0.014	0.04	<0.1	0.02	0.6	0.1	<0.05	4	0.7	<0.2
932763	Soil	20	0.30	77	0.036	<20	1.49	0.008	0.07	<0.1	0.02	1.8	0.1	<0.05	7	0.8	<0.2
932764	Soil	27	0.31	115	0.015	<20	2.72	0.011	0.11	0.1	0.05	2.7	0.3	<0.05	10	1.9	<0.2
932751	Soil	32	0.49	133	0.062	<20	1.99	0.011	0.08	<0.1	0.02	2.7	0.1	<0.05	6	0.9	<0.2
932752	Soil	34	0.50	158	0.050	<20	2.07	0.012	0.06	<0.1	0.02	3.0	0.2	<0.05	7	1.3	<0.2
932753	Soil	28	0.38	229	0.061	<20	1.79	0.011	0.06	<0.1	0.02	2.6	0.1	<0.05	8	0.8	<0.2
932754	Soil	42	0.58	248	0.082	<20	2.95	0.015	0.08	<0.1	0.04	4.6	0.1	<0.05	7	0.6	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
932755	Soil	2.5	19.0	22.5	77	0.6	18.4	8.0	312	2.85	10.6	2.0	2.5	12	0.5	0.3	0.2	66	0.11	0.039	12
932756	Soil	3.3	8.3	21.4	30	0.3	5.0	2.1	87	1.16	3.7	1.8	2.5	8	<0.1	0.1	0.3	27	0.07	0.018	7
932757	Soil	1.7	12.8	21.7	60	0.2	14.0	5.8	245	2.29	5.5	1.5	5.6	19	0.2	0.2	0.3	57	0.18	0.013	10
932775	Soil	0.8	16.8	37.3	39	0.2	13.3	6.1	128	2.84	7.4	1.5	13.1	12	0.2	0.3	0.2	60	0.12	0.039	19
932777	Soil	1.2	13.2	15.5	63	0.3	15.5	6.9	180	2.87	7.5	1.4	5.1	14	0.3	0.2	0.2	70	0.12	0.021	7
933079	Soil	1.3	65.6	68.5	166	0.8	16.3	10.0	400	2.74	10.8	1.7	12.1	20	0.3	0.2	1.0	47	0.21	0.035	25
933084	Soil	0.9	44.8	20.6	69	0.2	9.1	10.8	654	2.71	7.5	1.2	0.5	16	0.2	0.2	0.2	51	0.26	0.030	5
932703	Soil	1.8	24.2	36.2	90	0.3	28.8	8.5	275	2.35	8.7	4.3	9.5	29	0.2	0.4	0.2	51	0.34	0.039	24
CHO38	Soil	0.9	44.8	7.8	74	0.2	27.2	14.6	441	3.28	6.8	3.7	4.0	51	<0.1	0.3	0.2	72	0.73	0.047	24
SQE045	Soil	1.7	45.9	12.2	57	0.2	19.0	12.0	864	2.81	11.4	4.0	1.4	116	0.1	0.1	0.2	44	1.00	0.052	13
SQE046	Soil	1.7	21.0	24.3	69	0.1	22.5	16.4	721	3.83	6.3	3.0	9.6	77	0.1	0.1	0.4	71	0.78	0.121	31
SQE047	Soil	1.8	23.3	12.6	68	<0.1	22.8	16.5	812	3.31	5.0	6.5	3.9	66	0.1	0.2	0.2	65	0.85	0.160	17
SQE048	Soil	1.1	42.8	12.3	66	0.1	43.7	15.1	766	3.36	5.7	2.0	1.5	87	0.1	0.2	0.3	73	0.98	0.063	15
SQE049	Soil	1.1	27.6	13.6	64	<0.1	27.2	14.3	923	3.12	8.1	2.7	1.8	83	0.2	0.2	0.3	53	1.20	0.054	11
SQE050	Soil	1.1	30.8	13.5	71	0.2	23.7	15.8	438	3.57	13.4	3.7	5.0	41	0.2	0.3	0.3	63	0.45	0.066	18
SQE051	Soil	1.4	31.9	19.2	76	0.2	21.3	13.9	519	3.30	16.3	3.2	3.9	110	0.2	0.2	0.3	56	0.71	0.059	23
SQE052	Soil	1.6	22.3	20.0	53	0.2	17.6	7.9	268	2.44	11.2	2.5	3.1	45	0.1	0.2	0.2	50	0.47	0.050	16
SQE053	Soil	2.1	36.8	25.6	64	0.2	23.6	9.9	284	2.80	11.4	1.3	5.6	35	0.3	0.2	0.3	53	0.37	0.058	22
SQE054	Soil	2.4	30.0	21.1	69	0.2	24.9	15.4	731	3.27	9.3	0.8	3.9	100	0.2	0.2	0.3	68	0.86	0.064	17
SQE055	Soil	1.8	32.9	17.4	67	0.2	25.4	11.9	531	2.76	13.8	2.1	3.7	67	0.2	0.2	0.2	55	0.67	0.070	18
SQE056	Soil	1.8	38.3	17.8	67	0.1	31.3	15.2	619	3.05	11.7	2.5	5.6	59	0.3	0.3	0.2	60	0.65	0.055	19
SQE057	Soil	1.9	23.9	15.0	68	0.1	27.1	11.2	357	3.22	12.2	1.1	4.5	29	0.2	0.2	0.4	62	0.28	0.041	15
SQE058	Soil	4.2	41.6	70.1	132	0.3	41.7	13.8	461	2.92	10.7	2.0	8.7	37	0.3	0.2	0.4	44	0.27	0.050	23
SQE059	Soil	5.1	73.9	215.7	361	0.5	39.1	15.5	644	3.49	12.5	3.4	10.1	37	1.0	0.3	0.6	43	0.62	0.043	24
SQE060	Soil	3.8	36.1	103.1	139	0.2	31.1	12.8	717	2.90	9.8	2.1	6.3	35	0.6	0.2	0.4	52	0.49	0.041	19
SQE061	Soil	1.5	26.5	33.3	77	<0.1	20.9	8.8	265	2.60	7.2	2.8	5.9	23	0.2	0.3	0.2	60	0.32	0.024	16
SQE062	Soil	1.4	18.9	35.1	57	0.2	15.6	5.1	132	2.07	5.8	1.7	4.2	16	0.1	0.2	0.2	50	0.18	0.015	13
SQE063	Soil	1.1	27.6	40.3	82	0.1	16.2	9.5	438	2.81	5.5	1.2	7.8	20	0.2	0.2	0.3	51	0.26	0.038	18
SQE064	Soil	1.0	50.1	47.8	90	<0.1	19.2	13.6	565	3.09	3.7	0.6	9.6	21	0.2	0.1	0.4	55	0.28	0.030	20
SQE065	Soil	1.2	22.9	29.0	52	0.1	19.7	8.7	242	2.22	4.5	<0.5	7.0	27	0.3	0.2	0.3	44	0.35	0.032	17

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
932755	Soil	26	0.40	113	0.053	<20	2.08	0.013	0.06	<0.1	0.06	2.3	0.2	<0.05	7	<0.5	<0.2
932756	Soil	9	0.11	47	0.016	<20	0.90	0.009	0.06	<0.1	0.04	0.8	0.2	<0.05	4	1.1	<0.2
932757	Soil	23	0.34	129	0.039	<20	1.52	0.013	0.04	<0.1	0.02	1.9	0.2	<0.05	6	<0.5	<0.2
932775	Soil	31	0.27	107	0.054	<20	3.28	0.014	0.05	0.1	0.03	3.1	0.1	<0.05	8	<0.5	<0.2
932777	Soil	25	0.31	138	0.051	<20	2.04	0.010	0.04	<0.1	0.03	2.1	0.1	<0.05	8	<0.5	<0.2
933079	Soil	20	0.76	95	0.080	<20	1.66	0.010	0.16	<0.1	0.06	2.6	0.3	<0.05	5	1.2	<0.2
933084	Soil	13	0.91	88	0.082	<20	1.66	0.006	0.19	<0.1	0.03	1.8	0.3	<0.05	5	1.0	<0.2
932703	Soil	41	0.57	166	0.060	<20	1.77	0.017	0.05	0.1	0.04	3.9	0.2	<0.05	7	0.7	<0.2
CHO38	Soil	45	1.41	449	0.151	<20	1.97	0.027	0.35	0.2	0.06	5.1	0.2	<0.05	7	0.6	<0.2
SQE045	Soil	24	0.52	579	0.023	<20	1.21	0.016	0.10	<0.1	0.04	4.0	<0.1	0.06	4	0.8	<0.2
SQE046	Soil	42	0.66	496	0.026	<20	1.47	0.012	0.13	<0.1	0.03	5.7	0.1	<0.05	6	<0.5	<0.2
SQE047	Soil	36	0.91	404	0.067	<20	1.52	0.013	0.16	0.2	0.03	3.8	0.2	0.05	5	<0.5	<0.2
SQE048	Soil	66	0.72	494	0.066	<20	1.29	0.014	0.13	<0.1	0.02	6.7	0.1	0.12	5	<0.5	<0.2
SQE049	Soil	32	0.44	369	0.024	<20	0.88	0.007	0.08	<0.1	0.02	4.3	<0.1	0.09	3	<0.5	<0.2
SQE050	Soil	33	0.61	299	0.049	<20	1.53	0.010	0.11	<0.1	0.02	6.2	0.1	<0.05	5	<0.5	<0.2
SQE051	Soil	27	0.48	354	0.038	<20	1.52	0.012	0.09	<0.1	0.03	6.5	0.1	0.07	5	0.8	<0.2
SQE052	Soil	30	0.42	251	0.054	<20	1.51	0.011	0.06	<0.1	0.03	3.6	0.1	<0.05	5	<0.5	<0.2
SQE053	Soil	34	0.45	354	0.046	<20	1.43	0.011	0.08	<0.1	0.04	4.6	<0.1	<0.05	5	<0.5	<0.2
SQE054	Soil	42	0.76	346	0.059	<20	1.76	0.017	0.08	<0.1	0.03	5.8	<0.1	0.10	6	<0.5	<0.2
SQE055	Soil	33	0.52	351	0.046	<20	1.53	0.015	0.06	<0.1	0.03	4.6	<0.1	0.07	5	<0.5	<0.2
SQE056	Soil	45	0.53	585	0.048	<20	1.68	0.013	0.06	0.1	0.03	6.2	<0.1	<0.05	5	<0.5	<0.2
SQE057	Soil	36	0.48	406	0.033	<20	1.83	0.009	0.07	<0.1	0.02	4.0	0.2	<0.05	6	<0.5	<0.2
SQE058	Soil	54	0.81	312	0.020	<20	1.45	0.008	0.10	<0.1	0.03	4.1	0.2	0.06	4	1.1	<0.2
SQE059	Soil	38	0.89	450	0.035	<20	1.64	0.009	0.10	<0.1	0.11	4.8	0.2	<0.05	5	1.5	<0.2
SQE060	Soil	40	0.61	288	0.038	<20	1.64	0.011	0.07	<0.1	0.03	4.2	0.1	<0.05	5	0.9	<0.2
SQE061	Soil	35	0.58	189	0.080	<20	1.58	0.015	0.05	<0.1	0.01	4.0	<0.1	<0.05	5	<0.5	<0.2
SQE062	Soil	24	0.33	128	0.048	<20	1.55	0.009	0.06	<0.1	0.01	2.5	0.1	<0.05	5	<0.5	<0.2
SQE063	Soil	22	0.66	164	0.092	<20	1.57	0.008	0.17	<0.1	0.02	3.5	0.2	<0.05	5	<0.5	<0.2
SQE064	Soil	19	0.83	169	0.096	<20	1.73	0.005	0.22	<0.1	<0.01	3.9	0.2	<0.05	5	<0.5	<0.2
SQE065	Soil	30	0.53	201	0.037	<20	1.55	0.012	0.06	<0.1	0.02	3.4	<0.1	<0.05	5	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
SQE066	Soil	1.7	63.1	17.6	106	0.4	73.0	17.2	871	3.69	20.6	1.5	2.6	53	0.8	0.3	0.2	77	0.81	0.064	14
SQE088	Soil	1.8	34.5	13.3	57	0.3	22.5	14.0	689	3.56	10.8	47.7	8.1	22	<0.1	0.3	0.3	75	0.21	0.035	40
SQE073	Soil	0.8	33.1	11.3	53	<0.1	22.0	10.8	401	2.61	8.1	14.8	5.3	41	0.2	0.4	0.3	58	0.49	0.048	16
SQE074	Soil	1.0	27.0	10.9	49	0.1	19.4	14.1	738	2.53	8.7	3.0	3.5	43	0.2	0.4	0.2	55	0.53	0.058	16
SQE075	Soil	0.8	24.5	10.4	42	0.1	16.8	7.7	213	2.70	9.9	2.3	4.0	33	0.1	0.4	0.2	55	0.42	0.054	17
SQE076	Soil	1.0	26.5	12.2	48	0.1	21.9	13.1	531	2.48	8.0	1.5	4.4	44	0.2	0.4	0.2	55	0.58	0.063	17
SQE077	Soil	0.8	30.3	10.5	52	0.1	21.6	10.5	353	2.45	8.1	10.5	5.4	42	0.2	0.4	0.2	53	0.55	0.047	18
SQE078	Soil	0.8	32.9	10.6	52	0.1	25.2	12.4	499	2.63	8.1	1.2	4.8	48	0.2	0.4	0.2	55	0.61	0.056	18
SQE079	Soil	0.6	27.4	9.7	45	0.1	18.1	8.8	235	2.28	7.2	1.8	4.9	41	0.1	0.4	0.2	53	0.53	0.056	18
SQE080	Soil	0.8	27.1	9.4	46	0.1	21.0	9.8	507	2.26	6.7	1.8	4.7	44	0.1	0.3	0.2	45	0.62	0.046	19
SQE081	Soil	0.8	25.2	10.4	46	<0.1	20.6	8.6	265	2.29	6.8	2.0	6.3	38	0.1	0.4	0.2	49	0.53	0.042	17
SQE083	Soil	1.1	21.9	12.5	39	<0.1	17.5	8.4	299	2.32	8.0	1.4	6.3	32	<0.1	0.3	0.2	55	0.34	0.035	22
SQE084	Soil	1.8	42.8	15.4	50	0.2	25.6	12.7	696	3.16	14.8	2.3	7.8	42	0.1	0.3	0.3	69	0.49	0.047	34
932900	Soil	0.7	44.1	11.5	77	<0.1	19.1	14.6	578	3.14	7.1	<0.5	2.4	16	0.2	0.3	0.2	59	0.21	0.032	8
933018	Soil	0.5	26.1	37.7	84	0.2	29.9	16.9	383	3.03	6.3	3.3	6.1	29	0.2	0.2	0.5	52	0.51	0.053	27
933019	Soil	0.6	39.6	17.2	79	<0.1	15.3	15.3	691	3.11	5.0	<0.5	1.7	24	<0.1	0.1	0.3	62	0.40	0.039	8
933020	Soil	0.4	29.6	18.2	67	0.1	29.2	13.8	726	2.55	4.5	0.6	2.2	37	<0.1	0.2	0.2	47	0.62	0.060	19
933021	Soil	0.3	29.1	28.5	71	0.1	34.0	13.7	377	2.55	3.9	1.8	4.4	33	0.1	0.2	0.2	45	0.58	0.055	19
933022	Soil	0.7	20.5	31.1	49	<0.1	22.2	11.3	441	2.41	5.6	1.8	3.4	31	0.1	0.2	0.4	49	0.43	0.028	11
933023	Soil	0.4	33.9	17.2	64	0.1	50.0	12.0	505	2.00	3.0	1.7	3.0	50	0.2	0.2	0.3	36	0.83	0.071	25
933024	Soil	0.5	15.5	14.1	102	<0.1	33.0	15.9	1089	3.74	7.2	1.1	10.1	32	<0.1	<0.1	0.2	61	0.64	0.050	34
933025	Soil	0.8	24.8	36.1	103	0.1	64.3	28.3	1478	3.97	11.6	<0.5	4.5	36	0.1	0.1	0.5	85	0.79	0.050	20
933026	Soil	1.8	36.0	241.7	235	2.1	83.0	25.6	1352	3.27	20.9	6.0	10.4	29	0.7	0.1	7.2	52	0.61	0.087	38
933027	Soil	1.0	29.4	38.2	98	0.2	65.3	38.4	2406	4.27	32.5	3.1	6.5	28	0.1	0.1	1.3	69	0.56	0.077	19
933028	Soil	1.1	11.0	22.1	104	0.2	30.2	25.5	2315	4.27	16.5	1.5	6.4	29	<0.1	0.2	1.2	71	0.57	0.068	15
933029	Soil	0.6	47.5	13.5	65	0.2	18.1	15.8	296	2.82	7.9	4.0	2.6	20	0.1	0.3	0.3	52	0.41	0.048	7
933030	Soil	0.8	106.7	25.4	83	0.3	14.7	14.3	424	3.41	8.2	1.2	2.6	14	0.2	0.2	0.3	55	0.34	0.036	10
933031	Soil	0.7	22.6	20.8	78	0.1	10.2	9.2	362	3.02	7.0	0.8	2.7	17	<0.1	0.2	0.3	53	0.36	0.040	7
933032	Soil	0.5	29.0	19.8	53	0.1	10.7	10.9	466	3.00	7.8	1.6	3.2	14	<0.1	0.2	0.4	58	0.28	0.039	8
933033	Soil	0.9	34.4	55.9	49	0.2	13.0	9.0	303	2.53	6.5	1.5	10.6	17	<0.1	0.3	0.5	45	0.33	0.031	20

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
SQE066	Soil	80	1.00	332	0.039	<20	1.75	0.017	0.05	<0.1	0.04	10.2	<0.1	<0.05	5	0.8	<0.2
SQE088	Soil	40	0.48	281	0.075	<20	2.76	0.017	0.08	<0.1	0.05	6.6	0.1	<0.05	8	<0.5	<0.2
SQE073	Soil	24	0.46	245	0.079	<20	1.66	0.022	0.05	0.1	0.05	4.4	<0.1	<0.05	5	0.6	<0.2
SQE074	Soil	30	0.44	239	0.066	<20	1.63	0.020	0.04	<0.1	0.05	4.2	<0.1	<0.05	5	<0.5	<0.2
SQE075	Soil	27	0.37	223	0.064	<20	1.58	0.018	0.04	<0.1	0.06	4.4	<0.1	<0.05	5	<0.5	<0.2
SQE076	Soil	31	0.44	251	0.080	<20	1.55	0.026	0.05	0.1	0.06	4.3	<0.1	0.05	4	0.5	<0.2
SQE077	Soil	31	0.48	256	0.081	<20	1.69	0.023	0.05	0.1	0.05	4.9	<0.1	<0.05	5	<0.5	<0.2
SQE078	Soil	31	0.47	282	0.078	<20	1.57	0.023	0.05	<0.1	0.06	4.7	<0.1	<0.05	5	<0.5	<0.2
SQE079	Soil	28	0.44	248	0.070	<20	1.48	0.020	0.05	<0.1	0.05	4.4	<0.1	<0.05	4	<0.5	<0.2
SQE080	Soil	27	0.43	249	0.076	<20	1.46	0.021	0.05	0.2	0.05	4.2	<0.1	<0.05	4	<0.5	<0.2
SQE081	Soil	29	0.46	241	0.083	<20	1.53	0.019	0.05	<0.1	0.03	4.1	<0.1	<0.05	5	0.6	<0.2
SQE083	Soil	31	0.41	204	0.077	<20	1.62	0.013	0.05	<0.1	0.03	3.1	<0.1	<0.05	5	<0.5	<0.2
SQE084	Soil	38	0.44	310	0.079	<20	2.37	0.018	0.08	<0.1	0.04	5.5	<0.1	<0.05	7	<0.5	<0.2
932900	Soil	22	0.79	125	0.105	<20	1.83	0.010	0.19	<0.1	0.02	3.4	0.2	<0.05	5	<0.5	<0.2
933018	Soil	111	1.48	124	0.087	<20	1.92	0.011	0.08	<0.1	0.04	4.7	0.3	<0.05	6	<0.5	<0.2
933019	Soil	22	0.85	163	0.033	<20	1.98	0.009	0.06	<0.1	0.03	4.6	0.2	<0.05	6	<0.5	<0.2
933020	Soil	79	1.31	175	0.075	<20	2.07	0.012	0.07	<0.1	0.06	3.9	0.3	<0.05	6	<0.5	<0.2
933021	Soil	108	1.34	129	0.076	<20	1.88	0.011	0.08	<0.1	0.12	4.7	0.2	0.07	6	<0.5	<0.2
933022	Soil	75	0.99	129	0.050	<20	1.49	0.007	0.05	<0.1	0.01	2.2	0.2	<0.05	5	<0.5	<0.2
933023	Soil	88	1.23	155	0.066	<20	1.54	0.012	0.13	<0.1	0.04	3.2	0.3	0.07	5	<0.5	<0.2
933024	Soil	92	2.19	165	0.190	<20	2.48	0.008	0.64	<0.1	0.02	6.2	0.7	<0.05	9	<0.5	<0.2
933025	Soil	293	2.94	177	0.133	<20	2.56	0.008	0.34	<0.1	0.02	8.4	0.6	0.14	8	<0.5	<0.2
933026	Soil	158	2.69	214	0.122	<20	2.09	0.006	0.69	<0.1	0.06	7.2	0.4	0.12	7	0.8	1.0
933027	Soil	208	2.50	166	0.137	<20	2.16	0.005	0.44	<0.1	0.03	6.2	0.5	0.18	7	0.7	0.3
933028	Soil	118	2.55	153	0.169	<20	2.28	0.007	0.74	<0.1	0.02	5.9	0.5	0.10	9	<0.5	<0.2
933029	Soil	23	0.76	126	0.073	<20	1.59	0.008	0.09	<0.1	0.04	2.9	0.2	<0.05	5	<0.5	<0.2
933030	Soil	17	0.92	106	0.040	<20	1.68	0.005	0.07	<0.1	0.03	4.0	0.2	<0.05	4	<0.5	<0.2
933031	Soil	16	0.50	122	0.016	<20	1.20	0.006	0.04	<0.1	0.02	2.8	0.1	<0.05	4	<0.5	<0.2
933032	Soil	17	0.66	108	0.013	<20	1.55	0.005	0.05	<0.1	0.03	3.4	0.1	<0.05	4	<0.5	<0.2
933033	Soil	20	0.60	162	0.021	<20	1.62	0.005	0.09	<0.1	0.04	3.4	0.1	<0.05	4	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
933034	Soil	1.1	22.0	39.4	54	0.2	15.1	11.9	675	2.52	7.0	1.2	2.9	27	0.2	0.4	0.4	46	0.40	0.051	13
933035	Soil	2.8	13.5	132.1	31	0.2	7.6	4.1	211	1.58	5.5	2.8	7.2	16	0.2	0.8	0.5	30	0.10	0.031	28
933036	Soil	1.3	15.4	59.0	28	0.2	6.8	3.4	127	1.60	5.6	1.0	2.3	11	0.1	0.6	0.4	37	0.04	0.030	24
933037	Soil	1.6	8.4	43.2	25	0.2	3.6	2.0	74	1.27	4.8	3.1	7.9	15	<0.1	1.0	0.4	18	0.06	0.034	42

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

CERTIFICATE OF ANALYSIS WHI11000662.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
933034	Soil	19	0.46	251	0.031	<20	1.36	0.008	0.06	<0.1	0.05	2.5	<0.1	<0.05	4	<0.5	<0.2
933035	Soil	14	0.21	123	0.025	<20	0.77	0.004	0.06	<0.1	0.04	1.0	<0.1	<0.05	3	<0.5	<0.2
933036	Soil	15	0.17	73	0.023	<20	0.84	0.004	0.05	<0.1	0.04	1.0	<0.1	<0.05	4	<0.5	<0.2
933037	Soil	8	0.12	91	0.012	<20	0.51	0.004	0.06	<0.1	0.04	0.8	<0.1	<0.05	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

QUALITY CONTROL REPORT WHI11000662.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
Pulp Duplicates																					
SQE036	Soil	0.5	24.8	9.7	46	<0.1	19.9	8.9	258	2.65	7.8	6.9	4.3	42	0.3	0.4	0.2	64	0.52	0.058	16
REP SQE036	QC	0.5	26.3	9.8	46	0.1	19.2	9.1	257	2.69	8.1	5.6	4.3	44	0.2	0.3	0.2	62	0.50	0.055	17
S071	Soil	0.7	20.2	9.6	54	<0.1	20.5	8.5	246	2.70	8.3	0.7	3.8	30	0.1	0.4	0.2	61	0.33	0.034	11
REP S071	QC	0.9	20.6	9.8	56	<0.1	21.2	8.9	259	2.89	8.7	2.2	3.9	31	0.1	0.4	0.2	63	0.37	0.036	11
CH034	Soil	0.9	26.4	9.2	50	<0.1	22.5	10.9	317	3.03	6.6	3.1	4.2	37	0.1	0.3	0.1	56	0.77	0.054	15
REP CH034	QC	0.7	25.8	8.9	50	<0.1	22.6	11.1	309	2.98	6.8	1.9	4.3	36	0.1	0.3	0.1	55	0.77	0.051	15
C020	Soil	0.8	13.2	8.0	58	<0.1	13.7	8.5	391	2.48	6.0	<0.5	2.2	12	<0.1	0.2	<0.1	63	0.13	0.022	7
REP C020	QC	0.8	13.3	7.9	59	<0.1	12.8	8.2	378	2.44	6.1	6.6	2.1	12	<0.1	0.3	0.1	62	0.14	0.021	6
932886	Soil	1.2	36.1	40.1	129	0.3	47.1	21.4	725	3.96	15.5	7.6	9.9	13	0.1	0.1	1.0	58	0.27	0.043	28
REP 932886	QC	1.0	36.0	40.1	131	0.3	47.6	20.9	715	3.92	14.8	5.7	9.8	12	0.1	<0.1	1.0	57	0.25	0.046	28
933002	Soil	1.0	17.3	15.5	47	0.1	21.6	10.2	336	2.60	6.6	2.7	10.3	16	0.2	0.3	0.2	50	0.21	0.037	26
REP 933002	QC	0.9	18.2	15.7	48	<0.1	22.3	10.5	342	2.67	6.8	2.5	10.7	16	0.2	0.3	0.2	53	0.21	0.037	27
933006	Soil	1.0	16.8	25.0	48	<0.1	19.7	8.8	294	2.46	6.0	2.4	12.0	13	0.2	0.3	0.4	53	0.19	0.033	37
REP 933006	QC	1.0	15.5	23.2	44	<0.1	18.6	8.5	270	2.29	5.5	3.2	11.1	13	0.1	0.3	0.3	49	0.16	0.030	35
SQE025	Soil	1.6	32.4	13.0	52	0.1	22.4	11.9	486	2.75	6.9	1.6	4.9	46	0.2	0.2	0.3	44	0.63	0.045	20
REP SQE025	QC	1.5	32.1	12.3	54	0.1	22.3	11.9	476	2.72	6.9	<0.5	4.3	47	0.1	0.2	0.3	44	0.61	0.046	20
933084	Soil	0.9	44.8	20.6	69	0.2	9.1	10.8	654	2.71	7.5	1.2	0.5	16	0.2	0.2	0.2	51	0.26	0.030	5
REP 933084	QC	0.9	43.0	19.8	69	0.2	8.3	10.9	638	2.61	7.7	3.1	0.6	16	0.2	0.2	0.2	48	0.26	0.028	5
932900	Soil	0.7	44.1	11.5	77	<0.1	19.1	14.6	578	3.14	7.1	<0.5	2.4	16	0.2	0.3	0.2	59	0.21	0.032	8
REP 932900	QC	0.8	44.6	11.4	78	<0.1	18.1	13.6	568	3.13	6.8	0.8	2.5	16	0.2	0.3	0.2	59	0.20	0.034	8
Reference Materials																					
STD DS8	Standard	13.4	107.7	117.1	291	1.7	35.6	6.8	556	2.25	26.0	116.7	6.5	65	2.3	4.8	5.7	41	0.62	0.079	14
STD DS8	Standard	11.1	116.5	120.6	303	2.4	38.1	7.5	589	2.39	25.7	113.6	6.3	62	2.2	5.0	6.6	42	0.63	0.074	11
STD DS8	Standard	11.9	109.1	120.8	312	1.7	39.0	7.6	592	2.37	27.3	111.8	6.5	63	2.3	4.8	6.7	41	0.64	0.079	13
STD DS8	Standard	12.6	99.4	121.0	289	1.6	34.6	7.0	558	2.20	23.8	95.2	6.4	57	2.1	4.1	4.9	38	0.63	0.069	13
STD DS8	Standard	13.2	114.6	129.7	313	1.9	37.1	7.8	609	2.43	26.6	107.9	6.7	69	2.4	4.7	6.7	42	0.68	0.080	14
STD DS8	Standard	15.4	115.9	128.5	318	2.0	36.9	7.5	614	2.46	27.4	95.0	6.4	69	2.3	5.2	6.8	42	0.70	0.084	14
STD DS8	Standard	12.4	109.2	120.0	309	1.6	39.6	7.5	594	2.41	25.3	116.8	6.5	65	2.1	4.8	6.2	42	0.68	0.078	13

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

QUALITY CONTROL REPORT WHI11000662.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
Pulp Duplicates																	
SQE036	Soil	35	0.38	271	0.034	<20	1.78	0.013	0.04	<0.1	0.07	4.7	<0.1	<0.05	6	<0.5	<0.2
REP SQE036	QC	28	0.37	277	0.033	<20	1.73	0.013	0.04	<0.1	0.07	4.1	<0.1	0.06	6	<0.5	<0.2
S071	Soil	32	0.54	211	0.086	<20	1.83	0.020	0.05	<0.1	0.03	3.4	<0.1	<0.05	5	<0.5	<0.2
REP S071	QC	32	0.56	222	0.091	<20	1.83	0.019	0.06	<0.1	0.02	3.5	<0.1	<0.05	5	<0.5	<0.2
CH034	Soil	38	0.54	249	0.099	<20	1.64	0.022	0.15	0.1	0.03	4.3	<0.1	<0.05	5	<0.5	<0.2
REP CH034	QC	36	0.54	243	0.096	<20	1.58	0.021	0.15	<0.1	0.04	4.2	<0.1	<0.05	5	<0.5	<0.2
C020	Soil	24	0.41	244	0.065	<20	1.52	0.011	0.06	<0.1	<0.01	1.7	<0.1	<0.05	5	<0.5	<0.2
REP C020	QC	24	0.42	238	0.063	<20	1.48	0.011	0.06	<0.1	<0.01	1.6	<0.1	<0.05	5	<0.5	<0.2
932886	Soil	195	2.54	139	0.041	<20	2.58	0.005	0.17	<0.1	<0.01	8.7	0.2	<0.05	7	0.8	0.2
REP 932886	QC	188	2.54	137	0.040	<20	2.50	0.005	0.16	<0.1	0.03	8.8	0.2	<0.05	6	0.7	<0.2
933002	Soil	29	0.43	143	0.068	<20	1.87	0.009	0.06	0.1	0.05	2.6	<0.1	<0.05	4	<0.5	<0.2
REP 933002	QC	30	0.43	149	0.067	<20	1.87	0.009	0.06	<0.1	0.04	2.5	<0.1	<0.05	5	0.9	<0.2
933006	Soil	29	0.44	114	0.070	<20	1.70	0.008	0.08	<0.1	0.04	2.6	<0.1	<0.05	4	<0.5	<0.2
REP 933006	QC	27	0.41	103	0.064	<20	1.55	0.007	0.06	<0.1	0.02	2.4	<0.1	<0.05	4	<0.5	<0.2
SQE025	Soil	27	0.52	293	0.034	<20	1.44	0.015	0.06	<0.1	0.03	4.1	<0.1	<0.05	4	<0.5	<0.2
REP SQE025	QC	25	0.50	296	0.032	<20	1.36	0.014	0.06	<0.1	0.03	3.9	<0.1	<0.05	4	<0.5	<0.2
933084	Soil	13	0.91	88	0.082	<20	1.66	0.006	0.19	<0.1	0.03	1.8	0.3	<0.05	5	1.0	<0.2
REP 933084	QC	12	0.83	85	0.082	<20	1.53	0.005	0.18	<0.1	0.04	1.8	0.3	<0.05	5	0.7	<0.2
932900	Soil	22	0.79	125	0.105	<20	1.83	0.010	0.19	<0.1	0.02	3.4	0.2	<0.05	5	<0.5	<0.2
REP 932900	QC	22	0.82	121	0.106	<20	1.88	0.010	0.19	<0.1	0.03	3.3	0.2	<0.05	6	<0.5	<0.2
Reference Materials																	
STD DS8	Standard	107	0.59	276	0.114	<20	0.87	0.084	0.38	2.5	0.18	2.2	5.1	0.18	4	4.9	4.9
STD DS8	Standard	111	0.55	274	0.108	<20	0.80	0.078	0.40	3.1	0.17	1.9	5.2	0.17	4	4.5	4.5
STD DS8	Standard	115	0.60	279	0.110	<20	0.88	0.081	0.39	2.3	0.16	1.9	5.7	0.19	4	5.2	4.9
STD DS8	Standard	102	0.56	270	0.098	<20	0.84	0.086	0.38	2.5	0.18	1.9	5.3	0.18	4	5.1	4.4
STD DS8	Standard	116	0.60	294	0.118	<20	0.89	0.087	0.42	2.7	0.19	2.2	5.4	0.12	5	5.8	4.8
STD DS8	Standard	112	0.61	304	0.115	<20	0.93	0.092	0.43	2.6	0.22	2.2	5.5	0.17	5	6.7	4.9
STD DS8	Standard	116	0.61	291	0.114	<20	0.87	0.083	0.41	2.7	0.21	1.9	5.2	0.18	4	4.5	4.9

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

QUALITY CONTROL REPORT WHI11000662.1

		1DX Mo ppm 0.1	1DX Cu ppm 0.1	1DX Pb ppm 0.1	1DX Zn ppm 1	1DX Ag ppm 0.1	1DX Ni ppm 0.1	1DX Co ppm 0.1	1DX Mn ppm 1	1DX Fe % 0.01	1DX As ppm 0.5	1DX Au ppb 0.5	1DX Th ppm 0.1	1DX Sr ppm 1	1DX Cd ppm 0.1	1DX Sb ppm 0.1	1DX Bi ppm 0.1	1DX V ppm 2	1DX Ca % 0.01	1DX P % 0.001	1DX La ppm 1
STD DS8	Standard	12.8	105.1	117.7	297	1.8	35.8	6.9	561	2.23	23.1	99.1	5.9	58	2.1	4.3	4.7	37	0.62	0.076	13
STD DS8	Standard	14.3	111.0	120.8	312	1.8	38.7	7.8	595	2.38	26.3	100.9	6.4	64	2.4	4.0	5.8	41	0.72	0.075	14
STD DS8	Standard	14.4	107.7	122.4	303	1.8	39.0	7.4	596	2.65	25.8	107.5	6.3	59	2.6	3.9	6.0	42	0.65	0.072	13
STD DS8	Standard	14.1	104.3	126.3	308	1.6	37.6	7.4	601	2.66	25.2	98.3	6.8	64	2.4	4.1	6.1	41	0.67	0.076	14
STD OREAS45CA	Standard	0.9	489.3	20.7	57	0.2	231.0	84.1	883	16.01	4.5	43.2	6.9	15	0.1	0.1	0.2	195	0.39	0.036	15
STD OREAS45CA	Standard	0.8	463.6	19.9	59	0.3	215.6	82.0	860	14.56	4.7	48.3	6.6	15	<0.1	0.2	0.2	191	0.37	0.034	15
STD OREAS45CA	Standard	0.9	520.0	20.2	63	0.3	243.6	91.7	961	16.34	4.6	44.0	6.9	14	<0.1	<0.1	0.2	204	0.40	0.037	14
STD OREAS45CA	Standard	0.9	466.1	19.0	55	0.2	222.0	82.0	832	14.43	4.1	36.4	6.4	13	<0.1	<0.1	0.2	184	0.38	0.037	14
STD OREAS45CA	Standard	0.9	508.5	21.1	62	0.3	241.5	89.4	893	15.94	4.3	47.7	7.0	15	<0.1	<0.1	0.2	195	0.41	0.040	16
STD OREAS45CA	Standard	0.9	479.1	20.0	65	0.3	227.4	85.4	896	15.64	4.7	43.2	6.8	16	<0.1	<0.1	0.2	186	0.40	0.040	15
STD OREAS45CA	Standard	0.8	476.3	20.4	59	0.3	228.4	89.5	919	16.18	3.6	37.5	7.1	15	<0.1	0.1	0.2	205	0.43	0.040	14
STD OREAS45CA	Standard	0.9	485.5	19.9	59	0.3	226.4	86.7	889	15.75	3.8	37.5	6.8	14	<0.1	0.1	0.1	193	0.42	0.035	15
STD OREAS45CA	Standard	0.9	481.2	19.6	58	0.3	226.4	83.3	839	14.85	3.9	43.3	7.0	15	<0.1	0.1	0.2	190	0.37	0.033	15
STD OREAS45CA	Standard	0.8	496.3	20.4	55	0.2	237.9	87.0	873	17.22	3.7	37.5	7.0	14	<0.1	<0.1	0.2	202	0.38	0.034	14
STD OREAS45CA	Standard	0.7	488.2	20.5	58	0.2	232.6	85.2	853	17.30	3.9	44.2	6.8	15	0.1	<0.1	0.2	195	0.40	0.036	15
STD DS8 Expected		13.44	110	123	312	1.69	38.1	7.5	615	2.46	26	107	6.89	67.7	2.38	4.8	6.67	41.1	0.7	0.08	14.6
STD OREAS45CA Expected		1	494	20	60	0.275	240	92	943	15.69	3.8	43	7	15	0.1	0.13	0.19	215	0.4265	0.0385	15.9
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 16, 2011

QUALITY CONTROL REPORT WHI11000662.1

		1DX Cr ppm 1	1DX Mg % 0.01	1DX Ba ppm 1	1DX Ti % 0.001	1DX B ppm 20	1DX Al % 0.01	1DX Na % 0.001	1DX K % 0.01	1DX W ppm 0.1	1DX Hg ppm 0.01	1DX Sc ppm 0.1	1DX Tl ppm 0.1	1DX S % 0.05	1DX Ga ppm 1	1DX Se ppm 0.5	1DX Te ppm 0.2
STD DS8	Standard	111	0.57	272	0.097	<20	0.83	0.081	0.37	2.6	0.18	1.5	5.1	0.13	4	5.3	4.8
STD DS8	Standard	117	0.59	279	0.109	<20	0.87	0.087	0.40	2.3	0.17	2.0	5.2	0.18	4	5.7	4.7
STD DS8	Standard	118	0.54	285	0.107	<20	0.87	0.069	0.39	2.4	0.20	1.9	5.4	0.12	4	4.9	4.4
STD DS8	Standard	115	0.56	287	0.110	<20	0.87	0.085	0.41	2.5	0.21	1.9	5.3	0.14	4	4.6	5.0
STD OREAS45CA	Standard	666	0.14	152	0.131	<20	3.24	0.012	0.07	<0.1	0.03	36.6	<0.1	<0.05	18	0.7	<0.2
STD OREAS45CA	Standard	616	0.13	151	0.120	<20	2.93	0.011	0.07	<0.1	0.02	34.4	<0.1	<0.05	17	<0.5	<0.2
STD OREAS45CA	Standard	676	0.14	148	0.121	<20	3.43	0.013	0.07	<0.1	0.04	33.5	<0.1	<0.05	18	<0.5	<0.2
STD OREAS45CA	Standard	684	0.13	148	0.111	<20	3.49	0.010	0.07	<0.1	0.02	33.3	<0.1	<0.05	17	1.1	<0.2
STD OREAS45CA	Standard	664	0.16	159	0.141	<20	3.56	0.013	0.07	<0.1	0.02	38.6	<0.1	<0.05	18	0.5	<0.2
STD OREAS45CA	Standard	654	0.15	161	0.123	<20	3.53	0.013	0.07	<0.1	0.04	37.4	<0.1	<0.05	17	0.6	<0.2
STD OREAS45CA	Standard	657	0.14	155	0.131	<20	3.45	0.014	0.07	<0.1	0.03	35.0	<0.1	<0.05	18	<0.5	<0.2
STD OREAS45CA	Standard	721	0.13	158	0.108	<20	3.54	0.013	0.07	<0.1	0.02	34.2	<0.1	<0.05	17	0.8	<0.2
STD OREAS45CA	Standard	637	0.13	156	0.115	<20	3.20	0.010	0.06	<0.1	0.03	33.2	<0.1	<0.05	17	0.7	<0.2
STD OREAS45CA	Standard	731	0.12	155	0.133	<20	3.41	0.010	0.07	<0.1	0.03	35.5	<0.1	<0.05	18	0.6	<0.2
STD OREAS45CA	Standard	716	0.13	157	0.127	<20	3.61	0.012	0.07	<0.1	0.03	35.9	<0.1	<0.05	17	0.8	<0.2
STD DS8 Expected		115	0.6045	279	0.113	2.6	0.93	0.0883	0.41	3	0.192	2.3	5.4	0.1679	4.7	5.23	5
STD OREAS45CA Expected		709	0.1358	164	0.128		3.592	0.0075	0.0717		0.03	39.7	0.07	0.021	18.4	0.5	
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada

www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Submitted By: Mike MacIsaac
Receiving Lab: Canada-Whitehorse
Received: July 19, 2011
Report Date: August 15, 2011
Page: 1 of 12

CERTIFICATE OF ANALYSIS WHI11000663.1

CLIENT JOB INFORMATION

Project: FoGo
Shipment ID:
P.O. Number
Number of Samples: 312

SAMPLE DISPOSAL

DISP-PLP Dispose of Pulp After 90 days
DISP-RJT-SOIL Immediate Disposal of Soil Reject

Acme does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Method Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
Dry at 60C	312	Dry at 60C			WHI
SS80	312	Dry at 60C sieve 100g to -80 mesh			WHI
1DX1	312	1:1:1 Aqua Regia digestion ICP-MS analysis	0.5	Completed	VAN

ADDITIONAL COMMENTS

Invoice To: Metals Creek Resources
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3
Canada

CC: Don Heerema
Wayne Reid
Sandy Stares

BRITISH COLUMBIA CERTIFIED ASSAYER
CLARENCE LEONG
GENERAL MANAGER

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Acme assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

		Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
		Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
		Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
		MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
933038	Soil		2.0	18.1	96.7	34	0.3	7.1	4.8	150	1.84	6.7	7.3	17.5	14	0.4	1.4	0.9	21	0.08	0.025	39
933039	Soil		1.2	24.1	78.9	75	0.2	12.8	6.6	220	1.96	6.2	2.0	13.9	20	0.4	0.8	0.6	38	0.22	0.046	28
933040	Soil		1.0	43.3	116.6	250	0.6	13.1	12.5	512	3.67	12.7	4.4	7.4	14	0.6	0.4	1.0	58	0.18	0.036	16
935046	Soil		0.8	23.6	33.1	59	0.1	13.4	9.0	267	2.15	5.4	1.6	3.8	17	<0.1	0.2	0.5	43	0.18	0.032	15
935073	Soil		0.8	101.6	9.2	54	<0.1	12.1	14.9	546	4.87	6.8	1.3	1.3	11	0.2	0.4	0.2	84	0.15	0.024	4
935074	Soil		1.6	11.8	26.5	27	<0.1	6.8	3.5	155	2.34	8.2	1.9	5.8	7	0.3	0.5	0.6	52	0.05	0.025	30
935075	Soil		0.7	35.0	19.0	95	0.1	36.5	15.7	807	3.76	11.4	5.3	9.9	25	0.2	0.1	0.6	54	0.24	0.047	26
935076	Soil		1.3	32.7	197.6	268	0.7	62.7	36.6	1135	5.13	24.1	4.8	10.4	18	0.4	0.3	1.7	52	0.33	0.066	34
935077	Soil		0.9	31.7	38.8	81	0.3	48.7	21.4	626	3.49	9.7	3.4	6.5	23	0.2	0.2	0.7	67	0.44	0.041	21
935078	Soil		0.4	22.4	47.3	62	<0.1	41.2	23.4	639	3.31	5.8	<0.5	6.1	12	<0.1	0.1	0.2	53	0.21	0.044	22
935079	Soil		0.2	17.0	25.4	148	<0.1	97.5	22.4	1169	3.80	2.5	1.1	18.2	23	0.2	<0.1	0.2	46	0.37	0.073	53
933143	Soil		1.0	11.9	9.1	63	0.1	33.5	11.4	342	2.83	3.0	2.1	2.1	21	<0.1	<0.1	0.1	36	0.26	0.078	9
935047	Soil		0.8	18.6	32.9	51	0.2	15.0	9.0	330	2.24	5.3	1.5	3.3	22	<0.1	0.1	0.3	46	0.25	0.038	16
932951	Soil		0.6	19.3	67.5	120	<0.1	21.8	13.6	330	3.05	4.8	<0.5	8.7	9	0.2	0.1	0.2	42	0.15	0.057	13
932952	Soil		1.1	15.9	26.9	65	0.3	17.7	9.1	495	2.82	9.8	57.8	5.7	11	0.3	0.2	0.2	62	0.12	0.035	14
932953	Soil		1.7	76.0	30.7	42	0.4	9.0	13.5	443	3.34	16.9	<0.5	1.2	11	0.2	0.1	0.2	45	0.12	0.042	2
932954	Soil		1.0	19.4	104.1	90	0.5	10.0	8.7	388	2.73	7.2	1.1	1.6	10	0.4	0.4	1.0	64	0.11	0.023	6
932955	Soil		0.8	32.0	19.4	60	0.2	14.1	12.5	473	2.74	7.0	1.6	2.0	13	0.1	0.1	0.3	60	0.15	0.016	6
932956	Soil		1.1	24.7	16.0	93	0.2	7.3	11.0	527	2.99	9.7	<0.5	6.3	10	0.2	0.2	0.3	64	0.10	0.047	8
932957	Soil		1.0	28.4	6.9	33	<0.1	6.6	6.8	181	1.96	4.5	1.9	0.8	6	<0.1	0.2	<0.1	44	0.10	0.015	3
932958	Soil		1.3	27.7	29.9	64	0.5	31.4	13.5	380	3.33	12.0	3.4	5.1	11	0.3	0.4	0.2	68	0.11	0.030	9
932959	Soil		1.7	18.9	24.8	45	<0.1	20.7	7.8	177	3.57	15.6	2.7	5.8	9	0.1	0.2	0.2	87	0.07	0.026	10
932960	Soil		1.3	12.9	20.4	30	<0.1	7.2	3.9	138	2.60	9.0	0.6	5.0	10	0.2	0.4	0.3	82	0.06	0.026	16
932961	Soil		1.4	17.2	16.2	38	0.1	13.6	5.4	155	3.12	8.8	<0.5	5.8	10	0.2	0.2	0.2	78	0.08	0.027	17
932962	Soil		0.7	11.0	16.0	17	0.1	3.7	1.9	65	1.02	2.1	1.3	1.6	12	<0.1	0.1	0.1	29	0.12	0.022	7
932963	Soil		1.2	38.9	14.0	79	0.2	12.5	11.1	531	4.22	7.6	1.8	1.6	10	0.2	0.4	0.2	86	0.14	0.028	5
932964	Soil		0.9	56.1	21.8	71	0.1	14.1	19.9	718	4.23	6.5	1.2	3.9	10	0.1	0.2	1.0	69	0.10	0.019	6
932965	Soil		1.3	74.5	36.5	82	0.2	14.9	10.7	413	4.18	17.5	<0.5	2.9	10	<0.1	0.2	0.3	71	0.10	0.020	7
932966	Soil		0.6	53.6	10.0	78	<0.1	12.0	15.0	493	3.41	4.4	<0.5	2.3	11	<0.1	<0.1	0.1	62	0.14	0.020	4
932967	Soil		1.6	59.2	21.5	79	<0.1	13.8	14.1	494	3.84	11.1	<0.5	4.9	15	0.2	0.1	0.2	60	0.15	0.017	7

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
933038	Soil	12	0.19	75	0.014	<20	0.97	0.002	0.07	<0.1	0.07	1.5	<0.1	<0.05	2	0.5	<0.2
933039	Soil	19	0.42	218	0.053	<20	1.14	0.010	0.09	0.3	0.04	2.9	0.1	<0.05	3	<0.5	<0.2
933040	Soil	15	1.04	122	0.088	<20	1.80	0.005	0.26	<0.1	0.05	3.7	0.3	<0.05	6	0.6	0.4
935046	Soil	25	0.39	208	0.042	<20	1.69	0.009	0.06	0.1	0.04	2.6	0.3	<0.05	4	<0.5	<0.2
935073	Soil	20	1.72	73	0.151	<20	2.70	0.005	0.15	<0.1	0.01	3.7	0.3	<0.05	7	<0.5	<0.2
935074	Soil	16	0.11	50	0.055	<20	0.92	0.005	0.07	0.1	0.03	0.9	0.1	<0.05	6	0.7	<0.2
935075	Soil	111	2.53	591	0.144	<20	2.58	0.010	0.81	<0.1	0.03	8.5	0.5	0.16	7	1.3	<0.2
935076	Soil	111	1.80	151	0.084	<20	2.12	0.008	0.39	<0.1	0.07	6.3	0.4	<0.05	6	1.6	0.4
935077	Soil	181	2.24	399	0.140	<20	2.45	0.013	0.37	<0.1	0.06	8.7	0.4	0.08	6	1.0	<0.2
935078	Soil	208	1.50	76	0.035	<20	1.95	0.002	0.16	<0.1	0.01	5.9	0.4	<0.05	4	<0.5	<0.2
935079	Soil	161	3.21	285	0.148	<20	2.97	0.005	0.95	<0.1	0.03	6.2	0.7	<0.05	9	<0.5	<0.2
933143	Soil	93	1.62	104	0.075	<20	2.02	0.004	0.08	<0.1	0.02	1.8	0.1	<0.05	6	0.7	<0.2
935047	Soil	25	0.40	244	0.043	<20	1.78	0.009	0.06	<0.1	0.05	2.6	<0.1	<0.05	4	<0.5	<0.2
932951	Soil	26	1.31	76	0.063	<20	2.12	0.004	0.11	<0.1	<0.01	2.2	0.2	<0.05	7	<0.5	<0.2
932952	Soil	26	0.45	147	0.074	<20	1.75	0.008	0.09	<0.1	0.02	2.4	0.1	<0.05	6	<0.5	<0.2
932953	Soil	11	0.62	45	0.054	<20	1.13	0.003	0.08	<0.1	0.03	1.6	0.1	<0.05	4	<0.5	<0.2
932954	Soil	20	0.44	125	0.050	<20	1.48	0.010	0.03	<0.1	0.03	2.0	<0.1	<0.05	6	<0.5	0.2
932955	Soil	19	0.62	117	0.056	<20	1.74	0.005	0.07	<0.1	0.02	2.0	0.1	<0.05	6	<0.5	<0.2
932956	Soil	12	0.68	76	0.090	<20	1.38	0.005	0.13	<0.1	<0.01	2.3	0.2	<0.05	6	<0.5	<0.2
932957	Soil	10	0.29	39	0.053	<20	0.79	0.005	0.06	<0.1	0.02	1.1	<0.1	<0.05	4	<0.5	<0.2
932958	Soil	39	0.53	177	0.074	<20	3.31	0.009	0.07	<0.1	0.05	3.6	0.1	<0.05	6	<0.5	<0.2
932959	Soil	30	0.35	120	0.078	<20	2.19	0.005	0.05	<0.1	0.02	2.4	<0.1	<0.05	8	<0.5	<0.2
932960	Soil	18	0.17	71	0.083	<20	1.06	0.005	0.05	<0.1	0.03	1.3	<0.1	<0.05	8	<0.5	<0.2
932961	Soil	25	0.28	80	0.062	<20	1.77	0.006	0.06	<0.1	0.03	2.2	<0.1	<0.05	7	<0.5	<0.2
932962	Soil	10	0.09	88	0.031	<20	0.76	0.015	0.05	<0.1	0.04	1.0	<0.1	<0.05	4	<0.5	<0.2
932963	Soil	17	1.06	83	0.154	<20	1.98	0.005	0.16	<0.1	0.03	1.9	0.2	<0.05	8	<0.5	<0.2
932964	Soil	17	0.77	127	0.042	<20	2.20	0.004	0.28	<0.1	0.02	4.7	0.3	<0.05	5	<0.5	<0.2
932965	Soil	26	1.04	85	0.104	<20	2.01	0.004	0.13	<0.1	0.01	1.8	0.1	<0.05	6	0.7	<0.2
932966	Soil	16	1.50	58	0.123	<20	2.50	0.003	0.17	<0.1	0.02	2.0	0.2	<0.05	5	<0.5	<0.2
932967	Soil	24	1.13	66	0.086	<20	1.87	0.002	0.17	<0.1	<0.01	2.4	0.2	<0.05	7	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

		Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
		Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
		Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
		MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
932968	Soil		1.2	49.1	46.1	148	<0.1	32.8	15.6	1049	4.05	7.8	0.8	7.4	15	0.3	0.1	0.2	79	0.20	0.038	22
932969	Soil		0.6	24.8	80.7	153	0.2	65.7	15.1	298	2.87	3.5	<0.5	4.9	17	0.6	<0.1	0.2	45	0.27	0.057	25
932970	Soil		2.1	20.8	385.5	313	0.5	15.4	10.5	699	3.02	38.5	2.8	22.7	25	1.2	0.1	2.2	19	0.11	0.052	64
932971	Soil		1.8	21.3	288.0	270	0.2	19.0	14.1	977	3.29	22.0	<0.5	21.3	31	0.5	0.1	1.1	19	0.17	0.078	43
932972	Soil		1.8	16.0	210.7	306	0.1	26.7	19.9	1738	4.89	10.7	<0.5	12.2	14	0.7	0.1	0.4	52	0.19	0.078	36
932973	Soil		1.4	14.1	416.8	623	0.4	23.2	17.8	1712	4.41	7.8	<0.5	13.9	17	1.5	0.1	2.4	42	0.20	0.077	34
932974	Soil		1.7	6.4	303.7	615	0.3	12.0	13.2	945	3.19	16.2	2.6	22.2	11	0.7	0.1	1.4	21	0.12	0.056	39
932975	Soil		1.7	16.6	670.9	771	0.7	25.0	10.0	579	2.98	14.1	6.8	12.8	14	2.2	0.3	1.1	49	0.17	0.042	27
932976	Soil		0.6	20.5	84.8	207	<0.1	43.7	13.7	755	3.14	6.6	2.2	8.8	25	<0.1	<0.1	0.3	39	0.47	0.073	31
932977	Soil		0.6	49.3	12.4	116	0.3	15.9	19.3	894	4.30	5.6	2.1	1.6	22	<0.1	<0.1	<0.1	91	0.44	0.034	5
932978	Soil		0.5	70.4	96.1	188	0.2	20.3	18.9	1198	3.92	6.6	2.0	4.8	18	0.5	<0.1	0.3	67	0.37	0.058	55
932979	Soil		0.7	38.4	48.4	121	0.2	23.0	16.8	680	3.35	7.2	6.7	7.2	18	0.2	0.1	0.3	54	0.35	0.050	17
932980	Soil		0.9	55.2	23.9	101	0.5	25.2	20.1	1557	3.69	7.1	2.8	4.3	18	0.2	0.1	0.3	62	0.40	0.054	18
932981	Soil		0.5	84.6	26.0	101	1.0	17.5	15.1	939	3.08	5.4	3.9	2.3	16	0.2	0.2	0.4	58	0.37	0.051	22
932982	Soil		0.7	37.1	23.6	89	0.2	16.6	12.8	756	3.49	6.0	1.0	1.7	12	0.1	0.2	0.3	77	0.17	0.025	6
932983	Soil		0.7	53.1	46.1	145	0.2	17.9	13.2	784	3.12	7.4	2.7	2.7	16	0.2	0.2	0.5	65	0.23	0.032	10
932984	Soil		0.8	61.5	36.0	137	0.8	13.0	11.2	686	3.04	7.4	2.0	1.6	15	0.2	0.2	1.0	60	0.18	0.036	11
932985	Soil		0.6	55.7	61.0	112	0.2	14.5	11.4	759	2.92	8.3	2.3	6.2	14	0.2	0.2	0.4	49	0.18	0.026	17
932986	Soil		0.8	29.7	43.9	87	0.2	14.2	9.3	650	2.78	8.3	2.2	8.2	13	0.2	0.1	0.4	54	0.15	0.023	17
932987	Soil		1.1	24.8	68.9	84	0.2	14.6	7.8	412	2.67	8.7	3.7	8.1	12	0.2	0.2	0.4	53	0.12	0.030	18
932988	Soil		1.3	24.4	49.7	62	0.2	17.5	9.5	468	2.96	9.8	1.9	5.4	16	0.2	0.2	0.4	66	0.16	0.040	15
932989	Soil		2.1	18.6	44.8	53	0.1	12.1	8.6	405	2.52	8.9	1.8	14.5	13	0.1	0.2	0.5	45	0.09	0.025	28
932990	Soil		1.4	21.8	41.1	51	0.2	15.5	8.1	344	2.64	8.1	3.8	6.1	12	<0.1	0.2	0.3	56	0.12	0.036	16
932991	Soil		1.0	23.6	23.3	49	0.1	21.0	9.6	270	2.85	9.9	2.3	5.7	12	0.1	0.3	0.3	64	0.12	0.018	14
932992	Soil		1.1	22.4	39.5	46	<0.1	15.4	7.3	259	2.54	7.5	2.1	7.0	12	0.1	0.2	0.3	57	0.12	0.026	19
932993	Soil		1.0	17.5	29.2	45	<0.1	14.8	5.8	168	2.41	7.2	2.5	3.3	13	<0.1	0.2	0.3	59	0.13	0.031	15
932994	Soil		0.8	47.1	31.0	93	0.1	15.2	9.2	420	2.52	6.0	2.4	2.1	14	0.1	0.1	0.3	46	0.14	0.044	10
932995	Soil		1.0	60.6	43.7	77	0.1	15.8	8.5	351	2.93	9.2	3.1	4.2	12	0.1	0.2	0.4	57	0.13	0.032	12
932996	Soil		0.9	46.1	125.9	156	0.1	15.2	7.9	380	3.30	10.1	2.2	3.1	11	0.1	0.2	0.4	57	0.12	0.028	9
932997	Soil		0.9	54.3	60.2	78	0.4	16.3	7.8	376	2.68	7.3	2.4	0.9	16	0.3	0.2	0.4	53	0.15	0.036	16

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
932968	Soil	87	1.88	160	0.145	<20	2.77	0.006	0.47	<0.1	0.03	5.4	0.5	<0.05	8	<0.5	<0.2
932969	Soil	128	1.89	145	0.084	<20	2.23	0.005	0.15	<0.1	0.04	3.9	0.2	<0.05	7	<0.5	<0.2
932970	Soil	19	1.02	85	0.077	<20	1.33	0.006	0.44	<0.1	0.05	1.4	0.5	0.16	4	<0.5	<0.2
932971	Soil	20	1.31	88	0.151	<20	1.42	0.006	0.56	<0.1	0.02	1.4	0.5	0.16	4	<0.5	<0.2
932972	Soil	63	2.08	143	0.191	<20	2.78	0.005	0.62	<0.1	0.03	3.5	0.7	<0.05	9	0.6	<0.2
932973	Soil	29	1.69	170	0.190	<20	2.26	0.004	0.59	<0.1	0.03	3.1	0.6	<0.05	7	<0.5	0.2
932974	Soil	15	1.05	132	0.117	<20	1.60	0.004	0.42	<0.1	0.03	1.3	0.5	0.10	4	<0.5	<0.2
932975	Soil	27	0.63	102	0.097	<20	1.93	0.011	0.11	0.1	0.16	2.8	0.2	<0.05	5	<0.5	<0.2
932976	Soil	81	2.44	132	0.143	<20	2.28	0.007	0.52	<0.1	0.04	3.5	0.4	<0.05	8	<0.5	<0.2
932977	Soil	23	2.18	207	0.173	<20	2.54	0.008	0.77	<0.1	0.03	2.9	0.6	<0.05	7	<0.5	<0.2
932978	Soil	26	2.07	167	0.109	<20	2.37	0.006	0.49	<0.1	0.03	4.7	0.4	<0.05	6	<0.5	<0.2
932979	Soil	30	1.45	146	0.080	<20	2.09	0.007	0.13	<0.1	0.04	3.6	0.3	<0.05	6	<0.5	<0.2
932980	Soil	48	1.62	179	0.084	<20	2.11	0.006	0.36	<0.1	0.04	6.1	0.4	<0.05	6	0.6	<0.2
932981	Soil	28	1.20	182	0.068	<20	1.97	0.007	0.21	<0.1	0.07	7.0	0.2	<0.05	6	<0.5	<0.2
932982	Soil	30	1.31	101	0.093	<20	2.16	0.006	0.09	<0.1	0.02	3.6	0.1	<0.05	7	<0.5	<0.2
932983	Soil	26	1.11	146	0.082	<20	2.05	0.007	0.14	<0.1	0.03	4.1	0.2	<0.05	6	<0.5	<0.2
932984	Soil	18	0.93	116	0.070	<20	1.86	0.008	0.15	<0.1	0.03	3.2	0.2	<0.05	6	<0.5	<0.2
932985	Soil	20	0.76	122	0.044	<20	1.76	0.008	0.07	<0.1	0.07	3.6	0.1	<0.05	5	<0.5	<0.2
932986	Soil	24	0.48	152	0.048	<20	1.72	0.009	0.07	<0.1	0.02	3.3	<0.1	<0.05	5	<0.5	<0.2
932987	Soil	25	0.39	132	0.053	<20	1.69	0.009	0.07	<0.1	0.03	2.9	<0.1	<0.05	5	<0.5	<0.2
932988	Soil	31	0.39	176	0.069	<20	1.97	0.011	0.09	<0.1	0.04	3.1	<0.1	<0.05	7	<0.5	<0.2
932989	Soil	21	0.35	115	0.051	<20	1.47	0.005	0.09	<0.1	0.02	2.8	<0.1	<0.05	4	<0.5	<0.2
932990	Soil	27	0.40	181	0.066	<20	1.78	0.010	0.06	<0.1	0.02	3.0	<0.1	<0.05	6	<0.5	<0.2
932991	Soil	31	0.46	162	0.083	<20	2.14	0.011	0.06	<0.1	0.06	3.2	0.1	<0.05	6	<0.5	<0.2
932992	Soil	28	0.39	160	0.064	<20	1.89	0.010	0.06	<0.1	0.02	3.1	0.1	<0.05	6	<0.5	<0.2
932993	Soil	26	0.36	177	0.065	<20	1.76	0.009	0.06	<0.1	0.02	2.6	<0.1	<0.05	6	<0.5	<0.2
932994	Soil	22	0.87	126	0.060	<20	1.75	0.013	0.10	<0.1	0.02	2.7	0.1	<0.05	6	<0.5	<0.2
932995	Soil	25	0.69	131	0.067	<20	1.97	0.010	0.05	<0.1	0.03	3.4	<0.1	<0.05	6	0.8	<0.2
932996	Soil	24	0.84	118	0.053	<20	1.88	0.008	0.04	<0.1	0.02	3.0	0.1	<0.05	7	<0.5	<0.2
932997	Soil	24	0.55	205	0.048	<20	1.79	0.010	0.05	<0.1	0.06	2.5	<0.1	<0.05	6	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
932998	Soil	1.1	66.8	61.8	110	0.3	15.8	9.4	479	2.65	6.4	2.6	2.5	14	0.2	0.1	0.6	49	0.16	0.038	16
932999	Soil	1.0	81.9	49.9	122	0.3	15.3	9.9	652	3.03	4.9	0.7	1.9	14	0.3	0.1	0.5	37	0.19	0.054	17
933000	Soil	0.9	48.8	51.1	91	0.3	16.7	11.9	345	2.67	6.4	1.5	1.8	16	0.1	0.1	0.5	52	0.18	0.052	17
933200	Soil	1.7	24.5	94.5	96	0.1	47.9	15.3	496	3.89	9.7	1.4	5.4	10	<0.1	0.2	0.4	63	0.12	0.037	13
C046	Soil	0.5	26.2	6.5	46	<0.1	13.7	9.5	205	2.76	7.3	1.1	0.9	12	<0.1	0.2	0.1	81	0.20	0.043	7
C047	Soil	0.4	54.6	10.9	62	0.2	32.9	20.1	541	4.01	3.3	2.5	2.6	22	<0.1	<0.1	0.1	119	0.60	0.083	13
C048	Soil	0.8	40.8	10.6	49	0.2	26.2	16.4	1119	2.81	7.3	1.0	3.0	24	0.2	0.3	0.2	70	0.55	0.052	13
C049	Soil	0.9	28.2	9.3	52	<0.1	17.0	10.6	308	3.26	6.8	0.6	2.4	19	<0.1	0.3	0.1	83	0.45	0.057	9
C050	Soil	0.8	21.2	9.5	45	<0.1	11.7	8.1	257	2.83	4.8	1.0	1.8	17	<0.1	0.2	0.1	85	0.30	0.040	9
C051	Soil	0.6	26.0	9.2	54	<0.1	14.3	9.1	266	2.88	5.5	1.1	2.7	22	<0.1	0.2	0.1	76	0.40	0.069	11
C052	Soil	0.8	18.9	10.5	32	<0.1	10.4	6.4	143	2.08	6.0	1.5	1.3	18	<0.1	0.1	0.2	59	0.25	0.029	8
C053	Soil	0.8	19.5	7.4	60	<0.1	10.7	8.5	336	3.01	5.9	1.1	1.2	13	<0.1	0.2	0.1	71	0.19	0.036	7
C054	Soil	0.7	21.6	9.4	47	<0.1	23.6	9.2	200	2.38	8.7	1.3	3.2	19	0.7	1.1	0.5	54	0.33	0.049	10
C055	Soil	0.7	19.4	9.3	45	<0.1	21.4	9.7	275	2.43	7.0	2.8	2.6	20	<0.1	0.1	0.1	58	0.37	0.044	9
C056	Soil	0.7	24.0	10.3	46	0.1	21.4	8.6	190	2.20	6.9	2.0	2.7	23	0.5	0.6	0.4	51	0.45	0.049	10
C057	Soil	1.5	9.5	9.6	41	<0.1	14.2	6.3	149	2.72	13.8	<0.5	2.2	9	<0.1	0.2	0.2	61	0.11	0.035	7
C058	Soil	1.1	27.5	15.8	65	0.1	15.8	12.0	422	3.78	13.9	<0.5	3.1	16	<0.1	0.3	0.2	94	0.34	0.090	13
C059	Soil	0.5	45.9	5.9	59	<0.1	16.0	13.6	479	3.19	7.9	0.7	2.4	19	0.3	0.3	0.2	77	0.59	0.114	13
C060	Soil	0.8	22.7	7.5	44	<0.1	17.7	10.6	380	2.57	6.6	0.8	2.6	22	<0.1	0.3	0.1	66	0.46	0.044	8
C061	Soil	1.0	17.3	8.5	45	0.1	17.2	7.4	195	2.24	8.4	2.0	3.3	18	0.4	0.8	0.3	49	0.20	0.035	10
C062	Soil	1.2	25.2	10.1	47	0.1	21.9	9.6	234	2.71	23.3	2.2	5.0	21	<0.1	0.7	0.2	57	0.29	0.027	15
C063	Soil	1.3	20.1	11.7	73	<0.1	19.8	10.4	399	3.38	19.7	<0.5	4.3	14	0.1	2.1	0.2	71	0.26	0.029	9
C064	Soil	1.0	16.9	9.9	57	<0.1	20.0	13.8	1590	3.15	8.0	0.5	1.1	16	0.3	0.3	0.2	95	0.24	0.034	5
C065	Soil	0.8	21.4	15.9	47	<0.1	19.1	9.5	220	2.63	8.2	1.8	2.5	20	0.3	0.5	0.4	60	0.32	0.043	8
C066	Soil	0.6	28.4	9.6	61	<0.1	23.4	11.2	241	2.76	9.1	2.7	4.0	21	0.2	0.5	0.2	56	0.32	0.046	11
C067	Soil	0.8	23.6	11.1	100	<0.1	18.9	14.1	431	3.84	6.8	1.5	2.2	35	0.4	0.4	0.2	99	0.79	0.110	15
C068	Soil	0.7	20.5	8.3	106	<0.1	12.0	8.8	383	2.60	3.9	1.5	1.9	27	0.5	0.4	0.2	67	0.47	0.034	11
C069	Soil	0.7	22.6	10.0	78	<0.1	18.3	10.7	338	3.29	7.3	<0.5	2.8	25	0.2	0.5	0.2	66	0.41	0.053	10
C070	Soil	1.1	22.6	9.5	78	<0.1	17.0	9.2	300	2.70	10.1	2.5	3.3	21	0.3	0.4	0.2	51	0.33	0.056	12
C071	Soil	1.9	12.4	11.3	77	<0.1	11.6	5.0	303	2.28	16.0	2.1	2.3	14	0.4	0.4	0.2	46	0.20	0.021	8

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
932998	Soil	25	0.58	169	0.046	<20	1.56	0.008	0.07	<0.1	0.04	3.1	<0.1	<0.05	5	<0.5	<0.2
932999	Soil	21	0.49	195	0.026	<20	1.49	0.008	0.06	<0.1	0.04	3.8	<0.1	<0.05	4	<0.5	<0.2
933000	Soil	30	0.51	254	0.037	<20	1.91	0.013	0.06	<0.1	0.04	3.5	0.1	<0.05	5	<0.5	<0.2
933200	Soil	43	0.55	156	0.043	<20	2.19	0.008	0.06	<0.1	0.02	3.3	0.1	<0.05	7	<0.5	<0.2
C046	Soil	23	0.79	176	0.092	<20	1.70	0.017	0.09	<0.1	0.02	3.7	0.1	<0.05	6	<0.5	<0.2
C047	Soil	67	1.67	599	0.129	<20	2.48	0.017	0.37	<0.1	0.03	14.0	0.2	<0.05	8	<0.5	<0.2
C048	Soil	35	0.64	368	0.063	<20	1.59	0.019	0.07	<0.1	0.04	6.7	0.1	<0.05	5	0.6	<0.2
C049	Soil	29	0.66	259	0.073	<20	1.71	0.013	0.11	<0.1	0.02	5.3	<0.1	<0.05	6	<0.5	<0.2
C050	Soil	25	0.54	235	0.067	<20	1.60	0.011	0.11	<0.1	0.02	5.4	<0.1	<0.05	6	<0.5	<0.2
C051	Soil	26	0.65	236	0.078	<20	1.58	0.014	0.14	<0.1	0.03	5.8	<0.1	<0.05	5	<0.5	<0.2
C052	Soil	20	0.43	197	0.071	<20	1.37	0.012	0.05	<0.1	0.01	2.4	<0.1	<0.05	5	<0.5	<0.2
C053	Soil	21	0.56	165	0.065	<20	1.62	0.008	0.09	<0.1	<0.01	5.1	<0.1	<0.05	6	<0.5	<0.2
C054	Soil	37	0.61	249	0.054	<20	1.49	0.015	0.05	0.1	0.01	4.3	<0.1	<0.05	4	<0.5	<0.2
C055	Soil	33	0.63	268	0.046	<20	1.54	0.014	0.05	<0.1	0.04	4.5	<0.1	<0.05	5	<0.5	<0.2
C056	Soil	34	0.55	379	0.051	<20	1.38	0.017	0.05	0.1	0.03	4.3	<0.1	<0.05	4	<0.5	<0.2
C057	Soil	23	0.40	175	0.064	<20	1.47	0.009	0.09	0.1	0.01	2.8	<0.1	<0.05	5	<0.5	<0.2
C058	Soil	28	0.83	307	0.145	<20	1.80	0.010	0.33	0.1	<0.01	8.3	0.1	<0.05	6	0.5	<0.2
C059	Soil	23	0.87	351	0.139	<20	1.53	0.017	0.53	<0.1	0.05	4.2	0.2	<0.05	5	<0.5	<0.2
C060	Soil	29	0.66	279	0.084	<20	1.54	0.016	0.14	0.2	0.03	3.8	<0.1	<0.05	5	<0.5	<0.2
C061	Soil	27	0.40	240	0.057	<20	1.33	0.013	0.06	<0.1	<0.01	3.2	<0.1	<0.05	4	<0.5	<0.2
C062	Soil	36	0.54	295	0.057	<20	1.60	0.021	0.07	<0.1	0.04	6.1	<0.1	<0.05	5	<0.5	<0.2
C063	Soil	35	0.83	257	0.111	<20	2.05	0.010	0.18	<0.1	0.01	4.8	0.1	<0.05	7	<0.5	<0.2
C064	Soil	33	0.95	357	0.146	<20	1.88	0.015	0.08	0.1	<0.01	4.7	<0.1	<0.05	7	<0.5	<0.2
C065	Soil	26	0.60	199	0.064	<20	1.55	0.013	0.08	<0.1	<0.01	3.7	<0.1	<0.05	4	<0.5	<0.2
C066	Soil	30	0.56	191	0.064	<20	1.64	0.015	0.08	0.1	<0.01	4.6	<0.1	<0.05	5	<0.5	<0.2
C067	Soil	33	1.16	185	0.117	<20	1.91	0.028	0.06	<0.1	0.02	8.7	<0.1	<0.05	7	<0.5	<0.2
C068	Soil	20	0.65	226	0.084	<20	1.46	0.020	0.09	<0.1	0.02	6.0	<0.1	<0.05	6	<0.5	<0.2
C069	Soil	27	0.76	262	0.108	<20	1.91	0.017	0.07	<0.1	<0.01	7.2	<0.1	<0.05	7	<0.5	<0.2
C070	Soil	27	0.59	242	0.072	<20	1.51	0.018	0.09	<0.1	0.02	4.7	<0.1	<0.05	5	<0.5	<0.2
C071	Soil	21	0.41	159	0.083	<20	1.16	0.010	0.24	<0.1	0.01	4.2	0.2	<0.05	5	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
C072	Soil	1.4	15.2	9.1	113	<0.1	12.1	8.1	764	3.03	11.4	1.6	2.6	15	0.3	0.6	0.3	55	0.20	0.031	9
C073	Soil	1.4	21.4	13.0	106	0.2	11.7	7.9	335	2.94	7.5	1.3	1.7	16	0.2	0.4	0.3	58	0.20	0.026	8
C074	Soil	0.8	15.6	10.2	83	<0.1	9.4	6.4	391	2.54	6.5	1.7	2.7	19	0.3	0.5	0.2	45	0.29	0.042	9
C075	Soil	0.9	12.4	9.8	72	<0.1	13.0	6.0	312	2.38	6.6	<0.5	3.0	22	0.2	0.5	0.2	42	0.33	0.046	10
C076	Soil	1.2	15.3	9.1	69	<0.1	14.6	6.5	317	2.29	6.2	11.0	2.9	22	0.2	0.5	0.2	41	0.31	0.044	11
C078	Soil	1.2	13.7	8.7	86	<0.1	12.9	7.4	373	2.27	7.3	1.7	2.7	21	0.4	0.6	0.3	39	0.33	0.047	10
C079	Soil	1.4	25.6	12.8	102	0.1	20.2	10.0	576	3.01	7.6	3.0	2.9	32	0.3	0.6	0.2	61	0.58	0.060	11
C080	Soil	1.0	28.9	9.1	54	0.1	14.7	9.9	314	2.46	6.6	1.4	2.5	25	0.3	0.5	0.2	60	0.52	0.071	13
C081	Soil	0.9	33.7	8.1	49	<0.1	15.4	12.7	311	2.71	4.8	1.1	1.6	20	0.3	0.5	0.2	77	0.37	0.063	7
C082	Soil	1.5	34.5	13.2	47	<0.1	29.1	12.4	577	2.80	7.5	5.9	3.0	27	0.3	0.5	0.3	74	0.48	0.036	11
C083	Soil	1.0	37.9	12.9	63	<0.1	28.6	16.2	282	3.67	7.6	4.9	2.0	24	0.3	0.5	0.3	94	0.47	0.054	6
C084	Soil	0.9	35.5	18.4	60	<0.1	21.5	15.7	533	3.59	6.0	1.0	1.6	29	0.3	0.6	0.3	99	0.50	0.062	6
C085	Soil	1.3	34.9	8.1	53	<0.1	19.2	13.1	262	3.40	5.4	2.0	1.3	21	0.3	0.5	0.2	94	0.57	0.110	5
C086	Soil	1.2	49.9	9.2	60	0.1	14.2	15.9	392	4.22	4.8	<0.5	1.0	21	0.3	0.7	0.3	127	0.47	0.074	3
C087	Soil	1.1	33.7	7.4	63	<0.1	15.9	12.3	385	3.64	18.6	1.6	3.0	18	0.3	0.8	0.2	101	0.36	0.060	14
C088	Soil	1.1	18.3	11.5	49	0.1	17.1	9.7	278	2.85	8.1	2.1	2.5	18	0.3	0.6	0.3	70	0.24	0.039	8
C089	Soil	1.1	20.9	9.4	54	<0.1	16.8	10.2	275	3.42	13.1	2.3	2.8	15	0.3	0.7	0.3	77	0.28	0.061	9
C090	Soil	0.9	37.1	8.9	55	0.1	26.4	10.4	400	2.45	9.7	2.4	2.5	45	0.4	0.8	0.3	52	0.91	0.076	12
C091	Soil	0.9	14.2	7.7	42	<0.1	14.8	8.9	376	2.06	6.3	2.2	2.6	25	0.1	0.3	0.2	46	0.39	0.044	9
C092	Soil	1.0	17.4	8.1	47	<0.1	18.4	7.9	252	2.21	7.8	0.5	3.2	29	<0.1	0.3	0.1	53	0.47	0.058	11
C093	Soil	1.1	23.5	7.8	48	<0.1	21.2	8.8	340	2.30	8.2	<0.5	3.3	35	<0.1	0.4	0.1	51	0.58	0.070	12
C094	Soil	1.1	28.7	8.5	52	0.1	22.8	9.2	377	2.39	8.4	3.3	3.3	39	0.1	0.3	0.1	52	0.60	0.063	12
C096	Soil	0.8	30.7	8.4	54	0.2	24.3	9.6	446	2.30	8.3	1.7	2.8	41	0.2	0.3	0.2	51	0.65	0.062	12
932748	Soil	0.5	69.1	10.6	102	<0.1	18.1	17.7	682	4.05	8.2	<0.5	1.6	18	0.1	0.2	0.2	66	0.16	0.021	4
932749	Soil	0.9	69.0	40.9	140	0.5	14.7	12.1	676	3.21	8.5	<0.5	1.1	15	0.2	0.2	0.6	53	0.17	0.030	5
932750	Soil	0.6	31.4	18.8	110	0.2	12.0	13.0	739	2.99	4.4	<0.5	1.8	26	0.1	0.1	0.3	61	0.20	0.039	6
932766	Soil	1.2	12.1	35.7	71	<0.1	18.0	6.1	239	2.34	6.4	0.9	17.0	13	0.9	0.1	0.2	51	0.19	0.016	22
932767	Soil	3.9	13.7	27.7	94	0.2	19.3	7.7	285	3.03	8.2	<0.5	10.9	15	0.3	0.2	0.2	70	0.18	0.017	15
932768	Soil	14.2	12.9	40.7	70	0.1	13.8	5.6	248	2.62	7.9	<0.5	5.9	12	0.1	0.2	0.2	59	0.14	0.017	8
932769	Soil	4.3	10.1	35.7	59	0.1	11.0	4.7	222	2.36	11.2	<0.5	8.6	9	0.1	0.1	0.8	46	0.08	0.024	16

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
C072	Soil	21	0.56	199	0.132	<20	1.70	0.013	0.34	<0.1	0.02	6.7	0.2	<0.05	7	<0.5	<0.2
C073	Soil	20	0.68	190	0.132	<20	1.61	0.017	0.27	<0.1	<0.01	6.2	0.2	<0.05	7	<0.5	<0.2
C074	Soil	19	0.51	182	0.113	<20	1.48	0.014	0.29	0.1	<0.01	5.9	0.1	<0.05	6	<0.5	<0.2
C075	Soil	22	0.49	241	0.102	<20	1.37	0.018	0.16	0.2	0.01	5.5	0.1	<0.05	5	<0.5	<0.2
C076	Soil	23	0.48	249	0.088	<20	1.43	0.018	0.13	0.1	<0.01	5.1	0.1	<0.05	5	<0.5	<0.2
C078	Soil	18	0.50	196	0.095	<20	1.32	0.016	0.17	0.1	<0.01	5.0	0.1	<0.05	5	<0.5	<0.2
C079	Soil	30	0.69	300	0.095	<20	1.69	0.022	0.08	<0.1	0.02	6.5	0.1	<0.05	6	<0.5	<0.2
C080	Soil	24	0.64	335	0.099	<20	1.45	0.018	0.09	0.1	0.02	4.9	<0.1	<0.05	5	<0.5	<0.2
C081	Soil	29	0.89	284	0.131	<20	1.80	0.018	0.15	<0.1	<0.01	3.9	<0.1	<0.05	6	<0.5	<0.2
C082	Soil	41	0.78	372	0.111	<20	1.92	0.029	0.11	0.2	0.03	4.9	<0.1	<0.05	6	<0.5	<0.2
C083	Soil	50	1.43	276	0.149	<20	2.32	0.024	0.13	<0.1	<0.01	5.1	0.1	<0.05	7	<0.5	<0.2
C084	Soil	38	1.22	262	0.169	<20	2.30	0.023	0.17	0.1	0.02	5.0	<0.1	<0.05	8	<0.5	<0.2
C085	Soil	32	1.20	225	0.171	<20	2.21	0.021	0.35	<0.1	0.03	4.9	0.1	<0.05	7	<0.5	<0.2
C086	Soil	20	1.05	230	0.173	<20	2.24	0.027	0.49	<0.1	0.02	5.8	0.1	<0.05	7	<0.5	<0.2
C087	Soil	25	0.95	272	0.167	<20	1.85	0.016	0.59	<0.1	0.09	6.8	0.1	<0.05	7	<0.5	<0.2
C088	Soil	28	0.66	222	0.101	<20	1.70	0.014	0.12	0.1	0.02	3.1	<0.1	<0.05	5	<0.5	<0.2
C089	Soil	26	0.69	204	0.107	<20	1.76	0.011	0.20	0.2	<0.01	4.6	0.1	<0.05	6	<0.5	<0.2
C090	Soil	27	0.64	339	0.065	<20	1.23	0.032	0.06	0.3	0.03	3.6	<0.1	<0.05	4	<0.5	<0.2
C091	Soil	23	0.38	254	0.062	<20	1.28	0.018	0.04	0.1	0.01	2.5	<0.1	<0.05	4	<0.5	<0.2
C092	Soil	26	0.45	236	0.070	<20	1.24	0.022	0.05	0.1	<0.01	3.2	<0.1	<0.05	4	<0.5	<0.2
C093	Soil	27	0.50	256	0.066	<20	1.30	0.024	0.05	<0.1	0.02	3.2	<0.1	<0.05	4	<0.5	<0.2
C094	Soil	28	0.56	316	0.068	<20	1.42	0.027	0.06	0.2	0.03	3.7	<0.1	<0.05	4	<0.5	<0.2
C096	Soil	27	0.54	360	0.059	<20	1.39	0.023	0.06	0.1	0.03	3.6	<0.1	<0.05	4	0.7	<0.2
932748	Soil	20	1.65	118	0.141	<20	2.44	0.007	0.34	<0.1	0.03	2.1	0.5	<0.05	6	<0.5	<0.2
932749	Soil	18	1.08	101	0.084	<20	1.85	0.007	0.13	<0.1	0.03	2.1	0.2	<0.05	6	<0.5	<0.2
932750	Soil	14	1.01	160	0.104	<20	1.65	0.006	0.29	<0.1	0.01	2.1	0.2	<0.05	6	<0.5	<0.2
932766	Soil	29	0.39	74	0.023	<20	2.20	0.006	0.10	0.1	0.02	2.0	0.2	<0.05	8	<0.5	<0.2
932767	Soil	34	0.39	96	0.036	<20	2.17	0.010	0.08	<0.1	0.03	2.7	0.2	<0.05	7	<0.5	<0.2
932768	Soil	23	0.30	69	0.017	<20	1.83	0.008	0.08	<0.1	0.02	1.7	0.3	<0.05	7	<0.5	<0.2
932769	Soil	21	0.24	82	0.014	<20	1.71	0.006	0.12	<0.1	0.01	1.5	0.2	0.08	7	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
932770	Soil	1.9	15.2	17.8	69	0.2	15.4	6.9	222	2.91	6.9	11.1	4.7	12	0.2	0.2	0.2	72	0.12	0.020	7
932771	Soil	3.7	11.2	34.5	49	<0.1	15.3	5.8	184	2.23	6.0	<0.5	6.2	14	0.1	0.2	0.1	51	0.16	0.017	8
932772	Soil	2.2	12.1	23.3	95	0.1	11.4	5.8	259	2.53	5.8	<0.5	5.2	10	0.5	0.2	0.2	61	0.10	0.022	7
932773	Soil	1.0	9.3	23.3	56	0.3	13.9	5.8	197	2.28	5.3	<0.5	7.8	11	0.2	0.2	0.1	59	0.14	0.013	7
932774	Soil	1.3	19.2	21.7	50	<0.1	20.5	9.1	231	3.04	8.6	3.3	9.6	14	0.2	0.3	0.2	69	0.14	0.020	11
932776	Soil	0.9	11.9	27.0	45	<0.1	12.5	4.9	179	1.66	4.5	<0.5	12.1	16	<0.1	0.2	<0.1	45	0.21	0.022	32
932778	Soil	1.3	9.6	16.0	39	<0.1	9.3	3.8	174	1.91	4.4	<0.5	4.1	10	0.2	0.2	0.1	57	0.08	0.012	5
932780	Soil	1.4	16.7	21.3	74	0.1	17.1	7.5	350	3.15	9.5	<0.5	4.6	14	0.8	0.3	0.2	82	0.14	0.024	9
932781	Soil	1.4	9.6	14.1	67	<0.1	6.6	4.6	482	2.19	4.6	<0.5	1.7	9	0.3	0.2	0.2	67	0.07	0.023	6
932782	Soil	1.3	16.7	42.1	73	<0.1	22.3	8.8	241	2.92	8.1	<0.5	11.6	20	0.2	0.2	0.2	71	0.24	0.017	24
932783	Soil	1.1	16.1	21.3	62	0.2	19.3	8.4	249	2.81	8.7	<0.5	8.3	14	0.2	0.2	0.2	70	0.16	0.013	13
932784	Soil	1.0	11.1	21.7	60	<0.1	13.4	6.0	184	2.56	6.4	<0.5	4.3	13	0.2	0.2	0.2	65	0.13	0.023	16
932785	Soil	0.8	7.9	27.0	46	<0.1	10.4	4.2	167	1.30	3.3	1.6	6.0	15	0.2	0.1	0.2	35	0.24	0.015	18
932786	Soil	0.3	2.4	43.5	47	<0.1	1.9	0.6	29	0.28	1.1	<0.5	40.6	13	<0.1	<0.1	<0.1	5	0.95	0.006	50
932787	Soil	0.9	17.0	12.0	108	0.1	18.1	12.7	1362	2.56	4.7	<0.5	1.9	15	0.4	0.2	0.2	62	0.13	0.022	8
932788	Soil	0.6	22.6	18.1	52	<0.1	20.9	9.8	296	2.64	8.0	<0.5	18.2	20	<0.1	0.2	0.1	69	0.22	0.018	37
933101	Soil	0.9	67.5	15.0	81	0.4	13.5	13.7	560	2.62	4.4	1.1	1.0	15	0.1	0.1	0.2	51	0.24	0.034	6
933102	Soil	0.6	71.9	19.2	152	0.1	11.7	19.6	1249	3.81	2.1	<0.5	1.0	14	0.1	<0.1	0.3	64	0.19	0.022	2
933103	Soil	0.9	53.5	39.7	126	0.5	13.3	13.8	985	3.18	4.7	<0.5	5.6	21	0.2	0.1	0.9	55	0.23	0.028	12
933104	Soil	0.9	51.6	91.6	229	0.5	11.8	17.6	1010	3.30	9.8	1.2	3.4	18	0.3	0.2	1.3	59	0.17	0.032	8
933105	Soil	1.0	58.5	49.4	346	0.3	11.7	14.1	1158	4.73	10.8	<0.5	2.6	27	0.4	0.1	1.0	97	0.23	0.035	7
933106	Soil	0.8	57.6	90.1	343	1.3	39.5	22.6	1114	3.88	12.7	0.7	3.3	18	0.6	0.1	2.0	64	0.26	0.045	7
933107	Soil	1.2	40.3	65.0	238	1.1	41.7	12.7	940	3.73	17.3	<0.5	5.8	19	<0.1	0.1	2.7	55	0.39	0.042	16
933108	Soil	1.0	52.5	56.0	164	0.9	47.5	24.8	1032	3.64	9.9	<0.5	5.1	20	0.2	0.1	1.7	61	0.34	0.047	14
933109	Soil	1.1	45.9	98.4	193	0.9	9.3	9.8	498	2.78	6.6	2.5	2.6	14	0.5	0.2	2.2	59	0.13	0.029	8
933110	Soil	0.9	64.0	87.0	315	0.7	32.2	19.4	850	3.47	8.5	3.6	2.7	20	0.5	0.2	1.0	66	0.28	0.039	8
933111	Soil	0.6	120.0	251.9	198	1.9	21.6	24.5	937	3.60	7.5	2.5	1.4	14	0.3	0.2	6.5	63	0.23	0.025	4
933112	Soil	0.9	6.9	25.8	41	0.1	4.6	3.2	229	1.18	3.8	2.1	5.2	14	<0.1	0.1	3.5	32	0.11	0.018	10
933113	Soil	0.5	53.8	16.0	106	0.1	12.1	16.4	911	3.37	2.1	1.5	6.8	31	<0.1	<0.1	0.3	64	0.46	0.023	10
933114	Soil	0.5	49.8	162.1	346	0.2	10.0	21.4	926	4.19	7.5	1.2	1.1	15	0.3	0.2	0.4	65	0.24	0.027	4

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
932770	Soil	25	0.29	119	0.034	<20	1.95	0.011	0.04	<0.1	0.09	1.8	0.1	<0.05	8	<0.5	<0.2
932771	Soil	23	0.34	80	0.036	<20	1.43	0.009	0.08	<0.1	0.02	1.6	0.2	<0.05	5	<0.5	<0.2
932772	Soil	21	0.24	96	0.037	<20	1.62	0.008	0.04	<0.1	0.03	1.5	<0.1	<0.05	7	<0.5	<0.2
932773	Soil	25	0.31	97	0.045	<20	1.81	0.007	0.05	<0.1	0.02	1.7	<0.1	<0.05	7	<0.5	<0.2
932774	Soil	32	0.39	140	0.070	<20	2.58	0.010	0.05	<0.1	0.02	3.0	0.1	<0.05	7	<0.5	<0.2
932776	Soil	21	0.30	85	0.071	<20	1.18	0.009	0.06	<0.1	0.01	2.1	<0.1	<0.05	5	<0.5	<0.2
932778	Soil	17	0.18	73	0.052	<20	1.15	0.008	0.03	<0.1	0.01	1.3	<0.1	<0.05	6	<0.5	<0.2
932780	Soil	28	0.32	145	0.072	<20	1.85	0.008	0.05	<0.1	0.01	2.2	0.1	<0.05	9	<0.5	<0.2
932781	Soil	16	0.14	91	0.062	<20	1.09	0.009	0.02	<0.1	0.02	1.2	<0.1	<0.05	7	<0.5	<0.2
932782	Soil	38	0.44	150	0.052	<20	2.44	0.007	0.06	0.1	0.02	2.5	0.2	<0.05	7	<0.5	<0.2
932783	Soil	32	0.41	121	0.059	<20	2.33	0.008	0.06	<0.1	0.01	2.3	0.1	<0.05	7	<0.5	<0.2
932784	Soil	22	0.27	110	0.052	<20	1.67	0.010	0.05	<0.1	0.02	1.5	<0.1	<0.05	7	<0.5	<0.2
932785	Soil	18	0.25	73	0.050	<20	1.03	0.010	0.05	0.1	0.01	1.3	0.1	<0.05	4	<0.5	<0.2
932786	Soil	3	0.05	18	0.012	<20	1.64	0.025	0.08	0.6	<0.01	0.5	<0.1	<0.05	2	0.5	<0.2
932787	Soil	26	0.35	283	0.068	<20	1.97	0.012	0.02	<0.1	0.02	2.2	0.1	<0.05	6	<0.5	<0.2
932788	Soil	38	0.45	136	0.087	<20	2.43	0.008	0.06	<0.1	<0.01	3.9	<0.1	<0.05	6	<0.5	<0.2
933101	Soil	18	0.87	125	0.077	<20	1.57	0.005	0.13	<0.1	0.03	2.2	0.2	<0.05	5	<0.5	<0.2
933102	Soil	11	1.64	89	0.124	<20	2.07	0.003	0.39	<0.1	0.01	2.4	0.4	<0.05	6	<0.5	<0.2
933103	Soil	17	1.00	130	0.105	<20	1.79	0.007	0.27	<0.1	0.02	2.4	0.3	<0.05	5	<0.5	<0.2
933104	Soil	15	1.22	84	0.110	<20	1.69	0.006	0.29	<0.1	0.03	2.2	0.3	<0.05	6	0.5	<0.2
933105	Soil	14	2.06	201	0.196	<20	2.35	0.005	0.97	<0.1	0.03	3.6	0.6	0.10	9	<0.5	<0.2
933106	Soil	108	2.21	89	0.086	<20	2.52	0.004	0.23	<0.1	0.06	3.8	0.3	<0.05	7	<0.5	0.2
933107	Soil	114	2.12	78	0.104	<20	2.13	0.004	0.44	<0.1	0.02	3.7	0.5	<0.05	7	0.5	<0.2
933108	Soil	140	2.35	113	0.113	<20	2.50	0.005	0.24	<0.1	0.03	4.5	0.3	<0.05	8	<0.5	<0.2
933109	Soil	13	1.00	64	0.084	<20	1.51	0.003	0.16	<0.1	0.04	2.1	0.2	<0.05	6	<0.5	0.8
933110	Soil	81	2.04	89	0.093	<20	2.45	0.005	0.15	<0.1	0.06	4.1	0.2	<0.05	7	<0.5	<0.2
933111	Soil	20	1.66	83	0.094	<20	2.31	0.006	0.10	<0.1	0.03	2.6	0.3	<0.05	5	<0.5	1.5
933112	Soil	7	0.33	39	0.087	<20	0.69	0.003	0.10	<0.1	0.01	0.8	0.2	<0.05	6	<0.5	0.7
933113	Soil	15	1.74	105	0.130	<20	2.22	0.002	0.52	<0.1	<0.01	1.9	0.6	<0.05	5	<0.5	<0.2
933114	Soil	13	1.56	91	0.092	<20	2.34	0.003	0.25	<0.1	0.02	2.9	0.3	<0.05	6	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
933115	Soil	0.8	65.0	130.9	234	0.4	16.9	17.2	948	3.65	6.6	1.3	1.2	19	0.3	0.2	1.2	71	0.41	0.037	6
933116	Soil	1.1	44.6	121.1	222	0.5	26.0	19.9	1918	3.34	6.2	1.9	5.3	16	0.1	0.1	1.6	36	0.27	0.034	11
933118	Soil	0.5	44.9	47.3	140	0.4	15.7	14.4	510	2.77	8.6	2.0	3.7	16	0.3	0.3	0.8	67	0.31	0.039	9
933124	Soil	0.8	31.2	65.5	209	0.3	15.9	17.9	944	3.81	6.6	2.1	1.9	19	0.6	0.2	0.4	60	0.39	0.036	11
933126	Soil	0.7	20.4	160.8	329	0.4	42.4	13.8	464	2.70	8.5	4.2	5.6	30	0.6	0.1	1.3	44	0.44	0.068	24
933127	Soil	1.5	16.6	89.8	364	0.4	40.9	12.6	727	3.11	10.6	1.5	6.5	26	1.2	0.1	1.9	31	0.31	0.055	32
933129	Soil	3.4	32.9	581.1	562	0.5	28.5	17.4	1523	3.55	17.1	4.6	20.3	27	2.4	0.1	2.3	22	0.33	0.121	41
933130	Soil	2.2	14.3	660.8	537	0.4	17.6	13.0	590	2.92	15.8	3.0	8.9	27	1.2	0.3	1.9	42	0.12	0.049	25
933131	Soil	1.9	7.3	187.5	374	0.6	8.6	5.5	599	2.24	12.3	<0.5	23.5	9	0.8	0.3	1.7	36	0.08	0.021	19
933132	Soil	1.2	24.5	136.4	269	0.2	14.1	9.7	876	3.41	9.6	0.9	15.4	14	0.6	0.2	0.4	34	0.12	0.064	34
933135	Soil	2.0	22.3	290.8	202	0.3	14.9	6.1	269	2.60	15.2	4.0	5.7	24	0.5	0.3	0.6	43	0.11	0.036	26
933139	Soil	2.3	23.4	339.2	323	0.3	11.6	6.7	538	2.49	12.5	2.6	18.3	51	0.4	0.2	0.5	23	0.08	0.045	44
933140	Soil	0.7	41.2	31.2	116	0.1	41.6	21.4	1381	3.72	8.8	1.2	8.1	21	0.1	0.1	0.3	49	0.46	0.055	33
933063	Soil	2.3	54.6	223.7	93	0.6	11.0	10.3	420	3.36	28.4	4.2	13.7	23	0.2	0.4	1.0	36	0.09	0.028	21
933064	Soil	1.1	101.9	119.6	90	0.4	10.7	18.6	1036	3.44	14.4	2.9	3.6	11	0.2	0.2	0.8	41	0.11	0.043	13
933065	Soil	1.3	77.8	129.6	211	0.3	18.6	28.2	2060	4.32	14.4	<0.5	9.1	28	0.5	0.1	0.7	56	0.25	0.053	18
933066	Soil	1.5	78.2	127.3	347	0.8	14.3	10.6	854	3.39	14.7	0.7	7.9	20	0.4	0.1	3.0	46	0.36	0.073	11
933067	Soil	0.8	78.9	96.8	369	0.9	25.5	14.5	898	3.56	13.0	0.8	5.3	22	0.2	0.2	2.0	56	0.31	0.052	10
933068	Soil	1.3	103.0	162.9	446	1.3	21.6	11.1	782	3.39	25.6	1.9	5.6	20	0.3	0.1	2.7	46	0.32	0.046	12
933069	Soil	1.4	49.6	60.3	291	0.9	22.1	10.9	771	3.65	22.0	1.8	3.1	18	0.1	0.2	2.3	49	0.23	0.032	7
933070	Soil	1.4	78.5	79.6	278	1.3	19.1	18.5	728	3.88	23.5	2.9	5.9	15	0.2	0.3	2.4	58	0.23	0.049	9
933071	Soil	1.1	52.1	107.8	370	0.9	12.5	27.3	1677	3.72	11.3	<0.5	5.9	22	0.3	<0.1	3.7	48	0.35	0.041	5
933072	Soil	1.6	35.4	81.5	132	1.7	12.4	4.5	356	2.02	8.0	<0.5	1.4	24	0.4	0.1	5.4	34	0.35	0.047	10
933076	Soil	0.7	42.5	108.5	310	0.6	49.7	18.2	902	3.77	6.5	1.9	2.7	23	0.5	0.1	0.9	75	0.34	0.044	9
933077	Soil	1.5	95.3	77.5	167	0.2	31.8	21.4	684	4.70	16.2	0.9	4.6	21	0.3	0.1	0.7	106	0.43	0.047	13
932851	Soil	0.4	15.6	17.3	38	<0.1	15.0	11.4	326	2.51	5.8	1.9	9.9	21	<0.1	0.2	0.3	39	0.26	0.045	20
932852	Soil	0.5	18.5	10.3	45	<0.1	20.3	11.8	280	2.76	3.9	<0.5	4.8	21	<0.1	0.2	0.2	39	0.30	0.074	17
932853	Soil	0.3	4.9	7.7	47	<0.1	16.0	10.8	497	2.31	2.1	<0.5	6.0	24	<0.1	0.2	0.1	23	0.49	0.120	18
932854	Soil	0.9	11.0	9.9	55	<0.1	19.4	6.9	175	2.27	2.4	3.0	2.7	20	<0.1	0.1	0.2	31	0.27	0.074	9
932855	Soil	1.0	77.4	17.4	69	<0.1	27.5	21.9	356	3.55	9.1	1.3	2.7	16	<0.1	0.3	0.3	70	0.24	0.032	6

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
933115	Soil	27	1.37	117	0.085	<20	2.25	0.006	0.18	<0.1	0.03	2.4	0.3	<0.05	6	<0.5	<0.2
933116	Soil	27	1.87	95	0.091	<20	2.10	0.002	0.29	<0.1	0.02	2.4	0.4	<0.05	6	<0.5	<0.2
933118	Soil	24	1.27	90	0.087	<20	2.05	0.007	0.19	<0.1	0.04	3.8	0.2	0.05	5	<0.5	<0.2
933124	Soil	27	1.66	102	0.088	<20	2.06	0.004	0.36	<0.1	0.04	2.7	0.3	<0.05	5	<0.5	<0.2
933126	Soil	88	1.71	147	0.122	<20	2.05	0.008	0.36	<0.1	0.07	4.1	0.4	0.06	7	<0.5	<0.2
933127	Soil	76	1.63	141	0.114	<20	1.70	0.005	0.43	<0.1	0.06	2.6	0.4	<0.05	6	<0.5	<0.2
933129	Soil	27	1.52	189	0.193	<20	1.80	0.005	0.83	<0.1	0.03	2.0	0.7	<0.05	6	<0.5	<0.2
933130	Soil	22	0.64	97	0.098	<20	1.82	0.008	0.20	<0.1	0.06	1.9	0.3	0.07	5	<0.5	<0.2
933131	Soil	15	0.51	74	0.060	<20	1.22	0.004	0.08	<0.1	0.04	1.2	0.2	<0.05	4	<0.5	<0.2
933132	Soil	20	0.57	90	0.124	<20	1.29	0.004	0.31	<0.1	0.04	1.9	0.3	<0.05	5	<0.5	<0.2
933135	Soil	24	0.46	129	0.054	<20	1.76	0.007	0.14	<0.1	0.06	2.0	0.2	0.05	5	<0.5	<0.2
933139	Soil	14	0.72	82	0.104	<20	1.22	0.005	0.38	<0.1	0.04	1.3	0.4	0.11	4	<0.5	<0.2
933140	Soil	119	2.50	116	0.137	<20	2.26	0.004	0.57	<0.1	0.01	4.7	0.5	<0.05	7	<0.5	<0.2
933063	Soil	12	0.45	135	0.062	<20	1.19	0.023	0.24	<0.1	0.04	3.2	0.2	0.36	3	<0.5	0.9
933064	Soil	13	0.79	69	0.059	<20	1.49	0.006	0.09	<0.1	0.03	2.8	0.2	0.06	5	<0.5	<0.2
933065	Soil	23	1.50	153	0.163	<20	2.12	0.009	0.38	<0.1	0.06	4.6	0.5	0.10	6	<0.5	0.3
933066	Soil	15	1.40	68	0.079	<20	1.65	0.004	0.19	<0.1	0.03	3.8	0.4	<0.05	5	<0.5	0.6
933067	Soil	51	1.93	81	0.109	<20	2.28	0.006	0.21	<0.1	0.04	3.7	0.4	<0.05	7	<0.5	<0.2
933068	Soil	35	1.62	67	0.091	<20	1.98	0.006	0.21	<0.1	0.05	3.2	0.3	<0.05	6	<0.5	<0.2
933069	Soil	32	1.59	77	0.098	<20	2.09	0.003	0.11	<0.1	0.04	2.6	0.2	<0.05	6	<0.5	<0.2
933070	Soil	29	1.88	120	0.102	<20	2.42	0.004	0.35	<0.1	0.06	3.5	0.5	0.09	6	<0.5	<0.2
933071	Soil	10	1.94	95	0.082	<20	2.05	0.005	0.49	<0.1	0.02	2.7	0.4	0.07	5	<0.5	0.3
933072	Soil	23	0.87	79	0.056	<20	1.13	0.011	0.15	<0.1	0.07	1.5	0.2	0.06	4	<0.5	0.6
933076	Soil	178	2.73	147	0.121	<20	2.98	0.009	0.24	<0.1	0.06	5.4	0.3	<0.05	8	<0.5	<0.2
933077	Soil	91	2.64	96	0.101	<20	2.92	0.003	0.34	<0.1	0.02	4.5	0.3	<0.05	7	<0.5	<0.2
932851	Soil	22	0.62	168	0.062	<20	1.71	0.009	0.11	<0.1	0.02	2.7	0.2	<0.05	5	<0.5	<0.2
932852	Soil	36	0.99	151	0.058	<20	1.82	0.006	0.12	<0.1	0.02	2.6	0.2	<0.05	6	<0.5	<0.2
932853	Soil	14	1.17	135	0.073	<20	1.54	0.007	0.17	<0.1	0.03	1.8	0.3	<0.05	5	<0.5	<0.2
932854	Soil	36	1.08	95	0.076	<20	1.48	0.008	0.14	<0.1	0.06	1.8	0.2	<0.05	6	<0.5	<0.2
932855	Soil	46	1.64	110	0.148	<20	2.05	0.007	0.35	<0.1	<0.01	3.4	0.3	<0.05	6	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
932856	Soil	1.4	235.0	29.6	118	0.3	39.5	30.2	786	4.38	12.1	3.7	2.6	15	0.2	0.2	0.3	53	0.32	0.042	4
932857	Soil	0.5	20.7	13.9	78	0.1	25.0	11.9	448	2.96	3.3	2.4	3.8	23	<0.1	0.3	0.3	38	0.47	0.060	14
932858	Soil	0.7	12.0	32.7	77	0.1	20.3	12.9	472	2.95	4.1	2.1	7.4	24	<0.1	0.2	0.4	37	0.40	0.089	16
932859	Soil	0.9	18.9	12.3	117	0.1	45.3	22.8	754	4.38	6.5	2.2	7.6	22	<0.1	0.3	0.6	67	0.40	0.073	15
932860	Soil	2.0	34.0	108.0	97	0.4	19.4	11.7	495	3.06	7.3	4.2	27.9	20	0.2	1.1	1.2	49	0.25	0.032	92
932861	Soil	0.8	17.5	16.7	41	<0.1	13.3	5.2	229	1.78	4.4	2.1	17.8	17	<0.1	0.4	0.7	38	0.19	0.024	61
932862	Soil	0.7	15.4	29.6	36	<0.1	13.2	7.2	249	1.97	5.4	3.5	17.6	21	<0.1	0.5	0.7	41	0.24	0.031	77
932863	Soil	0.8	23.1	20.8	48	0.1	21.8	10.4	305	2.59	7.6	3.5	14.9	14	0.2	0.4	0.5	56	0.16	0.028	26
932864	Soil	2.5	22.3	62.2	70	0.1	18.9	6.5	373	3.39	9.6	3.5	22.4	11	0.2	0.6	1.1	55	0.09	0.031	44
932865	Soil	1.1	8.7	41.6	42	<0.1	12.2	5.9	254	2.43	4.9	3.0	9.0	14	0.2	0.4	0.7	38	0.11	0.026	28
932866	Soil	1.2	9.7	29.9	37	0.3	9.4	4.3	193	2.20	4.7	2.8	8.0	15	<0.1	0.5	0.8	37	0.15	0.029	33
932867	Soil	1.1	8.1	26.0	29	<0.1	8.8	3.7	139	2.10	5.4	0.7	9.5	8	0.2	0.3	0.7	45	0.06	0.017	24
932868	Soil	1.1	14.7	23.5	50	<0.1	19.8	9.6	327	3.10	9.7	5.3	7.8	16	0.1	0.4	0.4	61	0.15	0.029	13
932869	Soil	1.0	14.9	61.7	58	<0.1	10.9	4.9	259	1.87	5.4	2.2	13.1	12	0.2	0.5	0.9	45	0.12	0.019	28
932870	Soil	1.6	13.9	34.6	52	<0.1	14.2	8.4	688	3.24	9.2	1.1	8.8	12	0.2	0.4	0.6	70	0.11	0.017	15
932871	Soil	2.1	15.0	35.1	53	<0.1	13.9	5.3	252	2.43	6.5	2.2	27.4	9	0.2	0.4	0.9	37	0.08	0.018	50
932872	Soil	1.3	14.1	80.4	65	0.3	10.1	4.8	162	1.72	4.5	1.8	22.9	16	0.1	0.5	0.9	27	0.12	0.022	75
932873	Soil	1.7	36.9	114.1	123	0.3	20.4	20.0	906	3.58	12.7	3.4	10.0	21	0.4	1.0	0.8	39	0.28	0.034	30
932874	Soil	0.5	11.4	22.6	52	<0.1	13.3	8.0	354	2.06	2.9	<0.5	8.4	25	<0.1	<0.1	0.2	26	0.26	0.033	22
932875	Soil	0.3	36.6	14.1	55	<0.1	37.6	18.2	233	2.71	4.3	1.9	3.2	27	<0.1	0.1	0.2	43	0.37	0.041	13
932876	Soil	0.8	19.1	39.7	84	<0.1	40.7	20.8	1627	2.90	4.2	1.2	3.7	26	<0.1	0.1	0.5	49	0.40	0.061	14
932877	Soil	0.5	35.0	30.9	71	0.1	28.4	14.8	920	2.75	4.9	1.5	7.3	25	0.1	0.2	0.3	53	0.49	0.055	24
932878	Soil	0.3	16.4	32.8	90	<0.1	49.4	24.9	1149	3.48	3.2	1.3	6.3	23	<0.1	<0.1	0.2	66	0.55	0.072	17
932879	Soil	0.6	26.2	29.6	87	0.2	33.7	14.9	826	3.01	5.0	2.9	7.9	33	0.1	0.2	0.4	47	0.45	0.047	33
932707	Soil	24.2	11.2	30.5	38	0.5	10.7	4.7	157	2.26	9.2	7.5	5.2	12	0.1	0.3	0.2	54	0.13	0.015	12
932708	Soil	18.8	11.1	20.2	39	0.7	11.6	4.8	177	2.07	7.3	6.4	3.1	13	0.1	0.3	0.2	54	0.13	0.015	9
933100	Soil	1.0	16.1	15.1	41	<0.1	20.7	10.2	253	2.26	7.1	2.5	9.7	13	0.2	0.3	0.2	51	0.13	0.026	18
933041	Soil	1.3	31.9	71.9	78	0.5	5.1	5.6	801	1.94	6.7	0.6	24.7	6	<0.1	0.2	1.4	27	0.02	0.019	33
933042	Soil	1.3	28.6	85.8	44	0.3	9.9	5.4	258	2.69	7.0	2.6	29.2	8	<0.1	0.3	0.8	25	0.05	0.026	31
933043	Soil	0.6	65.0	18.9	95	0.2	13.1	20.1	967	4.85	4.2	1.1	3.7	7	0.1	0.2	0.3	66	0.09	0.032	5

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
932856	Soil	92	2.17	147	0.170	<20	2.47	0.005	0.57	<0.1	0.01	2.7	0.5	<0.05	6	1.2	<0.2
932857	Soil	45	1.61	191	0.117	<20	2.12	0.007	0.42	<0.1	0.02	3.3	0.3	<0.05	7	<0.5	<0.2
932858	Soil	30	1.28	150	0.116	<20	1.92	0.007	0.47	<0.1	0.01	2.2	0.4	<0.05	6	<0.5	<0.2
932859	Soil	127	2.48	205	0.150	<20	2.92	0.009	0.71	0.1	0.01	3.5	0.6	<0.05	9	0.9	<0.2
932860	Soil	38	1.14	208	0.105	<20	1.93	0.014	0.42	<0.1	0.08	4.5	0.3	<0.05	6	0.7	<0.2
932861	Soil	23	0.41	133	0.063	<20	1.28	0.010	0.07	<0.1	0.02	3.1	<0.1	<0.05	4	0.8	<0.2
932862	Soil	25	0.37	126	0.055	<20	1.45	0.011	0.07	<0.1	0.03	3.3	<0.1	<0.05	4	0.7	<0.2
932863	Soil	31	0.50	120	0.087	<20	2.30	0.010	0.08	<0.1	0.02	3.7	0.1	<0.05	6	<0.5	<0.2
932864	Soil	31	0.41	151	0.027	<20	2.57	0.012	0.11	0.1	0.04	3.5	0.1	<0.05	7	<0.5	<0.2
932865	Soil	19	0.28	150	0.033	<20	1.70	0.007	0.08	<0.1	0.04	1.7	0.1	<0.05	5	<0.5	<0.2
932866	Soil	22	0.30	126	0.041	<20	1.31	0.007	0.10	<0.1	0.05	1.9	<0.1	<0.05	4	<0.5	<0.2
932867	Soil	17	0.22	70	0.044	<20	1.33	0.005	0.05	<0.1	0.02	1.5	<0.1	<0.05	5	<0.5	<0.2
932868	Soil	30	0.43	144	0.071	<20	2.20	0.011	0.07	0.1	0.12	2.8	<0.1	<0.05	6	<0.5	<0.2
932869	Soil	20	0.27	85	0.056	<20	1.21	0.009	0.06	<0.1	0.03	2.2	<0.1	<0.05	4	<0.5	<0.2
932870	Soil	27	0.31	143	0.077	<20	1.50	0.007	0.07	<0.1	0.03	2.4	<0.1	<0.05	8	<0.5	<0.2
932871	Soil	21	0.30	87	0.043	<20	1.53	0.006	0.08	<0.1	0.03	2.4	0.1	<0.05	4	<0.5	<0.2
932872	Soil	20	0.30	131	0.050	<20	1.00	0.007	0.13	<0.1	0.05	2.8	0.1	<0.05	3	<0.5	<0.2
932873	Soil	24	0.30	207	0.042	<20	1.17	0.009	0.11	<0.1	0.10	4.4	<0.1	<0.05	3	<0.5	<0.2
932874	Soil	17	0.73	100	0.096	<20	1.27	0.007	0.17	<0.1	0.02	1.2	0.2	<0.05	5	<0.5	<0.2
932875	Soil	78	1.43	107	0.098	<20	1.91	0.010	0.10	<0.1	0.03	3.7	0.3	<0.05	6	<0.5	<0.2
932876	Soil	104	1.52	147	0.043	<20	1.95	0.009	0.08	<0.1	0.03	3.9	0.1	<0.05	6	<0.5	<0.2
932877	Soil	122	1.75	124	0.092	<20	1.86	0.014	0.21	<0.1	0.03	6.0	0.4	<0.05	6	<0.5	<0.2
932878	Soil	307	3.46	133	0.125	<20	2.75	0.006	0.32	<0.1	0.01	5.1	0.3	<0.05	8	<0.5	<0.2
932879	Soil	107	1.41	167	0.104	<20	1.88	0.012	0.26	<0.1	0.04	4.4	0.4	<0.05	6	<0.5	<0.2
932707	Soil	19	0.32	84	0.029	<20	1.47	0.009	0.08	<0.1	0.01	1.7	0.2	<0.05	6	0.7	<0.2
932708	Soil	20	0.33	80	0.040	<20	1.21	0.010	0.07	<0.1	0.01	1.5	0.2	<0.05	5	<0.5	<0.2
933100	Soil	26	0.39	149	0.065	<20	2.32	0.010	0.05	<0.1	0.03	2.5	<0.1	<0.05	5	0.5	<0.2
933041	Soil	8	0.21	61	0.032	<20	0.90	0.003	0.08	<0.1	0.02	1.0	0.2	<0.05	4	0.7	0.4
933042	Soil	12	0.25	50	0.025	<20	1.39	0.002	0.08	<0.1	0.06	1.0	<0.1	<0.05	4	<0.5	<0.2
933043	Soil	10	1.38	116	0.013	<20	2.81	0.001	0.15	<0.1	0.02	5.9	0.1	<0.05	6	0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
933044	Soil	1.1	9.7	27.4	26	<0.1	7.0	6.1	240	2.14	4.9	11.8	11.1	13	0.1	0.2	0.4	20	0.07	0.047	56
933045	Soil	1.1	11.3	24.2	31	<0.1	10.7	5.7	178	2.06	5.1	0.6	10.3	12	<0.1	0.3	0.5	29	0.07	0.032	34
933046	Soil	2.7	18.2	169.8	38	<0.1	14.4	7.1	263	1.89	6.0	1.9	12.9	16	0.2	0.4	0.3	35	0.11	0.031	31
933047	Soil	21.2	55.3	617.7	29	<0.1	11.6	6.3	315	1.75	8.7	8.4	15.0	14	0.2	0.6	0.3	27	0.09	0.030	27
933048	Soil	3.7	40.5	314.1	47	0.3	14.7	11.8	678	2.32	8.0	10.7	14.7	16	0.2	0.4	0.3	33	0.13	0.047	24
933049	Soil	1.5	10.7	51.0	25	<0.1	7.5	3.2	135	2.07	8.0	1.8	3.0	13	<0.1	0.4	0.4	95	0.10	0.015	11
933050	Soil	1.8	11.7	100.1	30	0.1	9.3	4.9	193	3.17	10.2	3.2	8.2	11	0.1	0.5	0.5	65	0.09	0.029	12
SQ001	Soil	0.8	17.2	16.8	41	<0.1	18.7	8.4	190	2.55	8.7	1.8	11.9	12	0.1	0.4	0.4	51	0.10	0.025	11
SQ002	Soil	0.9	7.6	8.2	20	<0.1	4.6	2.4	111	1.55	4.4	1.2	3.8	8	<0.1	0.3	0.3	40	0.05	0.014	7
SQ003	Soil	1.3	13.5	15.6	61	0.1	17.9	9.7	266	2.92	9.2	1.8	6.9	15	0.1	0.3	0.5	67	0.13	0.033	10
SQ004	Soil	1.5	10.7	32.3	32	0.2	9.5	4.4	171	3.38	9.6	1.8	3.8	10	0.1	0.4	0.6	92	0.09	0.027	9
SQ005	Soil	1.3	16.3	58.5	34	0.1	13.1	4.6	226	1.77	5.0	2.1	26.2	17	<0.1	0.4	1.5	33	0.18	0.017	67
SQ006	Soil	1.3	15.4	18.1	46	0.3	16.1	6.9	216	2.41	8.1	1.9	8.4	14	0.2	0.4	0.5	55	0.14	0.037	18
SQ007	Soil	1.6	12.8	17.9	47	0.2	16.2	6.2	191	3.92	12.1	0.6	4.9	13	0.2	0.5	0.4	94	0.11	0.034	11
SQ008	Soil	0.8	6.4	4.6	17	<0.1	3.8	1.1	82	0.67	1.9	0.7	0.8	7	<0.1	0.2	0.3	26	0.06	0.019	7
SQ009	Soil	1.0	24.2	15.3	43	<0.1	18.1	7.0	240	2.42	8.0	2.8	17.3	23	<0.1	0.4	0.4	54	0.16	0.012	58
SQ010	Soil	1.2	23.2	20.5	53	0.5	24.6	10.7	249	2.91	10.0	2.8	14.1	17	0.2	0.3	0.4	59	0.14	0.018	30
SQ011	Soil	1.1	19.1	22.0	57	0.1	17.1	7.1	558	2.39	6.8	2.0	13.9	21	0.2	0.4	0.5	51	0.21	0.032	97
SQ012	Soil	1.0	18.5	21.8	46	0.1	17.2	7.2	271	2.60	7.6	1.7	9.9	22	0.1	0.4	0.4	57	0.19	0.019	29
SQ013	Soil	1.7	20.7	28.4	72	0.2	19.2	11.2	725	3.46	11.8	1.4	6.9	17	0.1	0.4	0.5	78	0.16	0.039	19
SQ014	Soil	0.8	19.5	23.4	48	<0.1	16.3	6.9	392	2.15	6.2	1.5	11.1	21	<0.1	0.4	0.3	47	0.21	0.022	47
SQ015	Soil	1.6	14.3	27.7	49	0.1	14.6	6.6	279	3.58	9.2	1.0	11.9	17	0.2	0.3	0.6	71	0.13	0.032	17
SQ016	Soil	1.0	11.6	27.4	37	<0.1	13.5	5.9	274	2.20	5.4	1.2	15.8	12	0.2	0.4	0.5	41	0.12	0.019	54
SQ017	Soil	1.0	16.6	28.1	37	0.1	12.5	6.1	225	1.99	5.1	1.9	18.9	15	0.1	0.4	0.6	40	0.14	0.024	113
SQ018	Soil	2.7	25.3	54.3	68	0.4	21.3	9.5	808	3.33	10.2	6.0	31.0	27	0.1	0.4	1.2	54	0.22	0.057	413
SQ019	Soil	2.0	19.5	38.8	51	0.2	15.9	5.9	306	2.38	6.9	3.1	24.8	17	<0.1	0.4	0.9	43	0.16	0.028	102
SQ020	Soil	1.2	14.7	29.9	43	0.1	13.0	6.1	318	1.86	5.4	1.8	13.3	16	0.2	0.4	0.5	41	0.17	0.027	42
SQ021	Soil	0.9	14.9	19.2	44	<0.1	14.6	6.6	234	1.94	5.0	6.1	10.0	19	0.2	0.3	0.4	44	0.22	0.039	30
SQ022	Soil	1.6	13.8	23.1	59	<0.1	16.4	12.4	861	2.64	8.7	2.2	3.8	20	0.1	0.3	0.5	60	0.21	0.049	18
SQ023	Soil	2.4	13.1	36.7	63	<0.1	15.4	16.5	932	3.63	10.9	1.6	5.4	21	0.1	0.4	0.7	82	0.20	0.056	20

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
933044	Soil	11	0.17	72	0.016	<20	1.00	0.004	0.10	<0.1	0.02	1.3	<0.1	<0.05	2	<0.5	<0.2
933045	Soil	14	0.29	80	0.039	<20	1.26	0.005	0.10	<0.1	0.01	1.6	0.1	<0.05	3	<0.5	<0.2
933046	Soil	18	0.32	88	0.051	<20	1.22	0.007	0.07	<0.1	0.03	1.8	<0.1	<0.05	3	<0.5	<0.2
933047	Soil	14	0.25	68	0.033	<20	1.04	0.004	0.08	<0.1	0.03	1.4	<0.1	<0.05	2	0.8	0.3
933048	Soil	19	0.36	138	0.040	<20	1.40	0.006	0.08	0.3	0.05	2.2	<0.1	<0.05	4	0.6	0.2
933049	Soil	17	0.15	151	0.105	<20	0.89	0.005	0.04	<0.1	0.02	1.5	<0.1	<0.05	10	0.9	<0.2
933050	Soil	26	0.21	74	0.068	<20	1.93	0.005	0.05	0.1	0.06	2.3	<0.1	0.06	7	<0.5	<0.2
SQ001	Soil	27	0.37	135	0.058	<20	2.45	0.011	0.05	<0.1	0.01	2.9	0.1	<0.05	6	<0.5	<0.2
SQ002	Soil	11	0.13	59	0.039	<20	0.92	0.013	0.03	<0.1	0.01	1.2	<0.1	<0.05	6	<0.5	<0.2
SQ003	Soil	28	0.36	202	0.063	<20	2.73	0.009	0.06	<0.1	0.02	2.7	0.1	<0.05	8	<0.5	<0.2
SQ004	Soil	21	0.24	106	0.081	<20	1.38	0.005	0.04	<0.1	0.02	1.9	0.2	<0.05	10	<0.5	<0.2
SQ005	Soil	21	0.33	141	0.048	<20	1.22	0.011	0.08	<0.1	0.01	3.5	<0.1	<0.05	4	0.7	<0.2
SQ006	Soil	24	0.31	109	0.048	<20	2.03	0.009	0.07	<0.1	0.04	2.3	<0.1	<0.05	6	<0.5	<0.2
SQ007	Soil	32	0.33	104	0.070	<20	2.20	0.007	0.05	<0.1	0.06	2.5	0.1	<0.05	9	<0.5	<0.2
SQ008	Soil	9	0.06	62	0.025	<20	0.51	0.008	0.04	<0.1	0.03	0.6	<0.1	<0.05	4	<0.5	<0.2
SQ009	Soil	29	0.42	217	0.056	<20	1.86	0.008	0.07	<0.1	0.03	4.5	0.1	<0.05	6	<0.5	<0.2
SQ010	Soil	32	0.48	162	0.063	<20	2.69	0.010	0.07	<0.1	0.04	3.5	0.1	<0.05	6	<0.5	<0.2
SQ011	Soil	30	0.47	187	0.067	<20	1.73	0.011	0.09	<0.1	0.02	3.5	<0.1	<0.05	5	<0.5	<0.2
SQ012	Soil	28	0.43	167	0.057	<20	1.93	0.010	0.07	<0.1	0.02	3.3	0.1	<0.05	6	<0.5	<0.2
SQ013	Soil	32	0.46	194	0.063	<20	2.20	0.009	0.11	<0.1	0.04	3.2	0.1	<0.05	8	<0.5	<0.2
SQ014	Soil	27	0.45	207	0.061	<20	1.48	0.009	0.07	<0.1	0.03	3.6	<0.1	<0.05	4	<0.5	<0.2
SQ015	Soil	28	0.33	148	0.038	<20	2.68	0.008	0.07	<0.1	0.07	2.8	0.2	<0.05	9	<0.5	<0.2
SQ016	Soil	22	0.32	129	0.047	<20	1.77	0.007	0.06	<0.1	0.03	2.2	0.1	<0.05	5	<0.5	<0.2
SQ017	Soil	26	0.32	165	0.058	<20	1.38	0.012	0.07	<0.1	0.03	3.8	<0.1	<0.05	4	<0.5	<0.2
SQ018	Soil	38	0.44	453	0.038	<20	2.61	0.010	0.12	<0.1	0.08	7.4	0.2	<0.05	7	1.1	<0.2
SQ019	Soil	31	0.33	214	0.052	<20	1.72	0.008	0.10	<0.1	0.06	5.5	<0.1	<0.05	5	<0.5	<0.2
SQ020	Soil	26	0.32	142	0.062	<20	1.30	0.009	0.07	<0.1	0.04	3.4	<0.1	<0.05	4	<0.5	<0.2
SQ021	Soil	26	0.38	142	0.069	<20	1.32	0.010	0.07	<0.1	0.07	3.2	<0.1	<0.05	4	<0.5	<0.2
SQ022	Soil	27	0.46	164	0.060	<20	1.79	0.013	0.08	<0.1	0.03	2.6	0.1	<0.05	6	<0.5	<0.2
SQ023	Soil	29	0.43	142	0.065	<20	1.73	0.008	0.08	<0.1	0.03	2.5	<0.1	<0.05	7	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

		Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
		Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
		Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
		MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
SQ024	Soil		2.4	12.9	28.2	68	0.1	21.2	13.6	995	3.12	9.3	2.2	5.0	20	0.1	0.3	0.6	67	0.21	0.052	20
SQ025	Soil		1.3	20.7	70.5	167	0.3	20.6	15.3	3099	3.05	8.1	1.2	5.3	25	0.3	0.4	0.7	52	0.25	0.064	36
SQ026	Soil		0.7	22.1	43.3	116	0.3	22.9	12.2	691	2.76	5.3	2.7	2.8	43	0.4	0.3	0.5	45	0.67	0.067	46
SQ027	Soil		0.7	16.1	45.6	114	0.2	21.0	13.6	948	2.74	5.1	2.1	3.7	35	0.2	0.3	0.5	44	0.56	0.051	34
SQ028	Soil		0.7	25.6	85.9	132	0.4	27.1	11.3	780	2.37	4.6	1.6	3.0	52	0.4	0.3	0.5	41	0.93	0.058	49
SQ029	Soil		0.5	17.0	24.5	79	0.2	19.2	8.9	491	2.08	4.1	1.8	2.1	54	0.2	0.2	0.3	42	1.00	0.056	24
SQ030	Soil		0.6	21.1	24.8	88	0.2	22.3	10.8	673	2.45	4.7	3.7	2.8	52	0.3	0.3	0.3	45	1.03	0.058	29
SQ031	Soil		0.7	22.1	28.5	80	0.2	20.0	9.8	960	2.06	4.4	3.2	1.7	58	0.3	0.3	0.3	41	1.21	0.067	24
SQ032	Soil		0.6	20.9	36.6	77	0.2	21.9	12.4	650	2.66	6.1	2.8	3.0	36	0.1	0.2	0.4	50	0.68	0.048	25
SQ033	Soil		0.8	19.0	17.4	54	0.2	15.9	8.7	532	2.12	5.1	3.0	3.1	42	0.2	0.2	0.3	39	0.73	0.057	27
SQ034	Soil		1.2	15.5	17.9	57	0.1	17.9	11.4	614	2.36	6.0	2.6	3.7	38	0.2	0.2	0.4	40	0.68	0.057	28
SQ035	Soil		1.2	17.2	27.4	62	0.2	19.5	10.2	565	2.43	6.0	3.1	3.7	32	<0.1	0.2	0.5	45	0.49	0.049	24
SQ036	Soil		1.6	23.3	35.5	69	0.4	21.2	11.8	652	2.53	6.4	4.6	4.1	45	0.2	0.4	0.8	48	0.73	0.061	40
SQ037	Soil		1.5	23.0	44.3	71	0.3	21.8	10.7	630	2.57	6.2	6.5	5.7	41	0.2	0.3	0.9	47	0.66	0.055	39
SQ038	Soil		0.8	19.3	34.1	65	0.1	19.5	8.5	279	2.64	6.2	47.4	7.6	21	<0.1	0.3	0.5	55	0.30	0.022	23
932729	Soil		1.6	19.0	21.4	38	0.1	14.3	5.9	160	2.37	7.8	1.7	10.7	13	0.1	0.3	0.3	56	0.12	0.020	11
932730	Soil		1.2	9.7	31.7	23	<0.1	3.7	1.8	82	0.98	2.9	1.5	2.2	7	0.1	0.2	0.3	30	0.05	0.020	13
932731	Soil		1.3	12.8	48.7	33	0.3	7.2	4.0	273	1.53	4.9	3.8	7.9	16	0.1	0.2	0.5	30	0.13	0.045	48
932732	Soil		3.5	18.1	35.2	49	0.2	10.1	6.4	309	2.53	5.4	3.6	10.2	13	0.1	0.2	1.0	31	0.10	0.024	31
932733	Soil		0.9	27.0	25.0	74	<0.1	10.3	8.3	514	2.53	2.9	2.2	14.2	11	<0.1	0.2	0.7	37	0.08	0.023	28
932734	Soil		2.0	11.1	58.6	37	0.2	6.2	3.6	175	2.08	5.8	5.2	15.6	12	0.1	0.4	0.9	26	0.06	0.017	24
932735	Soil		3.7	16.5	94.4	40	0.3	11.7	5.6	159	2.40	13.6	3.3	10.5	10	0.1	0.4	0.4	43	0.08	0.021	10
932736	Soil		0.9	74.2	45.9	81	0.3	13.0	13.2	664	2.66	8.5	2.7	1.7	14	0.2	0.2	0.3	39	0.15	0.034	9
932737	Soil		0.8	71.9	85.5	173	0.4	17.0	16.4	574	2.87	9.9	3.9	3.3	18	0.2	0.2	0.7	51	0.14	0.028	11
932738	Soil		0.8	65.6	21.8	248	0.5	11.7	12.9	668	3.00	7.9	1.8	1.8	13	0.4	0.2	0.5	49	0.11	0.027	6
932739	Soil		0.8	60.5	73.2	183	0.6	8.9	9.6	388	1.98	7.9	1.8	1.8	11	0.6	0.1	1.3	35	0.11	0.028	7
932740	Soil		0.8	104.2	114.6	403	1.0	12.9	13.9	694	2.37	6.3	2.0	0.7	17	0.5	0.1	1.8	35	0.26	0.039	5
932741	Soil		0.9	87.6	125.6	434	1.0	10.7	10.2	772	3.54	14.3	3.3	1.2	17	0.4	0.1	2.0	42	0.22	0.027	4
932742	Soil		1.3	75.2	162.3	453	0.9	10.6	12.5	839	3.85	16.2	2.0	3.2	17	0.6	0.2	1.9	55	0.14	0.035	6
932743	Soil		1.1	44.5	131.9	223	0.7	11.2	12.9	676	2.61	12.0	3.7	16.8	18	0.4	0.2	4.1	37	0.10	0.031	32

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
SQ024	Soil	35	0.48	167	0.063	<20	1.97	0.012	0.08	<0.1	0.03	2.7	<0.1	<0.05	6	<0.5	<0.2
SQ025	Soil	37	0.65	242	0.047	<20	2.09	0.013	0.08	<0.1	0.23	4.9	0.2	<0.05	6	<0.5	<0.2
SQ026	Soil	39	0.84	241	0.070	<20	1.77	0.013	0.08	<0.1	0.07	3.8	0.2	0.06	5	<0.5	<0.2
SQ027	Soil	49	0.91	189	0.069	<20	1.73	0.011	0.08	<0.1	0.07	3.3	0.2	<0.05	6	<0.5	<0.2
SQ028	Soil	60	0.97	203	0.074	<20	1.66	0.014	0.09	0.1	0.08	3.4	0.2	0.06	5	<0.5	<0.2
SQ029	Soil	47	0.78	227	0.078	<20	1.66	0.019	0.08	<0.1	0.05	3.2	0.2	0.06	6	<0.5	<0.2
SQ030	Soil	52	0.89	241	0.087	<20	1.82	0.019	0.11	<0.1	0.05	3.6	0.2	<0.05	6	<0.5	<0.2
SQ031	Soil	45	0.69	289	0.069	<20	1.62	0.017	0.08	<0.1	0.06	2.9	0.2	0.07	5	<0.5	<0.2
SQ032	Soil	49	0.80	212	0.082	<20	1.84	0.015	0.07	<0.1	0.05	3.5	0.1	<0.05	6	<0.5	<0.2
SQ033	Soil	27	0.47	305	0.043	<20	1.51	0.012	0.07	0.1	0.04	3.0	<0.1	<0.05	5	<0.5	<0.2
SQ034	Soil	31	0.50	258	0.040	<20	1.39	0.011	0.06	0.1	0.05	2.6	<0.1	<0.05	5	<0.5	<0.2
SQ035	Soil	35	0.56	273	0.054	<20	1.64	0.012	0.07	<0.1	0.05	3.3	0.1	0.05	5	<0.5	<0.2
SQ036	Soil	37	0.58	309	0.056	<20	1.81	0.014	0.08	0.2	0.08	3.8	0.1	0.07	6	<0.5	<0.2
SQ037	Soil	39	0.62	293	0.056	<20	1.79	0.014	0.08	<0.1	0.06	3.7	0.1	<0.05	6	<0.5	<0.2
SQ038	Soil	39	0.64	173	0.069	<20	2.14	0.011	0.09	<0.1	0.03	3.9	0.1	<0.05	7	<0.5	<0.2
932729	Soil	23	0.30	154	0.062	<20	1.74	0.007	0.05	<0.1	0.03	2.4	<0.1	<0.05	6	<0.5	<0.2
932730	Soil	8	0.10	72	0.030	<20	0.75	0.008	0.04	<0.1	0.02	0.7	<0.1	<0.05	4	<0.5	<0.2
932731	Soil	13	0.24	167	0.025	<20	1.03	0.010	0.06	<0.1	0.06	1.3	<0.1	<0.05	4	<0.5	<0.2
932732	Soil	15	0.27	121	0.026	<20	0.96	0.005	0.10	<0.1	0.03	1.7	<0.1	<0.05	3	<0.5	0.3
932733	Soil	14	0.75	108	0.035	<20	1.37	0.004	0.16	<0.1	0.02	3.1	0.2	<0.05	4	<0.5	<0.2
932734	Soil	11	0.46	86	0.050	<20	0.83	0.008	0.15	<0.1	0.02	2.3	0.1	0.05	3	<0.5	0.2
932735	Soil	19	0.27	101	0.047	<20	1.47	0.015	0.10	<0.1	0.06	1.7	<0.1	0.07	4	<0.5	<0.2
932736	Soil	21	0.98	92	0.045	<20	1.67	0.006	0.05	<0.1	0.03	2.6	0.1	<0.05	5	<0.5	<0.2
932737	Soil	21	1.13	121	0.070	<20	1.92	0.007	0.08	<0.1	0.03	3.2	0.2	<0.05	6	<0.5	<0.2
932738	Soil	12	1.30	76	0.106	<20	1.79	0.005	0.34	<0.1	0.02	1.8	0.4	<0.05	5	<0.5	<0.2
932739	Soil	11	0.76	59	0.054	<20	1.26	0.006	0.09	<0.1	0.03	1.3	0.2	<0.05	4	<0.5	<0.2
932740	Soil	13	1.01	106	0.042	<20	1.65	0.007	0.05	<0.1	0.05	1.6	0.2	<0.05	4	<0.5	<0.2
932741	Soil	9	1.33	79	0.120	<20	1.80	0.004	0.31	<0.1	0.06	1.8	0.4	<0.05	5	<0.5	<0.2
932742	Soil	12	1.52	95	0.133	<20	1.99	0.005	0.43	<0.1	0.05	2.4	0.5	<0.05	6	<0.5	<0.2
932743	Soil	12	0.83	89	0.102	<20	1.59	0.006	0.28	<0.1	0.02	2.2	0.4	<0.05	5	<0.5	0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
932744	Soil	0.6	91.1	38.8	134	0.2	12.1	14.1	636	2.62	6.5	2.7	3.6	19	0.2	0.2	0.6	37	0.17	0.022	6
932745	Soil	1.4	67.2	51.1	168	0.2	10.5	17.5	1269	2.54	8.2	0.7	12.1	22	0.3	0.1	1.0	35	0.16	0.023	13
932746	Soil	0.9	77.4	24.8	88	0.2	18.3	11.6	467	2.74	7.3	2.7	2.0	20	0.2	0.2	0.4	52	0.23	0.029	10
932747	Soil	0.8	41.6	34.5	77	0.2	19.8	11.9	426	2.34	8.3	6.3	13.1	12	0.3	0.3	0.3	38	0.12	0.018	12
933051	Soil	1.1	13.9	82.4	54	<0.1	7.9	4.0	372	1.64	6.4	1.4	15.9	12	0.2	0.3	0.7	37	0.10	0.021	41
933052	Soil	1.4	27.3	71.8	77	0.3	11.4	8.2	748	2.03	4.3	2.1	27.3	14	0.2	0.1	0.7	29	0.10	0.023	78
933053	Soil	1.9	29.9	43.5	68	0.1	9.6	9.0	517	2.10	3.8	1.1	22.2	19	<0.1	0.1	0.6	32	0.14	0.026	45
933054	Soil	1.4	21.9	74.0	78	0.2	10.1	6.4	464	1.95	4.2	1.4	15.9	16	0.2	0.2	0.5	30	0.11	0.030	44
933055	Soil	2.4	15.7	35.9	54	0.3	6.2	4.8	193	2.66	3.4	2.3	11.3	19	<0.1	0.1	0.8	31	0.13	0.024	30
933056	Soil	3.7	18.6	111.2	40	0.5	4.8	2.9	184	2.18	12.1	2.3	16.5	22	<0.1	0.2	1.0	19	0.05	0.028	32
933057	Soil	2.2	40.0	132.8	144	0.4	11.5	5.8	356	2.28	13.6	3.2	27.4	24	0.3	0.2	0.8	21	0.14	0.026	35
933058	Soil	1.1	25.0	177.7	419	0.4	14.4	10.8	923	2.96	11.0	1.8	19.9	18	0.4	0.1	1.3	24	0.23	0.057	27
933059	Soil	0.7	63.7	102.0	242	0.6	19.6	13.0	577	3.23	9.3	2.3	9.8	17	0.4	0.2	1.0	52	0.22	0.050	19
933060	Soil	0.6	60.0	66.6	284	0.4	9.8	17.0	806	2.76	8.8	2.4	3.9	15	0.4	0.1	0.8	41	0.29	0.041	6
933061	Soil	0.8	73.3	128.7	227	0.3	7.4	14.2	481	4.04	9.8	0.9	13.3	19	0.3	0.1	1.3	35	0.12	0.031	22
933088	Soil	0.8	65.5	81.6	364	0.2	18.8	22.9	1176	4.06	7.8	1.5	4.0	19	0.3	0.1	1.1	80	0.28	0.025	7
933089	Soil	0.5	27.5	39.0	92	<0.1	8.9	8.3	403	1.82	4.6	<0.5	9.4	12	<0.1	<0.1	0.8	37	0.16	0.014	7
933090	Soil	1.0	52.3	42.2	94	0.2	19.4	20.2	765	3.86	6.3	1.3	2.8	20	<0.1	0.2	0.5	70	0.29	0.031	8
933091	Soil	0.7	31.6	49.9	123	<0.1	20.7	19.7	1152	3.98	8.9	2.9	3.4	42	0.2	0.1	0.4	63	0.69	0.053	11
933092	Soil	0.7	17.6	121.6	163	0.1	34.2	13.4	320	2.72	4.5	3.9	9.5	25	0.3	0.2	0.4	43	0.34	0.044	28
933093	Soil	0.5	48.8	80.4	147	<0.1	81.0	23.4	1046	3.69	3.8	1.4	10.3	17	0.5	<0.1	0.2	49	0.22	0.045	34
933094	Soil	0.5	26.0	25.7	109	0.1	73.8	19.9	1051	3.86	4.4	1.2	4.3	38	0.1	0.1	0.2	64	0.53	0.049	29
933095	Soil	1.2	15.2	124.8	96	0.2	19.1	8.8	311	2.83	9.5	5.0	7.3	20	0.3	0.3	0.4	60	0.18	0.021	20
933096	Soil	1.5	28.3	207.1	360	0.2	17.2	11.1	797	3.42	8.1	0.8	14.2	13	1.0	0.3	0.7	41	0.11	0.038	35
933097	Soil	1.1	24.9	158.5	297	<0.1	17.0	9.2	750	2.89	8.1	3.8	8.3	14	0.7	0.2	0.3	44	0.13	0.041	27
933098	Soil	1.2	16.9	68.9	126	0.1	17.5	8.0	332	2.94	9.9	1.8	3.7	16	0.5	0.3	0.3	54	0.14	0.038	18
933099	Soil	1.4	19.0	233.6	174	0.2	21.2	10.0	277	2.56	13.0	2.4	14.7	13	0.5	0.3	0.4	45	0.09	0.023	26
933087	Soil	1.9	12.3	115.5	63	0.1	9.4	3.8	139	1.92	8.0	2.3	12.2	12	0.2	0.3	0.7	37	0.06	0.022	25
933122	Soil	1.2	51.4	184.4	460	0.9	35.3	19.0	1226	4.33	9.2	3.1	3.2	24	0.6	0.2	1.1	75	0.44	0.054	18
933128	Soil	0.5	13.2	49.6	217	0.1	56.4	19.3	679	3.05	3.3	1.1	6.6	21	0.2	<0.1	0.3	34	0.27	0.056	32

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
932744	Soil	12	1.06	83	0.067	<20	1.65	0.005	0.12	<0.1	0.02	1.9	0.3	<0.05	4	<0.5	<0.2
932745	Soil	9	1.18	124	0.085	<20	1.64	0.005	0.28	<0.1	0.02	1.9	0.2	<0.05	4	<0.5	<0.2
932746	Soil	22	0.85	135	0.077	<20	1.95	0.009	0.07	0.6	0.03	2.5	0.2	<0.05	5	<0.5	<0.2
932747	Soil	21	0.56	109	0.061	<20	1.66	0.009	0.08	<0.1	0.04	1.9	0.1	<0.05	4	<0.5	<0.2
933051	Soil	13	0.21	87	0.040	<20	0.73	0.005	0.07	<0.1	<0.01	1.2	<0.1	<0.05	4	<0.5	<0.2
933052	Soil	16	0.69	166	0.046	<20	1.29	0.006	0.23	<0.1	0.02	2.6	0.2	<0.05	3	<0.5	<0.2
933053	Soil	15	0.89	205	0.062	<20	1.30	0.006	0.26	<0.1	0.01	2.4	0.2	<0.05	4	<0.5	<0.2
933054	Soil	16	0.51	143	0.062	<20	1.09	0.008	0.19	<0.1	0.03	1.7	0.2	<0.05	4	<0.5	<0.2
933055	Soil	3	0.58	149	0.038	<20	1.14	0.003	0.21	<0.1	0.04	2.6	0.2	<0.05	4	<0.5	<0.2
933056	Soil	10	0.16	104	0.024	<20	0.78	0.013	0.14	<0.1	0.04	0.9	<0.1	0.18	3	<0.5	<0.2
933057	Soil	21	0.63	80	0.058	<20	0.99	0.008	0.25	<0.1	0.04	1.9	0.3	0.07	3	<0.5	<0.2
933058	Soil	25	2.15	136	0.132	<20	1.94	0.004	0.64	<0.1	0.03	2.7	0.5	<0.05	6	<0.5	<0.2
933059	Soil	32	1.61	115	0.094	<20	2.21	0.007	0.24	<0.1	0.04	4.4	0.4	<0.05	6	<0.5	<0.2
933060	Soil	7	1.61	62	0.065	<20	1.79	0.003	0.17	<0.1	0.01	3.1	0.3	<0.05	4	<0.5	<0.2
933061	Soil	6	0.34	69	0.002	<20	0.77	0.003	0.14	<0.1	0.05	4.7	0.1	<0.05	2	<0.5	<0.2
933088	Soil	18	2.19	164	0.156	<20	2.65	0.006	0.55	<0.1	0.02	3.5	0.6	<0.05	7	<0.5	<0.2
933089	Soil	14	0.70	80	0.073	<20	1.11	0.005	0.13	<0.1	0.03	1.8	0.1	<0.05	4	<0.5	<0.2
933090	Soil	24	1.57	130	0.129	<20	2.16	0.007	0.28	<0.1	0.02	3.1	0.3	<0.05	6	<0.5	<0.2
933091	Soil	37	1.77	161	0.136	<20	2.11	0.006	0.27	<0.1	0.02	3.4	0.3	<0.05	7	0.8	<0.2
933092	Soil	70	1.39	151	0.130	<20	2.05	0.010	0.26	<0.1	0.06	4.4	0.4	<0.05	6	1.1	<0.2
933093	Soil	144	2.61	147	0.126	<20	2.62	0.005	0.27	<0.1	0.02	5.7	0.4	<0.05	9	0.9	<0.2
933094	Soil	147	2.31	276	0.202	<20	2.61	0.012	0.33	<0.1	0.03	5.8	0.4	<0.05	9	0.8	<0.2
933095	Soil	27	0.52	206	0.075	<20	2.02	0.010	0.08	<0.1	0.04	3.1	0.1	<0.05	6	0.7	<0.2
933096	Soil	22	0.63	92	0.095	<20	1.86	0.007	0.13	<0.1	0.05	1.9	0.3	<0.05	5	1.0	<0.2
933097	Soil	25	0.55	98	0.092	<20	1.56	0.008	0.15	<0.1	0.03	2.3	0.2	<0.05	6	0.6	<0.2
933098	Soil	27	0.40	166	0.062	<20	2.03	0.009	0.07	<0.1	0.03	2.8	0.1	<0.05	6	0.6	<0.2
933099	Soil	26	0.34	142	0.056	<20	2.22	0.008	0.09	<0.1	0.03	3.1	0.1	<0.05	5	1.2	<0.2
933087	Soil	16	0.19	73	0.043	<20	1.12	0.011	0.08	<0.1	0.02	1.4	<0.1	<0.05	4	<0.5	<0.2
933122	Soil	77	2.12	174	0.157	<20	2.20	0.005	0.62	<0.1	0.07	4.8	0.6	<0.05	8	0.9	<0.2
933128	Soil	113	2.39	100	0.120	<20	2.18	0.006	0.40	<0.1	0.03	2.9	0.4	<0.05	7	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
MDL		0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
933133	Soil	1.1	23.1	90.9	170	<0.1	18.6	7.2	360	3.05	9.1	2.1	5.8	14	0.7	0.3	0.4	57	0.12	0.031	24
933134	Soil	1.5	24.7	172.2	175	0.4	9.9	4.2	238	1.63	7.0	2.5	1.8	14	0.8	0.2	1.2	26	0.09	0.042	43
933138	Soil	2.2	15.1	150.2	65	0.2	8.9	3.3	109	1.90	8.0	3.4	1.5	14	0.2	0.2	0.7	34	0.09	0.039	19
935064	Soil	1.4	15.4	25.0	31	0.1	5.1	2.2	86	1.68	6.3	1.3	14.1	9	0.1	0.2	0.3	34	0.07	0.019	29
935065	Soil	1.6	38.2	60.8	72	0.1	12.7	6.8	207	2.32	7.0	1.6	22.2	13	0.3	0.2	0.3	36	0.09	0.022	32
935066	Soil	1.7	27.6	50.6	75	0.1	12.4	8.5	401	2.51	6.8	4.1	9.3	11	0.2	0.2	0.4	46	0.10	0.033	27
935067	Soil	1.7	38.3	42.0	68	0.2	15.3	8.0	242	2.50	7.1	2.2	15.8	12	0.2	0.3	0.3	50	0.08	0.023	33
935068	Soil	1.3	29.8	28.6	65	<0.1	19.3	9.5	324	2.72	8.3	1.6	12.7	13	0.2	0.3	0.3	60	0.12	0.023	27
935069	Soil	2.3	15.3	25.6	44	0.1	11.7	5.3	200	2.23	5.9	1.4	11.9	12	0.1	0.2	0.4	53	0.10	0.020	17
935070	Soil	1.0	14.2	21.3	37	<0.1	11.0	4.7	138	2.47	6.6	1.5	6.3	12	0.1	0.2	0.3	66	0.11	0.018	13
935071	Soil	0.9	10.2	42.6	30	<0.1	8.7	3.9	179	1.50	4.2	<0.5	11.6	8	<0.1	0.2	0.5	36	0.08	0.025	17
935072	Soil	1.2	13.3	74.3	73	<0.1	11.1	5.0	279	2.08	6.1	1.1	27.3	10	0.3	0.2	1.6	40	0.09	0.026	58

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

CERTIFICATE OF ANALYSIS WHI11000663.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
933133	Soil	27	0.55	155	0.082	<20	1.69	0.008	0.09	<0.1	0.08	2.8	0.2	<0.05	6	1.0	<0.2
933134	Soil	15	0.39	92	0.074	<20	0.85	0.006	0.20	<0.1	0.02	1.0	0.3	<0.05	5	<0.5	<0.2
933138	Soil	16	0.25	104	0.027	<20	1.29	0.010	0.07	<0.1	0.04	1.1	0.1	<0.05	5	0.8	<0.2
935064	Soil	11	0.14	74	0.024	<20	0.86	0.004	0.07	<0.1	0.01	0.9	<0.1	<0.05	4	<0.5	<0.2
935065	Soil	18	0.31	115	0.048	<20	1.46	0.007	0.11	<0.1	0.04	1.8	0.1	<0.05	4	<0.5	<0.2
935066	Soil	21	0.34	152	0.055	<20	1.55	0.007	0.07	<0.1	0.02	2.1	0.1	<0.05	6	<0.5	<0.2
935067	Soil	22	0.37	202	0.060	<20	1.88	0.010	0.06	<0.1	0.02	2.4	0.1	<0.05	6	0.6	<0.2
935068	Soil	29	0.48	187	0.083	<20	2.17	0.011	0.06	<0.1	0.02	3.8	<0.1	<0.05	6	0.8	<0.2
935069	Soil	21	0.28	161	0.060	<20	1.72	0.010	0.06	<0.1	0.01	2.0	0.1	<0.05	7	0.6	<0.2
935070	Soil	21	0.28	148	0.056	<20	1.74	0.009	0.04	<0.1	0.02	2.2	0.1	<0.05	8	<0.5	<0.2
935071	Soil	14	0.25	69	0.044	<20	0.90	0.007	0.05	<0.1	0.02	1.2	<0.1	<0.05	4	0.5	<0.2
935072	Soil	12	0.28	87	0.048	<20	1.36	0.007	0.07	<0.1	0.04	1.8	0.1	<0.05	4	0.6	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

QUALITY CONTROL REPORT WHI11000663.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
Pulp Duplicates																					
935073	Soil	0.8	101.6	9.2	54	<0.1	12.1	14.9	546	4.87	6.8	1.3	1.3	11	0.2	0.4	0.2	84	0.15	0.024	4
REP 935073	QC	0.9	108.3	9.9	58	<0.1	13.0	15.6	568	5.08	7.9	1.3	1.5	11	0.3	0.4	0.3	89	0.14	0.026	4
932985	Soil	0.6	55.7	61.0	112	0.2	14.5	11.4	759	2.92	8.3	2.3	6.2	14	0.2	0.2	0.4	49	0.18	0.026	17
REP 932985	QC	0.7	55.5	58.5	111	0.2	14.0	11.2	723	2.88	7.7	1.6	5.9	14	0.2	0.1	0.4	49	0.17	0.024	15
C068	Soil	0.7	20.5	8.3	106	<0.1	12.0	8.8	383	2.60	3.9	1.5	1.9	27	0.5	0.4	0.2	67	0.47	0.034	11
REP C068	QC	0.7	20.5	8.4	107	<0.1	12.5	8.5	383	2.61	3.9	<0.5	1.9	26	0.5	0.5	0.3	67	0.45	0.034	11
933108	Soil	1.0	52.5	56.0	164	0.9	47.5	24.8	1032	3.64	9.9	<0.5	5.1	20	0.2	0.1	1.7	61	0.34	0.047	14
REP 933108	QC	1.0	53.6	56.5	175	0.9	47.8	25.4	1049	3.71	9.9	0.6	5.0	20	0.2	0.2	1.7	62	0.34	0.046	14
933114	Soil	0.5	49.8	162.1	346	0.2	10.0	21.4	926	4.19	7.5	1.2	1.1	15	0.3	0.2	0.4	65	0.24	0.027	4
REP 933114	QC	0.6	50.2	165.2	348	0.2	9.7	21.1	946	4.22	7.3	0.6	1.1	15	0.3	0.1	0.4	67	0.24	0.028	4
933049	Soil	1.5	10.7	51.0	25	<0.1	7.5	3.2	135	2.07	8.0	1.8	3.0	13	<0.1	0.4	0.4	95	0.10	0.015	11
REP 933049	QC	1.3	10.7	51.3	25	<0.1	7.3	3.2	126	1.99	8.1	2.4	2.9	12	<0.1	0.3	0.4	89	0.09	0.014	10
SQ003	Soil	1.3	13.5	15.6	61	0.1	17.9	9.7	266	2.92	9.2	1.8	6.9	15	0.1	0.3	0.5	67	0.13	0.033	10
REP SQ003	QC	1.4	13.6	15.6	62	0.1	18.9	10.3	271	3.10	9.3	1.4	7.2	15	0.2	0.3	0.5	67	0.13	0.033	10
932736	Soil	0.9	74.2	45.9	81	0.3	13.0	13.2	664	2.66	8.5	2.7	1.7	14	0.2	0.2	0.3	39	0.15	0.034	9
REP 932736	QC	0.8	73.7	47.5	83	0.3	13.3	13.3	686	2.66	8.5	4.8	1.6	13	0.2	0.2	0.3	39	0.16	0.035	9
933093	Soil	0.5	48.8	80.4	147	<0.1	81.0	23.4	1046	3.69	3.8	1.4	10.3	17	0.5	<0.1	0.2	49	0.22	0.045	34
REP 933093	QC	0.5	50.4	86.5	148	<0.1	81.6	22.9	1025	3.77	3.7	2.4	11.3	18	0.4	<0.1	0.3	51	0.24	0.051	34
Reference Materials																					
STD DS8	Standard	13.6	107.9	122.8	305	1.6	38.1	7.4	575	2.35	25.8	101.6	6.6	60	2.4	4.7	6.1	40	0.64	0.073	12
STD DS8	Standard	15.0	108.7	122.6	315	2.0	36.8	7.5	617	2.43	26.8	109.6	6.4	64	2.3	4.6	6.1	42	0.68	0.080	13
STD DS8	Standard	12.3	112.1	128.6	319	1.9	36.5	7.8	584	2.39	27.2	102.9	6.4	67	2.2	5.0	7.1	41	0.66	0.076	13
STD DS8	Standard	14.5	112.5	127.4	310	1.9	37.4	7.8	611	2.47	26.3	105.8	6.6	72	2.6	5.1	6.9	44	0.68	0.081	14
STD DS8	Standard	13.1	110.3	128.0	320	1.8	36.9	7.6	620	2.45	27.2	108.2	7.3	74	2.4	5.3	7.1	43	0.70	0.081	14
STD DS8	Standard	13.2	120.0	131.4	322	1.9	38.1	7.6	607	2.52	27.8	112.3	6.8	70	2.4	4.8	6.9	41	0.71	0.082	14
STD DS8	Standard	12.4	110.4	131.6	298	1.8	35.3	7.4	567	2.30	24.7	91.8	6.3	66	2.3	5.0	6.6	40	0.65	0.082	13
STD DS8	Standard	13.9	115.5	128.7	313	1.7	39.8	8.0	626	2.56	28.1	124.9	6.5	63	2.6	5.0	6.2	43	0.67	0.081	13
STD DS8	Standard	12.7	103.4	118.6	292	1.6	35.9	7.0	580	2.32	25.2	90.4	6.3	61	2.1	4.1	6.3	40	0.64	0.075	13

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

QUALITY CONTROL REPORT WHI11000663.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
Pulp Duplicates																	
935073	Soil	20	1.72	73	0.151	<20	2.70	0.005	0.15	<0.1	0.01	3.7	0.3	<0.05	7	<0.5	<0.2
REP 935073	QC	20	1.81	75	0.154	<20	2.84	0.005	0.16	<0.1	0.02	4.0	0.3	<0.05	8	<0.5	<0.2
932985	Soil	20	0.76	122	0.044	<20	1.76	0.008	0.07	<0.1	0.07	3.6	0.1	<0.05	5	<0.5	<0.2
REP 932985	QC	20	0.76	120	0.044	<20	1.69	0.008	0.07	<0.1	0.02	3.6	0.1	<0.05	4	<0.5	<0.2
C068	Soil	20	0.65	226	0.084	<20	1.46	0.020	0.09	<0.1	0.02	6.0	<0.1	<0.05	6	<0.5	<0.2
REP C068	QC	20	0.65	232	0.081	<20	1.46	0.020	0.09	<0.1	0.02	5.7	<0.1	<0.05	6	<0.5	<0.2
933108	Soil	140	2.35	113	0.113	<20	2.50	0.005	0.24	<0.1	0.03	4.5	0.3	<0.05	8	<0.5	<0.2
REP 933108	QC	144	2.39	111	0.116	<20	2.55	0.005	0.24	0.1	0.04	4.6	0.3	<0.05	8	<0.5	<0.2
933114	Soil	13	1.56	91	0.092	<20	2.34	0.003	0.25	<0.1	0.02	2.9	0.3	<0.05	6	<0.5	<0.2
REP 933114	QC	13	1.64	95	0.093	<20	2.42	0.004	0.25	<0.1	0.01	3.0	0.3	<0.05	6	<0.5	<0.2
933049	Soil	17	0.15	151	0.105	<20	0.89	0.005	0.04	<0.1	0.02	1.5	<0.1	<0.05	10	0.9	<0.2
REP 933049	QC	17	0.15	152	0.099	<20	0.87	0.004	0.03	<0.1	0.02	1.5	<0.1	<0.05	9	<0.5	<0.2
SQ003	Soil	28	0.36	202	0.063	<20	2.73	0.009	0.06	<0.1	0.02	2.7	0.1	<0.05	8	<0.5	<0.2
REP SQ003	QC	29	0.35	198	0.060	<20	2.76	0.008	0.06	<0.1	0.02	2.6	0.1	<0.05	8	<0.5	<0.2
932736	Soil	21	0.98	92	0.045	<20	1.67	0.006	0.05	<0.1	0.03	2.6	0.1	<0.05	5	<0.5	<0.2
REP 932736	QC	21	1.04	90	0.045	<20	1.62	0.007	0.05	<0.1	0.03	2.7	0.1	<0.05	5	<0.5	<0.2
933093	Soil	144	2.61	147	0.126	<20	2.62	0.005	0.27	<0.1	0.02	5.7	0.4	<0.05	9	0.9	<0.2
REP 933093	QC	148	2.71	147	0.130	<20	2.72	0.005	0.28	<0.1	0.02	6.2	0.4	<0.05	9	1.1	<0.2
Reference Materials																	
STD DS8	Standard	112	0.59	292	0.100	<20	0.89	0.110	0.42	2.6	0.19	2.5	5.4	0.14	4	4.5	4.7
STD DS8	Standard	116	0.60	294	0.108	<20	0.92	0.107	0.43	2.6	0.22	2.5	5.2	0.17	5	5.9	5.1
STD DS8	Standard	112	0.60	286	0.112	<20	0.90	0.089	0.42	2.6	0.20	2.0	5.4	0.18	5	5.4	4.9
STD DS8	Standard	116	0.63	297	0.119	<20	0.98	0.104	0.44	2.8	0.21	2.5	5.6	0.15	5	4.9	5.0
STD DS8	Standard	114	0.61	305	0.115	<20	0.93	0.109	0.46	2.5	0.22	2.6	5.5	0.19	5	4.9	4.6
STD DS8	Standard	112	0.63	293	0.121	<20	1.00	0.102	0.43	2.8	0.23	2.5	5.7	0.15	5	5.5	5.4
STD DS8	Standard	106	0.59	291	0.111	<20	0.88	0.090	0.41	2.7	0.17	2.0	5.2	0.16	5	6.2	4.6
STD DS8	Standard	121	0.63	299	0.107	<20	0.93	0.094	0.42	2.6	0.21	2.1	5.5	0.15	5	5.3	5.2
STD DS8	Standard	110	0.58	281	0.106	<20	0.87	0.084	0.38	2.7	0.19	1.9	5.2	0.13	5	5.5	4.6

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

QUALITY CONTROL REPORT WHI11000663.1

		1DX Mo ppm 0.1	1DX Cu ppm 0.1	1DX Pb ppm 0.1	1DX Zn ppm 1	1DX Ag ppm 0.1	1DX Ni ppm 0.1	1DX Co ppm 0.1	1DX Mn ppm 1	1DX Fe % 0.01	1DX As ppm 0.5	1DX Au ppb 0.5	1DX Th ppm 0.1	1DX Sr ppm 1	1DX Cd ppm 0.1	1DX Sb ppm 0.1	1DX Bi ppm 0.1	1DX V ppm 2	1DX Ca % 0.01	1DX P % 0.001	1DX La ppm 1
STD OREAS45CA	Standard	1.1	474.8	19.7	59	0.3	225.1	87.3	879	15.15	4.4	39.1	6.8	14	0.2	0.3	0.2	194	0.40	0.037	15
STD OREAS45CA	Standard	0.9	499.8	19.7	69	0.2	231.8	87.9	918	15.94	4.7	48.8	6.6	14	0.1	<0.1	0.2	199	0.40	0.038	15
STD OREAS45CA	Standard	0.9	492.4	20.7	66	0.3	224.9	86.3	892	15.31	4.6	40.1	6.9	16	<0.1	0.1	0.2	188	0.40	0.037	15
STD OREAS45CA	Standard	0.8	488.8	21.9	60	0.3	231.9	88.9	895	15.80	4.6	43.8	7.1	16	0.1	<0.1	0.2	192	0.41	0.037	16
STD OREAS45CA	Standard	0.9	480.5	21.0	70	0.3	225.7	85.4	888	16.02	4.8	41.6	7.0	16	0.1	0.1	0.2	189	0.40	0.038	16
STD OREAS45CA	Standard	0.7	474.5	21.3	61	0.3	218.5	82.6	881	15.51	4.1	44.0	7.3	15	<0.1	<0.1	0.2	175	0.39	0.040	15
STD OREAS45CA	Standard	0.8	471.8	22.1	60	0.3	225.0	85.0	877	15.42	4.4	39.6	7.1	15	<0.1	0.1	0.2	184	0.39	0.038	15
STD OREAS45CA	Standard	0.9	494.8	20.5	61	0.3	234.2	88.5	884	15.40	3.9	40.8	6.8	14	0.1	0.1	0.1	202	0.38	0.034	15
STD OREAS45CA	Standard	0.9	473.4	19.5	56	0.3	223.9	83.8	868	15.25	3.5	33.6	6.7	14	0.1	0.1	0.2	194	0.39	0.035	15
STD DS8 Expected		13.44	110	123	312	1.69	38.1	7.5	615	2.46	26	107	6.89	67.7	2.38	4.8	6.67	41.1	0.7	0.08	14.6
STD OREAS45CA Expected		1	494	20	60	0.275	240	92	943	15.69	3.8	43	7	15	0.1	0.13	0.19	215	0.4265	0.0385	15.9
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	0.02	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 15, 2011

QUALITY CONTROL REPORT WHI11000663.1

		1DX Cr ppm 1	1DX Mg % 0.01	1DX Ba ppm 1	1DX Ti % 0.001	1DX B ppm 20	1DX Al % 0.01	1DX Na % 0.001	1DX K % 0.01	1DX W ppm 0.1	1DX Hg ppm 0.01	1DX Sc ppm 0.1	1DX Tl ppm 0.1	1DX S % 0.05	1DX Ga ppm 1	1DX Se ppm 0.5	1DX Te ppm 0.2
STD OREAS45CA	Standard	705	0.14	157	0.117	<20	3.40	0.013	0.07	<0.1	0.03	35.9	<0.1	<0.05	17	<0.5	<0.2
STD OREAS45CA	Standard	717	0.13	158	0.116	<20	3.45	0.012	0.07	<0.1	0.04	36.4	<0.1	<0.05	18	0.6	<0.2
STD OREAS45CA	Standard	640	0.15	158	0.131	<20	3.47	0.012	0.07	<0.1	0.03	37.4	<0.1	<0.05	18	<0.5	<0.2
STD OREAS45CA	Standard	674	0.15	166	0.129	<20	3.76	0.013	0.07	<0.1	0.03	38.4	<0.1	<0.05	18	<0.5	<0.2
STD OREAS45CA	Standard	652	0.15	169	0.134	<20	3.67	0.013	0.07	<0.1	0.03	37.6	<0.1	<0.05	19	<0.5	<0.2
STD OREAS45CA	Standard	629	0.15	158	0.127	<20	3.54	0.013	0.07	<0.1	0.03	37.4	<0.1	<0.05	18	0.7	<0.2
STD OREAS45CA	Standard	608	0.14	155	0.125	<20	3.31	0.012	0.07	<0.1	0.03	35.3	<0.1	<0.05	17	<0.5	<0.2
STD OREAS45CA	Standard	743	0.13	153	0.117	<20	3.31	0.011	0.07	<0.1	0.03	35.8	<0.1	<0.05	18	0.6	<0.2
STD OREAS45CA	Standard	693	0.12	155	0.127	<20	3.34	0.011	0.07	<0.1	0.03	35.1	<0.1	<0.05	17	<0.5	<0.2
STD DS8 Expected		115	0.6045	279	0.113	2.6	0.93	0.0883	0.41	3	0.192	2.3	5.4	0.1679	4.7	5.23	5
STD OREAS45CA Expected		709	0.1358	164	0.128		3.592	0.0075	0.0717		0.03	39.7	0.07	0.021	18.4	0.5	
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Whitehorse) Ltd.
77 Collins Lane Whitehorse YK Y1A 0A8 Canada

www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Submitted By: Mike MacIsaac
Receiving Lab: Canada-Whitehorse
Received: July 19, 2011
Report Date: August 01, 2011
Page: 1 of 2

CERTIFICATE OF ANALYSIS WHI11000664.1

CLIENT JOB INFORMATION

Project: FoGo
Shipment ID:
P.O. Number
Number of Samples: 26

SAMPLE DISPOSAL

DISP-PLP Dispose of Pulp After 90 days
DISP-RJT-SOIL Immediate Disposal of Soil Reject

Acme does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Method Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
Dry at 60C	24	Dry at 60C			WHI
SS80	24	Dry at 60C sieve 100g to -80 mesh			WHI
1DX1	24	1:1:1 Aqua Regia digestion ICP-MS analysis	0.5	Completed	VAN

ADDITIONAL COMMENTS

Invoice To: Metals Creek Resources
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3
Canada

CC: Don Heerema
Wayne Reid
Sandy Stares

BRITISH COLUMBIA CERTIFIED ASSAYER
CLARENCE LEONG
GENERAL MANAGER

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Acme assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

Acme Analytical Laboratories (Whitehorse) Ltd.
77 Collins Lane Whitehorse YK Y1A 0A8 Canada
Phone 867-393-4725 Fax 867-393-4775
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 01, 2011

CERTIFICATE OF ANALYSIS WHI11000664.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
K932723	Silt	1.2	18.0	28.5	110	0.1	13.6	8.6	658	1.73	3.8	2.8	4.1	24	0.9	<0.1	0.2	36	0.33	0.048	14
K932724	Silt	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.
K932725	Silt	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.
K932726	Silt	2.1	28.3	39.1	143	0.2	18.4	11.3	1056	2.17	5.2	1.5	3.7	31	1.4	0.1	0.3	43	0.42	0.045	18
K932727	Silt	1.8	18.0	32.1	101	0.1	12.0	9.7	732	1.77	4.8	3.0	6.5	21	0.7	<0.1	0.2	32	0.26	0.045	16
K932728	Silt	1.3	17.5	28.0	98	0.1	13.1	7.8	532	1.60	3.5	1.3	3.9	23	0.8	<0.1	0.2	36	0.33	0.048	15
K935062	Silt	1.5	21.6	28.7	112	<0.1	28.4	11.1	1094	1.62	4.0	0.7	6.0	46	1.2	<0.1	0.2	29	0.28	0.044	15
K935063	Silt	0.9	14.3	21.9	80	<0.1	13.7	7.9	582	1.50	3.3	3.0	4.3	27	0.7	<0.1	0.2	37	0.34	0.048	17
C037	Silt	0.6	15.7	5.6	54	<0.1	14.3	9.9	569	2.09	5.9	23.8	2.0	29	0.2	0.2	<0.1	43	0.52	0.072	9
C038	Silt	0.8	17.0	7.6	70	<0.1	17.0	15.0	902	2.63	10.4	1.8	3.2	22	0.2	0.2	<0.1	56	0.38	0.072	10
C039	Silt	0.4	12.7	4.7	56	<0.1	14.3	7.9	274	1.80	4.1	2.2	1.8	27	0.1	0.1	<0.1	42	0.49	0.074	9
C040	Silt	0.4	13.7	4.9	55	<0.1	14.7	8.7	308	1.85	4.8	2.4	1.7	27	<0.1	0.1	<0.1	41	0.45	0.062	8
C041	Silt	0.4	12.2	4.6	52	<0.1	13.6	7.9	291	1.80	4.2	1.7	1.9	27	0.2	0.1	<0.1	45	0.49	0.068	9
C042	Silt	0.4	15.0	5.2	57	<0.1	15.6	8.6	325	1.93	4.9	1.9	2.0	29	0.1	0.1	<0.1	45	0.51	0.067	9
C043	Silt	0.5	17.6	5.7	61	<0.1	16.3	9.6	370	2.07	5.4	2.8	1.8	32	0.1	0.1	<0.1	49	0.60	0.070	9
C044	Silt	0.5	13.0	4.6	44	<0.1	13.6	8.2	468	1.78	5.9	3.0	2.2	26	0.1	0.2	<0.1	39	0.41	0.057	9
C045	Silt	0.5	22.0	9.6	57	<0.1	9.1	9.3	348	2.46	5.7	1.7	1.6	23	0.1	0.1	<0.1	63	0.47	0.082	7
CH43	Silt	0.5	20.2	6.2	64	<0.1	17.8	10.2	451	2.25	5.9	5.7	1.9	36	0.2	0.2	<0.1	50	0.59	0.065	9
F066	Silt	0.4	9.0	12.0	52	<0.1	9.8	5.4	217	1.40	3.4	2.5	3.9	17	<0.1	<0.1	<0.1	31	0.31	0.043	15
F067	Silt	0.8	16.5	2.9	45	<0.1	20.9	8.2	407	1.97	4.8	2.6	1.6	80	0.3	0.3	<0.1	46	4.36	0.080	9
F0-16	Silt	0.7	17.0	7.2	67	<0.1	16.0	9.1	337	2.04	4.8	2.4	2.0	25	0.1	0.1	<0.1	50	0.42	0.051	9
F0-17	Silt	0.6	9.7	13.1	50	<0.1	11.3	5.5	248	1.65	4.0	1.3	3.7	22	0.2	<0.1	0.1	34	0.33	0.044	19
F0-34	Silt	1.1	18.2	25.3	102	0.1	18.3	8.3	595	1.55	3.6	3.0	4.5	32	0.7	<0.1	0.2	32	0.33	0.041	16
F0-35	Silt	0.6	16.0	5.9	65	<0.1	15.7	9.8	345	2.16	5.5	2.8	1.9	25	0.2	0.1	<0.1	48	0.41	0.057	9
F0-36	Silt	1.4	14.7	22.8	87	<0.1	19.9	9.6	797	1.60	5.8	2.5	6.8	19	0.6	<0.1	0.2	25	0.18	0.039	15
F0-37	Silt	0.7	18.0	11.6	75	<0.1	16.2	9.0	397	1.98	5.3	2.8	2.4	30	0.3	0.1	0.1	44	0.46	0.055	12

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Whitehorse) Ltd.
77 Collins Lane Whitehorse YK Y1A 0A8 Canada
Phone 867-393-4725 Fax 867-393-4775
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 01, 2011

CERTIFICATE OF ANALYSIS WHI11000664.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
K932723	Silt	19	0.38	88	0.041	<20	1.01	0.007	0.06	0.4	0.01	1.9	0.1	<0.05	3	<0.5	<0.2
K932724	Silt	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.
K932725	Silt	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.
K932726	Silt	28	0.45	132	0.042	<20	1.33	0.008	0.07	0.2	0.03	2.6	0.2	<0.05	4	0.8	<0.2
K932727	Silt	18	0.39	83	0.032	<20	0.97	0.007	0.07	0.2	0.02	1.6	0.1	<0.05	3	<0.5	<0.2
K932728	Silt	18	0.39	93	0.043	<20	1.06	0.008	0.06	<0.1	0.03	1.9	0.2	<0.05	3	<0.5	<0.2
K935062	Silt	11	0.40	248	0.030	<20	0.89	0.007	0.11	0.2	0.01	1.6	0.2	<0.05	3	0.6	<0.2
K935063	Silt	18	0.33	129	0.039	<20	0.91	0.008	0.06	0.4	0.02	2.0	<0.1	<0.05	3	<0.5	<0.2
C037	Silt	21	0.41	224	0.047	<20	0.92	0.014	0.08	0.2	0.03	2.4	<0.1	<0.05	3	0.6	<0.2
C038	Silt	25	0.64	211	0.054	<20	1.03	0.009	0.12	0.4	<0.01	2.9	<0.1	<0.05	4	<0.5	<0.2
C039	Silt	20	0.42	159	0.056	<20	1.06	0.017	0.08	<0.1	0.02	2.7	<0.1	<0.05	3	<0.5	<0.2
C040	Silt	20	0.45	155	0.052	<20	1.03	0.015	0.08	0.1	0.01	2.6	<0.1	<0.05	3	<0.5	<0.2
C041	Silt	21	0.40	171	0.057	<20	1.01	0.017	0.07	0.2	0.02	2.7	<0.1	<0.05	3	<0.5	<0.2
C042	Silt	21	0.42	180	0.059	<20	1.07	0.017	0.08	0.2	0.02	2.8	<0.1	<0.05	3	<0.5	<0.2
C043	Silt	24	0.46	202	0.064	<20	1.19	0.018	0.09	0.2	0.02	3.1	<0.1	<0.05	4	<0.5	<0.2
C044	Silt	17	0.31	210	0.047	<20	0.81	0.014	0.08	<0.1	0.02	2.0	<0.1	<0.05	3	<0.5	<0.2
C045	Silt	19	0.51	300	0.062	<20	1.13	0.018	0.19	0.2	0.01	4.5	<0.1	<0.05	4	<0.5	<0.2
CH43	Silt	26	0.47	221	0.059	<20	1.21	0.018	0.09	0.2	0.03	3.0	<0.1	0.06	4	0.7	<0.2
F066	Silt	15	0.33	88	0.036	<20	0.89	0.010	0.05	0.3	0.02	2.0	<0.1	<0.05	3	<0.5	<0.2
F067	Silt	19	1.00	119	0.055	<20	0.78	0.035	0.07	<0.1	0.04	2.5	<0.1	<0.05	2	<0.5	<0.2
F0-16	Silt	33	0.67	119	0.051	<20	1.29	0.012	0.06	0.1	0.02	2.7	<0.1	<0.05	4	<0.5	<0.2
F0-17	Silt	18	0.25	140	0.036	<20	1.35	0.010	0.06	0.1	0.04	2.3	<0.1	<0.05	4	0.5	<0.2
F0-34	Silt	19	0.38	113	0.039	<20	1.00	0.008	0.08	0.2	0.02	2.0	0.1	<0.05	3	<0.5	<0.2
F0-35	Silt	25	0.62	133	0.050	<20	1.28	0.013	0.07	0.1	0.01	3.0	<0.1	<0.05	4	<0.5	<0.2
F0-36	Silt	14	0.29	99	0.014	<20	0.71	0.005	0.10	0.2	<0.01	1.3	0.1	<0.05	2	0.6	<0.2
F0-37	Silt	24	0.63	138	0.050	<20	1.31	0.014	0.07	0.2	0.02	2.7	<0.1	<0.05	4	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Whitehorse) Ltd.
77 Collins Lane Whitehorse YK Y1A 0A8 Canada
Phone 867-393-4725 Fax 867-393-4775
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 01, 2011

QUALITY CONTROL REPORT WHI11000664.1

		Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
		Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
		Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
		MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
Pulp Duplicates																						
K932727	Silt		1.8	18.0	32.1	101	0.1	12.0	9.7	732	1.77	4.8	3.0	6.5	21	0.7	<0.1	0.2	32	0.26	0.045	16
REP K932727	QC		1.6	17.4	31.2	99	0.1	13.0	8.8	631	1.73	4.1	16.3	4.9	22	0.5	<0.1	0.3	34	0.30	0.043	15
Reference Materials																						
STD DS8	Standard		12.7	107.3	112.7	297	1.7	37.9	7.6	620	2.45	26.7	129.4	5.3	52	2.3	3.1	5.3	45	0.66	0.078	12
STD OREAS45CA	Standard		0.8	507.7	18.0	56	0.3	224.0	87.1	929	15.48	3.3	36.1	5.5	11	<0.1	<0.1	0.2	210	0.39	0.038	13
STD DS8 Expected			13.44	110	123	312	1.69	38.1	7.5	615	2.46	26	107	6.89	67.7	2.38	4.8	6.67	41.1	0.7	0.08	14.6
STD OREAS45CA Expected			1	494	20	60	0.275	240	92	943	15.69	3.8	43	7	15	0.1	0.13	0.19	215	0.4265	0.0385	15.9
BLK	Blank		<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Whitehorse) Ltd.
77 Collins Lane Whitehorse YK Y1A 0A8 Canada
Phone 867-393-4725 Fax 867-393-4775
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 01, 2011

QUALITY CONTROL REPORT WHI11000664.1

		Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
		Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
		Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
		MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
Pulp Duplicates																		
K932727	Silt		18	0.39	83	0.032	<20	0.97	0.007	0.07	0.2	0.02	1.6	0.1	<0.05	3	<0.5	<0.2
REP K932727	QC		19	0.38	86	0.037	<20	1.01	0.007	0.07	0.1	0.03	1.8	0.1	<0.05	3	<0.5	<0.2
Reference Materials																		
STD DS8	Standard		121	0.49	283	0.097	<20	0.90	0.083	0.40	2.3	0.22	1.9	5.4	0.19	4	5.3	5.0
STD OREAS45CA	Standard		870	0.10	151	0.106	<20	3.38	0.010	0.07	<0.1	0.03	35.7	<0.1	<0.05	17	<0.5	<0.2
STD DS8 Expected			115	0.6045	279	0.113	2.6	0.93	0.0883	0.41	3	0.192	2.3	5.4	0.1679	4.7	5.23	5
STD OREAS45CA Expected			709	0.1358	164	0.128		3.592	0.0075	0.0717		0.03	39.7	0.07	0.021	18.4	0.5	
BLK	Blank		<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada

www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Submitted By: Mike MacIsaac
Receiving Lab: Canada-Whitehorse
Received: July 19, 2011
Report Date: August 12, 2011
Page: 1 of 12

CERTIFICATE OF ANALYSIS WHI11000661.1

CLIENT JOB INFORMATION

Project: FoGo
Shipment ID:
P.O. Number
Number of Samples: 313

SAMPLE DISPOSAL

DISP-PLP Dispose of Pulp After 90 days
DISP-RJT-SOIL Immediate Disposal of Soil Reject

Acme does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Method Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
Dry at 60C	313	Dry at 60C			WHI
SS80	313	Dry at 60C sieve 100g to -80 mesh			WHI
1DX1	313	1:1:1 Aqua Regia digestion ICP-MS analysis	0.5	Completed	VAN

ADDITIONAL COMMENTS

Invoice To: Metals Creek Resources
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3
Canada

CC: Don Heerema
Wayne Reid
Sandy Stares

BRITISH COLUMBIA CERTIFIED ASSAYER
CLARENCE LEONG
GENERAL MANAGER

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Acme assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

		Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
		Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
		Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
		MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
932790	Soil		1.2	11.4	21.6	38	0.1	11.1	4.6	162	2.50	7.3	4.6	5.0	10	0.4	0.3	0.3	62	0.09	0.026	6
932765	Soil		1.0	13.6	34.4	63	0.1	16.4	6.5	372	2.33	6.0	2.9	10.5	19	0.3	0.2	0.3	56	0.26	0.016	30
932794	Soil		0.9	8.2	15.9	45	<0.1	9.3	3.6	154	1.76	4.1	1.1	3.2	12	0.2	0.1	0.2	49	0.11	0.012	6
932789	Soil		1.2	20.8	22.5	54	0.1	24.2	10.7	410	3.11	11.7	1.5	6.0	15	0.4	0.3	0.2	74	0.15	0.044	7
932713	Soil		10.6	10.7	29.0	33	0.5	7.2	2.8	100	1.44	6.3	5.9	3.3	11	<0.1	0.2	0.3	25	0.11	0.032	23
932798	Soil		1.0	18.4	18.5	58	0.4	23.6	9.3	255	3.13	9.0	6.8	7.4	13	0.4	0.3	0.3	72	0.12	0.025	13
932799	Soil		1.3	11.3	17.4	56	<0.1	13.4	5.5	192	2.66	6.6	10.0	4.6	8	0.2	0.2	0.2	66	0.08	0.017	7
932797	Soil		1.2	11.3	17.1	51	0.1	17.1	7.6	308	2.67	8.0	1.2	6.2	10	0.3	0.3	0.2	67	0.10	0.025	7
932709	Soil		12.4	12.4	16.7	46	0.3	13.0	5.9	221	2.54	8.5	3.6	2.7	10	0.4	0.3	0.2	68	0.09	0.033	7
932793	Soil		1.2	12.4	18.0	48	<0.1	11.0	5.1	350	2.26	6.0	<0.5	3.6	10	0.3	0.3	0.2	54	0.10	0.027	6
932800	Soil		1.0	17.7	11.7	54	0.1	17.7	7.4	214	2.73	7.2	1.6	3.3	14	0.2	0.3	0.2	66	0.12	0.016	10
932795	Soil		1.4	12.8	16.5	49	<0.1	13.7	6.0	307	2.65	6.6	<0.5	5.5	17	0.1	0.2	0.2	70	0.15	0.014	10
932791	Soil		1.3	14.8	18.2	56	<0.1	13.2	5.6	273	2.99	7.4	0.9	3.6	14	0.2	0.4	0.2	73	0.11	0.025	5
932796	Soil		1.1	11.2	17.7	47	<0.1	12.2	4.7	182	2.38	6.0	1.3	5.3	12	0.1	0.2	0.2	61	0.11	0.014	12
932792	Soil		1.5	24.6	17.9	56	0.1	23.6	9.9	322	3.14	10.2	2.4	8.7	21	0.2	0.3	0.2	76	0.17	0.021	14
932758	Soil		2.0	19.0	20.3	68	0.2	18.6	7.6	290	2.63	9.5	<0.5	4.5	14	0.4	0.2	0.3	60	0.17	0.023	11
933080	Soil		0.5	41.6	243.0	320	0.9	19.4	15.3	658	3.20	7.7	0.6	1.0	13	0.2	0.1	2.5	47	0.29	0.029	5
932706	Soil		24.5	11.4	31.7	36	0.5	13.1	4.0	132	1.65	7.0	2.1	3.5	12	0.2	0.5	0.2	38	0.12	0.020	11
933123	Soil		0.4	102.0	33.9	111	0.4	17.0	14.0	566	3.12	2.8	0.5	1.2	16	0.1	<0.1	0.4	70	0.50	0.035	4
933082	Soil		1.1	32.1	396.2	570	0.4	13.7	21.6	1108	4.49	23.3	2.0	1.1	15	0.4	0.2	3.5	87	0.20	0.031	3
933078	Soil		1.0	123.0	63.5	154	0.2	14.8	22.8	1075	4.72	16.2	1.3	1.7	25	0.3	0.2	0.5	86	0.43	0.026	5
933117	Soil		1.3	70.4	49.2	109	0.2	11.3	19.2	1011	3.99	10.7	1.6	1.1	12	<0.1	0.2	0.2	68	0.18	0.031	4
933083	Soil		1.0	106.9	57.2	83	0.6	20.7	18.5	615	3.27	7.5	1.5	1.4	20	<0.1	0.2	0.3	55	0.26	0.047	8
933062	Soil		1.6	20.7	123.6	79	0.2	9.0	5.5	352	3.13	17.9	0.9	11.5	11	0.1	0.4	1.0	46	0.06	0.024	11
933086	Soil		2.4	23.5	244.0	336	<0.1	12.0	4.9	444	3.33	13.8	<0.5	21.0	51	0.3	0.1	0.4	22	0.04	0.041	38
932710	Soil		12.6	16.3	22.9	46	0.2	15.8	7.1	244	2.29	7.3	1.3	5.6	18	<0.1	0.3	0.2	52	0.19	0.022	11
932779	Soil		0.9	13.4	9.7	88	0.2	7.6	7.3	2055	1.52	2.8	<0.5	1.0	11	1.3	0.2	0.2	41	0.09	0.020	5
933121	Soil		0.7	51.6	49.8	243	0.6	14.6	20.7	1459	3.94	7.2	11.6	2.9	21	0.8	0.2	0.7	61	0.45	0.038	10
932754	Soil		2.6	14.8	24.4	105	0.4	17.9	7.9	253	3.43	10.6	<0.5	6.0	12	0.3	0.3	0.3	81	0.11	0.030	8
933125	Soil		0.8	56.6	25.7	160	0.1	24.8	19.3	972	4.29	12.0	0.9	2.9	25	0.2	<0.1	0.2	84	0.54	0.031	9

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
932790	Soil	20	0.19	106	0.050	<20	1.87	0.010	0.02	<0.1	0.02	1.4	<0.1	<0.05	7	<0.5	<0.2
932765	Soil	25	0.40	107	0.031	<20	1.41	0.009	0.06	0.1	0.01	1.8	0.1	<0.05	6	<0.5	<0.2
932794	Soil	16	0.22	74	0.031	<20	1.05	0.007	0.03	<0.1	<0.01	1.2	<0.1	<0.05	5	<0.5	<0.2
932789	Soil	31	0.42	210	0.061	<20	3.08	0.007	0.04	0.1	0.05	2.1	0.1	<0.05	8	<0.5	<0.2
932713	Soil	15	0.21	54	0.013	<20	0.91	0.005	0.11	0.2	0.05	1.0	0.2	<0.05	4	<0.5	<0.2
932798	Soil	31	0.45	161	0.079	<20	2.78	0.009	0.04	0.1	0.05	2.4	<0.1	<0.05	7	<0.5	<0.2
932799	Soil	22	0.30	94	0.080	<20	1.42	0.008	0.03	<0.1	0.02	1.5	<0.1	<0.05	6	<0.5	<0.2
932797	Soil	25	0.36	159	0.061	<20	2.00	0.008	0.04	<0.1	0.04	1.7	<0.1	<0.05	7	<0.5	<0.2
932709	Soil	22	0.32	75	0.035	<20	1.32	0.008	0.06	<0.1	0.01	1.6	0.2	<0.05	7	<0.5	<0.2
932793	Soil	17	0.22	93	0.048	<20	1.37	0.013	0.04	<0.1	0.05	1.1	<0.1	<0.05	7	<0.5	<0.2
932800	Soil	29	0.36	143	0.061	<20	1.99	0.009	0.02	<0.1	0.04	1.9	<0.1	<0.05	6	<0.5	<0.2
932795	Soil	22	0.31	166	0.050	<20	1.69	0.009	0.04	<0.1	0.02	1.7	<0.1	<0.05	7	<0.5	<0.2
932791	Soil	21	0.24	180	0.057	<20	1.80	0.010	0.03	<0.1	0.04	1.4	<0.1	<0.05	8	<0.5	<0.2
932796	Soil	22	0.29	121	0.044	<20	1.45	0.009	0.04	<0.1	0.02	1.5	<0.1	<0.05	7	<0.5	<0.2
932792	Soil	38	0.45	228	0.073	<20	2.82	0.009	0.05	<0.1	0.03	3.2	0.1	<0.05	7	<0.5	<0.2
932758	Soil	29	0.44	102	0.032	<20	2.18	0.009	0.06	0.1	0.05	1.9	0.2	<0.05	6	<0.5	<0.2
933080	Soil	18	1.23	81	0.074	<20	1.95	0.006	0.09	<0.1	0.05	1.9	0.2	<0.05	5	<0.5	<0.2
932706	Soil	20	0.22	59	0.048	<20	0.71	0.010	0.09	0.1	0.03	1.0	0.2	0.08	4	<0.5	<0.2
933123	Soil	26	1.72	128	0.108	<20	2.15	0.005	0.39	<0.1	0.04	3.0	0.3	0.15	5	<0.5	<0.2
933082	Soil	23	1.45	85	0.141	<20	2.33	0.007	0.35	<0.1	0.02	1.9	0.4	<0.05	7	<0.5	<0.2
933078	Soil	14	1.73	116	0.099	<20	2.24	0.007	0.11	0.1	0.02	2.5	0.1	<0.05	7	<0.5	0.2
933117	Soil	13	1.40	98	0.102	<20	2.20	0.006	0.30	<0.1	0.02	2.1	0.4	<0.05	6	<0.5	<0.2
933083	Soil	27	0.86	168	0.074	<20	1.96	0.012	0.11	<0.1	0.06	3.0	0.2	<0.05	5	<0.5	<0.2
933062	Soil	14	0.25	76	0.051	<20	0.96	0.009	0.09	<0.1	0.01	1.6	0.1	0.08	5	<0.5	<0.2
933086	Soil	12	0.78	93	0.150	<20	1.27	0.004	0.33	<0.1	0.01	0.9	0.4	0.11	4	<0.5	<0.2
932710	Soil	24	0.44	94	0.049	<20	1.44	0.011	0.08	0.1	<0.01	2.1	0.2	<0.05	5	<0.5	<0.2
932779	Soil	12	0.14	148	0.049	<20	0.93	0.017	0.03	<0.1	0.02	1.1	0.1	<0.05	4	<0.5	<0.2
933121	Soil	17	1.17	150	0.084	<20	1.70	0.005	0.28	<0.1	0.04	4.0	0.4	<0.05	5	<0.5	<0.2
932754	Soil	29	0.36	116	0.042	<20	2.12	0.011	0.05	<0.1	0.12	2.1	0.1	<0.05	8	<0.5	<0.2
933125	Soil	40	2.30	195	0.184	<20	2.37	0.005	0.85	<0.1	0.02	2.6	0.6	0.06	7	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
SQE072	Soil	0.8	28.4	9.8	82	0.1	34.9	15.8	611	2.83	3.5	7.6	5.7	43	0.2	0.1	0.1	50	0.81	0.066	29
SQE068	Soil	2.3	31.3	21.9	73	0.2	43.0	14.6	763	2.78	5.9	0.8	1.9	32	0.3	0.2	0.2	60	0.57	0.046	10
SQE071	Soil	0.6	33.8	7.5	62	<0.1	36.4	16.8	588	2.59	3.3	2.6	2.9	30	<0.1	0.1	<0.1	53	0.77	0.053	8
SQE070	Soil	0.6	57.4	4.6	62	0.1	45.5	19.0	642	2.54	2.5	7.5	1.9	46	<0.1	0.1	<0.1	56	0.92	0.056	8
SQE069	Soil	3.0	72.3	18.2	84	0.4	59.2	19.8	2056	3.12	5.1	3.7	2.6	43	0.5	0.3	0.3	60	1.03	0.060	18
SQE033	Soil	1.0	33.0	19.1	69	0.1	17.7	11.1	466	2.74	7.7	2.0	3.1	34	<0.1	0.3	0.3	53	0.47	0.054	16
F045	Soil	1.1	13.1	12.1	49	0.1	16.9	7.2	194	3.00	7.1	1.8	2.7	12	0.3	0.3	0.3	76	0.13	0.013	7
SQ063	Soil	0.6	21.8	8.5	47	<0.1	16.5	8.2	295	1.99	6.0	2.0	1.6	34	0.1	0.3	0.2	47	0.44	0.056	10
932712	Soil	7.2	13.6	31.4	51	0.5	10.1	3.9	141	1.84	6.3	3.5	3.8	16	<0.1	0.3	0.4	29	0.16	0.039	35
933085	Soil	0.8	129.7	13.3	63	0.2	16.7	11.7	354	2.48	16.5	1.4	1.3	11	<0.1	0.2	0.1	37	0.14	0.019	4
932704	Soil	17.4	16.1	60.8	44	0.6	8.0	2.4	94	1.56	7.2	1.4	3.1	12	0.3	0.4	0.4	31	0.10	0.022	34
933136	Soil	1.3	11.9	214.3	148	0.2	9.3	4.3	213	2.05	9.0	1.6	6.4	13	0.7	0.2	0.4	45	0.08	0.028	26
933075	Soil	1.0	11.8	38.0	135	0.6	40.5	9.5	600	2.18	9.9	1.1	3.3	19	<0.1	<0.1	0.9	33	0.28	0.069	10
933073	Soil	1.2	47.0	84.9	255	1.9	16.7	8.3	722	3.50	18.4	1.5	2.0	17	0.2	0.1	3.1	63	0.34	0.056	5
F044	Soil	0.8	9.4	7.7	36	<0.1	10.4	4.4	127	1.91	5.2	0.6	1.5	7	0.4	0.3	0.2	49	0.06	0.013	4
933119	Soil	0.6	16.5	30.5	170	0.3	27.1	9.9	466	2.80	2.7	1.1	2.9	14	<0.1	0.1	0.6	61	0.28	0.032	8
F049	Soil	0.8	14.0	14.0	47	<0.1	17.0	7.3	212	2.60	7.3	0.7	5.6	14	0.1	0.2	0.2	65	0.10	0.013	11
933081	Soil	0.9	66.9	402.0	411	0.6	21.1	26.5	1072	4.67	12.8	1.0	2.7	12	0.5	0.2	1.1	81	0.15	0.027	6
933137	Soil	1.0	30.5	318.9	486	0.4	15.8	6.4	443	2.37	7.8	2.8	5.3	19	1.0	0.2	0.4	28	0.18	0.051	38
SQE031	Soil	1.0	38.1	14.5	67	0.1	25.3	12.8	479	3.24	8.7	2.8	4.6	35	0.1	0.3	0.4	54	0.53	0.057	16
F050	Soil	0.8	7.6	7.7	45	<0.1	8.9	6.2	554	1.53	3.1	<0.5	1.4	12	0.4	0.2	0.2	38	0.11	0.019	5
SQE085	Soil	1.1	26.4	11.7	45	0.2	18.8	12.8	415	2.99	11.8	6.6	5.6	31	<0.1	0.2	0.3	61	0.31	0.031	23
F042	Soil	1.0	8.7	14.9	42	<0.1	8.0	3.2	154	1.89	3.5	1.5	3.7	9	0.2	0.2	0.2	57	0.08	0.015	6
F043	Soil	0.7	11.5	15.7	45	<0.1	15.0	6.1	198	2.36	5.6	1.4	7.6	15	0.1	0.2	0.3	59	0.14	0.009	14
F048	Soil	0.9	10.6	11.0	34	<0.1	11.2	4.4	129	1.91	6.6	1.3	2.7	11	0.1	0.3	0.2	50	0.09	0.016	7
F046	Soil	0.8	9.9	9.9	42	<0.1	13.4	6.3	219	2.30	6.0	2.4	2.0	11	0.4	0.2	0.2	55	0.09	0.017	5
F040	Soil	0.9	9.7	10.2	41	<0.1	10.2	5.1	183	2.26	4.7	<0.5	1.6	11	0.2	0.2	0.1	55	0.10	0.022	4
F041	Soil	1.3	20.2	17.4	55	0.2	24.5	9.8	203	3.34	9.3	2.3	7.3	18	0.2	0.3	0.2	79	0.13	0.019	9
F038	Soil	0.9	17.5	14.0	49	<0.1	19.7	8.1	561	2.71	8.1	1.3	3.5	17	0.3	0.2	0.2	68	0.16	0.023	8
F039	Soil	0.9	22.4	12.3	58	<0.1	23.4	9.6	373	3.16	10.1	1.5	7.3	25	<0.1	0.2	0.2	77	0.21	0.014	14

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
SQE072	Soil	46	1.28	341	0.076	<20	1.73	0.012	0.12	0.2	0.02	2.8	<0.1	<0.05	5	<0.5	<0.2
SQE068	Soil	47	1.14	411	0.068	<20	1.80	0.010	0.11	<0.1	0.02	2.5	0.1	<0.05	6	0.5	<0.2
SQE071	Soil	50	1.16	373	0.093	<20	1.57	0.010	0.11	0.2	0.02	2.6	<0.1	<0.05	5	<0.5	<0.2
SQE070	Soil	61	1.52	819	0.100	<20	1.76	0.009	0.19	0.3	0.02	2.5	<0.1	<0.05	4	<0.5	<0.2
SQE069	Soil	54	1.19	728	0.073	<20	1.89	0.012	0.12	0.2	0.06	3.4	0.2	0.05	5	1.0	<0.2
SQE033	Soil	26	0.59	235	0.043	<20	1.69	0.015	0.05	<0.1	0.04	3.8	<0.1	<0.05	5	<0.5	<0.2
F045	Soil	27	0.30	146	0.053	<20	2.13	0.007	0.03	<0.1	0.01	1.8	0.1	<0.05	7	<0.5	<0.2
SQ063	Soil	25	0.40	213	0.059	<20	1.31	0.018	0.04	0.2	0.04	2.6	<0.1	<0.05	4	<0.5	<0.2
932712	Soil	19	0.29	95	0.015	<20	1.27	0.007	0.13	0.2	0.04	1.3	0.2	0.09	4	<0.5	<0.2
933085	Soil	16	0.88	78	0.038	<20	1.49	0.005	0.05	<0.1	0.01	1.8	0.1	<0.05	4	<0.5	<0.2
932704	Soil	15	0.11	67	0.020	<20	0.85	0.009	0.12	0.2	0.02	0.8	0.2	0.13	5	<0.5	<0.2
933136	Soil	16	0.26	149	0.027	<20	1.25	0.004	0.06	<0.1	0.04	1.3	<0.1	<0.05	5	<0.5	<0.2
933075	Soil	99	1.35	64	0.094	<20	1.46	0.003	0.32	<0.1	0.05	1.8	0.3	<0.05	5	<0.5	<0.2
933073	Soil	25	1.70	65	0.059	<20	1.91	0.005	0.21	<0.1	0.04	2.6	0.3	0.07	5	<0.5	0.4
F044	Soil	15	0.19	102	0.057	<20	1.26	0.010	0.02	<0.1	0.02	0.9	<0.1	<0.05	5	<0.5	<0.2
933119	Soil	67	1.87	81	0.127	<20	2.17	0.004	0.40	<0.1	0.03	3.6	0.4	<0.05	7	<0.5	<0.2
F049	Soil	25	0.35	164	0.060	<20	2.07	0.009	0.03	<0.1	0.03	1.8	0.1	<0.05	7	<0.5	<0.2
933081	Soil	27	1.26	125	0.140	<20	2.53	0.007	0.41	<0.1	0.05	2.8	0.5	<0.05	6	<0.5	<0.2
933137	Soil	18	0.56	110	0.069	<20	1.24	0.004	0.17	<0.1	0.05	1.4	0.3	<0.05	4	<0.5	<0.2
SQE031	Soil	30	0.58	348	0.035	<20	1.51	0.014	0.05	<0.1	0.04	4.5	<0.1	0.05	4	<0.5	<0.2
F050	Soil	13	0.20	113	0.045	<20	1.00	0.014	0.03	<0.1	0.02	0.9	<0.1	<0.05	4	<0.5	<0.2
SQE085	Soil	33	0.45	275	0.048	<20	2.19	0.014	0.06	<0.1	0.03	3.6	<0.1	<0.05	6	<0.5	<0.2
F042	Soil	14	0.14	94	0.055	<20	1.09	0.008	0.03	<0.1	0.03	1.2	<0.1	<0.05	6	<0.5	<0.2
F043	Soil	28	0.39	110	0.071	<20	1.88	0.012	0.04	<0.1	<0.01	2.3	0.2	<0.05	6	<0.5	<0.2
F048	Soil	18	0.25	91	0.060	<20	1.41	0.011	0.03	<0.1	0.02	1.3	<0.1	<0.05	6	<0.5	<0.2
F046	Soil	19	0.24	103	0.058	<20	1.57	0.014	0.03	<0.1	0.02	1.4	<0.1	<0.05	5	<0.5	<0.2
F040	Soil	17	0.22	102	0.062	<20	1.29	0.013	0.03	<0.1	0.03	1.1	<0.1	<0.05	7	<0.5	<0.2
F041	Soil	35	0.39	228	0.076	<20	3.21	0.009	0.03	<0.1	0.05	2.9	0.1	<0.05	8	<0.5	<0.2
F038	Soil	27	0.34	223	0.070	<20	2.40	0.012	0.04	<0.1	0.03	2.0	<0.1	<0.05	7	<0.5	<0.2
F039	Soil	42	0.52	244	0.079	<20	2.49	0.014	0.04	<0.1	0.02	4.2	0.1	<0.05	7	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
932714	Soil	1.9	13.4	31.0	58	<0.1	11.4	7.5	269	1.89	5.7	4.4	8.2	21	0.1	0.3	0.2	38	0.29	0.033	25
SQE086	Soil	1.4	41.4	15.4	51	0.2	22.8	13.0	890	3.14	13.8	2.8	10.1	42	0.1	0.2	0.4	64	0.40	0.039	50
SQE067	Soil	14.7	51.8	21.3	151	0.1	68.5	13.7	473	3.21	4.4	1.6	6.0	17	0.5	0.2	0.3	47	0.19	0.070	16
SQE087	Soil	1.0	22.6	10.4	46	0.2	19.0	9.8	536	2.56	8.3	1.7	5.5	34	0.2	0.3	0.3	53	0.34	0.035	29
SQE082	Soil	1.0	26.3	12.9	47	0.1	18.4	9.7	311	2.62	8.3	2.2	6.4	37	0.1	0.2	0.4	52	0.46	0.040	16
F056	Soil	0.6	17.7	11.1	50	0.2	17.0	7.6	234	2.36	6.1	19.2	5.0	26	0.1	0.2	0.2	58	0.29	0.036	16
933120	Soil	0.6	70.2	59.8	181	0.7	17.1	18.8	1102	3.57	6.4	2.7	1.9	15	0.2	0.2	1.0	76	0.43	0.042	6
SQ053	Soil	1.5	13.7	7.6	43	0.1	10.8	11.7	1166	1.79	3.5	2.8	0.6	48	0.3	0.1	0.1	32	0.85	0.083	10
F059	Soil	0.8	22.5	10.1	50	<0.1	19.2	8.8	306	2.25	6.1	3.0	3.0	36	<0.1	0.2	0.2	52	0.43	0.051	14
F063	Soil	0.6	16.1	12.5	49	<0.1	16.1	7.4	216	2.25	7.3	8.4	2.7	24	0.2	0.2	0.2	57	0.24	0.033	10
SQE028	Soil	1.2	28.3	15.9	58	<0.1	17.4	10.2	366	3.14	6.0	1.8	4.6	28	<0.1	0.2	0.3	50	0.39	0.039	15
F053	Soil	0.4	11.9	16.6	45	<0.1	11.0	4.5	164	1.53	3.2	7.5	7.4	22	0.2	0.2	0.1	41	0.28	0.037	20
F060	Soil	0.6	24.8	9.9	53	<0.1	19.4	7.3	221	2.24	5.3	2.0	4.0	36	<0.1	0.2	0.2	51	0.45	0.051	15
F054	Soil	0.9	13.8	9.7	36	<0.1	10.8	5.8	212	2.02	5.0	1.9	2.5	14	0.1	0.2	0.1	50	0.12	0.021	11
F057	Soil	0.8	26.7	11.9	61	0.1	21.7	8.3	267	2.64	6.5	1.7	3.6	35	0.1	0.3	0.2	58	0.44	0.050	18
F062	Soil	0.5	29.2	11.8	60	<0.1	19.3	8.9	275	2.51	7.5	1.5	3.9	37	0.1	0.2	0.2	58	0.46	0.050	15
F064	Soil	0.7	19.2	20.0	60	<0.1	15.4	7.1	199	2.13	5.6	2.8	2.7	33	0.1	0.2	0.2	47	0.39	0.058	20
F061	Soil	0.6	26.5	10.4	54	<0.1	18.6	7.9	230	2.29	5.3	2.9	4.8	41	0.1	0.2	0.2	50	0.51	0.052	16
F052	Soil	0.8	16.2	12.7	53	<0.1	18.0	7.1	209	2.71	7.2	1.9	5.8	15	0.3	0.2	0.2	64	0.18	0.029	14
F058	Soil	1.0	25.5	11.8	58	0.1	20.1	9.6	324	2.63	6.9	2.1	2.5	32	0.3	0.2	0.2	59	0.39	0.052	15
F047	Soil	0.8	11.6	11.1	63	<0.1	14.1	7.0	355	2.54	5.7	0.7	2.2	14	0.4	0.2	0.2	64	0.11	0.013	6
F065	Soil	0.5	11.2	15.6	64	<0.1	11.1	5.9	232	1.60	3.8	2.6	5.2	25	0.1	0.2	0.1	33	0.37	0.048	18
F055	Soil	0.4	14.8	10.8	43	<0.1	11.9	5.6	181	1.79	3.2	2.7	6.1	24	0.1	0.2	<0.1	46	0.31	0.042	18
SQ057	Soil	2.7	39.4	20.6	128	0.2	27.7	16.7	559	4.04	6.5	1.1	6.1	31	0.3	0.2	0.2	66	0.54	0.093	27
F051	Soil	1.0	12.6	12.5	54	0.1	16.0	7.4	201	2.78	6.5	1.4	3.3	13	0.2	0.2	0.2	70	0.13	0.026	7
CH078	Soil	0.6	59.8	7.8	83	<0.1	23.8	11.8	338	4.21	7.4	3.6	3.6	26	<0.1	0.6	0.1	105	0.29	0.041	14
CH076	Soil	0.7	34.6	9.6	54	<0.1	19.5	11.0	341	2.79	8.1	2.0	2.8	35	0.1	0.4	0.2	65	0.56	0.061	11
CH081	Soil	0.8	17.3	10.2	49	<0.1	13.1	7.3	220	2.93	8.3	1.3	2.1	13	<0.1	0.4	0.1	67	0.12	0.026	7
CH080	Soil	0.7	18.4	8.0	40	<0.1	10.8	6.4	173	2.21	5.9	1.5	1.6	18	<0.1	0.3	0.1	50	0.22	0.030	9
CH079	Soil	0.6	34.1	7.2	84	<0.1	14.2	9.7	281	3.61	6.7	1.3	3.4	30	<0.1	1.8	0.1	67	0.38	0.072	20

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
932714	Soil	22	0.37	84	0.046	<20	1.25	0.014	0.12	0.1	0.03	2.3	0.2	<0.05	4	<0.5	<0.2
SQE086	Soil	33	0.45	324	0.072	<20	1.93	0.016	0.07	<0.1	0.04	4.5	<0.1	<0.05	6	<0.5	<0.2
SQE067	Soil	33	0.85	108	0.025	<20	1.34	0.006	0.05	0.1	<0.01	1.7	0.1	<0.05	5	1.8	<0.2
SQE087	Soil	29	0.46	290	0.063	<20	1.64	0.013	0.06	<0.1	0.03	3.9	<0.1	<0.05	5	<0.5	<0.2
SQE082	Soil	31	0.47	243	0.076	<20	1.90	0.015	0.05	<0.1	0.02	3.2	<0.1	<0.05	5	<0.5	<0.2
F056	Soil	29	0.49	185	0.075	<20	1.89	0.015	0.05	<0.1	0.03	3.2	<0.1	<0.05	5	<0.5	<0.2
933120	Soil	25	1.75	133	0.111	<20	2.30	0.005	0.38	<0.1	0.07	4.0	0.3	<0.05	6	<0.5	<0.2
SQ053	Soil	11	1.01	283	0.019	<20	1.32	0.010	0.03	<0.1	0.05	2.2	<0.1	0.06	4	<0.5	<0.2
F059	Soil	27	0.49	237	0.067	<20	1.69	0.021	0.05	0.1	0.05	3.5	<0.1	<0.05	5	<0.5	<0.2
F063	Soil	25	0.41	163	0.074	<20	1.73	0.013	0.05	<0.1	0.02	2.4	<0.1	<0.05	5	<0.5	<0.2
SQE028	Soil	26	0.56	238	0.034	<20	1.56	0.013	0.05	<0.1	0.03	4.8	<0.1	<0.05	4	<0.5	<0.2
F053	Soil	18	0.29	72	0.083	<20	1.03	0.025	0.05	0.1	0.02	2.2	<0.1	<0.05	4	<0.5	<0.2
F060	Soil	31	0.49	194	0.090	<20	1.60	0.024	0.05	<0.1	0.03	3.6	<0.1	0.07	5	<0.5	<0.2
F054	Soil	20	0.27	114	0.067	<20	1.39	0.013	0.04	<0.1	0.02	1.9	<0.1	<0.05	6	<0.5	<0.2
F057	Soil	32	0.56	201	0.075	<20	2.02	0.022	0.07	<0.1	0.06	4.0	<0.1	<0.05	6	<0.5	<0.2
F062	Soil	30	0.51	208	0.098	<20	1.70	0.027	0.06	<0.1	0.02	4.0	0.1	<0.05	5	<0.5	<0.2
F064	Soil	27	0.46	187	0.059	<20	1.59	0.019	0.05	0.1	0.05	2.9	0.1	<0.05	5	<0.5	<0.2
F061	Soil	30	0.50	210	0.096	<20	1.68	0.028	0.05	<0.1	0.05	3.7	<0.1	<0.05	5	<0.5	<0.2
F052	Soil	31	0.42	112	0.094	<20	2.07	0.014	0.05	0.1	0.02	2.3	<0.1	<0.05	6	<0.5	<0.2
F058	Soil	31	0.48	216	0.070	<20	1.98	0.028	0.06	<0.1	0.05	3.1	<0.1	<0.05	6	<0.5	<0.2
F047	Soil	23	0.28	160	0.070	<20	1.67	0.017	0.03	<0.1	0.02	1.5	0.1	<0.05	7	<0.5	<0.2
F065	Soil	16	0.47	104	0.054	<20	0.99	0.013	0.05	0.2	0.02	2.2	0.1	<0.05	3	<0.5	<0.2
F055	Soil	22	0.35	111	0.094	<20	1.30	0.023	0.05	0.1	0.03	2.3	<0.1	<0.05	4	<0.5	<0.2
SQ057	Soil	24	1.53	355	0.085	<20	2.21	0.011	0.23	<0.1	0.04	4.7	0.3	<0.05	6	1.3	<0.2
F051	Soil	24	0.29	105	0.069	<20	2.08	0.010	0.05	<0.1	0.04	1.8	<0.1	<0.05	8	<0.5	<0.2
CH078	Soil	34	0.92	901	0.112	<20	2.15	0.013	0.28	<0.1	0.18	8.7	0.2	<0.05	8	0.6	<0.2
CH076	Soil	28	0.55	294	0.108	<20	1.65	0.021	0.08	<0.1	0.03	4.0	<0.1	<0.05	5	0.8	<0.2
CH081	Soil	23	0.51	200	0.079	<20	1.56	0.009	0.06	<0.1	0.02	2.7	<0.1	<0.05	5	<0.5	<0.2
CH080	Soil	20	0.42	385	0.049	<20	1.45	0.009	0.06	<0.1	0.08	2.9	<0.1	<0.05	6	<0.5	<0.2
CH079	Soil	21	0.47	1032	0.034	<20	1.39	0.011	0.12	<0.1	0.40	13.2	0.1	<0.05	5	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
CH083	Soil	0.6	29.5	9.6	67	<0.1	18.3	11.3	309	3.13	6.1	1.9	2.1	19	<0.1	0.3	0.1	80	0.23	0.030	8
CH066	Soil	0.9	26.5	7.8	45	<0.1	23.7	10.8	392	2.60	9.1	2.6	3.0	20	<0.1	0.3	0.1	59	0.23	0.022	8
CH072	Soil	0.5	26.7	6.8	43	<0.1	18.5	9.6	485	2.42	7.6	1.7	3.1	23	<0.1	0.4	0.1	51	0.30	0.052	10
CH067	Soil	0.5	33.3	4.3	86	<0.1	12.7	14.6	952	4.08	5.7	<0.5	1.5	15	0.1	0.2	<0.1	87	0.22	0.079	5
CH068	Soil	0.9	15.2	7.9	41	<0.1	17.0	7.7	402	2.39	7.6	23.8	2.6	20	<0.1	0.3	0.1	52	0.22	0.032	9
CH070	Soil	0.8	19.9	7.7	46	<0.1	22.0	9.7	333	2.43	7.9	2.2	3.6	21	<0.1	0.4	0.1	50	0.25	0.029	10
CH069	Soil	0.8	25.8	5.8	55	<0.1	18.5	12.7	372	3.13	7.3	3.9	2.0	22	<0.1	0.3	<0.1	81	0.36	0.062	8
CH073	Soil	0.8	42.4	9.0	46	<0.1	24.0	11.3	211	2.76	7.4	2.7	3.1	22	<0.1	0.3	0.1	60	0.30	0.047	10
CH071	Soil	0.9	13.7	6.9	47	<0.1	14.7	9.3	391	2.33	7.5	<0.5	2.7	20	<0.1	0.3	0.1	50	0.25	0.039	8
CH064	Soil	0.8	16.5	7.1	34	<0.1	12.5	6.5	160	2.11	7.1	1.6	2.3	14	<0.1	0.3	0.1	55	0.16	0.032	7
CH091	Soil	0.4	44.4	4.0	62	<0.1	15.9	12.9	317	3.49	3.1	0.6	1.9	23	<0.1	0.2	<0.1	87	0.33	0.036	6
CH077	Soil	0.9	21.9	11.6	58	0.1	16.7	10.9	376	2.58	7.8	1.9	2.9	31	<0.1	0.3	0.2	59	0.47	0.049	10
CH045	Soil	0.6	19.5	7.5	66	<0.1	8.8	7.9	381	3.06	4.0	1.8	1.3	15	0.1	0.2	0.1	62	0.25	0.073	7
CH046	Soil	0.9	21.4	10.8	56	<0.1	18.5	8.4	269	3.33	11.2	4.7	2.6	17	<0.1	0.3	0.2	67	0.23	0.065	8
CH047	Soil	0.6	21.4	9.3	52	<0.1	9.0	6.9	371	3.06	5.8	1.3	1.7	12	<0.1	0.1	0.1	56	0.16	0.057	9
CH051	Soil	0.7	20.7	8.5	45	0.1	9.7	6.7	234	2.67	7.0	0.9	1.8	18	<0.1	0.2	0.1	73	0.25	0.042	7
CH054	Soil	0.4	30.7	6.5	79	<0.1	11.9	11.4	699	4.48	4.2	<0.5	2.3	13	<0.1	0.1	<0.1	74	0.34	0.124	8
CH092	Soil	0.3	33.8	5.2	80	<0.1	8.4	10.7	427	3.43	1.9	<0.5	2.0	22	<0.1	0.1	<0.1	70	0.28	0.049	5
CH087	Soil	0.8	27.5	11.3	76	0.1	8.1	11.4	519	3.34	4.4	2.1	2.4	22	<0.1	0.4	0.2	68	0.31	0.085	8
CH082	Soil	0.7	18.1	16.3	75	<0.1	4.9	8.2	372	2.88	2.8	0.5	1.5	13	<0.1	0.5	0.2	69	0.16	0.021	5
CH085	Soil	0.5	20.4	8.8	51	<0.1	12.2	9.3	258	2.39	4.6	1.1	2.4	22	<0.1	0.4	0.1	59	0.30	0.030	7
CH084	Soil	0.6	23.1	18.8	62	<0.1	13.3	10.8	289	2.75	4.5	0.5	2.1	19	<0.1	0.4	0.2	75	0.25	0.033	7
CH086	Soil	0.6	26.8	5.2	88	<0.1	14.8	17.5	833	3.63	2.8	0.8	1.2	34	<0.1	0.2	<0.1	97	0.39	0.058	3
CH089	Soil	0.6	24.7	8.2	38	0.1	8.7	5.1	152	1.92	4.1	0.7	2.0	24	<0.1	0.4	0.2	49	0.27	0.022	10
CH094	Soil	0.5	42.2	5.9	73	<0.1	20.0	13.5	407	3.26	2.8	0.6	3.2	41	<0.1	0.1	<0.1	86	0.43	0.058	17
CH061	Soil	0.8	21.5	11.2	41	0.1	16.2	8.3	219	2.46	7.2	0.9	3.4	16	<0.1	0.3	0.2	64	0.17	0.024	9
CH075	Soil	1.0	31.7	13.4	54	<0.1	17.0	12.8	574	2.86	6.3	1.2	2.7	29	0.1	0.4	0.2	74	0.41	0.057	9
CH090	Soil	0.6	25.6	9.7	58	<0.1	11.0	9.3	292	2.73	5.0	<0.5	3.0	23	<0.1	0.3	0.2	61	0.24	0.030	12
CH088	Soil	0.7	17.1	9.0	42	<0.1	8.2	5.2	176	2.06	4.9	<0.5	2.2	18	<0.1	0.3	0.2	49	0.20	0.026	10
CH062	Soil	0.9	35.2	9.5	49	0.2	25.6	10.8	232	2.71	19.9	3.5	4.6	20	<0.1	0.5	0.2	61	0.21	0.041	10

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
CH083	Soil	29	0.97	343	0.135	<20	1.95	0.012	0.14	<0.1	0.03	3.1	0.1	<0.05	6	<0.5	<0.2
CH066	Soil	34	0.64	290	0.084	<20	1.65	0.014	0.08	<0.1	0.01	2.9	<0.1	<0.05	5	<0.5	<0.2
CH072	Soil	26	0.54	251	0.076	<20	1.21	0.017	0.12	<0.1	0.03	3.0	<0.1	<0.05	4	<0.5	<0.2
CH067	Soil	14	0.97	307	0.156	<20	1.85	0.010	0.43	<0.1	<0.01	4.3	0.1	<0.05	8	<0.5	<0.2
CH068	Soil	28	0.42	290	0.063	<20	1.35	0.011	0.06	<0.1	0.02	2.5	<0.1	<0.05	5	0.7	<0.2
CH070	Soil	29	0.47	288	0.068	<20	1.40	0.012	0.08	<0.1	0.01	3.2	<0.1	<0.05	4	0.8	<0.2
CH069	Soil	29	0.86	268	0.127	<20	1.62	0.013	0.22	<0.1	0.01	2.9	0.1	<0.05	6	<0.5	<0.2
CH073	Soil	30	0.59	294	0.072	<20	1.71	0.014	0.06	<0.1	0.02	3.4	<0.1	<0.05	5	<0.5	<0.2
CH071	Soil	23	0.45	281	0.078	<20	1.18	0.012	0.12	<0.1	0.02	2.8	<0.1	<0.05	4	<0.5	<0.2
CH064	Soil	21	0.43	179	0.077	<20	1.28	0.010	0.09	<0.1	0.02	1.9	<0.1	<0.05	5	<0.5	<0.2
CH091	Soil	40	1.24	520	0.175	<20	2.10	0.016	0.54	<0.1	0.02	4.9	0.2	<0.05	7	<0.5	<0.2
CH077	Soil	27	0.50	282	0.080	<20	1.55	0.017	0.07	<0.1	0.03	3.1	<0.1	<0.05	5	<0.5	<0.2
CH045	Soil	17	0.73	228	0.121	<20	1.66	0.013	0.32	<0.1	0.04	5.5	0.1	<0.05	8	<0.5	<0.2
CH046	Soil	26	0.65	199	0.089	<20	1.87	0.010	0.14	<0.1	0.01	3.4	0.1	<0.05	6	<0.5	<0.2
CH047	Soil	14	0.63	161	0.147	<20	1.55	0.009	0.27	<0.1	0.02	3.6	0.1	<0.05	7	<0.5	<0.2
CH051	Soil	19	0.61	211	0.093	<20	1.53	0.012	0.15	<0.1	0.03	3.9	<0.1	<0.05	6	<0.5	<0.2
CH054	Soil	19	1.23	269	0.309	<20	2.15	0.011	0.97	<0.1	<0.01	9.3	0.2	<0.05	9	<0.5	<0.2
CH092	Soil	17	1.18	635	0.209	<20	1.95	0.011	0.98	<0.1	0.04	5.3	0.3	<0.05	8	<0.5	<0.2
CH087	Soil	16	0.93	520	0.162	<20	1.69	0.013	0.59	<0.1	0.06	7.2	0.1	<0.05	7	0.5	<0.2
CH082	Soil	10	0.85	361	0.183	<20	1.66	0.008	0.35	<0.1	0.02	5.0	0.2	<0.05	8	<0.5	<0.2
CH085	Soil	22	0.70	405	0.103	<20	1.47	0.010	0.09	<0.1	0.05	3.3	<0.1	<0.05	5	<0.5	<0.2
CH084	Soil	23	0.81	337	0.110	<20	1.68	0.011	0.09	<0.1	0.03	4.1	<0.1	<0.05	6	<0.5	<0.2
CH086	Soil	31	1.53	533	0.257	<20	2.17	0.010	0.93	<0.1	0.03	3.8	0.2	<0.05	8	<0.5	<0.2
CH089	Soil	16	0.40	530	0.071	<20	1.24	0.010	0.13	<0.1	0.17	4.3	<0.1	<0.05	5	<0.5	<0.2
CH094	Soil	49	1.17	563	0.206	<20	1.79	0.016	0.63	<0.1	0.03	4.5	0.2	<0.05	6	<0.5	<0.2
CH061	Soil	28	0.49	274	0.104	<20	1.31	0.010	0.17	<0.1	0.02	4.0	<0.1	<0.05	5	0.6	<0.2
CH075	Soil	26	0.63	311	0.128	<20	1.46	0.019	0.17	0.1	0.02	4.4	<0.1	<0.05	5	<0.5	<0.2
CH090	Soil	22	0.65	488	0.116	<20	1.59	0.011	0.19	<0.1	0.11	5.1	<0.1	<0.05	6	<0.5	<0.2
CH088	Soil	16	0.42	397	0.080	<20	1.23	0.009	0.10	<0.1	0.06	3.6	<0.1	<0.05	5	<0.5	<0.2
CH062	Soil	32	0.56	280	0.088	<20	1.62	0.011	0.10	0.1	0.03	4.1	<0.1	<0.05	4	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
MDL		0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
CH065	Soil	0.7	16.2	8.7	48	0.1	12.5	7.3	311	2.81	5.8	1.2	3.0	16	<0.1	0.3	0.1	52	0.24	0.057	14
CH074	Soil	0.8	29.4	8.0	56	<0.1	14.6	14.8	381	3.48	5.2	<0.5	1.3	29	<0.1	0.1	0.1	106	0.44	0.102	4
CH059	Soil	1.3	25.0	13.9	42	0.1	15.2	8.4	196	2.84	7.7	2.2	2.6	15	<0.1	0.3	0.2	84	0.19	0.034	8
FO-013	Soil	2.3	33.8	29.7	84	0.2	23.2	8.2	279	3.04	8.3	3.7	7.9	60	0.3	0.3	0.6	55	0.54	0.054	49
FO-015	Soil	0.9	16.0	15.9	55	0.1	15.2	8.0	251	1.94	4.4	1.0	3.5	46	0.2	0.3	0.2	38	0.44	0.054	18
FO-018	Soil	0.5	20.4	11.1	49	<0.1	16.9	7.6	217	2.03	4.8	<0.5	2.5	35	<0.1	0.2	0.2	46	0.38	0.049	14
FO-033	Soil	1.1	12.4	23.7	51	<0.1	13.2	5.4	314	2.16	5.3	1.2	8.0	19	0.1	0.1	0.3	54	0.21	0.007	15
FO-026	Soil	1.2	11.1	13.2	39	<0.1	12.6	5.4	151	2.15	5.8	1.1	3.0	14	0.2	0.2	0.2	58	0.12	0.021	6
FO-025	Soil	0.9	18.0	22.4	40	0.1	13.5	7.4	169	1.84	4.5	0.5	7.0	20	0.1	0.2	0.3	47	0.15	0.024	49
FO-005	Soil	1.0	7.0	15.4	27	<0.1	4.7	2.1	98	0.97	1.6	3.8	0.9	8	<0.1	0.2	0.2	25	0.08	0.020	9
FO-024	Soil	1.1	21.0	19.3	50	0.1	17.2	12.7	424	2.65	7.5	1.2	7.6	29	0.2	0.2	0.3	66	0.24	0.023	28
FO-003	Soil	1.7	12.9	21.3	72	0.1	11.8	8.6	748	2.31	4.7	1.0	1.7	15	0.3	0.1	0.3	59	0.13	0.022	8
FO-002	Soil	0.5	9.4	26.8	57	<0.1	12.1	5.5	264	1.70	3.5	0.7	10.8	17	<0.1	0.2	0.2	37	0.33	0.024	21
FO-004	Soil	1.5	10.5	23.5	65	<0.1	12.0	5.7	276	2.26	5.7	1.7	2.7	18	0.2	0.1	0.4	55	0.18	0.025	8
FO-031	Soil	0.8	9.0	11.4	36	<0.1	11.0	5.4	226	2.05	4.0	0.7	1.9	15	0.3	0.2	0.2	57	0.11	0.013	6
FO-006	Soil	2.0	8.9	25.9	46	<0.1	9.6	4.1	201	1.84	5.7	0.8	5.6	18	0.1	0.1	0.5	48	0.21	0.018	25
FO-032	Soil	0.7	14.1	20.9	42	<0.1	16.0	7.1	202	2.60	7.7	0.7	8.2	23	0.2	0.1	0.4	62	0.16	0.010	12
FO-029	Soil	0.8	14.7	14.2	44	0.1	13.9	7.3	1050	2.08	5.2	1.3	4.5	20	0.3	0.2	0.2	55	0.16	0.019	46
FO-021	Soil	0.6	13.0	15.7	39	<0.1	13.3	4.8	163	1.66	3.6	1.8	6.6	26	<0.1	0.2	0.2	40	0.27	0.026	14
FO-023	Soil	1.3	20.4	22.9	45	0.2	15.7	15.3	438	2.23	6.6	2.0	5.0	22	<0.1	0.2	0.3	51	0.16	0.019	16
FO-022	Soil	0.7	12.5	15.2	41	0.1	12.7	5.3	171	1.79	4.0	5.2	4.4	23	<0.1	0.2	0.2	41	0.21	0.019	12
FO-030	Soil	0.9	11.7	12.1	44	<0.1	16.6	7.3	247	2.20	5.0	2.2	3.1	19	0.2	0.2	0.2	61	0.16	0.013	8
FO-028	Soil	0.6	6.9	11.6	28	<0.1	7.7	3.7	129	1.50	2.6	0.6	2.4	10	<0.1	0.1	0.2	41	0.09	0.011	5
FO-009	Soil	2.4	16.6	36.7	52	0.1	13.0	6.7	217	2.36	6.5	1.0	8.9	11	0.1	0.2	0.5	57	0.09	0.021	21
FO-007	Soil	1.6	9.4	18.7	52	<0.1	10.3	5.2	226	2.14	5.8	1.0	2.7	9	0.2	<0.1	0.3	53	0.08	0.018	8
FO-008	Soil	2.5	9.8	22.0	41	0.1	10.0	3.7	167	1.80	4.7	0.7	4.3	10	0.2	0.2	0.8	46	0.11	0.016	12
FO-011	Soil	1.9	15.2	19.4	53	<0.1	17.1	7.1	256	2.43	7.4	1.2	6.1	20	0.1	0.2	0.6	58	0.22	0.025	24
FO-010	Soil	2.0	12.4	15.7	49	<0.1	18.7	6.6	235	2.42	7.3	1.1	6.1	17	0.2	0.2	0.3	61	0.20	0.021	19
FO-018	Soil	0.7	19.1	13.8	55	<0.1	19.9	8.2	279	2.09	5.5	2.0	3.0	32	0.2	0.2	0.2	47	0.40	0.044	14
FO-027	Soil	0.8	10.5	10.5	60	<0.1	15.5	9.6	817	2.41	4.2	1.0	1.7	18	0.2	0.1	0.2	60	0.19	0.034	6

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
CH065	Soil	19	0.57	231	0.127	<20	1.50	0.010	0.30	<0.1	0.03	4.0	<0.1	<0.05	6	<0.5	<0.2
CH074	Soil	28	1.07	226	0.210	<20	1.69	0.014	0.55	<0.1	<0.01	2.5	0.1	<0.05	6	<0.5	<0.2
CH059	Soil	25	0.63	204	0.096	<20	1.61	0.012	0.16	<0.1	0.02	4.2	0.1	<0.05	6	<0.5	<0.2
FO-013	Soil	37	0.43	337	0.032	<20	3.05	0.014	0.14	0.2	0.08	6.1	0.2	<0.05	9	0.8	<0.2
FO-015	Soil	25	0.33	182	0.050	<20	1.71	0.014	0.06	0.1	0.05	3.6	0.1	<0.05	5	<0.5	<0.2
FO-018	Soil	28	0.42	210	0.068	<20	1.59	0.016	0.05	<0.1	0.03	3.4	<0.1	<0.05	5	<0.5	<0.2
FO-033	Soil	27	0.37	73	0.072	<20	2.02	0.015	0.04	<0.1	0.02	2.4	0.2	<0.05	5	<0.5	<0.2
FO-026	Soil	22	0.28	117	0.068	<20	1.35	0.009	0.04	<0.1	0.02	1.6	<0.1	<0.05	6	<0.5	<0.2
FO-025	Soil	23	0.29	148	0.076	<20	1.50	0.012	0.06	0.1	0.07	2.7	0.1	<0.05	5	<0.5	<0.2
FO-005	Soil	8	0.10	39	0.028	<20	0.57	0.012	0.04	<0.1	0.03	0.6	<0.1	<0.05	3	<0.5	<0.2
FO-024	Soil	30	0.42	203	0.072	<20	1.85	0.014	0.06	<0.1	0.03	3.0	0.1	<0.05	6	0.5	<0.2
FO-003	Soil	22	0.31	138	0.038	<20	1.84	0.012	0.04	<0.1	0.03	1.8	0.2	<0.05	7	<0.5	<0.2
FO-002	Soil	19	0.30	91	0.041	<20	1.50	0.012	0.08	0.1	0.02	1.8	0.2	<0.05	5	<0.5	<0.2
FO-004	Soil	21	0.32	104	0.026	<20	1.70	0.010	0.05	<0.1	0.02	1.6	0.2	<0.05	6	<0.5	<0.2
FO-031	Soil	18	0.27	131	0.065	<20	1.34	0.011	0.03	<0.1	<0.01	1.4	<0.1	<0.05	6	<0.5	<0.2
FO-006	Soil	17	0.29	72	0.040	<20	1.18	0.009	0.07	<0.1	0.03	1.6	0.1	<0.05	5	<0.5	<0.2
FO-032	Soil	33	0.44	181	0.054	<20	2.51	0.007	0.05	<0.1	0.01	2.9	0.2	<0.05	6	<0.5	<0.2
FO-029	Soil	22	0.28	226	0.062	<20	1.68	0.012	0.03	<0.1	0.02	2.6	0.1	<0.05	6	0.6	<0.2
FO-021	Soil	24	0.38	156	0.085	<20	1.19	0.016	0.05	<0.1	0.02	2.9	<0.1	<0.05	3	<0.5	<0.2
FO-023	Soil	29	0.28	192	0.055	<20	1.84	0.015	0.07	<0.1	0.02	2.8	<0.1	<0.05	6	<0.5	<0.2
FO-022	Soil	23	0.33	143	0.072	<20	1.39	0.014	0.05	<0.1	0.02	2.3	<0.1	<0.05	5	<0.5	<0.2
FO-030	Soil	28	0.41	228	0.062	<20	1.90	0.009	0.03	<0.1	0.02	2.2	<0.1	<0.05	6	<0.5	<0.2
FO-028	Soil	14	0.19	87	0.054	<20	1.07	0.012	0.02	<0.1	0.02	1.1	<0.1	<0.05	5	<0.5	<0.2
FO-009	Soil	25	0.33	86	0.038	<20	1.65	0.009	0.08	<0.1	0.02	1.9	0.1	<0.05	6	<0.5	<0.2
FO-007	Soil	21	0.31	75	0.030	<20	1.47	0.009	0.04	<0.1	0.02	1.4	0.1	<0.05	6	<0.5	<0.2
FO-008	Soil	19	0.25	74	0.038	<20	1.05	0.010	0.07	0.1	0.02	1.4	0.2	<0.05	5	<0.5	<0.2
FO-011	Soil	28	0.44	162	0.063	<20	1.58	0.012	0.08	<0.1	0.02	2.5	<0.1	<0.05	6	<0.5	<0.2
FO-010	Soil	33	0.46	114	0.073	<20	1.53	0.011	0.06	<0.1	0.01	2.3	0.1	<0.05	5	<0.5	<0.2
FO-018	Soil	34	0.45	205	0.071	<20	1.72	0.016	0.05	<0.1	0.05	3.4	<0.1	<0.05	5	<0.5	<0.2
FO-027	Soil	26	0.33	224	0.059	<20	1.63	0.013	0.04	<0.1	0.02	1.8	0.1	<0.05	6	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
MDL		0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
FO-001	Soil	1.4	22.6	16.7	56	0.2	28.1	13.2	257	3.94	12.5	2.6	10.1	17	0.2	0.2	0.2	81	0.15	0.028	17
F015	Soil	0.7	25.6	33.8	89	0.2	17.2	9.5	298	2.26	5.1	1.1	3.3	24	0.3	0.1	0.5	49	0.28	0.043	11
F019	Soil	1.0	27.0	52.4	94	0.2	19.5	11.5	380	2.19	3.8	1.5	2.1	21	0.4	0.2	0.4	45	0.25	0.051	10
F026	Soil	0.7	23.8	8.8	53	0.1	20.7	10.9	456	2.35	6.3	2.6	1.6	31	0.1	0.3	0.1	55	0.45	0.065	10
F027	Soil	0.6	28.3	9.3	58	0.1	24.0	10.3	356	2.72	7.5	11.9	2.6	33	0.1	0.3	0.2	63	0.47	0.069	11
F030	Soil	1.7	19.4	41.5	91	<0.1	16.4	12.2	686	2.32	6.3	1.4	5.1	26	0.4	0.2	0.5	49	0.27	0.052	18
F028	Soil	0.5	22.5	19.9	71	<0.1	16.4	7.7	233	2.09	3.9	2.3	5.3	29	0.1	0.2	0.2	47	0.36	0.049	14
F029	Soil	1.3	26.4	17.2	64	<0.1	25.4	10.5	298	2.57	6.4	1.3	4.2	35	0.2	0.3	0.3	59	0.44	0.052	12
F006	Soil	2.1	29.1	21.7	60	0.2	17.2	7.8	553	2.72	7.4	1.8	0.6	14	0.5	0.2	0.3	79	0.12	0.052	9
F037	Soil	1.0	6.5	9.0	36	0.1	4.9	2.7	134	1.24	2.2	0.5	1.3	8	<0.1	0.1	0.1	35	0.06	0.009	3
F025	Soil	0.8	30.4	9.8	71	<0.1	25.8	11.3	297	2.82	8.1	1.4	3.1	38	0.1	0.4	0.1	67	0.58	0.077	12
F007	Soil	0.7	32.6	15.1	34	0.2	11.0	4.2	190	1.63	3.5	1.8	1.0	11	0.2	0.2	0.2	41	0.09	0.018	7
F008	Soil	1.8	53.5	35.2	126	0.2	47.3	18.3	634	4.13	7.5	3.0	5.5	26	1.0	0.2	1.3	83	0.16	0.057	10
F011	Soil	3.5	29.1	121.6	158	0.3	30.5	10.3	505	2.95	7.2	2.9	12.3	31	0.9	0.2	2.8	68	0.35	0.041	58
F002	Soil	6.2	17.9	37.7	74	0.4	15.4	6.1	414	2.37	7.1	2.9	3.9	19	0.2	0.1	0.3	49	0.26	0.029	53
F036	Soil	2.4	10.7	33.4	47	0.1	12.2	4.3	146	1.81	5.5	3.0	7.8	16	0.1	0.1	0.2	45	0.15	0.011	43
F021	Soil	0.7	29.5	74.3	124	0.2	21.7	8.9	224	2.22	3.6	1.1	2.3	24	0.7	0.2	0.4	45	0.31	0.051	11
F023	Soil	0.8	26.9	44.8	114	0.3	19.8	9.0	298	2.44	5.4	3.1	2.8	24	0.6	0.2	2.4	55	0.30	0.045	9
F032	Soil	5.7	8.2	30.2	61	<0.1	13.7	6.7	271	2.13	7.4	1.6	4.2	15	0.1	0.1	0.3	48	0.19	0.025	11
F003	Soil	3.5	11.7	31.8	63	0.4	14.0	4.5	132	1.91	20.0	6.9	8.9	21	0.1	0.6	0.2	43	0.29	0.038	46
F022	Soil	1.0	29.8	93.0	136	0.4	24.7	9.8	295	2.45	4.6	3.3	2.5	27	0.8	0.2	0.4	51	0.33	0.052	11
F020	Soil	0.5	25.4	49.1	102	0.2	21.3	8.6	230	2.17	3.9	2.3	2.2	22	0.4	0.2	0.3	42	0.27	0.050	10
F017	Soil	1.1	33.1	44.2	106	0.3	21.7	9.4	299	2.48	5.0	1.7	2.3	25	0.3	0.2	0.5	56	0.28	0.048	10
F013	Soil	5.1	15.7	26.7	137	0.8	16.0	7.6	393	2.63	3.2	4.8	2.0	18	1.0	0.2	0.9	64	0.19	0.024	6
F009	Soil	1.8	21.4	14.3	55	0.1	17.8	7.9	294	3.14	8.2	2.8	2.8	13	0.4	0.1	0.3	79	0.11	0.049	8
F016	Soil	0.7	29.9	38.8	96	0.4	19.4	8.8	240	2.31	4.7	1.1	2.1	26	0.3	0.1	0.5	51	0.30	0.053	11
F018	Soil	0.9	26.9	38.7	104	0.2	20.4	11.0	309	2.24	3.8	4.0	2.7	24	0.4	0.1	0.5	48	0.28	0.046	10
F005	Soil	1.5	49.8	31.4	96	0.6	31.4	11.9	496	2.89	5.9	3.7	2.5	30	0.4	0.2	0.4	62	0.38	0.059	26
F033	Soil	10.9	18.8	51.7	44	0.4	10.5	2.9	110	1.59	7.3	3.9	11.0	14	0.2	<0.1	0.5	27	0.13	0.017	49
F024	Soil	0.7	29.0	26.8	108	0.2	20.5	10.2	369	2.40	4.8	2.2	2.2	29	0.4	0.3	0.6	55	0.38	0.059	10

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
FO-001	Soil	40	0.48	186	0.050	<20	3.56	0.012	0.06	<0.1	0.04	4.0	0.2	<0.05	8	<0.5	<0.2
F015	Soil	29	0.53	156	0.082	<20	1.71	0.012	0.05	1.6	0.03	2.8	<0.1	<0.05	5	<0.5	<0.2
F019	Soil	28	0.57	114	0.075	<20	1.43	0.011	0.06	0.3	0.02	2.2	0.1	<0.05	5	<0.5	<0.2
F026	Soil	29	0.50	200	0.076	<20	1.52	0.021	0.05	0.1	0.03	3.5	<0.1	<0.05	4	<0.5	<0.2
F027	Soil	29	0.56	203	0.090	<20	1.67	0.022	0.05	0.1	0.03	4.0	<0.1	<0.05	5	<0.5	<0.2
F030	Soil	26	0.58	124	0.060	<20	1.44	0.012	0.06	0.3	0.03	2.7	0.1	<0.05	5	<0.5	<0.2
F028	Soil	27	0.60	156	0.101	<20	1.61	0.018	0.05	0.1	0.01	3.2	0.1	<0.05	5	<0.5	<0.2
F029	Soil	39	0.58	188	0.110	<20	1.81	0.025	0.06	0.3	0.03	4.2	<0.1	<0.05	5	<0.5	<0.2
F006	Soil	30	0.34	91	0.072	<20	1.42	0.011	0.05	<0.1	0.03	1.7	<0.1	<0.05	9	<0.5	<0.2
F037	Soil	9	0.10	51	0.034	<20	0.76	0.018	0.03	<0.1	0.01	0.7	<0.1	<0.05	4	<0.5	<0.2
F025	Soil	33	0.62	227	0.102	<20	1.56	0.033	0.06	<0.1	0.03	4.2	<0.1	<0.05	5	<0.5	<0.2
F007	Soil	18	0.27	63	0.057	<20	0.99	0.019	0.03	<0.1	0.02	1.5	<0.1	<0.05	5	<0.5	<0.2
F008	Soil	71	1.23	97	0.075	<20	3.16	0.011	0.06	<0.1	0.03	4.1	0.1	<0.05	10	<0.5	0.2
F011	Soil	45	0.74	120	0.071	<20	2.00	0.012	0.06	0.9	0.02	4.0	0.3	<0.05	8	0.7	<0.2
F002	Soil	26	0.34	130	0.024	<20	1.58	0.013	0.13	0.1	0.03	2.1	0.3	<0.05	7	0.6	<0.2
F036	Soil	21	0.33	67	0.044	<20	1.13	0.011	0.08	<0.1	0.01	1.6	0.1	<0.05	4	<0.5	<0.2
F021	Soil	31	0.64	145	0.076	<20	1.70	0.015	0.06	0.2	0.03	3.0	0.2	<0.05	5	0.6	<0.2
F023	Soil	33	0.73	116	0.082	<20	1.73	0.015	0.05	0.1	0.03	2.9	0.1	<0.05	5	<0.5	<0.2
F032	Soil	24	0.38	77	0.027	<20	1.41	0.010	0.08	0.1	0.01	1.8	0.2	<0.05	6	<0.5	<0.2
F003	Soil	27	0.38	103	0.047	<20	1.62	0.015	0.10	0.1	0.05	3.1	0.3	<0.05	6	<0.5	<0.2
F022	Soil	36	0.67	153	0.079	<20	1.93	0.013	0.06	1.2	0.05	3.0	0.2	<0.05	6	<0.5	<0.2
F020	Soil	29	0.60	126	0.075	<20	1.59	0.013	0.06	0.2	0.04	2.5	0.1	<0.05	5	<0.5	<0.2
F017	Soil	33	0.62	153	0.084	<20	1.98	0.013	0.06	0.2	0.02	2.6	0.1	<0.05	6	<0.5	<0.2
F013	Soil	28	0.51	78	0.056	<20	1.44	0.012	0.08	0.2	0.03	2.2	0.3	<0.05	8	<0.5	<0.2
F009	Soil	35	0.40	124	0.059	<20	2.07	0.009	0.04	<0.1	0.03	2.6	0.1	<0.05	9	<0.5	<0.2
F016	Soil	30	0.56	160	0.078	<20	1.86	0.013	0.06	0.2	0.03	3.0	0.1	<0.05	6	<0.5	<0.2
F018	Soil	24	0.59	123	0.084	<20	1.57	0.014	0.07	0.2	0.03	2.6	0.1	<0.05	5	<0.5	<0.2
F005	Soil	50	0.80	155	0.066	<20	1.99	0.014	0.06	<0.1	0.04	4.2	0.1	<0.05	8	<0.5	<0.2
F033	Soil	19	0.20	92	0.015	<20	1.37	0.011	0.18	0.2	0.06	1.7	0.3	<0.05	5	0.7	<0.2
F024	Soil	33	0.77	144	0.081	<20	1.88	0.018	0.05	0.2	0.04	3.3	0.1	<0.05	6	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
MDL		0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
F014	Soil	1.2	14.6	35.2	68	0.1	13.5	6.8	249	1.60	4.0	3.2	3.8	29	0.2	0.1	0.3	33	0.28	0.052	12
F035	Soil	2.5	6.0	32.9	27	<0.1	7.6	2.8	84	1.46	6.0	3.3	8.0	8	<0.1	0.1	0.4	31	0.07	0.007	7
F010	Soil	1.9	35.2	37.4	104	0.3	29.9	11.1	648	2.90	7.7	2.3	3.0	14	0.6	0.3	0.4	64	0.11	0.046	12
F031	Soil	1.9	27.4	25.2	74	0.1	25.6	10.0	305	2.54	7.4	3.1	3.5	35	0.1	0.4	0.4	58	0.46	0.070	14
F004	Soil	2.8	39.4	67.2	149	0.3	34.0	11.4	579	2.69	6.3	2.7	7.6	30	0.4	0.2	0.4	51	0.37	0.069	41
933198	Soil	0.6	12.2	9.0	50	<0.1	25.5	15.1	327	2.87	3.9	1.6	7.2	23	<0.1	0.2	0.1	38	0.35	0.061	16
932936	Soil	0.5	23.2	11.9	69	<0.1	28.5	13.8	419	3.54	5.8	1.7	1.1	12	<0.1	0.1	0.1	64	0.15	0.030	2
933199	Soil	0.7	18.3	10.8	48	<0.1	24.9	14.0	467	2.62	6.7	1.8	3.5	19	<0.1	0.3	0.2	45	0.22	0.053	11
933197	Soil	1.4	14.2	14.9	36	<0.1	15.3	7.0	218	3.61	10.8	3.5	2.6	11	<0.1	0.4	0.2	67	0.09	0.040	7
932926	Soil	0.9	45.2	90.1	199	0.8	49.1	21.9	1206	3.58	9.2	1.3	3.7	24	0.2	<0.1	1.9	56	0.40	0.049	10
932925	Soil	0.9	59.6	171.0	345	0.7	16.8	24.6	745	2.88	17.9	1.8	0.8	10	0.6	0.2	3.0	49	0.09	0.022	3
932924	Soil	1.1	106.1	174.5	426	0.7	15.1	21.3	1321	4.10	14.5	1.8	2.5	18	0.4	0.2	2.3	58	0.08	0.033	5
933193	Soil	0.8	21.9	147.2	141	0.2	28.9	14.3	972	2.79	4.7	2.1	11.7	15	0.3	0.2	1.0	34	0.15	0.034	31
933196	Soil	0.8	21.8	12.6	87	<0.1	18.4	10.3	337	3.14	2.1	1.7	2.6	35	<0.1	<0.1	0.1	28	0.30	0.092	7
932949	Soil	1.9	17.4	365.6	184	0.2	10.6	4.3	269	2.58	7.8	1.9	20.6	22	0.7	0.3	1.1	34	0.09	0.028	37
933192	Soil	0.6	8.2	13.9	122	<0.1	37.9	23.4	826	3.96	4.0	1.1	4.4	24	<0.1	<0.1	0.1	38	0.43	0.141	12
933168	Soil	1.1	44.7	447.2	751	0.9	7.1	11.1	1316	3.06	13.5	1.6	50.2	16	0.9	<0.1	4.0	10	0.05	0.032	36
933169	Soil	1.0	93.2	25.0	45	0.2	13.0	15.4	583	3.56	5.7	1.5	1.9	8	0.1	0.2	0.7	53	0.07	0.030	3
932943	Soil	0.6	11.8	27.7	268	0.1	13.1	8.1	751	2.99	2.6	1.5	22.2	9	0.2	<0.1	<0.1	15	0.05	0.028	43
935080	Soil	1.1	77.9	232.5	464	0.7	12.7	7.3	958	4.33	22.2	1.8	1.4	27	0.3	0.2	3.3	59	0.07	0.044	3
932944	Soil	1.5	24.1	109.8	249	<0.1	16.0	12.2	738	3.33	8.2	1.8	17.5	12	0.9	0.3	0.4	30	0.07	0.034	36
932948	Soil	1.4	19.0	73.6	62	<0.1	16.0	7.0	217	2.34	10.7	0.8	7.4	15	0.3	0.3	0.3	41	0.09	0.029	18
932945	Soil	1.3	15.8	103.7	100	0.2	21.7	11.5	530	2.84	11.0	2.5	7.1	15	0.6	0.4	0.4	54	0.11	0.023	13
933167	Soil	1.2	35.0	457.8	303	0.3	9.7	20.5	1005	5.03	25.5	2.1	4.8	6	0.7	0.3	0.9	82	0.05	0.037	9
933164	Soil	0.6	43.0	45.0	132	0.2	9.0	7.2	347	3.11	7.2	1.8	7.9	8	0.2	<0.1	0.4	34	0.06	0.025	9
933158	Soil	0.4	56.7	105.4	145	<0.1	88.7	23.6	858	3.61	3.2	1.4	10.7	17	0.2	<0.1	0.3	67	0.30	0.068	26
932947	Soil	1.9	10.8	110.0	111	0.2	11.2	4.4	154	2.50	12.1	0.9	12.3	16	0.4	0.3	0.5	58	0.08	0.027	27
933163	Soil	0.7	100.1	17.7	195	0.7	15.4	24.6	950	4.27	13.6	0.7	1.2	6	0.1	0.2	0.4	89	0.06	0.027	2
933160	Soil	0.7	25.4	19.9	67	0.1	16.1	14.4	489	3.22	6.5	<0.5	0.8	9	<0.1	0.2	0.4	55	0.09	0.018	3
932946	Soil	1.0	19.2	159.2	339	<0.1	33.5	12.0	991	3.29	5.7	1.4	10.7	18	0.5	0.1	0.8	43	0.17	0.038	20

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
F014	Soil	20	0.51	97	0.044	<20	1.01	0.009	0.05	0.2	0.03	1.8	<0.1	<0.05	3	<0.5	<0.2
F035	Soil	14	0.17	40	0.023	<20	0.81	0.007	0.09	<0.1	0.01	0.8	0.1	<0.05	3	<0.5	<0.2
F010	Soil	40	0.56	97	0.053	<20	1.75	0.008	0.05	<0.1	0.03	2.2	0.1	<0.05	7	<0.5	<0.2
F031	Soil	35	0.60	178	0.071	<20	1.55	0.016	0.05	0.3	0.02	3.5	<0.1	<0.05	5	<0.5	<0.2
F004	Soil	55	0.98	95	0.029	<20	1.48	0.007	0.04	<0.1	0.01	2.8	0.1	<0.05	7	0.8	<0.2
933198	Soil	34	1.42	111	0.118	<20	1.82	0.008	0.31	<0.1	0.02	2.4	0.4	<0.05	6	<0.5	<0.2
932936	Soil	29	1.36	91	0.202	<20	1.83	0.003	0.69	<0.1	0.01	1.1	0.5	<0.05	6	<0.5	<0.2
933199	Soil	25	0.72	136	0.079	<20	1.59	0.008	0.07	0.1	0.02	2.2	0.2	<0.05	5	<0.5	<0.2
933197	Soil	27	0.35	110	0.098	<20	1.62	0.006	0.05	0.3	0.06	2.0	<0.1	<0.05	7	<0.5	<0.2
932926	Soil	180	2.80	110	0.120	<20	2.53	0.004	0.57	<0.1	0.02	3.2	0.4	<0.05	8	<0.5	<0.2
932925	Soil	14	1.05	47	0.064	<20	1.61	0.003	0.07	<0.1	0.06	1.5	0.2	<0.05	5	<0.5	<0.2
932924	Soil	17	1.38	77	0.117	<20	1.99	0.004	0.28	<0.1	0.08	2.4	0.3	0.12	6	<0.5	<0.2
933193	Soil	31	0.76	142	0.078	<20	1.50	0.006	0.21	<0.1	0.03	3.4	0.4	<0.05	4	<0.5	<0.2
933196	Soil	20	1.58	139	0.170	<20	1.71	0.005	0.69	<0.1	0.01	1.0	0.5	0.11	6	<0.5	<0.2
932949	Soil	24	0.30	130	0.065	<20	0.83	0.007	0.09	<0.1	0.03	1.0	<0.1	0.06	4	<0.5	<0.2
933192	Soil	49	2.25	227	0.196	<20	2.49	0.004	1.06	<0.1	0.01	1.3	0.6	<0.05	7	<0.5	<0.2
933168	Soil	8	1.56	124	0.137	<20	1.91	0.004	0.69	<0.1	0.04	1.1	0.9	0.10	5	0.6	0.3
933169	Soil	17	1.16	42	0.027	<20	1.93	0.003	0.04	<0.1	0.05	3.7	<0.1	<0.05	5	<0.5	0.2
932943	Soil	17	0.83	83	0.166	<20	1.26	0.003	0.35	<0.1	0.02	1.1	0.4	<0.05	4	<0.5	<0.2
935080	Soil	11	1.90	155	0.243	<20	2.39	0.005	0.72	<0.1	0.03	1.9	0.4	0.37	6	<0.5	<0.2
932944	Soil	17	0.24	120	0.035	<20	1.46	0.007	0.08	<0.1	0.04	1.7	0.1	<0.05	3	<0.5	<0.2
932948	Soil	23	0.37	88	0.055	<20	1.54	0.008	0.09	<0.1	0.04	2.0	<0.1	0.05	4	<0.5	<0.2
932945	Soil	28	0.44	108	0.078	<20	1.78	0.010	0.08	<0.1	0.05	2.4	<0.1	<0.05	5	<0.5	<0.2
933167	Soil	16	0.90	51	0.071	<20	1.84	0.005	0.15	<0.1	0.06	7.2	0.2	0.10	7	<0.5	<0.2
933164	Soil	8	0.10	68	0.003	<20	0.64	0.003	0.07	<0.1	0.03	10.5	<0.1	<0.05	2	<0.5	<0.2
933158	Soil	207	3.13	158	0.242	<20	2.77	0.004	0.83	<0.1	<0.01	6.2	0.5	<0.05	9	<0.5	<0.2
932947	Soil	20	0.19	154	0.053	<20	1.28	0.006	0.07	<0.1	0.04	1.4	<0.1	0.06	5	<0.5	<0.2
933163	Soil	20	1.38	114	0.151	<20	2.18	0.005	0.52	<0.1	0.02	3.1	0.4	0.09	5	<0.5	<0.2
933160	Soil	25	1.34	50	0.084	<20	1.76	0.004	0.06	<0.1	0.02	1.6	<0.1	<0.05	5	<0.5	<0.2
932946	Soil	67	1.57	106	0.196	<20	1.76	0.004	0.30	<0.1	0.02	2.4	0.4	<0.05	7	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

		Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
		Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
		Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
		MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
933195	Soil		0.5	127.8	4.5	47	<0.1	22.8	28.1	383	3.68	2.5	1.2	0.6	10	<0.1	0.1	0.2	79	0.11	0.034	1
933165	Soil		0.7	59.5	109.4	195	0.2	14.3	17.9	1107	3.31	4.9	1.7	4.7	10	0.3	0.1	0.4	45	0.11	0.034	12
933161	Soil		0.5	33.1	135.9	323	0.5	116.1	28.5	2128	4.53	5.4	0.8	6.5	6	0.6	0.1	1.1	95	0.12	0.021	20
933194	Soil		1.0	88.0	11.8	41	0.2	26.7	19.0	267	3.02	6.5	2.5	1.1	13	<0.1	0.2	0.2	50	0.20	0.055	6
933166	Soil		1.0	86.2	82.8	184	0.2	11.2	23.4	1060	3.79	12.5	1.2	3.4	11	0.3	0.2	0.7	49	0.08	0.033	9
932950	Soil		0.9	15.9	56.8	69	0.1	14.5	7.4	319	2.37	5.9	0.9	9.0	16	0.2	0.3	0.2	37	0.16	0.037	25
933162	Soil		0.6	70.1	57.4	425	1.2	15.8	21.7	849	3.60	9.9	2.0	2.5	10	0.5	<0.1	0.4	63	0.11	0.020	5
933159	Soil		0.8	42.7	6.5	94	<0.1	12.9	21.8	723	4.50	3.6	1.3	1.0	12	<0.1	<0.1	<0.1	74	0.16	0.025	2
932942	Soil		3.4	15.5	183.1	163	0.4	15.2	6.7	285	3.80	25.1	1.6	15.4	8	0.4	0.2	0.6	24	0.03	0.040	48
933191	Soil		1.1	17.9	47.1	77	0.1	18.5	10.0	457	3.53	6.6	1.2	5.9	12	0.1	0.5	1.1	58	0.16	0.063	14
932923	Soil		1.9	74.3	48.6	232	0.2	18.7	25.1	893	4.46	21.1	<0.5	2.7	26	0.3	0.3	1.1	61	0.11	0.032	6
932903	Soil		3.0	21.2	111.1	50	0.2	8.7	3.2	166	1.93	5.8	2.0	9.8	6	0.1	0.3	2.9	32	0.05	0.022	10
932904	Soil		1.5	16.5	18.1	42	0.2	21.0	9.2	219	2.74	8.7	2.5	7.1	11	0.2	0.3	0.4	63	0.10	0.025	10
932905	Soil		1.1	15.1	11.1	42	<0.1	6.0	6.3	85	0.70	2.1	0.7	42.9	6	<0.1	<0.1	0.2	3	<0.01	0.015	74
932906	Soil		2.1	12.0	42.1	53	0.1	10.1	3.9	154	2.51	8.8	1.5	15.0	10	0.2	0.3	1.0	39	0.06	0.034	25
932907	Soil		0.7	9.8	51.2	35	<0.1	7.8	2.4	147	0.78	3.2	1.8	11.5	5	0.2	0.1	0.3	16	0.03	0.015	39
932908	Soil		1.9	19.2	110.5	46	0.2	8.7	5.8	403	2.06	4.9	1.5	23.9	30	<0.1	0.2	0.5	25	0.05	0.023	56
932909	Soil		1.1	71.4	6.9	63	<0.1	9.9	9.7	672	4.46	4.5	<0.5	0.9	10	<0.1	0.2	1.0	34	0.07	0.036	3
932910	Soil		1.1	18.1	18.6	47	0.1	21.8	9.1	289	2.64	9.3	2.4	8.2	15	0.2	0.3	0.3	46	0.12	0.028	18
932911	Soil		2.2	10.5	81.7	27	0.2	7.7	3.0	115	1.73	8.2	1.5	16.8	17	<0.1	0.1	0.6	22	0.04	0.021	26
932912	Soil		5.1	9.0	187.1	41	0.2	2.3	1.3	88	1.26	12.3	<0.5	18.3	6	<0.1	0.2	0.4	4	0.02	0.011	24
932913	Soil		1.1	15.0	69.3	165	0.3	8.6	6.0	597	2.71	7.4	0.9	0.8	13	0.2	0.2	1.2	54	0.11	0.025	4
932914	Soil		1.0	32.4	57.5	102	0.6	8.5	5.2	337	2.74	9.7	0.9	1.0	8	0.2	0.2	0.8	65	0.06	0.020	4
932915	Soil		0.8	86.4	120.5	385	0.3	15.9	37.6	1067	3.50	30.7	1.1	0.8	10	0.3	0.2	1.4	20	0.08	0.028	1
932916	Soil		1.0	68.2	100.8	232	0.3	20.3	15.6	504	2.93	13.8	1.7	1.3	9	0.4	0.2	0.7	38	0.10	0.035	4
932917	Soil		0.2	108.2	21.5	239	0.1	16.0	27.7	1103	3.35	5.6	<0.5	0.6	13	0.4	<0.1	0.2	44	0.16	0.014	2
932918	Soil		0.5	39.5	211.9	359	0.7	18.1	14.4	663	4.30	14.1	2.0	1.7	16	0.5	0.3	2.0	54	0.11	0.033	4
932919	Soil		0.6	61.0	224.2	502	0.2	10.9	11.1	701	3.01	9.9	1.2	0.5	10	0.4	0.2	2.3	41	0.12	0.032	3
932920	Soil		0.5	101.9	16.3	88	0.2	26.8	25.5	486	2.85	18.3	1.8	1.8	11	0.2	0.2	0.2	38	0.12	0.024	4
932921	Soil		0.7	72.3	116.6	195	0.3	11.1	20.4	995	4.18	15.2	5.7	1.1	9	0.2	0.1	3.2	54	0.08	0.040	5

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
933195	Soil	19	2.01	81	0.159	<20	2.21	0.004	0.75	<0.1	<0.01	2.4	0.5	<0.05	5	<0.5	<0.2
933165	Soil	15	0.90	129	0.052	<20	1.64	0.004	0.19	<0.1	0.03	4.2	0.3	<0.05	4	<0.5	<0.2
933161	Soil	308	2.81	68	0.165	<20	3.04	0.003	0.29	<0.1	0.02	5.7	0.3	<0.05	8	<0.5	<0.2
933194	Soil	36	1.24	111	0.099	<20	1.62	0.006	0.18	<0.1	0.03	2.3	0.2	<0.05	5	<0.5	<0.2
933166	Soil	10	0.88	100	0.071	<20	1.52	0.004	0.19	<0.1	0.03	4.1	0.3	<0.05	5	<0.5	<0.2
932950	Soil	22	0.54	100	0.098	<20	1.21	0.006	0.10	<0.1	0.02	1.6	0.1	<0.05	4	<0.5	<0.2
933162	Soil	11	1.69	100	0.149	<20	2.45	0.004	0.66	<0.1	0.02	2.4	0.6	0.11	5	<0.5	<0.2
933159	Soil	15	1.83	237	0.185	<20	2.30	0.004	0.83	<0.1	0.02	1.9	0.4	<0.05	6	<0.5	<0.2
932942	Soil	16	0.10	109	0.006	<20	1.72	0.002	0.09	<0.1	0.05	1.5	0.2	<0.05	3	<0.5	<0.2
933191	Soil	54	1.07	79	0.096	<20	1.97	0.005	0.27	<0.1	0.04	2.0	0.2	<0.05	7	<0.5	<0.2
932923	Soil	16	1.30	90	0.150	<20	1.96	0.005	0.31	0.1	0.03	2.2	0.3	0.15	6	<0.5	<0.2
932903	Soil	13	0.13	75	0.031	<20	0.82	0.004	0.06	<0.1	0.04	1.1	<0.1	<0.05	3	<0.5	<0.2
932904	Soil	27	0.35	146	0.069	<20	2.47	0.007	0.05	<0.1	0.06	2.5	<0.1	<0.05	7	<0.5	<0.2
932905	Soil	6	0.07	39	0.002	<20	0.75	<0.001	0.07	<0.1	0.02	0.6	<0.1	<0.05	<1	<0.5	<0.2
932906	Soil	17	0.14	88	0.043	<20	1.02	0.003	0.06	<0.1	0.04	1.1	<0.1	<0.05	5	<0.5	<0.2
932907	Soil	9	0.10	51	0.013	<20	0.86	0.002	0.06	<0.1	0.03	0.7	<0.1	<0.05	2	<0.5	<0.2
932908	Soil	12	0.24	91	0.026	<20	0.95	0.005	0.12	<0.1	0.04	1.4	0.1	0.07	3	<0.5	<0.2
932909	Soil	14	2.12	59	0.107	<20	2.85	0.005	0.31	<0.1	0.03	4.3	0.3	0.06	8	<0.5	0.3
932910	Soil	24	0.43	104	0.067	<20	1.79	0.010	0.13	<0.1	0.03	2.4	<0.1	0.13	4	0.6	<0.2
932911	Soil	11	0.15	80	0.025	<20	0.99	0.010	0.12	<0.1	0.02	1.0	<0.1	0.13	2	<0.5	<0.2
932912	Soil	4	0.09	24	0.001	<20	0.50	0.004	0.09	<0.1	0.02	0.4	<0.1	0.11	<1	<0.5	<0.2
932913	Soil	13	0.82	84	0.091	<20	1.31	0.005	0.05	<0.1	0.02	1.1	<0.1	<0.05	6	<0.5	<0.2
932914	Soil	13	0.48	69	0.055	<20	1.43	0.003	0.03	<0.1	0.04	1.2	<0.1	<0.05	6	<0.5	<0.2
932915	Soil	7	1.17	40	0.039	<20	1.82	0.002	0.05	<0.1	0.02	1.3	<0.1	0.06	3	<0.5	<0.2
932916	Soil	17	0.73	62	0.039	<20	1.95	0.004	0.03	<0.1	0.03	1.7	<0.1	<0.05	4	<0.5	<0.2
932917	Soil	8	1.80	67	0.102	<20	2.29	0.002	0.27	<0.1	0.02	1.1	0.5	<0.05	4	<0.5	<0.2
932918	Soil	21	1.07	102	0.121	<20	2.80	0.008	0.17	<0.1	0.06	1.9	0.3	0.11	6	<0.5	<0.2
932919	Soil	11	1.01	63	0.047	<20	1.83	0.003	0.06	<0.1	0.03	1.1	0.2	<0.05	5	<0.5	<0.2
932920	Soil	16	0.83	93	0.035	<20	2.10	0.007	0.04	<0.1	0.04	2.1	<0.1	<0.05	3	<0.5	<0.2
932921	Soil	14	1.05	69	0.040	<20	2.11	0.004	0.07	<0.1	0.04	2.3	0.1	0.10	6	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
MDL		0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
932922	Soil	2.5	103.9	79.4	486	0.2	10.7	28.2	1428	6.88	22.4	1.4	0.8	15	0.3	0.1	1.0	158	0.11	0.021	1
935090	Soil	1.1	51.7	106.5	228	0.1	51.3	16.9	613	4.47	17.7	1.7	13.9	22	0.2	0.2	2.2	58	0.14	0.044	29
935091	Soil	0.6	35.8	15.4	215	0.1	35.5	16.3	841	4.49	6.0	1.4	7.4	18	0.1	0.1	0.3	69	0.19	0.034	22
935092	Soil	1.0	41.4	17.6	72	0.5	17.4	13.1	389	4.04	9.9	0.8	1.7	13	0.4	0.3	0.2	79	0.12	0.030	5
935093	Soil	1.0	56.0	34.3	88	0.2	18.8	13.5	529	3.69	10.1	1.4	4.1	16	0.1	0.2	0.3	60	0.14	0.028	9
935095	Soil	0.8	49.8	55.1	49	<0.1	4.1	10.7	962	2.29	1.6	1.0	10.6	11	<0.1	<0.1	0.4	5	0.20	0.100	15
935096	Soil	1.4	19.5	52.4	46	0.2	8.1	6.2	231	2.33	5.9	1.4	10.9	15	0.1	0.1	0.5	31	0.08	0.018	24
935097	Soil	2.2	49.6	18.7	67	0.1	11.9	8.0	231	3.81	9.9	2.7	4.3	12	0.1	0.2	0.4	60	0.08	0.024	12
935083	Soil	0.6	80.9	23.6	88	0.3	15.5	9.6	391	2.75	8.1	1.0	0.9	16	0.1	0.2	0.4	54	0.19	0.034	8
935098	Soil	0.8	43.7	46.8	128	0.2	19.5	11.4	622	2.98	6.1	2.0	5.9	18	0.1	0.2	0.4	50	0.15	0.024	16
935084	Soil	1.1	93.9	54.7	121	0.4	19.3	14.6	542	3.51	12.8	3.4	2.0	19	0.2	0.2	0.4	60	0.21	0.028	6
935094	Soil	0.8	30.1	38.2	110	<0.1	39.6	17.7	1087	3.08	3.9	0.7	16.4	29	0.1	<0.1	0.2	27	0.25	0.026	23
935099	Soil	1.4	31.9	20.5	59	0.7	26.9	14.5	382	3.25	11.0	2.5	9.4	17	0.5	0.4	0.3	76	0.11	0.020	22
935085	Soil	0.6	78.4	42.8	79	0.2	10.5	21.3	931	3.06	2.5	0.8	3.1	17	0.1	<0.1	0.9	39	0.15	0.022	6
935086	Soil	0.5	83.1	14.7	210	0.1	19.2	20.3	691	2.70	6.5	2.1	3.2	31	0.2	0.3	0.2	46	0.25	0.021	11
935087	Soil	0.7	34.2	11.7	54	0.1	16.9	10.5	287	2.17	5.9	2.1	1.6	15	0.2	0.2	0.2	46	0.15	0.025	8
935088	Soil	1.1	35.2	108.5	472	1.2	20.3	19.4	831	3.79	8.8	1.0	2.7	11	0.5	0.3	1.4	57	0.10	0.031	5
933151	Soil	1.9	20.2	68.3	84	<0.1	4.3	3.8	152	2.44	9.8	<0.5	16.6	9	0.1	0.3	0.3	38	0.04	0.018	17
933152	Soil	0.9	116.1	61.7	258	0.1	8.0	17.9	535	3.97	17.4	2.7	11.7	35	0.2	0.3	0.6	26	0.07	0.045	27
933153	Soil	1.2	141.1	109.2	182	0.3	12.1	7.4	416	3.50	11.8	2.8	8.3	16	0.2	0.3	0.9	48	0.09	0.035	19
933154	Soil	1.2	61.2	970.9	154	0.4	8.8	1.9	186	3.88	7.6	<0.5	3.7	60	0.2	0.3	1.5	52	0.07	0.048	19
933155	Soil	1.0	9.3	32.6	36	<0.1	7.2	5.1	207	2.36	5.1	<0.5	12.4	16	0.1	0.2	0.2	38	0.08	0.023	39
933156	Soil	0.6	15.1	34.7	45	<0.1	5.6	4.0	312	2.38	6.2	0.6	20.7	80	<0.1	0.2	0.4	27	0.05	0.033	59
933157	Soil	1.0	9.8	21.4	40	<0.1	13.1	11.4	600	2.56	5.8	0.5	9.6	25	0.1	0.2	0.3	34	0.10	0.033	22
932902	Soil	1.7	32.2	107.0	80	0.2	9.3	5.6	238	2.57	9.4	<0.5	16.1	7	0.2	0.3	0.5	52	0.05	0.025	16
FO34	Soil	4.9	6.8	45.2	29	0.1	5.7	2.2	87	1.16	5.6	1.0	10.3	9	0.1	0.2	0.3	23	0.10	0.011	21
FO12	Soil	3.9	23.6	85.1	144	0.4	23.0	8.7	410	2.59	5.0	2.1	4.2	17	0.5	0.2	1.7	66	0.15	0.021	10
FO01	Soil	4.7	11.8	22.9	40	0.4	10.0	4.3	162	2.25	6.7	2.1	3.0	9	0.1	0.3	0.2	61	0.07	0.026	6
932935	Soil	0.7	11.5	35.3	58	<0.1	5.1	5.3	421	1.92	3.3	1.0	16.8	8	<0.1	0.1	0.5	12	0.04	0.023	11
932941	Soil	1.9	11.7	289.6	106	0.1	7.4	3.6	133	1.44	10.8	1.0	23.5	15	0.2	0.3	0.5	16	0.03	0.019	33

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
932922	Soil	10	2.35	168	0.240	<20	3.11	0.004	0.93	<0.1	0.02	3.1	0.9	0.08	8	<0.5	<0.2
935090	Soil	110	1.74	130	0.136	<20	2.57	0.005	0.30	<0.1	<0.01	3.2	0.4	0.08	8	0.9	0.3
935091	Soil	105	2.47	170	0.190	<20	2.80	0.007	0.68	<0.1	0.01	5.2	0.9	<0.05	9	<0.5	<0.2
935092	Soil	23	0.82	108	0.091	<20	2.22	0.005	0.07	<0.1	0.03	2.8	0.1	<0.05	7	<0.5	<0.2
935093	Soil	39	1.06	125	0.068	<20	2.32	0.007	0.07	<0.1	0.02	3.6	0.1	0.05	6	<0.5	<0.2
935095	Soil	5	0.19	51	0.005	<20	0.92	<0.001	0.08	<0.1	<0.01	4.7	0.2	<0.05	2	<0.5	<0.2
935096	Soil	13	0.33	108	0.021	<20	1.07	0.005	0.07	<0.1	0.02	2.0	<0.1	<0.05	4	<0.5	<0.2
935097	Soil	24	0.31	143	0.036	<20	1.87	0.009	0.07	<0.1	0.02	3.2	0.2	<0.05	6	<0.5	0.4
935083	Soil	21	0.76	125	0.078	<20	1.74	0.006	0.10	<0.1	0.02	2.2	0.2	<0.05	6	<0.5	<0.2
935098	Soil	42	1.22	121	0.097	<20	1.91	0.007	0.26	<0.1	0.02	3.1	0.3	<0.05	6	<0.5	<0.2
935084	Soil	24	0.97	134	0.092	<20	1.96	0.009	0.07	<0.1	0.02	2.5	0.2	<0.05	6	<0.5	<0.2
935094	Soil	83	2.08	72	0.157	<20	2.16	0.003	0.19	<0.1	<0.01	2.8	0.4	<0.05	7	<0.5	<0.2
935099	Soil	41	0.51	280	0.104	<20	2.94	0.010	0.06	<0.1	0.04	6.3	<0.1	<0.05	6	<0.5	<0.2
935085	Soil	7	1.38	56	0.096	<20	1.78	0.002	0.24	<0.1	<0.01	1.0	0.3	<0.05	3	<0.5	<0.2
935086	Soil	19	1.27	138	0.114	<20	1.75	0.009	0.13	0.1	0.06	2.5	0.3	<0.05	4	<0.5	<0.2
935087	Soil	20	0.64	113	0.069	<20	1.65	0.008	0.05	<0.1	0.02	1.9	0.1	<0.05	4	<0.5	<0.2
935088	Soil	23	1.81	69	0.066	<20	3.30	0.005	0.06	<0.1	0.07	2.4	0.2	<0.05	7	<0.5	<0.2
933151	Soil	10	0.22	69	0.048	<20	0.82	0.003	0.08	<0.1	<0.01	0.9	0.1	<0.05	5	<0.5	<0.2
933152	Soil	9	0.57	159	0.045	<20	1.33	0.006	0.24	<0.1	0.02	2.6	0.2	0.10	3	<0.5	<0.2
933153	Soil	24	0.70	204	0.064	<20	1.53	0.009	0.30	<0.1	0.04	3.4	0.3	0.18	5	<0.5	<0.2
933154	Soil	19	0.59	272	0.107	<20	1.11	0.016	0.42	<0.1	0.04	2.7	0.3	0.56	6	<0.5	<0.2
933155	Soil	15	0.48	131	0.062	<20	1.43	0.008	0.13	<0.1	0.01	1.6	0.2	<0.05	5	<0.5	<0.2
933156	Soil	11	0.16	180	0.025	<20	0.94	0.006	0.18	<0.1	0.01	1.3	0.1	0.18	3	<0.5	<0.2
933157	Soil	22	0.35	177	0.050	<20	2.03	0.006	0.13	<0.1	0.04	1.8	0.2	<0.05	4	<0.5	<0.2
932902	Soil	17	0.17	99	0.046	<20	1.41	0.004	0.06	<0.1	0.04	1.5	0.1	<0.05	6	<0.5	<0.2
FO34	Soil	11	0.15	44	0.030	<20	0.64	0.006	0.12	0.1	<0.01	0.9	0.2	0.08	2	<0.5	<0.2
FO12	Soil	33	0.58	73	0.066	<20	1.58	0.007	0.06	<0.1	0.02	2.2	0.1	<0.05	7	<0.5	<0.2
FO01	Soil	19	0.19	72	0.041	<20	1.32	0.009	0.04	<0.1	0.03	1.5	0.2	<0.05	6	<0.5	<0.2
932935	Soil	9	0.31	33	0.078	<20	1.14	0.002	0.18	<0.1	0.03	0.8	0.3	<0.05	3	<0.5	<0.2
932941	Soil	9	0.12	33	0.016	<20	0.87	0.003	0.09	<0.1	0.02	0.8	<0.1	<0.05	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

		Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
		Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
		Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
		MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
932939	Soil		0.7	60.0	7.6	56	<0.1	20.7	14.4	505	2.91	5.3	1.0	2.6	12	<0.1	0.1	<0.1	65	0.10	0.016	5
932938	Soil		0.7	73.1	17.7	65	0.4	4.8	7.6	556	2.70	2.9	<0.5	1.2	10	<0.1	0.1	<0.1	34	0.08	0.014	2
932940	Soil		2.2	8.3	807.7	260	<0.1	5.2	1.8	145	2.61	18.7	2.1	22.0	39	0.3	0.2	0.7	36	0.03	0.047	50
932934	Soil		0.8	39.7	62.1	132	<0.1	15.3	14.1	480	3.24	7.5	2.4	1.6	13	0.2	0.3	0.3	60	0.15	0.035	5
932937	Soil		1.1	53.7	14.9	63	0.2	15.0	12.5	522	3.44	8.4	1.6	2.2	10	0.1	0.3	0.2	38	0.08	0.024	4
932933	Soil		0.2	169.3	10.0	80	0.1	17.0	31.1	1138	5.22	1.8	<0.5	0.4	14	<0.1	<0.1	0.1	128	0.14	0.014	<1
932931	Soil		0.8	41.4	109.2	164	0.4	8.0	4.9	319	1.86	5.9	1.8	17.4	14	0.3	0.1	1.5	26	0.11	0.030	38
932930	Soil		1.0	10.6	56.8	130	0.2	21.3	9.1	417	2.86	8.5	<0.5	5.5	13	0.3	0.3	0.5	48	0.09	0.016	11
932929	Soil		1.2	17.3	25.5	20	0.2	2.5	3.3	119	1.17	5.0	<0.5	14.7	5	<0.1	0.1	0.7	15	0.02	0.009	8
932927	Soil		1.1	31.6	103.4	173	0.4	66.2	18.6	1047	4.42	11.4	1.0	4.7	25	0.1	0.1	1.1	51	0.23	0.048	21
932928	Soil		1.0	71.3	49.9	88	0.4	15.6	21.6	736	3.44	7.0	0.7	1.3	14	0.2	0.2	0.8	55	0.12	0.038	6
935081	Soil		0.8	45.7	40.8	107	0.2	20.3	14.7	650	3.12	9.4	1.9	3.1	17	0.1	0.3	0.5	61	0.16	0.023	8
935082	Soil		0.5	71.5	27.1	206	0.1	19.0	23.7	1190	5.09	4.9	0.8	1.3	14	<0.1	<0.1	0.5	135	0.17	0.023	3
935100	Soil		1.1	20.5	29.9	54	0.1	18.5	8.2	219	2.82	9.2	14.9	11.6	13	0.3	0.3	0.3	57	0.08	0.021	14
935089	Soil		0.3	140.5	275.0	361	0.8	19.7	24.8	1080	3.65	4.6	0.8	3.8	15	0.4	<0.1	0.1	59	0.14	0.036	7
932901	Soil		1.3	20.4	49.1	54	0.3	15.5	7.4	250	2.81	9.7	1.1	7.6	10	0.3	0.4	0.2	61	0.08	0.038	14
SQE039	Soil		0.5	21.4	12.2	43	<0.1	18.6	5.5	143	1.92	4.4	3.1	2.9	37	0.1	0.2	0.2	38	0.36	0.044	15
SQE040	Soil		0.5	36.6	13.2	39	0.2	22.1	9.5	280	2.75	6.5	2.3	2.0	52	0.2	0.2	0.3	51	0.44	0.074	22
SQE067	Soil		0.7	27.7	9.6	50	0.1	21.9	8.5	315	2.38	6.9	31.6	3.8	37	0.1	0.4	0.2	49	0.51	0.052	13
SQE019	Soil		1.5	34.7	13.4	59	0.1	30.8	14.4	519	3.50	14.1	2.5	4.8	38	0.1	0.4	0.3	51	0.59	0.050	16
SQE020	Soil		1.3	34.3	11.8	58	0.1	29.9	12.8	714	2.73	9.2	2.5	2.9	53	0.2	0.5	0.3	40	0.82	0.057	16
SQE021	Soil		1.2	28.6	9.7	67	<0.1	30.2	11.2	227	3.09	4.4	3.5	12.4	22	<0.1	0.2	0.4	30	0.34	0.053	37
SQE022	Soil		2.0	35.8	17.4	69	<0.1	35.1	13.6	508	3.18	14.6	6.5	12.1	25	<0.1	0.2	0.4	23	0.34	0.053	44
SQE023	Soil		0.8	15.0	9.5	40	<0.1	16.9	7.2	219	2.29	6.2	3.4	6.5	22	<0.1	0.1	0.2	36	0.30	0.041	22
SQE060	Soil		0.8	13.6	9.8	65	<0.1	23.0	11.5	621	2.35	7.6	1.7	3.1	40	0.2	0.2	0.2	42	0.59	0.076	14
SQE061	Soil		0.5	25.1	9.0	63	<0.1	19.8	9.6	226	2.41	7.0	1.8	3.2	36	0.2	0.4	0.2	58	0.47	0.061	12
SQE064	Soil		0.9	25.0	10.8	47	0.1	18.6	8.3	255	2.37	7.2	0.9	2.4	32	0.2	0.3	0.3	51	0.41	0.047	12
CH048	Soil		0.6	71.9	9.2	40	0.2	10.2	12.9	280	3.02	2.8	2.0	0.9	14	<0.1	<0.1	0.2	113	0.46	0.122	5
CH049	Soil		0.4	45.3	18.4	33	0.1	8.6	8.1	171	2.35	3.3	1.9	1.4	14	<0.1	<0.1	0.2	84	0.30	0.082	6
CH050	Soil		0.8	31.7	11.2	65	<0.1	13.4	9.5	334	3.87	12.6	1.8	2.0	17	0.1	0.2	0.2	122	0.24	0.060	6

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
932939	Soil	21	1.20	101	0.136	<20	1.71	0.002	0.45	<0.1	<0.01	1.6	0.4	<0.05	5	<0.5	<0.2
932938	Soil	4	0.84	33	0.152	<20	1.77	0.002	0.36	<0.1	0.03	1.2	0.7	<0.05	3	<0.5	<0.2
932940	Soil	8	0.32	72	0.131	<20	0.77	0.001	0.17	<0.1	0.04	0.7	0.3	<0.05	5	<0.5	<0.2
932934	Soil	19	0.76	98	0.094	<20	1.91	0.007	0.12	<0.1	0.02	1.9	0.2	<0.05	5	<0.5	<0.2
932937	Soil	19	0.53	86	0.099	<20	1.99	0.004	0.19	<0.1	0.03	1.8	0.3	<0.05	5	<0.5	<0.2
932933	Soil	44	2.82	235	0.262	<20	3.23	0.004	1.26	<0.1	0.01	1.9	0.8	<0.05	6	<0.5	<0.2
932931	Soil	10	0.75	55	0.078	<20	1.18	0.005	0.27	<0.1	0.03	1.6	0.3	<0.05	3	<0.5	<0.2
932930	Soil	24	0.92	56	0.148	<20	1.53	0.003	0.10	<0.1	0.02	1.3	0.2	<0.05	7	<0.5	<0.2
932929	Soil	4	0.13	35	0.053	<20	0.50	0.001	0.06	<0.1	0.01	0.3	0.1	<0.05	3	<0.5	<0.2
932927	Soil	182	2.46	122	0.146	<20	2.50	0.002	0.46	<0.1	0.02	2.3	0.4	<0.05	7	<0.5	<0.2
932928	Soil	18	1.08	85	0.068	<20	1.84	0.007	0.08	<0.1	0.05	2.5	0.1	<0.05	5	<0.5	0.3
935081	Soil	22	0.94	129	0.099	<20	1.92	0.009	0.08	0.1	0.03	2.8	0.2	<0.05	5	<0.5	<0.2
935082	Soil	29	2.62	164	0.216	<20	3.13	0.005	0.70	<0.1	<0.01	4.0	0.7	<0.05	8	<0.5	<0.2
935100	Soil	29	0.40	208	0.059	<20	2.48	0.007	0.05	<0.1	0.05	2.6	0.1	<0.05	5	<0.5	<0.2
935089	Soil	17	2.61	34	0.079	<20	2.61	0.002	0.10	<0.1	0.01	3.5	0.2	<0.05	6	<0.5	<0.2
932901	Soil	27	0.34	99	0.064	<20	2.15	0.006	0.05	<0.1	0.07	2.5	<0.1	<0.05	6	<0.5	<0.2
SQE039	Soil	29	0.33	227	0.035	<20	1.35	0.011	0.04	<0.1	0.04	3.4	<0.1	<0.05	4	<0.5	<0.2
SQE040	Soil	33	0.31	321	0.020	<20	2.00	0.010	0.04	<0.1	0.08	3.5	<0.1	<0.05	6	<0.5	<0.2
SQE067	Soil	30	0.50	258	0.073	<20	1.49	0.024	0.04	<0.1	0.03	4.0	<0.1	<0.05	4	0.6	<0.2
SQE019	Soil	28	0.43	250	0.051	<20	1.48	0.018	0.05	0.2	0.04	4.2	<0.1	<0.05	4	0.8	<0.2
SQE020	Soil	23	0.43	271	0.039	<20	1.32	0.019	0.06	0.1	0.05	3.4	<0.1	<0.05	4	0.8	<0.2
SQE021	Soil	23	0.42	138	0.040	<20	1.07	0.011	0.11	<0.1	0.01	3.7	0.2	<0.05	3	0.7	<0.2
SQE022	Soil	18	0.24	277	0.008	<20	0.91	0.007	0.07	0.2	0.02	4.3	<0.1	<0.05	2	0.8	<0.2
SQE023	Soil	20	0.39	140	0.034	<20	1.00	0.011	0.05	<0.1	<0.01	2.1	<0.1	<0.05	3	<0.5	<0.2
SQE060	Soil	28	0.55	174	0.047	<20	1.15	0.017	0.06	0.2	0.02	3.0	<0.1	<0.05	4	<0.5	<0.2
SQE061	Soil	30	0.50	249	0.080	<20	1.55	0.023	0.05	<0.1	0.03	4.1	<0.1	<0.05	5	<0.5	<0.2
SQE064	Soil	30	0.40	216	0.066	<20	1.62	0.016	0.04	<0.1	0.03	3.6	<0.1	<0.05	5	0.6	<0.2
CH048	Soil	18	1.13	309	0.205	<20	1.70	0.033	0.63	<0.1	0.01	4.2	0.1	<0.05	7	<0.5	<0.2
CH049	Soil	13	0.78	193	0.123	<20	1.43	0.027	0.33	<0.1	0.02	3.5	0.1	<0.05	6	<0.5	<0.2
CH050	Soil	23	0.87	214	0.186	<20	1.81	0.011	0.43	<0.1	<0.01	6.9	0.2	<0.05	8	0.6	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
CH055	Soil	0.6	57.1	5.4	72	<0.1	13.1	16.1	435	4.23	3.5	2.9	1.5	16	<0.1	0.2	<0.1	133	0.40	0.117	7
CH056	Soil	0.6	25.4	7.0	54	<0.1	15.5	9.6	284	2.77	6.7	1.4	2.9	19	<0.1	0.2	0.1	62	0.28	0.062	13
CH053	Soil	1.1	17.6	8.5	35	0.2	12.2	7.1	403	2.44	8.2	1.6	1.8	12	<0.1	0.3	0.2	61	0.13	0.054	6
CH052	Soil	1.2	29.6	9.6	46	0.2	15.4	9.8	624	3.18	9.5	1.0	2.5	18	<0.1	0.3	0.1	81	0.23	0.027	8
CH058	Soil	0.8	27.2	10.1	77	0.1	9.2	13.8	766	5.19	4.8	1.2	1.7	13	<0.1	<0.1	0.2	142	0.23	0.061	7
CH057	Soil	0.6	73.6	3.6	59	<0.1	16.0	19.8	473	4.14	4.6	1.1	1.3	12	<0.1	0.1	<0.1	142	0.35	0.126	7
CH060	Soil	0.9	29.6	9.3	48	0.2	19.2	9.7	275	2.80	8.9	2.8	3.4	18	0.1	0.3	0.2	64	0.23	0.043	11
CH044	Soil	3.6	54.6	12.0	87	<0.1	15.3	10.9	590	5.20	221.2	0.6	4.3	9	0.1	0.4	0.3	155	0.15	0.096	8
CH093	Soil	0.6	55.3	8.4	82	0.1	18.8	13.3	468	3.72	3.3	<0.5	3.8	35	<0.1	0.2	0.1	90	0.41	0.042	16
CH063	Soil	1.3	21.2	10.1	45	<0.1	21.2	9.6	279	2.87	13.3	2.3	3.5	19	<0.1	0.4	0.2	67	0.29	0.025	10
FO-012	Soil	2.9	28.6	26.6	70	0.2	20.9	8.6	299	2.99	7.9	1.4	7.2	43	0.3	0.2	0.5	61	0.44	0.045	43
FO-020	Soil	0.8	19.9	11.4	48	<0.1	19.8	7.6	284	2.05	4.2	0.9	4.1	39	0.2	0.2	0.2	49	0.47	0.033	15
FO-014	Soil	1.4	23.7	19.0	72	0.2	20.0	9.0	323	2.64	6.7	1.5	6.6	51	0.2	0.2	0.4	49	0.52	0.056	28

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

CERTIFICATE OF ANALYSIS WHI11000661.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
CH055	Soil	21	1.48	485	0.141	<20	2.23	0.019	0.74	<0.1	<0.01	8.0	0.2	<0.05	8	<0.5	<0.2
CH056	Soil	26	0.72	218	0.106	<20	1.54	0.013	0.16	0.1	0.01	4.4	<0.1	<0.05	5	<0.5	<0.2
CH053	Soil	24	0.37	183	0.068	<20	1.27	0.009	0.12	<0.1	0.02	2.2	<0.1	<0.05	5	<0.5	<0.2
CH052	Soil	30	0.63	253	0.113	<20	1.79	0.012	0.16	<0.1	0.02	4.3	<0.1	<0.05	6	<0.5	<0.2
CH058	Soil	17	1.66	371	0.310	<20	2.56	0.009	0.93	0.1	0.01	10.1	0.3	<0.05	10	<0.5	<0.2
CH057	Soil	23	1.70	283	0.170	<20	2.26	0.030	0.59	0.1	<0.01	5.6	0.2	<0.05	7	0.6	<0.2
CH060	Soil	27	0.59	275	0.102	<20	1.55	0.009	0.16	<0.1	0.02	3.9	<0.1	<0.05	5	<0.5	<0.2
CH044	Soil	51	1.14	239	0.239	<20	2.26	0.009	0.96	<0.1	<0.01	12.8	0.5	<0.05	10	0.6	<0.2
CH093	Soil	34	1.25	769	0.171	<20	2.27	0.015	0.88	<0.1	0.13	8.9	0.2	<0.05	8	<0.5	<0.2
CH063	Soil	34	0.56	318	0.087	<20	1.59	0.014	0.15	<0.1	0.02	4.4	<0.1	<0.05	5	<0.5	<0.2
FO-012	Soil	35	0.44	281	0.039	<20	2.49	0.016	0.12	0.2	0.04	4.1	0.2	<0.05	9	0.7	<0.2
FO-020	Soil	33	0.48	227	0.079	<20	1.55	0.019	0.05	<0.1	0.03	3.8	<0.1	<0.05	5	<0.5	<0.2
FO-014	Soil	31	0.41	276	0.043	<20	2.64	0.015	0.08	0.1	0.08	5.5	0.2	<0.05	7	0.8	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

QUALITY CONTROL REPORT WHI11000661.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
Pulp Duplicates																					
933082	Soil	1.1	32.1	396.2	570	0.4	13.7	21.6	1108	4.49	23.3	2.0	1.1	15	0.4	0.2	3.5	87	0.20	0.031	3
REP 933082	QC	1.0	32.2	403.2	583	0.4	13.9	21.4	1070	4.49	23.3	0.9	1.1	14	0.4	0.2	3.5	86	0.21	0.036	3
SQE082	Soil	1.0	26.3	12.9	47	0.1	18.4	9.7	311	2.62	8.3	2.2	6.4	37	0.1	0.2	0.4	52	0.46	0.040	16
REP SQE082	QC	1.0	29.7	12.2	49	0.1	19.5	9.9	325	2.85	8.3	2.1	6.5	36	<0.1	0.2	0.3	53	0.47	0.041	16
F061	Soil	0.6	26.5	10.4	54	<0.1	18.6	7.9	230	2.29	5.3	2.9	4.8	41	0.1	0.2	0.2	50	0.51	0.052	16
REP F061	QC	0.5	26.4	10.4	55	<0.1	19.3	8.1	233	2.28	5.3	5.3	4.8	40	0.1	0.3	0.2	52	0.51	0.051	16
FO-026	Soil	1.2	11.1	13.2	39	<0.1	12.6	5.4	151	2.15	5.8	1.1	3.0	14	0.2	0.2	0.2	58	0.12	0.021	6
REP FO-026	QC	1.1	11.0	13.4	40	<0.1	12.9	5.6	151	2.15	5.7	4.8	2.9	15	0.2	0.2	0.3	57	0.12	0.021	7
F030	Soil	1.7	19.4	41.5	91	<0.1	16.4	12.2	686	2.32	6.3	1.4	5.1	26	0.4	0.2	0.5	49	0.27	0.052	18
REP F030	QC	1.6	20.1	43.5	93	<0.1	17.0	12.7	743	2.46	6.7	1.5	4.8	27	0.5	0.2	0.4	51	0.28	0.054	18
932949	Soil	1.9	17.4	365.6	184	0.2	10.6	4.3	269	2.58	7.8	1.9	20.6	22	0.7	0.3	1.1	34	0.09	0.028	37
REP 932949	QC	1.9	17.7	363.6	184	0.2	11.5	4.2	266	2.58	8.2	1.6	21.3	22	0.7	0.2	1.1	34	0.08	0.027	38
932913	Soil	1.1	15.0	69.3	165	0.3	8.6	6.0	597	2.71	7.4	0.9	0.8	13	0.2	0.2	1.2	54	0.11	0.025	4
REP 932913	QC	1.0	14.5	67.4	156	0.2	8.1	5.8	589	2.65	7.5	1.1	0.8	13	0.1	0.2	1.1	51	0.10	0.026	4
932934	Soil	0.8	39.7	62.1	132	<0.1	15.3	14.1	480	3.24	7.5	2.4	1.6	13	0.2	0.3	0.3	60	0.15	0.035	5
REP 932934	QC	0.9	42.4	63.6	133	<0.1	15.3	14.5	501	3.36	7.6	2.2	1.6	14	0.2	0.3	0.3	62	0.15	0.037	5
FO-020	Soil	0.8	19.9	11.4	48	<0.1	19.8	7.6	284	2.05	4.2	0.9	4.1	39	0.2	0.2	0.2	49	0.47	0.033	15
REP FO-020	QC	0.7	20.1	10.9	48	<0.1	19.9	8.1	288	2.09	4.3	1.2	4.1	40	0.1	0.2	0.2	51	0.49	0.034	16
Reference Materials																					
STD DS8	Standard	13.9	106.8	124.2	310	1.8	37.5	7.5	592	2.37	25.5	103.3	7.4	70	2.3	5.1	7.4	41	0.66	0.079	13
STD DS8	Standard	12.3	103.5	120.7	298	1.8	34.3	7.1	557	2.21	24.3	92.7	7.4	67	2.3	5.0	7.6	39	0.61	0.075	12
STD DS8	Standard	12.0	105.7	117.9	310	1.7	37.0	7.4	587	2.33	26.8	93.0	8.1	67	2.1	4.9	7.4	40	0.62	0.082	12
STD DS8	Standard	13.4	108.7	125.8	318	1.7	36.7	7.2	610	2.41	27.7	101.6	6.4	65	2.4	4.4	6.3	41	0.66	0.082	11
STD DS8	Standard	11.1	110.9	134.0	323	1.9	40.4	7.7	618	2.48	28.1	113.6	6.2	68	2.6	4.5	6.5	42	0.66	0.087	11
STD DS8	Standard	12.4	106.8	123.4	310	2.0	36.9	7.2	583	2.32	26.0	116.9	6.0	65	2.2	4.2	6.2	40	0.64	0.077	12
STD DS8	Standard	13.5	112.5	126.9	311	1.9	37.6	7.5	620	2.52	26.9	122.7	7.0	72	2.4	4.4	6.1	42	0.69	0.082	14
STD DS8	Standard	12.8	113.1	120.9	319	1.8	39.1	7.9	618	2.52	27.1	122.3	6.5	66	2.0	4.5	7.1	43	0.67	0.079	13
STD DS8	Standard	12.5	109.9	121.1	314	1.8	38.7	7.6	630	2.52	26.9	121.6	6.1	66	2.4	4.2	6.9	43	0.71	0.083	12

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

QUALITY CONTROL REPORT WHI11000661.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
Pulp Duplicates																	
933082	Soil	23	1.45	85	0.141	<20	2.33	0.007	0.35	<0.1	0.02	1.9	0.4	<0.05	7	<0.5	<0.2
REP 933082	QC	22	1.41	87	0.141	<20	2.23	0.006	0.35	<0.1	0.04	1.9	0.4	<0.05	7	<0.5	<0.2
SQE082	Soil	31	0.47	243	0.076	<20	1.90	0.015	0.05	<0.1	0.02	3.2	<0.1	<0.05	5	<0.5	<0.2
REP SQE082	QC	33	0.46	241	0.082	<20	1.81	0.015	0.05	0.1	0.03	3.5	<0.1	<0.05	5	<0.5	<0.2
F061	Soil	30	0.50	210	0.096	<20	1.68	0.028	0.05	<0.1	0.05	3.7	<0.1	<0.05	5	<0.5	<0.2
REP F061	QC	29	0.50	207	0.097	<20	1.65	0.028	0.05	<0.1	0.05	3.8	<0.1	<0.05	5	<0.5	<0.2
FO-026	Soil	22	0.28	117	0.068	<20	1.35	0.009	0.04	<0.1	0.02	1.6	<0.1	<0.05	6	<0.5	<0.2
REP FO-026	QC	22	0.29	121	0.071	<20	1.40	0.010	0.04	<0.1	0.03	1.7	<0.1	<0.05	6	<0.5	<0.2
F030	Soil	26	0.58	124	0.060	<20	1.44	0.012	0.06	0.3	0.03	2.7	0.1	<0.05	5	<0.5	<0.2
REP F030	QC	26	0.61	124	0.065	<20	1.51	0.013	0.06	0.8	0.03	2.7	0.1	<0.05	5	<0.5	<0.2
932949	Soil	24	0.30	130	0.065	<20	0.83	0.007	0.09	<0.1	0.03	1.0	<0.1	0.06	4	<0.5	<0.2
REP 932949	QC	26	0.30	132	0.067	<20	0.81	0.006	0.09	<0.1	0.03	1.1	0.1	0.07	4	<0.5	<0.2
932913	Soil	13	0.82	84	0.091	<20	1.31	0.005	0.05	<0.1	0.02	1.1	<0.1	<0.05	6	<0.5	<0.2
REP 932913	QC	12	0.83	85	0.085	<20	1.30	0.004	0.05	<0.1	0.02	1.0	<0.1	<0.05	6	0.7	<0.2
932934	Soil	19	0.76	98	0.094	<20	1.91	0.007	0.12	<0.1	0.02	1.9	0.2	<0.05	5	<0.5	<0.2
REP 932934	QC	19	0.79	101	0.094	<20	1.97	0.006	0.13	<0.1	0.03	2.1	0.2	<0.05	5	<0.5	<0.2
FO-020	Soil	33	0.48	227	0.079	<20	1.55	0.019	0.05	<0.1	0.03	3.8	<0.1	<0.05	5	<0.5	<0.2
REP FO-020	QC	33	0.49	230	0.081	<20	1.59	0.020	0.05	<0.1	0.02	4.0	<0.1	<0.05	5	<0.5	<0.2
Reference Materials																	
STD DS8	Standard	115	0.59	287	0.121	<20	0.84	0.083	0.42	2.6	0.20	2.1	4.9	0.16	4	5.2	4.5
STD DS8	Standard	108	0.56	276	0.111	<20	0.82	0.078	0.39	2.4	0.21	1.9	5.0	0.14	4	4.7	4.6
STD DS8	Standard	113	0.58	286	0.111	<20	0.82	0.076	0.40	2.6	0.19	1.9	4.9	0.17	4	4.9	4.1
STD DS8	Standard	114	0.60	289	0.108	<20	0.86	0.083	0.41	3.4	0.20	1.9	5.4	0.18	4	5.2	5.1
STD DS8	Standard	116	0.61	294	0.108	<20	0.89	0.086	0.42	3.0	0.20	2.0	5.5	0.18	4	5.1	4.8
STD DS8	Standard	107	0.58	279	0.107	<20	0.84	0.080	0.40	2.7	0.19	2.0	5.4	0.16	4	5.5	4.7
STD DS8	Standard	117	0.60	297	0.117	<20	0.91	0.090	0.42	2.5	0.22	2.0	5.5	0.18	5	5.8	4.8
STD DS8	Standard	122	0.60	295	0.113	<20	0.89	0.082	0.41	2.7	0.20	2.0	5.6	0.14	5	5.4	5.6
STD DS8	Standard	119	0.62	287	0.117	<20	0.89	0.087	0.44	2.7	0.22	2.1	5.3	0.17	5	4.8	5.5

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

QUALITY CONTROL REPORT WHI11000661.1

		1DX Mo ppm 0.1	1DX Cu ppm 0.1	1DX Pb ppm 0.1	1DX Zn ppm 1	1DX Ag ppm 0.1	1DX Ni ppm 0.1	1DX Co ppm 0.1	1DX Mn ppm 1	1DX Fe % 0.01	1DX As ppm 0.5	1DX Au ppb 0.5	1DX Th ppm 0.1	1DX Sr ppm 1	1DX Cd ppm 0.1	1DX Sb ppm 0.1	1DX Bi ppm 0.1	1DX V ppm 2	1DX Ca % 0.01	1DX P % 0.001	1DX La ppm 1
STD OREAS45CA	Standard	0.8	423.3	22.4	55	0.3	201.8	78.9	829	14.12	3.3	44.4	7.4	15	<0.1	0.1	0.2	180	0.36	0.035	15
STD OREAS45CA	Standard	0.7	426.5	22.1	54	0.3	197.8	79.5	846	14.54	3.7	38.6	7.3	16	0.1	<0.1	0.2	181	0.38	0.033	15
STD OREAS45CA	Standard	0.8	437.3	21.7	55	0.3	207.7	81.9	839	14.39	3.6	38.3	7.4	16	0.1	<0.1	0.2	185	0.36	0.035	15
STD OREAS45CA	Standard	0.8	467.7	20.7	56	0.3	215.2	86.3	887	14.67	3.9	37.1	6.8	15	0.1	0.1	0.2	191	0.40	0.039	14
STD OREAS45CA	Standard	0.8	482.9	20.5	56	0.2	222.5	87.9	873	15.26	3.9	33.6	6.9	15	<0.1	<0.1	0.2	197	0.41	0.038	14
STD OREAS45CA	Standard	0.8	474.7	21.3	58	0.3	229.4	84.7	914	15.86	4.3	36.3	6.6	16	0.1	<0.1	0.2	199	0.40	0.039	14
STD OREAS45CA	Standard	0.7	489.1	20.2	58	0.3	233.6	85.7	886	15.68	3.5	34.0	6.7	16	<0.1	<0.1	0.2	191	0.39	0.038	15
STD OREAS45CA	Standard	0.7	483.1	20.5	58	0.3	233.6	88.3	887	15.53	3.1	36.8	6.8	16	0.2	<0.1	0.2	191	0.39	0.034	15
STD OREAS45CA	Standard	0.7	478.0	19.6	59	0.3	231.2	86.3	865	15.36	3.5	37.6	6.8	15	<0.1	<0.1	0.2	184	0.38	0.034	15
STD DS8 Expected		13.44	110	123	312	1.69	38.1	7.5	615	2.46	26	107	6.89	67.7	2.38	4.8	6.67	41.1	0.7	0.08	14.6
STD OREAS45CA Expected		1	494	20	60	0.275	240	92	943	15.69	3.8	43	7	15	0.1	0.13	0.19	215	0.4265	0.0385	15.9
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 12, 2011

QUALITY CONTROL REPORT WHI11000661.1

		1DX Cr ppm 1	1DX Mg % 0.01	1DX Ba ppm 1	1DX Ti % 0.001	1DX B ppm 20	1DX Al % 0.01	1DX Na % 0.001	1DX K % 0.01	1DX W ppm 0.1	1DX Hg ppm 0.01	1DX Sc ppm 0.1	1DX Tl ppm 0.1	1DX S % 0.05	1DX Ga ppm 1	1DX Se ppm 0.5	1DX Te ppm 0.2
STD OREAS45CA	Standard	546	0.13	154	0.119	<20	2.89	0.010	0.06	<0.1	0.02	32.6	<0.1	<0.05	16	<0.5	<0.2
STD OREAS45CA	Standard	554	0.12	158	0.120	<20	2.88	0.011	0.06	<0.1	0.02	32.3	<0.1	<0.05	16	<0.5	<0.2
STD OREAS45CA	Standard	568	0.13	152	0.123	<20	2.86	0.010	0.06	<0.1	0.02	33.1	<0.1	<0.05	16	<0.5	<0.2
STD OREAS45CA	Standard	605	0.13	159	0.114	<20	3.22	0.012	0.06	<0.1	0.03	31.8	<0.1	<0.05	17	<0.5	<0.2
STD OREAS45CA	Standard	638	0.13	160	0.121	<20	3.10	0.013	0.07	<0.1	0.03	33.1	<0.1	<0.05	17	<0.5	<0.2
STD OREAS45CA	Standard	652	0.14	156	0.123	<20	3.37	0.012	0.07	<0.1	0.03	34.6	<0.1	<0.05	18	0.5	<0.2
STD OREAS45CA	Standard	657	0.14	157	0.127	<20	3.43	0.013	0.07	<0.1	0.03	34.2	<0.1	<0.05	18	<0.5	<0.2
STD OREAS45CA	Standard	652	0.14	164	0.123	<20	3.19	0.012	0.06	<0.1	0.04	36.5	<0.1	<0.05	18	0.6	<0.2
STD OREAS45CA	Standard	617	0.14	155	0.116	<20	3.29	0.012	0.07	<0.1	0.03	34.5	<0.1	<0.05	18	<0.5	<0.2
STD DS8 Expected		115	0.6045	279	0.113	2.6	0.93	0.0883	0.41	3	0.192	2.3	5.4	0.1679	4.7	5.23	5
STD OREAS45CA Expected		709	0.1358	164	0.128		3.592	0.0075	0.0717		0.03	39.7	0.07	0.021	18.4	0.5	
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada

www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Submitted By: Mike MacIsaac
Receiving Lab: Canada-Whitehorse
Received: July 15, 2011
Report Date: August 08, 2011
Page: 1 of 3

CERTIFICATE OF ANALYSIS WHI11000591.1

CLIENT JOB INFORMATION

Project: FoGo
Shipment ID:
P.O. Number
Number of Samples: 45

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Method Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
R200-250	45	Crush, split and pulverize 250 g rock to 200 mesh			WHI
G601	45	Fire Assay fusion Au by ICP-ES	30	Completed	VAN

SAMPLE DISPOSAL

DISP-PLP Dispose of Pulp After 90 days
DISP-RJT Dispose of Reject After 90 days

Acme does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

ADDITIONAL COMMENTS

Invoice To: Metals Creek Resources
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3
Canada

CC: Don Heerema
Wayne Reid
Sandy Stares

BRITISH COLUMBIA CERTIFIED ASSAYER
RAYMOND CHAN
CHIEF ASSAYER

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Acme assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 08, 2011

CERTIFICATE OF ANALYSIS WHI11000591.1

	Method	WGHT	G6
	Analyte	Wgt	Au
	Unit	kg	gm/t
	MDL	0.01	0.005
K935001	Rock	1.10	0.006
K935002	Rock	1.10	<0.005
K935003	Rock	1.56	<0.005
K935004	Rock	1.16	<0.005
K935005	Rock	0.95	<0.005
K935006	Rock	1.11	<0.005
K935007	Rock	0.98	<0.005
K935008	Rock	1.75	<0.005
K935009	Rock	1.39	<0.005
K935010	Rock	1.57	<0.005
K935011	Rock	0.92	<0.005
K935012	Rock	0.98	<0.005
K935013	Rock	1.31	<0.005
K935014	Rock	1.06	<0.005
K935015	Rock	1.04	<0.005
K935016	Rock	0.89	<0.005
K935017	Rock	0.98	<0.005
K935018	Rock	0.99	<0.005
K932801	Rock	1.12	<0.005
K932802	Rock	1.22	<0.005
K932803	Rock	0.78	<0.005
K932804	Rock	0.97	<0.005
K932805	Rock	1.34	<0.005
K932806	Rock	1.38	<0.005
K932807	Rock	1.27	<0.005
K932808	Rock	1.11	<0.005
K932809	Rock	0.69	<0.005
K932810	Rock	0.78	<0.005
K932811	Rock	0.76	<0.005
K932812	Rock	1.05	<0.005

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 08, 2011

CERTIFICATE OF ANALYSIS WHI11000591.1

		Method	WGHT	G6
		Analyte	Wgt	Au
		Unit	kg	gm/t
		MDL	0.01	0.005
K932813	Rock		0.93	<0.005
K932814	Rock		1.51	<0.005
K932815	Rock		0.65	<0.005
K932816	Rock		0.76	<0.005
K932817	Rock		0.98	<0.005
A	Rock		1.08	<0.005
B	Rock		0.95	<0.005
C	Rock		1.34	<0.005
D	Rock		1.51	<0.005
E	Rock		0.88	<0.005
F	Rock		1.10	<0.005
G	Rock		0.92	<0.005
H	Rock		0.98	0.010
I	Rock		1.20	0.006
J	Rock		1.01	<0.005

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Metals Creek Resources**
Suite 329, 1100 Memorial Ave.
Thunder Bay ON P7B 4A3 Canada

Project: FoGo
Report Date: August 08, 2011

QUALITY CONTROL REPORT WHI11000591.1

		Method	WGHT	G6
		Analyte	Wgt	Au
		Unit	kg	gm/t
		MDL	0.01	0.005
Pulp Duplicates				
REP K935002	QC			<0.005
K932814	Rock		1.51	<0.005
REP K932814	QC			<0.005
G	Rock		0.92	<0.005
REP G	QC			0.006
Core Reject Duplicates				
K935002	Rock		1.10	<0.005
DUP K935002	QC			<0.005
B	Rock		0.95	<0.005
DUP B	QC			<0.005
Reference Materials				
STD OXH82	Standard			1.295
STD OXH82	Standard			1.320
STD OXH82	Standard			1.325
STD OXK79	Standard			3.709
STD OXK79	Standard			3.594
STD OXK79	Standard			3.813
STD OXH82 Expected				1.278
STD OXK79 Expected				3.532
BLK	Blank			<0.005
BLK	Blank			<0.005
BLK	Blank			<0.005
BLK	Blank			<0.005
BLK	Blank			<0.005
BLK	Blank			<0.005
Prep Wash				
G1	Prep Blank			<0.005
G1	Prep Blank			<0.005

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Appendix VI

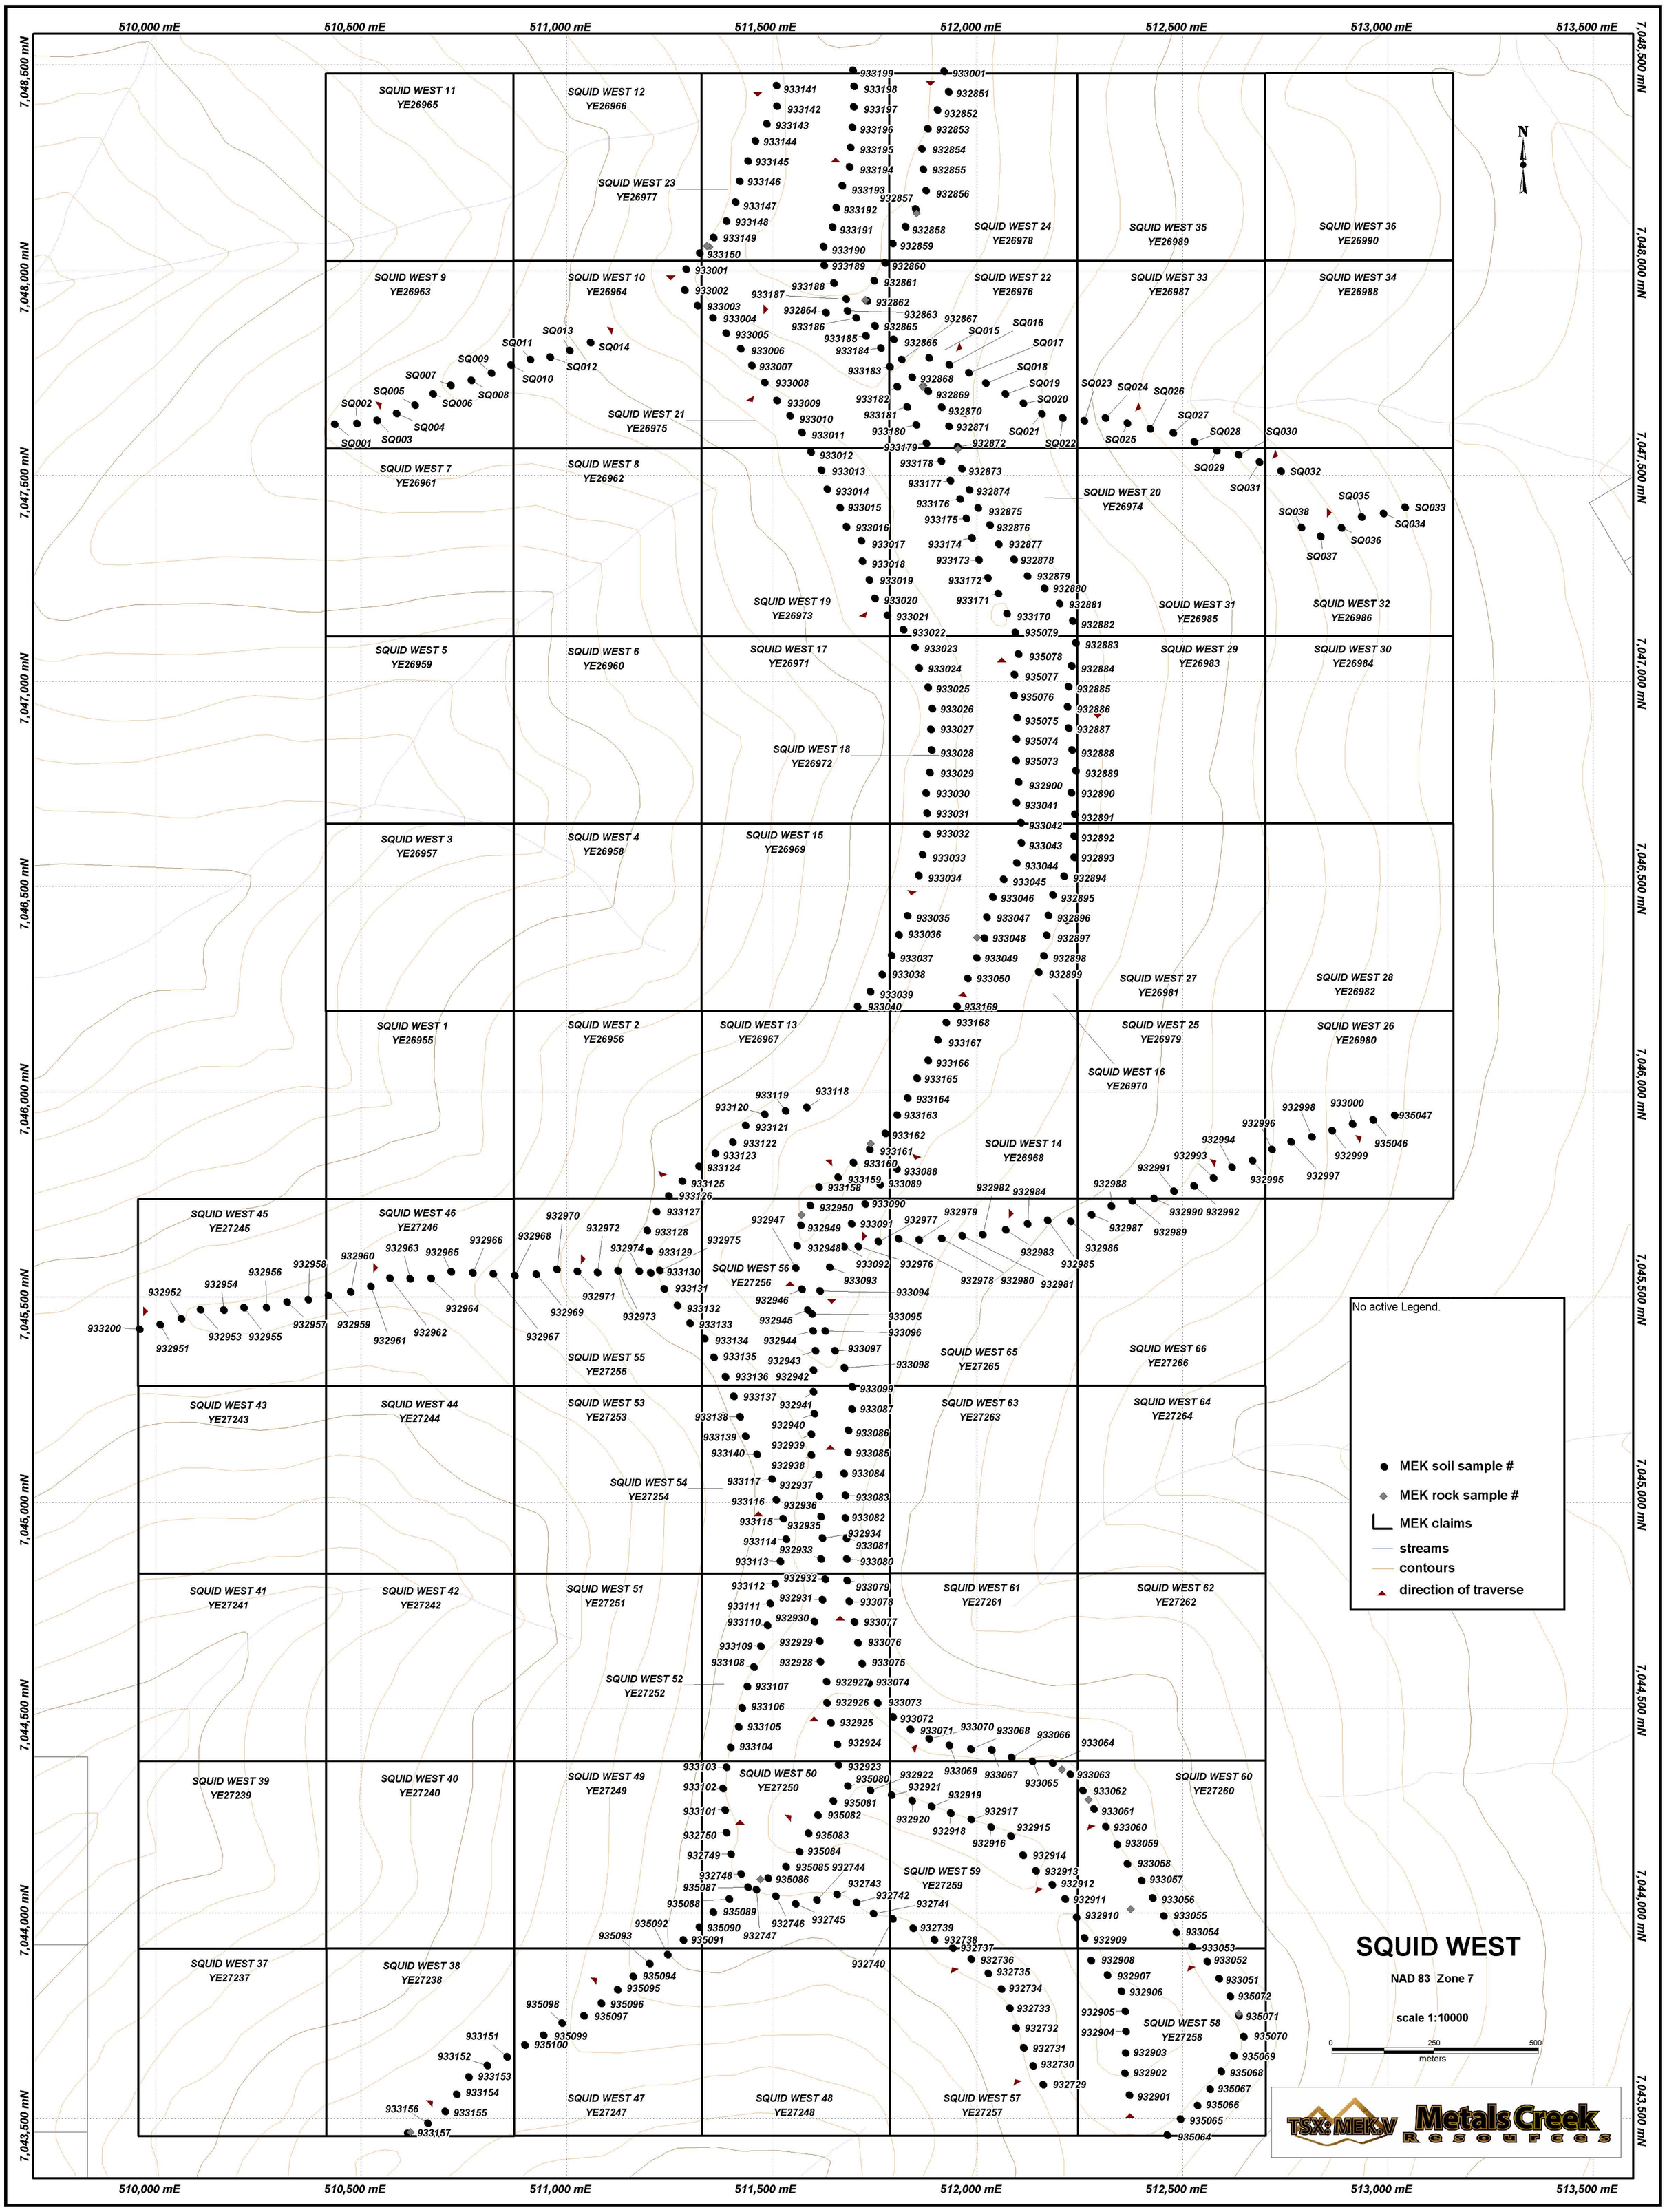
510,000 mE
510,500 mE
511,000 mE
511,500 mE
512,000 mE
512,500 mE
513,000 mE
513,500 mE
7,048,500 mN
7,048,000 mN
7,047,500 mN
7,047,000 mN
7,046,500 mN
7,046,000 mN
7,045,500 mN
7,045,000 mN
7,044,500 mN
7,044,000 mN
7,043,500 mN
N
SQUID WEST 11 YE26965
SQUID WEST 12 YE26966
SQUID WEST 23 YE26977
SQUID WEST 24 YE26978
SQUID WEST 35 YE26989
SQUID WEST 36 YE26990
SQUID WEST 9 YE26963
SQUID WEST 10 YE26964
SQUID WEST 22 YE26976
SQUID WEST 33 YE26987
SQUID WEST 34 YE26988
SQUID WEST 21 YE26975
SQUID WEST 7 YE26961
SQUID WEST 8 YE26962
SQUID WEST 20 YE26974
SQUID WEST 19 YE26973
SQUID WEST 31 YE26985
SQUID WEST 32 YE26986
SQUID WEST 5 YE26959
SQUID WEST 6 YE26960
SQUID WEST 17 YE26971
SQUID WEST 29 YE26983
SQUID WEST 30 YE26984
SQUID WEST 18 YE26972
SQUID WEST 3 YE26957
SQUID WEST 4 YE26958
SQUID WEST 15 YE26969
SQUID WEST 27 YE26981
SQUID WEST 28 YE26982
SQUID WEST 1 YE26955
SQUID WEST 2 YE26956
SQUID WEST 13 YE26967
SQUID WEST 16 YE26970
SQUID WEST 25 YE26979
SQUID WEST 26 YE26980
SQUID WEST 14 YE26968
SQUID WEST 45 YE27245
SQUID WEST 46 YE27246
SQUID WEST 56 YE27256
SQUID WEST 55 YE27255
SQUID WEST 65 YE27265
SQUID WEST 66 YE27266
SQUID WEST 43 YE27243
SQUID WEST 44 YE27244
SQUID WEST 53 YE27253
SQUID WEST 63 YE27263
SQUID WEST 64 YE27264
SQUID WEST 54 YE27254
SQUID WEST 41 YE27241
SQUID WEST 42 YE27242
SQUID WEST 51 YE27251
SQUID WEST 61 YE27261
SQUID WEST 62 YE27262
SQUID WEST 52 YE27252
SQUID WEST 39 YE27239
SQUID WEST 40 YE27240
SQUID WEST 49 YE27249
SQUID WEST 50 YE27250
SQUID WEST 59 YE27259
SQUID WEST 60 YE27260
SQUID WEST 37 YE27237
SQUID WEST 38 YE27238
SQUID WEST 58 YE27258
SQUID WEST 47 YE27247
SQUID WEST 48 YE27248
SQUID WEST 57 YE27257
No active Legend.
MEK soil sample #
MEK rock sample #
MEK claims
streams
contours
direction of traverse
SQUID WEST
NAD 83 Zone 7
scale 1:10000
0
250
500
meters
TSX: MEK.V
Metals Creek Resources

510,000 mE | 510,500 mE | 511,000 mE | 511,500 mE | 512,000 mE | 512,500 mE | 513,000 mE | 513,500 mE

7,048,500 mN | 7,048,000 mN | 7,047,500 mN | 7,047,000 mN | 7,046,500 mN | 7,046,000 mN | 7,045,500 mN | 7,045,000 mN | 7,044,500 mN | 7,044,000 mN | 7,043,500 mN

SQUID WEST 11 YE26965
SQUID WEST 12 YE26966
SQUID WEST 23 YE26977
SQUID WEST 24 YE26978
SQUID WEST 35 YE26989
SQUID WEST 36 YE26990
SQUID WEST 9 YE26963
SQUID WEST 10 YE26964
SQUID WEST 22 YE26976
SQUID WEST 33 YE26987
SQUID WEST 34 YE26988
SQUID WEST 21 YE26975
SQUID WEST 7 YE26961
SQUID WEST 8 YE26962
SQUID WEST 20 YE26974
SQUID WEST 19 YE26973
SQUID WEST 31 YE26985
SQUID WEST 32 YE26986
SQUID WEST 5 YE26959
SQUID WEST 6 YE26960
SQUID WEST 17 YE26971
SQUID WEST 29 YE26983
SQUID WEST 30 YE26984
SQUID WEST 18 YE26972
SQUID WEST 3 YE26957
SQUID WEST 4 YE26958
SQUID WEST 15 YE26969
SQUID WEST 27 YE26981
SQUID WEST 28 YE26982
SQUID WEST 1 YE26955
SQUID WEST 2 YE26956
SQUID WEST 13 YE26967
SQUID WEST 25 YE26979
SQUID WEST 26 YE26980
SQUID WEST 16 YE26970
SQUID WEST 14 YE26968
SQUID WEST 45 YE27245
SQUID WEST 46 YE27246
SQUID WEST 56 YE27256
SQUID WEST 55 YE27255
SQUID WEST 65 YE27265
SQUID WEST 66 YE27266
SQUID WEST 43 YE27243
SQUID WEST 44 YE27244
SQUID WEST 53 YE27253
SQUID WEST 63 YE27263
SQUID WEST 64 YE27264
SQUID WEST 54 YE27254
SQUID WEST 41 YE27241
SQUID WEST 42 YE27242
SQUID WEST 51 YE27251
SQUID WEST 61 YE27261
SQUID WEST 62 YE27262
SQUID WEST 52 YE27252
SQUID WEST 39 YE27239
SQUID WEST 40 YE27240
SQUID WEST 49 YE27249
SQUID WEST 50 YE27250
SQUID WEST 60 YE27260
SQUID WEST 59 YE27259
SQUID WEST 37 YE27237
SQUID WEST 38 YE27238
SQUID WEST 58 YE27258
SQUID WEST 47 YE27247
SQUID WEST 48 YE27248
SQUID WEST 57 YE27257

N

Squid_West Au in soils (ppb)

70 to 178	(0)	
30 to 70	(2)	
15 to 30	(1)	
5 to 15	(32)	
0 to 5	(414)	

Squid West Au in rock (g/t)

◆ <0.005

MEK claims
streams
contours
direction of traverse

SQUID WEST

NAD 83 Zone 7

scale 1:10000

0 250 500
meters

TSX: MEK.V Metals Creek Resources

510,000 mE | 510,500 mE | 511,000 mE | 511,500 mE | 512,000 mE | 512,500 mE | 513,000 mE | 513,500 mE

7,048,500 mN | 7,048,000 mN | 7,047,500 mN | 7,047,000 mN | 7,046,500 mN | 7,046,000 mN | 7,045,500 mN | 7,045,000 mN | 7,044,500 mN | 7,044,000 mN | 7,043,500 mN

SQUID WEST 11 YE26965
SQUID WEST 12 YE26966
SQUID WEST 23 YE26977
SQUID WEST 24 YE26978
SQUID WEST 35 YE26989
SQUID WEST 36 YE26990
SQUID WEST 9 YE26963
SQUID WEST 10 YE26964
SQUID WEST 22 YE26976
SQUID WEST 33 YE26987
SQUID WEST 34 YE26988
SQUID WEST 21 YE26975
SQUID WEST 7 YE26961
SQUID WEST 8 YE26962
SQUID WEST 20 YE26974
SQUID WEST 19 YE26973
SQUID WEST 31 YE26985
SQUID WEST 32 YE26986
SQUID WEST 5 YE26959
SQUID WEST 6 YE26960
SQUID WEST 17 YE26971
SQUID WEST 29 YE26983
SQUID WEST 30 YE26984
SQUID WEST 18 YE26972
SQUID WEST 3 YE26957
SQUID WEST 4 YE26958
SQUID WEST 15 YE26969
SQUID WEST 27 YE26981
SQUID WEST 28 YE26982
SQUID WEST 1 YE26955
SQUID WEST 2 YE26956
SQUID WEST 13 YE26967
SQUID WEST 25 YE26979
SQUID WEST 26 YE26980
SQUID WEST 16 YE26970
SQUID WEST 14 YE26968
SQUID WEST 45 YE27245
SQUID WEST 46 YE27246
SQUID WEST 56 YE27256
SQUID WEST 55 YE27255
SQUID WEST 65 YE27265
SQUID WEST 66 YE27266
SQUID WEST 43 YE27243
SQUID WEST 44 YE27244
SQUID WEST 53 YE27253
SQUID WEST 63 YE27263
SQUID WEST 64 YE27264
SQUID WEST 54 YE27254
SQUID WEST 41 YE27241
SQUID WEST 42 YE27242
SQUID WEST 51 YE27251
SQUID WEST 61 YE27261
SQUID WEST 62 YE27262
SQUID WEST 52 YE27252
SQUID WEST 39 YE27239
SQUID WEST 40 YE27240
SQUID WEST 49 YE27249
SQUID WEST 50 YE27250
SQUID WEST 60 YE27260
SQUID WEST 59 YE27259
SQUID WEST 37 YE27237
SQUID WEST 38 YE27238
SQUID WEST 58 YE27258
SQUID WEST 47 YE27247
SQUID WEST 48 YE27248
SQUID WEST 57 YE27257

N

Squid West Cu in soils (ppm)

200 to 999	(1)
100 to 200	(20)
50 to 100	(89)
25 to 50	(98)
0 to 25	(241)

MEK claims
streams
contours
direction of traverse

SQUID WEST

NAD 83 Zone 7

scale 1:10000

0 250 500
meters

TSX: MEK.V Metals Creek Resources

510,000 mE | 510,500 mE | 511,000 mE | 511,500 mE | 512,000 mE | 512,500 mE | 513,000 mE | 513,500 mE

7,048,500 mN | 7,048,000 mN | 7,047,500 mN | 7,047,000 mN | 7,046,500 mN | 7,046,000 mN | 7,045,500 mN | 7,045,000 mN | 7,044,500 mN | 7,044,000 mN | 7,043,500 mN

SQUID WEST 11 YE26965
SQUID WEST 12 YE26966
SQUID WEST 23 YE26977
SQUID WEST 24 YE26978
SQUID WEST 35 YE26989
SQUID WEST 36 YE26990
SQUID WEST 9 YE26963
SQUID WEST 10 YE26964
SQUID WEST 22 YE26976
SQUID WEST 33 YE26987
SQUID WEST 34 YE26988
SQUID WEST 21 YE26975
SQUID WEST 7 YE26961
SQUID WEST 8 YE26962
SQUID WEST 20 YE26974
SQUID WEST 19 YE26973
SQUID WEST 31 YE26985
SQUID WEST 32 YE26986
SQUID WEST 5 YE26959
SQUID WEST 6 YE26960
SQUID WEST 17 YE26971
SQUID WEST 29 YE26983
SQUID WEST 30 YE26984
SQUID WEST 18 YE26972
SQUID WEST 3 YE26957
SQUID WEST 4 YE26958
SQUID WEST 15 YE26969
SQUID WEST 27 YE26981
SQUID WEST 28 YE26982
SQUID WEST 1 YE26955
SQUID WEST 2 YE26956
SQUID WEST 13 YE26967
SQUID WEST 25 YE26979
SQUID WEST 26 YE26980
SQUID WEST 16 YE26970
SQUID WEST 14 YE26968
SQUID WEST 45 YE27245
SQUID WEST 46 YE27246
SQUID WEST 56 YE27256
SQUID WEST 55 YE27255
SQUID WEST 65 YE27265
SQUID WEST 66 YE27266
SQUID WEST 43 YE27243
SQUID WEST 44 YE27244
SQUID WEST 53 YE27253
SQUID WEST 63 YE27263
SQUID WEST 64 YE27264
SQUID WEST 54 YE27254
SQUID WEST 41 YE27241
SQUID WEST 42 YE27242
SQUID WEST 51 YE27251
SQUID WEST 61 YE27261
SQUID WEST 62 YE27262
SQUID WEST 52 YE27252
SQUID WEST 39 YE27239
SQUID WEST 40 YE27240
SQUID WEST 49 YE27249
SQUID WEST 50 YE27250
SQUID WEST 60 YE27260
SQUID WEST 59 YE27259
SQUID WEST 37 YE27237
SQUID WEST 38 YE27238
SQUID WEST 58 YE27258
SQUID WEST 47 YE27247
SQUID WEST 48 YE27248
SQUID WEST 57 YE27257

N

Squid West Pb in soils (ppm)

- 250 to 999 (22)
- 140 to 250 (30)
- 80 to 140 (72)
- 40 to 80 (98)
- 0 to 40 (227)

MEK claims
streams
contours
direction of traverse

SQUID WEST

NAD 83 Zone 7

scale 1:10000

0 250 500
meters

TSX: MEK.V Metals Creek Resources

510,000 mE | 510,500 mE | 511,000 mE | 511,500 mE | 512,000 mE | 512,500 mE | 513,000 mE | 513,500 mE

7,048,500 mN | 7,048,000 mN | 7,047,500 mN | 7,047,000 mN | 7,046,500 mN | 7,046,000 mN | 7,045,500 mN | 7,045,000 mN | 7,044,500 mN | 7,044,000 mN | 7,043,500 mN

SQUID WEST 11 YE26965
SQUID WEST 12 YE26966
SQUID WEST 23 YE26977
SQUID WEST 24 YE26978
SQUID WEST 35 YE26989
SQUID WEST 36 YE26990
SQUID WEST 9 YE26963
SQUID WEST 10 YE26964
SQUID WEST 22 YE26976
SQUID WEST 33 YE26987
SQUID WEST 34 YE26988
SQUID WEST 21 YE26975
SQUID WEST 7 YE26961
SQUID WEST 8 YE26962
SQUID WEST 20 YE26974
SQUID WEST 19 YE26973
SQUID WEST 31 YE26985
SQUID WEST 32 YE26986
SQUID WEST 5 YE26959
SQUID WEST 6 YE26960
SQUID WEST 17 YE26971
SQUID WEST 29 YE26983
SQUID WEST 30 YE26984
SQUID WEST 18 YE26972
SQUID WEST 3 YE26957
SQUID WEST 4 YE26958
SQUID WEST 15 YE26969
SQUID WEST 27 YE26981
SQUID WEST 28 YE26982
SQUID WEST 1 YE26955
SQUID WEST 2 YE26956
SQUID WEST 13 YE26967
SQUID WEST 25 YE26979
SQUID WEST 26 YE26980
SQUID WEST 16 YE26970
SQUID WEST 14 YE26968
SQUID WEST 45 YE27245
SQUID WEST 46 YE27246
SQUID WEST 56 YE27256
SQUID WEST 55 YE27255
SQUID WEST 65 YE27265
SQUID WEST 66 YE27266
SQUID WEST 43 YE27243
SQUID WEST 44 YE27244
SQUID WEST 53 YE27253
SQUID WEST 63 YE27263
SQUID WEST 64 YE27264
SQUID WEST 54 YE27254
SQUID WEST 41 YE27241
SQUID WEST 42 YE27242
SQUID WEST 51 YE27251
SQUID WEST 61 YE27261
SQUID WEST 62 YE27262
SQUID WEST 52 YE27252
SQUID WEST 39 YE27239
SQUID WEST 40 YE27240
SQUID WEST 49 YE27249
SQUID WEST 50 YE27250
SQUID WEST 60 YE27260
SQUID WEST 59 YE27259
SQUID WEST 37 YE27237
SQUID WEST 38 YE27238
SQUID WEST 58 YE27258
SQUID WEST 47 YE27247
SQUID WEST 48 YE27248
SQUID WEST 57 YE27257

N

Squid West Zn in soils (ppm)

- 400 to 999 (21)
- 200 to 400 (60)
- 100 to 200 (91)
- 50 to 100 (170)
- 0 to 50 (107)

MEK claims
streams
contours
direction of traverse

SQUID WEST

NAD 83 Zone 7

scale 1:10000

0 250 500
meters

TSX: MEK.V Metals Creek Resources

Appendix VII

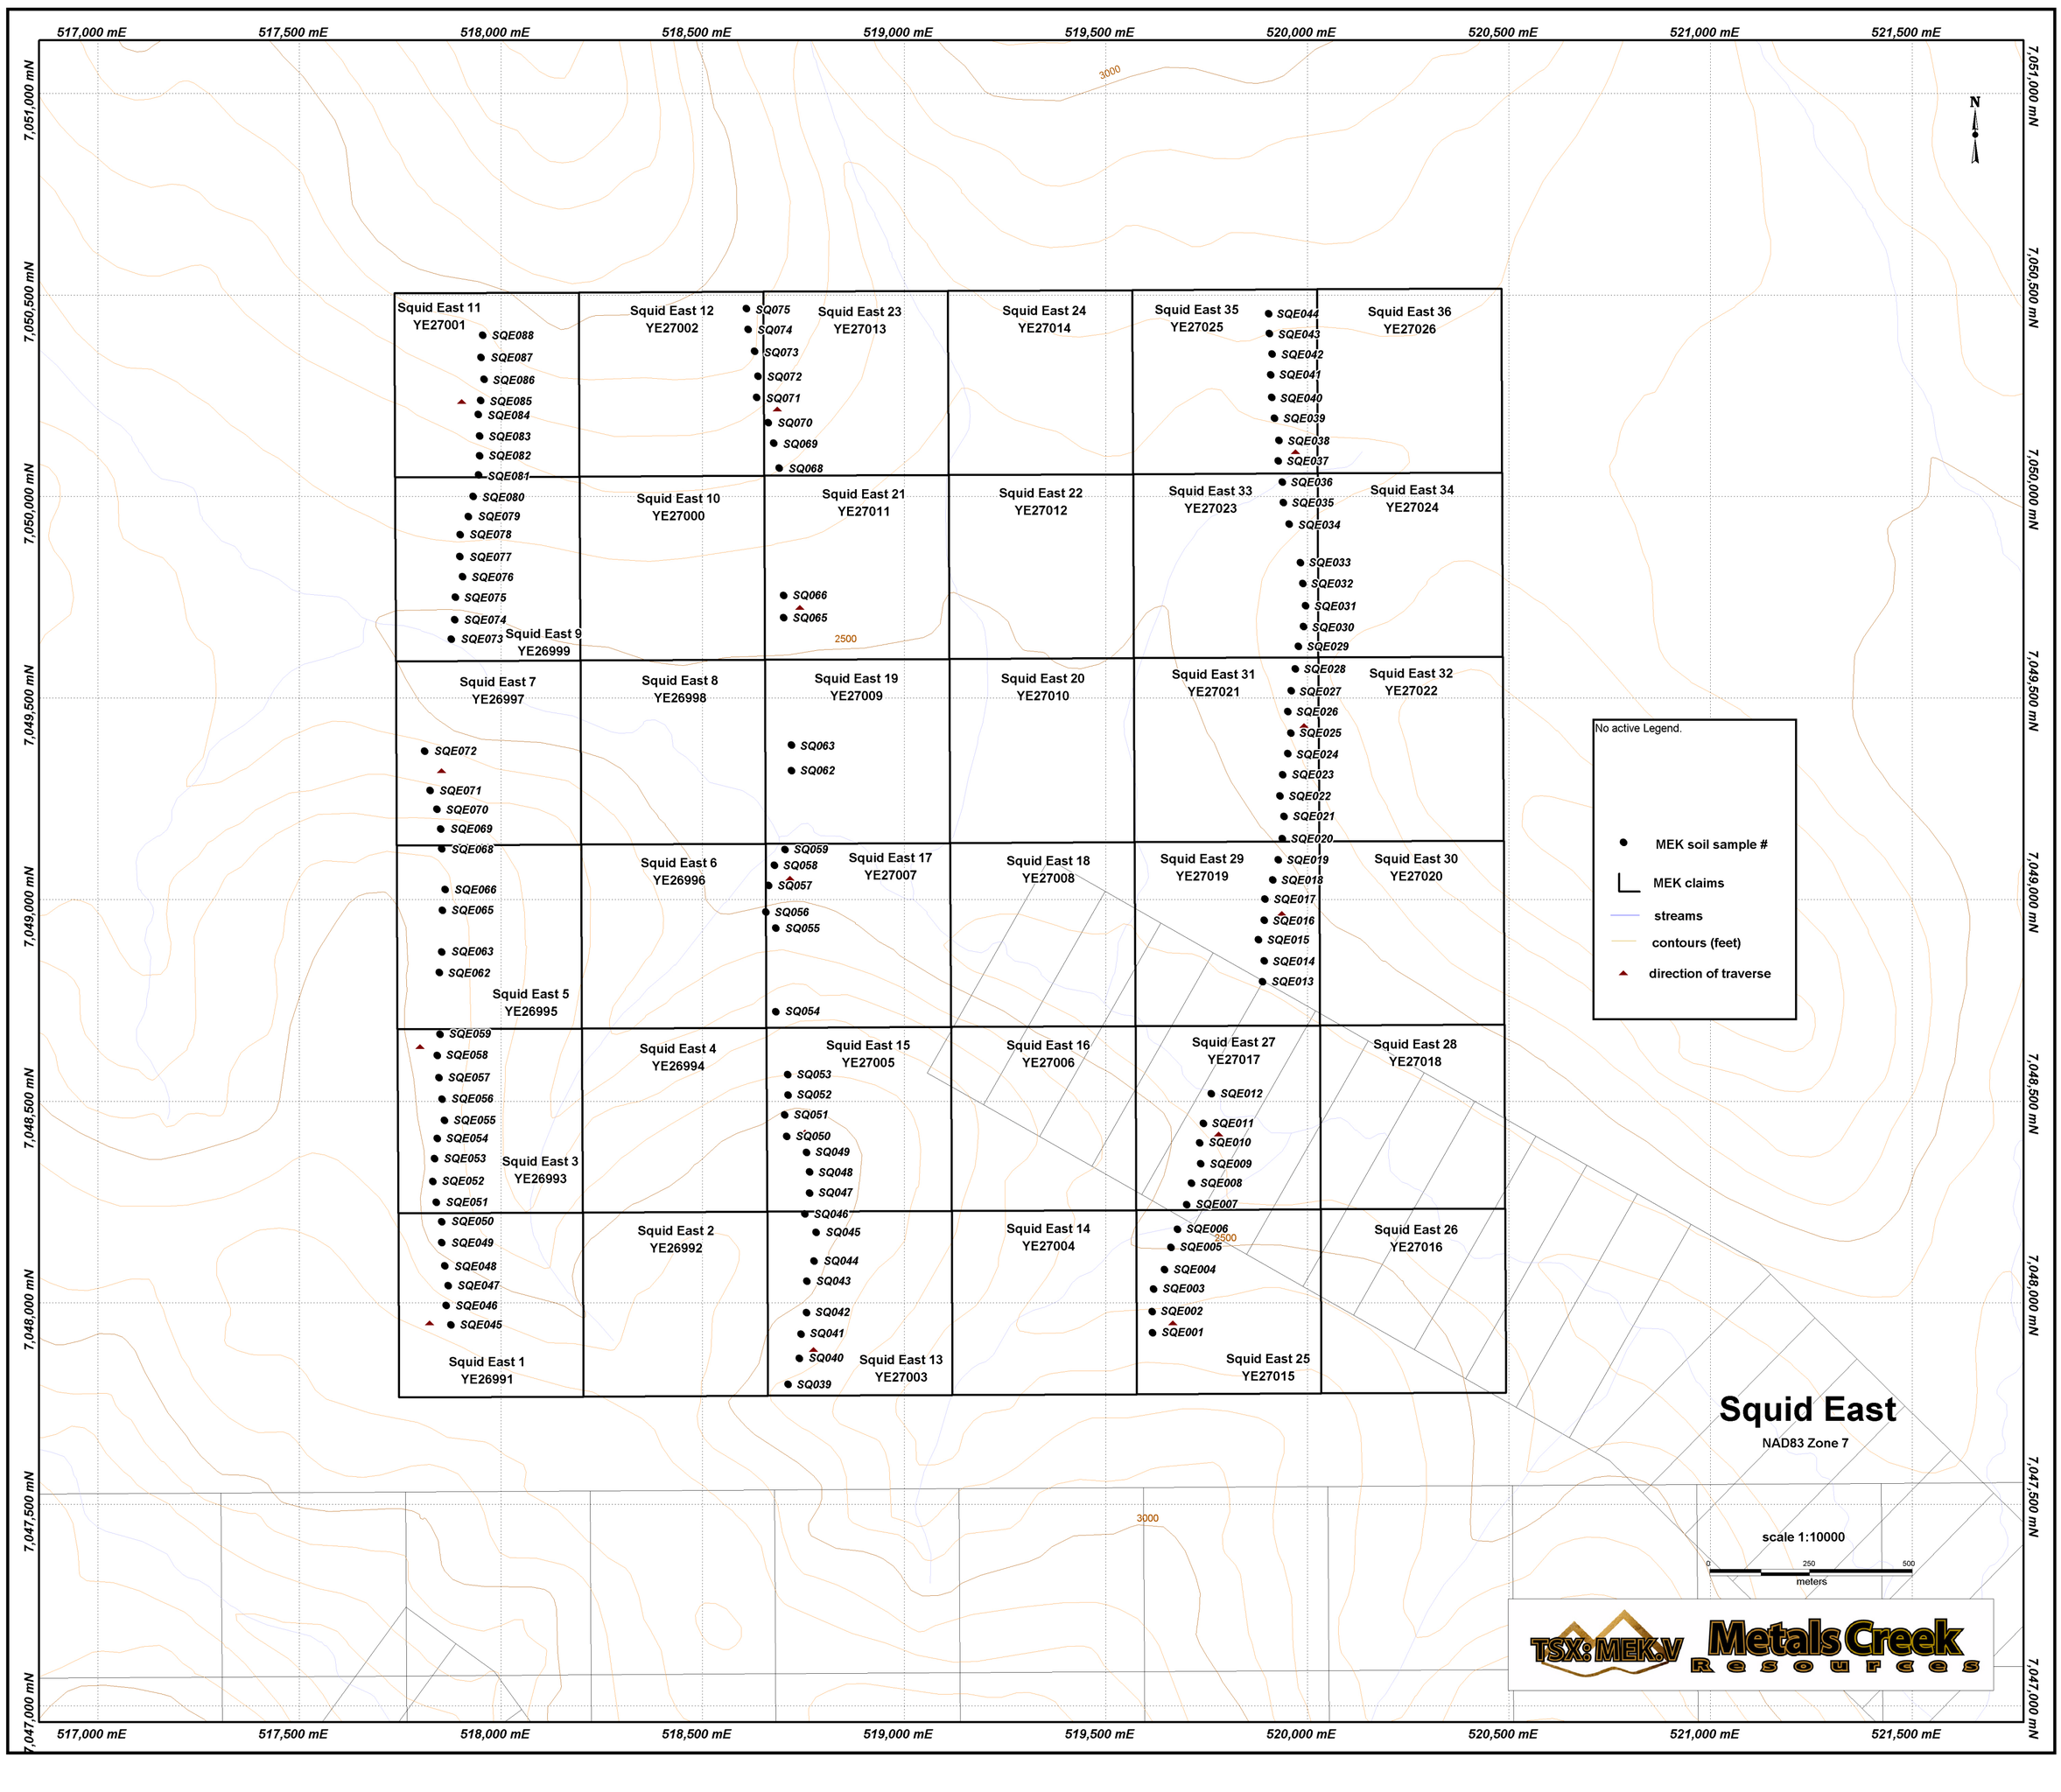
517,000 mE
517,500 mE
518,000 mE
518,500 mE
519,000 mE
519,500 mE
520,000 mE
520,500 mE
521,000 mE
521,500 mE
7,051,000 mN
7,050,500 mN
7,050,000 mN
7,049,500 mN
7,049,000 mN
7,048,500 mN
7,048,000 mN
7,047,500 mN
7,047,000 mN
N
3000
2500
Squid East 11 YE27001
SQE088
SQE087
SQE086
SQE085
SQE084
SQE083
SQE082
SQE081
Squid East 12 YE27002
SQ075
SQ074
SQ073
SQ072
SQ071
SQ070
SQ069
SQ068
Squid East 23 YE27013
Squid East 24 YE27014
Squid East 35 YE27025
SQE044
SQE043
SQE042
SQE041
SQE040
SQE039
SQE038
SQE037
Squid East 36 YE27026
SQE080
SQE079
SQE078
SQE077
SQE076
SQE075
SQE074
SQE073
Squid East 9 YE26999
Squid East 10 YE27000
Squid East 21 YE27011
SQ066
SQ065
Squid East 22 YE27012
Squid East 33 YE27023
SQE036
SQE035
SQE034
SQE033
SQE032
SQE031
SQE030
SQE029
Squid East 34 YE27024
Squid East 7 YE26997
SQE072
SQE071
SQE070
SQE069
SQE068
Squid East 8 YE26998
Squid East 19 YE27009
SQ063
SQ062
Squid East 20 YE27010
Squid East 31 YE27021
SQE028
SQE027
SQE026
SQE025
SQE024
SQE023
SQE022
SQE021
SQE020
Squid East 32 YE27022
Squid East 6 YE26996
SQ059
SQ058
SQ057
SQ056
SQ055
Squid East 17 YE27007
Squid East 18 YE27008
Squid East 29 YE27019
SQE019
SQE018
SQE017
SQE016
SQE015
SQE014
SQE013
Squid East 30 YE27020
SQE066
SQE065
SQE063
SQE062
Squid East 5 YE26995
SQ054
SQE059
SQE058
SQE057
SQE056
SQE055
SQE054
SQE053
SQE052
SQE051
Squid East 3 YE26993
Squid East 4 YE26994
Squid East 15 YE27005
SQ053
SQ052
SQ051
SQ050
SQ049
SQ048
SQ047
Squid East 16 YE27006
Squid East 27 YE27017
SQE012
SQE011
SQE010
SQE009
SQE008
SQE007
Squid East 28 YE27018
SQE050
SQE049
SQE048
SQE047
SQE046
SQE045
Squid East 1 YE26991
Squid East 2 YE26992
SQ046
SQ045
SQ044
SQ043
SQ042
SQ041
SQ040
SQ039
Squid East 13 YE27003
Squid East 14 YE27004
SQE006
SQE005
SQE004
SQE003
SQE002
SQE001
Squid East 25 YE27015
Squid East 26 YE27016
No active Legend.
MEK soil sample #
MEK claims
streams
contours (feet)
direction of traverse
Squid East
NAD83 Zone 7
scale 1:10000
0
250
500
meters
TSX: MEK.V
Metals Creek Resources

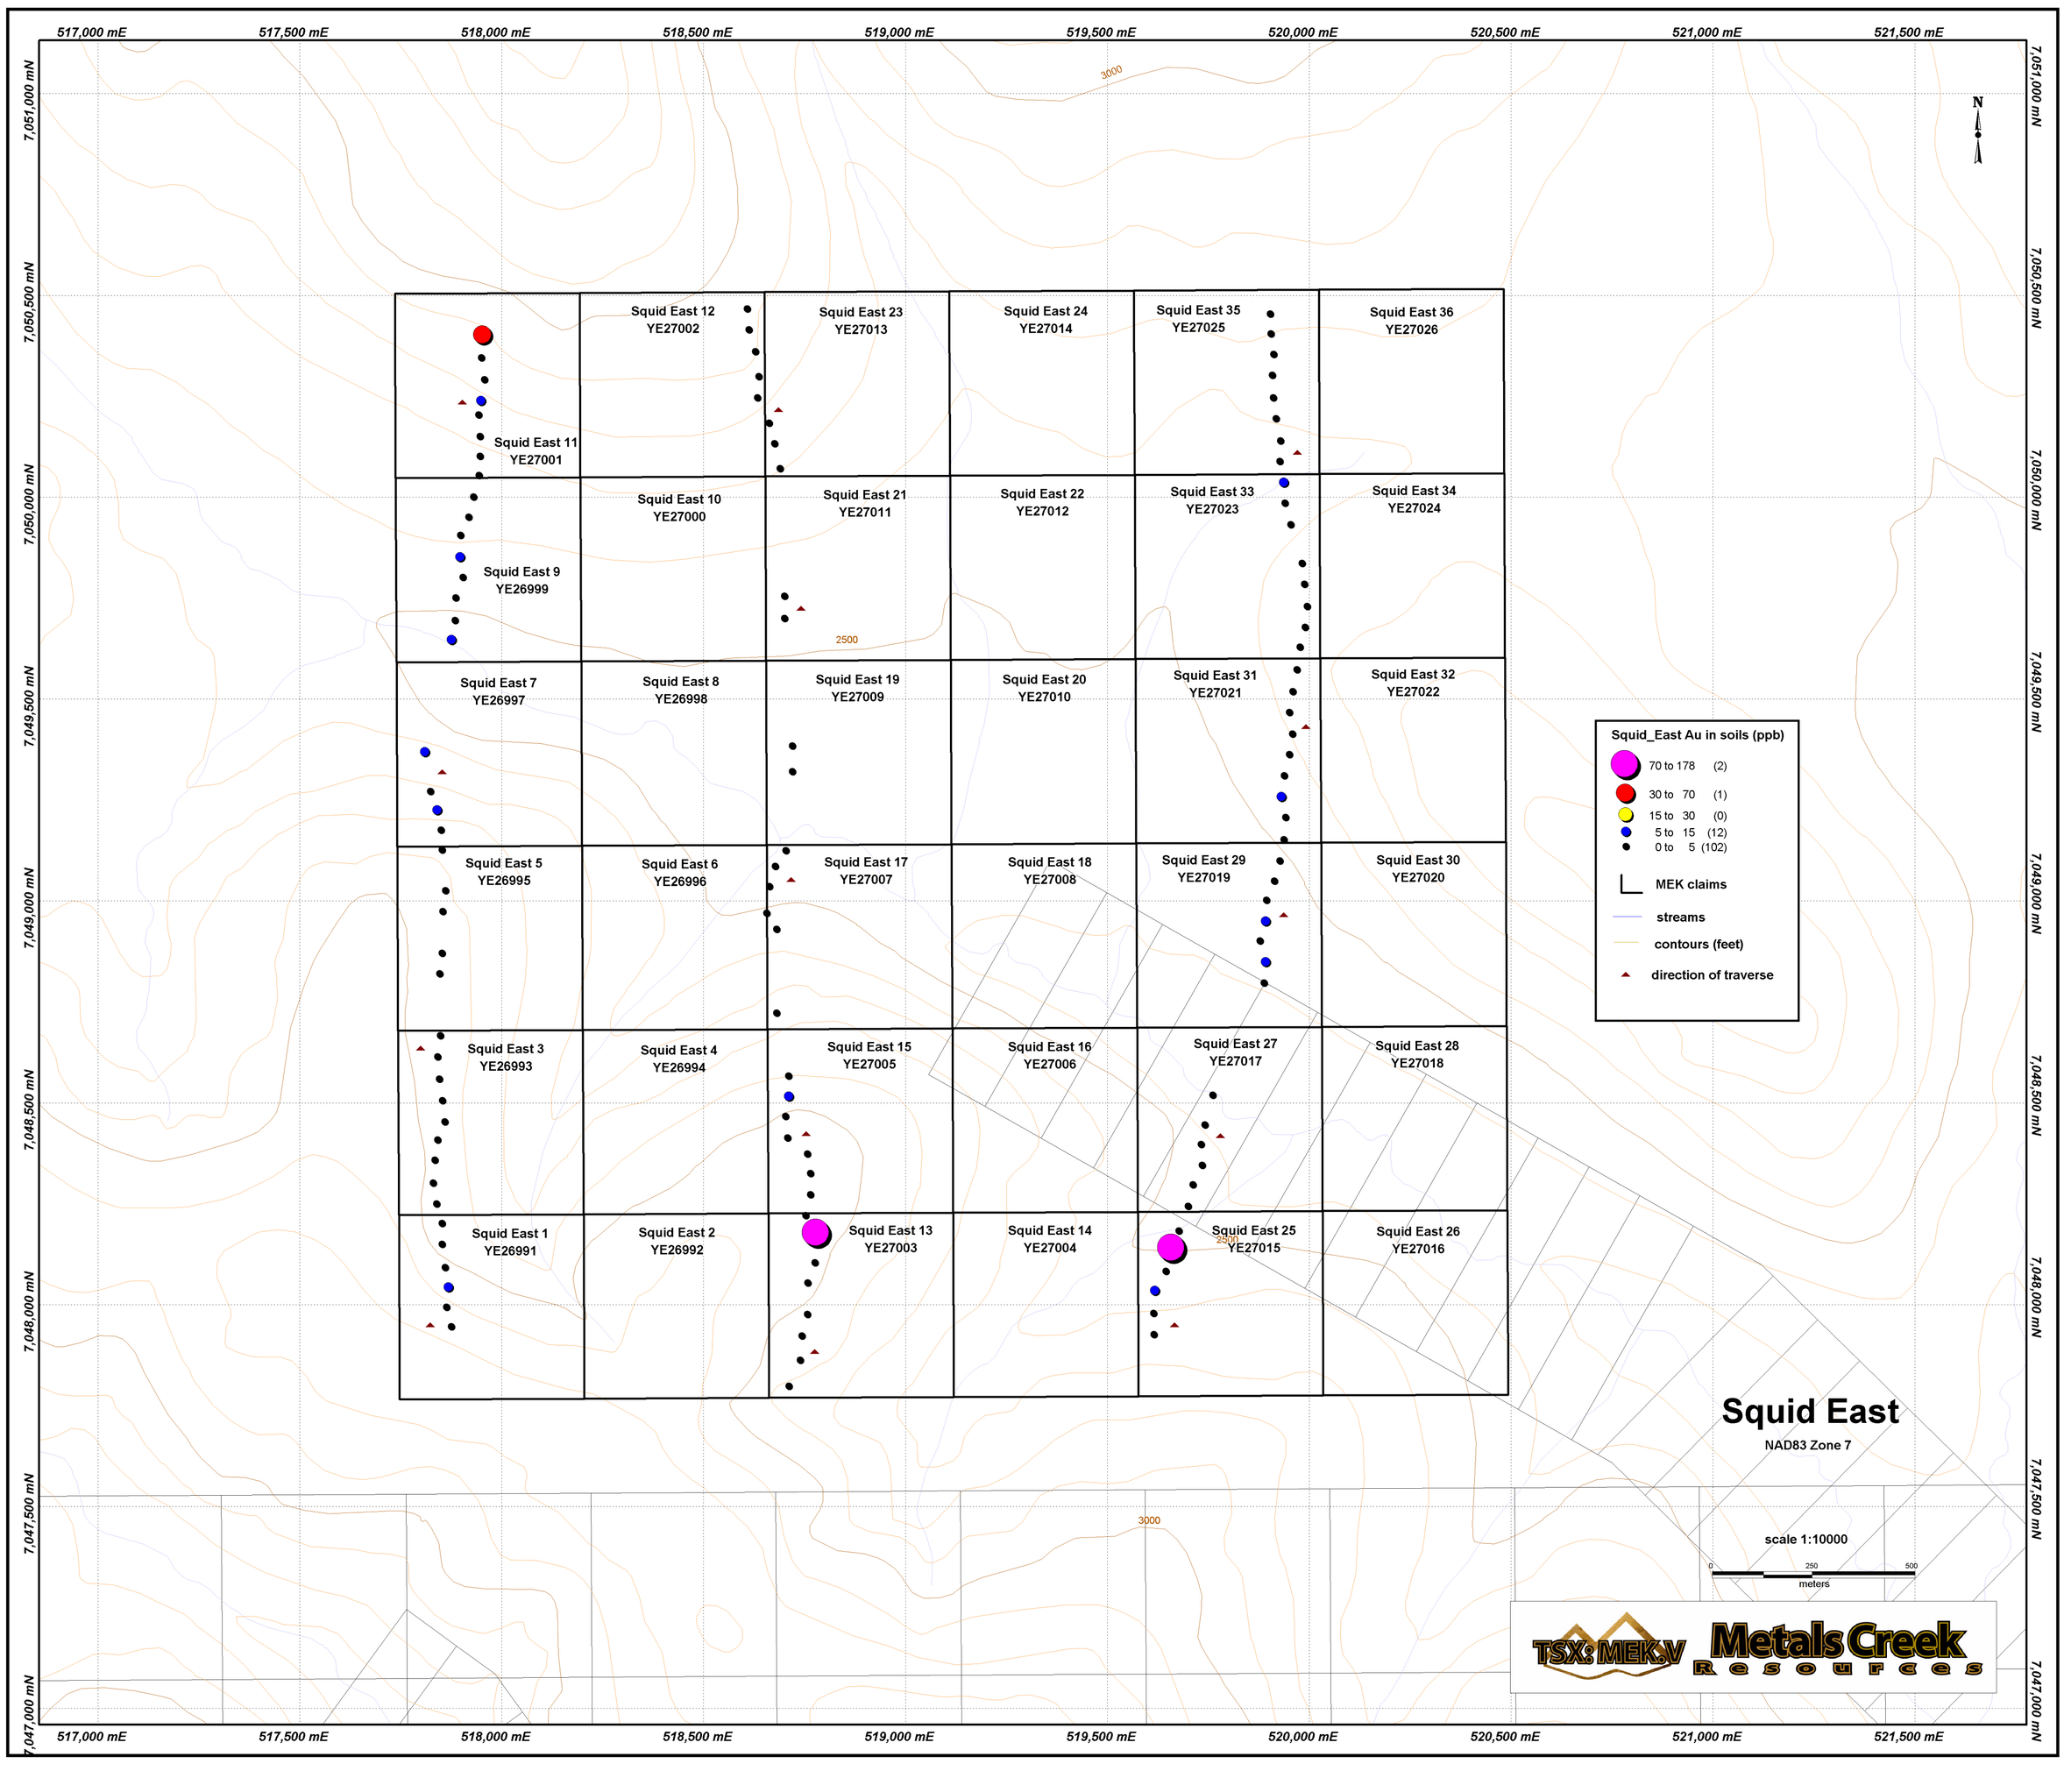
517,000 mE
517,500 mE
518,000 mE
518,500 mE
519,000 mE
519,500 mE
520,000 mE
520,500 mE
521,000 mE
521,500 mE
7,051,000 mN
7,050,500 mN
7,050,000 mN
7,049,500 mN
7,049,000 mN
7,048,500 mN
7,048,000 mN
7,047,500 mN
7,047,000 mN
N
3000
2500
Squid East 11 YE27001
Squid East 12 YE27002
Squid East 23 YE27013
Squid East 24 YE27014
Squid East 35 YE27025
Squid East 36 YE27026
Squid East 9 YE26999
Squid East 10 YE27000
Squid East 21 YE27011
Squid East 22 YE27012
Squid East 33 YE27023
Squid East 34 YE27024
Squid East 7 YE26997
Squid East 8 YE26998
Squid East 19 YE27009
Squid East 20 YE27010
Squid East 31 YE27021
Squid East 32 YE27022
Squid East 5 YE26995
Squid East 6 YE26996
Squid East 17 YE27007
Squid East 18 YE27008
Squid East 29 YE27019
Squid East 30 YE27020
Squid East 3 YE26993
Squid East 4 YE26994
Squid East 15 YE27005
Squid East 16 YE27006
Squid East 27 YE27017
Squid East 28 YE27018
Squid East 1 YE26991
Squid East 2 YE26992
Squid East 13 YE27003
Squid East 14 YE27004
Squid East 25 YE27015
Squid East 26 YE27016
Squid_East Au in soils (ppb)
70 to 178 (2)
30 to 70 (1)
15 to 30 (0)
5 to 15 (12)
0 to 5 (102)
MEK claims
streams
contours (feet)
direction of traverse
Squid East
NAD83 Zone 7
scale 1:10000
0
250
500
meters
TSX: MEK.V
Metals Creek Resources

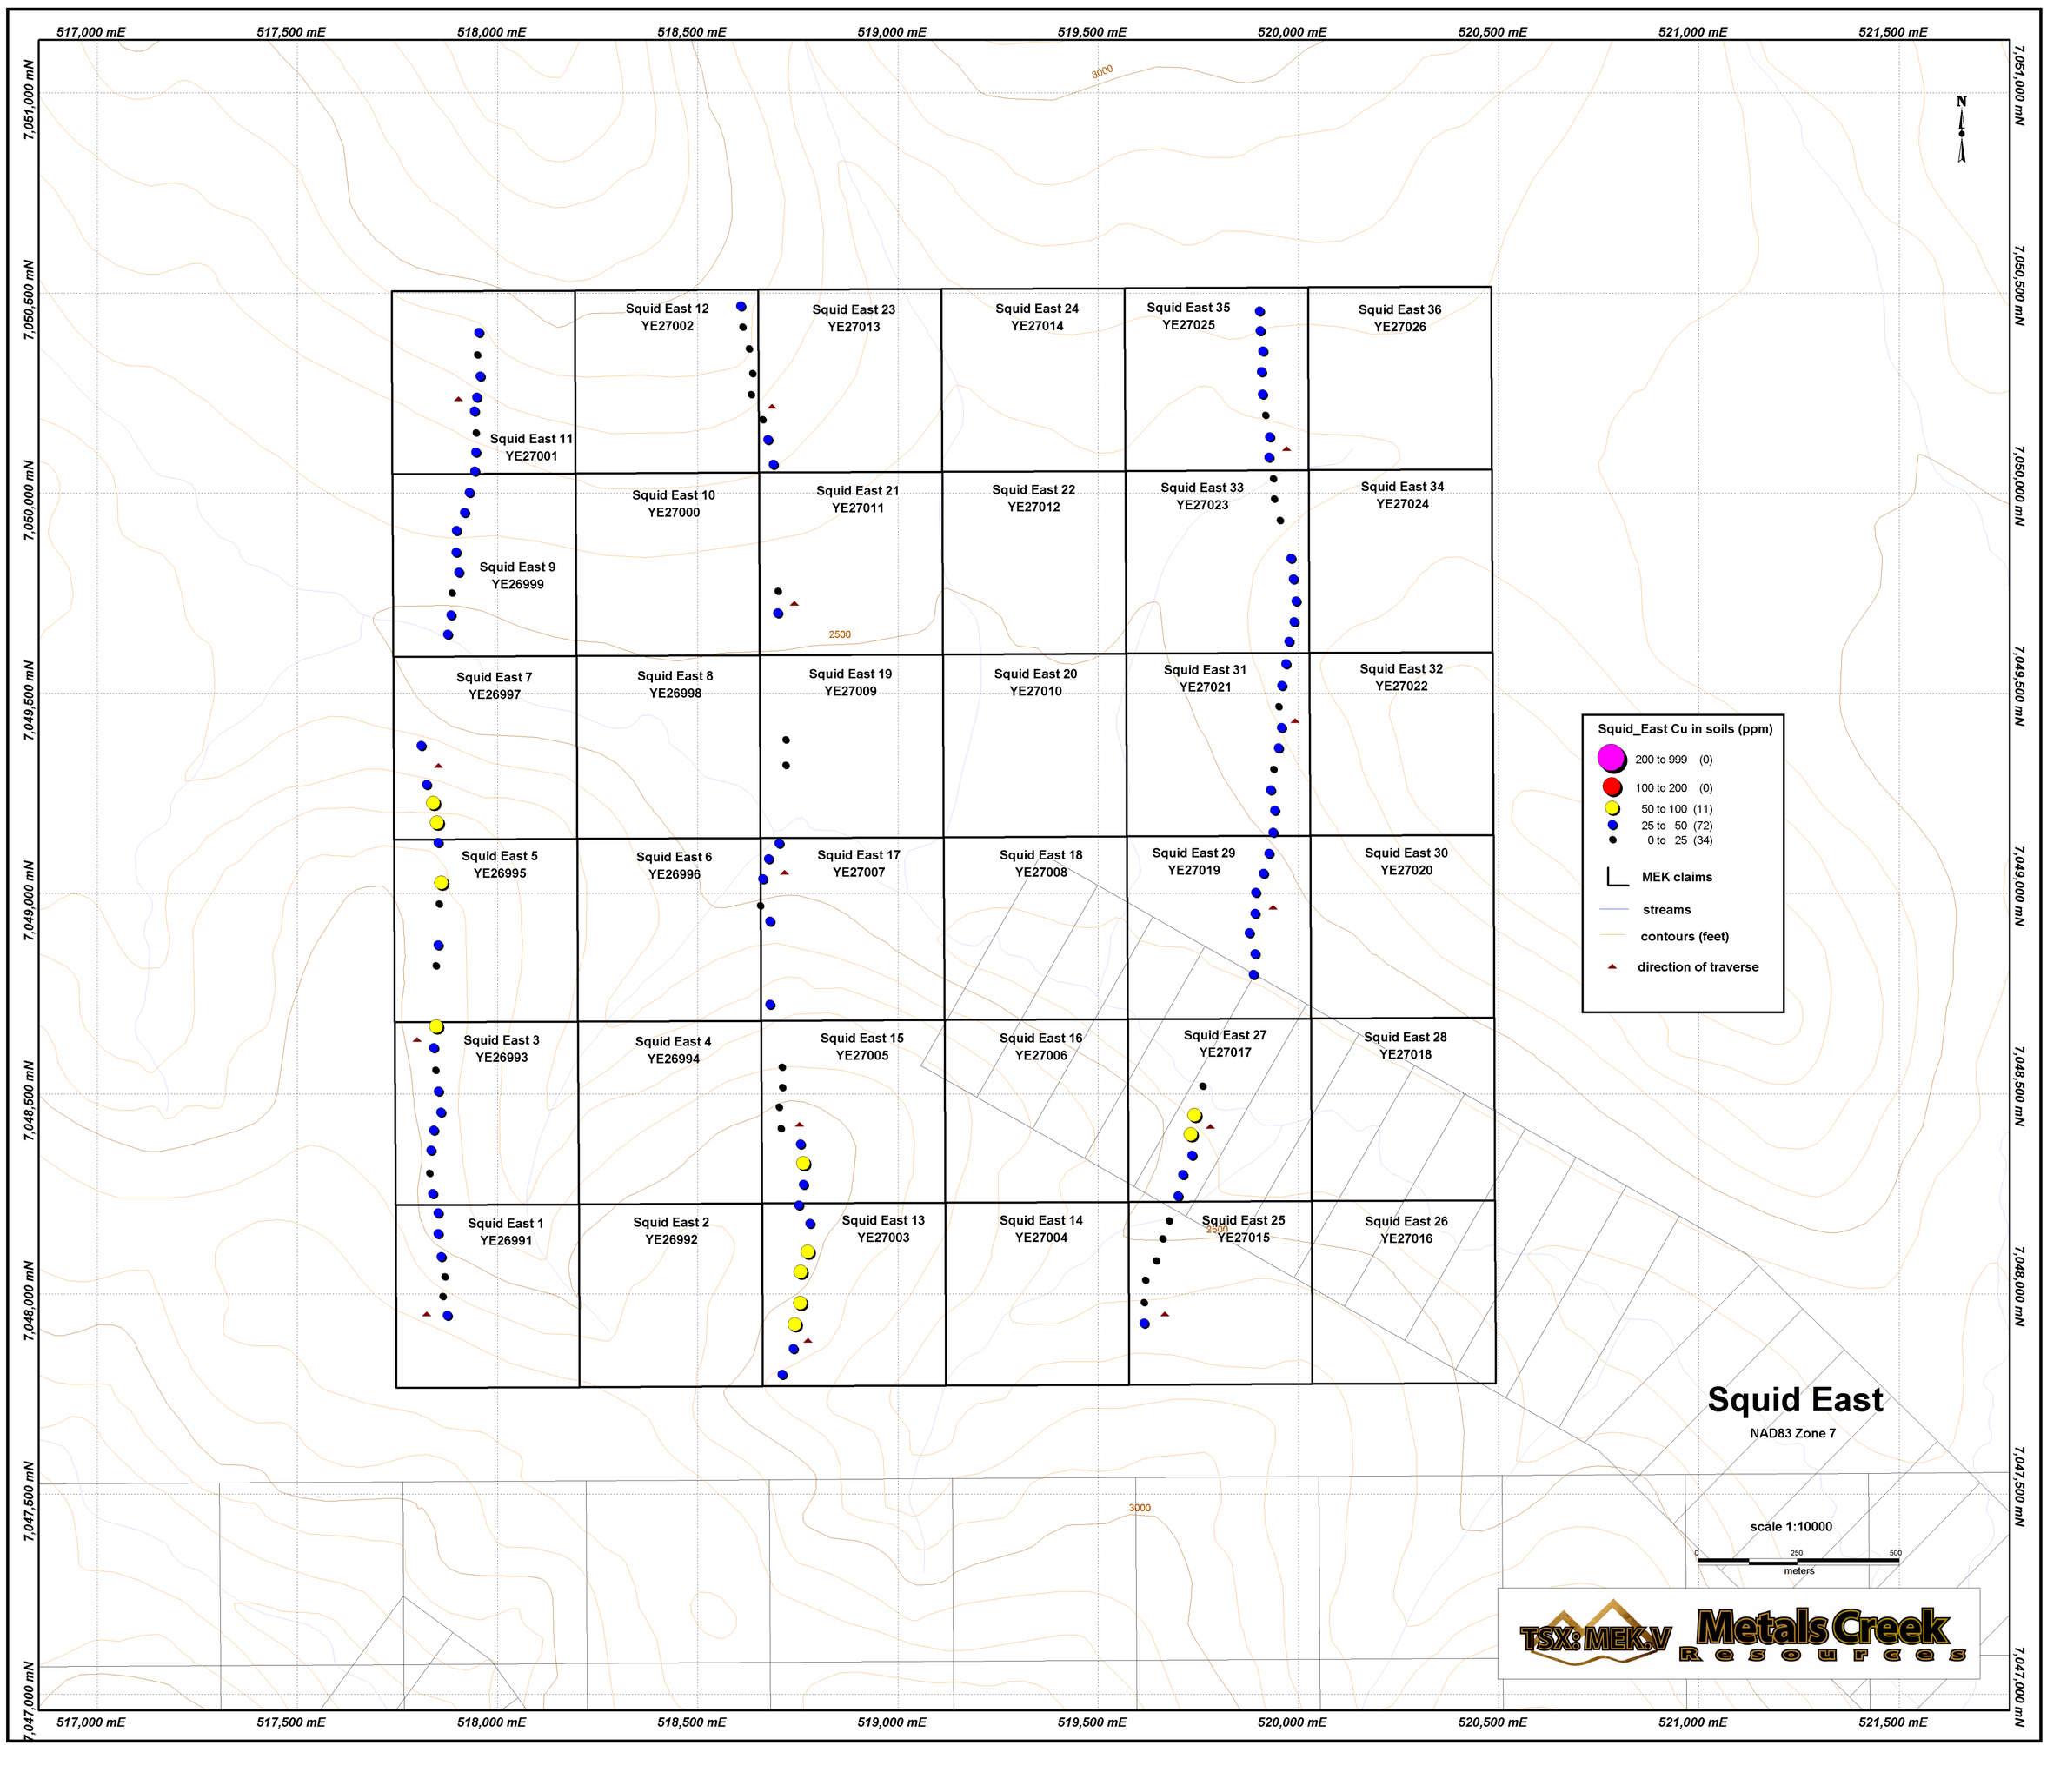
517,000 mE
517,500 mE
518,000 mE
518,500 mE
519,000 mE
519,500 mE
520,000 mE
520,500 mE
521,000 mE
521,500 mE
7,051,000 mN
7,050,500 mN
7,050,000 mN
7,049,500 mN
7,049,000 mN
7,048,500 mN
7,048,000 mN
7,047,500 mN
7,047,000 mN
N
3000
2500
Squid East 12 YE27002
Squid East 23 YE27013
Squid East 24 YE27014
Squid East 35 YE27025
Squid East 36 YE27026
Squid East 11 YE27001
Squid East 10 YE27000
Squid East 21 YE27011
Squid East 22 YE27012
Squid East 33 YE27023
Squid East 34 YE27024
Squid East 9 YE26999
Squid East 7 YE26997
Squid East 8 YE26998
Squid East 19 YE27009
Squid East 20 YE27010
Squid East 31 YE27021
Squid East 32 YE27022
Squid East 5 YE26995
Squid East 6 YE26996
Squid East 17 YE27007
Squid East 18 YE27008
Squid East 29 YE27019
Squid East 30 YE27020
Squid East 3 YE26993
Squid East 4 YE26994
Squid East 15 YE27005
Squid East 16 YE27006
Squid East 27 YE27017
Squid East 28 YE27018
Squid East 1 YE26991
Squid East 2 YE26992
Squid East 13 YE27003
Squid East 14 YE27004
Squid East 25 YE27015
Squid East 26 YE27016
Squid_East Cu in soils (ppm)
200 to 999 (0)
100 to 200 (0)
50 to 100 (11)
25 to 50 (72)
0 to 25 (34)
MEK claims
streams
contours (feet)
direction of traverse
Squid East
NAD83 Zone 7
scale 1:10000
0
250
500
meters
TSX:MEK.V
Metals Creek Resources

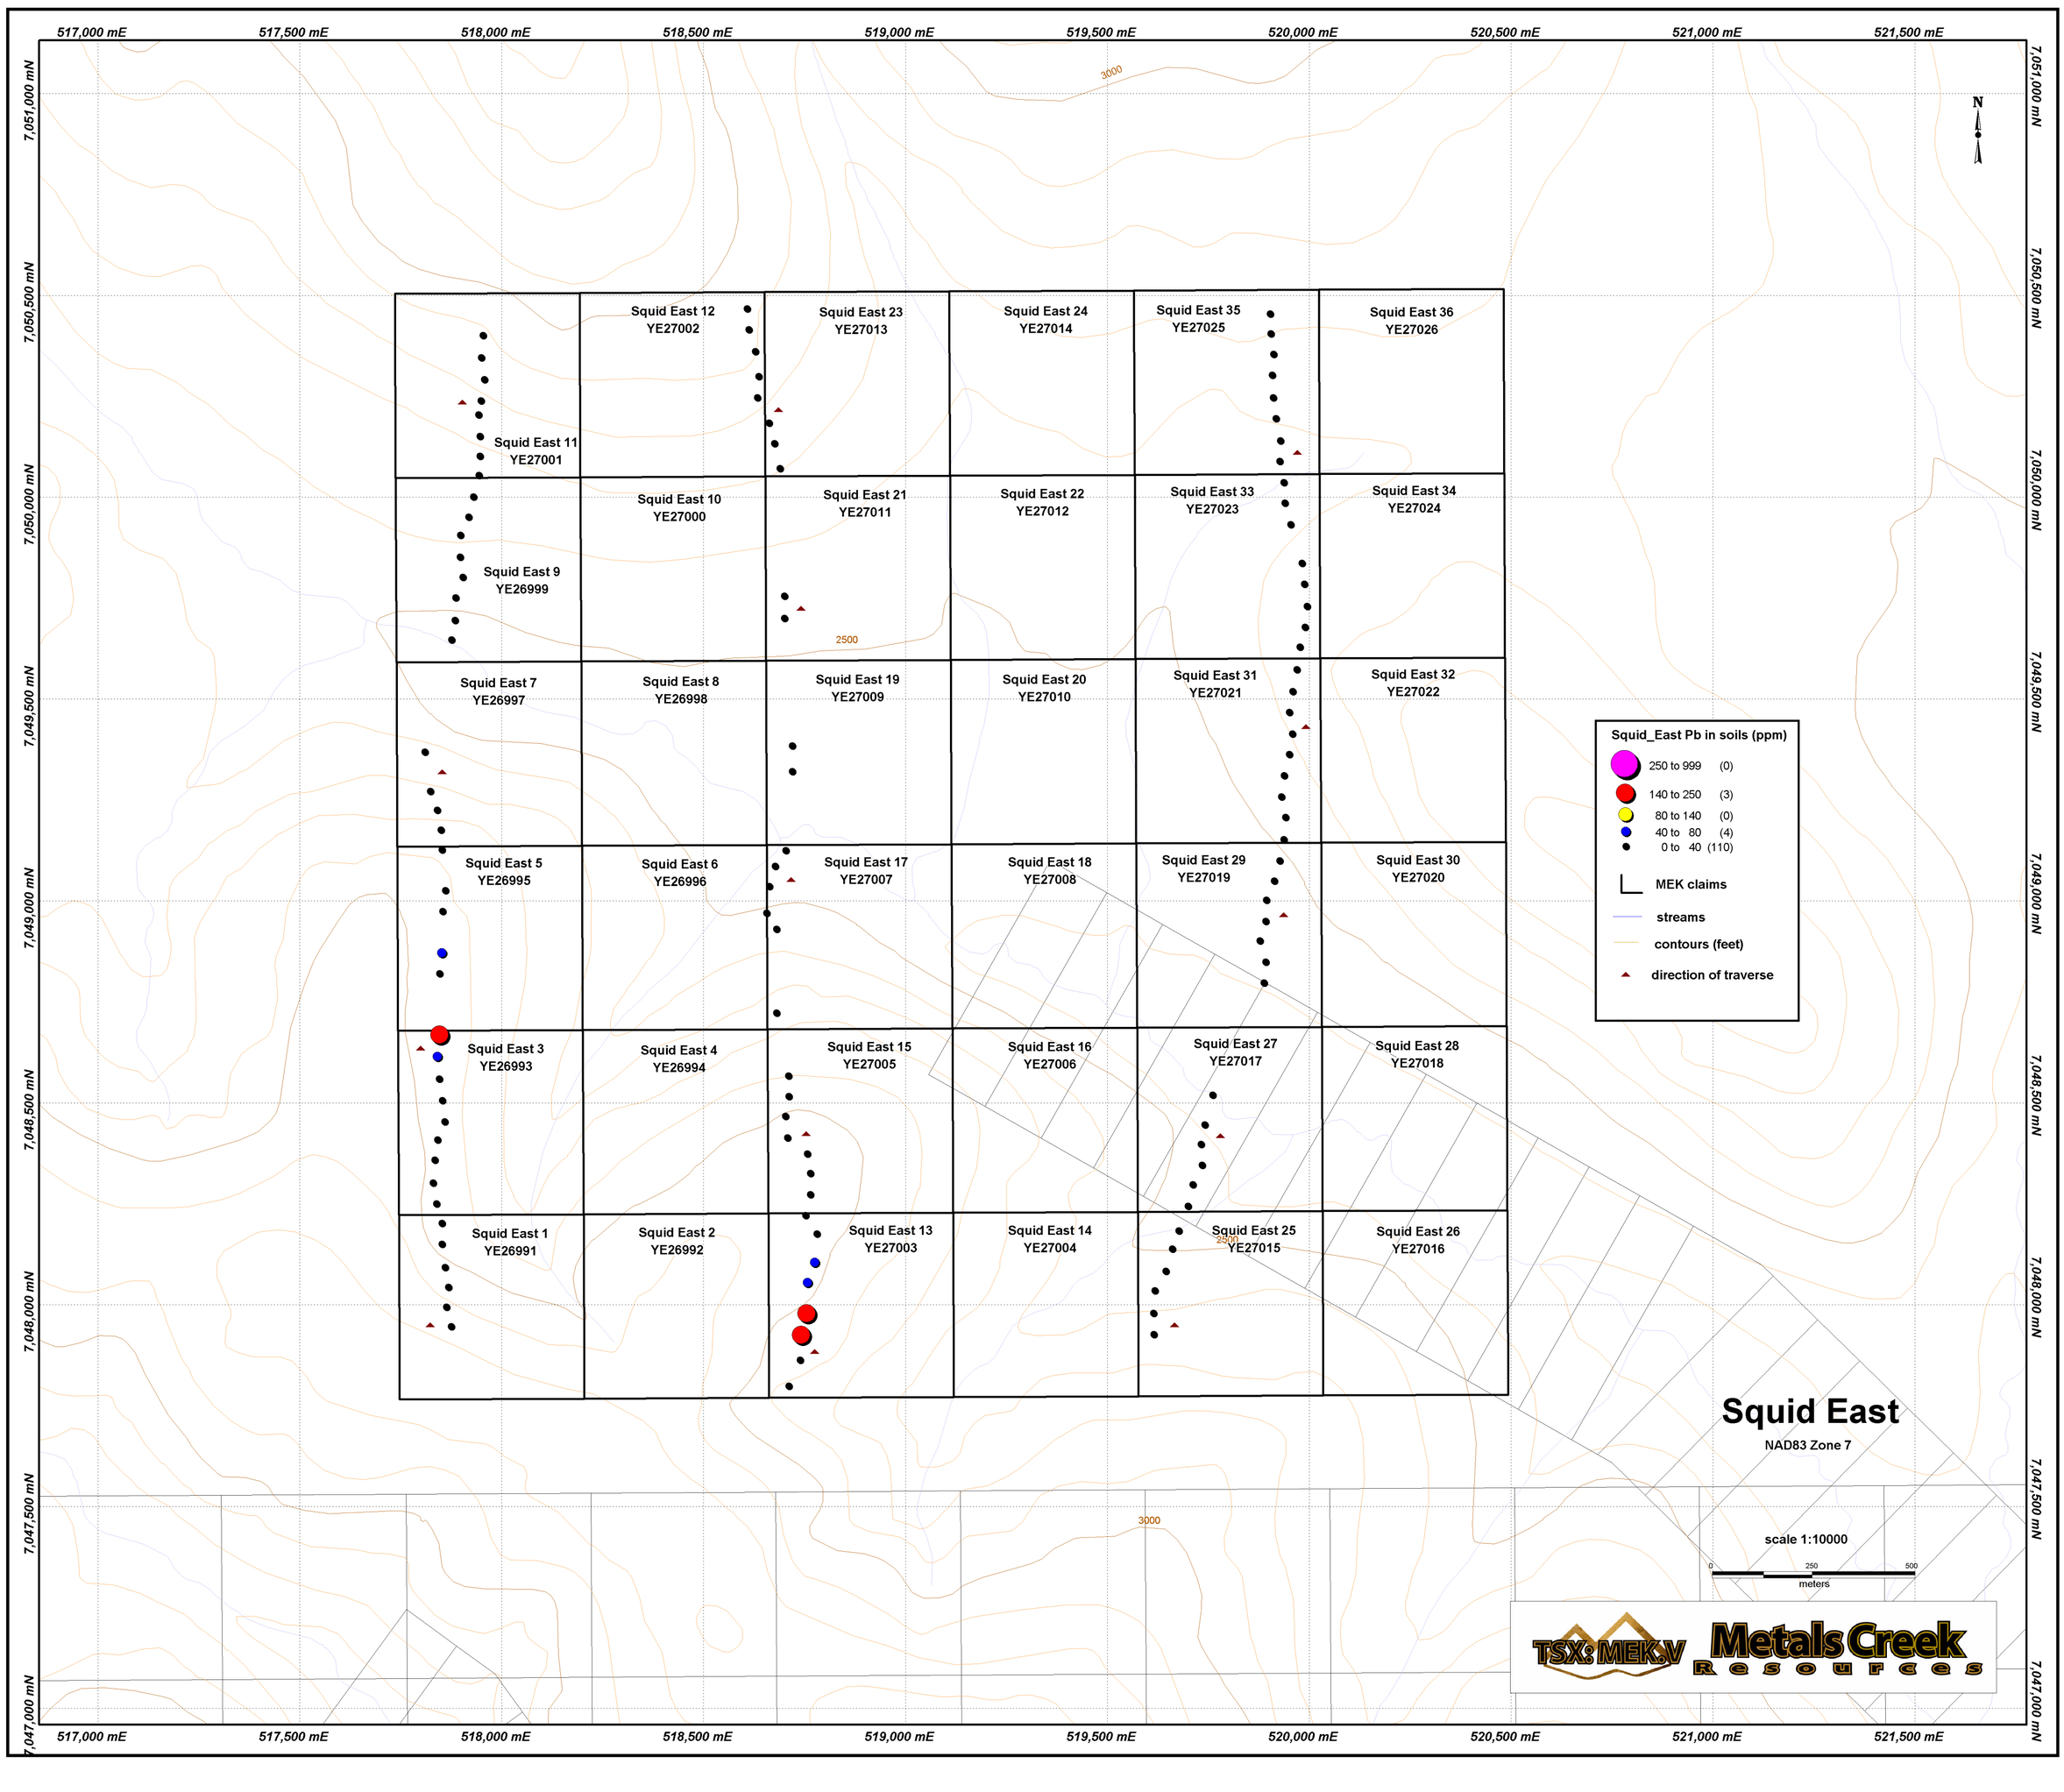
517,000 mE
517,500 mE
518,000 mE
518,500 mE
519,000 mE
519,500 mE
520,000 mE
520,500 mE
521,000 mE
521,500 mE
7,051,000 mN
7,050,500 mN
7,050,000 mN
7,049,500 mN
7,049,000 mN
7,048,500 mN
7,048,000 mN
7,047,500 mN
7,047,000 mN
N
3000
2500
Squid East 11 YE27001
Squid East 12 YE27002
Squid East 23 YE27013
Squid East 24 YE27014
Squid East 35 YE27025
Squid East 36 YE27026
Squid East 9 YE26999
Squid East 10 YE27000
Squid East 21 YE27011
Squid East 22 YE27012
Squid East 33 YE27023
Squid East 34 YE27024
Squid East 7 YE26997
Squid East 8 YE26998
Squid East 19 YE27009
Squid East 20 YE27010
Squid East 31 YE27021
Squid East 32 YE27022
Squid East 5 YE26995
Squid East 6 YE26996
Squid East 17 YE27007
Squid East 18 YE27008
Squid East 29 YE27019
Squid East 30 YE27020
Squid East 3 YE26993
Squid East 4 YE26994
Squid East 15 YE27005
Squid East 16 YE27006
Squid East 27 YE27017
Squid East 28 YE27018
Squid East 1 YE26991
Squid East 2 YE26992
Squid East 13 YE27003
Squid East 14 YE27004
Squid East 25 YE27015
Squid East 26 YE27016
Squid_East Pb in soils (ppm)
250 to 999 (0)
140 to 250 (3)
80 to 140 (0)
40 to 80 (4)
0 to 40 (110)
MEK claims
streams
contours (feet)
direction of traverse
Squid East
NAD83 Zone 7
scale 1:10000
0
250
500
meters
TSX: MEK.V
Metals Creek Resources

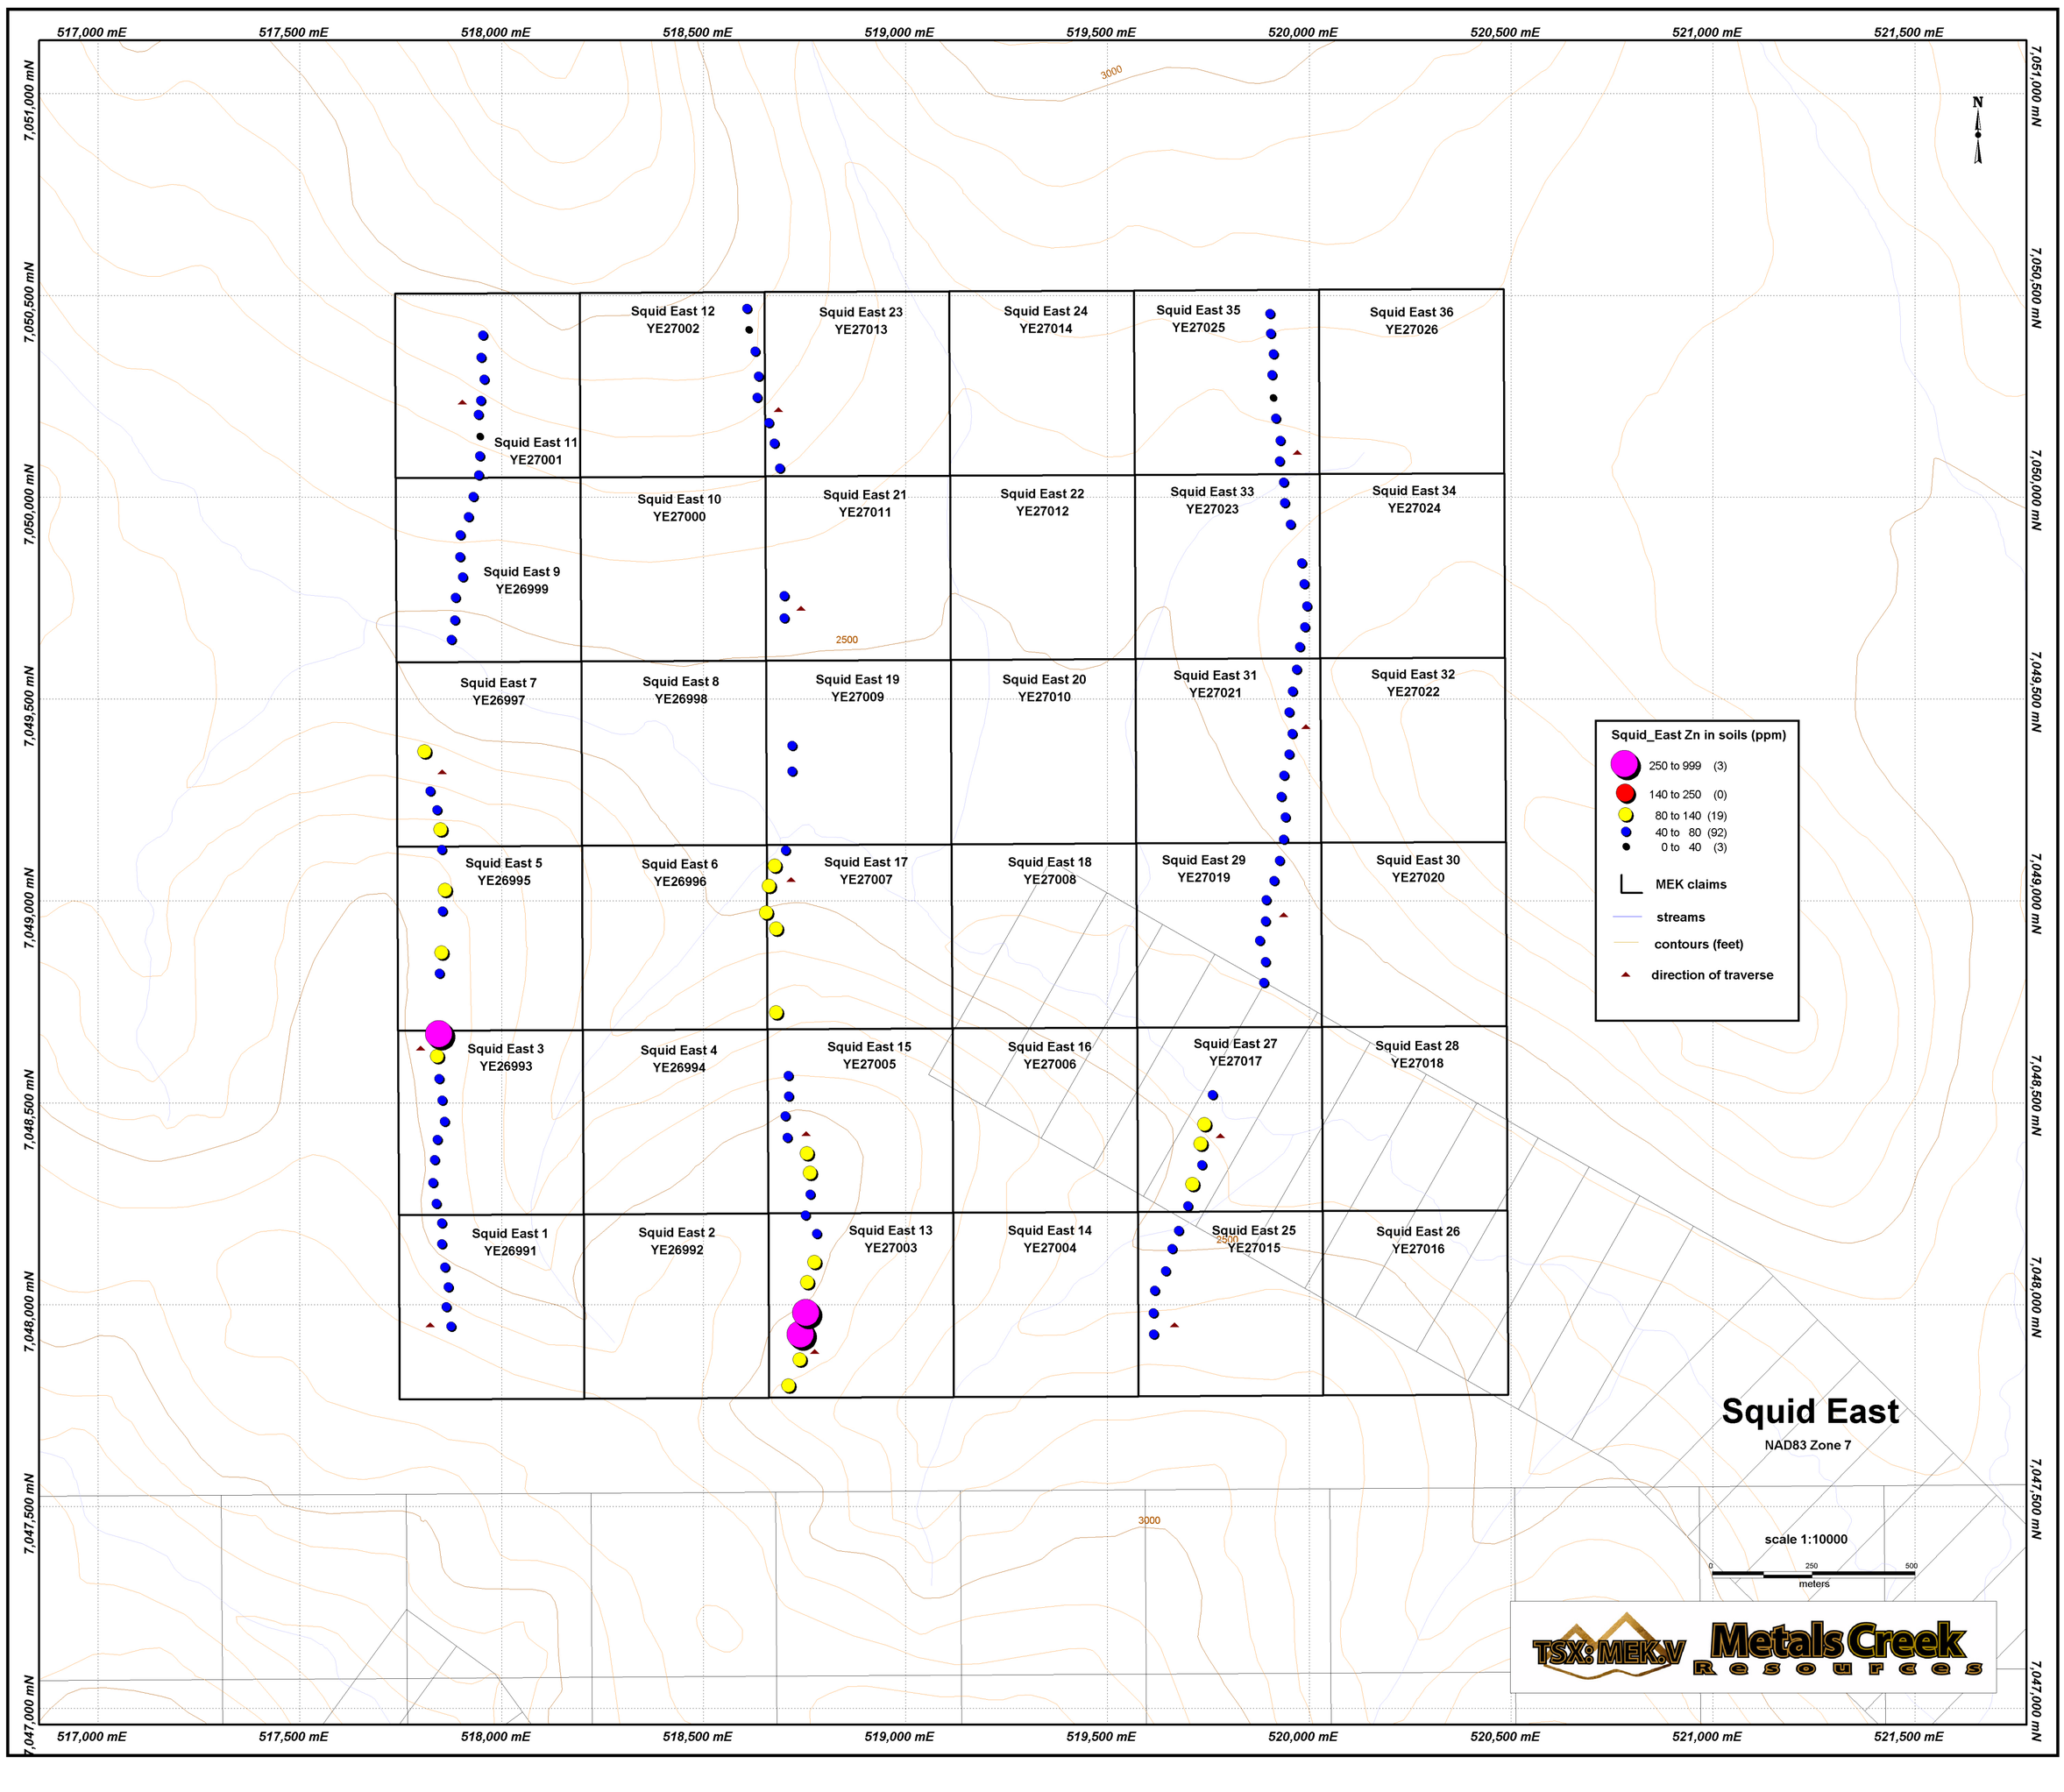
517,000 mE
517,500 mE
518,000 mE
518,500 mE
519,000 mE
519,500 mE
520,000 mE
520,500 mE
521,000 mE
521,500 mE
7,051,000 mN
7,050,500 mN
7,050,000 mN
7,049,500 mN
7,049,000 mN
7,048,500 mN
7,048,000 mN
7,047,500 mN
7,047,000 mN
N
3000
2500
Squid East 12 YE27002
Squid East 23 YE27013
Squid East 24 YE27014
Squid East 35 YE27025
Squid East 36 YE27026
Squid East 11 YE27001
Squid East 10 YE27000
Squid East 21 YE27011
Squid East 22 YE27012
Squid East 33 YE27023
Squid East 34 YE27024
Squid East 9 YE26999
Squid East 7 YE26997
Squid East 8 YE26998
Squid East 19 YE27009
Squid East 20 YE27010
Squid East 31 YE27021
Squid East 32 YE27022
Squid East 5 YE26995
Squid East 6 YE26996
Squid East 17 YE27007
Squid East 18 YE27008
Squid East 29 YE27019
Squid East 30 YE27020
Squid East 3 YE26993
Squid East 4 YE26994
Squid East 15 YE27005
Squid East 16 YE27006
Squid East 27 YE27017
Squid East 28 YE27018
Squid East 1 YE26991
Squid East 2 YE26992
Squid East 13 YE27003
Squid East 14 YE27004
Squid East 25 YE27015
Squid East 26 YE27016
Squid_East Zn in soils (ppm)
250 to 999 (3)
140 to 250 (0)
80 to 140 (19)
40 to 80 (92)
0 to 40 (3)
MEK claims
streams
contours (feet)
direction of traverse
Squid East
NAD83 Zone 7
scale 1:10000
0
250
500
meters
TSX: MEK.V
Metals Creek Resources

Appendix VIII

526,500 mE | 527,000 mE | 527,500 mE | 528,000 mE | 528,500 mE | 529,000 mE | 529,500 mE | 530,000 mE

7,034,500 mN | 7,034,000 mN | 7,033,500 mN | 7,033,000 mN | 7,032,500 mN | 7,032,000 mN | 7,031,500 mN | 7,031,000 mN | 7,030,500 mN | 7,030,000 mN

FOGO 17 YE26917 | FOGO 18 YE26918 | FOGO 35 YE26935 | FOGO 36 YE26936 | FOGO 53 YE26953 | FOGO 54 YE26954

FOGO 15 YE26915 | FOGO 16 YE26916 | FOGO 33 YE26933 | FOGO 34 YE26934 | FOGO 51 YE26951 | FOGO 52 YE26952

FOGO 13 YE26913 | FOGO 14 YE26914 | FOGO 31 YE26931 | FOGO 32 YE26932 | FOGO 49 YE26949 | FOGO 50 YE26950

FOGO 11 YE26911 | FOGO 12 YE26912 | FOGO 29 YE26929 | FOGO 30 YE26930 | FOGO 47 YE26947 | FOGO 48 YE26948

FOGO 9 YE26909 | FOGO 10 YE26910 | FOGO 27 YE26927 | FOGO 28 YE26928 | FOGO 45 YE26945 | FOGO 46 YE26946

FOGO 7 YE26907 | FOGO 8 YE26908 | FOGO 25 YE26925 | FOGO 26 YE26926 | FOGO 43 YE26943 | FOGO 44 YE26944

FOGO 5 YE26905 | FOGO 6 YE26906 | FOGO 23 YE26923 | FOGO 24 YE26924 | FOGO 41 YE26941 | FOGO 42 YE26942

FOGO 3 YE26903 | FOGO 4 YE26904 | FOGO 21 YE26921 | FOGO 22 YE26922 | FOGO 39 YE26939 | FOGO 40 YE26940

FOGO 1 YE26901 | FOGO 2 YE26902 | FOGO 19 YE26919 | FOGO 20 YE26920 | FOGO 37 YE26937 | FOGO 38 YE26938

N

F0-37 F0-36 E0-35

F064 F065 F063 F062 F066 K935063 F0-34 K935062 F061 F060 F058 F059 F057 F056 F054 F055 F052 F053 F049 F050 F051 F046 F042 F044 F040 F043 F045 F047 F048 F041 F039 F038

935061 935060 935059 935058 935057 935056 935055 935054 935053 935052 935051 932800 932799 932798 932797 932796 932795 K932728

K932727 K935010 K932726 K935009 932794 932793 932792 932791 932790 932789 932788 932787 932786 FO-033 FO-032 FO-031 FO-030 FO-029 FO-028 FO-027 FO-026 FO-025 FO-024 FO-023 FO-022 FO-021 FO-020 FO-019 FO-018

K935008 K932723 K935007 932722 932785 932784 932783 932782 932781 932780 932779 932778 932777 F0-17 F0-16

F028 F031 F033 F035 F037 932721 932720 932719 932718 932717 932716 932715 932714 932713 932712 932776 932775 932774 932773 932772 932771 932770 932769 932768 932767 FO-002 FO-001 FO-015 FO-014 FO-013 FO-012 FO-011 FO-010 FO-009 FO-008 FO-007 FO-006 FO-005 FO-004 FO-003 F026 F025 F027 F029 F030 F032 FO34 F036 F023 F024

F022 F021 F020 F019 F018 F017 F016 F015 F014 F011 F010 K935006 F007 F013 FO12 F009 F008 K935003 F006 F005 F003 F004 K935004 K935005 K935002 932711 932710 932709 932708 932707 932706 932705 932704 932703 F002 FO01 K935001 932766 932765 932764 932763 932762 932761 932760 932758 932757 932756 932755 932754 932753 932752 932751

No active Legend.

- MEK soil sample #
- MEK silt sample #
- MEK rock sample #
- MEK claims
- streams
- contours
- direction of traverse

Fogo

NAD 83 Zone 7

scale 1:10000

0 250 500

meters

TSX: MEK.V Metals Creek Resources

526,500 mE | 527,000 mE | 527,500 mE | 528,000 mE | 528,500 mE | 529,000 mE | 529,500 mE | 530,000 mE

7,034,500 mN | 7,034,000 mN | 7,033,500 mN | 7,033,000 mN | 7,032,500 mN | 7,032,000 mN | 7,031,500 mN | 7,031,000 mN | 7,030,500 mN | 7,030,000 mN

FOGO 17 YE26917 | FOGO 18 YE26918 | FOGO 35 YE26935 | FOGO 36 YE26936 | FOGO 53 YE26953 | FOGO 54 YE26954

FOGO 15 YE26915 | FOGO 16 YE26916 | FOGO 33 YE26933 | FOGO 34 YE26934 | FOGO 51 YE26951 | FOGO 52 YE26952

FOGO 49 YE26949 | FOGO 50 YE26950

FOGO 13 YE26913 | FOGO 14 YE26914 | FOGO 31 YE26931 | FOGO 32 YE26932

FOGO 11 YE26911 | FOGO 12 YE26912 | FOGO 29 YE26929 | FOGO 30 YE26930 | FOGO 47 YE26947 | FOGO 48 YE26948

FOGO 9 YE26909 | FOGO 10 YE26910 | FOGO 45 YE26945 | FOGO 46 YE26946

FOGO 27 YE26927 | FOGO 28 YE26928

FOGO 7 YE26907 | FOGO 8 YE26908

FOGO 25 YE26925 | FOGO 26 YE26926 | FOGO 43 YE26943 | FOGO 44 YE26944

FOGO 23 YE26923 | FOGO 24 YE26924 | FOGO 41 YE26941

FOGO 5 YE26905 | FOGO 6 YE26906 | FOGO 42 YE26942

FOGO 3 YE26903 | FOGO 4 YE26904 | FOGO 21 YE26921

FOGO 22 YE26922 | FOGO 39 YE26939 | FOGO 40 YE26940

FOGO 1 YE26901 | FOGO 2 YE26902 | FOGO 19 YE26919 | FOGO 20 YE26920 | FOGO 37 YE26937 | FOGO 38 YE26938

N

Fogo Au in soils (ppb)

- 70 to 178 (0)
- 30 to 70 (0)
- 15 to 30 (1)
- 5 to 15 (13)
- 0 to 5 (162)

Fogo Au in silts (ppb)

- 0 to 5 (14)

Fogo Au in rock (g/t)

- <0.005 to 0.006 (10)

MEK claims

streams

contours

Fogo

NAD 83 Zone 7

scale 1:10000

0 250 500

meters

TSX: MEK.V Metals Creek Resources

526,500 mE | 527,000 mE | 527,500 mE | 528,000 mE | 528,500 mE | 529,000 mE | 529,500 mE | 530,000 mE

7,034,500 mN | 7,034,000 mN | 7,033,500 mN | 7,033,000 mN | 7,032,500 mN | 7,032,000 mN | 7,031,500 mN | 7,031,000 mN | 7,030,500 mN | 7,030,000 mN

FOGO 17 YE26917
FOGO 18 YE26918
FOGO 35 YE26935
FOGO 36 YE26936
FOGO 53 YE26953
FOGO 54 YE26954
FOGO 15 YE26915
FOGO 16 YE26916
FOGO 33 YE26933
FOGO 34 YE26934
FOGO 51 YE26951
FOGO 52 YE26952
FOGO 49 YE26949
FOGO 50 YE26950
FOGO 13 YE26913
FOGO 14 YE26914
FOGO 31 YE26931
FOGO 32 YE26932
FOGO 11 YE26911
FOGO 12 YE26912
FOGO 29 YE26929
FOGO 30 YE26930
FOGO 47 YE26947
FOGO 48 YE26948
FOGO 9 YE26909
FOGO 10 YE26910
FOGO 27 YE26927
FOGO 28 YE26928
FOGO 45 YE26945
FOGO 46 YE26946
FOGO 7 YE26907
FOGO 8 YE26908
FOGO 25 YE26925
FOGO 26 YE26926
FOGO 43 YE26943
FOGO 44 YE26944
FOGO 5 YE26905
FOGO 6 YE26906
FOGO 23 YE26923
FOGO 24 YE26924
FOGO 41 YE26941
FOGO 42 YE26942
FOGO 3 YE26903
FOGO 4 YE26904
FOGO 21 YE26921
FOGO 22 YE26922
FOGO 39 YE26939
FOGO 40 YE26940
FOGO 1 YE26901
FOGO 2 YE26902
FOGO 19 YE26919
FOGO 20 YE26920
FOGO 37 YE26937
FOGO 38 YE26938

N

Fogo Cu in soils (ppm)

- 200 to 999 (0)
- 100 to 200 (0)
- 50 to 100 (1)
- 25 to 50 (29)
- 0 to 25 (146)

Fogo Cu in silts (ppm)

- 25 to 50 (1)
- 0 to 25 (13)

MEK claims
streams
contours

Fogo

NAD 83 Zone 7

scale 1:10000

0 250 500
meters

TSX: MEK.V Metals Creek Resources

526,500 mE | 527,000 mE | 527,500 mE | 528,000 mE | 528,500 mE | 529,000 mE | 529,500 mE | 530,000 mE

7,034,500 mN | 7,034,000 mN | 7,033,500 mN | 7,033,000 mN | 7,032,500 mN | 7,032,000 mN | 7,031,500 mN | 7,031,000 mN | 7,030,500 mN | 7,030,000 mN

FOGO 17 YE26917 | FOGO 18 YE26918 | FOGO 35 YE26935 | FOGO 36 YE26936 | FOGO 53 YE26953 | FOGO 54 YE26954

FOGO 15 YE26915 | FOGO 16 YE26916 | FOGO 33 YE26933 | FOGO 34 YE26934 | FOGO 51 YE26951 | FOGO 52 YE26952

FOGO 49 YE26949 | FOGO 50 YE26950

FOGO 13 YE26913 | FOGO 14 YE26914 | FOGO 31 YE26931 | FOGO 32 YE26932

FOGO 11 YE26911 | FOGO 12 YE26912 | FOGO 29 YE26929 | FOGO 30 YE26930 | FOGO 47 YE26947 | FOGO 48 YE26948

FOGO 9 YE26909 | FOGO 10 YE26910 | FOGO 45 YE26945 | FOGO 46 YE26946

FOGO 27 YE26927 | FOGO 28 YE26928

FOGO 7 YE26907 | FOGO 8 YE26908

FOGO 25 YE26925 | FOGO 26 YE26926 | FOGO 43 YE26943 | FOGO 44 YE26944

FOGO 23 YE26923 | FOGO 24 YE26924 | FOGO 41 YE26941

FOGO 5 YE26905 | FOGO 6 YE26906 | FOGO 42 YE26942

FOGO 3 YE26903 | FOGO 4 YE26904 | FOGO 21 YE26921

FOGO 22 YE26922 | FOGO 39 YE26939 | FOGO 40 YE26940

FOGO 1 YE26901 | FOGO 2 YE26902 | FOGO 19 YE26919 | FOGO 20 YE26920 | FOGO 37 YE26937 | FOGO 38 YE26938

N

Fogo Pb in soils (ppm)

- 250 to 999 (0)
- 140 to 250 (0)
- 80 to 140 (3)
- 40 to 80 (20)
- 0 to 40 (153)

Fogo Pb in silts (ppm)

- 0 to 40 (14)

- MEK claims
- streams
- contours

Fogo

NAD 83 Zone 7

scale 1:10000

0 250 500
meters

TSX: MEK.V Metals Creek Resources

526,500 mE | 527,000 mE | 527,500 mE | 528,000 mE | 528,500 mE | 529,000 mE | 529,500 mE | 530,000 mE

7,034,500 mN | 7,034,000 mN | 7,033,500 mN | 7,033,000 mN | 7,032,500 mN | 7,032,000 mN | 7,031,500 mN | 7,031,000 mN | 7,030,500 mN | 7,030,000 mN

FOGO 17 YE26917
FOGO 18 YE26918
FOGO 35 YE26935
FOGO 36 YE26936
FOGO 53 YE26953
FOGO 54 YE26954
FOGO 15 YE26915
FOGO 16 YE26916
FOGO 33 YE26933
FOGO 34 YE26934
FOGO 51 YE26951
FOGO 52 YE26952
FOGO 49 YE26949
FOGO 50 YE26950
FOGO 13 YE26913
FOGO 14 YE26914
FOGO 31 YE26931
FOGO 32 YE26932
FOGO 11 YE26911
FOGO 12 YE26912
FOGO 29 YE26929
FOGO 30 YE26930
FOGO 47 YE26947
FOGO 48 YE26948
FOGO 9 YE26909
FOGO 10 YE26910
FOGO 45 YE26945
FOGO 46 YE26946
FOGO 27 YE26927
FOGO 28 YE26928
FOGO 7 YE26907
FOGO 8 YE26908
FOGO 25 YE26925
FOGO 26 YE26926
FOGO 43 YE26943
FOGO 44 YE26944
FOGO 23 YE26923
FOGO 24 YE26924
FOGO 41 YE26941
FOGO 5 YE26905
FOGO 6 YE26906
FOGO 42 YE26942
FOGO 3 YE26903
FOGO 4 YE26904
FOGO 21 YE26921
FOGO 22 YE26922
FOGO 39 YE26939
FOGO 40 YE26940
FOGO 1 YE26901
FOGO 2 YE26902
FOGO 19 YE26919
FOGO 20 YE26920
FOGO 37 YE26937
FOGO 38 YE26938

N

Fogo Zn in soils (ppm)

178 to 250	(0)
140 to 250	(3)
80 to 140	(22)
40 to 80	(122)
0 to 40	(29)

Fogo Zn in silts (ppm)

140 to 250	(1)
80 to 140	(7)
40 to 80	(6)
0 to 40	(0)

MEK claims
streams
contours

Fogo

NAD 83 Zone 7

scale 1:10000

0 250 500
meters

TSX: MEK.V Metals Creek Resources

Appendix IX

560,500 mE | 561,000 mE | 561,500 mE | 562,000 mE | 562,500 mE | 563,000 mE | 563,500 mE | 564,000 mE | 564,500 mE | 565,000 mE

7,033,000 mN | 7,032,500 mN | 7,032,000 mN | 7,031,500 mN | 7,031,000 mN

CHANGE 40 YE26796 | CHANGE 38 YE26794 | CHANGE 36 YE26792 | CHANGE 34 YE26790 | CHANGE 32 YE26788 | CHANGE 30 YE26786 | CHANGE 28 YE26784 | CHANGE 26 YE26782 | CHANGE 24 YE26780 | CHANGE 22 YE26778

CHANGE 39 YE26795 | CHANGE 37 YE26793 | CHANGE 35 YE26791 | CHANGE 33 YE26789 | CHANGE 31 YE26787 | CHANGE 29 YE26785 | CHANGE 27 YE26783 | CHANGE 25 YE26781 | CHANGE 23 YE26779 | CHANGE 21 YE26777

CHANGE 20 YE26776 | CHANGE 18 YE26774 | CHANGE 16 YE26772 | CHANGE 14 YE26770 | CHANGE 12 YE26768 | CHANGE 10 YE26766 | CHANGE 8 YE26764 | CHANGE 6 YE26762 | CHANGE 4 YE26760 | CHANGE 2 YE26758

CHANGE 19 YE26775 | CHANGE 17 YE26773 | CHANGE 15 YE26771 | CHANGE 13 YE26769 | CHANGE 11 YE26767 | CHANGE 9 YE26765 | CHANGE 7 YE26763 | CHANGE 5 YE26761 | CHANGE 3 YE26759 | CHANGE 1 YE26757

No active Legend.

- MEK soil sample #
- MEK silt sample #
- claim boundaries
- contours (feet)
- streams
- direction of traverse

scale 1:7500

0 0.5 1 kilometers

Change Claims

NAD83 Zone 7

TSX:MEK.V Metals Creek Resources

560,500 mE | 561,000 mE | 561,500 mE | 562,000 mE | 562,500 mE | 563,000 mE | 563,500 mE | 564,000 mE | 564,500 mE | 565,000 mE

7,033,000 mN | 7,032,500 mN | 7,032,000 mN | 7,031,500 mN | 7,031,000 mN

N

CHANGE 40 YE26796 | CHANGE 38 YE26794 | CHANGE 36 YE26792 | CHANGE 34 YE26790 | CHANGE 32 YE26788 | CHANGE 30 YE26786 | CHANGE 28 YE26784 | CHANGE 26 YE26782 | CHANGE 24 YE26780 | CHANGE 22 YE26778

CHANGE 39 YE26795 | CHANGE 37 YE26793 | CHANGE 35 YE26791 | CHANGE 33 YE26789 | CHANGE 31 YE26787 | CHANGE 29 YE26785 | CHANGE 27 YE26783 | CHANGE 25 YE26781 | CHANGE 23 YE26779 | CHANGE 21 YE26777

CHANGE 20 YE26776 | CHANGE 18 YE26774 | CHANGE 16 YE26772 | CHANGE 14 YE26770 | CHANGE 12 YE26768 | CHANGE 10 YE26766 | CHANGE 8 YE26764 | CHANGE 6 YE26762 | CHANGE 4 YE26760 | CHANGE 2 YE26758

CHANGE 19 YE26775 | CHANGE 17 YE26773 | CHANGE 15 YE26771 | CHANGE 13 YE26769 | CHANGE 11 YE26767 | CHANGE 9 YE26765 | CHANGE 7 YE26763 | CHANGE 5 YE26761 | CHANGE 3 YE26759 | CHANGE 1 YE26757

1500

2000

2500

Change Au in silts (ppb)

- 15 to 30 (1)
- 5 to 15 (1)
- 0 to 5 (8)

Change Au in soils (ppb)

- 70 to 178 (0)
- 30 to 70 (0)
- 15 to 30 (1)
- 5 to 15 (6)
- 0 to 5 (171)

claim boundaries

contours (feet)

streams

direction of traverse

0 | 0.5 | 1

kilometers

Change Claims

NAD83 Zone 7

TSX:MEK.V Metals Creek Resources

560,500 mE | 561,000 mE | 561,500 mE | 562,000 mE | 562,500 mE | 563,000 mE | 563,500 mE | 564,000 mE | 564,500 mE | 565,000 mE

7,033,000 mN | 7,032,500 mN | 7,032,000 mN | 7,031,500 mN | 7,031,000 mN

CHANGE 40 YE26796 | CHANGE 38 YE26794 | CHANGE 36 YE26792 | CHANGE 34 YE26790 | CHANGE 32 YE26788 | CHANGE 30 YE26786 | CHANGE 28 YE26784 | CHANGE 26 YE26782 | CHANGE 24 YE26780 | CHANGE 22 YE26778

CHANGE 39 YE26795 | CHANGE 37 YE26793 | CHANGE 35 YE26791 | CHANGE 33 YE26789 | CHANGE 31 YE26787 | CHANGE 29 YE26785 | CHANGE 27 YE26783 | CHANGE 25 YE26781 | CHANGE 23 YE26779 | CHANGE 21 YE26777

CHANGE 20 YE26776 | CHANGE 18 YE26774 | CHANGE 16 YE26772 | CHANGE 14 YE26770 | CHANGE 12 YE26768 | CHANGE 10 YE26766 | CHANGE 8 YE26764 | CHANGE 6 YE26762 | CHANGE 4 YE26760 | CHANGE 2 YE26758

CHANGE 19 YE26775 | CHANGE 17 YE26773 | CHANGE 15 YE26771 | CHANGE 13 YE26769 | CHANGE 11 YE26767 | CHANGE 9 YE26765 | CHANGE 7 YE26763 | CHANGE 5 YE26761 | CHANGE 3 YE26759 | CHANGE 1 YE26757

1500 | 2000 | 2500

N

Change Cu in silts (ppm)
- 0 to 25 (10)

Change Cu in soils (ppm)
- 200 to 999 (0)
- 100 to 200 (1)
- 50 to 100 (8)
- 25 to 50 (77)
- 0 to 25 (92)

claim boundaries
contours (feet)
streams
direction of traverse

scale 1:7500

0 | 0.5 | 1
kilometers

Change Claims

NAD83 Zone 7

TSX:MEK.V Metals Creek Resources

560,500 mE | 561,000 mE | 561,500 mE | 562,000 mE | 562,500 mE | 563,000 mE | 563,500 mE | 564,000 mE | 564,500 mE | 565,000 mE

7,033,000 mN | 7,032,500 mN | 7,032,000 mN | 7,031,500 mN | 7,031,000 mN

CHANGE 40 YE26796 | CHANGE 38 YE26794 | CHANGE 36 YE26792 | CHANGE 34 YE26790 | CHANGE 32 YE26788 | CHANGE 30 YE26786 | CHANGE 28 YE26784 | CHANGE 26 YE26782 | CHANGE 24 YE26780 | CHANGE 22 YE26778

CHANGE 39 YE26795 | CHANGE 37 YE26793 | CHANGE 35 YE26791 | CHANGE 33 YE26789 | CHANGE 31 YE26787 | CHANGE 29 YE26785 | CHANGE 27 YE26783 | CHANGE 25 YE26781 | CHANGE 23 YE26779 | CHANGE 21 YE26777

CHANGE 20 YE26776 | CHANGE 18 YE26774 | CHANGE 16 YE26772 | CHANGE 14 YE26770 | CHANGE 12 YE26768 | CHANGE 10 YE26766 | CHANGE 8 YE26764 | CHANGE 6 YE26762 | CHANGE 4 YE26760 | CHANGE 2 YE26758

CHANGE 19 YE26775 | CHANGE 17 YE26773 | CHANGE 15 YE26771 | CHANGE 13 YE26769 | CHANGE 11 YE26767 | CHANGE 9 YE26765 | CHANGE 7 YE26763 | CHANGE 5 YE26761 | CHANGE 3 YE26759 | CHANGE 1 YE26757

1500

2000

2500

N

Change Zn in silts (ppm)
- 40 to 80 (10)

Change Zn in soils (ppm)
- 250 to 999 (1)
- 140 to 250 (0)
- 80 to 140 (19)
- 40 to 80 (145)
- 0 to 40 (13)

claim boundaries
contours (feet)
streams
direction of traverse

scale 1:7500

0 | 0.5 | 1
kilometers

Change Claims

NAD83 Zone 7

TSX:MEK.V Metals Creek Resources