ASSESSMENT REPORT

LUCKY STRIKE PROPERTY – YUKON TERRITORY, CANADA

63°12’10” N, 139°07’06” W, Dawson Mining District

Prepared for:
GOLDSTRIKE RESOURCES LTD.

Prepared by:

AURORA GEOSCIENCES

ASSESSMENT REPORT
LUCKY STRIKE PROPERTY – YUKON TERRITORY, CANADA
Dawson Mining District, Yukon Territory, Canada
NTS: 115O02, 115O03

YD155903-YD155905, LUCKY 1-3; YC91801-YC91872, Lucky 101-172; YC98689-YC98700, AU 89-100; YC98701-YC98710, Strike 1-10; YC98721-YC98730, Strike 21-30; YC98741-YC98750, Strike 41-50; YC98761-YC98770, Strike 61-70; YC98781-YC98790, Strike 81-90; YC98801-YC98816, AU 101-116; YC99475-YC99488, Strike 101-114; YC99489-YC99500, Lucky 1-12; YD05999-YD06086, Lucky 13-100; YD155593, AB 33; YD155599-YD155600, AB 19-20; YE87601-YE78700, L 101-200; YF04703-YF04722, AB 43-62; YF04801-YF04806, AB 1-6; YF04808-YF04818, AB 7-17; YF04821-YF04832, AB 18-29; YF04830-YF04832, AB 30-32; YF04901-YF05000, L 1-100; YF06601-YF06830, LS 1-230; YF46604-YF46612, AB 34-42

63°12’10” N, 139°07’06” W
UTM (NAD 83): 594640, 7009575, Zone 7

Effective Date, Mar 30, 2018

Prepared for:
GOLDSTRIKE RESOURCES LTD.
1300-1111 W Georgia St,
Vancouver BC V6E 4M3, Canada

Prepared by:
AURORA GEOSCIENCES LTD
34A Laberge Rd.
Whitehorse, Yukon Y1A 5T6

Author:
Carl Schulze, B.Sc., P.Geo., (QP)

TABLE OF CONTENTS

1 EXECUTIVE SUMMARY 1

1.1 Property Description and Ownership 1
1.2 History 1
1.3 Geology and Mineralization 2
1.4 2017 Exploration Program Results 3
1.5 Recommendations 3

2 INTRODUCTION 5

2.1 Terms of Reference 5
2.2 Terms, Definitions and Units 5
2.3 Sources of Information 6

3 PROPERTY DESCRIPTION AND LOCATION 6

3.1 Property Description 6
3.2 Land Tenure and Underlying Agreements 8

4 ACCESSIBILITY, CLIMATE, LOCAL RESOURCES, INFRASTRUCTURE AND PHYSIOGRAPHY 11

5 HISTORY 12

5.1 Three Sisters Occurrence (115O 007) 12
5.2 Strike Occurrence (115O 170) 13
5.3 Simmons Occurrence (115O 171) 13
5.4 Agate Occurrence (115O 015) 14
5.5 2013 – 2016 Exploration by Goldstrike Resources Ltd. 14
5.5.1 2013 Goldstrike Program 14
5.5.2 2014 Goldstrike Program 14
5.5.3 2015 Goldstrike Exploration Program 15
5.5.4 2016 Goldstrike Exploration Program 15

6 GEOLOGICAL SETTING AND MINERALIZATION 21

6.1 Regional Geology 21
6.2 Property Geology 24
6.3 Mineralization 26
6.3.1 Monte Carlo Zone 26
6.3.2 Belmont Zone 26
6.3.3 Boss and Samson Zones 26

7 DEPOSIT SETTINGS 31

8 EXPLORATION 33

8.1 2013 – 2016 Exploration 33
8.1.1 2013 Exploration 33
8.1.2 2014 Exploration 33
8.1.3 2015 Exploration 34
8.1.4 2016 Exploration 34
8.1.4.1 Monte Carlo Zone 36
8.1.4.2 Belmont Zone 38
8.1.4.3 Samson and Boss Zones 38
8.1.4.4 Maverick Zone 38

9 2017 EXPLORATION PROGRAM 38

9.1 Sections DDLS-17-01 through 04, 08 39
9.2 Sections DDLS-17-05, 06 41
9.3 Holes DDLS-17-07 and 09 42
9.4 Comments on Results 48

10 SAMPLE PREPARATION, ANALYSES, AND SECURITY 50

10.1 Drill Core Sampling 50

11 INTERPRETATION AND CONCLUSIONS 52

11.1 Interpretation 52
11.2 Conclusions 53

12 RECOMMENDATIONS 55

12.1 Recommendations 55
12.2 Recommended budget 56
12.2.1 Recommended Budget, Phase 1 56
12.2.2 Recommended budget, Phase 2 57
12.3 Recommended budget, Phase 3 58

19. REFERENCES 59

LIST OF FIGURES

Figure 1: Location Map, Lucky Strike property 9
Figure 2: Claim Map, Lucky Strike property 10
Figure 3: Airborne Total Magnetic Field, Lucky Strike property 17
Figure 4: Airborne Potassium Count, Lucky Strike property 18
Figure 5: 2016 Induced Polarization Resistivity Survey 19
Figure 6: 2016 Ground Total Field Magnetic Survey 20
Figure 7: Regional Geology map 23
Figure 8: Property area geology 25
Figure 9: Detail geology, Monte Carlo zone 28
Figure 10: Mineralized Sample from LS-TR-16-11, 0 - 10M. Intensely silicified orthogneiss (C. Jones) 29
Figure 11: Monte Carlo Rock Types (C. Jones, 2016) 30
Figure 12: Monte Carlo Mineralized Specimens (C. Jones) 31
Figure 13: 2017 Property-wide soil sample plot 35
Figure 14: 2016 Trench Layout, Monte Carlo zone 37
Figure 20: KD 600 drill, Kluane Drilling, 2017 43
Figure 21: Plan Map, 2017 Drilling 44
Figure 22: Section, DDLS 17-01, 02, 03, 04, 08 45
Figure 23: Section DDLS 17_05, 06, 07 46
Figure 24: Section DDLS 17-09 47
Figure 25: Portion of "Discovery Hole" DDLS-17-09: 27.89 - 36.88m 49
Figure 26: Portion of Sample #1876869, 26.03 g/t Au (2017 value) 49
Figure 27: Core Sampling Facility, Monte Carlo zone 52

LIST OF TABLES

Table 1: 2016 trench results, Monte Carlo Zone 36

TABLE 3: DRILL COLLAR DATA, 2017 PROGRAM 39

APPENDICES

APPENDIX 1: .....CERTIFICATE OF AUTHOR, DATE, CONSENT AND SIGNATURES
APPENDIX 2: .....STATEMENT OF 2017 EXPENDITURES
APPENDIX 3: ..... DIAMOND DRILL LOGS, CORE SAMPLE DESCRIPTIONS
APPENDIX 4: .....ORIGINAL ASSAY CERTIFICATES
APPENDIX 5: ..... AIRBORNE LIDAR TOPOGRAPHIC SURVEY REPORT
APPENDIX 6:..... PROPERTY CLAIMS SUMMARY TABLE

1 EXECUTIVE SUMMARY

1.1 PROPERTY DESCRIPTION AND OWNERSHIP

In February of 2018, Aurora Geosciences Ltd. (hereinafter "Aurora"), of Whitehorse, Yukon, was commissioned by Goldstrike Resources Ltd. (hereinafter "Goldstrike") of British Columbia, Canada, to write an Assessment Report in compliance with regulations under the Yukon Quartz Mining Act, Department of Energy, Mines and Resources, Government of Yukon (YG), on its Lucky Strike property. The Lucky Strike property is situated in the Dawson Range of west-central Yukon Territory, Canada.

The Lucky Strike property comprises 753 contiguous quartz claims totaling 15,723 hectares (38,836 acres). The property is geographically centered at 63°12'10" N Latitude, 139°07'06" W Longitude (UTM NAD 83: 594640, 7009575, Zone 7) on NTS map sheets 115O/02 and 115O/03 in the Dawson Mining District of Yukon Territory, Canada.

1.2 HISTORY

Little exploration took place within present property boundaries prior to 2009, when positive results were returned from diamond drilling on the neighbouring Golden Saddle target in May, 2009. In June 2009, B. Naughty staked four occurrences subsequent to the public release of results from the Golden Saddle. Naughty acquired the Three Sisters, Strike, Simmons and Agate occurrences. Only the Agate occurrence had activity prior to 2009. The Agate showing was staked in 1900, then again in 1982 as a jade prospect. In 1987, the Agate prospect was optioned to New Era Development which conducted some hard rock and placer exploration.

Mr. Naughty optioned the AU claims, covering the Three Sisters occurrence, to a 50/50 joint venture (JV) comprised of Alix Resources Ltd (Alix) and Cloudbreak Resources Ltd. (Cloudbreak). Alix sold its 50% interest to Cloudbreak in January of 2010. In November of 2010, Cloudbreak optioned the AU and adjacent claims to Accelrate Power Systems Inc. (Accelrate), which completed a NI 43-101 technical report on all exploration to date. In June of 2011, Accelrate changed its name to Goldstrike Resources Ltd.

Mr. Naughty optioned portions of the claim package covering the Strike occurrence to First Lithium Resources Inc., Network Exploration, and Newcastle Minerals Ltd, which conducted some geological mapping and soil sampling. The remainder of the claims covering the Strike occurrence were optioned to the Alix – Cloudbreak JV, which conducted geological mapping, soil sampling and prospecting. This program included a grid soil survey, which identified four zones of anomalous gold geochemistry deemed worthy of follow-up. This target became known as "Zone 1" during subsequent exploration.

The Simmons occurrence was also optioned to the Alix-Cloudbreak JV. The Three Sisters, Strike and Simmons occurrence were all covered by high resolution magnetic and radiometric airborne surveys either in late 2009 or late 2010. The Agate occurrence was optioned to Weststar Resources Corp. in 2009 which renamed the occurrence as the Golden Fox and conducted soil and silt geochemical sampling. This occurrence was incorporated into the present block in 2016.

Goldstrike has conducted surface exploration programs annually since 2013. Programs from 2013 through to 2015 were completed on the "original" claim block, whereas the 2016 program was conducted across the expanded and currentclaim block. The 2013 program, focusing on "Zone 1", comprised grid soil

sampling, a ground magnetic survey and a trenching program. Positive results led to a more extensive 2014 program of similar activities across Zone 1, and included limited rock and soil sampling at "Zone 2", to the northwest. Zone 1 includes a target about 1.0 km northwest of the main Zone 1 target. In 2015, trenching and soil sampling continued at both of these Zone 1 targets. Soil sampling was done at Zone 2, which returned sporadic very high gold values.

In 2016, a more extensive exploration program was conducted in two phases: an initial phase of soil sampling, trenching and ground magnetic surveying on the existing claims, followed by an expansion of the claim block to its present size. The second phase comprised soil geochemical sampling primarily across the expanded area. By the end of 2016, five zones had been identified through soil geochemical sampling. From north to south these zones are: the Monte Carlo (formerly Zone 2), the Belmont, the Samson (formerly the northwest part of Zone 1), the Boss (main Zone 1) and the Maverick. The Monte Carlo zone became the target for the 2017 diamond drilling program, comprising 1,032.8m in 9 holes, while the Monte Carlo and Belmont zones both underwent further trenching in 2017.

1.3 Geology and Mineralization

The White Gold District is underlain by late Paleozoic meta-siliciclastic, meta-volcanic, meta-plutonic rocks comprising the Yukon-Tanana Terrane (YTT), a large allocthonous terrane accreted on to the Ancient North American Platform to the northeast. The YTT comprises four main lithological assemblages: the Proterozoic to Devonian Snowcap Assemblage, the Devono-Mississippian Finlayson assemblage, the Mississippian to Lower Permian Klinkit assemblage, and the mid to late Permian Klondike assemblage. Recent regional geological interpretation by the Yukon Geological Survey indicates a fifth major member, the Simpson Assemblage, consisting of tonalite and intermediate to mafic orthogneiss; this underlies the majority of the Lucky Strike property.

The YTT stratigraphy has undergone subsequent intrusive by three major magmatic episodes: the Upper Triassic to Lower Jurassic Aishihik Suite, including the Minto Suite; the Tintina Gold Belt, comprising granitic, monzonitic to dioritic stocks; and a Cretaceous-Tertiary magmatic event resulting in extensive Carmacks Group mafic to felsic volcanics. The structural and stratigraphic framework has been modified by syn- and post-accretionary tectonism commencing during collision of the YTT with the Ancestral North American platform commencing in late Permian time and continuing through Cretaceous to the Paleocene due to collision of the Alexander-Wrangellia Terrane along the Shakwak Fault marking the southwest boundary of the YTT. This compressional regime resulted in development of major strike-slip faults as well as significant thrust fault systems.

The Lucky Strike property is underlain mainly by a NW-SE extending package of Simpson Assemblage orthogneiss intercalated in eastern areas with NW-SE trending units of Snowcap Assemblage quartzites, psammites and schist. Two early Jurassic plutons occur: one towards the northern boundary, and the other directly west of the property, underlying the Scotch Minfile Occurrence. Updated mapping indicates the latter may be a member of the Tintina Gold Belt.

By the end of 2016, the Monte Carlo Zone had been identified as the main exploration target. Trenching exposed zones of altered orthogneiss with grey quartz veining, returning values to 0.42 g/t Au across 154 metres, including 0.76 g/t Au across 78 metres. The geochemical signature is similar to that of the Golden Saddle Deposit held by White Gold Corp. to the southwest. Similar mineralization was exposed by trenching at the Belmont zone, although gold grades are much lower. Trenching in 2013, at the Boss Zone,

returned values up to 3.088 g/t gold across 5 metres, from altered orthogneiss with quartz veining. The best value from trenching at the Samson zone was 0.32 g/t Au across 12.0 metres.

The deposit setting is orogenic, whereby auriferous zones are associated with deep-seated crustal faulting, with no identifiable local source. Although the majority of Yukon precious metal occurrences can be classed as "Intrusion-related Gold" mineralization, the lack of contact metamorphism, hornfelsing, and alteration typical of these systems indicates this setting is not applicable, and the mineralization in the White Gold area is considered orogenic.

1.4 2017 Exploration Program Results

The main focus of the 2017 program was a 1,032.8-metre diamond drilling program completing 9 holes which targeted a NNW-trending mineralized horizon at the Monte Carlo zone. Drilling was completed along two NE-SW trending sections, spaced about 230 metres apart, targeting mineralization identified from trenching within the hanging wall orthogneiss. The mineralization is up-dip of a property-scale NNW-trending, steeply ENE-dipping thrust fault underlain by footwall metasediments.

The first four holes utilized NTW-sized core but poor core recoveries prompted switching to wider HTW core. Mineralized intercepts were returned from brecciated, to gouge-textured, orthogneiss along both sections and consistently about 50 metres stratigraphically above the thrust fault. One south-directed hole was drilled along each of the sections. Hole DDLA-17-09, the south-directed hole along the southern section, returned a near-surface intercept of 5.36 g/t Au across 22.0 metres, and is considered a "discovery hole" by Goldstrike, although it represents an oblique intercept.

Data verification from the 2017 drilling program indicates a satisfactory level of accuracy and precision of the data. Further resampling of pulps from the higher-grade portions of hole DDLS-17-09 also indicate a high level of accuracy of results. However, gold values for original and re-split sections of core returned significantly varying results, indicating a "coarse gold effect" is present at the Monte Carlo zone.

Results of exploration to date infer that a mineralized horizon may extend at least 250-metres between the two drill sections, located within hanging wall orthogneiss above a NNW-striking, steeply ENE dipping property-scale thrust fault. Insufficient drilling has been done to confirm the contiguity of this zone and significantly more drilling would have to occur to determine whether a mineral resource exists. However, the zone is coincident with a lineament identified from airborne LIDAR topographic surveying extending about 1.0 km to the SSE. Mineralization within this lineament may occur within splays of the main thrust fault, amenable to deposition from orogenic fluids, into zones of structural preparation. The oxidized state of associated sulphides might indicate mineralization could be amenable to heap-leach extraction techniques, significantly improving potential economic viability.

The 2017 program also included an airborne LIDAR topographic survey, with a report included in Appendix 5.

1.5 Recommendations

Results of exploration from 2009 through 2017 indicate potential for the property to host further mineralized zones, and the Monte Carlo zone to be of significant size. A three-phase program is recommended for 2018: a Phase 1 program of surface exploration, a Phase 2 program of 1,000 metres of diamond drilling, and a final Phase 3 program of 500 metres of diamond drilling.

Phase 1 recommendations comprise ridge-and-spur grid soil geochemical sampling, 600 metres of mechanized trenching, and an 8.0 km of Induced Polarization (IP) surveying, targeting the Monte Carlo area and an area with a prospective radiometric signature some 1,500 metres to the east. The trenching will target the Monte Carlo zone vicinity.

Both phases of the 2018 diamond drilling program will target the Monte Carlo zone, using a heli-portable drill, utilizing HTW-sized core.

Phase 1 will involve eight field personnel (excluding the contract IP-crew), a helicopter pilot, cook and a cook's helper, the latter during the duration of the IP survey. Phases 2 and 3 may be conducted with a five-person crew, helicopter pilot, cook, and 4-person drill crew.

The program is expected to commence in mid to late June and extend until early September. Proposed expenditures for all three phases, including data compilation, a report and 5% contingency are expected to be CDN$1,509,000.

2 INTRODUCTION

This assessment report has been prepared by Mr. Carl Schulze (BSc., P.Geo.) of Aurora Geosciences Ltd. (Aurora). The report has been commissioned by Mr. Daithi Mac Gearailt of Druid Exploration, an agent of Goldstrike Resources Ltd. ("Goldstrike").

The 2017 drilling program was managed by Mr. Clayton Jones, of Roberts Creek, British Columbia, employed by Druid Exploration Ltd. of Dawson City, Yukon.

2.1 TERMS OF REFERENCE

The author has been requested to write this report using the following terms of reference:

a) Review and compile all available data obtained by Goldstrike Resources Ltd. and its predecessors,
b) Provide an Assessment Report to the standards of the Yukon Quartz Mining Act,
c) Verify and support technical disclosures by Goldstrike Resources Ltd.

2.2 TERMS, DEFINITIONS AND UNITS

All costs contained in this report are in Canadian dollars (CDN$). Distances are reported in centimetres (cm), metres (m) and km (kilometres). The term "GPS" refers to "Global Positioning System" with co-ordinates reported in UTM NAD 83 projection, Zone 8. "Minfile Occurrence" refers to documented mineral occurrences on file with the Yukon Minfile, Department of Energy, Mines and Resources, Government of Yukon.

A "Grab Sample" consists of a single piece of rock to be analyzed. A "Composite Grab Sample" is similar to a grab sample, but comprises multiple pieces of similar rock material, reported over a specific distance. A "chip sample" consists of a contiguously sampled section, or "chip", of rock, to obtain a more accurate representation of grade over width. A "float" sample is a rock sample that has been transported from its original bedrock source. "Mag" and "EM" refer to "Magnetic" and "Electromagnetic" methods referencing geophysical surveying. "IP" is an abbreviation for Induced Polarization geophysical surveying.

A collar location is the exact easting, northing and elevation, listed in UTM NAD 83, Zone 8, of the drill collar. An azimuth is the horizontal direction of drilling and a dip is the downward angle of drilling.

The term "ppm" refers to parts per million, which is equivalent to grams per metric tonne (g/t); the term "ppb" refers to parts per billion. Some historic grades are reported in "oz./ton" which is ounces per short ton. "Ma" refers to million years. The symbol "%" refers to weight percent unless otherwise stated. "QA/QC" refers to "Quality Assurance/ Quality Control".

ICP-ES stands for "Inductively coupled plasma emission spectroscopy", and AA stands for "atomic absorption". AQ300 refers to 33 element four-acid ICP-AES. "FA350-Au" refers to gold (Au) analysis of a 50-gram sample by fire assay with ICP-ES finish.

"CEO" stands for Chief Executive Officer. "NI 43-101" stands for National Instrument 43-101.

Elemental abbreviations used in this report are:

Au: Gold	Mn: Manganese
Ag: Silver	Mo: Molybdenum
Al: Aluminum	Na: Sodium
As: Arsenic	Ni: Nickel
B: Boron	Hg: Mercury
Ba: Barium	P: Phosphorous
Be: Beryllium	Pb: Lead
Bi: Bismuth	S: Sulphur
Ca: Calcium	Sb: Antimony
Cd: Cadmium	Sc: Scandium
Co: Cobalt	Sr: Strontium
Cr: Chrome	Th: Thorium
Cu: Copper	Ti: Titanium
Fe: Iron	Tl: Thallium
Ga: Gallium	U: Uranium
K: Potassium	V: Vanadium
La: Lanthanum	W: Tungsten
Mg: Magnesium	Zn: Zinc
Se: Selenium	Te: Tellurium

2.3 Sources of Information

Much of the information on the Lucky Strike property (geological setting, structural geology, airborne geophysics and past assessment reports) was provided by Goldstrike.

Information on claim tenure, including adjacent properties, and regional geology was provided by the "Yukon Mapmaker Online" website of the Yukon Geology Survey at http://mapservices.gov.yk.ca/YGS/Load.htm. Information on regional geology was provided by the "Yukon Bedrock Geology" website and by the "YGS Mapmaker Online" website, both available at http://www.geology.gov.yk.ca/Web_map_gallery.html. Information on mineral deposit resources and reserves at the neighbouring White Gold Property was supplied either by the Yukon Minfile website at http://yukon2.maps.arcgis.com/apps/Solutions/s2.html?appid=c759ea8ef5f748ecbd3e8c920da0ddcc, or at the website of White Gold Corp at www.whitegoldcorp.ca.

3 PROPERTY DESCRIPTION AND LOCATION

3.1 Property Description

The Lucky Strike property consists of 753 contiguous Yukon quartz mining claims, comprising approximately 15,723 hectares (38,836 acres). The property is geographically centred at 63°12'10" N Latitude, 139°07'06" W W Longitude (UTM NAD 83: 594640, 7009575, Zone 7) on NTS map sheets 115O/02 and 115O/03 in the Dawson Mining District of Yukon Territory, Canada. All but three claims are

100% held either by Goldstrike or by Cloudbreak Resources Ltd. (a predecessor company). The LUCKY 1-3 claims are held 100% by Terrance King, a director of Goldstrike.

The claim status for each claim that comprises the property is included in Appendix 3 (effective February 26, 2018).

The property, comprising 261 claims in 2015, was expanded in 2016 to its present size. The expansion completely enclosed the BREW 1-168 claim block which is 100% held by White Gold Corp.

Several NNE-flowing streams extending across, or partially across, the property are covered by placer claims or placer leases (A placer lease allows the holder exclusive rights to stake placer claims for a period of one year). The most northerly watercourse is Simmons Creek with the lower portion covered by a placer lease held by D. Bruce McArthur. The next significant drainage to the southeast, an unnamed stream, is partially covered by a placer lease 100% held by Twigg Stinson. The majority of this lease is located within the Brew property, although the lower extent of Brewer Creek is located within the Lucky Strike property. No workings or significant environmental disturbance are visible from 2010 Google Earth imagery.

Brewer Creek, the next stream to the southeast, is covered by a series of placer claims and a Placer Mining Land Use permit held by Dynamic Endeavors Inc. The majority of these are located within the Brew property. As of 2010, current or recently active workings are visible from Google Earth imagery, and an airstrip of unknown condition has been excavated along the ridgeline to the southeast. Telford Creek, to the southeast of Brewer Creek, is largely covered by the JR placer claims, held by Mr. Joel Robert White. No significant workings are visible from Google earth imagery.

Barker Creek, of which sections flow across the expanded claim block, has significant active placer workings along the majority of its extent. The lower portion of Barker Creek flows across the Lucky Strike property and is covered by placer claims held by Mr. Stuart Schmidt and a Placer Mining Land Use permit held by Schmidt Mining Corp. The extreme southern portion of the Lucky Strike property covers the upstream portion of Barker Creek. This area is covered by the SAGER CLAIM placer claims held 50% by Mr. Merrit Sager and 50% by Mr. Derek Fellars, and a Placer Mining Land Use permit held by Sager Merrit K. A placer lease held by Mr. Nick Karran, covers Agate Creek, a left tributary of Barker Creek.

The property, including expanded sections, is covered by a Class 3 Quartz Land Use permit, Permit #LQ00463, valid until August 8, 2022.

The surface rights on the property are held by the Crown. Exploration activities are therefore dependant upon obtaining the appropriate land use permit(s) for proposed exploration activities. Activities allowed under a “Class 1” exploration permit comprise rock, soil and silt geochemical sampling, geological mapping, trenching (to a limit of 400m^3 per claim), temporary trail construction (to a maximum of 3.0 km) and a maximum of 250 person-days in camp.

A gradation of permits, for Class 2 through Class 4 activities, is required for more significant programs like diamond drilling and reverse-circulation drilling programs having a footprint exceeding Class 1 limits. Larger exploration programs require a “Class 3 Permit”, are valid for five years (ten if requested) and are acquired through the local Mining Recorder, Department of Energy, Mines and Resources (EMR), Government of Yukon.

Class 3 permit activities allow for sizable diamond drilling programs (depending on the number of clearings per claim), up to 5,000 m^3 of trenching per claim per year, the establishment of up to 15 km of new roads and 40 km of new trails, and up to 200,000 tonnes of underground excavation. Additional permits required

include a "Consolidated Environmental Act Permit" for proper disposal of camp waste and ash resulting from incineration, and a "Fuel Spill Contingency Plan". A "Yukon Water License" is required if water usage exceeds 300m^3/day. Additional licenses may be required for "Disposal of Special Waste".

All applications for Class 2 through Class 4 require review by the Yukon Environmental and Socioeconomic Board (YESAB). YESAB will recommend whether a project may proceed, whether it may proceed with modifications, or whether the project does not meet the environmental or socioeconomic expectations and should not proceed. Following submission by YESAB, a Decision Body determines whether to accept the recommendations, and, if a permit is awarded, what the conditions of the permit will be.

There are no significant environmental liabilities on the property. The property is located within an overlap area of the traditional territory of the Tr'ondek Hwech'In First Nation (THFN) and the Nacho Nyak Dun First nation (NNDFN).

The northwest corner of the property is bordered by a parcel of "Class A" settlement land, specifically Block TH R12-A, held by the Tr'ondek Hwech'in First Nation. Class A settlement lands are areas whereby the applicable First Nation retains both the surface and subsurface rights. Although no encumbrances related to First Nations ownership occur directly on the property, Goldstrike wants to maintain a respectful working relationship, including partnership agreements, with the Tr'ondek Hwech'in and Nacho Nyak Dun First Nations.

The author is not aware of any other significant factors or risks potentially affecting access, title, or the right or ability to perform exploration on the property.

3.2 Land Tenure and Underlying Agreements

The following section was supplied by the website of the Apex Resources Inc. and modified slightly by the author.

All claims comprising the property are 100% held by Goldstrike, except for the LUCKY 1-3 claims which are 100% held by Terry (Terrance) King. The Lucky 1-172, Strike 7-10, 27-30, 46-50, 65-70, 85-90 and AU 89-116 claims are held by Cloudbreak Resources Ltd. (Cloudbreak), a precursor company to Goldstrike. The "original" 219 claims comprising the Lucky Strike property were staked in June of 2009, following on the release of favourable drilling results from the nearby Golden Saddle deposit (Figure 33). The claims were staked by a 50/50 joint venture between Cloudbreak and Alix Resources Corp. In 2010, Cloudbreak was renamed as "Petro One Energy Corp." (Petro One) who then purchased Alix Resources' 50% interest to obtain the full 100% interest in the property.

In 2010 Accelrate Power Systems Inc. entered into an option agreement to acquire a 70% interest in the property from Petro One, and subsequently completed its acquisition. Accelrate was renamed as Goldstrike Resources Ltd. In 2015, Goldstrike acquired Petro One and obtained a 100% interest in the property (Jones, 2016). In 2016, the remaining 534 claims were staked.

There are no royalties, back-in clauses or other encumbrances on the present Lucky Strike property.


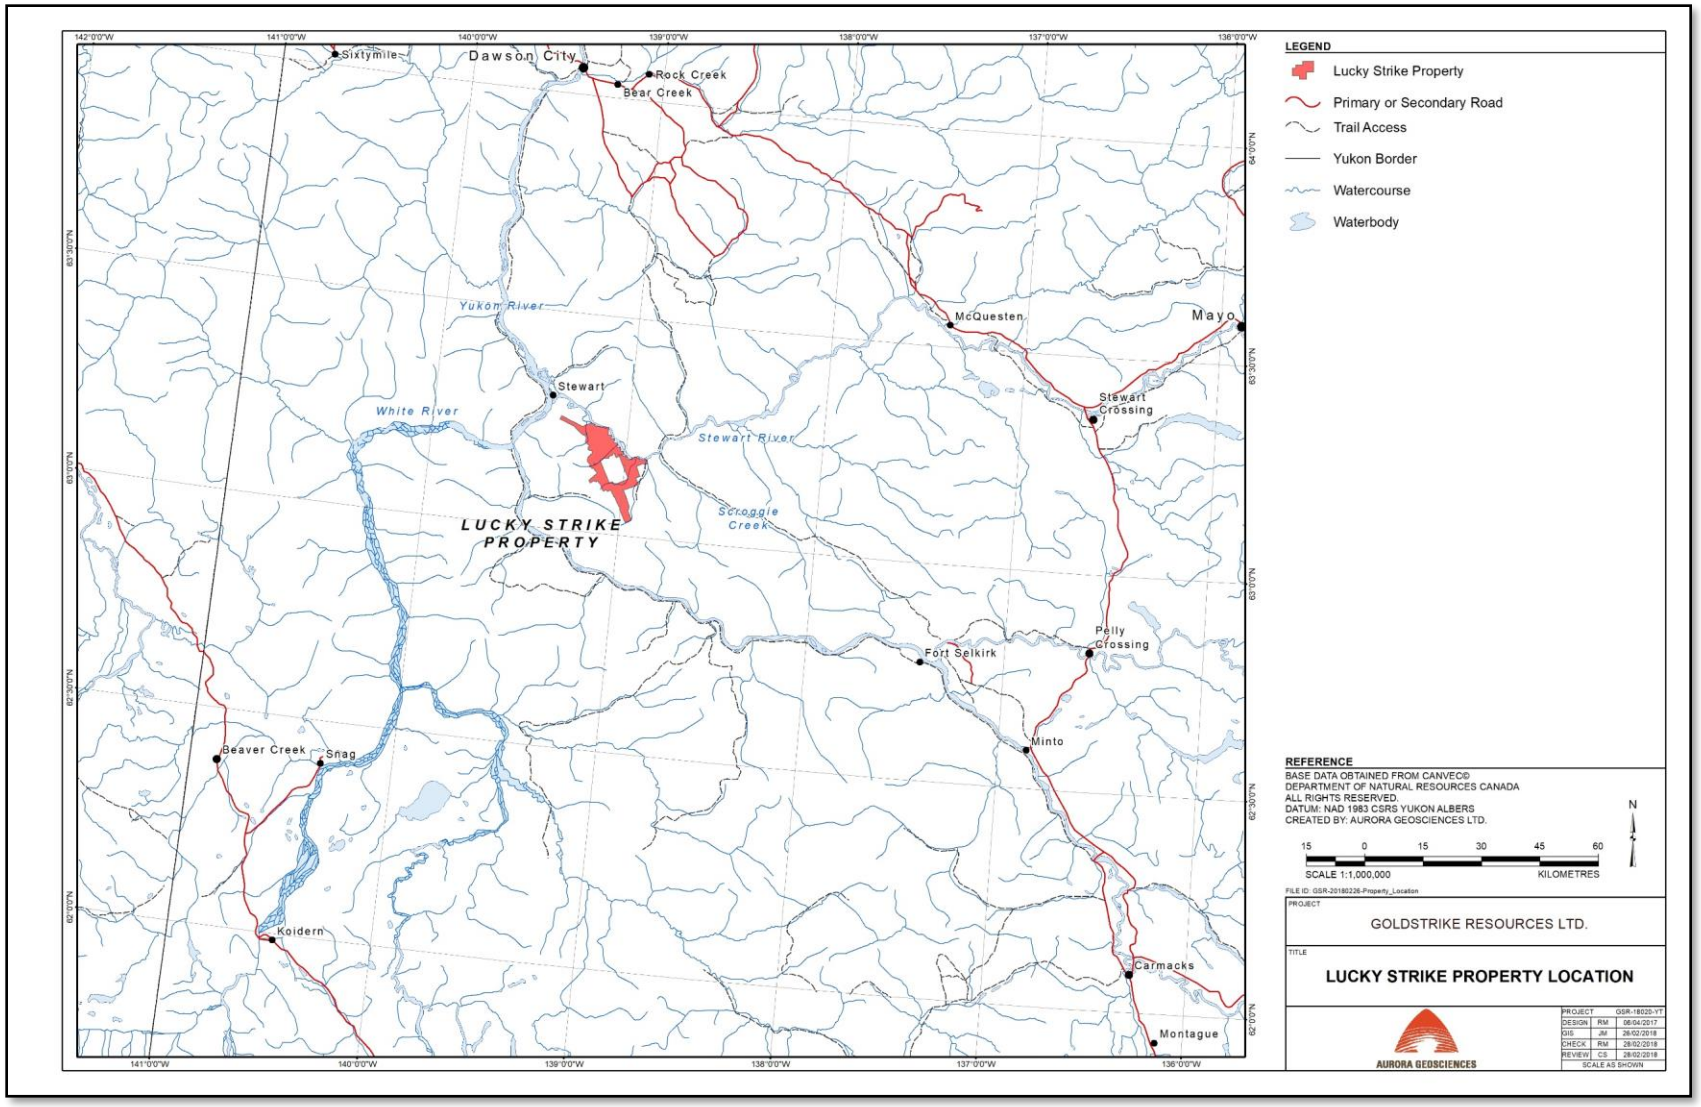


Figure 1: Location Map, Lucky Strike property

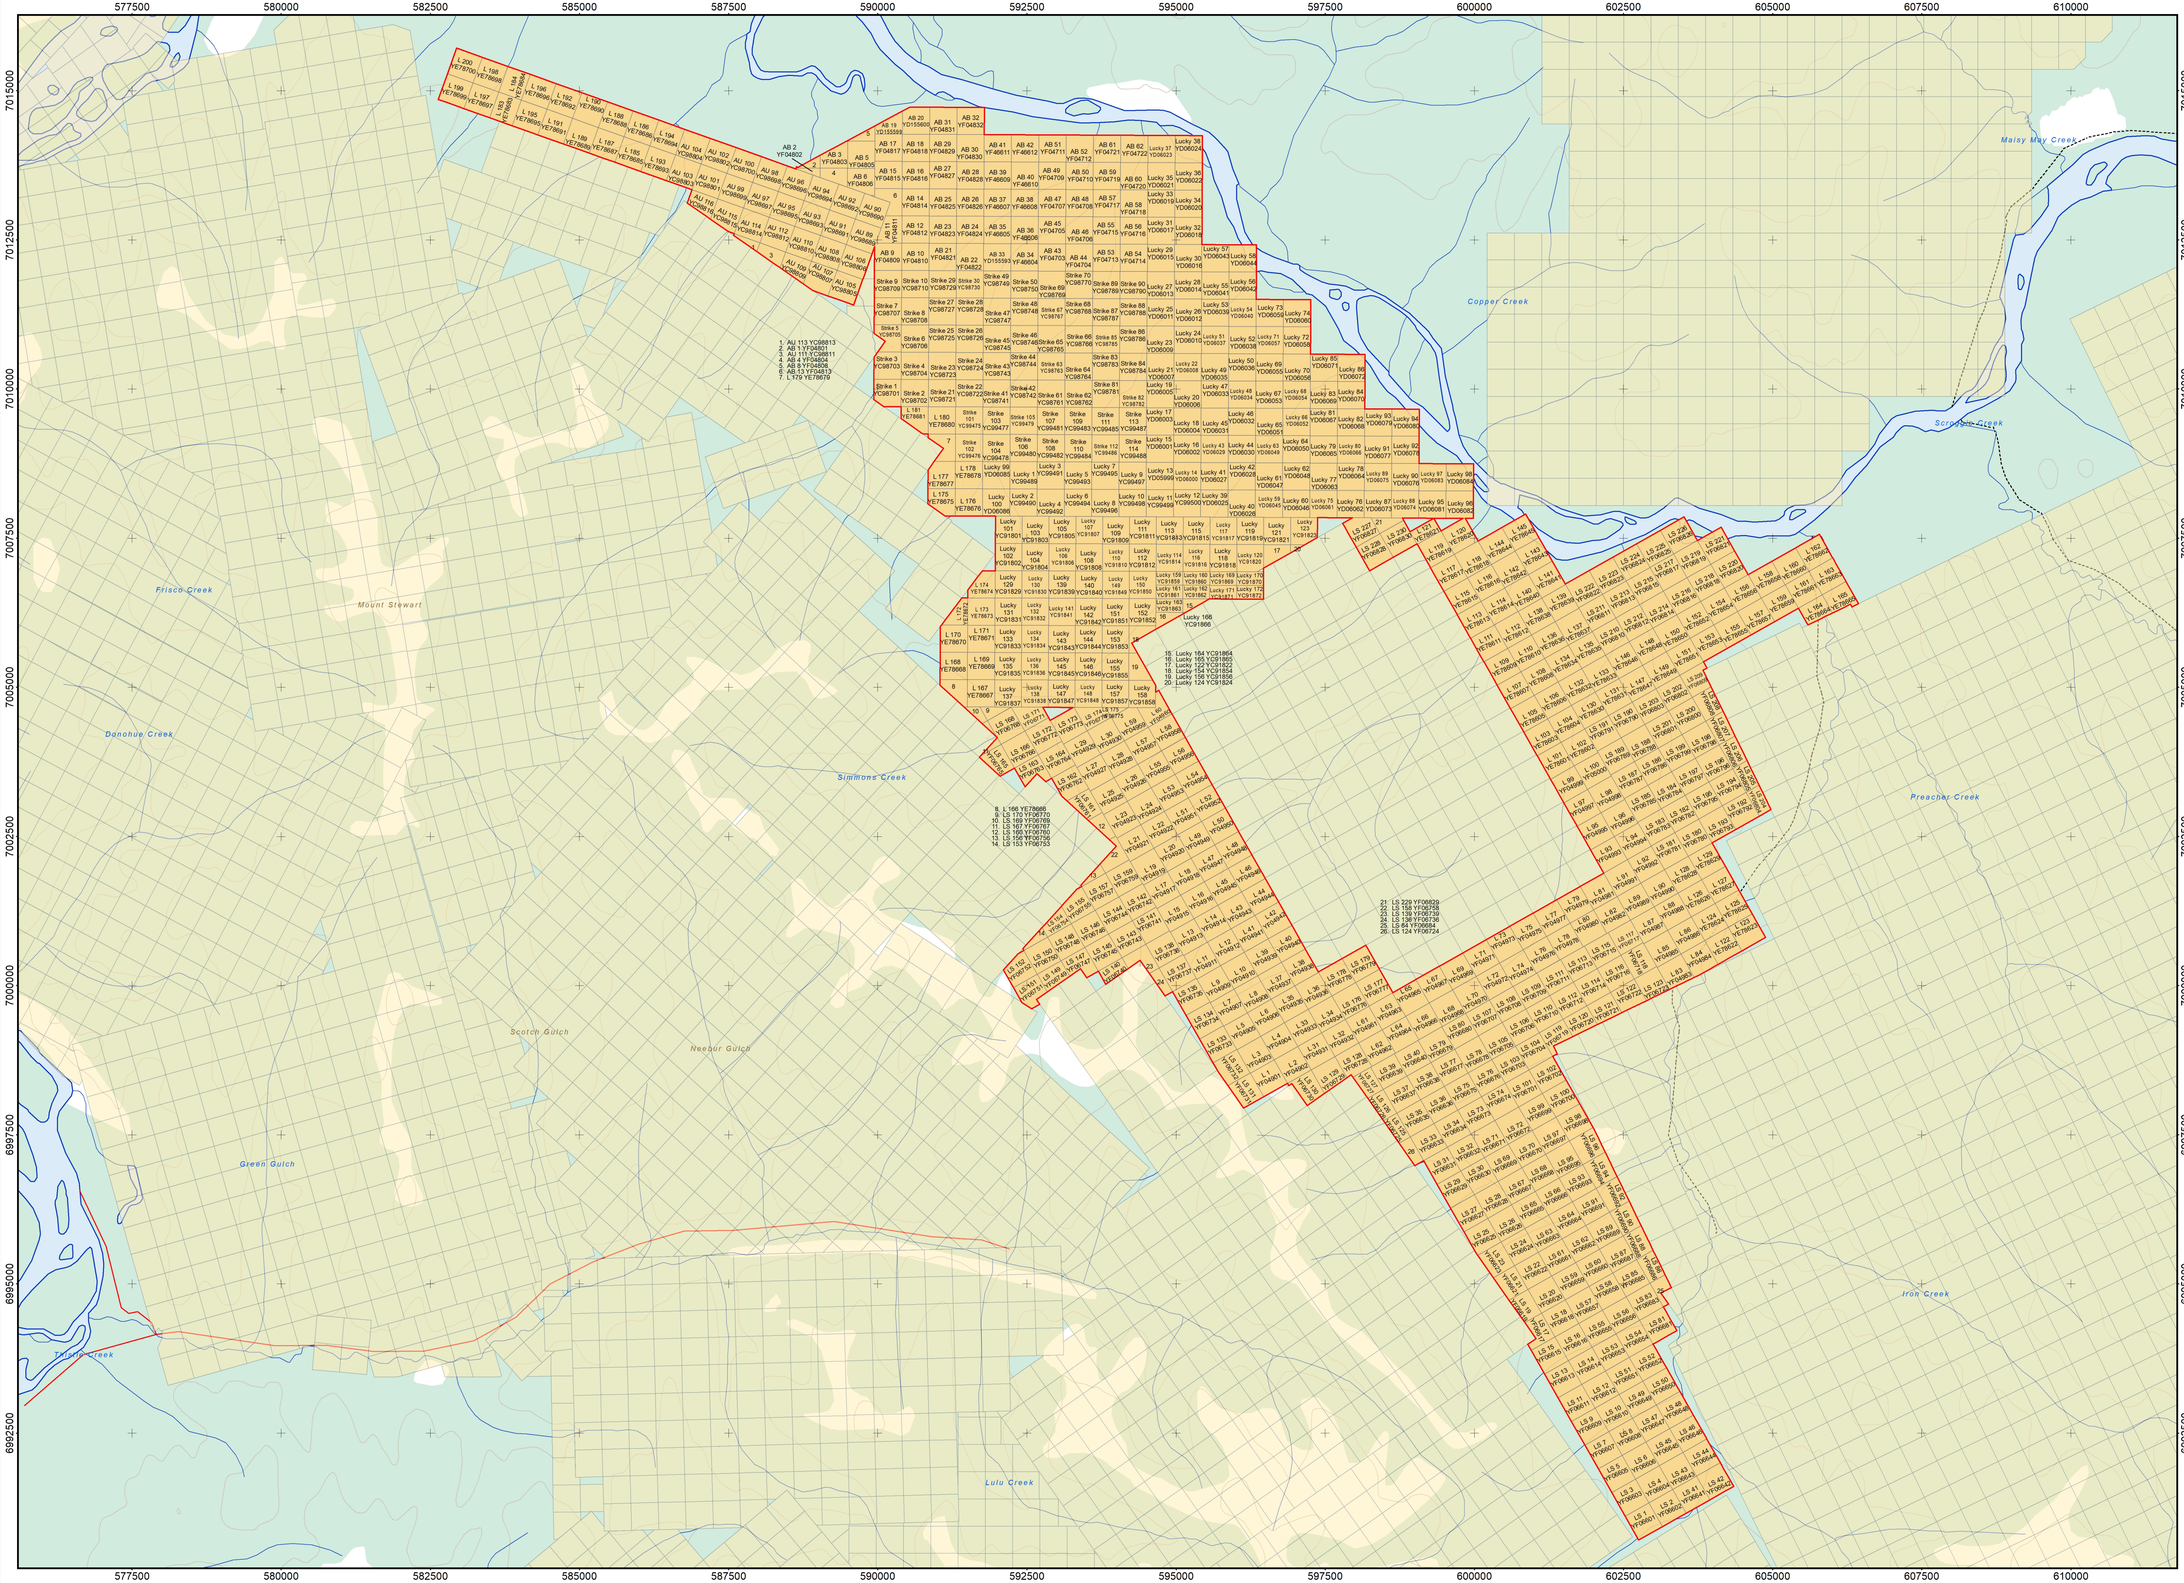

LEGEND

- Lucky Strike Property
- Lucky Strike Claims
- Other Active Claims
- Watercourse
- Trail Access
- Road Access
- Waterbody
- Forested Area

REFERENCE

NTS 250K 115O
BASE DATA OBTAINED FROM CANVEC©
DEPARTMENT OF NATURAL RESOURCES
CANADA ALL RIGHTS RESERVED.
DATUM: NAD 1983 CSRS UTM ZONE 7N
CREATED BY: AURORA GEOSCIENCES LTD.

N

1 0 1 2 3 4

SCALE 1:50,000 KILOMETRES

FILE ID: GSR-20180228-Property_Claims_Labels

PROJECT
GOLDSTRIKE RESOURCES LTD.

TITLE
LUCKY STRIKE PROPERTY CLAIMS

AURORA GEOSCIENCES

PROJECT		GSR-18020-YT
DESIGN	JM	06/04/2017
GIS	JM	28/02/2018
CHECK	JM	17/04/2018
REVIEW	CS	17/04/2018
SCALE AS SHOWN		

4 ACCESSIBILITY, CLIMATE, LOCAL RESOURCES, INFRASTRUCTURE AND PHYSIOGRAPHY

The Lucky Strike property is located in west-central Yukon Territory, within NTS map sheets 115O/03 and 115O/02. The property is geographically centred at 63°12'10" N Latitude, 139°07'06" W Longitude (UTM NAD 83: 594640, 7009575, Zone 7), 95 km south of the Town of Dawson City. Access to the property is by helicopter, and by barge or river boat for areas along the northeast property boundary adjacent to the Stewart River. Local roads extend along the majority of the Barker Creek drainage, which is connected by seasonal road to Thistle Creek to the southwest. The condition of the connector road is unknown. A local road extends along the lower portion of Brewer Creek, and an airstrip, in unknown condition, is located along the ridge between the Brewer Creek and Telford Creek drainage basins.

The climate in the Mount Anderson area is subarctic continental, with short, warm summers and long, very cold winters. Average daily high and low temperatures in July for Dawson are 23.1°C and 8.2°C, respectively. The average daily high and low temperatures in January are -21.8°C and -30.1°C. Average precipitation varies from 8.2 mm in April to 49.0 mm in July, comprising an annual precipitation of 324.4 mm (Wikipedia, after Environment Canada, information for Dawson City, YT). Winter snowfall is moderate, averaging 166.5 cm of snow per annum. Temperature and precipitation at the property vary with elevation, with greater precipitation and lower temperatures at higher elevations. The field season extends from late May until late September, but diamond drilling may be done in winter conditions if freezing of water lines can be prevented. Extended daylight hours occur from May through August which can assist in the feasibility of exploration.

The property is situated along the northwest margin of the "Dawson Range", extending southeast from the "White Gold" area to WNW of Minto Landing, Yukon. Elevation ranges from approximately 365 m (1,200 feet) along the Stewart River to about 1,160 m (3,805 feet) along the southwest property boundary, near the headwaters of Telford Creek. Outcrop exposure is estimated at less than 0.5% and limited primarily to steep stream valleys. Lower elevations are covered by thick deposits of loess (windblown fine sand), with north and east facing slopes typically containing permafrost. Gravel benches of unknown thickness occur in the northwestern property area, particularly near the confluence of Lucky Strike Creek and the Stewart River (Jones, 2016). The property is located along the extreme western margin of an area of "pre-Reid" late Pliocene to Pleistocene glaciation, directly north of Beringia which escaped all continental glaciation events and covered west-central Yukon and central Alaska.

Typical high-latitude boreal forest vegetation includes white spruce, birch and poplar, and covers lower elevations, becoming progressively stunted and mixed with "buckbrush" with increasing elevation. Some ridgelines and hilltops are covered by alpine vegetation, consisting of grasses and small scrub. Much of the northern property area was subjected to a forest fire around 2005 and is covered by fallen trees and scrubby re-growth.

Dawson City, Yukon, is a full-service community with a population reported in the 2011 census of 1,319 (Wikipedia, 2016). The population increases to approximately 2,000 when including neighbouring communities in the Klondike area. Dawson City has bulk fuel, grocery and hardware services, abundant accommodation, an available skilled work force, and government services including the mining recorder for the Dawson Mining District. Dawson City is approximately 550 kilometres along the North Klondike Highway from Whitehorse, Yukon. Whitehorse is a full-service community of 29,000, with excellent

accommodations, groceries, hardware, camp supplies, bulk fuel and expediting services, and a skilled workforce. Whitehorse, the capital city of Yukon, has full government services, including the Whitehorse Mining Recorder and the Yukon Geological Survey.

The property size and moderate terrain are adequate to accommodate mining facilities, potential mill processing sites, heap leach pads, tailings impoundments and waste disposal sites. There is sufficient water on the property to supply mining, milling and drilling operations. The nearest electrical infrastructure, the main power line from Whitehorse to Dawson, is located about 85 km north of the property. This power line is part of the main Yukon electric power grid, servicing Whitehorse, Dawson, Faro and Haines Junction, with a total capacity of 116 MW.

5 HISTORY

Little exploration has been documented prior to the release of strongly positive diamond drilling results from the nearby Golden Saddle deposit in May of 2009. Four Yukon Minfile occurrences have been documented; from northwest to southeast these are: Three Sisters (#115O 007), Strike (#1150 170), Simmons (115O 171) and Agate (#115O 015). The Three Sisters is located within the northern AU block of claims, and the Strike and Simmons are located in the block of Lucky and Strike claims. The Agate occurrence is located towards the southern end of the expanded portion of the property.

The present property area is located within the Stewart River area, remapped by J. Ryan and S. Gordey of the Geological Survey of Canada (GSC), as part of the "Ancient Pacific Margin NATMAP Project". This project was an interagency project combining the efforts of the GSC, the Yukon Geology Program (now the Yukon Geological Survey) and the British Columbia Geological Survey Branch. The purpose was to improve the understanding of pericratonic terranes, specifically the Yukon Tanana Terrane. In 2005 Ryan and Gordey released their geological compilation map of the Stewart River area (Yukon Minfile, 2011).

5.1 THREE SISTERS OCCURRENCE (115O 007)

The Three Sisters showing was originally staked in 1992, presumably to cover quartz veining. No work was reported, other than a description of the area was underlain by Paleozoic metasediments and granite gneisses (Vivian, White and Robinson, 2010).

In June of 2009, B. Naughty staked the AU claims, and in July optioned the Au 89-116 to a 50/50 joint venture comprised of Alix Resources Ltd (Alix) and Cloudbreak Resources Ltd (Cloudbreak). The joint venture immediately carried out geological mapping and soil geochemical sampling. Alix sold its 50% interest to Cloudbreak in January of 2010.

In October 2010, Cloudbreak conducted a high resolution airborne geophysical survey across the AU claims. In November, Cloubreak optioned the AU and adjacent claims to Accelrate Power Systems Inc. (Accelrate). Accelrate completed a NI 43-101 technical report on all exploration to date. In December 2010, Cloudbreak changed its name to Petro One Energy Corp. In June of 2011, Accelrate shareholders voted to change the company's main focus from oil exploration to mineral exploration and voted to change the name to Goldstrike Resources Ltd (Goldstrike).

In July of 2010, Naughty optioned the AU 1-2 and 9-42 claims to Erin ventures Ltd. (Erin) (Yukon Minfile, 2011). In June of 2011, Erin conducted geological mapping, prospecting and geochemical sampling on these claims (Yukon Minfile, 2011).

5.2 STRIKE OCCURRENCE (115O 170)

The Strike 1-114 claims were originally staked by B. Naughty in June of 2009. Naughty then optioned the STRIKE 17-20, 37-40, 56-60, 75-80 and 95-100 claims to First Lithium Resources Inc (First Lithium), which flew a combined airborne magnetic and radiomagnetic survey across these claims.

Following the First Lithium option, Naughty optioned the STRIKE 1-6, 21-26, 41-45, 61-64 and 81-84 claims to Network Exploration (Network). In September of 2009, Network conducted geological mapping and soil geochemical sampling. In November of 2009, an airborne magnetic and radiometric geophysical survey was completed. In June 2010, First Lithium purchased Network's STRIKE claims that were south of, and contiguous with, First Lithium's STRIKE claims. First Lithium completed a soil geochemical survey on both blocks in August of 2010.

In late June of 2009, Naughty also optioned the STRIKE 11-16, 31-36, 51-55, 71-74 AND 91-94 claims to Newcastle Minerals Ltd. which conducted an airborne magnetic and radiometric survey in November of that year (Yukon Minfile, 2011).

In July of 2009, Naughty optioned the STRIKE 7-10, 27-30, 46-50, 65-70 and 85-90 claims to the joint venture between Alix and Cloudbreak. The joint venture immediately conducted geological mapping, soil sampling and prospecting program on these claims (Yukon Minfile, 2011). A detailed grid soil sampling program consisting of 1,503 samples was completed in September of 2009. The survey revealed four zones of anomalous gold values deemed worthy of follow-up exploration (Vivian et al, 2010). The most notable is a NW-SE trending soil anomaly extending northwest from the southeast corner of the claim block to the Strike claim block. One other soil anomaly parallels this in the southwestern property corner. The joint venture also contracted Precision Geophysics to conduct an airborne magnetic and radiometric survey in November of 2009.

It appears likely that one airborne survey covered all of the optioned claim parcels. In January of 2010, Cloudbreak purchased Alix's interest in the Strike and associated claims.

In March of 2010, Atocha Resources Inc. optioned the STRIKE 100-114 claims from Naughty and completed a geological mapping and soil sampling program in June.

As part of its option agreement with Accelrate, Cloudbreak optioned its 70% interest in its STRIKE and neighbouring claims to Accelrate Power Systems, which became Goldstrike by June of 2011.

5.3 SIMMONS OCCURRENCE (115O 171)

This occurrence was staked as the LUCKY 1-172 by B. Naughty, who then optioned these claims to the Alix-Cloudbreak joint venture in July and August of 2009. The joint venture conducted geological mapping and soil geochemical sampling (part of the same program described in Section 6.2) in September of 2009. In January of 2010, Cloudbreak purchased Alix's 50% interest in the claims.

In October of 2010, Cloudbreak completed a high resolution airborne magnetic and radiomagnetic survey across the claims. These claims were incorporated into the option agreement whereby Accelrate obtained a 70% interest in the claims, which were officially held by Goldstrike by June of 2011 (Yukon Minfile, 2011).

5.4 AGATE OCCURRENCE (115O 015)

Early activity near the Agate occurrence included staking of the Mountain Chief and other claims by J. McGilvray in September of 1900, and the Golden King claim in February of 1901. The occurrence was restaked in 1982 as the DL 1-72 block by Don Lee, who transferred the block to Lee's Jade and Opal Ltd. in 1985. The claims were subsequently optioned to New Era Development Ltd. in 1987, which explored the property together with local placer activity.

The area was restaked as the RB 1-50 claims by B. Naughty in June of 2009, who then optioned these claims in July to Weststar Resources Corp. (Weststar) in exchange for cash, shares and work commitments. Weststar renamed the claim block as the Golden Fox and completed a silt and soil geochemical program in October of 2009. The sampling occurred along three separate drainages and identified an 850-metre long anomalous area returning values to 30 ppb gold from silt sampling.

5.5 2013 – 2016 EXPLORATION BY GOLDSTRIKE RESOURCES LTD.

Goldstrike conducted surface exploration programs annually since 2013. Programs from 2013 through to 2015 were completed on the "original" claim block, whereas the 2016 program was conducted across the expanded present claim block. Discussion of results of these programs is disclosed under Section 7.3, "Mineralization".

5.5.1 2013 Goldstrike Program

The 2013 program consisted of soil geochemical sampling, a ground magnetic survey and the mechanized excavation of six trenches utilizing a "Candig" backhoe. The survey focused on the LUCKY 15-20 claims in the central part of the claim block, near the largest of the soil anomalies identified in 2009 by Accelrate. A total of 179 chip samples, mostly 2.0m in length with some 3.0 and 5.0-metre samples, were obtained from the trenches. Six further samples were taken from test pits, and three more from prospecting, for a total of 188 samples. All trenches and pits were backfilled and reclaimed.

A total of 245 soil geochemical samples were taken from a 500 x 550-metre grid within the trenched area, and four more samples were taken while prospecting.

The magnetic survey utilized a backpack-mounted Gem Systems GSM-19 Overhauser ground magnetometer. Although the entire 2013 soil grid was slated for magnetic surveying, only the western third of the grid was completed (Mac Gearailt, 2013).

5.5.2 2014 Goldstrike Program

In 2014, exploration consisted of further mechanized trenching, soil sampling and a 25 line-km ground magnetic survey across two areas of the property covering a total of 21 quartz claims. The main area was named Zone 1 and was centered on the 2013 work. Only limited exploration comprising soil and rock sampling was completed at Zone 2, within the eastern part of the AU claim block.

At Zone 1, a total of 244 metres was excavated in five trenches, with the collection of 91 chip and 11 grab samples. A further six test pits were excavated obtaining an additional 13 samples. A further 28 samples

were taken from extra sampling of trenches or during the prospecting of Zone 1. Two soil grids were also completed at Zone 1; a main grid comprising 414 samples and a western grid comprising 132 samples.

Five rock grab samples were obtained from Zone 2 along with 68 ridge and spur contour soil samples (Mac Gearailt, 2013).

5.5.3 2015 Goldstrike Exploration Program

The 2015 program consisted of mechanized trenching, soil sampling, rock sampling and prospecting. The work focused on Zone 1 and Zone 2, which had been re-named as the AU claims.

Work at Zone 1 consisted of mechanical excavation of a single 69-metre trench and 21 hand-dug pits. The hand-dug pits were oriented in two parallel 50 m long rows. A total of 35 samples were obtained from trenching, and 23 rock grab samples from the pits. Work also included a single 400-metre soil geochemical survey line comprising 12 samples, six to the northeast of the test pit lines, and six extending to the north.

At the Au claims, 117 soil samples were taken from a 1,200 x 300-metre grid extending NW-SE.

5.5.4 2016 Goldstrike Exploration Program

The 2016 exploration program comprised two phases: a 15-day Phase I program, in late July, comprising trenching, soil sampling, ground magnetic surveying and prospecting; and a Phase II program of trenching and soil sampling across several grids southeast of the Samson Zone. Phase II was conducted at approximately the same time as the additional 492 claims were added. The total land package was now 753 claims, extending the claim block to the south with a total linear distance of 30 km with a surface area of approximately 150 sq. km.

Phase I was designed to follow up on positive 2015 results from rock and soil sampling at the Samson Zone (formerly Zone 1, west grid) and the Monte Carlo Zone (formerly Zone 2/ Au Claims). Nine trenches comprising 476.8 metres were excavated with 287 rock samples obtained. Also, seven line-km of ground magnetic surveying were completed. A total of 970 soil and 24 rock geochemical samples were obtained from across the property during Phase 1. The target areas were the Monte Carlo and Samson zones.

Phase II was conducted in the latter half of September and involved reconnaissance and grid soil geochemical sampling across southern property areas, 296.5 metres of trenching, and prospecting. A total of 149 trench, 905 soil and 12 rock grab samples were obtained. An Induced Polarization (IP) survey comprising seven lines approximately 1.0 km each was completed by Aurora Geosciences ltd. across the Monte Carlo and Belmont Zones.

By the completion of Phase II, five target areas had been identified. From northwest to southeast these target areas are: the Monte Carlo, Belmont, Samson, Boss and Maverick zones. Several small soil geochemical grids were also completed in the southern property area.

The 2016 report discusses trenching and soil geochemical surveying in detail, although does not distinguish the particular exploration phase the work was done in. In 2016, a total of 12 trenches totaling 773 metres were excavated: 3 trenches totaling 154 metres at the Samson Zone; 2 trenches comprising 231.5 metres at the Belmont Zone, and 7 trenches totaling 385 metres at the Monte Carlo Zone.

A total of 1,875 deep auger soil samples were taken in 2016, comprising tightly spaced grid sampling and additional ridge and spur sampling. The program led to identification of two further soil anomalies, called the Belmont Zone, between the Monte Carlo and Samson zones, and the Maverick Zone, located towards

the southern end of the property. Specific amounts of soils were not provided, except at the Samson Zone where 396 samples were obtained.

The program also included the collection of 36 rock grab samples and 3 stream sediment samples. Most of the rock samples were obtained from four hand-excavated pits located at sites of known anomalous soil values. The silt samples were taken from a single northeast-flowing drainage located in the central property area.

In 2016, a 7-km ground magnetic survey was also completed by Aurora Geosciences Ltd. at the Monte Carlo and Samson zones.

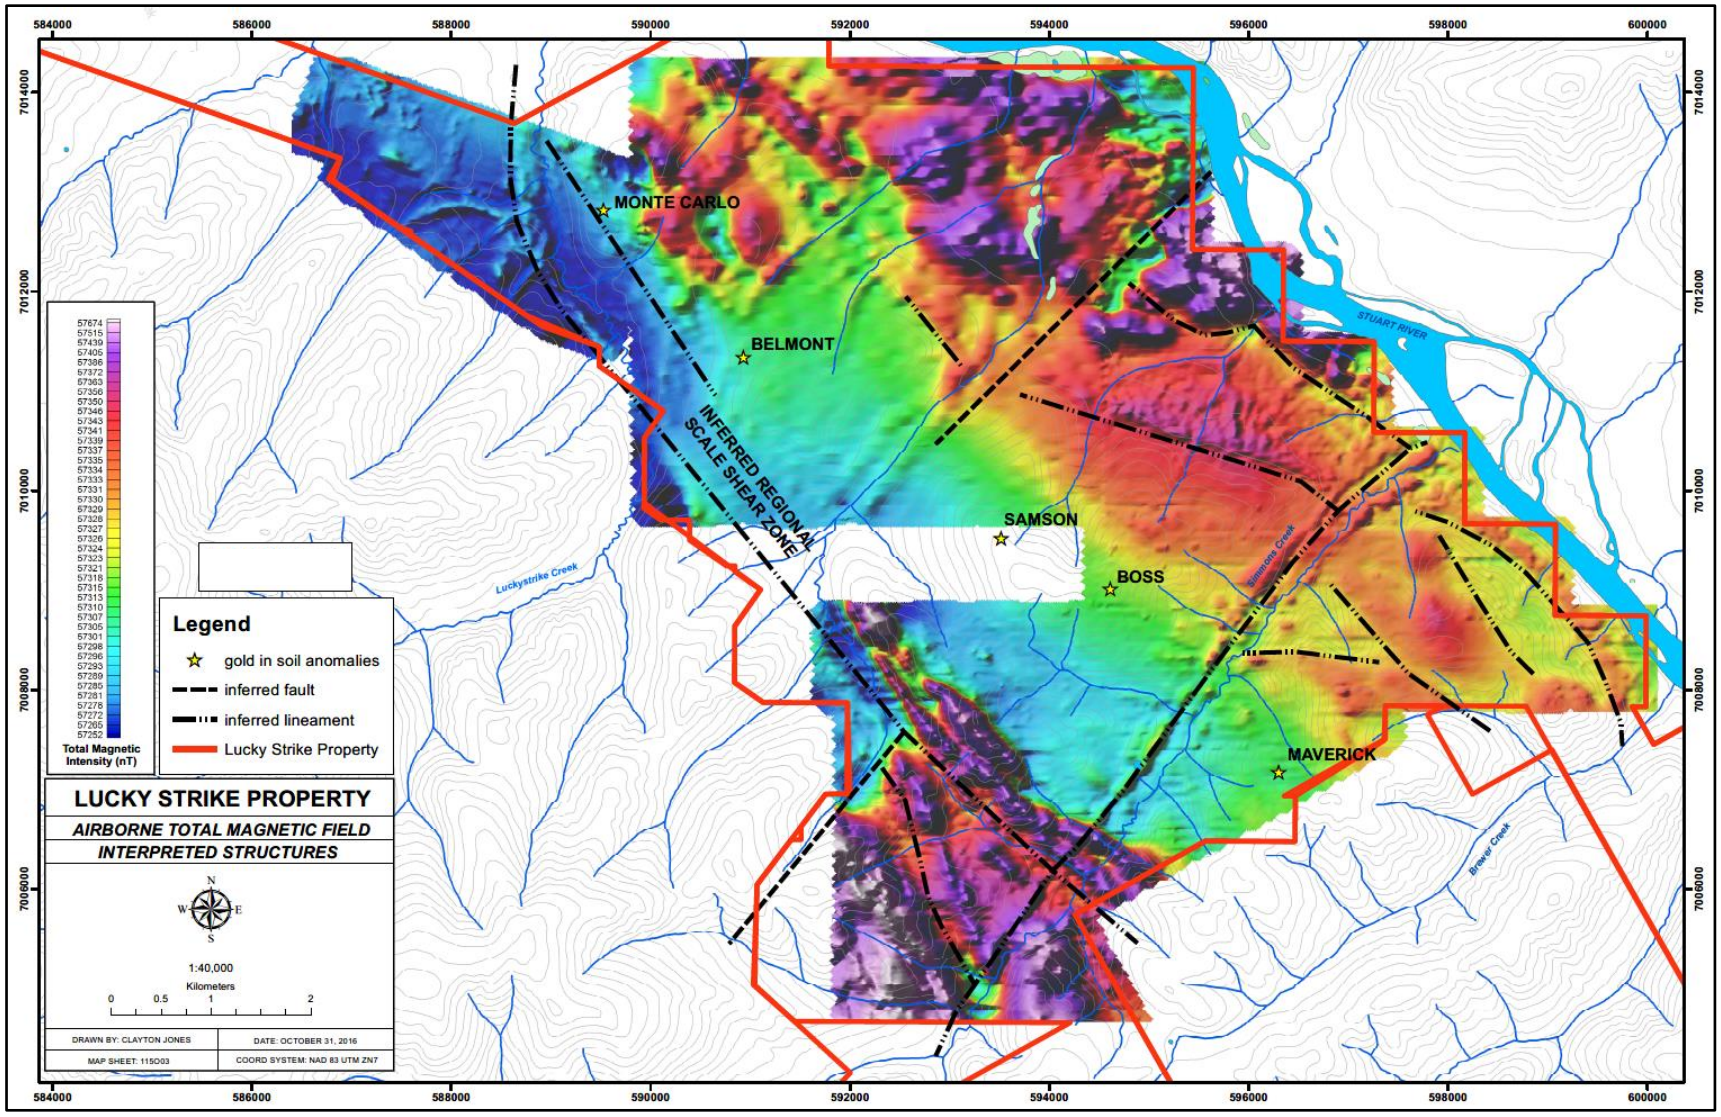


Figure 3: Airborne Total Magnetic Field, Lucky Strike property

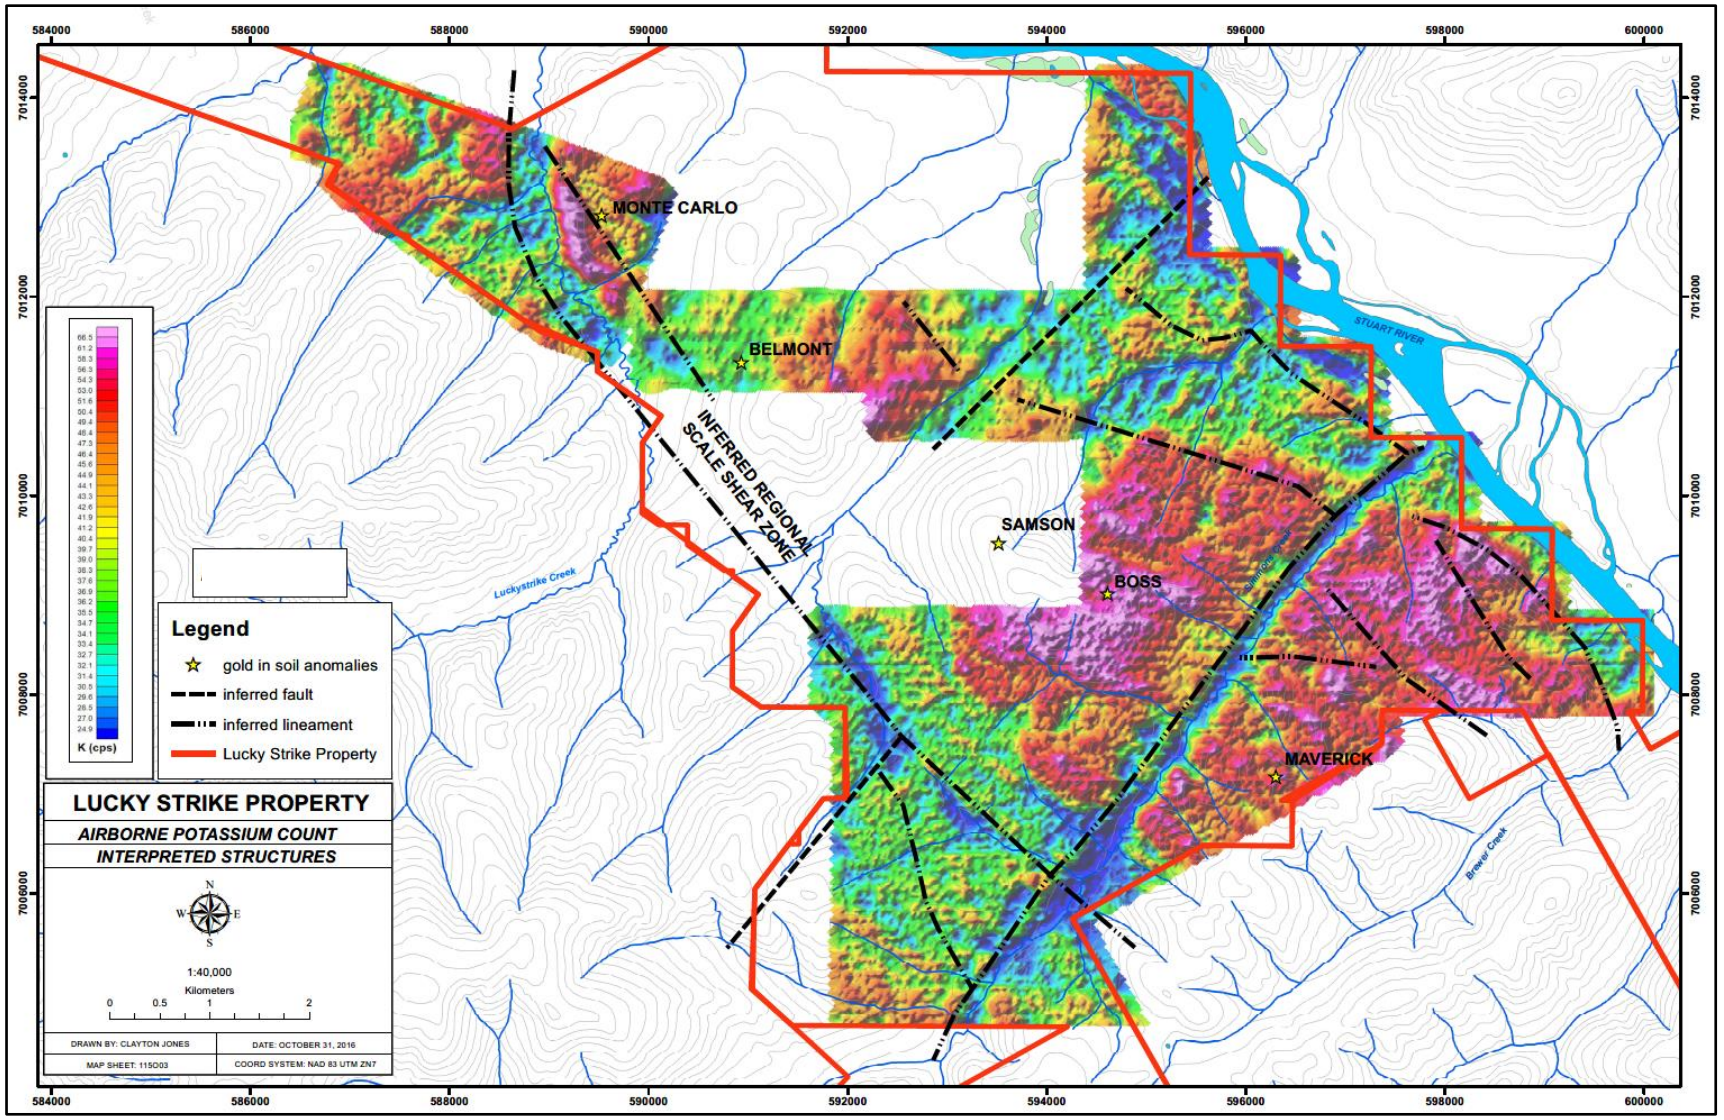


Figure 4: Airborne Potassium Count, Lucky Strike property

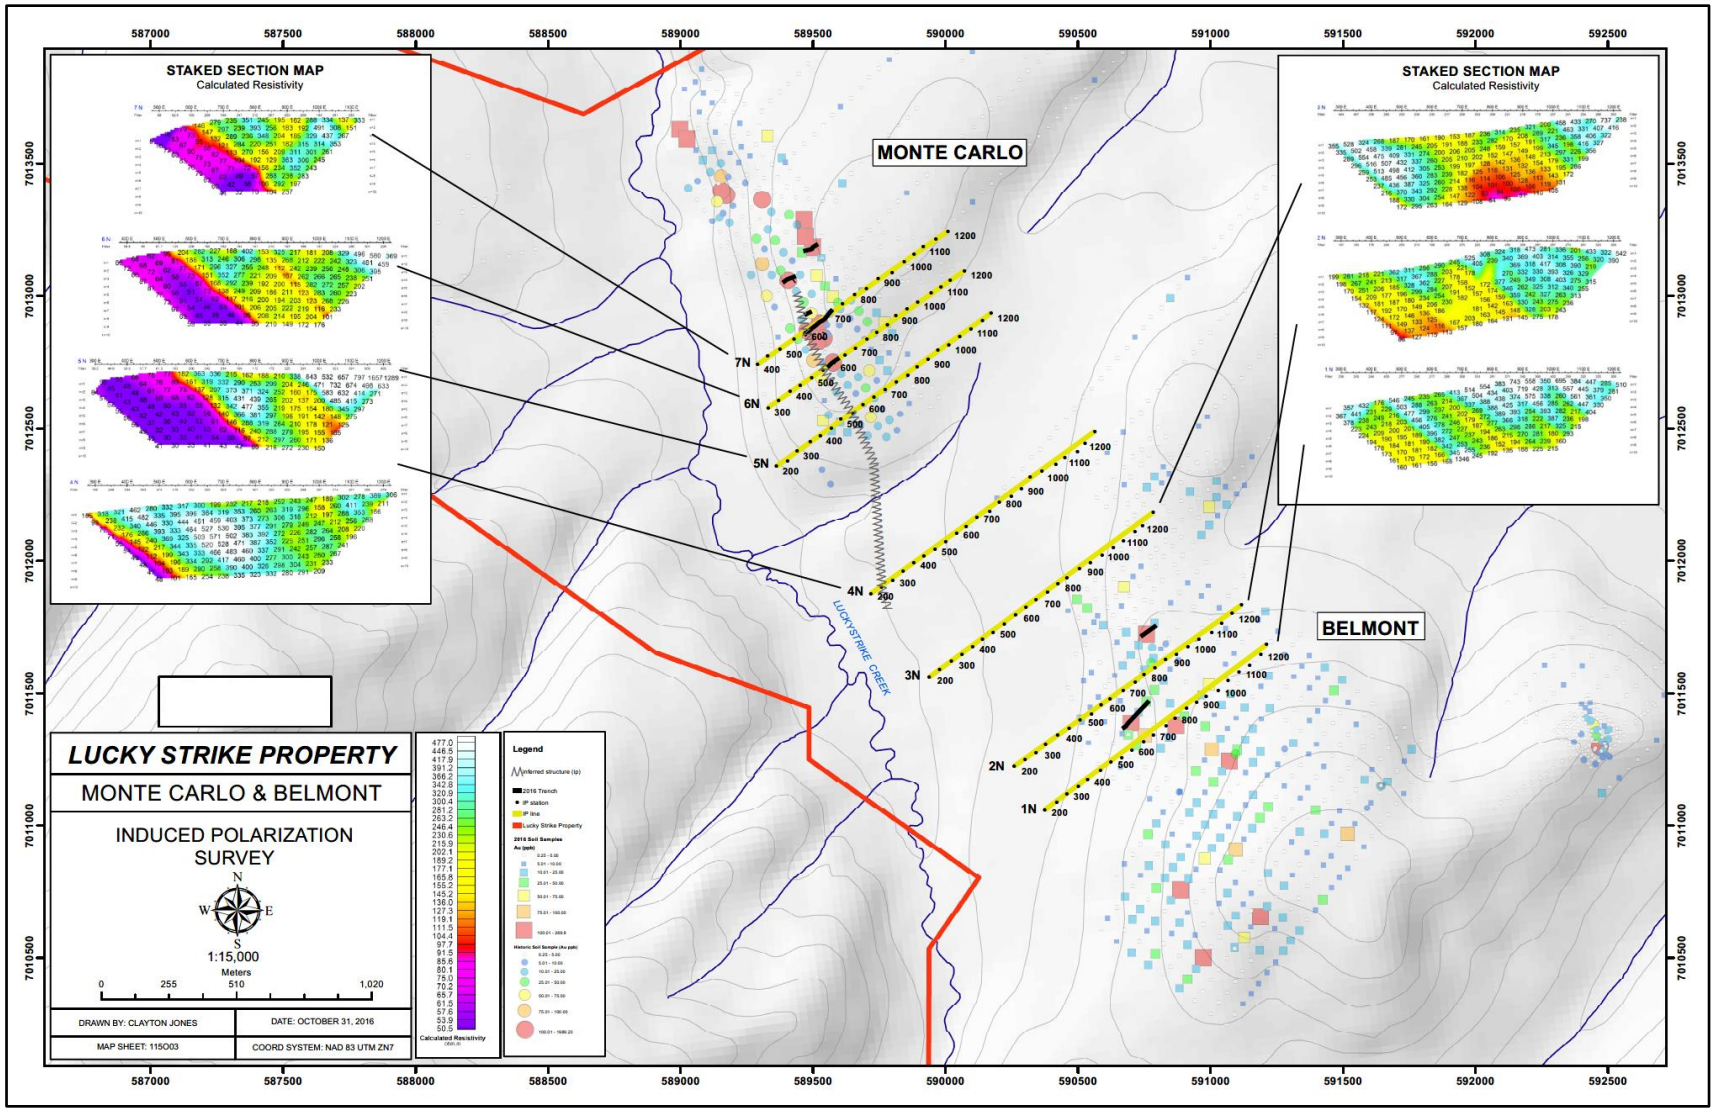


Figure 5: 2016 Induced Polarization Resistivity Survey

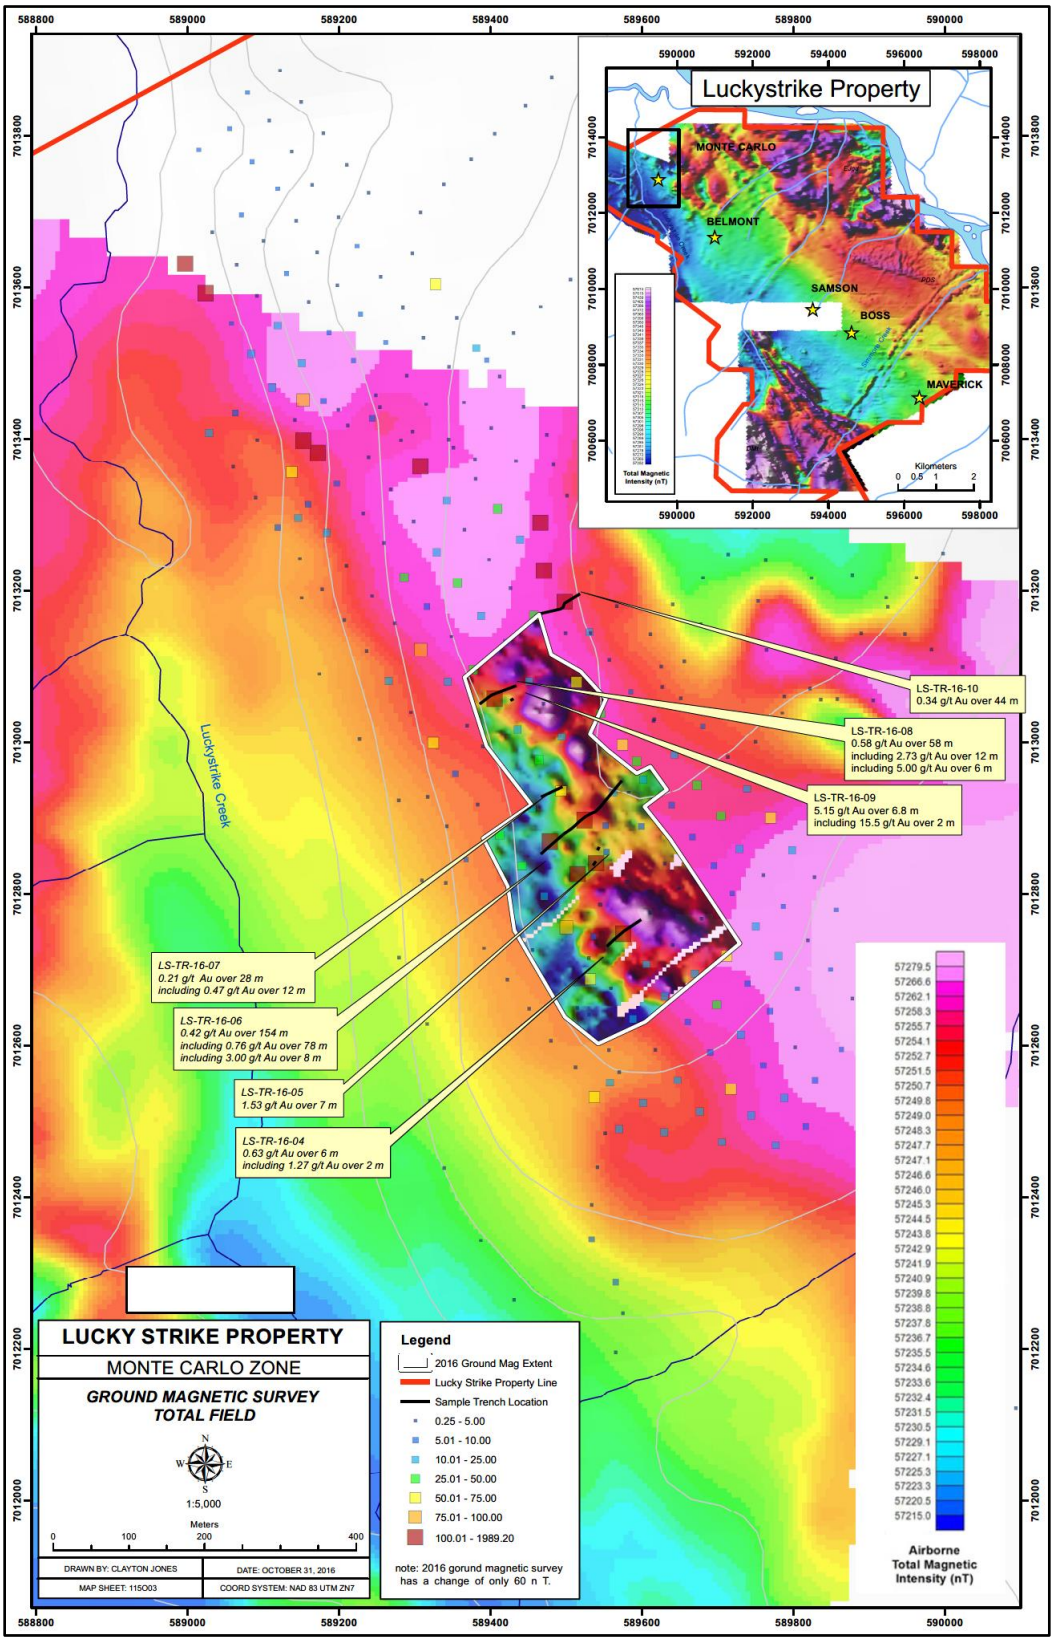


Figure 6: 2016 Ground Total Field Magnetic Survey

6 GEOLOGICAL SETTING AND MINERALIZATION

6.1 REGIONAL GEOLOGY

The following description of regional geology is based partly on a master's thesis paper titled: "*Late Jurassic Fault-Hosted Gold Mineralization of the Golden Saddle Deposit, White Gold District, Yukon"*, by Leif Anthony Bailey (*Bailey L. A., 2013*). The paper, which provides a comprehensive description of the geological setting of the While Gold District, focuses on the Golden Saddle Deposit roughly 15 km to the west, held by White Gold Corp.

The White Gold District is underlain by late Paleozoic meta-siliciclastic, meta-volcanic, meta-plutonic rocks of amphibolite-grade comprising the Yukon-Tanana Terrane (YTT). The YTT is a large allocthonous terrane accreted on to the Ancient North American Platform, the boundary of which is marked by the NW-SE trending right lateral Tintina Fault Zone to the northeast. The southwest boundary is marked by the NW-SE trending Denali (Shakwak) Fault zone, separating the YTT to the northeast from a younger allocthonous terrane comprising the Alexander-Wrangellia Terrane to the southwest.

The YTT is comprised of four main lithological assemblages, of which the oldest is the Proterozoic to Devonian Snowcap Assemblage consisting of siliciclastic sediments including metapelites and psammites, deposited on a passive continental margin setting. This is overlain by three major volcanic and volcanoclastic assemblages formed in island arc settings: the Devono-Mississippial Finlayson assemblage, the Mississippian to Lower Permian Klinkkit assemblage, and the mid to late Permian Klondike assemblage. The Finlayson volcanics are coeval with subvolcanic and plutonic units, which have become intercalated and crosscut by various YTT lithological units. These weakly to strongly metamorphosed rocks occur as units of intermediate to mafic orthogneiss and metagranite, and underlie the majority of the Lucky Strike property (Bailey, 2013). A territory-wide Yukon Geology Map by Gordey and Makepeace indicates that the dominant assemblage in the area, and underlying the Lucky Strike property, is the Devonian to Mississippian Nasina Series fine clastic sediments; in the property area, however, the Yukon mapmaker Online website identifies these as Mississippian Simpson assemblage tonalities and intermediate to mafic orthogneiss. The Nasina Series, Simpson Assemblage rocks may be correlative with lithologically similar Finlayson Assemblage rocks.

The YTT stratigraphjy has undergone subsequent intrusion by three major magmatic episodes. The earliest was an Upper Triassic to Lower Jurassic event resulting in emplacement of two plutonic suites; the Aishihik Suite of biotite-hornblende granodioritic to dioritic rocks; and the Long Lake Suite of felsic granitic to syenitic rocks (Gordey and Makepeace, 2001). The Aishihik Suite includes the Minto Suite of granodioritic rocks, which includes the host intrusives for the Minto Mine to the ESE.

The second major intrusive event occurred during mid to late Cretaceous time (110 – 70Ma) and resulted in emplacement of granitic, monzonitic to quartz monzonitic and dioritic intrusions of the Tintina Gold Belt. Plutons of this suite are commonly associated with intrusion-related gold +/- silver mineralization, including several active and past-producing mines in central Yukon and Alaska.

The final magmatic event occurred during the Cretaceous-Tertiary temporal boundary, resulting in extensive units of mafic and lesser felsic volcanic flows with minor pyroclastic rocks, as well as conglomerates to fine clastic sediments.

The structural and stratigraphic framework of the YTT has been modified by syn- and post-accretionary tectonism commencing during collision of the YTT with the Ancestral North American platform during the late Permian to early Jurassic periods. Tectonism continued during early Cretaceous through Paleocene time due to collision of the Alexander- Wrangellia Terrane along the Shakwak Fault. The compressional regime caused by continued collision resulted in development of major strike-slip faults as well as significant thrust fault systems (Bailey, 2013).

Geological compilation by Gordey and Makepeace shows the Lucky Strike property and White Gold area to be underlain by an aerially extensive package of Devono-Mississippian Nasina Series siliciclastic sediments, intercalated with large units of Carmacks Group volcanic rocks north and southeast of the property (Figure 3). This package is bounded to the south by the mid-Cretaceous granodioritic Dawson Range Batholith. A large unit of Long Lake Suite granitic rocks occurs somewhat to the southeast of the property; Aishihik Suite batholiths occur to the southeast of that.

The Golden Saddle deposit, to the west, occurs in an area of NNW striking, ENE dipping thrust faulting, indicating a locally strongly compressional regime. Thrust faulting has resulted in alternating narrow units of NNW-trending Finlayson Assemblage metavolcanics separated by Snowcap Assemblage psammites, quartzites and schist, and hosting minor units of Devono-Mississippian pyroxenites and serpentinites. These have been subsequently offset by a large number of late ENE trending faults, likely normal or reverse faults, resulting in small-scale offsetting of Paleozoic stratigraphy.

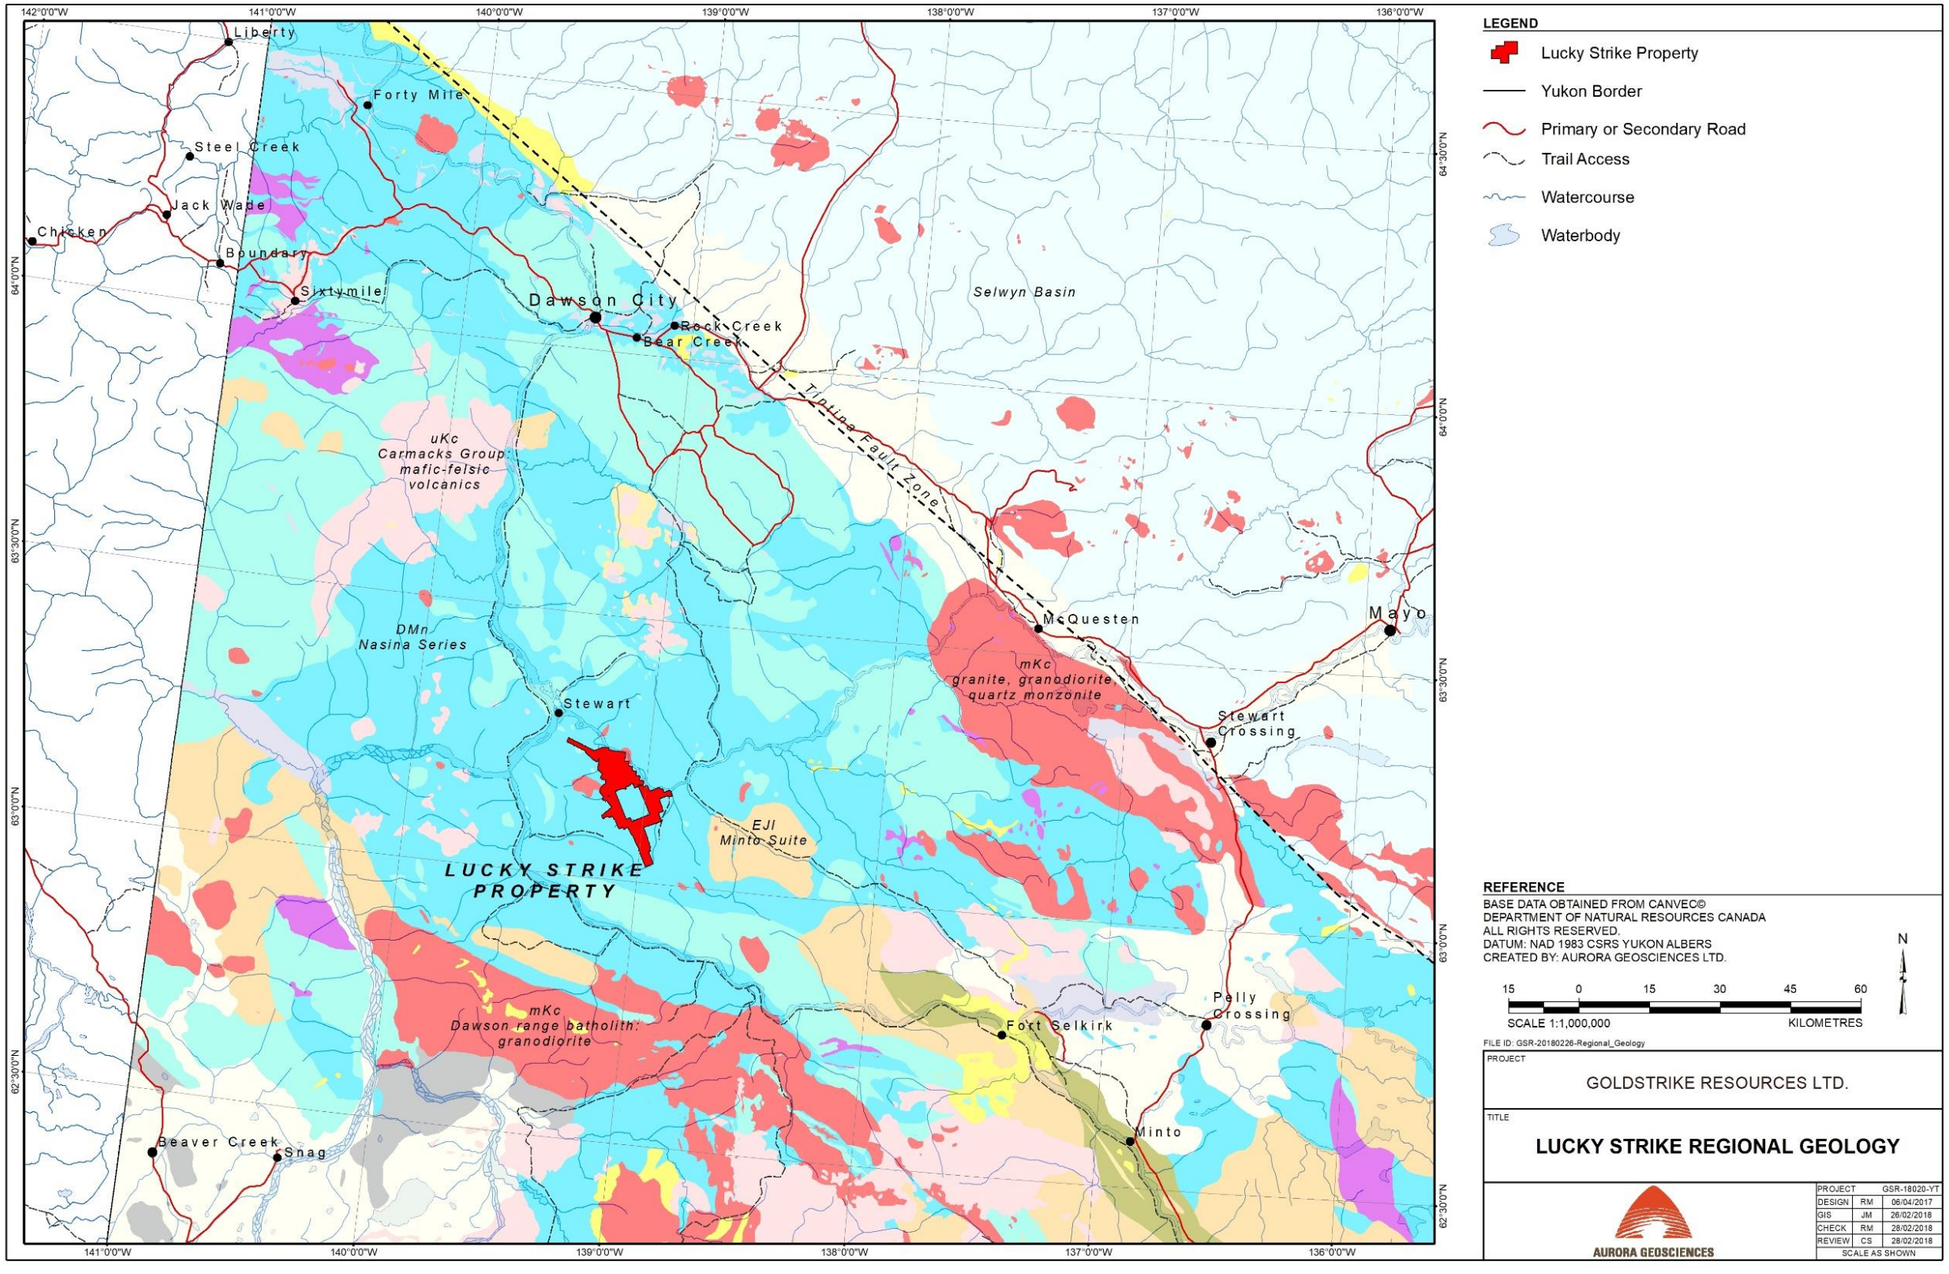


Figure 7: Regional Geology map

6.2 PROPERTY GEOLOGY

Little property-scale mapping has been done to date. Review of the Yukon mapmaker website indicates the Lucky Strike property is underlain mainly by an aerially extensive, NW-SE extending package of Mississippian Simpson Assemblage tonalities and intermediate to mafic orthogneiss. In east-central areas, these rocks are intercalated with NW-SE trending units of Proterozoic to Devonian Snowcap Assemblage quartzites, psammites and schist and minor marble (Figure 4). Two early Jurassic Long Lake Suite plutons occur in the property vicinity: one towards the northern boundary, and the other directly west of the property, underlying the Scotch Minfile Occurrence (#115O 006). An updated map by Gordey and Ryan (2005) indicates this stock to be a Cretaceous granite, and if so, this is likely to be a member of the Tintina Gold Belt.

The property geology map in the 2016 Goldstrike assessment report also indicates several circular units of Devono-Mississippian orthogneiss, as well as two narrow, linear units along the southwest margin, the latter likely intercalated with the much more extensive orthogneiss. The map also shows a small unit of Eocene rhyolite in the extreme southern area (Jones, 2016).

Although property-wide mapping has not been done, detailed geological mapping was accomplished in the Monte Carlo Zone area. Mapping here indicates that a NNW-striking, ENE dipping thrust fault separates a unit of Devono-Mississippian meta- quartz monzodiorite to the east, forming the hanging wall to a footwall unit of Eocene(?) porphyritic volcanic (quartz latite) rocks to the west (Figure 5). The age of the footwall rocks is questionable, due to the lack of sizable Tertiary units in the area; however, aerially extensive packages of Late Cretaceous Carmacks Group volcanics are common. The thrust fault contact is coincident with the main mineralized zone at Monte Carlo. Directly north, a unit of Devono-Mississippian marble has been mapped, as have several units of Devono-Mississippian meta-gabbro, which may be intercalated with amphibolite. Another property-scale north-striking, east-dipping thrust fault has been interpreted as occurring along Lucky Strike Creek.

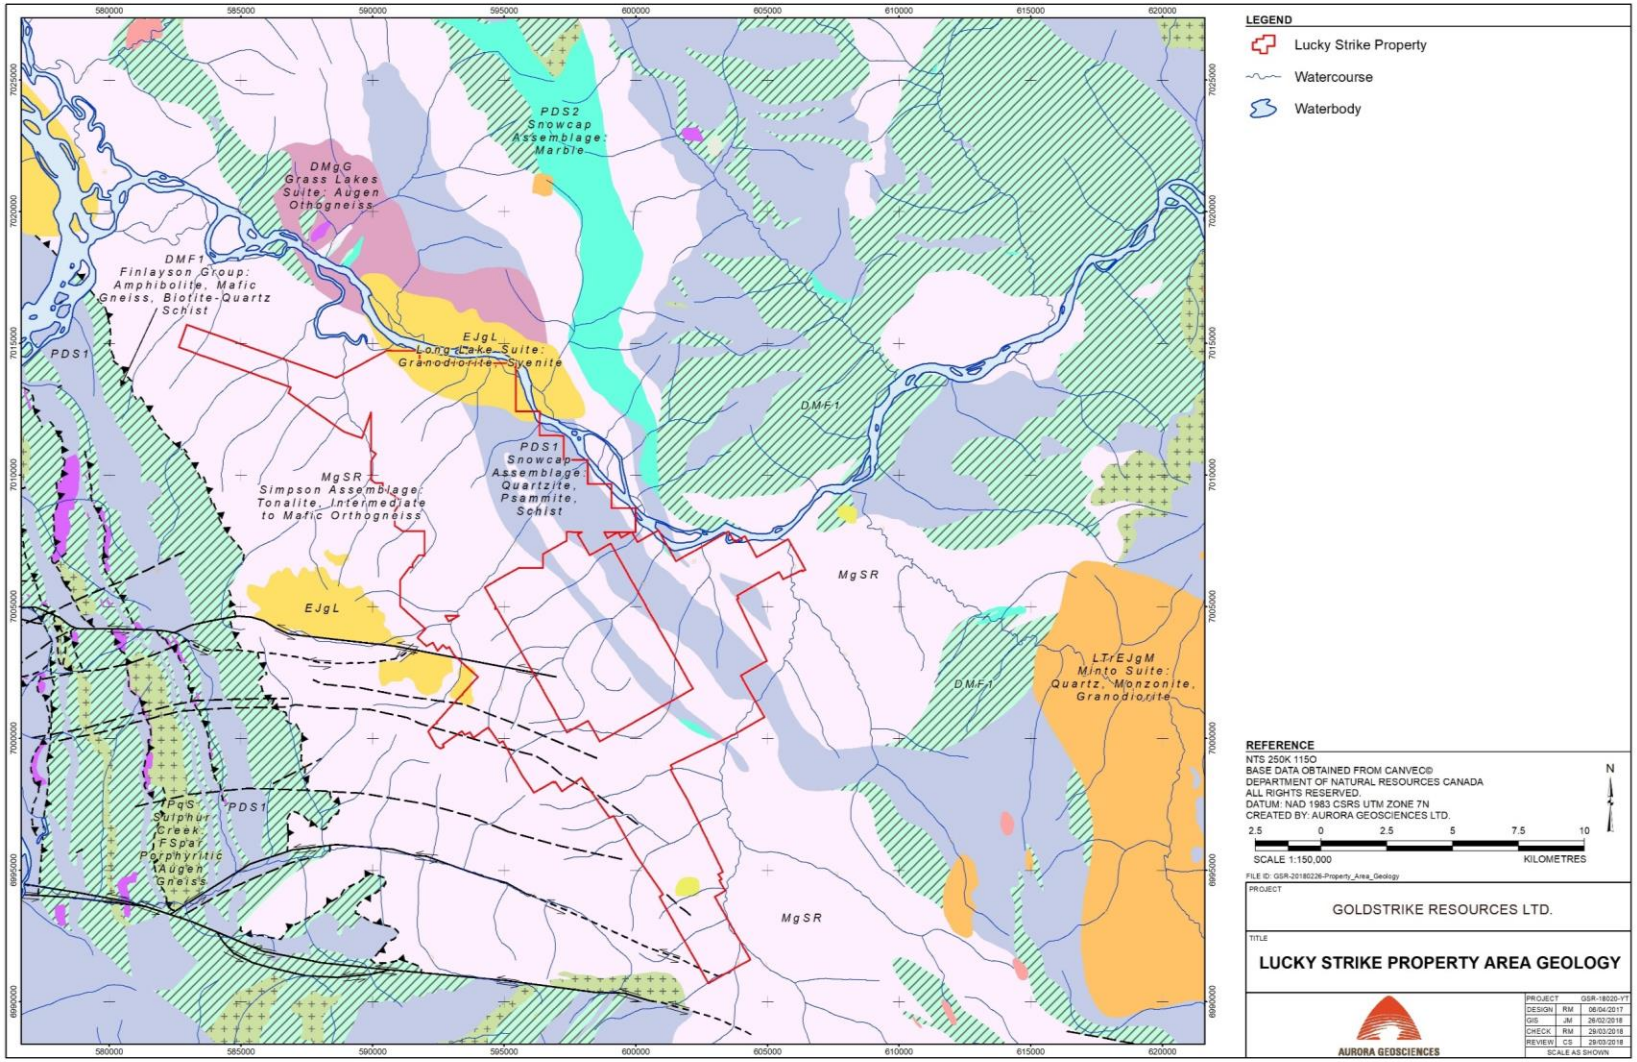


Figure 8: Property area geology

6.3 MINERALIZATION

By 2016, exploration had identified five significant zones of mineralization or soil anomalies. From north to south these are: the Monte Carlo, Belmont, Samson, Boss and Maverick zones. Mineralization is discussed in this section, with more detailed exploration results described in Section 9, "Exploration".

This section is based on the 2016 assessment report on the Lucky Strike property titled "2016 surface Exploration Report on the Lucky Strike property, White Gold District" by Clayton Jones.

6.3.1 Monte Carlo Zone

The Monte Carlo Zone was originally called "Zone 2", then the "AU Claims". It was renamed in 2016, following positive results from soil geochemical sampling and trench chip sampling.

Trench sampling returned significant gold values in all seven trenches excavated. The best value was returned from trench LS-TR-16-06, comprising a value of 0.42 g/t Au across 154 metres, including 0.76 g/t Au across 78 metres and 3.0 g/t across 8 metres. Mineralization is hosted by strongly oxidized, semi-brecciated, silicified and carbonate-altered felsic orthogneiss with quartz veins. The orthogneiss is intercalated with meta-gabbro (amphibolite?), marble and felsic volcanic units. The highest gold grades were returned from pyritic quartz veins, or areas of intense silicification, along a fault contact with meta-gabbro and orthogneiss. Lower gold grades were returned from strongly fractured, to semi-brecciated, strongly silicified and carbonate-altered orthogneiss.

The geochemical signature of auriferous zones is similar to that of the Golden Saddle deposit 15 km to the southwest. Gold has a moderate to strong correlation with silver (Ag), mercury (Hg), molybdenum (Mo), lead (Pb), sulphur (S) and antimony (Sb) with a weak negative correlation to chromium (Cr), titanium (Ti), and zinc (Zn).

6.3.2 Belmont Zone

Two trenches at the Belmont Zone revealed similar mineralization to the Monte Carlo Zone, but with much lower gold grades. Trench LS-TR0-16-11 exposed a 20-metre interval of sheared, strongly silicified and brecciated orthogneiss, with abundant cubic pyrite. These samples returned anomalous values of Au, Te (tellurium), and Ag. This interval was interpreted as being the source of elevated Au, Te and Ag values from soil sampling. The two trenches are located along the fringe of a 1500 x 800-metre gold-in-soil anomaly.

6.3.3 Boss and Samson Zones

The Boss Zone is the present name for "Zone 1", described in the 2013 through 2015 reports, while the Samson Zone is the revised name for the small grid about 1 km northwest.

Trenching and test pitting commenced in 2013, at Zone 1 (Boss Zone), with a total of six trenches totaling 417 metres. Gold values to 3,087.7 ppb across 5 metres were returned, with numerous samples exceeding 100 ppb. Anomalous values were returned from gneiss, orthogneiss or schist, typically associated with brecciation and/or quartz veining. Most of the samples show strong weathering and oxidation, with variable quartz (silicification?) and feldspar alteration. Minor and more weakly altered dyke material was noted in some descriptions of auriferous rock. Gold has a strong correlation with Ag, Sb, Pb and Ba (Barium) (Mac Gearailt, 2013).

The 2014 program included further trenching at Zone 1 (Boss Zone), with a total of five trenches comprising 244 metres excavated. Two trenches were essentially duplicates of 2013 work, returning values to 2,044 ppb Au, while the other three trenches returned low gold values. The program also included 41 rock grab samples from test pitting in the area. A float sample, from a pit about 1.0 km to the northwest, returned a gold value of 1.1 g/t from a sample described as grey to blue silicified volcanic rock with visible gold in quartz. Deepening of the pit failed to reach bedrock. The 2014 description of mineralized zones was essentially the same as the 2013 descriptions. However, the 2014 samples were found to have a different pathfinder element signature, with strong correlations between Au and Hg, Sc (Scandium), Pb, Tl, Ag, Cd, Ni, Pb and Cu (Mac Gearailt, 2014).

The 2015 program at Zone 1 consisted of a single 69-metre trench exposing orthogneiss, with variable degrees of shearing and silicification, and quartz veining and sericite alteration. Sampling returned gold values from 0.25 to 217 ppb Au. The 2015 program also included two NE-SW trending lines of hand-dug pits near the anomalous 2014 sample, now called the Samson showing. Gold values ranged from 1 to 4,263 ppb Au, with 7 of 23 samples returning greater than 500 ppb Au. The 2015 descriptions, of mineralized zones, are essentially the same as of the 2013 and 2014 reports, although some samples displayed “polished slickensides” indicating shearing. The sample returning 4,263 ppb Au comprised 70% quartz and 30% orthogneiss (Mac Gearailt, 2015).

The 2016 program at the Samson showing consisted of 3 trenches comprising 154 metres. Sampling returned anomalous gold values with the best result being 0.32 g/t Au across 12 metres, including 0.41 g/t Au across 6 metres. Mineralized intervals were hosted by quartz vein-bearing hydrothermal breccia within orthogneiss intercalated with quartz-biotite schist.

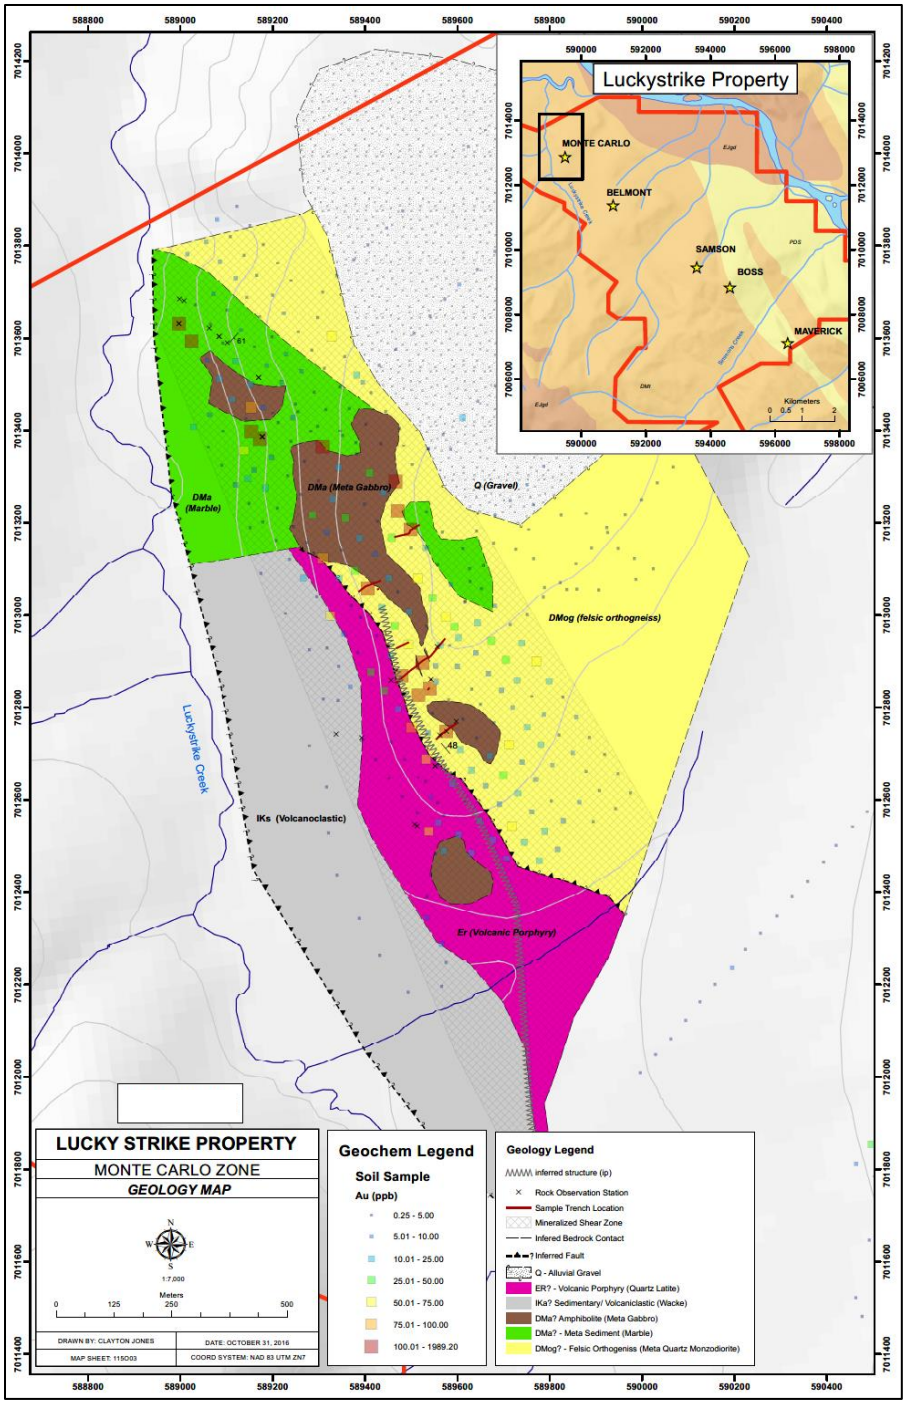


Figure 9: Detail geology, Monte Carlo zone

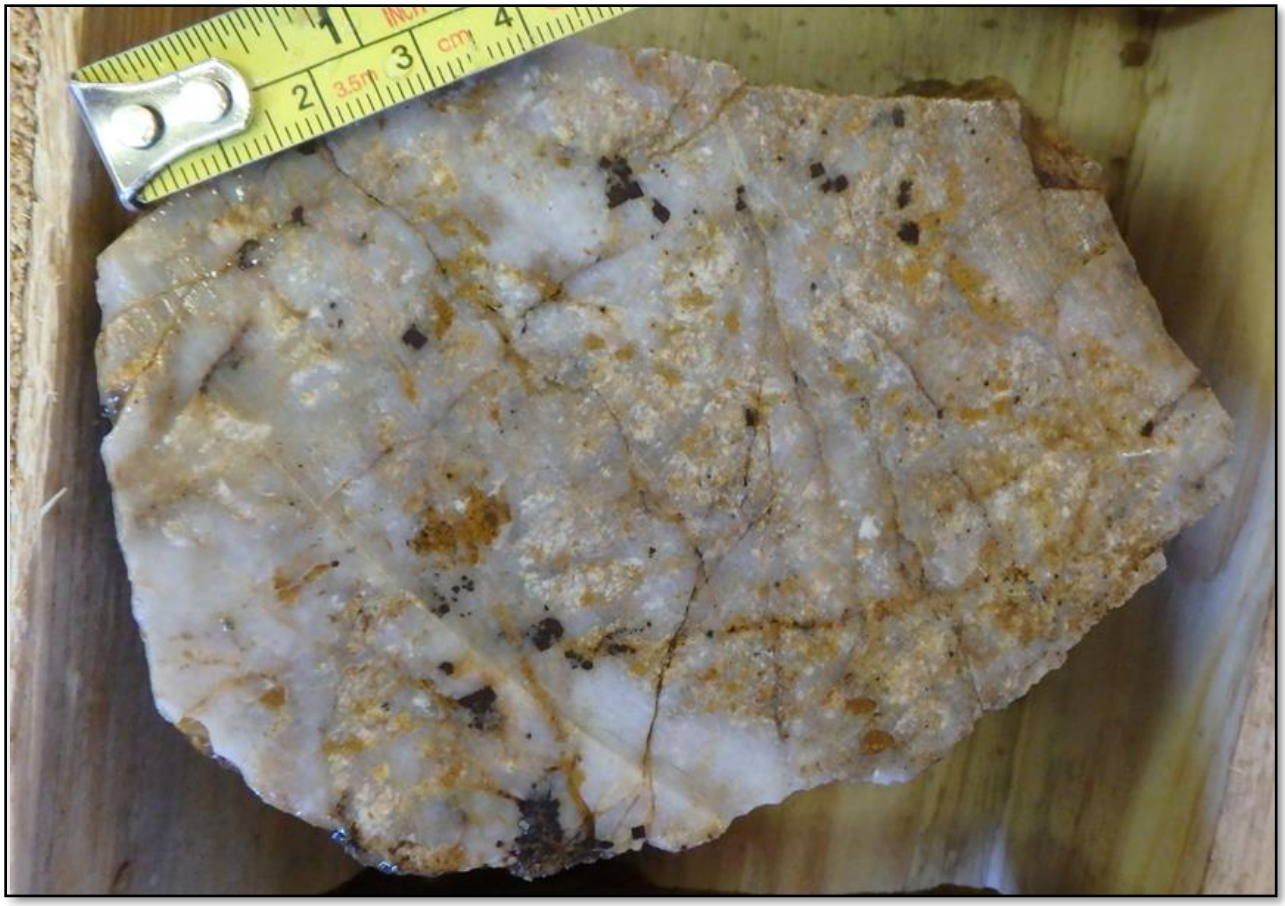


Figure 10: Mineralized Sample from LS-TR-16-11, 0 - 10M. Intensely silicified orthogneiss (C. Jones)

MONTE CARLO ROCK TYPES, Figure 10

(Text taken verbatim from 2016 assessment report by C. Jones.)

A *–**wacke** (minor lithic clasts) / **volcaniclastic** / **epiclastic** composed of abundant, apparently detrital quartz, plagioclase, Kspar and minor (partly chloritized) biotite and muscovite in a matrix of quartz, clay? or sericite and carbonate* ***B*** *- **volcanic porphyry**, plagioclase-Kspar (sanidine)-minor quartz-biotite phyric, probably extrusive quartz latite porphyry, altered to clay (kaolinite?)-limonite, but the alteration may be mainly due to weathering.* ***C*** *– **marble** with minor quartz and accessory graphite, the latter two concentrated along thin veinlets (bluish in hand specimen). The rock has been strongly deformed and cataclasized, but retains a weakly developed foliation.* ***D*** *– **felsic orthogneiss**, very weakly foliated, medium/coarse-grained leucocratic felsic (quartz diorite?) orthogneiss composed of plagioclase-quartz-minor hematite-limonite (after Fe-calcite), brecciated and cut by poorly defined, irregular veinlets of quartz-hematite-limonite (after Fe-calcite, after pyrite?).* ***E*** *– **meta-gabbro/diabase** composed of hornblende-plagioclase-accessory quartz-magnetite (oxidized to hematite)-calcite-epidote-sphene-apatite-sericite-pyrite (oxidized to limonite). Minor alteration to calcite, Kspar, and sericite may be hydrothermal.* ***F*** *– **coarse conglomerate** that grades in the wacke / volcaniclastic (A).*

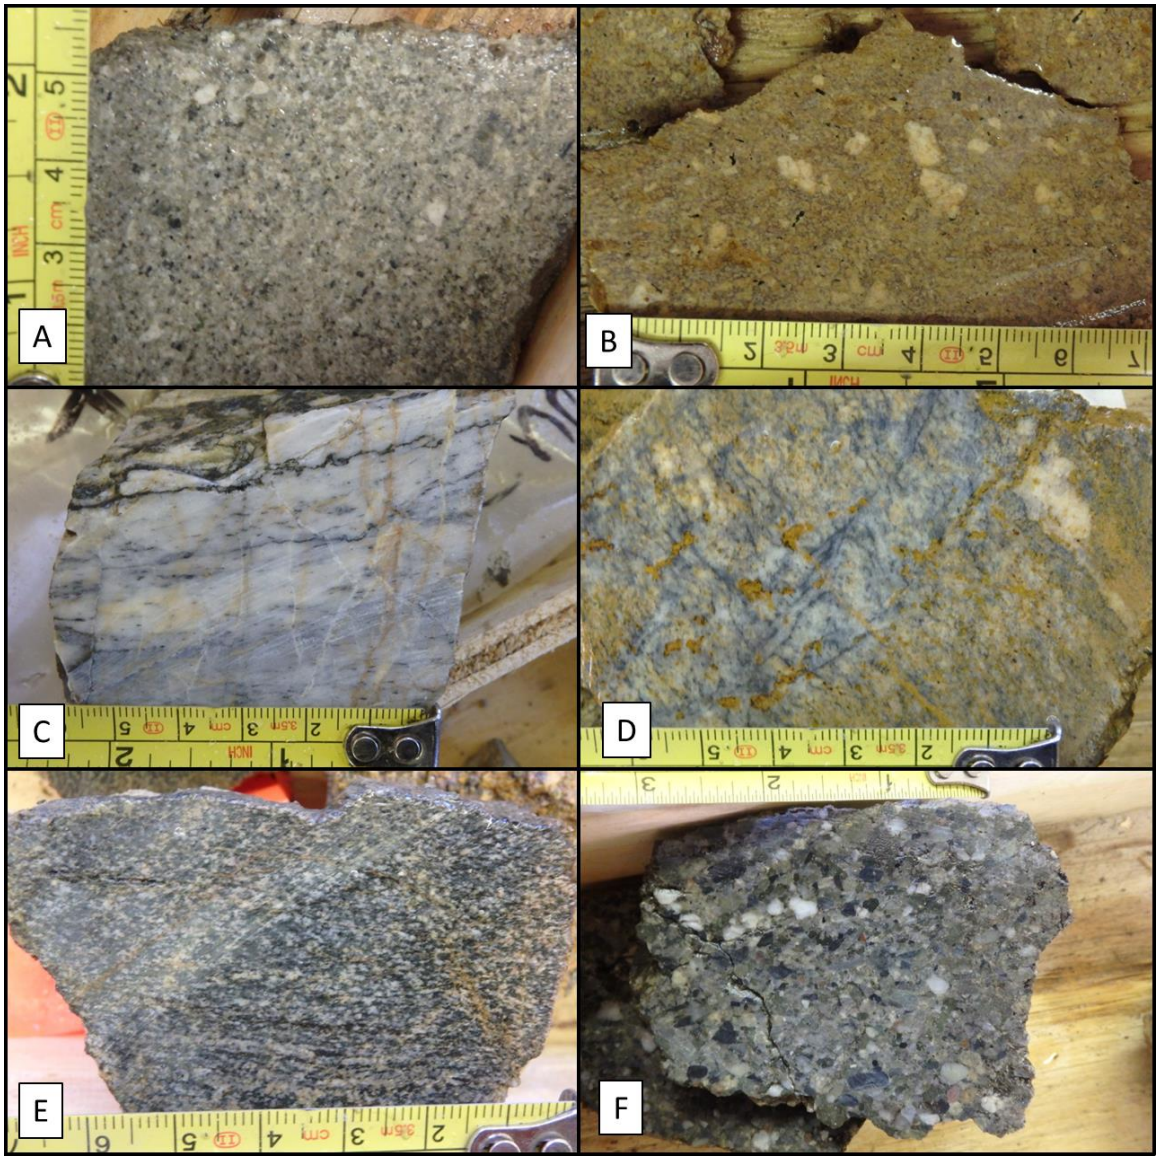


Figure 11: Monte Carlo Rock Types (C. Jones, 2016)

MONTE CARLO MINERALIZED SPECIMENS, Figure 11

(Text taken verbatim from 2016 assessment report by C. Jones.)

***A** – **LS-TR-16-09,** 15.0 g/t Au over 2 m (0 – 2m), rep sample 1513952, massive coarse quartz vein that has been subjected to a later phase of strong deformation and recrystallization, apparently associated with mineralization by pyrite, possible barite? and gold, the latter occurring with limonite but otherwise free in quartz**. B** - **Sample 1513952** - detailed view (1.5 mm wide) to show irregular gold grains intergrown with limonite along very narrow, curving fracture (at the contact between recrystallized quartz that contains closely associated, nearby cubic pyrite or limonite pseudomorphs). Note there are also two tiny gold/limonite particles (indicated) in recrystallized quartz. **C - LS-TR-16-04**, 1.27 g/t Au over 2 m , 36 – 38 m, silicified orthogneiss with mineralized quartz veining **D LS-TR-16-5B**, 1.92 g/t Au over 2 m (0 – 2 m), quartz veining hosted in intensely silicified orthogneiss **E - LS-TR-16-06**, 0 – 10 m, up to 0.34 g/t Au, host for the low Au values is likely in the limonitic veinlets, weakly foliated, fine/medium-grained leucocratic felsic orthogneiss (quartz monzodiorite?) composed of plagioclase-Kspar-quartz-minor limonite-rutile, cut*

by poorly defined, partly vuggy veinlet zones of limonite (after pyrite?)-trace carbonate-Kspar (?). ***F - LS-TR-16-06****, 3.0 g/t Au over 4 m (92 – 96 m) intensely silicified orthogneiss, sub brecciated.*

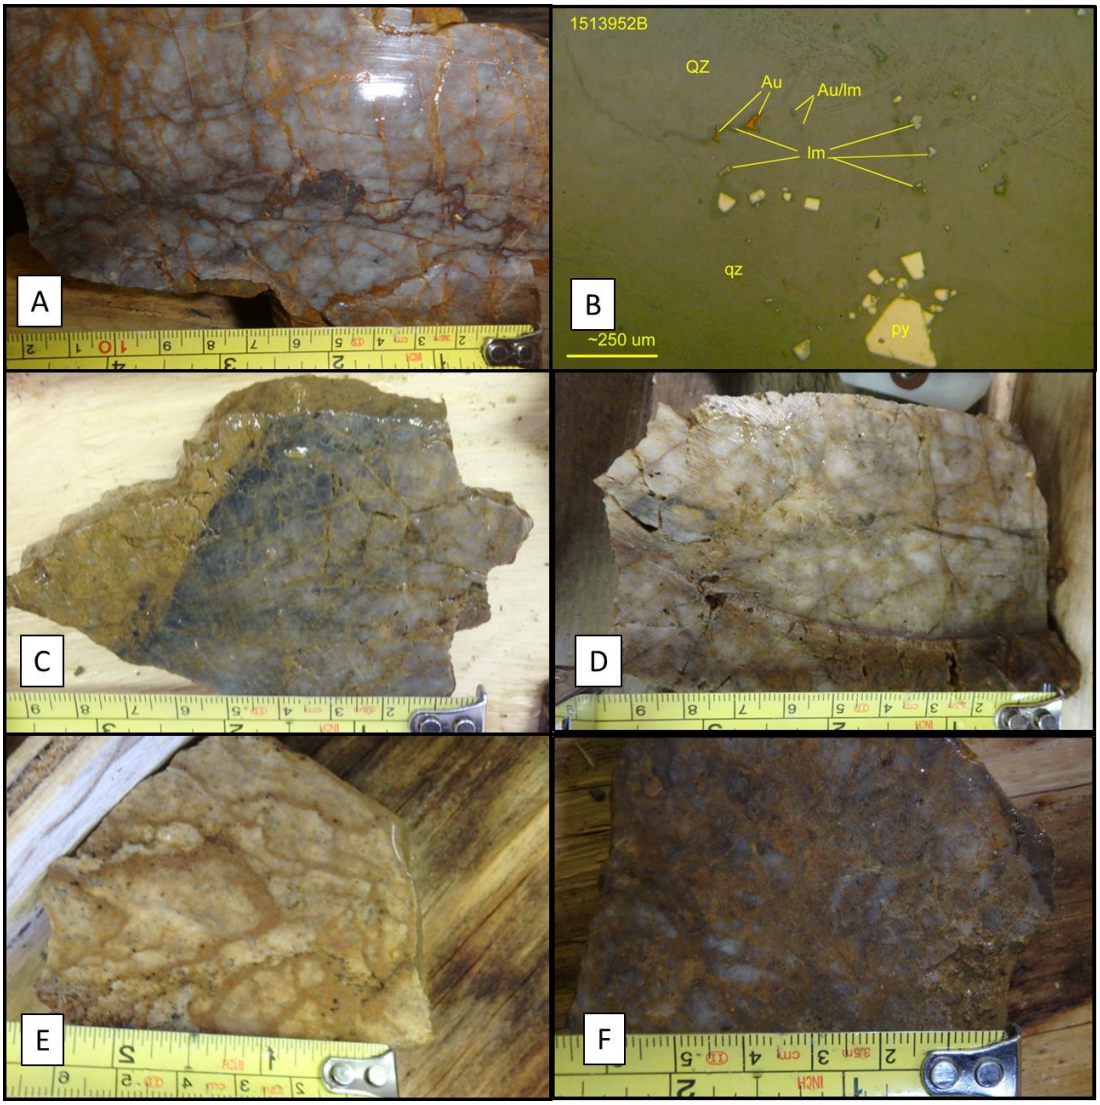


Figure 12: Monte Carlo Mineralized Specimens (C. Jones)

No trenching or rock descriptions are available for the Maverick Zone.

7 DEPOSIT SETTINGS

Two possible deposit settings may be applicable to mineralization at the Lucky Strike property: "Intrusion-Related Gold", associated with plutons or stocks and which may be manifested as a number of distinct sub-settings; and "Orogenic Gold", where mineralization is sourced from deep-seated "crustal" faults in the absence of an intrusive centre.

The Intrusion-Related gold setting is applicable if the stock hosting the Scotch Minfile occurrence is a member of the Tintina Gold Belt. In the Intrusion-Related Gold setting, mineralization is associated with a core intrusion, typically varying in composition from monzonite, quartz monzonite, granite, granodiorite to syenite. The intrusion is typically associated with dykes or apophyses, commonly occurring as multiple pulses with varying compositions that become more felsic with progressive cooling and solidification of the intrusion. Intrusion-related settings include vein and stockwork lode settings, skarn, replacement-style and sheeted, "Fort Knox"-style deposits.

In the project area, the main settings typically associated with Intrusion-Related Gold are vein-style and breccia-hosted hydrothermal settings. Vein-style deposits occur as vein, stringer and stockwork zones. Veins are typically planar structures, formed when siliceous metal-rich fluids pass through an open area, such as a fault zone. Silica is gradually emplaced from vein margins to the centre; specific fluid pulses may result in metal-rich layers, including precious metal-rich layers, within the vein. Stringer and stockwork zones occur when metal-rich siliceous fluids pass through brecciated or strongly fractured areas, most typically fault zones, within the host rock. Vein deposits tend to be high grade and of small tonnage; stringer and stockwork deposits tend to be of lower grade but higher tonnage, due to incorporation of unmineralized country rock.

The breccia-style setting is also of hydrothermal origin, with the majority of mineralization occurring being vein or "lode" style. Veins are typically fracture-filing, and commonly disseminate into stringer or stockwork zones. In areas of Yukon, particularly in unglaciated Beringia, weathering has penetrated considerably deeper than in glaciated areas, due to the much greater time frame involved. This has allowed sulphide minerals, which may contain gold either within their lattice structures, along grain boundaries, or interstitially, to oxidize. Oxidized mineralization is amenable to heap-leach extraction techniques, increasing economic viability at much lower grades.

Gold +/- silver vein mineralization is typically associated with a suite of "pathfinder elements", particularly arsenic, and also antimony, mercury, and, if proximal to the intrusion, bismuth. Arsenic is a particularly strong indicator of gold, as this element tends to precipitate from solution at the same temperature and pressure as gold. Bismuth is typically associated with gold if a source intrusion is nearby.

The "Orogenic Gold" setting is characterized by larger auriferous quartz veins, potentially more than 1.0 km in length and multiple metres in width, associated with a similar pathfinder element suite as that within hydrothermal or hydromagmatic intrusion-related veining. Although mineralized quartz veining may be abundant, there is no evidence of intrusive activity, such as hornfels aureoles or contact metamorphic minerals, skarn or replacement-style mineralization (Hart and Lewis, 2005). Rather, the conduits are district-scale deep-seated "crustal" faults that allow for hydrothermal fluid movement from a typically unknown source. The mechanism for emplacement in local structures is similar to that of intrusion-related veining, whereby mineralized zones develop from fluid movement from the main fault conduit into splays or other areas of "structural preparation". This may result in a similar mineral and alteration fabric as for intrusion-related lode settings. Orogenic mineralization is not limited to larger, kilometric-scale veins.

Potential also exists for mineralization from both Intrusion-related and Orogenic sources, although the geochemical signatures would likely differ. Mineralization in the Klondike gold district has been ascertained as orogenic, rendering this the most likely setting. However, additional auriferous mineralization may also have originated from the "Scotch" intrusion, if it is a member of the Tintina Gold Belt.

8 EXPLORATION

8.1 2013 – 2016 EXPLORATION

8.1.1 2013 Exploration

The information on the 2013 – 2015 exploration programs was supplied by annual assessment reports written by D. Mac Gearailt, and filed with the Dawson Mining Recorder,

The 2013 exploration program focused on Zone 1, on the Lucky 15 through 20 claims. It comprised a six-person crew for eight days completing mechanical trenching, soil sampling and a ground magnetic survey. A total of 417 metres was excavated in 6 trenches using a small portable "Candig" excavator. Anomalous gold values were returned from all trenches, although individual samples ranged from background to a maximum of 3,087.7 ppb across 5 metres.

A 500m by 500-metre soil geochemical grid was also completed across Zone 1. Gold values ranged from background to 70 ppb, with 34 samples returning values greater than 10 ppb. Calculation of correlation matrices indicates that Au has the strongest affinity for Bi and Sb. Plotting of Pb, Ba, Sb and Mo indicate anomalous zones have a WNW-ESE orientation.

The 2.25 line-km ground magnetic survey was conducted along the five western lines of the soil grid. Surveying revealed a fairly high magnetic signature in the north, and a low signature in the south, suggesting two separate lithologies. Field observations support this, with a possible change from mafic orthogneiss in the south to more felsic schists in the north.

8.1.2 2014 Exploration

The 2014 exploration program consisted of mechanical trenching, soil sampling and a 25 line-km ground magnetic survey over a somewhat expanded area of Zone 1, as well as reconnaissance-style soil sampling on Zone 2. This work was completed in 16 days using a 4-person crew.

A further 5 trenches totaling 244 metres were excavated, with two trenches essentially duplicating the most prospective 2013 trenches, returning values from 2 to 2,066 ppb Au. Values from the other three ranged from 1 to 32 ppb Au. Additionally, a total of 13 samples were taken from six pits, and 28 further rock grab samples from the trenched areas. Pit sample values ranged from 3 to 236 ppb Au, although a sample returning 1.1 g/t Au was returned from a pit about 1.0 km to the northwest. This sample returned a value of 0.279 ppb Au by "regular" ICP analysis. Five samples returned from Zone 2 returned values from 9 to 57 ppb Au.

A total of 608 soil samples were taken in 2014, comprising 414 soils from the main Zone 1 grid, 132 samples from the grid centered on the anomalous sample to the west, and 62 samples from reconnaissance-style "ridge-and-spur" sampling at Zone 2. Plotting of gold values at the main grid indicates a 750-metre NW-SE trend of anomalous values extending through the northern part of the trenched area. Plotting of values from the smaller Zone 1 grid returned values from background to 91.9 ppb Au, with all samples exceeding 10 ppb occurring in the northwestern area. Soil sampling at Zone 2 returned sporadic high values, to a maximum of 923.7 ppb Au along a small ridge east of Lucky Strike Creek, although most gold values were at or near detection level.

The ground magnetic survey done at Zone 1 indicates lithological variation across the surveyed area. Survey results indicate an increasingly high magnetic response from the southwest towards the northeast of the survey area.

8.1.3 2015 Exploration

The 2015 program, completed by a five-person crew over 9 days, comprised mechanical trenching, prospecting, and soil and rock sampling across Zones 1 and 2.

At the main previously trenched Zone 1 area, a single 69-metre trench was excavated, with 35 samples taken. Results ranged from detection to 217 ppb Au. At the northwestern Zone 1, 23 rock grab samples were taken from 22 pits, mostly arranged in two NE-SW trending rows. Gold results ranged from 1 to 4,263 ppb.

A total of 129 soil samples were taken in 2015. Of these, 12 samples were taken near the western Zone 1 target, northeast and north of the two lines of pits, returning values from 1.7 to 17 ppb Au. The remaining 117 samples were taken from a NW-SE trending grid centered on the anomalous gold-in-soil values somewhat east of Lucky Strike Creek. Gold values here ranged from 1.1 to 1,982.7 ppb and indicate a pronounced NW-SE trend of anomalous values.

8.1.4 2016 Exploration

The information on the 2016 program was provided by the 2016 assessment report by C. Jones.

Exploration in 2016 comprised a Phase I program of mechanical trenching, soil sampling, a ground magnetic survey and prospecting, followed by a Phase II program comprised of trenching, soil sampling across newly established grids, ridge-and-spur soil sampling and prospecting. Phase 1 was completed by a 7-person crew over 15 days; Phase 2 was completed by four personnel over 14 days.

By the end of 2016, five zones or target areas were identified. These five zones, from north to south are: the Monte Carlo Zone (formerly Zone 2/ Au Claims), Belmont Zone, Samson Zone (the smaller northwest grid of Zone 1), the Boss Zone (the main Grid 1 area) and the Maverick Zone.

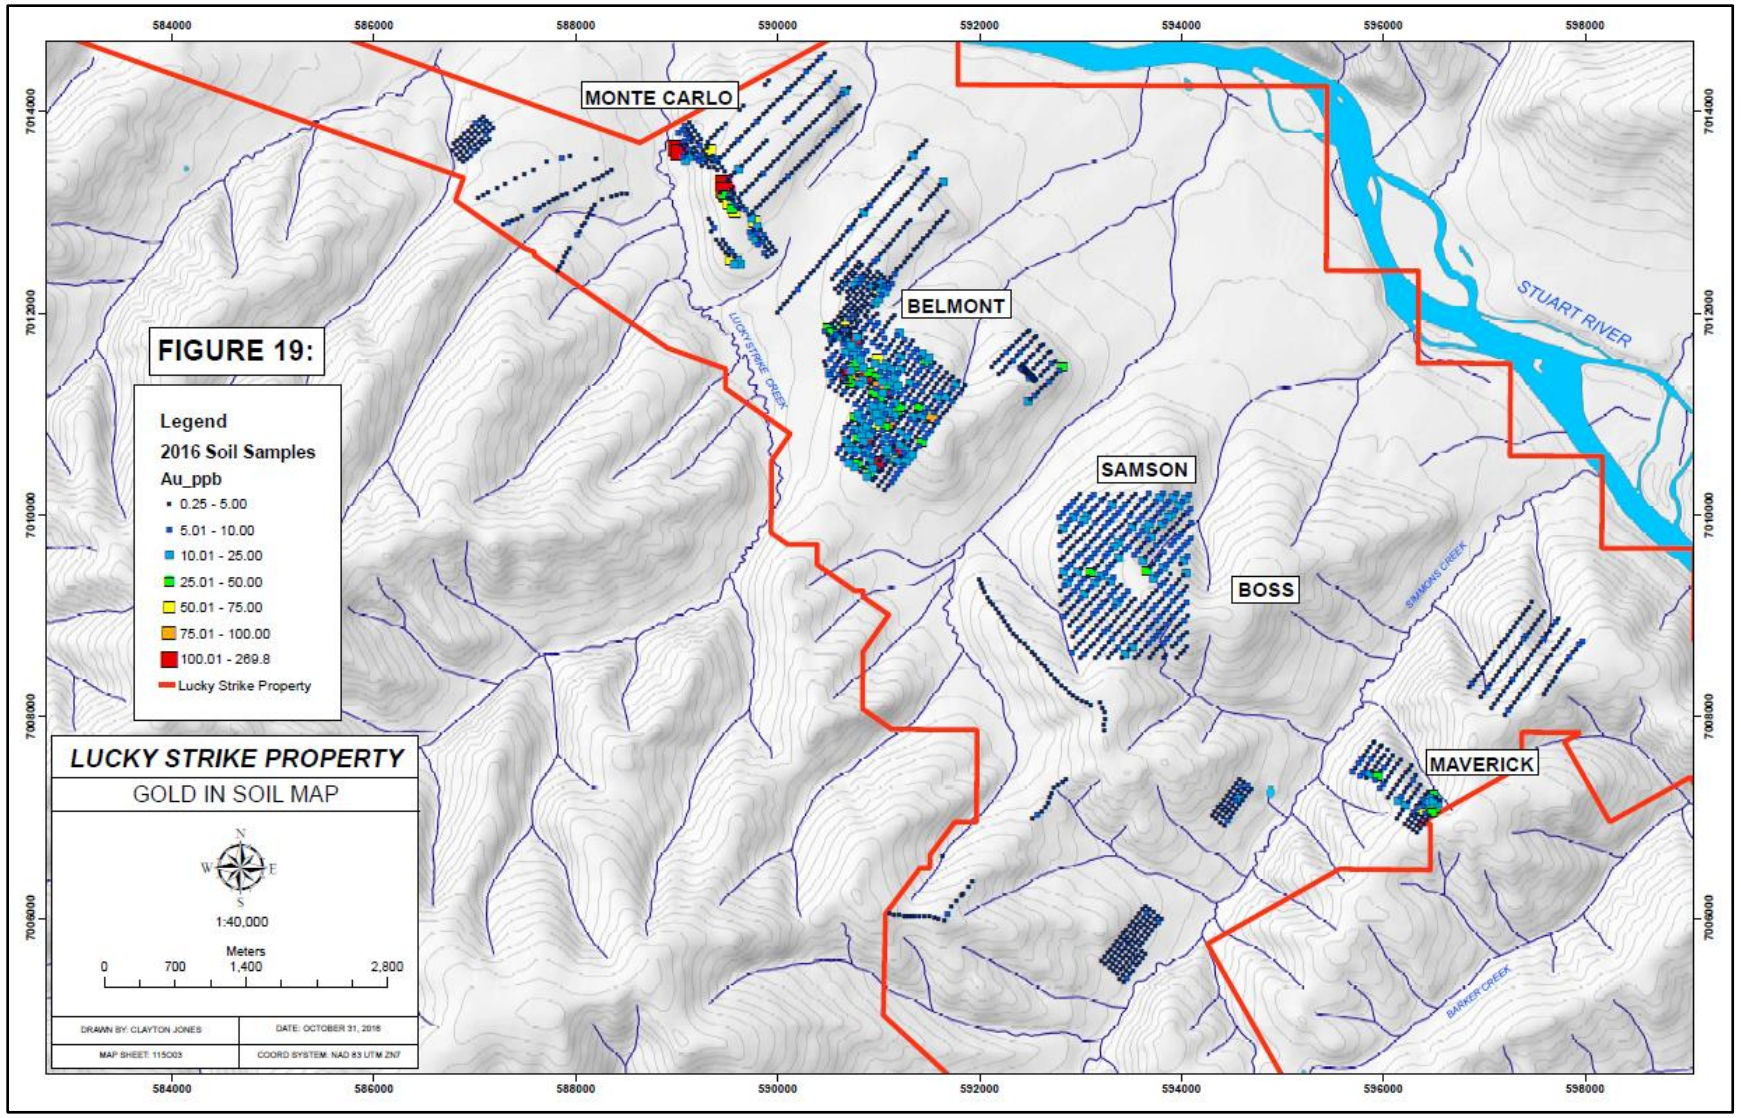


Figure 13: 2017 Property-wide soil sample plot

8.1.4.1 Monte Carlo Zone

The Monte Carlo Zone is the most prospective of the five zones and is the primary exploration target. The 2016 program included seven trenches totaling 385 metres, with results ranging from 0.63 g/t Au across 6 metres in Trench LS-TR-16-04, to 0.42 g/t Au across 154 metres in trench LS-TR-A6-06. Trench results are shown in Table 1 below, and the trench layout is shown in Figure 13.

ZONE	TRENCH	GOLD (g/t Au)	Length (meters)
MONTE CARLO	LS-TR-16-04	0.63	6
MONTE CARLO	INCLUDING	1.27	2
MONTE CARLO	LS-TR-16-05B	1.53	7
MONTE CARLO	LS-TR-16-06	0.42	154
MONTE CARLO	INCLUDING	0.76	78
MONTE CARLO	INCLUDING	3	8
MONTE CARLO	INCLUDING	9.7	2
MONTE CARLO	LS-TR-16-07	0.47	12
MONTE CARLO	LS-TR-16-08	2.73	12
MONTE CARLO	INCLUDING	5	6
MONTE CARLO	LS-TR-16-09	5.15	6.8
MONTE CARLO	INCLUDING	15.5	2
MONTE CARLO	LS-TR-16-10	0.34	44
MONTE CARLO	INCLUDING	0.56	14

Table 1: 2016 trench results, Monte Carlo Zone

Individual gold values ranged from detection to 15.5 g/t, with potentially no economic grades of silver or other pathfinder elements.

A total of 1,875 soils were obtained across the property in 2016. At the Monte Carlo Zone, sampling expanded on the anomaly identified in 2015, returning values from detection to 0.27 g/t Au. The zone is on trend with an aerially extensive zone at the Belmont target. Both targets share a very similar geochemical signature, with strong correlations between gold and silver, and gold and tellurium.

A total of 36 rock grab samples and 3 stream sediment samples were taken across the property in 2016. At the Monte Carlo Zone, a sample of altered limonitic, silicified and carbonate-altered pyritic orthogneiss from a pit, roughly 400 metres northwest of Trench 8, returned a value of 0.76 g/t Au. Another sample from a pit, 700 metres northwest of trench 8, returned 0.11 g/t Au.

In 2016, a total of 7 line-km of ground magnetic surveying was completed on the Monte Carlo and Samson zones. At Monte Carlo, the survey revealed magnetic high anomalies coinciding with anomalous gold values from several of the 2016 trenches. A 2D Induced Polarization survey comprising seven 1-km lines was completed by Aurora Geosciences Ltd. The survey identified a marked resistivity contrast, interpreted to coincide with the lithological contact along the thrust fault, coincident with the mineralized trend.

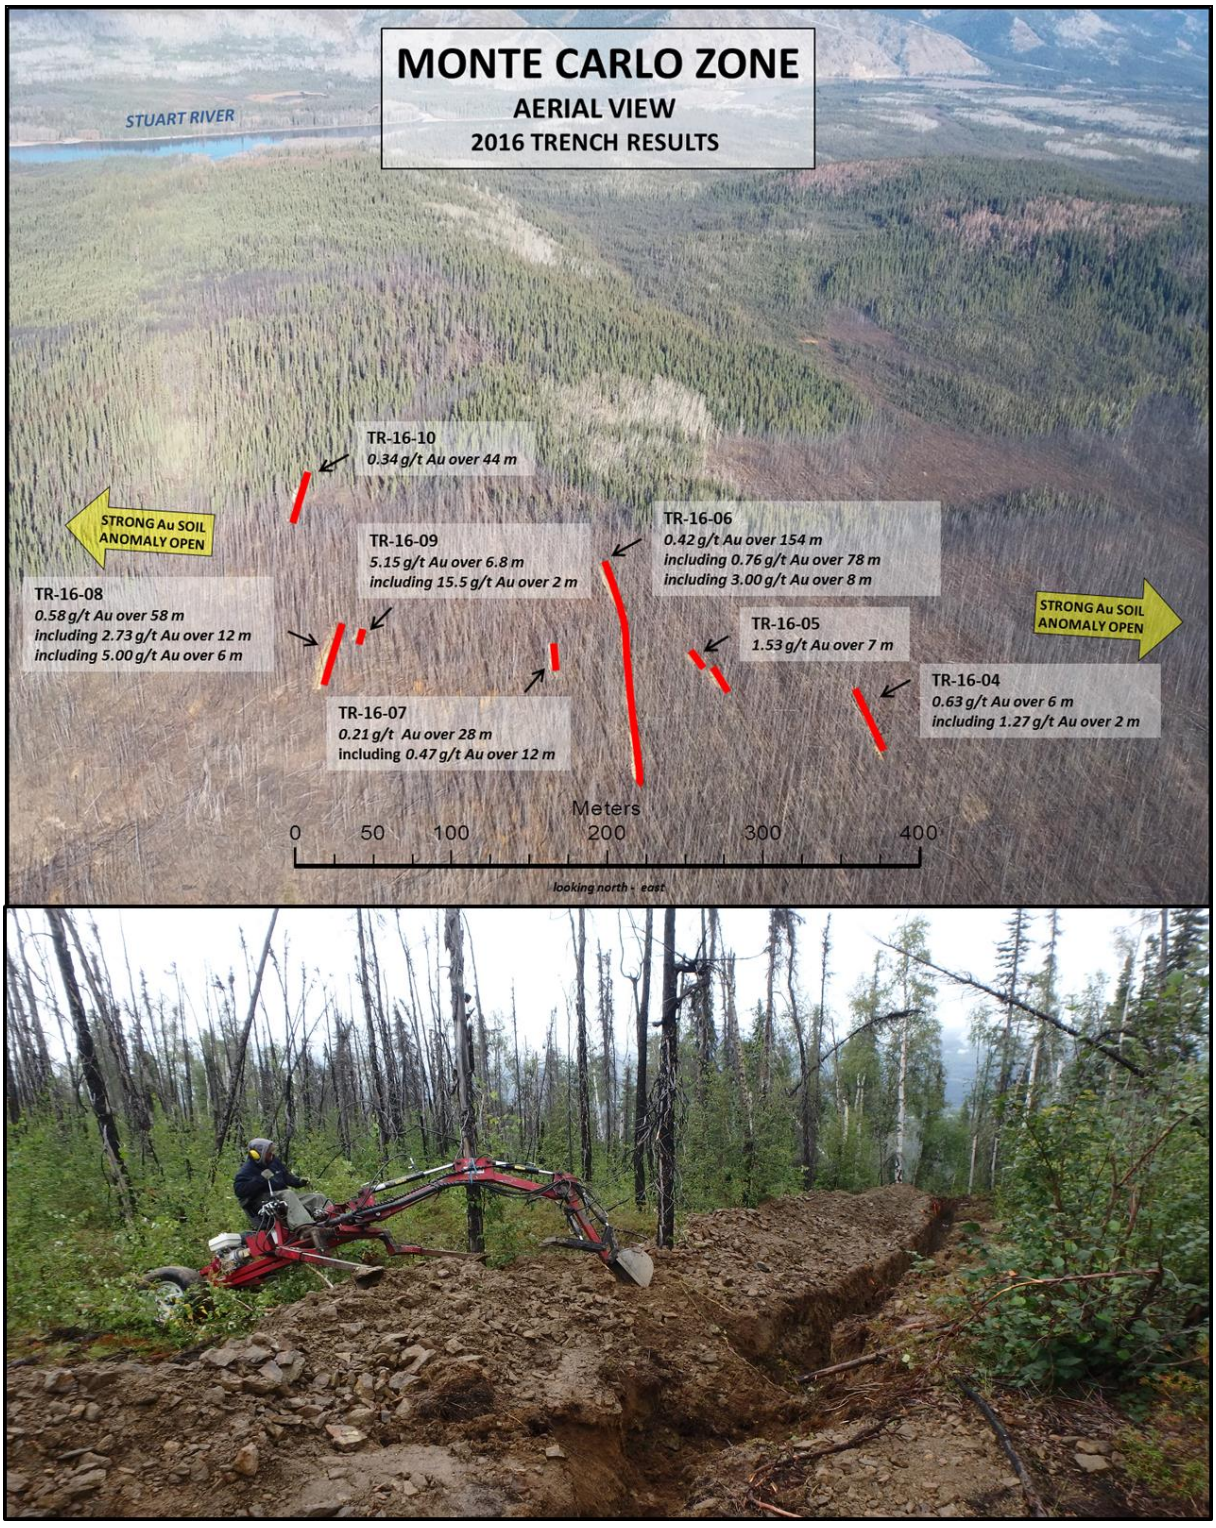


Figure 14: 2016 Trench Layout, Monte Carlo zone

8.1.4.2 Belmont Zone

A total of two trenches comprising 231.5 metres was excavated at the Belmont Zone. Results ranged from background to 0.24 g/t gold across 2 metres. The trenches were excavated along the western fringe of a 1500 x 800-metre gold-in-soil anomaly, roughly along trend of the Monte Carlo Zone anomaly. Values ranged from background to greater than 100 ppb Au.

Two rock grab samples taken from two separate pits at the Belmont Zone returned anomalous gold values to 99 ppb Au.

Three of the Induced Polarization (IP) lines extended across the Belmont Zone. One of these, Line 3, revealed a resistivity high feature at depth. On another line, Line 2, a resistivity contrast towards the southwest end of the line was documented.

8.1.4.3 Samson and Boss Zones

Soil sampling at the Boss Zone was completed near earlier trenching and comprised 396 samples, forming a 1.6 x 1.3 km grid. Assaying revealed irregularly-shaped zones of weakly anomalous gold values to a maximum of 33.9 ppb Au. A smaller grid completed over the Samson Zone returned mainly background values, except for one sample in the northeast corner which returned > 25.0 ppb Au.

8.1.4.4 Maverick Zone

The Maverick Zone, located directly north of the Brew claim block, is the southernmost zone along the 10-km trend. A small soil geochemical grid was established, results from which show a 200 x 150-metre gold anomaly, with values ranging from 20 to 90 ppb Au. The anomaly remains open to the northeast.

Several other small soil geochemical grids returned background to near-background gold values.

9 2017 EXPLORATION PROGRAM

The 2017 program comprised an airborne LIDAR topographic survey (Appendix 5), and a diamond drilling program comprising 1,033 metres in 9 holes. Holes DDLS-17-01 through 04 were drilled utilizing NTW-sized core. Difficulties obtaining adequate core recoveries resulted in holes DDLS-17-05 through 09 being drilled with wider-diameter HTW core, resulting in improved core recoveries.

Holes DDLS-17-01 through 04 and DDLS-17-08 were drilled near the campsite along a NE-SW trending section at azimuths of 230°. Holes DDLS-17-05 and 06 were drilled at the same azimuth, along a parallel section, approximately 250 metres to the NNW. Hole DDLS-17-07 was collared at the same site as holes 17-05 and 06 but at an azimuth of 180°. Hole DDLS-17-09 was collared somewhat north of holes 17-01 through 03 and drilled at a 180° azimuth. Collar data is shown in Table 2, and significant intercepts are listed on a per-hole basis below.

Table 2: Drill Collar Data, 2017 Program

Hole ID	Easting (NAD 83)	Northing (NAD 83)	Elevation (m)	Azimuth	Dip	EOH (m)
DDLS-17-01	589530	7012908	545	230	-55	127.4
DDLS-17-02	589530	7012908	545	230	-70	27.55
DDLS-17-03	589530	7012908	545	230	-74	154.47
DDLS-17-04	589565	7012934	555	230	-75	119.51
DDLS-17-05	589401	7013086	540	230	-55	99.09
DDLS-17-06	589401	7013086	540	230	-75	114.33
DDLS-17-07	589401	7013086	540	180	-55	103.02
DDLS-17-08	589565	7012934	555	230	-55	144.8
DDLS-17-09	589523	7012928	545	180	-55	142.65
					Total:	1032.82

Goldstrike has been unable to determine whether the intercepts represent true widths; therefore, the intercepts listed should not be considered as such and may represent narrower true intervals.

9.1 SECTIONS DDLS-17-01 THROUGH 04, 08

DDLS-17-01

Hole DDLS-17-01, drilled at an azimuth of 230° and dip of -55°, terminated at a depth of 127.4m, returned several anomalous intercepts. The anomalous intercepts include 0.68 g/t Au across 6.24 metres, from 9.00 to 14.85m, including 3.334 g/t Au from 14.46 to 14.85m. Farther downhole, an intercept of 1.75 g/t Au across 3.57 metres, from 18.29 to 21.86m, was returned and includes 3.121 g/t Au across 1.67 metres, from 18.29 to 19.96m. No sample was returned from the intermediate interval from 14.85 to 18.29 metres. Farther downhole, an intercept of 0.28 g/t Au across 9.45 metres was returned from 23.55 to 33.00m, including a 0.35-metre intercept grading 1.322 g/t Au from 15.45 to 25.80m. One further intercept of 0.26 g/t Au across 4.12 metres was returned from 59.88 to 64.00m. Recoveries typically exceeded 80% and commonly 90%, although a recovery of 44.9% was recorded from 18.29 to 21.34m, much of this zone returning higher-grade gold values.

All intercepts were returned from orthogneiss within the hanging wall of the thrust fault marking the main mineralized zone. The drilling intersected the fault contact at about 87.7m and extended into the footwall metasediments beneath this.

DDLS-07-02

Hole DDLS-17-02 was collared at the same site as DDLS-17-01, at an azimuth of 230° and dip of -70°, and terminated at 27.55m, due to poor recoveries. The hole returned an intercept of 1.33 g/t Au across 9.55 metres, from 18.00m to 27.55m, including 2.840 g/t across 3.66 metres, from 21.34m to 25.00m. The hole is open at depth, although the final 2.55 metres returned a value of only 308 ppb Au. Recoveries ranged from 83.6 to 98.0% from casing to 21.34m, but were very poor beneath this, ranging from 15.8% to 22.3%

to the end of hole. The entire hole was drilled through orthogneiss. Again, the higher-grade intercepts are represented by zones of poor recovery.

DDLS-17-03

Hole DDLS-17-03 was collared at the same location as DDLS-17-01 and 02, at an azimuth of 230° and dip of -74°. The hole returned a value of 7.495 g/t Au across 0.1 metres from 14.5 to 14.6m. It also returned an intercept of 0.6 1 g/t Au across 10.8 metres, from 19.2m to 30.0m, including 3.616 g/t Au across 0.52m from 28.00m to 28.52m. Recoveries across much of this interval were poor, at 16.6% from 21.34m to 24.36m, and 35.2% from 24.36m to 27.43m. The hole also returned intercepts of 0.83 g/t across 2.0 metres from 32.0m to 34.0m; 0.96 g/t Au across 1.07 from 40.0m to 41.07m; and 0.74 g/t Au across 0.94 metres from 49.06 to 50.0m. Recoveries across mineralized intervals ranged from 80.1% to 96.5%.

All intercepts were returned from orthogneiss within the hanging wall of the thrust fault marking the main mineralized zone. The drilling intersected the fault contact at about 118 metres and extended into the footwall metasediments beneath this.

DDLS-17-04

Hole DDLS-17-04 was collared at the same site as DDLS-17-03, at an azimuth of 230° and dip of -75°. The hole was terminated at a depth of 119.5m. The upper and lowermost portions extended through orthogneiss, with the remainder extending through biotite-chlorite schist. The only significantly elevated interval is one of 0.51 g/t Au across 0.27 metres, from 113.8m to 114.07m. Recoveries exceeded 80% for the majority of intervals, with locally poor recoveries to 6.4%. The elevated gold values were taken from an interval with recoveries of 114.75%, likely representing a spreading out of core fragments in the core box.

DDLS-17-08

Hole DDLS-17-08 was added to this drill section late in the program to obtain more accurate gold values from thicker, HTW core. The hole was collared at the same site as DDLS-17-04, at an azimuth of 230° and dip of -55°. The hole intersected orthogneiss to a depth of 136.72m, where it intersected sheared material with greywacke clasts, indicating the main thrust fault. The hole was terminated at 144.8m within footwall greywacke.

The hole returned a significant intercept of 3.04 g/t Au across 7.73 metres from 6.1m to 13.83m. This includes a 1.52-metre sub-interval returning 14.04 g/t Au, from 7.62m to 9.14m. Recovery is poor (48.03%) across this sub-interval. Farther downhole, a 3.0-metre intercept grading 0.68 g/t Au was returned from 66.00m to 69.00m. Recoveries from this interval ranged from 81.58% to 88.82%.

Summary, DDLS-17-01 through DDLS-17-04, DDLS-17-08

The majority of significant intervals within this section were returned from near-surface strongly oxidized, brecciated to gouged material within orthogneiss, defined as meta-intrusive rocks. Mineralized intercepts in holes DDLS-17-01, 02 and 03 may represent a steeply northeast-dipping zone, although this does not appear to extend to depth. Holes DDLS-17-02, 03 and 08 also define the vertical trace of the thrust fault, which roughly parallels the overlying mineralized horizon.

Poor recoveries within mineralized zones must be considered, particularly in DDLS-17-01, where multi-gram values were returned from either side of a 3.05-metre interval having 0% recovery. This suggests potential for similar grades within the lost material. Much of the higher-grade material in these three holes was returned from areas of poor core recovery, indicating the grades returned cannot be relied on to represent true gold grades.

It is noteworthy that the mineralized interval in DDLS-17-08 was not repeated in hole DDLS-17-04. This may be due to a combination of nugget effect, larger-diameter HTW core in hole DDLS-17-08, and the comparatively narrow high-grade sub-interval in Hole 08, which may have limited down-hole extent.

9.2 SECTIONS DDLS-17-05, 06

DDLS-17-05

Hole DDLS-17-05 was collared along the parallel section to the NNW, at an azimuth of 230° and dip of -55°. The hole intersected orthogneiss to 82.9 metres, where it extended through a shear zone representing the thrust fault. The hole was terminated at 99.1 metres, in mixed greywacke and siltstone representing footwall metasediments.

The hole returned one significant intercept of 0.70 g/t Au across 3.79 metres from 25.75m to 29.54m. Recoveries were high, from 96.73% to 98.03%, with a small portion of the interval having a recovery of 81.58% and are considered as representing reproducible gold values.

DDLS-17-06

Hole DDLS-17-06 was collared to the northeast of DDS-17-05, at an azimuth of 230° and dip of -75°. The hole extended through orthogneiss until a depth of 102.6 metres, where it passed through the thrust fault and into underlying metasediments. The hole was terminated in footwall greywacke at 114.3m.

The hole returned an intercept of 5.12 g/t Au across 2.15 metres from 26.00m to 28.15m, including a sub-interval of 10.16 g/t Au across 0.91 metres, from 27.24m to 28.15m. Recoveries were 78.43% to 27.44m, and 94.08% for the reminder of the interval, indicating the values may be considered as reproducible. Farther down-hole, an intercept of 1.13 g/t Au across 2.6m was returned from 85.00m to 87.60m. Recoveries ranged from 87.50% to 98.04%, sufficiently high to render the results as reliable.

Summary, DDLS_17-05 and DDLS-17-06

Drilling along this section confirmed the NNW strike, and steep ENE dip, of the main thrust fault separating hanging wall orthogneiss from footwall metasediments. Although a limited number of mineralized zones were intersected, results suggest mineralized zones dip subparallel to the thrust fault. Recoveries were higher than in the southern section due mainly to the use of thicker HTW core, indicating a higher degree of confidence of results.

9.3 HOLES DDLS-17-07 AND 09

DDLS-17-07

Hole DDLS-17-07 was collared at the same site as DDLS-17-05 and 06, but at an azimuth of 180° and dip of -55°. The hole intersected orthogneiss to a depth of 89.8m, where it intersected sheared metasediments marking the thrust fault contact. The hole was terminated within footwall greywacke at a depth of 103 metres.

The hole returned one significant intercept of 1.3 g/t across 5.0 metres, from 18.00m to 23.00m. Much of this interval was contained within a sub-interval of 4.986 g/t Au across 1.0 metres, from 19.00m to 20.00m. Recoveries across the higher grade sub-interval stood at 78.95%, from 18.29m to 19.81m, and at 59.48%, from 19.81m to 21.34m. Throughout the remainder of the overall interval core recoveries ranged from 54.16 to 69.28%.

The single mineralized intercept is located at a comparable depth to those within holes DDLS-17-05 and 06, although insufficient information exists to confirm these represent a single mineralized zone.

DDLS-17-09

DDLS-17-09 was collared about 25 metres north of the lower section, drilled at an azimuth of 180° and dip of -55°. The drill hole intersected orthogneiss, including brecciated orthogneiss in deeper portions, to a depth of 133.2m, where it encountered a shear zone representing the main thrust fault. The hole was terminated at a depth of 142.7m, in footwall interbedded siltstone and greywacke.

Goldstrike has labelled this as the “Discovery Hole” for the project. The hole returned an intercept of 5.36 g/t Au across 22.0 metres, from 13.00m to 35.00m, including a sub-interval of 25.13 g/t Au across 4.21 metres, from 29.32m to 33.53m. Goldstrike personnel believe the hole intersected the zone at an oblique angle, and that the interval does not represent true width of the zone (Mac Gearailt, pers comm). Recoveries from 12.19m to 28.96m were high, ranging from 88.24% to 100.00%, indicating values returned have a high confidence level of true values. However, recoveries across the remainder of the intercept to 33.53m, including the high grade sub-intercept, ranged from 52.19% to 57.24%, rendering gold values as having low confidence to represent true grades. No recovery results were provided from 33.53m to 35.05m.

Several shorter, lower-grade intervals were encountered somewhat farther down-hole. These lower grade intervals are: 0.99 g/t Au across 2.16m, from 38.84m to 41.00m; 0.29 g/t Au across 2.76 metres, from 43.24m to 46.00m; 0.45 g/t Au across 3.28 metres, from 52.53m to 55.81m; and 0.86 g/t Au across 0.71 metres, from 70.29m to 71.00m. Recoveries across these zones ranged from 77.63% to 98.69%, indicating moderate confidence in sample results to represent true values.

The long, high-grade intercept is proximal to significant intercepts from holes DDLS 17-01 through 03. These may represent a single mineralized zone, although further drilling is required to confirm this.



Figure 15: KD 600 drill, Kluane Drilling, 2017

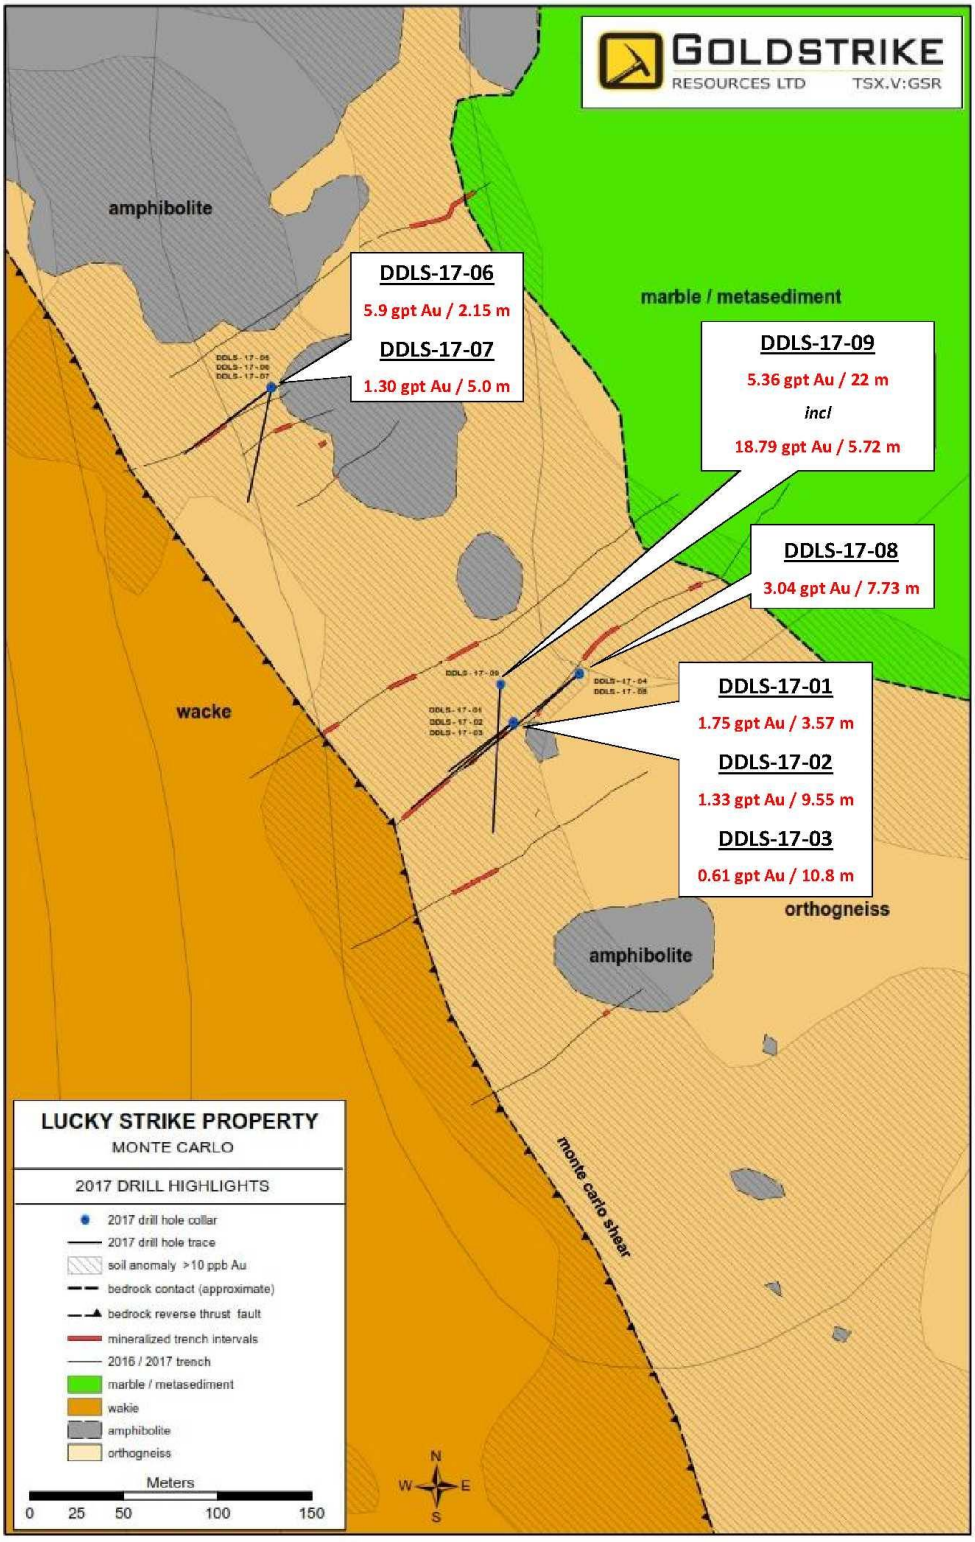


Figure 16: Plan Map, 2017 Drilling

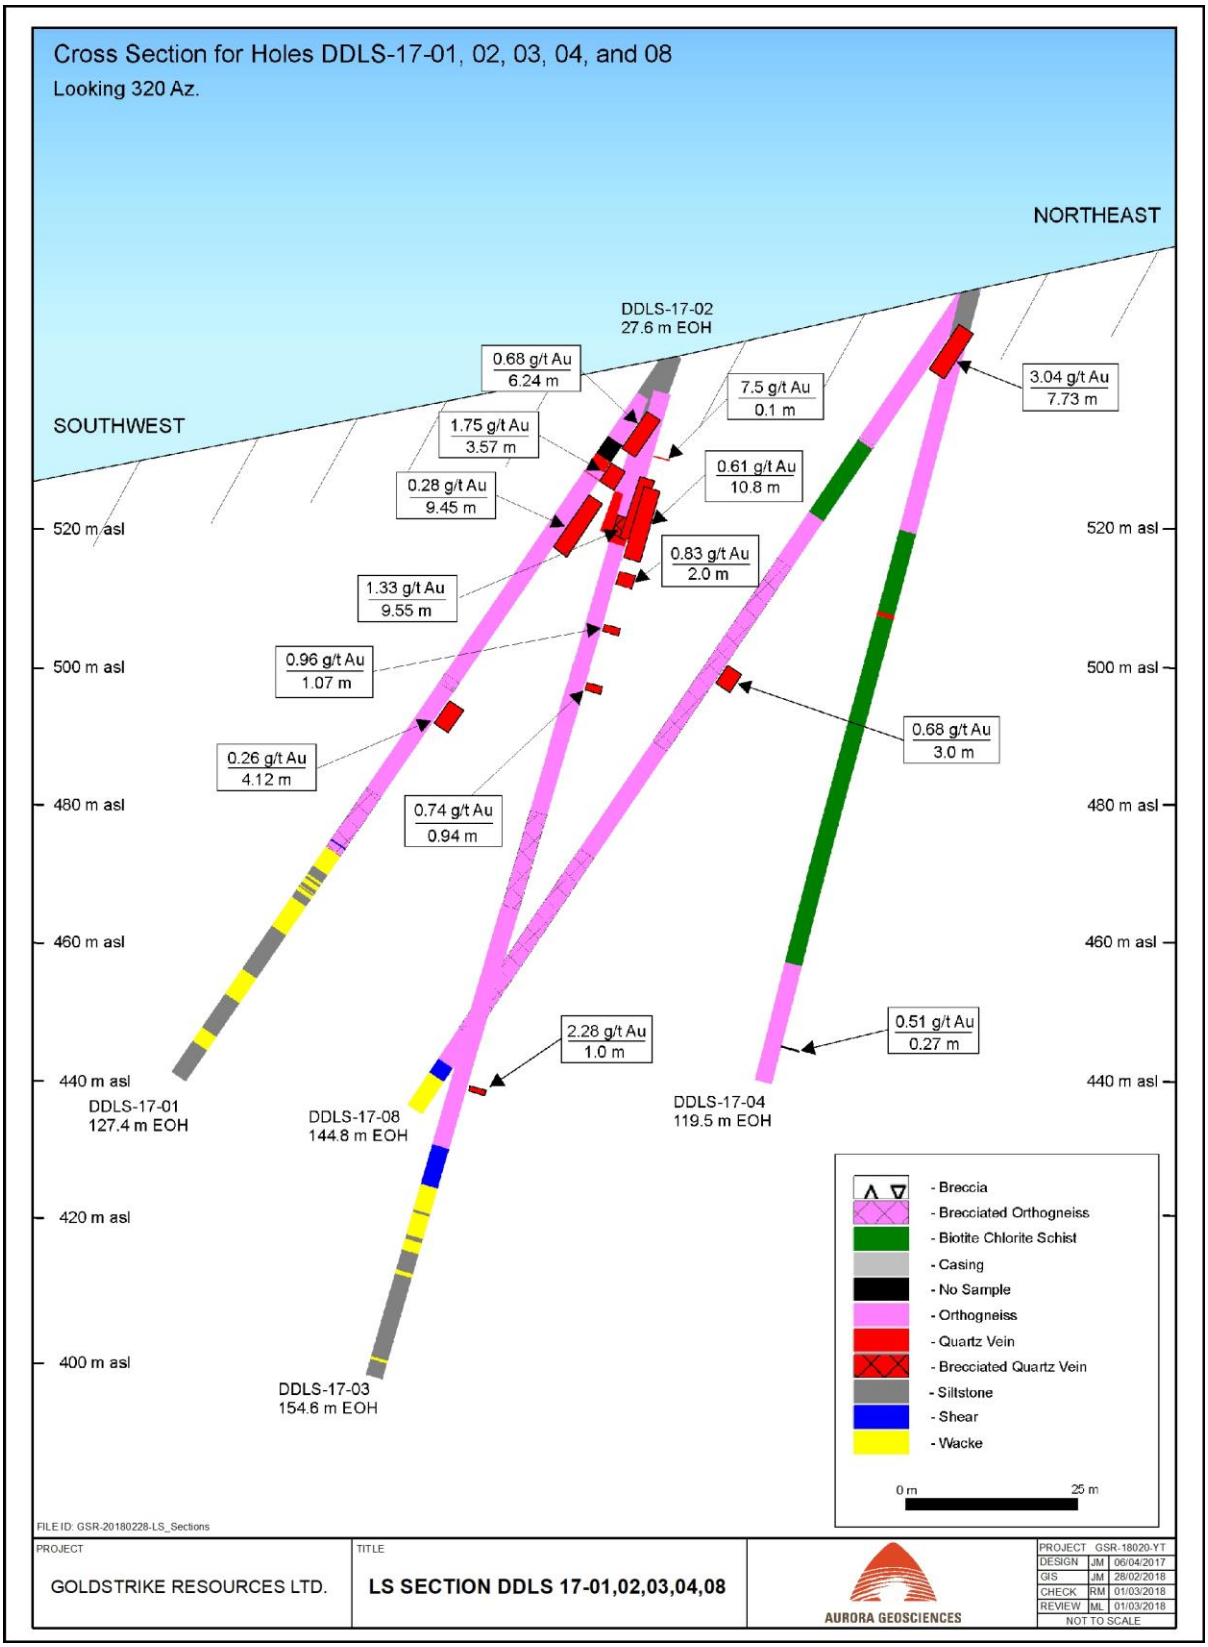


Figure 17: Section, DDLS 17-01, 02, 03, 04, 08

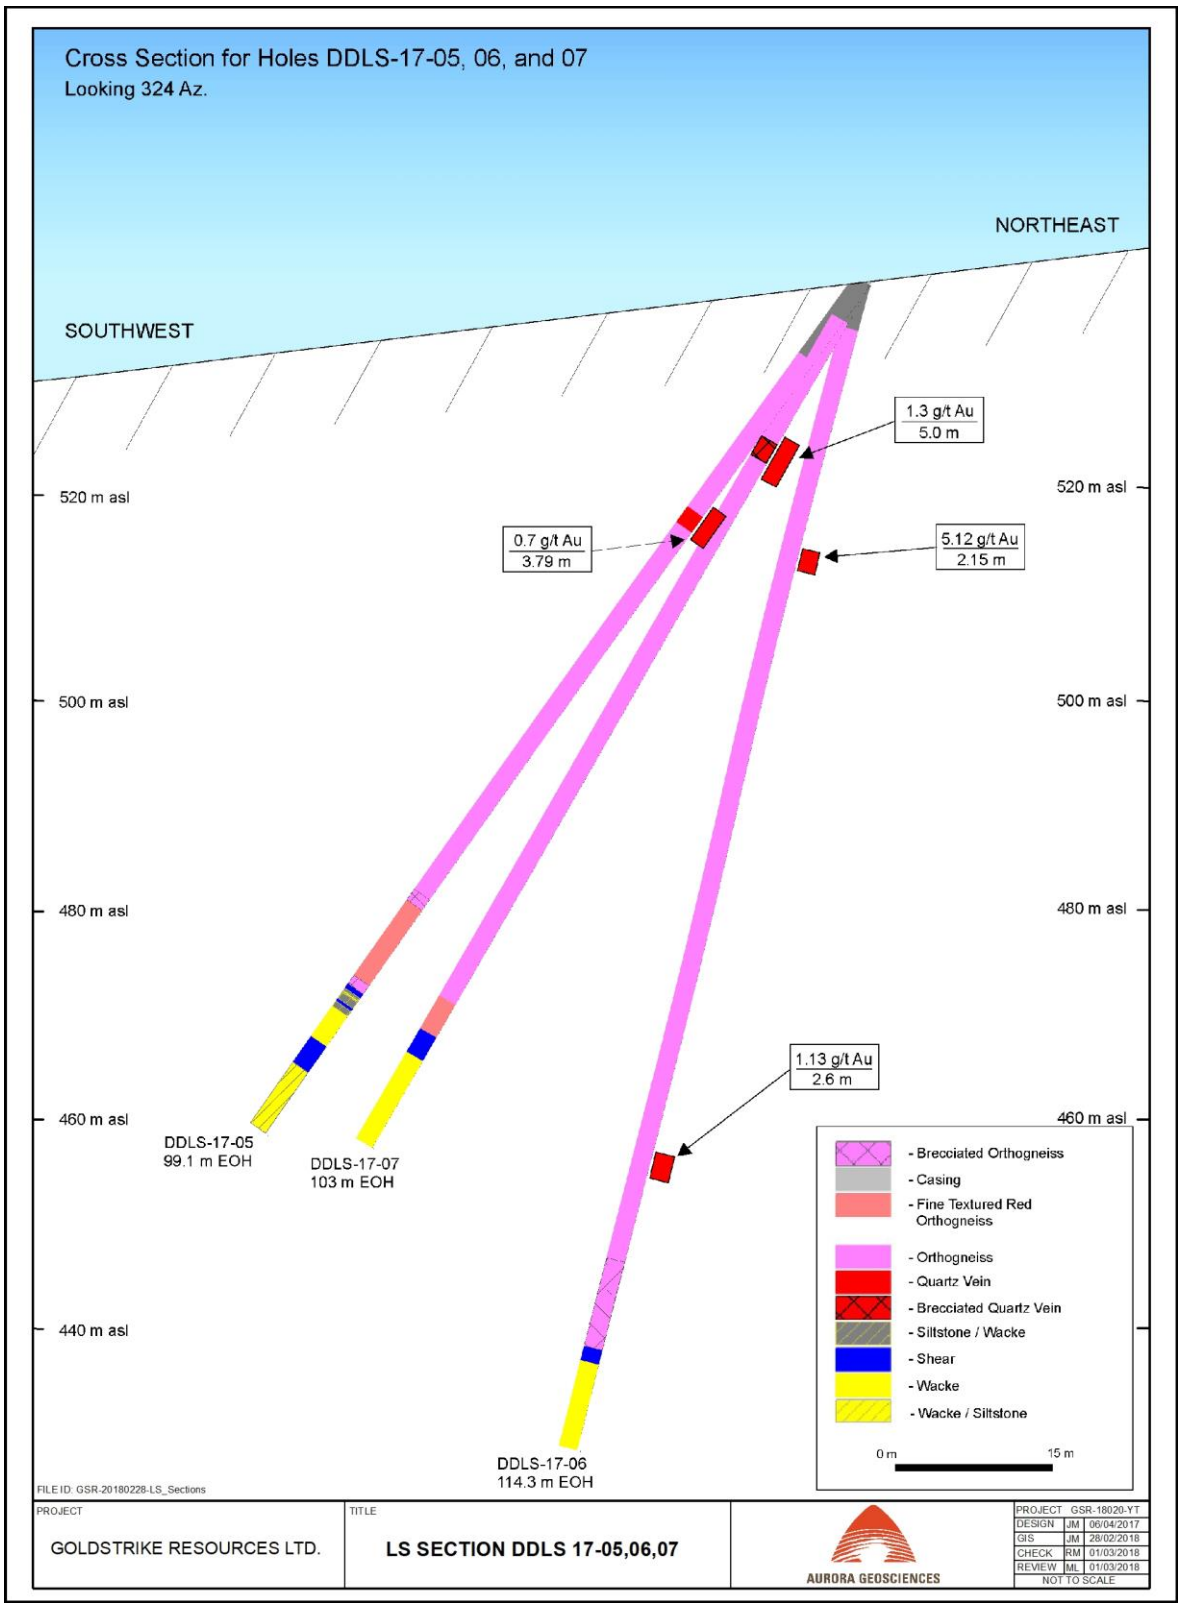


Figure 18: Section DDLS 17_05, 06, 07

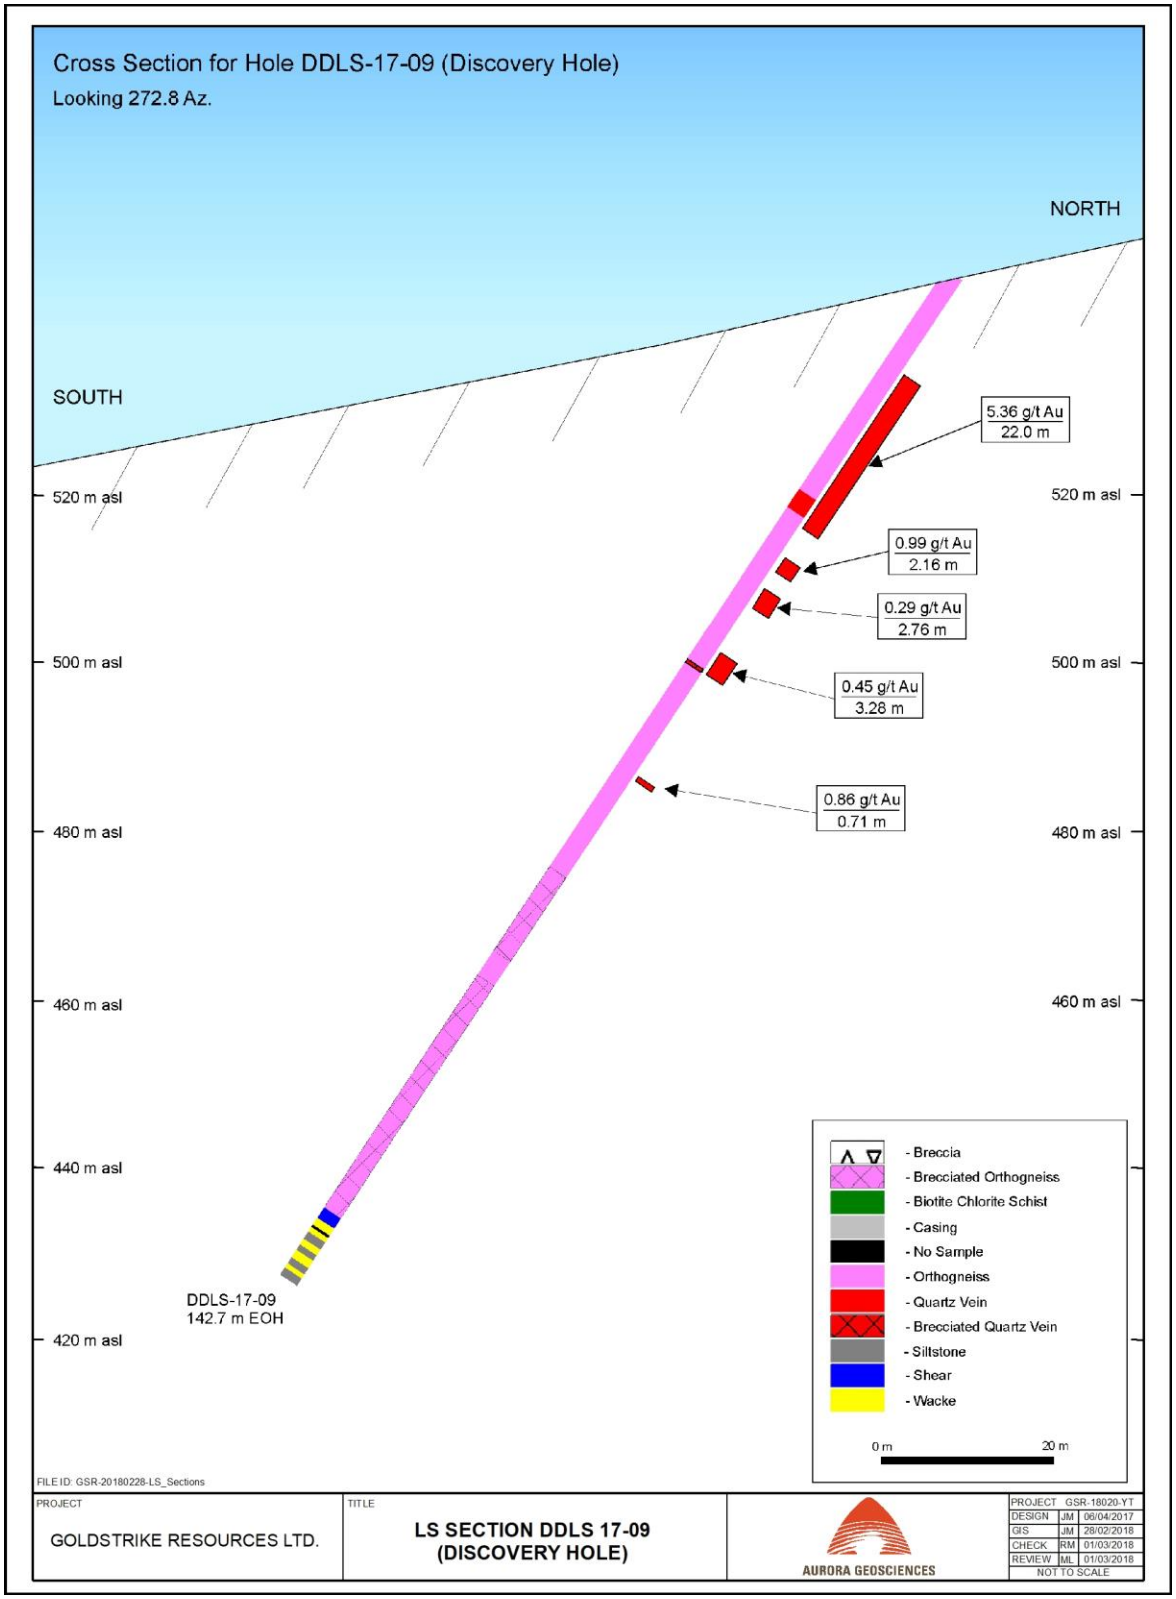


Figure 19: Section DDLS 17-09

9.4 COMMENTS ON RESULTS

Drilling in 2017 confirmed the relationship of mineralization to a property-scale NNW-trending, steeply ENE-dipping, thrust fault separating hanging-wall orthogneiss to the east from footwall metasediments to the west. Mineralized zones to date are located approximately 60 to 90 metres uphole of the thrust fault. This relationship is consistent in both sections, as well as the holes drilled at a 180° azimuth. Significant drilling would have to be undertaken to provide a resource estimate.

Inspection of core in March of 2018, indicates much of the high-grade mineralization occurs within zones of gouge hosting grey quartz vein fragments and in larger fractured grey quartz veins. In Hole DDLS-17-09, gold values to 26.03 g/t were also returned from somewhat more competent silicified orthogneiss with fracture-controlled limonite after sulphides. Several of these zones are marked by poor core recoveries, rendering results obtained as having a lower confidence in true grade. If mineralized material is preferentially retained, true values are likely lower. However, in areas of oxidized material, gold may be preferentially lost if thin seams of auriferous oxidized material are not retained in core. Results from holes DDLS-17-05 through 09 are somewhat more reproducible due to better recoveries from wider-diameter core. Assay results from core with recoveries below 90% have higher gold assys.

No visible gold was logged, suggesting gold occurs as very fine grains within lattice structures of pyrite and other sulphide minerals, or as fine coatings along grain boundaries. A hand sample cut by a rock saw revealed that gold occurs as very fine grains intergrown with limonite (oxidized sulphides?) along fine fractures, as well as very fine grains in recrystallized quartz (Figure 11b). A lack of visible gold diminishes the influence of the “coarse gold effect” whereby results may be skewed depending on relative presence or absence of large gold grains in a sample. This improves the reliability of results as representing true gold values of the respective intercepts. However, some degree of coarse gold effect occurs here, and is described in Section 12.2, “Data Verification”.



Figure 20: Portion of "Discovery Hole" DDLS-17-09: 27.89 - 36.88m



Figure 21: Portion of Sample #1876869, 26.03 g/t Au (2017 value)

10 SAMPLE PREPARATION, ANALYSES, AND SECURITY

10.1 DRILL CORE SAMPLING

Kluane Drilling Ltd., of Whitehorse, Yukon, completed the 2017 drilling at Lucky Strike, using used their own KD 600 drill rig. Holes 1 – 4 utilized NTW core size, while holes 5 – 9 utilized the wider-diameter HTW core size. Drill holes were designed to follow up on auriferous colluvium encountered in 2016 and 2017 trenches. A downhole survey was conducted approximately every 30 m if possible. A metre-mark was placed in the core box after every 3.05-meter run. Core boxes were transported from the drill site to the core logging station, located at the camp, via ATV or helicopter. The core was cleaned, and boxes were labelled with: "From - To" (m) meterage, hole id, and box number. Metre marks were made on the core and high-quality pictures were taken of each box. A rock quality designation (RQD) was completed on all the core and included core recovery and the sum of all lengths of core fragments of > 10 cm per 3.05-metre run (the actual RQD value). The core was then logged, noting changes in lithology type, structure, and minerology. Lastly the core was broken into approximately 1.0-metre sample intervals with some intervals being shorter or longer depending on lithology, structure, or minerology. The entire upper portion of the holes was sampled. This includes the orthogneiss, schist and shear zone marking the thrust fault. The bottom end of the holes, comprising the sedimentary unit beneath the shear zone, was only periodically sampled. The following information was recorded for each sample; sample id, from (m), to (m), rock code, brief description, alteration intensity (0, tr, weak (w), moderate (m), strong (s)), quartz percentage, sulphide percentage (py), lab codes, and shipping information. Water proof sample tags supplied by Acme Analytical labs (now Bureau Veritas) were used for sampling.

A combination of a standard sample followed by a blank sample was added into the sample sequence after every 34 samples (at sample 35, 70, etc.). Alternating high and low Au-value standards were used, while the blank standard remained the same throughout. The standards are from CDN Resource Laboratories Ltd. The low standard (CDN-CM-18) contained 5.28 g/t Au, plus or minus 0.35 g/t Au, and the high standard (CDN-GS-6B) contained 6.45 g/t Au, plus or minus 0.33 g/t Au. The blank used (CDN-BL-10) contains < 0.01 g/t Au. Reference material certificates for each may be found at:

http://www.cdnlabs.com/Certificates/GS6B%20Certificate.pdf
http://www.cdnlabs.com/Certificates/ME-18%20Certificate.pdf
http://www.cdnlabs.com/Certificates/CDN-BL-10%20Certificate.pdf

Once core was logged and samples broken out and described, prepared core boxes were stacked near the core cutting facility directly beside the core logging facility. The core was cut using a gas-powered Husqvarna MS 360 G diamond blade core saw. The core was cut down the middle with one half placed in labelled poly bag. If the sample was too brittle, soft or broken for proper cutting, a spoon or knife was used to split the core in half. One sample Id tag was placed in the sample bag with the sample, while the other sample half was placed back into the core box and the equivalent Id tag was stapled at the start of the sample interval. Once the entire sample interval was placed in the bag, the poly bag was sealed with a zip tie. All samples were transported to camp and securely stored before transportation to Dawson City. The core boxes were stacked in piles once all samples were cut. The piles were stacked by hole number and left onsite.

Prior to transport to Dawson City, sample series in groups were placed in labeled rice bags with a tamper-proof security tag. Each security tag has a unique Id that is recorded, in the database along with the corresponding samples in that particular rice bag. This information can be found in the shipping information on the sample data spreadsheet. Samples were transported by helicopter (Oceanview Helicopters Ltd.) to a nearby airstrip (Thistle or Blackhills strips), where they were then loaded into a fixed-wing airplane (Great River Air Ltd.) that delivered them to Dawson City airport. Sample shipment dates were random as shipments were dependent upon the schedules of the airline. The samples were received at the Dawson City airport by a Druid Exploration employee who then transported and securely stored the samples in a locked facility at the Druid Exploration lot. The samples were then transported to Kluane Freight lines in Dawson City where they were ground-delivered to Bureau Veritas in Whitehorse for analytical analysis.

All core samples were crushed and pulverized in the Bureau Veritas laboratory in Whitehorse, YT, and the sample pulps were then analyzed by Bureau Veritas in Vancouver, BC. The samples were first dried at 60 degrees C, then up to a 1 kg sample was crushed to 70% passing a 10 mesh (2mm) screen. A 250 g split of the sample was then further pulverized to 85% passing a 200 mesh (75um) screen. The remaining coarse rejects of the sample were stored at the Bureau Veritas storage facility in Vancouver, BC. Unless other intentions are clearly stated, all rejects and splits were disposed of after 3 months from the date of analytical completion.

All samples received both Aqua Regia ICP - MS 36 element analytical analysis (AQ201), and fire assay ICP – ES analytical analysis (FA-350 – Au) for gold only. If the fire assay gold values were greater than 10 g/t Au (fire assay upper limit) then a metallic screen fire assay (FS652) was completed for gold only. The ICP-MS technique comprised analysis for Mo, Cu, Pb, Zn, Ag, Ni, Co, Mn, Fe, As, Th, Sr, Cd, Sb, Bi, V, Ca, P, La, Cr, Mg, Ba, Ti, B, Al, Na, K, W, Hg, Sc, Tl, S, Ga, Se, Te, and Au.

The Aqua Regia ICP - MS (AQ201) analysis involves a 15 g split leached in hot (95°C) Aqua Regia solution with an inductively-coupled plasma mass spectroscopy (ICP-MS) finish. The fire assay ICP - ES (FA 350 - Au) analysis involves a 50-gram split being fully decomposed in a 3B lead-collection fire assay fusion procedure with an inductively-coupled plasma [atomic] emission spectroscopy (ICP-ES) finish. The metallic screen fire assay (FS652) screens 50 – 500 g pulps to 106 microns. The entire portion of the material not passing the screen (plus fraction) receives a 3B lead collection fire assay and the remainder material passing the screen (minus fraction) receives duplicate analysis for gold by the same fire assay analytical analysis. A calculation using sample weight is made to determine the total gold concentration for the entire sample (plus and minus fraction). This analytical procedure provides the most accurate gold assay for a sample.



Figure 22: Core Sampling Facility, Monte Carlo zone

11 INTERPRETATION AND CONCLUSIONS

11.1 INTERPRETATION

The Lucky Strike property was staked on a speculative basis following release of positive diamond drilling results on the Golden Saddle prospect (now deposit) to the southwest by Underworld Resources Inc. in May of 2009. From 2009 to 2017, Underworld Resources, and subsequently Kinross Gold Corp., have determined that precious metal-bearing mineralization is of orogenic origin, related to deep-seated crustal faulting, and lacking a spatial relationship to local intrusions. This style of mineralization is pervasive throughout the Klondike district to the north.

The Lucky Strike property has undergone a steady progression of exploration since 2009. Work from 2009 through 2014 focused on the "Zone 1" target but shifted to the "Zone 2" target to the northwest, from 2015 onward. By 2016, Zone 1 became known as the Boss (main Zone 1 target) and Samson (northwest Zone 1 target) zones, and Zone 2 was renamed as the "Monte Carlo Zone". Results from trenching and soil geochemical sampling at the Monte Carlo zone determined this to be the prime target on the property. Other targets identified by the end of 2016 were the Belmont Zone, between the Monte Carlo and Samson zones, and the Maverick zone, south of the Boss Zone.

The 2017 program focused primarily on diamond drilling of the Monte Carlo zone. Hole DDLS-17-09, the final 2017 hole, returned a near-surface intercept of 5.36 g/t gold across 22.0m, and is considered a "discovery hole" by Goldstrike personnel. No confirmation for the angle of intercept of mineralization

was determined, and as such is interpreted as an oblique intercept. However, the 2017 results warrant further diamond drilling to delineate the mineralized zone at Monte Carlo.

Diamond drilling in 2017 took place mainly along two parallel NE-SW trending sections, both of which targeted the NNW-striking, steeply ENE-dipping, thrust fault separating hanging wall orthogneiss from footwall metasediments. Both sections indicate mineralization occurs roughly 50 – 60 metres stratigraphically up-dip of the thrust fault. Intercepts are marked mainly by strongly fractured to brecciated orthogneiss, commonly with gouge, showing moderate carbonate alteration, patchy silicification, and fractured grey quartz veining. This may be due to a parallel fault trace up-dip of the main thrust fault, acting as a zone of structural preparation and subsequent emplacement of auriferous quartz vein and stringer mineralization. The mineralized zones host moderately abundant oxidized sulphides, with oxidation likely due to meteoric waters percolating downwards from surface. Intercepts are quite variable within sections; however, drilling results, combined with mechanized trenching results, indicate the plausibility of a continuous mineralized horizon extending between the two drilled sections. Induced Polarization resistivity results indicate a sharp contrast between hanging wall orthogneiss and footwall metasediments.

LIDAR survey results show a lineament along the trenched and drilled areas, extending SSE of the drilled sections, for up to 1.0 km and extending somewhat to the northwest. This provides further evidence that the target is of considerable extent. The aerially extensive soil anomaly on the Belmont zone, including the 2017 extensions, is approximately along strike to the SSE of the Monte Carlo zone, indicating potential for the two anomalies to represent a single mineralized horizon.

A model for the setting of mineralization at the Monte Carlo zone, potentially extending on to the Belmont zone, is of a structurally-hosted mineralized horizon within hanging wall orthogneiss, approximately paralleling the trace of the thrust fault. This may occur as multiple splays, from the underlying thrust fault rather than a single continuous zone, although further drilling is required to substantiate this. Smaller structural features are more likely to host mineralized zones than larger property to district-scale features. The structural horizon likely has a strike length exceeding 1.0 km, indicating improved potential economic viability. Precious metals are hosted preferentially within grey quartz veins and stringers, and to a lesser degree within fractured altered orthogneiss. Associated sulphides have been oxidised, likely due to percolated meteoric waters. This oxidised state would provide for improved recoveries through heap leaching, improving its economic viability.

A review of pathfinder element geochemistry reveals a lack of substantially elevated bismuth (Bi) values. This, combined with lack of observed hornfelsing, provides evidence that mineralization is not intrusion-related. This is despite proximity to the Scotch stock to the southwest, identified in some mapping projects as a member of the Tintina Gold Belt. Therefore, this stock is a member of an earlier suite, and/or is unlikely to be the source of mineralization at the Lucky Strike property. Mineralization may be ascertained as being of orogenic origin, likely coeval with that of the Golden Saddle deposit.

11.2 CONCLUSIONS

The following conclusions may be made from results of the 2017 program, the 2018 property visit, and programs from 2009 through 2016:

- Soil sampling, particularly during 2016, has identified several anomalous zones. From northwest to southeast these zones are: the Monte Carlo, Belmont, Samson, Boss and Maverick. Anomalous gold values were returned from trenching at the Monte Carlo, Belmont and Boss zones.
- At the Monte Carlo zone, a mineralized horizon comprising grey quartz veining and oxidized gouge has been identified in two diamond drill sections, spaced about 230 metres apart, and likely represent a single continuous structurally-controlled horizon. In both sections, the mineralized horizon is located within hanging wall orthogneiss about 50 to 60 metres stratigraphically above, and to the east of, a NNW-striking, steeply ESE-dipping, thrust fault separating the orthogneiss from footwall metasediments.
- Analysis of LIDAR plots shows a structure coincident with the mineralized horizon, extending for more than 1.0 km, mainly to the SSE, indicating potential for the mineralized horizon to have significant strike extent.
- Higher grade gold mineralization from diamond drilling is hosted mainly in strongly fractured orthogneiss, including gouge, with the highest gold grades returned from fractured to rubbly grey quartz veining.
- Mineralized zones are associated with oxidized sulphides. Oxidized material is considerably more amenable to gold liberation through heap leaching, improving the viability of low-grade gold deposits.
- Mineralization is likely of orogenic origin, shown by the lack of contact aureoles or other intrusion-related features and alteration assemblages. The lack of anomalous bismuth values is further evidence against an intrusion-related model. Gold mineralization at the nearby Golden Saddle deposit, and in large part across the Klondike area, is considered of orogenic origin.

12 RECOMMENDATIONS

12.1 RECOMMENDATIONS

Results of exploration from 2009 through 2017 indicate the potential for the property to host further mineralized zones, and for the Monte Carlo zone to be of significant size. A three-phase exploration program is recommended for 2018: a Phase 1 program of surface exploration, a Phase 2 program of 1,000 metres of diamond drilling, and a final Phase 3 program of a further 500 metres of diamond drilling.

Recommendations or Phase 1 consist of further ridge-and-spur grid soil geochemical sampling, further mechanized trenching, approximately 8.0 km of Induced Polarization (IP) surveying, and some further geological mapping, prospecting and rock sampling. The soil sampling program is expected to comprise approximately 1,000 soil samples during property-wide ridge-and-spur sampling, and 500 soils using grid sampling. The location of the grids will be determined from results of the ridge-and-spur soil sampling.

Approximately 600 metres of mechanized trenching is planned for the Monte Carlo zone, and across a target to the east having a similar radiometric signature. The IP surveying is planned for the vicinity of the Monte Carlo and Belmont zones, and to cover the radiometric signature to the east.

Both phases of the 2018 diamond drilling program are planned to target the Monte Carlo zone and will consist of infill drilling as well as step-out holes. Systematic drilling to confirm the dip and strike of mineralization is critical in determining the true widths of the mineralized zones. This program will involve a heli-portable drill, utilizing HTW-sized core.

Phase 1 is proposed to be conducted with up to eight field personnel (excluding the contract IP-crew), a helicopter pilot, cook and a cook's helper, the latter during the duration of the geophysical survey. Phases 2 and 3 may be conducted with a five-person crew, helicopter pilot, cook, and 4-person drill crew.

The program is expected to commence in mid to late June, and extend until early September, to maximize thawing of permafrost for ease of soil sampling. Proposed expenditures for all three phases, including data compilation, a report and 5% contingency is anticipated to be CDN$1,509,000.

12.2 RECOMMENDED BUDGET

12.2.1 Recommended Budget, Phase 1

Personnel, Project Geologist: 55 days @ $700/day (including pre-season prep):		$ 38,500
Personnel, Field Geologist (incl, trench logging): 44 days @ $500/day:		$ 22,000
Personnel, Trench sampler: 43 days @ $450/day:		$ 19,350
Personnel, Two soil samplers: 2 x 35 days @ $450/day:		$ 31,500
Personnel, Cook: 44 days @ $550/day:		$ 24,200
Personnel, Cook-s helper: 11 days @ $450/day:		$ 4,950
Personnel, Camp Manager: 44 days @ $500/day:		$ 22,000
Personnel, CanDig (heli-portable backhoe) operator:		$ 27,950
Personnel, Brush cutter: 43 days @ $450/day:		$ 19,350
IP Surveying. 9 line-km @ $2,800/ln km, plus travel:		$ 30,400
Rock sampling: 400 samples (field, trench) @ $40/sample:		$ 16,000
Soil sampling: 1,500 samples @ 34/sample:		$ 51,000
Helicopter support, Hughes 500: 126 hrs @ $1,515/hr wet:		$ 190,890
Helicopter support, B-3: 3 hours @ $2,300/hr:		$ 6,900
Expediting:		$ 5,000
Groceries: 465 person/days @ $45/day:		$ 20,925
ATV rental: 42 days @ $80/day:		$ 3,360
Camp rental: 461 person-days @$75/day:		$ 34,575
Satellite phone, Internet, etc:		$ 1,000
Gasoline, 3.5 barrels @ $400/barrel:		$ 1,400
Propane:		$ 500
Lumber:		$ 1,000
Field supplies:		$ 900
Field office supplies:		$ 400
	Field total:	**$ 574,050**
Digitizing, GIS: 45 hours @ $60/hr:		$ 2,700
Report writing, data compilation:		$ 11,400
Report preparation supplies:		$ 500
	Project total:	**$ 588,650**
	5% Contingency:	$ 29,433
	Grand Total:	**$ 618,083**

12.2.2 Recommended budget, Phase 2

Personnel, Project Geologist: 32 days @ $700/day (including pre-season prep):		$ 22,400
Personnel, Core Logging Geologist: 29 days @ $500/day:		$ 14,500
Personnel, Core Geotech and sampler: 2 x 28 days @ $450/day:		$ 25,200
Personnel, Cook: 28 days @ $550/day:		$ 15,400
Personnel, Camp Manager: 28 days @ $500/day:		$ 14,000
Drilling, 1,000m @ $200/m, all-in:		$ 200,000
Drill equipment rental: 20 days @ $50/day:		$ 1,000
Mobe and Demobe:		$ 7,000
Core sampling: 800 samples (drill core) @ $40/sample:		$ 32,000
Sample standards:		$ 275
Drill survey tool rental:		$ 2,000
Core boxes: 340@ $15/box:		$ 5,100
Helicopter support, Hughes 500: 81 hrs @ $1,515/hr wet:		$ 122,715
Helicopter support, B-3: 4 hours @ $2,300/hr:		$ 9,200
Expediting:		$ 3,000
Groceries: 276 person/days @ $45/day:		$ 12,420
ATV rental: 27 days @ $80/day:		$ 2,160
Camp rental: 276 person-days @$75/day:		$ 20,700
Satellite phone, Internet, etc:		$ 600
Drilling fuel, including pump: 44 barrels @$370/barrel:		$ 16,280
Gasoline, 1.9 barrels @ $400/barrel:		$ 360
Propane:		$ 300
Lumber:		$ 2,500
Field supplies:		$ 300
Field office supplies:		$ 250
	Field total:	**$ 529,660**
Digitizing, GIS: 40 hours @ $60/hr:		$ 2,400
Report writing, data compilation:		$ 7,000
Report preparation supplies:		$ 500
	Project total:	**$ 539,560**
	5% Contingency:	$ 26,978
	Grand Total:	**$ 566,538**

12.3 RECOMMENDED BUDGET, PHASE 3

Personnel, Project Geologist: 18 days @ $700/day (including pre-season prep):		$ 12,600
Personnel, Core logging geologist: 18 days @ $500/day:		$ 9,000
Personnel, Core Geotech and sampler: 2 x 16 days @ $450/day:		$ 14,400
Personnel, Cook: 16 days @ $550/day:		$ 8,800
Personnel, Camp Manager: 18 days @ $500/day:		$ 9,000
Drilling, 500m @ $200/m, all-in:		$ 100,000
Drill equipment rental: 10 days @ $50/day:		$ 500
Mobe and Demobe:		$ 13,000
Core sampling: 400 samples (drill core) @ $40/sample:		$ 16,000
Sample standards:		$ 140
Drill survey tool rental:		$ 1,000
Core boxes: 340@ $15/box:		$ 2,550
Helicopter support, Hughes 500: 48 hrs @ $1,515/hr wet:		$ 72,720
Helicopter support, B-3: 5 hours @ $2,300/hr:		$ 11,500
Expediting:		$ 2,000
Groceries: 152 person/days @ $45/day:		$ 6,840
ATV rental: 16 days @ $80/day:		$ 1,280
Camp rental: 152 person-days @$75/day:		$ 11,400
Satellite phone, Internet, etc:		$ 400
Drilling fuel, including pump: 22 barrels @$370/barrel:		$ 8,140
Gasoline, ($400/barrel):		$ 240
Propane:		$ 200
Lumber:		$ 1,500
Field supplies:		$ 200
Field office supplies:		$ 150
	Field total:	**$ 303,560**
Digitizing, GIS: 40 hours @ $60/hr:		$ 1,800
Report writing, data compilation:		$ 3,500
Report preparation supplies:		$ 300
	Project total:	**$ 309,160**
	5% Contingency:	$ 15,458
	Grand Total:	**$ 324,618**

19. REFERENCES

Arne, D., Benson, D., Brown, O., Pennimpede, C., 2011. Yukon Assessment Report 095526. Report on the 2010 Geochemical, Geophysical, and Geological work on the Whiskey Property.

Goldfarb, R.J., Marsh, E.E., Hart, C.J.R., Mair, J.L., Miller, M.L. and Johnson, C. (2007): "Geology and Origin of Epigenetic Lode Gold Deposits, Tintina Gold Province, Alaska and Yukon". Scientific Investigations Report 2007-5289-A. In: eds. by L.P. Gough and W.C. Day. U.S. Department of the Interior and U.S. Geological Survey. Chapter A of Recent U.S. Geological Survey Studies in the Tintina Gold Province, Alaska, United State, and Yukon, Canada - Results of a 5-Year Project, pp. A1-A18.

Gordey, S.P., Makepeace, A.J. 2001: Bedrock Geology, Yukon Territory, Geological Survey of Canada, Open File 3754; and Exploration and Geology services Division, Yukon Indian and Northern Affairs Canada, Open File 2001-1.

Hart, C. The Geological Framework of the Yukon Territory. Yukon Geological Survey.

Jones, C. (2017): "2016 Surface Exploration Report on the Lucky Strike property, White Gold District. Goldstrike Resources Ltd." In press.

Norman, G., 2010: Yukon Assessment Report 095531. "2010 Geochemical Assessment Report on the Gold Cap Property – Pacific Ridge Exploration – Owner and Polar/Stewart Property – Ryanwood Exploration Inc. – Owner". Filed with the Dawson Mining Recorder, Department of Energy, Mines and Resources, Government of Yukon.

Pautler, J., and Shahkar, A., 2014: "NI 43-101 Technical Report. NI 43-101 Technical Report on the QV Project, White Gold district, Yukon Territory". Filed on SEDAR website.

Ryan, S., 2009: Yukon Assessment Report 095276. Geochemical/Geological Report on the Gold Cap and Polar/Stewart Properties. Filed with the Dawson Mining Recorder, Department of Energy, Mines and Resources, Government of Yukon.

Ryan, S., 2012: Yukon Assessment Report 095994. Geochemical Report on Brew Claims. Filed with the Dawson Mining Recorder, Department of Energy, Mines and Resources, Government of Yukon.

Schulze, C. 2009: "Assessment Report on the 2009 Drilling Program, Sonora Property, Dawson Range, Yukon". For: Northern Tiger Resources Inc. Filed with the Whitehorse Mining Recorder, Department of Energy, Mines and Resources, Government of Yukon.

Sedar website at: http://www.sedar.com/FindCompanyDocuments.do

Shearer, J.T., 2010: Yukon Assessment Report 095545. "Soil Sampling and Prospecting Report on the Au 1+2, 9-12, 13-42 Claims". Filed with the Whitehorse Mining Recorder, Department of Energy, Mines and Resources, Government of Yukon.

Smith, H., 2009: Yukon Assessment Report 095157. "Assessment report describing geochemical sampling and prospecting at the Green Gulch property". Filed with the Whitehorse Mining Recorder, Department of Energy, Mines and Resources, Government of Yukon.

Smith, H., 2012: Yukon Assessment Report 096230. "Assessment report describing geochemical sampling, geophysical surveys, petrographic studies and diamond drilling at the Touleary property. Filed with the Whitehorse Mining Recorder, Department of Energy, Mines and Resources, Government of Yukon".

Tetra Tech (2012): Understanding and running an effective QA/QC program. Mineral Exploration Roundup 2012 Conference, Vancouver, BC.

Van Loon, S. and Bond, J.D. (compilers), 2014: Yukon Placer Mining Industry 2010-2014, Yukon Geological Survey. p.230.

Vivian, G., White, D., and Robinson, J., 2010: Yukon Assessment Report 095521. "Technical Report Au, BRC, Lucky, and Strike Claims, Yukon Territory". Filed with the Whitehorse Mining Recorder, Department of Energy, Mines and Resources, Government of Yukon.

White Gold Corp., 2018. News Release (March 5): White Gold Corp. Announces Mineral Resource Estimate of 961,000 Indicated and 282,500 Inferred Ounces of Gold on the White Gold Property, Yukon, Canada.

Wikipedia website, 2017: Mayo, Yukon, focusing on Environment Canada statistics, at https://en.wikipedia.org/wiki/Dawson_City

Yukon Geology Survey, Energy Mines and Resources, 2017: Website at http://www.geology.gov.yk.ca/

Yukon Minfile, 2017: Website at http://data.geology.gov.yk.ca

Yukon Mining Recorder, Energy, Mines and Resources, 2017: Website at http://www.yukonminingrecorder.ca/

APPENDIX 1

CERTIFICATE OF QUALIFICATIONS, CONSENT, DATE AND SIGNATURES

I, Carl Schulze, BSc, with business and residence addresses in Whitehorse, Yukon Territory, do hereby certify that:

1. I am a graduate of Lakehead University with a B.Sc. degree in Geology obtained in 1984.

2. I am a Professional Geoscientist registered with the Association of Professional Engineers and Geoscientists of British Columbia (registration number 25393), Association of Professional Geoscientists of Ontario (registration no. 1966) and with the Northwest Territories and Nunavut Association of Professional Engineers and Geoscientists (NAPEG, registration number L3359).

3. I have been employed in mineral exploration as a geologist since 1984, primarily on projects in the Yukon Territory, Northwest Territories, Nunavut, Alaska and British Columbia.

4. I supervised the work described in this report and wrote this report.

5. I have no interest, direct or indirect, nor do I hope to receive any interest, direct or indirect, from Eureka Resources Inc. or any of its properties.

Dated this 25th day of April, 2018 in Whitehorse, Yukon Territory.

Respectfully Submitted,

Carl Schulze

_____

Carl M. Schulze, BSc. P. Geo.

APPENDIX 2

STATEMENT OF 2017 EXPENDITURES

EXPLORATION COSTS, ASSOCIATED WITH GOLDSTRIKE RESOURCE'S LUCKY STRIKE PROPERTY IN 2017 Work conducted between July 6th and September 21, 2017		
ITEM	**COMPANY**	**AMOUNT**
HELICOPTER	Oceanview Helicopters/ Trans North Helicopters	$ 153,798.48
FIXED WING	Great River Air	$ 34,749.97
LIDAR	Eagle Mapping Services Ltd.	$ 49,900.00
DRILLING	Kluane Drilling Ltd.	$ 137,629.31
FUEL: DIESEL, GAS and JET FUEL	AFD Petroleum/ Environmental Refuelling Systems Inc.	$ 37,530.16
ASSAY COSTS	Bureau Veritas Commodities Canada Ltd.	$ 8,813.54
	Total 2017 Expenditures	**$ 422,421.46**

APPENDIX 3

DIAMOND DRILL LOGS, CORE SAMPLE DESCRIPTIONS

GOLDSTRIKE RESOURCES LTD.

Drill Hole	DDLS-17-01	**Property**	Lucky Strike	**Zone**	Monte Carlo

Preliminary Coordinates (UTM NAD 83)

Easting	589530	**Northing**	7012908	**Elevation (m)**	545
Survey by	Clayton Jones	**Survey Method**	gps	**Date**	August 11, 2017

Final Coordinates (UTM NAD 83)

Easting	589530	***Northing***	7012908	***Elevation (m)***	545
Survey by	Clayton Jones	**Survey Method**	gps	**Date**	August 11, 2017

Summary

Depth (m)	127.41	**Azimuth**	230	**Dip**	-55
Core Size	NTW	**Casing (ft)**	40	**Logged By**	Clayton Jones

Drill Company	Kluane Drilling Ltd.	**Drill Rig**	KD 600-2
Drill Start Date	August 11, 2017	**Drill Comp Date**	August 13, 2017
Log Start Date	August 13, 2017	**Log Comp Date**	August 13, 2017
Final casing	40	**Core Location**	Monte Carlo Camp
Comments	swelling clays down hole forced stop	**Claim #**	Au 92 (YC98692)

Samples

Sample Numbers	1876001 - 1876097		
Number	97	**Lab**	Bureau Veritas
Cut by	Craig Sinclair	**Date Shipped**	August 18, 2017

Down Hole Survey

Depth (m)	Measured Azm.	Corrected Azm.	Dip	Magnetic Field (nT)	Temperature
21.34	210.34	229.81	55.82	56937	18.7
44.00	211.08	230.55	55.41	56757	25.4
80.00	209.62	229.09	55.51	56728	25.2
110.00	208.68	228.15	55.47	56600	14.8

Rock Types

OG - Orthogneiss (monzonite protolith)
BXOG - Brecciated / Sheared Orthogneiss
CLBSH - Chlorite Biotite Schist
DQV - Grey to Dark Grey/Blue Quartz Vein
QV - White - Translucent Quartz Vein
QVBX - Brecciated Quartz Vein
SHR - Black Plasticine Textured Fault Gouge Breccia with Wacke Clasts
W - Wacke / Volcanoclastic (quartz rich)
S - Siltstone
Clay - Clay
QBX - Silicified Quartz Rich Brecciated zone in Orthogneiss
FROG - Fine Textured Silicified Red Orthogneiss

Abbreviations

qrtz - quartz
qrtzc - quartz carbonate
sil - silicified / silicification
chl - chlorite
carb - carbonate
alt'n - alteration
bx - breccia / brecciated
fol - foliated
str - stringer
wk - weak
dtca - degrees to core axis
sub - partial
frac - fracture / fractured
zn - zone
tr - trace
def - deformed
ori - orientation
decomp - decomposed
diss - disseminated
qtsw - quartz stockwork
spec hem - specular hematite
pmorph - pseudomorph
oxi - oxidized
vnlt - veinlet
discon - discontinues
brn - brown
med - medium
mod - moderate
ca - core axis
drk - dark
comp - competent
text - texture / textured
frags - fragments
occ - occasional
poss - possible
stw - stockwork
qv - quartz vein
qs - quartz stringer
min - mineralized (pyrite)
plag - plagioclase
flt - fault
shr- shear
dif - different
conc - concentration
irreg - irregular

Code	Sulphides & Oxides
aspy	arsenopyrite
az	azurite
bis	bismuthinite
cpy	chalcopyrite
gn	galena
hem	hematite
lim	limonite
mag	magnetite
mal	malachite
mo	molybdenite
po	pyrrhotite
py	pyrite
sc	scorordite
sch	scheelite
sp	sphalerite
tel	tellurides
VG	visible gold

Code	Silicates & Alteration
ab	albite (albititized)
Al-sil	Aluminum silicate
amp	amphibole class
ad	andalusite
ank	ankerite
arg	argillic
bio	biotite
cal	calcite
cl	amorphous clay alteration
crd	cordierite
cs	calcite stringers
cb	carbonate alteration (unspecified)
chl	chlorite (chloritized)
chltd	chloritoid
dol	dolomite
ep	epidote
fu	fuschite
fd	feldspar
gar	garnet
gf	graphite
ksp	K-feldspar
px	pyroxene class

Code	Silicates & Alteration
qcs	quartz-carbonate stringer
qcv	quartz-carbonate vein
qs	quartz stringer
qtz	quartz
qv	quartz vein
ser	sericite
sid	siderite
sil	silicified
sl	sillimanite
tour	tourmaline
xtls	crystals

Code	Structure
ap	axial plane
bd	bedding
bnd	banding
boud	boudinage
bx	breccia
clvg	cleavage
crn	crenulated/crenulation
cg	coarse-grained
drf	drag fold
fltbx	fault breccia
fltg	fault gouge
fg	fine-grained
fol	foliation
frac	fracture
incl	inclusion
jnt	joint/jointed
lam	laminated/lamination
ln	lineament
mg	medium-grained
mega	megacrysts
msv	massive
pheno	phenocrysts
porp	porphyritic
sch	schistosity
sh	shear
slk	slickenside
vfg	very fine grained
vn	vein

To	Rock Code 1	Rock Code 2	Description (include rock header name from code): DDLS-17-01
7.62	Casing		Overburden
15.24	OG		frac and oxi og, weak fol, mod sil, brown stained with weak carb alteration throughout, qv and qrtz stringer at 40 - 55 dtca (2 - 3 %), minor cal vlts at 40 - 55 dtca
			9.06 5 - 10 mm qv at 55 dtca
			11.20 frac surface at 20 dtca
			10.88 patchy < 1% dark blue metallic oxide, < 1 mm, lim str at 40 - 55 dtca
			13.00 - 13.30 sulphide pmorph filled with dark brown lim, 2 cm qv at 45 dtca
			14.40 - fol at 45 - 50 dtca
			14.85 - 15.24 sandy clay with rock fragments
18.29	No Sample		completely lost / washed down hole, no sample (more likely 15.24 - 19.80 lost down hole = 4.56 m lost), this was estimated by measuring back from next block along solid competent core.
20	QV	OG	frac rounded qrtz vn rubble, patchy dark grey color with minor weathered out py voids
21.34	OG		light brown very weak fol og, sheared appearance with slight vn / str offsets and sub bx of og, patchy cal str throughout at 2%, patchy py pmorph filled with lim < 2 mm at 1%
			20.20 - 5 mm light grey qrtz in very sil 10 cm section? vn at 15 dtca
			21.00 - 4 cm qv / sil vn
21.44	QV	OG	frac rounded qrtz vn rubble, slight grey color with weathered out py voids
22.53	OG		oxi and frac light brown og, weak fol except in a few local patches with less intense sil, patchy qrtz vn, sil and frac at 50 - 60 dtca, sub brecciated locally
			21.44 - 21.86 light brown carb alt'd og, 1 cm cal vn at 65 dtca,
			21.74 - 21.84 light brown sandy clay, decomp og
			21.86 - 22.53 less alt'd og with mod developed fol at 50 dtca, qrtz lim str at 50 dtca,
23.55	OG	QV	very sil og with 80% qrtz,
25.45	OG		oxi and frac light brown og, weak to mod fol with more developed fol in patches with less sil, patchy qrtz vn and sil at 50 - 60 dtca, sub brecciated locally
			23.55 - 24.39 brown weak fol og, patchy cal vnlt / micro stw 3 %, vuggy calcite locally
			24.22 - 1 cm qrtz vn at 55 dtca
			24.39 - 24.69 oxi and frac light brown og
			24.39 - a few rounded drk qrtz pebbles (not enough to break out and sample)
			24.69 -24.95, sandy clay rubble, decomp og
			24.95 - 25.45 mod fol og, abundant bio (mineral alignment defining fol)
25.8	OG	QVBX	sil / qv at 60 dtca, very frac with rubble at end of unit, sub bx with qrtz clasts in decomp og
31.87	OG		oxi and frac light brown og, weak to mod fol with more developed fol in area with less sil, patchy qrtz vn and sil at 50 - 60 dtca, sub bx locally, patchy cal-lim-qrtz vnlts orthogonal to fol at 30 dtca
			25.80 - 26.65 og mod fol, abundant bio, frac / fol at 60 dtca
			26.65 - 27.60 poor fol, sil og, 50 % qrtz, very fractured throughout with rubble
			27.60 - 28.45 weak sil mod fol og, abundant bio, fol at 50 dtca, cal - lim - qrtz str < 10 mm at 30 dtca orthogonal to fol, str contain py pmorphs at margins (up to 4 mm wide)
			28.45 - 30.95 weak sil mod fol og, abundant bio, fol at 60 dtca,
			30.60 cal - lim - qrtz str 5mm parallel to ca (0 dtca)
			30.95 - 31.60 albite and sil altered og, abundant white plagioclase throughout, gradational contact, < 1mm dark brown str at 45 dtca (orthogonal to fol)
			31.60 - 31.87 weak sil, mod fol og, 1 - 2mm dark brown lim str orthogonal to fol at 45 dtca,

39.05	OG		weak sil, mod fol og, fol at 60 dtca, lim and qrtz str
			32.20 - 32.34 light brown decomp og with qrtz clasts, good contact at 35 dtca
			33.60 -35.00 broken decomp og, sandy clay with rock fragments
			35.30 - 35.90 strong sil and albite alt'n, 2 -3 % py pmorphs filled with lim,
			35.40 40 cm unit of strong sil and albite at 45 dtca , 2% py pmorphs filled w lim
			36.31 - 36.58 decomp og, sandy clay
			37.60 - 37.90 broken decomp og, sandy clay
			37.55 1 cm qv at 65 dtca
41.8	OG		mod sil og, qrtz cal and lim str throughout, shearing with discontinues and offset lim str
			39.98 - 40.76 decomp og, sandy clay
			39.80 1 cm cal vnlts between 20 - 40 dtca
43.6	OG		less oxi og, beige to white color, weak fol with blueish bio, fol 55 dtca, < 1mm lim stringer stw, metallic blue hematite? @ 2 -3 %, trace py pmorphs
43.84	OG		beige clay with minor og frags < 1 cm, sharp contact with og at 55 dtca, fault gouge?
57.15	OG		light brown mod fol og, fol 70 dtca, minor qrtz calcite str, local section of intense sil
			44.40 natural frac filled with purple clay, contact at weak alt og and sil unit, 35 dtca
			47.25 5mm cal str at 70 dtca
			48.30 - 48.55 strong sil with cal lim str, str / frac at 10 - 20 dtca,
			50.85 -51.72 strong sil, cal lim stringers at 15 - 20 dtca
			51.00 2 cm qrtz carb vn 45 dtca & lim str orthogonal at 20 dtca
			54.40 - cal stw
			55.12 - 57.15 mod sil , weaker fol, qrtz calcite stringer and vn (up to 2 cm)
			56.00 def red hem stringer at 50 dtca orthogonal to fol
			56.60 2 cm def qrtz vn parallel to fol (55 dtca), hem str and lim-cal stringer post cut qrtz vns
58.7	BXOG		very decomposed bx og, light brown orange sandy clay matrix with darker orange clasts of og
59.88	OG		mod fol, weak alt'd og with broken rubble section (20 cm) 59.50 - 59.88 broken
61.45	OG		weak fol, mod sil og, qrtz str 50 dtca,
61.8	OG		decomp og, sandy clay broken og frags
62.03	OG	BXQV	sil / sheared qrtz rich unit in decom og
62.95	OG	BXQV	decomp og, sandy clay with broken og frags
65.15	OG	BXQV	sil bx og, local zones of strong sil and frac hydrothermal qrtz breccia
			62.95-63.12 sil and sheared qrtz rich unit in decom og, qrtz clast in orange fine text matrix (BX?)
			63.20 - 5 cm purple hematite def vn
			63.70 - 63.92 - strong sil bx zone, sharp upper and lower contacts that are orthogonal to each other (tapering?, pinch and swell vn) both at 50 - 55 dtca
66.98	OG		gradational upper contact, darker grey purple, finer text then other og, strong sil with no fol, qrtz cal stw (minor) , og is distinct from other og above
			66.70 qrtz carb stockwork,
71.28	OG		brownish purple mod fol, weak sil og, cal qrtz vnlets < 5mm with fol (55 dtca),
72.25	OG		def and frac qrtz vning / sil in mod sil og,
			72.00 - 10 cm wide frac qrtz vn, approx. 50 dtca

73.15	OG		brown purple mod fol, weak sil og, cal qrtz vnlets < 5mm with fol (55 dtca),
74.07	OG		sil darker grey og with mod fol, 20 cm broken rubble section at 73.15 - 73-35
75.74	OG		decomp broken og rubble, contact with lower unit is sharp, 70 dtca
77.3	OG		sheared strong sil og, no fol, sub brecciated throughout, deformed frac qrtz vns to 2 cm,
86.35	BXOG		shear zone / fault, decomp og, sandy clay with og and qrtz fragments, local 5 - 10 cm competent core pieces, sil og, 10 - 20 cm sections of sub bx with resistive sil clasts in rotten sandy clay og matrix
			83.80 - 5 cm dark black clay gouge
86.5	SHR		86.35 - 86.50 dark grey clay (plasticine shear gouge)
87.7	BXOG		black to dark brown sandy clay (fault gouge?), lower contact with wacke sharp at 40 dtca,
			87.30 - 87.40 competent fine text og
91	W		competent medium grained wacke, weak carb alt'n
			88.00 - 91.00 med - course grained wacke, broken rubble, decomp with sandy clay sections
92.43	S		very fine grained sandstone / siltstone, light to dark grey, abundant fine mica throughout, soft to the touch
			91.00 - 91.25 very fine grained light grey to brown smeary sandstone /siltstone, 5 cm by 1 cm irregular bleb of dark black staining with fine diss sulphide?, sharp lower contact at 45 dtca
			91.25 - 92.43 very fine grained micaceous sandstone/siltstone, minor amount of wacke clasts with cal str (sheared up rip up clasts from upper bed), sharp lower contact at 55 dtca, soft
96.55	W	S	92.43 - 92.78 light grey medium textured wacke, cal str /stw, mod carb alt'n, sharp upper and lower contact 25 - 30 dtca, competent
		S	92.78 - 93.14 smeary light brown to dark brown, fine grained siltstone, very soft
		W	93.14 - 93.84 medium grained sheared wacke, light grey, strong carb alt'n
		S	93.84 - 94.40 darker smeary grey, soft, fine grained siltstone
		W	94.40 - 94.55 medium grained sheared wacke, , light gray, mod carb alt
		S	94.55 - 94.70 darker smeary grey, soft, fine grained siltstone
		W	94.70 - 95.30 medium grained sheared wacke, , light gray, mod carb alt
		S	95.30 - 96.55 darker smeary grey, soft, fine grained siltstone
101.62	W		med - course texture wacke, light grey
			97.10 - 97.20 conglomerate (very course wacke) with rounded quartz (epiclastic)
109.22	S		dark grey to black siltstone, local zones of increase frac and soft silty sandy sections, overall soft to the touch, lower contact at 70 dtca, sub bx in places with carb alt'd wacke clast up to 5 cm wide
113.61	W		medium - course textured wacke, weak to mod carb alt'n, very competent
119.55	S		dark grey, fine grained siltstone, local strong frac, sharp lower contact at 45 dtca
121.92	W		fine grained wacke, light grey
127.41	S		EOH, black graphitic siltstone shear?, soft with conchoidal frac, waxy shinny frac surface

GOLDSTRIKE RESOURCES LTD.

Drill Hole	DDLS-17-02	Property	Lucky Strike	Zone	Monte Carlo

Preliminary Coordinates (UTM NAD 83)					
Easting	589530	Northing	7012908	Elevation (m)	545
Survey by	Clayton Jones	Survey Method	gps	Date	August 14, 2017

Final Coordinates (UTM NAD 83)					
Easting	589530	*Northing*	7012908	*Elevation (m)*	545
Survey by	Clayton Jones	Survey Method	gps	Date	August 14, 2017

Summary					
Depth (m)	27.55	Azimuth	230	Dip	-70
Core Size	NTW	Casing (ft)	45	Logged By	Clayton Jones
Drill Company	Kluane Drilling Ltd.			Drill Rig	KD 600-2
Drill Start Date	August 13, 2017			Drill Comp Date	August 14, 2017
Log Start Date	August 14, 2017			Log Comp Date	August 14, 2017
Final casing				Core Location	Monte Carlo Camp
Comments	stopped because core barrel lost dh			Claim #	Au 92 (YC98692)

Samples			
Sample Numbers	1876098 - 1876110		
Number	13	Lab	Bureau Veritas
Cut by	Craig Sinclair	Date Shipped	August 18, 2017

Down Hole Survey					
Depth (m)	Measured Azm.	Corrected Azm.	Dip	Magnetic Field (nT)	Temperature
N.A.	N.A.	N.A.	N.A.	N.A.	N.A.

From	To	Rock Code 1	Rock Code 2	Description (include rock header name from code): DDLS-17-02
0	13.72	CASEING		overburden
13.72	21.34	OG		mod to strong sil og, oxi with brown staining throughout, poor fol, sheared appearance with bx sections, very weak carb alt'n, lim and cal str < 1mm, lim stw locally,
				13.72 - 16.5 - black orange molted look, soft black mineral mixed in with sheared og?
				14.30 1 cm sil/qv with 10% py pmorphs up to 4mm, 70 dtca
				15.30 -15.90 broken core
				16.05 - 16.60 strong sil, alb alt'n, light brown cream beige, 1 % py pmorphs, 10% bio, 5mm qrtz cal vnlt at 35 - 40 dtca
				16.40 lim stringer / frac 55 dtca
				17.90 - 21.34 strong sil og, oxi with brown staining, sub bx with local zones of qv/sil, very def, 1 -2 % py pmorphs,
				17.02 - 17.80 broken core
				17.90 5 cm qrtz vein, frac with lim str, tr py pmorphs
				20.80 very def discon qv, 2 @ 1 cm each, py bleb pmorphs (5%)
21.34	24.38	QV	OG	very poor recovery, crumbly broken qrtz vning and og, 20 cm section of qrtz pebble rubble
24.38	27.55	QV	QVBX	35 cm drk vning and qrtz bx, 10 cm sandy qrtz pebble rubble, 20 cm broken dark qrtz rubble, 20 brown oxi og
				24.38 -25.00 bxqv, broken dark qrtz clasts in dark orange sil og matrix, 5% cal in matrix, very frac with < 1mm lim str and lim filled frac, tr py pmorphs,

| Sample ID | From | To | Length | Rock Code 1 | Rock Code 2 | Description | Alteration Intensity (0, tr, w, m, s) | | | | | | Quartz (%) | | | Sulphide % | | | Other Mineralization (%) | | | Lab codes | | Shipping information | | | | | Assays | | Wgt | Au | Mo | Cu | Pb | Zn | Ag | Ni | Co | Mn | Fe | As | Au | Th | Sr | Cd | Sb | Bi | V | Ca | P | La | Cr | Mg | Ba | Ti | B | Al | Na | K | W | Hg | Sc | Ti | S | Ga | Se | Te |
|---|---|---

GOLDSTRIKE RESOURCES LTD.

Drill Hole	DDLS-17-03	**Property**	Lucky Strike	**Zone**	Monte Carlo

Preliminary Coordinates (UTM NAD 83)					
Easting	589530	**Northing**	7012908	**Elevation (m)**	545
Survey by	Clayton Jones	**Survey Method**	gps	**Date**	August 14, 2017

Final Coordinates (UTM NAD 83)					
Easting	589530	***Northing***	7012908	***Elevation (m)***	545
Survey by	Clayton Jones	**Survey Method**	gps	**Date**	August 14, 2017

Summary					
Depth (m)	154.57	**Azimuth**	230	**Dip**	-74
Core Size	NTW	**Casing (ft)**	20	**Logged By**	Clayton Jones
Drill Company	Kluane Drilling Ltd.			**Drill Rig**	KD 600-2
Drill Start Date	August 14, 2017			**Drill Comp Date**	August 16, 2017
Log Start Date	August 14, 2017			**Log Comp Date**	August 16, 2017
Final casing	20			**Core Location**	Monte Carlo Camp
Comments	74 dip because 1 ft step out			**Claim #**	Au 92 (YC98692)

Samples			
Sample Numbers	1876111 - 1876235		
Number	125	**Lab**	Bureau Veritas
Cut by	Craig Sinclair	**Date Shipped**	August 21, 2017

Down Hole Survey

Depth (m)	Measured Azm.	Corrected Azm.	Dip	Magnetic Field (nT)	Temperature
46.00	213.47	232.93	-73.61	57049	15.3
96.00	211.2	230.66	-73.58	56902	21.3
129.00	211.91	231.37	-73.9	56676	17.2
152.00	212.88	232.34	-73.9	56777	14.6

From	To	Rock Code 1	Rock Code 2	Description (include rock header name from code): DDLS-17-03
5.49	11.60	OG		oxi qrtz bio og, mod sil, 5 - 10% bio, weak - no fol, local patches of strong sil and min (py pmorphs), lim cal str at 90 dtca
				5.49 - 8.20 broken with < 10 cm pieces and sandy clay sections
				6.20 - large 3 cm X 5mm vuggy lim filled void
				8.20 - 11.60 light brown mod sil og, qrtz cal lim str
				8.20 - 8.40 strong oxi, sil og with 1 -2 % py pmorphs, sub bx
				11.10 py pmorphs, up to 10 mm wide
				10.58 - 10.75 folded sheared qrtz vning, recumbent bends, 1 - 2% py pmorphs,
11.60	13.46	OG		darker brown, non fol og, mod to strong sil, beige < 1mm plag (beige) specs throughout (speckled)
				11.85 - 1 cm qrtz vn at 60 dtca
				12.50 - cal str 50 dtca
13.46	14.00	OG		very frac og, strong oxi, sub bx with def discon lim str, major frac parallel with ca (0 dtca),
				13.75 - 14.00 broken rubble section
14.00	17.89	OG		frac coarse text og, abundant bio (10 % locally), patchy zones of well developed fol / weak alt
				14.50 - 14.60 10 cm sil og section with 1 cm qrtz vn at 65 - 70 dtca, 10% py pmorphs
17.89	19.20	OG		oxi og, strong sil with def frac qrtz vning, 2 - 3 % py pmorphs, fractured and broken sections
				17.85 - 18.24 strong sil og, def frac qrtz veins (1 -2 cm), large 1 cm bleb oxi py, cut by def qrtz - lim - py 1 -2 mm str (post large frac qrtz coming in with fol)
				18.20 - 1 cm wide irregular bleb of py pmorphs,
19.20	21. 60	OG	QVBX	increase sil and frac og, sub bx locally, qrtz lim str
				19.20 - 1 cm qrtz vn with fine wispy black oxi str at margins 10 - 15 dtca
				21.10 - 1 mm lim str 30 dtca, cuts qrtz str / vnlet
				19.90 - 20.30 very frac core
				19.20 - 21.60 very strong sil, sub bx with lim str stw, py pmorphs up 5mm (2 % overall),
21.60	24.38	OG		60 cm of broken og , strong sil with abundant qrtz frags, 5 cm qrtz sand at end of run (poor recovery)
24.38	27.43	QVBX	OG	entire 10 ft run sampled, very poor recovery, very strong sil and bx og / qv, lim str stw locally (bx consists of qrtz clast supported in light orange lim matrix?)
				27.23 5mm beige qrtz vnlt, 10 dtca
27.43	28.52	DQV	OG	27.43 - 28.00 dark brown qrtz / strong sil og frac with < 5 cm pieces
				28.00 - 28.52 qrtz sand and pebbles
28.52	32.00	OG		strong sil og, sheared with patchy qrtz vning and bx, lim str , tr - 1% py pmorphs
32.00	34.90	OG		very broken oxi and frac brown og, mainly decomp with sandy sections
34.90	36.51	OG		lighter brown mod - strong sil og, weak fol at 35 dtca, very competent,
				35.40 - 35.55 strong sil zone with qrtz vn / bx, lim matrix with frac qrtz clasts

				36.09 - 36.15 qrtz vn bx tr py pmorphs
36.51	41.40	OG		mod fol og, abundant bio with fol, 40 dtca, lim str orthogonal to fol at 40 - 45 dtca,
				37.40 - def qrtz breccia 10 cm section,
				37.92 -1 cm light beige clay gouge seam , 60 dtca
				39.85 - 2 cm qrtz bio vn with fol, 30 dtca
				40.07 - 41.40 lighter beige color, increase sil and alb alt'n, mod fol
41.40	44.20	OG		decomp og with a few minor sections of competent core, sandy clay, soft to touch
				42.19 - 42.51 lighter beige brown unit, more competent, with mod carb alt and strong frac
				42.40-42.51 - soft light beige cal rich sandy clay (gouge) sharp contact @ 60 dtca
				42.67 - 44.20 decomp og, sandy clay
44.20	45.90	OG		weak sil og, well fol, tiger stripe pattern, fol at 35 - 55 dtca, cal qrtz vnlet with fol (< 5mm)
45.90	57.15	OG		increase sil og (mod) with patches of strong sil with bx and sections with weak sil with good fol, patchy zones of very frac and decomp sections also
				45.90 - 46.65 strong sil with shearing (bx), tr py
				46.65 - 47.00 decomp og, sandy clay
				46.84 - 6 cm purple hem stain, 55 dtca
				47.00 - 47.60 strong sil og, minor oxi py and py pmorphs, frac with minor rubble sections
				47.60 - 47.71 grey blue qrtz, qrtz bx with metallic dark grey / blue oxi stw, 1 -2 % oxi py , cubic - blebby > 2mm
				47.90 - 49.06 - decomp og, sandy clay, sharp lower contact with qrtz bx, 50 dtca,
				49.06 - 49.24 qrtz bx, frac with lim filled frac, tr py pmorphs
				52.15 - 52.33 strong sil, 20% dark grey blue metallic oxi, swirly sheared text, lim qrtz str, 3 cm alb lim qrtz vn cuts 75 dtca
				53.10 - 53.35 beige sil zone, qrtz bx in very sil og, lim str, patchy musc bio throughout (5%),
				55.00 - 57.15 - strong sil zones with blue metallic min with qrtz vning / bx (2 - 3 %)
				57.00 - 5 mm qrtz cal vnlet 35 dtca
57.15	59.85	OG		weak sil , mod fol, tiger stripe look, fol 45 dtca
59.85	60.36	OG		beige to white qrtz vn/strong sil og, 5 % musc flakes, sub bx with qrtz lim str
60.36	61.72	OG		weak sil, mod fol og, tiger stripes,
61.72	62.50	OG		beige to white qrtz plag unit, gradational contacts, non fol coarse text og? 2% musc & bio
62.50	69.18	OG		weak to mod sil og, local zone of strong sil with py, weak to mod fol
				63.40 - 63.60 5 cm irregular qrtz with fresh py and oxi py blebs up to 10mm, 2 - 3 % py over all
				65.40 - 5 -10 mm qrtz cal vnlet at 35 dtca, margin contain fine dark grey metallic oxi? tr py
				65.80 - 2 -5 mm oxi py in crumbly og
				66.33 - 67.95 very frac broken rubble with fine sand (cuttings?)
				66.76 - 67.37 strong sil with blueish qrtz vning, fine diss dark grey metallic oxide with qrtz vn, 30 dtca

				67.37 - 67.83 sandy (cuttings?).
69.18	83.53	BXOG	OG	sandy coarse text decomp og, light brown to purple with smeary sheared appearance, soft to touch, weak carb alt throughout (interpreted as a shear zone), local zones with sil clasts in sandy clay matrix of decomp og
				69.18 - 74.27 brown to orange soft decomp og, coarse sandy text, semi decomp, patchy irregular qrtz vn (< 5 cm), sheared appearance
				74.27 - 75.60 decomp smeary purple og, wispy str parallel to ca (0 dtca)
				75.60 - 77.75 brown orange decomp og, strong sil og / qrtz vn at 76.50 & 77.50
				77.75 - 78.20 decomp smeary purple og, wispy str parallel to ca,
				78.20 - 79.14 decom smeary purple og and brown decomp og
				79.14 - 81.05 mainly brown decomp sandy og
				81.05 - 82.25 light grey decomp og with local sil zone with some 5 cm competent core pieces
				80.00 - 3 cm light beige soft vn? 20 dtca (clay?)
				82.25 - 83.53 - decomp og
83.53	89.50	OG		brown purple mod fol og coarse text, discon & def,2 mm hem lim vnlets (dark brown red) parallel to ca (0 dtca), few def frac qrtz vn/bx, local sections very soft (semi decomp)
				84.90 - 85.10 soft silty sand (cuttings?)
				85.10 - 85.34 core sample shrinks to 4 cm (perfect circular core sample for 23 cm? drillers have never seen this before (as if they changed bit to BQ by accident?)
				85.90 - 20 cm 1 -2 mm dark brown / red hem vnlet at 0 dtca, discontinues
				86.35 - folded qrtz frac / def qrtz cal hem vn, 5- 10mm qrtz vn with hem at margins and offset 1 - 5mm
				88.45 - 5 cm def qrtz vn with fine frac filled with yellow lim, 25 dtca approx.
89.50	93.00	OG		very broken and crumbly purple brown og (same unit as above but more frac and decomp), minor zones of strong sil and qrtz with tr py
			QVBX	91 - 91.56 very broken, strong sil og, qrtz bx, tr py
93.00	96.06	OG		competent core, lighter brown with increase alb, mod sil og, minor alb alt, fol at 60 dtca, tr py
				94.55 tr py (fresh)
				95.40 - 20 cm zone og strong alb sil alt 1% py / dark grey metallic oxide
96.06	102.85	OG		very broken light brown crumbly og, patchy competent well sil zones and some complete decomp crumbly sandy og zones
				100.00 - 100.58 - light brown with strong sil / qrtz clasts in sandy clay matrix
				100.58 - 102.74 more grey , less light brown crumbly decomp og
				97.56 - 10 cm of bleached white unit, no carb, strong alb alt? decomp fdpr to fine white clay (Kaolinite?)
102.85	103.75	OG	QVBX	grey frac og, strong sil locally with bx, frac and crumbly from 102.85 - 103.20 , tr py
103.75	105.00	OG		broken frac grey og,
105.00	106.55	OG		competent core, strong sil og with very fine diss'd py at 1 % overall, white qrtz str and dark brown red hem str
				105.69 3 cm long 1mm py str
				105.90 white qrtz vnlet 25 - 30 dtca cutting sil min zone
				105.90 - 106.55 very strong sil og / qv, fine diss py throughout at 1 -3 %,

106.55	107.00	OG		light brown frac og, semi decomp with abundant qrtz
107.00	115.70	OG		broken frac og, strong sil, tr py throughout,
				109.20 - 10 cm strong hem alt (very red) tr - 1 % fine diss py, qrtz str
				112.05 - 115.70 grey strong sil og, tr fine diss py, very broken with crumbly rubble zones
115.70	118.30	OG	QVBX	light grey to beige strong sil og, with 2 -5 % py locally, 2 % overall, fine diss and fracture fill, swirly orange beige purple color
118.30	19.75	OG		transition zone from decomp light orange og to black solid clay (shear)
119.75	125.70	SHR		dense clay / plasticine, black, minor clasts of lower wacke unit, Mod to strong carb,
				120.20 - 120.30 - competent light grey wacke block. Rip up clast from lower unit?
				122 - 125.70 sub bx with rip up light grey wacke clasts,
125.70	129.57	W		decomp broken light grey med grain wacke
				127.38 - 127 58 dark black clay (fault gouge). Lower contact 40 dtca
				129.57 - 129.67 grey sandy silt (cuttings?),
129.57	129.97	S		129.67 - 129.97 light grey, fine grain micaceous siltstone
129.97	133.35	W		med to coarse grain, light grey wacke, 5 % fine muscovite in matrix, easy to crumble with pressure
133.35	134.00	S		sheared bx fine grain siltstone, micaceous with fine muscovite, lower contact with wacke at 35 / 40 dtca
134.00	135.67	W		med to coarse grain, light grey wacke, 5 % fine muscovite in matrix, easy to crumble with pressure
135.67	154.57	S		dark grey to black, fine grain siltstone, weak to strong frac, micaceous with fine musc or ser in matrix, < 1 mm wispy cal str throughout @ 1 % , few minor zones of fine grained wacke, few sections of strong shear bx with abundant frac and bx
			W	138.64 - 139.24 mod grain wacke
			S	137 - 138.35 dark black siltstone , very frac , lower contact at 50 dtca
			S	139.70 - 144.24 dark black strong frac siltstone
				143.70 dark wispy frac / staining in light grey fine gran wacke at 40 dtca,
			W	151.80 - 152.20 mod grain wacke light grey
				152.20 - 154.57 - dark grey micaceous siltstone, fine grain, bx with siltstone clast, cal str < 1mm,

Sample ID	From	To	Length	Rock Code 1	Rock Code 2
	(m)	(m)	(m)		
1876111	5.49	6.00	0.51	OG	
1876112	6.00	7.00	1.00	OG	
1876113	7.00	8.00	1.00	OG	
1876114	8.00	9.00	1.00	OG	
1876115	9.00	10.00	1.00	OG	
1876116	10.00	11.00	1.00	OG	
1876117	11.00	12.00	1.00	OG	
1876118	12.00	13.00	1.00	OG	
1876119	13.00	14.00	1.00	OG	
1876120	14.00	14.50	0.50	OG	
1876121	14.50	14.60	0.10	OG	
1876122	14.60	17.89	3.29	OG	
1876123	17.89	19.20	1.31	OG	
1876124	19.20	20.00	0.80	OG	BX
1876125	20.00	21.34	1.34	OG	BX
1876126	21.34	24.38	3.04	OG	QVBX
1876127	24.38	27.43	3.05	QVBX	OG
1876128	27.43	28.00	0.57	QV	OG
1876129	28.00	28.52	0.52	QV	OG
1876130	28.52	29.00	0.48	OG	BX
1876131	29.00	30.00	1.00	OG	BX
1876132	30.00	31.00	1.00	OG	BX
1876133	31.00	32.00	1.00	OG	BX
1876134	32.00	33.00	1.00	OG	
1876135	33.00	34.00	1.00	OG	
1876136	34.00	34.90	0.90	OG	
1876137	34.90	36.00	1.10	OG	
1876138	36.00	37.00	1.00	OG	
1876139	37.00	38.00	1.00	OG	
1876140					
1876141					
1876142	38.00	39.00	1.00	OG	
1876143	39.00	40.00	1.00	OG	
1876144	40.00	41.07	1.07	OG	

1876145	41.07	42.19	1.12	OG	
1876146	42.19	42.67	0.48	OG	
1876147	42.67	44.20	1.53	OG	
1876148	44.20	45.90	1.70	OG	
1876149	45.90	47.00	1.10	OG	
1876150	47.00	48.00	1.00	OG	
1876151	48.00	49.06	1.06	OG	
1876152	49.06	50.00	0.94	OG	
1876153	50.00	51.00	1.00	OG	
1876154	51.00	52.15	1.15	OG	
1876155	52.15	53.10	0.95	OG	
1876156	53.10	53.35	0.25	OG	
1876157	53.35	55.00	1.65	OG	
1876158	55.00	56.00	1.00	OG	
1876159	56.00	57.15	1.15	OG	
1876160	57.15	58.00	0.85	OG	
1876161	58.00	59.00	1.00	OG	
1876162	59.00	59.85	0.85	OG	
1876163	59.85	60.36	0.51	OG	
1876164	60.36	61.72	1.36	OG	
1876165	61.72	62.50	0.78	OG	
1876166	62.50	63.40	0.90	OG	
1876167	63.40	63.60	0.20	OG	
1876168	63.60	65.00	1.40	OG	
1876169	65.00	66.00	1.00	OG	
1876170	66.00	66.76	0.76	OG	
1876171	66.76	67.37	0.61	OG	
1876172	67.37	68.00	0.63	OG	
1876173	68.00	69.18	1.18	OG	
1876174	69.18	70.00	0.82	BXOG	
1876175					
1876176					
1876177	70.00	71.00	1.00	BXOG	
1876178	71.00	72.00	1.00	BXOG	
1876179	72.00	73.00	1.00	BXOG	
1876180	73.00	74.00	1.00	BXOG	
1876181	74.00	75.00	1.00	BXOG	

1876182	75.00	76.00	1.00	BXOG	
1876183	76.00	77.00	1.00	BXOG	
1876184	77.00	78.00	1.00	BXOG	
1876185	78.00	79.00	1.00	BXOG	
1876186	79.00	80.00	1.00	BXOG	
1876187	80.00	81.00	1.00	BXOG	
1876188	81.00	82.90	1.90	BXOG	
1876189	82.90	83.53	0.63	BXOG	
1876190	83.53	84.90	1.37	OG	
1876191	84.90	86.00	1.10	OG	
1876192	86.00	87.00	1.00	OG	
1876193	87.00	88.00	1.00	OG	
1876194	88.00	89.50	1.50	OG	
1876195	89.50	91.00	1.50	OG	
1876196	91.00	91.56	0.56	OG	QVBX
1876197	91.56	93.00	1.44	OG	
1876198	93.00	94.00	1.00	OG	
1876199	94.00	95.00	1.00	OG	
1876200	95.00	96.04	1.04	OG	
1876201	96.04	97.00	0.96	OG	
1876202	97.00	98.00	1.00	OG	
1876203	98.00	99.00	1.00	OG	
1876204	99.00	100.00	1.00	OG	
1876205	100.00	101.00	1.00	OG	
1876206	101.00	102.85	1.85	OG	
1876207	102.85	104.00	1.15	OG	QVBX
1876208	104.00	105.00	1.00	OG	
1876209	105.00	106.55	1.55	OG	
1876210					
1876211					
1876212	106.55	107.00	0.45	OG	
1876213	107.00	108.00	1.00	OG	
1876214	108.00	109.00	1.00	OG	
1876215	109.00	110.00	1.00	OG	
1876216	110.00	111.00	1.00	OG	
1876217	111.00	112.00	1.00	OG	
1876218	112.00	113.00	1.00	OG	

1876219	113.00	114.00	1.00	OG	
1876220	114.00	115.00	1.00	OG	
1876221	115.00	115.70	0.70	OG	
1876222	115.70	117.00	1.30	BXOG	QVBX
1876223	117.00	118.30	1.30	BXOG	QVBX
1876224	118.30	119.75	1.45	BXOG	OG
1876225	119.75	120.00	0.25	SHR	
1876226	120.00	121.00	1.00	SHR	
1876227	121.00	122.00	1.00	SHR	
1876228	122.00	125.70	3.70	SHR	W
1876229	125.70	127.00	1.30	W	
1876230	127.00	129.00	2.00	W	SHR
1876231	129.00	131.00	2.00	W	S
1876232	131.00	133.00	2.00	W	S
1876233	137.00	138.35	1.35	S	
1876234	151.80	153.00	1.20	S	
1876235	153.00	154.57	1.57	S	

Description
broken frac og, tr py pmorphs, mod sil, poor fol, minor cal str < 1mm, mod lim str
broken frac og, tr py pmorphs, mod sil, poor fol, minor cal str < 1mm, mod lim str
broken decomp og, sandy sections
mod sil og, 30 cm broken sandy decomp og
broken frac og, tr py pmorphs, mod sil, poor fol, minor cal str < 1mm, mod lim str
mod to strong sil og, 40 cm zone of folded sheared qrtz vns (< 2 cm), 2% pmorphs
darker brown oxi og, mod sil, 1 cm qrtz vn with tr py pmorphs, 10 cm strong sil zone with py pmorphs up to 1cm wide
darker brown oxi og, mod sil, 1 cm qrtz vn with tr py pmorphs
oxi and sil og, 50 cm strong frac and crumbly (sub bx) with tr py pmorphs
coarse text og, weak alt with patches of mod fol, abundant bio
light brown - beige sil zone, 10% py pmorphs (rep sample to see if elevated py = elevated Au)
broken oxi og, mod sil, weak fol, crumbly rubble sections (very poor recovery), minor qrtz vn with tr py pmorphs
strong oxi and frac unit, 20 cm zone of def 1 - 2 cm qrtz vn (sub folded/sheared) with irregular dollar coin size oxi py bleb
strong sil og, sub bx locally, lim stw, with 1 -2 % py blebs (up to 10 mm), minor cal str
strong sil og, sub bx locally, lim stw, with 1 -2 % py blebs (up to 10 mm), minor cal str
very poor recovery, broken rubble of strong sil og, sub bx with abundant qrtz fragments, tr - 1% py pmorphs
strong sil og, highly frac qrtz with lim filled frac, qrtz bx, sheared cal str, tr py pmorphs
very frac , very sil og / qv, frac with < 5 cm pieces
coarse qrtz sand with rounded qrtz pebbles (flt)
strong sil og with patchy zones of qrtz vn / bx, sheared with def lim, cal, qrtz str, tr py pmorphs
strong sil og with patchy zones of qrtz vn / bx, sheared with def lim, cal, qrtz str, tr py pmorphs
strong sil og with patchy zones of qrtz vn / bx, sheared with def lim, cal, qrtz str, tr py pmorphs
strong sil og with patchy zones of qrtz vn / bx, sheared with def lim, cal, qrtz str, tr py pmorphs
broken frac oxi og, decomp to sand in local sections
broken frac oxi og, decomp to sand in local sections , 20 cm sil zone with qrtz bx and tr py
broken frac oxi og, decomp to sand in local sections
lighter brown grey og, stronger sil, very competent, cal lim qrtz str
sil og with weak fol, 5 cm qrtz bx vn
mod sil og, weak fol, 10 cm section of frac qrtz bx
BLANK (CDN-BL-10)
STANDARD (CDN-ME-18)
mod sil og, weak fol, 5 cm section of frac qrtz bx
mod sil og, weak fol, 5 cm section of frac qrtz bx
light beige og, sil with mod fol, abundant bio in fol, minor alb alt, 20 cm of strong sil with def and discontinues lim py str parallel to ca

light beige og, sil with mod fol, abundant bio in fol, minor alb alt , 20 cm decomp og section
carb alt og, mod sil and bx, 7 cm beige gouge
decomp og, frac and crumbly, weak sil, minor cal vnlt < 5 mm
weak fol og, < 5m qrtz cal str, 6 cm purple hem stain vn
strong sil og, sub bx locally, frac with 60 cm decomp sandy clay section
strong sil bx og, 1 -2 % py, up to 5mm py pmorphs, fine diss'd metallic dark grey blue min (5%)
decomp sandy clay og, local qrtz and sil og clasts in sandy mud matrix
frac semi decomp og, 15 cm strong sil qrtz bx wit tr py,
50% mod sil, mod fol og, 50% decomp frac og
50% mod sil, mod fol og, 50% decomp frac og,
very frac oxi og, 18 cm strong sil bx og, 5% dark grey metallic oxide, tr py,
qrtz vein / sil section, tr py, 5% mus and bio flakes
weak sil, mod fol, og,
patchy strong sil with def qrtz vn in mod sil og, minor drk qrtz vning (dark metallic oxide?), fine < 1mm cal lim str
patchy strong sil with def qrtz vn in mod sil og, minor drk qrtz vning (dark metallic oxide?), fine < 1mm cal lim str
weak sil mod fol og, tiger look (black orange stripes), minor cal qrtz lim str
weak sil mod fol og, tiger look (black orange stripes), minor cal qrtz lim str
weak sil mod fol og, tiger look(black orange stripes), minor cal qrtz lim str
qrtz vn / sil section, lim / cal def str, 2 - 5 % mus flakes
weak sil mod fol og, tiger look (black orange stripes), minor cal qrtz lim str
light beige sil unit, no fol, minor lim str
mod sil og, weak to mod fol, frac with broken rubble sections
5 cm irregular qrtz vn, bleb oxi & fresh py up to 10 mm at margin of vn, molted orange black sil og with micro lim filled frac throughout
mod sil og, weak to mod fol, frac with broken rubble sections, minor dark qrtz cal vnlets < 5mm with fine diss black oxide
mod sil og, weak to mod fol, frac with broken rubble sections, minor dark qrtz cal vnlets < 5mm with fine diss black oxide
mod sil og, weak to mod fol, frac with broken rubble sections, minor dark qrtz cal vnlets < 5mm with fine diss black oxide
strong sil og unit, sub bx, 2 cm qrtz vnlt with drk black metallic oxide diss at margin of vn
fine sand (cuttings?), few rock frags < 5 cm
mod sil og, weak to mod fol, frac with broken rubble sections, minor dark qrtz, cal vnlets < 5mm with fine diss black oxide
light brown semi decomp og, soft to the touch, sandy text, patchy qrtz vn / sil zones with tr py
BLANK (CDN-BL-10)
STD (CDN-GS-6B)
light brown semi decomp og, soft to the touch, sandy text, patchy qrtz vn / sil zones with tr py
light brown semi decomp og, soft to the touch, sandy text, patchy qrtz vn / sil zones with tr py
light brown semi decomp og, soft to the touch, sandy text, patchy qrtz vn / sil zones with tr py
darker brown purple decomp og, swirly sheared look, soft to the touch, patchy sil clasts throughout
darker brown purple decomp og, swirly sheared look, soft to the touch, patchy sil clasts throughout

strong sil og / qrtz vn rubble with 50% decomp og
strong sil og / qrtz vn rubble with 50% decomp og
50% brown purple decomp og, sub bx with sil clasts in sandy matrix, 50% light brown decomp og
50% brown purple decomp og, sub bx with sil clasts in sandy matrix, 50% light brown decomp og
light brown semi decomp og, soft to the touch, sandy text, patchy qrtz vn / sil zones with tr py
light grey decomp og,
light brown decomp og,
light brown decomp og,
semi decomp purple brown og, sandy text
purple brown weak sil mod fol og, couple hem vnlets 1 - 5mm wide, 20 cm zone of sandy clay (cuttings),
purple brown weak sil mod fol og, 2 cm folded qrtz hem vn,
purple brown weak sil mod fol og, minor < 2mm hem str
purple brown weak sil mod fol og, 5 cm qrtz vn
broken decomp purple brown og
very frac crumbly strong sil og / qrtz bx, tr - 1% fresh py in hem str
decomp sandy reddish brown og
mod sil, mod fol og, lighter brown / beige qrtz and lim str and qrtz vnlets up 10 mm
mod sil, mod fol og, lighter brown / beige qrtz and lim str and qrtz vnlets up 10 mm, tr py
40 cm of strong sil and alb alt, tr py and 1% drk oxide
broken frac semi decomp og (light brown), minor white clay str (kaolinite)
10 cm strong alb alt zone, abundant soft white clay (Kaolinite)
frac broken , semi decomp og,
light brown frac broken, semi decomp og
light brown frac broken, semi decomp og
grey brown frac broken og
competent grey og, strong sil and qvbx locally, tr py
light brown broken frac og rubble
strong sil og, competent core, dark brown red to beige, fine diss py at 1 -2 % throughout, minor blebs at 2mm, white qrtz str 1mm at 25 - 30 dtca
BLANK (CDN-BL-10)
STD (CDN-ME-18)
light brown / orange decomp og rubble, sandy clay matrix with abundant sil clasts throughout
grey, strong sil og, very frac, tr diss py
grey, strong sil og, very frac, tr diss py
grey, strong sil og, very frac, tr diss py
grey, strong sil og, very frac, tr diss py
grey, strong sil og, very frac, tr diss py
grey strong sil og, very frac, tr py, more comp then previous with a few 10 cm pieces , 10 cm qrtz vn

grey strong sil og, very frac, tr py, more comp then previous with a few 10 cm pieces
grey strong sil og, frac with rubble sections, tr diss py
grey strong sil og, frac with rubble sections, tr diss py
frac sil og, light grey to beige, 1 - 2 % frac fill and diss py
strong sil bx og, 1 -3 % py filled frac, dark brown oxide with patchy fresh py, 10 mm bleb of py, beige orange purple blotchy
transition zone from og to shear, orange sandy semi decomp og, patchy sil clasts with diss py and frac fill py
transition zone from og to shear, light brown to dark black clay
shear zone, black clay with 10 cm comp wacke rip up clast
shear zone, black plasticine like fault gouge with minor wacke clasts (sub bx?)
shear zone, black clay, transition zone to wacke, abundant rip up clast of light grey wacke,
rumbly sandy light grey decomp wacke
rumbly sandy light grey decomp wacke, poor recovery, 20 cm black clay gouge unit
comp light grey med to coarse text wacke, 10 cm dark grey sandy silt , 40 cm fine grain siltstone
comp light grey med to coarse grain wacke
dark grey to black, strong frac / sheared, plastic like shiny frac surface
30 cm light grey mod grain wacke, remainder of sample is sheared dark grey bx siltstone with darker grey shr clasts, minor cal str
frac and sheared (bx), fine grain ,dark grey siltstone with black shr clasts, minor < 1 mm cal str

Alteration Intensity (0, tr, w, m, s)						Quartz (%)		Sulphide %			Other Mineralization (%)		
Sil	Ser	Al-Sil	Chl	carb	Ep	QRTZ	QRTZC	Py	Aspy	Po	hem	lim	VG
m						5		tr					
m						5		tr					
m						5		tr					
m						10		tr					
								1					
m						5		1					
m													
m						10							
w													
s								10					
m						5		tr					
s						30		2					
s						30		2					
s						60		1					
s						60		1					
s						90		tr					
s						90		tr					
						90		tr					
s						25		tr					
s						25		tr					
s						25		tr					
s						25		tr					
m													
m								tr					
m													
s						5							
m						10		tr					
m						20		tr					
m						10		tr					
m						20							

m						20							
m				m		40							
w													
w						5							
s						20		tr					
s						40		2					
s								tr					
m						10							
m						5							
s						20							
s						80							
w						5							
m						30		tr					
m						30		tr					
w						5							
w						5							
w						5							
s						80							
w						5							
s						80							
m						5		tr					
s						60		3					
m						10		tr					
m						10		tr					
m						10		tr					
s						60		tr					
m						10							
w				w		5							
w				w		10							
w				w		10							
w				w									
w				w		10							
w				w									

w				w		25							
w				w		25							
				w		10							
				w		10							
				w		20		tr					
				w		5							
				w									
				w									
w						5							
w						5							
w						5							
w						5							
s							80	1					
m							10						
m							10	tr					
s							50	tr					
w							5						
s						40							
s						75		2					
m													
s						50		tr					
s						50		tr					
s						25		tr					
s						25		tr					
s						25		tr					
s						30		tr					

s						35		tr					
s						30		tr					
s						30		tr					
s						30		2					
s						90		3					
m						25		tr					
				m									
				m									
				m									
				m									

Lab codes		Shipping information				
Prep	Analysis	Shipping ID	Rice Bag ID (ex. 1 of 5)	Rice Bag Security Code	Shipping overseer	Shipping date
PRP70-250	AQ201, FA350-Au	DDLS-17-03	1	706017	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	1	706017	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	1	706017	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	1	706017	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	1	706017	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	1	706017	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	1	706017	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	2	706018	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	2	706018	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	2	706018	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	2	706018	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	2	706018	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	3	706019	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	3	706019	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	3	706019	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	3	706019	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	3	706019	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	3	706019	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	3	706019	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	4	706020	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	4	706020	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	4	706020	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	4	706020	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	4	706020	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	4	706020	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	4	706020	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	5	706021	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	5	706021	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	5	706021	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	5	706021	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	5	706021	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	5	706021	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	5	706021	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	5	706021	Clayton Jones	21-Aug-17

PRP70-250	AQ201, FA350-Au	DDLS-17-03	5	706021	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	6	706022	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	6	706022	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	6	706022	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	6	706022	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	6	706022	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	6	706022	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	7	706023	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	7	706023	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	7	706023	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	7	706023	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	7	706023	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	7	706023	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	8	706024	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	8	706024	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	8	706024	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	8	706024	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	8	706024	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	8	706024	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	9	706025	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	9	706025	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	9	706025	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	9	706025	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	9	706025	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	9	706025	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	10	706026	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	10	706026	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	10	706026	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	10	706026	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	10	706026	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	10	706026	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	10	706026	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	10	706026	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	11	706027	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	11	706027	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	11	706027	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	11	706027	Clayton Jones	21-Aug-17

PRP70-250	AQ201, FA350-Au	DDLS-17-03	11	706027	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	11	706027	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	11	706027	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	12	706028	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	12	706028	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	12	706028	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	12	706028	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	12	706028	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	12	706028	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	13	706029	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	13	706029	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	13	706029	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	13	706029	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	13	706029	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	13	706029	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	14	706030	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	14	706030	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	14	706030	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	14	706030	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	14	706030	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	14	706030	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	15	706031	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	15	706031	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	15	706031	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	15	706031	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	15	706031	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	15	706031	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	16	706032	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	16	706032	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	16	706032	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	16	706032	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	16	706032	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	17	706033	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	17	706033	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	17	706033	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	17	706033	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	17	706033	Clayton Jones	21-Aug-17

PRP70-250	AQ201, FA350-Au	DDLS-17-03	18	706034	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	18	706034	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	18	706034	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	18	706034	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	18	706034	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	18	706034	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	19	706035	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	19	706035	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	19	706035	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	19	706035	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	19	706035	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	19	706035	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	20	706036	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	20	706036	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	20	706036	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	20	706036	Clayton Jones	21-Aug-17
PRP70-250	AQ201, FA350-Au	DDLS-17-03	20	706036	Clayton Jones	21-Aug-17

Assays		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As
Lab ID	Analyte	KG	PPB	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	PPM
1876111	Drill Core	1.31	138	1.3	21.3	2.8	55	0.3	9.7	17.5	982	4.57	6.6
1876112	Drill Core	2.14	6	1.5	10.3	4.7	75	<0.1	14.4	24.5	1241	5.68	5.4
1876113	Drill Core	1.1	<2	2	3.9	2	99	0.1	43.8	34.2	1447	8.09	2.8
1876114	Drill Core	2.96	<2	1.5	20.5	2.4	53	<0.1	12.2	16.4	926	4.17	4
1876115	Drill Core	2.51	<2	2.2	41.3	2.1	49	<0.1	6.2	17.3	1054	4.55	2.9
1876116	Drill Core	2.65	<2	3	17.8	2.4	53	<0.1	9.4	17.7	1013	4.89	2.7
1876117	Drill Core	2.96	40	3.7	19	2.5	60	<0.1	8.9	26.5	1478	5.15	2.4
1876118	Drill Core	3.17	<2	4.5	43.2	2.8	81	<0.1	20.5	31.5	1547	6.81	3.6
1876119	Drill Core	2.98	<2	3.3	116.1	2.2	61	<0.1	14.2	33.4	1208	6.02	1.6
1876120	Drill Core	1.56	44	2.9	66.7	1.8	61	0.1	16.3	23.2	900	5.59	2.1
1876121	Drill Core	0.31	7495	7.6	259.9	3.5	26	11.6	13.8	16.8	733	6.61	4.4
1876122	Drill Core	3.88	53	7.2	46.4	2.4	67	0.2	11.1	24.2	966	6.83	3.5
1876123	Drill Core	3.25	27	5.5	78.6	3	66	0.1	21.5	23.3	1114	5.48	3.1
1876124	Drill Core	1.85	737	8.7	15	3.3	61	0.3	13.5	17.3	1435	4.88	3.4
1876125	Drill Core	2.71	157	8.4	10.1	3.2	55	0.3	9.9	16.3	1196	4.53	2.8
1876126	Drill Core	1.4	164	13.3	11.9	4.5	52	2.7	9.1	14.1	1140	4.28	5.3
1876127	Drill Core	3.25	724	54.4	192.2	17.1	28	3.1	6.6	10.9	422	1.74	50.6
1876128	Drill Core	1.25	1611	35.3	86.1	12	21	5.7	5	6.5	367	1.43	28.7
1876129	Drill Core	1.57	3616	64	144.8	21.4	26	>100.0	29.6	10.2	794	2.58	16.3
1876130	Drill Core	1.58	289	14.4	36.2	5.3	56	6.1	8.1	13.3	925	3.17	18.6
1876131	Drill Core	3.2	135	10.9	4.1	3.9	63	0.4	8.1	14.1	901	3.67	13.9
1876132	Drill Core	2.72	42	8.1	3.4	3.9	59	<0.1	8.7	15.9	900	3.71	13
1876133	Drill Core	2.98	18	11.6	6.4	4	58	<0.1	8.2	15.6	978	3.54	12.3
1876134	Drill Core	2.13	963	16.2	106.6	5.3	75	1.1	10	17.2	868	3.8	25.3
1876135	Drill Core	2.24	705	19.2	53.9	7.6	84	1	13.9	19.5	1061	4	43.7
1876136	Drill Core	2.21	15	7.4	8.2	6.1	63	0.3	12.9	18.9	782	3.58	36
1876137	Drill Core	2.72	28	2.6	4.6	3.3	36	0.1	6.4	7	455	1.76	30
1876138	Drill Core	3.14	9	2	7.6	2.4	31	<0.1	4	7	392	1.8	4.3
1876139	Drill Core	3.02	<2	1.5	14.8	3.7	41	<0.1	5.1	9.2	552	2.46	2.7
1876140	Rock Pulp	0.06	4	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.
1876141	Rock Pulp	0.08	447	44.9	>10000.0	936.2	>10000	59.9	17.5	3.1	621	12.34	142.4
1876142	Drill Core	2.9	95	2.4	10.7	4.3	58	<0.1	4.6	11.4	716	3.25	2.6
1876143	Drill Core	3.07	6	1.4	2.8	3.9	43	<0.1	4.1	8.6	494	2.6	2.8
1876144	Drill Core	2.75	955	3.7	34.4	2.6	31	0.3	3.7	7	579	2.02	0.8

1876145	Drill Core	3.16	22	2.5	22.4	2.1	39	0.2	3.5	10.2	675	2.81	1.3
1876146	Drill Core	1.21	27	1.4	22.8	1.9	33	<0.1	4.5	7.8	640	2.1	0.8
1876147	Drill Core	4.39	<2	1	27	2.5	46	0.1	4.1	10.2	694	3.28	1.7
1876148	Drill Core	3.9	31	1.1	61	2.4	56	0.1	5.4	12.9	733	3.25	1.5
1876149	Drill Core	2.93	56	3.8	39.4	3.7	41	0.3	3.9	8.9	705	2.88	4.6
1876150	Drill Core	2.14	32	1.8	28.9	4.1	42	0.2	2.6	9.8	1246	3.45	1
1876151	Drill Core	2.88	4	6.5	29.9	2.6	45	1	4.1	11.8	565	2.99	1.8
1876152	Drill Core	2.77	743	31.9	23.5	5.8	42	1.3	4.1	12.1	1086	2.91	2.6
1876153	Drill Core	2.16	8	4.7	29.4	3.2	44	<0.1	2.8	9.7	924	3.08	1.6
1876154	Drill Core	3.62	4	3.5	33	2.5	48	0.1	2.8	10	630	3	1.1
1876155	Drill Core	3.06	14	2.7	25	2	38	<0.1	3	8.4	727	2.65	0.6
1876156	Drill Core	0.71	<2	0.7	2.9	1.4	15	<0.1	0.9	3.1	340	0.97	<0.5
1876157	Drill Core	3.65	<2	1	19	2.2	36	<0.1	3.4	8	480	2.36	0.5
1876158	Drill Core	2.82	<2	1.2	42.7	2.1	42	<0.1	2.9	8.8	728	2.7	1.3
1876159	Drill Core	1.99	<2	0.9	43.8	2.3	47	0.3	3.3	10	675	3.16	1.5
1876160	Drill Core	2.61	<2	1.6	38.7	2.4	49	<0.1	4.1	12.1	683	3.09	1.5
1876161	Drill Core	2.51	<2	1.8	35.6	2.2	51	<0.1	4.1	12.4	625	3.44	1.1
1876162	Drill Core	2.63	<2	0.9	29.4	2.1	50	<0.1	3.7	10.3	461	2.9	1.7
1876163	Drill Core	1.69	4	0.3	2.5	1.2	19	<0.1	1.1	3.5	277	0.99	0.9
1876164	Drill Core	3.74	2	1.1	42.6	2.7	51	<0.1	7.8	13.3	552	3.39	1.9
1876165	Drill Core	1.97	<2	0.3	3.2	2.1	23	<0.1	1.8	3.9	357	1.16	<0.5
1876166	Drill Core	2.09	30	2.6	54	2.9	48	0.1	3.6	9.7	481	3.04	5
1876167	Drill Core	0.6	5	0.6	133.4	2.3	33	0.1	2.2	7.7	450	2.56	1.6
1876168	Drill Core	3.68	<2	1	38.1	2.2	48	<0.1	3.1	10.6	557	3.1	1
1876169	Drill Core	3.01	3	0.7	34.6	2.6	52	<0.1	3.7	10.7	538	3.17	1.7
1876170	Drill Core	2.16	<2	0.9	23.8	2.5	40	0.5	3.2	9.8	522	2.66	1.2
1876171	Drill Core	0.93	<2	0.3	4.4	2.8	50	<0.1	2.6	8.1	1136	3.94	0.8
1876172	Drill Core	2.09	66	13.3	120	3.3	46	37.9	22.8	11.4	870	3.48	6.2
1876173	Drill Core	3.85	18	0.5	38.3	2.2	43	0.2	3.7	10	657	2.91	1.2
1876174	Drill Core	2.04	3	0.6	57.1	1.9	40	0.2	4.8	9.3	668	2.33	2.2
1876175	Rock Pulp	0.06	9	8.6	49.4	2.8	49	<0.1	31.4	8.7	500	3.14	5.6
1876176	Rock Pulp	0.06	6525	1.4	14.1	19.9	60	0.1	14.2	1.6	998	0.56	4353.6
1876177	Drill Core	2.81	<2	0.8	30.2	2.2	38	<0.1	2.9	9.1	598	2.88	3.2
1876178	Drill Core	2.22	<2	0.6	32.7	2.1	41	<0.1	2.3	8.1	610	2.97	3.3
1876179	Drill Core	3.36	2	3.1	63.3	2.8	51	0.1	5	10.6	740	3.31	1.9
1876180	Drill Core	2.97	2	1.5	59	2.1	54	0.2	5.7	11.4	847	3.28	2.7
1876181	Drill Core	2.97	<2	1.3	31.2	2.6	49	<0.1	3.5	10.1	683	3.23	4.2

1876182	Drill Core	2.69	3	1.4	52.5	4.1	60	0.1	4.2	13.1	844	3.34	8.1
1876183	Drill Core	2.87	<2	1.5	37.3	4.2	64	<0.1	5	13.9	905	3.72	14.1
1876184	Drill Core	2.51	<2	1.3	41.4	3.5	77	<0.1	6	14.7	894	4.17	10.9
1876185	Drill Core	2.98	<2	1.9	28.5	4.1	55	<0.1	4.3	13.4	827	3.67	7.3
1876186	Drill Core	2.92	3	1.7	37.9	2	48	<0.1	3.3	12.3	797	3.31	1.9
1876187	Drill Core	3.4	8	0.3	29	1.7	41	0.2	2.3	8.6	668	2.67	1.8
1876188	Drill Core	3.02	25	0.5	43.1	1.6	28	0.2	2.3	7.2	1214	2.53	1.1
1876189	Drill Core	1.86	25	1.2	21.7	2.8	61	0.2	3.9	12.5	1332	3.31	3.1
1876190	Drill Core	4.06	<2	0.7	38.8	2.7	62	0.2	3.6	13.2	870	3.71	3.4
1876191	Drill Core	3.08	6	0.9	45.5	3	58	1.4	3.9	12.7	781	3.53	10.4
1876192	Drill Core	2.83	<2	0.9	63.6	2.6	53	<0.1	3.2	13.4	807	3.57	4.6
1876193	Drill Core	2.69	<2	1.6	42.3	2.2	53	0.1	3.6	12	802	3.51	3.9
1876194	Drill Core	4.6	<2	0.3	33.1	2.1	59	<0.1	3.7	12.2	833	3.59	4.6
1876195	Drill Core	3.44	<2	0.6	31.2	2.3	54	0.2	3.9	12.5	808	3.69	2.7
1876196	Drill Core	0.94	<2	0.2	87.5	3.1	72	0.2	5	18	1039	3.73	2.4
1876197	Drill Core	3.45	<2	0.8	29.2	3.1	52	0.2	3.9	12	856	3.58	4.2
1876198	Drill Core	2.3	8	0.6	38.7	2.3	65	<0.1	4.8	15	1076	4.01	2.6
1876199	Drill Core	3.04	2	0.4	39.6	3.2	63	<0.1	3.7	12.9	885	3.61	3.4
1876200	Drill Core	2.94	<2	0.7	23	1.9	54	<0.1	3.6	10.9	744	3.03	3.1
1876201	Drill Core	3.09	<2	0.9	31.3	3.1	64	<0.1	4.3	12.7	822	3.48	2.5
1876202	Drill Core	2.8	<2	0.7	28.1	2.5	54	<0.1	4.3	10.1	773	3.33	2.5
1876203	Drill Core	1.64	<2	4.8	48.3	2.1	51	<0.1	4.2	10.3	679	3.14	1.9
1876204	Drill Core	3.47	3	3.1	33.3	3	60	<0.1	4.6	12.6	735	3.49	3.2
1876205	Drill Core	2.76	15	0.8	21.2	3	57	<0.1	5.4	11.3	921	3.41	3
1876206	Drill Core	3.92	12	0.3	6	2.5	51	<0.1	4.6	10.3	1078	3.2	2.4
1876207	Drill Core	3.9	3	0.3	2.5	2.2	53	<0.1	5.1	10.4	1098	3.73	3.3
1876208	Drill Core	1.15	<2	0.9	26.6	4.6	69	<0.1	12.3	18.6	753	4.64	5.1
1876209	Drill Core	4.2	7	1.1	64.9	4.1	61	<0.1	10	17	829	3.94	9.1
1876210	Rock Pulp	0.06	4	7.7	48.2	2.6	46	<0.1	31.5	9.1	499	3.14	4.7
1876211	Rock Pulp	0.11	418	44.7	>10000.0	1031.7	>10000	63	18.3	3.1	712	13	153
1876212	Drill Core	1.84	39	1	11.7	4.3	46	0.2	17.2	13.6	711	2.98	14.2
1876213	Drill Core	2.85	2	0.5	3.9	2.3	38	<0.1	8.8	9.3	470	2.35	3
1876214	Drill Core	1.83	9	0.6	36.5	4	63	<0.1	18.3	18.4	906	4.53	3.9
1876215	Drill Core	2.94	38	0.8	17.1	3.3	61	0.3	15.1	19	915	4.35	4.8
1876216	Drill Core	3.15	2283	0.6	1078.7	3.8	59	40.4	9.2	14	727	3.82	19.7
1876217	Drill Core	2.62	20	2.2	79.7	2.4	56	0.4	7.4	14	895	3.69	12.7
1876218	Drill Core	2	8	0.5	23.9	2	48	0.1	6	11.2	801	3.18	2.7

1876219	Drill Core	3.02	19	0.5	16.2	1.6	43	0.2	5.6	10.2	710	2.88	3.2
1876220	Drill Core	2.48	23	0.5	13.3	2.2	39	0.3	5.4	10.8	613	2.72	16.7
1876221	Drill Core	1.61	32	0.3	5.5	1.5	37	0.2	4.2	7.8	555	2.35	4.6
1876222	Drill Core	3.19	207	1.3	10.8	2.1	32	0.7	5.6	7.9	588	2.53	17.6
1876223	Drill Core	3.32	72	1.1	8.4	4	43	0.2	18.6	19.5	725	4.22	40.7
1876224	Drill Core	3.21	137	2.5	51.3	6	52	0.5	15.6	14.9	525	3.39	51.2
1876225	Drill Core	1.02	2	1.1	25.3	29.4	97	<0.1	23.6	13.3	480	3.44	27.5
1876226	Drill Core	2.63	5	1.5	22.3	22.7	67	0.1	18.3	11.3	499	2.45	28.4
1876227	Drill Core	3.3	2	1.1	23	22.5	74	0.2	18.8	10.6	405	2.16	30.6
1876228	Drill Core	4.32	2	1.2	23	17.4	58	0.3	17.5	10.4	315	2.03	27.5
1876229	Drill Core	4.28	<2	1.1	13.4	14.7	24	0.1	8	4.3	324	1.44	13.8
1876230	Drill Core	3.43	<2	0.9	12.3	13.8	38	0.1	10.6	6	328	1.7	15.4
1876231	Drill Core	5.02	<2	0.5	13	11	39	<0.1	9.6	6	319	1.79	8.4
1876232	Drill Core	3.53	<2	0.3	4.2	9.1	20	<0.1	4.9	3.2	188	1.12	4.7
1876233	Drill Core	3.25	4	0.9	24.1	28.7	91	0.2	23.1	13.6	210	2.26	6.1
1876234	Drill Core	3.51	2	0.8	14.5	18.6	65	0.1	24.8	10.7	640	2.34	12.7
1876235	Drill Core	4.54	3	0.9	16.9	27.9	80	0.1	26.5	12.8	354	1.68	6.9

Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La	Cr	Mg	Ba	Ti	B	Al
PPB	PPM	PPM	PPM	PPM	PPM	PPM	%	%	PPM	PPM	%	PPM	%	PPM	%
84.6	1.5	44	0.1	0.6	<0.1	102	3.48	0.061	6	9	1.18	119	0.014	6	0.61
1.5	1.4	42	0.1	1.5	<0.1	121	3.8	0.077	4	11	0.8	206	0.015	13	1.05
<0.5	0.7	44	<0.1	0.5	<0.1	216	4.48	0.022	2	162	1.64	512	0.102	12	2.23
0.6	1	75	0.2	1.4	<0.1	102	5.14	0.069	3	33	0.85	125	0.007	9	0.76
<0.5	1.6	42	<0.1	0.7	<0.1	91	2.88	0.086	8	4	0.79	216	0.028	6	0.7
<0.5	1.6	43	<0.1	0.3	<0.1	113	2.44	0.069	8	18	0.89	210	0.026	6	0.88
48	2.1	66	<0.1	0.3	<0.1	152	4.57	0.082	8	10	1.79	534	0.036	5	0.71
<0.5	1.7	50	<0.1	0.7	<0.1	206	3.27	0.105	10	34	1.34	339	0.04	8	0.9
2.3	2.2	54	<0.1	0.4	<0.1	155	4.34	0.072	10	29	1.05	2512	0.03	5	1.07
50	4.4	38	0.1	0.4	<0.1	132	2.28	0.047	15	66	1.35	754	0.15	6	1.8
8844.3	4	61	0.3	1	0.1	62	4.33	0.071	20	13	0.97	1919	0.028	1	0.48
60.9	3.3	49	0.2	0.5	<0.1	126	2.71	0.137	10	11	1.39	572	0.098	6	1.9
24.9	3.4	67	0.1	1.1	0.2	142	3.85	0.073	11	98	1.71	175	0.028	7	1.47
569.3	1.8	92	0.5	0.4	<0.1	107	4.44	0.089	7	33	2.23	355	0.094	4	1.16
219.1	1	114	0.2	0.4	<0.1	90	5.18	0.055	7	15	1.61	137	0.016	4	0.74
144.1	1.1	80	0.2	0.6	<0.1	79	4.34	0.046	5	14	1.39	155	0.016	5	0.72
878.1	0.2	54	0.3	7.4	0.2	22	2.99	0.008	<1	4	1.03	265	<0.001	7	0.15
1781.2	0.2	71	0.2	3.9	0.1	12	1.83	0.005	1	5	0.72	242	<0.001	5	0.19
3830.7	0.7	53	0.7	1	0.3	28	2.49	0.015	4	31	0.93	206	0.005	2	0.39
402.6	1	61	0.3	2.1	<0.1	45	5.15	0.005	4	6	1.66	330	<0.001	7	0.45
144.6	0.9	54	0.2	0.7	<0.1	50	5.31	0.004	4	6	1.69	153	0.001	12	0.66
55.9	1	53	0.2	0.7	<0.1	56	5.34	0.014	4	8	1.81	188	0.001	8	0.6
36.3	1	64	0.2	0.8	<0.1	54	6.48	0.024	4	8	1.27	153	0.001	11	0.74
1096.5	0.6	60	0.3	3.3	<0.1	54	5.52	0.005	2	5	1.52	155	0.001	9	0.59
734.2	0.4	63	0.4	3	<0.1	70	6.32	0.003	1	18	1.95	143	<0.001	7	0.53
9.1	1.3	36	0.2	0.4	<0.1	97	5.17	0.018	2	7	1.71	150	0.001	10	0.75
8.1	2.5	46	0.1	0.4	<0.1	21	3.24	0.005	4	5	1.12	356	<0.001	3	0.65
5.9	2.5	34	<0.1	0.3	<0.1	28	3.01	0.009	6	2	1.01	311	0.002	3	0.53
1.5	2.1	52	<0.1	0.2	<0.1	43	4.34	0.013	4	2	1.44	932	0.005	6	0.95
I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.
498.5	<0.1	31	236.9	36.2	10.3	10	1.55	0.035	<1	14	1.89	19	0.003	4	0.93
84.1	3.1	77	0.1	0.2	<0.1	65	4.45	0.027	5	3	1.37	1460	0.023	5	1
2.3	4.7	42	<0.1	0.3	<0.1	56	2.74	0.025	4	4	1.06	573	0.036	6	1.16
492.5	1.7	46	0.3	0.1	<0.1	42	3.13	0.029	8	2	1.09	267	0.002	2	0.63

19.6	2.6	59	0.1	0.1	<0.1	56	2.94	0.04	7	3	0.87	258	0.015	4	1.17
47.7	0.8	95	<0.1	<0.1	<0.1	29	3.7	0.02	3	1	0.7	435	0.002	4	0.62
2	2.2	98	<0.1	0.2	<0.1	60	4.8	0.06	6	3	0.69	589	0.003	4	1.03
40.8	2.3	109	<0.1	0.2	<0.1	59	3.81	0.067	6	4	0.58	296	0.008	4	1.15
110.3	1.8	97	<0.1	0.5	<0.1	57	4.17	0.054	5	5	0.81	2814	0.017	4	1.02
42.4	1.7	94	0.2	0.1	<0.1	64	4.58	0.053	6	5	0.86	2243	0.013	2	0.6
4	1.2	43	<0.1	0.3	<0.1	55	2.47	0.063	3	5	0.77	278	0.008	4	1.3
1493.1	1.1	81	0.3	0.2	<0.1	33	4.95	0.044	4	2	1.31	936	0.004	3	0.66
8.2	2.1	92	0.2	0.2	<0.1	57	3.87	0.06	7	4	0.75	571	0.015	2	0.84
4.4	2.1	83	<0.1	0.1	<0.1	55	3.68	0.055	7	5	0.72	859	0.022	3	1.18
6.6	1.2	62	<0.1	<0.1	<0.1	47	3.33	0.05	5	4	0.9	280	0.014	3	0.64
0.8	0.1	50	<0.1	<0.1	<0.1	14	2.11	0.005	1	1	0.44	929	0.004	1	0.33
0.7	2.6	48	<0.1	<0.1	<0.1	37	2.36	0.036	5	4	0.58	400	0.006	4	0.77
1.1	2	84	<0.1	<0.1	<0.1	50	4.01	0.048	4	3	0.9	1379	0.005	4	0.63
<0.5	1.4	62	<0.1	<0.1	<0.1	62	3.69	0.044	4	4	0.84	135	0.005	4	0.68
0.6	1.8	73	<0.1	<0.1	0.2	63	3.37	0.056	4	4	0.7	282	0.011	5	1.06
<0.5	1.9	55	<0.1	<0.1	<0.1	67	3.11	0.052	4	4	0.71	122	0.012	4	1.08
0.8	2	48	<0.1	0.1	<0.1	49	2.01	0.056	4	4	0.48	177	0.021	4	0.9
<0.5	0.3	40	<0.1	<0.1	<0.1	13	2.24	0.017	1	1	0.34	189	0.01	1	0.45
1.7	2.5	52	<0.1	0.1	<0.1	73	2.67	0.093	10	11	0.65	1131	0.013	5	1.17
2.5	1.3	66	<0.1	<0.1	<0.1	17	2.88	0.004	2	1	0.48	177	0.015	2	0.53
40.7	1.8	31	<0.1	0.3	<0.1	51	1.87	0.071	4	4	0.58	151	0.015	5	0.98
5.1	1.2	49	<0.1	0.1	<0.1	47	2.62	0.16	4	3	0.56	281	0.018	4	0.93
<0.5	1.4	39	<0.1	<0.1	<0.1	60	2.53	0.051	4	4	0.61	267	0.022	4	0.95
<0.5	1.3	49	<0.1	<0.1	<0.1	62	2.38	0.049	3	4	0.47	110	0.009	4	0.89
1.3	0.9	33	<0.1	<0.1	<0.1	48	2.04	0.055	3	4	0.54	296	0.006	5	0.81
<0.5	1.9	90	0.2	<0.1	<0.1	102	5.66	0.062	8	4	1.87	873	0.015	2	0.4
66.2	1.3	78	0.1	0.4	<0.1	60	4.51	0.057	5	52	0.98	2796	0.007	4	0.68
9.7	0.9	59	<0.1	<0.1	<0.1	57	3.44	0.049	3	4	0.78	549	0.005	4	0.69
1.5	0.9	67	<0.1	<0.1	<0.1	39	3.2	0.042	2	3	0.86	1207	0.001	4	0.79
<0.5	1.2	54	0.1	0.5	<0.1	70	1.02	0.058	5	37	0.83	110	0.147	5	1.79
7031.8	1.2	182	0.4	27.2	0.4	23	25.84	0.016	7	23	5.35	39	0.001	4	0.19
<0.5	1.1	98	<0.1	0.1	<0.1	43	3.89	0.048	3	3	0.89	105	0.002	5	0.79
<0.5	1.5	35	<0.1	0.2	<0.1	59	2.91	0.047	3	4	0.83	204	0.003	4	0.73
1.1	1.3	100	<0.1	0.1	<0.1	53	3.84	0.05	3	4	0.87	315	0.003	5	0.65
2.9	1.1	49	<0.1	0.1	<0.1	50	3.83	0.051	2	3	1.06	167	<0.001	5	0.75
0.9	0.8	39	<0.1	0.4	<0.1	60	3.67	0.06	2	6	0.99	53	0.002	5	0.83

3.8	1.1	45	<0.1	0.5	<0.1	67	4.22	0.052	3	5	1.28	96	0.001	4	0.81
1.5	1.1	41	<0.1	0.9	<0.1	72	4.62	0.034	3	5	1.49	115	<0.001	5	0.82
<0.5	1	41	<0.1	0.8	<0.1	84	3.92	0.035	2	6	1.24	90	<0.001	5	0.93
<0.5	1.7	46	<0.1	0.7	<0.1	83	3.76	0.046	2	6	1.04	41	0.002	3	0.81
3.1	0.9	33	<0.1	0.2	<0.1	57	2.79	0.049	2	4	0.91	256	0.002	3	0.83
7.5	0.9	40	<0.1	0.1	<0.1	45	2.96	0.035	1	3	0.94	237	<0.001	3	0.8
33.4	1.9	59	0.6	<0.1	<0.1	53	2.95	0.063	8	4	1.15	1967	0.008	3	0.61
31.3	1.3	106	0.3	0.2	<0.1	63	6.01	0.06	4	5	1.37	2359	0.002	4	0.89
0.8	1.3	56	<0.1	0.3	<0.1	87	4.32	0.079	3	8	1.15	165	0.003	5	0.95
4.7	1.3	68	<0.1	0.4	<0.1	80	4.29	0.055	4	6	0.99	270	0.005	5	0.84
1.6	1.5	62	<0.1	0.5	<0.1	80	4.4	0.063	4	6	1.09	45	0.004	8	0.88
<0.5	1.5	43	<0.1	0.4	<0.1	87	4.07	0.057	3	5	1.2	84	0.004	5	0.84
0.5	1.7	48	<0.1	0.4	<0.1	78	4.3	0.057	4	5	1.27	665	0.005	7	0.97
<0.5	1.2	42	<0.1	0.4	<0.1	88	3.63	0.056	3	7	1.1	226	0.004	6	0.94
<0.5	2.4	84	<0.1	0.2	<0.1	102	8.02	0.059	5	5	2.34	689	0.002	3	0.59
<0.5	1.2	44	<0.1	0.6	<0.1	90	3.84	0.044	2	7	1.18	1472	0.004	5	0.85
4	1.4	49	<0.1	0.5	<0.1	85	5.28	0.049	2	6	1.65	37	0.004	5	0.85
<0.5	1.9	43	<0.1	0.5	<0.1	82	4.63	0.06	3	5	1.38	36	0.003	4	0.84
0.8	2	31	<0.1	0.3	<0.1	65	3.27	0.05	2	5	1.05	47	0.004	5	0.81
<0.5	2	38	<0.1	0.4	<0.1	86	4.06	0.061	3	6	1.33	72	0.004	5	1.06
<0.5	1.1	37	<0.1	0.4	<0.1	78	4.23	0.048	2	5	1.39	191	0.002	4	0.86
<0.5	0.9	31	<0.1	0.4	<0.1	68	3.5	0.047	2	5	1.16	57	0.002	3	0.78
1.2	1	44	<0.1	0.5	<0.1	70	4.15	0.036	2	5	1.36	943	0.002	6	0.86
27.1	1.6	48	<0.1	0.2	<0.1	72	5.78	0.033	2	4	1.86	138	0.002	3	0.82
18.1	1.2	51	<0.1	0.3	<0.1	93	5.08	0.03	2	6	1.65	951	0.002	3	0.71
3.4	1.4	40	<0.1	0.3	<0.1	116	4.52	0.039	3	8	1.55	59	0.003	2	0.56
0.6	0.7	33	<0.1	0.9	<0.1	120	3.06	0.031	1	26	1.06	217	<0.001	6	0.66
5.7	1	40	0.1	1.5	<0.1	123	5.98	0.022	2	10	1.92	82	<0.001	3	0.54
1.4	1.1	50	0.1	0.5	<0.1	70	0.99	0.059	5	39	0.83	112	0.155	6	1.84
549.1	<0.1	37	260.9	38.6	10.6	12	1.64	0.041	<1	15	1.78	15	0.002	1	0.79
40.2	1.1	36	0.1	0.8	<0.1	86	4.9	0.016	2	77	1.75	69	<0.001	3	0.52
2.3	1	21	<0.1	0.2	<0.1	64	2.54	0.02	3	10	0.98	30	<0.001	3	0.66
10.1	1.2	34	0.1	0.4	<0.1	126	4.44	0.024	3	29	1.68	44	0.002	5	0.91
34.8	1.4	38	0.1	0.5	<0.1	140	5.24	0.023	3	24	1.87	177	0.003	5	0.69
2115.4	0.9	36	0.2	2.8	0.1	85	4.17	0.026	2	13	1.49	470	0.001	6	0.86
20.9	0.8	29	0.1	0.6	<0.1	82	4.64	0.038	2	5	1.69	220	0.003	3	0.75
7.8	0.9	29	<0.1	0.1	<0.1	69	4.35	0.032	2	8	1.61	25	0.001	4	0.88

21.1	0.9	24	0.1	0.2	<0.1	57	3.7	0.026	3	5	1.39	40	0.001	3	0.65
21.1	0.8	24	<0.1	0.7	<0.1	47	3.16	0.013	2	7	1.19	56	<0.001	5	0.61
33.4	1.2	29	0.1	0.4	<0.1	37	2.75	0.017	3	4	1.05	40	<0.001	7	0.57
194.4	0.6	38	<0.1	1.1	<0.1	37	3.34	0.004	2	8	1.27	44	<0.001	5	0.6
71.2	0.2	41	<0.1	1.6	<0.1	99	4.96	0.003	<1	50	1.81	86	<0.001	3	0.55
107.8	0.5	57	0.1	2.6	<0.1	51	2.9	0.002	<1	13	0.76	63	<0.001	5	0.58
0.7	4.8	142	0.3	1.4	0.4	21	0.73	0.005	5	11	0.31	321	<0.001	4	0.64
2.8	4.8	168	<0.1	0.4	0.3	19	1.85	0.006	8	12	0.6	1265	<0.001	3	0.94
0.7	7.3	123	0.2	0.3	0.4	22	1.32	0.01	12	13	0.46	1275	<0.001	5	1.55
2.7	6.6	58	0.2	0.2	0.3	16	0.57	0.007	14	15	0.33	220	<0.001	4	0.82
1.4	5.7	60	<0.1	0.2	0.2	12	0.97	0.014	11	13	0.34	325	<0.001	3	0.43
0.5	5.6	81	<0.1	0.2	0.4	16	1.11	0.015	11	14	0.36	196	<0.001	3	0.49
0.9	3.9	46	<0.1	0.1	0.2	14	0.4	0.004	9	15	0.31	207	0.001	2	0.54
0.7	2.6	36	<0.1	0.1	<0.1	9	0.42	0.009	5	9	0.22	129	<0.001	1	0.27
1.1	12.7	168	0.3	1.1	0.4	29	0.3	0.016	28	23	0.45	2152	0.001	2	2.84
2.9	10.6	143	0.1	1.4	0.3	23	1.04	0.012	22	19	0.38	684	0.004	1	1.8
1.8	10	170	0.2	1.2	0.3	24	0.79	0.012	25	17	0.35	890	0.002	1	1.88

Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
%	%	PPM	PPM	PPM	PPM	%	PPM	PPM	PPM
0.032	0.23	0.2	0.02	20.4	<0.1	<0.05	2	<0.5	<0.2
0.02	0.47	0.1	<0.01	23.1	0.2	<0.05	3	<0.5	<0.2
0.01	1.53	0.1	<0.01	31.8	0.6	<0.05	9	<0.5	<0.2
0.021	0.26	0.1	<0.01	20	<0.1	<0.05	3	<0.5	<0.2
0.034	0.31	<0.1	<0.01	17.6	0.1	<0.05	3	<0.5	<0.2
0.039	0.36	<0.1	<0.01	19.5	0.1	<0.05	4	<0.5	<0.2
0.046	0.42	<0.1	<0.01	24.8	0.2	<0.05	4	<0.5	<0.2
0.041	0.51	<0.1	<0.01	27	0.2	<0.05	5	<0.5	<0.2
0.027	0.46	<0.1	<0.01	23.3	0.2	0.06	4	<0.5	<0.2
0.035	1.17	<0.1	<0.01	21.2	0.4	<0.05	7	<0.5	<0.2
0.05	0.21	0.2	0.35	11.2	<0.1	0.07	2	0.7	8.3
0.026	1.08	0.3	0.01	19.2	0.4	<0.05	6	<0.5	<0.2
0.023	0.7	<0.1	0.02	27.2	0.3	<0.05	5	<0.5	<0.2
0.045	0.71	0.2	0.02	26.5	0.3	<0.05	5	<0.5	0.2
0.037	0.26	0.2	0.04	18.5	<0.1	<0.05	2	<0.5	<0.2
0.033	0.28	4.2	0.07	18.1	0.1	<0.05	3	<0.5	<0.2
0.006	0.06	0.5	0.2	5	0.1	0.06	<1	<0.5	0.9
0.005	0.04	5.2	0.17	4.9	<0.1	0.05	<1	<0.5	1.4
0.012	0.09	>100.0	*	6.7	<0.1	<0.05	1	<0.5	6.8
0.007	0.17	6.6	0.06	14.6	0.1	<0.05	1	<0.5	0.3
0.007	0.21	0.5	0.03	14	<0.1	<0.05	1	<0.5	<0.2
0.007	0.23	0.1	0.03	13.7	<0.1	<0.05	2	<0.5	<0.2
0.005	0.26	0.1	0.04	14.3	0.1	<0.05	2	<0.5	<0.2
0.007	0.21	0.4	0.04	14.4	<0.1	<0.05	1	<0.5	<0.2
0.007	0.15	0.8	0.05	18.3	<0.1	<0.05	1	<0.5	<0.2
0.012	0.3	0.3	0.03	14.1	0.1	<0.05	2	<0.5	<0.2
0.005	0.09	<0.1	0.02	3.9	<0.1	<0.05	2	<0.5	<0.2
0.005	0.15	<0.1	0.01	5.7	<0.1	<0.05	1	<0.5	<0.2
0.009	0.22	<0.1	0.01	6.3	<0.1	<0.05	2	<0.5	<0.2
I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.
0.031	0.09	0.3	2.76	2.2	0.9	>10.00	6	3.8	8.7
0.006	0.3	<0.1	0.01	10	<0.1	<0.05	3	<0.5	<0.2
0.006	0.36	<0.1	0.01	10.6	<0.1	<0.05	3	<0.5	<0.2
0.003	0.1	<0.1	0.02	9.8	<0.1	<0.05	1	<0.5	<0.2

0.009	0.39	<0.1	0.02	12.5	<0.1	<0.05	3	<0.5	<0.2
0.017	0.18	<0.1	<0.01	6	<0.1	<0.05	1	<0.5	<0.2
0.016	0.26	0.2	<0.01	16.1	<0.1	<0.05	2	<0.5	<0.2
0.02	0.34	<0.1	<0.01	15.4	<0.1	<0.05	3	<0.5	<0.2
0.021	0.35	0.2	0.02	12.2	<0.1	0.07	3	<0.5	<0.2
0.033	0.18	0.2	0.02	17.4	<0.1	0.07	1	<0.5	<0.2
0.011	0.44	1.7	<0.01	15.5	0.1	<0.05	3	<0.5	<0.2
0.019	0.17	0.2	0.09	15.1	<0.1	<0.05	1	<0.5	0.7
0.031	0.32	0.3	0.01	20.2	<0.1	<0.05	3	<0.5	<0.2
0.03	0.39	0.2	0.01	17.6	<0.1	<0.05	3	<0.5	<0.2
0.039	0.21	0.2	0.01	14.2	<0.1	<0.05	2	<0.5	<0.2
0.059	0.14	<0.1	<0.01	3.5	<0.1	<0.05	<1	<0.5	<0.2
0.028	0.27	<0.1	0.01	9.9	<0.1	<0.05	2	<0.5	<0.2
0.024	0.2	<0.1	0.02	17	<0.1	<0.05	1	<0.5	<0.2
0.022	0.22	0.5	<0.01	19.6	<0.1	<0.05	2	<0.5	<0.2
0.02	0.36	<0.1	<0.01	20.2	<0.1	<0.05	3	<0.5	<0.2
0.023	0.37	<0.1	<0.01	20.7	<0.1	<0.05	3	<0.5	<0.2
0.03	0.39	<0.1	0.02	17.7	<0.1	<0.05	3	<0.5	<0.2
0.043	0.18	<0.1	0.01	3.8	<0.1	<0.05	1	<0.5	<0.2
0.026	0.42	<0.1	0.02	18.8	<0.1	<0.05	3	<0.5	<0.2
0.039	0.2	<0.1	0.02	1.9	<0.1	<0.05	1	<0.5	<0.2
0.031	0.35	0.1	0.03	17.2	<0.1	<0.05	3	<0.5	<0.2
0.027	0.36	<0.1	0.05	14.9	<0.1	<0.05	3	<0.5	<0.2
0.032	0.36	0.1	0.02	20.9	<0.1	<0.05	3	<0.5	<0.2
0.027	0.31	<0.1	0.02	20.6	<0.1	<0.05	3	<0.5	<0.2
0.026	0.28	1.1	0.04	16.1	<0.1	<0.05	2	<0.5	<0.2
0.03	0.1	0.7	0.08	24.2	<0.1	<0.05	<1	0.5	<0.2
0.019	0.22	99.4	0.05	14.6	<0.1	<0.05	2	<0.5	<0.2
0.021	0.25	0.6	0.03	18.2	<0.1	<0.05	2	<0.5	<0.2
0.009	0.29	0.6	0.02	15.4	<0.1	<0.05	2	<0.5	<0.2
0.123	0.18	0.5	0.02	5.8	<0.1	<0.05	5	<0.5	<0.2
0.009	0.06	3.5	4.09	1.9	15.1	<0.05	<1	0.9	<0.2
0.019	0.23	0.1	0.06	13.3	<0.1	<0.05	2	<0.5	<0.2
0.03	0.18	0.1	0.07	16.4	<0.1	<0.05	2	1.1	<0.2
0.025	0.2	0.2	0.09	17.2	<0.1	<0.05	2	0.9	<0.2
0.015	0.25	0.3	0.14	17.3	<0.1	<0.05	2	<0.5	<0.2
0.008	0.19	0.2	0.11	16.8	<0.1	<0.05	2	<0.5	<0.2

0.007	0.14	0.2	1.43	20	<0.1	<0.05	2	0.5	<0.2
0.009	0.13	<0.1	2.97	18.3	<0.1	<0.05	2	0.6	<0.2
0.008	0.14	0.1	1.72	20.1	<0.1	<0.05	2	<0.5	<0.2
0.007	0.12	<0.1	0.96	20.8	<0.1	<0.05	2	<0.5	<0.2
0.009	0.23	<0.1	0.1	19.9	<0.1	<0.05	2	<0.5	<0.2
0.009	0.26	<0.1	0.06	17.7	<0.1	<0.05	2	<0.5	<0.2
0.031	0.14	0.4	0.12	10.2	<0.1	0.08	1	<0.5	<0.2
0.013	0.18	0.2	0.08	18	<0.1	0.09	2	<0.5	<0.2
0.008	0.22	0.3	0.02	22.7	<0.1	<0.05	2	<0.5	<0.2
0.007	0.24	6.7	0.03	20	<0.1	<0.05	2	<0.5	<0.2
0.007	0.22	<0.1	0.02	23.4	<0.1	<0.05	2	0.6	<0.2
0.008	0.21	0.4	0.02	20.3	<0.1	<0.05	2	0.6	<0.2
0.009	0.22	0.3	0.03	20.6	<0.1	<0.05	2	<0.5	<0.2
0.01	0.19	0.8	0.03	21.5	<0.1	0.06	2	<0.5	<0.2
0.015	0.05	0.4	0.06	13	<0.1	0.27	1	0.8	<0.2
0.008	0.14	0.3	0.02	20.9	<0.1	<0.05	2	<0.5	<0.2
0.007	0.19	0.2	0.04	19.6	<0.1	<0.05	2	<0.5	<0.2
0.008	0.16	0.1	0.14	22.7	<0.1	<0.05	2	<0.5	<0.2
0.007	0.18	<0.1	0.05	18	<0.1	<0.05	2	<0.5	<0.2
0.009	0.17	<0.1	0.15	21.8	<0.1	<0.05	3	<0.5	<0.2
0.008	0.09	<0.1	0.05	17.8	<0.1	<0.05	2	<0.5	<0.2
0.007	0.12	<0.1	0.05	17.7	<0.1	<0.05	2	<0.5	<0.2
0.01	0.22	0.2	0.34	19.8	<0.1	0.09	3	<0.5	<0.2
0.008	0.08	0.1	1.09	16.6	<0.1	<0.05	2	<0.5	<0.2
0.008	0.09	0.1	0.96	22	<0.1	<0.05	1	<0.5	<0.2
0.007	0.04	<0.1	1	21.7	<0.1	<0.05	1	<0.5	<0.2
0.009	0.14	<0.1	1.24	25.2	<0.1	0.07	2	<0.5	<0.2
0.008	0.07	<0.1	1.29	14.4	<0.1	0.12	1	<0.5	<0.2
0.126	0.18	0.4	0.02	5.3	<0.1	<0.05	5	<0.5	<0.2
0.025	0.07	0.4	2.92	1.9	0.9	>10.00	5	4.4	9.1
0.008	0.06	0.4	2.04	17.5	<0.1	0.06	1	<0.5	<0.2
0.006	0.05	<0.1	2.28	8.5	<0.1	<0.05	1	<0.5	<0.2
0.008	0.09	<0.1	0.92	17.9	<0.1	0.07	2	<0.5	<0.2
0.013	0.11	0.4	0.68	18.3	<0.1	0.11	2	<0.5	<0.2
0.009	0.12	0.3	4.64	17.6	<0.1	0.18	2	0.6	23.9
0.009	0.09	0.1	0.3	17.8	<0.1	0.08	2	<0.5	<0.2
0.008	0.11	<0.1	0.12	14.4	<0.1	0.08	2	<0.5	<0.2

0.006	0.09	0.4	0.23	15	<0.1	0.06	1	<0.5	<0.2
0.007	0.11	0.2	0.37	12.4	<0.1	0.16	1	<0.5	<0.2
0.006	0.11	<0.1	0.58	11.7	<0.1	<0.05	1	<0.5	<0.2
0.007	0.07	0.1	0.71	9.2	0.1	0.43	1	<0.5	0.6
0.009	0.07	<0.1	0.97	18.2	0.8	1.29	1	<0.5	<0.2
0.009	0.16	0.2	0.55	14.6	0.4	1.19	1	<0.5	0.3
0.015	0.21	<0.1	0.14	7.9	0.3	0.37	4	<0.5	<0.2
0.021	0.24	<0.1	0.11	7.1	<0.1	0.09	3	<0.5	<0.2
0.035	0.41	<0.1	0.13	6.2	<0.1	0.07	5	<0.5	<0.2
0.026	0.26	0.2	0.08	4.6	0.1	0.11	3	<0.5	<0.2
0.034	0.19	0.4	0.05	2.4	0.1	0.13	1	<0.5	<0.2
0.043	0.2	0.3	0.04	3	0.1	0.08	2	<0.5	<0.2
0.027	0.19	0.1	0.03	3.9	0.1	<0.05	2	<0.5	<0.2
0.02	0.11	<0.1	0.02	2.7	<0.1	<0.05	1	<0.5	<0.2
0.102	0.41	<0.1	0.13	7.4	0.3	0.07	8	<0.5	<0.2
0.115	0.25	<0.1	0.11	6	0.2	<0.05	5	<0.5	<0.2
0.139	0.26	<0.1	0.12	7	0.2	<0.05	5	<0.5	<0.2

GOLDSTRIKE RESOURCES LTD.

Drill Hole	DDLS-17-04	**Property**	Lucky Strike	**Zone**	Monte Carlo
Easting	589565	**Northing**	7012934	**Elevation (m)**	555
Survey by	Clayton Jones	**Survey Method**	gps	**Date**	August 14, 2017

Final Coordinates (UTM NAD 83)

Easting	589565	***Northing***	7012934	***Elevation (m)***	555
Survey by	Clayton Jones	**Survey Method**	gps	**Date**	August 14, 2017

Summary

Depth (m)	119.51	**Azimuth**	230	**Dip**	-75
Core Size	NTW	**Casing (ft)**	20	**Logged By**	Clayton Jones

Drill Company	Kluane Drilling Ltd.	**Drill Rig**	KD 600-2
Drill Start Date	August 16, 2017	**Drill Comp Date**	August 20, 2017
Log Start Date	August 16, 2017	**Log Comp Date**	August 20, 2017
Final casing	20	**Core Location**	Monte Carlo Camp
Comments	abandonded due to clay in fault (slow)	**Claim #**	Au 92 (YC98692)

Samples

Sample Numbers	1876236 -1876356		
Number	121	**Lab**	Bureau Veritas
Cut by	Craig Sinclair	**Date Shipped**	August 28, 2017

Down Hole Survey

Depth (m)	Measured Azm.	Corrected Azm.	Dip	Magnetic Field (nT)	Temperature
39.00	208.58	228.04	-75.14	56821	16.1
69.00	210.37	229.83	-74.92	57040	22.6
100.00	190.69	210.15	-74.73	14865	12.3

From	To	Rock Code 1	Rock Code 2	Description (include rock header name from code): DDLS-17-04
0	7.62	CASEING		Overburden
7.62	10.67	OG		strong oxi og rubble, 10 cm rounded pebbles at start, very poor recovery
10.67	36.73	OG		light brown mod fol og, tiger stripe color (orange brown with fine bio defining fol), decomp zones and minor sil bx zones, fol at 50 - 60 dtca, qv & sil approx. with fol
				12.00 - 12.19 orange brown strong oxi and decomp og with qrtz frags
				13.71 - 16.76 poor recovery, darker grey og , abundant fine grained bio
				16.76 - 18.30 broken frac beige to light brown og
			QBX	16.90 - 17.68 strong sil with minor bx and dark grey/blue wispy str (spec hem)
				17.68 - 20.75 weak sil, mod fol, med to coarse text og, minor alb alt with beige plag speckling
				19.25 black soft vnlet 2 -5mm at 15 - 20 dtca
				19.65 - black soft oxide (grey green fresh) bleb 1 cm wide
				19.80 fol at 55 dtca
			QBX	20.75 - 22.39 strong sil bx og, fine cal / lim str < 1mm at 5%, 21.95 - 22.39 decomp & frac with sandy clay
			QBX	22.39 - 22.90 strong sil bx og , cal hem & qrtz str stw at 55 - 60 dtca, orange lim stained matrix
			QBX	22.90 - 25.75 light brown mod fol og, minor zones of bx and qrtz vn, minor cal str < 2mm
				22.80 - 3 cm def frac qrtz vn, approx. 60 dtca, unique dull grey angular clasts in qrtz vn?
			QBX	25.75 - 26.00 strong sil bx zn with drk grey str (spec hem)
				26.00 - 27.43 oxi brown og rubble
				27.43 - 28.4 mod to strong sil, light brown, weak fol
				28.0 - major frac nearly parallel to ca (15 - 20 dtca) , cal filled locally
				29.65 - 30.25 very dark (black) (fine bio or hb) fine text zone that fades into light brown orange og? 5 - 15mm bands of fine text black mineral perpendicular to ca
				30.25 - 36.75 mod fol intermediate to mafic, darker grey og, patches of strong lim frac and sil, minor alb alt'n, cal str < 1 mm with fol 55 / 60 dtca
		OG	QBX	30.23 - 30.58 - strong sil bx zone, beige to orange, frac fill lim str, tr - 1 % fine grey blue spec hem
				32.90 - 33.50 light brown to beige og, mod alb & sil alt
				33.08 - 1 cm drk grey qrtz vn at 75 / 80 dtca, margin of vn contain 1 mm spec hem
				35.70 - 36.75 light brown, mod sil, with zones of semi decomp og (transition zn to bio cl schist or CLBSH), qrtz vn with drk brown hem str
		OG	QBX	36.62 - 36.73 qrtz vn bx separates bio cl schist CLBSH and og unit, qrtz & qrtz carb vn at 60 dtca, wispy blueish zones with fine pin head spec hem, tr cubic py (fresh)
36.73	49	CLBSH		drk grey mafic to intermediate fine text CLBSH / cl -bio schist, weak to strong cl alt'n (green color (cl?), weak to mod cl alt, mod fol at 45 - 50 dtca, < 1 mm cal & lim str, 1 - 5 cm qrtz carb vn with fol (tr py locally), red hem stain frac surfaces
				36.73 - 38.35 transition zone, light brown oxi frac zones, minor qrtz bx zones
				38.75 - 38.85 dark brown red, sandy clay with rock frag
				40.80 - 40.95 red dark brown sandy clay with rock frag
				42.75 - discon epidote vnlet (3mm)
				43.00 - 43.50 broken semi decomp, hem alt with dark brown red hem str and frac fill
				45.00 - 46.05 more broken frac zone, minor hem stain rubble with 2 - 4 cm qrtz vn with tr py
49	49.6	QV	CLBSH	qrtz vn at 15 dtca, blotchy with micro qrtz lim str stw re sil, minor spec hem diss and in < 1 mm str perpendicular to ca
49.6	53	CLBSH		brown stained (oi) cl - bio schist / CLBSH, strong frac throughout, orange to red hem stained frac surfaces, def sub bx swirly 1 -5 cm qrtz carb (pinkish) with fol, tr py
53	65	CLBSH		competent, mod fol CLBSH, fine bio / hb making up fol, lighter brown color with patchy strong sil & bx zones, fol/frac at 50 dtca, 1 - 5 cm qrtz vn with fol tr py, lim & cal str < 1mm
				59.30 - 62.45 broken rubble, mod to strong sil, oxi frac, drk qrtz str, tr py

				60.50 - lim / oxi py bx vnlet 5 mm wide at 65 dtca
			QBX	62.45 - 63.80 strong sil bx, dark grey blue with prominent beige qrtz cal lim vnlet / str at 40 dtca, diss fresh and oxi py at 0.5 %
				64.50 - 65 soft sandy clay decomp CLBSH sections
65	85.36	CLBSH		dark grey fine text CLBSH / cl-bio schist, mod fol with cl/hb defining fol, mod to strong cl alt'n, fol / frac 50 dtca, green color (cl?) 1 - 10 cm qrtz carb kspar vn with tr py with fol, tr cal str, dark grey str (spec hem) @ 0.5 %) , red brown hem stain frac, tr py, minor lighter grey med text zones in and out (sil?)
				65.25 - 4 - 1 cm qrtz carb vn with fol 50 dtca
				? 3 cm sil / qrtz feldspar vn (pinkish) with 0.5 - 1% py diss
				69.50 - 9 cm qrtz carb kspar vn, tr py
				70.50 - 1 - 2 cm qrtz carb vn , tr py
				74.30 - 78.35 very broken frac CLBSH, rubble sections
				80.95 - 81.00 drk red brown decomp CLBSH
				81.25 - 81.85 lighter grey CLBSH, med text, less bio / hb, weak sil, mod fol, qrtz / kspar sub bx with tr diss py < 0.5 %, drk grey str 1 -2 %
				83.5 - 84.85 - 1 % fine diss py throughout,
85.36	97.65	CLBSH		lighter grey med text CLBSH, mod fol with bio / hb defining fol, strong frac and crumbly sections, tr py throughout, locally up 1% py, drk grey spec hem str throughout (tr to locally @ 5%) , tr cal qrtz carb str, minor qrtz carb vn up to 10 cm, local strong sil / frac zones
				83.5 - 83.60 qrtz carb bxvn , diss pin head py and drk grey pin head spec hem
				84.78 - 84.85 qrtz kspar vn, pink with tr py and grey spec hem str
			QBX	89.50 - 10 cm sil zone with wispy <1 mm spec hem str and diss cubic py up to 4mm wide
			QBX	87.70 - 87.85 - strong sil bx unit, 20% drk grey wispy spec hem, 0.5% py
			QBX	91.46 - 92.60 - strong sil with increase frac bx with increase drk spec hem str and diss py
				94.30 - 94.70 soft decomp strong cl alt'd CLBSH (green)
97.65	99.3	CLBSH		mod cl alt, light grey mod frac CLBSH with soft decomp sections, 2 - 3 % diss py,
				98.5 - 99.30 5% diss py and drk grey str, strong cl alt with green hue
99.3	101.75	CLBSH		decomp beige to light brown, soft clay with qrtz carb str and clasts (transition zone)
101.75	103.7	OG		light grey, very frac, med to coarse text og, sandy rough surface, semi decomp in places (soft to the touch)
103.7	111.89	OG		light grey to marron, med to coarse text , weak fol og, strong sil and bx, def qrtz vn at approx. 45 dtca, tr - 0.5 % py, wispy drk grey str (spec hem) throughout at 1 -2 %
				105.65 - 5 mm bleb of py
				106.70 - 5 cm qrtz vn 45 dtca
				109 - 109.40 light creamy beige clay with frac rock (gouge?)
111.89	112.8	OG	cuttings	cuttings from side wall, light brown clay gravel with abundant polymer mixed in (spongy jello feeling), 7 meters of cuttings in box
				12.20 - 12.30 competent core rubble, grey - marron og with tr py and dark str
12.8	113.8	OG	cuttings	cuttings from side wall, light brown, 2.5 m of cuttings
113.8	119.51	OG		grey to marron og, mod to strong sil and sub bx, pervasive fine diss'd spec hem (pin head into matrix causing dark grey str and patches), very frac throughout, a few local up to 20 cm pieces of competent core, mod fol locally at 35 dtca, no carb alt, no cal str, tr - 0.5 % py
				113.80 - 117. 37 darker grey sil og, weak fol, strong sil with bx qrtz/fd with dark str and patches (fine pin head diss spec hem)
				113.98 - 114.07 single piece of core, qrtz/fd vn with good py min with blebs of diss py up to 5mm (2- 3%)
				115.85 - 118.00 very frac, light brown to grey clay gravel, very poor recovery
				118.59 - 119.51 increase red stained frac og, well fol, qrtz str at fol (35 dtca), mod competent, tr py, EOH

GOLDSTRIKE RESOURCES LTD.

Drill Hole	DDLS-17-05	**Property**	Lucky Strike	**Zone**	Monte Carlo
Easting	589401	**Northing**	7013086	**Elevation (m)**	540
Survey by	Clayton Jones	**Survey Method**	gps	**Date**	August 20, 2017

Final Coordinates (UTM NAD 83)

Easting	589401	***Northing***	7013086	***Elevation (m)***	540
Survey by	Clayton Jones	**Survey Method**	gps	**Date**	August 20, 2017

Summary

Depth (m)	99.09	**Azimuth**	230	**Dip**	-55
Core Size	HTW	**Casing (ft)**	70	**Logged By**	Clayton Jones

Drill Company	Kluane Drilling Ltd.	**Drill Rig**	KD 600-2
Drill Start Date	August 21, 2017	**Drill Comp Date**	August 24, 2017
Log Start Date	August 23, 2017	**Log Comp Date**	August 24, 2017
Final casing	70	**Core Location**	Monte Carlo Camp
Comments		**Claim #**	Au 92 (YC98692)

Samples

Sample Numbers	1876357 - 1876457		
Number	101	**Lab**	Bureau Veritas
Cut by	Craig Sinclair	**Date Shipped**	August 28, 2017

Down Hole Survey

Depth (m)	Measured Azm.	Corrected Azm.	Dip	Magnetic Field (nT)	Temperature
30.49	213.42	232.89	-54.21	56794	9.5
66.00	212.51	231.98	-54.81	56741	N.A.
89.94	213.06	232.53	-55.03	56791	12.5

From	To	Rock Code 1	Rock Code 2	Description (include rock header name from code): DDLS-17-05
0.00	9.14	Casing		Overburden
9.14	13.68	OG		weaker oxi og, strong carb alt with qrtz - carb - lim vning, mod fol with bio defining fol, lighter beige brown then deeper units, fol @ 55 / 65 dtca, lim vns & str at 15 - 25 dtca, local mod sil zn with increase qrtz and lim vn/str, tr py, patchy cl alt with green stained frac
				10.40 1 -2 cm def lim vn 20 dtca,
				9.65 - 15-25 dtca 1 cm def lim, 2mm oxi cubic pyrite
				12.19 - 13.68 - broken brown oxi og, sandy gravel sections, silty clay sections, fractured sections, minor qrtz fragments
13.68	18.80	OG		brown oxi og, mod sil, mod - weak fol (bio defining fol), mod - strong carb alt, fol at 55 dtca, minor def qrtz and hem vn, tr - 0.5 % oxi py or py pmorphs replaced with dark brown lim throughout , local frac and sandy silt sections throughout, micro cal str throughout, minor patchy cl alt with green stained frac
				13.80 - 4 cm grey qrtz vn, frac with tr py, appear to be with fol
				17.40, 4 cm def grey qrtz vn, 0.5 % fine diss py and 1-2 % cubic py < 1mm @ margins
				17.00 - 17.75 increase sil zn with 0.5 % - 1% py pmorphs throughout
				17.75 - 18.23 very broken sandy silt sections
				18.35 -1 cm lim vn , 25 dtca
18.80	27.22	OG		strong sil brown og, no fol, mod carb alt, def qrtz vn with abundant frac filled with lim - cal - lim - hem str 0 - 10 dtca, 0.5 % oxi py blebs and cubic < 2 mm
				19.20 - frac qrtz vn, with tr cubic py (up to 6mm), 25 cm qrtz rubble zn (poor recovery)
				18.90 - 1 cm irregular shape of beige kspar
				21.20 - 22.06 darker brown with increase in fine bio, beige cal lim vnlet 5mm 0 dtca,
				23.75 - folded def qrtz vning, 30 cm section with 0.5% cubic py and several 1 - 2 cm vns
				26.08 - 26.65 broken frac sandy unit, flt?
		OG	BX	25.75 - 27.22 strong sil and carb alt og, sub bx with def qrtz vn / clasts throughout, orange brown carb - lim matrix, vuggy cal str and stw , lim - hem str < 1mm, 0.5 % py cubic and blebs < 1mm
27.22	29.05	QV	QVBX	QVBX - highly frac grey qrtz vn with beige cal - lim frac fill (maybe stringers?), the contact zones (margins) are brecciaed with beige - lim cal matrix, approx. 2% oxi and fresh cubic py
			QVBX	27.22 - 27.59 qrtz bx, light brown orange carb - lim matrix supported bx with grey qrtz clasts
				27.55 beige 10 mm cal / qrtz carb vn at 30-35 dtca
			QV	27.59 - 28.82 light brown grey qrtz vn, with cal - lim micro str throughout, all different orientation to core axis, @ 27.90 contains dark grey patches (fine diss'd py in qrtz), 1 -3 % cubic py throughout
			QVBX	28.82 - 29.05 qrtz bx, light brown orange carb - lim matrix supported bx with grey qrtz vn clasts
29.05	29.54	OG		strong sil and carb alt og, sub bx with def qrtz vn / clasts throughout, orange brown carb lim matrix, cal - lim - hem str < 1mm, tr - 0.5 % py cubic and blebs < 1mm
29.54	29.93	OG		brown to beige soft sandy decomp og, carb alt'd, minor sil og fragment
29.93	53.25	OG		light brown mod to strong sil og, mod to strong carb alt, weak - mod fol (bio define fol) at 55 - 70 dtca, silicification varies with stronger alt locally, tr cubic and bleb py throughout with local zones containing up to 1%, patchy def frac qrtz vning throughout (1 - 10 cm), < 1mm - 10mm calcite str, < 1 mm lim - hem str, patchy local minor green patches and str of chlorite?
				30.31 - 30.69 slighter drk sil zone, tr - 0.5 %, cal - lim str stw
				30.64 - 30.80 darker grey zn with increase def qrtz vn, tr py
				33.00 - hem cal vnlet 1 - 5mm at 25 dtca
				36.55 - 1 cm frac qrtz vn at 50 dtca
				37.20 - 3 cm def qrtz vn (discontinues)
				37.40 - broken qrtz vn (clasts?), 10 mm oxi py bleb with beige 1 mm halo
				37.50 - 3 cm x 5mm green patch (chlorite?)
				37.70 - 38.30 abundant def qrtz vn, frac with tr oxi py, multiple cal - hem qrtz str orientations / generations
				30.95 - mat massive green brown mineral vn at margin of beige cal vnlet (2 -3 cm) def offset vn at 30 dtca
				40.80 - 40.95 broken crumbly sandy og (semi decomp)
				42.25 - 20 mm oxi py bleb (sub cubic)
				42.30 - weak fol og, 55 - 60 dtca , 10 mm qrtz vn at fol, < 2mm cal & lim str at fol
				42.83 - 42.93 brown silty clay

				at 43 m there was a cave in with 0.80 m of debris re drilled through
				43.60 - 44.51 decomp og, soft sandy text, brighter orange in places, cal str
				44.86 frac irregular qrtz vn, drk patches, tr cubic py, no orientation (discontinues?) clast?
				46.23 - 6 cm qrtz vn, dark patches, tr py , 45 - 50 dtca
				46.50 - fol at 65 dtca
				47.85 def frac qrtz vn
				48.20 3 cm qrtz vn with fol, 65 - 70 dtca
				48.10 fol and qrtz vn @ 70 dtca
				48.30 - 48.45 beige carb alt zn, beige cal vn / stw
				49.92 - 50.05 lighter beige, carb alt sub bx with qrtz qv clasts, 0.5% dark brown oxi py blebs
				55.55 - 51.50 slight darker brown -grey og, strong carb alt, drk brown oxi py blebs & str < 1mm wide, lim cal str all dif orientations to ca, 0.5 - 1% py
53.25	64.00	OG		light brown weal sil, well fol og, local qrtz vn and sil zn, weak to no carb alt, patchy cl alt with green staining locally, fol 50 dtca, red stained hem frac , minor cal str < 1mm, tr py overall
				55.70 - 4 cm frac qrtz vn, 60 dtca , not with fol, tr py
				53.88 - drk brown red 2 mm hem str 25 - 30 dtca,
				56.50 - few 10 mm def qrtz vn with diss py,
				54.57 - cubic py in 1 cm qrtz carb vn
				54 - 57.92 - increase py in qv, blebs up to 10mm, 0.5% overall
				55.20 - 10 mm bleb py,
				57.00 - fol at 50 - 55 dtca
				57.70 - cubic py in qrtz carb sil zn
				57.92 - 61 70, darker grey brown zn, many frac zn with crumby rubbles zones,
				62.50 - 62.70 decomp frac unit abundant beige cal
				63.30 very fine (pin head) dis py
				63.50 - 1 cm def frac qrtz vn with hem str at margin, cubic py
64.00	71.92	OG		light red / beige weak to mod sil, strong fol og, local qrtz vn and sil zn, patchy cl staining (green stained frac), fol steepens to 80 dtca, tr py throughout
				64.10 hem str 2 mm at 30 dtca,
				65.54 - 2 - 4 cm wavy def qrtz vn, tr py, margins contain < 1 mm fine oxi py (lined)
				4 cm qrtz vn, beige, tr py, at 30 dtca
				66.20 - 66.27 grey brown sandy gouge
				irregular discontinues beige cal vnlet 1 - 20 mm, margins contain < 1mm fine diss black spec hem
				66.89 - 67.24 soft decomp og, orange red sandy clay
				67.24 - 71.92 well fol, weak alt, minor 1 mm hem cal str, fol at 80 dtca
				70.00 fresh py bleb 5mm in og (not in vn)
				70.12 - 70.22 dark blue section of og (sil?), smeary sub bx
				71.76 - 7 cm sil zn with sharp contacts (darker brown with < 1mm qrtz clasts and drk swirly qrtz, 70 dtca
71.92	73.20	BXOG		orange decomp sub bx soft crumbly og, sheared? upper contact 35 - 45 dtca, lower contact is near perpendicular to core axis
73.20	81.92	FROG		red - marron fine text og or maybe fine grained sandstone?, mod sil, mod fol 75 dtca, qrtz cal wispy str 40 dtca, qrtz cal vnlet < 5 cm with fol, tr py throughout
				78.40 - 79.00 - bx zn, beige frac cal clasts in sandstone
				75.30 - 4 cm qrtz cal vn, tr py
				78.30 - 1 -2 mm hem str at 30 dtca , mod sil zn with sub bx with def qrtz vn / clasts , tr py
				79.00 - dis py in sandstone
				79.00 - 81.92 sub bx zn with qrtz / qrtz cal frac clasts / vn, good py min with 0.5 % dis py,

81.92	82.94	BXOG		orange decomp sub bx soft crumbly og, transition into shear zn,
				81.92 - 82.51 light orange brown soft gouge? ,
				82.51 - 82.87 competent core, beige to white og, weak sil, sandy texture, no py
				82.87 - 82.94 light orange brown soft gouge , sharp lower contact approx. perpendicular to core axis, uneven wavy contact surface
82.94	83.40	SHR		shear zn, black plasticine text with grey wacke clasts and oxi sandstone clasts, sharp upper and lower contact, 75 - 80 dtca,
83.40	83.65	S/W		light grey swirly fine grained siltstone, sheared and soft semi decomp, fine mica throughout
83.65	85.52	W/S		sheared broken light grey med text wacke clasts (up to 20 cm) in dark grey fine grained sandstone (soft).
			S	83.72 - 2 cm black / grey fine grained siltstone, soft
			S/W	83.90 - 84.60 dark grey smeary fine grained siltstone matrix with 1 - 15 cm wacke clasts
			SHR	84.60 - 84.90 black plasticine flt gouge
			S/W	84.90 - 85.52 dark grey smeary fine grained siltstone matrix with wacke clasts
85.52	89.00	W		med to coarse grained light grey (bleached) wacke, qrtz rich, a few very coarse conglomerate sections, micaceous with fine mica throughout, tr py locally
				85.52 - 86.20 coarse conglomerate with rounded clasts qrtz / shale clasts up to 15 mm
				86.69 - 87.05 coarse conglomerate with rounded clasts qrtz / shale clasts up to 15 mm
				86.70 - 0.5 % py fin dis
				84.50 - 0.5 % py fine dis
89.00	92.00	SHR	W/S	black shear zn, sooty siltstone text with minor fol / shear direction (elongated clasts inline), 50 dtca, sharp lower contact at 35 dtca, gradational upper contact
92.00	99.09	W/SS		black shear zn, sooty siltstone text with minor fol / shear direction (elongated clasts inline), 50 dtca, sharp lower contact at 35 dtca, gradational upper contact



GOLDSTRIKE RESOURCES LTD.

Drill Hole	DDLS-17-06	**Property**	Lucky Strike	**Zone**	Monte Carlo
Easting	589401	**Northing**	7013086	**Elevation (m)**	540
Survey by	Clayton Jones	**Survey Method**	gps	**Date**	August 20, 2017

Final Coordinates (UTM NAD 83)

Easting	589401	***Northing***	7013086	***Elevation (m)***	540.000
Survey by	Clayton Jones	**Survey Method**	gps	**Date**	August 20, 2017

Summary

Depth (m)	114.33	**Azimuth**	230	**Dip**	-75
Core Size	HTW	**Casing (ft)**	20	**Logged By**	Clayton Jones
Drill Company	Kluane Drilling Ltd.			**Drill Rig**	KD 600-2
Drill Start Date	August 24, 2017			**Drill Comp Date**	August 26, 2017
Log Start Date	August 25, 2017			**Log Comp Date**	August 27, 2017
Final casing	20			**Core Location**	Monte Carlo Camp
Comments				**Claim #**	Au 92 (YC98692)

Samples

Sample Numbers	1876458 - 1876568		
Number	111	**Lab**	Bureau Veritas
Cut by	Robin Miller	**Date Shipped**	September 11, 2017

Down Hole Survey

Depth (m)	Measured Azm.	Corrected Azm.	Dip	Magnetic Field (nT)	Temperature
18.00	213.75	233.22	-75.02	57098	N.A.
50.30	214.62	234.09	-77.29	57125	12.7
80.00	214.29	233.76	-75.45	56972	10.8
114.33	211.62	231.09	-75.93	56998	14.4

From	To	Rock Code 1	Rock Code 2	Description (include rock header name from code): DDLS-17-06
0	4.51	CASEING		overburden
4.51	38.5	OG		light brown mod to strong sil og, poor fol, weak to mod carb alt, local strong sil zn with def frac qrtz vn, < 1mm cal str and < 3 mm dark brown - red hem str, tr - 1% cubic py with blebs up to 20mm, patchy minor chl alt with green staining on frac surfaces
				4.51 - 6.80 vey oxi frac broken og with sandy silt sections, abundant frac qrtz vn
				5.0 - 5.20 frac qrtz vn rubble with tr py
				6.90 - 1 - 4 cm qrtz vns approx. 50 - 60 dtca
				7.22 - 7.82 strong sil with def frac qrtz str / vnlet, sub bx with brown orange lim matrix, tr py
				10.00 - 12.40 1% cubic py, slight lighter beige with 1 cm def qrtz vn
				11.00 - 20 mm oxi cubic py cluster (touching py cubes)
				11.20 - 2 cm frac qrtz vn
				12.60 - 1 cm qrtz vn at 45 dtca
			QBX	14.50 - 14.80 - qrtz bx with elongated frac qrtz clasts in sil og, elongated clasts are at 60 dtca
				16.00 - 23.00 - 0.5 - 1% coarse cubic py clusters (20 mm) and large blebs (10 X 40 mm)
				15.00 - dark brown red hem str (< 3mm) at 0 dtca
				16.41 - 5 mm py bleb
				17.00 - dark brown red hem str (< 3mm) at 10 dtca
				17.90 - 18.94 many large elongated blebs of py (40 X 10 mm), 1% py overall , py appears to be following str orientation (broken def and discontinues) of 50 dtca
				17.40 - 1 cm qrtz - cal vnlet
				20.65 - 21.00 darker brown grey coarse text og, strong sil
				22.20 - 1mm red brown hem str at 50 - 55 dtca
				22.50 - beige cal - hem str / vnlet at 35 dtca
				23.30 - 23.30 - very strong sil zn with 4 def qrtz vn with fol (30 dtca), vn are broken and discontinues, beige cal vnlet orthogonal at 30 dtca
				23.50 - 1 cm irregular dark brown massive very hard vn, (minor fizz with hcl to powder) Ankerite?
				23.67 - 23.87 sandy decomp og
				25.91 - 26.70 frac sandy rubble og
			QV	27.24 - 28.15 frac dark crumbly unit, dark qrtz fragments throughout (possible edge / margin of qrtz vn zone that hole was targeted for?)
				30.02 3 cm purple vn at 50 dtca, purple clay stained frac with chl alt (green staining)
				30.80 - 7 cm qrtz - cal vn (beige), 20 dtca, cut by oxi py str up to 2mm at 45 dtca
				31.30 frac surface with purple clay, 25 dtca
				33.30 - 2 cm frac def qrtz vn, approx. 80 dtca
				33.50 - dark qrtz hem string throughout
				33.60 - 10 cm white qrtz vn on one side of core, tr py
				38.50 - 5mm py bleb
38.5	45.1	OG		mod to strong sil og, mod fol between 35 - 45 dtca (fine bio rich def fol), tr - 0.5 % diss py throughout,
				39.10 fol at 45 dtca 1 cm def qrtz vn with fol
				39.95 - qrtz carb vn 4cm wide, tr py, 50 dtca
				41.00 - fol at 35 dtca
				42.39 - 43.20 broken frac qrtz with rubble zn
			QBX	44.95 - 45.10 -beige to orange qrtz carb alt unit, sub bx with strong def qv, tr py
45.1	47.15	OG		broken frac semi decomp og unit sandy clay rubble
47.15	48.5	OG		darker grey brown, strong sil zn with dark < 1 mm qrtz hem str, def frac qrtz and cal str and vnlet, tr py
				48.00 - 48.20 qrtz cal stw with purple hem staining, tr py

48.5	56.8	OG		weak sil, mod fol, og, sandy texture compared to glassy texture in uphole og, minor sections of soft decomposed and frac og, minor < 1mm cal str with fol, red / purple hem str < 3 mm, minor chl alt with green staining in frac, red clay filled frac
				48.58 - 50.15 frac broken section, sandy gravel sections,
				50.15 - 51.53 increase qrtz vn with tr cubic py
				51.50 - fol at 35 dtca
				56.10 - few frac / blotches of green chl staining
				56.45 - 56.80 decomp frac sandy text og with 10 cm silty cuttings, lower contact sharp @ 50 dtca
56.8	69.1	OG		light brown, weak to mod sil og, weak to mod fol, minor broken sandy decomp sections, very gradational contact, slow transition to slight more sil og, patchy chl alt with light green staining , fol approx. 30 - 50 dtca, gradational contact over 10 m
				56.80 - 57.15 increase sil zn, red hem staining, def frac qrtz vn at approx. 30 dtca, contact at 30 dtca, orange clay filled contact frac
				60.10 - white qrtz carb vn, def, 50 dtca
				60.44 - 62.04 broken frac oxi og, sandy gravel patches
				64.02 - 64.62 very frac decomp brown og, 30 cm grey brown sandy section
				66.00 frac 50 cm def qrtz vn, tr cubic py
				66.30 - 5 cm dark red purple to black shear zn, 50 dtca
				67.30 - 67.50 sandy frac og (light brown)
				67.70 - 68.10 sandy frac og (light brown), upper contact at approx. 50 dtca
			QBX	68.10 - 68.60 - strong sil, sub bx with increase qving
				68.50 - 68.60 wispy smeary fine spec hem str
69.1	95.87	OG		darker brown red, increase red hem str / blotches, weak to mod fol og, minor un oxi grey patches with tr diss py, 1 mm qrtz carb str at various ori to core axis, patchy light green chl alt
				69.90 - weak fol at approx. 30 dtca
				70.55 slight bleaching (alb alt?, soft so not qrtz, no hcl reaction in powder form), abundant py blebs at 5% over 10 cm section
				71.55 - 71.75 light brown sandy crumbly section, upper contact at 40 dtca
				71.75 - 75.37 weaker sil, coarse grain og, frac with several crumbly broken section
				74.55 - 74.75 light brown sandy gouge, 30 dtca
				75.50 2 dark red brown hem str at 30 dtca
				77.00 def frac qrtz vn with tr py, 40 - 60 dtca
				77.62 - 79.76 abundant def frac beige yellow stained qrtz carb vns with tr py blebs
				78.40 - 5mm py bleb in qrtz carb vn
				79.10 15 cm beige qrtz carb def vn, approx. 30 / 50 dtca (with fol)
				80.70 - fol at 20 - 30 dtca
				8.60 tr diss py blebs
				81.60 - 82.55 sandy crumbly section
				83.30 - 5 mm red brown hem str, 1 -2 mm str at 40 dtca
				82.40 - 85.36 increase red stained, mod to strong sil , weak fol
				85.36 - 87.60 strong qrtz carb stw with fine diss spec hematite (dark black blue pinheads)
				87.60 - 89.73 very dark brown red stained, weak fol, strong frac
				90.60 - 5 cm zn with good py blebs
				90.70 - 93.18 very broken frac crumbly sandy sections, decomp weak sil
				93.18 - 94.51 dark grey purple with def qrtz carb vn / clast
				94.51 - 95.47 light brown smeary text, pistachio green chl alt'n and 10 cm zn of strong spec hem (fine dark blue)
95.87	104.55	BXOG	QVBX	alt'd / bx transition zn between og and black shear zn, good py min throughout, abundant qrtz vning, qrtz bx and cl alt'n
			OG	95.87 - 96.10 light brown sandy gouge with qrtz clasts

			QVBX	96.10 - 97.00 semi decomp qrtz carb vn bx, light brown, fine pin head diss py in grey qrtz clasts, vn/bx/fol at 20 - 25 dtca, minor carb (weak fizz with powder) only locally, 5 cm zn of frac massive brown chalcedony with black clasts ? tr - 0.5% py throughout
			QV	97.00 - 98.10 competent solid qrtz vn with wispy blue grey staining throughout, py blebs up to 10mm (0.5% overall), strong micro frac, upper contact at 25 - 30 dtca
			OG	98.10 - 99.10 broken crumbly decomp og with abundant qrtz clasts throughout, 30 cm qrtz rich orange zn, 30 cm qrtz rich red zn, 30 cm green stained zn
			OG	99.10 - 99.94 pistachio green, strong fol, weak sil og / cl alt qrtz vn, fol @ 30 dtca, py blebs throughout (up to 5mm) 1 % qrtz carb vn / str with fol
			OG	99.94 - 100.60 strong sil og / qrtz vn, strong frac, slight green alt, dark grey patches with fine pin head diss py, local blebs up to 5mm, very frac at upper end of unit
			OG	100.60 - 103.44 grey green (pistachio) strong frac and decomp og, fine diss py throughout in clasts (2%) , local bx with sil clasts in sandy clay matrix
			OG	102.63 - 103.44 decomp bx, sil og and qrtz clasts in brown green (pistachio) sandy matrix, 2% py
			QVBX	103.44 - 104.55 light grey sandy text matrix with frac white qrtz clasts with massive py blebs near margins of qrtz clasts (up to 10% locally) , sharp lower contact with shear at 40 dtca
			QVBX	103.44 - 104.15 qrtz bx zn with good py and qrtz clasts, bx fades to matrix only (sandy decomp) downhole towards the shear
104.55	105.93	SHR		bx shear zn, black plasticine text fault gouge with limey wacke clasts throughout, sharp upper contact at 40 dtca
105.93	114.33	W	S	sheared wacke/ siltstone zn, tr py locally, large scale bx with dark grey - black fine grain siltstone to black clay rich gouge matrix and 10 mm to 1 m wacke clasts throughout (coarse to med text)
			W	107.04 - 107.60 coarse grain wacke with rounded pebbles up to 10mm

GOLDSTRIKE RESOURCES LTD.

Drill Hole	DDLS-17-07	**Property**	Lucky Strike	**Zone**	Monte Carlo

Preliminary Coordinates (UTM NAD 83)					
Easting	589401	**Northing**	7013086	**Elevation (m)**	540
Survey by	Claton Jones	**Survey Method**	gps	**Date**	August 20, 2017

Final Coordinates (UTM NAD 83)					
Easting	589401	***Northing***	7013086	***Elevation (m)***	540
Survey by	Claton Jones	**Survey Method**	gps	**Date**	August 20, 2017

Summary					
Depth (m)	103.02	**Azimuth**	180	**Dip**	-55
Core Size	HTW	**Casing (ft)**	40	**Logged By**	Sam Wigmore

Drill Company	Kluane Drilling Ltd.	**Drill Rig**	KD 600-2
Drill Start Date	September 6, 2017	**Drill Comp Date**	September 8, 2017
Log Start Date	September 7, 2017	**Log Comp Date**	September 9, 2017
Final casing	40	**Core Location**	Monte Carlo Camp
Comments		**Claim #**	Au 92 (YC98692)

Samples			
Sample Numbers	1876569-1876677		
Number	109	**Lab**	Bureau Veritas
Cut by	Sam Wigmore	**Date Shipped**	September 19, 2017

Down Hole Survey

Depth (m)	Measured Azm.	Corrected Azm.	Dip	Magnetic Field (nT)	Temperature
10.67	172.08	191.54	-52.92	57102	13.6
51.00	170.96	190.42	-52.94	56894	9
100.58	171.35	190.81	-52.55	56757	3.6

From	To	Rock Code 1	Rock Code 2	Description (include rock header name from code): DDLS-17-07
0	4.57	CASING		Overburden
4.57	19	OG		Light orange brown poor-mod sil og, high fol, weak to mod carb alt, <3mm dark red hem str, <1mm cal str, occ strong sil zones
				4.57-6.50 - coarse grained
				5.50 - fol approx. 45 dtca
				6.50 - bio porphyroblasts (5mm-10mm)
				6.60-7.00 - lim after py pseudomorphs (1%), become fine-med grained onwards
				7.07-8.37 - Dark grey, high fol, poor-mod sil, fine grained og. Fol approx. 40 dtca. 3 X 2mm qrtz carb veins approx.25 dtca
				11.30 - 5mm hem stained carb vein approx. 25 dtca. Fol approx. 45 dtca.
				12.05 onwards - lim after py pseudomorphs (<1%).
				13.06-14.15 - un-fol og
				14.15-18.49 - With occ qv and high sil zones.
				15.05-18.49 - fine fresh py in og (<1%). Qtz carb vein (5mm) @ 15.05m approx. 40 dtca.
				15.60 - 50mm qv with cubic py and lim (3%)
				16.46-17.16 - Rubble zone. Poor sil, med-coarse grained og.
				17.80 - Fol approx. 50 dtca
				18.49-19.00 - un-fol og
19	21.34	QVBX	QV	High bx, dark coloured qrtz with carb/lim in fractures, heavy lim alteration, <1mm carb str, <1% py and py pseudomorphs.
				19.00-19.10 and 21.29-21.34 - matrix supported bx, clasts of qrtz and matrix of lim.
21.34	85.92	OG		Orange brown, mod sil og, high fol, weak to mod carb alt, <1mm carb str, occ qv and high sil zones.
				25.20 - fol approx. 40 dtca
				26.30 - fol approx.30 dtca
				26.56-26.97 - un fol, high sil og
				26.80 - 30mm qv approx. 15 dtca,
				28.20 - 30mm qv approx. 75 dtca,
				28.40 - 30mm band of clay
			QBX	28.95-32.00 - Rubble zone. Some short (70mm) sections of qvbx and og
				32.75-33.31- High sil zone, <1mm spec hem str, 2% chl alt, <1% fine py/lim pseudomorphs
				33.50- 34.37 - Rubble zone, poorly sil, bx og frags and decomposed rock/clay
				34.50 - Fol approx. 65 dtca
				34.62-36.24 - Rubble zone, poorly sil og frags and sandy lenses. 1mm carb veins in rock frags.
				35.50 - Feldspar veinlets (2mm) approx. 60 and 0 dtca
				36.65 - Fol approx. 35 dtca
				37.20-39.22 - Rubble zone, some small sections (100mm) competent og.
			QBX	40.80 - 100mm qvbx with carb str, with one lim after py pseudomorph
				40.80 onwards - No carb alt and some decomposed layers
				41.30 - Fol approx. 65 dtca

				43.03-45.50 - Weak, low sil, decomposed og, poor and irregular fol, with bands (up to 50mm) of clay. 2mm carb clay band @ 43.10 approx. 20 dtca. Contact with competent rock at base approx. 30 dtca.
				45.50-48.00 - High sil zone, with qv (10-40mm), 1-2% py/lim
				47.70 - Fol approx. 60 dtca
				49.60 - QV (70mm) approx. 40 dtca with light brown staining.
				49.70-51.17 - Rubble zone. Some small (100mm) sections of v.weak/decomposed rock. qrtz rubble @ 50.29-50.35.
				51.17-53.64 - High sil zone, with tr py, 5 X qv up to 80mm, 1mm spec hem str
				51.85 - Fol approx. 70 dtca
				53.45 - qv approx. 50 dtca
				53.64 onwards - mod sil og, med-coarse grained, tr py, 1mm carb str, 2mm hem str, occ qv
				54.60 - Fol approx. 70 dtca
				54.80 - 5mm qv approx. 30 dtca
				56.35 and 56.55 - 30mm qv approx. 75 dtca
				56.90-57.50 - py conc along 2 X 5mm qv approx. 75 dtca
				57.35 - 2mm hem str approx. 45 dtca
				57.75-62.26 - high sil zone
				58.00-58.50 - Rubble zone. Some small (50mm) sections of high sil og
			QV	58.60-58.76 - Light brown stained qv (100mm), tr py, 60mm clay between qv and lower contact with og
			QBX	58.93-59.03 - qvbx, light brown staining, tr py
				59.03 onwards - dark orange brown colour
				59.70 - Fol approx. 70 dtca
				60.20-60.45 - weak sil/decomposed zone
				61.24 - dark stained qv approx. 60 dtca
				62.60 - 5mm qv approx. 40 dtca, high conc (5%) of py in wall rock 30mm either side of qv
				63.40 - 30mm qv, with 3-4% py, approx. 60 dtca
				63.50-64.01 - Rubble and clay zone.
				64.22-64.42 - Decomposed og/clay
				64.80-68.30 - High sil zone
				64.95 - 8mm qv approx. 70 dtca
				65.30 - 15mm qv with light brown alt zone 30mm either side, 10% py in zone, approx. 35 dtca
				66.40 - Fol approx. 50 dtca
				67.70 and 67.95 - 7mm qv approx. 65 dtca
				68.38 - 10mm qv with 10mm alt zone above, alt zone 10% py, approx. 60 dtca
				69.95 - 2mm hem str approx. 35 dtca
				70.60-71.04 - Decomposed og/clay
				71.04-76.50 - dark red colour staining and high sil zone

				71.07 - Fol approx. 70 dtca
				71.70 - 3mm carb vein, approx. 50 dtca
				71.80-73.15 - 8 X qv (up to 20mm), approx. 70 dtca
				72.40 - Fol approx. 60 dtca
				74.10 - 2mm hem str approx. 65 dtca
				74.80-74.90 - Band of clay
				75.15 - qv and alt zone (30mm), 5% py
				76.10 - Fol approx. 45 dtca
				76.50-76.75 - Band of clay/decomposed og
			QBX	76.75-77.03 - qvbx with light brown staining
				77.03-79.01 - weak-mod sil zone
				77.50-77.70 - 3 X 3mm spec hem str
				77.80 - Fol approx. 30 dtca
				77.95 - fracture infilled with 3mm of clay, change in fol below fracture approx. 5 dtca, poss sheared by fault zone
			BXOG	79.01-80.49 - Decomposed and bx og, with clay bands, poss fault zone
				80.49 onwards - brown mod sil og, poor-mod fol, occ qv, occ sandy zones, 2% py (conc in poor fol zones near qv)
				81.95 - 10mm qv approx. 65 dtca
				83.25- 85.00 - Zone of decomposed og, rubble and clay
				83.58 - Fol approx. 45 dtca
			QBX	85.00-85.26 - qvbx, tr py
				85.26-85.90 - Rubble, clay and decomposed rock zone.
85.9	89.82	FROG		Redish brown high sil og, weak fol-un-fol, numerous qv (up to 40mm), 3% py conc in qv, tr py in wallrock, 1mm spec hem str
				85.95 - Fol approx. 65 dtca
				86.15 - 3mm spec hem str approx. 65 dtca
				87.15-87.35 - Band of decomposed rock/clay
				87.67 - 25mm qv approx. 65 dtca
				88.60-89.82 - weak/decomposing og, with pistachio green chl alt and sandy bands, 1% py
89.82	90.67	SHR	OG	smeared light brown mudstone text fault gouge with bands of sand and clay throughout
90.67	92.63	SHR		bx shear zone, black plasticine text fault gouge with matrix supported wacke clasts throughout, sharp contacts at top and base, contact at base approx. 50 dtca
92.63	103.02	W	S	Light grey coarse grained wacke/sandstone, sub rounded grains, locally sheared, tr py
				102.72-103.02 - bx zone, black plasticine text fault gauge with matrix supported wacke clasts
				103.02 - EOH

| Sample ID | From | To | Length | Rock Code 1 | Rock Code 2 | Description | Alteration Intensity (0, tr, w, m, s) | | | | | | Quartz (%) | | Sulphide % | | | Lab codes | Shipping Information | | | | | Assays | | Wgt | Au | Mo | Cu | Pb | Zn | Ag | Ni | Co | Mn | Fe | As | Au | Th | Sr | Cd | Sb | Bi | V | Ca | P | La | Cr | Mg | Ba | Ti | B | Al | Na | K | W | Hg | Sc | Ti | S | Ga | Se | Te |
|---|---|---

GOLDSTRIKE RESOURCES LTD.

Drill Hole	DDLS-17-08	**Property**	Lucky Strike	**Zone**	Monte Carlo
Easting	589565	**Northing**	7012934	**Elevation (m)**	555
Survey by	Clayton Jones	**Survey Method**	gps	**Date**	August 20, 2017

Final Coordinates (UTM NAD 83)

Easting	589565	***Northing***	7012934	***Elevation (m)***	555.000
Survey by	Clayton Jones	**Survey Method**	gps	**Date**	August 20, 2017

Summary

Depth (m)	144.80	**Azimuth**	230	**Dip**	-55
Core Size	HTW	**Casing (ft)**	80	**Logged By**	Sam Wigmore
Drill Company	Kluane Drilling Ltd.			**Drill Rig**	KD 600-2
Drill Start Date	September 8, 2017			**Drill Comp Date**	September 11, 2017
Log Start Date	September 9, 2017			**Log Comp Date**	September 11, 2017
Final casing	80			**Core Location**	Monte Carlo Camp
Comments	sample ID 1876734 WAS NOT USED			**Claim #**	Au 92 (YC98692)

Samples

Sample Numbers	1876678 - 1876839 (minus 1876734)		
Number	162	**Lab**	Bureau Veritas
Cut by	Sam Wigmore	**Date Shipped**	September 19, 2017

Down Hole Survey

Depth (m)	Measured Azm.	Corrected Azm.	Dip	Magnetic Field (nT)	Temperature
54.00	211.01	230.47	55.77	56748	N.A.
94.00	210.98	230.44	55.76	56740	N.A.
135.64	210.35	229.81	56.25	56820	9.9

From	To	Rock Code 1	Rock Code 2	Description (include rock header name from code): DDLS-17-08
0	11.98	OG		Rubble zone. Fragments of decomposed og.
				6.10-6.33 - Micaceous sandy zone
11.98	13.83	OG		Decomposed light brown og, poor-un fol, weak-mod carb alt
				12.35 - Cluster of large (5mm) cubic pseudomorphs (lim after py?)
				12.50-12.70 - Mod sil zone
13.83	19.26	OG		Decomposed light brown og, coarse grained, str fol, weak-mod carb alt, occ weak sil zone, 20mm qcv, local tr lim after py
				14.90 - Fol approx. 55 dtca
				15.07 - 2mm carb lenses
				15.97-16.56 - Partially bx zone
				18.96-19.18 - Partially bx zone
19.26	27.43	OG		Light orange brown weak sil og, str fol, fine-med grained, occ 1mm carb str, 2mm hem str, local spec hem str, qv approx. equal to fol (50-65 dtca, shallower dtca with depth)
				19.63 - Fol approx. 65 dtca
				19.91-20.25 - Band of clay and sand
				21.34-21.60 - Irregular 4mm qcv with 1% lim after py in wallrock
				21.64 - Fol approx. 60 dtca
				22.92 - 15mm qv approx. 55 dtca
				23.55-27.43 - Mod sil og
				23.55-23.75 - Couple of spec hem str
				24.38-24.68 - Band of sandy clay
				26.00 - 10mm qv approx. 50 dtca, cluster of cubic pseudomorphs (lim after py)
				26.12 - Fol approx. 50 dtca
				26.60-27.00 - Albite alteration in og, qrtz and lim str
27.5	28.08	BXOG		Decomposed shear bx zone, matrix supported, sub rounded clasts of og, bands of clay throughout, contact at base approx. 60 dtca
28.08	40.7	CLBSH		Dark grey mafic to intermediate fine text CLBSH / cl -bio schist, mod sil, weak to mod cl alt, < 1 mm cal & lim str, 1 - 5 cm qv with fol, red hem stain frac surfaces
				29.26 - 5mm spec hem str
				29.31-31.99 - Rubble zone, fragments of mod sil CLBSH (with rare tr py) and qrtz
				32.07 - 10mm qv approx. 45 dtca
				32.15 - Fol approx. 45 dtca
				33.15-33.20 - Decomposed zone.
				33.65-33.73 - Band of sandy clay
				33.90 - 12mm qv approx. 50 dtca
				35.67-35.87 - Band of clay and decomposed rock
				37.23-37.37 - QV with pink staining approx. 45 dtca
				38.70-38.75 - Band of sandy clay
				39.13-39.25 - Un-fol zone, with 1% lim after py directly above zone
				39.30 - Fol approx. 55 dtca
				39.52 - 10mm qcv approx. 25 dtca (x cuts fol)
				40.09 - 4mm qcv approx. 70 dtca, heavily oxi zone either side with coarse bio
				40.40-40.70 - 2mm fractures infilled with epi approx. 25 dtca
				40.50 - 15mm discon qv approx. 50 dtca

40.7	45.72	OG		Orange brown weak-strong sil og(?) str fol, occ hem str and stain on fractures, qcv and qv, <1mm cal and lim str, local tr py, contact with clbsh approx. 65 dtca
				40.87 - 60mm discon qcv
				41.70-45.32 - Strong sil zone, with tr lim after py, occ mod sil bands
				42.80 - 60mm brown stained qv approx. 50 dtca
				44.00 - Fol approx. 50 dtca
				45.32-45.72 - Grey coloured og(?), increase in feldspar %, decrease in lim alt
				45.67 - Fol approx. 50 dtca
45.72	48.87	OG		Orange brown and occ green decomposed og(?), occ hem str, occ clay bands,
				46.81-47.70 - Rubble and clay zone
				47.90 - Fol approx. 45 dtca
				48.00-48.25 - zone of weak chl alt
			BXOG	48.25-48.87 - Partially bx
48.87	51.72	BXOG		Light orange brown decomposed shear bx, sub rounded-rounded clasts, matrix supported, some hem staining, some chl alt
51.72	74.45	BXOG	OG	Light brown decomposed-mod sil og, zones of bx throughout, poor fol, 2mm hem str, localised zones with up to 5% lim after py, tr lim after py throughout, occ <1mm carb str
				52.45-52.55 - Zone with 2% lim after py
				53.00-53.36 - Decomposed zone
				53.91-54.07 - Decomposed zone
				55.53-56.16 - Zone with 5% lim after py
				56.00 - Fol approx. 55 dtca
				56.16-57.91 - Decomposed and highly bx zone, tr lim after py
				57.91-59.40 - Mod sil, weak bx zone, tr lim after py
				59.60-59.87 - Decomposed zone
				60.45 - Hem str approx. 45 dtca
				60.40-60.60 - Zone with 2% lim after py
				61.25 - 20mm qv with hem staining approx. 25 dtca
				62.32 - 15mm qcv approx. 35 dtca
				62.71-63.08 - Decomposed and highly bx zone, tr py
				64.22-64.90 - Zone with 5% lim after py
				65.20 - Large (20mm X 5mm) lim after py pseudomorph, some relict fresh py in centre
				65.70-67.30 - Decomposed and highly bx zone
				67.30-68.44 - mod sil, bx zone, hem str, qrtz str and tr lim after py
				68.44-68.67 - Decomposed and highly bx zone
				68.67-68.95 - Mod sil, bx og and qv, 1% py
				68.95-69.26 - Decomposed and highly bx zone
				69.26-70.92 - Mod sil, un-fol zone, 1% py
				69.34 - 40mm qv approx. 40 dtca
				70.82 - 90mm discon qv
				70.92-71.90 - Decomposed, highly bx zone
				71.54 - 4mm hem str approx., 40 dtca
				71.90-72.25 - mod sil, un-fol zone, with tr py
				72.20 - 1mm hem str approx. 35 dtca

				72.71 - Cluster of lim after py cubes
				72.97-74.45 - Decomposing partially bx zone
				74.10 - Fol approx. 45 dtca
74.45	81.1	BXOG	OG	Brown to pink brown decomposed bx, matrix supported, sub rounded clasts of og, zones of og throughout (large clasts?), contact at base approx. 45 dtca
				76.08-77.00 - Zone of decomposed og, poss large clast in bx
				77.30-78.75 - Zone light pink brown colour, decomposed bx
				78.75-78.85 - Mod-Str sil og zone, tr py, upper and lower contact approx., 45 dtca, poss large clast in bx
				80.08-80.20 - Clast of mod sil og
81.1	99.95	OG		Weak-mod sil og, high fol, occ decomposed bands, occ str sil bands, tr py, 2mm hem str, occ spec hem str, <1mm carb str
				81.76 - Fol approx. 30 dtca
				82.10-82.40 - Decomposed and rubble zone
				82.55-82.70 - High sil zone, with spec hem str and tr py
				82.80 - 10mm x 10mm cube of lim after py
				85.34-85.84 - Rubble zone
				86.20-86.42 - Decomposed zone
				86.70 - Spec hem str approx. 40 dtca
				86.92 - Fol approx. 35 dtca
				87.93 - 10mm qrtz and spec hem vein approx. 15 dtca, str sil zone either side of vein
				88.26-89.98 - Red staining to og
				89.36-89.50 - Str sil zone with irregular 15mm qv and spec hem
				89.50 onwards - Tr of fresh py
				89.30 and 89.69 - Light green, glassy mineral alt (possible epidote?)
				90.82-90.91 - Str sil zone
				90.91-91.92 - Well fol zone, fol @91.79 approx. 45 dtca
				92.54-92.76 - Str sil zone, with abundant (30%) spec hem str
				93.05-93.74 - Decomposed zone
				93.74-95.64 - Red hem stain on fracs
				94.08 - Fol approx. 40 dtca
				94.40-94.69 - Str sil zone with spec hem str
				94.59 - 10mm qv approx. 45 dtca
			QBX	96.22-96.55 - Band of qvbx, tr py, light brown and pink staining
				98.08 - Fol approx. 50 dtca
				98.40 - 15mm qrtz and spec hem vein approx. 60 dtca
				99.06-99.95 - Decomposed zone
				99.52 - Fol approx. 25 dtca
99.95	119.87	BXOG	OG	Decomposed-mod sil og, partially bx, with rubble zones of str sil og, tr py in mod sil zones
				100.50-102.17 - Rubble zone. Fragments of str sil og and sandy clay
				102.17-102.64 - Decomposed zone
				102.64-103.31 - Rubble zone. Fragments of str sil og and sandy clay
				104.70 - Fol approx. 35 dtca
				105.08 - Tr py

				105.13-106.62 - Decomposed zone
				106.08 - 2mm hem str approx. 35 dtca
				106.50 onwards - Dark red/maroon staining
				107.75-109.70 - Zone of un-bx weak sil og, highly fol, tr py
				108.49 - Fol approx. 45 dtca
				108.86 - 2mm hem str approx. 25 dtca
				110.02 - 110.85 - Mod sil zone, tr py
				110.78 - 70mm qv approx. 25 dtca
				111.59-112.93 - Decomposed zone, contact at base approx. 50 dtca
				112.97 - Fol approx. 55 dtca
				113.26-114.88 - Decomposed and highly bx zone
				115.82-117.91 - Decomposed zone
				117.91-118.56 - Mod sil zone with tr py
				118.56-119.12 - Decomposed zone
119.87	131.33	BXOG	OG	Decomposed bx, with sections of decomposed to mod sil og throughout,
				120.50 - 4mm hem str approx. 45 dtca
				120.58-121.04 - Mod sil zone, bx
				122.15-124.08 - Decomposed bx, matrix supported, sub rounded clasts
				124.97-126.69 - Zone with mod sil og, poorly fol, with dark red/maroon staining, approx. 40% rec as rubble/60% core, tr py
				125.76 - Fol approx. 70 dtca
				126.69-130.00 - Rubble zone with sections of mod sil og
				130.13 - Fol approx. 55 dtca
131.33	136.72	OG	BXOG	Light orange brown mod sil og, poor fol, some bx zones, 2% py throughout, some zones with up to 5% py, 25mm of grey fine mudstone at base contact approx. 55 dtca
				131.66-132.00 - Decomposed and bx zone
				132.59-132.67 - Weak chl alt
				133.05 - Gradual colour change to light grey
				134.11-134.87 - Zone with 5% py, some large (12mm x 5mm) crystals
				135.64-135.93 - Light orange brown smeared section with light grey mudstone rip up clast
				135.80 - Fol approx. 60 dtca
136.72	139.1	SHR		bx shear zone, black plasticine text fault gouge with matrix supported wacke clasts (some carb) throughout, sharp contact at top approx. 55 dtca
				137.22-137.44 - Large clast of mod sil wacke, with 1mm black str
139.1	144.28	W	S	Light grey coarse grained wacke, bx, locally sheared, local mod sil zones, sharp contact at base approx. 35 dtca
				140.10-140.72 - Dark grey sheared material
				141.56-142.36 - Dark grey sheared material
				143.18-143.37 - Black sheared material
				144.01-144.28 - Black sheared material
144.28	144.78	W	S	Light grey coarse grained wacke/sandstone, sub rounded grains
				144.28-144.38 - Mod sil zone
				144.78 - EOH

| Sample ID | From | To | Length | Rock Code 1 | Rock Code 2 | Description | Alteration Intensity (0, tr, w, m, s) | | | | | | Quartz (%) | | | Sulphide % | | | Lab codes | | Shipping information | | | | | Assays | | | | | |

| | | |

GOLDSTRIKE RESOURCES LTD.

Drill Hole	DDLS-17-09	**Property**	Lucky Strike	**Zone**	Monte Carlo
Easting	589523	**Northing**	7012928	**Elevation (m)**	545.000
Survey by	Clayton Jones	**Survey Method**	gps	**Date**	September 14, 2017

Final Coordinates (UTM NAD 83)

Easting	589523	***Northing***	7012928	***Elevation (m)***	545
Survey by	Clayton Jones	**Survey Method**	gps	**Date**	September 14, 2017

Summary

Depth (m)	142.65	**Azimuth**	180	**Dip**	-55
Core Size	HTW	**Casing (ft)**	40	**Logged By**	Clayton Jones

Drill Company	Kluane Drilling Ltd.	**Drill Rig**	KD 600-2
Drill Start Date	September 11, 2017	**Drill Comp Date**	September 14, 2017
Log Start Date	September 12, 2017	**Log Comp Date**	September 14, 2017
Final casing	40	**Core Location**	Monte Carlo Camp
Comments		**Claim #**	Au 92 (YC98692)

Samples

Sample Numbers	1876840 - 1876983		
Number	144	**Lab**	Bureau Veritas
Cut by	Sam Wigmore	**Date Shipped**	September 21, 2017

Down Hole Survey

Depth (m)	Measured Azm.	Corrected Azm.	Dip	Magnetic Field (nT)	Temperature
12.19	163.4	182.86	-56.34	57271	10.1
51.00	163.61	183.07	-56.65	56960	2.3
91.00	163.17	182.63	-56.34	56644	6.8
142.00	162.49	181.95	-56.85	56844	N.A.

From	To	Rock Code 1	Rock Code 2	Description (include rock header name from code): DDLS-17-09
0	4.62	OG		decomp og, brown sandy soft sections with rubble zones, bio rich
4.62	8.5	OG		weak to non sil coarse text og with abundant bio flakes up to 10 mm (porphyroblasts?), weak fol approx. 30 dtca, 1 - 10 mm red hem - cal stringers @ approx. 25 - 30 dtca not with fol, 2 - 20 mm qrtz vn with fol
				6.55 - 2 10 mm red hem - cal vnlets @ 40 dtca
				6.60 irregular 20 mm qrtz vn @ 25 - 30 dtca
				6.90 - 30 mm qrtz vn @ 25 - 30 dtca
				7.20 weak fol at 30 dtca
				7.72 - 5mm hem - cal str
				8.10 - 5mm hem cal str
8.5	11.48	OG		weak sil og, weak fol, broken frac core, tr cubic py up to 4mm
				9.81 - 10.05 mod sil zn with light beige color and 1% oxi cubic py
			CLBSH	10.53 - 11.16 - darker brown more mafic og, fine dark hb or bio ground mass, tr oxi py
				11.28 - 11.48 decomp og, sandy clay with sil clasts
11.48	24.45	OG		mod to strong sil og, light brown with weak fol, local zn of strong sil and qrtz vning with cubic ,blebby and vnlets of oxi py up to 10% locally, overall py @ 1 - 2 %, minor carb alt with mica cal str
				11.48 - 12.25 broken frac zn
				12.35 very weak fol @ approx. 40 dtca
				12.70 - 13.72 strong oxi py min @ 1 - 2 %
				13.50 - 10 cm zn of strong py min with large > 5mm cubic py clusters (10% over 10 cm zn), py spatially associated with 2 cm qrtz vn (no measurement possible, likely with fol)
				14.45 - 10 cm qrtz vn with 10 % cubic oxi py and oxi py str < 5mm
				15.74- 10 cm white to grey qrtz vn / sil zn with 1 -3 % cubic oxi py
				17.70 - 15 cm white to grey blue qrtz vn / sil zn, 40 dtca, 5% elongated py blebs same ori as qrtz vn (40 dtca)
				19.14 large cluster of large cubic py (1 - 8 mm)
				19.85 - 21.45 strong sil og, 2% oxi cubic py
				21.00 - 20 mm irregular qrtz vn @ 65 dtca, cubic oxi py within vn and at margins, py blebs up to 10 mm
				19.50 - 2 mm lim cal str with bleached sil margins and cubic py at margins, 30 dtca
				20.62 - 5 mm lim cal frac fill with abundant cubic py at margins, zn is strong sil
				21.45 - 22.20 fine text grey blue strong sil og, qrtz carb str, broken frac core, dark smeary qrtz str throughout with fine diss spec hem @ 2%, oxi cubic py @ 2%
				22.20 - 24.43 strong sil, fine text brown grey alt og, oxi cubic py @ 2%, fine diss and str of spec hem throughout, mod to strong carb alt with micro cal str
				23.29 - 10 mm irregular frac qrtz vn, approx. 30 dtca
				23.60 discon cal - lim str (beige) < 5mm @ 30 dtca,
24.45	31.25	OG		med to coarse text og, strong sil with no fol, irregular qrtz vning / stw, strong oxi py min (5%) with cubic and blebby (up to 35 X 20 mm) and 10 mm vning (vn are discontinues and don't cut core), slight bleaching with lighter beige and speckled with white soft clay mineral (albite? Or decomp calcite), 5 - 40 mm qrtz vn @ approx. 30 dtca, patchy diss spec hem throughout
				25.00 - large 15 mm oxi py bleb
				25.22 - qrtz, py, cal 5 mm str @ 30 - 35 dtca
				25.34 - 20 mm oxi py bleb
				25.44 - 80 mm X 10 mm X 10 mm py bleb / vn (discontinues)

				25.68 - 30 mm qrtz vn / sil zn with blebby py at margins
				27.19 irregular py vn 1 - 10 mm wide @ approx. 20 dtca
				27.64 (35 X 20 mm oxi py bleb), has little depth into core, flat sheet like mineralization?
				27.73 - abundant large py blebs
				29.32 - 29.60 strong albite / cal alt unit, abundant white soft mineral throughout, upper contact @ 35 dtca
				31.02 - 31.25 broken sandy rubble
31.25	33.78	QV	QVBX	light to dark grey, fractured qrtz with rubble zn with rounded washed pebbles (poor recovery), 1 % fresh cubic py
				33.00 - 33.53 qrtz rubble becomes darker in color
33.78	37.43	OG		vn/flt margin, strong sil og, fine text, light brown orange lim stained, strong carb alt, abundant micro cal str, patchy broken frac zn, tr - 1% cubic oxi py
				37.05 - 3 cm and 2 cm tan qrtz chalcedony vns @ 25 dtca , qrtz clasts within chalcedony vn (sub bx?) and are cross cut by vuggy cal str and lim str
37.43	38.84	OG		sandy decomp og and rubble zn
38.84	44.2	OG		strong sil og, weak to mod fol, bio define fol @ 40 dtca, local sheared zns with no fol, tr - 0.5 % py overall, local zn of increase qrtz and py min, lim cal str < 1mm, mod carb alt with micro cal str
				39.62 - 39.75 rounded qrtz and sil og pebbles
				40.25 qrtz vning with py blebs
				40.75 fol @ 40 dtca
				41.50 - 1 - 3 cm sil zn that cuts bio fol and contains cubic py, approx. 40 dtca (not with fol)
				43.00 - 43.24 dark grey purple weak sil zn?
				43.24 - 44.20 strong sil, increase qrtz and py min (sil / qrtz vn with fol @ 40 - 45 dtca) , cubic py @ 1% in discontinues lineation with fol / vn ori
44.2	46.75	OG		weaker sil og, qrtz rich, semi decomp with rough sandy texture, patchy cubic py min with local zn up to 2%
				44.20 - weak sil, semi decomp og, abundant qrtz vn with 1 -2 % cubic py < 5 mm , patchy drk qrtz vning
				45.62 - 45.72 sandy decomp og
				46.00 - soft smeary semi decomp weak sil og unit, blotchy appearance, tr py
46.75	55.24	OG	BXOG	mod to strong sil og, weak to mod fol, bio define fol @ 40 dtca, local sheared bx and strong sil zns with no fol , patchy strong py mineralization but tr - 0.5 % py overall, local zn of increase qrtz and py min, lim cal str < 1mm, mod carb alt with micro cal str
				52.15 - 52.37 strong sil zn with bluish grey color, tr py, fine diss spec hem, vuggy cal str stw
				50.60 - 12 cm sil zn with 1 cm qrtz vn, sil zn with fol @ 45 dtca, blebby py (< 5mm) @ 5%
				51.82 - 52.53 soft decomp sandy silt og, 5 cm dark purple staining at start of unit
				52.9 - large blebby cubic py in qrtz vn / sil zn
				54.10 - large elongated blebs of py (3mm X 25mm),
				54.52 - 5mm qrtz vn with fol @ 45 dtca, cubic py < 2 mm at margin and elongated with vn
				55.00 - large py blebs
55.24	55.81	QVBX	QV	qvbx at 45 dtca, strongly frac, jigsaw bx qrtz, cal filled micro frac throughout (stw), upper half is orange lim matrix with qrtz clasts, lower half is grey qrtz vn with a def offset 10 mm dark grey qrtz vn (also 45 dtca) cutting it, similar to main vn showing on surface in trench and vn seen in this hole (31.25 - 33.78), 0.5 % cubic fresh py (< 2mm)
55.81	70.29	OG	BXOG	mod to strong sil og, weak to mod fol, bio define fol @ 40 dtca, local sheared and strong sil zns with no fol , patchy strong py mineralization but tr - 0.5 % py overall, local zn of increase qrtz and py min, lim cal str < 1mm, mod carb alt with micro cal str
				58.30 - fol @ 25 dtca
				59.13 - 60.00 strong sil zn, no fol, lim orange stained, up to 4 cm irreg qrtz vn with blebby py, minor diss spec hem
				59.28 - qrtz vn with blebby py
				60.25 - wispy 1 -2 mm dark qrtz str with spec hem and 1 - 5 mm beige cal str, 0 dtca

				60.36 - 60.89 soft sub bx decomp og with qrtz vning,
				60.96 - 1 -3 mm cal - spec hem str @ 0 dtca
				62.10 cubic py < 2 mm, mod sil zn
				63.25 - 5 cm grey blue sil zn with spec hem
				64.00 - 69.66 mod to strong sil og, weak to no fol, wispy dark qrtz, brown cal lim str throughout core @ 0 - 10 dtca, tr fresh cubic py throughout,
				65.25 - wispy brown cal-lim-spec hem - qrtz vn at 5 dtca, tr cubic py
				66.8 wispy lim - cal - dark qrtz vn with fresh cubic py
				67.45 wispy lim - cal dark qrtz str length of 50 cm core, tr cubic py
				68.80 crenulated (folded) frac qrtz vn
			QV	69.66 - 70.29 beige qrtz vn, 5% bio and mica speckled, frac with cal str, 1 mm spec hem str 5 dtca,
				69.72 - 69-82 weak sil og host rock
70.29	84.8	OG	BXOG	similar to above unit, but more broken frac zns and semi decomp sections, transition zn into sheared decomp / bx og unit , weaker sil with coarser text surface on core, weak sil, weak to mod fol, tr py, patchy sil zns
				71.60 - 10 mm orange cal lim vnlet
				71.93 - fol @ 45 dtca
				73.30 cubic py , 10 cm sil zn with qrtz vn,
				74.30 - 74.50 dark qrtz, spec hem, strong sil zn in decomps weak sil zn, minor cubic py,
				75.10 - 75.50 strong sil zn with dark grey blue spec hem, tr py
				77.72 - 78.85 - beige qrtz rich semi decomp , sandy text og, tr cubic py
				79.07 - 79.35 irreg 2 - 4 cm qrtz vn @ approx. 30 dtca, dark qrtz clasts (sub bx?)
				82.00 - 85.00 - 0.5 % diss cubic py throughout, weak sil og but good qrtz vn/stw
84.8	96.76	BXOG		sheared soft decomp og, bx locally, blotchy swirly appearance, orangey brown, purple, gradational contact (slowly becomes less competent and decomp and sheared), occ cubic and blebby py overall tr - 0.25%, local strong sil clasts / zn within soft sandy decomp units
				87 - 87.40 light color beige with oxi py blebs
				88.30 - 10 cm dark purple in decomp bx og
				90 - 91 lighter beige color with blue spec hem diss, less decomp with sugary text and swirly qrtz vn along core axis, 10 x 20 mm fresh py bleb @ 90.02
				91.03 - 2 mm X 5 mm py bleb in 10 cm sil clasts
				91.27 - blebby py (5 mm)
				91.5 strong sil blue grey clasts
				93 - 5 cm blue grey sil zn, spec hem, tr py
				93.36 cubic py
				94.77 - strong bx with qrtz clasts in beige yellow sandy matrix, approx. 20 dtca upper contact, approx. 20 cm wide zn
				95 crumbly frac qrtz clasts / vn in smeary bx, with tr cubic py
				96.25 - strong sil blue grey zn, 15 cm wide,
96.76	100.2	OG		weak sil og, mod fol, bio define @ 45 dtca, upper and lower bx contact @ approx. 25 dtca,
100.2	114.3	BXOG		sheared soft decomp og, bx with blotchy swirly appearance, orangey brown, purple, occ cubic and blebby py overall tr overall, local strong sil clasts / zn within soft sandy decomp units
				100.53 - 100.83 grey blue qrtz rich og, diss spec hem
				103.60 - reddish brown mineral bleb (garnet?)
				103.30 - 104.10 lighter beige color, bx og with patchy sil clasts, sharp lower bx contact (clast supported qrtz og clasts bx, < 5mm clasts), 25 dtca,

				106.75 - 3 cm soft clay dark grey vn? 25 dtca
				107.02 - 107.20 strong sil blue grey zn, spec hem, tr py
				108.05 light brown soft vn with qrtz clast with light grey soft rined? Approx. 30 - 50 dtca, 10 cm wide
				108.20 - 109.73 very coarse text semi decomp og, minor local bx/shear, darker brown purple
				109.73 - 110.94 very coarse text decomp og, abundant dark brown qrtz
				110.94 - 113.40 sheared / bx purple marron og,
				113.40 - 114.30 light brown to dark brown smeary bx, strong sil (bluish grey) clast < 1mm - 20 cm,
				113.60 - 113.81 large strong sil clast (blueish grey),
				114.40 - 118.30 coarse text, weakly fol, weakly sheared og, swirly foliation, semi decomp
				117.35 - 118.30 very broken with rubble zn
			QV	118.30 - 119.80 strongly frac white to beige qrtz vn, tr - 0,5 % blebby py
				119.80 - 121.29 marron coarse text og, sub bx with white crumbly qrtz vn
				121.10 - 7 cm wide white crumbly qrtz vn @ 35 dtca
				121.20 - 121.65 - light grey beige strong sil og, no fol,
121.65	128	BXOG	OG	bleached coarse text grey to light marron og, very frac crumbly unit and semi decomp with sandy rubble zns, abundant qrtz, 0.5 - 1 % py diss throughout, weak fol occ, approx. 35 dtca, 1 -3 cm qrtz vn with fol, soft dark grey patches and vnlets, occ red staining and mineral (garnet?)
				123.22 large 15mm py bleb
				123.05 fine diss py
				124.09 - 124.97 sandy grey gravel
				127.80 fine diss py patch
				125.50 - patchy fine diss py
128	133.17	BXOG	OG	softer stronger decomp bleached / alt bx unit, beige to pistachio (greenish) sandy clay matrix with sil og clasts and qrtz clasts throughout, occ red garnet clasts / red staining and 2 % py blebs and str in sil clasts
				128.45 good garnet min with 5mm garnet mineral
				129 - 132 strong py min @ 2% with large blebs up to 3 mm
				129.40 - 30 X 50 mm sil clasts with intense fresh py stw / frac fill
				131.10 5 cm light green stained zn with red garnets min within it
				131.35 large 10 mm y bleb
				132 - 133.17 fine text, soft clay unit , beige with patchy wispy py str (discontinues) @ 1 - 2 % , 1 cm massive grey clay bands
				132.59 - 132.75 grey clay band with sil grey qrtz clast throughout, tr py, strong carb alt, approx. 50 dtca
				132.92 - 3 cm black plasticine shear gouge
			CLAY	132.30 small lonnie size blebs of wispy py
133.17	134.6	SHR		black plasticine shear gouge with wacke clasts that are carb alt (react to hcl), clast up to 25 cm, upper lower contact approx. 45 dtca
134.6	142.65	W		sheared light grey (bleached) qrtz rich coarse grained wacke interbedded / sheared with dark grey to black fine grain siltstone with abundant fine mica throughout
			W	134.60 - 135.64 coarse text , semi bx light grey (bleached) qrtz rich wacke , large angular and rounded clasts up to 15mm
			BX	135.64 - 135.91 bx plasticine shear gouge
			W	135.91- 136.567 coarse wacke
			S	136.56 - 137.57 dark grey to black siltstone shear
			W	137.57 138.38 - coarse wacke
			S	138.38 - 139.15 dark grey siltstone

			W	139.15 - 140.21 medium text wacke
			S	140.21 - 141.05 sheared smeary grey siltstone
			W	141.05 - 141.63 coarse wacke
			S	141.63 - 142.65 sheared siltstone, smeary dark light grey

| | | |

APPENDIX 4

ORIGINAL ASSAY CERTIFICATES

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Submitted By: Daithi Mac Gerailt
Receiving Lab: Canada-Whitehorse
Received: August 22, 2017
Report Date: October 16, 2017
Page: 1 of 5

CERTIFICATE OF ANALYSIS WHI17000658.1

CLIENT JOB INFORMATION

Project: Lucky Strike
Shipment ID: DDLS-17-01
P.O. Number
Number of Samples: 97

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	93	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	4	Sort, label and box pulps			WHI
FA350-Au	97	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	97	Environmental disposal charge-Fire assay lead waste			VAN
AQ201	97	1:1:1 Aqua Regia digestion ICP-MS analysis	15	Completed	VAN
SHP01	97	Per sample shipping charges for branch shipments			VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources Ltd.
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3
Canada

CC:

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000658.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876001	Drill Core	2.17	47	1.4	22.7	2.9	54	0.7	6.1	17.3	899	4.57	4.3	38.2	1.8	48	0.2	1.2	<0.1	77	3.31
1876002	Drill Core	1.68	363	1.1	83.4	2.9	63	0.7	9.0	16.7	715	5.76	3.6	385.1	1.3	31	0.2	1.1	<0.1	138	2.76
1876003	Drill Core	1.84	603	1.7	63.5	2.8	65	1.0	7.2	23.4	1657	6.13	4.1	584.7	2.2	32	0.4	0.7	<0.1	102	3.20
1876004	Drill Core	2.22	570	1.1	54.5	3.0	67	0.5	10.1	19.9	1431	6.11	4.7	540.7	1.3	48	0.4	0.5	<0.1	104	2.92
1876005	Drill Core	2.45	256	1.7	40.9	3.6	98	0.6	14.6	23.0	1501	6.97	4.6	264.4	1.1	51	0.5	0.6	<0.1	126	3.66
1876006	Drill Core	2.36	420	1.0	29.7	3.7	48	1.1	7.1	15.7	958	4.57	4.4	439.0	2.1	36	0.5	0.6	<0.1	77	3.20
1876007	Drill Core	1.65	874	0.6	95.9	6.1	37	1.9	6.6	12.4	934	4.11	4.8	754.3	1.4	30	0.8	0.6	<0.1	81	1.90
1876008	Drill Core	0.66	3334	1.1	26.3	3.0	30	3.7	8.2	13.5	1307	3.43	4.5	4779.5	0.8	29	1.1	0.5	<0.1	80	0.30
1876009	Drill Core	0.56	3121	31.4	32.4	43.6	28	4.8	7.5	8.9	448	1.99	11.4	3555.2	0.4	31	0.3	1.3	0.2	33	1.54
1876010	Drill Core	3.32	392	7.4	19.0	4.6	63	0.2	13.2	17.7	1088	3.61	13.9	277.9	0.8	67	0.5	0.8	<0.1	62	6.54
1876011	Drill Core	0.61	3270	12.6	6.7	24.3	43	9.7	10.7	15.8	839	3.07	5.2	3386.8	0.5	60	0.4	0.4	0.1	50	5.93
1876012	Drill Core	1.03	401	3.8	6.7	5.1	61	0.1	14.6	20.2	1194	3.71	4.9	315.9	0.5	102	0.4	0.3	<0.1	85	9.53
1876013	Drill Core	1.72	8	2.3	10.2	3.7	66	<0.1	12.0	21.7	1136	4.14	3.2	4.5	0.9	64	0.1	0.7	<0.1	146	4.78
1876014	Drill Core	2.14	39	3.2	3.2	3.7	60	<0.1	8.4	14.9	758	2.89	2.2	179.5	2.6	99	0.2	0.5	<0.1	70	4.81
1876015	Drill Core	2.65	146	3.0	5.2	8.0	102	0.6	15.1	28.7	1552	4.96	3.6	96.8	1.8	118	0.2	3.2	<0.1	228	7.15
1876016	Drill Core	1.29	139	3.3	11.2	2.6	36	1.3	8.2	9.1	500	1.96	2.5	178.6	3.3	42	0.1	0.2	<0.1	33	3.15
1876017	Drill Core	1.05	28	2.5	29.9	1.9	52	<0.1	10.3	12.3	686	3.25	1.3	18.7	1.9	47	0.1	0.2	<0.1	75	2.47
1876018	Drill Core	1.35	1322	12.1	41.6	3.1	31	0.6	7.0	9.4	452	2.15	2.6	515.8	1.7	35	0.2	0.3	<0.1	35	2.43
1876019	Drill Core	2.52	198	9.2	60.8	2.8	63	0.2	14.7	19.4	853	4.12	2.7	179.6	2.0	46	0.2	0.2	<0.1	92	3.96
1876020	Drill Core	2.54	359	10.9	30.6	3.6	31	1.1	5.7	7.8	558	2.01	16.4	351.4	3.1	49	0.2	0.6	<0.1	29	2.55
1876021	Drill Core	4.41	177	3.8	16.1	1.9	29	0.7	3.0	7.4	477	2.19	2.7	249.7	2.2	35	<0.1	0.2	<0.1	37	2.48
1876022	Drill Core	2.26	616	8.0	13.2	1.9	43	1.5	4.7	9.5	552	2.54	1.7	491.4	3.0	34	<0.1	0.2	<0.1	45	1.86
1876023	Drill Core	2.11	85	16.9	14.2	2.3	42	0.4	3.6	9.0	746	2.76	1.2	48.1	2.2	30	0.2	0.2	<0.1	37	3.56
1876024	Drill Core	2.52	315	9.3	40.1	2.2	40	1.1	3.7	8.4	721	2.67	1.7	422.2	2.5	34	0.2	0.3	<0.1	37	2.84
1876025	Drill Core	3.14	189	8.9	15.4	1.8	26	0.5	2.6	8.7	580	1.86	2.7	102.5	3.5	26	0.2	0.4	<0.1	32	1.69
1876026	Drill Core	2.12	25	5.9	7.9	1.9	34	0.2	3.7	8.1	578	2.32	1.6	24.2	2.9	26	0.1	0.3	<0.1	43	2.06
1876027	Drill Core	2.51	25	3.5	14.5	3.2	57	<0.1	2.3	6.3	516	2.12	3.2	17.6	1.8	35	0.1	1.5	<0.1	37	3.18
1876028	Drill Core	1.58	658	3.9	26.1	2.9	41	1.4	4.1	13.1	1270	3.29	1.3	575.4	3.0	56	0.4	<0.1	<0.1	33	3.61
1876029	Drill Core	2.70	158	3.6	25.8	3.2	43	0.5	3.1	9.7	714	2.74	1.7	129.0	1.8	60	0.2	0.3	<0.1	50	3.60
1876030	Drill Core	2.86	239	2.4	21.8	1.8	34	0.5	3.1	9.0	444	2.54	1.7	224.5	1.8	29	0.1	0.2	<0.1	45	1.53

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000658.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876001	Drill Core	0.075	7	7	0.54	145	0.008	9	0.80	0.034	0.37	0.7	0.02	14.4	0.1	<0.05	2	<0.5	<0.2
1876002	Drill Core	0.116	5	7	0.86	464	0.071	9	1.71	0.013	1.11	0.2	0.04	20.5	0.4	<0.05	6	<0.5	0.3
1876003	Drill Core	0.112	8	14	0.49	496	0.039	5	1.06	0.023	0.64	0.4	0.02	24.8	0.2	<0.05	4	<0.5	0.4
1876004	Drill Core	0.102	9	14	0.37	291	0.018	5	0.82	0.052	0.37	<0.1	0.04	22.8	0.2	<0.05	3	<0.5	<0.2
1876005	Drill Core	0.075	9	15	0.65	275	0.034	4	1.01	0.035	0.53	0.2	0.02	27.8	0.2	<0.05	5	<0.5	<0.2
1876006	Drill Core	0.063	9	11	0.35	213	0.013	6	0.84	0.032	0.32	0.5	0.05	17.9	0.1	<0.05	3	<0.5	0.5
1876007	Drill Core	0.060	8	14	0.21	226	0.007	4	0.66	0.042	0.15	<0.1	0.18	23.4	<0.1	<0.05	2	<0.5	1.3
1876008	Drill Core	0.052	5	14	0.23	269	<0.001	4	0.62	0.036	0.11	1.0	0.44	13.4	<0.1	<0.05	1	<0.5	3.0
1876009	Drill Core	0.009	2	6	0.26	614	0.002	2	0.27	0.008	0.05	0.7	0.14	7.6	<0.1	<0.05	<1	<0.5	1.6
1876010	Drill Core	0.004	3	22	1.87	109	<0.001	2	0.68	0.007	0.10	<0.1	0.06	19.8	<0.1	<0.05	2	<0.5	0.2
1876011	Drill Core	0.004	2	17	1.41	309	<0.001	2	0.40	0.007	0.09	0.4	0.19	14.6	<0.1	<0.05	<1	<0.5	3.9
1876012	Drill Core	0.004	2	43	2.69	107	0.002	4	0.68	0.007	0.23	<0.1	0.01	28.1	<0.1	<0.05	2	<0.5	<0.2
1876013	Drill Core	0.017	3	31	2.06	130	0.017	7	1.10	0.023	0.43	<0.1	<0.01	28.0	0.2	<0.05	4	<0.5	<0.2
1876014	Drill Core	0.028	5	20	1.88	95	0.002	2	0.46	0.068	0.09	<0.1	<0.01	14.0	<0.1	<0.05	1	<0.5	<0.2
1876015	Drill Core	0.018	3	125	3.01	195	0.018	6	0.90	0.015	0.43	0.3	0.02	43.4	0.2	<0.05	6	<0.5	<0.2
1876016	Drill Core	0.010	5	9	0.84	62	0.001	2	0.76	0.022	0.10	2.2	0.01	6.1	<0.1	<0.05	2	<0.5	<0.2
1876017	Drill Core	0.020	5	6	1.06	85	0.017	5	0.84	0.029	0.37	<0.1	<0.01	13.1	0.1	<0.05	3	<0.5	<0.2
1876018	Drill Core	0.013	5	4	0.71	72	0.003	2	0.66	0.026	0.17	0.1	0.03	7.9	<0.1	<0.05	1	<0.5	0.4
1876019	Drill Core	0.033	3	5	1.18	183	0.023	6	1.30	0.013	0.62	<0.1	0.01	15.5	0.1	<0.05	4	<0.5	<0.2
1876020	Drill Core	0.014	8	4	0.76	152	0.002	3	0.80	0.005	0.12	0.3	0.04	6.9	<0.1	<0.05	2	<0.5	0.5
1876021	Drill Core	0.018	5	3	0.68	307	0.015	5	0.82	0.004	0.35	1.1	0.04	6.6	0.1	<0.05	2	<0.5	0.3
1876022	Drill Core	0.041	5	4	0.73	347	0.030	6	1.15	0.004	0.54	0.4	0.04	7.7	0.2	<0.05	3	<0.5	0.7
1876023	Drill Core	0.037	7	2	0.73	216	0.011	4	0.70	0.003	0.33	0.3	0.01	7.6	<0.1	<0.05	2	<0.5	<0.2
1876024	Drill Core	0.030	6	2	0.72	166	0.008	6	0.88	0.003	0.26	0.3	0.02	8.3	<0.1	<0.05	2	<0.5	0.9
1876025	Drill Core	0.034	7	2	0.54	162	0.008	4	0.64	0.003	0.23	0.2	0.03	7.8	<0.1	<0.05	1	<0.5	<0.2
1876026	Drill Core	0.036	7	3	0.65	212	0.008	6	0.85	0.003	0.32	<0.1	0.02	8.4	<0.1	<0.05	2	<0.5	<0.2
1876027	Drill Core	0.022	6	2	0.59	1021	0.004	5	0.63	0.003	0.21	0.1	0.01	7.1	<0.1	<0.05	1	<0.5	<0.2
1876028	Drill Core	0.041	9	2	0.72	1761	0.002	2	0.61	0.019	0.11	0.1	0.02	9.3	<0.1	<0.05	1	<0.5	0.8
1876029	Drill Core	0.032	5	2	0.86	1098	0.011	7	0.86	0.005	0.33	0.4	0.05	10.0	<0.1	<0.05	2	<0.5	0.3
1876030	Drill Core	0.035	2	3	0.63	752	0.034	6	1.05	0.007	0.53	0.2	0.07	10.6	<0.1	<0.05	2	<0.5	0.4

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000658.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876031	Drill Core	1.82	237	3.4	9.6	2.4	31	0.4	3.1	7.9	518	2.16	1.3	193.1	1.5	38	0.2	0.3	<0.1	39	2.45
1876032	Drill Core	2.60	555	7.5	16.1	1.7	23	0.7	2.6	4.5	381	1.54	0.9	571.4	1.9	53	0.3	0.1	<0.1	14	2.18
1876033	Drill Core	1.93	57	11.1	14.7	2.7	26	0.8	4.0	8.4	662	2.24	2.2	59.8	2.0	27	0.1	0.1	<0.1	36	1.76
1876034	Drill Core	1.50	14	3.9	24.6	4.1	55	0.4	9.1	16.2	817	4.01	1.0	13.0	1.7	60	0.2	0.1	<0.1	122	3.04
1876035	Rock Pulp	0.08	5	7.7	50.4	2.8	48	<0.1	33.7	9.6	476	3.08	4.9	2.0	1.1	57	<0.1	0.5	<0.1	68	0.99
1876036	Rock Pulp	0.08	6454	1.6	15.3	23.1	61	0.2	13.4	1.5	941	0.52	4148.4	6416.8	1.4	199	0.6	32.6	0.4	19	24.24
1876037	Drill Core	3.36	6	1.3	9.0	1.5	18	<0.1	2.1	5.7	857	2.21	1.5	7.2	2.4	70	0.4	<0.1	<0.1	41	2.40
1876038	Drill Core	1.68	14	2.3	6.1	2.8	21	<0.1	2.7	7.4	1120	2.39	1.3	11.3	2.8	68	0.6	<0.1	<0.1	39	2.41
1876039	Drill Core	0.80	52	1.9	24.3	2.2	24	<0.1	3.0	9.0	747	1.50	1.8	37.0	0.7	48	0.1	<0.1	<0.1	34	8.59
1876040	Drill Core	3.30	19	0.8	16.6	2.4	39	<0.1	6.4	10.4	596	2.66	1.8	3.6	2.1	73	<0.1	0.1	<0.1	47	3.20
1876041	Drill Core	2.92	<2	0.4	46.4	2.1	46	<0.1	4.1	11.1	705	3.20	2.2	3.1	1.5	69	<0.1	0.1	<0.1	58	3.72
1876042	Drill Core	3.10	<2	0.9	42.4	2.4	46	<0.1	4.6	11.2	634	3.09	2.5	1.8	1.0	63	<0.1	0.2	<0.1	55	2.87
1876043	Drill Core	3.47	21	1.8	48.0	2.3	43	0.1	3.6	10.7	714	3.06	1.6	18.1	0.9	70	<0.1	0.1	<0.1	61	3.19
1876044	Drill Core	0.83	17	0.6	14.7	1.5	23	<0.1	1.8	4.3	498	1.63	0.8	17.7	0.5	93	<0.1	<0.1	<0.1	33	3.29
1876045	Drill Core	1.86	2	0.7	31.9	2.0	31	0.2	3.5	7.1	407	1.94	1.4	2.7	2.9	37	<0.1	0.1	<0.1	37	2.06
1876046	Drill Core	3.62	36	0.9	30.5	2.5	43	0.2	3.7	9.7	540	2.86	2.5	34.0	1.9	51	<0.1	0.2	<0.1	56	2.46
1876047	Drill Core	2.36	6	5.5	29.5	2.9	45	<0.1	3.0	9.4	709	2.87	3.8	3.7	2.0	81	<0.1	<0.1	<0.1	63	3.72
1876048	Drill Core	1.22	2	8.2	17.9	1.8	53	0.1	3.7	10.8	571	2.91	1.6	2.1	2.3	73	<0.1	<0.1	<0.1	61	2.81
1876049	Drill Core	1.14	6	2.2	9.6	1.9	43	<0.1	2.8	8.5	716	2.53	2.0	5.7	3.5	66	<0.1	<0.1	<0.1	49	3.64
1876050	Drill Core	1.40	<2	1.2	60.5	2.1	44	<0.1	4.8	11.4	689	3.07	1.9	<0.5	0.9	69	<0.1	0.1	<0.1	59	3.45
1876051	Drill Core	2.88	<2	0.5	50.3	2.1	46	<0.1	5.3	11.5	537	3.05	2.0	0.9	1.4	42	<0.1	0.2	<0.1	62	2.19
1876052	Drill Core	2.95	8	0.5	45.7	1.9	43	<0.1	4.9	11.2	765	3.05	2.2	2.8	1.1	70	<0.1	<0.1	<0.1	65	3.90
1876053	Drill Core	2.67	2	0.5	48.2	2.8	46	<0.1	4.6	12.2	773	3.49	4.4	2.5	1.5	60	<0.1	0.3	<0.1	68	4.16
1876054	Drill Core	2.98	3	0.6	45.6	2.5	41	<0.1	3.1	9.3	576	2.91	2.6	2.3	1.5	55	<0.1	0.1	<0.1	62	3.02
1876055	Drill Core	4.08	<2	1.0	26.0	2.1	38	<0.1	3.4	7.4	556	2.49	2.1	0.9	1.1	53	<0.1	<0.1	<0.1	46	3.82
1876056	Drill Core	3.66	8	1.1	33.3	2.1	41	<0.1	3.1	10.5	603	3.07	1.8	7.6	1.5	42	<0.1	0.1	<0.1	62	2.64
1876057	Drill Core	2.55	217	1.0	35.8	2.2	37	0.6	3.4	8.8	787	3.05	1.4	278.3	1.6	54	0.3	0.1	<0.1	65	2.76
1876058	Drill Core	2.05	344	1.3	47.7	3.7	47	1.0	3.8	12.5	727	3.06	12.2	468.4	1.4	80	0.2	0.2	<0.1	60	3.54
1876059	Drill Core	0.67	28	1.4	25.0	4.3	43	0.1	3.3	11.7	715	2.99	12.7	28.0	1.9	76	0.2	0.3	<0.1	57	3.87
1876060	Drill Core	2.48	17	1.1	49.4	2.2	46	<0.1	4.0	13.0	897	3.33	3.2	10.8	1.1	26	0.1	0.3	<0.1	59	2.32

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000658.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876031	Drill Core	0.031	5	3	0.68	1547	0.009	5	0.85	0.005	0.28	0.2	0.09	8.1	<0.1	<0.05	2	<0.5	0.3
1876032	Drill Core	0.015	5	4	0.56	885	<0.001	3	0.42	0.005	0.15	0.5	0.01	7.1	<0.1	<0.05	<1	<0.5	0.5
1876033	Drill Core	0.026	6	22	0.54	235	0.005	4	0.77	0.016	0.26	1.2	0.02	8.7	<0.1	<0.05	2	<0.5	0.3
1876034	Drill Core	0.051	7	23	0.70	152	0.010	6	0.75	0.035	0.27	0.5	0.02	18.1	<0.1	<0.05	3	<0.5	<0.2
1876035	Rock Pulp	0.051	5	39	0.80	114	0.137	7	1.77	0.129	0.17	0.4	0.02	5.0	<0.1	<0.05	5	<0.5	<0.2
1876036	Rock Pulp	0.017	7	24	6.22	44	0.001	5	0.25	0.013	0.06	4.2	4.42	2.1	16.7	<0.05	<1	0.7	<0.2
1876037	Drill Core	0.030	9	2	0.62	809	0.016	4	0.42	0.068	0.15	0.3	0.01	8.4	<0.1	<0.05	<1	<0.5	<0.2
1876038	Drill Core	0.032	11	2	0.69	217	0.010	5	0.33	0.055	0.12	0.2	0.02	7.9	<0.1	<0.05	<1	<0.5	<0.2
1876039	Drill Core	0.022	2	3	0.81	271	<0.001	4	1.58	0.012	0.43	<0.1	0.01	8.5	<0.1	<0.05	3	<0.5	<0.2
1876040	Drill Core	0.070	7	20	0.71	179	0.007	5	0.85	0.019	0.35	<0.1	<0.01	10.2	<0.1	<0.05	2	<0.5	<0.2
1876041	Drill Core	0.050	6	4	0.71	432	0.017	7	1.19	0.031	0.45	<0.1	<0.01	14.5	<0.1	<0.05	3	<0.5	<0.2
1876042	Drill Core	0.043	3	4	0.46	158	0.007	6	0.95	0.020	0.32	<0.1	0.01	17.2	<0.1	<0.05	3	<0.5	<0.2
1876043	Drill Core	0.049	3	4	0.54	181	0.012	6	0.96	0.030	0.34	0.1	0.03	18.0	<0.1	<0.05	3	<0.5	<0.2
1876044	Drill Core	0.024	3	4	0.36	473	0.013	3	0.43	0.049	0.16	0.1	0.01	7.1	<0.1	<0.05	1	<0.5	<0.2
1876045	Drill Core	0.036	3	3	0.36	98	0.006	6	0.78	0.039	0.24	0.4	0.02	11.1	<0.1	<0.05	2	<0.5	<0.2
1876046	Drill Core	0.046	4	4	0.45	188	0.010	6	0.82	0.036	0.28	<0.1	0.02	17.2	<0.1	<0.05	3	<0.5	<0.2
1876047	Drill Core	0.044	6	4	0.75	324	0.013	6	0.65	0.047	0.17	<0.1	0.02	18.2	<0.1	<0.05	2	<0.5	<0.2
1876048	Drill Core	0.045	5	4	0.48	150	0.016	6	0.75	0.030	0.26	0.4	0.02	19.8	<0.1	<0.05	2	<0.5	<0.2
1876049	Drill Core	0.039	5	3	0.70	127	0.005	4	0.64	0.039	0.20	0.1	0.04	11.7	<0.1	<0.05	2	<0.5	<0.2
1876050	Drill Core	0.047	3	4	0.46	127	0.005	6	0.80	0.023	0.27	<0.1	<0.01	17.4	<0.1	<0.05	2	<0.5	<0.2
1876051	Drill Core	0.051	4	9	0.49	658	0.016	6	1.01	0.030	0.36	<0.1	<0.01	19.3	<0.1	<0.05	3	<0.5	<0.2
1876052	Drill Core	0.049	4	10	0.57	823	0.014	8	1.00	0.027	0.33	0.1	0.01	19.3	<0.1	<0.05	3	<0.5	<0.2
1876053	Drill Core	0.053	4	4	0.81	440	0.005	9	0.88	0.025	0.26	<0.1	<0.01	16.6	<0.1	<0.05	2	<0.5	<0.2
1876054	Drill Core	0.048	3	4	0.66	1334	0.006	6	0.79	0.030	0.23	<0.1	0.02	17.5	<0.1	<0.05	2	<0.5	<0.2
1876055	Drill Core	0.036	3	3	0.74	953	0.001	4	0.79	0.010	0.23	<0.1	0.03	16.9	<0.1	<0.05	2	<0.5	<0.2
1876056	Drill Core	0.055	4	4	0.50	141	0.013	7	0.90	0.026	0.36	<0.1	0.21	17.9	0.1	<0.05	3	<0.5	<0.2
1876057	Drill Core	0.051	7	5	0.77	77	0.015	4	0.64	0.044	0.24	0.1	0.51	15.8	<0.1	<0.05	2	<0.5	0.3
1876058	Drill Core	0.040	5	3	0.69	98	0.003	4	0.70	0.032	0.21	<0.1	2.69	17.0	<0.1	<0.05	2	<0.5	0.7
1876059	Drill Core	0.044	7	3	0.71	85	0.001	3	0.49	0.039	0.13	<0.1	1.84	12.9	<0.1	<0.05	1	<0.5	<0.2
1876060	Drill Core	0.046	2	4	0.61	340	0.002	5	0.94	0.010	0.29	<0.1	0.21	20.5	0.2	<0.05	3	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000658.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876061	Drill Core	2.91	486	0.7	27.8	3.1	40	<0.1	4.1	10.3	730	2.91	14.1	360.1	0.6	40	<0.1	1.1	<0.1	60	3.30
1876062	Drill Core	3.41	49	2.4	29.0	2.5	47	<0.1	4.5	11.0	862	2.98	15.6	46.8	1.0	35	0.1	1.0	<0.1	54	3.79
1876063	Drill Core	2.48	32	3.0	9.6	2.2	50	<0.1	5.3	11.5	960	3.62	5.9	39.3	1.5	43	<0.1	0.5	<0.1	69	2.78
1876064	Drill Core	2.59	<2	0.7	2.9	1.0	32	<0.1	3.5	7.9	1028	3.08	6.5	2.0	1.6	19	<0.1	0.2	<0.1	85	2.45
1876065	Drill Core	2.26	<2	0.9	39.0	1.6	53	<0.1	4.5	12.5	744	3.60	4.2	1.6	1.2	25	<0.1	0.5	<0.1	78	2.34
1876066	Drill Core	2.92	<2	0.8	43.9	1.6	52	<0.1	4.9	12.1	698	3.62	3.6	0.8	1.4	44	<0.1	0.3	<0.1	72	2.59
1876067	Drill Core	2.76	2	0.4	20.6	1.6	44	<0.1	3.9	11.1	616	3.19	4.7	1.7	1.5	22	<0.1	0.3	<0.1	68	2.24
1876068	Drill Core	3.47	9	0.3	34.4	1.8	50	<0.1	4.6	11.4	635	3.62	4.3	5.0	1.6	21	<0.1	0.4	<0.1	75	2.29
1876069	Drill Core	2.99	3	0.3	51.0	3.0	59	<0.1	5.0	12.5	816	3.59	7.8	4.7	1.0	32	<0.1	0.9	<0.1	69	3.69
1876070	Rock Pulp	0.08	6	8.0	47.7	2.7	45	<0.1	29.9	9.3	463	3.04	6.0	<0.5	1.3	55	<0.1	0.4	<0.1	68	1.01
1876071	Rock Pulp	0.10	449	40.4	>10000	1011.3	>10000	60.5	16.7	3.1	680	12.08	140.6	589.1	<0.1	37	271.4	34.7	11.3	10	1.59
1876072	Drill Core	2.59	<2	0.3	35.9	1.7	54	<0.1	3.4	11.1	647	3.22	4.4	1.9	1.3	25	<0.1	0.3	<0.1	66	2.30
1876073	Drill Core	3.34	12	0.3	42.8	1.3	54	<0.1	3.6	12.5	834	3.64	3.0	11.3	1.2	29	<0.1	0.2	<0.1	78	3.30
1876074	Drill Core	5.15	10	0.9	44.3	2.5	59	0.6	5.6	13.0	872	3.53	21.3	11.8	1.2	49	0.1	0.6	<0.1	60	4.07
1876075	Drill Core	5.12	38	25.3	38.6	2.8	76	<0.1	13.0	17.7	950	3.94	10.4	39.9	1.2	60	0.1	1.2	<0.1	71	4.94
1876076	Drill Core	1.34	5	22.9	12.8	2.5	55	<0.1	14.0	17.3	938	4.19	13.4	4.5	0.2	56	0.1	1.1	<0.1	113	5.14
1876077	Drill Core	3.16	<2	3.0	12.4	3.9	59	<0.1	25.0	22.3	1359	4.46	7.1	2.1	1.5	108	<0.1	0.2	<0.1	98	6.23
1876078	Drill Core	2.88	<2	2.5	17.9	2.3	57	<0.1	15.1	19.9	943	4.19	23.0	1.7	1.4	63	<0.1	0.4	<0.1	85	3.37
1876079	Drill Core	2.64	11	1.8	33.1	2.3	61	0.1	11.3	18.3	672	4.19	26.9	12.3	0.5	44	0.1	1.1	<0.1	73	2.03
1876080	Drill Core	1.28	85	0.3	32.3	1.7	33	0.4	3.4	8.3	587	2.45	7.2	88.0	1.2	34	0.2	0.5	<0.1	47	2.10
1876081	Drill Core	2.60	12	1.2	27.7	1.4	36	<0.1	3.0	8.0	574	2.63	2.3	16.0	1.5	35	<0.1	0.2	<0.1	45	2.17
1876082	Drill Core	2.52	6	2.7	28.6	1.9	33	0.2	4.6	7.7	541	2.45	4.2	3.1	1.0	42	0.1	0.6	<0.1	35	2.25
1876083	Drill Core	2.16	10	1.2	24.9	1.9	42	0.1	4.8	8.3	573	2.73	2.7	6.9	1.1	34	<0.1	0.1	<0.1	37	2.09
1876084	Drill Core	3.00	4	1.4	31.3	8.0	62	<0.1	11.6	14.7	1132	4.02	3.7	1.9	1.3	84	<0.1	<0.1	<0.1	62	4.46
1876085	Drill Core	2.31	4	0.9	29.7	19.0	58	<0.1	19.9	20.0	1168	3.59	18.4	3.3	4.0	110	0.2	0.3	0.2	49	3.83
1876086	Drill Core	3.29	2	0.4	19.6	17.7	65	0.2	16.5	9.9	525	2.79	6.2	5.6	10.0	77	0.1	0.1	0.3	27	1.10
1876087	Drill Core	0.95	<2	0.2	7.3	9.7	27	<0.1	8.9	6.5	325	1.79	13.1	1.8	5.2	45	<0.1	0.2	0.1	15	0.90
1876088	Drill Core	1.99	2	0.3	4.9	9.8	23	<0.1	5.0	4.1	252	1.11	7.1	<0.5	4.3	51	<0.1	<0.1	0.1	13	1.16
1876089	Drill Core	2.96	<2	0.2	4.8	10.3	23	<0.1	5.8	4.4	329	1.13	5.3	<0.5	4.7	64	<0.1	0.1	<0.1	13	1.73
1876090	Drill Core	2.93	<2	0.2	4.6	8.8	19	<0.1	5.1	4.9	442	0.96	5.0	<0.5	4.2	98	<0.1	<0.1	<0.1	11	2.61

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000658.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876061	Drill Core	0.021	<1	3	0.98	31	0.001	4	0.68	0.005	0.11	<0.1	1.24	13.9	<0.1	<0.05	2	<0.5	<0.2
1876062	Drill Core	0.027	2	3	1.35	48	<0.001	4	0.80	0.005	0.19	<0.1	0.81	13.4	<0.1	<0.05	2	<0.5	<0.2
1876063	Drill Core	0.047	4	4	0.98	34	0.001	2	0.78	0.004	0.05	<0.1	2.68	18.1	<0.1	<0.05	2	<0.5	<0.2
1876064	Drill Core	0.038	8	6	0.86	56	0.003	3	0.81	0.005	0.03	<0.1	0.38	19.8	<0.1	<0.05	2	<0.5	<0.2
1876065	Drill Core	0.054	1	6	0.83	58	0.003	7	0.92	0.006	0.17	<0.1	0.13	19.9	<0.1	<0.05	2	<0.5	<0.2
1876066	Drill Core	0.052	2	6	0.83	180	0.002	8	0.95	0.007	0.20	<0.1	0.05	20.5	<0.1	<0.05	2	<0.5	<0.2
1876067	Drill Core	0.055	2	6	0.79	100	0.004	6	1.01	0.007	0.19	<0.1	0.12	17.7	<0.1	<0.05	2	<0.5	<0.2
1876068	Drill Core	0.057	3	6	0.79	66	0.003	5	0.94	0.007	0.17	<0.1	2.22	20.9	<0.1	<0.05	2	<0.5	<0.2
1876069	Drill Core	0.041	2	20	1.27	78	0.002	7	0.88	0.008	0.16	<0.1	1.87	17.0	<0.1	<0.05	2	<0.5	<0.2
1876070	Rock Pulp	0.064	5	41	0.81	118	0.163	7	1.84	0.138	0.17	0.4	0.02	5.3	0.1	<0.05	5	<0.5	<0.2
1876071	Rock Pulp	0.039	<1	14	1.73	12	0.002	4	0.90	0.028	0.08	0.3	2.95	1.7	1.1	>10	5	3.8	9.0
1876072	Drill Core	0.048	2	4	0.79	158	0.008	6	1.15	0.007	0.22	<0.1	0.34	19.1	<0.1	<0.05	3	<0.5	<0.2
1876073	Drill Core	0.053	3	5	1.15	142	0.009	6	1.04	0.008	0.23	0.2	0.20	15.5	<0.1	<0.05	2	<0.5	<0.2
1876074	Drill Core	0.035	3	5	1.43	170	0.002	5	0.86	0.007	0.23	1.3	1.01	15.1	<0.1	<0.05	2	<0.5	<0.2
1876075	Drill Core	0.012	4	13	1.81	67	0.002	6	0.86	0.007	0.19	<0.1	0.55	15.5	<0.1	<0.05	2	<0.5	<0.2
1876076	Drill Core	0.002	<1	54	1.94	123	0.001	5	0.81	0.011	0.14	<0.1	0.11	20.5	<0.1	<0.05	1	<0.5	<0.2
1876077	Drill Core	0.045	4	105	2.46	74	0.001	4	0.74	0.024	0.29	<0.1	0.14	19.2	0.2	<0.05	2	<0.5	<0.2
1876078	Drill Core	0.038	4	19	1.34	72	0.001	4	0.90	0.025	0.21	<0.1	0.24	17.4	0.2	<0.05	2	<0.5	<0.2
1876079	Drill Core	0.011	1	12	0.83	121	<0.001	5	0.79	0.012	0.18	<0.1	0.35	14.7	0.1	<0.05	2	<0.5	<0.2
1876080	Drill Core	0.034	3	3	0.79	152	0.004	6	0.81	0.016	0.28	0.1	0.22	12.8	0.2	<0.05	2	<0.5	0.2
1876081	Drill Core	0.036	3	3	0.81	165	0.005	7	0.91	0.018	0.34	<0.1	0.17	14.8	0.2	<0.05	2	<0.5	<0.2
1876082	Drill Core	0.029	2	4	0.83	293	0.002	4	0.86	0.011	0.26	0.4	0.45	12.1	0.1	<0.05	2	<0.5	<0.2
1876083	Drill Core	0.029	<1	3	0.81	93	0.008	5	1.01	0.013	0.42	0.2	0.54	13.3	0.2	<0.05	2	<0.5	<0.2
1876084	Drill Core	0.033	2	14	1.58	354	0.001	4	0.85	0.018	0.36	<0.1	0.40	17.2	0.2	<0.05	2	0.5	<0.2
1876085	Drill Core	0.043	8	14	1.44	208	<0.001	4	0.86	0.023	0.35	<0.1	0.28	14.9	0.1	<0.05	2	<0.5	<0.2
1876086	Drill Core	0.018	23	14	0.41	230	0.004	3	0.86	0.014	0.25	<0.1	0.07	6.9	0.2	<0.05	4	<0.5	<0.2
1876087	Drill Core	0.026	11	7	0.26	54	0.002	1	0.41	0.014	0.09	<0.1	0.03	3.3	<0.1	<0.05	1	<0.5	<0.2
1876088	Drill Core	0.010	9	6	0.22	172	0.002	1	0.47	0.021	0.11	0.1	0.02	3.2	<0.1	<0.05	2	<0.5	<0.2
1876089	Drill Core	0.011	10	6	0.26	272	0.002	1	0.43	0.018	0.09	<0.1	0.02	3.5	<0.1	<0.05	1	<0.5	<0.2
1876090	Drill Core	0.010	9	6	0.24	1560	0.002	1	0.47	0.020	0.09	0.1	0.04	2.7	<0.1	0.10	1	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000658.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876091	Drill Core	0.68	<2	0.4	5.3	7.1	19	<0.1	6.4	7.0	414	1.72	6.6	<0.5	2.9	121	<0.1	0.2	<0.1	11	2.72
1876092	Drill Core	2.14	3	0.2	28.1	19.6	93	0.1	22.3	12.4	496	3.29	2.0	0.9	11.6	59	0.2	<0.1	0.4	31	0.21
1876093	Drill Core	5.34	2	0.3	24.0	17.1	71	<0.1	15.9	8.8	542	2.38	3.1	1.5	9.2	108	0.1	0.1	0.3	22	1.59
1876094	Drill Core	5.24	2	0.6	18.7	18.6	54	<0.1	18.6	8.9	481	2.17	6.6	<0.5	10.5	96	0.1	0.5	0.3	20	1.04
1876095	Drill Core	2.68	3	0.4	18.8	24.0	83	0.1	20.1	11.7	635	2.85	7.4	0.8	11.2	129	0.2	0.6	0.4	22	0.49
1876096	Drill Core	5.86	<2	0.4	4.8	15.6	33	0.1	9.3	6.9	518	1.89	5.5	<0.5	9.5	74	<0.1	0.6	0.1	19	1.20
1876097	Drill Core	4.05	3	1.0	19.5	22.0	74	1.6	32.3	15.7	625	2.54	8.1	1.2	10.7	149	0.2	0.7	0.3	28	0.37

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000658.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876091	Drill Core	0.011	7	6	0.20	62	0.002	<1	0.43	0.014	0.08	<0.1	0.05	3.1	0.5	0.96	2	<0.5	<0.2
1876092	Drill Core	0.013	29	22	0.75	2217	0.013	2	1.55	0.021	0.36	<0.1	0.09	7.2	0.3	0.06	6	<0.5	<0.2
1876093	Drill Core	0.008	22	14	0.54	2155	0.006	2	1.00	0.017	0.25	<0.1	0.05	5.9	0.2	0.06	4	<0.5	<0.2
1876094	Drill Core	0.012	22	15	0.43	1423	0.003	3	1.33	0.022	0.23	<0.1	0.08	4.9	0.2	0.12	4	<0.5	<0.2
1876095	Drill Core	0.015	22	15	0.56	217	0.002	1	2.09	0.056	0.33	<0.1	0.16	6.7	0.3	<0.05	6	<0.5	<0.2
1876096	Drill Core	0.038	17	9	0.35	200	0.002	1	1.44	0.041	0.12	<0.1	0.05	3.5	0.1	<0.05	4	<0.5	<0.2
1876097	Drill Core	0.017	24	20	0.46	862	0.003	2	2.30	0.090	0.30	0.3	0.12	7.5	0.3	<0.05	6	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada

PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000658.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
Pulp Duplicates																					
1876009	Drill Core	0.56	3121	31.4	32.4	43.6	28	4.8	7.5	8.9	448	1.99	11.4	3555.2	0.4	31	0.3	1.3	0.2	33	1.54
REP 1876009	QC		3322																		
1876023	Drill Core	2.11	85	16.9	14.2	2.3	42	0.4	3.6	9.0	746	2.76	1.2	48.1	2.2	30	0.2	0.2	<0.1	37	3.56
REP 1876023	QC			15.4	13.9	2.2	40	0.3	3.2	8.8	779	2.73	0.9	49.5	2.0	28	0.1	0.2	<0.1	36	3.49
1876041	Drill Core	2.92	<2	0.4	46.4	2.1	46	<0.1	4.1	11.1	705	3.20	2.2	3.1	1.5	69	<0.1	0.1	<0.1	58	3.72
REP 1876041	QC		<2																		
1876057	Drill Core	2.55	217	1.0	35.8	2.2	37	0.6	3.4	8.8	787	3.05	1.4	278.3	1.6	54	0.3	0.1	<0.1	65	2.76
REP 1876057	QC			1.0	37.0	2.2	37	0.6	3.2	8.5	794	3.07	1.3	196.6	1.6	57	0.3	0.1	<0.1	66	2.78
1876075	Drill Core	5.12	38	25.3	38.6	2.8	76	<0.1	13.0	17.7	950	3.94	10.4	39.9	1.2	60	0.1	1.2	<0.1	71	4.94
REP 1876075	QC		36																		
1876091	Drill Core	0.68	<2	0.4	5.3	7.1	19	<0.1	6.4	7.0	414	1.72	6.6	<0.5	2.9	121	<0.1	0.2	<0.1	11	2.72
REP 1876091	QC			0.4	5.3	7.3	18	<0.1	6.4	7.6	428	1.70	6.3	<0.5	2.9	121	<0.1	0.2	<0.1	11	2.80
Core Reject Duplicates																					
1876026	Drill Core	2.12	25	5.9	7.9	1.9	34	0.2	3.7	8.1	578	2.32	1.6	24.2	2.9	26	0.1	0.3	<0.1	43	2.06
DUP 1876026	QC		49	5.9	7.2	1.9	35	0.2	3.3	8.2	542	2.29	2.0	31.9	3.3	25	0.2	0.3	<0.1	42	2.09
1876060	Drill Core	2.48	17	1.1	49.4	2.2	46	<0.1	4.0	13.0	897	3.33	3.2	10.8	1.1	26	0.1	0.3	<0.1	59	2.32
DUP 1876060	QC		12	1.0	50.0	2.0	45	<0.1	4.6	13.5	927	3.40	2.7	12.0	1.0	25	<0.1	0.2	<0.1	60	2.39
1876094	Drill Core	5.24	2	0.6	18.7	18.6	54	<0.1	18.6	8.9	481	2.17	6.6	<0.5	10.5	96	0.1	0.5	0.3	20	1.04
DUP 1876094	QC		<2	0.6	17.7	18.0	57	<0.1	18.9	10.5	508	2.17	6.6	0.7	9.7	94	<0.1	0.8	0.2	20	1.06
Reference Materials																					
STD DS11	Standard			14.9	151.9	137.1	322	1.6	77.7	13.6	1018	3.14	42.4	64.0	7.9	63	2.4	9.1	11.4	51	1.06
STD DS11	Standard			13.0	141.2	129.1	320	1.8	79.3	15.0	1049	3.12	41.5	94.8	7.5	64	2.4	8.7	11.3	48	1.03
STD DS11	Standard			14.7	156.7	138.7	339	1.8	78.8	14.5	992	3.04	43.2	101.2	7.5	70	2.4	9.1	11.7	48	1.05
STD OXC129	Standard			1.2	26.9	6.0	39	<0.1	78.9	20.7	416	2.97	0.6	171.9	1.7	184	<0.1	<0.1	<0.1	52	0.67
STD OXC129	Standard			1.1	24.5	5.3	37	<0.1	72.0	19.7	421	3.02	0.6	184.2	1.5	163	<0.1	<0.1	<0.1	50	0.66
STD OXC129	Standard			1.2	26.6	6.1	39	<0.1	74.1	20.2	436	3.02	0.6	204.5	1.8	195	<0.1	<0.1	<0.1	51	0.74
STD OXC145	Standard		221																		
STD OXC145	Standard		203																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000658.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
Pulp Duplicates																			
1876009	Drill Core	0.009	2	6	0.26	614	0.002	2	0.27	0.008	0.05	0.7	0.14	7.6	<0.1	<0.05	<1	<0.5	1.6
REP 1876009	QC																		
1876023	Drill Core	0.037	7	2	0.73	216	0.011	4	0.70	0.003	0.33	0.3	0.01	7.6	<0.1	<0.05	2	<0.5	<0.2
REP 1876023	QC	0.035	8	2	0.73	235	0.010	4	0.68	0.003	0.33	0.3	0.01	6.7	<0.1	<0.05	2	<0.5	<0.2
1876041	Drill Core	0.050	6	4	0.71	432	0.017	7	1.19	0.031	0.45	<0.1	<0.01	14.5	<0.1	<0.05	3	<0.5	<0.2
REP 1876041	QC																		
1876057	Drill Core	0.051	7	5	0.77	77	0.015	4	0.64	0.044	0.24	0.1	0.51	15.8	<0.1	<0.05	2	<0.5	0.3
REP 1876057	QC	0.052	7	4	0.76	75	0.015	4	0.65	0.044	0.24	0.1	0.52	16.3	<0.1	<0.05	2	<0.5	0.3
1876075	Drill Core	0.012	4	13	1.81	67	0.002	6	0.86	0.007	0.19	<0.1	0.55	15.5	<0.1	<0.05	2	<0.5	<0.2
REP 1876075	QC																		
1876091	Drill Core	0.011	7	6	0.20	62	0.002	<1	0.43	0.014	0.08	<0.1	0.05	3.1	0.5	0.96	2	<0.5	<0.2
REP 1876091	QC	0.009	7	6	0.20	59	0.002	<1	0.44	0.014	0.09	<0.1	0.05	2.9	0.6	0.98	1	<0.5	<0.2
Core Reject Duplicates																			
1876026	Drill Core	0.036	7	3	0.65	212	0.008	6	0.85	0.003	0.32	<0.1	0.02	8.4	<0.1	<0.05	2	<0.5	<0.2
DUP 1876026	QC	0.032	7	2	0.64	211	0.009	5	0.84	0.003	0.32	<0.1	0.02	9.3	<0.1	<0.05	2	<0.5	<0.2
1876060	Drill Core	0.046	2	4	0.61	340	0.002	5	0.94	0.010	0.29	<0.1	0.21	20.5	0.2	<0.05	3	<0.5	<0.2
DUP 1876060	QC	0.046	2	4	0.63	352	0.002	4	0.97	0.009	0.29	<0.1	0.20	19.7	0.1	<0.05	3	<0.5	<0.2
1876094	Drill Core	0.012	22	15	0.43	1423	0.003	3	1.33	0.022	0.23	<0.1	0.08	4.9	0.2	0.12	4	<0.5	<0.2
DUP 1876094	QC	0.010	21	13	0.43	1451	0.003	2	1.33	0.022	0.23	<0.1	0.08	5.0	0.3	0.12	4	<0.5	<0.2
Reference Materials																			
STD DS11	Standard	0.067	19	60	0.84	407	0.103	9	1.19	0.073	0.40	3.1	0.26	3.4	4.7	0.28	5	2.0	4.3
STD DS11	Standard	0.074	19	60	0.85	383	0.088	5	1.15	0.073	0.40	2.9	0.27	2.9	5.1	0.27	5	2.2	4.5
STD DS11	Standard	0.071	18	60	0.83	365	0.094	7	1.16	0.070	0.40	2.9	0.28	3.2	4.9	0.28	4	1.5	4.6
STD OXC129	Standard	0.098	12	51	1.53	48	0.389	1	1.51	0.566	0.35	<0.1	<0.01	0.7	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.099	12	50	1.55	47	0.361	<1	1.57	0.594	0.38	<0.1	<0.01	0.6	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.109	13	55	1.56	53	0.415	1	1.69	0.607	0.39	<0.1	<0.01	0.9	<0.1	<0.05	5	<0.5	<0.2
STD OXC145	Standard																		
STD OXC145	Standard																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000658.1

		WGHT Wgt kg 0.01	FA350 Au ppb 2	AQ201 Mo ppm 0.1	AQ201 Cu ppm 0.1	AQ201 Pb ppm 0.1	AQ201 Zn ppm 1	AQ201 Ag ppm 0.1	AQ201 Ni ppm 0.1	AQ201 Co ppm 0.1	AQ201 Mn ppm 1	AQ201 Fe % 0.01	AQ201 As ppm 0.5	AQ201 Au ppb 0.5	AQ201 Th ppm 0.1	AQ201 Sr ppm 1	AQ201 Cd ppm 0.1	AQ201 Sb ppm 0.1	AQ201 Bi ppm 0.1	AQ201 V ppm 2	AQ201 Ca % 0.01
STD OXC145	Standard		203																		
STD OXH122	Standard		1333																		
STD OXH122	Standard		1214																		
STD OXH122	Standard		1261																		
STD OXC145 Expected			212																		
STD OXH122 Expected			1247																		
STD OXC129 Expected				1.3	28	6.3	42.9		79.5	20.3	421	3.065	0.6	195	1.9					51	0.665
STD DS11 Expected				14.6	156	138	345	1.71	81.9	14.2	1055	3.2082	42.8	79	7.65	67.3	2.37	8.74	12.2	50	1.063
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
Prep Wash																					
ROCK-WHI	Prep Blank		<2	0.5	5.7	1.2	32	<0.1	1.0	3.9	522	1.71	1.4	<0.5	2.0	18	<0.1	<0.1	<0.1	23	0.61
ROCK-WHI	Prep Blank		<2	0.7	3.8	1.1	36	<0.1	0.9	4.2	648	1.79	1.4	<0.5	2.3	23	<0.1	<0.1	<0.1	23	0.66

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000658.1

		AQ201 P % 0.001	AQ201 La ppm 1	AQ201 Cr ppm 1	AQ201 Mg % 0.01	AQ201 Ba ppm 1	AQ201 Ti % 0.001	AQ201 B ppm 1	AQ201 Al % 0.01	AQ201 Na % 0.001	AQ201 K % 0.01	AQ201 W ppm 0.1	AQ201 Hg ppm 0.01	AQ201 Sc ppm 0.1	AQ201 Tl ppm 0.1	AQ201 S % 0.05	AQ201 Ga ppm 1	AQ201 Se ppm 0.5	AQ201 Te ppm 0.2
STD OXC145	Standard																		
STD OXH122	Standard																		
STD OXH122	Standard																		
STD OXH122	Standard																		
STD OXC145 Expected																			
STD OXH122 Expected																			
STD OXC129 Expected		0.102	13	52	1.545	50	0.4	1	1.58	0.6	0.37			1.1			5.6		
STD DS11 Expected		0.0701	18.6	61.5	0.85	385	0.0976		1.1795	0.0762	0.4	2.9	0.3	3.4	4.9	0.2835	5.1	1.9	4.56
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
Prep Wash																			
ROCK-WHI	Prep Blank	0.040	6	2	0.45	56	0.068	<1	0.98	0.144	0.12	0.2	<0.01	2.8	<0.1	<0.05	3	<0.5	<0.2
ROCK-WHI	Prep Blank	0.040	6	2	0.51	68	0.075	<1	1.09	0.154	0.14	0.1	<0.01	3.3	<0.1	0.08	3	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Submitted By: Daithi Mac Gerailt
Receiving Lab: Canada-Whitehorse
Received: August 22, 2017
Report Date: October 16, 2017
Page: 1 of 2

CERTIFICATE OF ANALYSIS WHI17000661.1

CLIENT JOB INFORMATION

Project: Lucky Strike
Shipment ID: DDLS-17-02
P.O. Number
Number of Samples: 13

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	11	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	2	Sort, label and box pulps			WHI
FA350-Au	13	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	13	Environmental disposal charge-Fire assay lead waste			VAN
AQ201	13	1:1:1 Aqua Regia digestion ICP-MS analysis	15	Completed	VAN
SHP01	13	Per sample shipping charges for branch shipments			VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources Ltd.
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3
Canada

CC:

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000661.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876098	Drill Core	4.16	345	4.7	34.6	2.7	46	0.9	8.1	19.7	962	4.98	4.1	313.5	1.8	45	0.2	0.5	<0.1	102	2.86
1876099	Drill Core	2.18	11	5.3	57.9	3.2	69	0.3	14.9	34.2	1146	8.40	15.5	12.4	1.6	51	<0.1	0.5	<0.1	155	3.21
1876100	Drill Core	3.21	51	7.0	29.6	3.7	68	0.1	18.4	22.1	1385	5.20	13.7	56.6	1.6	92	0.3	0.4	<0.1	114	5.48
1876101	Drill Core	2.15	71	4.9	24.5	2.7	59	2.8	9.3	17.4	1213	4.87	3.1	50.2	1.8	91	0.3	0.3	<0.1	114	3.34
1876102	Drill Core	2.55	1246	9.1	76.8	3.1	72	0.9	7.4	19.4	1511	5.36	3.4	198.1	1.9	113	0.7	0.5	<0.1	111	4.52
1876103	Drill Core	2.73	50	7.4	35.4	2.6	47	0.2	8.8	14.5	918	3.96	7.1	54.8	1.1	75	0.4	0.4	<0.1	71	3.80
1876104	Drill Core	2.62	127	8.3	37.4	3.2	53	0.2	7.8	15.2	923	4.19	17.1	102.8	1.2	70	0.6	0.6	<0.1	79	4.47
1876105	Rock Pulp	0.08	8	8.5	51.3	3.0	49	<0.1	37.5	9.9	504	3.31	4.9	3.9	1.3	61	0.1	0.4	<0.1	70	1.03
1876106	Rock Pulp	0.08	6444	1.4	15.9	22.0	69	0.2	13.4	1.7	907	0.58	4293.0	7212.3	1.5	189	0.6	26.8	0.4	21	24.89
1876107	Drill Core	0.95	317	14.4	22.4	4.2	52	0.6	6.5	15.0	1103	3.98	7.4	395.7	2.2	64	0.6	0.5	<0.1	78	3.38
1876108	Drill Core	1.21	2595	9.2	8.1	15.4	29	6.9	7.4	11.0	740	2.42	12.2	2424.4	1.0	48	1.6	0.4	0.2	68	2.89
1876109	Drill Core	1.33	4042	57.6	61.4	68.4	11	15.3	14.2	18.4	334	1.42	39.3	4251.9	0.2	133	0.6	2.4	0.9	15	1.20
1876110	Drill Core	0.63	308	12.9	36.8	6.7	63	0.6	10.0	12.3	1081	3.16	43.0	244.7	0.4	74	0.5	1.3	<0.1	46	7.57

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000661.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876098	Drill Core	0.085	8	14	0.97	585	0.046	5	1.01	0.029	0.49	0.3	0.08	20.8	0.2	<0.05	3	<0.5	0.4
1876099	Drill Core	0.086	9	27	1.18	332	0.055	9	1.52	0.017	0.76	0.2	0.03	27.3	0.3	<0.05	5	<0.5	<0.2
1876100	Drill Core	0.057	8	61	1.99	202	0.027	4	1.13	0.014	0.47	<0.1	0.05	25.1	0.2	<0.05	4	<0.5	<0.2
1876101	Drill Core	0.083	9	11	1.24	244	0.055	5	1.02	0.043	0.48	5.3	0.02	20.6	0.2	<0.05	3	<0.5	<0.2
1876102	Drill Core	0.085	9	10	1.61	159	0.024	6	0.89	0.041	0.33	0.7	0.05	23.9	0.1	<0.05	3	<0.5	0.5
1876103	Drill Core	0.058	6	16	1.09	126	0.006	5	0.80	0.023	0.19	0.1	0.05	16.5	<0.1	<0.05	2	<0.5	<0.2
1876104	Drill Core	0.035	7	14	1.17	155	0.008	5	0.90	0.014	0.20	<0.1	0.12	18.7	0.1	<0.05	2	<0.5	<0.2
1876105	Rock Pulp	0.060	5	44	0.84	126	0.160	8	1.85	0.132	0.18	0.4	0.02	5.6	<0.1	<0.05	6	<0.5	<0.2
1876106	Rock Pulp	0.016	8	25	6.58	43	0.001	3	0.23	0.013	0.06	3.9	4.51	2.8	16.5	<0.05	<1	<0.5	<0.2
1876107	Drill Core	0.028	9	3	0.86	159	0.004	4	0.70	0.004	0.14	<0.1	0.16	21.3	0.1	<0.05	2	<0.5	0.4
1876108	Drill Core	0.017	6	13	0.57	104	0.003	3	0.46	0.003	0.06	1.4	0.63	15.1	<0.1	<0.05	1	<0.5	3.5
1876109	Drill Core	0.007	1	9	0.17	442	0.003	3	0.14	0.003	0.03	6.3	1.23	2.8	0.2	<0.05	<1	<0.5	6.7
1876110	Drill Core	0.003	1	10	1.49	193	<0.001	7	0.39	0.006	0.07	0.2	0.07	16.0	0.1	<0.05	<1	<0.5	0.3

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada

PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000661.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
Pulp Duplicates																					
1876104	Drill Core	2.62	127	8.3	37.4	3.2	53	0.2	7.8	15.2	923	4.19	17.1	102.8	1.2	70	0.6	0.6	<0.1	79	4.47
REP 1876104	QC		127	7.9	39.7	3.5	59	0.2	8.4	16.2	978	4.38	19.0	131.4	1.3	77	0.5	0.6	<0.1	82	4.71
Reference Materials																					
STD DS11	Standard			12.9	160.0	134.0	342	1.8	72.8	13.6	1087	3.19	45.3	77.2	7.2	72	2.3	8.2	12.0	51	1.06
STD OXC129	Standard			1.3	28.0	6.5	40	<0.1	81.8	22.7	445	3.25	0.6	197.9	2.0	191	<0.1	<0.1	<0.1	55	0.72
STD OXC145	Standard		220																		
STD OXC145 Expected			212																		
STD OXC129 Expected				1.3	28	6.3	42.9		79.5	20.3	421	3.065	0.6	195	1.9					51	0.665
STD DS11 Expected				14.6	156	138	345	1.71	81.9	14.2	1055	3.2082	42.8	79	7.65	67.3	2.37	8.74	12.2	50	1.063
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
Prep Wash																					
ROCK-WHI	Prep Blank		<2	0.7	5.1	1.4	37	<0.1	1.4	4.6	546	1.85	1.0	<0.5	2.6	30	<0.1	<0.1	<0.1	26	0.68
ROCK-WHI	Prep Blank		<2	0.7	3.1	1.1	33	<0.1	1.2	3.5	601	1.80	1.3	<0.5	2.3	26	<0.1	<0.1	<0.1	24	0.84

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000661.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
Pulp Duplicates																			
1876104	Drill Core	0.035	7	14	1.17	155	0.008	5	0.90	0.014	0.20	<0.1	0.12	18.7	0.1	<0.05	2	<0.5	<0.2
REP 1876104	QC	0.033	7	14	1.24	162	0.008	4	0.95	0.014	0.21	<0.1	0.11	20.4	0.1	<0.05	3	<0.5	<0.2
Reference Materials																			
STD DS11	Standard	0.071	19	60	0.84	357	0.098	6	1.15	0.073	0.40	3.0	0.26	3.0	4.7	0.29	5	2.0	4.3
STD OXC129	Standard	0.116	14	56	1.64	52	0.468	<1	1.63	0.618	0.39	<0.1	<0.01	0.9	<0.1	<0.05	6	<0.5	<0.2
STD OXC145	Standard																		
STD OXC145 Expected																			
STD OXC129 Expected		0.102	13	52	1.545	50	0.4	1	1.58	0.6	0.37			1.1			5.6		
STD DS11 Expected		0.0701	18.6	61.5	0.85	385	0.0976		1.1795	0.0762	0.4	2.9	0.3	3.4	4.9	0.2835	5.1	1.9	4.56
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
Prep Wash																			
ROCK-WHI	Prep Blank	0.038	7	3	0.50	58	0.092	<1	1.05	0.108	0.10	<0.1	<0.01	4.0	<0.1	<0.05	4	<0.5	<0.2
ROCK-WHI	Prep Blank	0.045	7	3	0.47	61	0.088	3	0.93	0.092	0.10	<0.1	0.02	3.3	<0.1	<0.05	4	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Submitted By: Daithi Mac Gerailt
Receiving Lab: Canada-Whitehorse
Received: August 24, 2017
Report Date: October 16, 2017
Page: 1 of 6

CERTIFICATE OF ANALYSIS WHI17000683.1

CLIENT JOB INFORMATION

Project: Lucky Strike
Shipment ID: DDLS-2017-03
P.O. Number
Number of Samples: 125

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	119	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	6	Sort, label and box pulps			WHI
FA350-Au	125	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	125	Environmental disposal charge-Fire assay lead waste			VAN
AQ201	124	1:1:1 Aqua Regia digestion ICP-MS analysis	15	Completed	VAN
SHP01	125	Per sample shipping charges for branch shipments			VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources Ltd.
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3
Canada

CC:

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000683.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876111	Drill Core	1.31	138	1.3	21.3	2.8	55	0.3	9.7	17.5	982	4.57	6.6	84.6	1.5	44	0.1	0.6	<0.1	102	3.48
1876112	Drill Core	2.14	6	1.5	10.3	4.7	75	<0.1	14.4	24.5	1241	5.68	5.4	1.5	1.4	42	0.1	1.5	<0.1	121	3.80
1876113	Drill Core	1.10	<2	2.0	3.9	2.0	99	0.1	43.8	34.2	1447	8.09	2.8	<0.5	0.7	44	<0.1	0.5	<0.1	216	4.48
1876114	Drill Core	2.96	<2	1.5	20.5	2.4	53	<0.1	12.2	16.4	926	4.17	4.0	0.6	1.0	75	0.2	1.4	<0.1	102	5.14
1876115	Drill Core	2.51	<2	2.2	41.3	2.1	49	<0.1	6.2	17.3	1054	4.55	2.9	<0.5	1.6	42	<0.1	0.7	<0.1	91	2.88
1876116	Drill Core	2.65	<2	3.0	17.8	2.4	53	<0.1	9.4	17.7	1013	4.89	2.7	<0.5	1.6	43	<0.1	0.3	<0.1	113	2.44
1876117	Drill Core	2.96	40	3.7	19.0	2.5	60	<0.1	8.9	26.5	1478	5.15	2.4	48.0	2.1	66	<0.1	0.3	<0.1	152	4.57
1876118	Drill Core	3.17	<2	4.5	43.2	2.8	81	<0.1	20.5	31.5	1547	6.81	3.6	<0.5	1.7	50	<0.1	0.7	<0.1	206	3.27
1876119	Drill Core	2.98	<2	3.3	116.1	2.2	61	<0.1	14.2	33.4	1208	6.02	1.6	2.3	2.2	54	<0.1	0.4	<0.1	155	4.34
1876120	Drill Core	1.56	44	2.9	66.7	1.8	61	0.1	16.3	23.2	900	5.59	2.1	50.0	4.4	38	0.1	0.4	<0.1	132	2.28
1876121	Drill Core	0.31	7495	7.6	259.9	3.5	26	11.6	13.8	16.8	733	6.61	4.4	8844.3	4.0	61	0.3	1.0	0.1	62	4.33
1876122	Drill Core	3.88	53	7.2	46.4	2.4	67	0.2	11.1	24.2	966	6.83	3.5	60.9	3.3	49	0.2	0.5	<0.1	126	2.71
1876123	Drill Core	3.25	27	5.5	78.6	3.0	66	0.1	21.5	23.3	1114	5.48	3.1	24.9	3.4	67	0.1	1.1	0.2	142	3.85
1876124	Drill Core	1.85	737	8.7	15.0	3.3	61	0.3	13.5	17.3	1435	4.88	3.4	569.3	1.8	92	0.5	0.4	<0.1	107	4.44
1876125	Drill Core	2.71	157	8.4	10.1	3.2	55	0.3	9.9	16.3	1196	4.53	2.8	219.1	1.0	114	0.2	0.4	<0.1	90	5.18
1876126	Drill Core	1.40	164	13.3	11.9	4.5	52	2.7	9.1	14.1	1140	4.28	5.3	144.1	1.1	80	0.2	0.6	<0.1	79	4.34
1876127	Drill Core	3.25	724	54.4	192.2	17.1	28	3.1	6.6	10.9	422	1.74	50.6	878.1	0.2	54	0.3	7.4	0.2	22	2.99
1876128	Drill Core	1.25	1611	35.3	86.1	12.0	21	5.7	5.0	6.5	367	1.43	28.7	1781.2	0.2	71	0.2	3.9	0.1	12	1.83
1876129	Drill Core	1.57	3616	64.0	144.8	21.4	26	>100	29.6	10.2	794	2.58	16.3	3830.7	0.7	53	0.7	1.0	0.3	28	2.49
1876130	Drill Core	1.58	289	14.4	36.2	5.3	56	6.1	8.1	13.3	925	3.17	18.6	402.6	1.0	61	0.3	2.1	<0.1	45	5.15
1876131	Drill Core	3.20	135	10.9	4.1	3.9	63	0.4	8.1	14.1	901	3.67	13.9	144.6	0.9	54	0.2	0.7	<0.1	50	5.31
1876132	Drill Core	2.72	42	8.1	3.4	3.9	59	<0.1	8.7	15.9	900	3.71	13.0	55.9	1.0	53	0.2	0.7	<0.1	56	5.34
1876133	Drill Core	2.98	18	11.6	6.4	4.0	58	<0.1	8.2	15.6	978	3.54	12.3	36.3	1.0	64	0.2	0.8	<0.1	54	6.48
1876134	Drill Core	2.13	963	16.2	106.6	5.3	75	1.1	10.0	17.2	868	3.80	25.3	1096.5	0.6	60	0.3	3.3	<0.1	54	5.52
1876135	Drill Core	2.24	705	19.2	53.9	7.6	84	1.0	13.9	19.5	1061	4.00	43.7	734.2	0.4	63	0.4	3.0	<0.1	70	6.32
1876136	Drill Core	2.21	15	7.4	8.2	6.1	63	0.3	12.9	18.9	782	3.58	36.0	9.1	1.3	36	0.2	0.4	<0.1	97	5.17
1876137	Drill Core	2.72	28	2.6	4.6	3.3	36	0.1	6.4	7.0	455	1.76	30.0	8.1	2.5	46	0.1	0.4	<0.1	21	3.24
1876138	Drill Core	3.14	9	2.0	7.6	2.4	31	<0.1	4.0	7.0	392	1.80	4.3	5.9	2.5	34	<0.1	0.3	<0.1	28	3.01
1876139	Drill Core	3.02	<2	1.5	14.8	3.7	41	<0.1	5.1	9.2	552	2.46	2.7	1.5	2.1	52	<0.1	0.2	<0.1	43	4.34
1876140	Rock Pulp	0.06	4	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000683.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876111	Drill Core	0.061	6	9	1.18	119	0.014	6	0.61	0.032	0.23	0.2	0.02	20.4	<0.1	<0.05	2	<0.5	<0.2
1876112	Drill Core	0.077	4	11	0.80	206	0.015	13	1.05	0.020	0.47	0.1	<0.01	23.1	0.2	<0.05	3	<0.5	<0.2
1876113	Drill Core	0.022	2	162	1.64	512	0.102	12	2.23	0.010	1.53	0.1	<0.01	31.8	0.6	<0.05	9	<0.5	<0.2
1876114	Drill Core	0.069	3	33	0.85	125	0.007	9	0.76	0.021	0.26	0.1	<0.01	20.0	<0.1	<0.05	3	<0.5	<0.2
1876115	Drill Core	0.086	8	4	0.79	216	0.028	6	0.70	0.034	0.31	<0.1	<0.01	17.6	0.1	<0.05	3	<0.5	<0.2
1876116	Drill Core	0.069	8	18	0.89	210	0.026	6	0.88	0.039	0.36	<0.1	<0.01	19.5	0.1	<0.05	4	<0.5	<0.2
1876117	Drill Core	0.082	8	10	1.79	534	0.036	5	0.71	0.046	0.42	<0.1	<0.01	24.8	0.2	<0.05	4	<0.5	<0.2
1876118	Drill Core	0.105	10	34	1.34	339	0.040	8	0.90	0.041	0.51	<0.1	<0.01	27.0	0.2	<0.05	5	<0.5	<0.2
1876119	Drill Core	0.072	10	29	1.05	2512	0.030	5	1.07	0.027	0.46	<0.1	<0.01	23.3	0.2	0.06	4	<0.5	<0.2
1876120	Drill Core	0.047	15	66	1.35	754	0.150	6	1.80	0.035	1.17	<0.1	<0.01	21.2	0.4	<0.05	7	<0.5	<0.2
1876121	Drill Core	0.071	20	13	0.97	1919	0.028	1	0.48	0.050	0.21	0.2	0.35	11.2	<0.1	0.07	2	0.7	8.3
1876122	Drill Core	0.137	10	11	1.39	572	0.098	6	1.90	0.026	1.08	0.3	0.01	19.2	0.4	<0.05	6	<0.5	<0.2
1876123	Drill Core	0.073	11	98	1.71	175	0.028	7	1.47	0.023	0.70	<0.1	0.02	27.2	0.3	<0.05	5	<0.5	<0.2
1876124	Drill Core	0.089	7	33	2.23	355	0.094	4	1.16	0.045	0.71	0.2	0.02	26.5	0.3	<0.05	5	<0.5	0.2
1876125	Drill Core	0.055	7	15	1.61	137	0.016	4	0.74	0.037	0.26	0.2	0.04	18.5	<0.1	<0.05	2	<0.5	<0.2
1876126	Drill Core	0.046	5	14	1.39	155	0.016	5	0.72	0.033	0.28	4.2	0.07	18.1	0.1	<0.05	3	<0.5	<0.2
1876127	Drill Core	0.008	<1	4	1.03	265	<0.001	7	0.15	0.006	0.06	0.5	0.20	5.0	0.1	0.06	<1	<0.5	0.9
1876128	Drill Core	0.005	1	5	0.72	242	<0.001	5	0.19	0.005	0.04	5.2	0.17	4.9	<0.1	0.05	<1	<0.5	1.4
1876129	Drill Core	0.015	4	31	0.93	206	0.005	2	0.39	0.012	0.09	>100	*	6.7	<0.1	<0.05	1	<0.5	6.8
1876130	Drill Core	0.005	4	6	1.66	330	<0.001	7	0.45	0.007	0.17	6.6	0.06	14.6	0.1	<0.05	1	<0.5	0.3
1876131	Drill Core	0.004	4	6	1.69	153	0.001	12	0.66	0.007	0.21	0.5	0.03	14.0	<0.1	<0.05	1	<0.5	<0.2
1876132	Drill Core	0.014	4	8	1.81	188	0.001	8	0.60	0.007	0.23	0.1	0.03	13.7	<0.1	<0.05	2	<0.5	<0.2
1876133	Drill Core	0.024	4	8	1.27	153	0.001	11	0.74	0.005	0.26	0.1	0.04	14.3	0.1	<0.05	2	<0.5	<0.2
1876134	Drill Core	0.005	2	5	1.52	155	0.001	9	0.59	0.007	0.21	0.4	0.04	14.4	<0.1	<0.05	1	<0.5	<0.2
1876135	Drill Core	0.003	1	18	1.95	143	<0.001	7	0.53	0.007	0.15	0.8	0.05	18.3	<0.1	<0.05	1	<0.5	<0.2
1876136	Drill Core	0.018	2	7	1.71	150	0.001	10	0.75	0.012	0.30	0.3	0.03	14.1	0.1	<0.05	2	<0.5	<0.2
1876137	Drill Core	0.005	4	5	1.12	356	<0.001	3	0.65	0.005	0.09	<0.1	0.02	3.9	<0.1	<0.05	2	<0.5	<0.2
1876138	Drill Core	0.009	6	2	1.01	311	0.002	3	0.53	0.005	0.15	<0.1	0.01	5.7	<0.1	<0.05	1	<0.5	<0.2
1876139	Drill Core	0.013	4	2	1.44	932	0.005	6	0.95	0.009	0.22	<0.1	0.01	6.3	<0.1	<0.05	2	<0.5	<0.2
1876140	Rock Pulp	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000683.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876141	Rock Pulp	0.08	447	44.9	>10000	936.2	>10000	59.9	17.5	3.1	621	12.34	142.4	498.5	<0.1	31	236.9	36.2	10.3	10	1.55
1876142	Drill Core	2.90	95	2.4	10.7	4.3	58	<0.1	4.6	11.4	716	3.25	2.6	84.1	3.1	77	0.1	0.2	<0.1	65	4.45
1876143	Drill Core	3.07	6	1.4	2.8	3.9	43	<0.1	4.1	8.6	494	2.60	2.8	2.3	4.7	42	<0.1	0.3	<0.1	56	2.74
1876144	Drill Core	2.75	955	3.7	34.4	2.6	31	0.3	3.7	7.0	579	2.02	0.8	492.5	1.7	46	0.3	0.1	<0.1	42	3.13
1876145	Drill Core	3.16	22	2.5	22.4	2.1	39	0.2	3.5	10.2	675	2.81	1.3	19.6	2.6	59	0.1	0.1	<0.1	56	2.94
1876146	Drill Core	1.21	27	1.4	22.8	1.9	33	<0.1	4.5	7.8	640	2.10	0.8	47.7	0.8	95	<0.1	<0.1	<0.1	29	3.70
1876147	Drill Core	4.39	<2	1.0	27.0	2.5	46	0.1	4.1	10.2	694	3.28	1.7	2.0	2.2	98	<0.1	0.2	<0.1	60	4.80
1876148	Drill Core	3.90	31	1.1	61.0	2.4	56	0.1	5.4	12.9	733	3.25	1.5	40.8	2.3	109	<0.1	0.2	<0.1	59	3.81
1876149	Drill Core	2.93	56	3.8	39.4	3.7	41	0.3	3.9	8.9	705	2.88	4.6	110.3	1.8	97	<0.1	0.5	<0.1	57	4.17
1876150	Drill Core	2.14	32	1.8	28.9	4.1	42	0.2	2.6	9.8	1246	3.45	1.0	42.4	1.7	94	0.2	0.1	<0.1	64	4.58
1876151	Drill Core	2.88	4	6.5	29.9	2.6	45	1.0	4.1	11.8	565	2.99	1.8	4.0	1.2	43	<0.1	0.3	<0.1	55	2.47
1876152	Drill Core	2.77	743	31.9	23.5	5.8	42	1.3	4.1	12.1	1086	2.91	2.6	1493.1	1.1	81	0.3	0.2	<0.1	33	4.95
1876153	Drill Core	2.16	8	4.7	29.4	3.2	44	<0.1	2.8	9.7	924	3.08	1.6	8.2	2.1	92	0.2	0.2	<0.1	57	3.87
1876154	Drill Core	3.62	4	3.5	33.0	2.5	48	0.1	2.8	10.0	630	3.00	1.1	4.4	2.1	83	<0.1	0.1	<0.1	55	3.68
1876155	Drill Core	3.06	14	2.7	25.0	2.0	38	<0.1	3.0	8.4	727	2.65	0.6	6.6	1.2	62	<0.1	<0.1	<0.1	47	3.33
1876156	Drill Core	0.71	<2	0.7	2.9	1.4	15	<0.1	0.9	3.1	340	0.97	<0.5	0.8	0.1	50	<0.1	<0.1	<0.1	14	2.11
1876157	Drill Core	3.65	<2	1.0	19.0	2.2	36	<0.1	3.4	8.0	480	2.36	0.5	0.7	2.6	48	<0.1	<0.1	<0.1	37	2.36
1876158	Drill Core	2.82	<2	1.2	42.7	2.1	42	<0.1	2.9	8.8	728	2.70	1.3	1.1	2.0	84	<0.1	<0.1	<0.1	50	4.01
1876159	Drill Core	1.99	<2	0.9	43.8	2.3	47	0.3	3.3	10.0	675	3.16	1.5	<0.5	1.4	62	<0.1	<0.1	<0.1	62	3.69
1876160	Drill Core	2.61	<2	1.6	38.7	2.4	49	<0.1	4.1	12.1	683	3.09	1.5	0.6	1.8	73	<0.1	<0.1	0.2	63	3.37
1876161	Drill Core	2.51	<2	1.8	35.6	2.2	51	<0.1	4.1	12.4	625	3.44	1.1	<0.5	1.9	55	<0.1	<0.1	<0.1	67	3.11
1876162	Drill Core	2.63	<2	0.9	29.4	2.1	50	<0.1	3.7	10.3	461	2.90	1.7	0.8	2.0	48	<0.1	0.1	<0.1	49	2.01
1876163	Drill Core	1.69	4	0.3	2.5	1.2	19	<0.1	1.1	3.5	277	0.99	0.9	<0.5	0.3	40	<0.1	<0.1	<0.1	13	2.24
1876164	Drill Core	3.74	2	1.1	42.6	2.7	51	<0.1	7.8	13.3	552	3.39	1.9	1.7	2.5	52	<0.1	0.1	<0.1	73	2.67
1876165	Drill Core	1.97	<2	0.3	3.2	2.1	23	<0.1	1.8	3.9	357	1.16	<0.5	2.5	1.3	66	<0.1	<0.1	<0.1	17	2.88
1876166	Drill Core	2.09	30	2.6	54.0	2.9	48	0.1	3.6	9.7	481	3.04	5.0	40.7	1.8	31	<0.1	0.3	<0.1	51	1.87
1876167	Drill Core	0.60	5	0.6	133.4	2.3	33	0.1	2.2	7.7	450	2.56	1.6	5.1	1.2	49	<0.1	0.1	<0.1	47	2.62
1876168	Drill Core	3.68	<2	1.0	38.1	2.2	48	<0.1	3.1	10.6	557	3.10	1.0	<0.5	1.4	39	<0.1	<0.1	<0.1	60	2.53
1876169	Drill Core	3.01	3	0.7	34.6	2.6	52	<0.1	3.7	10.7	538	3.17	1.7	<0.5	1.3	49	<0.1	<0.1	<0.1	62	2.38
1876170	Drill Core	2.16	<2	0.9	23.8	2.5	40	0.5	3.2	9.8	522	2.66	1.2	1.3	0.9	33	<0.1	<0.1	<0.1	48	2.04

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000683.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876141	Rock Pulp	0.035	<1	14	1.89	19	0.003	4	0.93	0.031	0.09	0.3	2.76	2.2	0.9	>10	6	3.8	8.7
1876142	Drill Core	0.027	5	3	1.37	1460	0.023	5	1.00	0.006	0.30	<0.1	0.01	10.0	<0.1	<0.05	3	<0.5	<0.2
1876143	Drill Core	0.025	4	4	1.06	573	0.036	6	1.16	0.006	0.36	<0.1	0.01	10.6	<0.1	<0.05	3	<0.5	<0.2
1876144	Drill Core	0.029	8	2	1.09	267	0.002	2	0.63	0.003	0.10	<0.1	0.02	9.8	<0.1	<0.05	1	<0.5	<0.2
1876145	Drill Core	0.040	7	3	0.87	258	0.015	4	1.17	0.009	0.39	<0.1	0.02	12.5	<0.1	<0.05	3	<0.5	<0.2
1876146	Drill Core	0.020	3	1	0.70	435	0.002	4	0.62	0.017	0.18	<0.1	<0.01	6.0	<0.1	<0.05	1	<0.5	<0.2
1876147	Drill Core	0.060	6	3	0.69	589	0.003	4	1.03	0.016	0.26	0.2	<0.01	16.1	<0.1	<0.05	2	<0.5	<0.2
1876148	Drill Core	0.067	6	4	0.58	296	0.008	4	1.15	0.020	0.34	<0.1	<0.01	15.4	<0.1	<0.05	3	<0.5	<0.2
1876149	Drill Core	0.054	5	5	0.81	2814	0.017	4	1.02	0.021	0.35	0.2	0.02	12.2	<0.1	0.07	3	<0.5	<0.2
1876150	Drill Core	0.053	6	5	0.86	2243	0.013	2	0.60	0.033	0.18	0.2	0.02	17.4	<0.1	0.07	1	<0.5	<0.2
1876151	Drill Core	0.063	3	5	0.77	278	0.008	4	1.30	0.011	0.44	1.7	<0.01	15.5	0.1	<0.05	3	<0.5	<0.2
1876152	Drill Core	0.044	4	2	1.31	936	0.004	3	0.66	0.019	0.17	0.2	0.09	15.1	<0.1	<0.05	1	<0.5	0.7
1876153	Drill Core	0.060	7	4	0.75	571	0.015	2	0.84	0.031	0.32	0.3	0.01	20.2	<0.1	<0.05	3	<0.5	<0.2
1876154	Drill Core	0.055	7	5	0.72	859	0.022	3	1.18	0.030	0.39	0.2	0.01	17.6	<0.1	<0.05	3	<0.5	<0.2
1876155	Drill Core	0.050	5	4	0.90	280	0.014	3	0.64	0.039	0.21	0.2	0.01	14.2	<0.1	<0.05	2	<0.5	<0.2
1876156	Drill Core	0.005	1	1	0.44	929	0.004	1	0.33	0.059	0.14	<0.1	<0.01	3.5	<0.1	<0.05	<1	<0.5	<0.2
1876157	Drill Core	0.036	5	4	0.58	400	0.006	4	0.77	0.028	0.27	<0.1	0.01	9.9	<0.1	<0.05	2	<0.5	<0.2
1876158	Drill Core	0.048	4	3	0.90	1379	0.005	4	0.63	0.024	0.20	<0.1	0.02	17.0	<0.1	<0.05	1	<0.5	<0.2
1876159	Drill Core	0.044	4	4	0.84	135	0.005	4	0.68	0.022	0.22	0.5	<0.01	19.6	<0.1	<0.05	2	<0.5	<0.2
1876160	Drill Core	0.056	4	4	0.70	282	0.011	5	1.06	0.020	0.36	<0.1	<0.01	20.2	<0.1	<0.05	3	<0.5	<0.2
1876161	Drill Core	0.052	4	4	0.71	122	0.012	4	1.08	0.023	0.37	<0.1	<0.01	20.7	<0.1	<0.05	3	<0.5	<0.2
1876162	Drill Core	0.056	4	4	0.48	177	0.021	4	0.90	0.030	0.39	<0.1	0.02	17.7	<0.1	<0.05	3	<0.5	<0.2
1876163	Drill Core	0.017	1	1	0.34	189	0.010	1	0.45	0.043	0.18	<0.1	0.01	3.8	<0.1	<0.05	1	<0.5	<0.2
1876164	Drill Core	0.093	10	11	0.65	1131	0.013	5	1.17	0.026	0.42	<0.1	0.02	18.8	<0.1	<0.05	3	<0.5	<0.2
1876165	Drill Core	0.004	2	1	0.48	177	0.015	2	0.53	0.039	0.20	<0.1	0.02	1.9	<0.1	<0.05	1	<0.5	<0.2
1876166	Drill Core	0.071	4	4	0.58	151	0.015	5	0.98	0.031	0.35	0.1	0.03	17.2	<0.1	<0.05	3	<0.5	<0.2
1876167	Drill Core	0.160	4	3	0.56	281	0.018	4	0.93	0.027	0.36	<0.1	0.05	14.9	<0.1	<0.05	3	<0.5	<0.2
1876168	Drill Core	0.051	4	4	0.61	267	0.022	4	0.95	0.032	0.36	0.1	0.02	20.9	<0.1	<0.05	3	<0.5	<0.2
1876169	Drill Core	0.049	3	4	0.47	110	0.009	4	0.89	0.027	0.31	<0.1	0.02	20.6	<0.1	<0.05	3	<0.5	<0.2
1876170	Drill Core	0.055	3	4	0.54	296	0.006	5	0.81	0.026	0.28	1.1	0.04	16.1	<0.1	<0.05	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000683.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876171	Drill Core	0.93	<2	0.3	4.4	2.8	50	<0.1	2.6	8.1	1136	3.94	0.8	<0.5	1.9	90	0.2	<0.1	<0.1	102	5.66
1876172	Drill Core	2.09	66	13.3	120.0	3.3	46	37.9	22.8	11.4	870	3.48	6.2	66.2	1.3	78	0.1	0.4	<0.1	60	4.51
1876173	Drill Core	3.85	18	0.5	38.3	2.2	43	0.2	3.7	10.0	657	2.91	1.2	9.7	0.9	59	<0.1	<0.1	<0.1	57	3.44
1876174	Drill Core	2.04	3	0.6	57.1	1.9	40	0.2	4.8	9.3	668	2.33	2.2	1.5	0.9	67	<0.1	<0.1	<0.1	39	3.20
1876175	Rock Pulp	0.06	9	8.6	49.4	2.8	49	<0.1	31.4	8.7	500	3.14	5.6	<0.5	1.2	54	0.1	0.5	<0.1	70	1.02
1876176	Rock Pulp	0.06	6525	1.4	14.1	19.9	60	0.1	14.2	1.6	998	0.56	4353.6	7031.8	1.2	182	0.4	27.2	0.4	23	25.84
1876177	Drill Core	2.81	<2	0.8	30.2	2.2	38	<0.1	2.9	9.1	598	2.88	3.2	<0.5	1.1	98	<0.1	0.1	<0.1	43	3.89
1876178	Drill Core	2.22	<2	0.6	32.7	2.1	41	<0.1	2.3	8.1	610	2.97	3.3	<0.5	1.5	35	<0.1	0.2	<0.1	59	2.91
1876179	Drill Core	3.36	2	3.1	63.3	2.8	51	0.1	5.0	10.6	740	3.31	1.9	1.1	1.3	100	<0.1	0.1	<0.1	53	3.84
1876180	Drill Core	2.97	2	1.5	59.0	2.1	54	0.2	5.7	11.4	847	3.28	2.7	2.9	1.1	49	<0.1	0.1	<0.1	50	3.83
1876181	Drill Core	2.97	<2	1.3	31.2	2.6	49	<0.1	3.5	10.1	683	3.23	4.2	0.9	0.8	39	<0.1	0.4	<0.1	60	3.67
1876182	Drill Core	2.69	3	1.4	52.5	4.1	60	0.1	4.2	13.1	844	3.34	8.1	3.8	1.1	45	<0.1	0.5	<0.1	67	4.22
1876183	Drill Core	2.87	<2	1.5	37.3	4.2	64	<0.1	5.0	13.9	905	3.72	14.1	1.5	1.1	41	<0.1	0.9	<0.1	72	4.62
1876184	Drill Core	2.51	<2	1.3	41.4	3.5	77	<0.1	6.0	14.7	894	4.17	10.9	<0.5	1.0	41	<0.1	0.8	<0.1	84	3.92
1876185	Drill Core	2.98	<2	1.9	28.5	4.1	55	<0.1	4.3	13.4	827	3.67	7.3	<0.5	1.7	46	<0.1	0.7	<0.1	83	3.76
1876186	Drill Core	2.92	3	1.7	37.9	2.0	48	<0.1	3.3	12.3	797	3.31	1.9	3.1	0.9	33	<0.1	0.2	<0.1	57	2.79
1876187	Drill Core	3.40	8	0.3	29.0	1.7	41	0.2	2.3	8.6	668	2.67	1.8	7.5	0.9	40	<0.1	0.1	<0.1	45	2.96
1876188	Drill Core	3.02	25	0.5	43.1	1.6	28	0.2	2.3	7.2	1214	2.53	1.1	33.4	1.9	59	0.6	<0.1	<0.1	53	2.95
1876189	Drill Core	1.86	25	1.2	21.7	2.8	61	0.2	3.9	12.5	1332	3.31	3.1	31.3	1.3	106	0.3	0.2	<0.1	63	6.01
1876190	Drill Core	4.06	<2	0.7	38.8	2.7	62	0.2	3.6	13.2	870	3.71	3.4	0.8	1.3	56	<0.1	0.3	<0.1	87	4.32
1876191	Drill Core	3.08	6	0.9	45.5	3.0	58	1.4	3.9	12.7	781	3.53	10.4	4.7	1.3	68	<0.1	0.4	<0.1	80	4.29
1876192	Drill Core	2.83	<2	0.9	63.6	2.6	53	<0.1	3.2	13.4	807	3.57	4.6	1.6	1.5	62	<0.1	0.5	<0.1	80	4.40
1876193	Drill Core	2.69	<2	1.6	42.3	2.2	53	0.1	3.6	12.0	802	3.51	3.9	<0.5	1.5	43	<0.1	0.4	<0.1	87	4.07
1876194	Drill Core	4.60	<2	0.3	33.1	2.1	59	<0.1	3.7	12.2	833	3.59	4.6	0.5	1.7	48	<0.1	0.4	<0.1	78	4.30
1876195	Drill Core	3.44	<2	0.6	31.2	2.3	54	0.2	3.9	12.5	808	3.69	2.7	<0.5	1.2	42	<0.1	0.4	<0.1	88	3.63
1876196	Drill Core	0.94	<2	0.2	87.5	3.1	72	0.2	5.0	18.0	1039	3.73	2.4	<0.5	2.4	84	<0.1	0.2	<0.1	102	8.02
1876197	Drill Core	3.45	<2	0.8	29.2	3.1	52	0.2	3.9	12.0	856	3.58	4.2	<0.5	1.2	44	<0.1	0.6	<0.1	90	3.84
1876198	Drill Core	2.30	8	0.6	38.7	2.3	65	<0.1	4.8	15.0	1076	4.01	2.6	4.0	1.4	49	<0.1	0.5	<0.1	85	5.28
1876199	Drill Core	3.04	2	0.4	39.6	3.2	63	<0.1	3.7	12.9	885	3.61	3.4	<0.5	1.9	43	<0.1	0.5	<0.1	82	4.63
1876200	Drill Core	2.94	<2	0.7	23.0	1.9	54	<0.1	3.6	10.9	744	3.03	3.1	0.8	2.0	31	<0.1	0.3	<0.1	65	3.27

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000683.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876171	Drill Core	0.062	8	4	1.87	873	0.015	2	0.40	0.030	0.10	0.7	0.08	24.2	<0.1	<0.05	<1	0.5	<0.2
1876172	Drill Core	0.057	5	52	0.98	2796	0.007	4	0.68	0.019	0.22	99.4	0.05	14.6	<0.1	<0.05	2	<0.5	<0.2
1876173	Drill Core	0.049	3	4	0.78	549	0.005	4	0.69	0.021	0.25	0.6	0.03	18.2	<0.1	<0.05	2	<0.5	<0.2
1876174	Drill Core	0.042	2	3	0.86	1207	0.001	4	0.79	0.009	0.29	0.6	0.02	15.4	<0.1	<0.05	2	<0.5	<0.2
1876175	Rock Pulp	0.058	5	37	0.83	110	0.147	5	1.79	0.123	0.18	0.5	0.02	5.8	<0.1	<0.05	5	<0.5	<0.2
1876176	Rock Pulp	0.016	7	23	5.35	39	0.001	4	0.19	0.009	0.06	3.5	4.09	1.9	15.1	<0.05	<1	0.9	<0.2
1876177	Drill Core	0.048	3	3	0.89	105	0.002	5	0.79	0.019	0.23	0.1	0.06	13.3	<0.1	<0.05	2	<0.5	<0.2
1876178	Drill Core	0.047	3	4	0.83	204	0.003	4	0.73	0.030	0.18	0.1	0.07	16.4	<0.1	<0.05	2	1.1	<0.2
1876179	Drill Core	0.050	3	4	0.87	315	0.003	5	0.65	0.025	0.20	0.2	0.09	17.2	<0.1	<0.05	2	0.9	<0.2
1876180	Drill Core	0.051	2	3	1.06	167	<0.001	5	0.75	0.015	0.25	0.3	0.14	17.3	<0.1	<0.05	2	<0.5	<0.2
1876181	Drill Core	0.060	2	6	0.99	53	0.002	5	0.83	0.008	0.19	0.2	0.11	16.8	<0.1	<0.05	2	<0.5	<0.2
1876182	Drill Core	0.052	3	5	1.28	96	0.001	4	0.81	0.007	0.14	0.2	1.43	20.0	<0.1	<0.05	2	0.5	<0.2
1876183	Drill Core	0.034	3	5	1.49	115	<0.001	5	0.82	0.009	0.13	<0.1	2.97	18.3	<0.1	<0.05	2	0.6	<0.2
1876184	Drill Core	0.035	2	6	1.24	90	<0.001	5	0.93	0.008	0.14	0.1	1.72	20.1	<0.1	<0.05	2	<0.5	<0.2
1876185	Drill Core	0.046	2	6	1.04	41	0.002	3	0.81	0.007	0.12	<0.1	0.96	20.8	<0.1	<0.05	2	<0.5	<0.2
1876186	Drill Core	0.049	2	4	0.91	256	0.002	3	0.83	0.009	0.23	<0.1	0.10	19.9	<0.1	<0.05	2	<0.5	<0.2
1876187	Drill Core	0.035	1	3	0.94	237	<0.001	3	0.80	0.009	0.26	<0.1	0.06	17.7	<0.1	<0.05	2	<0.5	<0.2
1876188	Drill Core	0.063	8	4	1.15	1967	0.008	3	0.61	0.031	0.14	0.4	0.12	10.2	<0.1	0.08	1	<0.5	<0.2
1876189	Drill Core	0.060	4	5	1.37	2359	0.002	4	0.89	0.013	0.18	0.2	0.08	18.0	<0.1	0.09	2	<0.5	<0.2
1876190	Drill Core	0.079	3	8	1.15	165	0.003	5	0.95	0.008	0.22	0.3	0.02	22.7	<0.1	<0.05	2	<0.5	<0.2
1876191	Drill Core	0.055	4	6	0.99	270	0.005	5	0.84	0.007	0.24	6.7	0.03	20.0	<0.1	<0.05	2	<0.5	<0.2
1876192	Drill Core	0.063	4	6	1.09	45	0.004	8	0.88	0.007	0.22	<0.1	0.02	23.4	<0.1	<0.05	2	0.6	<0.2
1876193	Drill Core	0.057	3	5	1.20	84	0.004	5	0.84	0.008	0.21	0.4	0.02	20.3	<0.1	<0.05	2	0.6	<0.2
1876194	Drill Core	0.057	4	5	1.27	665	0.005	7	0.97	0.009	0.22	0.3	0.03	20.6	<0.1	<0.05	2	<0.5	<0.2
1876195	Drill Core	0.056	3	7	1.10	226	0.004	6	0.94	0.010	0.19	0.8	0.03	21.5	<0.1	0.06	2	<0.5	<0.2
1876196	Drill Core	0.059	5	5	2.34	689	0.002	3	0.59	0.015	0.05	0.4	0.06	13.0	<0.1	0.27	1	0.8	<0.2
1876197	Drill Core	0.044	2	7	1.18	1472	0.004	5	0.85	0.008	0.14	0.3	0.02	20.9	<0.1	<0.05	2	<0.5	<0.2
1876198	Drill Core	0.049	2	6	1.65	37	0.004	5	0.85	0.007	0.19	0.2	0.04	19.6	<0.1	<0.05	2	<0.5	<0.2
1876199	Drill Core	0.060	3	5	1.38	36	0.003	4	0.84	0.008	0.16	0.1	0.14	22.7	<0.1	<0.05	2	<0.5	<0.2
1876200	Drill Core	0.050	2	5	1.05	47	0.004	5	0.81	0.007	0.18	<0.1	0.05	18.0	<0.1	<0.05	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000683.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876201	Drill Core	3.09	<2	0.9	31.3	3.1	64	<0.1	4.3	12.7	822	3.48	2.5	<0.5	2.0	38	<0.1	0.4	<0.1	86	4.06
1876202	Drill Core	2.80	<2	0.7	28.1	2.5	54	<0.1	4.3	10.1	773	3.33	2.5	<0.5	1.1	37	<0.1	0.4	<0.1	78	4.23
1876203	Drill Core	1.64	<2	4.8	48.3	2.1	51	<0.1	4.2	10.3	679	3.14	1.9	<0.5	0.9	31	<0.1	0.4	<0.1	68	3.50
1876204	Drill Core	3.47	3	3.1	33.3	3.0	60	<0.1	4.6	12.6	735	3.49	3.2	1.2	1.0	44	<0.1	0.5	<0.1	70	4.15
1876205	Drill Core	2.76	15	0.8	21.2	3.0	57	<0.1	5.4	11.3	921	3.41	3.0	27.1	1.6	48	<0.1	0.2	<0.1	72	5.78
1876206	Drill Core	3.92	12	0.3	6.0	2.5	51	<0.1	4.6	10.3	1078	3.20	2.4	18.1	1.2	51	<0.1	0.3	<0.1	93	5.08
1876207	Drill Core	3.90	3	0.3	2.5	2.2	53	<0.1	5.1	10.4	1098	3.73	3.3	3.4	1.4	40	<0.1	0.3	<0.1	116	4.52
1876208	Drill Core	1.15	<2	0.9	26.6	4.6	69	<0.1	12.3	18.6	753	4.64	5.1	0.6	0.7	33	<0.1	0.9	<0.1	120	3.06
1876209	Drill Core	4.20	7	1.1	64.9	4.1	61	<0.1	10.0	17.0	829	3.94	9.1	5.7	1.0	40	0.1	1.5	<0.1	123	5.98
1876210	Rock Pulp	0.06	4	7.7	48.2	2.6	46	<0.1	31.5	9.1	499	3.14	4.7	1.4	1.1	50	0.1	0.5	<0.1	70	0.99
1876211	Rock Pulp	0.11	418	44.7	>10000	1031.7	>10000	63.0	18.3	3.1	712	13.00	153.0	549.1	<0.1	37	260.9	38.6	10.6	12	1.64
1876212	Drill Core	1.84	39	1.0	11.7	4.3	46	0.2	17.2	13.6	711	2.98	14.2	40.2	1.1	36	0.1	0.8	<0.1	86	4.90
1876213	Drill Core	2.85	2	0.5	3.9	2.3	38	<0.1	8.8	9.3	470	2.35	3.0	2.3	1.0	21	<0.1	0.2	<0.1	64	2.54
1876214	Drill Core	1.83	9	0.6	36.5	4.0	63	<0.1	18.3	18.4	906	4.53	3.9	10.1	1.2	34	0.1	0.4	<0.1	126	4.44
1876215	Drill Core	2.94	38	0.8	17.1	3.3	61	0.3	15.1	19.0	915	4.35	4.8	34.8	1.4	38	0.1	0.5	<0.1	140	5.24
1876216	Drill Core	3.15	2283	0.6	1078.7	3.8	59	40.4	9.2	14.0	727	3.82	19.7	2115.4	0.9	36	0.2	2.8	0.1	85	4.17
1876217	Drill Core	2.62	20	2.2	79.7	2.4	56	0.4	7.4	14.0	895	3.69	12.7	20.9	0.8	29	0.1	0.6	<0.1	82	4.64
1876218	Drill Core	2.00	8	0.5	23.9	2.0	48	0.1	6.0	11.2	801	3.18	2.7	7.8	0.9	29	<0.1	0.1	<0.1	69	4.35
1876219	Drill Core	3.02	19	0.5	16.2	1.6	43	0.2	5.6	10.2	710	2.88	3.2	21.1	0.9	24	0.1	0.2	<0.1	57	3.70
1876220	Drill Core	2.48	23	0.5	13.3	2.2	39	0.3	5.4	10.8	613	2.72	16.7	21.1	0.8	24	<0.1	0.7	<0.1	47	3.16
1876221	Drill Core	1.61	32	0.3	5.5	1.5	37	0.2	4.2	7.8	555	2.35	4.6	33.4	1.2	29	0.1	0.4	<0.1	37	2.75
1876222	Drill Core	3.19	207	1.3	10.8	2.1	32	0.7	5.6	7.9	588	2.53	17.6	194.4	0.6	38	<0.1	1.1	<0.1	37	3.34
1876223	Drill Core	3.32	72	1.1	8.4	4.0	43	0.2	18.6	19.5	725	4.22	40.7	71.2	0.2	41	<0.1	1.6	<0.1	99	4.96
1876224	Drill Core	3.21	137	2.5	51.3	6.0	52	0.5	15.6	14.9	525	3.39	51.2	107.8	0.5	57	0.1	2.6	<0.1	51	2.90
1876225	Drill Core	1.02	2	1.1	25.3	29.4	97	<0.1	23.6	13.3	480	3.44	27.5	0.7	4.8	142	0.3	1.4	0.4	21	0.73
1876226	Drill Core	2.63	5	1.5	22.3	22.7	67	0.1	18.3	11.3	499	2.45	28.4	2.8	4.8	168	<0.1	0.4	0.3	19	1.85
1876227	Drill Core	3.30	2	1.1	23.0	22.5	74	0.2	18.8	10.6	405	2.16	30.6	0.7	7.3	123	0.2	0.3	0.4	22	1.32
1876228	Drill Core	4.32	2	1.2	23.0	17.4	58	0.3	17.5	10.4	315	2.03	27.5	2.7	6.6	58	0.2	0.2	0.3	16	0.57
1876229	Drill Core	4.28	<2	1.1	13.4	14.7	24	0.1	8.0	4.3	324	1.44	13.8	1.4	5.7	60	<0.1	0.2	0.2	12	0.97
1876230	Drill Core	3.43	<2	0.9	12.3	13.8	38	0.1	10.6	6.0	328	1.70	15.4	0.5	5.6	81	<0.1	0.2	0.4	16	1.11

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000683.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876201	Drill Core	0.061	3	6	1.33	72	0.004	5	1.06	0.009	0.17	<0.1	0.15	21.8	<0.1	<0.05	3	<0.5	<0.2
1876202	Drill Core	0.048	2	5	1.39	191	0.002	4	0.86	0.008	0.09	<0.1	0.05	17.8	<0.1	<0.05	2	<0.5	<0.2
1876203	Drill Core	0.047	2	5	1.16	57	0.002	3	0.78	0.007	0.12	<0.1	0.05	17.7	<0.1	<0.05	2	<0.5	<0.2
1876204	Drill Core	0.036	2	5	1.36	943	0.002	6	0.86	0.010	0.22	0.2	0.34	19.8	<0.1	0.09	3	<0.5	<0.2
1876205	Drill Core	0.033	2	4	1.86	138	0.002	3	0.82	0.008	0.08	0.1	1.09	16.6	<0.1	<0.05	2	<0.5	<0.2
1876206	Drill Core	0.030	2	6	1.65	951	0.002	3	0.71	0.008	0.09	0.1	0.96	22.0	<0.1	<0.05	1	<0.5	<0.2
1876207	Drill Core	0.039	3	8	1.55	59	0.003	2	0.56	0.007	0.04	<0.1	1.00	21.7	<0.1	<0.05	1	<0.5	<0.2
1876208	Drill Core	0.031	1	26	1.06	217	<0.001	6	0.66	0.009	0.14	<0.1	1.24	25.2	<0.1	0.07	2	<0.5	<0.2
1876209	Drill Core	0.022	2	10	1.92	82	<0.001	3	0.54	0.008	0.07	<0.1	1.29	14.4	<0.1	0.12	1	<0.5	<0.2
1876210	Rock Pulp	0.059	5	39	0.83	112	0.155	6	1.84	0.126	0.18	0.4	0.02	5.3	<0.1	<0.05	5	<0.5	<0.2
1876211	Rock Pulp	0.041	<1	15	1.78	15	0.002	1	0.79	0.025	0.07	0.4	2.92	1.9	0.9	>10	5	4.4	9.1
1876212	Drill Core	0.016	2	77	1.75	69	<0.001	3	0.52	0.008	0.06	0.4	2.04	17.5	<0.1	0.06	1	<0.5	<0.2
1876213	Drill Core	0.020	3	10	0.98	30	<0.001	3	0.66	0.006	0.05	<0.1	2.28	8.5	<0.1	<0.05	1	<0.5	<0.2
1876214	Drill Core	0.024	3	29	1.68	44	0.002	5	0.91	0.008	0.09	<0.1	0.92	17.9	<0.1	0.07	2	<0.5	<0.2
1876215	Drill Core	0.023	3	24	1.87	177	0.003	5	0.69	0.013	0.11	0.4	0.68	18.3	<0.1	0.11	2	<0.5	<0.2
1876216	Drill Core	0.026	2	13	1.49	470	0.001	6	0.86	0.009	0.12	0.3	4.64	17.6	<0.1	0.18	2	0.6	23.9
1876217	Drill Core	0.038	2	5	1.69	220	0.003	3	0.75	0.009	0.09	0.1	0.30	17.8	<0.1	0.08	2	<0.5	<0.2
1876218	Drill Core	0.032	2	8	1.61	25	0.001	4	0.88	0.008	0.11	<0.1	0.12	14.4	<0.1	0.08	2	<0.5	<0.2
1876219	Drill Core	0.026	3	5	1.39	40	0.001	3	0.65	0.006	0.09	0.4	0.23	15.0	<0.1	0.06	1	<0.5	<0.2
1876220	Drill Core	0.013	2	7	1.19	56	<0.001	5	0.61	0.007	0.11	0.2	0.37	12.4	<0.1	0.16	1	<0.5	<0.2
1876221	Drill Core	0.017	3	4	1.05	40	<0.001	7	0.57	0.006	0.11	<0.1	0.58	11.7	<0.1	<0.05	1	<0.5	<0.2
1876222	Drill Core	0.004	2	8	1.27	44	<0.001	5	0.60	0.007	0.07	0.1	0.71	9.2	0.1	0.43	1	<0.5	0.6
1876223	Drill Core	0.003	<1	50	1.81	86	<0.001	3	0.55	0.009	0.07	<0.1	0.97	18.2	0.8	1.29	1	<0.5	<0.2
1876224	Drill Core	0.002	<1	13	0.76	63	<0.001	5	0.58	0.009	0.16	0.2	0.55	14.6	0.4	1.19	1	<0.5	0.3
1876225	Drill Core	0.005	5	11	0.31	321	<0.001	4	0.64	0.015	0.21	<0.1	0.14	7.9	0.3	0.37	4	<0.5	<0.2
1876226	Drill Core	0.006	8	12	0.60	1265	<0.001	3	0.94	0.021	0.24	<0.1	0.11	7.1	<0.1	0.09	3	<0.5	<0.2
1876227	Drill Core	0.010	12	13	0.46	1275	<0.001	5	1.55	0.035	0.41	<0.1	0.13	6.2	<0.1	0.07	5	<0.5	<0.2
1876228	Drill Core	0.007	14	15	0.33	220	<0.001	4	0.82	0.026	0.26	0.2	0.08	4.6	0.1	0.11	3	<0.5	<0.2
1876229	Drill Core	0.014	11	13	0.34	325	<0.001	3	0.43	0.034	0.19	0.4	0.05	2.4	0.1	0.13	1	<0.5	<0.2
1876230	Drill Core	0.015	11	14	0.36	196	<0.001	3	0.49	0.043	0.20	0.3	0.04	3.0	0.1	0.08	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000683.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876231	Drill Core	5.02	<2	0.5	13.0	11.0	39	<0.1	9.6	6.0	319	1.79	8.4	0.9	3.9	46	<0.1	0.1	0.2	14	0.40
1876232	Drill Core	3.53	<2	0.3	4.2	9.1	20	<0.1	4.9	3.2	188	1.12	4.7	0.7	2.6	36	<0.1	0.1	<0.1	9	0.42
1876233	Drill Core	3.25	4	0.9	24.1	28.7	91	0.2	23.1	13.6	210	2.26	6.1	1.1	12.7	168	0.3	1.1	0.4	29	0.30
1876234	Drill Core	3.51	2	0.8	14.5	18.6	65	0.1	24.8	10.7	640	2.34	12.7	2.9	10.6	143	0.1	1.4	0.3	23	1.04
1876235	Drill Core	4.54	3	0.9	16.9	27.9	80	0.1	26.5	12.8	354	1.68	6.9	1.8	10.0	170	0.2	1.2	0.3	24	0.79

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000683.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876231	Drill Core	0.004	9	15	0.31	207	0.001	2	0.54	0.027	0.19	0.1	0.03	3.9	0.1	<0.05	2	<0.5	<0.2
1876232	Drill Core	0.009	5	9	0.22	129	<0.001	1	0.27	0.020	0.11	<0.1	0.02	2.7	<0.1	<0.05	1	<0.5	<0.2
1876233	Drill Core	0.016	28	23	0.45	2152	0.001	2	2.84	0.102	0.41	<0.1	0.13	7.4	0.3	0.07	8	<0.5	<0.2
1876234	Drill Core	0.012	22	19	0.38	684	0.004	1	1.80	0.115	0.25	<0.1	0.11	6.0	0.2	<0.05	5	<0.5	<0.2
1876235	Drill Core	0.012	25	17	0.35	890	0.002	1	1.88	0.139	0.26	<0.1	0.12	7.0	0.2	<0.05	5	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada

PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000683.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
Pulp Duplicates																					
1876139	Drill Core	3.02	<2	1.5	14.8	3.7	41	<0.1	5.1	9.2	552	2.46	2.7	1.5	2.1	52	<0.1	0.2	<0.1	43	4.34
REP 1876139	QC		3																		
1876173	Drill Core	3.85	18	0.5	38.3	2.2	43	0.2	3.7	10.0	657	2.91	1.2	9.7	0.9	59	<0.1	<0.1	<0.1	57	3.44
REP 1876173	QC		10																		
1876177	Drill Core	2.81	<2	0.8	30.2	2.2	38	<0.1	2.9	9.1	598	2.88	3.2	<0.5	1.1	98	<0.1	0.1	<0.1	43	3.89
REP 1876177	QC			0.6	32.9	2.2	42	<0.1	2.8	9.0	599	2.87	3.7	1.0	1.0	103	<0.1	0.1	<0.1	43	3.87
1876207	Drill Core	3.90	3	0.3	2.5	2.2	53	<0.1	5.1	10.4	1098	3.73	3.3	3.4	1.4	40	<0.1	0.3	<0.1	116	4.52
REP 1876207	QC		3																		
1876212	Drill Core	1.84	39	1.0	11.7	4.3	46	0.2	17.2	13.6	711	2.98	14.2	40.2	1.1	36	0.1	0.8	<0.1	86	4.90
REP 1876212	QC			0.9	11.0	4.6	52	0.2	18.3	13.9	691	2.91	14.6	44.1	1.1	37	0.1	0.9	<0.1	85	4.77
1876213	Drill Core	2.85	2	0.5	3.9	2.3	38	<0.1	8.8	9.3	470	2.35	3.0	2.3	1.0	21	<0.1	0.2	<0.1	64	2.54
REP 1876213	QC		3																		
1876234	Drill Core	3.51	2	0.8	14.5	18.6	65	0.1	24.8	10.7	640	2.34	12.7	2.9	10.6	143	0.1	1.4	0.3	23	1.04
REP 1876234	QC			0.9	14.6	18.1	66	<0.1	24.1	10.5	627	2.34	12.5	1.3	10.6	143	<0.1	1.4	0.2	22	1.05
Core Reject Duplicates																					
1876135	Drill Core	2.24	705	19.2	53.9	7.6	84	1.0	13.9	19.5	1061	4.00	43.7	734.2	0.4	63	0.4	3.0	<0.1	70	6.32
DUP 1876135	QC		535	20.2	48.9	7.7	85	1.0	14.8	20.1	1079	4.02	44.1	584.2	0.4	64	0.4	2.3	<0.1	70	6.39
1876169	Drill Core	3.01	3	0.7	34.6	2.6	52	<0.1	3.7	10.7	538	3.17	1.7	<0.5	1.3	49	<0.1	<0.1	<0.1	62	2.38
DUP 1876169	QC		<2	0.6	32.6	2.5	45	<0.1	3.2	11.1	555	3.15	1.3	<0.5	1.2	45	<0.1	<0.1	<0.1	62	2.38
1876203	Drill Core	1.64	<2	4.8	48.3	2.1	51	<0.1	4.2	10.3	679	3.14	1.9	<0.5	0.9	31	<0.1	0.4	<0.1	68	3.50
DUP 1876203	QC		<2	4.5	50.8	2.0	53	<0.1	4.4	9.8	645	3.14	1.9	<0.5	0.9	31	<0.1	0.4	<0.1	68	3.56
Reference Materials																					
STD DS11	Standard			14.3	153.7	139.4	341	1.8	89.3	14.6	1071	3.09	41.3	77.3	7.3	69	2.6	8.5	11.3	51	1.07
STD DS11	Standard			16.6	156.4	137.8	348	1.8	81.8	13.6	1064	3.16	45.9	93.3	7.8	68	2.5	8.9	12.2	52	1.06
STD DS11	Standard			14.5	156.9	133.8	341	1.7	80.9	13.6	1029	3.17	43.2	100.2	7.8	65	2.6	8.9	11.4	53	1.07
STD DS11	Standard			14.5	152.4	137.1	335	1.7	78.4	13.4	1044	3.11	41.8	75.9	7.6	65	2.6	8.9	11.8	49	1.04
STD DS11	Standard			15.8	153.1	134.0	353	1.6	82.4	14.2	1085	3.22	45.5	80.7	8.1	73	2.5	9.6	11.6	52	1.09
STD DS11	Standard			14.6	156.4	143.5	351	1.8	81.6	13.6	1076	3.17	43.7	130.9	8.4	74	2.6	9.7	13.4	51	1.06

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000683.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
Pulp Duplicates																			
1876139	Drill Core	0.013	4	2	1.44	932	0.005	6	0.95	0.009	0.22	<0.1	0.01	6.3	<0.1	<0.05	2	<0.5	<0.2
REP 1876139	QC																		
1876173	Drill Core	0.049	3	4	0.78	549	0.005	4	0.69	0.021	0.25	0.6	0.03	18.2	<0.1	<0.05	2	<0.5	<0.2
REP 1876173	QC																		
1876177	Drill Core	0.048	3	3	0.89	105	0.002	5	0.79	0.019	0.23	0.1	0.06	13.3	<0.1	<0.05	2	<0.5	<0.2
REP 1876177	QC	0.048	3	3	0.90	101	0.002	4	0.79	0.019	0.24	0.2	0.05	14.6	<0.1	<0.05	2	0.7	<0.2
1876207	Drill Core	0.039	3	8	1.55	59	0.003	2	0.56	0.007	0.04	<0.1	1.00	21.7	<0.1	<0.05	1	<0.5	<0.2
REP 1876207	QC																		
1876212	Drill Core	0.016	2	77	1.75	69	<0.001	3	0.52	0.008	0.06	0.4	2.04	17.5	<0.1	0.06	1	<0.5	<0.2
REP 1876212	QC	0.014	2	78	1.73	69	<0.001	1	0.50	0.008	0.06	0.5	2.07	17.5	<0.1	0.06	1	<0.5	<0.2
1876213	Drill Core	0.020	3	10	0.98	30	<0.001	3	0.66	0.006	0.05	<0.1	2.28	8.5	<0.1	<0.05	1	<0.5	<0.2
REP 1876213	QC																		
1876234	Drill Core	0.012	22	19	0.38	684	0.004	1	1.80	0.115	0.25	<0.1	0.11	6.0	0.2	<0.05	5	<0.5	<0.2
REP 1876234	QC	0.012	22	19	0.38	689	0.003	1	1.72	0.115	0.25	<0.1	0.12	5.9	0.2	<0.05	6	<0.5	<0.2
Core Reject Duplicates																			
1876135	Drill Core	0.003	1	18	1.95	143	<0.001	7	0.53	0.007	0.15	0.8	0.05	18.3	<0.1	<0.05	1	<0.5	<0.2
DUP 1876135	QC	0.003	1	19	1.93	143	<0.001	7	0.51	0.007	0.15	0.8	0.04	17.3	<0.1	<0.05	1	<0.5	<0.2
1876169	Drill Core	0.049	3	4	0.47	110	0.009	4	0.89	0.027	0.31	<0.1	0.02	20.6	<0.1	<0.05	3	<0.5	<0.2
DUP 1876169	QC	0.057	3	5	0.46	113	0.008	5	0.92	0.029	0.32	<0.1	0.02	22.0	<0.1	<0.05	2	<0.5	<0.2
1876203	Drill Core	0.047	2	5	1.16	57	0.002	3	0.78	0.007	0.12	<0.1	0.05	17.7	<0.1	<0.05	2	<0.5	<0.2
DUP 1876203	QC	0.040	2	5	1.16	59	0.002	5	0.87	0.007	0.13	<0.1	0.04	18.7	<0.1	<0.05	2	<0.5	<0.2
Reference Materials																			
STD DS11	Standard	0.072	18	57	0.85	349	0.091	6	1.18	0.071	0.40	3.2	0.24	2.9	4.6	0.29	5	2.4	4.7
STD DS11	Standard	0.074	20	61	0.87	379	0.102	7	1.18	0.072	0.41	3.0	0.27	3.4	4.6	0.29	5	2.1	5.0
STD DS11	Standard	0.072	19	61	0.85	381	0.098	7	1.23	0.072	0.41	3.0	0.28	3.2	4.9	0.29	5	2.2	4.4
STD DS11	Standard	0.072	18	60	0.83	362	0.094	7	1.13	0.070	0.40	3.0	0.28	3.2	4.9	0.27	5	1.7	5.1
STD DS11	Standard	0.066	20	62	0.85	392	0.111	8	1.24	0.076	0.42	3.1	0.24	3.6	4.9	0.28	5	2.9	4.9
STD DS11	Standard	0.075	20	61	0.84	400	0.100	7	1.16	0.073	0.41	2.9	0.28	3.2	4.9	0.28	5	2.3	5.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000683.1

		WGHT Wgt kg 0.01	FA350 Au ppb 2	AQ201 Mo ppm 0.1	AQ201 Cu ppm 0.1	AQ201 Pb ppm 0.1	AQ201 Zn ppm 1	AQ201 Ag ppm 0.1	AQ201 Ni ppm 0.1	AQ201 Co ppm 0.1	AQ201 Mn ppm 1	AQ201 Fe % 0.01	AQ201 As ppm 0.5	AQ201 Au ppb 0.5	AQ201 Th ppm 0.1	AQ201 Sr ppm 1	AQ201 Cd ppm 0.1	AQ201 Sb ppm 0.1	AQ201 Bi ppm 0.1	AQ201 V ppm 2	AQ201 Ca % 0.01
STD OXC129	Standard			1.4	28.2	5.9	42	<0.1	84.4	20.8	423	3.00	<0.5	208.3	1.7	188	<0.1	<0.1	<0.1	52	0.65
STD OXC129	Standard			1.4	31.4	6.3	47	<0.1	84.2	20.7	419	3.04	0.6	200.0	1.8	193	<0.1	<0.1	<0.1	54	0.68
STD OXC129	Standard			1.4	29.1	6.6	43	<0.1	83.6	21.8	441	3.10	0.5	206.5	1.9	190	<0.1	<0.1	<0.1	54	0.71
STD OXC129	Standard			1.2	28.1	6.2	40	<0.1	81.9	20.3	417	3.05	0.7	198.1	1.8	184	<0.1	<0.1	<0.1	51	0.68
STD OXC129	Standard			1.0	27.7	6.1	42	<0.1	85.6	21.3	412	3.09	0.6	197.9	1.7	191	<0.1	<0.1	<0.1	56	0.77
STD OXC129	Standard			1.2	28.0	6.3	45	<0.1	77.7	21.1	443	3.14	0.9	210.3	1.9	199	<0.1	<0.1	<0.1	54	0.67
STD OXC145	Standard		213																		
STD OXC145	Standard		211																		
STD OXC145	Standard		218																		
STD OXC145	Standard		205																		
STD OXH139	Standard		1346																		
STD OXH139	Standard		1312																		
STD OXH139	Standard		1292																		
STD OXH139	Standard		1235																		
STD OXH139 Expected			1312																		
STD OXC145 Expected			212																		
STD OXC129 Expected				1.3	28	6.3	42.9		79.5	20.3	421	3.065	0.6	195	1.9					51	0.665
STD DS11 Expected				14.6	156	138	345	1.71	81.9	14.2	1055	3.2082	42.8	79	7.65	67.3	2.37	8.74	12.2	50	1.063
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank		<2																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000683.1

		AQ201 P % 0.001	AQ201 La ppm 1	AQ201 Cr ppm 1	AQ201 Mg % 0.01	AQ201 Ba ppm 1	AQ201 Ti % 0.001	AQ201 B ppm 1	AQ201 Al % 0.01	AQ201 Na % 0.001	AQ201 K % 0.01	AQ201 W ppm 0.1	AQ201 Hg ppm 0.01	AQ201 Sc ppm 0.1	AQ201 Tl ppm 0.1	AQ201 S % 0.05	AQ201 Ga ppm 1	AQ201 Se ppm 0.5	AQ201 Te ppm 0.2
STD OXC129	Standard	0.107	13	56	1.54	51	0.418	<1	1.51	0.572	0.36	<0.1	<0.01	0.7	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.102	13	51	1.55	50	0.410	<1	1.60	0.586	0.36	<0.1	<0.01	0.7	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.110	13	56	1.59	52	0.427	<1	1.65	0.591	0.37	<0.1	0.01	1.3	<0.1	<0.05	6	<0.5	<0.2
STD OXC129	Standard	0.102	12	54	1.55	49	0.413	<1	1.57	0.590	0.37	<0.1	<0.01	1.1	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.100	11	52	1.58	50	0.386	1	1.62	0.597	0.38	<0.1	<0.01	0.9	<0.1	<0.05	6	<0.5	<0.2
STD OXC129	Standard	0.110	13	52	1.58	52	0.416	2	1.55	0.597	0.38	<0.1	<0.01	1.2	<0.1	<0.05	6	<0.5	<0.2
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXH139 Expected																			
STD OXC145 Expected																			
STD OXC129 Expected		0.102	13	52	1.545	50	0.4	1	1.58	0.6	0.37			1.1			5.6		
STD DS11 Expected		0.0701	18.6	61.5	0.85	385	0.0976		1.1795	0.0762	0.4	2.9	0.3	3.4	4.9	0.2835	5.1	1.9	4.56
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000683.1

		WGHT Wgt kg 0.01	FA350 Au ppb 2	AQ201 Mo ppm 0.1	AQ201 Cu ppm 0.1	AQ201 Pb ppm 0.1	AQ201 Zn ppm 1	AQ201 Ag ppm 0.1	AQ201 Ni ppm 0.1	AQ201 Co ppm 0.1	AQ201 Mn ppm 1	AQ201 Fe % 0.01	AQ201 As ppm 0.5	AQ201 Au ppb 0.5	AQ201 Th ppm 0.1	AQ201 Sr ppm 1	AQ201 Cd ppm 0.1	AQ201 Sb ppm 0.1	AQ201 Bi ppm 0.1	AQ201 V ppm 2	AQ201 Ca % 0.01
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
Prep Wash																					
ROCK-WHI	Prep Blank		<2	0.6	4.0	1.2	35	<0.1	0.9	3.7	551	1.71	1.2	0.8	2.3	23	<0.1	<0.1	<0.1	22	0.58
ROCK-WHI	Prep Blank		<2	0.7	4.8	1.5	36	<0.1	1.3	3.7	561	1.71	1.4	<0.5	2.3	27	<0.1	<0.1	<0.1	22	0.69

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000683.1

		AQ201 P % 0.001	AQ201 La ppm 1	AQ201 Cr ppm 1	AQ201 Mg % 0.01	AQ201 Ba ppm 1	AQ201 Ti % 0.001	AQ201 B ppm 1	AQ201 Al % 0.01	AQ201 Na % 0.001	AQ201 K % 0.01	AQ201 W ppm 0.1	AQ201 Hg ppm 0.01	AQ201 Sc ppm 0.1	AQ201 Tl ppm 0.1	AQ201 S % 0.05	AQ201 Ga ppm 1	AQ201 Se ppm 0.5	AQ201 Te ppm 0.2
BLK	Blank																		
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
Prep Wash																			
ROCK-WHI	Prep Blank	0.044	6	2	0.50	54	0.084	<1	0.90	0.062	0.07	0.1	<0.01	2.9	<0.1	<0.05	4	<0.5	<0.2
ROCK-WHI	Prep Blank	0.041	6	3	0.49	63	0.082	2	0.97	0.070	0.09	0.1	<0.01	3.2	<0.1	<0.05	4	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Submitted By: Daithi Mac Gerailt
Receiving Lab: Canada-Whitehorse
Received: August 29, 2017
Report Date: October 16, 2017
Page: 1 of 5

CERTIFICATE OF ANALYSIS WHI17000734.1

CLIENT JOB INFORMATION

Project: Lucky Strike
Shipment ID: DDLS-17-05
P.O. Number
Number of Samples: 101

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	95	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	6	Sort, label and box pulps			WHI
FA350-Au	101	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	101	Environmental disposal charge-Fire assay lead waste			VAN
AQ201	101	1:1:1 Aqua Regia digestion ICP-MS analysis	15	Completed	VAN
SHP01	101	Per sample shipping charges for branch shipments			VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources Ltd.
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3
Canada

CC:

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000734.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876357	Drill Core	4.30	<2	0.9	43.5	100.8	45	4.5	10.8	13.5	1107	3.36	3.5	0.8	2.1	33	0.1	0.2	0.3	57	4.61
1876358	Drill Core	4.86	<2	0.8	80.4	13.0	26	0.1	4.9	7.4	637	2.14	2.3	1.8	2.0	19	0.1	0.3	<0.1	33	3.20
1876359	Drill Core	3.40	10	2.8	15.6	293.4	56	0.6	12.6	15.6	1103	4.42	4.3	7.6	2.7	23	0.1	0.4	1.0	78	1.64
1876360	Drill Core	4.20	15	4.4	48.5	54.0	62	2.5	18.1	23.9	1131	5.06	4.6	13.2	1.8	24	0.1	0.8	0.2	107	2.19
1876361	Drill Core	3.17	7	5.9	48.2	38.1	88	1.9	32.5	35.2	1740	7.13	5.2	6.9	1.0	39	0.1	0.9	<0.1	194	3.27
1876362	Drill Core	0.46	6	2.6	6.8	25.6	47	<0.1	14.3	12.2	970	3.39	5.9	4.5	1.7	19	<0.1	0.6	<0.1	75	1.06
1876363	Drill Core	4.50	6	5.2	49.7	26.9	77	0.4	17.8	19.8	1160	4.90	5.5	6.4	1.9	24	<0.1	1.0	<0.1	96	3.73
1876364	Drill Core	3.95	<2	4.4	87.9	23.2	66	0.7	9.0	16.4	1114	4.49	4.4	<0.5	2.1	27	0.1	0.6	<0.1	81	3.80
1876365	Drill Core	2.94	<2	3.1	21.6	16.1	68	1.2	10.7	14.3	1069	4.44	3.9	1.1	2.0	24	0.1	0.6	<0.1	68	2.52
1876366	Drill Core	3.52	<2	1.7	34.0	36.4	65	0.1	11.5	17.3	1195	4.97	2.6	<0.5	2.2	29	0.1	0.4	0.1	71	2.59
1876367	Drill Core	3.88	<2	2.0	13.5	12.6	55	0.7	8.4	13.9	971	4.52	2.8	1.3	2.5	24	0.1	0.4	<0.1	60	2.92
1876368	Drill Core	3.93	<2	2.2	16.4	26.5	50	0.2	7.7	14.2	856	3.84	2.8	<0.5	2.2	31	<0.1	0.5	<0.1	70	3.26
1876369	Drill Core	3.77	<2	3.4	16.0	23.9	44	0.2	7.5	13.6	960	3.49	3.8	<0.5	4.8	45	<0.1	0.8	0.1	70	4.29
1876370	Drill Core	4.46	3	3.9	77.7	32.8	55	0.2	8.7	14.8	941	3.89	5.9	0.8	2.1	38	0.2	0.8	0.1	98	3.78
1876371	Drill Core	3.71	<2	5.0	39.6	31.3	67	0.2	9.2	18.6	1346	5.32	5.0	1.6	1.3	41	0.2	0.7	0.2	105	4.63
1876372	Drill Core	2.74	<2	6.5	34.8	27.9	61	<0.1	7.1	18.1	1168	4.48	6.5	<0.5	1.6	39	0.2	0.8	<0.1	116	4.37
1876373	Drill Core	4.42	<2	6.0	26.3	22.5	57	<0.1	8.0	16.4	1224	4.30	7.7	<0.5	1.6	59	0.2	1.0	<0.1	126	5.92
1876374	Drill Core	2.36	3	4.9	35.1	20.5	60	<0.1	8.7	15.5	1226	3.88	9.1	<0.5	0.9	48	0.2	1.3	<0.1	107	6.23
1876375	Drill Core	6.43	1064	18.9	85.7	20.8	60	1.6	14.7	19.6	1907	3.45	46.1	987.5	0.5	68	1.0	6.2	<0.1	61	6.49
1876376	Drill Core	1.69	579	28.7	47.8	23.7	27	0.8	7.1	6.4	478	1.67	16.9	593.9	<0.1	32	0.4	4.6	<0.1	12	4.23
1876377	Drill Core	2.76	365	106.8	22.7	26.2	16	1.4	4.6	3.3	191	0.81	7.8	573.5	<0.1	13	0.3	3.2	0.3	5	2.38
1876378	Drill Core	3.76	290	37.9	26.2	8.8	12	0.7	3.5	2.5	165	0.72	11.9	285.7	<0.1	13	0.1	3.0	<0.1	5	1.47
1876379	Drill Core	1.01	938	34.6	127.3	9.7	22	1.7	9.1	7.4	447	1.90	106.5	989.5	<0.1	28	0.5	12.9	0.1	13	2.33
1876380	Rock Pulp	0.06	10	7.5	46.2	2.8	45	<0.1	31.0	8.7	501	3.05	5.0	4.9	1.2	54	<0.1	0.5	<0.1	67	1.02
1876381	Rock Pulp	0.06	6353	1.4	13.9	20.7	56	0.1	12.7	1.4	900	0.55	4097.7	7039.6	1.2	181	0.4	30.8	0.4	20	22.59
1876382	Drill Core	2.28	585	18.3	134.7	14.3	68	2.0	9.8	16.3	1472	3.67	101.3	571.1	0.7	75	0.8	11.5	<0.1	77	6.08
1876383	Drill Core	2.24	14	9.2	18.5	3.6	51	0.1	6.6	16.8	917	3.24	12.3	13.7	1.7	23	<0.1	1.2	<0.1	71	3.96
1876384	Drill Core	4.20	2	3.8	55.8	5.1	58	0.1	5.4	13.2	986	3.67	3.4	2.3	1.3	37	0.1	0.3	<0.1	81	4.50
1876385	Drill Core	3.94	2	2.6	27.6	2.3	53	<0.1	5.8	11.7	872	3.30	3.9	1.7	1.2	27	<0.1	0.2	<0.1	82	4.39
1876386	Drill Core	4.96	<2	1.4	42.9	2.5	63	<0.1	4.6	13.6	913	3.82	3.6	1.1	1.9	45	<0.1	0.2	<0.1	98	2.94

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000734.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876357	Drill Core	0.039	8	21	0.23	572	0.008	8	0.99	0.044	0.26	19.8	<0.01	12.4	<0.1	<0.05	3	<0.5	<0.2
1876358	Drill Core	0.039	4	6	0.15	269	0.014	4	0.62	0.031	0.18	0.4	0.01	7.6	<0.1	<0.05	2	<0.5	<0.2
1876359	Drill Core	0.059	7	21	0.22	270	0.010	4	0.77	0.046	0.22	1.4	0.01	21.2	<0.1	<0.05	3	<0.5	<0.2
1876360	Drill Core	0.064	7	27	0.34	361	0.009	8	1.02	0.032	0.37	8.2	0.02	24.6	0.2	<0.05	4	<0.5	<0.2
1876361	Drill Core	0.069	7	48	0.62	388	0.035	6	1.22	0.043	0.57	4.4	0.01	30.6	0.3	<0.05	5	<0.5	<0.2
1876362	Drill Core	0.026	14	36	0.17	185	0.009	3	0.26	0.042	0.10	0.3	0.03	14.8	<0.1	<0.05	1	<0.5	<0.2
1876363	Drill Core	0.056	5	36	0.36	345	0.013	8	1.06	0.020	0.40	0.8	0.01	24.6	0.2	<0.05	4	0.6	<0.2
1876364	Drill Core	0.059	4	13	0.24	884	0.006	6	0.86	0.017	0.25	2.7	<0.01	22.9	0.1	<0.05	3	<0.5	<0.2
1876365	Drill Core	0.087	5	47	0.31	692	0.018	6	0.98	0.024	0.36	5.0	<0.01	20.7	0.1	<0.05	3	<0.5	<0.2
1876366	Drill Core	0.076	8	33	0.39	1242	0.031	8	0.97	0.033	0.45	0.3	<0.01	19.9	0.2	<0.05	4	<0.5	<0.2
1876367	Drill Core	0.065	9	20	0.27	939	0.010	8	0.92	0.031	0.33	2.2	<0.01	19.1	0.1	<0.05	3	0.7	<0.2
1876368	Drill Core	0.082	5	15	0.43	1131	0.014	6	0.85	0.010	0.25	0.5	0.01	17.8	<0.1	<0.05	3	<0.5	<0.2
1876369	Drill Core	0.060	6	12	0.62	1284	0.002	5	0.80	0.013	0.15	0.4	0.05	17.4	<0.1	<0.05	2	<0.5	<0.2
1876370	Drill Core	0.044	3	46	0.73	1026	0.003	4	1.27	0.005	0.13	0.2	0.04	17.9	<0.1	<0.05	3	<0.5	<0.2
1876371	Drill Core	0.064	4	10	0.89	1075	0.003	9	0.94	0.005	0.19	0.2	0.02	23.3	<0.1	<0.05	3	<0.5	<0.2
1876372	Drill Core	0.040	4	6	1.10	893	0.003	6	1.00	0.005	0.17	0.1	0.02	23.3	0.1	<0.05	3	0.5	<0.2
1876373	Drill Core	0.031	4	5	1.72	1316	0.002	6	0.85	0.010	0.15	<0.1	0.03	23.5	<0.1	<0.05	2	<0.5	<0.2
1876374	Drill Core	0.012	2	5	1.37	860	<0.001	5	0.70	0.007	0.15	<0.1	0.10	20.8	<0.1	<0.05	2	<0.5	<0.2
1876375	Drill Core	0.009	2	13	0.50	427	<0.001	5	0.58	0.003	0.06	<0.1	0.25	16.6	0.2	<0.05	1	0.6	1.3
1876376	Drill Core	0.002	<1	5	1.27	189	<0.001	<1	0.11	0.002	<0.01	<0.1	0.11	2.6	<0.1	<0.05	<1	<0.5	0.9
1876377	Drill Core	0.001	<1	3	0.76	126	<0.001	<1	0.02	0.002	<0.01	0.2	0.15	0.3	0.1	<0.05	<1	<0.5	1.7
1876378	Drill Core	<0.001	<1	4	0.41	395	<0.001	<1	0.01	0.002	<0.01	0.2	0.08	0.4	<0.1	<0.05	<1	<0.5	0.6
1876379	Drill Core	0.002	<1	7	0.27	896	<0.001	<1	0.05	0.002	<0.01	0.1	0.20	1.5	<0.1	0.05	<1	<0.5	1.5
1876380	Rock Pulp	0.054	5	39	0.79	119	0.138	7	1.73	0.128	0.17	0.4	0.02	5.6	<0.1	<0.05	6	<0.5	<0.2
1876381	Rock Pulp	0.017	7	22	5.97	43	0.001	6	0.23	0.009	0.06	3.7	4.20	2.0	15.7	<0.05	<1	<0.5	<0.2
1876382	Drill Core	0.005	2	5	1.23	597	<0.001	4	0.55	0.003	0.03	<0.1	0.32	15.6	0.1	<0.05	1	<0.5	1.5
1876383	Drill Core	0.027	2	6	0.23	199	0.001	4	0.87	0.003	0.12	0.3	0.04	20.1	<0.1	<0.05	2	<0.5	<0.2
1876384	Drill Core	0.029	3	5	0.82	475	0.002	6	0.74	0.004	0.11	0.6	0.01	17.0	<0.1	<0.05	2	<0.5	<0.2
1876385	Drill Core	0.037	3	6	0.81	277	0.003	5	0.98	0.005	0.16	0.2	0.01	19.3	<0.1	<0.05	3	<0.5	<0.2
1876386	Drill Core	0.055	3	6	0.73	285	0.008	8	1.03	0.017	0.25	<0.1	<0.01	19.5	<0.1	<0.05	3	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000734.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876387	Drill Core	4.66	<2	1.0	33.0	2.9	62	<0.1	5.6	14.6	957	3.83	4.9	1.1	1.6	83	<0.1	0.3	<0.1	77	4.27
1876388	Drill Core	3.61	<2	0.9	30.3	2.9	53	<0.1	6.5	12.4	807	3.31	27.2	0.8	1.5	56	<0.1	0.5	<0.1	74	3.91
1876389	Drill Core	2.43	<2	1.2	26.0	2.8	60	<0.1	9.7	12.8	727	3.34	15.2	1.6	2.1	40	<0.1	0.4	<0.1	60	3.13
1876390	Drill Core	3.16	<2	1.2	34.1	2.2	59	0.2	12.2	13.4	681	3.39	2.7	1.9	2.7	47	<0.1	0.2	<0.1	79	2.55
1876391	Drill Core	3.48	<2	0.9	47.5	1.3	64	0.1	11.4	16.3	835	3.87	1.8	1.6	2.8	41	0.1	0.1	<0.1	87	2.54
1876392	Drill Core	4.11	<2	0.9	44.3	1.2	70	<0.1	8.1	18.7	1163	4.62	3.5	0.6	2.5	52	0.1	0.1	<0.1	105	3.22
1876393	Drill Core	5.05	<2	1.2	58.1	1.4	62	<0.1	6.9	16.7	957	3.85	1.5	1.0	2.5	58	<0.1	0.1	<0.1	95	3.14
1876394	Drill Core	4.81	<2	0.9	44.5	2.4	59	0.1	7.2	13.8	966	3.68	2.5	0.9	2.3	49	<0.1	0.1	<0.1	89	3.49
1876395	Drill Core	4.76	<2	0.6	28.0	2.1	53	<0.1	6.5	13.5	740	3.37	2.0	1.1	2.0	42	<0.1	0.2	<0.1	63	2.58
1876396	Drill Core	4.67	<2	0.7	40.8	1.9	55	0.4	8.9	19.6	945	4.49	1.9	1.4	2.4	59	<0.1	0.2	<0.1	103	3.81
1876397	Drill Core	3.37	<2	1.5	42.8	4.4	72	1.2	11.2	13.6	642	3.79	3.5	0.9	2.5	31	0.1	0.1	<0.1	84	3.04
1876398	Drill Core	4.46	<2	0.4	38.1	2.3	60	0.2	7.9	20.6	1128	4.27	3.1	<0.5	2.0	95	<0.1	0.1	<0.1	108	4.57
1876399	Drill Core	4.26	<2	1.0	51.2	2.3	45	0.4	7.6	15.3	783	3.59	2.3	0.6	1.4	93	0.1	0.2	<0.1	82	3.73
1876400	Drill Core	1.09	<2	0.9	40.9	2.2	43	<0.1	5.3	12.7	595	2.76	2.1	<0.5	0.5	25	0.1	0.2	<0.1	63	2.09
1876401	Drill Core	4.74	<2	1.5	45.3	2.6	76	0.4	9.8	19.8	1059	4.67	3.7	0.9	1.6	40	0.1	0.2	<0.1	154	3.18
1876402	Drill Core	0.78	<2	0.9	28.4	1.5	35	<0.1	4.8	10.1	620	2.31	1.1	<0.5	1.3	23	<0.1	<0.1	<0.1	87	1.84
1876403	Drill Core	2.87	<2	2.0	27.6	2.3	68	<0.1	7.7	17.3	1052	4.32	2.5	<0.5	2.2	41	<0.1	0.2	<0.1	147	3.58
1876404	Drill Core	4.98	<2	2.1	41.0	2.5	73	0.2	13.2	18.3	1023	4.31	2.8	<0.5	1.6	55	0.1	0.3	<0.1	128	3.50
1876405	Drill Core	4.79	<2	2.8	63.8	4.5	69	0.2	13.3	18.8	955	4.13	4.6	<0.5	2.7	54	<0.1	0.4	<0.1	151	4.09
1876406	Drill Core	4.05	<2	2.7	38.8	2.7	82	<0.1	13.0	21.8	1035	5.06	4.6	0.7	1.6	48	0.1	0.2	<0.1	155	3.96
1876407	Drill Core	4.18	<2	1.6	19.7	2.9	59	<0.1	8.7	17.6	824	3.88	2.8	<0.5	2.1	58	0.1	0.3	<0.1	116	3.94
1876408	Drill Core	5.00	58	1.6	9.2	4.6	67	0.1	7.6	17.5	944	4.15	5.2	59.5	2.4	68	0.2	0.4	<0.1	157	5.28
1876409	Drill Core	4.21	<2	1.5	12.5	3.0	61	<0.1	8.2	18.1	999	4.15	4.8	1.2	2.3	66	<0.1	0.3	<0.1	131	4.20
1876410	Drill Core	5.21	<2	1.7	47.3	2.0	56	<0.1	8.5	16.6	750	3.97	3.5	<0.5	2.1	64	<0.1	<0.1	<0.1	109	3.37
1876411	Drill Core	4.66	<2	2.7	28.4	2.2	61	<0.1	7.0	16.8	815	4.32	4.5	<0.5	3.2	77	<0.1	0.3	<0.1	130	3.17
1876412	Drill Core	3.66	<2	15.6	147.0	2.1	54	<0.1	7.4	17.2	789	4.12	3.9	<0.5	3.2	83	0.1	0.2	<0.1	106	3.01
1876413	Drill Core	5.24	<2	5.1	152.7	2.5	50	<0.1	6.5	16.0	740	3.85	5.2	<0.5	4.0	77	<0.1	0.4	<0.1	111	2.62
1876414	Drill Core	3.89	13	3.8	45.4	3.5	57	<0.1	8.5	17.8	852	4.16	4.3	10.9	2.4	71	0.1	0.2	<0.1	127	3.41
1876415	Rock Pulp	0.06	4	7.8	49.7	2.8	48	<0.1	32.3	9.3	494	3.15	5.1	1.8	1.1	52	0.1	0.5	<0.1	71	1.01
1876416	Rock Pulp	0.09	485	46.5	>10000	944.4	>10000	59.5	17.3	3.1	632	12.21	149.3	507.5	<0.1	34	235.9	35.8	10.2	11	1.53

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000734.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876387	Drill Core	0.059	2	6	0.85	762	0.003	6	0.87	0.017	0.24	<0.1	0.02	20.0	<0.1	<0.05	2	<0.5	<0.2
1876388	Drill Core	0.032	2	9	0.92	641	0.001	8	0.78	0.006	0.19	<0.1	0.02	17.6	<0.1	<0.05	2	<0.5	<0.2
1876389	Drill Core	0.013	4	19	0.75	380	0.004	5	0.80	0.003	0.17	0.2	0.02	11.9	<0.1	<0.05	3	<0.5	<0.2
1876390	Drill Core	0.032	5	25	0.59	265	0.009	5	0.68	0.029	0.23	1.0	<0.01	14.5	<0.1	<0.05	3	<0.5	<0.2
1876391	Drill Core	0.044	7	15	0.61	189	0.010	6	0.63	0.040	0.28	0.3	<0.01	15.7	0.1	<0.05	3	<0.5	<0.2
1876392	Drill Core	0.071	8	11	0.89	758	0.018	6	0.75	0.041	0.37	<0.1	<0.01	19.6	0.1	<0.05	3	<0.5	<0.2
1876393	Drill Core	0.051	7	11	0.79	1898	0.015	6	0.73	0.040	0.35	0.2	<0.01	17.6	0.1	<0.05	3	<0.5	<0.2
1876394	Drill Core	0.030	5	13	0.79	2204	0.003	5	0.58	0.030	0.15	0.3	<0.01	14.5	<0.1	0.06	2	<0.5	<0.2
1876395	Drill Core	0.035	3	7	0.65	2067	0.007	6	0.71	0.030	0.26	<0.1	<0.01	11.9	<0.1	0.05	2	<0.5	<0.2
1876396	Drill Core	0.083	10	11	1.10	568	0.015	6	0.80	0.032	0.44	1.1	<0.01	17.7	<0.1	<0.05	3	<0.5	<0.2
1876397	Drill Core	0.037	4	16	0.79	241	0.005	5	0.78	0.019	0.19	4.4	<0.01	14.0	<0.1	<0.05	3	<0.5	<0.2
1876398	Drill Core	0.036	5	13	1.13	1053	0.008	5	0.72	0.029	0.35	0.6	<0.01	21.5	0.1	<0.05	2	<0.5	<0.2
1876399	Drill Core	0.039	4	11	0.80	343	0.004	6	0.66	0.030	0.27	2.0	<0.01	16.0	<0.1	<0.05	2	<0.5	<0.2
1876400	Drill Core	0.023	3	15	0.75	252	0.002	4	0.39	0.027	0.15	<0.1	<0.01	13.1	<0.1	<0.05	1	<0.5	<0.2
1876401	Drill Core	0.039	4	24	1.11	144	0.009	6	0.68	0.039	0.30	2.4	<0.01	24.5	<0.1	<0.05	3	<0.5	<0.2
1876402	Drill Core	0.043	3	12	0.66	69	0.006	4	0.45	0.028	0.18	<0.1	<0.01	12.4	<0.1	<0.05	2	<0.5	<0.2
1876403	Drill Core	0.029	5	12	1.14	100	0.010	4	0.58	0.040	0.24	0.1	<0.01	23.4	<0.1	<0.05	2	<0.5	<0.2
1876404	Drill Core	0.035	5	34	0.91	141	0.006	6	0.75	0.030	0.28	0.8	<0.01	26.1	<0.1	<0.05	2	<0.5	<0.2
1876405	Drill Core	0.041	4	25	0.98	131	0.004	6	0.84	0.015	0.17	0.8	<0.01	21.3	<0.1	<0.05	2	<0.5	<0.2
1876406	Drill Core	0.114	5	14	0.67	227	0.007	7	1.05	0.018	0.33	<0.1	<0.01	17.7	0.1	<0.05	4	<0.5	<0.2
1876407	Drill Core	0.050	6	13	0.86	169	0.016	6	0.98	0.013	0.32	0.1	<0.01	16.3	<0.1	<0.05	3	<0.5	<0.2
1876408	Drill Core	0.030	5	16	1.29	138	0.020	6	1.24	0.007	0.19	0.1	0.04	21.9	<0.1	<0.05	3	<0.5	<0.2
1876409	Drill Core	0.030	5	17	1.11	139	0.011	4	0.79	0.025	0.22	0.1	<0.01	21.8	<0.1	<0.05	2	<0.5	<0.2
1876410	Drill Core	0.041	4	14	0.90	196	0.007	7	0.85	0.032	0.36	<0.1	<0.01	20.7	<0.1	<0.05	3	<0.5	<0.2
1876411	Drill Core	0.052	8	15	1.14	294	0.015	8	0.94	0.052	0.42	<0.1	<0.01	21.2	0.1	<0.05	3	<0.5	<0.2
1876412	Drill Core	0.036	5	16	0.97	555	0.008	8	0.86	0.046	0.39	0.1	<0.01	20.5	0.1	<0.05	3	<0.5	<0.2
1876413	Drill Core	0.033	7	13	1.14	528	0.029	9	1.09	0.041	0.55	0.2	<0.01	18.0	0.1	<0.05	3	<0.5	<0.2
1876414	Drill Core	0.035	6	22	1.48	773	0.028	10	1.32	0.037	0.65	0.3	<0.01	19.0	0.2	<0.05	4	<0.5	<0.2
1876415	Rock Pulp	0.058	5	39	0.82	113	0.136	8	1.85	0.140	0.17	0.4	0.01	5.6	<0.1	<0.05	6	<0.5	<0.2
1876416	Rock Pulp	0.036	<1	14	1.86	11	0.002	3	0.93	0.035	0.10	0.3	2.73	2.2	1.0	>10	6	3.3	8.5

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000734.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876417	Drill Core	4.47	549	1.3	85.4	5.7	56	1.8	8.6	18.2	804	4.27	4.1	491.8	2.5	49	0.1	0.3	<0.1	115	3.18
1876418	Drill Core	4.96	6	1.1	36.5	4.3	61	0.2	8.5	18.9	889	4.38	3.6	4.4	2.7	47	0.2	0.4	<0.1	136	3.03
1876419	Drill Core	3.81	13	0.9	54.7	4.8	55	0.2	7.5	18.4	915	3.97	1.9	11.2	2.7	73	<0.1	0.2	<0.1	130	5.91
1876420	Drill Core	4.70	2	1.1	70.8	3.7	57	0.2	8.3	21.4	972	4.74	2.7	<0.5	1.3	80	0.1	0.2	<0.1	131	4.12
1876421	Drill Core	5.96	8	1.2	59.3	3.5	62	0.1	8.1	19.7	924	4.26	4.2	3.4	1.5	68	0.2	0.2	0.1	130	4.31
1876422	Drill Core	4.49	<2	2.0	45.0	2.7	62	<0.1	6.9	19.6	918	4.36	6.0	<0.5	1.7	65	0.1	0.3	<0.1	129	3.76
1876423	Drill Core	4.84	<2	1.3	47.8	2.8	64	<0.1	8.0	21.2	972	4.53	12.4	<0.5	1.6	68	<0.1	0.4	<0.1	129	3.97
1876424	Drill Core	5.05	<2	0.8	36.5	2.7	60	<0.1	7.5	19.3	931	4.30	5.3	<0.5	2.1	45	<0.1	0.3	<0.1	131	4.04
1876425	Drill Core	3.76	<2	0.9	57.9	6.8	63	0.4	9.6	19.7	927	4.37	4.8	<0.5	2.4	69	<0.1	0.4	<0.1	134	5.02
1876426	Drill Core	2.53	<2	1.1	52.4	3.5	40	0.4	5.0	11.2	691	3.68	3.8	<0.5	1.1	51	<0.1	0.9	<0.1	76	3.30
1876427	Drill Core	2.79	<2	1.0	48.7	3.7	54	<0.1	8.9	19.2	894	4.38	4.1	<0.5	2.0	59	<0.1	2.6	<0.1	94	3.89
1876428	Drill Core	5.37	<2	4.1	34.2	4.7	54	<0.1	6.9	16.0	884	3.92	3.0	<0.5	2.0	53	0.1	1.4	<0.1	89	4.56
1876429	Drill Core	5.05	3	1.5	39.6	3.3	52	<0.1	7.4	16.4	852	4.08	3.5	<0.5	1.5	47	0.1	3.8	<0.1	87	3.58
1876430	Drill Core	4.86	9	0.8	34.7	2.9	48	<0.1	6.9	15.0	809	4.01	3.3	6.3	2.3	48	<0.1	3.8	<0.1	85	3.38
1876431	Drill Core	4.35	<2	1.1	27.1	3.5	58	<0.1	9.1	16.5	919	4.13	3.3	<0.5	1.8	49	0.1	3.8	<0.1	79	4.31
1876432	Drill Core	7.32	130	139.2	34.1	7.5	75	0.3	9.8	16.8	896	4.36	14.9	135.5	0.6	67	0.6	4.7	<0.1	78	4.55
1876433	Drill Core	3.19	10	2.6	6.5	1.6	57	<0.1	19.2	16.3	797	4.39	19.3	6.7	0.3	64	<0.1	1.9	<0.1	62	3.41
1876434	Drill Core	4.89	3	1.3	49.6	1.8	56	<0.1	13.4	18.2	765	4.31	4.7	1.6	0.5	59	0.1	0.8	<0.1	87	4.26
1876435	Drill Core	4.93	<2	0.6	47.7	2.2	70	<0.1	17.1	15.3	814	4.04	10.7	1.3	0.4	48	<0.1	0.6	<0.1	89	3.89
1876436	Drill Core	5.32	4	0.4	59.3	2.4	68	<0.1	14.9	14.3	984	3.85	4.5	4.4	0.4	48	0.2	0.6	<0.1	77	4.09
1876437	Drill Core	4.73	6	0.8	66.3	2.7	89	<0.1	24.9	19.0	1194	4.64	5.7	7.2	1.3	73	0.3	0.7	<0.1	85	4.82
1876438	Drill Core	4.90	4	0.5	35.9	3.3	73	<0.1	15.1	16.2	945	3.81	15.6	3.5	1.0	78	0.2	1.0	<0.1	83	5.16
1876439	Drill Core	4.93	<2	0.8	65.0	3.1	108	<0.1	21.8	20.8	1106	5.56	15.3	2.8	0.6	67	0.1	0.7	<0.1	120	5.05
1876440	Drill Core	5.05	<2	0.6	43.1	2.1	80	<0.1	10.7	14.2	749	4.17	4.7	1.1	0.4	61	0.2	0.5	<0.1	77	4.44
1876441	Drill Core	4.82	3	0.8	20.5	4.1	94	<0.1	19.8	20.6	1209	5.17	9.8	<0.5	0.3	64	<0.1	1.0	<0.1	118	3.80
1876442	Drill Core	2.73	79	13.7	56.4	9.8	52	0.2	19.3	16.6	778	3.49	28.4	87.9	1.9	74	0.1	1.1	0.1	42	2.84
1876443	Drill Core	2.06	20	1.0	12.8	4.6	69	<0.1	13.3	15.1	1064	3.40	12.0	25.3	2.6	104	0.2	0.3	<0.1	50	3.54
1876444	Drill Core	1.59	3	0.6	22.0	19.5	35	0.1	9.3	5.6	284	1.92	24.9	<0.5	7.7	86	0.2	0.2	0.3	17	0.39
1876445	Drill Core	3.28	<2	0.6	13.1	16.1	60	<0.1	13.4	7.8	399	2.47	11.7	2.1	6.8	103	0.2	0.2	0.2	14	1.29
1876446	Drill Core	4.80	3	1.6	24.5	18.6	90	0.2	25.1	10.6	428	2.46	29.6	<0.5	9.2	92	0.5	0.5	0.3	17	0.78

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000734.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876417	Drill Core	0.033	5	15	1.02	369	0.013	7	1.04	0.021	0.42	0.9	0.13	22.7	0.1	<0.05	3	<0.5	1.1
1876418	Drill Core	0.040	5	20	1.22	398	0.038	9	1.37	0.017	0.58	0.9	0.01	23.7	0.1	<0.05	4	<0.5	<0.2
1876419	Drill Core	0.029	5	15	1.66	146	0.008	5	0.96	0.008	0.25	0.6	0.02	18.3	<0.1	<0.05	2	<0.5	<0.2
1876420	Drill Core	0.035	4	21	1.29	318	0.016	8	1.12	0.030	0.43	0.5	<0.01	22.8	0.1	<0.05	3	<0.5	<0.2
1876421	Drill Core	0.045	5	14	1.59	330	0.014	7	1.00	0.035	0.42	0.2	<0.01	21.8	0.2	<0.05	3	<0.5	<0.2
1876422	Drill Core	0.051	5	18	1.33	251	0.011	6	0.74	0.048	0.32	0.3	<0.01	21.8	0.1	<0.05	2	<0.5	<0.2
1876423	Drill Core	0.040	4	15	1.37	751	0.010	7	0.71	0.042	0.28	<0.1	0.03	22.8	<0.1	<0.05	2	<0.5	<0.2
1876424	Drill Core	0.046	5	15	1.49	149	0.006	8	0.89	0.026	0.30	<0.1	<0.01	22.3	<0.1	<0.05	2	<0.5	<0.2
1876425	Drill Core	0.042	6	19	1.80	1311	0.007	6	1.33	0.014	0.27	2.5	<0.01	21.8	<0.1	<0.05	3	<0.5	<0.2
1876426	Drill Core	0.033	2	15	1.06	669	0.002	4	0.76	0.012	0.30	1.6	<0.01	19.8	<0.1	<0.05	2	0.6	<0.2
1876427	Drill Core	0.032	4	17	1.44	891	0.005	10	0.93	0.007	0.32	0.2	<0.01	20.7	<0.1	<0.05	2	<0.5	<0.2
1876428	Drill Core	0.027	5	11	1.75	400	0.005	9	0.91	0.009	0.33	0.2	0.04	16.9	<0.1	<0.05	2	<0.5	<0.2
1876429	Drill Core	0.032	4	15	1.41	459	0.006	14	0.91	0.017	0.43	<0.1	0.05	22.0	0.1	<0.05	2	<0.5	<0.2
1876430	Drill Core	0.029	5	10	1.39	589	0.020	11	0.90	0.029	0.42	0.2	0.04	16.7	0.1	<0.05	2	<0.5	<0.2
1876431	Drill Core	0.023	3	14	1.73	469	0.003	12	0.77	0.022	0.35	<0.1	0.07	17.0	0.2	<0.05	2	<0.5	<0.2
1876432	Drill Core	0.007	1	9	1.92	773	<0.001	13	0.63	0.013	0.25	0.1	0.38	17.0	0.2	<0.05	1	<0.5	<0.2
1876433	Drill Core	0.004	1	19	1.76	834	0.001	6	0.76	0.005	0.20	<0.1	0.24	18.4	0.1	0.07	2	<0.5	<0.2
1876434	Drill Core	0.009	2	15	1.86	199	0.002	7	0.80	0.007	0.22	<0.1	0.21	20.6	0.2	0.12	2	<0.5	<0.2
1876435	Drill Core	0.003	1	23	1.56	114	0.002	7	0.77	0.008	0.18	<0.1	0.08	17.0	0.1	0.08	2	<0.5	<0.2
1876436	Drill Core	0.003	2	16	1.68	83	0.002	8	0.76	0.008	0.17	<0.1	0.07	16.9	<0.1	0.11	2	<0.5	<0.2
1876437	Drill Core	0.007	5	44	2.04	136	0.002	7	0.80	0.009	0.23	<0.1	0.12	19.6	0.1	0.13	2	<0.5	<0.2
1876438	Drill Core	0.005	3	17	2.12	207	<0.001	10	0.71	0.010	0.19	<0.1	0.18	14.1	<0.1	0.06	2	<0.5	<0.2
1876439	Drill Core	0.009	2	33	2.28	491	<0.001	10	0.80	0.014	0.18	<0.1	0.20	21.4	<0.1	0.24	2	<0.5	<0.2
1876440	Drill Core	0.005	2	13	1.94	604	<0.001	8	0.72	0.009	0.17	<0.1	0.06	16.1	<0.1	0.22	1	<0.5	<0.2
1876441	Drill Core	0.002	1	28	2.03	393	<0.001	8	0.74	0.011	0.18	<0.1	0.12	21.9	<0.1	0.13	2	<0.5	<0.2
1876442	Drill Core	0.043	1	21	1.22	283	<0.001	4	0.86	0.020	0.42	<0.1	0.20	13.8	0.2	0.05	2	<0.5	<0.2
1876443	Drill Core	0.031	4	8	1.61	2104	<0.001	2	0.53	0.064	0.22	<0.1	0.22	9.6	<0.1	0.07	1	<0.5	<0.2
1876444	Drill Core	0.011	13	10	0.44	832	<0.001	4	1.10	0.013	0.31	<0.1	0.10	5.0	<0.1	<0.05	3	<0.5	<0.2
1876445	Drill Core	0.009	13	15	0.55	2062	<0.001	2	0.70	0.019	0.22	<0.1	0.08	5.2	0.2	0.06	2	<0.5	<0.2
1876446	Drill Core	0.015	15	16	0.52	1676	<0.001	4	0.80	0.018	0.30	<0.1	0.08	5.4	0.2	0.08	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000734.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876447	Drill Core	4.52	5	0.9	39.7	13.0	54	0.2	17.4	7.3	260	1.42	19.4	0.8	8.3	59	0.4	0.3	0.3	10	0.82
1876448	Drill Core	4.07	3	0.4	30.7	8.9	16	<0.1	8.2	2.9	219	1.39	4.1	3.0	8.0	38	<0.1	0.2	0.1	5	0.59
1876449	Drill Core	4.95	<2	0.3	20.9	14.5	43	<0.1	13.1	7.7	219	1.61	11.0	<0.5	8.0	49	<0.1	0.2	0.3	9	0.60
1876450	Rock Pulp	0.05	4	7.2	49.1	2.6	46	<0.1	32.9	8.6	482	3.06	5.2	1.0	1.1	53	0.2	0.4	<0.1	63	0.99
1876451	Rock Pulp	0.05	5905	1.3	14.5	20.6	61	0.1	10.9	1.5	853	0.50	4116.1	6683.0	1.3	175	0.5	30.9	0.5	17	24.25
1876452	Drill Core	4.77	<2	0.6	9.3	11.1	34	<0.1	9.0	5.3	271	1.68	8.2	0.9	7.1	56	0.1	<0.1	0.1	8	0.82
1876453	Drill Core	4.94	3	0.9	20.1	19.4	74	<0.1	14.8	10.3	415	2.43	20.2	1.5	12.2	74	0.2	0.3	0.3	19	0.68
1876454	Drill Core	4.03	2	0.8	21.2	20.1	80	<0.1	16.3	12.3	542	3.01	23.2	1.2	13.3	75	<0.1	0.3	0.4	21	0.57
1876455	Drill Core	4.84	<2	0.9	23.0	20.1	78	<0.1	21.9	12.0	454	2.57	33.0	0.6	11.9	78	0.2	0.3	0.4	18	0.60
1876456	Drill Core	4.00	<2	1.2	4.0	3.7	14	<0.1	2.8	3.8	301	1.45	7.3	1.5	2.1	66	<0.1	0.2	<0.1	11	1.67
1876457	Drill Core	4.05	<2	0.4	30.3	10.5	59	<0.1	13.1	9.6	296	2.10	16.2	2.4	5.1	43	<0.1	0.2	0.1	19	0.51

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000734.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876447	Drill Core	0.008	18	6	0.36	259	<0.001	2	0.50	0.010	0.21	<0.1	0.08	3.1	0.1	0.12	2	0.6	<0.2
1876448	Drill Core	0.003	20	12	0.27	269	<0.001	1	0.29	0.013	0.10	<0.1	0.07	1.9	<0.1	0.23	<1	<0.5	<0.2
1876449	Drill Core	0.006	18	6	0.31	305	<0.001	5	0.54	0.014	0.20	<0.1	0.09	3.6	0.1	0.28	2	<0.5	<0.2
1876450	Rock Pulp	0.053	5	39	0.80	105	0.131	6	1.70	0.128	0.17	0.3	0.02	5.2	<0.1	<0.05	5	<0.5	<0.2
1876451	Rock Pulp	0.017	7	22	5.77	39	0.001	6	0.19	0.008	0.05	3.7	4.24	2.5	15.7	<0.05	<1	<0.5	<0.2
1876452	Drill Core	0.008	15	14	0.35	90	<0.001	2	0.39	0.019	0.14	<0.1	0.07	2.8	0.1	0.09	1	<0.5	<0.2
1876453	Drill Core	0.010	20	7	0.53	351	<0.001	4	0.85	0.017	0.24	<0.1	0.08	7.1	<0.1	<0.05	2	<0.5	<0.2
1876454	Drill Core	0.013	21	12	0.54	497	<0.001	6	0.94	0.017	0.24	<0.1	0.08	7.6	<0.1	<0.05	3	<0.5	<0.2
1876455	Drill Core	0.012	19	10	0.53	335	<0.001	3	0.97	0.022	0.32	<0.1	0.09	6.8	<0.1	<0.05	3	<0.5	<0.2
1876456	Drill Core	0.002	7	14	0.35	92	0.002	1	0.27	0.014	0.08	<0.1	0.06	2.2	0.1	0.15	<1	<0.5	<0.2
1876457	Drill Core	0.007	14	7	0.39	97	0.002	2	0.62	0.016	0.16	<0.1	0.05	5.9	0.1	0.07	3	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada

PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000734.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
Pulp Duplicates																					
1876363	Drill Core	4.50	6	5.2	49.7	26.9	77	0.4	17.8	19.8	1160	4.90	5.5	6.4	1.9	24	<0.1	1.0	<0.1	96	3.73
REP 1876363	QC		6																		
1876377	Drill Core	2.76	365	106.8	22.7	26.2	16	1.4	4.6	3.3	191	0.81	7.8	573.5	<0.1	13	0.3	3.2	0.3	5	2.38
REP 1876377	QC			108.4	21.8	26.4	15	1.4	4.4	3.3	193	0.81	7.8	372.9	<0.1	13	0.3	3.4	0.3	6	2.38
1876395	Drill Core	4.76	<2	0.6	28.0	2.1	53	<0.1	6.5	13.5	740	3.37	2.0	1.1	2.0	42	<0.1	0.2	<0.1	63	2.58
REP 1876395	QC		<2																		
1876411	Drill Core	4.66	<2	2.7	28.4	2.2	61	<0.1	7.0	16.8	815	4.32	4.5	<0.5	3.2	77	<0.1	0.3	<0.1	130	3.17
REP 1876411	QC			3.2	28.7	2.2	59	<0.1	7.2	17.1	840	4.39	4.8	<0.5	3.1	78	<0.1	0.2	<0.1	129	3.23
1876429	Drill Core	5.05	3	1.5	39.6	3.3	52	<0.1	7.4	16.4	852	4.08	3.5	<0.5	1.5	47	0.1	3.8	<0.1	87	3.58
REP 1876429	QC		2																		
1876445	Drill Core	3.28	<2	0.6	13.1	16.1	60	<0.1	13.4	7.8	399	2.47	11.7	2.1	6.8	103	0.2	0.2	0.2	14	1.29
REP 1876445	QC			0.6	13.2	15.9	65	<0.1	14.1	8.0	410	2.44	12.5	<0.5	7.0	110	0.1	0.2	0.3	14	1.26
REP 1876456	QC		<2																		
Core Reject Duplicates																					
1876388	Drill Core	3.61	<2	0.9	30.3	2.9	53	<0.1	6.5	12.4	807	3.31	27.2	0.8	1.5	56	<0.1	0.5	<0.1	74	3.91
DUP 1876388	QC		<2	0.8	28.3	2.9	51	<0.1	6.3	13.1	814	3.41	25.6	<0.5	1.6	55	<0.1	0.5	<0.1	76	4.00
1876422	Drill Core	4.49	<2	2.0	45.0	2.7	62	<0.1	6.9	19.6	918	4.36	6.0	<0.5	1.7	65	0.1	0.3	<0.1	129	3.76
DUP 1876422	QC		<2	1.7	46.1	2.7	62	<0.1	7.5	20.2	941	4.54	5.9	<0.5	1.7	65	<0.1	0.4	<0.1	134	3.81
1876456	Drill Core	4.00	<2	1.2	4.0	3.7	14	<0.1	2.8	3.8	301	1.45	7.3	1.5	2.1	66	<0.1	0.2	<0.1	11	1.67
DUP 1876456	QC		<2	1.1	3.8	4.6	14	<0.1	3.0	3.7	303	1.38	7.2	<0.5	2.0	68	<0.1	0.2	<0.1	10	1.72
Reference Materials																					
STD DS11	Standard			13.5	145.0	133.1	341	1.6	78.6	13.4	1034	3.09	42.6	70.8	7.8	68	2.1	9.2	13.1	48	1.06
STD DS11	Standard			14.1	151.3	136.3	332	1.7	76.8	13.9	1057	3.07	42.7	74.5	7.7	71	2.5	9.7	12.0	51	1.06
STD DS11	Standard			14.4	155.7	141.2	349	1.8	82.0	14.3	1040	3.13	43.9	83.6	7.8	67	2.7	8.8	12.1	53	1.06
STD DS11	Standard			13.3	156.3	139.9	342	1.7	75.7	12.8	975	3.03	40.9	70.0	7.4	63	2.6	8.7	11.8	48	1.03
STD OXC129	Standard			1.3	28.5	6.1	40	<0.1	81.4	21.5	423	2.99	<0.5	201.6	1.9	187	<0.1	<0.1	<0.1	48	0.66
STD OXC129	Standard			1.2	27.4	5.9	40	<0.1	78.5	19.8	423	2.97	1.2	213.4	1.8	194	<0.1	<0.1	<0.1	51	0.71
STD OXC129	Standard			1.3	27.8	6.0	42	<0.1	79.8	20.6	421	3.05	0.7	191.9	1.7	192	<0.1	<0.1	<0.1	55	0.67

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000734.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
Pulp Duplicates																			
1876363	Drill Core	0.056	5	36	0.36	345	0.013	8	1.06	0.020	0.40	0.8	0.01	24.6	0.2	<0.05	4	0.6	<0.2
REP 1876363	QC																		
1876377	Drill Core	0.001	<1	3	0.76	126	<0.001	<1	0.02	0.002	<0.01	0.2	0.15	0.3	0.1	<0.05	<1	<0.5	1.7
REP 1876377	QC	0.001	<1	3	0.75	124	<0.001	<1	0.02	0.002	<0.01	0.2	0.14	0.3	0.1	<0.05	<1	<0.5	1.8
1876395	Drill Core	0.035	3	7	0.65	2067	0.007	6	0.71	0.030	0.26	<0.1	<0.01	11.9	<0.1	0.05	2	<0.5	<0.2
REP 1876395	QC																		
1876411	Drill Core	0.052	8	15	1.14	294	0.015	8	0.94	0.052	0.42	<0.1	<0.01	21.2	0.1	<0.05	3	<0.5	<0.2
REP 1876411	QC	0.050	8	15	1.13	293	0.015	8	0.93	0.053	0.41	<0.1	<0.01	21.1	0.1	<0.05	3	<0.5	<0.2
1876429	Drill Core	0.032	4	15	1.41	459	0.006	14	0.91	0.017	0.43	<0.1	0.05	22.0	0.1	<0.05	2	<0.5	<0.2
REP 1876429	QC																		
1876445	Drill Core	0.009	13	15	0.55	2062	<0.001	2	0.70	0.019	0.22	<0.1	0.08	5.2	0.2	0.06	2	<0.5	<0.2
REP 1876445	QC	0.008	14	15	0.55	1912	<0.001	3	0.68	0.018	0.22	<0.1	0.08	5.6	0.1	0.06	2	<0.5	<0.2
REP 1876456	QC																		
Core Reject Duplicates																			
1876388	Drill Core	0.032	2	9	0.92	641	0.001	8	0.78	0.006	0.19	<0.1	0.02	17.6	<0.1	<0.05	2	<0.5	<0.2
DUP 1876388	QC	0.033	2	9	0.94	674	0.001	8	0.86	0.006	0.20	<0.1	0.03	17.8	<0.1	<0.05	2	<0.5	<0.2
1876422	Drill Core	0.051	5	18	1.33	251	0.011	6	0.74	0.048	0.32	0.3	<0.01	21.8	0.1	<0.05	2	<0.5	<0.2
DUP 1876422	QC	0.050	6	19	1.38	263	0.012	7	0.83	0.052	0.34	0.2	0.01	22.8	0.1	<0.05	3	<0.5	<0.2
1876456	Drill Core	0.002	7	14	0.35	92	0.002	1	0.27	0.014	0.08	<0.1	0.06	2.2	0.1	0.15	<1	<0.5	<0.2
DUP 1876456	QC	0.002	7	13	0.35	97	0.001	2	0.25	0.014	0.07	<0.1	0.05	2.1	0.1	0.15	<1	<0.5	<0.2
Reference Materials																			
STD DS11	Standard	0.064	19	58	0.84	360	0.097	7	1.15	0.072	0.40	3.0	0.27	3.2	4.7	0.27	5	2.0	4.5
STD DS11	Standard	0.071	19	58	0.83	382	0.099	6	1.18	0.075	0.41	2.8	0.25	3.2	4.8	0.28	5	2.3	4.5
STD DS11	Standard	0.072	18	60	0.86	368	0.090	8	1.18	0.077	0.41	3.3	0.25	3.3	4.9	0.29	5	2.0	4.8
STD DS11	Standard	0.063	18	57	0.81	346	0.088	6	1.11	0.069	0.39	3.0	0.26	3.0	4.5	0.27	5	1.6	4.3
STD OXC129	Standard	0.108	13	53	1.53	51	0.408	2	1.49	0.589	0.36	<0.1	<0.01	1.1	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.103	12	52	1.55	52	0.412	1	1.57	0.593	0.36	<0.1	<0.01	0.7	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.107	12	53	1.56	50	0.407	2	1.57	0.581	0.37	<0.1	<0.01	1.1	<0.1	<0.05	5	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000734.1

		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
STD OXC129	Standard			1.1	27.8	6.3	38	<0.1	74.1	19.6	398	2.94	0.7	187.9	1.7	176	<0.1	<0.1	<0.1	50	0.67
STD OXC145	Standard		221																		
STD OXC145	Standard		210																		
STD OXC145	Standard		223																		
STD OXC145	Standard		211																		
STD OXC145	Standard		205																		
STD OXH122	Standard		1241																		
STD OXH122	Standard		1188																		
STD OXH122	Standard		1164																		
STD OXH122 Expected			1247																		
STD OXC145 Expected			212																		
STD OXC129 Expected				1.3	28	6.3	42.9		79.5	20.3	421	3.065	0.6	195	1.9					51	0.665
STD DS11 Expected				14.6	156	138	345	1.71	81.9	14.2	1055	3.2082	42.8	79	7.65	67.3	2.37	8.74	12.2	50	1.063
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	0.3	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
Prep Wash																					
ROCK-WHI	Prep Blank		<2	0.6	5.1	1.7	35	<0.1	0.8	4.1	549	1.75	0.9	3.2	2.1	24	<0.1	0.1	<0.1	26	0.61
ROCK-WHI	Prep Blank		<2	0.6	9.0	1.7	40	<0.1	0.9	3.8	567	1.70	0.7	<0.5	2.3	27	<0.1	<0.1	<0.1	23	0.63

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000734.1

		AQ201 P % 0.001	AQ201 La ppm 1	AQ201 Cr ppm 1	AQ201 Mg % 0.01	AQ201 Ba ppm 1	AQ201 Ti % 0.001	AQ201 B ppm 1	AQ201 Al % 0.01	AQ201 Na % 0.001	AQ201 K % 0.01	AQ201 W ppm 0.1	AQ201 Hg ppm 0.01	AQ201 Sc ppm 0.1	AQ201 Tl ppm 0.1	AQ201 S % 0.05	AQ201 Ga ppm 1	AQ201 Se ppm 0.5	AQ201 Te ppm 0.2
STD OXC129	Standard	0.094	12	49	1.41	47	0.358	<1	1.48	0.553	0.34	<0.1	<0.01	0.7	<0.1	<0.05	5	<0.5	<0.2
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXH122	Standard																		
STD OXH122	Standard																		
STD OXH122	Standard																		
STD OXH122 Expected																			
STD OXC145 Expected																			
STD OXC129 Expected		0.102	13	52	1.545	50	0.4	1	1.58	0.6	0.37			1.1			5.6		
STD DS11 Expected		0.0701	18.6	61.5	0.85	385	0.0976		1.1795	0.0762	0.4	2.9	0.3	3.4	4.9	0.2835	5.1	1.9	4.56
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
Prep Wash																			
ROCK-WHI	Prep Blank	0.041	6	2	0.48	60	0.096	1	1.01	0.117	0.12	0.1	0.01	3.2	<0.1	<0.05	4	<0.5	<0.2
ROCK-WHI	Prep Blank	0.041	7	2	0.47	67	0.095	2	1.08	0.126	0.13	0.2	<0.01	3.3	<0.1	<0.05	4	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Submitted By: Daithi Mac Gerailt
Receiving Lab: Canada-Whitehorse
Received: August 29, 2017
Report Date: October 16, 2017
Page: 1 of 6

CERTIFICATE OF ANALYSIS WHI17000735.1

CLIENT JOB INFORMATION

Project: Lucky Strike
Shipment ID: DDLS-17-04
P.O. Number
Number of Samples: 121

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	113	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	8	Sort, label and box pulps			WHI
FA350-Au	121	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	121	Environmental disposal charge-Fire assay lead waste			VAN
AQ201	121	1:1:1 Aqua Regia digestion ICP-MS analysis	15	Completed	VAN
SHP01	121	Per sample shipping charges for branch shipments			VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources Ltd.
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3
Canada

CC:

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000735.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876236	Drill Core	1.07	12	0.5	25.7	2.1	46	0.1	4.5	4.3	367	2.18	2.0	7.3	1.8	15	0.2	0.3	<0.1	24	0.65
1876237	Drill Core	3.84	20	0.6	22.0	1.8	48	0.3	3.7	5.5	416	3.04	1.7	24.0	1.1	14	0.2	0.3	<0.1	21	0.34
1876238	Drill Core	2.34	52	0.7	37.5	1.7	55	0.3	5.4	7.9	650	2.91	2.1	52.9	1.1	22	0.4	0.5	<0.1	29	2.55
1876239	Drill Core	0.66	13	1.0	51.1	9.2	93	0.1	13.5	23.3	1058	5.66	3.3	10.6	0.8	18	0.3	1.2	<0.1	131	4.72
1876240	Drill Core	2.64	20	1.4	6.3	5.7	28	0.5	5.2	7.8	606	3.48	1.4	24.9	1.4	19	0.3	0.3	<0.1	75	3.69
1876241	Drill Core	2.27	7	1.5	24.0	4.6	63	<0.1	9.2	16.0	780	4.32	2.6	2.0	1.1	26	0.1	0.7	<0.1	115	2.89
1876242	Drill Core	2.57	<2	4.4	60.7	6.3	68	<0.1	16.1	24.9	1292	5.84	5.2	0.6	1.4	42	0.1	4.8	<0.1	142	2.81
1876243	Drill Core	2.13	4	0.9	42.7	4.8	65	<0.1	13.6	22.5	902	4.92	3.2	3.4	1.4	28	0.1	1.2	<0.1	136	2.44
1876244	Drill Core	3.61	3	1.8	83.4	7.6	83	<0.1	14.2	24.3	1452	5.41	3.4	0.6	0.8	68	0.2	0.7	<0.1	174	7.45
1876245	Rock Pulp	0.06	6	7.7	46.5	2.8	44	<0.1	32.3	9.1	476	3.13	5.2	<0.5	1.2	55	0.1	0.5	<0.1	68	1.00
1876246	Rock Pulp	0.05	6274	1.4	14.3	20.8	57	0.1	11.7	1.6	872	0.54	4134.4	7366.1	1.2	169	0.5	29.9	0.4	21	23.30
1876247	Drill Core	2.93	2	2.6	28.9	5.4	67	<0.1	10.9	21.1	1303	4.83	3.8	3.0	0.4	72	0.1	0.6	<0.1	138	8.45
1876248	Drill Core	2.82	4	2.8	37.8	6.5	73	<0.1	12.7	22.0	1233	4.94	3.5	2.1	0.7	50	0.1	0.4	<0.1	164	5.61
1876249	Drill Core	2.61	3	3.2	48.6	3.5	69	<0.1	13.4	21.0	921	5.14	2.3	5.2	0.5	82	0.1	0.8	<0.1	167	3.69
1876250	Drill Core	1.80	3	5.3	46.5	4.2	64	<0.1	10.6	18.4	951	4.35	2.2	3.9	0.6	55	0.2	0.4	<0.1	128	4.43
1876251	Drill Core	1.86	<2	4.9	13.6	3.8	61	<0.1	6.6	12.8	731	3.44	2.8	3.3	0.8	35	0.1	0.4	<0.1	87	1.96
1876252	Drill Core	1.66	5	5.8	6.7	6.3	107	0.1	29.1	25.1	1732	6.84	4.3	4.2	1.1	58	<0.1	0.3	<0.1	187	4.49
1876253	Drill Core	2.12	17	7.9	13.0	3.9	81	<0.1	16.7	20.4	1342	5.27	3.0	17.9	2.0	48	0.2	0.3	<0.1	117	2.98
1876254	Drill Core	1.91	5	2.8	2.3	3.3	73	<0.1	4.7	11.9	619	4.68	2.5	5.3	4.8	63	<0.1	0.6	<0.1	99	1.70
1876255	Drill Core	1.29	5	4.0	3.4	3.6	46	<0.1	4.9	8.3	894	3.10	2.2	5.3	3.5	86	0.4	0.2	<0.1	69	4.37
1876256	Drill Core	3.85	3	3.6	4.6	3.8	39	<0.1	3.2	7.2	433	2.58	1.6	2.3	2.7	42	<0.1	0.3	<0.1	36	2.08
1876257	Drill Core	2.06	64	4.4	19.2	2.7	37	2.5	3.4	7.4	441	2.31	1.8	53.3	3.3	47	0.1	0.4	<0.1	43	1.81
1876258	Drill Core	2.68	15	2.6	10.5	3.8	44	0.3	5.4	10.4	716	2.91	2.3	13.2	2.4	77	0.3	0.3	<0.1	63	3.24
1876259	Drill Core	2.97	<2	1.9	19.9	2.8	54	0.3	7.3	12.6	618	3.19	1.9	2.4	3.3	40	0.1	0.4	<0.1	67	2.90
1876260	Drill Core	3.33	<2	5.1	46.3	2.1	48	0.1	13.5	16.3	908	3.53	1.9	0.5	2.1	107	<0.1	0.4	0.2	80	5.16
1876261	Drill Core	1.57	6	2.8	59.1	2.7	49	0.1	13.4	19.0	777	3.77	2.6	4.1	2.9	77	0.1	0.9	<0.1	79	4.27
1876262	Drill Core	0.57	24	1.2	11.0	2.2	61	0.3	14.6	14.6	1268	3.70	2.3	22.7	1.7	154	0.4	0.2	<0.1	93	7.20
1876263	Drill Core	3.81	12	1.5	15.0	1.8	45	0.3	14.9	15.5	649	3.18	3.3	12.0	1.7	83	0.2	0.1	<0.1	78	3.39
1876264	Drill Core	3.06	<2	0.9	30.0	1.5	31	0.2	9.4	12.7	467	2.77	4.3	<0.5	1.9	26	<0.1	0.1	<0.1	61	0.97
1876265	Drill Core	2.90	<2	1.1	35.3	1.1	42	<0.1	4.6	12.7	490	3.65	5.0	<0.5	3.0	22	<0.1	<0.1	<0.1	67	0.58

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000735.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876236	Drill Core	0.017	9	49	0.21	239	0.017	3	0.68	0.042	0.23	0.7	0.03	9.2	<0.1	<0.05	3	<0.5	<0.2
1876237	Drill Core	0.009	5	3	0.12	157	0.002	3	0.65	0.018	0.13	1.1	0.08	11.2	<0.1	<0.05	3	<0.5	<0.2
1876238	Drill Core	0.017	6	42	0.10	162	0.002	3	0.61	0.017	0.13	0.9	0.71	8.7	<0.1	<0.05	2	<0.5	<0.2
1876239	Drill Core	0.050	2	18	0.53	296	0.029	8	1.55	0.005	0.88	0.3	0.02	22.9	0.3	<0.05	5	<0.5	<0.2
1876240	Drill Core	0.045	6	15	0.14	251	0.018	3	0.57	0.041	0.15	3.3	0.03	8.9	<0.1	<0.05	1	<0.5	<0.2
1876241	Drill Core	0.046	5	18	0.50	249	0.015	4	1.39	0.014	0.47	0.2	0.01	19.0	0.1	<0.05	5	<0.5	<0.2
1876242	Drill Core	0.047	7	27	0.60	319	0.022	5	1.21	0.046	0.49	<0.1	<0.01	26.8	0.2	<0.05	4	<0.5	<0.2
1876243	Drill Core	0.060	5	21	0.46	219	0.008	5	1.16	0.016	0.36	<0.1	<0.01	30.4	0.1	<0.05	3	<0.5	<0.2
1876244	Drill Core	0.030	4	25	1.45	198	0.010	6	1.08	0.007	0.30	<0.1	<0.01	24.9	0.1	<0.05	4	<0.5	<0.2
1876245	Rock Pulp	0.057	5	40	0.80	118	0.145	5	1.76	0.126	0.17	0.4	0.02	5.2	<0.1	<0.05	5	<0.5	<0.2
1876246	Rock Pulp	0.015	7	23	6.06	41	0.001	3	0.23	0.014	0.06	3.8	4.29	1.7	16.4	<0.05	<1	<0.5	<0.2
1876247	Drill Core	0.014	2	18	1.37	164	0.003	6	0.78	0.005	0.20	<0.1	<0.01	22.4	<0.1	<0.05	2	<0.5	<0.2
1876248	Drill Core	0.032	3	27	1.97	190	0.012	6	0.94	0.045	0.33	<0.1	0.01	25.3	0.1	<0.05	4	<0.5	<0.2
1876249	Drill Core	0.032	3	29	1.13	154	0.029	8	1.21	0.030	0.60	<0.1	<0.01	27.7	0.2	<0.05	5	<0.5	<0.2
1876250	Drill Core	0.031	3	23	1.30	1672	0.030	6	1.16	0.048	0.53	<0.1	<0.01	21.6	0.2	<0.05	4	<0.5	<0.2
1876251	Drill Core	0.030	6	12	0.80	493	0.012	6	0.58	0.047	0.23	0.4	0.02	15.2	<0.1	<0.05	3	<0.5	<0.2
1876252	Drill Core	0.045	5	38	1.96	450	0.007	7	0.74	0.044	0.22	0.3	0.04	29.3	<0.1	<0.05	3	<0.5	<0.2
1876253	Drill Core	0.039	5	13	1.37	128	0.010	4	0.62	0.037	0.21	0.3	0.03	18.8	<0.1	<0.05	2	<0.5	<0.2
1876254	Drill Core	0.130	4	10	1.38	379	0.111	11	2.50	0.042	1.83	0.3	0.02	15.7	0.5	<0.05	10	<0.5	<0.2
1876255	Drill Core	0.017	10	24	1.10	126	0.020	3	0.51	0.027	0.18	0.2	<0.01	12.5	<0.1	<0.05	1	<0.5	<0.2
1876256	Drill Core	0.016	3	12	0.61	405	0.039	5	1.06	0.014	0.54	0.6	<0.01	9.0	0.2	<0.05	3	<0.5	<0.2
1876257	Drill Core	0.016	6	8	0.63	399	0.030	5	0.84	0.023	0.41	21.2	0.38	8.2	0.1	<0.05	2	<0.5	0.3
1876258	Drill Core	0.016	6	14	1.05	344	0.028	6	0.87	0.020	0.40	0.7	0.02	12.8	0.1	<0.05	2	<0.5	<0.2
1876259	Drill Core	0.033	10	21	0.88	407	0.045	7	1.26	0.026	0.56	0.6	<0.01	14.4	0.1	<0.05	4	<0.5	<0.2
1876260	Drill Core	0.088	10	27	1.26	1707	0.017	7	1.58	0.041	0.23	0.1	<0.01	15.0	<0.1	<0.05	5	<0.5	<0.2
1876261	Drill Core	0.085	11	36	1.36	246	0.010	3	1.63	0.027	0.33	<0.1	<0.01	14.9	<0.1	<0.05	5	<0.5	<0.2
1876262	Drill Core	0.050	13	57	1.79	2362	0.073	2	1.45	0.041	0.61	0.4	0.03	13.2	0.2	0.06	5	<0.5	0.3
1876263	Drill Core	0.067	8	50	1.72	786	0.075	3	2.16	0.048	0.40	0.3	<0.01	10.7	0.1	<0.05	6	<0.5	<0.2
1876264	Drill Core	0.068	7	32	1.40	347	0.127	3	1.63	0.082	0.39	0.3	0.02	6.7	<0.1	<0.05	5	<0.5	<0.2
1876265	Drill Core	0.070	8	19	1.39	714	0.186	2	1.97	0.058	0.74	0.1	0.05	6.7	0.2	<0.05	7	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000735.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876266	Drill Core	3.68	<2	1.1	18.5	1.4	49	<0.1	12.7	13.7	586	3.33	5.4	<0.5	2.0	49	<0.1	<0.1	<0.1	72	1.59
1876267	Drill Core	2.73	7	1.0	29.6	0.9	32	1.3	63.1	13.3	463	2.65	2.5	3.6	2.0	29	<0.1	<0.1	<0.1	58	1.29
1876268	Drill Core	2.87	<2	1.9	25.9	1.1	47	<0.1	28.8	17.4	673	3.52	3.9	<0.5	1.2	35	<0.1	<0.1	<0.1	101	1.58
1876269	Drill Core	3.75	<2	1.9	16.9	2.1	45	<0.1	25.2	17.7	517	3.20	6.3	0.9	0.7	38	<0.1	<0.1	<0.1	81	1.19
1876270	Drill Core	3.52	<2	2.3	65.7	1.5	33	<0.1	31.8	18.2	402	2.61	4.0	1.0	0.4	42	<0.1	<0.1	<0.1	71	1.43
1876271	Drill Core	3.11	<2	1.5	57.3	2.4	52	0.1	18.9	19.5	662	3.51	3.8	1.6	0.7	63	<0.1	<0.1	<0.1	112	2.38
1876272	Drill Core	3.14	<2	0.6	49.1	1.4	45	<0.1	36.3	18.8	506	2.91	2.6	<0.5	1.0	47	<0.1	<0.1	<0.1	92	2.24
1876273	Drill Core	3.45	6	0.9	76.7	1.2	37	<0.1	29.9	22.4	417	2.73	1.4	<0.5	0.4	36	<0.1	<0.1	<0.1	120	1.38
1876274	Drill Core	3.02	<2	1.3	60.4	2.2	69	<0.1	15.9	24.3	770	4.36	2.9	<0.5	1.1	56	<0.1	<0.1	<0.1	143	2.70
1876275	Drill Core	1.64	<2	0.5	12.9	2.1	12	<0.1	2.3	3.2	441	0.95	<0.5	<0.5	0.3	34	<0.1	<0.1	<0.1	9	2.32
1876276	Drill Core	5.34	<2	0.8	51.5	2.7	52	0.3	1.7	5.9	556	2.97	2.3	1.0	3.2	36	<0.1	0.1	0.1	13	1.81
1876277	Drill Core	2.86	<2	0.8	35.7	6.4	36	<0.1	1.8	5.1	467	2.32	1.7	<0.5	3.0	29	<0.1	0.1	0.1	9	1.59
1876278	Drill Core	3.23	<2	1.2	54.9	4.5	59	0.2	1.8	6.8	507	3.04	2.4	<0.5	3.9	19	<0.1	0.1	0.2	11	1.10
1876279	Drill Core	2.96	<2	0.7	32.4	2.4	56	<0.1	3.0	5.9	503	3.15	1.9	<0.5	4.1	19	<0.1	0.1	0.2	15	1.00
1876280	Rock Pulp	0.04	6	7.3	46.4	2.5	42	<0.1	30.3	8.6	474	3.07	4.5	1.0	1.0	48	<0.1	0.3	<0.1	68	0.98
1876281	Rock Pulp	0.07	453	47.5	>10000	977.4	>10000	60.3	17.4	3.0	641	12.32	159.0	447.4	<0.1	34	238.3	35.7	11.1	13	1.59
1876282	Drill Core	3.12	<2	0.6	35.8	2.0	69	0.1	2.7	5.8	536	3.33	1.3	0.8	4.1	17	<0.1	<0.1	0.2	17	0.92
1876283	Drill Core	2.73	<2	0.8	36.4	1.8	69	0.1	3.5	7.5	453	3.00	1.6	<0.5	4.5	16	0.1	0.1	0.2	15	0.82
1876284	Drill Core	3.16	<2	1.7	20.4	2.6	75	<0.1	31.5	19.8	950	3.94	1.9	0.7	2.5	78	0.1	0.1	<0.1	86	5.08
1876285	Drill Core	2.97	3	6.0	16.6	1.8	74	<0.1	21.5	23.9	1139	4.46	2.2	1.5	2.5	70	0.2	0.1	<0.1	93	5.14
1876286	Drill Core	3.63	5	4.6	15.8	2.9	70	<0.1	14.8	19.9	1253	4.65	2.2	2.4	2.8	96	<0.1	0.1	<0.1	80	5.33
1876287	Drill Core	2.39	5	2.3	21.0	4.2	56	0.6	4.2	9.1	763	3.13	3.9	4.0	4.1	43	<0.1	<0.1	<0.1	11	1.08
1876288	Drill Core	2.79	6	1.6	34.4	4.0	42	1.1	2.6	7.1	520	3.03	2.0	5.9	3.8	42	<0.1	0.1	<0.1	14	0.82
1876289	Drill Core	4.06	3	1.4	65.1	3.5	45	0.3	2.9	6.3	458	2.87	2.1	2.5	4.1	23	<0.1	0.1	0.1	11	0.59
1876290	Drill Core	0.75	<2	1.6	15.6	2.9	37	<0.1	3.1	6.5	972	2.91	2.3	<0.5	3.0	43	<0.1	0.1	<0.1	15	3.65
1876291	Drill Core	2.50	<2	1.0	20.8	5.4	37	0.1	4.1	7.0	1066	3.09	5.3	1.3	2.8	68	0.1	0.2	<0.1	19	5.53
1876292	Drill Core	1.39	<2	1.7	60.2	7.4	58	0.1	18.1	21.4	1775	4.79	2.7	<0.5	1.5	60	0.2	0.5	<0.1	94	5.99
1876293	Drill Core	3.22	<2	1.2	51.1	19.2	52	0.3	23.0	17.6	1264	4.22	2.3	<0.5	2.0	117	<0.1	0.1	0.3	65	6.85
1876294	Drill Core	2.90	<2	1.1	52.0	3.1	69	<0.1	13.0	17.2	627	3.81	1.6	<0.5	2.2	51	<0.1	<0.1	<0.1	70	1.83
1876295	Drill Core	2.90	<2	0.9	35.9	2.9	64	<0.1	11.2	22.0	796	4.13	1.2	<0.5	2.0	65	<0.1	<0.1	<0.1	107	2.20

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000735.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876266	Drill Core	0.082	7	47	1.54	404	0.168	2	1.67	0.074	0.46	0.2	0.01	7.2	0.1	<0.05	6	<0.5	<0.2
1876267	Drill Core	0.065	7	198	1.64	274	0.149	4	1.52	0.080	0.38	2.0	<0.01	5.3	<0.1	<0.05	5	<0.5	<0.2
1876268	Drill Core	0.071	5	89	2.02	531	0.188	4	2.07	0.089	0.72	<0.1	<0.01	8.1	0.2	<0.05	6	<0.5	<0.2
1876269	Drill Core	0.072	3	149	2.30	240	0.138	4	1.98	0.068	0.35	<0.1	<0.01	7.5	<0.1	<0.05	6	<0.5	<0.2
1876270	Drill Core	0.066	2	86	1.60	105	0.157	3	1.49	0.133	0.20	<0.1	<0.01	8.1	<0.1	<0.05	5	<0.5	<0.2
1876271	Drill Core	0.045	3	61	2.09	156	0.148	3	2.01	0.062	0.29	0.2	<0.01	11.0	<0.1	<0.05	7	<0.5	<0.2
1876272	Drill Core	0.130	5	216	2.03	918	0.113	2	1.77	0.153	0.19	<0.1	<0.01	8.7	<0.1	<0.05	6	<0.5	<0.2
1876273	Drill Core	0.066	2	82	1.50	1190	0.108	2	1.49	0.134	0.24	<0.1	<0.01	8.7	<0.1	0.06	4	<0.5	<0.2
1876274	Drill Core	0.043	5	46	1.93	126	0.090	4	2.21	0.069	0.21	<0.1	<0.01	10.9	<0.1	<0.05	7	<0.5	<0.2
1876275	Drill Core	0.008	6	8	0.26	195	0.010	3	0.48	0.060	0.14	0.1	0.01	1.6	<0.1	<0.05	2	<0.5	<0.2
1876276	Drill Core	0.030	12	5	0.42	408	0.060	2	1.09	0.040	0.36	0.6	<0.01	7.1	<0.1	<0.05	4	<0.5	<0.2
1876277	Drill Core	0.029	12	3	0.20	526	0.026	3	0.59	0.047	0.23	0.2	<0.01	5.5	<0.1	<0.05	2	<0.5	<0.2
1876278	Drill Core	0.035	14	3	0.26	365	0.063	4	0.84	0.039	0.38	0.2	<0.01	8.7	<0.1	<0.05	3	<0.5	<0.2
1876279	Drill Core	0.034	13	5	0.37	362	0.113	4	1.12	0.053	0.59	0.1	<0.01	9.0	0.1	<0.05	4	<0.5	<0.2
1876280	Rock Pulp	0.055	5	41	0.80	114	0.130	7	1.85	0.155	0.19	0.3	0.01	4.8	<0.1	<0.05	5	<0.5	<0.2
1876281	Rock Pulp	0.034	<1	15	1.74	15	0.003	2	0.96	0.041	0.10	0.4	2.83	2.2	1.0	>10	6	3.3	9.1
1876282	Drill Core	0.032	15	5	0.41	405	0.131	2	1.21	0.046	0.66	0.2	<0.01	8.8	0.1	<0.05	4	<0.5	<0.2
1876283	Drill Core	0.033	13	5	0.42	331	0.112	2	1.07	0.035	0.60	0.2	<0.01	8.8	0.1	<0.05	4	<0.5	<0.2
1876284	Drill Core	0.069	12	98	1.56	203	0.023	3	2.12	0.024	0.40	<0.1	<0.01	16.4	<0.1	<0.05	7	0.8	<0.2
1876285	Drill Core	0.054	9	61	1.62	245	0.023	4	2.05	0.022	0.40	<0.1	<0.01	17.9	<0.1	<0.05	6	<0.5	<0.2
1876286	Drill Core	0.050	12	37	1.15	306	0.028	6	1.40	0.022	0.50	<0.1	<0.01	18.0	0.1	<0.05	4	<0.5	<0.2
1876287	Drill Core	0.034	14	4	0.24	303	0.021	2	0.67	0.029	0.29	0.9	<0.01	8.7	<0.1	<0.05	2	<0.5	<0.2
1876288	Drill Core	0.032	12	3	0.18	935	0.031	2	0.58	0.042	0.26	2.6	<0.01	8.5	<0.1	<0.05	2	<0.5	<0.2
1876289	Drill Core	0.031	11	4	0.23	497	0.039	3	0.71	0.038	0.32	0.5	<0.01	8.9	<0.1	<0.05	2	<0.5	<0.2
1876290	Drill Core	0.027	11	3	0.51	1045	0.025	4	0.68	0.028	0.20	0.1	<0.01	9.4	<0.1	<0.05	2	<0.5	<0.2
1876291	Drill Core	0.026	8	3	1.00	1033	0.014	3	0.34	0.042	0.14	0.3	<0.01	9.9	<0.1	<0.05	<1	<0.5	<0.2
1876292	Drill Core	0.046	8	33	1.37	446	0.027	8	1.31	0.016	0.54	<0.1	<0.01	22.5	0.2	<0.05	3	0.7	<0.2
1876293	Drill Core	0.053	12	85	1.10	1230	0.036	4	1.66	0.013	0.53	0.3	<0.01	15.2	0.1	<0.05	4	<0.5	<0.2
1876294	Drill Core	0.049	7	31	1.58	421	0.107	3	2.46	0.032	0.87	<0.1	0.01	9.6	0.2	<0.05	7	<0.5	<0.2
1876295	Drill Core	0.047	6	38	1.92	216	0.108	2	2.34	0.039	0.48	<0.1	<0.01	10.4	0.1	<0.05	7	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000735.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876296	Drill Core	2.78	<2	1.5	36.7	2.0	62	<0.1	13.8	22.2	841	4.83	3.2	<0.5	1.3	47	<0.1	<0.1	<0.1	165	1.93
1876297	Drill Core	3.45	<2	1.9	34.0	57.6	57	0.4	18.2	20.5	640	3.87	1.8	<0.5	0.8	57	<0.1	<0.1	0.9	116	1.70
1876298	Drill Core	3.26	<2	1.8	21.3	3.8	50	0.1	15.5	17.9	793	3.97	1.8	<0.5	2.0	64	<0.1	<0.1	<0.1	107	2.75
1876299	Drill Core	3.09	<2	0.9	23.4	5.3	63	<0.1	17.5	20.2	850	4.57	3.1	<0.5	2.5	59	<0.1	<0.1	<0.1	126	2.76
1876300	Drill Core	3.20	<2	1.3	41.4	185.4	40	1.0	4.3	15.5	728	3.86	1.7	<0.5	1.8	32	<0.1	<0.1	3.3	95	1.77
1876301	Drill Core	2.41	<2	0.4	44.2	4.2	47	2.0	4.1	14.7	644	3.77	1.7	<0.5	1.4	24	<0.1	<0.1	<0.1	89	0.98
1876302	Drill Core	3.67	<2	0.7	44.5	6.4	41	0.5	3.7	13.4	653	3.19	1.3	<0.5	1.2	25	<0.1	<0.1	<0.1	79	1.12
1876303	Drill Core	2.78	3	0.9	49.6	0.9	58	0.6	4.0	16.3	909	3.96	1.5	<0.5	0.9	35	<0.1	<0.1	<0.1	105	1.88
1876304	Drill Core	2.31	<2	1.1	31.8	3.5	42	0.7	4.1	14.6	669	3.16	2.3	<0.5	1.2	41	<0.1	0.1	<0.1	79	1.34
1876305	Drill Core	3.58	<2	1.4	52.3	1.2	41	0.4	5.4	14.9	585	3.43	2.5	<0.5	1.4	36	<0.1	<0.1	<0.1	85	1.05
1876306	Drill Core	2.61	27	3.0	180.2	0.8	42	0.2	3.2	10.8	513	3.40	3.5	59.4	2.5	16	<0.1	<0.1	<0.1	95	0.93
1876307	Drill Core	2.84	<2	3.2	69.5	0.7	38	0.1	15.7	14.8	654	3.41	2.1	1.1	2.7	28	<0.1	<0.1	<0.1	101	1.15
1876308	Drill Core	3.49	<2	1.4	17.5	0.9	49	<0.1	14.7	18.8	661	4.17	1.3	1.3	2.1	25	<0.1	<0.1	<0.1	115	1.41
1876309	Drill Core	3.38	<2	1.2	16.7	1.6	52	<0.1	23.1	23.9	966	4.75	2.1	<0.5	1.6	81	<0.1	<0.1	<0.1	163	2.49
1876310	Drill Core	3.27	<2	1.2	13.1	1.4	32	<0.1	22.1	15.7	691	3.37	3.1	<0.5	3.8	35	<0.1	<0.1	<0.1	107	1.77
1876311	Drill Core	2.55	<2	0.7	9.3	0.8	35	<0.1	19.3	21.3	619	4.22	2.3	<0.5	1.7	36	<0.1	0.1	<0.1	154	1.48
1876312	Drill Core	1.71	3	0.9	4.6	0.4	26	<0.1	20.0	16.0	730	3.74	0.9	<0.5	1.5	57	<0.1	<0.1	<0.1	128	2.20
1876313	Drill Core	1.22	142	0.6	7.8	1.1	49	<0.1	13.0	22.3	2082	5.42	5.0	110.4	0.8	190	0.6	<0.1	<0.1	177	7.83
1876314	Drill Core	3.14	<2	0.8	5.4	0.6	53	<0.1	23.6	20.1	1180	4.94	1.2	<0.5	2.5	71	<0.1	<0.1	<0.1	166	3.32
1876315	Rock Pulp	0.06	10	7.8	46.2	2.6	41	<0.1	32.4	8.8	491	3.15	4.8	<0.5	1.1	50	<0.1	0.5	<0.1	67	0.97
1876316	Rock Pulp	0.07	6492	1.2	14.9	21.1	57	0.1	13.5	1.4	928	0.54	4171.4	7314.4	1.3	179	0.4	27.2	0.4	21	23.46
1876317	Drill Core	3.51	<2	1.4	12.8	3.5	41	0.1	18.9	14.4	740	3.77	2.1	1.6	4.2	56	<0.1	0.1	<0.1	112	2.50
1876318	Drill Core	3.07	<2	1.6	4.7	1.3	37	<0.1	19.3	11.0	495	2.52	1.1	<0.5	6.1	35	<0.1	<0.1	<0.1	53	1.60
1876319	Drill Core	2.43	<2	0.8	6.6	1.7	47	<0.1	23.8	14.9	930	3.62	1.3	1.6	4.5	92	<0.1	0.1	<0.1	103	2.99
1876320	Drill Core	0.66	<2	1.1	11.7	1.7	60	<0.1	22.1	15.0	925	3.85	1.8	<0.5	5.0	79	0.1	0.1	<0.1	108	2.75
1876321	Drill Core	2.45	<2	0.9	14.0	1.7	80	0.1	22.1	13.0	527	2.96	1.4	<0.5	4.9	37	0.1	<0.1	<0.1	61	1.51
1876322	Drill Core	3.11	35	0.8	5.8	4.5	54	0.1	18.1	11.3	916	3.17	2.1	32.5	4.3	54	0.1	0.4	<0.1	76	3.16
1876323	Drill Core	3.30	<2	0.6	2.0	1.7	35	0.1	26.6	14.1	811	3.18	1.5	1.0	4.4	47	<0.1	0.1	<0.1	79	2.44
1876324	Drill Core	3.36	<2	0.6	1.1	1.5	38	0.1	26.7	11.7	716	2.84	1.1	0.7	4.6	57	<0.1	0.1	<0.1	79	2.61
1876325	Drill Core	2.73	<2	0.7	15.0	1.5	36	<0.1	21.2	17.2	788	4.27	1.5	0.7	2.6	74	<0.1	0.2	<0.1	120	3.10

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000735.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876296	Drill Core	0.058	5	44	2.48	302	0.155	3	2.56	0.042	0.55	<0.1	<0.01	14.4	0.1	<0.05	8	<0.5	<0.2
1876297	Drill Core	0.045	3	66	2.13	702	0.113	2	2.15	0.054	0.31	<0.1	<0.01	10.6	<0.1	<0.05	7	<0.5	<0.2
1876298	Drill Core	0.059	9	66	2.15	1526	0.088	4	2.33	0.036	0.41	0.1	<0.01	9.9	<0.1	<0.05	7	<0.5	<0.2
1876299	Drill Core	0.064	11	70	2.65	176	0.085	3	2.61	0.036	0.28	<0.1	<0.01	13.5	<0.1	<0.05	9	<0.5	<0.2
1876300	Drill Core	0.031	6	10	1.45	232	0.091	3	1.77	0.053	0.61	0.2	0.03	8.4	<0.1	0.13	7	0.7	<0.2
1876301	Drill Core	0.030	4	8	1.52	332	0.120	4	1.99	0.051	0.82	3.3	0.01	6.5	0.1	<0.05	7	<0.5	<0.2
1876302	Drill Core	0.029	4	7	1.28	299	0.094	2	1.69	0.055	0.69	0.8	<0.01	4.9	0.1	<0.05	5	<0.5	<0.2
1876303	Drill Core	0.034	4	7	1.56	311	0.083	2	2.07	0.047	0.61	1.2	<0.01	8.1	<0.1	<0.05	7	<0.5	<0.2
1876304	Drill Core	0.032	3	8	1.59	168	0.087	3	1.85	0.055	0.40	1.3	<0.01	6.6	<0.1	<0.05	6	<0.5	<0.2
1876305	Drill Core	0.039	5	8	1.52	212	0.088	3	1.69	0.052	0.49	0.4	<0.01	6.4	<0.1	<0.05	6	<0.5	<0.2
1876306	Drill Core	0.025	8	7	1.51	589	0.089	2	1.50	0.075	0.64	0.3	<0.01	9.9	0.1	0.06	7	<0.5	<0.2
1876307	Drill Core	0.050	11	55	1.78	482	0.106	1	1.50	0.085	0.54	0.2	<0.01	7.0	0.1	<0.05	6	<0.5	<0.2
1876308	Drill Core	0.085	11	39	1.75	414	0.140	1	1.56	0.126	0.64	0.2	<0.01	7.8	0.1	0.06	7	<0.5	<0.2
1876309	Drill Core	0.073	7	51	2.32	451	0.190	2	1.88	0.094	0.59	0.2	<0.01	9.3	0.1	0.05	8	<0.5	<0.2
1876310	Drill Core	0.049	12	78	1.99	367	0.159	2	1.60	0.097	0.43	0.1	<0.01	9.2	<0.1	<0.05	7	<0.5	<0.2
1876311	Drill Core	0.076	8	44	2.05	297	0.149	2	1.69	0.151	0.30	0.1	<0.01	9.8	<0.1	0.08	7	<0.5	<0.2
1876312	Drill Core	0.071	10	50	2.12	278	0.120	2	1.78	0.163	0.37	0.2	<0.01	10.9	<0.1	<0.05	7	<0.5	<0.2
1876313	Drill Core	0.077	8	17	2.48	144	0.081	1	1.62	0.063	0.28	0.2	0.02	17.7	<0.1	0.09	7	<0.5	<0.2
1876314	Drill Core	0.071	12	67	2.38	739	0.086	3	2.29	0.062	0.49	0.1	<0.01	15.8	<0.1	0.05	9	<0.5	<0.2
1876315	Rock Pulp	0.056	5	40	0.79	110	0.133	6	1.72	0.122	0.16	0.4	0.01	5.3	<0.1	<0.05	5	<0.5	<0.2
1876316	Rock Pulp	0.016	7	22	6.08	39	0.001	4	0.21	0.014	0.06	4.0	4.26	1.9	16.1	<0.05	<1	<0.5	<0.2
1876317	Drill Core	0.053	17	37	1.88	1347	0.051	3	1.68	0.045	0.36	0.2	0.02	14.8	<0.1	0.09	8	<0.5	<0.2
1876318	Drill Core	0.033	20	50	1.34	532	0.052	3	1.23	0.054	0.40	<0.1	0.02	7.1	<0.1	<0.05	5	<0.5	<0.2
1876319	Drill Core	0.041	15	62	1.91	1015	0.054	2	1.31	0.061	0.33	<0.1	<0.01	13.0	<0.1	0.07	7	<0.5	<0.2
1876320	Drill Core	0.037	17	59	2.00	1284	0.079	1	1.28	0.060	0.45	0.1	<0.01	15.3	0.1	0.07	7	<0.5	<0.2
1876321	Drill Core	0.038	16	51	1.24	946	0.033	3	1.14	0.052	0.31	0.3	0.04	10.4	<0.1	0.10	4	<0.5	<0.2
1876322	Drill Core	0.048	13	49	1.77	343	0.024	3	1.11	0.048	0.29	0.1	0.04	13.2	<0.1	0.05	5	<0.5	<0.2
1876323	Drill Core	0.040	16	79	1.94	491	0.020	3	1.35	0.048	0.30	0.3	0.01	13.2	<0.1	<0.05	6	<0.5	<0.2
1876324	Drill Core	0.039	13	72	1.77	372	0.011	2	1.09	0.062	0.18	0.3	<0.01	15.7	<0.1	<0.05	5	<0.5	<0.2
1876325	Drill Core	0.065	13	51	2.13	532	0.024	3	1.63	0.041	0.31	0.1	<0.01	16.0	<0.1	0.19	7	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000735.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876326	Drill Core	3.70	<2	1.2	5.3	1.4	41	<0.1	25.7	15.0	744	3.55	1.5	<0.5	4.5	64	<0.1	0.2	<0.1	101	2.60
1876327	Drill Core	1.08	<2	0.5	45.1	3.6	64	0.2	19.7	28.2	863	6.26	4.0	<0.5	1.7	51	<0.1	0.4	<0.1	138	2.30
1876328	Drill Core	4.54	4	0.8	20.1	3.0	47	<0.1	16.0	19.7	993	4.49	2.6	4.6	2.9	83	<0.1	0.3	<0.1	84	3.73
1876329	Drill Core	2.88	<2	0.4	42.4	2.4	46	<0.1	24.1	23.0	981	5.01	1.7	1.0	2.4	85	<0.1	0.4	<0.1	90	3.87
1876330	Drill Core	2.11	<2	0.5	22.9	7.8	57	0.1	36.8	25.2	950	5.56	3.0	1.1	3.1	82	<0.1	0.6	0.3	137	3.76
1876331	Drill Core	4.67	<2	1.5	27.9	2.8	44	<0.1	17.1	24.7	1422	5.39	1.7	<0.5	1.4	86	<0.1	0.5	<0.1	129	5.59
1876332	Drill Core	4.73	77	1.0	61.5	5.2	56	0.2	13.4	27.7	1212	6.14	2.0	28.4	1.2	71	<0.1	0.5	0.1	120	4.07
1876333	Drill Core	3.94	100	0.6	6.4	2.0	26	0.7	3.4	7.6	522	2.40	1.0	163.8	2.0	36	<0.1	<0.1	<0.1	43	2.16
1876334	Drill Core	3.24	27	0.6	15.4	2.6	37	0.2	3.6	10.1	833	3.36	2.1	45.6	1.7	54	0.1	0.1	<0.1	61	3.42
1876335	Drill Core	2.40	7	0.5	26.4	2.7	34	0.4	2.3	8.1	585	2.64	1.5	6.6	2.1	52	<0.1	0.2	<0.1	45	2.72
1876336	Drill Core	3.74	<2	0.6	5.0	3.1	30	<0.1	4.4	6.8	648	2.12	2.6	1.6	2.3	45	<0.1	0.2	<0.1	48	2.42
1876337	Drill Core	3.30	<2	7.4	12.8	2.3	29	<0.1	2.4	7.2	664	2.13	2.9	0.7	2.6	35	<0.1	<0.1	<0.1	51	2.05
1876338	Drill Core	2.87	<2	4.3	2.4	1.6	23	<0.1	1.8	5.3	691	1.78	2.1	<0.5	2.6	28	<0.1	<0.1	<0.1	43	1.66
1876339	Drill Core	2.97	<2	0.4	2.3	1.4	19	<0.1	2.0	4.6	456	1.52	2.4	1.2	1.5	24	<0.1	<0.1	<0.1	35	1.51
1876340	Drill Core	3.33	17	0.4	2.6	1.4	24	<0.1	2.1	5.6	623	1.88	1.9	34.6	2.1	30	<0.1	0.2	<0.1	44	1.66
1876341	Drill Core	1.14	<2	0.6	20.6	2.3	38	0.3	3.4	9.9	685	2.69	1.0	0.7	0.9	34	<0.1	0.1	<0.1	46	3.19
1876342	Drill Core	2.14	<2	1.9	53.0	2.5	40	1.1	2.9	11.2	664	3.28	1.5	1.0	1.4	27	<0.1	0.1	<0.1	55	2.62
1876343	Drill Core	2.62	<2	0.8	46.4	2.6	44	0.2	3.2	11.0	634	3.27	2.0	1.3	1.1	27	<0.1	0.2	<0.1	63	2.54
1876344	Drill Core	1.97	13	0.6	32.5	2.4	46	<0.1	3.6	11.9	728	3.59	2.0	12.5	1.2	28	<0.1	0.2	<0.1	81	2.61
1876345	Drill Core	5.84	4	4.6	56.4	3.2	48	25.4	10.7	13.0	821	3.74	2.4	2.3	1.5	46	<0.1	0.2	<0.1	65	3.36
1876346	Drill Core	0.68	4	1.3	45.9	2.5	51	1.9	4.9	13.8	659	3.82	1.7	3.3	1.1	35	<0.1	<0.1	<0.1	71	2.76
1876347	Drill Core	11.44	4	2.6	43.9	2.8	44	14.9	7.1	11.6	805	3.36	1.3	2.7	1.1	36	<0.1	0.2	<0.1	60	3.43
1876348	Drill Core	5.80	28	4.2	40.1	2.9	46	0.4	3.8	11.9	862	3.48	1.2	27.0	1.1	40	<0.1	0.1	<0.1	68	3.84
1876349	Drill Core	0.90	194	1.7	43.2	2.2	44	0.9	4.1	12.0	1086	3.88	1.1	182.1	1.2	42	<0.1	0.1	<0.1	97	3.96
1876350	Rock Pulp	0.06	10	7.7	49.1	2.9	49	<0.1	32.9	9.1	484	3.17	5.6	1.9	1.3	58	<0.1	0.5	<0.1	69	1.01
1876351	Rock Pulp	0.08	542	45.9	>10000	929.7	>10000	60.9	17.8	3.0	636	12.29	149.1	665.1	<0.1	33	230.3	33.7	10.2	10	1.53
1876352	Drill Core	0.29	1159	0.5	70.7	3.2	65	4.9	4.4	16.7	1373	4.67	0.9	1179.4	1.0	48	0.3	0.1	<0.1	106	5.58
1876353	Drill Core	4.12	20	1.4	49.9	2.7	58	0.2	4.5	13.5	795	3.63	0.8	20.3	1.3	33	<0.1	<0.1	<0.1	75	3.28
1876354	Drill Core	2.77	35	1.2	29.3	2.6	55	0.2	3.9	12.3	1053	3.78	1.5	36.4	1.6	41	<0.1	0.1	<0.1	103	4.23
1876355	Drill Core	4.52	39	1.0	12.7	2.4	50	0.2	4.1	10.6	828	3.22	3.9	43.7	1.5	44	<0.1	0.3	<0.1	85	3.76

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000735.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876326	Drill Core	0.037	12	83	1.94	128	0.024	2	1.35	0.057	0.22	0.1	0.02	16.6	<0.1	0.06	6	<0.5	<0.2
1876327	Drill Core	0.097	9	33	1.93	57	0.010	5	2.52	0.023	0.37	0.2	0.02	18.4	<0.1	0.19	8	<0.5	<0.2
1876328	Drill Core	0.057	10	34	2.17	284	0.019	3	1.48	0.037	0.41	<0.1	0.02	17.6	<0.1	0.06	6	<0.5	<0.2
1876329	Drill Core	0.055	7	49	2.31	128	0.014	3	1.67	0.034	0.42	0.1	<0.01	21.4	<0.1	0.19	5	<0.5	<0.2
1876330	Drill Core	0.076	14	63	2.15	91	0.013	4	1.53	0.035	0.36	<0.1	<0.01	25.6	<0.1	0.22	7	<0.5	<0.2
1876331	Drill Core	0.060	8	22	2.66	55	0.013	3	1.00	0.033	0.28	0.2	<0.01	20.4	<0.1	0.16	4	<0.5	<0.2
1876332	Drill Core	0.079	7	15	2.07	287	0.007	3	1.13	0.018	0.34	0.2	<0.01	17.8	<0.1	0.25	3	<0.5	<0.2
1876333	Drill Core	0.029	4	4	0.85	843	0.006	4	0.53	0.005	0.19	0.6	<0.01	9.3	<0.1	0.08	1	<0.5	0.3
1876334	Drill Core	0.039	4	4	1.27	1024	0.008	4	0.48	0.039	0.19	0.7	<0.01	13.0	<0.1	0.07	1	<0.5	<0.2
1876335	Drill Core	0.047	4	3	0.93	936	0.006	4	0.58	0.029	0.20	1.2	<0.01	8.8	<0.1	0.08	2	<0.5	<0.2
1876336	Drill Core	0.032	5	8	0.76	1063	0.002	4	0.34	0.051	0.10	0.2	0.01	9.5	<0.1	0.08	<1	<0.5	<0.2
1876337	Drill Core	0.030	25	3	0.66	361	0.003	3	0.26	0.055	0.09	0.1	0.02	12.7	<0.1	0.07	<1	<0.5	<0.2
1876338	Drill Core	0.033	27	3	0.53	385	0.002	2	0.19	0.068	0.05	0.2	0.01	10.1	<0.1	<0.05	<1	<0.5	<0.2
1876339	Drill Core	0.020	5	5	0.51	54	0.002	2	0.19	0.044	0.06	0.3	<0.01	7.6	<0.1	<0.05	<1	<0.5	<0.2
1876340	Drill Core	0.022	7	5	0.61	174	0.001	3	0.27	0.039	0.07	0.2	0.01	9.7	<0.1	<0.05	<1	<0.5	<0.2
1876341	Drill Core	0.038	2	5	1.06	36	0.002	4	0.44	0.007	0.16	0.8	<0.01	15.8	<0.1	0.06	1	<0.5	<0.2
1876342	Drill Core	0.061	3	5	0.80	73	0.005	5	0.52	0.030	0.18	2.2	0.02	15.2	<0.1	0.09	1	<0.5	<0.2
1876343	Drill Core	0.062	2	5	0.78	78	0.009	4	0.42	0.036	0.17	0.7	0.01	18.4	<0.1	0.07	1	<0.5	<0.2
1876344	Drill Core	0.072	3	7	0.83	444	0.009	6	0.59	0.027	0.25	0.2	0.02	23.4	<0.1	0.08	2	<0.5	<0.2
1876345	Drill Core	0.056	4	26	1.17	417	0.011	4	0.65	0.026	0.26	52.4	0.19	18.0	<0.1	0.09	2	<0.5	<0.2
1876346	Drill Core	0.057	3	8	0.87	90	0.004	4	0.53	0.026	0.19	2.8	0.01	18.2	<0.1	0.11	2	<0.5	<0.2
1876347	Drill Core	0.045	3	11	1.11	81	0.003	4	0.45	0.017	0.19	31.0	<0.01	19.7	<0.1	0.09	1	<0.5	<0.2
1876348	Drill Core	0.044	3	7	1.23	82	0.004	5	0.50	0.020	0.20	9.2	0.02	18.6	<0.1	0.09	1	<0.5	<0.2
1876349	Drill Core	0.047	3	8	1.34	397	0.020	2	0.27	0.046	0.09	4.7	0.13	21.7	<0.1	0.26	<1	<0.5	0.6
1876350	Rock Pulp	0.054	5	40	0.81	115	0.147	5	1.79	0.128	0.17	0.5	0.02	5.6	<0.1	<0.05	6	<0.5	<0.2
1876351	Rock Pulp	0.035	<1	14	1.82	10	0.002	2	0.91	0.031	0.09	0.3	2.63	2.0	0.9	>10	6	2.2	7.5
1876352	Drill Core	0.050	2	7	1.90	186	0.014	<1	0.23	0.038	0.07	0.3	0.60	21.8	<0.1	0.70	<1	1.1	3.1
1876353	Drill Core	0.060	4	8	1.03	59	0.004	4	0.51	0.025	0.19	2.7	0.04	22.2	<0.1	0.13	2	<0.5	<0.2
1876354	Drill Core	0.062	4	8	1.39	79	0.013	4	0.55	0.022	0.17	1.5	0.03	24.2	<0.1	0.11	2	<0.5	<0.2
1876355	Drill Core	0.047	2	10	1.23	611	0.013	2	0.65	0.014	0.12	2.8	0.06	20.8	<0.1	0.06	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000735.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876356	Drill Core	1.05	<2	0.9	10.9	2.2	36	<0.1	2.6	8.2	524	2.58	3.9	0.6	1.7	25	<0.1	0.5	<0.1	55	2.41

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

CERTIFICATE OF ANALYSIS WHI17000735.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876356	Drill Core	0.034	1	5	0.81	71	0.009	4	0.74	0.008	0.15	0.2	0.02	16.4	<0.1	0.07	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada

PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000735.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
Pulp Duplicates																					
1876250	Drill Core	1.80	3	5.3	46.5	4.2	64	<0.1	10.6	18.4	951	4.35	2.2	3.9	0.6	55	0.2	0.4	<0.1	128	4.43
REP 1876250	QC		3																		
1876263	Drill Core	3.81	12	1.5	15.0	1.8	45	0.3	14.9	15.5	649	3.18	3.3	12.0	1.7	83	0.2	0.1	<0.1	78	3.39
REP 1876263	QC			1.4	15.0	1.7	45	0.3	15.0	15.0	640	3.14	3.1	12.6	1.7	81	0.2	0.1	<0.1	78	3.37
1876283	Drill Core	2.73	<2	0.8	36.4	1.8	69	0.1	3.5	7.5	453	3.00	1.6	<0.5	4.5	16	0.1	0.1	0.2	15	0.82
REP 1876283	QC		<2																		
1876298	Drill Core	3.26	<2	1.8	21.3	3.8	50	0.1	15.5	17.9	793	3.97	1.8	<0.5	2.0	64	<0.1	<0.1	<0.1	107	2.75
REP 1876298	QC			2.1	21.8	4.0	54	0.1	17.4	18.3	775	4.03	2.1	<0.5	2.2	73	<0.1	<0.1	<0.1	109	2.72
1876317	Drill Core	3.51	<2	1.4	12.8	3.5	41	0.1	18.9	14.4	740	3.77	2.1	1.6	4.2	56	<0.1	0.1	<0.1	112	2.50
REP 1876317	QC		2																		
1876333	Drill Core	3.94	100	0.6	6.4	2.0	26	0.7	3.4	7.6	522	2.40	1.0	163.8	2.0	36	<0.1	<0.1	<0.1	43	2.16
REP 1876333	QC			0.7	6.7	2.1	28	0.7	3.4	7.6	506	2.38	1.0	87.0	2.1	39	<0.1	0.1	<0.1	42	2.15
1876345	Drill Core	5.84	4	4.6	56.4	3.2	48	25.4	10.7	13.0	821	3.74	2.4	2.3	1.5	46	<0.1	0.2	<0.1	65	3.36
REP 1876345	QC		4																		
1876353	Drill Core	4.12	20	1.4	49.9	2.7	58	0.2	4.5	13.5	795	3.63	0.8	20.3	1.3	33	<0.1	<0.1	<0.1	75	3.28
REP 1876353	QC			1.1	50.4	2.9	59	0.2	4.6	13.5	799	3.66	1.0	15.4	1.3	38	<0.1	<0.1	<0.1	77	3.34
Core Reject Duplicates																					
1876267	Drill Core	2.73	7	1.0	29.6	0.9	32	1.3	63.1	13.3	463	2.65	2.5	3.6	2.0	29	<0.1	<0.1	<0.1	58	1.29
DUP 1876267	QC		6	0.9	22.3	0.8	32	0.1	59.5	12.8	464	2.51	2.4	4.1	2.0	27	<0.1	<0.1	<0.1	55	1.30
1876301	Drill Core	2.41	<2	0.4	44.2	4.2	47	2.0	4.1	14.7	644	3.77	1.7	<0.5	1.4	24	<0.1	<0.1	<0.1	89	0.98
DUP 1876301	QC		<2	0.4	44.0	3.8	49	2.0	3.9	14.6	628	3.68	1.8	<0.5	1.4	25	<0.1	<0.1	<0.1	87	0.96
1876335	Drill Core	2.40	7	0.5	26.4	2.7	34	0.4	2.3	8.1	585	2.64	1.5	6.6	2.1	52	<0.1	0.2	<0.1	45	2.72
DUP 1876335	QC		9	0.4	25.6	2.8	33	0.4	2.7	8.9	614	2.65	1.5	8.2	2.0	54	<0.1	0.2	<0.1	46	2.80
Reference Materials																					
STD DS11	Standard			14.2	147.9	139.4	344	1.8	79.5	14.2	1083	3.19	43.4	101.1	8.1	70	2.4	9.5	11.9	50	1.06
STD DS11	Standard			13.1	147.3	126.2	329	1.6	80.0	13.3	1001	3.01	37.8	80.5	7.1	64	2.1	7.3	10.8	50	1.01
STD DS11	Standard			13.0	146.6	125.0	314	1.7	80.4	14.0	1047	3.11	39.3	74.5	6.8	63	2.3	8.1	10.9	49	1.04
STD DS11	Standard			14.6	148.8	133.4	326	1.8	78.5	14.6	1092	3.24	44.5	135.2	7.6	64	2.2	8.3	11.5	51	1.07

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000735.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
Pulp Duplicates																			
1876250	Drill Core	0.031	3	23	1.30	1672	0.030	6	1.16	0.048	0.53	<0.1	<0.01	21.6	0.2	<0.05	4	<0.5	<0.2
REP 1876250	QC																		
1876263	Drill Core	0.067	8	50	1.72	786	0.075	3	2.16	0.048	0.40	0.3	<0.01	10.7	0.1	<0.05	6	<0.5	<0.2
REP 1876263	QC	0.067	8	51	1.71	772	0.076	6	2.17	0.049	0.40	0.3	<0.01	10.9	0.1	<0.05	6	<0.5	<0.2
1876283	Drill Core	0.033	13	5	0.42	331	0.112	2	1.07	0.035	0.60	0.2	<0.01	8.8	0.1	<0.05	4	<0.5	<0.2
REP 1876283	QC																		
1876298	Drill Core	0.059	9	66	2.15	1526	0.088	4	2.33	0.036	0.41	0.1	<0.01	9.9	<0.1	<0.05	7	<0.5	<0.2
REP 1876298	QC	0.059	8	65	2.12	1562	0.091	3	2.34	0.037	0.41	0.2	<0.01	10.6	<0.1	<0.05	8	<0.5	<0.2
1876317	Drill Core	0.053	17	37	1.88	1347	0.051	3	1.68	0.045	0.36	0.2	0.02	14.8	<0.1	0.09	8	<0.5	<0.2
REP 1876317	QC																		
1876333	Drill Core	0.029	4	4	0.85	843	0.006	4	0.53	0.005	0.19	0.6	<0.01	9.3	<0.1	0.08	1	<0.5	0.3
REP 1876333	QC	0.029	3	4	0.85	827	0.006	4	0.52	0.005	0.19	0.7	<0.01	9.9	<0.1	0.08	2	<0.5	0.2
1876345	Drill Core	0.056	4	26	1.17	417	0.011	4	0.65	0.026	0.26	52.4	0.19	18.0	<0.1	0.09	2	<0.5	<0.2
REP 1876345	QC																		
1876353	Drill Core	0.060	4	8	1.03	59	0.004	4	0.51	0.025	0.19	2.7	0.04	22.2	<0.1	0.13	2	<0.5	<0.2
REP 1876353	QC	0.061	3	7	1.04	57	0.004	3	0.53	0.026	0.20	2.8	0.04	23.1	<0.1	0.14	2	<0.5	<0.2
Core Reject Duplicates																			
1876267	Drill Core	0.065	7	198	1.64	274	0.149	4	1.52	0.080	0.38	2.0	<0.01	5.3	<0.1	<0.05	5	<0.5	<0.2
DUP 1876267	QC	0.059	7	194	1.57	236	0.132	2	1.44	0.077	0.33	1.7	<0.01	5.2	<0.1	<0.05	5	<0.5	<0.2
1876301	Drill Core	0.030	4	8	1.52	332	0.120	4	1.99	0.051	0.82	3.3	0.01	6.5	0.1	<0.05	7	<0.5	<0.2
DUP 1876301	QC	0.029	4	7	1.50	305	0.122	4	2.00	0.048	0.81	3.3	0.01	6.9	0.1	<0.05	7	<0.5	<0.2
1876335	Drill Core	0.047	4	3	0.93	936	0.006	4	0.58	0.029	0.20	1.2	<0.01	8.8	<0.1	0.08	2	<0.5	<0.2
DUP 1876335	QC	0.049	4	3	0.94	943	0.006	3	0.56	0.029	0.20	1.2	0.01	8.3	<0.1	0.08	2	<0.5	<0.2
Reference Materials																			
STD DS11	Standard	0.069	20	62	0.86	390	0.100	7	1.20	0.072	0.41	3.0	0.28	3.2	5.0	0.28	5	2.1	5.0
STD DS11	Standard	0.067	17	57	0.81	323	0.085	6	1.14	0.072	0.39	2.5	0.24	2.9	4.6	0.27	4	2.4	4.2
STD DS11	Standard	0.069	17	58	0.82	340	0.084	6	1.12	0.068	0.39	2.9	0.23	2.9	4.7	0.28	4	1.8	4.6
STD DS11	Standard	0.072	20	67	0.85	401	0.100	9	1.16	0.070	0.41	2.8	0.25	3.3	4.7	0.28	5	2.1	4.5

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000735.1

		WGHT Wgt kg 0.01	FA350 Au ppb 2	AQ201 Mo ppm 0.1	AQ201 Cu ppm 0.1	AQ201 Pb ppm 0.1	AQ201 Zn ppm 1	AQ201 Ag ppm 0.1	AQ201 Ni ppm 0.1	AQ201 Co ppm 0.1	AQ201 Mn ppm 1	AQ201 Fe % 0.01	AQ201 As ppm 0.5	AQ201 Au ppb 0.5	AQ201 Th ppm 0.1	AQ201 Sr ppm 1	AQ201 Cd ppm 0.1	AQ201 Sb ppm 0.1	AQ201 Bi ppm 0.1	AQ201 V ppm 2	AQ201 Ca % 0.01
STD DS11	Standard			12.9	141.6	127.3	328	1.7	77.0	13.5	1068	3.13	41.3	74.3	7.4	63	2.2	8.7	11.5	49	1.05
STD OXC129	Standard			1.2	27.9	6.3	40	<0.1	80.7	20.6	417	3.07	0.7	207.6	1.8	195	<0.1	<0.1	<0.1	53	0.73
STD OXC129	Standard			1.1	28.4	6.0	43	<0.1	81.9	20.4	412	2.95	<0.5	197.9	1.8	193	<0.1	<0.1	<0.1	52	0.65
STD OXC129	Standard			1.1	26.5	5.7	37	<0.1	82.6	21.2	425	3.07	<0.5	200.7	1.6	166	<0.1	<0.1	<0.1	53	0.68
STD OXC129	Standard			1.2	27.4	5.9	37	<0.1	84.1	21.6	422	3.05	0.5	191.0	1.7	171	<0.1	<0.1	<0.1	51	0.66
STD OXC129	Standard			1.1	26.8	5.5	39	<0.1	75.3	21.4	448	3.08	<0.5	173.9	1.6	171	<0.1	<0.1	<0.1	52	0.66
STD OXC145	Standard		215																		
STD OXC145	Standard		215																		
STD OXC145	Standard		211																		
STD OXC145	Standard		204																		
STD OXH122	Standard		1250																		
STD OXH122	Standard		1175																		
STD OXH139	Standard		1280																		
STD OXH139	Standard		1253																		
STD OXH122 Expected			1247																		
STD OXC145 Expected			212																		
STD OXH139 Expected			1312																		
STD OXC129 Expected				1.3	28	6.3	42.9		79.5	20.3	421	3.065	0.6	195	1.9					51	0.665
STD DS11 Expected				14.6	156	138	345	1.71	81.9	14.2	1055	3.2082	42.8	79	7.65	67.3	2.37	8.74	12.2	50	1.063
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000735.1

		AQ201 P % 0.001	AQ201 La ppm 1	AQ201 Cr ppm 1	AQ201 Mg % 0.01	AQ201 Ba ppm 1	AQ201 Ti % 0.001	AQ201 B ppm 1	AQ201 Al % 0.01	AQ201 Na % 0.001	AQ201 K % 0.01	AQ201 W ppm 0.1	AQ201 Hg ppm 0.01	AQ201 Sc ppm 0.1	AQ201 Tl ppm 0.1	AQ201 S % 0.05	AQ201 Ga ppm 1	AQ201 Se ppm 0.5	AQ201 Te ppm 0.2
STD DS11	Standard	0.075	19	62	0.84	346	0.089	8	1.13	0.069	0.40	3.0	0.26	3.1	5.2	0.28	4	2.4	4.7
STD OXC129	Standard	0.096	13	54	1.58	52	0.417	1	1.60	0.605	0.37	<0.1	<0.01	0.7	<0.1	<0.05	6	<0.5	<0.2
STD OXC129	Standard	0.092	12	52	1.54	47	0.398	1	1.54	0.563	0.35	<0.1	<0.01	0.6	<0.1	<0.05	6	<0.5	<0.2
STD OXC129	Standard	0.103	12	54	1.56	50	0.390	<1	1.54	0.601	0.37	<0.1	<0.01	0.6	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.100	12	54	1.55	49	0.386	<1	1.51	0.591	0.37	<0.1	<0.01	0.5	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.103	12	53	1.57	46	0.359	<1	1.52	0.589	0.37	<0.1	<0.01	0.9	<0.1	<0.05	5	<0.5	<0.2
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXH122	Standard																		
STD OXH122	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXH122 Expected																			
STD OXC145 Expected																			
STD OXH139 Expected																			
STD OXC129 Expected		0.102	13	52	1.545	50	0.4	1	1.58	0.6	0.37			1.1			5.6		
STD DS11 Expected		0.0701	18.6	61.5	0.85	385	0.0976		1.1795	0.0762	0.4	2.9	0.3	3.4	4.9	0.2835	5.1	1.9	4.56
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000735.1

		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
Prep Wash																					
ROCK-WHI	Prep Blank		<2	0.7	4.0	1.1	36	<0.1	1.6	3.8	540	1.76	1.1	<0.5	2.4	28	<0.1	<0.1	<0.1	23	0.63
ROCK-WHI	Prep Blank		<2	0.6	3.2	0.9	31	<0.1	0.8	3.8	554	1.80	1.0	<0.5	2.0	25	<0.1	<0.1	<0.1	23	0.60

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 16, 2017

QUALITY CONTROL REPORT WHI17000735.1

		AQ201 P % 0.001	AQ201 La ppm 1	AQ201 Cr ppm 1	AQ201 Mg % 0.01	AQ201 Ba ppm 1	AQ201 Ti % 0.001	AQ201 B ppm 1	AQ201 Al % 0.01	AQ201 Na % 0.001	AQ201 K % 0.01	AQ201 W ppm 0.1	AQ201 Hg ppm 0.01	AQ201 Sc ppm 0.1	AQ201 Tl ppm 0.1	AQ201 S % 0.05	AQ201 Ga ppm 1	AQ201 Se ppm 0.5	AQ201 Te ppm 0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
Prep Wash																			
ROCK-WHI	Prep Blank	0.037	6	44	0.46	64	0.083	<1	1.06	0.138	0.13	0.1	<0.01	4.4	<0.1	<0.05	4	<0.5	<0.2
ROCK-WHI	Prep Blank	0.037	6	5	0.46	67	0.070	1	1.00	0.132	0.13	<0.1	<0.01	3.5	<0.1	<0.05	3	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Submitted By: Daithi Mac Gerailt
Receiving Lab: Canada-Whitehorse
Received: September 15, 2017
Report Date: October 26, 2017
Page: 1 of 5

CERTIFICATE OF ANALYSIS WHI17000859.1

CLIENT JOB INFORMATION

Project: Lucky Strike
Shipment ID: DDLS-17-06
P.O. Number
Number of Samples: 111

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	105	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	6	Sort, label and box pulps			WHI
FA350-Au	111	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	111	Environmental disposal charge-Fire assay lead waste			VAN
AQ201	111	1:1:1 Aqua Regia digestion ICP-MS analysis	15	Completed	VAN
SHP01	111	Per sample shipping charges for branch shipments			VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources Ltd.
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3
Canada

CC:

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 26, 2017

CERTIFICATE OF ANALYSIS WHI17000859.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876458	Drill Core	2.92	5	1.8	15.6	141.7	65	0.5	22.3	18.6	1485	5.11	12.8	3.2	1.1	27	0.3	0.3	0.4	129	2.81
1876459	Drill Core	1.79	4	1.6	5.0	29.9	98	0.2	48.9	30.3	2700	7.51	9.7	2.7	0.4	38	0.2	0.4	0.1	210	3.94
1876460	Drill Core	5.34	<2	1.4	6.1	125.3	98	0.2	69.6	25.2	1959	5.72	10.1	0.9	1.0	39	0.3	0.4	0.5	178	6.36
1876461	Drill Core	3.54	<2	1.5	36.5	435.8	75	0.3	28.0	19.4	1408	4.69	5.8	<0.5	2.3	27	0.4	0.3	0.9	125	4.21
1876462	Drill Core	4.03	2	1.2	6.9	89.0	68	<0.1	19.1	16.9	1268	4.58	6.6	<0.5	3.0	21	0.3	0.4	0.2	119	4.59
1876463	Drill Core	4.71	4	1.8	16.7	64.0	79	<0.1	20.1	20.7	1660	5.27	8.7	1.8	3.2	33	0.2	0.2	<0.1	123	4.88
1876464	Drill Core	3.41	41	2.7	228.3	324.0	60	0.5	13.8	27.7	974	4.76	8.1	41.1	2.8	21	0.3	0.3	0.9	97	1.07
1876465	Drill Core	4.42	28	3.2	66.4	710.1	87	0.8	25.9	29.7	1831	6.16	7.8	26.1	0.8	37	0.4	0.3	2.0	190	5.24
1876466	Drill Core	3.76	<2	2.3	20.3	22.4	73	<0.1	26.7	25.8	1726	5.98	3.2	<0.5	0.9	33	0.2	0.3	<0.1	156	6.30
1876467	Drill Core	4.03	3	1.9	96.9	103.5	81	0.1	19.3	20.8	1337	5.22	4.5	<0.5	2.4	42	0.2	0.2	0.5	121	5.72
1876468	Drill Core	4.30	3	1.8	36.2	32.5	67	<0.1	7.5	17.5	1297	4.74	3.7	0.8	2.6	77	0.2	0.3	0.1	94	5.47
1876469	Drill Core	4.33	<2	1.2	28.1	20.3	69	<0.1	8.0	17.0	1393	4.85	3.3	<0.5	3.0	45	0.1	0.2	0.2	74	3.78
1876470	Drill Core	4.13	<2	0.7	41.6	29.2	58	<0.1	6.7	14.4	1253	4.66	4.2	<0.5	2.4	92	0.1	0.8	0.1	77	4.73
1876471	Drill Core	3.80	<2	2.9	40.7	18.2	58	<0.1	8.4	18.6	1142	4.62	5.9	<0.5	1.7	85	0.1	1.3	<0.1	83	4.81
1876472	Drill Core	5.25	<2	2.9	10.7	24.6	62	0.1	10.3	16.0	1138	4.25	7.5	1.1	1.6	106	0.1	2.4	<0.1	97	5.60
1876473	Drill Core	5.47	<2	1.5	53.8	19.8	60	0.2	8.5	21.0	1176	4.67	11.4	<0.5	1.6	42	0.2	0.9	0.1	93	2.67
1876474	Drill Core	4.03	<2	2.3	13.2	17.2	63	<0.1	7.1	19.2	1113	4.92	24.2	0.8	1.4	55	0.1	0.6	<0.1	130	4.78
1876475	Drill Core	4.09	<2	1.8	28.2	27.5	66	<0.1	10.1	17.6	996	4.45	3.0	<0.5	1.6	60	0.1	0.7	<0.1	115	4.63
1876476	Drill Core	4.88	<2	2.1	13.4	46.2	54	0.1	9.0	14.8	962	3.73	5.4	<0.5	0.9	57	0.2	0.5	0.5	102	4.11
1876477	Drill Core	3.48	<2	3.1	6.0	11.8	66	<0.1	7.5	18.4	1352	4.63	2.8	<0.5	1.1	41	0.1	0.4	<0.1	116	4.94
1876478	Drill Core	3.96	<2	3.5	20.7	12.8	66	<0.1	7.0	16.1	1401	4.20	2.9	0.8	1.0	50	0.2	0.4	<0.1	120	5.59
1876479	Drill Core	5.33	1422	12.3	18.1	13.9	56	4.8	8.6	18.0	1237	4.54	15.0	1429.5	0.9	45	0.4	1.6	<0.1	97	4.98
1876480	Drill Core	2.38	>10000	282.0	310.2	93.8	96	38.8	25.9	30.0	4104	6.41	131.1	11979.5	0.7	33	2.3	15.0	0.6	84	0.97
1876481	Drill Core	4.06	20	4.2	42.9	3.7	57	0.3	5.0	14.4	889	3.52	4.2	27.5	1.4	26	0.1	0.5	<0.1	88	3.57
1876482	Drill Core	4.72	14	3.0	14.7	2.2	49	<0.1	3.9	12.3	862	3.10	8.0	13.2	1.2	33	<0.1	0.4	<0.1	77	4.09
1876483	Drill Core	5.10	5	2.5	10.6	3.8	55	<0.1	4.5	12.8	914	3.26	5.1	4.5	1.2	64	<0.1	0.4	<0.1	70	5.16
1876484	Drill Core	4.21	6	3.0	19.7	2.9	48	<0.1	3.8	11.6	759	3.11	8.6	4.5	2.1	60	<0.1	0.4	<0.1	64	3.66
1876485	Rock Pulp	0.07	2	7.0	47.4	2.8	46	<0.1	31.7	8.4	499	3.11	4.8	3.2	1.2	56	0.1	0.4	<0.1	73	1.07
1876486	Rock Pulp	0.11	473	44.7	>10000	943.8	>10000	59.9	17.7	2.8	635	11.66	144.8	422.5	<0.1	36	249.3	29.0	11.7	10	1.57
1876487	Drill Core	5.04	<2	2.8	36.1	3.4	57	<0.1	4.1	12.0	705	3.35	7.0	0.5	2.5	59	<0.1	0.3	<0.1	86	3.12

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 26, 2017

CERTIFICATE OF ANALYSIS WHI17000859.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876458	Drill Core	0.052	6	38	0.33	343	0.016	4	0.86	0.038	0.33	0.6	0.01	24.9	0.1	<0.05	3	<0.5	<0.2
1876459	Drill Core	0.072	11	48	0.55	512	0.016	7	1.56	0.022	0.56	<0.1	0.01	34.8	0.3	<0.05	6	<0.5	<0.2
1876460	Drill Core	0.021	5	270	0.68	1080	0.053	5	0.95	0.023	0.46	0.1	<0.01	23.6	0.2	<0.05	6	<0.5	<0.2
1876461	Drill Core	0.051	7	48	0.44	874	0.019	6	0.95	0.030	0.37	<0.1	<0.01	28.2	0.2	<0.05	4	<0.5	<0.2
1876462	Drill Core	0.056	7	62	0.34	398	0.012	6	0.85	0.025	0.32	<0.1	<0.01	27.3	0.1	<0.05	4	<0.5	<0.2
1876463	Drill Core	0.056	9	58	0.39	394	0.017	5	0.78	0.039	0.29	<0.1	<0.01	30.2	0.1	<0.05	4	<0.5	<0.2
1876464	Drill Core	0.052	6	26	0.17	254	0.006	4	0.59	0.037	0.18	<0.1	0.02	17.4	<0.1	<0.05	2	0.9	<0.2
1876465	Drill Core	0.054	5	38	0.44	803	0.016	7	0.90	0.029	0.35	<0.1	0.02	27.3	0.2	<0.05	4	<0.5	<0.2
1876466	Drill Core	0.057	5	43	0.50	643	0.009	6	1.14	0.017	0.45	<0.1	<0.01	29.4	0.2	<0.05	4	<0.5	<0.2
1876467	Drill Core	0.055	8	39	0.55	1262	0.012	6	0.95	0.023	0.37	<0.1	0.02	23.3	0.2	<0.05	3	<0.5	<0.2
1876468	Drill Core	0.056	10	7	0.45	1954	0.017	5	0.86	0.020	0.33	<0.1	<0.01	18.5	0.1	<0.05	3	<0.5	<0.2
1876469	Drill Core	0.074	9	15	0.55	802	0.017	7	1.01	0.020	0.36	<0.1	<0.01	21.6	0.1	<0.05	3	<0.5	<0.2
1876470	Drill Core	0.083	7	15	0.90	1066	0.010	6	0.85	0.020	0.26	<0.1	<0.01	20.7	0.1	<0.05	2	<0.5	<0.2
1876471	Drill Core	0.069	6	27	0.75	628	0.008	6	0.86	0.017	0.21	<0.1	<0.01	22.3	<0.1	0.10	3	<0.5	<0.2
1876472	Drill Core	0.045	5	26	1.13	540	0.006	5	0.94	0.010	0.20	0.2	0.01	29.4	<0.1	<0.05	3	<0.5	<0.2
1876473	Drill Core	0.081	4	25	0.66	1325	0.007	5	0.81	0.038	0.17	0.2	0.10	20.4	0.1	0.06	2	0.5	<0.2
1876474	Drill Core	0.059	4	7	1.21	1149	0.004	6	0.95	0.009	0.21	<0.1	0.05	24.7	0.1	<0.05	3	<0.5	<0.2
1876475	Drill Core	0.042	4	17	1.44	958	0.006	8	1.10	0.007	0.28	<0.1	0.02	23.4	0.1	0.06	3	0.5	<0.2
1876476	Drill Core	0.055	3	6	1.13	600	0.005	5	0.89	0.017	0.19	<0.1	0.02	15.9	0.1	<0.05	2	<0.5	<0.2
1876477	Drill Core	0.055	3	5	1.36	398	0.003	7	0.84	0.006	0.24	<0.1	0.02	25.8	0.1	<0.05	3	<0.5	<0.2
1876478	Drill Core	0.040	3	5	1.77	568	0.002	5	0.84	0.007	0.19	<0.1	0.34	24.0	<0.1	<0.05	2	<0.5	<0.2
1876479	Drill Core	0.026	2	6	0.89	567	0.002	7	0.87	0.005	0.24	0.3	0.45	20.1	0.1	<0.05	2	0.5	3.2
1876480	Drill Core	0.012	3	9	0.14	833	<0.001	2	0.50	0.002	0.02	0.6	2.30	9.0	0.5	<0.05	1	1.6	31.3
1876481	Drill Core	0.046	3	7	0.64	336	0.003	5	0.95	0.007	0.20	<0.1	0.02	20.7	0.1	<0.05	3	0.7	<0.2
1876482	Drill Core	0.044	3	5	1.12	219	0.002	5	0.78	0.006	0.14	<0.1	0.01	20.2	<0.1	<0.05	2	<0.5	<0.2
1876483	Drill Core	0.035	2	5	1.44	291	0.002	5	0.84	0.007	0.14	<0.1	<0.01	19.7	<0.1	<0.05	2	<0.5	<0.2
1876484	Drill Core	0.043	1	4	0.66	1840	0.004	5	0.85	0.004	0.22	<0.1	0.02	17.5	<0.1	<0.05	2	<0.5	<0.2
1876485	Rock Pulp	0.055	5	39	0.81	120	0.143	5	1.91	0.159	0.19	0.4	0.01	5.4	<0.1	<0.05	6	<0.5	<0.2
1876486	Rock Pulp	0.035	<1	14	1.88	10	0.002	2	1.00	0.041	0.11	0.3	2.70	1.8	0.9	>10	6	4.2	8.4
1876487	Drill Core	0.047	3	7	0.70	692	0.008	7	1.07	0.005	0.29	<0.1	<0.01	18.8	<0.1	<0.05	3	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 26, 2017

CERTIFICATE OF ANALYSIS WHI17000859.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876488	Drill Core	4.39	2	1.8	22.7	4.3	55	<0.1	4.8	12.3	828	3.25	5.3	1.1	2.5	61	<0.1	0.2	<0.1	85	3.95
1876489	Drill Core	5.01	<2	1.0	31.2	4.4	56	<0.1	4.2	13.2	819	3.59	6.7	0.9	2.6	50	<0.1	0.3	<0.1	94	3.15
1876490	Drill Core	4.22	2	2.0	72.8	2.7	72	0.1	5.4	17.5	1173	4.50	6.4	2.3	2.8	71	<0.1	0.2	<0.1	109	3.69
1876491	Drill Core	4.03	4	2.8	75.6	3.7	89	0.6	7.1	20.9	1273	4.93	16.4	3.7	3.0	58	<0.1	0.3	0.1	122	3.09
1876492	Drill Core	4.71	2	2.1	53.7	2.5	45	<0.1	4.9	10.4	667	2.75	8.6	0.7	1.7	42	<0.1	0.3	<0.1	77	3.15
1876493	Drill Core	3.40	<2	3.0	31.6	2.4	56	<0.1	10.6	12.9	765	3.24	4.9	<0.5	3.5	42	0.1	0.2	<0.1	65	4.36
1876494	Drill Core	3.33	<2	2.0	32.1	3.0	45	<0.1	7.3	8.9	449	2.54	10.5	<0.5	2.5	36	0.1	0.3	<0.1	47	3.18
1876495	Drill Core	4.35	<2	1.7	15.1	3.4	49	<0.1	12.6	12.2	603	3.12	4.6	<0.5	3.3	38	<0.1	0.5	<0.1	93	3.19
1876496	Drill Core	4.25	2	1.4	11.9	2.7	41	<0.1	8.4	8.4	446	2.39	2.1	<0.5	3.4	32	0.1	0.2	<0.1	58	2.30
1876497	Drill Core	2.73	<2	1.4	21.6	3.6	44	<0.1	9.1	9.8	703	2.84	3.1	<0.5	2.1	40	<0.1	0.1	<0.1	66	4.25
1876498	Drill Core	4.02	<2	2.3	21.3	4.0	66	<0.1	15.0	13.1	719	3.42	3.3	<0.5	2.4	45	0.1	0.3	<0.1	98	3.35
1876499	Drill Core	2.91	<2	2.5	9.3	3.0	73	<0.1	13.6	10.7	812	3.45	2.3	<0.5	1.5	39	0.1	<0.1	<0.1	82	3.25
1876500	Drill Core	1.52	6	2.8	30.1	2.4	65	<0.1	10.2	15.2	939	3.57	2.3	3.4	1.6	22	0.1	0.1	<0.1	68	3.54
1876501	Drill Core	3.69	115	2.7	39.2	4.1	66	0.3	12.1	17.6	1128	4.04	4.2	101.8	1.9	60	0.2	0.4	<0.1	121	4.96
1876502	Drill Core	4.65	24	1.0	40.5	2.3	57	<0.1	8.1	16.1	1158	4.20	3.5	23.2	1.7	56	0.2	<0.1	<0.1	126	5.05
1876503	Drill Core	1.33	4	1.1	41.4	1.6	45	<0.1	6.2	18.1	631	3.37	2.2	2.3	2.0	27	<0.1	0.1	<0.1	84	2.45
1876504	Drill Core	3.07	2	1.9	40.5	3.1	59	0.2	8.2	17.1	854	3.80	3.7	1.6	2.2	30	0.1	0.3	<0.1	112	2.60
1876505	Drill Core	2.57	<2	0.8	38.5	1.9	44	<0.1	5.7	15.8	908	3.48	3.9	<0.5	2.0	69	<0.1	0.2	<0.1	92	6.67
1876506	Drill Core	3.96	<2	0.7	35.0	1.8	40	<0.1	5.2	14.1	665	3.17	3.4	<0.5	2.9	60	<0.1	0.1	<0.1	87	2.74
1876507	Drill Core	3.80	<2	1.0	45.4	2.1	47	<0.1	7.5	15.0	859	3.71	2.6	<0.5	2.9	89	<0.1	0.2	<0.1	102	4.10
1876508	Drill Core	4.53	<2	0.8	66.7	2.5	50	<0.1	7.5	20.6	987	4.07	4.1	<0.5	2.6	92	<0.1	0.2	<0.1	95	4.46
1876509	Drill Core	4.93	<2	0.7	50.9	2.2	36	<0.1	5.8	14.2	706	3.29	4.4	<0.5	3.2	40	<0.1	0.2	<0.1	84	3.15
1876510	Drill Core	6.34	<2	0.5	32.6	2.3	42	<0.1	6.2	13.3	573	3.17	5.2	<0.5	5.3	45	<0.1	0.3	<0.1	81	2.70
1876511	Drill Core	5.71	4	3.7	51.9	2.9	46	0.8	6.5	13.9	729	3.62	4.0	2.1	2.8	71	<0.1	0.3	<0.1	73	3.42
1876512	Drill Core	4.53	<2	0.6	14.6	3.3	65	<0.1	6.4	15.9	1079	3.95	4.6	1.1	1.9	49	0.1	0.2	<0.1	116	3.88
1876513	Drill Core	5.40	<2	0.7	36.7	3.0	63	<0.1	7.1	16.6	934	3.97	3.9	<0.5	1.7	42	0.2	0.3	<0.1	125	2.86
1876514	Drill Core	5.44	<2	0.7	33.4	3.6	57	<0.1	6.9	15.0	928	3.92	5.5	<0.5	2.5	44	0.4	0.3	<0.1	124	3.18
1876515	Drill Core	4.13	<2	1.3	40.1	2.3	57	<0.1	7.8	17.2	978	3.94	3.5	<0.5	1.6	45	0.2	0.2	<0.1	123	3.81
1876516	Drill Core	4.23	<2	1.6	25.0	3.1	72	0.1	7.4	17.0	1056	4.14	6.5	<0.5	3.0	88	<0.1	0.2	<0.1	127	4.57
1876517	Drill Core	4.05	<2	1.9	39.4	3.7	57	<0.1	8.5	24.6	1334	4.06	4.0	<0.5	1.8	64	<0.1	0.2	<0.1	109	3.30

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 26, 2017

CERTIFICATE OF ANALYSIS WHI17000859.1

		Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
		Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
		Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
		MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876488	Drill Core		0.039	4	6	1.15	748	0.005	7	0.89	0.008	0.20	<0.1	<0.01	16.5	<0.1	<0.05	3	<0.5	<0.2
1876489	Drill Core		0.055	3	7	0.97	456	0.014	8	1.19	0.014	0.38	<0.1	<0.01	19.8	0.1	<0.05	3	<0.5	<0.2
1876490	Drill Core		0.065	4	8	0.82	573	0.017	6	0.88	0.022	0.34	0.1	<0.01	29.4	0.1	<0.05	3	<0.5	<0.2
1876491	Drill Core		0.063	4	10	0.96	849	0.016	7	0.90	0.018	0.31	0.7	<0.01	31.7	0.1	<0.05	3	<0.5	<0.2
1876492	Drill Core		0.020	3	6	0.95	525	0.004	3	0.75	0.005	0.10	<0.1	0.02	14.4	<0.1	<0.05	2	<0.5	<0.2
1876493	Drill Core		0.019	6	27	1.39	774	0.006	4	0.64	0.004	0.14	0.2	<0.01	11.1	<0.1	<0.05	2	<0.5	<0.2
1876494	Drill Core		0.013	4	15	1.13	818	0.005	4	0.66	0.006	0.16	0.1	0.02	9.9	<0.1	<0.05	2	<0.5	<0.2
1876495	Drill Core		0.024	6	26	1.15	531	0.017	5	0.87	0.005	0.29	<0.1	<0.01	15.8	<0.1	<0.05	3	<0.5	<0.2
1876496	Drill Core		0.024	5	19	0.80	300	0.006	5	0.70	0.009	0.20	<0.1	<0.01	13.4	<0.1	<0.05	2	<0.5	<0.2
1876497	Drill Core		0.027	5	22	1.58	256	0.006	4	0.78	0.006	0.23	<0.1	<0.01	11.3	<0.1	<0.05	3	<0.5	<0.2
1876498	Drill Core		0.027	4	62	1.26	551	0.020	8	1.03	0.008	0.38	<0.1	<0.01	23.6	0.1	<0.05	3	<0.5	<0.2
1876499	Drill Core		0.024	3	41	1.10	973	0.023	6	1.09	0.008	0.41	<0.1	<0.01	16.4	0.1	<0.05	4	<0.5	<0.2
1876500	Drill Core		0.025	3	25	1.00	586	0.014	5	1.18	0.009	0.36	<0.1	<0.01	13.1	<0.1	<0.05	4	<0.5	<0.2
1876501	Drill Core		0.079	5	30	1.36	2631	0.007	5	0.95	0.007	0.23	<0.1	0.06	18.3	<0.1	0.06	3	<0.5	0.2
1876502	Drill Core		0.051	8	18	1.95	255	0.023	5	0.75	0.030	0.26	0.2	0.01	15.2	0.1	<0.05	3	<0.5	<0.2
1876503	Drill Core		0.048	4	10	0.92	119	0.019	5	0.86	0.035	0.35	<0.1	<0.01	14.3	0.1	<0.05	3	<0.5	<0.2
1876504	Drill Core		0.051	5	13	1.09	392	0.013	7	0.92	0.021	0.35	0.7	0.18	22.5	<0.1	<0.05	3	<0.5	<0.2
1876505	Drill Core		0.035	5	11	1.44	1197	0.010	5	0.87	0.016	0.31	<0.1	<0.01	16.9	<0.1	<0.05	2	<0.5	<0.2
1876506	Drill Core		0.034	4	11	0.85	604	0.007	4	0.60	0.029	0.27	<0.1	<0.01	18.8	<0.1	<0.05	2	<0.5	<0.2
1876507	Drill Core		0.034	9	14	1.23	646	0.016	7	0.81	0.030	0.37	<0.1	<0.01	21.4	<0.1	<0.05	2	<0.5	<0.2
1876508	Drill Core		0.033	9	11	1.37	1513	0.019	8	0.88	0.024	0.43	<0.1	<0.01	19.7	<0.1	<0.05	2	<0.5	<0.2
1876509	Drill Core		0.036	7	12	0.93	254	0.007	6	0.70	0.027	0.33	<0.1	<0.01	18.8	<0.1	<0.05	2	<0.5	<0.2
1876510	Drill Core		0.035	8	11	0.77	261	0.017	7	0.79	0.026	0.43	<0.1	<0.01	17.4	<0.1	<0.05	2	<0.5	<0.2
1876511	Drill Core		0.039	5	12	0.84	261	0.003	5	0.56	0.019	0.27	3.3	<0.01	16.7	<0.1	<0.05	1	<0.5	<0.2
1876512	Drill Core		0.032	4	12	1.50	149	0.011	3	0.49	0.036	0.21	0.2	<0.01	20.3	<0.1	<0.05	2	<0.5	<0.2
1876513	Drill Core		0.036	6	15	1.18	1002	0.020	5	0.63	0.044	0.31	0.2	<0.01	21.8	0.1	<0.05	3	<0.5	<0.2
1876514	Drill Core		0.040	5	15	1.29	348	0.013	7	0.66	0.033	0.28	<0.1	<0.01	23.2	<0.1	<0.05	2	<0.5	<0.2
1876515	Drill Core		0.034	4	14	1.52	107	0.005	6	0.67	0.027	0.20	0.2	<0.01	19.6	<0.1	<0.05	2	<0.5	<0.2
1876516	Drill Core		0.033	6	16	1.69	238	0.006	5	0.61	0.034	0.14	0.5	<0.01	20.5	<0.1	<0.05	2	<0.5	<0.2
1876517	Drill Core		0.034	4	13	1.22	298	0.004	6	0.78	0.027	0.25	<0.1	<0.01	20.6	<0.1	<0.05	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 26, 2017

CERTIFICATE OF ANALYSIS WHI17000859.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876518	Drill Core	4.24	<2	3.0	94.8	2.5	62	0.1	7.5	15.7	772	3.92	4.3	<0.5	4.1	40	<0.1	0.2	<0.1	114	2.80
1876519	Drill Core	6.48	2	1.6	53.6	2.6	61	0.7	9.6	18.5	919	4.06	8.8	<0.5	1.9	38	<0.1	0.2	<0.1	115	3.14
1876520	Rock Pulp	0.07	6	8.6	51.2	2.9	46	<0.1	29.5	8.3	513	3.04	5.8	0.9	1.2	53	0.2	0.5	<0.1	67	1.02
1876521	Rock Pulp	0.07	6194	1.3	14.4	18.8	61	0.1	11.7	1.4	864	0.55	3748.1	6121.6	1.1	166	0.4	26.6	0.4	18	23.40
1876522	Drill Core	4.39	<2	1.4	54.0	3.4	67	<0.1	10.2	18.9	905	4.27	5.3	<0.5	1.9	42	<0.1	0.5	<0.1	125	3.92
1876523	Drill Core	3.14	<2	0.9	57.6	4.8	63	0.1	8.5	19.9	877	4.57	7.4	<0.5	1.7	41	<0.1	1.1	0.2	135	3.53
1876524	Drill Core	5.60	5	1.4	56.3	4.4	55	0.2	7.3	15.9	838	3.88	7.8	4.1	1.5	44	<0.1	0.6	<0.1	109	4.10
1876525	Drill Core	4.24	132	1.0	58.7	6.4	56	0.5	6.8	16.2	926	4.01	8.5	112.2	1.2	45	0.2	0.6	<0.1	102	5.15
1876526	Drill Core	5.61	2	0.8	47.3	4.5	58	<0.1	8.4	19.0	984	4.12	2.2	1.8	1.4	60	0.1	0.1	<0.1	116	5.31
1876527	Drill Core	4.57	<2	1.9	72.7	4.2	49	<0.1	7.9	18.3	978	4.47	2.5	<0.5	1.4	59	<0.1	0.1	0.2	123	5.12
1876528	Drill Core	4.81	<2	3.5	46.6	3.4	52	0.2	7.6	18.3	898	4.31	3.2	0.6	2.7	59	<0.1	0.1	<0.1	120	4.53
1876529	Drill Core	4.51	<2	3.8	36.7	2.9	53	0.1	6.8	17.2	819	4.17	3.2	0.5	3.3	56	<0.1	0.2	<0.1	110	3.70
1876530	Drill Core	3.97	<2	3.4	51.5	2.8	46	0.1	6.9	15.7	708	3.86	3.2	<0.5	1.1	57	<0.1	0.2	<0.1	120	3.29
1876531	Drill Core	4.63	<2	3.3	50.8	2.7	44	0.2	6.9	15.8	723	3.66	3.6	<0.5	1.8	69	<0.1	0.2	<0.1	106	3.65
1876532	Drill Core	4.43	<2	0.6	38.7	3.1	54	<0.1	7.7	17.0	847	4.20	3.1	<0.5	1.6	52	0.1	0.3	<0.1	126	4.30
1876533	Drill Core	5.72	<2	0.8	42.8	3.1	54	<0.1	7.3	21.2	768	4.04	4.0	<0.5	1.3	50	<0.1	0.4	<0.1	116	3.92
1876534	Drill Core	4.13	<2	1.8	46.1	3.4	49	<0.1	7.6	19.2	719	3.67	3.0	<0.5	1.9	42	<0.1	0.3	<0.1	117	4.15
1876535	Drill Core	6.66	<2	2.6	34.3	3.3	44	0.3	7.6	17.6	702	3.44	2.5	<0.5	2.6	49	<0.1	0.3	<0.1	105	4.27
1876536	Drill Core	3.00	<2	2.4	32.8	2.9	54	<0.1	9.4	17.4	782	4.16	3.5	<0.5	1.7	57	<0.1	0.4	<0.1	123	3.78
1876537	Drill Core	4.44	<2	2.5	60.7	3.3	49	<0.1	7.8	16.9	731	4.16	7.1	<0.5	2.3	42	<0.1	0.8	<0.1	135	3.36
1876538	Drill Core	5.21	<2	2.7	28.7	3.5	50	0.1	7.3	16.0	764	3.90	9.6	<0.5	2.5	48	<0.1	0.5	<0.1	119	3.84
1876539	Drill Core	4.85	<2	4.2	46.1	2.6	50	0.4	7.6	16.1	805	4.03	19.9	<0.5	2.1	51	<0.1	0.4	<0.1	113	3.80
1876540	Drill Core	5.41	<2	1.6	21.2	2.7	58	0.1	8.6	19.3	939	4.37	3.4	<0.5	1.7	58	<0.1	0.2	<0.1	120	5.05
1876541	Drill Core	5.51	7	1.6	24.5	2.7	48	0.1	7.2	17.1	719	3.95	4.2	4.7	2.1	43	<0.1	0.4	<0.1	118	3.51
1876542	Drill Core	5.06	596	1.4	67.7	3.2	56	4.1	8.5	18.0	927	4.21	2.2	501.0	1.8	51	0.2	0.3	<0.1	117	5.30
1876543	Drill Core	8.25	1456	3.4	164.8	3.4	52	14.6	7.7	17.3	839	3.99	5.1	1277.8	1.8	55	0.2	0.6	<0.1	103	5.26
1876544	Drill Core	6.74	15	3.2	43.4	2.8	55	0.2	8.1	18.3	786	4.03	3.7	15.0	1.7	49	<0.1	0.4	<0.1	116	4.21
1876545	Drill Core	4.37	2	1.9	29.0	2.6	50	<0.1	7.5	18.1	759	3.94	12.5	2.2	1.4	44	<0.1	0.6	<0.1	118	3.66
1876546	Drill Core	5.34	<2	1.9	49.2	2.2	45	0.4	6.3	15.9	859	3.62	5.5	0.7	2.1	45	<0.1	0.5	<0.1	91	3.94
1876547	Drill Core	5.67	4	1.6	45.7	2.4	44	0.1	7.1	16.7	653	3.69	5.1	2.8	1.2	41	<0.1	1.0	<0.1	87	2.78

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 26, 2017

CERTIFICATE OF ANALYSIS WHI17000859.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876518	Drill Core	0.036	7	17	1.16	245	0.005	4	0.57	0.049	0.17	0.3	<0.01	22.9	<0.1	<0.05	2	<0.5	<0.2
1876519	Drill Core	0.038	6	18	1.29	225	0.006	4	0.66	0.036	0.21	3.1	<0.01	22.1	<0.1	<0.05	2	<0.5	<0.2
1876520	Rock Pulp	0.057	5	41	0.81	113	0.153	8	1.83	0.132	0.17	0.4	<0.01	5.4	<0.1	<0.05	6	<0.5	<0.2
1876521	Rock Pulp	0.015	6	22	5.63	40	0.001	5	0.21	0.009	0.05	3.3	3.93	2.0	14.5	<0.05	<1	<0.5	<0.2
1876522	Drill Core	0.041	4	16	1.44	214	0.008	7	0.71	0.015	0.25	0.3	<0.01	22.7	<0.1	<0.05	2	<0.5	<0.2
1876523	Drill Core	0.042	3	16	1.41	654	0.009	7	0.92	0.006	0.29	0.3	0.06	25.6	<0.1	<0.05	3	<0.5	<0.2
1876524	Drill Core	0.032	3	16	1.63	701	0.003	4	0.72	0.007	0.15	0.7	0.19	21.5	<0.1	<0.05	2	<0.5	<0.2
1876525	Drill Core	0.022	4	11	2.04	112	0.003	5	0.76	0.008	0.20	0.1	0.31	17.1	<0.1	<0.05	2	<0.5	0.2
1876526	Drill Core	0.032	6	14	2.05	222	0.006	7	0.80	0.012	0.22	<0.1	0.01	19.3	<0.1	<0.05	2	<0.5	<0.2
1876527	Drill Core	0.028	5	12	1.86	128	0.003	6	0.75	0.012	0.20	<0.1	0.02	20.0	<0.1	<0.05	2	<0.5	<0.2
1876528	Drill Core	0.035	6	13	1.61	203	0.007	7	0.86	0.013	0.28	0.8	0.01	19.0	<0.1	<0.05	2	<0.5	<0.2
1876529	Drill Core	0.047	8	11	1.38	153	0.017	7	0.91	0.015	0.37	0.3	<0.01	18.8	<0.1	<0.05	2	<0.5	<0.2
1876530	Drill Core	0.043	4	14	1.22	136	0.016	8	0.97	0.012	0.42	0.4	<0.01	22.7	0.1	<0.05	3	<0.5	<0.2
1876531	Drill Core	0.033	4	12	1.37	145	0.015	8	1.05	0.009	0.40	0.4	<0.01	20.3	<0.1	<0.05	3	<0.5	<0.2
1876532	Drill Core	0.036	6	14	1.55	104	0.008	8	0.92	0.012	0.24	0.1	<0.01	19.9	<0.1	<0.05	2	<0.5	<0.2
1876533	Drill Core	0.033	4	14	1.46	115	0.012	7	0.94	0.008	0.27	0.1	<0.01	20.8	<0.1	<0.05	3	<0.5	<0.2
1876534	Drill Core	0.024	4	15	1.46	106	0.005	6	0.81	0.009	0.19	<0.1	<0.01	20.7	<0.1	<0.05	2	<0.5	<0.2
1876535	Drill Core	0.019	4	14	1.63	117	0.009	6	0.91	0.010	0.20	1.9	<0.01	18.7	<0.1	<0.05	2	<0.5	<0.2
1876536	Drill Core	0.021	3	20	1.33	99	0.009	6	0.93	0.009	0.19	0.2	<0.01	24.2	<0.1	<0.05	3	<0.5	<0.2
1876537	Drill Core	0.028	2	21	1.16	143	0.009	7	0.92	0.009	0.16	0.1	<0.01	23.1	<0.1	<0.05	2	<0.5	<0.2
1876538	Drill Core	0.046	5	14	1.58	205	0.029	9	1.03	0.013	0.37	0.7	0.02	16.3	0.1	<0.05	3	<0.5	<0.2
1876539	Drill Core	0.034	5	14	1.59	163	0.013	7	0.95	0.013	0.26	1.6	0.01	18.5	<0.1	<0.05	3	<0.5	<0.2
1876540	Drill Core	0.030	7	15	2.05	243	0.009	8	0.84	0.013	0.22	0.4	0.01	17.7	<0.1	<0.05	2	<0.5	<0.2
1876541	Drill Core	0.031	4	16	1.42	87	0.009	7	0.85	0.010	0.20	<0.1	0.02	21.2	<0.1	<0.05	2	<0.5	<0.2
1876542	Drill Core	0.029	6	14	2.09	147	0.020	6	0.83	0.010	0.22	0.2	0.36	15.4	<0.1	<0.05	3	<0.5	2.7
1876543	Drill Core	0.034	5	11	1.98	191	0.008	9	0.87	0.012	0.24	0.4	0.65	15.7	<0.1	0.07	3	<0.5	7.7
1876544	Drill Core	0.021	5	16	1.66	189	0.010	7	0.79	0.011	0.24	0.3	0.07	19.6	<0.1	<0.05	2	<0.5	<0.2
1876545	Drill Core	0.030	6	14	1.50	239	0.006	7	0.79	0.010	0.20	0.1	0.05	22.2	<0.1	0.06	2	<0.5	<0.2
1876546	Drill Core	0.025	7	10	1.64	824	0.015	7	0.80	0.009	0.23	0.8	0.04	15.8	<0.1	<0.05	2	<0.5	<0.2
1876547	Drill Core	0.030	3	11	1.17	872	0.010	9	0.82	0.009	0.28	0.4	0.03	19.1	<0.1	<0.05	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 26, 2017

CERTIFICATE OF ANALYSIS WHI17000859.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876548	Drill Core	5.24	<2	0.6	33.8	3.0	64	<0.1	7.3	19.1	947	3.89	3.2	1.6	1.0	48	0.2	1.6	<0.1	76	5.13
1876549	Drill Core	5.27	<2	1.3	44.3	3.0	55	<0.1	7.3	18.4	891	4.13	3.2	2.3	0.9	40	<0.1	5.5	<0.1	92	3.90
1876550	Drill Core	3.73	3	1.6	52.9	3.0	61	1.8	7.6	18.7	745	4.26	3.0	2.5	1.0	36	0.2	5.0	<0.1	101	3.72
1876551	Drill Core	5.35	4	1.5	14.2	2.6	60	<0.1	7.5	15.7	701	3.81	3.8	1.6	0.7	45	0.2	2.9	<0.1	89	3.65
1876552	Drill Core	1.04	21	41.3	26.3	3.9	63	0.4	9.2	19.5	943	4.05	24.5	16.6	0.6	50	0.4	1.7	<0.1	81	4.80
1876553	Drill Core	4.48	49	53.2	149.5	4.4	75	0.4	15.9	20.5	728	4.16	28.4	52.5	0.2	61	0.3	4.2	<0.1	58	4.12
1876554	Drill Core	6.11	8	3.7	53.8	1.5	38	0.1	6.7	9.8	429	2.54	7.2	6.9	0.2	40	0.1	1.5	<0.1	29	2.85
1876555	Rock Pulp	0.07	7	8.3	55.6	3.1	48	0.1	34.9	10.2	480	3.13	5.3	1.2	1.3	62	0.1	0.5	<0.1	68	1.05
1876556	Rock Pulp	0.10	527	43.1	>10000	954.4	>10000	61.4	18.9	3.4	676	12.33	132.6	508.7	<0.1	38	269.2	31.3	11.2	10	1.56
1876557	Drill Core	6.14	<2	1.1	94.4	2.0	64	0.3	16.5	14.7	647	3.57	9.4	3.1	0.2	45	0.2	1.0	<0.1	59	2.97
1876558	Drill Core	4.09	<2	0.3	53.9	1.9	69	<0.1	20.0	17.5	713	3.76	3.7	2.1	0.2	47	0.2	0.5	<0.1	76	3.24
1876559	Drill Core	2.42	2	0.7	124.0	2.0	104	0.1	12.1	11.9	585	2.82	10.7	2.2	0.4	31	0.7	0.9	<0.1	57	3.23
1876560	Drill Core	5.88	2	0.4	66.5	3.1	82	0.2	17.3	16.0	809	3.78	25.7	2.8	0.4	53	0.4	0.8	<0.1	83	4.68
1876561	Drill Core	7.22	2	0.5	80.7	2.7	110	<0.1	28.5	23.2	1318	5.89	8.9	1.2	1.3	55	0.2	0.5	<0.1	126	4.44
1876562	Drill Core	3.74	3	2.3	64.3	2.1	69	<0.1	22.5	16.6	931	6.57	4.4	2.9	0.9	93	0.2	0.3	<0.1	85	5.07
1876563	Drill Core	1.92	8	4.8	40.1	3.2	66	<0.1	14.8	15.6	997	4.32	8.1	6.2	0.8	76	0.2	0.2	<0.1	60	3.57
1876564	Drill Core	2.86	4	1.2	49.0	22.3	73	0.1	17.5	10.0	346	1.96	26.3	<0.5	8.6	100	0.1	0.3	0.4	21	1.08
1876565	Drill Core	4.53	3	0.6	31.2	18.3	57	<0.1	15.4	9.9	419	2.26	15.9	2.4	10.6	116	0.1	0.2	0.3	14	1.39
1876566	Drill Core	4.80	3	0.6	27.9	18.5	75	<0.1	15.2	9.9	412	2.02	15.2	1.7	9.3	114	0.2	0.2	0.3	15	1.15
1876567	Drill Core	5.08	<2	0.4	15.0	14.2	42	<0.1	11.0	7.2	285	2.04	10.0	<0.5	8.8	76	<0.1	0.2	0.2	12	0.92
1876568	Drill Core	6.25	<2	0.5	24.6	16.6	63	<0.1	16.5	12.2	529	2.61	16.7	<0.5	6.9	79	0.1	0.3	0.3	16	1.09

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 26, 2017

CERTIFICATE OF ANALYSIS WHI17000859.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876548	Drill Core	0.019	3	7	2.00	406	0.003	8	0.75	0.010	0.27	<0.1	0.04	16.7	<0.1	<0.05	2	<0.5	<0.2
1876549	Drill Core	0.025	2	11	1.57	434	0.003	10	0.77	0.012	0.29	0.1	0.01	19.3	0.1	<0.05	2	<0.5	<0.2
1876550	Drill Core	0.025	2	11	1.48	249	0.003	10	0.76	0.009	0.26	2.7	0.02	20.0	0.1	<0.05	2	<0.5	<0.2
1876551	Drill Core	0.007	1	12	1.49	133	0.002	11	0.68	0.010	0.27	0.2	0.06	18.2	0.2	<0.05	2	<0.5	<0.2
1876552	Drill Core	0.001	1	7	1.89	362	<0.001	9	0.56	0.012	0.21	1.3	0.21	18.5	0.1	<0.05	1	<0.5	<0.2
1876553	Drill Core	0.002	<1	12	1.90	289	<0.001	9	0.49	0.009	0.21	0.3	0.20	14.5	0.1	0.20	<1	<0.5	<0.2
1876554	Drill Core	0.002	<1	4	1.25	137	<0.001	8	0.51	0.006	0.18	0.2	0.12	8.2	<0.1	0.18	<1	<0.5	<0.2
1876555	Rock Pulp	0.062	6	42	0.81	124	0.152	8	1.81	0.130	0.17	0.4	0.02	5.8	<0.1	<0.05	6	<0.5	<0.2
1876556	Rock Pulp	0.035	<1	15	1.88	9	0.002	3	0.92	0.029	0.08	0.3	2.72	1.9	0.9	>10	5	3.0	7.5
1876557	Drill Core	0.002	<1	22	1.37	276	0.001	8	0.50	0.008	0.19	1.5	0.14	15.3	0.2	0.20	2	0.6	<0.2
1876558	Drill Core	0.003	1	27	1.56	191	0.001	9	0.62	0.008	0.20	<0.1	0.10	17.6	0.1	0.18	2	<0.5	<0.2
1876559	Drill Core	0.003	1	11	1.42	139	<0.001	7	0.38	0.007	0.10	<0.1	0.17	8.0	0.2	0.26	<1	0.7	<0.2
1876560	Drill Core	0.003	2	16	2.03	365	<0.001	7	0.52	0.013	0.16	0.4	0.15	15.1	0.3	0.33	1	1.7	<0.2
1876561	Drill Core	0.029	4	32	2.16	501	<0.001	5	0.46	0.018	0.18	0.2	0.07	24.3	0.2	0.22	2	<0.5	<0.2
1876562	Drill Core	0.025	2	16	1.60	16	<0.001	6	0.44	0.017	0.18	<0.1	0.09	14.6	0.4	3.73	1	<0.5	<0.2
1876563	Drill Core	0.017	2	16	1.62	1146	<0.001	5	0.51	0.021	0.26	<0.1	0.09	15.6	<0.1	0.13	1	<0.5	<0.2
1876564	Drill Core	0.009	14	10	0.46	950	<0.001	3	1.41	0.031	0.42	<0.1	0.12	6.3	<0.1	0.14	4	<0.5	<0.2
1876565	Drill Core	0.009	19	8	0.51	1495	<0.001	3	0.55	0.023	0.20	<0.1	0.08	5.5	<0.1	0.09	2	<0.5	<0.2
1876566	Drill Core	0.011	18	8	0.43	2055	<0.001	2	0.60	0.024	0.20	<0.1	0.08	5.3	<0.1	0.07	2	<0.5	<0.2
1876567	Drill Core	0.011	19	6	0.35	1432	<0.001	2	0.41	0.022	0.15	<0.1	0.09	4.7	0.2	0.09	1	<0.5	<0.2
1876568	Drill Core	0.008	18	9	0.53	269	0.001	3	0.50	0.025	0.21	<0.1	0.05	5.4	0.1	0.10	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada

PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 26, 2017

QUALITY CONTROL REPORT WHI17000859.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
Pulp Duplicates																					
1876461	Drill Core	3.54	<2	1.5	36.5	435.8	75	0.3	28.0	19.4	1408	4.69	5.8	<0.5	2.3	27	0.4	0.3	0.9	125	4.21
REP 1876461	QC			1.5	34.1	421.7	69	0.3	26.4	18.4	1351	4.63	5.3	<0.5	2.3	26	0.3	0.4	0.9	124	4.17
REP 1876477	QC		<2																		
1876495	Drill Core	4.35	<2	1.7	15.1	3.4	49	<0.1	12.6	12.2	603	3.12	4.6	<0.5	3.3	38	<0.1	0.5	<0.1	93	3.19
REP 1876495	QC			1.8	16.1	3.6	55	<0.1	12.2	12.2	582	3.14	5.4	<0.5	3.3	42	<0.1	0.5	<0.1	92	3.24
REP 1876511	QC		4																		
1876530	Drill Core	3.97	<2	3.4	51.5	2.8	46	0.1	6.9	15.7	708	3.86	3.2	<0.5	1.1	57	<0.1	0.2	<0.1	120	3.29
REP 1876530	QC			3.2	53.0	2.7	48	0.1	6.5	15.0	677	3.82	3.1	<0.5	1.2	56	<0.1	0.3	<0.1	119	3.29
REP 1876545	QC		<2																		
1876562	Drill Core	3.74	3	2.3	64.3	2.1	69	<0.1	22.5	16.6	931	6.57	4.4	2.9	0.9	93	0.2	0.3	<0.1	85	5.07
REP 1876562	QC			2.4	67.9	2.2	71	<0.1	21.1	16.7	918	6.60	4.0	1.7	0.9	90	0.2	0.3	<0.1	86	5.09
Core Reject Duplicates																					
1876477	Drill Core	3.48	<2	3.1	6.0	11.8	66	<0.1	7.5	18.4	1352	4.63	2.8	<0.5	1.1	41	0.1	0.4	<0.1	116	4.94
DUP 1876477	QC		<2	3.1	6.4	11.6	65	<0.1	7.0	17.7	1338	4.62	2.9	<0.5	1.1	41	0.2	0.4	<0.1	118	4.93
1876511	Drill Core	5.71	4	3.7	51.9	2.9	46	0.8	6.5	13.9	729	3.62	4.0	2.1	2.8	71	<0.1	0.3	<0.1	73	3.42
DUP 1876511	QC		5	4.4	50.7	2.6	43	0.9	6.4	13.7	709	3.59	4.1	5.7	2.7	66	<0.1	0.3	<0.1	74	3.45
1876545	Drill Core	4.37	2	1.9	29.0	2.6	50	<0.1	7.5	18.1	759	3.94	12.5	2.2	1.4	44	<0.1	0.6	<0.1	118	3.66
DUP 1876545	QC		<2	2.0	28.8	2.7	52	<0.1	6.9	17.4	776	3.96	9.4	0.9	1.4	44	<0.1	0.5	<0.1	115	3.68
Reference Materials																					
STD DS11	Standard			14.8	146.5	139.3	341	1.9	74.9	13.7	1050	3.26	50.6	70.5	7.6	68	2.8	9.5	11.6	50	1.07
STD DS11	Standard			12.8	143.7	122.1	321	1.7	73.9	13.6	983	3.02	47.1	68.5	7.7	64	2.4	8.6	11.9	49	1.05
STD DS11	Standard			15.3	150.4	139.5	341	1.7	76.6	13.9	1043	3.13	45.0	70.7	8.2	72	2.7	8.6	13.0	53	1.08
STD DS11	Standard			15.1	162.1	140.9	339	1.8	86.4	15.6	1084	3.14	44.0	82.9	8.5	75	2.8	8.7	12.4	51	1.08
STD OXC129	Standard			1.3	27.3	6.4	39	<0.1	79.2	21.6	452	3.18	0.7	198.2	1.8	162	<0.1	<0.1	<0.1	53	0.67
STD OXC129	Standard			1.3	25.0	5.8	40	<0.1	72.4	20.4	433	2.95	0.7	181.8	1.7	175	<0.1	<0.1	<0.1	53	0.69
STD OXC129	Standard			1.2	27.1	6.6	42	<0.1	79.5	20.6	440	3.09	<0.5	191.6	1.9	209	<0.1	<0.1	<0.1	57	0.77
STD OXC129	Standard			1.3	31.2	6.5	41	<0.1	80.7	22.9	421	3.05	<0.5	189.5	2.0	209	<0.1	<0.1	<0.1	54	0.74
STD OXC145	Standard		200																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 26, 2017

QUALITY CONTROL REPORT WHI17000859.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
Pulp Duplicates																			
1876461	Drill Core	0.051	7	48	0.44	874	0.019	6	0.95	0.030	0.37	<0.1	<0.01	28.2	0.2	<0.05	4	<0.5	<0.2
REP 1876461	QC	0.049	7	45	0.43	840	0.019	6	0.90	0.030	0.37	<0.1	<0.01	27.5	0.2	<0.05	4	<0.5	<0.2
REP 1876477	QC																		
1876495	Drill Core	0.024	6	26	1.15	531	0.017	5	0.87	0.005	0.29	<0.1	<0.01	15.8	<0.1	<0.05	3	<0.5	<0.2
REP 1876495	QC	0.024	5	28	1.16	533	0.019	5	0.87	0.006	0.29	<0.1	<0.01	16.1	<0.1	<0.05	3	<0.5	<0.2
REP 1876511	QC																		
1876530	Drill Core	0.043	4	14	1.22	136	0.016	8	0.97	0.012	0.42	0.4	<0.01	22.7	0.1	<0.05	3	<0.5	<0.2
REP 1876530	QC	0.042	4	13	1.22	130	0.016	9	0.98	0.012	0.41	0.4	<0.01	22.2	0.1	<0.05	3	<0.5	<0.2
REP 1876545	QC																		
1876562	Drill Core	0.025	2	16	1.60	16	<0.001	6	0.44	0.017	0.18	<0.1	0.09	14.6	0.4	3.73	1	<0.5	<0.2
REP 1876562	QC	0.026	2	19	1.60	16	<0.001	3	0.46	0.017	0.18	<0.1	0.08	14.9	0.4	3.73	1	<0.5	<0.2
Core Reject Duplicates																			
1876477	Drill Core	0.055	3	5	1.36	398	0.003	7	0.84	0.006	0.24	<0.1	0.02	25.8	0.1	<0.05	3	<0.5	<0.2
DUP 1876477	QC	0.053	3	5	1.37	403	0.003	6	0.86	0.006	0.23	<0.1	0.02	26.1	0.1	<0.05	2	<0.5	<0.2
1876511	Drill Core	0.039	5	12	0.84	261	0.003	5	0.56	0.019	0.27	3.3	<0.01	16.7	<0.1	<0.05	1	<0.5	<0.2
DUP 1876511	QC	0.035	6	14	0.86	287	0.003	5	0.59	0.019	0.28	3.9	<0.01	16.3	<0.1	<0.05	1	<0.5	<0.2
1876545	Drill Core	0.030	6	14	1.50	239	0.006	7	0.79	0.010	0.20	0.1	0.05	22.2	<0.1	0.06	2	<0.5	<0.2
DUP 1876545	QC	0.033	5	14	1.50	230	0.007	8	0.81	0.010	0.20	0.1	0.03	21.3	<0.1	<0.05	2	<0.5	<0.2
Reference Materials																			
STD DS11	Standard	0.074	19	63	0.85	388	0.096	8	1.16	0.078	0.41	3.3	0.26	3.5	5.3	0.28	5	2.5	4.9
STD DS11	Standard	0.060	18	62	0.83	389	0.091	8	1.16	0.073	0.40	3.0	0.24	3.3	4.6	0.27	5	2.4	4.2
STD DS11	Standard	0.072	21	60	0.86	388	0.101	6	1.25	0.081	0.41	2.8	0.26	3.3	5.0	0.29	5	2.4	4.9
STD DS11	Standard	0.068	21	63	0.85	394	0.109	7	1.19	0.071	0.41	2.8	0.27	3.5	4.8	0.27	5	1.9	4.5
STD OXC129	Standard	0.103	13	55	1.54	52	0.413	1	1.61	0.612	0.40	<0.1	<0.01	1.2	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.101	12	53	1.56	49	0.407	1	1.63	0.599	0.38	<0.1	<0.01	1.5	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.103	13	55	1.61	57	0.428	1	1.74	0.620	0.39	<0.1	<0.01	0.8	<0.1	<0.05	6	<0.5	<0.2
STD OXC129	Standard	0.096	14	55	1.57	52	0.419	1	1.60	0.600	0.36	<0.1	<0.01	0.9	<0.1	<0.05	6	<0.5	<0.2
STD OXC145	Standard																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 26, 2017

QUALITY CONTROL REPORT WHI17000859.1

		WGHT Wgt kg 0.01	FA350 Au ppb 2	AQ201 Mo ppm 0.1	AQ201 Cu ppm 0.1	AQ201 Pb ppm 0.1	AQ201 Zn ppm 1	AQ201 Ag ppm 0.1	AQ201 Ni ppm 0.1	AQ201 Co ppm 0.1	AQ201 Mn ppm 1	AQ201 Fe % 0.01	AQ201 As ppm 0.5	AQ201 Au ppb 0.5	AQ201 Th ppm 0.1	AQ201 Sr ppm 1	AQ201 Cd ppm 0.1	AQ201 Sb ppm 0.1	AQ201 Bi ppm 0.1	AQ201 V ppm 2	AQ201 Ca % 0.01
STD OXC145	Standard		209																		
STD OXC145	Standard		216																		
STD OXC145	Standard		207																		
STD OXH139	Standard		1294																		
STD OXH139	Standard		1275																		
STD OXH139	Standard		1351																		
STD OXH139	Standard		1323																		
STD OXC145 Expected			212																		
STD OXH139 Expected			1312																		
STD OXC129 Expected				1.3	28	6.3	42.9		79.5	20.3	421	3.065	0.6	195	1.9					51	0.665
STD DS11 Expected				14.6	156	138	345	1.71	81.9	14.2	1055	3.2082	42.8	79	7.65	67.3	2.37	8.74	12.2	50	1.063
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
Prep Wash																					
ROCK-WHI	Prep Blank		<2	0.8	4.7	1.3	37	<0.1	0.9	4.0	608	2.03	7.7	1.7	2.3	23	<0.1	0.1	0.2	25	0.63
ROCK-WHI	Prep Blank		<2	0.9	4.9	1.7	37	<0.1	1.0	4.0	574	2.05	4.6	<0.5	2.4	26	<0.1	<0.1	<0.1	25	0.63

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: October 26, 2017

QUALITY CONTROL REPORT WHI17000859.1

		AQ201 P % 0.001	AQ201 La ppm 1	AQ201 Cr ppm 1	AQ201 Mg % 0.01	AQ201 Ba ppm 1	AQ201 Ti % 0.001	AQ201 B ppm 1	AQ201 Al % 0.01	AQ201 Na % 0.001	AQ201 K % 0.01	AQ201 W ppm 0.1	AQ201 Hg ppm 0.01	AQ201 Sc ppm 0.1	AQ201 Tl ppm 0.1	AQ201 S % 0.05	AQ201 Ga ppm 1	AQ201 Se ppm 0.5	AQ201 Te ppm 0.2
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXC145 Expected																			
STD OXH139 Expected																			
STD OXC129 Expected		0.102	13	52	1.545	50	0.4	1	1.58	0.6	0.37			1.1			5.6		
STD DS11 Expected		0.0701	18.6	61.5	0.85	385	0.0976		1.1795	0.0762	0.4	2.9	0.3	3.4	4.9	0.2835	5.1	1.9	4.56
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
Prep Wash																			
ROCK-WHI	Prep Blank	0.044	7	3	0.51	62	0.083	2	1.07	0.126	0.12	<0.1	<0.01	3.3	<0.1	0.07	4	<0.5	<0.2
ROCK-WHI	Prep Blank	0.047	7	4	0.51	55	0.081	1	1.05	0.110	0.11	<0.1	<0.01	3.1	<0.1	<0.05	4	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Submitted By: Daithi Mac Gerailt
Receiving Lab: Canada-Whitehorse
Received: October 16, 2017
Report Date: November 06, 2017
Page: 1 of 2

CERTIFICATE OF ANALYSIS WHI17000859M.1

CLIENT JOB INFORMATION

Project: Lucky Strike
Shipment ID: DDLS-17-06
P.O. Number
Number of Samples: 1

SAMPLE DISPOSAL

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PUL85	1	Pulverize to 85% passing 200 mesh			VAN
SPTRF	1	Split samples by riffle splitter			WHI
FS652	1	Metallic Sieve 500g to 150 mesh			VAN
FS652	1	Metallic Fire Assay - duplicate minus fraction analysis	50	Completed	VAN
EN002	1	Environmental disposal charge-Fire assay lead waste			VAN
SHP01	1	Per sample shipping charges for branch shipments			VAN
FA550	1	Lead collection fire assay 50G fusion - Grav finish	50	Completed	VAN
FA550	1	Lead collection fire assay 50G fusion - Grav finish	50	Completed	VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources Ltd.
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3
Canada

CC:

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 06, 2017

CERTIFICATE OF ANALYSIS WHI17000859M.1

		Method	M150	FA450	FA450	FS652	FS652	FS652	FA550	FA550
		Analyte	TotWt	-Au	-Au + Au	Wt	+ Au	Au Total	-Au	-Au
		Unit	g	gm/t	gm/t	g	gm/t	gm/t	gm/t	gm/t
		MDL	1	0.005	0.005	0.01	0.05	0.05	0.9	0.9
1876480	Drill Core		486	9.991	>10	31.55	10.21	10.16	10.1	10.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 06, 2017

QUALITY CONTROL REPORT WHI17000859M.1

	Method	M150	FA450	FA450	FS652	FS652	FS652	FA550	FA550
	Analyte	TotWt	-Au	-Au	+ Au Wt	+ Au	Au Total	-Au	-Au
	Unit	g	gm/t	gm/t	g	gm/t	gm/t	gm/t	gm/t
	MDL	1	0.005	0.005	0.01	0.05	0.05	0.9	0.9
Reference Materials									
STD AGPROOF	Standard								<0.9
STD OXC145	Standard			0.214					
STD OXC145	Standard		0.206						
STD OXH139	Standard			1.263					
STD OXH139	Standard		1.280						
STD OXN134	Standard			7.508					
STD OXN134	Standard		7.575						
STD OXP91	Standard				50.51	14.83			
STD OXP91	Standard				49.84	14.57			
STD OXQ90	Standard							24.3	
STD SP49	Standard								18.4
STD SQ70	Standard								39.5
STD OXP91 Expected						14.82			
BLK	Blank			<0.005					
BLK	Blank			<0.005					
BLK	Blank		<0.005						
BLK	Blank				50.00	<0.05			
BLK	Blank				50.00	<0.05			
BLK	Blank								<0.9
BLK	Blank							<0.9	
Prep Wash									
ROCK-WHI	Prep Blank	516	<0.005	<0.005	37.25	<0.05	<0.05		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Submitted By: Daithi Mac Gerailt
Receiving Lab: Canada-Whitehorse
Received: October 05, 2017
Report Date: November 13, 2017
Page: 1 of 5

CERTIFICATE OF ANALYSIS WHI17001022.1

CLIENT JOB INFORMATION

Project: Lucky Strike
Shipment ID: DDLS-17-07
P.O. Number
Number of Samples: 109

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	103	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	6	Sort, label and box pulps			WHI
FA350-Au	109	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	109	Environmental disposal charge-Fire assay lead waste			VAN
AQ201	109	1:1:1 Aqua Regia digestion ICP-MS analysis	15	Completed	VAN
SHP01	109	Per sample shipping charges for branch shipments			VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources Ltd.
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3
Canada

CC:

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 13, 2017

CERTIFICATE OF ANALYSIS WHI17001022.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876569	Drill Core	4.91	3	1.4	40.3	15.6	85	0.1	58.4	25.7	1670	5.76	6.8	1.2	3.7	31	0.1	0.3	<0.1	88	3.46
1876570	Drill Core	7.07	3	0.7	29.6	6.6	53	<0.1	15.4	16.2	959	4.25	4.0	0.9	5.0	26	<0.1	0.2	<0.1	71	1.87
1876571	Drill Core	4.09	5	0.8	42.3	3.9	67	<0.1	22.6	21.4	1186	5.42	7.4	3.1	2.6	37	0.1	0.5	<0.1	124	2.69
1876572	Drill Core	4.33	2	1.4	18.2	16.1	71	<0.1	23.5	24.3	1545	5.88	7.4	1.2	0.5	34	0.2	1.0	<0.1	151	2.58
1876573	Drill Core	4.86	12	1.6	37.6	16.8	70	0.1	18.4	23.2	1323	6.07	6.5	12.0	1.9	31	0.1	0.7	<0.1	108	1.59
1876574	Drill Core	3.10	15	1.5	49.5	3.7	60	<0.1	20.4	22.2	1183	5.04	3.2	14.4	2.8	27	<0.1	0.4	<0.1	76	1.33
1876575	Drill Core	4.86	7	1.9	58.0	21.2	73	<0.1	30.8	33.9	1939	8.00	3.3	6.1	0.6	29	0.1	0.7	<0.1	164	3.64
1876576	Drill Core	4.69	9	2.3	34.8	14.0	57	<0.1	7.8	16.2	896	4.33	3.0	8.5	2.5	20	0.1	0.3	<0.1	58	2.95
1876577	Drill Core	5.04	12	4.4	26.7	18.7	71	0.1	8.7	16.3	1035	5.23	4.8	12.4	2.3	19	0.1	0.5	<0.1	69	2.41
1876578	Drill Core	3.59	16	5.0	25.8	35.7	75	0.3	14.3	17.3	1183	4.59	8.6	15.4	2.0	24	0.1	0.8	0.1	103	3.66
1876579	Drill Core	4.34	22	4.3	27.0	75.1	60	0.3	7.9	15.9	1136	3.60	6.7	24.1	2.1	28	0.2	0.4	0.5	72	3.02
1876580	Drill Core	5.01	<2	4.0	25.8	49.8	69	<0.1	5.3	17.0	960	4.30	4.8	<0.5	1.5	69	0.2	0.4	<0.1	114	4.76
1876581	Drill Core	3.71	<2	5.5	53.8	24.4	80	0.3	5.8	23.9	1236	5.45	3.7	<0.5	1.9	42	<0.1	0.4	<0.1	130	3.52
1876582	Drill Core	3.02	2	4.5	64.3	18.7	91	0.9	9.0	27.8	1137	6.14	3.4	1.5	1.2	45	0.2	0.8	<0.1	119	3.69
1876583	Drill Core	4.09	128	5.0	42.9	38.8	75	0.8	17.1	18.9	1195	3.96	64.9	143.0	0.6	84	0.4	2.6	0.2	133	6.63
1876584	Drill Core	3.53	4986	25.5	148.4	138.8	33	16.2	5.0	6.3	246	1.28	55.7	5249.3	<0.1	38	0.5	11.6	1.1	16	0.87
1876585	Drill Core	3.48	619	29.9	25.7	17.6	33	2.8	5.0	8.8	516	2.15	31.6	532.7	0.5	35	0.3	1.9	0.1	42	2.42
1876586	Drill Core	4.75	338	6.3	1648.9	9.5	47	>100	67.5	11.4	874	2.92	18.4	336.2	1.2	44	0.3	0.6	<0.1	60	3.53
1876587	Drill Core	3.83	7	1.6	20.9	2.9	47	<0.1	4.6	10.6	820	3.02	3.7	8.8	1.4	46	<0.1	0.2	<0.1	63	3.40
1876588	Drill Core	1.82	15	1.2	9.1	4.0	40	<0.1	3.7	8.6	543	2.27	1.7	18.1	1.4	40	<0.1	0.1	<0.1	41	3.91
1876589	Drill Core	5.37	2	2.2	7.1	5.6	49	<0.1	5.0	11.4	621	2.85	4.6	4.4	1.7	40	<0.1	0.3	<0.1	65	3.44
1876590	Rock Pulp	0.06	9	7.9	49.7	2.9	47	0.1	34.6	9.2	546	3.16	5.7	0.5	1.2	51	0.1	0.4	<0.1	66	0.97
1876591	Rock Pulp	0.06	6234	1.3	13.4	18.9	58	0.1	11.2	1.5	870	0.56	4456.8	6072.1	1.2	166	0.5	20.6	0.4	21	22.16
1876592	Drill Core	2.53	6	2.9	28.5	6.6	72	<0.1	10.3	19.9	928	4.05	5.3	3.1	1.2	47	<0.1	0.2	<0.1	114	4.03
1876593	Drill Core	2.18	7	2.6	15.0	8.7	59	<0.1	6.3	12.7	711	3.06	7.9	2.1	1.1	51	0.2	0.2	<0.1	68	5.96
1876594	Drill Core	5.04	3	1.7	17.2	5.3	50	<0.1	5.7	12.6	592	2.61	4.6	2.6	1.5	29	<0.1	0.1	<0.1	59	3.57
1876595	Drill Core	4.70	4	1.9	16.2	4.7	53	<0.1	5.0	10.4	684	2.85	3.9	5.9	1.9	51	0.1	<0.1	<0.1	60	4.59
1876596	Drill Core	3.81	5	3.8	27.4	3.5	61	<0.1	4.9	10.9	858	3.44	3.3	6.5	1.5	43	<0.1	0.1	<0.1	77	4.56
1876597	Drill Core	2.47	<2	1.7	23.5	1.8	52	0.1	3.1	9.5	665	2.92	3.5	<0.5	1.1	30	<0.1	0.1	<0.1	81	3.69
1876598	Drill Core	4.19	<2	1.1	13.3	1.8	49	<0.1	3.9	8.9	639	2.86	8.1	<0.5	1.0	31	<0.1	0.1	<0.1	71	3.78

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 13, 2017

CERTIFICATE OF ANALYSIS WHI17001022.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876569	Drill Core	0.079	12	145	0.63	468	0.029	4	1.19	0.027	0.39	0.5	<0.01	24.1	0.2	<0.05	6	<0.5	<0.2
1876570	Drill Core	0.078	18	28	0.50	434	0.051	5	0.94	0.038	0.49	<0.1	<0.01	18.1	0.2	<0.05	4	<0.5	<0.2
1876571	Drill Core	0.068	14	32	0.61	440	0.037	7	1.17	0.032	0.51	0.1	<0.01	23.9	0.2	<0.05	6	<0.5	<0.2
1876572	Drill Core	0.068	4	43	0.90	371	0.081	4	1.49	0.084	0.38	<0.1	<0.01	22.4	0.2	<0.05	6	<0.5	<0.2
1876573	Drill Core	0.075	13	28	0.68	415	0.060	5	1.18	0.049	0.54	<0.1	0.02	26.1	0.3	<0.05	6	<0.5	<0.2
1876574	Drill Core	0.082	12	27	0.74	494	0.073	5	1.25	0.034	0.67	<0.1	0.03	22.1	0.4	<0.05	6	<0.5	<0.2
1876575	Drill Core	0.060	5	44	0.56	634	0.018	5	1.17	0.032	0.32	<0.1	0.02	26.8	0.2	<0.05	5	<0.5	<0.2
1876576	Drill Core	0.061	9	8	0.19	232	0.003	6	0.69	0.030	0.23	<0.1	<0.01	22.1	0.1	<0.05	3	<0.5	<0.2
1876577	Drill Core	0.099	8	21	0.28	286	0.012	7	0.89	0.024	0.29	<0.1	0.02	24.6	0.2	<0.05	4	<0.5	<0.2
1876578	Drill Core	0.059	5	53	0.18	238	0.005	7	0.60	0.009	0.12	0.2	0.04	26.3	<0.1	<0.05	2	<0.5	<0.2
1876579	Drill Core	0.080	4	11	0.24	630	0.006	4	0.67	0.021	0.13	<0.1	0.06	19.2	<0.1	<0.05	2	<0.5	<0.2
1876580	Drill Core	0.051	5	7	1.11	1246	0.007	4	0.66	0.009	0.17	<0.1	<0.01	24.2	<0.1	0.06	2	<0.5	<0.2
1876581	Drill Core	0.051	6	5	0.77	710	0.010	5	0.73	0.024	0.28	0.7	<0.01	29.3	0.2	<0.05	3	<0.5	<0.2
1876582	Drill Core	0.068	4	13	0.87	630	0.004	6	0.73	0.016	0.19	2.4	0.02	29.2	0.1	0.15	3	1.4	<0.2
1876583	Drill Core	0.018	2	47	1.29	1572	0.003	5	0.56	0.004	0.11	0.1	0.29	23.0	0.2	<0.05	2	<0.5	0.6
1876584	Drill Core	0.003	<1	6	0.11	1197	<0.001	2	0.06	0.002	<0.01	1.0	0.85	1.7	<0.1	0.07	<1	<0.5	11.8
1876585	Drill Core	0.011	1	5	0.35	1238	0.001	4	0.26	0.002	0.05	6.0	0.21	7.9	<0.1	<0.05	<1	<0.5	1.5
1876586	Drill Core	0.028	4	5	0.78	452	0.001	3	0.48	0.003	0.06	>100	0.07	17.6	<0.1	<0.05	1	<0.5	0.7
1876587	Drill Core	0.040	4	5	0.97	414	0.004	4	0.90	0.004	0.12	0.1	0.02	16.7	<0.1	<0.05	2	<0.5	<0.2
1876588	Drill Core	0.027	2	5	0.96	220	0.008	5	0.85	0.006	0.19	0.3	0.02	10.9	<0.1	<0.05	2	<0.5	<0.2
1876589	Drill Core	0.039	2	11	0.87	214	0.011	10	1.02	0.007	0.28	<0.1	0.02	18.8	0.1	<0.05	3	<0.5	<0.2
1876590	Rock Pulp	0.050	5	40	0.80	121	0.134	7	1.71	0.120	0.16	0.4	0.01	5.0	<0.1	<0.05	6	<0.5	<0.2
1876591	Rock Pulp	0.016	7	21	6.05	40	0.001	4	0.21	0.009	0.06	3.3	4.02	2.4	14.7	<0.05	<1	<0.5	<0.2
1876592	Drill Core	0.050	4	35	1.14	240	0.005	6	0.79	0.006	0.23	<0.1	0.03	28.3	<0.1	<0.05	2	<0.5	<0.2
1876593	Drill Core	0.023	2	5	1.97	193	<0.001	4	0.45	0.009	0.09	0.2	0.02	16.2	<0.1	<0.05	1	<0.5	<0.2
1876594	Drill Core	0.037	2	5	1.09	287	0.002	5	0.64	0.006	0.15	<0.1	0.02	19.8	<0.1	<0.05	2	<0.5	<0.2
1876595	Drill Core	0.026	2	4	1.46	672	0.003	4	0.57	0.005	0.14	<0.1	<0.01	13.7	<0.1	<0.05	2	<0.5	<0.2
1876596	Drill Core	0.034	3	6	1.46	356	0.006	5	0.71	0.006	0.18	0.2	<0.01	17.7	<0.1	<0.05	2	<0.5	<0.2
1876597	Drill Core	0.016	2	5	0.96	159	0.006	3	0.68	0.004	0.07	0.6	<0.01	19.9	<0.1	<0.05	2	<0.5	<0.2
1876598	Drill Core	0.013	2	5	1.09	359	0.003	3	0.51	0.005	0.07	0.3	0.01	18.6	<0.1	<0.05	1	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 13, 2017

CERTIFICATE OF ANALYSIS WHI17001022.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876599	Drill Core	3.90	<2	1.0	43.0	2.6	65	<0.1	9.0	11.6	661	3.38	15.6	<0.5	3.0	37	<0.1	0.2	<0.1	66	2.44
1876600	Drill Core	2.76	<2	0.5	28.3	1.8	49	<0.1	7.2	9.4	552	2.71	2.6	<0.5	2.9	44	<0.1	<0.1	<0.1	46	2.11
1876601	Drill Core	3.82	<2	0.7	33.1	2.0	60	<0.1	10.5	15.9	880	3.64	4.1	<0.5	2.1	38	<0.1	<0.1	<0.1	78	2.57
1876602	Drill Core	2.49	<2	0.8	39.8	1.8	48	<0.1	6.9	12.5	837	3.07	5.7	0.7	3.3	41	<0.1	<0.1	<0.1	64	2.37
1876603	Drill Core	1.11	<2	0.3	24.3	1.6	36	<0.1	3.5	6.9	299	2.28	5.7	2.6	4.2	29	<0.1	0.1	<0.1	27	1.36
1876604	Drill Core	1.96	<2	0.4	44.1	1.9	57	<0.1	8.0	12.5	439	3.26	1.3	1.3	4.3	28	<0.1	<0.1	<0.1	77	1.52
1876605	Drill Core	3.84	<2	0.7	59.1	2.8	73	<0.1	18.7	18.3	773	4.42	2.6	1.0	3.3	89	<0.1	0.3	<0.1	131	3.48
1876606	Drill Core	5.51	<2	0.8	29.7	2.0	68	<0.1	11.2	15.3	836	3.99	2.5	<0.5	2.1	83	<0.1	0.2	<0.1	110	3.58
1876607	Drill Core	3.89	<2	0.5	51.4	1.6	51	<0.1	9.3	11.3	569	2.86	2.1	<0.5	2.4	84	<0.1	<0.1	<0.1	52	2.63
1876608	Drill Core	5.56	2	1.0	35.4	2.2	68	0.3	10.0	13.8	843	3.85	10.3	1.0	1.7	44	<0.1	0.1	<0.1	86	4.42
1876609	Drill Core	5.09	<2	0.7	31.2	2.5	56	<0.1	6.2	11.6	578	3.11	4.1	<0.5	2.1	52	<0.1	<0.1	<0.1	59	2.70
1876610	Drill Core	5.91	<2	1.1	30.0	1.5	43	<0.1	5.2	9.4	542	2.84	4.6	<0.5	1.7	60	<0.1	<0.1	<0.1	44	2.14
1876611	Drill Core	6.64	3	1.0	42.9	2.3	77	<0.1	9.8	19.5	1082	4.81	13.1	2.1	1.9	63	0.2	0.2	<0.1	113	3.73
1876612	Drill Core	5.20	11	1.3	60.1	1.9	64	0.1	8.6	17.4	1113	3.97	11.9	10.8	1.7	64	0.1	0.1	<0.1	95	4.13
1876613	Drill Core	4.91	<2	2.3	65.5	1.5	57	<0.1	7.6	15.3	1092	3.86	2.4	0.9	2.6	32	<0.1	0.2	<0.1	71	3.36
1876614	Drill Core	5.03	<2	1.2	31.1	2.2	63	<0.1	11.2	20.9	1276	4.53	3.2	1.3	1.7	59	<0.1	0.1	<0.1	108	5.59
1876615	Drill Core	3.16	<2	1.2	33.9	2.0	54	<0.1	8.0	18.9	919	3.55	2.6	1.8	1.5	75	<0.1	<0.1	<0.1	76	4.36
1876616	Drill Core	2.04	6	0.9	23.6	3.8	62	0.2	8.9	15.5	916	3.77	24.6	5.5	1.4	59	<0.1	0.2	<0.1	89	6.53
1876617	Drill Core	5.16	<2	1.6	41.0	3.4	77	<0.1	11.9	21.8	1163	4.72	4.4	<0.5	2.0	57	<0.1	0.3	<0.1	115	5.62
1876618	Drill Core	5.38	<2	0.7	30.5	2.2	68	<0.1	7.8	17.6	940	4.06	1.9	<0.5	2.2	26	<0.1	<0.1	<0.1	90	3.39
1876619	Drill Core	4.90	<2	0.3	22.5	2.9	57	<0.1	6.7	17.0	1159	3.97	3.6	<0.5	1.2	39	<0.1	0.2	<0.1	83	5.33
1876620	Drill Core	5.90	<2	0.4	29.2	2.5	51	<0.1	8.3	19.1	883	3.97	2.9	2.0	1.9	31	<0.1	0.1	<0.1	96	3.75
1876621	Drill Core	5.00	<2	0.9	13.2	4.0	64	<0.1	8.5	16.2	1000	3.80	3.0	1.2	1.7	46	0.2	0.2	<0.1	94	6.00
1876622	Drill Core	3.36	16	0.7	25.2	2.7	51	0.2	6.2	12.5	724	3.23	2.6	17.0	2.3	37	0.2	0.1	<0.1	97	3.96
1876623	Drill Core	4.35	10	1.7	37.6	4.8	65	<0.1	8.5	16.5	831	4.05	3.3	12.3	1.9	60	0.2	0.2	<0.1	140	4.76
1876624	Drill Core	5.71	5	1.0	38.0	4.7	61	<0.1	9.6	20.7	1241	4.43	2.3	4.6	2.1	71	0.2	0.1	<0.1	147	6.47
1876625	Rock Pulp	0.06	3	8.1	51.6	2.9	52	0.1	34.9	9.5	523	3.12	5.2	1.2	1.2	54	0.1	0.4	<0.1	68	1.02
1876626	Rock Pulp	0.09	379	44.0	>10000	956.3	>10000	61.6	18.5	3.6	668	12.10	149.4	500.1	<0.1	36	261.6	30.4	10.8	9	1.56
1876627	Drill Core	4.90	<2	0.9	79.7	2.6	69	<0.1	10.7	25.9	1144	4.95	1.6	0.6	1.6	60	0.1	0.2	<0.1	137	3.91
1876628	Drill Core	5.51	<2	0.5	57.1	3.0	55	0.3	8.4	18.3	1071	4.10	2.4	<0.5	3.7	70	<0.1	0.2	<0.1	83	4.32

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 13, 2017

CERTIFICATE OF ANALYSIS WHI17001022.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876599	Drill Core	0.029	6	16	0.98	1148	0.004	4	0.57	0.025	0.17	0.1	0.15	13.5	<0.1	<0.05	2	<0.5	<0.2
1876600	Drill Core	0.024	9	11	0.84	1110	0.004	4	0.39	0.037	0.12	<0.1	<0.01	6.9	<0.1	<0.05	2	<0.5	<0.2
1876601	Drill Core	0.032	4	25	0.86	1155	0.004	7	0.75	0.021	0.28	<0.1	<0.01	19.9	0.1	<0.05	3	<0.5	<0.2
1876602	Drill Core	0.042	6	9	0.68	402	0.008	3	0.73	0.029	0.25	0.2	<0.01	10.8	0.1	<0.05	3	<0.5	<0.2
1876603	Drill Core	0.006	4	4	0.56	773	0.015	3	0.70	0.026	0.24	<0.1	0.03	7.2	<0.1	<0.05	3	<0.5	<0.2
1876604	Drill Core	0.027	5	15	0.88	608	0.041	5	1.09	0.020	0.52	0.2	0.01	12.6	0.1	<0.05	4	<0.5	<0.2
1876605	Drill Core	0.090	5	74	0.90	932	0.021	6	1.19	0.024	0.58	<0.1	<0.01	22.9	0.2	<0.05	4	<0.5	<0.2
1876606	Drill Core	0.057	4	20	0.89	1175	0.015	6	0.91	0.024	0.45	<0.1	<0.01	20.8	0.1	<0.05	3	<0.5	<0.2
1876607	Drill Core	0.033	4	15	0.84	2365	0.016	5	0.87	0.028	0.38	<0.1	<0.01	12.5	0.1	0.05	3	<0.5	<0.2
1876608	Drill Core	0.041	4	17	1.10	1450	0.012	4	0.74	0.017	0.29	1.3	<0.01	17.0	0.1	<0.05	3	<0.5	<0.2
1876609	Drill Core	0.057	3	9	0.85	1766	0.018	6	0.99	0.010	0.33	0.4	<0.01	13.0	0.1	<0.05	4	<0.5	<0.2
1876610	Drill Core	0.024	2	5	0.55	2104	0.009	3	0.63	0.029	0.20	0.4	<0.01	10.7	<0.1	0.05	2	<0.5	<0.2
1876611	Drill Core	0.062	6	13	1.25	322	0.013	4	0.74	0.034	0.31	0.2	0.02	20.9	0.1	<0.05	3	<0.5	<0.2
1876612	Drill Core	0.031	5	10	1.36	397	0.006	4	0.53	0.033	0.16	0.1	0.05	16.4	<0.1	<0.05	2	<0.5	<0.2
1876613	Drill Core	0.042	6	7	0.90	166	0.003	4	0.56	0.032	0.19	<0.1	0.02	14.6	<0.1	<0.05	2	<0.5	<0.2
1876614	Drill Core	0.060	6	18	2.20	221	0.003	6	0.77	0.020	0.28	<0.1	<0.01	21.3	<0.1	<0.05	3	<0.5	<0.2
1876615	Drill Core	0.039	3	8	1.39	650	0.002	3	0.78	0.015	0.17	<0.1	0.03	12.7	<0.1	<0.05	2	<0.5	<0.2
1876616	Drill Core	0.015	3	7	2.41	234	0.001	2	0.57	0.012	0.08	<0.1	0.10	12.2	<0.1	<0.05	1	<0.5	<0.2
1876617	Drill Core	0.046	4	12	2.01	595	0.002	4	0.70	0.007	0.13	<0.1	0.02	18.3	<0.1	<0.05	2	<0.5	<0.2
1876618	Drill Core	0.032	4	11	1.26	144	0.008	5	0.79	0.018	0.24	<0.1	<0.01	17.1	<0.1	<0.05	3	<0.5	<0.2
1876619	Drill Core	0.025	4	9	2.05	271	0.003	6	0.69	0.014	0.22	<0.1	<0.01	15.1	<0.1	<0.05	2	<0.5	<0.2
1876620	Drill Core	0.027	3	11	1.25	506	0.003	6	0.83	0.009	0.28	<0.1	<0.01	18.8	<0.1	<0.05	2	<0.5	<0.2
1876621	Drill Core	0.032	5	8	2.33	149	0.002	5	0.66	0.008	0.16	0.1	0.02	14.3	<0.1	<0.05	2	<0.5	<0.2
1876622	Drill Core	0.037	8	9	1.28	125	0.006	2	0.76	0.018	0.11	0.2	0.04	15.6	<0.1	<0.05	2	<0.5	<0.2
1876623	Drill Core	0.023	5	16	1.27	162	0.008	4	0.79	0.007	0.17	0.2	0.02	24.1	<0.1	<0.05	2	<0.5	<0.2
1876624	Drill Core	0.020	6	15	2.11	240	0.007	4	0.76	0.008	0.19	<0.1	<0.01	20.4	<0.1	<0.05	2	<0.5	<0.2
1876625	Rock Pulp	0.067	5	41	0.81	112	0.138	5	1.82	0.127	0.17	0.4	0.01	5.8	<0.1	<0.05	6	<0.5	<0.2
1876626	Rock Pulp	0.038	<1	15	1.85	8	0.002	1	0.88	0.028	0.08	0.3	2.81	1.9	1.0	>10	6	5.1	8.9
1876627	Drill Core	0.026	3	17	1.25	684	0.011	5	0.88	0.017	0.38	<0.1	0.01	28.2	0.1	<0.05	2	<0.5	<0.2
1876628	Drill Core	0.069	8	8	1.54	552	0.004	7	0.82	0.021	0.36	1.4	<0.01	17.1	<0.1	<0.05	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 13, 2017

CERTIFICATE OF ANALYSIS WHI17001022.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876629	Drill Core	6.06	14	0.5	31.2	3.1	57	<0.1	8.0	19.9	973	4.27	3.5	12.8	2.7	47	<0.1	0.3	<0.1	110	3.81
1876630	Drill Core	4.16	30	0.5	27.1	4.0	60	0.1	8.9	19.1	927	4.28	4.2	31.3	2.9	39	<0.1	0.5	<0.1	133	3.92
1876631	Drill Core	3.94	41	5.1	44.5	4.6	61	1.3	8.7	17.3	709	3.91	8.3	38.3	1.8	29	<0.1	0.7	<0.1	99	2.99
1876632	Drill Core	2.73	<2	1.9	23.8	3.5	42	0.8	5.5	13.1	777	2.89	3.4	1.8	1.0	50	<0.1	0.2	<0.1	66	3.97
1876633	Drill Core	5.43	66	0.9	31.2	3.9	62	0.1	8.7	21.3	931	4.29	4.1	57.9	1.7	32	<0.1	0.4	<0.1	118	3.43
1876634	Drill Core	4.70	40	0.9	31.6	4.2	58	0.1	7.3	17.9	831	3.94	2.7	35.2	1.9	61	0.2	0.2	<0.1	117	4.57
1876635	Drill Core	5.52	<2	2.0	31.4	3.3	56	<0.1	7.2	17.3	785	3.83	2.4	0.9	2.5	35	0.1	0.2	<0.1	112	3.91
1876636	Drill Core	4.82	<2	0.8	17.6	3.2	55	<0.1	7.8	17.7	729	4.06	4.0	<0.5	1.9	33	0.1	0.3	<0.1	112	3.46
1876637	Drill Core	5.28	154	2.9	94.6	4.3	64	0.6	9.8	20.3	838	4.11	5.6	158.8	1.9	39	0.2	0.3	<0.1	111	4.43
1876638	Drill Core	7.34	27	1.3	43.6	4.5	71	0.1	12.9	19.4	990	4.83	4.6	25.7	2.2	62	0.4	0.3	0.1	140	5.59
1876639	Drill Core	1.23	175	0.7	62.6	5.3	80	0.8	10.1	23.6	1243	5.15	3.0	184.1	1.9	77	0.4	0.1	<0.1	177	7.42
1876640	Drill Core	3.07	54	0.9	44.5	3.8	64	0.2	8.1	18.0	882	4.41	2.7	56.8	1.8	53	0.2	0.2	<0.1	139	4.84
1876641	Drill Core	5.46	41	1.3	42.5	3.3	56	0.2	8.3	18.0	855	4.40	4.6	33.8	1.6	54	0.1	0.5	<0.1	142	4.19
1876642	Drill Core	5.16	6	1.4	49.6	2.7	56	0.1	7.7	17.8	823	4.24	3.9	5.0	1.9	39	0.1	0.2	<0.1	133	4.43
1876643	Drill Core	5.28	34	1.1	65.1	3.6	54	0.3	7.9	17.3	772	3.66	3.2	32.3	1.9	52	0.1	0.1	<0.1	119	4.80
1876644	Drill Core	5.00	16	1.1	56.5	2.9	61	0.2	8.9	19.2	845	4.41	2.8	13.5	2.3	41	<0.1	0.2	<0.1	131	3.79
1876645	Drill Core	5.09	<2	1.4	56.2	2.9	59	0.1	9.0	21.0	942	4.81	2.4	<0.5	1.9	41	<0.1	0.3	<0.1	143	4.20
1876646	Drill Core	5.29	12	1.1	82.4	3.0	75	<0.1	9.7	24.7	1102	5.65	2.1	0.7	2.6	57	0.1	0.2	<0.1	159	4.38
1876647	Drill Core	4.75	<2	2.0	47.6	3.0	59	<0.1	8.1	20.0	856	4.52	14.4	<0.5	1.6	48	<0.1	0.4	<0.1	145	3.94
1876648	Drill Core	5.79	7	1.2	55.4	2.6	64	<0.1	9.4	21.4	968	4.74	2.3	5.2	1.3	50	0.1	0.2	<0.1	145	4.64
1876649	Drill Core	5.62	<2	1.8	65.6	3.0	55	<0.1	8.3	19.8	852	4.49	3.3	<0.5	1.4	48	<0.1	0.2	<0.1	135	3.91
1876650	Drill Core	5.66	3	1.3	62.2	3.0	57	<0.1	8.5	21.4	902	4.44	3.7	1.1	1.4	48	<0.1	0.2	<0.1	139	4.61
1876651	Drill Core	3.07	<2	1.2	49.0	3.1	54	<0.1	7.8	19.3	813	4.42	3.1	<0.5	1.8	46	<0.1	0.3	<0.1	130	3.76
1876652	Drill Core	3.17	<2	1.0	32.1	2.5	40	<0.1	5.5	13.1	644	2.90	3.3	<0.5	1.0	46	<0.1	<0.1	<0.1	64	3.72
1876653	Drill Core	5.19	5	1.0	33.4	2.8	53	<0.1	8.7	18.3	970	4.32	3.2	0.8	1.1	51	0.1	0.2	<0.1	97	5.36
1876654	Drill Core	5.31	23	22.6	50.0	4.0	57	0.2	8.7	18.3	851	4.10	4.4	17.8	1.1	40	0.2	0.2	<0.1	88	4.31
1876655	Drill Core	5.32	398	750.9	38.6	31.5	68	1.3	13.7	22.2	1092	4.43	27.8	406.4	0.9	63	1.1	2.1	<0.1	77	4.74
1876656	Drill Core	5.46	175	261.0	70.8	15.4	84	0.4	15.8	20.8	1129	4.94	24.6	208.4	0.9	66	0.6	2.0	<0.1	57	4.61
1876657	Drill Core	5.78	18	5.7	49.0	2.3	87	<0.1	13.2	17.3	874	4.76	8.2	18.2	1.2	71	0.2	0.5	<0.1	57	4.20
1876658	Drill Core	5.90	3	1.9	77.8	2.1	76	0.4	16.7	17.8	739	4.65	6.7	4.0	0.4	56	0.1	0.4	<0.1	74	3.52

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 13, 2017

CERTIFICATE OF ANALYSIS WHI17001022.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876629	Drill Core	0.046	4	13	1.44	347	0.010	8	0.85	0.017	0.37	<0.1	0.01	22.4	0.1	<0.05	2	<0.5	<0.2
1876630	Drill Core	0.040	4	19	1.49	304	0.019	5	1.01	0.007	0.37	<0.1	<0.01	24.5	<0.1	<0.05	3	<0.5	<0.2
1876631	Drill Core	0.032	2	17	1.04	742	0.008	7	0.80	0.008	0.26	2.7	0.02	22.0	0.1	<0.05	2	<0.5	<0.2
1876632	Drill Core	0.019	3	9	1.35	126	0.003	5	0.64	0.027	0.16	2.2	<0.01	9.9	<0.1	<0.05	2	<0.5	<0.2
1876633	Drill Core	0.034	3	17	1.14	157	0.004	6	0.78	0.006	0.20	<0.1	0.03	22.9	<0.1	<0.05	2	<0.5	<0.2
1876634	Drill Core	0.026	4	14	1.41	223	0.005	5	0.86	0.007	0.20	0.1	0.02	20.9	<0.1	<0.05	3	<0.5	<0.2
1876635	Drill Core	0.027	4	14	1.35	225	0.007	5	0.78	0.006	0.21	<0.1	<0.01	19.7	<0.1	<0.05	3	<0.5	<0.2
1876636	Drill Core	0.036	2	14	1.22	257	0.010	5	0.96	0.009	0.30	<0.1	<0.01	21.6	0.1	<0.05	3	<0.5	<0.2
1876637	Drill Core	0.030	3	13	1.10	200	0.003	6	0.86	0.006	0.24	0.3	0.15	21.4	<0.1	<0.05	2	<0.5	0.4
1876638	Drill Core	0.041	5	23	2.08	211	0.013	4	1.12	0.010	0.38	0.1	0.14	21.8	0.1	<0.05	4	<0.5	<0.2
1876639	Drill Core	0.031	5	18	2.75	233	0.004	4	0.91	0.014	0.16	<0.1	0.23	23.7	<0.1	0.23	2	0.9	0.5
1876640	Drill Core	0.040	5	14	1.75	211	0.012	5	0.94	0.008	0.29	<0.1	0.06	20.3	0.1	<0.05	3	<0.5	<0.2
1876641	Drill Core	0.032	4	17	1.51	158	0.015	7	1.09	0.007	0.28	<0.1	0.03	23.0	<0.1	<0.05	3	<0.5	<0.2
1876642	Drill Core	0.034	3	15	1.79	269	0.015	5	0.94	0.009	0.30	0.1	0.02	23.3	<0.1	<0.05	3	<0.5	<0.2
1876643	Drill Core	0.026	4	14	1.76	150	0.005	5	0.89	0.007	0.17	<0.1	0.05	20.3	<0.1	<0.05	2	<0.5	<0.2
1876644	Drill Core	0.040	5	15	1.44	372	0.008	6	0.90	0.013	0.30	<0.1	0.03	24.2	<0.1	<0.05	2	<0.5	<0.2
1876645	Drill Core	0.038	5	17	1.54	314	0.013	9	0.96	0.009	0.35	0.2	<0.01	25.4	<0.1	<0.05	2	<0.5	<0.2
1876646	Drill Core	0.083	9	16	1.60	328	0.009	7	0.93	0.010	0.30	<0.1	0.01	28.5	<0.1	<0.05	3	<0.5	<0.2
1876647	Drill Core	0.031	4	17	1.60	161	0.011	8	0.95	0.008	0.26	<0.1	0.03	24.7	<0.1	<0.05	2	<0.5	<0.2
1876648	Drill Core	0.028	4	15	1.78	233	0.004	6	0.75	0.009	0.17	<0.1	0.02	23.6	<0.1	<0.05	2	<0.5	<0.2
1876649	Drill Core	0.030	4	16	1.55	148	0.004	7	0.91	0.009	0.22	<0.1	0.01	22.9	<0.1	<0.05	2	<0.5	<0.2
1876650	Drill Core	0.035	5	14	1.80	191	0.005	5	0.78	0.009	0.23	<0.1	0.02	22.1	<0.1	<0.05	2	<0.5	<0.2
1876651	Drill Core	0.038	5	15	1.56	284	0.010	7	0.92	0.009	0.30	<0.1	0.01	24.2	0.1	<0.05	2	<0.5	<0.2
1876652	Drill Core	0.022	2	7	1.44	1301	<0.001	5	0.71	0.007	0.17	<0.1	0.19	12.6	<0.1	<0.05	1	<0.5	<0.2
1876653	Drill Core	0.024	3	11	2.13	269	0.007	9	0.83	0.007	0.32	0.2	0.02	15.7	0.2	<0.05	2	<0.5	<0.2
1876654	Drill Core	0.026	3	9	1.75	203	0.003	8	0.74	0.010	0.29	0.2	0.09	17.0	0.3	<0.05	2	<0.5	<0.2
1876655	Drill Core	0.007	3	8	2.03	308	<0.001	8	0.58	0.007	0.21	0.8	0.72	16.9	0.6	<0.05	1	<0.5	1.0
1876656	Drill Core	0.011	4	12	2.45	251	<0.001	6	0.48	0.008	0.25	0.1	0.26	18.6	0.4	0.12	1	<0.5	0.3
1876657	Drill Core	0.035	4	11	2.37	154	0.002	5	0.59	0.013	0.28	<0.1	0.12	15.8	0.2	0.15	2	<0.5	<0.2
1876658	Drill Core	0.009	2	13	2.01	664	0.002	4	0.61	0.014	0.22	0.8	0.10	17.8	0.1	0.13	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 13, 2017

CERTIFICATE OF ANALYSIS WHI17001022.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876659	Drill Core	6.56	7	3.0	72.0	1.8	67	<0.1	17.4	19.3	844	4.63	5.6	6.2	0.4	64	<0.1	0.2	<0.1	65	4.32
1876660	Rock Pulp	0.06	5	7.3	47.7	2.8	47	<0.1	32.5	8.7	500	3.15	4.8	1.8	1.1	53	0.1	0.4	<0.1	66	1.00
1876661	Rock Pulp	0.06	6213	1.4	16.2	22.3	65	0.1	12.8	1.5	887	0.54	4272.9	7129.8	1.4	181	0.5	22.9	0.5	21	22.07
1876662	Drill Core	3.81	7	3.6	10.6	1.9	46	0.1	20.3	18.1	771	4.46	11.5	5.8	0.3	57	<0.1	0.3	<0.1	101	3.84
1876663	Drill Core	2.48	<2	0.5	10.9	1.6	33	<0.1	12.6	10.1	539	2.76	3.1	<0.5	0.2	47	<0.1	<0.1	0.1	51	3.83
1876664	Drill Core	3.94	<2	1.6	13.4	2.3	64	<0.1	21.4	23.1	942	5.80	7.2	0.6	0.4	55	<0.1	0.1	<0.1	169	3.95
1876665	Drill Core	5.11	<2	0.5	48.0	1.9	54	<0.1	13.0	14.2	702	3.95	2.2	<0.5	3.5	52	0.1	<0.1	<0.1	83	3.71
1876666	Drill Core	5.52	<2	1.0	37.7	1.3	51	<0.1	20.3	15.9	647	3.65	1.4	1.2	0.6	39	0.1	<0.1	<0.1	81	3.22
1876667	Drill Core	3.72	<2	0.7	61.4	1.3	87	<0.1	21.4	18.1	976	4.38	1.3	0.6	0.4	61	0.2	<0.1	<0.1	108	3.80
1876668	Drill Core	6.47	<2	1.1	65.3	1.7	82	<0.1	17.7	18.9	978	4.29	3.9	<0.5	0.4	65	0.1	<0.1	<0.1	96	4.01
1876669	Drill Core	3.54	45	17.2	38.4	11.4	57	0.2	21.2	18.9	808	3.32	46.8	44.7	2.7	79	0.2	0.6	0.1	31	2.69
1876670	Drill Core	3.51	3	0.7	20.7	17.0	64	<0.1	15.3	9.5	394	2.20	27.8	<0.5	7.5	100	0.2	0.1	0.3	15	1.05
1876671	Drill Core	5.60	<2	1.2	19.3	19.2	69	0.1	15.8	10.0	437	2.12	25.8	<0.5	6.9	91	0.2	0.1	0.3	16	1.00
1876672	Drill Core	2.12	<2	5.1	15.8	8.1	13	<0.1	7.4	3.9	257	1.48	28.7	1.3	5.0	52	<0.1	0.3	0.2	6	0.89
1876673	Drill Core	4.91	3	17.1	29.1	7.8	9	<0.1	5.7	3.7	227	1.26	22.4	1.9	5.8	57	<0.1	0.5	0.3	7	1.07
1876674	Drill Core	4.24	<2	1.4	18.9	7.8	23	<0.1	9.5	5.0	225	1.24	16.4	0.7	7.0	41	<0.1	0.1	0.3	6	0.59
1876675	Drill Core	5.61	<2	0.5	18.6	8.4	19	<0.1	7.9	3.7	165	1.11	8.5	<0.5	5.0	34	<0.1	0.1	0.2	5	0.41
1876676	Drill Core	5.49	<2	0.4	21.8	13.9	36	<0.1	11.3	5.3	334	1.62	47.5	<0.5	5.9	86	<0.1	0.2	0.4	8	1.78
1876677	Drill Core	5.62	<2	0.3	16.2	12.4	35	<0.1	11.2	6.3	291	1.53	21.7	<0.5	7.9	46	0.1	0.1	0.2	7	0.78

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 13, 2017

CERTIFICATE OF ANALYSIS WHI17001022.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876659	Drill Core	0.014	2	12	2.34	300	<0.001	3	0.54	0.010	0.25	<0.1	0.08	17.3	0.1	0.09	1	<0.5	<0.2
1876660	Rock Pulp	0.059	5	39	0.80	112	0.131	6	1.73	0.122	0.16	0.3	<0.01	5.4	<0.1	<0.05	5	<0.5	<0.2
1876661	Rock Pulp	0.016	7	23	6.05	43	0.001	6	0.22	0.009	0.06	3.7	4.57	1.8	16.6	<0.05	<1	<0.5	<0.2
1876662	Drill Core	0.026	2	18	1.85	309	<0.001	6	0.67	0.012	0.25	0.3	0.13	17.6	0.1	0.06	2	<0.5	<0.2
1876663	Drill Core	0.009	1	10	1.71	371	<0.001	4	0.51	0.008	0.15	<0.1	0.06	7.6	<0.1	<0.05	1	<0.5	<0.2
1876664	Drill Core	0.042	2	15	1.86	329	0.001	7	0.72	0.017	0.19	<0.1	0.09	24.4	<0.1	0.12	2	<0.5	<0.2
1876665	Drill Core	0.079	9	10	1.74	139	0.001	6	0.53	0.028	0.17	<0.1	0.08	14.4	<0.1	0.21	2	<0.5	<0.2
1876666	Drill Core	0.023	2	26	1.62	307	0.001	5	0.68	0.012	0.16	<0.1	0.09	16.4	<0.1	0.17	2	0.7	<0.2
1876667	Drill Core	0.004	2	30	2.08	667	<0.001	4	0.58	0.013	0.12	<0.1	0.06	19.0	<0.1	0.21	2	<0.5	<0.2
1876668	Drill Core	0.002	2	21	2.22	891	0.001	6	0.62	0.015	0.22	<0.1	0.06	19.8	<0.1	0.17	2	<0.5	<0.2
1876669	Drill Core	0.054	2	8	1.16	70	<0.001	4	0.74	0.019	0.40	<0.1	0.23	11.5	0.1	<0.05	2	<0.5	<0.2
1876670	Drill Core	0.011	15	7	0.49	936	<0.001	3	0.79	0.015	0.27	<0.1	0.09	5.2	<0.1	0.07	3	<0.5	<0.2
1876671	Drill Core	0.010	12	7	0.50	933	<0.001	3	0.78	0.016	0.26	<0.1	0.12	5.3	<0.1	0.07	2	<0.5	<0.2
1876672	Drill Core	0.003	15	4	0.34	261	<0.001	4	0.25	0.015	0.13	<0.1	0.07	2.1	<0.1	0.12	<1	<0.5	<0.2
1876673	Drill Core	0.003	20	4	0.32	377	<0.001	5	0.23	0.015	0.12	<0.1	0.05	2.0	0.1	0.11	<1	<0.5	<0.2
1876674	Drill Core	0.009	20	4	0.28	110	<0.001	4	0.30	0.015	0.17	<0.1	0.03	2.2	<0.1	<0.05	<1	<0.5	<0.2
1876675	Drill Core	0.007	12	4	0.19	39	<0.001	4	0.24	0.017	0.15	<0.1	0.02	1.5	<0.1	<0.05	<1	<0.5	<0.2
1876676	Drill Core	0.008	14	6	0.37	59	<0.001	4	0.40	0.017	0.20	<0.1	0.04	2.6	<0.1	0.06	1	<0.5	<0.2
1876677	Drill Core	0.008	16	5	0.34	57	<0.001	5	0.44	0.016	0.20	<0.1	0.03	3.0	<0.1	0.05	1	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 13, 2017

QUALITY CONTROL REPORT WHI17001022.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
Pulp Duplicates																					
1876572	Drill Core	4.33	2	1.4	18.2	16.1	71	<0.1	23.5	24.3	1545	5.88	7.4	1.2	0.5	34	0.2	1.0	<0.1	151	2.58
REP 1876572	QC			1.4	17.7	16.5	74	<0.1	26.0	24.0	1520	5.74	7.1	0.5	0.4	33	0.1	1.1	<0.1	149	2.56
REP 1876588	QC			1.5	9.6	4.0	37	<0.1	3.6	8.6	530	2.24	2.4	22.7	1.3	39	<0.1	0.2	<0.1	40	3.87
1876598	Drill Core	4.19	<2	1.1	13.3	1.8	49	<0.1	3.9	8.9	639	2.86	8.1	<0.5	1.0	31	<0.1	0.1	<0.1	71	3.78
REP 1876598	QC		<2																		
1876605	Drill Core	3.84	<2	0.7	59.1	2.8	73	<0.1	18.7	18.3	773	4.42	2.6	1.0	3.3	89	<0.1	0.3	<0.1	131	3.48
REP 1876605	QC			0.8	60.6	2.9	71	<0.1	20.1	18.9	832	4.35	2.4	0.6	3.4	87	<0.1	0.3	<0.1	129	3.42
1876632	Drill Core	2.73	<2	1.9	23.8	3.5	42	0.8	5.5	13.1	777	2.89	3.4	1.8	1.0	50	<0.1	0.2	<0.1	66	3.97
REP 1876632	QC		2																		
1876640	Drill Core	3.07	54	0.9	44.5	3.8	64	0.2	8.1	18.0	882	4.41	2.7	56.8	1.8	53	0.2	0.2	<0.1	139	4.84
REP 1876640	QC			0.9	43.3	3.7	63	0.2	7.8	17.5	862	4.39	2.7	53.3	1.7	53	0.2	0.2	<0.1	139	4.79
1876666	Drill Core	5.52	<2	1.0	37.7	1.3	51	<0.1	20.3	15.9	647	3.65	1.4	1.2	0.6	39	0.1	<0.1	<0.1	81	3.22
REP 1876666	QC		<2																		
1876675	Drill Core	5.61	<2	0.5	18.6	8.4	19	<0.1	7.9	3.7	165	1.11	8.5	<0.5	5.0	34	<0.1	0.1	0.2	5	0.41
REP 1876675	QC			0.5	18.1	8.5	19	<0.1	7.5	3.6	160	1.08	8.2	<0.5	4.9	32	<0.1	0.1	0.1	5	0.40
Core Reject Duplicates																					
1876588	Drill Core	1.82	15	1.2	9.1	4.0	40	<0.1	3.7	8.6	543	2.27	1.7	18.1	1.4	40	<0.1	0.1	<0.1	41	3.91
DUP 1876588	QC		17	1.3	9.2	4.3	40	<0.1	3.6	7.7	514	2.16	2.1	19.5	1.3	40	<0.1	0.2	<0.1	39	3.73
1876622	Drill Core	3.36	16	0.7	25.2	2.7	51	0.2	6.2	12.5	724	3.23	2.6	17.0	2.3	37	0.2	0.1	<0.1	97	3.96
DUP 1876622	QC		12	0.8	31.2	3.0	56	0.2	6.8	11.9	717	3.26	2.7	14.4	2.3	38	0.2	0.1	<0.1	97	3.96
1876656	Drill Core	5.46	175	261.0	70.8	15.4	84	0.4	15.8	20.8	1129	4.94	24.6	208.4	0.9	66	0.6	2.0	<0.1	57	4.61
DUP 1876656	QC		153	247.0	68.2	14.4	82	0.4	15.2	20.3	1137	4.94	23.1	172.3	0.9	66	0.5	2.1	<0.1	58	4.76
Reference Materials																					
STD DS11	Standard			14.4	163.1	134.8	330	1.7	77.8	14.3	1091	3.15	43.2	64.9	7.5	65	2.6	7.3	11.8	51	1.08
STD DS11	Standard			14.6	159.7	134.6	352	1.9	77.2	14.4	985	3.14	46.4	63.1	7.5	66	2.6	7.5	11.8	50	1.05
STD DS11	Standard			13.9	160.6	141.3	359	1.8	83.5	14.6	1095	3.21	44.6	78.4	8.1	68	2.6	8.0	12.1	51	1.07
STD DS11	Standard			14.0	149.8	140.9	330	1.7	77.0	13.9	1047	3.07	42.2	68.9	7.8	65	2.3	7.2	11.8	49	1.06
STD DS11	Standard			13.2	153.0	148.5	326	1.7	82.2	14.0	1029	3.10	42.1	72.5	8.1	65	2.3	8.8	13.0	46	1.04

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 13, 2017

QUALITY CONTROL REPORT WHI17001022.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
Pulp Duplicates																			
1876572	Drill Core	0.068	4	43	0.90	371	0.081	4	1.49	0.084	0.38	<0.1	<0.01	22.4	0.2	<0.05	6	<0.5	<0.2
REP 1876572	QC	0.066	4	43	0.88	370	0.075	4	1.45	0.082	0.38	<0.1	<0.01	22.7	0.2	<0.05	7	<0.5	<0.2
REP 1876588	QC	0.024	2	5	0.95	234	0.008	5	0.85	0.007	0.19	0.3	0.01	11.1	<0.1	<0.05	3	<0.5	<0.2
1876598	Drill Core	0.013	2	5	1.09	359	0.003	3	0.51	0.005	0.07	0.3	0.01	18.6	<0.1	<0.05	1	<0.5	<0.2
REP 1876598	QC																		
1876605	Drill Core	0.090	5	74	0.90	932	0.021	6	1.19	0.024	0.58	<0.1	<0.01	22.9	0.2	<0.05	4	<0.5	<0.2
REP 1876605	QC	0.085	5	74	0.89	912	0.020	5	1.20	0.024	0.58	<0.1	<0.01	24.4	0.2	<0.05	4	<0.5	<0.2
1876632	Drill Core	0.019	3	9	1.35	126	0.003	5	0.64	0.027	0.16	2.2	<0.01	9.9	<0.1	<0.05	2	<0.5	<0.2
REP 1876632	QC																		
1876640	Drill Core	0.040	5	14	1.75	211	0.012	5	0.94	0.008	0.29	<0.1	0.06	20.3	0.1	<0.05	3	<0.5	<0.2
REP 1876640	QC	0.039	5	14	1.74	211	0.012	6	0.96	0.008	0.29	<0.1	0.05	20.1	<0.1	<0.05	3	0.7	<0.2
1876666	Drill Core	0.023	2	26	1.62	307	0.001	5	0.68	0.012	0.16	<0.1	0.09	16.4	<0.1	0.17	2	0.7	<0.2
REP 1876666	QC																		
1876675	Drill Core	0.007	12	4	0.19	39	<0.001	4	0.24	0.017	0.15	<0.1	0.02	1.5	<0.1	<0.05	<1	<0.5	<0.2
REP 1876675	QC	0.007	12	4	0.17	38	<0.001	4	0.24	0.016	0.15	<0.1	0.02	1.5	<0.1	<0.05	<1	<0.5	<0.2
Core Reject Duplicates																			
1876588	Drill Core	0.027	2	5	0.96	220	0.008	5	0.85	0.006	0.19	0.3	0.02	10.9	<0.1	<0.05	2	<0.5	<0.2
DUP 1876588	QC	0.023	2	5	0.94	212	0.008	4	0.80	0.007	0.19	0.3	0.01	10.3	<0.1	<0.05	2	<0.5	<0.2
1876622	Drill Core	0.037	8	9	1.28	125	0.006	2	0.76	0.018	0.11	0.2	0.04	15.6	<0.1	<0.05	2	<0.5	<0.2
DUP 1876622	QC	0.045	8	9	1.29	119	0.006	4	0.77	0.018	0.11	0.2	0.03	16.8	<0.1	<0.05	2	<0.5	<0.2
1876656	Drill Core	0.011	4	12	2.45	251	<0.001	6	0.48	0.008	0.25	0.1	0.26	18.6	0.4	0.12	1	<0.5	0.3
DUP 1876656	QC	0.012	3	12	2.48	235	<0.001	5	0.47	0.008	0.26	0.1	0.24	18.1	0.4	0.12	1	<0.5	0.2
Reference Materials																			
STD DS11	Standard	0.080	18	62	0.85	339	0.097	6	1.22	0.074	0.42	2.6	0.26	3.4	5.1	0.28	5	1.8	4.6
STD DS11	Standard	0.069	19	55	0.84	354	0.092	8	1.15	0.070	0.40	2.8	0.25	3.2	5.0	0.28	5	2.0	4.7
STD DS11	Standard	0.072	19	62	0.85	366	0.096	8	1.17	0.071	0.41	3.0	0.26	3.4	4.9	0.29	5	2.1	4.9
STD DS11	Standard	0.064	18	58	0.85	372	0.094	9	1.15	0.072	0.41	2.9	0.28	3.1	4.9	0.28	5	2.2	4.5
STD DS11	Standard	0.066	18	60	0.83	379	0.091	6	1.10	0.068	0.40	3.2	0.28	2.9	5.0	0.27	5	2.0	4.9

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 13, 2017

QUALITY CONTROL REPORT WHI17001022.1

		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
STD DS11	Standard			14.0	151.4	136.5	340	1.7	84.0	14.2	1044	3.09	42.5	99.2	7.8	61	2.5	8.0	12.2	49	1.06
STD OXC129	Standard			1.3	32.3	6.2	41	<0.1	90.7	23.0	417	3.07	0.6	194.6	1.7	188	<0.1	<0.1	<0.1	52	0.71
STD OXC129	Standard			1.4	29.9	6.3	48	<0.1	82.1	20.8	450	3.12	1.1	199.5	1.9	200	<0.1	<0.1	<0.1	54	0.69
STD OXC129	Standard			1.2	28.2	6.2	40	<0.1	81.8	20.3	429	3.04	0.7	182.5	1.8	193	<0.1	<0.1	<0.1	51	0.71
STD OXC129	Standard			1.3	26.6	6.0	37	<0.1	77.2	20.6	419	3.03	<0.5	186.0	1.8	190	<0.1	<0.1	<0.1	51	0.70
STD OXC129	Standard			1.2	27.7	6.6	39	<0.1	82.9	20.5	429	3.08	<0.5	219.7	1.9	179	<0.1	<0.1	<0.1	49	0.65
STD OXC129	Standard			1.3	31.3	6.7	47	<0.1	87.1	24.0	432	3.15	<0.5	209.1	2.2	190	<0.1	<0.1	<0.1	52	0.75
STD OXC145	Standard		213																		
STD OXC145	Standard		207																		
STD OXC145	Standard		203																		
STD OXC145	Standard		198																		
STD OXC145	Standard		205																		
STD OXH139	Standard		1300																		
STD OXH139	Standard		1243																		
STD OXH139	Standard		1234																		
STD OXH139 Expected			1312																		
STD OXC145 Expected			212																		
STD OXC129 Expected				1.3	28	6.3	42.9		79.5	20.3	421	3.065	0.6	195	1.9					51	0.665
STD DS11 Expected				14.6	156	138	345	1.71	81.9	14.2	1055	3.2082	42.8	79	7.65	67.3	2.37	8.74	12.2	50	1.063
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		3																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 13, 2017

QUALITY CONTROL REPORT WHI17001022.1

		AQ201 P % 0.001	AQ201 La ppm 1	AQ201 Cr ppm 1	AQ201 Mg % 0.01	AQ201 Ba ppm 1	AQ201 Ti % 0.001	AQ201 B ppm 1	AQ201 Al % 0.01	AQ201 Na % 0.001	AQ201 K % 0.01	AQ201 W ppm 0.1	AQ201 Hg ppm 0.01	AQ201 Sc ppm 0.1	AQ201 Tl ppm 0.1	AQ201 S % 0.05	AQ201 Ga ppm 1	AQ201 Se ppm 0.5	AQ201 Te ppm 0.2
STD DS11	Standard	0.072	19	57	0.85	387	0.095	6	1.18	0.073	0.41	3.2	0.26	3.3	4.7	0.27	5	2.0	4.6
STD OXC129	Standard	0.114	13	57	1.58	50	0.414	<1	1.56	0.589	0.36	<0.1	<0.01	1.1	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.111	14	57	1.59	55	0.429	2	1.54	0.594	0.36	<0.1	<0.01	0.9	<0.1	<0.05	6	<0.5	<0.2
STD OXC129	Standard	0.102	13	52	1.55	51	0.421	2	1.56	0.582	0.35	<0.1	<0.01	0.9	<0.1	<0.05	6	<0.5	<0.2
STD OXC129	Standard	0.100	12	53	1.59	50	0.409	2	1.61	0.593	0.37	0.1	0.01	0.6	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.097	12	54	1.53	51	0.419	1	1.54	0.594	0.36	<0.1	<0.01	0.7	0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.108	13	58	1.62	56	0.435	<1	1.66	0.606	0.37	<0.1	<0.01	1.1	<0.1	<0.05	6	<0.5	<0.2
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXH139 Expected																			
STD OXC145 Expected																			
STD OXC129 Expected		0.102	13	52	1.545	50	0.4	1	1.58	0.6	0.37			1.1			5.6		
STD DS11 Expected		0.0701	18.6	61.5	0.85	385	0.0976		1.1795	0.0762	0.4	2.9	0.3	3.4	4.9	0.2835	5.1	1.9	4.56
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 13, 2017

QUALITY CONTROL REPORT WHI17001022.1

		WGHT Wgt kg 0.01	FA350 Au ppb 2	AQ201 Mo ppm 0.1	AQ201 Cu ppm 0.1	AQ201 Pb ppm 0.1	AQ201 Zn ppm 1	AQ201 Ag ppm 0.1	AQ201 Ni ppm 0.1	AQ201 Co ppm 0.1	AQ201 Mn ppm 1	AQ201 Fe % 0.01	AQ201 As ppm 0.5	AQ201 Au ppb 0.5	AQ201 Th ppm 0.1	AQ201 Sr ppm 1	AQ201 Cd ppm 0.1	AQ201 Sb ppm 0.1	AQ201 Bi ppm 0.1	AQ201 V ppm 2	AQ201 Ca % 0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
Prep Wash																					
ROCK-WHI	Prep Blank		<2	0.8	7.0	1.2	39	<0.1	1.1	4.2	677	1.94	1.4	<0.5	2.3	21	<0.1	<0.1	<0.1	22	0.61
ROCK-WHI	Prep Blank		<2	0.6	6.5	2.0	40	<0.1	1.2	4.1	634	1.84	1.5	<0.5	2.6	23	<0.1	<0.1	<0.1	22	0.55

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 13, 2017

QUALITY CONTROL REPORT WHI17001022.1

		AQ201 P % 0.001	AQ201 La ppm 1	AQ201 Cr ppm 1	AQ201 Mg % 0.01	AQ201 Ba ppm 1	AQ201 Ti % 0.001	AQ201 B ppm 1	AQ201 Al % 0.01	AQ201 Na % 0.001	AQ201 K % 0.01	AQ201 W ppm 0.1	AQ201 Hg ppm 0.01	AQ201 Sc ppm 0.1	AQ201 Tl ppm 0.1	AQ201 S % 0.05	AQ201 Ga ppm 1	AQ201 Se ppm 0.5	AQ201 Te ppm 0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
Prep Wash																			
ROCK-WHI	Prep Blank	0.035	6	4	0.52	55	0.069	2	0.90	0.067	0.08	0.2	<0.01	3.0	<0.1	0.07	4	<0.5	<0.2
ROCK-WHI	Prep Blank	0.043	6	4	0.48	58	0.078	2	0.84	0.068	0.08	0.1	<0.01	2.8	<0.1	<0.05	4	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Submitted By: Daithi Mac Gerailt
Receiving Lab: Canada-Whitehorse
Received: October 05, 2017
Report Date: November 29, 2017
Page: 1 of 6

CERTIFICATE OF ANALYSIS WHI17001023.1

CLIENT JOB INFORMATION

Project: Lucky Strike
Shipment ID: DDLS-17-08
P.O. Number
Number of Samples: 138

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	130	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	8	Sort, label and box pulps			WHI
FA350-Au	138	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	138	Environmental disposal charge-Fire assay lead waste			VAN
AQ201	138	1:1:1 Aqua Regia digestion ICP-MS analysis	15	Completed	VAN
SHP01	138	Per sample shipping charges for branch shipments			VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources Ltd.
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4
Canada

CC:

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

CERTIFICATE OF ANALYSIS WHI17001023.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876678	Drill Core	2.87	5	1.9	22.8	7.0	50	0.3	11.0	6.6	300	2.42	5.0	6.1	3.5	20	<0.1	0.3	0.1	54	0.23
1876679	Drill Core	2.76	6	1.6	39.4	3.0	108	0.4	5.9	11.6	568	2.76	2.3	7.1	1.2	19	0.3	<0.1	<0.1	53	0.16
1876680	Drill Core	5.24	21	0.8	73.4	2.8	199	0.1	8.2	17.4	936	4.78	4.2	22.0	1.9	13	0.4	0.1	<0.1	87	0.27
1876681	Drill Core	6.85	9	0.5	38.2	3.2	126	<0.1	7.1	14.1	841	3.96	2.2	11.0	1.0	13	0.3	0.4	<0.1	93	0.16
1876682	Drill Core	4.71	647	0.8	34.9	2.5	88	0.6	10.0	17.2	812	4.49	1.5	271.6	1.3	14	0.3	0.2	<0.1	83	0.30
1876683	Drill Core	3.40	>10000	0.8	43.5	3.0	79	30.5	10.3	9.9	780	3.22	1.4	14148.0	1.9	15	0.7	0.3	<0.1	36	0.17
1876684	Drill Core	4.26	83	1.5	37.5	2.3	51	0.2	18.2	9.3	457	8.35	3.6	96.6	1.8	28	0.2	0.4	<0.1	26	0.11
1876685	Drill Core	5.59	122	0.8	15.4	2.6	43	0.2	5.0	10.8	541	2.98	2.2	111.4	1.2	15	0.4	0.3	<0.1	72	3.02
1876686	Drill Core	5.07	199	0.8	13.5	2.8	53	0.3	7.1	12.9	715	3.72	2.3	995.4	1.2	29	0.4	0.8	<0.1	90	3.74
1876687	Drill Core	4.61	800	1.0	21.0	2.3	37	0.5	7.2	10.6	784	2.73	0.9	646.9	1.5	19	0.5	0.1	<0.1	41	2.90
1876688	Drill Core	5.77	17	1.0	24.7	2.3	50	<0.1	8.0	11.5	639	3.37	2.3	19.2	0.9	23	0.2	0.3	<0.1	91	4.09
1876689	Drill Core	4.72	18	1.7	14.3	2.4	40	<0.1	5.5	11.4	931	3.43	3.0	15.8	1.0	27	0.4	2.3	<0.1	86	4.64
1876690	Drill Core	5.64	<2	2.1	50.8	3.3	69	0.1	6.8	11.9	631	2.92	2.8	15.1	1.5	10	<0.1	1.1	<0.1	80	0.37
1876691	Drill Core	5.21	5	1.5	76.6	4.2	63	<0.1	9.0	16.5	792	3.90	3.6	8.9	0.8	22	<0.1	0.7	<0.1	117	4.30
1876692	Drill Core	5.03	14	0.9	87.6	4.2	65	<0.1	10.1	17.9	887	4.18	3.8	3.2	0.8	20	0.1	0.7	<0.1	132	2.76
1876693	Drill Core	5.63	<2	1.0	75.6	2.8	80	<0.1	14.6	22.1	1173	4.60	2.6	2.7	0.8	39	<0.1	0.4	<0.1	149	5.74
1876694	Drill Core	4.30	24	1.0	52.9	3.5	83	<0.1	13.0	20.9	1187	4.69	2.9	4.2	0.8	42	0.1	0.2	<0.1	160	4.41
1876695	Rock Pulp	0.06	5	8.6	55.4	3.0	52	<0.1	32.8	8.5	428	3.11	5.5	3.5	1.3	57	0.1	0.4	<0.1	68	1.01
1876696	Rock Pulp	0.10	417	46.6	>10000	965.9	>10000	60.4	16.2	4.0	608	11.98	137.0	511.7	<0.1	35	243.1	28.3	10.1	11	1.54
1876697	Drill Core	5.36	2	7.1	36.4	4.5	95	<0.1	12.7	20.7	1293	4.58	4.2	0.6	0.9	60	0.1	0.4	<0.1	162	6.54
1876698	Drill Core	4.52	<2	2.4	47.4	7.5	71	<0.1	11.5	17.6	921	4.66	6.4	0.9	0.8	50	0.1	8.5	<0.1	162	4.57
1876699	Drill Core	4.65	<2	1.4	63.0	5.8	55	<0.1	9.0	18.5	982	4.52	3.2	0.8	0.9	91	<0.1	1.8	<0.1	132	5.31
1876700	Drill Core	5.16	8	1.5	41.2	3.5	70	0.1	10.0	16.9	937	4.18	2.1	7.6	0.8	55	0.2	0.3	<0.1	115	3.81
1876701	Drill Core	4.75	<2	1.2	20.0	4.0	57	<0.1	6.2	15.2	632	3.48	2.0	1.2	0.6	76	<0.1	0.2	0.2	97	3.49
1876702	Drill Core	2.78	<2	2.2	11.6	5.3	54	<0.1	6.2	14.0	763	3.81	4.5	<0.5	0.6	25	<0.1	1.1	0.1	86	2.74
1876703	Drill Core	1.72	<2	5.6	15.9	3.6	48	<0.1	4.8	7.9	611	2.54	0.7	1.6	1.0	43	<0.1	<0.1	<0.1	58	4.44
1876704	Drill Core	2.20	3	6.1	10.4	2.9	58	<0.1	5.6	12.1	684	3.38	2.3	3.0	0.5	37	<0.1	0.2	<0.1	77	2.75
1876705	Drill Core	1.96	32	7.3	17.5	4.9	57	<0.1	9.9	16.1	1129	3.31	2.4	30.1	2.2	87	0.6	0.1	<0.1	71	3.60
1876706	Drill Core	1.81	4	0.9	32.1	3.6	60	<0.1	4.0	13.6	539	3.33	1.5	2.3	2.8	36	<0.1	<0.1	<0.1	72	1.37
1876707	Drill Core	4.96	8	1.0	27.0	2.1	49	<0.1	8.3	12.1	632	3.00	2.5	12.4	2.3	56	0.1	<0.1	<0.1	73	2.78

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

CERTIFICATE OF ANALYSIS WHI17001023.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876678	Drill Core	0.020	14	26	0.29	233	0.061	4	1.36	0.054	0.15	0.9	0.02	6.7	<0.1	<0.05	4	<0.5	<0.2
1876679	Drill Core	0.029	3	12	0.20	256	0.021	7	1.11	0.065	0.31	0.6	0.02	9.1	<0.1	<0.05	4	<0.5	<0.2
1876680	Drill Core	0.056	6	14	0.48	375	0.047	6	1.31	0.016	0.52	0.1	0.03	15.3	0.2	<0.05	6	<0.5	<0.2
1876681	Drill Core	0.038	3	9	0.31	256	0.032	8	1.25	0.005	0.39	<0.1	0.04	14.2	0.1	<0.05	5	<0.5	<0.2
1876682	Drill Core	0.037	5	13	0.26	256	0.007	7	1.32	0.025	0.35	0.2	0.05	14.2	<0.1	<0.05	3	<0.5	<0.2
1876683	Drill Core	0.007	10	15	0.27	263	0.010	2	0.68	0.045	0.15	0.5	1.57	18.9	<0.1	<0.05	2	<0.5	20.6
1876684	Drill Core	0.019	7	112	0.15	147	0.008	11	1.76	0.183	0.26	0.3	0.05	5.0	<0.1	<0.05	6	<0.5	<0.2
1876685	Drill Core	0.035	4	18	0.13	160	0.011	7	0.78	0.015	0.23	0.4	0.05	8.0	<0.1	<0.05	2	<0.5	<0.2
1876686	Drill Core	0.054	4	13	0.14	161	0.014	4	0.70	0.016	0.18	0.1	0.08	12.3	<0.1	<0.05	2	<0.5	<0.2
1876687	Drill Core	0.021	7	8	0.11	168	0.003	3	0.68	0.034	0.09	0.2	0.07	12.1	<0.1	<0.05	2	<0.5	0.3
1876688	Drill Core	0.032	3	13	0.31	398	0.027	7	1.23	0.013	0.52	0.1	0.04	13.1	0.1	<0.05	4	<0.5	<0.2
1876689	Drill Core	0.045	5	9	0.21	1203	0.024	4	0.76	0.030	0.26	0.2	0.01	10.5	<0.1	<0.05	2	<0.5	<0.2
1876690	Drill Core	0.036	2	7	0.43	226	0.019	3	1.35	0.016	0.36	0.2	0.01	11.5	0.1	<0.05	4	<0.5	<0.2
1876691	Drill Core	0.050	3	18	0.25	179	0.003	4	0.89	0.002	0.18	0.1	<0.01	19.2	<0.1	<0.05	3	<0.5	<0.2
1876692	Drill Core	0.041	3	28	0.33	301	0.007	5	1.30	0.006	0.29	0.1	<0.01	21.5	0.1	<0.05	4	<0.5	<0.2
1876693	Drill Core	0.036	3	23	0.32	274	0.013	6	0.85	0.021	0.27	<0.1	<0.01	26.6	<0.1	<0.05	3	<0.5	<0.2
1876694	Drill Core	0.040	4	25	0.66	282	0.030	6	1.23	0.029	0.43	<0.1	0.01	20.2	0.2	<0.05	5	<0.5	<0.2
1876695	Rock Pulp	0.059	5	39	0.80	108	0.162	4	1.68	0.121	0.16	0.4	0.01	6.0	<0.1	<0.05	6	<0.5	<0.2
1876696	Rock Pulp	0.037	<1	16	1.82	11	0.003	2	0.98	0.042	0.11	0.3	2.70	1.9	1.0	>10	6	5.2	8.3
1876697	Drill Core	0.027	4	24	1.57	182	0.014	5	0.78	0.023	0.24	<0.1	<0.01	24.2	<0.1	<0.05	4	<0.5	<0.2
1876698	Drill Core	0.037	3	28	1.01	274	0.028	6	1.41	0.016	0.43	<0.1	<0.01	21.8	0.1	<0.05	4	<0.5	<0.2
1876699	Drill Core	0.033	4	18	0.98	201	0.010	5	0.89	0.016	0.28	<0.1	<0.01	19.4	0.1	<0.05	2	<0.5	<0.2
1876700	Drill Core	0.031	3	12	1.24	149	0.005	7	1.08	0.004	0.32	0.2	<0.01	17.1	0.1	<0.05	3	<0.5	<0.2
1876701	Drill Core	0.027	2	7	0.86	144	0.015	6	0.78	0.020	0.26	<0.1	<0.01	14.5	<0.1	<0.05	3	<0.5	<0.2
1876702	Drill Core	0.039	1	7	0.51	140	0.006	10	0.94	0.007	0.28	<0.1	<0.01	19.0	<0.1	<0.05	3	<0.5	<0.2
1876703	Drill Core	0.021	5	3	0.64	162	0.002	2	0.67	0.005	0.09	0.2	0.01	7.6	<0.1	<0.05	1	<0.5	<0.2
1876704	Drill Core	0.028	3	7	0.65	259	0.012	9	0.98	0.009	0.24	0.1	<0.01	15.8	<0.1	<0.05	3	<0.5	<0.2
1876705	Drill Core	0.040	8	22	1.62	128	0.005	1	1.22	0.006	0.15	<0.1	0.03	13.3	<0.1	<0.05	3	<0.5	<0.2
1876706	Drill Core	0.029	7	14	1.22	562	0.129	2	1.88	0.066	0.73	0.2	<0.01	8.6	0.2	<0.05	6	<0.5	<0.2
1876707	Drill Core	0.031	9	53	1.36	403	0.122	1	1.62	0.049	0.56	0.3	<0.01	8.1	0.1	<0.05	5	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

CERTIFICATE OF ANALYSIS WHI17001023.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876708	Drill Core	3.14	3	1.0	25.9	2.0	49	<0.1	14.3	14.9	533	2.92	2.9	2.6	2.4	52	<0.1	<0.1	<0.1	72	2.14
1876709	Drill Core	3.95	17	0.9	30.7	1.5	41	<0.1	9.1	15.1	537	3.26	3.7	11.4	1.8	44	<0.1	<0.1	<0.1	78	1.74
1876710	Drill Core	2.87	<2	0.6	20.9	1.7	50	<0.1	10.9	14.9	397	2.98	2.2	<0.5	1.5	46	<0.1	<0.1	<0.1	65	1.18
1876711	Drill Core	5.24	<2	0.9	63.0	2.4	63	<0.1	19.6	18.0	687	3.82	3.9	0.9	2.1	44	<0.1	<0.1	<0.1	91	1.36
1876712	Drill Core	2.07	<2	1.1	28.1	2.1	69	<0.1	16.4	15.9	538	3.08	3.0	<0.5	1.1	49	<0.1	<0.1	<0.1	59	1.35
1876713	Drill Core	3.33	<2	1.1	23.6	1.5	48	<0.1	50.6	15.1	523	3.01	2.5	0.6	1.1	48	<0.1	<0.1	<0.1	64	1.42
1876714	Drill Core	3.90	<2	0.8	25.7	1.8	58	<0.1	23.3	16.3	588	2.96	5.2	<0.5	0.8	56	<0.1	<0.1	0.2	75	1.85
1876715	Drill Core	5.48	<2	1.3	86.9	1.6	65	<0.1	21.6	18.1	487	3.12	2.1	<0.5	1.3	58	<0.1	<0.1	<0.1	94	2.07
1876716	Drill Core	3.39	<2	1.0	54.8	2.0	66	<0.1	36.7	17.8	789	3.46	3.6	<0.5	1.5	102	0.1	<0.1	<0.1	107	4.49
1876717	Drill Core	5.48	<2	0.6	98.9	1.3	59	<0.1	25.4	29.0	601	4.07	1.5	<0.5	0.9	63	<0.1	<0.1	<0.1	232	2.77
1876718	Drill Core	3.16	<2	0.4	35.2	1.4	85	<0.1	50.9	23.5	894	4.95	1.1	<0.5	0.9	76	<0.1	0.1	<0.1	171	4.75
1876719	Drill Core	3.14	<2	0.9	34.7	3.0	53	<0.1	8.5	9.3	636	2.89	1.7	3.1	2.4	43	0.1	0.2	<0.1	47	2.89
1876720	Drill Core	1.58	2	1.1	37.7	3.1	37	<0.1	2.1	5.3	718	3.02	1.1	1.9	2.8	59	0.2	0.1	<0.1	15	1.35
1876721	Drill Core	3.56	3	1.5	29.5	3.5	39	<0.1	2.3	5.6	641	2.97	2.6	2.2	3.7	61	0.1	0.1	0.1	20	1.86
1876722	Drill Core	3.13	3	1.0	21.1	2.9	41	<0.1	2.2	5.6	504	3.07	1.8	1.9	3.5	29	0.1	0.1	0.1	16	0.95
1876723	Drill Core	2.32	8	1.8	50.9	3.5	53	<0.1	3.1	7.2	567	3.23	2.4	3.8	3.8	62	0.4	0.3	0.2	13	1.08
1876724	Drill Core	2.69	<2	1.7	38.2	3.1	39	<0.1	2.9	5.5	438	2.99	2.7	1.3	4.0	36	<0.1	0.2	0.1	16	0.90
1876725	Drill Core	3.47	<2	2.3	22.2	3.5	53	<0.1	13.6	17.7	596	3.64	2.8	<0.5	4.9	52	0.1	0.2	<0.1	66	2.16
1876726	Drill Core	2.82	<2	2.1	26.3	3.1	68	<0.1	12.6	18.3	805	3.87	2.8	<0.5	2.2	111	0.1	0.2	<0.1	84	4.17
1876727	Drill Core	3.83	<2	1.3	25.7	3.0	61	<0.1	14.9	17.8	896	3.57	2.0	<0.5	1.9	134	0.1	0.1	<0.1	93	5.03
1876728	Drill Core	4.72	14	2.7	44.2	5.8	61	<0.1	13.9	15.9	580	4.22	1.6	18.7	2.2	71	0.2	0.2	<0.1	92	2.79
1876729	Drill Core	4.48	3	2.2	43.9	4.6	72	<0.1	19.1	18.7	531	4.89	3.0	1.1	2.7	78	<0.1	0.1	<0.1	85	2.08
1876730	Rock Pulp	0.06	5	8.1	51.3	3.0	58	0.1	35.0	8.8	527	3.22	5.7	<0.5	1.3	61	0.1	0.4	<0.1	67	1.02
1876731	Rock Pulp	0.06	6432	1.3	14.9	20.8	62	0.1	12.8	1.5	980	0.51	4234.9	6712.8	1.2	176	0.5	26.3	0.4	18	26.56
1876732	Drill Core	3.07	5	1.6	46.6	7.1	55	<0.1	14.6	14.6	722	4.43	2.6	6.4	2.6	114	<0.1	0.3	<0.1	120	3.74
1876733	Drill Core	5.63	3	2.0	30.6	5.4	54	<0.1	5.0	10.1	908	4.49	5.0	1.4	2.4	120	<0.1	0.4	<0.1	71	5.01
1876735	Drill Core	4.21	3	3.7	23.4	3.1	49	<0.1	4.9	14.7	1198	4.59	17.7	2.0	2.3	139	0.1	0.4	<0.1	82	6.10
1876736	Drill Core	4.63	4	1.9	39.5	3.2	66	<0.1	5.3	16.4	907	4.67	5.8	1.0	2.5	90	<0.1	0.3	<0.1	112	3.86
1876737	Drill Core	2.03	<2	2.1	65.2	3.4	64	<0.1	9.3	21.2	1040	5.16	4.0	<0.5	2.0	106	<0.1	0.3	<0.1	155	4.46
1876738	Drill Core	2.91	2	3.3	92.9	20.1	63	0.2	11.8	22.0	915	6.03	196.0	1.0	2.0	112	<0.1	1.2	0.4	131	4.21

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

CERTIFICATE OF ANALYSIS WHI17001023.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876708	Drill Core	0.073	9	90	1.87	124	0.126	4	2.01	0.095	0.25	0.1	0.01	8.0	<0.1	<0.05	6	<0.5	<0.2
1876709	Drill Core	0.072	7	39	1.57	364	0.157	2	1.72	0.055	0.43	0.2	<0.01	6.8	<0.1	<0.05	6	<0.5	<0.2
1876710	Drill Core	0.074	5	41	1.54	419	0.228	3	1.89	0.093	0.65	<0.1	<0.01	6.1	0.1	<0.05	6	<0.5	<0.2
1876711	Drill Core	0.099	7	54	1.80	474	0.191	3	2.25	0.111	0.50	<0.1	0.02	8.9	0.1	<0.05	7	<0.5	<0.2
1876712	Drill Core	0.066	4	58	1.92	326	0.140	3	1.94	0.051	0.44	0.1	<0.01	7.7	0.1	<0.05	7	<0.5	<0.2
1876713	Drill Core	0.064	4	132	2.06	386	0.155	2	2.01	0.061	0.54	0.1	<0.01	6.8	0.1	<0.05	6	<0.5	<0.2
1876714	Drill Core	0.077	4	86	2.14	136	0.135	3	2.08	0.101	0.24	<0.1	<0.01	8.3	<0.1	<0.05	7	<0.5	<0.2
1876715	Drill Core	0.091	6	79	1.90	162	0.142	3	1.96	0.122	0.35	<0.1	<0.01	11.5	<0.1	<0.05	7	<0.5	<0.2
1876716	Drill Core	0.100	8	167	1.96	129	0.116	2	1.82	0.112	0.28	0.2	<0.01	13.0	<0.1	<0.05	7	<0.5	<0.2
1876717	Drill Core	0.088	4	74	1.76	456	0.134	2	2.18	0.207	0.30	<0.1	<0.01	16.6	<0.1	<0.05	7	<0.5	<0.2
1876718	Drill Core	0.076	5	162	1.91	211	0.126	2	2.54	0.140	0.45	<0.1	<0.01	18.9	<0.1	<0.05	8	<0.5	<0.2
1876719	Drill Core	0.037	8	27	0.58	256	0.034	4	1.16	0.038	0.34	0.1	<0.01	11.8	<0.1	<0.05	4	<0.5	<0.2
1876720	Drill Core	0.032	11	5	0.18	143	0.030	2	0.56	0.118	0.15	0.3	<0.01	9.7	<0.1	<0.05	2	<0.5	<0.2
1876721	Drill Core	0.041	15	7	0.18	254	0.026	2	0.53	0.084	0.16	0.2	<0.01	13.8	<0.1	<0.05	2	<0.5	<0.2
1876722	Drill Core	0.027	13	5	0.14	154	0.027	3	0.77	0.087	0.25	0.2	<0.01	7.8	<0.1	<0.05	2	<0.5	<0.2
1876723	Drill Core	0.036	16	7	0.11	166	0.029	4	0.56	0.064	0.19	0.3	<0.01	11.2	<0.1	<0.05	2	<0.5	<0.2
1876724	Drill Core	0.038	14	5	0.16	161	0.029	2	0.72	0.079	0.24	<0.1	<0.01	9.4	<0.1	<0.05	2	<0.5	<0.2
1876725	Drill Core	0.049	13	40	0.83	292	0.012	6	1.85	0.020	0.41	<0.1	<0.01	15.5	<0.1	<0.05	6	<0.5	<0.2
1876726	Drill Core	0.083	9	42	1.45	334	0.017	3	2.74	0.018	0.52	<0.1	<0.01	17.1	0.1	<0.05	7	<0.5	<0.2
1876727	Drill Core	0.063	9	45	1.70	298	0.014	2	2.55	0.010	0.42	<0.1	<0.01	13.6	<0.1	<0.05	7	<0.5	<0.2
1876728	Drill Core	0.083	7	35	1.66	591	0.007	3	2.28	0.007	0.39	<0.1	0.01	14.1	0.1	<0.05	7	<0.5	<0.2
1876729	Drill Core	0.058	7	60	1.85	435	0.011	2	3.03	0.008	0.43	<0.1	<0.01	12.1	0.1	<0.05	8	<0.5	<0.2
1876730	Rock Pulp	0.063	5	38	0.82	118	0.147	9	1.81	0.131	0.17	0.3	0.01	6.5	<0.1	<0.05	6	<0.5	<0.2
1876731	Rock Pulp	0.018	7	23	5.67	44	0.001	4	0.20	0.009	0.06	3.8	4.25	2.5	15.6	<0.05	<1	<0.5	<0.2
1876732	Drill Core	0.073	13	43	1.47	2778	0.014	3	2.60	0.011	0.41	<0.1	<0.01	18.0	<0.1	0.06	7	<0.5	<0.2
1876733	Drill Core	0.081	13	13	0.94	2862	0.006	4	1.78	0.019	0.27	<0.1	<0.01	17.7	<0.1	0.06	6	0.6	<0.2
1876735	Drill Core	0.123	13	14	1.33	194	0.015	3	0.96	0.063	0.20	<0.1	<0.01	15.7	<0.1	<0.05	3	<0.5	<0.2
1876736	Drill Core	0.124	12	9	0.94	217	0.042	5	1.58	0.039	0.44	<0.1	<0.01	15.9	0.1	<0.05	6	<0.5	<0.2
1876737	Drill Core	0.083	10	7	0.76	164	0.039	3	0.96	0.065	0.31	<0.1	<0.01	22.8	<0.1	<0.05	4	<0.5	<0.2
1876738	Drill Core	0.068	8	12	0.95	155	0.024	4	0.91	0.048	0.33	<0.1	0.06	22.7	0.1	<0.05	4	0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

CERTIFICATE OF ANALYSIS WHI17001023.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876739	Drill Core	3.97	<2	1.9	90.1	8.5	57	<0.1	10.4	21.4	920	5.13	5.1	0.9	2.7	59	<0.1	0.3	<0.1	107	3.23
1876740	Drill Core	4.57	<2	1.7	76.2	13.8	58	<0.1	10.4	22.9	840	5.45	13.3	<0.5	4.5	39	0.1	0.4	0.1	94	1.96
1876741	Drill Core	5.01	160	2.2	85.2	78.0	69	0.5	15.9	19.1	1223	4.95	3.4	152.9	1.8	128	0.6	0.2	0.1	122	5.36
1876742	Drill Core	2.96	3	2.7	17.0	21.9	75	<0.1	16.9	19.3	905	4.34	2.1	3.4	2.9	91	0.1	0.2	<0.1	115	3.96
1876743	Drill Core	4.43	<2	1.1	6.4	8.8	58	<0.1	23.3	19.3	1149	4.66	2.1	2.2	2.6	105	<0.1	0.2	<0.1	104	4.53
1876744	Drill Core	3.57	247	1.7	8.1	6.7	64	<0.1	24.6	22.1	1345	5.26	1.2	320.4	3.3	98	0.2	0.5	0.1	108	4.63
1876745	Drill Core	5.71	<2	0.8	12.0	6.0	67	<0.1	25.8	21.4	1106	5.43	<0.5	0.7	2.6	109	<0.1	0.5	<0.1	127	4.12
1876746	Drill Core	5.63	<2	1.3	23.8	2.7	63	<0.1	22.7	23.4	1159	6.50	2.8	0.8	1.8	128	<0.1	0.2	<0.1	137	4.38
1876747	Drill Core	3.03	25	5.0	39.1	4.5	81	<0.1	46.3	31.2	1342	9.31	3.0	23.3	0.8	73	0.1	0.4	<0.1	232	3.55
1876748	Drill Core	6.10	61	9.6	45.5	5.1	57	0.2	16.1	21.1	1491	5.27	2.8	64.5	1.1	84	0.4	0.4	<0.1	124	7.15
1876749	Drill Core	4.11	712	16.6	132.2	3.7	43	1.3	10.6	13.1	1428	4.14	6.6	632.2	0.8	95	1.0	0.8	<0.1	78	6.83
1876750	Drill Core	4.14	895	20.9	12.2	4.4	62	1.4	14.6	20.9	1570	4.51	4.2	1603.1	1.3	52	0.3	0.2	<0.1	99	5.22
1876751	Drill Core	4.47	447	15.1	27.1	2.5	46	0.2	9.0	13.1	1088	3.28	3.6	460.6	1.0	49	0.2	0.6	<0.1	69	4.80
1876752	Drill Core	4.19	64	19.0	6.7	3.1	61	<0.1	8.7	17.6	1090	3.89	1.6	88.8	0.7	52	0.2	0.2	<0.1	72	5.06
1876753	Drill Core	2.99	66	9.2	3.8	3.0	63	<0.1	13.2	18.0	1040	3.83	1.4	53.7	0.3	66	0.2	0.1	<0.1	70	5.99
1876754	Drill Core	5.18	20	7.0	1.4	3.4	58	<0.1	10.5	16.3	1109	3.82	1.2	20.8	0.7	64	0.2	0.1	<0.1	82	6.65
1876755	Drill Core	3.63	36	9.6	3.0	3.2	52	<0.1	7.2	14.0	1064	3.65	1.5	30.3	1.0	60	0.2	0.1	<0.1	80	6.13
1876756	Drill Core	4.49	7	14.5	6.3	3.6	41	<0.1	6.4	13.7	800	2.83	2.3	10.5	0.7	48	0.1	0.2	<0.1	61	4.48
1876757	Drill Core	2.22	20	16.0	7.8	4.0	54	0.1	6.5	12.5	926	3.58	2.1	20.6	0.9	75	0.2	0.2	<0.1	74	6.40
1876758	Drill Core	3.09	12	9.9	37.9	6.8	57	<0.1	17.9	22.1	1086	5.19	1.9	10.2	1.4	59	0.1	0.3	0.1	115	3.87
1876759	Drill Core	4.10	84	14.6	43.1	3.3	65	0.1	18.5	32.5	1580	7.03	2.2	20.1	1.1	73	0.2	0.2	<0.1	157	5.13
1876760	Drill Core	4.74	4	3.9	10.1	2.0	48	<0.1	16.5	23.7	936	4.65	2.0	2.4	3.5	41	<0.1	0.1	<0.1	80	2.11
1876761	Drill Core	5.35	31	2.6	45.1	4.8	54	0.2	16.3	22.8	694	4.58	1.0	28.6	1.5	51	<0.1	0.3	<0.1	119	2.91
1876762	Drill Core	4.99	7	2.6	41.0	2.6	37	<0.1	7.3	13.4	745	3.40	1.2	2.8	1.6	68	<0.1	0.2	<0.1	61	4.01
1876763	Drill Core	5.10	15	2.1	22.7	2.3	37	0.1	7.5	12.9	757	3.06	0.8	11.1	2.3	67	<0.1	0.1	<0.1	46	3.75
1876764	Drill Core	5.43	44	1.2	14.4	2.0	33	0.2	3.9	10.0	896	2.90	1.8	56.1	1.3	51	0.3	0.2	<0.1	54	2.79
1876765	Rock Pulp	0.06	8	7.4	48.5	2.8	45	<0.1	33.5	9.7	484	3.18	5.3	9.0	1.2	53	<0.1	0.4	<0.1	66	0.99
1876766	Rock Pulp	0.10	479	43.0	>10000	913.6	>10000	61.0	18.5	3.2	682	12.40	139.5	501.9	<0.1	34	241.8	26.2	10.3	11	1.63
1876767	Drill Core	5.38	5	1.3	14.8	1.8	51	<0.1	4.4	11.9	1122	3.64	1.3	4.2	1.1	46	0.2	0.2	<0.1	89	2.52
1876768	Drill Core	4.73	23	0.9	21.3	2.2	41	<0.1	3.8	11.1	1267	3.62	1.0	7.4	1.2	56	0.3	0.3	<0.1	96	3.36

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

CERTIFICATE OF ANALYSIS WHI17001023.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876739	Drill Core	0.071	7	5	0.88	140	0.014	7	1.37	0.035	0.41	<0.1	<0.01	27.3	0.1	<0.05	4	<0.5	<0.2
1876740	Drill Core	0.074	14	12	1.04	1023	0.032	6	1.44	0.032	0.55	<0.1	0.01	20.8	0.2	<0.05	5	<0.5	<0.2
1876741	Drill Core	0.042	8	30	1.29	77	0.007	2	0.61	0.079	0.14	<0.1	0.02	22.9	<0.1	<0.05	2	<0.5	0.4
1876742	Drill Core	0.069	9	58	1.24	2446	0.004	3	0.88	0.042	0.27	<0.1	<0.01	24.8	<0.1	0.05	3	0.9	<0.2
1876743	Drill Core	0.076	11	71	1.65	128	0.010	5	1.10	0.045	0.48	<0.1	<0.01	24.7	0.1	<0.05	4	<0.5	<0.2
1876744	Drill Core	0.068	14	68	1.71	162	0.025	5	1.62	0.025	0.69	<0.1	0.01	26.7	0.2	<0.05	6	<0.5	<0.2
1876745	Drill Core	0.055	9	91	1.62	123	0.020	5	1.88	0.047	0.58	<0.1	<0.01	25.2	0.2	<0.05	8	<0.5	<0.2
1876746	Drill Core	0.062	8	14	1.29	154	0.018	5	1.10	0.038	0.42	<0.1	<0.01	21.8	0.1	<0.05	4	<0.5	<0.2
1876747	Drill Core	0.091	8	14	1.35	135	0.034	5	1.29	0.026	0.58	<0.1	<0.01	28.6	0.2	<0.05	6	<0.5	<0.2
1876748	Drill Core	0.041	5	32	2.05	107	0.005	4	0.79	0.020	0.20	<0.1	0.03	21.1	<0.1	<0.05	3	<0.5	<0.2
1876749	Drill Core	0.068	3	8	1.94	1591	0.010	5	0.78	0.010	0.29	<0.1	0.06	16.5	0.1	<0.05	3	<0.5	0.4
1876750	Drill Core	0.016	5	23	1.60	106	0.002	6	0.54	0.005	0.11	0.6	0.15	19.8	<0.1	<0.05	1	<0.5	0.9
1876751	Drill Core	0.009	4	18	1.36	493	0.001	6	0.56	0.005	0.09	<0.1	0.02	14.4	<0.1	<0.05	1	<0.5	<0.2
1876752	Drill Core	0.014	2	5	1.49	116	0.002	8	0.57	0.006	0.20	<0.1	0.01	15.5	<0.1	<0.05	1	<0.5	<0.2
1876753	Drill Core	0.013	2	19	1.81	61	0.002	6	0.63	0.006	0.17	<0.1	0.01	16.9	<0.1	<0.05	2	<0.5	<0.2
1876754	Drill Core	0.016	3	24	1.98	64	0.002	6	0.60	0.006	0.22	<0.1	0.01	18.0	<0.1	<0.05	2	<0.5	<0.2
1876755	Drill Core	0.026	4	10	2.00	62	0.004	5	0.60	0.006	0.19	0.3	0.02	15.8	<0.1	<0.05	2	<0.5	<0.2
1876756	Drill Core	0.038	2	14	1.40	94	0.002	8	0.70	0.007	0.29	<0.1	0.01	16.5	<0.1	<0.05	2	<0.5	<0.2
1876757	Drill Core	0.037	4	11	1.46	1693	0.004	6	0.78	0.007	0.28	<0.1	0.02	15.8	<0.1	<0.05	2	0.7	<0.2
1876758	Drill Core	0.058	7	45	1.64	735	0.008	5	2.22	0.015	0.41	<0.1	0.01	18.2	0.2	<0.05	7	0.5	<0.2
1876759	Drill Core	0.092	10	22	1.72	220	0.017	1	1.81	0.017	0.28	0.1	0.01	20.4	<0.1	<0.05	7	<0.5	<0.2
1876760	Drill Core	0.073	13	39	1.75	264	0.037	3	1.80	0.025	0.53	<0.1	<0.01	15.3	0.1	<0.05	6	<0.5	<0.2
1876761	Drill Core	0.064	5	27	1.83	666	0.004	<1	1.98	0.009	0.23	<0.1	0.01	18.2	<0.1	0.14	7	2.2	<0.2
1876762	Drill Core	0.035	4	4	1.27	636	0.002	3	0.89	0.010	0.33	<0.1	0.01	12.4	<0.1	<0.05	2	1.1	<0.2
1876763	Drill Core	0.029	4	6	1.24	1003	0.008	2	0.62	0.017	0.28	0.1	0.02	10.1	<0.1	<0.05	2	<0.5	<0.2
1876764	Drill Core	0.040	2	4	1.10	895	0.008	2	0.59	0.028	0.19	0.3	0.01	14.9	<0.1	<0.05	2	<0.5	<0.2
1876765	Rock Pulp	0.058	5	40	0.82	113	0.136	6	1.79	0.129	0.17	0.4	0.01	5.2	<0.1	<0.05	6	<0.5	<0.2
1876766	Rock Pulp	0.038	<1	15	1.78	8	0.002	3	0.84	0.028	0.08	0.3	2.62	1.8	0.9	>10	6	4.9	7.9
1876767	Drill Core	0.066	2	7	0.98	584	0.034	2	0.44	0.043	0.16	0.3	0.01	24.5	<0.1	<0.05	1	<0.5	<0.2
1876768	Drill Core	0.058	3	6	1.28	99	0.031	1	0.40	0.063	0.13	0.2	0.01	23.5	<0.1	<0.05	1	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

CERTIFICATE OF ANALYSIS WHI17001023.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876769	Drill Core	4.98	<2	1.1	37.0	2.0	57	<0.1	4.3	13.9	790	3.61	0.6	<0.5	1.4	34	<0.1	0.2	<0.1	65	2.41
1876770	Drill Core	5.84	<2	2.5	75.4	2.0	56	<0.1	4.9	14.5	738	3.83	0.9	2.6	1.6	35	<0.1	0.2	<0.1	65	2.28
1876771	Drill Core	4.82	<2	4.9	30.8	2.1	50	<0.1	4.4	11.8	884	3.40	1.1	1.4	2.2	37	<0.1	0.3	<0.1	70	3.09
1876772	Drill Core	5.11	3	1.6	33.6	2.1	39	<0.1	3.0	10.9	864	3.14	0.9	<0.5	1.9	38	<0.1	0.3	<0.1	56	3.84
1876773	Drill Core	4.98	<2	0.8	25.5	2.0	32	<0.1	3.2	8.7	498	2.94	1.5	<0.5	2.6	26	<0.1	0.4	<0.1	56	2.04
1876774	Drill Core	5.43	<2	0.7	48.2	2.3	41	<0.1	3.5	10.7	710	3.46	1.7	<0.5	1.8	49	<0.1	0.4	<0.1	62	2.74
1876775	Drill Core	5.01	<2	2.3	50.2	2.0	45	<0.1	4.0	12.5	627	3.31	0.9	<0.5	1.6	44	<0.1	0.2	<0.1	60	2.82
1876776	Drill Core	3.90	<2	1.5	31.6	2.0	43	<0.1	2.9	11.3	944	3.33	1.2	<0.5	1.8	70	<0.1	0.2	<0.1	69	5.09
1876777	Drill Core	6.45	<2	0.5	36.4	2.0	43	<0.1	3.2	11.9	891	3.47	1.0	<0.5	2.1	58	<0.1	0.1	<0.1	55	4.28
1876778	Drill Core	4.64	44	6.0	34.7	2.9	51	0.3	5.0	13.3	945	3.51	1.4	40.2	2.0	59	0.2	0.2	<0.1	68	4.53
1876779	Drill Core	3.71	4	2.1	44.5	2.5	53	<0.1	4.6	14.8	1080	3.60	1.0	4.3	2.2	66	<0.1	0.1	<0.1	61	4.57
1876780	Drill Core	5.93	13	4.4	43.7	2.6	59	<0.1	4.6	15.8	989	3.91	1.8	7.4	2.6	85	0.1	0.2	<0.1	72	4.73
1876781	Drill Core	5.59	<2	1.8	44.0	1.7	44	<0.1	4.2	14.2	636	3.31	1.0	<0.5	2.4	51	<0.1	0.1	<0.1	56	2.87
1876782	Drill Core	1.55	<2	0.4	30.9	1.0	22	<0.1	3.3	6.7	418	1.71	1.0	0.6	5.0	38	<0.1	0.1	<0.1	18	2.12
1876783	Drill Core	1.91	<2	0.9	35.6	1.4	58	<0.1	5.7	13.9	1364	3.90	0.8	1.6	1.5	90	<0.1	0.1	<0.1	50	8.05
1876784	Drill Core	5.01	<2	1.3	49.9	1.2	41	<0.1	4.7	10.6	673	3.27	0.8	<0.5	1.6	41	<0.1	0.2	<0.1	48	2.78
1876785	Drill Core	4.75	<2	0.5	64.9	1.7	46	<0.1	4.0	11.8	744	3.62	1.2	1.4	1.9	52	<0.1	0.2	<0.1	48	3.17
1876786	Drill Core	5.19	<2	0.2	65.7	2.1	55	0.1	5.0	12.0	854	3.79	1.4	<0.5	1.6	51	<0.1	0.2	<0.1	55	3.62
1876787	Drill Core	1.84	2	0.6	37.4	2.4	60	<0.1	4.6	16.7	1365	4.40	1.7	1.2	1.3	67	0.1	0.1	<0.1	84	5.51
1876788	Drill Core	1.28	5	4.3	39.0	1.8	53	6.5	12.4	11.2	1325	3.85	2.2	4.0	1.4	54	0.2	0.2	<0.1	125	4.61
1876789	Drill Core	2.14	<2	1.0	32.0	2.1	50	0.9	4.0	12.0	608	3.50	1.0	1.3	1.1	27	<0.1	0.2	<0.1	41	2.10
1876790	Drill Core	4.17	4	4.5	31.0	2.1	51	5.1	7.8	11.7	1124	3.94	2.1	4.5	1.7	61	0.2	0.1	<0.1	106	4.47
1876791	Drill Core	3.47	<2	1.1	55.8	2.6	55	0.3	6.0	13.9	806	3.97	1.7	2.1	1.7	36	<0.1	0.2	<0.1	67	2.76
1876792	Drill Core	4.83	5	0.5	50.5	2.2	66	0.3	5.7	13.5	790	4.00	1.0	4.3	1.7	45	<0.1	0.2	<0.1	74	2.99
1876793	Drill Core	4.29	<2	0.5	43.3	2.5	62	<0.1	4.9	14.0	819	4.31	1.7	<0.5	1.3	53	<0.1	0.3	<0.1	66	2.76
1876794	Drill Core	3.04	13	0.5	34.5	2.3	40	<0.1	3.4	10.0	807	3.09	2.5	12.8	1.2	42	0.2	0.2	<0.1	55	2.63
1876795	Drill Core	4.83	<2	0.5	28.9	2.4	48	<0.1	3.6	11.3	784	3.65	3.4	<0.5	0.5	34	<0.1	0.6	<0.1	58	3.24
1876796	Drill Core	5.13	<2	0.5	38.8	2.3	60	<0.1	4.2	12.4	865	3.95	2.9	<0.5	0.9	44	<0.1	0.3	<0.1	75	3.56
1876797	Drill Core	4.96	<2	0.6	46.9	2.6	55	<0.1	3.9	14.2	910	3.72	3.2	<0.5	1.0	47	<0.1	1.2	<0.1	74	3.81
1876798	Drill Core	4.30	<2	0.5	26.0	2.9	47	<0.1	3.1	11.0	713	3.33	5.2	0.5	1.1	41	<0.1	2.2	<0.1	75	4.01

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

CERTIFICATE OF ANALYSIS WHI17001023.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876769	Drill Core	0.055	4	6	0.92	194	0.018	3	0.66	0.030	0.31	<0.1	<0.01	19.6	<0.1	<0.05	2	<0.5	<0.2
1876770	Drill Core	0.064	4	6	0.97	297	0.029	4	0.85	0.028	0.41	<0.1	<0.01	19.1	<0.1	<0.05	3	<0.5	<0.2
1876771	Drill Core	0.063	4	7	1.15	316	0.027	2	0.71	0.027	0.32	0.2	<0.01	14.8	<0.1	<0.05	3	<0.5	<0.2
1876772	Drill Core	0.057	3	4	1.20	250	0.008	3	0.69	0.023	0.30	<0.1	<0.01	16.6	<0.1	<0.05	2	<0.5	<0.2
1876773	Drill Core	0.068	6	6	0.70	169	0.014	5	0.70	0.027	0.33	<0.1	<0.01	15.7	<0.1	<0.05	2	<0.5	<0.2
1876774	Drill Core	0.064	5	5	0.81	683	0.019	4	0.77	0.034	0.37	<0.1	<0.01	15.6	<0.1	<0.05	2	<0.5	<0.2
1876775	Drill Core	0.060	6	6	0.81	812	0.012	5	0.66	0.034	0.30	<0.1	<0.01	15.2	<0.1	0.13	2	<0.5	<0.2
1876776	Drill Core	0.055	6	5	1.10	1167	0.012	5	0.56	0.040	0.23	<0.1	<0.01	18.4	<0.1	0.05	2	<0.5	<0.2
1876777	Drill Core	0.064	7	5	1.24	100	0.011	4	0.65	0.025	0.29	<0.1	<0.01	16.4	<0.1	<0.05	2	<0.5	<0.2
1876778	Drill Core	0.063	6	7	1.35	137	0.010	4	0.59	0.037	0.27	<0.1	0.06	16.2	<0.1	0.06	2	<0.5	<0.2
1876779	Drill Core	0.056	7	6	1.34	190	0.011	4	0.66	0.025	0.29	<0.1	0.02	17.1	<0.1	<0.05	2	<0.5	<0.2
1876780	Drill Core	0.065	7	6	0.91	136	0.022	3	0.71	0.043	0.30	0.1	0.02	19.6	<0.1	0.07	3	<0.5	<0.2
1876781	Drill Core	0.073	5	6	0.74	134	0.005	3	0.62	0.025	0.21	<0.1	0.01	18.1	<0.1	<0.05	2	<0.5	<0.2
1876782	Drill Core	0.029	4	3	0.68	142	0.002	2	0.26	0.037	0.09	<0.1	0.02	6.3	<0.1	<0.05	<1	<0.5	<0.2
1876783	Drill Core	0.063	6	4	2.94	296	0.002	3	0.39	0.027	0.15	<0.1	0.02	12.8	<0.1	<0.05	1	<0.5	<0.2
1876784	Drill Core	0.076	4	5	0.87	58	0.003	4	0.55	0.022	0.24	<0.1	<0.01	19.5	<0.1	<0.05	1	<0.5	<0.2
1876785	Drill Core	0.081	4	4	0.94	175	0.004	4	0.59	0.024	0.23	<0.1	<0.01	18.4	<0.1	<0.05	2	<0.5	<0.2
1876786	Drill Core	0.073	3	5	1.04	142	0.004	4	0.59	0.016	0.25	0.2	<0.01	19.1	<0.1	<0.05	1	<0.5	<0.2
1876787	Drill Core	0.056	3	4	1.76	850	0.005	3	0.57	0.014	0.20	0.2	0.01	18.3	<0.1	<0.05	2	<0.5	<0.2
1876788	Drill Core	0.040	7	15	1.57	254	0.021	3	0.27	0.035	0.08	49.4	<0.01	25.2	<0.1	<0.05	<1	<0.5	<0.2
1876789	Drill Core	0.058	1	5	0.60	59	0.003	4	0.54	0.008	0.21	5.0	<0.01	13.3	<0.1	<0.05	1	<0.5	<0.2
1876790	Drill Core	0.054	8	16	1.39	201	0.021	2	0.48	0.032	0.13	25.5	<0.01	19.4	<0.1	<0.05	1	<0.5	<0.2
1876791	Drill Core	0.067	3	6	0.84	66	0.003	5	0.68	0.020	0.22	0.8	0.03	25.5	<0.1	<0.05	2	<0.5	<0.2
1876792	Drill Core	0.075	3	6	0.93	148	0.007	3	0.59	0.025	0.25	1.3	0.03	21.5	<0.1	<0.05	2	<0.5	<0.2
1876793	Drill Core	0.073	3	5	0.81	2020	0.005	4	0.63	0.027	0.25	<0.1	0.03	21.1	<0.1	0.07	2	<0.5	<0.2
1876794	Drill Core	0.058	2	7	1.00	622	0.004	4	0.65	0.014	0.19	<0.1	0.05	17.8	<0.1	<0.05	2	<0.5	<0.2
1876795	Drill Core	0.047	1	4	1.01	59	0.002	5	0.54	0.006	0.19	<0.1	0.02	16.2	<0.1	<0.05	1	<0.5	<0.2
1876796	Drill Core	0.061	1	6	1.02	397	0.003	5	0.57	0.006	0.19	0.1	0.03	23.6	<0.1	<0.05	2	<0.5	<0.2
1876797	Drill Core	0.065	2	6	1.21	50	0.004	6	0.61	0.006	0.19	<0.1	0.01	22.9	<0.1	<0.05	2	<0.5	<0.2
1876798	Drill Core	0.043	3	7	1.29	220	0.005	4	0.57	0.006	0.13	<0.1	0.01	18.1	<0.1	<0.05	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

CERTIFICATE OF ANALYSIS WHI17001023.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876799	Drill Core	5.48	<2	0.7	31.3	3.1	68	<0.1	3.8	14.0	832	3.81	5.3	<0.5	1.7	55	<0.1	0.9	<0.1	84	4.62
1876800	Rock Pulp	0.06	6	6.4	48.7	2.7	45	<0.1	31.7	9.0	522	3.10	4.7	1.5	1.1	49	0.1	0.4	<0.1	66	0.97
1876801	Rock Pulp	0.06	6618	1.1	15.7	20.4	60	0.2	12.6	1.7	924	0.56	4348.9	6423.6	1.2	165	0.6	24.2	0.4	21	23.48
1876802	Drill Core	3.54	<2	0.6	66.4	1.9	50	<0.1	3.8	12.8	878	3.87	3.1	1.0	1.3	45	<0.1	0.3	<0.1	78	3.54
1876803	Drill Core	3.95	<2	0.7	27.7	2.3	62	<0.1	4.4	12.7	818	4.22	3.8	<0.5	1.1	39	<0.1	0.5	<0.1	87	3.27
1876804	Drill Core	4.47	2	1.2	39.5	2.3	54	0.1	4.0	11.3	825	3.57	6.7	0.7	1.1	44	<0.1	0.5	<0.1	81	3.57
1876805	Drill Core	3.66	<2	0.9	30.5	2.2	54	<0.1	3.5	12.9	899	4.25	4.5	<0.5	1.4	36	<0.1	0.5	<0.1	80	3.46
1876806	Drill Core	4.04	2	0.4	49.5	2.3	63	<0.1	4.1	13.8	808	3.81	2.7	2.3	1.3	39	<0.1	0.2	<0.1	69	3.69
1876807	Drill Core	4.10	<2	0.5	45.0	2.2	63	<0.1	4.6	13.1	991	3.96	2.8	<0.5	1.0	49	<0.1	0.3	<0.1	73	4.14
1876808	Drill Core	5.15	<2	0.6	34.8	2.5	67	<0.1	4.2	14.3	895	4.13	3.3	1.0	1.3	42	0.1	0.4	<0.1	92	4.21
1876809	Drill Core	3.58	<2	1.0	49.2	2.1	69	<0.1	4.9	14.0	811	4.13	4.1	<0.5	1.7	41	0.1	0.5	<0.1	80	3.05
1876810	Drill Core	2.99	<2	0.4	17.7	2.4	47	<0.1	3.6	10.7	614	3.08	3.8	<0.5	1.0	37	<0.1	0.4	<0.1	62	2.80
1876811	Drill Core	2.08	2	0.5	9.4	5.7	44	0.1	4.4	11.4	786	3.01	11.6	1.2	0.4	42	<0.1	0.8	<0.1	68	4.00
1876812	Drill Core	2.69	9	0.5	8.7	4.2	57	0.2	4.4	11.6	746	3.28	7.8	6.1	1.0	44	<0.1	0.5	<0.1	73	3.98
1876813	Drill Core	3.52	2	0.3	12.0	3.0	48	<0.1	4.7	9.6	807	3.17	4.1	<0.5	1.1	38	<0.1	0.3	<0.1	65	4.02
1876814	Drill Core	4.71	8	0.4	34.2	1.8	56	<0.1	4.4	10.6	961	3.55	2.7	134.8	0.9	36	<0.1	0.3	<0.1	78	4.30
1876815	Drill Core	2.20	<2	0.5	17.1	1.9	60	0.1	5.1	11.4	857	3.81	3.1	3.8	1.2	32	<0.1	0.3	<0.1	105	3.71
1876816	Drill Core	2.45	<2	0.7	98.6	2.4	59	<0.1	5.0	16.3	671	4.05	4.0	1.9	0.9	36	<0.1	0.8	0.2	104	3.76

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

CERTIFICATE OF ANALYSIS WHI17001023.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876799	Drill Core	0.058	4	6	1.46	110	0.006	8	0.78	0.010	0.19	<0.1	0.01	22.7	<0.1	<0.05	2	<0.5	<0.2
1876800	Rock Pulp	0.066	5	38	0.79	99	0.121	7	1.73	0.122	0.17	0.3	0.01	4.8	<0.1	<0.05	6	<0.5	<0.2
1876801	Rock Pulp	0.015	7	22	6.14	38	0.001	6	0.22	0.008	0.06	3.7	4.18	2.5	15.2	<0.05	<1	<0.5	<0.2
1876802	Drill Core	0.064	4	7	1.10	794	0.005	6	0.67	0.008	0.18	<0.1	0.01	24.3	<0.1	<0.05	2	<0.5	<0.2
1876803	Drill Core	0.060	3	7	0.99	39	0.007	3	0.73	0.008	0.15	<0.1	0.02	22.7	<0.1	<0.05	2	<0.5	<0.2
1876804	Drill Core	0.045	1	7	1.11	393	0.004	3	0.57	0.006	0.11	0.2	0.02	18.6	<0.1	<0.05	2	<0.5	<0.2
1876805	Drill Core	0.066	1	5	1.06	64	0.004	5	0.69	0.007	0.21	<0.1	0.01	24.2	<0.1	<0.05	2	<0.5	<0.2
1876806	Drill Core	0.050	2	6	1.19	163	0.003	6	0.61	0.008	0.20	<0.1	0.03	22.0	<0.1	<0.05	2	<0.5	<0.2
1876807	Drill Core	0.050	2	4	1.41	687	0.003	6	0.70	0.009	0.21	<0.1	0.02	21.2	<0.1	<0.05	2	0.6	<0.2
1876808	Drill Core	0.056	2	6	1.33	69	0.002	4	0.56	0.008	0.12	<0.1	0.18	27.6	<0.1	<0.05	1	<0.5	<0.2
1876809	Drill Core	0.070	3	5	1.01	342	0.005	7	0.77	0.008	0.25	<0.1	0.08	25.8	0.1	<0.05	3	<0.5	<0.2
1876810	Drill Core	0.043	2	5	0.92	319	0.002	8	0.69	0.006	0.16	0.1	0.60	18.4	<0.1	<0.05	2	<0.5	<0.2
1876811	Drill Core	0.008	<1	3	1.38	55	<0.001	5	0.44	0.006	0.08	<0.1	4.05	17.0	<0.1	<0.05	1	<0.5	<0.2
1876812	Drill Core	0.016	2	4	1.43	32	<0.001	4	0.57	0.008	0.17	<0.1	3.09	17.7	<0.1	<0.05	2	<0.5	<0.2
1876813	Drill Core	0.031	2	3	1.39	14	<0.001	5	0.59	0.007	0.12	<0.1	2.00	18.1	<0.1	<0.05	1	<0.5	<0.2
1876814	Drill Core	0.038	1	5	1.45	434	0.002	4	0.51	0.007	0.13	<0.1	0.19	18.4	<0.1	<0.05	1	<0.5	<0.2
1876815	Drill Core	0.046	2	7	1.28	193	0.003	3	0.65	0.008	0.08	0.3	0.28	27.0	<0.1	<0.05	2	<0.5	<0.2
1876816	Drill Core	0.045	2	7	1.23	39	0.002	4	0.75	0.007	0.11	0.1	0.52	19.8	<0.1	0.11	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

QUALITY CONTROL REPORT WHI17001023.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
Pulp Duplicates																					
1876699	Drill Core	4.65	<2	1.4	63.0	5.8	55	<0.1	9.0	18.5	982	4.52	3.2	0.8	0.9	91	<0.1	1.8	<0.1	132	5.31
REP 1876699	QC			1.7	59.8	6.3	62	<0.1	8.9	19.0	1056	4.56	3.8	<0.5	1.0	98	0.1	2.0	<0.1	134	5.27
1876702	Drill Core	2.78	<2	2.2	11.6	5.3	54	<0.1	6.2	14.0	763	3.81	4.5	<0.5	0.6	25	<0.1	1.1	0.1	86	2.74
REP 1876702	QC		<2																		
1876733	Drill Core	5.63	3	2.0	30.6	5.4	54	<0.1	5.0	10.1	908	4.49	5.0	1.4	2.4	120	<0.1	0.4	<0.1	71	5.01
REP 1876733	QC			2.3	31.8	6.0	63	<0.1	5.6	10.9	870	4.42	5.2	1.5	2.7	136	<0.1	0.4	<0.1	70	4.92
1876737	Drill Core	2.03	<2	2.1	65.2	3.4	64	<0.1	9.3	21.2	1040	5.16	4.0	<0.5	2.0	106	<0.1	0.3	<0.1	155	4.46
REP 1876737	QC		<2																		
1876769	Drill Core	4.98	<2	1.1	37.0	2.0	57	<0.1	4.3	13.9	790	3.61	0.6	<0.5	1.4	34	<0.1	0.2	<0.1	65	2.41
REP 1876769	QC			1.2	38.5	2.1	57	<0.1	4.6	14.2	805	3.57	<0.5	0.9	1.4	33	<0.1	0.2	<0.1	65	2.39
1876771	Drill Core	4.82	<2	4.9	30.8	2.1	50	<0.1	4.4	11.8	884	3.40	1.1	1.4	2.2	37	<0.1	0.3	<0.1	70	3.09
REP 1876771	QC		<2																		
1876804	Drill Core	4.47	2	1.2	39.5	2.3	54	0.1	4.0	11.3	825	3.57	6.7	0.7	1.1	44	<0.1	0.5	<0.1	81	3.57
REP 1876804	QC			0.9	39.1	2.1	48	<0.1	4.0	12.9	879	3.59	5.7	1.1	1.0	42	<0.1	0.5	<0.1	80	3.60
1876805	Drill Core	3.66	<2	0.9	30.5	2.2	54	<0.1	3.5	12.9	899	4.25	4.5	<0.5	1.4	36	<0.1	0.5	<0.1	80	3.46
REP 1876805	QC		<2																		
Core Reject Duplicates																					
1876678	Drill Core	2.87	5	1.9	22.8	7.0	50	0.3	11.0	6.6	300	2.42	5.0	6.1	3.5	20	<0.1	0.3	0.1	54	0.23
DUP 1876678	QC		4	1.6	17.1	5.2	43	0.3	11.2	6.4	300	2.31	4.9	3.8	3.3	20	<0.1	0.3	0.1	51	0.21
1876712	Drill Core	2.07	<2	1.1	28.1	2.1	69	<0.1	16.4	15.9	538	3.08	3.0	<0.5	1.1	49	<0.1	<0.1	<0.1	59	1.35
DUP 1876712	QC		<2	0.9	25.4	2.0	56	<0.1	15.1	16.4	581	3.15	2.5	<0.5	1.0	51	<0.1	<0.1	<0.1	58	1.39
1876747	Drill Core	3.03	25	5.0	39.1	4.5	81	<0.1	46.3	31.2	1342	9.31	3.0	23.3	0.8	73	0.1	0.4	<0.1	232	3.55
DUP 1876747	QC		22	5.4	38.4	4.5	80	<0.1	47.9	31.8	1311	9.20	3.4	18.3	0.8	73	0.1	0.4	<0.1	231	3.55
1876781	Drill Core	5.59	<2	1.8	44.0	1.7	44	<0.1	4.2	14.2	636	3.31	1.0	<0.5	2.4	51	<0.1	0.1	<0.1	56	2.87
DUP 1876781	QC		<2	1.5	46.3	1.8	43	<0.1	4.3	14.0	669	3.41	1.0	1.4	2.4	52	<0.1	0.2	<0.1	56	2.81
1876815	Drill Core	2.20	<2	0.5	17.1	1.9	60	0.1	5.1	11.4	857	3.81	3.1	3.8	1.2	32	<0.1	0.3	<0.1	105	3.71
DUP 1876815	QC		<2	0.6	19.0	2.0	65	<0.1	4.8	13.2	775	3.79	3.4	3.6	1.2	34	<0.1	0.3	<0.1	106	3.79
Reference Materials																					

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

QUALITY CONTROL REPORT WHI17001023.1

		Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
		Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
		Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
		MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
Pulp Duplicates																				
1876699	Drill Core		0.033	4	18	0.98	201	0.010	5	0.89	0.016	0.28	<0.1	<0.01	19.4	0.1	<0.05	2	<0.5	<0.2
REP 1876699	QC		0.034	4	18	0.99	214	0.012	7	0.90	0.016	0.29	<0.1	<0.01	19.1	0.1	<0.05	3	<0.5	<0.2
1876702	Drill Core		0.039	1	7	0.51	140	0.006	10	0.94	0.007	0.28	<0.1	<0.01	19.0	<0.1	<0.05	3	<0.5	<0.2
REP 1876702	QC																			
1876733	Drill Core		0.081	13	13	0.94	2862	0.006	4	1.78	0.019	0.27	<0.1	<0.01	17.7	<0.1	0.06	6	0.6	<0.2
REP 1876733	QC		0.087	13	13	0.93	2740	0.006	5	1.77	0.019	0.27	<0.1	<0.01	18.0	<0.1	0.06	7	1.0	<0.2
1876737	Drill Core		0.083	10	7	0.76	164	0.039	3	0.96	0.065	0.31	<0.1	<0.01	22.8	<0.1	<0.05	4	<0.5	<0.2
REP 1876737	QC																			
1876769	Drill Core		0.055	4	6	0.92	194	0.018	3	0.66	0.030	0.31	<0.1	<0.01	19.6	<0.1	<0.05	2	<0.5	<0.2
REP 1876769	QC		0.059	4	7	0.91	197	0.019	3	0.66	0.030	0.31	<0.1	<0.01	19.9	<0.1	<0.05	3	<0.5	<0.2
1876771	Drill Core		0.063	4	7	1.15	316	0.027	2	0.71	0.027	0.32	0.2	<0.01	14.8	<0.1	<0.05	3	<0.5	<0.2
REP 1876771	QC																			
1876804	Drill Core		0.045	1	7	1.11	393	0.004	3	0.57	0.006	0.11	0.2	0.02	18.6	<0.1	<0.05	2	<0.5	<0.2
REP 1876804	QC		0.043	2	7	1.11	366	0.004	4	0.56	0.006	0.10	0.2	0.02	18.7	<0.1	<0.05	2	<0.5	<0.2
1876805	Drill Core		0.066	1	5	1.06	64	0.004	5	0.69	0.007	0.21	<0.1	0.01	24.2	<0.1	<0.05	2	<0.5	<0.2
REP 1876805	QC																			
Core Reject Duplicates																				
1876678	Drill Core		0.020	14	26	0.29	233	0.061	4	1.36	0.054	0.15	0.9	0.02	6.7	<0.1	<0.05	4	<0.5	<0.2
DUP 1876678	QC		0.017	14	22	0.26	205	0.059	3	1.27	0.060	0.14	0.7	0.01	5.5	<0.1	<0.05	4	<0.5	<0.2
1876712	Drill Core		0.066	4	58	1.92	326	0.140	3	1.94	0.051	0.44	0.1	<0.01	7.7	0.1	<0.05	7	<0.5	<0.2
DUP 1876712	QC		0.069	4	46	1.85	332	0.131	3	1.92	0.066	0.43	0.1	<0.01	6.1	0.1	<0.05	6	<0.5	<0.2
1876747	Drill Core		0.091	8	14	1.35	135	0.034	5	1.29	0.026	0.58	<0.1	<0.01	28.6	0.2	<0.05	6	<0.5	<0.2
DUP 1876747	QC		0.095	8	14	1.34	132	0.034	5	1.28	0.027	0.57	<0.1	0.01	28.0	0.2	<0.05	6	<0.5	<0.2
1876781	Drill Core		0.073	5	6	0.74	134	0.005	3	0.62	0.025	0.21	<0.1	0.01	18.1	<0.1	<0.05	2	<0.5	<0.2
DUP 1876781	QC		0.083	5	6	0.74	151	0.005	5	0.56	0.026	0.21	<0.1	0.02	18.6	<0.1	<0.05	1	<0.5	<0.2
1876815	Drill Core		0.046	2	7	1.28	193	0.003	3	0.65	0.008	0.08	0.3	0.28	27.0	<0.1	<0.05	2	<0.5	<0.2
DUP 1876815	QC		0.045	2	7	1.31	215	0.003	5	0.61	0.008	0.08	0.4	0.30	28.1	<0.1	<0.05	2	<0.5	<0.2
Reference Materials																				

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

QUALITY CONTROL REPORT WHI17001023.1

		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
STD DS11	Standard			13.7	146.9	133.6	355	1.6	82.8	12.8	1062	3.09	44.5	76.2	8.0	67	2.3	8.9	11.8	50	1.04
STD DS11	Standard			14.8	156.5	141.0	344	1.8	74.0	13.1	1056	3.20	45.8	64.5	8.5	68	2.6	8.4	12.6	49	1.06
STD DS11	Standard			14.4	164.4	142.3	349	1.7	70.3	14.4	957	3.07	41.5	91.0	7.8	67	3.0	7.4	11.2	49	1.04
STD DS11	Standard			14.3	161.6	140.1	356	1.7	72.4	14.7	1075	3.14	40.1	68.5	8.2	69	2.6	7.9	11.3	49	1.06
STD DS11	Standard			13.9	156.3	139.2	338	1.8	82.6	14.2	1041	3.11	42.9	68.5	7.4	63	2.3	7.5	11.9	48	1.04
STD OXC129	Standard			1.2	27.8	6.1	40	<0.1	77.4	18.9	424	3.01	<0.5	185.8	1.7	185	<0.1	<0.1	<0.1	53	0.68
STD OXC129	Standard			1.2	29.4	6.7	46	<0.1	87.8	18.4	446	3.04	0.6	203.2	2.0	203	<0.1	<0.1	<0.1	52	0.70
STD OXC129	Standard			1.2	28.0	5.8	43	<0.1	72.1	20.0	415	2.94	0.7	178.3	1.7	177	<0.1	<0.1	<0.1	53	0.67
STD OXC129	Standard			1.4	29.6	6.8	47	<0.1	87.7	19.9	444	3.18	<0.5	204.4	1.9	187	<0.1	<0.1	<0.1	55	0.71
STD OXC129	Standard			1.2	28.0	5.9	39	<0.1	86.0	20.8	428	3.08	0.7	214.6	1.8	189	<0.1	<0.1	<0.1	52	0.69
STD OXC145	Standard		213																		
STD OXC145	Standard		211																		
STD OXC145	Standard		214																		
STD OXC145	Standard		203																		
STD OXC145	Standard		218																		
STD OXC145	Standard		206																		
STD OXC145	Standard		202																		
STD OXH139	Standard		1279																		
STD OXH139	Standard		1366																		
STD OXH139	Standard		1363																		
STD OXH139	Standard		1277																		
STD OXH139 Expected			1312																		
STD OXC129 Expected				1.3	28	6.2	42.9		79.5	20.3	421	3.065	0.6	195	1.9					51	0.684
STD DS11 Expected				14.6	149	138	345	1.71	77.7	14.2	1055	3.1	42.8	79	7.65	67.3	2.37	8.74	12.2	50	1.063
STD OXC145 Expected			212																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

QUALITY CONTROL REPORT WHI17001023.1

		AQ201 P % 0.001	AQ201 La ppm 1	AQ201 Cr ppm 1	AQ201 Mg % 0.01	AQ201 Ba ppm 1	AQ201 Ti % 0.001	AQ201 B ppm 1	AQ201 Al % 0.01	AQ201 Na % 0.001	AQ201 K % 0.01	AQ201 W ppm 0.1	AQ201 Hg ppm 0.01	AQ201 Sc ppm 0.1	AQ201 Tl ppm 0.1	AQ201 S % 0.05	AQ201 Ga ppm 1	AQ201 Se ppm 0.5	AQ201 Te ppm 0.2
STD DS11	Standard	0.078	18	58	0.82	349	0.094	8	1.12	0.071	0.40	2.8	0.26	3.9	4.4	0.28	5	2.4	4.5
STD DS11	Standard	0.077	20	59	0.85	392	0.102	8	1.16	0.074	0.41	2.7	0.28	3.6	4.7	0.28	5	2.2	4.8
STD DS11	Standard	0.077	19	59	0.82	368	0.096	6	1.18	0.071	0.40	2.9	0.25	2.8	4.7	0.27	5	2.2	4.5
STD DS11	Standard	0.073	19	59	0.84	364	0.101	8	1.14	0.071	0.40	2.8	0.28	2.6	4.7	0.28	5	1.8	4.6
STD DS11	Standard	0.068	18	60	0.84	367	0.091	7	1.13	0.071	0.40	2.8	0.25	3.1	4.8	0.28	5	2.2	5.0
STD OXC129	Standard	0.112	12	53	1.56	50	0.379	2	1.57	0.605	0.37	<0.1	<0.01	1.1	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.102	13	52	1.55	51	0.394	2	1.57	0.589	0.36	<0.1	<0.01	1.1	<0.1	<0.05	6	<0.5	<0.2
STD OXC129	Standard	0.103	12	50	1.53	47	0.380	<1	1.67	0.598	0.38	<0.1	<0.01	1.0	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.101	13	54	1.66	53	0.403	1	1.63	0.630	0.39	<0.1	<0.01	0.8	<0.1	<0.05	6	<0.5	<0.2
STD OXC129	Standard	0.107	13	56	1.57	51	0.428	2	1.57	0.603	0.37	<0.1	<0.01	0.6	<0.1	<0.05	6	<0.5	<0.2
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXH139 Expected																			
STD OXC129 Expected		0.102	12.5	52	1.545	50	0.4	1	1.58	0.59	0.3655			1.1			5.5		
STD DS11 Expected		0.0701	18.6	61.5	0.85	385	0.0976		1.1795	0.0762	0.4	2.9	0.26	3.4	4.9	0.2835	5.1	2.2	4.56
STD OXC145 Expected																			
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

QUALITY CONTROL REPORT WHI17001023.1

		WGHT Wgt kg 0.01	FA350 Au ppb 2	AQ201 Mo ppm 0.1	AQ201 Cu ppm 0.1	AQ201 Pb ppm 0.1	AQ201 Zn ppm 1	AQ201 Ag ppm 0.1	AQ201 Ni ppm 0.1	AQ201 Co ppm 0.1	AQ201 Mn ppm 1	AQ201 Fe % 0.01	AQ201 As ppm 0.5	AQ201 Au ppb 0.5	AQ201 Th ppm 0.1	AQ201 Sr ppm 1	AQ201 Cd ppm 0.1	AQ201 Sb ppm 0.1	AQ201 Bi ppm 0.1	AQ201 V ppm 2	AQ201 Ca % 0.01
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank		<2																		
Prep Wash																					
ROCK-WHI	Prep Blank		<2	0.9	14.6	2.4	46	<0.1	2.5	4.8	571	1.71	1.5	1.0	1.6	38	<0.1	<0.1	<0.1	24	1.50
ROCK-WHI	Prep Blank		<2	0.9	16.1	1.8	49	<0.1	3.1	4.4	612	1.93	1.3	0.6	2.4	29	<0.1	<0.1	<0.1	24	0.66

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

QUALITY CONTROL REPORT WHI17001023.1

		AQ201 P % 0.001	AQ201 La ppm 1	AQ201 Cr ppm 1	AQ201 Mg % 0.01	AQ201 Ba ppm 1	AQ201 Ti % 0.001	AQ201 B ppm 1	AQ201 Al % 0.01	AQ201 Na % 0.001	AQ201 K % 0.01	AQ201 W ppm 0.1	AQ201 Hg ppm 0.01	AQ201 Sc ppm 0.1	AQ201 Tl ppm 0.1	AQ201 S % 0.05	AQ201 Ga ppm 1	AQ201 Se ppm 0.5	AQ201 Te ppm 0.2
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank																		
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank																		
Prep Wash																			
ROCK-WHI	Prep Blank	0.047	6	5	0.58	56	0.072	2	1.35	0.094	0.11	0.1	<0.01	4.1	<0.1	0.08	4	<0.5	<0.2
ROCK-WHI	Prep Blank	0.041	7	6	0.51	62	0.096	3	1.14	0.141	0.14	0.1	<0.01	3.5	<0.1	<0.05	4	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Submitted By: Daithi Mac Gerailt
Receiving Lab: Canada-Whitehorse
Received: November 14, 2017
Report Date: November 29, 2017
Page: 1 of 2

CERTIFICATE OF ANALYSIS WHI17001023M.1

CLIENT JOB INFORMATION

Project: Lucky Strike
Shipment ID: DDLS-17-08
P.O. Number
Number of Samples: 1

SAMPLE DISPOSAL

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PUL85	1	Pulverize to 85% passing 200 mesh			VAN
SPTRF	1	Split samples by riffle splitter			VAN
FS652	1	Metallic Sieve 500g to 150 mesh		Completed	VAN
FS652	1	Metallic Fire Assay - duplicate minus fraction analysis	50	Completed	VAN
EN002	1	Environmental disposal charge-Fire assay lead waste			VAN
SHP01	1	Per sample shipping charges for branch shipments			VAN
FA550	1	Lead collection fire assay 50G fusion - Grav finish	50	Completed	VAN
FA550	1	Lead collection fire assay 50G fusion - Grav finish	50	Completed	VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources Ltd.
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4
Canada

CC:

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

CERTIFICATE OF ANALYSIS WHI17001023M.1

		Method	M150	FA450	FA450	FS652	FS652	FS652	FA550	FA550
		Analyte	TotWt	-Au	-Au + Au	Wt	+ Au	Au Total	-Au	-Au
		Unit	g	gm/t	gm/t	g	gm/t	gm/t	gm/t	gm/t
		MDL	1	0.005	0.005	0.01	0.05	0.05	0.9	0.9
1876683	Drill Core		545	>10	>10	31.88	44.23	14.04	11.6	12.7

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1010 - 1130 West Pender St.
Vancouver British Columbia V6E 4A4 Canada

Project: Lucky Strike
Report Date: November 29, 2017

QUALITY CONTROL REPORT WHI17001023M.1

	Method	M150	FA450	FA450	FS652	FS652	FS652	FA550	FA550
	Analyte	TotWt	-Au	-Au	+ Au Wt	+ Au	Au Total	-Au	-Au
	Unit	g	gm/t	gm/t	g	gm/t	gm/t	gm/t	gm/t
	MDL	1	0.005	0.005	0.01	0.05	0.05	0.9	0.9
Pulp Duplicates									
1876683	Drill Core	545	>10	>10	31.88	44.23	14.04	11.6	12.7
REP 1876683	QC							11.9	13.1
Reference Materials									
STD AGPROOF	Standard								<0.9
STD OXC145	Standard		0.205						
STD OXC145	Standard			0.199					
STD OXH139	Standard		1.290						
STD OXH139	Standard			1.239					
STD OXN134	Standard		7.637						
STD OXN134	Standard			7.249					
STD OXQ90	Standard				49.87	24.70			
STD OXQ90	Standard				50.05	23.62			
STD OXQ90	Standard							24.2	
STD SP49	Standard								18.5
STD SQ70	Standard								40.1
STD OXQ90 Expected						24.88			
BLK	Blank		<0.005						
BLK	Blank		<0.005						
BLK	Blank				50.00	<0.05			
BLK	Blank				50.00	<0.05			
BLK	Blank			<0.005					
BLK	Blank			<0.005					
BLK	Blank								<0.9
BLK	Blank							<0.9	
Prep Wash									
ROCK-WHI	Prep Blank	4	0.013	0.011	26.17	<0.05	<0.05		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Submitted By: Daithi Mac Gerailt
Receiving Lab: Canada-Whitehorse
Received: October 05, 2017
Report Date: November 07, 2017
Page: 1 of 2

CERTIFICATE OF ANALYSIS WHI17001024.1

CLIENT JOB INFORMATION

Project: Lucky Strike
Shipment ID: DDLS-17-08
P.O. Number
Number of Samples: 23

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	21	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	2	Sort, label and box pulps			WHI
FA350-Au	23	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	23	Environmental disposal charge-Fire assay lead waste			VAN
AQ201	23	1:1:1 Aqua Regia digestion ICP-MS analysis	15	Completed	VAN
SHP01	23	Per sample shipping charges for branch shipments			VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources Ltd.
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3
Canada

CC:

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 07, 2017

CERTIFICATE OF ANALYSIS WHI17001024.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876817	Drill Core	4.53	<2	0.9	41.4	4.7	55	<0.1	7.1	13.8	709	3.63	9.5	<0.5	1.1	28	<0.1	1.1	<0.1	76	3.02
1876818	Drill Core	4.63	<2	0.7	6.9	3.4	40	<0.1	6.5	10.5	621	2.73	7.7	<0.5	1.1	20	<0.1	0.5	<0.1	63	2.83
1876819	Drill Core	2.59	2	0.3	5.6	3.6	55	<0.1	8.7	14.8	904	3.49	5.3	<0.5	1.2	34	<0.1	0.4	<0.1	106	4.24
1876820	Drill Core	4.28	<2	0.5	6.5	2.2	39	<0.1	6.7	8.6	541	2.36	5.1	<0.5	1.3	26	0.1	0.4	<0.1	55	3.44
1876821	Drill Core	5.40	109	0.9	30.7	2.6	50	0.6	8.1	12.1	722	3.05	21.4	102.3	0.6	30	0.1	1.4	<0.1	64	4.67
1876822	Drill Core	3.96	65	2.5	30.7	2.8	55	0.3	12.6	14.8	779	3.42	9.2	70.5	0.7	34	0.2	0.5	<0.1	80	4.51
1876823	Drill Core	4.42	4	3.7	35.0	2.3	47	<0.1	11.9	12.6	696	2.73	10.7	3.8	0.8	33	0.2	0.4	<0.1	75	4.37
1876824	Drill Core	3.15	40	1.0	26.2	1.7	40	0.2	7.0	9.3	808	2.34	4.6	41.4	0.9	39	0.3	0.4	<0.1	49	3.65
1876825	Drill Core	3.85	31	3.8	18.9	2.2	47	0.1	9.5	12.8	842	3.02	9.6	33.1	1.2	66	0.2	0.9	<0.1	50	5.13
1876826	Drill Core	2.89	115	11.6	18.1	2.7	47	0.3	6.6	10.1	815	3.24	17.3	109.6	1.3	63	0.2	1.5	<0.1	45	5.12
1876827	Drill Core	3.38	10	9.0	15.0	7.6	60	<0.1	13.8	15.8	945	3.16	24.0	12.2	0.9	105	<0.1	0.5	<0.1	51	3.52
1876828	Drill Core	2.37	<2	1.2	20.9	24.5	57	<0.1	18.3	12.0	409	2.07	31.8	<0.5	4.1	92	<0.1	0.1	0.4	16	0.63
1876829	Drill Core	1.11	<2	0.3	11.0	8.1	49	<0.1	6.4	7.2	286	2.47	9.4	<0.5	1.8	63	0.2	<0.1	<0.1	21	0.43
1876830	Drill Core	2.71	<2	0.9	22.9	23.8	75	0.1	19.4	11.8	392	1.89	31.3	0.6	6.9	103	0.2	0.1	0.4	13	0.98
1876831	Drill Core	4.98	3	0.8	21.0	22.1	70	0.1	17.5	10.8	414	1.91	27.3	<0.5	7.3	119	0.2	0.1	0.3	12	1.30
1876832	Drill Core	3.79	<2	0.4	18.6	12.7	43	<0.1	11.9	5.8	210	1.32	13.9	1.9	5.7	39	<0.1	<0.1	0.2	9	0.73
1876833	Drill Core	4.19	<2	0.6	31.2	21.8	77	<0.1	18.6	12.7	798	3.34	22.5	0.9	8.1	81	0.2	<0.1	0.6	20	0.68
1876834	Drill Core	5.15	3	1.2	25.8	18.6	62	<0.1	15.4	8.9	468	2.33	26.5	<0.5	7.5	84	0.1	<0.1	0.7	20	0.99
1876835	Rock Pulp	0.05	5	7.5	49.0	2.7	45	<0.1	32.6	8.9	491	3.02	4.8	<0.5	1.1	49	0.1	0.4	<0.1	65	1.00
1876836	Rock Pulp	0.09	457	44.5	>10000	961.5	>10000	59.5	17.5	3.1	614	12.07	136.5	502.2	<0.1	34	245.1	24.2	11.3	8	1.62
1876837	Drill Core	4.10	2	0.4	26.3	19.7	78	<0.1	22.1	12.7	447	2.50	32.3	<0.5	5.8	87	0.2	<0.1	0.4	19	0.76
1876838	Drill Core	4.62	3	0.3	21.0	20.6	58	<0.1	16.6	11.2	372	1.55	23.7	<0.5	5.3	83	0.1	<0.1	0.3	11	1.01
1876839	Drill Core	2.39	<2	0.2	4.6	6.9	17	<0.1	5.1	3.0	255	1.07	5.1	<0.5	2.7	43	<0.1	0.1	<0.1	6	0.80

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 07, 2017

CERTIFICATE OF ANALYSIS WHI17001024.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876817	Drill Core	0.046	2	7	1.01	49	<0.001	5	0.62	0.007	0.09	0.1	3.39	19.9	<0.1	0.20	1	<0.5	<0.2
1876818	Drill Core	0.020	2	5	1.03	82	0.002	4	0.57	0.006	0.05	0.1	3.22	12.8	<0.1	<0.05	1	<0.5	<0.2
1876819	Drill Core	0.019	2	8	1.60	208	0.002	5	0.51	0.009	0.07	<0.1	1.72	17.6	<0.1	<0.05	2	<0.5	<0.2
1876820	Drill Core	0.011	2	11	1.27	53	<0.001	4	0.44	0.007	0.05	<0.1	1.44	7.6	<0.1	<0.05	1	<0.5	<0.2
1876821	Drill Core	0.008	1	6	1.75	22	<0.001	3	0.44	0.008	0.06	<0.1	0.66	11.6	0.1	0.10	1	<0.5	0.3
1876822	Drill Core	0.006	1	18	1.76	34	<0.001	4	0.41	0.009	0.08	<0.1	0.86	15.2	<0.1	0.08	1	<0.5	0.2
1876823	Drill Core	0.011	2	35	1.69	28	<0.001	5	0.49	0.008	0.12	<0.1	0.43	17.7	<0.1	0.15	1	<0.5	<0.2
1876824	Drill Core	0.008	3	8	1.39	19	<0.001	5	0.54	0.006	0.13	<0.1	0.50	10.9	<0.1	0.33	1	<0.5	<0.2
1876825	Drill Core	0.014	3	11	1.61	66	<0.001	5	0.53	0.006	0.13	<0.1	0.44	13.2	0.1	0.85	1	<0.5	<0.2
1876826	Drill Core	0.005	3	4	1.62	85	<0.001	6	0.48	0.007	0.10	<0.1	0.65	11.6	0.1	0.88	1	<0.5	0.4
1876827	Drill Core	0.034	2	15	1.35	100	<0.001	4	0.62	0.022	0.29	<0.1	12.29	17.3	0.2	0.63	2	<0.5	<0.2
1876828	Drill Core	0.003	6	5	0.42	705	<0.001	3	0.48	0.013	0.15	<0.1	1.09	7.5	<0.1	0.05	1	<0.5	<0.2
1876829	Drill Core	0.009	6	5	0.48	536	<0.001	2	0.37	0.012	0.08	<0.1	0.16	5.3	<0.1	<0.05	2	<0.5	<0.2
1876830	Drill Core	0.009	13	7	0.41	251	<0.001	3	0.71	0.022	0.24	<0.1	0.19	5.2	<0.1	<0.05	3	<0.5	<0.2
1876831	Drill Core	0.008	12	7	0.42	313	<0.001	3	0.65	0.022	0.22	<0.1	0.15	4.7	<0.1	<0.05	2	<0.5	<0.2
1876832	Drill Core	0.003	12	7	0.35	382	0.002	4	0.41	0.015	0.16	<0.1	0.08	2.9	0.1	0.12	2	<0.5	<0.2
1876833	Drill Core	0.018	22	9	0.63	897	<0.001	4	0.58	0.032	0.26	<0.1	0.05	4.9	0.1	0.07	3	<0.5	<0.2
1876834	Drill Core	0.022	17	9	0.58	700	<0.001	4	0.53	0.038	0.23	<0.1	0.06	4.1	<0.1	0.11	2	<0.5	<0.2
1876835	Rock Pulp	0.054	5	39	0.80	106	0.134	7	1.76	0.122	0.16	0.3	0.02	4.9	<0.1	<0.05	5	<0.5	<0.2
1876836	Rock Pulp	0.036	<1	14	1.75	7	0.002	2	0.80	0.025	0.07	0.3	2.85	1.6	1.0	>10	5	3.8	8.1
1876837	Drill Core	0.010	15	11	0.50	261	0.001	2	0.51	0.023	0.20	<0.1	0.03	6.5	<0.1	<0.05	3	<0.5	<0.2
1876838	Drill Core	0.006	11	8	0.41	329	<0.001	2	0.47	0.023	0.18	<0.1	0.03	4.5	<0.1	<0.05	2	<0.5	<0.2
1876839	Drill Core	0.003	3	7	0.33	117	<0.001	<1	0.21	0.018	0.08	<0.1	0.02	1.6	<0.1	<0.05	<1	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 07, 2017

QUALITY CONTROL REPORT WHI17001024.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
Pulp Duplicates																					
1876837	Drill Core	4.10	2	0.4	26.3	19.7	78	<0.1	22.1	12.7	447	2.50	32.3	<0.5	5.8	87	0.2	<0.1	0.4	19	0.76
REP 1876837	QC		<2																		
Reference Materials																					
STD DS11	Standard			14.0	149.8	140.9	330	1.7	77.0	13.9	1047	3.07	42.2	68.9	7.8	65	2.3	7.2	11.8	49	1.06
STD OXC129	Standard			1.3	26.6	6.0	37	<0.1	77.2	20.6	419	3.03	<0.5	186.0	1.8	190	<0.1	<0.1	<0.1	51	0.70
STD OXC145	Standard		198																		
STD OXC145	Standard		205																		
STD OXH139	Standard		1303																		
STD OXC129 Expected				1.3	28	6.3	42.9		79.5	20.3	421	3.065	0.6	195	1.9					51	0.665
STD DS11 Expected				14.6	156	138	345	1.71	81.9	14.2	1055	3.2082	42.8	79	7.65	67.3	2.37	8.74	12.2	50	1.063
STD OXC145 Expected			212																		
STD OXH139 Expected			1312																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank		<2																		
BLK	Blank		<2																		
Prep Wash																					
ROCK-WHI	Prep Blank		<2	0.6	3.9	1.1	34	<0.1	0.8	4.0	578	1.73	1.0	<0.5	2.3	23	<0.1	<0.1	<0.1	21	0.61
ROCK-WHI	Prep Blank		<2	0.8	4.4	1.1	38	<0.1	0.8	4.0	570	1.69	1.0	<0.5	2.3	26	<0.1	<0.1	<0.1	21	0.59

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 07, 2017

QUALITY CONTROL REPORT WHI17001024.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
Pulp Duplicates																			
1876837	Drill Core	0.010	15	11	0.50	261	0.001	2	0.51	0.023	0.20	<0.1	0.03	6.5	<0.1	<0.05	3	<0.5	<0.2
REP 1876837	QC																		
Reference Materials																			
STD DS11	Standard	0.064	18	58	0.85	372	0.094	9	1.15	0.072	0.41	2.9	0.28	3.1	4.9	0.28	5	2.2	4.5
STD OXC129	Standard	0.100	12	53	1.59	50	0.409	2	1.61	0.593	0.37	0.1	0.01	0.6	<0.1	<0.05	5	<0.5	<0.2
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXH139	Standard																		
STD OXC129 Expected		0.102	13	52	1.545	50	0.4	1	1.58	0.6	0.37			1.1			5.6		
STD DS11 Expected		0.0701	18.6	61.5	0.85	385	0.0976		1.1795	0.0762	0.4	2.9	0.3	3.4	4.9	0.2835	5.1	1.9	4.56
STD OXC145 Expected																			
STD OXH139 Expected																			
BLK	Blank																		
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank																		
BLK	Blank																		
Prep Wash																			
ROCK-WHI	Prep Blank	0.039	6	4	0.50	55	0.073	4	0.90	0.065	0.07	<0.1	<0.01	2.6	<0.1	<0.05	4	<0.5	<0.2
ROCK-WHI	Prep Blank	0.041	6	5	0.49	58	0.078	2	0.91	0.072	0.08	<0.1	<0.01	2.6	<0.1	0.07	4	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Submitted By: Daithi Mac Gerailt
Receiving Lab: Canada-Whitehorse
Received: October 05, 2017
Report Date: November 09, 2017
Page: 1 of 6

CERTIFICATE OF ANALYSIS WHI17001025.1

CLIENT JOB INFORMATION

Project: Lucky Strike
Shipment ID: DDLS-17-09
P.O. Number
Number of Samples: 144

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	136	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	8	Sort, label and box pulps			WHI
FA350-Au	144	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	144	Environmental disposal charge-Fire assay lead waste			VAN
AQ201	144	1:1:1 Aqua Regia digestion ICP-MS analysis	15	Completed	VAN
SHP01	144	Per sample shipping charges for branch shipments			VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources Ltd.
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3
Canada

CC:

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 09, 2017

CERTIFICATE OF ANALYSIS WHI17001025.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876840	Drill Core	4.10	88	3.3	21.5	3.9	45	0.4	10.4	16.1	836	4.06	4.5	69.9	3.0	66	0.1	0.5	<0.1	107	5.04
1876841	Drill Core	4.67	6	2.9	5.8	2.2	47	0.4	6.2	20.6	831	5.08	3.4	5.2	3.1	61	<0.1	0.3	<0.1	121	4.00
1876842	Drill Core	7.52	68	3.4	15.1	3.2	56	0.2	4.5	22.0	1088	5.56	5.8	62.9	3.1	42	<0.1	0.5	<0.1	135	3.07
1876843	Drill Core	3.61	<2	1.0	28.8	1.7	64	<0.1	3.6	19.2	901	5.02	2.2	0.9	1.8	68	<0.1	0.3	<0.1	110	2.99
1876844	Drill Core	4.84	<2	1.1	22.5	1.3	58	<0.1	3.4	13.9	762	3.76	2.0	0.6	2.1	55	<0.1	0.1	<0.1	76	2.23
1876845	Drill Core	7.26	<2	1.2	26.8	2.1	68	<0.1	2.8	16.4	831	4.74	2.2	<0.5	2.1	58	<0.1	0.2	<0.1	94	2.64
1876846	Drill Core	4.22	<2	4.7	30.0	2.2	67	<0.1	5.9	16.6	1126	4.62	3.8	<0.5	3.5	69	<0.1	0.3	<0.1	81	3.48
1876847	Drill Core	3.69	<2	6.1	55.1	1.5	56	<0.1	12.1	24.7	1665	6.26	3.3	<0.5	1.5	61	<0.1	0.3	<0.1	128	4.33
1876848	Drill Core	3.64	<2	3.2	85.8	1.3	58	<0.1	19.7	32.2	992	5.78	2.9	<0.5	0.3	73	0.1	0.4	<0.1	152	4.00
1876849	Drill Core	2.85	<2	5.9	33.4	2.0	41	<0.1	8.9	21.0	1253	5.24	5.1	<0.5	1.5	100	<0.1	0.5	<0.1	113	5.60
1876850	Drill Core	4.33	3	12.1	25.0	6.4	77	<0.1	7.8	19.6	1185	5.11	3.7	2.2	2.0	55	0.1	0.2	<0.1	129	2.74
1876851	Drill Core	4.86	189	10.4	27.3	43.9	71	0.6	7.2	24.9	1211	5.38	24.6	157.5	2.6	69	0.3	0.5	0.2	108	3.08
1876852	Drill Core	4.88	1764	6.7	97.2	9.3	46	2.6	5.7	16.8	1113	4.69	41.1	1463.7	3.2	81	0.5	0.7	0.1	80	3.23
1876853	Drill Core	4.71	52	4.6	42.1	4.5	45	0.2	5.1	14.7	967	4.06	8.2	61.5	4.1	90	0.4	0.3	<0.1	81	3.06
1876854	Drill Core	4.45	2415	9.8	159.2	5.9	38	4.8	5.3	15.9	964	4.41	14.9	2479.5	4.8	98	0.5	0.4	<0.1	70	3.40
1876855	Drill Core	4.59	893	5.9	8.2	3.5	49	3.5	7.1	16.4	901	4.35	6.7	812.2	1.4	74	0.5	0.2	<0.1	63	2.88
1876856	Drill Core	4.58	1976	6.2	22.0	3.3	70	2.9	10.9	16.8	1158	5.08	3.5	1734.1	1.2	65	0.2	0.2	<0.1	71	2.85
1876857	Drill Core	3.93	522	6.9	43.8	3.3	63	0.9	7.6	16.5	875	4.71	2.6	870.9	1.7	60	0.2	0.2	<0.1	68	2.05
1876858	Drill Core	4.16	387	6.1	28.2	3.8	45	0.9	3.9	9.2	611	3.50	3.0	454.5	1.5	49	0.3	0.2	<0.1	46	2.45
1876859	Drill Core	3.08	119	5.9	109.9	3.1	42	0.4	5.0	13.6	723	4.20	2.3	132.9	1.4	37	0.2	0.3	<0.1	50	1.78
1876860	Drill Core	3.32	500	7.0	48.4	3.2	38	0.6	6.7	13.8	1196	4.01	3.9	695.2	1.5	84	0.8	0.3	<0.1	74	3.78
1876861	Drill Core	4.66	37	9.3	39.3	4.3	72	0.1	13.9	22.1	1557	5.98	5.0	42.1	1.0	87	0.4	0.3	<0.1	166	4.65
1876862	Drill Core	6.94	32	13.0	19.6	3.6	72	0.1	13.0	20.6	1559	6.01	4.3	28.6	0.9	101	0.3	0.4	<0.1	150	4.15
1876863	Drill Core	3.08	351	9.9	47.8	3.9	54	0.8	10.6	18.0	950	4.98	2.2	355.1	1.5	45	0.2	0.4	<0.1	84	2.63
1876864	Drill Core	5.09	444	11.9	16.2	6.6	69	1.0	10.1	20.9	1241	5.70	5.5	488.3	1.6	72	0.5	0.3	<0.1	87	3.06
1876865	Drill Core	4.97	139	7.9	8.3	5.7	47	0.3	8.8	12.9	1370	4.18	4.8	131.6	1.1	77	0.6	0.2	<0.1	81	5.28
1876866	Drill Core	4.71	603	12.3	18.2	51.7	64	1.1	10.2	24.2	1271	5.41	4.0	634.2	1.6	72	0.4	0.3	0.5	88	3.39
1876867	Drill Core	6.12	1131	15.7	18.0	6.4	51	2.2	5.4	23.4	1393	5.14	11.2	1265.6	2.5	68	0.6	0.5	<0.1	84	2.52
1876868	Drill Core	1.52	>10000	36.0	36.8	18.8	45	42.2	15.9	30.3	2914	5.78	12.7	18216.9	1.1	83	2.4	1.3	0.2	82	3.57
1876869	Drill Core	3.01	>10000	42.5	144.7	45.6	43	64.1	16.8	26.5	2687	5.67	15.0	28061.5	0.6	61	2.3	1.8	0.3	61	2.48

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 09, 2017

CERTIFICATE OF ANALYSIS WHI17001025.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876840	Drill Core	0.062	10	20	0.61	270	0.020	4	0.98	0.025	0.25	0.6	0.02	19.2	0.2	<0.05	4	<0.5	0.2
1876841	Drill Core	0.098	13	11	0.82	265	0.034	4	1.29	0.023	0.55	0.6	0.01	19.0	0.2	<0.05	4	<0.5	<0.2
1876842	Drill Core	0.106	12	11	0.73	238	0.030	4	1.19	0.030	0.41	0.3	<0.01	23.0	0.1	<0.05	5	<0.5	<0.2
1876843	Drill Core	0.090	9	9	1.16	957	0.045	5	1.79	0.031	0.58	<0.1	<0.01	15.5	0.2	<0.05	7	<0.5	<0.2
1876844	Drill Core	0.061	8	8	0.96	1275	0.094	3	1.38	0.042	0.68	<0.1	0.01	11.2	0.2	<0.05	5	<0.5	<0.2
1876845	Drill Core	0.120	9	6	1.07	1087	0.107	5	1.66	0.045	0.84	<0.1	<0.01	13.9	0.2	<0.05	6	<0.5	<0.2
1876846	Drill Core	0.093	14	12	0.69	197	0.008	6	0.86	0.036	0.26	<0.1	<0.01	15.4	<0.1	<0.05	3	<0.5	<0.2
1876847	Drill Core	0.086	10	20	0.78	259	0.012	6	1.05	0.036	0.35	<0.1	<0.01	22.7	0.1	<0.05	4	<0.5	<0.2
1876848	Drill Core	0.065	3	23	1.05	209	0.080	4	1.54	0.104	0.42	<0.1	<0.01	21.6	0.1	<0.05	7	<0.5	<0.2
1876849	Drill Core	0.082	7	13	0.67	365	0.020	5	1.23	0.040	0.24	<0.1	0.01	18.8	<0.1	<0.05	4	<0.5	<0.2
1876850	Drill Core	0.084	8	27	0.95	366	0.009	6	0.71	0.043	0.26	<0.1	0.02	28.0	<0.1	<0.05	3	<0.5	<0.2
1876851	Drill Core	0.112	10	8	1.06	192	0.008	5	0.63	0.040	0.20	<0.1	0.08	20.1	<0.1	<0.05	3	<0.5	0.5
1876852	Drill Core	0.098	13	4	1.16	290	0.007	4	0.53	0.054	0.15	<0.1	0.25	12.5	<0.1	<0.05	2	<0.5	1.6
1876853	Drill Core	0.077	8	3	0.99	106	0.014	4	0.59	0.046	0.21	<0.1	0.03	13.7	<0.1	<0.05	2	<0.5	<0.2
1876854	Drill Core	0.060	11	4	1.16	139	0.008	3	0.48	0.055	0.15	<0.1	0.06	13.0	<0.1	<0.05	2	<0.5	2.7
1876855	Drill Core	0.061	7	13	1.05	250	0.012	6	0.71	0.047	0.28	<0.1	0.30	19.8	<0.1	<0.05	3	<0.5	2.1
1876856	Drill Core	0.056	8	20	0.99	528	0.010	6	0.74	0.041	0.29	<0.1	0.47	19.0	<0.1	<0.05	3	<0.5	2.9
1876857	Drill Core	0.081	11	13	0.71	896	0.016	6	0.73	0.053	0.34	<0.1	0.06	22.7	0.1	<0.05	4	<0.5	0.6
1876858	Drill Core	0.053	5	6	0.71	497	0.006	5	0.62	0.044	0.24	<0.1	0.05	18.4	<0.1	<0.05	3	<0.5	0.6
1876859	Drill Core	0.078	6	11	0.57	338	0.015	5	0.71	0.044	0.30	<0.1	0.02	16.5	<0.1	<0.05	3	<0.5	<0.2
1876860	Drill Core	0.067	10	19	1.41	78	0.023	<1	0.26	0.074	0.07	0.1	0.08	18.8	<0.1	<0.05	<1	<0.5	0.4
1876861	Drill Core	0.081	7	13	1.90	105	0.030	4	0.64	0.052	0.32	<0.1	0.04	24.3	0.1	<0.05	3	<0.5	<0.2
1876862	Drill Core	0.072	6	16	1.53	148	0.039	3	0.81	0.044	0.41	<0.1	0.05	26.0	0.2	<0.05	4	<0.5	<0.2
1876863	Drill Core	0.090	7	22	0.85	159	0.019	3	0.87	0.034	0.38	<0.1	0.12	19.1	0.1	<0.05	3	<0.5	0.5
1876864	Drill Core	0.077	7	17	1.17	118	0.011	2	0.67	0.032	0.24	<0.1	0.19	22.8	<0.1	<0.05	2	<0.5	0.9
1876865	Drill Core	0.063	6	19	1.55	111	0.010	1	0.56	0.024	0.14	<0.1	0.12	19.2	<0.1	<0.05	1	<0.5	0.2
1876866	Drill Core	0.074	7	21	1.27	86	0.007	3	0.59	0.042	0.16	<0.1	0.18	24.0	<0.1	<0.05	2	<0.5	0.8
1876867	Drill Core	0.047	8	2	1.00	111	0.001	2	0.47	0.039	0.05	<0.1	0.36	20.3	<0.1	<0.05	1	1.4	2.0
1876868	Drill Core	0.023	5	18	1.62	336	0.001	<1	0.59	0.003	0.02	<0.1	5.20	23.7	0.1	<0.05	1	1.2	29.2
1876869	Drill Core	0.016	3	15	1.00	437	<0.001	1	0.54	0.010	0.03	0.2	8.27	17.4	<0.1	<0.05	2	1.3	42.5

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 09, 2017

CERTIFICATE OF ANALYSIS WHI17001025.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876870	Rock Pulp	0.06	21	7.9	58.6	2.8	51	0.1	27.8	9.5	435	3.12	6.0	1.4	1.3	51	0.1	0.4	<0.1	66	0.97
1876871	Rock Pulp	0.06	6584	1.4	14.3	20.1	58	0.1	11.7	1.7	875	0.57	4404.1	6155.1	1.2	177	0.5	25.3	0.4	21	23.15
1876872	Drill Core	1.22	>10000	24.8	70.5	174.3	19	>100	6.9	8.8	550	1.71	8.7	67333.5	0.1	68	0.7	1.2	1.3	14	3.35
1876873	Drill Core	2.05	>10000	40.1	101.1	117.7	18	29.9	4.0	5.2	373	1.22	24.0	13526.3	<0.1	70	0.5	3.5	0.6	12	3.20
1876874	Drill Core	1.19	1298	27.8	60.1	6.5	46	1.4	6.1	8.6	546	2.75	73.3	1297.3	0.3	47	0.3	2.6	<0.1	33	3.63
1876875	Drill Core	2.76	303	30.2	53.0	5.9	65	0.8	10.1	19.4	1041	4.06	27.1	411.5	0.4	56	0.3	1.7	<0.1	71	5.67
1876876	Drill Core	3.18	25	6.6	28.4	4.1	50	<0.1	7.9	15.7	887	3.61	14.1	14.5	0.6	58	0.2	0.8	<0.1	69	5.31
1876877	Drill Core	6.65	59	7.1	3.9	5.1	57	<0.1	9.0	14.1	965	3.27	19.4	34.6	0.5	81	0.3	0.2	<0.1	73	6.84
1876878	Drill Core	3.47	28	5.2	25.3	5.0	46	0.3	10.3	12.5	730	2.63	13.2	20.3	2.1	49	0.2	0.2	<0.1	57	5.39
1876879	Drill Core	5.84	1607	5.1	69.0	11.2	55	3.3	9.6	15.5	782	3.38	4.7	1664.5	1.5	63	0.1	0.5	<0.1	63	3.80
1876880	Drill Core	4.40	276	2.9	53.5	9.0	39	1.4	4.0	9.2	583	2.41	5.6	258.2	1.6	43	0.1	0.3	0.6	50	3.39
1876881	Drill Core	4.93	23	1.9	13.6	2.7	35	<0.1	3.0	7.5	544	2.29	2.1	22.8	2.6	38	<0.1	0.2	<0.1	50	3.32
1876882	Drill Core	6.22	36	3.1	26.0	2.5	33	0.1	3.5	7.9	519	2.37	1.7	37.3	3.6	41	<0.1	0.2	<0.1	47	2.79
1876883	Drill Core	3.63	223	3.4	30.0	1.2	34	0.4	3.6	8.4	498	2.38	1.1	201.3	2.2	22	0.1	0.1	<0.1	35	1.52
1876884	Drill Core	2.60	235	10.4	8.5	2.0	26	0.6	2.7	6.1	390	1.83	0.5	273.7	1.9	32	0.1	0.1	<0.1	21	2.01
1876885	Drill Core	4.64	399	7.0	19.8	1.9	26	0.9	4.2	7.2	503	2.02	0.9	490.3	2.3	33	0.2	<0.1	<0.1	17	2.77
1876886	Drill Core	3.66	14	2.4	25.8	1.7	39	<0.1	3.9	8.2	660	2.63	0.9	10.5	1.7	45	0.2	<0.1	<0.1	35	3.09
1876887	Drill Core	4.54	4	1.4	50.5	2.2	65	<0.1	6.3	16.7	716	3.79	1.2	1.4	2.0	37	<0.1	0.1	<0.1	70	2.43
1876888	Drill Core	3.33	119	1.2	53.7	1.9	52	0.3	3.3	11.2	1064	3.55	0.8	104.4	2.0	106	0.4	0.1	<0.1	96	4.51
1876889	Drill Core	6.77	7	0.6	56.9	2.7	59	<0.1	4.2	12.8	769	3.32	0.8	3.8	2.0	85	<0.1	<0.1	<0.1	64	4.24
1876890	Drill Core	4.81	390	2.3	32.3	3.0	51	1.6	3.7	13.2	854	3.06	0.8	395.2	1.3	91	0.1	0.1	<0.1	59	4.03
1876891	Drill Core	3.87	5	0.6	20.4	2.1	37	<0.1	3.0	10.1	464	2.60	0.9	1.4	1.8	56	<0.1	<0.1	<0.1	47	2.20
1876892	Drill Core	2.54	26	2.0	40.3	4.3	60	0.2	3.5	14.5	1116	3.65	0.9	23.3	1.9	129	0.1	0.1	<0.1	61	5.28
1876893	Drill Core	5.62	376	1.8	35.1	2.5	46	1.5	3.6	13.6	908	3.40	<0.5	382.3	2.5	106	0.3	<0.1	<0.1	52	4.21
1876894	Drill Core	5.86	497	2.2	37.5	2.6	45	2.5	4.9	11.8	859	3.41	1.1	464.6	2.1	59	0.2	<0.1	<0.1	47	3.15
1876895	Drill Core	1.81	537	23.5	56.6	11.3	50	2.4	4.9	14.2	1652	3.46	8.9	506.9	0.6	103	0.6	0.3	0.1	37	6.77
1876896	Drill Core	6.32	5	1.4	27.8	2.4	47	<0.1	3.6	11.9	735	3.32	1.1	3.6	1.5	69	<0.1	0.2	<0.1	66	3.92
1876897	Drill Core	4.73	5	0.9	43.2	2.4	61	<0.1	4.2	13.9	660	3.30	1.4	2.3	2.2	97	<0.1	<0.1	<0.1	62	3.38
1876898	Drill Core	5.31	6	1.1	40.3	1.9	46	<0.1	3.3	11.6	645	3.24	1.0	3.7	1.9	45	<0.1	<0.1	<0.1	60	2.75
1876899	Drill Core	4.05	4	1.3	34.4	2.9	42	<0.1	3.2	10.0	835	2.94	1.1	8.0	1.8	85	<0.1	<0.1	<0.1	57	5.15

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 09, 2017

CERTIFICATE OF ANALYSIS WHI17001025.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876870	Rock Pulp	0.062	5	44	0.79	120	0.126	7	1.65	0.115	0.16	0.4	0.02	5.9	<0.1	<0.05	5	<0.5	<0.2
1876871	Rock Pulp	0.016	6	20	6.12	40	0.001	4	0.21	0.009	0.06	3.6	4.05	2.6	14.4	<0.05	<1	<0.5	<0.2
1876872	Drill Core	0.006	<1	6	0.28	1724	<0.001	<1	0.11	0.002	<0.01	0.3	12.80	3.0	<0.1	0.07	<1	<0.5	75.3
1876873	Drill Core	0.005	<1	5	0.44	1576	<0.001	2	0.06	0.003	0.01	0.5	2.34	1.8	<0.1	0.07	<1	<0.5	23.1
1876874	Drill Core	0.003	1	6	1.24	186	<0.001	6	0.23	0.006	0.04	0.8	0.20	8.1	<0.1	<0.05	<1	0.6	0.4
1876875	Drill Core	0.002	1	6	1.68	189	0.001	15	0.48	0.007	0.24	0.9	0.12	19.4	0.1	<0.05	1	<0.5	<0.2
1876876	Drill Core	0.003	2	7	1.66	167	0.001	10	0.62	0.007	0.22	0.1	0.04	15.0	<0.1	<0.05	2	<0.5	<0.2
1876877	Drill Core	0.004	1	11	1.84	132	0.001	5	0.49	0.008	0.13	<0.1	0.05	14.2	<0.1	<0.05	1	<0.5	<0.2
1876878	Drill Core	0.011	4	6	1.41	241	0.002	5	0.54	0.007	0.11	0.7	0.05	10.3	<0.1	<0.05	1	<0.5	<0.2
1876879	Drill Core	0.019	3	4	1.35	1552	0.006	5	0.79	0.005	0.22	0.9	0.20	11.1	<0.1	<0.05	2	0.6	2.1
1876880	Drill Core	0.019	4	4	1.07	1025	0.013	5	0.78	0.006	0.19	<0.1	0.11	8.5	<0.1	<0.05	2	0.8	0.7
1876881	Drill Core	0.022	5	4	1.08	621	0.016	2	0.70	0.005	0.20	<0.1	<0.01	8.5	<0.1	<0.05	2	<0.5	<0.2
1876882	Drill Core	0.023	5	6	0.93	393	0.014	2	0.83	0.004	0.23	0.1	<0.01	9.0	<0.1	<0.05	2	<0.5	<0.2
1876883	Drill Core	0.029	6	3	0.57	213	0.039	6	0.93	0.012	0.45	<0.1	0.02	6.9	<0.1	<0.05	2	<0.5	0.4
1876884	Drill Core	0.015	6	2	0.58	1432	0.009	6	0.58	0.003	0.20	<0.1	0.04	5.1	<0.1	<0.05	1	<0.5	0.4
1876885	Drill Core	0.018	6	4	0.58	1117	0.004	6	0.62	0.010	0.17	<0.1	0.03	5.1	<0.1	<0.05	2	<0.5	0.8
1876886	Drill Core	0.035	4	3	0.56	2619	0.003	4	0.74	0.009	0.25	<0.1	<0.01	9.7	<0.1	0.06	2	<0.5	<0.2
1876887	Drill Core	0.066	4	6	0.76	293	0.023	5	1.32	0.019	0.47	<0.1	<0.01	18.4	<0.1	<0.05	3	<0.5	<0.2
1876888	Drill Core	0.065	7	7	0.93	2471	0.027	4	0.47	0.047	0.17	0.2	0.01	19.4	<0.1	0.06	1	<0.5	0.2
1876889	Drill Core	0.067	5	7	0.77	896	0.042	4	1.28	0.025	0.52	0.1	<0.01	15.3	<0.1	<0.05	4	<0.5	<0.2
1876890	Drill Core	0.058	5	5	0.70	2482	0.052	5	0.92	0.028	0.47	0.2	0.07	12.5	<0.1	0.06	3	0.5	1.0
1876891	Drill Core	0.053	4	5	0.51	451	0.062	3	1.09	0.035	0.53	<0.1	<0.01	8.1	0.1	<0.05	4	<0.5	<0.2
1876892	Drill Core	0.062	5	6	0.89	2715	0.021	4	0.93	0.019	0.43	0.1	<0.01	14.7	<0.1	0.06	3	<0.5	<0.2
1876893	Drill Core	0.073	8	5	0.91	2127	0.009	5	0.50	0.045	0.20	0.1	0.03	15.0	<0.1	0.06	1	<0.5	1.0
1876894	Drill Core	0.069	7	5	0.98	209	0.004	4	0.60	0.025	0.24	<0.1	0.06	16.1	<0.1	<0.05	1	<0.5	1.5
1876895	Drill Core	0.028	2	3	2.10	1571	0.003	3	0.58	0.007	0.13	0.2	0.08	19.5	<0.1	0.10	1	0.5	1.3
1876896	Drill Core	0.049	5	6	0.58	1107	0.021	5	0.90	0.020	0.35	<0.1	<0.01	21.2	<0.1	<0.05	3	<0.5	<0.2
1876897	Drill Core	0.054	5	5	0.66	257	0.045	4	1.07	0.025	0.50	0.1	<0.01	19.1	<0.1	<0.05	4	<0.5	<0.2
1876898	Drill Core	0.054	5	6	0.64	114	0.028	3	0.87	0.034	0.38	0.1	<0.01	16.2	<0.1	<0.05	3	<0.5	<0.2
1876899	Drill Core	0.045	6	5	0.57	115	0.016	3	0.57	0.035	0.22	<0.1	<0.01	16.9	<0.1	<0.05	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 09, 2017

CERTIFICATE OF ANALYSIS WHI17001025.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876900	Drill Core	3.84	3	1.1	29.2	3.1	51	<0.1	3.7	11.1	780	3.11	1.2	3.1	1.8	78	<0.1	<0.1	<0.1	61	4.65
1876901	Drill Core	4.84	21	0.9	58.4	2.3	48	<0.1	3.3	10.1	727	3.22	0.7	21.5	2.5	45	<0.1	<0.1	<0.1	58	2.13
1876902	Drill Core	4.66	5	1.0	62.3	1.6	39	<0.1	2.8	9.8	587	2.83	1.0	<0.5	2.6	54	<0.1	<0.1	<0.1	47	2.76
1876903	Drill Core	4.86	<2	0.9	47.2	1.5	57	<0.1	3.9	12.3	606	3.25	1.1	0.5	2.1	42	<0.1	<0.1	<0.1	53	2.17
1876904	Drill Core	5.38	10	0.7	34.9	1.5	60	<0.1	3.7	11.0	810	3.31	1.0	2.4	2.2	93	<0.1	<0.1	<0.1	55	3.57
1876905	Rock Pulp	0.05	7	7.6	47.8	2.7	45	<0.1	31.8	9.8	456	3.04	4.4	<0.5	1.1	48	0.1	0.4	<0.1	62	0.96
1876906	Rock Pulp	0.09	501	45.5	>10000	985.0	>10000	58.5	18.0	3.6	670	12.02	134.7	536.7	<0.1	35	240.7	26.9	11.1	7	1.54
1876907	Drill Core	4.36	7	1.2	42.9	1.8	61	<0.1	3.5	11.6	820	3.59	0.9	6.6	2.2	59	<0.1	<0.1	<0.1	62	3.01
1876908	Drill Core	4.26	46	1.2	32.6	1.6	54	0.1	3.7	12.6	891	3.76	1.3	45.7	2.4	52	<0.1	<0.1	<0.1	77	2.92
1876909	Drill Core	6.54	159	1.0	30.9	1.5	49	0.4	3.1	10.6	749	3.39	1.2	208.9	1.7	91	<0.1	<0.1	<0.1	53	3.50
1876910	Drill Core	6.98	5	1.4	39.0	1.3	51	<0.1	3.4	10.2	590	3.19	1.0	2.5	2.2	66	<0.1	<0.1	<0.1	49	2.12
1876911	Drill Core	3.12	11	1.5	5.0	1.1	20	<0.1	1.6	3.6	279	1.18	<0.5	11.4	0.3	75	<0.1	<0.1	<0.1	16	2.19
1876912	Drill Core	3.95	863	2.3	33.2	2.3	46	0.7	4.1	10.2	697	2.95	1.8	635.2	2.9	59	<0.1	<0.1	<0.1	52	2.86
1876913	Drill Core	5.07	82	3.5	39.9	2.6	45	0.2	3.4	11.1	686	3.23	1.3	86.1	1.5	81	<0.1	<0.1	<0.1	57	4.33
1876914	Drill Core	3.95	7	1.8	32.9	2.5	31	<0.1	2.8	7.2	468	2.71	1.7	17.8	1.3	62	<0.1	0.1	<0.1	49	3.35
1876915	Drill Core	4.68	13	1.5	18.5	2.4	44	<0.1	3.0	11.3	748	3.31	1.6	21.5	1.3	57	<0.1	0.1	<0.1	62	2.81
1876916	Drill Core	5.38	5	1.1	24.6	1.9	44	<0.1	3.3	10.0	710	3.15	1.7	9.4	1.5	60	0.1	<0.1	<0.1	55	3.42
1876917	Drill Core	4.38	15	1.0	61.8	2.3	55	0.2	8.1	14.5	758	3.94	1.2	33.4	1.6	122	<0.1	<0.1	<0.1	78	4.26
1876918	Drill Core	4.01	9	1.1	108.6	2.9	64	<0.1	10.4	19.1	790	4.72	1.5	11.7	1.1	43	<0.1	0.2	<0.1	101	3.28
1876919	Drill Core	3.46	63	1.1	42.2	3.1	54	0.1	4.7	12.8	916	3.75	0.9	35.3	1.1	88	0.1	<0.1	<0.1	70	4.76
1876920	Drill Core	6.32	42	0.7	30.4	2.5	38	0.1	3.1	8.6	705	3.01	1.2	35.6	1.0	72	0.2	<0.1	<0.1	55	3.83
1876921	Drill Core	4.77	7	0.8	25.8	3.0	39	<0.1	3.0	8.6	639	2.81	1.2	18.3	0.9	61	<0.1	0.1	<0.1	43	4.00
1876922	Drill Core	5.77	<2	0.8	32.4	2.4	43	<0.1	4.8	10.4	479	2.98	1.8	4.4	0.9	48	<0.1	0.1	<0.1	48	1.62
1876923	Drill Core	5.02	<2	1.3	60.3	2.7	51	<0.1	7.4	15.3	693	3.76	1.9	3.8	1.1	102	<0.1	0.1	<0.1	69	2.89
1876924	Drill Core	4.57	<2	1.2	77.4	2.0	73	<0.1	9.2	17.4	773	4.28	1.6	1.1	1.1	74	<0.1	<0.1	<0.1	85	3.02
1876925	Drill Core	5.90	<2	0.6	58.2	2.1	46	<0.1	4.0	12.3	692	3.32	1.5	1.6	1.1	50	<0.1	<0.1	<0.1	58	3.12
1876926	Drill Core	5.33	<2	0.5	39.6	2.3	39	<0.1	3.3	9.3	521	2.88	1.3	1.2	0.9	29	<0.1	<0.1	<0.1	52	2.01
1876927	Drill Core	4.66	6	0.8	22.8	2.4	51	<0.1	3.9	11.4	723	3.29	1.4	4.7	1.4	57	<0.1	0.1	<0.1	58	3.53
1876928	Drill Core	4.44	32	0.5	29.0	2.1	44	0.1	3.8	10.0	785	3.05	3.5	31.3	1.4	46	<0.1	<0.1	<0.1	53	3.44
1876929	Drill Core	4.72	789	0.5	60.2	2.5	51	1.4	6.2	11.4	998	3.42	10.8	674.5	0.9	137	0.2	<0.1	<0.1	72	5.09

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 09, 2017

CERTIFICATE OF ANALYSIS WHI17001025.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876900	Drill Core	0.050	6	4	0.76	159	0.005	4	0.63	0.025	0.19	0.2	<0.01	18.7	<0.1	<0.05	2	<0.5	<0.2
1876901	Drill Core	0.053	6	5	0.63	173	0.012	5	0.74	0.033	0.25	<0.1	0.01	21.8	<0.1	<0.05	2	<0.5	<0.2
1876902	Drill Core	0.050	5	4	0.42	97	0.005	5	0.70	0.037	0.22	<0.1	<0.01	15.9	<0.1	<0.05	2	<0.5	<0.2
1876903	Drill Core	0.062	6	6	0.67	102	0.012	3	0.74	0.041	0.26	<0.1	0.01	21.5	<0.1	<0.05	3	<0.5	<0.2
1876904	Drill Core	0.050	9	5	1.02	114	0.019	<1	0.68	0.044	0.25	<0.1	<0.01	21.5	<0.1	<0.05	3	<0.5	<0.2
1876905	Rock Pulp	0.060	5	36	0.79	100	0.121	6	1.75	0.121	0.16	0.3	<0.01	4.4	<0.1	<0.05	5	<0.5	<0.2
1876906	Rock Pulp	0.037	<1	13	1.70	8	0.002	3	0.78	0.025	0.07	0.3	2.71	1.5	1.0	>10	6	3.0	8.5
1876907	Drill Core	0.067	10	8	1.04	450	0.032	3	0.95	0.042	0.36	<0.1	0.02	20.2	<0.1	<0.05	3	<0.5	<0.2
1876908	Drill Core	0.087	11	18	1.11	891	0.042	5	1.03	0.041	0.47	<0.1	0.02	19.5	0.1	<0.05	4	<0.5	<0.2
1876909	Drill Core	0.056	9	5	0.86	869	0.023	5	0.78	0.039	0.27	0.1	0.03	20.5	<0.1	<0.05	2	<0.5	<0.2
1876910	Drill Core	0.052	6	5	0.60	189	0.017	3	0.84	0.044	0.27	<0.1	0.02	16.7	<0.1	<0.05	3	<0.5	<0.2
1876911	Drill Core	0.013	1	3	0.48	322	0.012	1	0.51	0.076	0.18	<0.1	<0.01	3.6	<0.1	<0.05	2	<0.5	<0.2
1876912	Drill Core	0.060	8	6	0.95	159	0.028	4	0.93	0.035	0.33	<0.1	0.17	13.6	<0.1	<0.05	3	<0.5	1.1
1876913	Drill Core	0.047	5	4	0.55	311	0.017	4	0.89	0.027	0.30	<0.1	0.04	18.6	<0.1	<0.05	2	<0.5	<0.2
1876914	Drill Core	0.046	4	5	0.38	980	0.007	4	0.73	0.029	0.20	<0.1	0.02	14.5	<0.1	<0.05	2	<0.5	<0.2
1876915	Drill Core	0.052	4	5	0.55	401	0.012	4	0.87	0.025	0.25	<0.1	0.02	20.7	<0.1	<0.05	3	<0.5	<0.2
1876916	Drill Core	0.052	4	5	0.60	144	0.015	4	0.70	0.038	0.21	<0.1	0.03	19.2	<0.1	<0.05	2	<0.5	<0.2
1876917	Drill Core	0.070	5	4	0.47	478	0.011	4	0.95	0.030	0.28	0.1	0.04	20.8	<0.1	<0.05	3	<0.5	<0.2
1876918	Drill Core	0.113	4	5	0.49	163	0.004	5	1.07	0.029	0.33	<0.1	0.04	23.2	<0.1	<0.05	3	<0.5	<0.2
1876919	Drill Core	0.066	5	8	1.02	922	0.005	5	0.81	0.026	0.28	<0.1	0.06	17.9	<0.1	<0.05	2	<0.5	<0.2
1876920	Drill Core	0.055	4	5	0.99	1138	0.007	5	0.74	0.026	0.23	<0.1	0.08	18.7	<0.1	<0.05	2	<0.5	<0.2
1876921	Drill Core	0.038	3	4	1.07	324	0.005	6	0.74	0.020	0.20	0.1	0.03	14.3	<0.1	<0.05	2	<0.5	<0.2
1876922	Drill Core	0.051	2	4	0.34	197	0.005	9	0.78	0.028	0.23	<0.1	0.03	20.4	<0.1	<0.05	3	<0.5	<0.2
1876923	Drill Core	0.078	2	4	0.52	244	0.003	6	0.73	0.028	0.23	<0.1	0.04	19.8	<0.1	<0.05	3	<0.5	<0.2
1876924	Drill Core	0.077	3	4	0.80	309	0.004	6	0.90	0.031	0.34	<0.1	0.05	18.5	<0.1	<0.05	4	<0.5	<0.2
1876925	Drill Core	0.055	3	4	0.83	426	0.003	5	0.63	0.030	0.20	<0.1	0.08	20.6	<0.1	<0.05	2	<0.5	<0.2
1876926	Drill Core	0.059	2	4	0.54	235	0.004	7	0.74	0.027	0.20	<0.1	0.06	19.6	<0.1	<0.05	2	<0.5	<0.2
1876927	Drill Core	0.057	4	4	0.96	1957	0.003	6	0.84	0.021	0.21	<0.1	0.07	18.9	<0.1	<0.05	2	<0.5	<0.2
1876928	Drill Core	0.054	3	5	1.04	293	0.006	4	0.73	0.023	0.19	<0.1	0.13	16.0	<0.1	<0.05	2	<0.5	<0.2
1876929	Drill Core	0.051	3	4	1.33	578	0.002	3	0.61	0.014	0.16	<0.1	0.46	20.6	<0.1	<0.05	2	<0.5	1.0

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 09, 2017

CERTIFICATE OF ANALYSIS WHI17001025.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876930	Drill Core	4.48	<2	0.5	38.4	2.5	38	<0.1	3.6	8.7	685	2.84	1.4	1.6	0.8	99	<0.1	0.1	<0.1	66	4.31
1876931	Drill Core	4.40	13	0.7	29.9	3.0	46	<0.1	3.4	10.6	788	2.99	2.3	15.0	1.4	102	0.2	<0.1	<0.1	61	4.34
1876932	Drill Core	5.27	104	0.8	25.1	2.0	40	0.2	3.5	12.0	1128	3.28	2.1	96.5	1.4	58	0.3	<0.1	<0.1	71	4.27
1876933	Drill Core	4.88	233	2.1	38.2	2.4	44	0.5	3.5	11.5	993	3.12	5.0	285.7	0.9	49	0.2	<0.1	<0.1	48	3.84
1876934	Drill Core	5.00	22	2.3	29.7	2.1	46	<0.1	4.2	11.3	626	3.19	0.7	25.1	1.4	47	<0.1	<0.1	<0.1	53	3.20
1876935	Drill Core	4.55	35	1.1	41.8	2.3	39	0.2	3.9	9.3	997	2.72	1.1	44.0	1.1	74	0.2	<0.1	<0.1	44	4.07
1876936	Drill Core	5.04	3	0.8	43.0	2.1	28	0.1	5.3	6.4	496	2.09	1.3	7.7	1.0	31	<0.1	<0.1	<0.1	31	2.20
1876937	Drill Core	4.17	5	0.6	19.5	2.7	45	0.1	3.5	9.4	502	2.80	0.6	3.7	1.3	65	<0.1	<0.1	<0.1	52	2.79
1876938	Drill Core	3.52	15	0.2	18.3	1.6	23	<0.1	2.3	5.0	408	1.58	0.6	18.1	2.9	49	<0.1	<0.1	<0.1	24	2.01
1876939	Drill Core	5.58	18	0.4	51.1	2.5	53	0.1	5.1	11.6	432	3.19	0.8	16.3	1.8	45	<0.1	0.1	<0.1	44	1.82
1876940	Rock Pulp	0.05	9	8.3	49.1	2.7	45	<0.1	33.0	9.0	462	3.04	5.0	3.4	1.3	55	0.1	0.5	<0.1	63	1.02
1876941	Rock Pulp	0.05	6578	1.4	15.3	21.3	68	0.2	12.1	1.7	865	0.51	4100.4	7484.3	1.5	185	0.5	26.3	0.4	17	24.84
1876942	Drill Core	4.53	59	3.8	59.1	2.1	51	0.3	5.2	11.0	515	3.15	0.6	65.8	2.4	56	<0.1	<0.1	<0.1	46	2.21
1876943	Drill Core	4.94	<2	0.9	43.8	2.1	42	<0.1	5.2	10.2	491	2.92	0.8	1.4	3.2	34	<0.1	<0.1	<0.1	39	1.95
1876944	Drill Core	4.73	16	1.0	47.9	2.7	44	0.1	4.1	12.1	889	3.24	0.8	19.0	1.4	82	0.2	<0.1	<0.1	57	4.26
1876945	Drill Core	4.35	3	0.3	129.5	1.8	49	0.1	8.4	14.7	737	3.50	0.6	0.9	1.4	76	<0.1	<0.1	<0.1	61	3.14
1876946	Drill Core	5.58	17	0.4	40.5	2.3	36	0.1	3.8	8.2	513	2.18	1.2	13.7	2.4	63	<0.1	<0.1	<0.1	34	2.75
1876947	Drill Core	3.82	3	0.3	19.3	1.4	24	<0.1	2.6	4.3	356	1.10	0.7	3.8	4.9	36	<0.1	<0.1	<0.1	12	1.92
1876948	Drill Core	3.94	9	0.5	42.6	2.9	38	<0.1	5.7	8.5	609	2.62	0.9	6.0	1.6	58	<0.1	0.1	<0.1	50	3.60
1876949	Drill Core	4.45	6	0.6	39.0	2.2	44	<0.1	3.7	11.2	691	3.01	1.9	4.2	1.1	57	<0.1	<0.1	<0.1	42	3.54
1876950	Drill Core	2.84	5	0.7	31.1	2.0	42	<0.1	2.9	11.0	695	3.11	2.1	2.0	0.9	51	<0.1	<0.1	<0.1	41	2.95
1876951	Drill Core	6.84	49	11.6	38.6	2.4	46	0.1	4.4	11.8	931	3.30	4.8	60.0	1.2	42	0.2	0.1	<0.1	46	3.99
1876952	Drill Core	3.65	<2	1.0	38.2	2.5	54	<0.1	4.5	14.7	758	3.85	4.3	2.5	0.9	35	<0.1	0.3	<0.1	72	3.89
1876953	Drill Core	4.94	<2	1.0	35.7	2.4	56	<0.1	4.9	14.8	807	3.68	3.1	1.5	1.4	29	<0.1	0.3	<0.1	68	3.86
1876954	Drill Core	2.48	3	1.1	25.5	3.2	50	0.2	5.5	13.4	547	3.19	7.1	<0.5	1.1	22	<0.1	0.4	<0.1	52	2.37
1876955	Drill Core	4.94	3	0.4	39.5	1.4	37	<0.1	5.0	10.0	506	2.85	1.6	1.0	1.4	31	<0.1	0.1	<0.1	29	2.20
1876956	Drill Core	6.51	<2	0.6	37.1	1.7	36	<0.1	5.3	9.9	511	2.98	1.9	<0.5	1.1	29	<0.1	0.1	<0.1	38	2.14
1876957	Drill Core	4.57	12	0.9	33.4	2.5	57	<0.1	5.0	12.7	798	2.96	9.2	11.3	1.1	47	0.1	<0.1	<0.1	39	3.56
1876958	Drill Core	3.05	<2	0.7	37.7	1.9	49	<0.1	5.3	11.4	749	3.33	4.8	<0.5	1.0	31	<0.1	0.4	<0.1	73	2.95
1876959	Drill Core	4.36	<2	0.7	58.4	2.1	58	<0.1	5.6	14.2	867	4.14	4.2	<0.5	1.4	29	<0.1	0.4	<0.1	86	2.93

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 09, 2017

CERTIFICATE OF ANALYSIS WHI17001025.1

Method		AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876930	Drill Core	0.047	3	7	1.07	217	0.003	4	0.67	0.012	0.18	<0.1	0.02	17.5	<0.1	<0.05	2	<0.5	<0.2
1876931	Drill Core	0.049	3	6	1.22	102	0.004	4	0.68	0.016	0.22	<0.1	0.08	18.2	<0.1	<0.05	2	<0.5	<0.2
1876932	Drill Core	0.048	3	5	1.27	85	0.010	3	0.34	0.036	0.08	<0.1	0.22	19.5	<0.1	0.07	<1	<0.5	<0.2
1876933	Drill Core	0.047	2	3	1.07	130	0.003	3	0.56	0.024	0.21	<0.1	0.21	16.3	<0.1	0.10	2	<0.5	0.2
1876934	Drill Core	0.046	3	4	0.79	95	0.004	3	0.61	0.024	0.22	<0.1	0.12	16.7	<0.1	<0.05	2	<0.5	<0.2
1876935	Drill Core	0.042	3	4	0.96	164	0.003	4	0.65	0.016	0.21	<0.1	0.09	16.9	<0.1	<0.05	2	<0.5	<0.2
1876936	Drill Core	0.038	3	3	0.66	402	0.003	4	0.62	0.009	0.19	0.3	0.01	12.2	<0.1	<0.05	2	<0.5	<0.2
1876937	Drill Core	0.059	4	5	0.67	86	0.013	4	0.79	0.012	0.28	0.2	0.03	20.4	0.1	<0.05	3	<0.5	<0.2
1876938	Drill Core	0.022	5	3	0.51	134	0.005	2	0.51	0.025	0.14	<0.1	0.08	7.9	<0.1	<0.05	2	<0.5	<0.2
1876939	Drill Core	0.056	5	7	0.61	211	0.014	3	1.07	0.024	0.30	<0.1	0.03	16.4	<0.1	<0.05	3	<0.5	<0.2
1876940	Rock Pulp	0.061	5	39	0.79	113	0.142	8	1.75	0.122	0.16	0.3	0.02	5.5	<0.1	<0.05	6	<0.5	<0.2
1876941	Rock Pulp	0.017	8	23	5.92	43	0.001	8	0.21	0.010	0.06	3.7	4.47	2.5	16.7	<0.05	<1	<0.5	<0.2
1876942	Drill Core	0.051	6	4	0.76	117	0.014	2	0.74	0.029	0.26	<0.1	0.05	18.5	<0.1	0.08	2	0.7	<0.2
1876943	Drill Core	0.046	4	4	0.63	48	0.010	2	0.80	0.021	0.24	0.2	0.02	14.6	<0.1	<0.05	3	<0.5	<0.2
1876944	Drill Core	0.045	5	5	1.09	48	0.007	3	0.52	0.023	0.18	0.1	0.07	15.5	<0.1	<0.05	2	<0.5	<0.2
1876945	Drill Core	0.097	5	3	0.81	78	0.005	3	0.64	0.025	0.24	<0.1	0.02	14.3	<0.1	0.16	2	<0.5	<0.2
1876946	Drill Core	0.038	4	3	0.67	164	0.004	1	0.63	0.016	0.18	0.2	0.05	12.7	<0.1	<0.05	2	<0.5	<0.2
1876947	Drill Core	0.009	5	2	0.56	59	0.003	<1	0.41	0.018	0.12	0.1	0.08	3.6	<0.1	<0.05	1	<0.5	<0.2
1876948	Drill Core	0.045	3	4	0.81	115	0.008	3	0.68	0.021	0.21	<0.1	0.06	16.1	<0.1	<0.05	2	<0.5	<0.2
1876949	Drill Core	0.047	2	4	0.83	23	0.003	3	0.54	0.016	0.19	<0.1	0.07	17.2	<0.1	<0.05	2	0.5	<0.2
1876950	Drill Core	0.048	1	3	0.79	2134	0.003	3	0.56	0.014	0.21	<0.1	0.05	17.8	<0.1	0.07	1	<0.5	<0.2
1876951	Drill Core	0.043	2	3	1.22	92	0.003	<1	0.43	0.015	0.16	0.1	0.22	16.0	<0.1	0.06	1	<0.5	<0.2
1876952	Drill Core	0.049	2	6	1.17	43	0.003	4	0.56	0.009	0.14	<0.1	0.04	19.8	<0.1	<0.05	2	0.6	<0.2
1876953	Drill Core	0.041	2	5	1.26	45	0.002	3	0.56	0.009	0.15	<0.1	0.20	16.1	<0.1	0.08	1	<0.5	<0.2
1876954	Drill Core	0.045	<1	6	0.74	25	<0.001	3	0.57	0.007	0.11	0.3	0.87	17.6	<0.1	<0.05	2	<0.5	<0.2
1876955	Drill Core	0.042	<1	3	0.61	126	0.002	3	0.52	0.012	0.20	<0.1	0.14	17.0	<0.1	<0.05	1	<0.5	<0.2
1876956	Drill Core	0.046	<1	4	0.61	123	0.004	5	0.53	0.012	0.19	<0.1	0.11	18.4	<0.1	<0.05	1	<0.5	<0.2
1876957	Drill Core	0.041	1	3	1.14	154	<0.001	2	0.60	0.014	0.23	<0.1	0.17	17.0	<0.1	<0.05	2	<0.5	<0.2
1876958	Drill Core	0.050	2	6	1.00	26	0.005	2	0.62	0.008	0.10	<0.1	0.07	19.6	<0.1	<0.05	2	<0.5	<0.2
1876959	Drill Core	0.055	2	7	1.01	121	0.007	5	0.64	0.008	0.14	<0.1	0.04	24.6	<0.1	<0.05	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 09, 2017

CERTIFICATE OF ANALYSIS WHI17001025.1

Method		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1876960	Drill Core	4.38	<2	0.7	57.4	2.0	61	<0.1	7.1	15.0	959	4.31	3.5	<0.5	1.6	31	<0.1	0.4	<0.1	87	3.12
1876961	Drill Core	5.27	4	2.3	29.9	2.0	61	<0.1	5.3	13.9	850	3.88	3.9	1.3	1.2	29	<0.1	0.4	<0.1	68	3.70
1876962	Drill Core	4.91	114	1.5	23.0	1.6	28	<0.1	7.0	6.4	501	1.91	18.8	87.6	0.4	18	<0.1	0.7	<0.1	23	1.94
1876963	Drill Core	7.37	84	1.1	20.8	2.0	47	<0.1	4.6	10.6	844	3.17	7.2	64.2	1.0	40	0.2	0.3	<0.1	36	3.52
1876964	Drill Core	2.15	87	0.3	9.3	1.8	62	<0.1	3.8	13.0	1002	3.88	2.2	51.3	1.4	51	0.1	0.2	<0.1	35	4.47
1876965	Drill Core	6.44	10	0.2	30.6	1.6	46	<0.1	4.9	11.3	731	2.94	4.8	7.2	1.1	29	<0.1	0.3	<0.1	46	3.33
1876966	Drill Core	5.77	<2	0.4	23.7	1.2	56	<0.1	4.9	12.5	801	3.29	3.4	<0.5	1.5	27	<0.1	0.2	<0.1	70	3.07
1876967	Drill Core	4.08	12	0.4	35.5	1.7	52	0.1	4.8	11.7	742	3.45	6.8	11.1	1.3	28	<0.1	0.3	<0.1	63	3.32
1876968	Drill Core	4.15	29	0.7	35.8	1.9	57	<0.1	6.1	14.7	816	3.76	3.5	55.4	1.1	30	<0.1	0.2	<0.1	72	3.78
1876969	Drill Core	4.35	5	0.5	34.5	1.8	60	<0.1	6.3	14.2	805	3.80	2.9	4.7	1.2	33	<0.1	0.1	<0.1	70	3.90
1876970	Drill Core	4.60	9	1.4	54.0	3.9	69	<0.1	6.7	16.3	926	3.89	4.4	7.6	1.5	46	<0.1	0.4	<0.1	61	4.30
1876971	Drill Core	4.95	90	0.3	35.2	2.4	43	0.3	7.2	10.0	691	2.86	2.1	79.6	1.7	40	0.1	<0.1	<0.1	39	2.96
1876972	Drill Core	5.06	39	0.4	18.6	4.3	55	0.2	15.7	18.0	1118	3.72	3.5	37.4	1.5	67	<0.1	<0.1	<0.1	54	3.81
1876973	Drill Core	5.25	<2	1.3	43.1	5.3	64	<0.1	34.5	22.6	1257	4.67	1.4	3.9	1.2	62	0.1	0.3	<0.1	81	3.65
1876974	Drill Core	4.91	<2	1.1	41.1	4.8	66	<0.1	18.8	21.5	1185	4.45	3.9	1.1	1.3	77	0.1	<0.1	<0.1	67	4.95
1876975	Rock Pulp	0.05	7	7.9	53.1	2.5	44	<0.1	33.8	9.4	468	3.09	4.6	1.8	1.1	51	0.1	0.3	<0.1	65	1.00
1876976	Rock Pulp	0.09	426	46.7	>10000	935.0	>10000	58.1	17.5	3.8	607	12.43	132.6	549.4	<0.1	36	242.6	24.3	11.3	8	1.63
1876977	Drill Core	5.45	5	0.9	25.0	11.7	58	<0.1	19.5	19.9	1134	3.96	14.4	1.7	2.3	95	0.2	0.3	0.2	62	3.61
1876978	Drill Core	6.36	3	0.8	18.6	19.6	64	<0.1	16.2	9.6	387	1.80	26.0	<0.5	6.3	114	0.2	0.1	0.3	14	1.17
1876979	Drill Core	6.60	<2	0.3	9.9	12.6	32	<0.1	8.7	4.5	284	1.20	11.7	<0.5	5.1	95	<0.1	<0.1	0.1	7	1.39
1876980	Drill Core	6.83	<2	0.3	26.1	18.2	62	<0.1	16.5	8.7	259	1.77	17.5	<0.5	6.9	55	0.2	<0.1	0.3	14	0.57
1876981	Drill Core	7.20	<2	0.2	25.7	18.2	49	<0.1	16.5	7.4	232	1.42	15.1	<0.5	6.2	50	0.2	<0.1	0.3	11	0.67
1876982	Drill Core	6.81	<2	0.2	22.6	13.0	41	<0.1	13.0	7.3	300	1.52	11.1	<0.5	5.0	50	<0.1	<0.1	0.2	11	0.70
1876983	Drill Core	8.88	3	1.9	321.8	13.3	71	59.7	37.6	8.6	327	1.80	22.6	<0.5	7.0	73	<0.1	<0.1	0.2	15	0.85

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 09, 2017

CERTIFICATE OF ANALYSIS WHI17001025.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1876960	Drill Core	0.061	1	6	1.13	137	0.005	3	0.58	0.007	0.12	<0.1	0.08	22.1	<0.1	<0.05	2	<0.5	<0.2
1876961	Drill Core	0.038	2	6	1.30	66	0.002	3	0.53	0.009	0.17	<0.1	0.46	16.9	<0.1	0.16	1	<0.5	<0.2
1876962	Drill Core	0.012	2	5	0.72	22	<0.001	2	0.27	0.003	0.05	0.1	0.84	8.2	<0.1	0.08	<1	<0.5	<0.2
1876963	Drill Core	0.036	2	3	1.35	74	0.001	2	0.46	0.005	0.16	<0.1	3.53	15.6	<0.1	0.13	1	<0.5	<0.2
1876964	Drill Core	0.030	5	3	1.83	71	<0.001	3	0.59	0.006	0.07	<0.1	1.18	19.5	<0.1	<0.05	1	<0.5	<0.2
1876965	Drill Core	0.036	2	5	1.21	114	0.001	2	0.51	0.007	0.18	<0.1	0.68	17.6	<0.1	0.17	1	<0.5	<0.2
1876966	Drill Core	0.047	2	6	1.20	129	0.004	2	0.65	0.007	0.08	<0.1	0.85	19.7	<0.1	0.17	1	<0.5	<0.2
1876967	Drill Core	0.046	2	5	1.25	271	0.003	4	0.55	0.009	0.13	0.1	0.97	17.5	<0.1	0.33	1	<0.5	<0.2
1876968	Drill Core	0.047	2	7	1.38	541	0.003	3	0.56	0.009	0.14	<0.1	0.25	19.4	<0.1	0.28	1	<0.5	<0.2
1876969	Drill Core	0.050	2	6	1.45	420	0.002	4	0.60	0.011	0.17	0.1	0.15	18.4	<0.1	0.11	1	<0.5	<0.2
1876970	Drill Core	0.045	3	4	1.65	378	0.001	3	0.57	0.010	0.22	<0.1	1.32	15.7	<0.1	0.32	2	<0.5	<0.2
1876971	Drill Core	0.039	2	5	1.17	375	0.001	3	0.57	0.012	0.20	<0.1	0.37	13.6	<0.1	0.20	1	<0.5	0.2
1876972	Drill Core	0.047	3	17	1.63	335	0.001	2	0.41	0.029	0.18	<0.1	0.41	16.0	0.2	0.39	1	<0.5	<0.2
1876973	Drill Core	0.050	2	47	1.81	426	0.003	3	0.48	0.037	0.27	<0.1	0.10	22.4	0.2	0.17	2	<0.5	<0.2
1876974	Drill Core	0.048	3	16	2.12	362	0.001	1	0.41	0.031	0.20	<0.1	0.14	16.4	0.1	0.32	2	0.8	<0.2
1876975	Rock Pulp	0.057	5	40	0.80	110	0.145	5	1.80	0.122	0.16	0.4	0.02	5.0	<0.1	<0.05	5	<0.5	<0.2
1876976	Rock Pulp	0.035	<1	14	1.76	10	0.002	1	0.82	0.026	0.07	0.4	2.85	1.7	1.0	>10	6	3.4	9.0
1876977	Drill Core	0.046	5	17	1.51	526	<0.001	4	0.59	0.033	0.29	<0.1	0.18	17.0	<0.1	0.19	2	<0.5	<0.2
1876978	Drill Core	0.008	11	8	0.40	1093	<0.001	2	0.76	0.031	0.24	<0.1	0.11	5.0	<0.1	0.06	2	<0.5	<0.2
1876979	Drill Core	0.004	9	5	0.35	1320	<0.001	2	0.42	0.018	0.15	<0.1	0.07	2.6	<0.1	0.07	1	<0.5	<0.2
1876980	Drill Core	0.005	17	8	0.43	302	0.001	4	0.63	0.024	0.24	<0.1	0.07	4.2	<0.1	<0.05	3	<0.5	<0.2
1876981	Drill Core	0.004	16	7	0.39	50	0.001	4	0.56	0.023	0.22	<0.1	0.03	4.2	<0.1	0.08	3	<0.5	<0.2
1876982	Drill Core	0.005	14	8	0.37	64	0.001	3	0.44	0.022	0.18	<0.1	0.04	3.8	<0.1	<0.05	2	<0.5	<0.2
1876983	Drill Core	0.009	18	9	0.39	108	<0.001	3	0.56	0.029	0.22	82.4	0.03	4.4	<0.1	0.06	2	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada

PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike

Report Date: November 09, 2017

QUALITY CONTROL REPORT WHI17001025.1

	Method	WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
Pulp Duplicates																					
1876850	Drill Core	4.33	3	12.1	25.0	6.4	77	<0.1	7.8	19.6	1185	5.11	3.7	2.2	2.0	55	0.1	0.2	<0.1	129	2.74
REP 1876850	QC		3																		
1876861	Drill Core	4.66	37	9.3	39.3	4.3	72	0.1	13.9	22.1	1557	5.98	5.0	42.1	1.0	87	0.4	0.3	<0.1	166	4.65
REP 1876861	QC			8.6	39.4	4.1	64	0.1	13.6	24.5	1548	5.92	4.2	46.7	0.9	82	0.4	0.3	<0.1	162	4.62
1876895	Drill Core	1.81	537	23.5	56.6	11.3	50	2.4	4.9	14.2	1652	3.46	8.9	506.9	0.6	103	0.6	0.3	0.1	37	6.77
REP 1876895	QC			25.4	58.2	11.7	51	2.5	5.5	14.9	1629	3.47	9.5	487.7	0.7	106	0.6	0.3	0.1	37	6.78
1876917	Drill Core	4.38	15	1.0	61.8	2.3	55	0.2	8.1	14.5	758	3.94	1.2	33.4	1.6	122	<0.1	<0.1	<0.1	78	4.26
REP 1876917	QC		11																		
1876930	Drill Core	4.48	<2	0.5	38.4	2.5	38	<0.1	3.6	8.7	685	2.84	1.4	1.6	0.8	99	<0.1	0.1	<0.1	66	4.31
REP 1876930	QC			0.6	40.1	2.6	39	<0.1	3.5	9.7	678	2.85	2.0	1.9	0.9	98	<0.1	0.1	<0.1	66	4.31
1876951	Drill Core	6.84	49	11.6	38.6	2.4	46	0.1	4.4	11.8	931	3.30	4.8	60.0	1.2	42	0.2	0.1	<0.1	46	3.99
REP 1876951	QC		49																		
1876965	Drill Core	6.44	10	0.2	30.6	1.6	46	<0.1	4.9	11.3	731	2.94	4.8	7.2	1.1	29	<0.1	0.3	<0.1	46	3.33
REP 1876965	QC			0.4	28.9	1.6	42	<0.1	4.7	10.9	712	2.90	4.7	7.7	1.1	29	<0.1	0.3	<0.1	45	3.27
REP 1876969	QC		6																		
1876981	Drill Core	7.20	<2	0.2	25.7	18.2	49	<0.1	16.5	7.4	232	1.42	15.1	<0.5	6.2	50	0.2	<0.1	0.3	11	0.67
REP 1876981	QC			0.2	27.0	19.1	49	<0.1	17.0	7.5	238	1.46	15.6	<0.5	6.4	52	0.1	<0.1	0.4	12	0.68
Core Reject Duplicates																					
1876867	Drill Core	6.12	1131	15.7	18.0	6.4	51	2.2	5.4	23.4	1393	5.14	11.2	1265.6	2.5	68	0.6	0.5	<0.1	84	2.52
DUP 1876867	QC		1110	16.0	17.5	6.4	59	2.3	5.7	26.1	1384	5.13	10.8	1233.8	2.4	71	0.7	0.4	<0.1	84	2.52
1876901	Drill Core	4.84	21	0.9	58.4	2.3	48	<0.1	3.3	10.1	727	3.22	0.7	21.5	2.5	45	<0.1	<0.1	<0.1	58	2.13
DUP 1876901	QC		26	0.7	54.1	2.1	47	<0.1	3.1	10.0	700	3.20	1.1	29.3	2.4	40	0.1	<0.1	<0.1	58	2.12
1876935	Drill Core	4.55	35	1.1	41.8	2.3	39	0.2	3.9	9.3	997	2.72	1.1	44.0	1.1	74	0.2	<0.1	<0.1	44	4.07
DUP 1876935	QC		38	1.0	42.5	2.1	38	0.2	3.8	9.8	953	2.77	1.0	37.8	1.0	71	0.2	<0.1	<0.1	43	3.97
1876969	Drill Core	4.35	5	0.5	34.5	1.8	60	<0.1	6.3	14.2	805	3.80	2.9	4.7	1.2	33	<0.1	0.1	<0.1	70	3.90
DUP 1876969	QC		5	0.5	39.3	1.7	60	<0.1	6.6	13.7	822	3.68	3.0	4.6	1.2	32	<0.1	0.1	<0.1	69	3.83
Reference Materials																					
STD DS11	Standard			14.3	161.6	140.1	356	1.7	72.4	14.7	1075	3.14	40.1	68.5	8.2	69	2.6	7.9	11.3	49	1.06

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 09, 2017

QUALITY CONTROL REPORT WHI17001025.1

	Method	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
Pulp Duplicates																			
1876850	Drill Core	0.084	8	27	0.95	366	0.009	6	0.71	0.043	0.26	<0.1	0.02	28.0	<0.1	<0.05	3	<0.5	<0.2
REP 1876850	QC																		
1876861	Drill Core	0.081	7	13	1.90	105	0.030	4	0.64	0.052	0.32	<0.1	0.04	24.3	0.1	<0.05	3	<0.5	<0.2
REP 1876861	QC	0.078	6	11	1.88	96	0.029	5	0.62	0.051	0.32	<0.1	0.04	24.9	0.1	<0.05	3	<0.5	<0.2
1876895	Drill Core	0.028	2	3	2.10	1571	0.003	3	0.58	0.007	0.13	0.2	0.08	19.5	<0.1	0.10	1	0.5	1.3
REP 1876895	QC	0.029	2	3	2.07	1505	0.003	3	0.60	0.008	0.13	0.2	0.10	20.2	<0.1	0.10	1	0.6	1.3
1876917	Drill Core	0.070	5	4	0.47	478	0.011	4	0.95	0.030	0.28	0.1	0.04	20.8	<0.1	<0.05	3	<0.5	<0.2
REP 1876917	QC																		
1876930	Drill Core	0.047	3	7	1.07	217	0.003	4	0.67	0.012	0.18	<0.1	0.02	17.5	<0.1	<0.05	2	<0.5	<0.2
REP 1876930	QC	0.047	3	7	1.07	217	0.003	5	0.68	0.012	0.19	<0.1	0.01	18.4	<0.1	<0.05	2	<0.5	<0.2
1876951	Drill Core	0.043	2	3	1.22	92	0.003	<1	0.43	0.015	0.16	0.1	0.22	16.0	<0.1	0.06	1	<0.5	<0.2
REP 1876951	QC																		
1876965	Drill Core	0.036	2	5	1.21	114	0.001	2	0.51	0.007	0.18	<0.1	0.68	17.6	<0.1	0.17	1	<0.5	<0.2
REP 1876965	QC	0.035	2	4	1.21	121	0.001	3	0.51	0.007	0.18	<0.1	0.68	17.7	<0.1	0.17	1	<0.5	<0.2
REP 1876969	QC																		
1876981	Drill Core	0.004	16	7	0.39	50	0.001	4	0.56	0.023	0.22	<0.1	0.03	4.2	<0.1	0.08	3	<0.5	<0.2
REP 1876981	QC	0.004	16	8	0.39	50	0.001	3	0.57	0.024	0.22	<0.1	0.04	4.0	0.1	0.08	3	<0.5	<0.2
Core Reject Duplicates																			
1876867	Drill Core	0.047	8	2	1.00	111	0.001	2	0.47	0.039	0.05	<0.1	0.36	20.3	<0.1	<0.05	1	1.4	2.0
DUP 1876867	QC	0.053	8	3	0.99	94	0.001	1	0.49	0.042	0.05	<0.1	0.35	18.6	<0.1	<0.05	1	0.7	1.7
1876901	Drill Core	0.053	6	5	0.63	173	0.012	5	0.74	0.033	0.25	<0.1	0.01	21.8	<0.1	<0.05	2	<0.5	<0.2
DUP 1876901	QC	0.054	6	5	0.62	162	0.011	4	0.74	0.032	0.25	<0.1	<0.01	20.9	<0.1	<0.05	2	<0.5	<0.2
1876935	Drill Core	0.042	3	4	0.96	164	0.003	4	0.65	0.016	0.21	<0.1	0.09	16.9	<0.1	<0.05	2	<0.5	<0.2
DUP 1876935	QC	0.050	4	4	0.93	151	0.003	3	0.70	0.018	0.23	<0.1	0.08	15.6	<0.1	<0.05	2	<0.5	<0.2
1876969	Drill Core	0.050	2	6	1.45	420	0.002	4	0.60	0.011	0.17	0.1	0.15	18.4	<0.1	0.11	1	<0.5	<0.2
DUP 1876969	QC	0.047	2	6	1.45	403	0.002	2	0.59	0.011	0.16	0.1	0.13	19.4	<0.1	0.11	1	<0.5	<0.2
Reference Materials																			
STD DS11	Standard	0.073	19	59	0.84	364	0.101	8	1.14	0.071	0.40	2.8	0.28	2.6	4.7	0.28	5	1.8	4.6

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 09, 2017

QUALITY CONTROL REPORT WHI17001025.1

		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
STD DS11	Standard			14.5	145.8	137.3	337	1.7	78.3	13.9	1049	3.10	43.8	77.4	7.8	66	2.3	7.7	12.3	50	1.06
STD DS11	Standard			14.7	158.6	145.0	346	1.9	81.7	14.3	1047	3.17	43.5	180.0	8.5	70	2.7	8.2	11.8	48	1.07
STD DS11	Standard			15.7	151.2	131.7	330	1.7	82.8	13.1	1031	3.15	42.2	74.7	8.1	70	2.4	8.6	11.6	48	1.09
STD DS11	Standard			14.4	153.8	131.8	361	1.6	75.6	13.6	1030	3.07	41.1	74.4	7.7	64	2.3	7.3	11.5	47	1.05
STD OXC129	Standard			1.4	29.6	6.8	47	<0.1	87.7	19.9	444	3.18	<0.5	204.4	1.9	187	<0.1	<0.1	<0.1	55	0.71
STD OXC129	Standard			1.2	28.2	5.8	39	<0.1	81.6	21.4	418	3.03	0.6	190.5	1.7	188	<0.1	<0.1	<0.1	53	0.77
STD OXC129	Standard			1.4	28.3	6.4	41	<0.1	86.9	21.2	445	3.12	<0.5	199.3	1.8	185	<0.1	<0.1	<0.1	52	0.70
STD OXC129	Standard			1.4	27.6	5.9	38	<0.1	70.8	20.5	408	3.14	<0.5	192.4	1.7	185	<0.1	<0.1	<0.1	52	0.75
STD OXC129	Standard			1.4	30.9	6.2	48	<0.1	88.2	21.6	399	2.98	<0.5	199.6	1.9	199	<0.1	<0.1	<0.1	49	0.66
STD OXC145	Standard		205																		
STD OXC145	Standard		214																		
STD OXC145	Standard		213																		
STD OXC145	Standard		217																		
STD OXC145	Standard		215																		
STD OXC145	Standard		202																		
STD OXH139	Standard		1303																		
STD OXH139	Standard		1258																		
STD OXH139	Standard		1325																		
STD OXH139	Standard		1304																		
STD OXH139	Standard		1305																		
STD OXH139	Standard		1258																		
STD OXC145 Expected			212																		
STD OXH139 Expected			1312																		
STD OXC129 Expected				1.3	28	6.3	42.9		79.5	20.3	421	3.065	0.6	195	1.9					51	0.665
STD DS11 Expected				14.6	156	138	345	1.71	81.9	14.2	1055	3.2082	42.8	79	7.65	67.3	2.37	8.74	12.2	50	1.063
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 09, 2017

QUALITY CONTROL REPORT WHI17001025.1

		AQ201 P % 0.001	AQ201 La ppm 1	AQ201 Cr ppm 1	AQ201 Mg % 0.01	AQ201 Ba ppm 1	AQ201 Ti % 0.001	AQ201 B ppm 1	AQ201 Al % 0.01	AQ201 Na % 0.001	AQ201 K % 0.01	AQ201 W ppm 0.1	AQ201 Hg ppm 0.01	AQ201 Sc ppm 0.1	AQ201 Tl ppm 0.1	AQ201 S % 0.05	AQ201 Ga ppm 1	AQ201 Se ppm 0.5	AQ201 Te ppm 0.2
STD DS11	Standard	0.069	20	60	0.83	373	0.095	8	1.18	0.074	0.41	3.0	0.25	3.3	4.8	0.27	5	2.3	4.6
STD DS11	Standard	0.066	17	60	0.85	341	0.103	7	1.14	0.070	0.40	3.1	0.28	2.9	5.2	0.27	5	2.8	4.7
STD DS11	Standard	0.067	20	61	0.84	360	0.106	10	1.18	0.072	0.41	2.6	0.26	3.4	5.2	0.27	5	2.4	4.9
STD DS11	Standard	0.065	18	55	0.84	358	0.092	5	1.13	0.070	0.40	2.9	0.26	2.8	4.5	0.27	5	2.0	4.5
STD OXC129	Standard	0.101	13	54	1.66	53	0.403	1	1.63	0.630	0.39	<0.1	<0.01	0.8	<0.1	<0.05	6	<0.5	<0.2
STD OXC129	Standard	0.095	12	56	1.58	52	0.418	1	1.61	0.586	0.36	0.1	<0.01	0.7	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.096	13	57	1.59	51	0.450	<1	1.59	0.592	0.37	<0.1	0.01	0.9	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.105	12	51	1.58	50	0.419	<1	1.66	0.607	0.37	<0.1	<0.01	1.1	<0.1	<0.05	5	<0.5	<0.2
STD OXC129	Standard	0.101	13	53	1.56	51	0.395	2	1.54	0.576	0.36	<0.1	<0.01	0.8	<0.1	<0.05	6	<0.5	<0.2
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXC145	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXH139	Standard																		
STD OXC145 Expected																			
STD OXH139 Expected																			
STD OXC129 Expected		0.102	13	52	1.545	50	0.4	1	1.58	0.6	0.37			1.1			5.6		
STD DS11 Expected		0.0701	18.6	61.5	0.85	385	0.0976		1.1795	0.0762	0.4	2.9	0.3	3.4	4.9	0.2835	5.1	1.9	4.56
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 09, 2017

QUALITY CONTROL REPORT WHI17001025.1

		WGHT	FA350	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201	AQ201
		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
BLK	Blank		<2																		
BLK	Blank		4																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		4																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
Prep Wash																					
ROCK-WHI	Prep Blank		<2	0.7	4.6	1.0	34	<0.1	0.6	3.6	628	1.89	1.3	<0.5	2.1	19	<0.1	<0.1	<0.1	23	0.70
ROCK-WHI	Prep Blank		<2	0.7	5.6	1.1	35	<0.1	0.7	3.7	492	1.72	0.7	<0.5	2.5	21	<0.1	<0.1	<0.1	20	0.57

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 09, 2017

QUALITY CONTROL REPORT WHI17001025.1

		AQ201 P % 0.001	AQ201 La ppm 1	AQ201 Cr ppm 1	AQ201 Mg % 0.01	AQ201 Ba ppm 1	AQ201 Ti % 0.001	AQ201 B ppm 1	AQ201 Al % 0.01	AQ201 Na % 0.001	AQ201 K % 0.01	AQ201 W ppm 0.1	AQ201 Hg ppm 0.01	AQ201 Sc ppm 0.1	AQ201 Tl ppm 0.1	AQ201 S % 0.05	AQ201 Ga ppm 1	AQ201 Se ppm 0.5	AQ201 Te ppm 0.2
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
Prep Wash																			
ROCK-WHI	Prep Blank	0.038	5	3	0.50	76	0.074	<1	0.83	0.070	0.08	<0.1	0.01	2.2	<0.1	0.06	3	<0.5	<0.2
ROCK-WHI	Prep Blank	0.034	5	2	0.47	49	0.066	<1	0.79	0.060	0.07	<0.1	<0.01	2.4	<0.1	<0.05	3	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Submitted By: Daithi Mac Gerailt
Receiving Lab: Canada-Whitehorse
Received: November 08, 2017
Report Date: November 16, 2017
Page: 1 of 2

CERTIFICATE OF ANALYSIS WHI17001025M.1

CLIENT JOB INFORMATION

Project: Lucky Strike
Shipment ID: DDLS-17-09
P.O. Number
Number of Samples: 4

SAMPLE DISPOSAL

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PUL85	4	Pulverize to 85% passing 200 mesh			VAN
SPTRF	4	Split samples by riffle splitter			WHI
FS652	4	Metallic Sieve 500g to 150 mesh			VAN
FS652	4	Metallic Fire Assay - duplicate minus fraction analysis	50	Completed	VAN
EN002	4	Environmental disposal charge-Fire assay lead waste			VAN
SHP01	4	Per sample shipping charges for branch shipments			VAN
FA550	4	Lead collection fire assay 50G fusion - Grav finish	50	Completed	VAN
FA550	4	Lead collection fire assay 50G fusion - Grav finish	50	Completed	VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources Ltd.
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3
Canada

CC:



This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 16, 2017

CERTIFICATE OF ANALYSIS WHI17001025M.1

		Method	M150	FA450	FA450	FS652	FS652	FS652	FA550	FA550
		Analyte	TotWt	-Au	-Au + Au	Wt	+ Au	Au Total	-Au	-Au
		Unit	g	gm/t	gm/t	g	gm/t	gm/t	gm/t	gm/t
		MDL	1	0.005	0.005	0.01	0.05	0.05	0.9	0.9
1876868	Drill Core		437	>10	>10	37.79	16.99	15.40	15.3	15.2
1876869	Drill Core		490	>10	>10	36.17	40.64	26.03	24.8	25.0
1876872	Drill Core		480	>10	>10	31.48	86.37	54.06	51.8	51.8
1876873	Drill Core		532	>10	>10	32.58	11.85	11.75	11.5	12.0

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Goldstrike Resources Ltd.**
1300 - 1111 West Georgia Street
Vancouver British Columbia V6E 4M3 Canada

Project: Lucky Strike
Report Date: November 16, 2017

QUALITY CONTROL REPORT WHI17001025M.1

		Method	M150	FA450	FA450	FS652	FS652	FS652	FA550	FA550
		Analyte	TotWt	-Au	-Au	+ Au Wt	+ Au	Au Total	-Au	-Au
		Unit	g	gm/t	gm/t	g	gm/t	gm/t	gm/t	gm/t
		MDL	1	0.005	0.005	0.01	0.05	0.05	0.9	0.9
Pulp Duplicates										
1876868	Drill Core		437	>10	>10	37.79	16.99	15.40	15.3	15.2
REP 1876868	QC									15.4
1876869	Drill Core		490	>10	>10	36.17	40.64	26.03	24.8	25.0
REP 1876869	QC								24.7	
Reference Materials										
STD AGPROOF	Standard									<0.9
STD OXC145	Standard				0.219					
STD OXC145	Standard			0.212						
STD OXH139	Standard				1.360					
STD OXH139	Standard			1.329						
STD OXN134	Standard				7.948					
STD OXN134	Standard			7.883						
STD OXQ90	Standard					49.94	24.49			
STD OXQ90	Standard					50.05	25.09			
STD OXQ90	Standard								25.0	
STD SP49	Standard									18.4
STD SQ70	Standard									39.7
STD OXQ90 Expected							24.88			
BLK	Blank					50.00	<0.05			
BLK	Blank					50.00	<0.05			
BLK	Blank								<0.9	
BLK	Blank									<0.9
BLK	Blank				<0.005					
BLK	Blank				<0.005					
BLK	Blank			<0.005						
BLK	Blank			0.007						
Prep Wash										
ROCK-WHI	Prep Blank		474	<0.005	<0.005	39.55	<0.05	<0.05		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

APPENDIX 5

AIRBORNE LIDAR TOPOGRAPHIC SURVEY REPORT

Lucky Strike Property

LiDAR Survey

Barker Creek area,
Dawson Mining District

Goldstrike Resources Ltd.



Legend

- Mineralized zones
- Lucky Strike outline

Background: NW hillshade image generated from DEM

0 1,250 2,500 5,000 Meters

NTS Mapsheets: 115o02, 03, 06
Datum: NAD83 Zone 7
Date: April 18th, 2018

GOLDSTRIKE RESOURCES LTD TSX.V:GSR

APPENDIX 6

PROPERTY CLAIMS SUMMARY TABLE

Grant No	Claim Name	Claim Owner	Recording Date	Staking Date	Expiry Date	Map No.
YD155903	LUCKY 1	Terry (Terrence) King - 100%	2011-08-23	2011-08-21	2030-12-18	115O03
YD155904	LUCKY 2	Terry (Terrence) King - 100%	2011-08-23	2011-08-21	2030-12-18	115O03
YD155905	LUCKY 3	Terry (Terrence) King - 100%	2011-08-23	2011-08-21	2030-12-18	115O03
YC99489	Lucky 1	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC99490	Lucky 2	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC99491	Lucky 3	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC99492	Lucky 4	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC99493	Lucky 5	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC99494	Lucky 6	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC99495	Lucky 7	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC99496	Lucky 8	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC99497	Lucky 9	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC99498	Lucky 10	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC99499	Lucky 11	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC99500	Lucky 12	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YD05999	Lucky 13	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YD06000	Lucky 14	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YD06001	Lucky 15	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YD06002	Lucky 16	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YD06003	Lucky 17	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YD06004	Lucky 18	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YD06005	Lucky 19	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YD06006	Lucky 20	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YD06007	Lucky 21	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YD06008	Lucky 22	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YD06009	Lucky 23	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03

YD06010	Lucky 24	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06011	Lucky 25	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06012	Lucky 26	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06013	Lucky 27	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06014	Lucky 28	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06015	Lucky 29	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06016	Lucky 30	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06017	Lucky 31	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06018	Lucky 32	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06019	Lucky 33	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06020	Lucky 34	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06021	Lucky 35	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06022	Lucky 36	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06023	Lucky 37	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06024	Lucky 38	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06025	Lucky 39	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06026	Lucky 40	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06027	Lucky 41	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06028	Lucky 42	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06029	Lucky 43	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06030	Lucky 44	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06031	Lucky 45	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06032	Lucky 46	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06033	Lucky 47	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06034	Lucky 48	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06035	Lucky 49	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06036	Lucky 50	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03

YD06037	Lucky 51	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06038	Lucky 52	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06039	Lucky 53	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06040	Lucky 54	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06041	Lucky 55	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06042	Lucky 56	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06043	Lucky 57	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06044	Lucky 58	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06045	Lucky 59	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06046	Lucky 60	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06047	Lucky 61	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06048	Lucky 62	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06049	Lucky 63	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06050	Lucky 64	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06051	Lucky 65	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06052	Lucky 66	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06053	Lucky 67	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06054	Lucky 68	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06055	Lucky 69	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06056	Lucky 70	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06057	Lucky 71	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06058	Lucky 72	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06059	Lucky 73	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06060	Lucky 74	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06061	Lucky 75	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06062	Lucky 76	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06063	Lucky 77	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03

YD06064	Lucky 78	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06065	Lucky 79	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06066	Lucky 80	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06067	Lucky 81	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06068	Lucky 82	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06069	Lucky 83	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06070	Lucky 84	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06071	Lucky 85	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06072	Lucky 86	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06073	Lucky 87	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06074	Lucky 88	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06075	Lucky 89	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06076	Lucky 90	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06077	Lucky 91	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06078	Lucky 92	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06079	Lucky 93	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06080	Lucky 94	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06081	Lucky 95	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06082	Lucky 96	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06083	Lucky 97	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06084	Lucky 98	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06085	Lucky 99	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YD06086	Lucky 100	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-27	2031-12-18	115O03
YC91801	Lucky 101	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91802	Lucky 102	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91803	Lucky 103	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91804	Lucky 104	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03

YC91805	Lucky 105	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91806	Lucky 106	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91807	Lucky 107	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91808	Lucky 108	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91809	Lucky 109	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91810	Lucky 110	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91811	Lucky 111	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91812	Lucky 112	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91813	Lucky 113	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91814	Lucky 114	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91815	Lucky 115	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91816	Lucky 116	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91817	Lucky 117	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91818	Lucky 118	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91819	Lucky 119	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91820	Lucky 120	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-28	2031-12-18	115O03
YC91821	Lucky 121	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91822	Lucky 122	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91823	Lucky 123	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91824	Lucky 124	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91829	Lucky 129	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91830	Lucky 130	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91831	Lucky 131	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91832	Lucky 132	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91833	Lucky 133	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91834	Lucky 134	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91835	Lucky 135	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03

YC91836	Lucky 136	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91837	Lucky 137	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91838	Lucky 138	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91839	Lucky 139	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91840	Lucky 140	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91841	Lucky 141	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91842	Lucky 142	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91843	Lucky 143	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91844	Lucky 144	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91845	Lucky 145	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91846	Lucky 146	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91847	Lucky 147	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91848	Lucky 148	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91849	Lucky 149	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91850	Lucky 150	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91851	Lucky 151	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91852	Lucky 152	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91853	Lucky 153	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91854	Lucky 154	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91855	Lucky 155	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91856	Lucky 156	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91857	Lucky 157	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91858	Lucky 158	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-28	2031-12-18	115O03
YC91859	Lucky 159	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-29	2031-12-18	115O03
YC91860	Lucky 160	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-29	2031-12-18	115O03
YC91861	Lucky 161	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-29	2031-12-18	115O03
YC91862	Lucky 162	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-29	2031-12-18	115O03

YC91863	Lucky 163	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-29	2031-12-18	115O03
YC91864	Lucky 164	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-29	2031-12-18	115O03
YC91865	Lucky 165	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-29	2031-12-18	115O03
YC91866	Lucky 166	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-29	2031-12-18	115O03
YC91869	Lucky 169	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-29	2031-12-18	115O03
YC91870	Lucky 170	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-29	2031-12-18	115O03
YC91871	Lucky 171	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-29	2031-12-18	115O03
YC91872	Lucky 172	Cloudbreak Resources Ltd - 100%	2009-06-29	2009-06-29	2031-12-18	115O03
YC98701	Strike 1	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98702	Strike 2	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98703	Strike 3	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98704	Strike 4	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98705	Strike 5	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98706	Strike 6	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98707	Strike 7	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98708	Strike 8	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98709	Strike 9	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98710	Strike 10	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98721	Strike 21	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98722	Strike 22	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98723	Strike 23	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98724	Strike 24	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98725	Strike 25	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98726	Strike 26	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98727	Strike 27	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98728	Strike 28	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98729	Strike 29	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03

YC98730	Strike 30	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98741	Strike 41	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98742	Strike 42	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98743	Strike 43	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98744	Strike 44	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98745	Strike 45	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98746	Strike 46	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98747	Strike 47	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98748	Strike 48	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98749	Strike 49	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98750	Strike 50	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98761	Strike 61	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98762	Strike 62	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98763	Strike 63	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98764	Strike 64	Goldstrike Resources Ltd. - 100%	2009-06-18	2009-06-13	2030-12-18	115O03
YC98765	Strike 65	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98766	Strike 66	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98767	Strike 67	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98768	Strike 68	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98769	Strike 69	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98770	Strike 70	Cloudbreak Resources Ltd - 100%	2009-06-18	2009-06-13	2031-12-18	115O03
YC98781	Strike 81	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2030-12-18	115O03
YC98782	Strike 82	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2030-12-18	115O03
YC98783	Strike 83	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2030-12-18	115O03
YC98784	Strike 84	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2030-12-18	115O03
YC98785	Strike 85	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC98786	Strike 86	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-20	2031-12-18	115O03

YC98787	Strike 87	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC98788	Strike 88	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC98789	Strike 89	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC98790	Strike 90	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC99475	Strike 101	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC99476	Strike 102	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC99477	Strike 103	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC99478	Strike 104	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC99479	Strike 105	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC99480	Strike 106	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC99481	Strike 107	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC99482	Strike 108	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC99483	Strike 109	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC99484	Strike 110	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC99485	Strike 111	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC99486	Strike 112	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC99487	Strike 113	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC99488	Strike 114	Goldstrike Resources Ltd. - 100%	2009-06-30	2009-06-20	2031-12-18	115O03
YC98689	AU 89	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98690	AU 90	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98691	AU 91	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98692	AU 92	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98693	AU 93	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98694	AU 94	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98695	AU 95	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98696	AU 96	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98697	AU 97	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03

YC98698	AU 98	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98699	AU 99	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98700	AU 100	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98801	AU 101	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98802	AU 102	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98803	AU 103	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98804	AU 104	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98805	AU 105	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98806	AU 106	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98807	AU 107	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98808	AU 108	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98809	AU 109	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98810	AU 110	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98811	AU 111	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98812	AU 112	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98813	AU 113	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98814	AU 114	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98815	AU 115	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YC98816	AU 116	Cloudbreak Resources Ltd - 100%	2009-06-30	2009-06-12	2031-12-18	115O03
YD155599	AB 19	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YD155600	AB 20	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04830	AB 30	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04831	AB 31	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04832	AB 32	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YD155593	AB 33	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF46604	AB 34	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF46605	AB 35	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03

YF46606	AB 36	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF46607	AB 37	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF46608	AB 38	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF46609	AB 39	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF46610	AB 40	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF46611	AB 41	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF46612	AB 42	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04703	AB 43	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04704	AB 44	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04705	AB 45	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04706	AB 46	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04707	AB 47	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04708	AB 48	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04709	AB 49	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04710	AB 50	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04711	AB 51	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04712	AB 52	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04713	AB 53	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04714	AB 54	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04715	AB 55	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04716	AB 56	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04717	AB 57	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04718	AB 58	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04719	AB 59	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04720	AB 60	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04721	AB 61	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03
YF04722	AB 62	Goldstrike Resources Ltd. - 100%	2016-05-09	2016-05-09	2025-05-09	115O03

YF04801	AB 1	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04802	AB 2	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04803	AB 3	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04804	AB 4	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04805	AB 5	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04806	AB 6	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04808	AB 7	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04809	AB 8	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04810	AB 9	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04811	AB 10	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04812	AB 11	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04813	AB 12	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04814	AB 13	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04815	AB 14	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04816	AB 15	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04817	AB 16	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04818	AB 17	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04821	AB 18	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04822	AB 19	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04823	AB 20	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04824	AB 21	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04825	AB 22	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04826	AB 23	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04827	AB 24	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04828	AB 25	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04829	AB 26	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04830	AB 27	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03

YF04831	AB 28	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04832	AB 29	Goldstrike Resources Ltd. - 100%	2015-10-02	2015-10-01	2021-10-02	115O03
YF04901	L 1	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04902	L 2	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04903	L 3	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04904	L 4	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04905	L 5	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04906	L 6	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04907	L 7	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04908	L 8	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04909	L 9	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04910	L 10	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04911	L 11	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04912	L 12	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04913	L 13	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04914	L 14	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04915	L 15	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04916	L 16	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04917	L 17	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04918	L 18	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04919	L 19	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04920	L 20	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04921	L 21	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04922	L 22	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04923	L 23	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04924	L 24	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04925	L 25	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03

YF04926	L 26	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04927	L 27	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04928	L 28	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04929	L 29	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04930	L 30	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04931	L 31	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04932	L 32	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04933	L 33	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04934	L 34	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04935	L 35	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04936	L 36	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04937	L 37	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04938	L 38	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04939	L 39	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04940	L 40	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04941	L 41	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04942	L 42	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04943	L 43	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04944	L 44	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04945	L 45	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04946	L 46	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04947	L 47	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04948	L 48	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04949	L 49	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04950	L 50	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04951	L 51	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04952	L 52	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03

YF04953	L 53	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04954	L 54	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04955	L 55	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04956	L 56	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04957	L 57	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04958	L 58	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04959	L 59	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04960	L 60	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04961	L 61	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04962	L 62	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04963	L 63	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04964	L 64	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04965	L 65	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04966	L 66	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04967	L 67	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04968	L 68	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04969	L 69	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04970	L 70	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04971	L 71	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04972	L 72	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04973	L 73	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04974	L 74	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04975	L 75	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04976	L 76	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04977	L 77	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04978	L 78	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04979	L 79	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03

YF04980	L 80	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04981	L 81	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04982	L 82	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YF04983	L 83	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF04984	L 84	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF04985	L 85	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF04986	L 86	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF04987	L 87	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF04988	L 88	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF04989	L 89	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF04990	L 90	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF04991	L 91	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF04992	L 92	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF04993	L 93	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF04994	L 94	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF04995	L 95	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF04996	L 96	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF04997	L 97	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF04998	L 98	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF04999	L 99	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YF05000	L 100	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78601	L 101	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78602	L 102	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78603	L 103	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78604	L 104	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78605	L 105	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78606	L 106	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02

YE78607	L 107	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78608	L 108	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78609	L 109	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78610	L 110	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78611	L 111	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78612	L 112	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78613	L 113	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78614	L 114	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78615	L 115	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78616	L 116	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78617	L 117	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78618	L 118	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78619	L 119	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78620	L 120	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78621	L 121	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78622	L 122	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78623	L 123	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78624	L 124	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78625	L 125	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78626	L 126	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78627	L 127	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78628	L 128	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78629	L 129	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78630	L 130	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78631	L 131	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78632	L 132	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78633	L 133	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02

YE78634	L 134	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78635	L 135	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78636	L 136	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78637	L 137	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78638	L 138	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78639	L 139	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78640	L 140	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78641	L 141	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78642	L 142	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78643	L 143	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78644	L 144	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78645	L 145	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78646	L 146	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78647	L 147	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78648	L 148	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78649	L 149	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78650	L 150	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78651	L 151	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78652	L 152	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78653	L 153	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78654	L 154	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78655	L 155	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78656	L 156	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78657	L 157	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78658	L 158	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78659	L 159	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78660	L 160	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02

YE78661	L 161	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78662	L 162	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78663	L 163	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78664	L 164	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78665	L 165	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O02
YE78666	L 166	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YE78667	L 167	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YE78668	L 168	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YE78669	L 169	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YE78670	L 170	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YE78671	L 171	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YE78672	L 172	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YE78673	L 173	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YE78674	L 174	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YE78675	L 175	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YE78676	L 176	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YE78677	L 177	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YE78678	L 178	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YE78679	L 179	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YE78680	L 180	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YE78681	L 181	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-29	2025-06-10	115O03
YE78683	L 183	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78684	L 184	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78685	L 185	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78686	L 186	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78687	L 187	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78688	L 188	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03

YE78689	L 189	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78690	L 190	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78691	L 191	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78692	L 192	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78693	L 193	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78694	L 194	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78695	L 195	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78696	L 196	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78697	L 197	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78698	L 198	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78699	L 199	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YE78700	L 200	Goldstrike Resources Ltd. - 100%	2016-06-10	2016-05-28	2025-06-10	115O03
YF06601	LS 1	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06602	LS 2	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06603	LS 3	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06604	LS 4	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06605	LS 5	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06606	LS 6	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06607	LS 7	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06608	LS 8	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06609	LS 9	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06610	LS 10	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06611	LS 11	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06612	LS 12	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06613	LS 13	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06614	LS 14	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06615	LS 15	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02

YF06616	LS 16	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06617	LS 17	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06618	LS 18	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06619	LS 19	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06620	LS 20	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06621	LS 21	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06622	LS 22	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06623	LS 23	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06624	LS 24	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06625	LS 25	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06626	LS 26	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06627	LS 27	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06628	LS 28	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06629	LS 29	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06630	LS 30	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06631	LS 31	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06632	LS 32	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06633	LS 33	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06634	LS 34	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06635	LS 35	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06636	LS 36	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06637	LS 37	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06638	LS 38	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06639	LS 39	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06640	LS 40	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06641	LS 41	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06642	LS 42	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02

YF06643	LS 43	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06644	LS 44	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06645	LS 45	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06646	LS 46	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06647	LS 47	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06648	LS 48	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06649	LS 49	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06650	LS 50	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06651	LS 51	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06652	LS 52	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06653	LS 53	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06654	LS 54	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06655	LS 55	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06656	LS 56	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06657	LS 57	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06658	LS 58	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06659	LS 59	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06660	LS 60	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06661	LS 61	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06662	LS 62	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06663	LS 63	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06664	LS 64	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06665	LS 65	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06666	LS 66	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06667	LS 67	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06668	LS 68	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06669	LS 69	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02

YF06670	LS 70	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06671	LS 71	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06672	LS 72	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06673	LS 73	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06674	LS 74	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06675	LS 75	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06676	LS 76	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06677	LS 77	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06678	LS 78	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06679	LS 79	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06680	LS 80	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06681	LS 81	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06683	LS 83	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06684	LS 84	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06685	LS 85	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06686	LS 86	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06687	LS 87	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06688	LS 88	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06689	LS 89	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06690	LS 90	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06691	LS 91	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06692	LS 92	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06693	LS 93	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06694	LS 94	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06695	LS 95	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06696	LS 96	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06697	LS 97	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02

YF06698	LS 98	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06699	LS 99	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06700	LS 100	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06701	LS 101	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06702	LS 102	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06703	LS 103	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06704	LS 104	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06705	LS 105	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06706	LS 106	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06707	LS 107	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06708	LS 108	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06709	LS 109	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06710	LS 110	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06711	LS 111	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06712	LS 112	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06713	LS 113	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06714	LS 114	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06715	LS 115	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06716	LS 116	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06717	LS 117	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06718	LS 118	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-26	2021-10-04	115O02
YF06719	LS 119	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06720	LS 120	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06721	LS 121	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06722	LS 122	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06723	LS 123	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06724	LS 124	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02

YF06725	LS 125	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06726	LS 126	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06727	LS 127	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06728	LS 128	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06729	LS 129	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06730	LS 130	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06731	LS 131	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06732	LS 132	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06733	LS 133	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06734	LS 134	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06735	LS 135	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06736	LS 136	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06737	LS 137	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06738	LS 138	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06739	LS 139	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06740	LS 140	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06741	LS 141	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06742	LS 142	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06743	LS 143	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06744	LS 144	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06745	LS 145	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06746	LS 146	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06747	LS 147	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06748	LS 148	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06749	LS 149	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06750	LS 150	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06751	LS 151	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02

YF06752	LS 152	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06753	LS 153	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06754	LS 154	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06755	LS 155	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06756	LS 156	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06757	LS 157	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06758	LS 158	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06759	LS 159	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06760	LS 160	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-10-04	2021-10-04	115O02
YF06761	LS 161	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-10-04	2021-10-04	115O02
YF06762	LS 162	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-10-04	2021-10-04	115O02
YF06763	LS 163	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-10-04	2021-10-04	115O02
YF06764	LS 164	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-10-04	2021-10-04	115O02
YF06765	LS 165	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06766	LS 166	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06767	LS 167	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06768	LS 168	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06769	LS 169	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06770	LS 170	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06771	LS 171	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06772	LS 172	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06773	LS 173	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06774	LS 174	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06775	LS 175	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06776	LS 176	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06777	LS 177	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06778	LS 178	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02

YF06779	LS 179	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06780	LS 180	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06781	LS 181	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06782	LS 182	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06783	LS 183	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06784	LS 184	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06785	LS 185	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06786	LS 186	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06787	LS 187	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06788	LS 188	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06789	LS 189	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06790	LS 190	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06791	LS 191	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06792	LS 192	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06793	LS 193	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06794	LS 194	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06795	LS 195	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06796	LS 196	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06797	LS 197	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06798	LS 198	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06799	LS 199	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06800	LS 200	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06801	LS 201	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06802	LS 202	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06803	LS 203	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06804	LS 204	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06805	LS 205	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02

YF06806	LS 206	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06807	LS 207	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06808	LS 208	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06809	LS 209	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-27	2021-10-04	115O02
YF06810	LS 210	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06811	LS 211	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06812	LS 212	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06813	LS 213	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06814	LS 214	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06815	LS 215	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06816	LS 216	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06817	LS 217	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06818	LS 218	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06819	LS 219	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06820	LS 220	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06821	LS 221	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06822	LS 222	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06823	LS 223	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06824	LS 224	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06825	LS 225	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06826	LS 226	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-28	2021-10-04	115O02
YF06827	LS 227	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06828	LS 228	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06829	LS 229	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02
YF06830	LS 230	Goldstrike Resources Ltd. - 100%	2016-10-04	2016-09-29	2021-10-04	115O02