ASSESSMENT REPORT

2019 DIAMOND DRILLING

on the

Lucky Strike Property

Dawson Mining District, Yukon Territory

for

Luckystrike Resources Ltd.

1010 – 1130 West Pender Street
Vancouver, British Columbia
Canada V6E 4A4
Telephone: (604) 568-8807
Facsimile: (604) 681-1864

NTS Mapsheets: 115o02, 115o03, 115o06
UTM Coordinates: E593000, N7010000 (NAD83, Zone7)
Claim filed: AB, AU, L, LS, LUCKY, Lucky, Strike (listed in Appendix 1)
Owner: Luckystrike Resources Ltd.
Author: D. Ferraro, HBSc.
Dates worked performed: July 1st, 2019 to July 30th, 2019

TABLE OF CONTENTS

1.0 Summary 4
2.0 Introduction 6
3.0 Property Location and Access 6
4.0 Physiography, Vegetation, and Climate 8
5.0 Property Description 8
6.0 Property History
    6.1 Historical Exploration 10
    6.2 Exploration Performed by Goldstrike/Luckystrike Resources 10
7.0 Geology
    7.1 Regional Geology 12
    7.2 Property Geology and Mineralization 13
8.0 2019 Diamond Drill Program
    8.1 Summary of Drilling 25
    8.2 Sample Preparation, Analysis, and QA/QC 25
    8.3 Drill Results 25
9.0 Discussion 34
10.0 Conclusions and Recommendations 38
References 39
Statement of Expenditures 41
Certificates of Qualifications 41

Figures, Photos, and Tables

Figure 1: General location of the Lucky Strike Property 7
Figure 2: Claim Location Map 9
Figure 3: Regional Geology 17
Figure 4: Airborne Magnetics: Total Magnetic Field 18
Figure 5: Airborne Magnetics: 1st Vertical Derivative 19
Figure 6: Airborne Magnetics: Radiometric Potassium Count 20
Figure 7: Monte Carlo Zone Geology Map 21
Figure 8: Monte Carlo Rock Types 22
Figure 9: Monte Carlo Mineralized Specimens 23
Figure 10: Marble Breccia Outcropping 24
Figure 11: Cross section of geology at the Monte Carlo zone, looking NW 34
Figure 12: Section of IP L7 with DDLS-19-01 35

Photo 1: DDLS-19-01, 161m – altered orthogneiss with pyrite 26
Photo 2: DDLS-19-01, 249m – albite alteration with pyrite stringers 27
Photo 3: DDLS-19-01, 274m – quartz veining with pyrite 27
Photo 4: DDLS-19-02, 75m – faulted limonitic orthogneiss 28
Photo 5: DDLS-19-02, 272m – albititic orthogneiss with quartz veining and pyrite 29

TABLE OF CONTENTS (CONTINUED)

Photo 6: DDLS-19-02, 294m – silicified orthogneiss with disseminated pyrite.....29
Photo 7: DDLS-19-03, 141m – magnetite-bearing amphibolite 30
Photo 8: DDLS-19-03, 220m – silicified mica schist with pyrite 30
Photo 9: DDLS-19-04, 18m – quartzite with cataclastic deformation 31
Photo 10: DDLS-19-04, 76m – pervasively limonitized vein zone 32

Table 1: 2019 drill collar information 32
Table 2: 2019 diamond drill results 32
Table 3: Comparison of 2017-2019 drilling correlations to gold 37

Appendices

Appendix I: List of Claims.....42

Appendix II: 2019 Data Verification and QA/QC Report.....59

Appendix III: Drill Logs and Sample Intervals.....90

Appendix IV: Drilling Assay Certificates 122
DDLS-19-01 123
DDLS-19-02 168
DDLS-19-03 213
DDLS-19-04 252

Appendix V: Drill Sections and Plan Map.....294

Digital data

2019 Drill Assay Master excel

1.0 SUMMARY

A diamond drill program was conducted on the Lucky Strike Property between July 1st and July 30th, 2019. The program consisted of four holes totalling 1105.82m. The property is owned 100% by Luckystrike Resources Ltd. and consists of 750 contiguous quartz claims located in the Dawson Mining District.

The Lucky Strike Property is located primarily on NTS map sheet 115o03 with parts on 115o02 and 115o06. The property is approximately 100 kilometers south-southeast of Dawson City and 350 kilometers northwest of Whitehorse. Currently the property is only accessible by helicopter chartered from Dawson City or by boat via the Stewart River however; the proposed all season service road connecting Dawson City to the Coffee Creek mine will pass directly through the property.

The property is located in the heart of the White Gold mining district and spans 30 km northwest – southeast, covering 150 square kilometers of similar geology to that of Kinross's neighbouring White property that hosts the 1.2 million ounce Golden Saddle deposit. The Golden Saddle deposit is located 15 km east of the property. Other nearby gold deposits include Goldcorp's advanced stage 2.16 million oz. Coffee deposit located 24 km to the southwest and Comstock Metals' early stage QV deposit that contains a growing gold resource of 230 000 ounces.

Lucky Strike is unglaciated and characterized by smooth round-topped hills with steeply incised drainages. Isolated Tertiary gravel benches have been mapped along the northern edge of the property on the left limit of the Stewart River valley. The property encompasses an area of tree-covered hills often in various stages of recovery from historical forest fires and lies within the mature dendritic drainages of the Yukon River watershed. Elevations on the property range from 390 m along creek valleys to a maximum height of 2700 m at the mountain tops. The property is bisected by the north-east, steeply dipping drainage of Simmons Creek and partially drained by historic placer gold creeks: Telford, Brewer, and Barker.

The Lucky Strike Property contained no documented exploration work prior to 2009. The original core Lucky Strike property (219 claims) was staked in 2009 by a 50/50 joint venture between Alix Resources Corp. and Cloudbreak Resources Ltd, due to its proximity and similar geology to the newly discovered Golden Saddle deposit. A property-wide soil sampling program containing 1503 samples and airborne geophysical survey was completed in 2009 and 2010. In 2010, Cloudbreak Resources Ltd. (renamed to Petro One Energy Corp.) purchased the remaining 50% interest in the property for a total 100% interest. In 2011, Petro One Energy Corp then optioned 70% interest in the property to Accelrate Power Systems Inc. (renamed to Goldstrike Resources Ltd.) In 2015 Goldstrike acquired Petro One Energy Corp to retain 100% interest in the Lucky Strike Property. In 2018 the property was spun out to Luckystrike Resources Ltd. with no underlying royalties or payments.

The property has been worked continuously every year since 2011 with the addition of 532 mineral claims over the years, now totalling 750 claims. From 2011 to 2018, Goldstrike took 6694 soil samples, 9 silt samples, 466 rock grab samples, and 2045 trench rock samples from 44 mechanically excavated trenches. A total of 2392.64 meters of diamond drilling in 20 holes was completed in 2017 and 2018. A total of 30 km of ground magnetic survey lines has been completed on the Lucky Strike property as well as 12 lines of IP totalling 15.3 line km. The majority of the historical work done by Goldstrike to date has taken place at the Monte Carlo and Boss zones.

Geologically, the property is underlain by the Paleozoic Yukon-Tanana Terrane that accreted to the western edge of the North America craton approximately 250 – 60 million years ago. It is bound to the northeast and southwest by the regional-scale, right lateral fault systems of the Tintina and Denali. No detailed property scale geological map has been completed for the Lucky Strike property and outcrop is limited to less than 0.5%, making geological mapping difficult. However, regional scale mapping shows the majority of the property is underlain by Devonian to Mississippian meta- sedimentary, amphibolite, and orthogneiss rocks of the Simpson Range and Snowcap assemblages. These rocks contain amphibolite grade metamorphism and appear to occur in northwest trending

1.0 SUMMARY (CONTINUED)

panels through the property. The property is intruded by Early Jurassic to Eocene plutonic and volcanic suites, consisting of granite, granodiorite and monzonite.

Lucky Strike contains five gold in soil anomalies located along a 10 km northwest - southeast trend that coincides with a strong linear geophysical anomaly believed to represent a regional scale shear zone. These soil anomalies have been coined the Monte Carlo, Belmont, Samson, Boss, and Maverick zones. Gold mineralization on the property is hosted in highly weathered and oxidized units of quartz veined, sub brecciated, silicified and carbonate-altered orthogneiss and schists. Gold appears to be free gold spatially related to limonite and pyrite.

The 2019 diamond drill program was centered on the Monte Carlo zone and totalled 1105.82 meters of HTW and NTW-sized core over 4 holes spanning 800 meters of strike length. This is the third drill campaign at Monte Carlo, preceded by a 1033 meter program in 2017 and a 1360 meter program in 2018. Results from the programs include 5.36 g/t Au over 22m (2017) and 4.55 g/t Au over 7.6m (2018). Previous mechanical trenching in the area has also indicated widespread gold mineralization in the zone with results including 0.76 g/t Au over 78m.

The primary purpose of the 2019 program was to target a 1.8 kilometer-long chargeable anomaly outlined in the IP surveys. One 2018 diamond drill hole (DDLS-18-06) intersected the edge of the chargeable anomaly and assayed 4.55 g/t Au over 7.6m within a zone of silicified, albitized, pyrite-rich orthogneiss. This marked the first time fresh sulphide with associated gold had been encountered at the Monte Carlo zone.

Results from the 2019 diamond drill program at Lucky Strike suggest that, with some exception, the chargeability anomaly as outlined in the IP survey can be attributed to larger packages of pyrite-bearing chlorite schist and some smaller units of magnetite-bearing amphibolite. This appears to be the case in holes DDLS-19-03 and 19-04. Hole DDLS-19-02 was generally inconclusive, with no lithology or mineralization corresponding to a geophysical response. This can be partly attributed to the downdip nature of the hole.

The exception is DDLS-19-01. A weakly mineralized orthogneiss unit appears to directly correspond with chargeability. The lack of any deeper, large zone of pyrite-bearing chlorite schist discourages a lithological source for the response. Localized silicification with increase sulphide content and higher gold grades at depth is encouraging.

It is evident that further drilling should be done in the vicinity of DDLS-19-01 and 19-02, as well as to the northwest around DDLS-18-10. It is recommended that holes be drilled at a 230 azimuth or normal to this pending further structural investigation.

It is clear that there are mineralized fluid pathways to depth within the orthogneiss package, evidenced by deeper, higher grade intersections of localized pyritiferous, silicified, albitized, faulted orthogneiss. All future holes should be drilled until intersecting the shear zone.

Another hole should be drilled on IP L5, stepped 100m forward from DDLS-19-03. This is to account for the large nature of the chargeability anomaly, the potential for errors into plotting the IP, and to move away from the magnetic high that this hole was collared in, reducing the likelihood of intercepting large, gold-barren mafic packages.

Beyond the Monte Carlo zone is a 10-kilometer gold trend that remains undrilled. Encouraging results from 2018 trenching at the Belmont zone warrant an IP survey and possibly limited exploratory drilling. Sporadic but high-grade surface values at the Boss Zone could be investigated with one or two well-placed exploratory drill holes. Maverick, while difficult to explore due to topography, warrants additional work due to the prospective grades of the single trench done in 2018.

2.0 INTRODUCTION

This assessment report has been prepared on behalf of Luckystrike Resources Ltd. of Vancouver, BC to fulfill the assessment requirements of the Dawson Mining Recorder. The report describes the 2019 diamond drill program on the Lucky Strike Property in the Dawson Mining District of the Yukon Territory.

The Lucky Strike Property was formerly held by Goldstrike Resources Ltd., of Vancouver, BC. However, in May of 2018 Goldstrike Resources Ltd. announced a proposed spin-off of its White Gold District properties, including the Lucky Strike Property. The arrangement was completed in August, 2018.

Field work for the 2019 season was performed by Druid Exploration Inc. of Dawson City, YT and various consultants. Drilling was performed by Kluane Drilling Ltd. of Whitehorse, YT. The report was prepared by D. Ferraro of Dawson, YT.

3.0 PROPERTY LOCATION AND ACCESS

The Lucky Strike property is located within the Dawson Mining District, primarily on NTS map sheet 115o03 with parts on 115o02 and 115o06. The property is geographically centred at approximately 63° 12' 10" N , 139° 7' 6" W or UTM 7009583 N and 594636 E (NAD 83, Zone 7). Lucky Strike is approximately 100 kilometers south-southeast of Dawson City and 350 kilometers northwest of Whitehorse (Figure 1). Currently the property is only accessible by helicopter chartered from Dawson City or by boat via the Stewart River; however, the proposed all season service road connecting Dawson City to the Coffee Creek mine will pass directly through the property. During the 2019 program the property was accessed by helicopter out of Dawson City and staging from the Black Hills area.


The property is located in the heart of the White Gold mining district and spans 30 km northwest – southeast, covering 150 square kilometers of similar geology to that of Kinross's neighbouring White property that hosts the 1.2 million ounce Golden Saddle deposit (Arseneau, 2018). The Golden Saddle deposit is located 15 km east of the property. Other nearby gold deposits include Goldcorp's advanced stage 2.16 million oz. Coffee deposit (Doerksen et al., 2016), located 24 km to the southwest and Comstock's early stage QV deposit that contains a growing gold resource of 230 000 ounces. (Pautler and Shahkar, 2014).

560000 570000 580000 590000 600000 610000

7050000 7040000 7030000 7020000 7010000 7000000 6990000 6980000

Rosbute Creek
YUKON RIVER
Henderson Creek
STUART RIVER
QV
WHITE RIVER
Frisco Creek
GOLDEN SADDLE
Luckystrike Creek
Scotch Creek
Thistle Airstrip
Thistle Creek
Los Angeles Creek
Carlisle Creek
Independence Creek
Kirkman Creek
Ballarat Creek
COFFEE
Coffee Creek
Daisy May Creek
Black Hills Creek
Scroggie Creek
Simmons Creek
Brewer Creek
Telford Creek
Barker Creek

MONTE CARLO
BELMONT
SAMSON
BOSS
MAVERICK

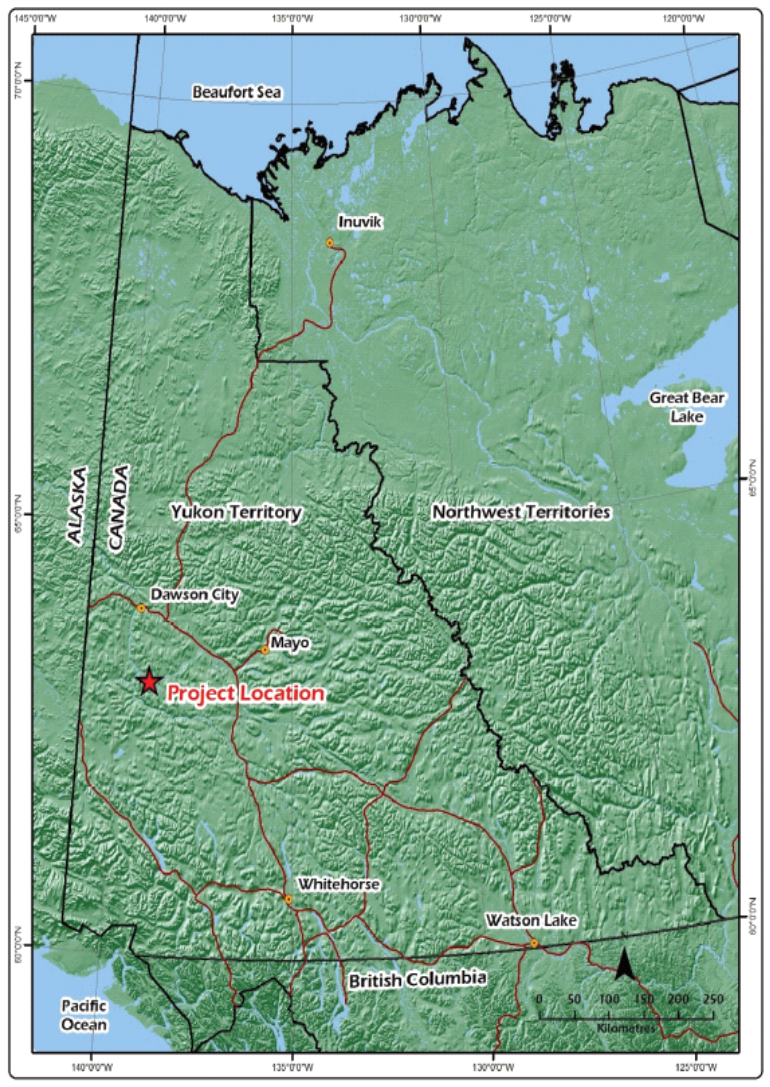

General Location Map

FIGURE 1:

LUCKY STRIKE PROPERTY

LOCATION MAP

N W E S

1:250,000

Kilometers 0 2.5 5 10

DRAWN BY: CLAYTON JONES	DATE: OCTOBER 31, 2016
MAP SHEET: 115O03	COORD SYSTEM: NAD 83 UTM ZN7

Legend

- Major Gold Deposit
- Luckystrike Au showings
- Lucky Strike Property
- Small Road
- Coffee Mine Road (proposed)

4.0 PHISIOGRAPHY, VEGETATION, AND CLIMATE

The Lucky Strike Property is situated in a portion of the Yukon that is unglaciated (Duk-Rodkin, 2001) and lies within the mature dendritic drainages that are characterized by smooth round topped hills with steeply incised drainages. Elevations on the property range from 390 m near the Stuart River valley to a maximum height of 2700m at the highest mountain tops within the claim block.

Parts of the property were subjected to a forest fire approximately a decade ago, leaving large areas covered in burnt fallen trees. Areas of re-growth are densely populated with birch trees and the few un-burnt areas on the property contain mature pine forests with thick moss cover on the ground.

Bedrock exposure is generally limited to less than 0.5 %, except for few localities along steeply incised creek drainages on the property where rock cliffs are exposed. Lower elevations in the valley contain thick loess deposits and permafrost. Large gravel benches of unknown thickness are mapped in the southwest of the property near the confluence of the Lucky Strike Creek and the Stuart River. These benches are believed to represent Tertiary paleo Stuart River gravel deposits.

A small portion of the property contains higher elevations that have subalpine to alpine climate with low scrub and commonly scarce soil development. The remainder of the property contains very mature soil development with deep “A” and “B” horizons and very oxidized and leached “C” horizons.

The Yukon has a sub-arctic continental climate. Summer temperatures can reach up to 35° C but the mean temperature is 10° C. Winter temperatures can be very cold reaching down to - 55° C but with a mean winter temperature of -23° C.

5.0 PROPERTY DESCRIPTION

The Lucky Strike Property is comprised of 750 contiguous quartz claims located in the Dawson Mining District (Figure 2). The claims stretch 30 km long covering approximately 150 square kilometers of land within NTS map sheets 115o03, 115o02, and 115o06.

The property is comprised of 61 ‘AB’, 28 ‘AU’, 199 ‘L’, 229 ‘LS’, 3 ‘LUCKY’, 166 ‘Lucky’, and 64 ‘Strike’ claims (a complete list of the claims and their statuses can be found in Appendix I).

The Lucky Strike Property is 100%-owned by Luckystrike Resources Ltd. The property was spun-out from Goldstrike Resources Ltd. in August, 2018.

Lucky Strike Property

Figure 2: Claim Location Map

Legend

- Lucky Strike Property
- Luckystrike Resources Ltd. claims
- Yukon quartz claims

N
W E
S

0 1,500 3,000 6,000 Meters

NTS Mapsheets: 115o02, 03, 06
Datum: NAD83 Zone 7
Date: January 2019

LUCKYSTRIKE
RESOURCES LTD. TSX.V : LUKY

6.0 PROPERTY HISTORY

6.1 Historical Exploration

The Lucky Strike Property contained no documented exploration work prior to 2009. The original core Lucky Strike property (219 claims) was staked in 2009 by a 50/50 joint venture between Alix Resources Corp. and Cloudbreak Resources Ltd, due to its proximity and similar geology to the newly discovered Golden Saddle deposit, now owned by White Gold Corp. A property-wide soil sampling program containing 1503 samples and airborne geophysical survey was completed in 2009 and 2010. (Vivian, G., et al., 2011). In 2010, Cloudbreak Resources Ltd. (renamed to Petro One Energy Corp) purchased the remaining 50% interest in the property for a total 100% interest. In 2011, Petro One Energy Corp then optioned 70% interest in the property to Accelrate Power Systems Inc. (renamed to Goldstrike Resources Ltd.) In 2015 Goldstrike acquired Petro One Energy Corp to retain 100% interest in the Lucky Strike Property. In 2018 the property was spun out to Luckystrike Resources Ltd. with no underlying royalties or payments.

1992: MINFILE 115 O 007 (THREE SISTERS)
Staked as Three Sisters in April of 1992. No work reported. Claims were assumed to cover quartz veins.

2009 - 2010: MINFILE 115 O 171 (SIMMONS)
A property wide soil sampling program was conducted by Aurora Geosciences from Whitehorse on behalf of Accelrate Power Systems Inc. This soil sample program collected a total of 1503 B horizon soil samples. The samples were obtained from hand excavated pits using a mattock with average depths of 20 cm below the organic rich A horizon. The results from this survey must be viewed with caution as mineralized bedrock will often not show a geochemical signature in the "A" or "B: horizon but rather the "C" horizon.

An airborne geophysical survey (magnetic field and radio metrics) was conducted by Precision Geophysics on behalf of Accelrate Power Systems Inc. (Vivian et al., 2011).

2009: MINFILE 115 O 015 (AGATE)
The area was first staked in 1900 for unknown reasons and re-staked several times until most recently in 2009 by B. Naughty and optioned to Weststar Resources Ltd (Weststar). Weststar collected silt and soil samples alongside three distinct drainage areas in the north, central and southern parts of the claim block. Analytical results from the silts identified an anomalous area approximately 850 m in length situated in the central part of the claim block that returned elevated gold values up to 30 ppb (McQueen, 2009).

6.2 Exploration Performed by Luckystrike Resources Ltd. and Goldstrike Resources Ltd.

The property has been worked continuously every year since 2011 with the addition of 532 mineral claims over the years, now totalling 750 claims. From 2011 to 2019, Goldstike/Luckystrike

took 6636 soil samples, 9 silt samples, 465 rock grab samples, and 2045 trench rock samples from 44 mechanically excavated trenches. A total of 3498.44 meters of diamond drilling in 24 holes has been done as of 2019. A total of 30 km of ground magnetic survey lines has also been completed on the Lucky Strike property. The majority of the historical work done by Goldstrike to date has taken place at the Monte Carlo and Boss zones.

2011: A soil sampling, prospecting and trenching program was conducted by Druid Exploration from Dawson City and by Kryotec Engineering from Whitehorse. A total of 554 soil samples , 4 silt samples, 115 rock grab samples and 35 trench samples (over 35 m) were taken (Mac Gearailt, 2011).

2012: Two (2) days of prospecting and soil sampling and one (1) day of ground magnetometer surveying was conducted by Druid Exploration of Dawson City. A total of 49 soil samples and 37 rock grab samples were taken.

2013: Six (6) days of prospecting, soil sampling, mechanical trenching and ground magnetometer surveying was completed. Work was conducted by Druid Exploration of Dawson City. A total of 6 trenches totaling 417 m (179 analytical samples), 249 soil samples, and 9 rock grab samples from pits and prospecting were completed (Mac Gearailt, 2013).

2014: Sixteen (16) days of prospecting soil sampling, mechanical trenching and ground magnetometer surveying was completed. Work was conducted by Druid of Dawson City. A total of 5 trenches totaling 244 m (91 analytical samples), 608 soil samples, and 41 rock grab samples from pits and prospecting was completed (Mac Gearailt, 2014).

2015: Nine (9) days of prospecting, soil sampling, and mechanical trenching was completed. Work was conducted by Druid Exploration of Dawson City. One (1) trench totaling 69 m (35 analytical samples), 129 soil samples, and 23 rock grab samples were completed (Mac Gearailt, 2015).

2016: The 2016 exploration program consisted of soil sampling, prospecting, mechanical trenching, and a 2D Induced Polarization geophysical survey. All soil sampling, prospecting and mechanical trenching was conducted by Druid Exploration. The IP survey was conducted by Aurora Geosciences of Whitehorse. A total of 12 trenches comprising 773 m (381 geochemical samples), 1875 soil samples and 36 rock grab samples were acquired during the 2016 program. Seven lines kilometers of IP were completed (Jones, 2016).

2017: The 2017 program consisted of soil sampling, diamond drilling, mechanical trenching, and an airborne LiDAR survey. A total 1032.93m of diamond drilling in 9 holes was completed at the Monte Carlo zone. Nine rock grabs and 690 soil samples were taken and 1091m of mechanized trenching completed. Kluane Drilling of Whitehorse conducted the drilling and Druid Exploration conducted the field work. A property-wide airborne LiDAR survey was completed by Eagle Mapping of Port Coquitlam, BC (Schultze, 2017).

2018: The 2018 exploration program consisted of an IP survey, soil sampling, prospecting, trenching, and diamond drilling. The IP survey expanded upon the 2016 survey, totalling 8.2 line kilometers over 5 lines. Two thousand five hundred thirty-one (2531) soil samples and 148 rock samples were taken. The mechanical trenching program consisted of 11 trenches totalling 1865.5m. Trenching was completed at all 5 known mineralized zones at Lucky Strike: two at Monte Carlo (213m), two at Belmont (810m), one at Samson (150m), five at Boss (526m), and one at Maverick (166.5m). The 2018 diamond drill program was centered on the Monte Carlo zone and totalled 1359.71 meters of HTW-sized core over 11 holes (Ferraro, 2018).

7.0 GEOLOGY

7.1 Regional Geology

The following regional geology description for the White Gold district is summarized from the master's thesis paper, *Late Jurassic Fault-Hosted Gold Mineralization of the Golden Saddle Deposit, White Gold District, Yukon,* written by Leif Anthony Bailey (Bailey, 2013). This scientific paper focuses on the Golden Saddle gold deposit located only 15 km west of the Lucky Strike property and remains the most comprehensive geological report for the White Gold District to date. Refer to Figure 3 for the regional geology map of the White Gold District.

The White Gold District is underlain by late Paleozoic, amphibolite-grade metamorphic rocks including meta - siliciclastic, meta - volcanic, meta - volcaniclastic, and meta - plutonic rocks that make up the Yukon-Tannana Terrane (YTT). The White Gold District is a relatively new mining district with the first significant gold deposit discovered in 2009 (Golden Saddle). The district hosts the 1.2 million oz. Golden Saddle deposit (Arseneau, 2018), 2.16 million oz. Coffee deposit (Doerksen et al., 2016), and 230 000 oz. QV deposit (Pautler and Shahkar, 2014).

The YTT was a large allochthon terrane that accreted to ancestral North America 400 million years ago forming present day Yukon and BC. The YTT terrane is made up of 4 main Paleozoic lithological assemblages that represent distinct depositional / geological settings throughout the accretionary process and is bound by the northeast and southwest by regional scale, right lateral, fault systems of the Tintina and Denali. The Pre-Devonian Snowcap assemblage consists of siliciclastic sediments deposited on a passive margin setting. The Snowcap assemblage was overlain by 3 main volcanic / volcaniclastic assemblages in an island arc setting. These assemblages include the late Devonian to Early Mississippian Finlayson assemblage, Mississippian to Early Permian Klinkkit assemblage and the mid to late Permian Klondike assemblage.

Devonian to Mississippian sub-volcanic and plutonic magmatic episodes occurred coeval with deposition of the Finlayson assemblage and is often inter-foliated and cross cut by the various YTT lithological assemblages. These magmatic episodes include intermediate to mafic granitite

and orthogneiss units having a strong to weak metamorphic fabric and are the dominant rock type on the Lucky Strike Property.

There are 3 main Mesozoic magmatic episodes that intrude the Paleozoic metamorphic assemblages. The first episode consisted of Late Triassic to early Jurassic granite, granodiorite, monzonite, and monzodiorite; followed by Mid Cretaceous granite to granodiorite. And lastly, the Late Cretaceous plutonic / volcanic rocks of the Carmacks group intruded the YTT. The Carmacks group rocks include monzodiorite, diorite, basalt and basaltic andesite. Insignificant volumetric amounts of Eocene bimodal basalt flows and andesite dikes occur sporadically throughout the YTT and mark the youngest magmatic event.

Various types of ultra-mafic rocks also inter-finger with the metamorphic rocks of the YTT. These rock types include the Mesozoic meta-gabbro, chlorite calc-schist, and Permian to Jurassic pyroxonite and hornblendenite dikes and plutons. Small narrow seams of serpentinite occur along thrust fault boundaries and are believed to represent a small portion of the Slide Mountain terrane that is a Devonian to Permian age oceanic assemblage that formed between the YTT terrane and Ancestral North America prior to accretion.

The stratigraphy and structural framework of the YTT terrane was modified by the syn- and post-accretionary tectonism during the Mesozoic era. This collision resulted in very complex structural geology with many deformation stages. The YTT terrane began to collide with Ancestral North America in late Permian to early Jurassic. The continued accretion of other terranes up against the YTT and the ancestral North America craton continued through early Cretaceous into the Paleocene. The compressional forces caused by the continued accretion of terranes forced the YTT to be bisected by major strike slip faults; the Denali to the southwest and Tintina to the northeast as well as major thrust fault systems to form.

Both the Golden Saddle gold deposit (15 km east of Lucky Strike) and the Coffee deposit (24 km southwest of the property) are believed to be epigenetic orogenic, structurally, and lithological controlled gold deposits. The Golden Saddle deposit is hosted at the intersection of a major Jurassic age, north striking, thrust fault and a transpressional strike slip fault system with gold being hosted in a series of sub parallel, structurally complex, faults with early folding and shears zones with polyphaser quartz carbonate sulphide veins, fracture zones and breccias.

7.2 Property Geology and Mineralization

No detailed property scale geological map has been completed for the entire Lucky Strike property and outcrop is limited to less than 0.5%, making geological mapping difficult. However, regional scale mapping by Gordey and Ryan (2005), shows the majority of the property is underlain by Devonian to Mississippian metasedimentary, amphibolite, and orthogneiss rocks of the Simpson Range and Snowcap assemblages. The rocks have undergone amphibolite grade metamorphism and appear to occur in northwest-trending panels through the property. The property is intruded by Early Jurassic to Eocene plutonic and volcanic suites, consisting of granite,

granodiorite and monzonite. Refer to Figure 3 showing the property geology as mapped by Gordey and Ryan (2005).

The property contains five gold in soil anomalies located along a 10 km northwest - southeast trend that coincides with a strong linear geophysical anomaly believed to represent a regional scale shear zone. These soil anomalies have been coined the Monte Carlo, Belmont, Samson, Boss, and Maverick zones (west to east respectively). Refer to Figures 4-6 showing the property-wide airborne total magnetic field, 1ST Vertical Derivative, and Potassium Count with geophysical inferred structures.

Gold mineralization on the property is hosted in highly weathered and oxidized units of quartz veined, sub-brecciated, silicified and carbonate-altered orthogneiss and schists. Gold appears to be free gold spatially related to limonite and pyrite.

Monte Carlo

Detailed geological mapping was completed during the 2016 exploration program at the Monte Carlo zone 1.5 X 0.5 km area (Figure 7). The Monte Carlo zone was discovered in 2015 by a detailed soil geochemical survey and further outlined by trenching during the 2016 program. This zone shows the most encouraging results to date on the property. Using the mechanical trenches, rock fragments from hand excavated pits, local outcropping, soil geochemistry, and geophysical surveys; a geological map was created for the zone. Due to the frost shattered and highly oxidized nature of the bedrock in the area, detailed sample descriptions were very difficult. Seven rock samples obtained from specific trenches, pits, and outcrop received detailed petrographic descriptions (thin sections) and whole rock geochemical analyses in order to better understand the lithology, mineralization, and alteration (See Jones, 2016 for full petrographic report).

Gold mineralization at the Monte Carlo zone is hosted primarily in Devonian to Mississippian? moderately foliated felsic orthogneiss of quartz monzodiorite to quartz diorite composition that are inter-fingered with weakly foliated meta-mafic/intermediate intrusive of gabbro composition and Devonian to Mississippian metasedimentary marble units. These units are believed to be striking approximately northwest and dipping approximately 45-60 degrees to the northeast. Structural measurements are inferred and should be cautioned as the mechanical excavated trenches did not display competent bedrock but rather highly weathered frost shatter and decomposed bedrock. Refer to Figure 8 showing major host rock types at the Monte Carlo Zone.

Highest grades of gold occur in strongly silicified or massive quartz veins associated with pyrite and limonite at a fault contact with meta-mafic intrusive (gabbro) and orthogneiss units. Petrographic studies showed that gold was free in the quartz. Lower gold grades occur in sub brecciated, strongly silicified, highly fractured, variably carbonate-altered, and limonitic orthogneiss units. Refer to Figure 9 showing mineralized rock specimens from the trenches.

The auriferous orthogneiss and meta-mafic intrusive have a northwest-trending shear contact with a younger? felsic porphyritic volcanic unit of quartz latite composition that appears to grade

into volcanoclastic to epiclastic greywacke towards the Lucky Strike Creek (southeast). These volcanic / volcaniclastic rocks have a strong geophysical response (high K count and low resistivity) that clearly distinguishes it from the adjoining orthogneiss unit bound to the northeast. These major units are believed to be separated by a property-scale thrust fault contact, hosted within a larger regional scale shear zone. Several trenches displayed evidence of faulting and shearing with rock displaying slickenside surfaces.

The Monte Carlo Zone is located along a 10 km long major northwest trending linear geophysical anomaly that partially coincides with the deeply incised Lucky Strike Creek that has been interpreted to represent a regional scale thrust fault. Brecciated marble cliff faces exposed along the right limit of the Lucky Strike creek within the Monte Carlo zone further provide evidence of the regional scale fault system.

A few Devonian to Mississippian metasedimentary marble cliff outcroppings are exposed alongside the Lucky Strike Creek at the far northwest end of the Monte Carlo zone and appear to be in contact and inter-fingered with the orthogneiss and meta-mafic intrusive that hosts the gold mineralization observed in the trenches. These marble cliffs contain local zones of intense brecciation also seen in LS-TR-16-10 and the top of 2018 drill hole DDLS-18-10. Refer to Figure 10 showing field photographs of the marble breccia outcropping alongside the creek. This unit appears to strike approximately northeast and dips moderately to the northwest. The hillside immediately adjacent to the Monte Carlo zone is capped with a thick unit of Quaternary sediment believed to represent a Tertiary gravel bench from the paleo Stuart River. These bench deposits are mapped by Fuller (1994) and confirmed by soil sample descriptions.

Belmont

The Belmont Zone represents a 1500x800 meter area of anomalous gold-in-soil (up to 254 ppb Au) with associated silver and tellurium. Two 2016 trenches at the Belmont Zone revealed similar mineralization to the Monte Carlo Zone, but with much lower gold grades. Trench LS-TR-16-11 exposed a 20-metre interval of sheared, strongly silicified and brecciated orthogneiss, with abundant cubic pyrite. These samples returned anomalous values of Au, Te, and Ag. This interval was interpreted as being the source of elevated Au, Te and Ag values from soil sampling. The two trenches are located along the fringe of a 1500 x 800-metre gold-in-soil anomaly. An open-ended chargeability anomaly is present in the eastern-most corner of the 2016 IP survey which is located at the west end of Belmont. The source of the anomaly is unknown, but thought to be lithological (mafic plug).

Samson

The Samson Zone represents a 600x300 meter area of anomalous gold-in-soil (up to 91 ppb Au). The 2016 program at the Samson showing consisted of 3 trenches comprising 154 metres. Sampling returned anomalous gold values with the best result being 0.32 g/t Au across 12 metres, including 0.41 g/t Au across 6 metres. Mineralized intervals were hosted by quartz vein-bearing hydrothermal breccia within orthogneiss intercalated with quartz-biotite schist. A hand-dug pit at the location of an anomalous soil sample revealed a blue-grey silicified schist float with visible

gold in quartz; however, this float only assayed 1.1 g/t Au. Other grabs from the area assay up to 4.26 g/t Au. This particular sample was comprised of 70% quartz and 30% orthogneiss (Mac Gearailt, 2015).

Boss

The Boss Zone (previously named "Zone 1" in the 2013 through 2015 assessment reports) is a 1000x1000 meter area of anomalous gold-in-soil (up to 700 ppb Au) with associated silver (up to 9.9 ppm Ag). Trenching and test pitting commenced in 2013 with a total of six trenches totaling 417 metres. Gold values to 3,087.7 ppb across 5 metres were returned, with numerous samples exceeding 100 ppb. Anomalous values were returned from gneiss, orthogneiss or schist, typically associated with brecciation and/or quartz veining. Most of the samples show strong weathering and oxidation, with variable quartz (silicification?) and feldspar alteration. Minor and more weakly altered dyke material was noted in some descriptions of auriferous rock. Gold has a strong correlation with Ag, Sb, Pb, and Ba (Mac Gearailt, 2013).

The 2014 program included further trenching at Boss with a total of five trenches comprising 244 metres excavated. Two trenches were essentially duplicates of 2013 work, returning values to 2,044 ppb Au, while the other three trenches returned low gold values. The program also included 41 rock grab samples from test pitting in the area. The 2014 description of mineralized zones was essentially the same as the 2013 descriptions. However, the 2014 samples were found to have a different pathfinder element signature, with strong correlations between Au and Hg, Sc, Pb, Tl, Ag, Cd, Ni, Pb and Cu (Mac Gearailt, 2014).

The 2015 program at Boss consisted of a single 69-metre trench exposing orthogneiss, with variable degrees of shearing and silicification, and quartz veining and sericite alteration. Sampling returned gold values from 0.25 to 217 ppb Au.

Maverick

The Maverick zone represents the southeastern extent of the 10-kilometer gold trend. Soil sampling has indicated an area of 150x200 meters of anomalous gold (up to 90 ppb Au). Trenching in 2018 indicates the source of the mineralization is silicified, oxidized orthogneiss and quartz-sericite schist with quartz veining, slickensides, and fault gouge. This zone appears to continue into the adjacent 'Brew' property (currently held by White Gold Corp.) where much work has been done.

(Section 7.2 modified from Jones, 2016 and Schulze, 2017)

580000 590000 600000

7010000 7000000 6990000 6980000

QV
GOLDEN SADDLE
COFFEE
MONTE CARLO
BELMONT
SAMSON
BOSS
MAVERICK
STEWART RIVER
YUKON RIVER
Frisco Creek
Lucky Strike Creek
Simmons Creek
Brewer Creek
Telford Creek
Scotch Creek
Scroggie Creek
Thistle Creek
Kirkman Creek
Carlisle Creek
Independence Creek
Coffee Creek
Ballarat Creek

EJL DMF DMgM MSR DMG PDS PS DMN ITR PK LTrS LTrEJM mKW uKC

Figure 3

LUCKY STRIKE PROPERTY

REGIONAL GEOLOGY

N W E S

1:135,000

Kilometers

0 1 2 4 6

DRAWN BY: CLAYTON JONES	DATE: OCTOBER 31, 2016
MAP SHEET: 115O03	COORD SYSTEM: NAD 83 UTM ZN7

Legend

- Lucky Strike Property
- Placer Gold Creek
- Lucky Strike Au Zones
- Faults
- Gold Deposits

Bedrock

Eocene
- ITR — rhyolite, quartz – porphyry dikes

Late Cretaceous
- uKC — Carmacks group - volcanic rocks

Early Cretaceous
- mKW — granite, granodiorite

Jurassic
- EJL — granodiorite, syenite, pyroxenite

Permian
- PK — klondike Schist – felsic schist / gneiss
- PS — felsic orthogneiss

Paleozoic
- LTrEJM — felsic intrusive – granite, monzonite, quartz monzonite
- LTrS — mafic intrusive – clinopyroxenite, gabro, horblendite

Devonian - Mississippian
- DMF — amphibolite
- MSR — interm. to mafic orthogneiss & amphibolite
- PDS — Fp-qtz-mica gneiss & schist
- DMG — augen orthogneiss

584000 586000 588000 590000 592000 594000 596000 598000 600000

7014000 7012000 7010000 7008000 7006000

MONTE CARLO

BELMONT

SAMSON

BOSS

MAVERICK

INFERRED REGIONAL SCALE SHEAR ZONE

STUART RIVER

Luckystrike Creek

Simmons Creek

Brewer Creek

57674
57515
57439
57405
57386
57372
57363
57356
57350
57346
57343
57341
57339
57337
57335
57334
57333
57331
57330
57329
57328
57327
57326
57324
57323
57321
57318
57315
57313
57310
57307
57305
57301
57298
57296
57293
57289
57285
57281
57278
57272
57265
57252

Total Magnetic Intensity (nT)

Figure 4

Legend

- gold in soil anomalies
- inferred fault
- inferred lineament
- Lucky Strike Property

LUCKY STRIKE PROPERTY

AIRBORNE TOTAL MAGNETIC FIELD

INTERPRETED STRUCTURES

N W E S

1:40,000

Kilometers

0 0.5 1 2

DRAWN BY: CLAYTON JONES	DATE: OCTOBER 31, 2016
MAP SHEET: 115O03	COORD SYSTEM: NAD 83 UTM ZN7

584000 586000 588000 590000 592000 594000 596000 598000 600000

7014000 7012000 7010000 7008000 7006000

MONTE CARLO

BELMONT

SAMSON

BOSS

MAVERICK

INFERRED REGIONAL SCALE SHEAR ZONE

STUART RIVER

Luckystrike Creek

Simmons Creek

Brewer Creek

1.2 0.7 0.4 0.2 0.1 0.1 0.1 0.0 0.0 0.0 0.0 0.0 -0.0 -0.0 -0.0 -0.0 -0.0 -0.0 -0.0 -0.1 -0.1 -0.1 -0.1 -0.1 -0.1 -0.1 -0.1 -0.2 -0.2 -0.2 -0.3 -0.3 -0.4 -0.5 -0.6 -0.8

1ST VD Intensity

Figure 5

Legend

- gold in soil anomalies
- inferred fault
- inferred lineament
- Lucky Strike Property

LUCKY STRIKE PROPERTY

AIRBORNE 1ST VERTICAL DERIVATIVE

INTERPRETED STRUCTURES

N W E S

1:40,000

Kilometers

0 0.5 1 2

DRAWN BY: CLAYTON JONES	DATE: OCTOBER 31, 2016
MAP SHEET: 115O03	COORD SYSTEM: NAD 83 UTM ZN7

584000 586000 588000 590000 592000 594000 596000 598000 600000

7014000 7012000 7010000 7008000 7006000

MONTE CARLO

BELMONT

SAMSON

BOSS

MAVERICK

INFERRED REGIONAL SCALE SHEAR ZONE

STUART RIVER

Luckystrike Creek

Simmons Creek

Brewer Creek

66.5
61.2
58.3
56.3
54.3
53.0
51.6
50.4
49.4
48.4
47.3
46.4
45.6
44.9
44.1
43.3
42.6
41.9
41.2
40.4
39.7
39.0
38.3
37.6
36.9
36.2
35.5
34.7
34.1
33.4
32.7
32.1
31.4
30.5
29.6
28.5
27.0
24.9

K (cps)

Figure 6

Legend

- gold in soil anomalies
- inferred fault
- inferred lineament
- Lucky Strike Property

LUCKY STRIKE PROPERTY

AIRBORNE POTASSIUM COUNT

INTERPRETED STRUCTURES

N W E S

1:40,000

Kilometers

0 0.5 1 2

DRAWN BY: CLAYTON JONES	DATE: OCTOBER 31, 2016
MAP SHEET: 115O03	COORD SYSTEM: NAD 83 UTM ZN7

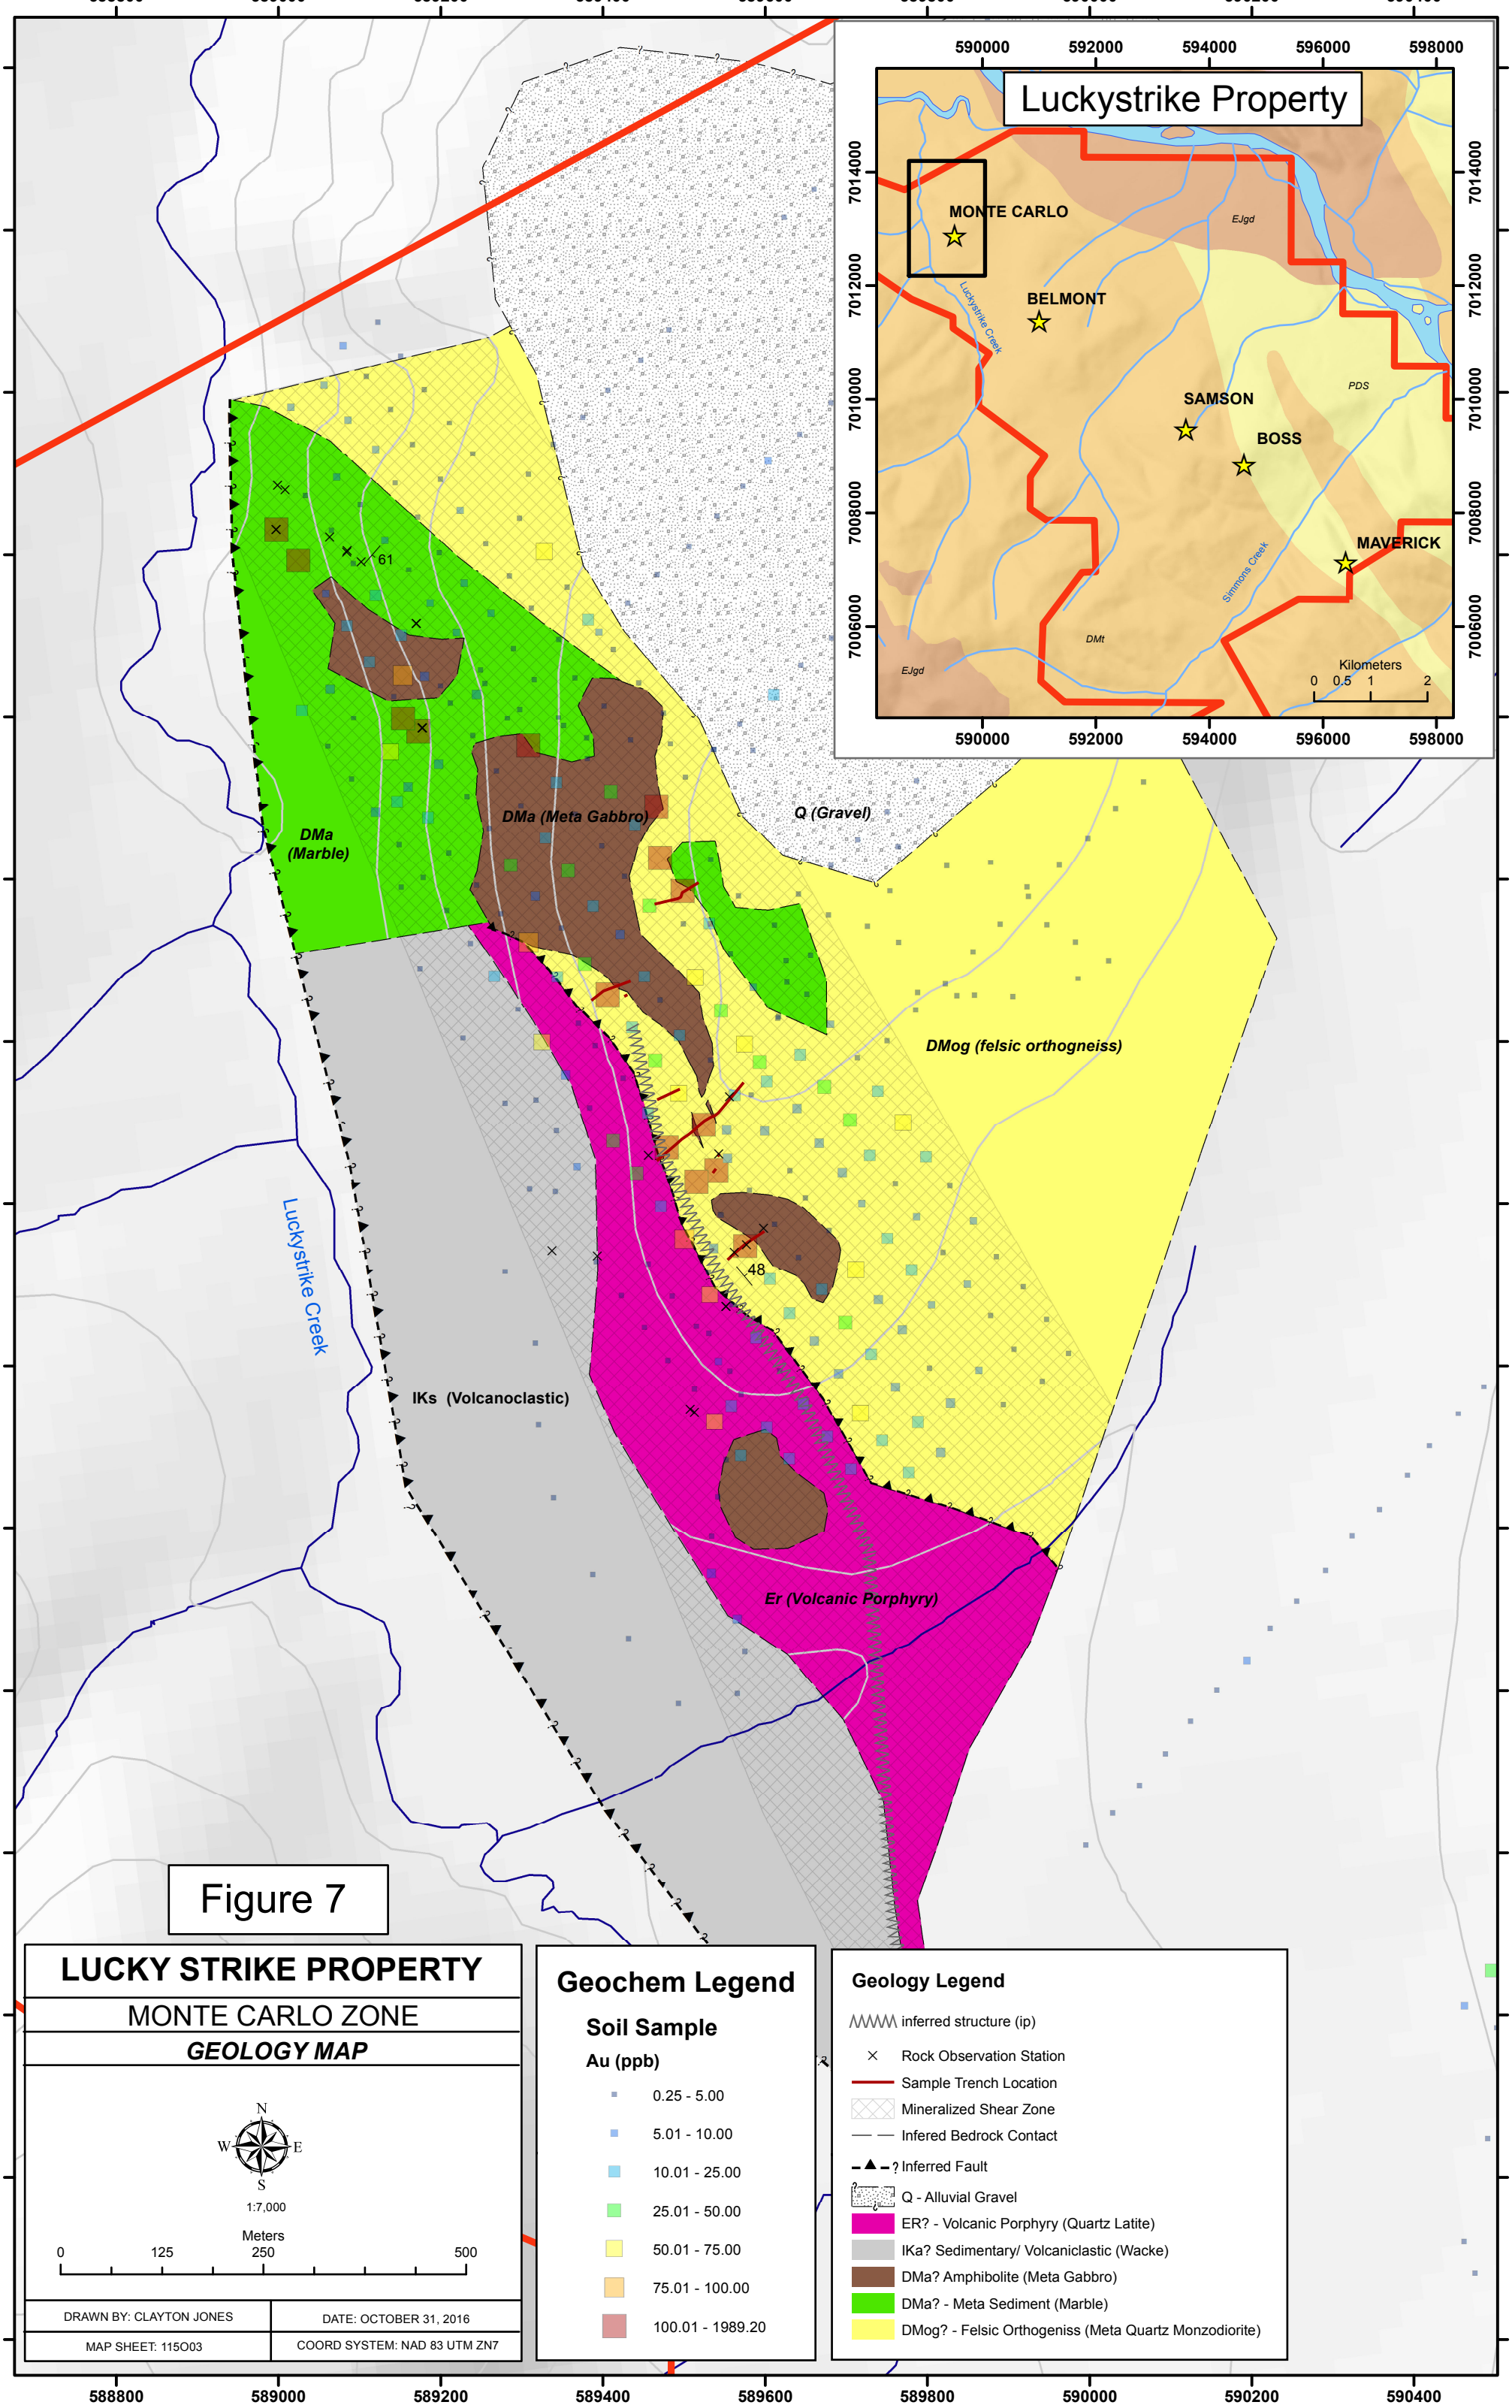


Figure 7

LUCKY STRIKE PROPERTY

MONTE CARLO ZONE

GEOLOGY MAP

N W E S

1:7,000

Meters

0 125 250 500

DRAWN BY: CLAYTON JONES	DATE: OCTOBER 31, 2016
MAP SHEET: 115O03	COORD SYSTEM: NAD 83 UTM ZN7

Geochem Legend

Soil Sample

Au (ppb)

- 0.25 - 5.00
- 5.01 - 10.00
- 10.01 - 25.00
- 25.01 - 50.00
- 50.01 - 75.00
- 75.01 - 100.00
- 100.01 - 1989.20

Geology Legend

- inferred structure (ip)
- Rock Observation Station
- Sample Trench Location
- Mineralized Shear Zone
- Infered Bedrock Contact
- ? Inferred Fault
- Q - Alluvial Gravel
- ER? - Volcanic Porphyry (Quartz Latite)
- IKa? Sedimentary/ Volcaniclastic (Wacke)
- DMa? Amphibolite (Meta Gabbro)
- DMa? - Meta Sediment (Marble)
- DMog? - Felsic Orthogeniss (Meta Quartz Monzodiorite)

FIGURE 8: MONTE CARLO ROCK TYPES

A –wacke *(minor lithic clasts) /* ***volcaniclastic*** */* ***epiclastic*** *composed of abundant, apparently detrital quartz, plagioclase, Kspar and minor (partly chloritized) biotite and muscovite in a matrix of quartz, clay? or sericite and carbonate* ***B*** *-* ***volcanic porphyry****, plagioclase-Kspar (sanidine)-minor quartz-biotite phyric, probably extrusive quartz latite porphyry, altered to clay (kaolinite?)-limonite, but the alteration may be mainly due to weathering.* ***C – marble*** *with minor quartz and accessory graphite, the latter two concentrated along thin veinlets (bluish in hand specimen). The rock has been strongly deformed and cataclasized, but retains a weakly developed foliation.* ***D – felsic orthogneiss****, very weakly foliated, medium/coarse-grained leucocratic felsic (quartz diorite?) orthogneiss composed of plagioclase-quartz-minor hematite-limonite (after Fe-calcite), brecciated and cut by poorly defined, irregular veinlets of quartz-hematite-limonite (after Fe-calcite, after pyrite?).* ***E – meta-gabbro/diabase*** *composed of hornblende-plagioclase-accessory quartz-magnetite (oxidized to hematite)-calcite-epidote-sphene-apatite-sericite-pyrite (oxidized to limonite). Minor alteration to calcite, Kspar, and sericite may be hydrothermal.* ***F – coarse conglomerate*** *that grades in the wacke / volcaniclastic (A).*

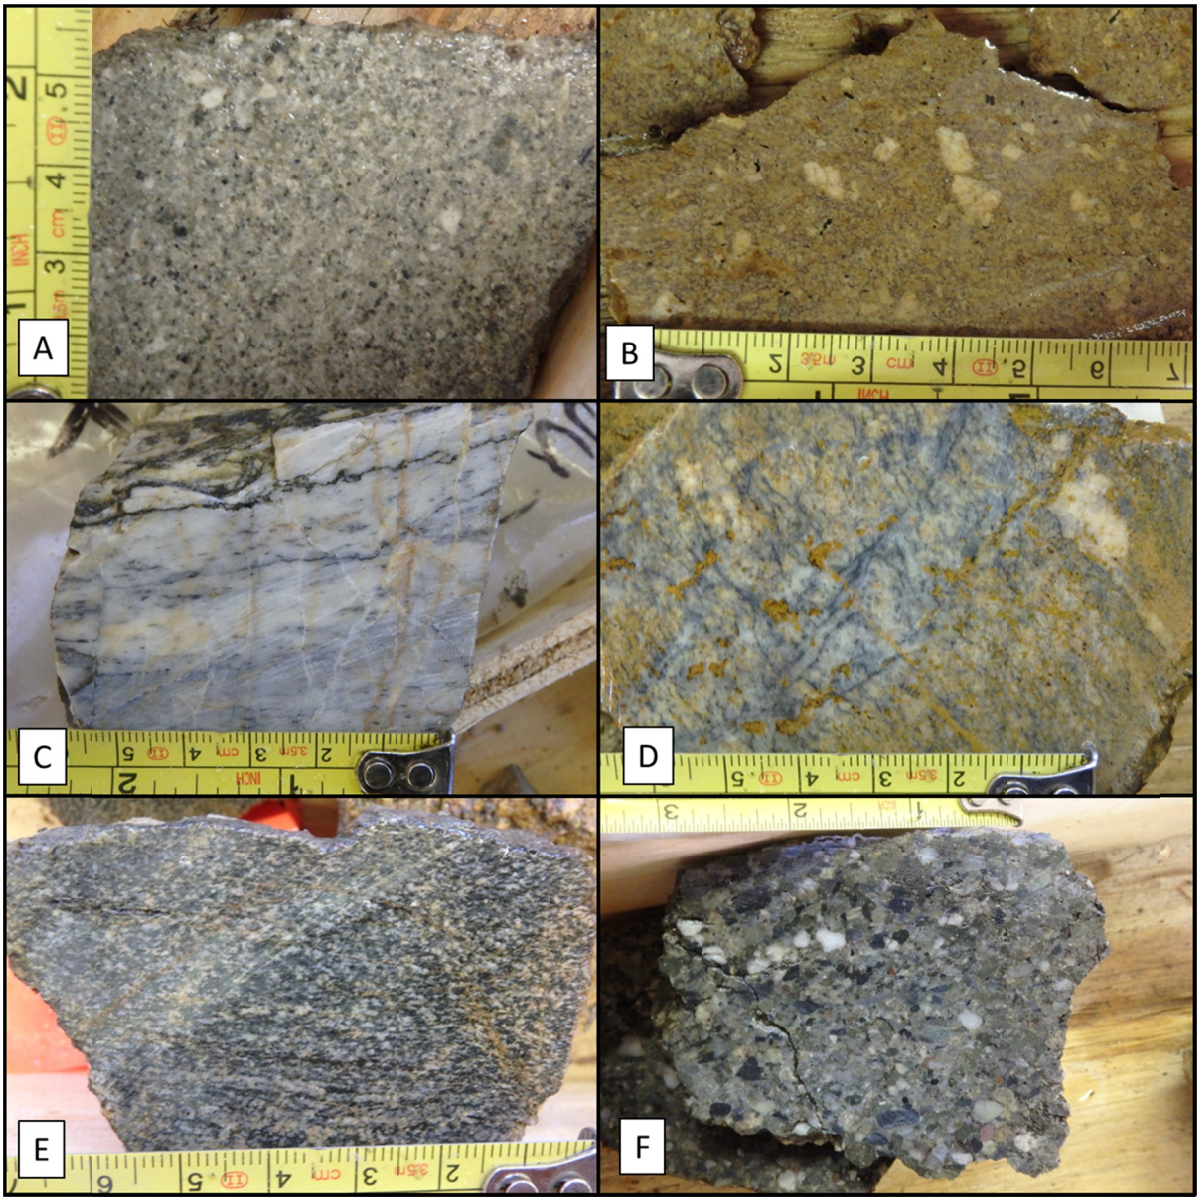


FIGURE 9: MONTE CARLO MINERALIZED SPECIMENS

A – LS-TR-16-09, *15.0 g/t Au over 2 m (0 – 2m), rep sample 1513952, massive coarse quartz vein that has been subjected to a later phase of strong deformation and recrystallization, apparently associated with mineralization by pyrite, possible barite? and gold, the latter occurring with limonite but otherwise free in quartz.* ***B - Sample 1513952*** *- detailed view (1.5 mm wide) to show irregular gold grains intergrown with limonite along very narrow, curving fracture (at the contact between recrystallized quartz that contains closely associated, nearby cubic pyrite or limonite pseudomorphs). Note there are also two tiny gold/limonite particles (indicated) in recrystallized quartz.* ***C - LS-TR-16-04****, 1.27 g/t Au over 2 m , 36 – 38 m, silicified orthogneiss with mineralized quartz veining* ***D LS-TR-16-5B****, 1.92 g/t Au over 2 m (0 – 2 m), quartz veining hosted in intensely silicified orthogneiss* ***E - LS-TR-16-06****, 0 – 10 m, up to 0.34 g/t Au, host for the low Au values is likely in the limonitic veinlets, weakly foliated, fine/medium-grained leucocratic felsic orthogneiss (quartz monzodiorite?) composed of plagioclase-Kspar-quartz-minor limonite-rutile, cut by poorly defined, partly vuggy veinlet zones of limonite (after pyrite?)-trace carbonate-Kspar (?).* ***F - LS-TR-16-06****, 3.0 g/t Au over 4 m (92 – 96 m) intensely silicified orthogneiss, sub brecciated.*

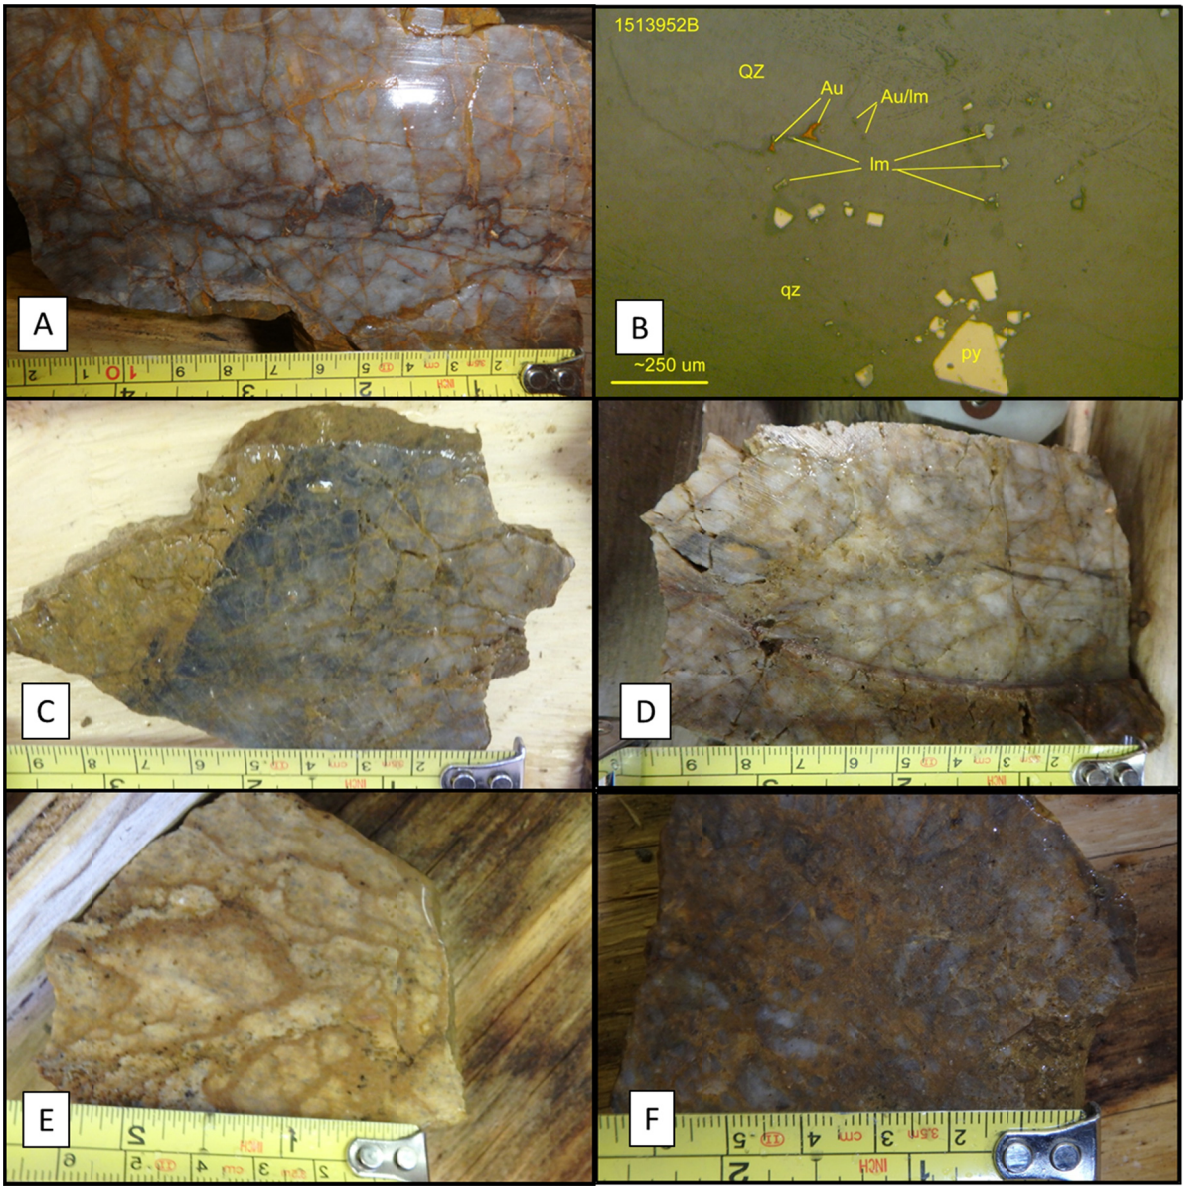


FIGURE 10: MARBLE BRECCIA OUTCROPPING

Left *– **m**arble outcro**p** exposure on the left limit **o**f Lucky Strik**e** near the nor**t**hern boundar**y** of the Lucky Strike* ***y*** *boundary within the Mon**t**e Carlo Zone.* ***Top right*** *– local matrix **s**upported breccia observed in the marble **c**liffs.* ***Bottom right*** *– local br**e**ccia observe**d** in the marbl**e** cliff with lar**g**e > 10 cm qu**a**rtz / feldspar **c**lasts.*



8.0 2019 DIAMOND DRILL PROGRAM

8.1 Summary of Drilling

Four diamond drill holes were drilled from July 5th, 2019 to July 24th, 2019 totalling 1105.82 meters. All holes were drilled at the Monte Carlo zone. Both HTW and NTW core diameters were used in each hole. Holes began with an HTW core diameter then reduced to NTW for reasons of technical difficulty or efficiency of drilling. Changes of core diameter are noted in both the logs and the sample lists. Drilling was performed under contract by Kluane Drilling Ltd. of Whitehorse, YT with their KD-1000 heli-portable rig. Kluane also performed downhole surveys (Devishot tool). As of December 2019, all 2017-2019 drill core is stored on the Lucky Strike Property at the Monte Carlo zone camp.

8.2 Sample Preparation, Analysis, and QA/QC

A complete report detailing sampling methodology, chain of custody, analysis methods, data verification and general QA/QC can be found in Appendix II. Overall the precision of the assay data was considered to be satisfactory.

8.3 Drill Results

The following is a summary of the results and significant geological intersections, broken down by hole. Drill logs, assays, and sections can be found in Appendices III, IV, and V, respectively. An Excel workbook with assays, collar locations, downhole surveys and geology is included digitally.

The 2019 diamond drill program was centered on the Monte Carlo zone and totalled 1105.82 meters of HTW and NTW-sized core over 4 holes spanning 800 meters of strike length (see Table 1 for collar information). This is the third drill campaign at Monte Carlo, preceded by a 1033 meter program in 2017 and a 1360 meter program in 2018. Results from the programs include 5.36 g/t Au over 22m (2017) and 4.55 g/t Au over 7.6m (2018). Previous mechanical trenching in the area has also indicated widespread gold mineralization in the zone with results including 0.76 g/t Au over 78m.

The primary purpose of the 2019 program was to target a 1.8 kilometer-long chargeable anomaly outlined in 2016 and 2018 IP (induced polarization) surveys (see Ferraro, 2018). One 2018 diamond drill hole (DDLS-18-06) intersected the edge of the chargeable anomaly and assayed 4.55 g/t Au over 7.6m within a zone of silicified, albitized, pyrite-rich orthogneiss. This marked the first time fresh sulphide with associated gold had been encountered at the Monte Carlo zone. As this unit was deemed a potential source of the chargeable signature, it was decided that the entirety of the 2019 program would be devoted to drill testing the IP.

DDLS-19-01

Drill hole DDLS-19-01 was drilled on section with hole DDLS-18-06 (among others) on IP L7. It was designed to drill through the heart of the chargeable anomaly (outer shell at 95m, core at 170m downhole depth). This was the original intent of DDLS-18-06, however when re-inverting the 2016 and 2018 IP data a spatial discrepancy was discovered, which ended up moving the core of this anomaly ~75m to the northeast along the line; thus only the edge of the anomaly was intersected.

This hole was drilled at a 230 degree azimuth and -75 degree dip. Due to prior trenching it was expected that the hole would collar in a marble unit; however, this unit was only intercepted from 31-38m. The hole otherwise consisted of typical orthogneiss and chlorite schist with a lens of ultramafic rock observed at 92-106m. At 109m a broad, low grade zone of orthogneiss was intercepted, yielding **0.10 g/t Au over 67m (109-176m)**. Zones of increased brecciation yielded slightly higher values. A zone of bleached, altered, and fractured orthogneiss with high pyrite content (up to 7%) was present at **158 – 163m** and yielded some higher gold values such as 0.55 g/t over 1m (158m) and 0.44 g/t over 1m (162m) with an overall grade of **0.28 g/t over 5m** (Photo 1). It is possible that this zone represents the extension of the mineralized fault seen at 176.9m in DDLS-18-06.



Photo 1: Altered orthogneiss with high pyrite content yielded 0.28 g/t Au over 5m (158-163m) in DDLS-19-01.

Other sporadic gold zones were intercepted down hole.

- A zone of otherwise unremarkable biotite orthogneiss returned **1.58 g/t Au over 1m at 222.6m**, likely related to a deformed quartz vein but with almost no sulphide. Interestingly, sodium is depleted in this assay.
- A fracture zone yielded **0.86 g/t Au over 2m at 245-247m**.
- A zone of intense albite alteration with 4-6% pyrite returned **1.91 g/t Au over 2m at 249-251m** (Photo 2).
- A weakly silicified, fractured orthogneiss zone towards the end of the hole yielded **0.88 g/t over 6m (273-279m)**. This zone displayed abundant quartz veining with pyrite mineralization (Photo 3) but is mostly intensely fractured core representing a large fault.



Photo 2: Intense albite alteration with pyrite stringers yielded 1.91 g/t Au over 2m at 249-251m (DDLS-19-01).



Photo 3: Quartz veining and pyrite at 274.5m assayed 0.59 g/t Au over 1m (274-275m) which led into a fault zone yielding an overall intercept of 0.88 g/t Au over 6m (273-279m) in DDLS-19-01.

DDLS-19-02

Drill hole DDLS-19-02 was drilled on IP L6 and was designed to hit two targets. The first was the upper zone of oxide mineralization discovered in 2018 trench LSTR-18-02 (0.90 g/t Au over 22m). This trench is located 50m northwest of the hole (along strike). The second target was the chargeable anomaly at depth (outer shell at 130m, core at 250m downhole depth). To hit both targets the hole was drilled at a 050 degree azimuth, -65 degree dip. Despite this being somewhat down dip of geology, core angles observed in 2018 hole DDLS-18-06 drilled at the same azimuth (but -75 degree dip) were deemed acceptable and it was thought that this hole would be similar. Due to budgetary reasons it seemed prudent to risk seeing less geology but intercepting both

targets. However due to the shallowed dip, core angles were very shallow and in retrospect the hole should have been drilled normal to geology and only targeted the IP anomaly.

The hole collared in limonitic orthogneiss. The hole displayed lower than normal background gold values in this area at <10 ppb Au. A zone of brecciated quartz veining and minor fault gouge yielded **0.29 g/t Au over 4.2m (17.0-21.2m)**. At 46m more shearing is observed with lenses of darker limonitic mica schist. Background gold grades increase in this zone from 10-50 ppb Au. A large fault zone of limonitic orthogneiss and mica schist yielded an intercept of **0.21 g/t Au over 10.3m (67.7-78.0m)** (Photo 4).



Photo 4: Faulted limonitic orthogneiss and mica schist yielded 0.21 g/t Au 10.3m (67.7-78.0m) in DDLS-19-02.

Below this, the rock grades to chlorite schist and mica schist with no gold grades. At 187m a large fault zone in orthogneiss was encountered yielding a low grade intercept of **0.18 g/t Au over 13.2m (190.8-204.0m)**.

Deeper in the hole small breccia units and pyrite-mienralizaed quartz veins were encountered.

- A zone of silicified, albitic orthogneiss with quartz veinlets and pyrite assayed **0.59 g/t Au over 1m at 272-273m** (Photo 5).
- A weakly brecciated orthogneiss zone assayed **0.91 g/t Au over 1m at 289-290m.**
- Silicified orthogneiss with disseminated fine to medium grained pyrite assayed **0.48 g/t Au over 1m at 294-295m** (Photo 6).

Although the rock was looking more prospective towards the bottom of the hole with increased silicification and pyrite mineralization, the hole was forced to be shut down due to the above faulted rock binding the rods.



Photo 5: Albite-altered orthogneiss with pyritic, deformed quartz veining assayed 0.59 g/t Au over 1m at 272-273m in DDLS-19-02.



Photo 6: Silicified orthogneiss with disseminated pyrite assayed 0.48 g/t Au over 1m at 294m in DDLS-19-02.

DDLS-19-03

Drill hole DDLS-19-03 was drilled at an azimuth of 230 degrees and dip of -75 degrees on IP L5. It was designed to intercept the IP anomaly in the southeast area of the Monte Carlo Zone. The outer shell of the anomaly is located ~110m downhole and the core at ~270m.

The drill hole is located in a low-lying area of the zone. The hole went through 32 meters of overburden before intercepting a chlorite schist unit. At 63m a limonitic orthogneiss was encountered typical of the host rock for the zone, however no significant gold values were returned. Oxidation decreases gradationally, with fresh pyrite and un-oxidized rock starting at about 82m.

From 132m to 173m a unique, more mafic unit was encountered. This is termed chlorite amphibolite in the drill logs. This unit is often medium grained with likely a dioritic to gabbroic protolith (Photo 7). Of particular note is the magnetite content. This unit is magnetic throughout, sometimes strongly. This may account for some weak IP response.

From 173m to 213m the lithology varies between chlorite schist and orthogneiss. From 213m to 228m a unique silver/white mica schist was encountered (Photo 8). This unit displayed medium grained mica and quartz veining with interlayered schist. Localized silicification with fine grained and very fine grained disseminated pyrite were considered prospective at the time of logging. This unit did indeed display elevated gold assays, with the highest value reaching 0.23 g/t Au over 1m (221-222m).

The remainder of the hole consisted of interlayered orthogneiss and chlorite schist with some prospective zones of brecciation, silicification, albite alteration, and pyrite mineralization, however no significant assays were returned.



Photo 7: Magnetite-bearing amphibolite was encountered from 132-173m in DDLS-19-03.



Photo 8: Mica schist with localized silicification and pyrite was encountered at 213-228m in DDLS-19-03.

DDLS-19-04

Drill hole DDLS-19-04 was drilled in the northwest area of the Monte Carlo zone on IP L200. It was drilled at a 240 degree azimuth, -65 degree dip. This hole was designed primarily to intersect the IP anomaly as it is closest to surface in this area. The outer shell of the anomaly is located approximately 60m downhole and the core 160m downhole. The secondary purpose was to intersect near-surface mineralization discovered in 2018 trench LSTR-18-01 (0.94 g/t Au over 30m) which is located 100m southeast of the hole (along strike).

The hole collared in a previously unseen unit, dark grey siliceous quartzite unit with limonitic fractures and varying degrees of cataclastic deformation (Photo 9). Although some more intense brecciation and quartz veining was observed, no sulphides were present in the unit and no significant gold values returned.

At 66m the lithology graded to a finer sericitic schist with localized pervasive oxidation. This softer unit was cut by a large, orange and white brecciated quartz vein with associated silica-flooded schist from 74m to 81m but ultimately was barren of mineralization (Photo 10). At 84m a hematitic and limonitic orthogneiss unit was intersected, similar to orthogneiss seen in previous holes.

From 104m to 116m a magnetite-bearing dioritic orthogneiss or amphibolite was intersected. Below this the rock grades between orthogneiss and chlorite schist for the remainder of the hole. Interesting to note, oxide minerals (mostly hematitic fractures) are present all the way down to 175m (158m vertical depth). Very little sulphide was observed in the core, the most being found in the chlorite schist towards the bottom of the hole (up to 1% pyrite). The highest gold value returned from the entire hole was 0.095 g/t Au over 1m (188-189m) corresponding to a small shear zone within the chlorite schist.



Photo 9: Siliceous quartzite unit with cataclastic deformation in DDLS-19-04.



Photo 10: Pervasively limonitized quartz veining and silica flooding in DDLS-19-04.

Table 1: Drill collar information

Hole ID	Easting	Northing	Azimuth	Dip	Depth (m)
DDLS-19-01	589761	7013075	230	-75	281.03
DDLS-19-02	589710	7012843	50	-65	297.18
DDLS-19-03	590018	7012825	230	-75	327.36
DDLS-19-04	589433	7013410	240	-65	200.25

Table 2: Assay highlights

Hole ID	From (m)	To (m)	Interval (m)	Au (g/t)
DDLS-19-01	109.00	176.00	67.00	0.10
including				
DDLS-19-01	115.00	116.00	1.00	0.86
DDLS-19-01	158.00	159.00	1.00	0.55
DDLS-19-01	162.00	163.00	1.00	0.45
DDLS-19-01	222.60	223.60	1.00	1.58
DDLS-19-01	232.00	233.00	1.00	0.72
DDLS-19-01	245.00	246.00	1.00	1.16
DDLS-19-01	249.00	251.00	2.00	1.91
DDLS-19-01	269.00	270.00	1.00	0.85
DDLS-19-01	273.00	279.00	6.00	0.88
including				
DDLS-19-01	275.00	276.00	1.00	2.68

DDLS-19-02	17.00	21.20	4.20	0.29
DDLS-19-02	67.70	78.00	10.30	0.21
		including		
DDLS-19-02	74.00	77.00	3.00	0.43
DDLS-19-02	190.80	204.00	13.20	0.18*
		including		
DDLS-19-02	199.00	204.00	5.00	0.27
		including		
DDLS-19-02	200.00	201.00	1.00	0.49
DDLS-19-02	272.00	273.00	1.00	0.59
DDLS-19-02	289.00	290.00	1.00	0.91
DDLS-19-02	294.00	295.00	1.00	0.48
DDLS-19-03	221.00	222.00	1.00	0.23
DDLS-19-04	*No significant values*			

*3.05m zone of poor recovery within this interval

9.0 DISCUSSION

The 2019 diamond drill program at Monte Carlo was designed to investigate a buried geophysical anomaly identified in the 2016-2018 IP surveys. The anomaly is characterized by strong chargeability responses (10 to 17 mV/V) and is traceable for at least 1.8 kilometers. This signature occurs within the Monte Carlo orthogneiss package, approximately 400 meters northeast of the thrust fault/shear zone in the location of DDLS-19-03 (IP L5) and trending in a northwest direction. While the shear zone and general strike of the geology is at 330 degrees, the anomaly trends at ~315 degrees. The anomaly converges with the shear zone around IP L000 (note: there are different naming conventions for the IP lines, see Ferraro, 2018). Inversions done on the IP data indicate that the anomaly core is at 160-200m depth in the southeast of the zone and shallows to the northwest. Figure 11 displays a cross section of the Monte Carlo zone in the vicinity of DDLS-19-01.

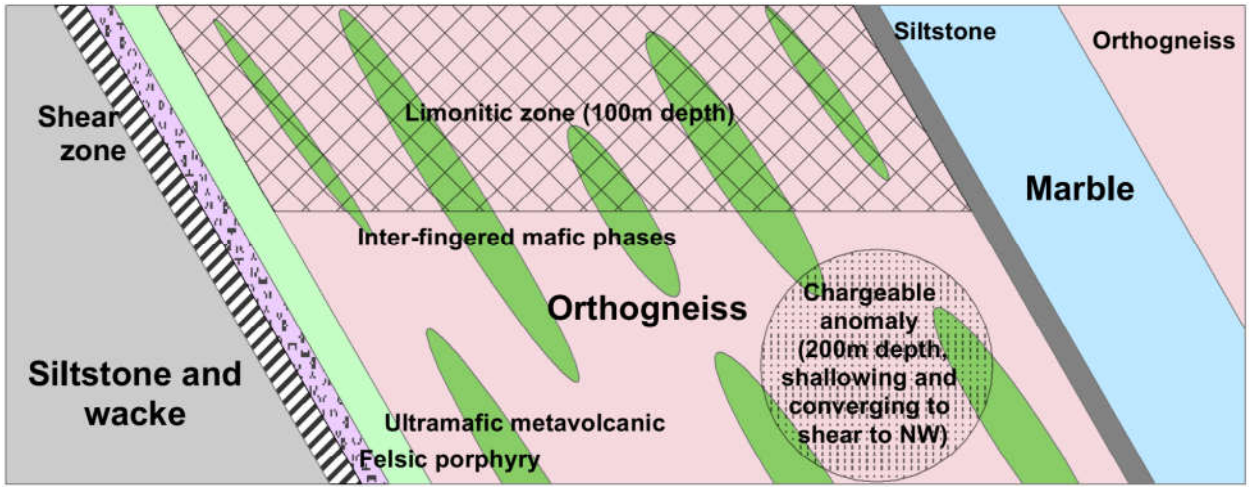


Figure 11: Cross section of geology at the Monte Carlo zone, looking northwest.

Supporting the relation of gold mineralization to the anomaly was the results of 2018 hole DDLS-18-06. This hole intersected a silicified, albitized fault zone with up to 8% fresh pyrite and returned an intersection of 4.55 g/t Au over 7.6m at 170m vertical depth. This was the first time unoxidized pyrite had been observed on the property. It was intended that 18-06 drill through the core of the anomaly but due to a spatial discrepancy found when inverting the IP data, the anomaly was moved 75m to the northeast, meaning this hole only clipped the edge of it.

The risk of the program was that the chargeability response was not particularly strong in the overall sense (but strong relative it's surroundings) and thus could be lithological in origin. Supporting this is the low, but consistent pyrite content in the more mafic phases of the orthogneiss.

As is evident in the assay results, the 2019 drill program generally did not yield significant gold intercepts within this anomaly. However, it would appear there is some correlation. DDLS-19-01 intercepted a broad, low grade zone (0.10 g/t Au over 67m) beginning at the top of the anomaly,

with significant pyrite content (up to 7%) present at the core of the anomaly (Figure 12). However, below this gold assays dropped off completely. Towards the bottom of the hole, and the bottom of the projected anomaly, sporadic, higher grade gold assays were yielded from small zones of faulting, silicification, and pyrite mineralization. Ideally this hole would have gone deeper and continued to the shear zone, however technical issues and budgetary concerns prevented this.

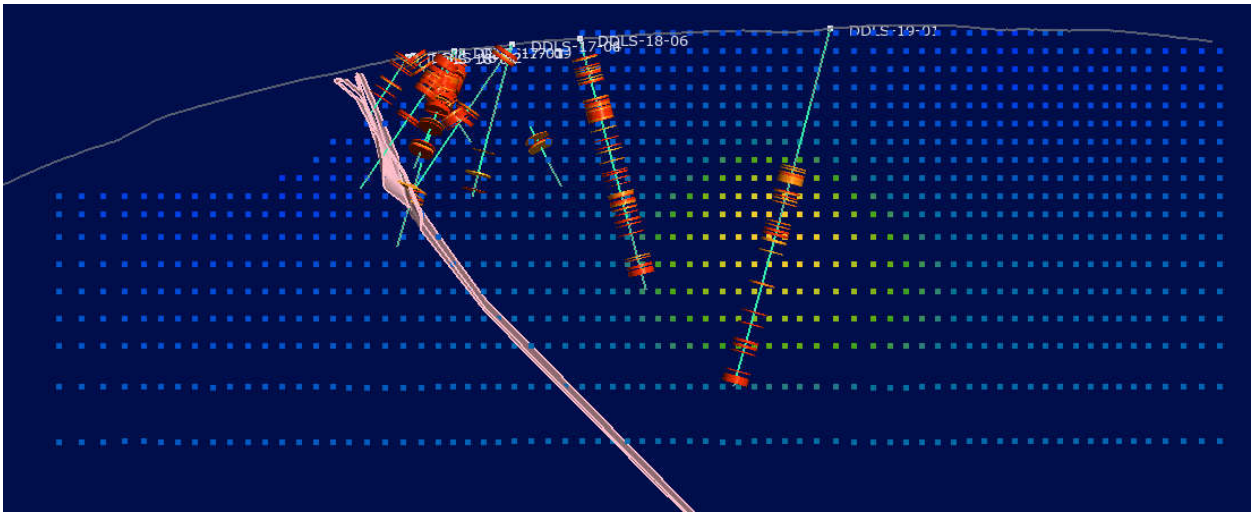


Figure 12: Section of IP L7 looking northwest showing chargeability in coloured points. DDLS-19-01 is on the right with grade shells displaying gold assays >100 ppb Au. The pink linear feature is the projection of the Monte Carlo shear plane.

One hundred fifty meters to the southeast, DDLS-19-02 was drilled to intersect near surface mineralization in a nearby trench as well as the IP anomaly. To accomplish this the hole had to be drilled downdip of geology at an 050 degress azimuth. Core angles observed in 2018 hole DDLS-18-06 drilled at the same azimuth (but -75 degree dip) were deemed acceptable and it was thought that this hole would be similar. Due to budgetary reasons it seemed prudent to risk seeing less geology but intercepting both targets. However due to the shallowed dip, core angles were very shallow and in retrospect the hole should have been drilled normal to geology, only targeting the IP anomaly.

In this hole correlation of gold to chargeability is mostly inconclusive. The outer edge of the anomaly is located ~130m downhole and the core ~235m downhole. A gold-barren, pyrite-bearing chlorite schist extends from 83m to 187m. A fault zone marks the contact to orthogneiss and yielded low grade gold values from 187m down to 210m, well within the anomaly. However, very little pyrite was observed within this gold zone. As with 19-01, sporadic gold values continue to the bottom of the hole, often associated with pyrite. Also as with 19-01, this hole should have gone deeper, but the shallow core angles and faulting bound the rods, forcing the hole to be shut down.

DDLS-19-03 is located 200m southeast of DDLS-19-03. In this area the anomaly is stronger than 19-02, larger, and deeper. The outer shell of the anomaly is located ~110m downhole and the core at ~270m. In this hole the edge of the anomaly appears to coincide with a pyrite-bearing

chlorite schist beginning at 114m and extending to 214m. A more mafic, magnetite-bearing amphibolite unit is present at 132m to 173m. Magnetite does produce a weak chargeability response, so in combination with the pyrite, it would appear that at least part of the anomaly can be attributed to lithology here.

That said, around the core of the anomaly, there is a prospective looking 10m section of faulted, silicified orthogneiss with up to 5% pyrite (232-242m) but this unit did not yield significant gold values.

Of particular note in 19-03 is the pyritiferous white/silver mica schist present from 214m to 228m. This unit displayed anomalous gold values up to 233 ppb Au. There is also slightly elevated copper and arsenic values in this zone, up to 132 ppm Cu and 24 ppm As (anomalous for the Monte Carlo zone). There is some research to support the association of white mica to gold mineralization at the Coffee Creek deposit. In his 2014 Master's thesis on the Latte Gold Zone, Buitenhuis demonstrated that metamorphic mica interacting with mineralized fluid (S, As, Sb, CO_2, Au in the case of Latte) produces a white mica and forms arsenian pyrite +/- gold along relict foliation planes (Buitenhuis, 2014). Although this unit has been rarely observed so far, it presents an interesting potential and should be watched for in the future.

DDLS-19-04 was drilled 800m northwest of 19-03 on IP L200. It was targeting both near surface mineralization of trench LSTR-18-01 and the chargeability anomaly. The outer shell of the anomaly is located approximately 60m downhole and the core 160m downhole. No significant assays were produced from this hole. The outer shell of the anomaly coincides with a contact from a quartzite unit to a sericite schist present from 66m to 84m. No sulphide was observed in the schist. Hematitic orthogneiss below the schist was also barren of sulphides. Some magnetite-bearing amphibolite was present at 104m to 115m. From 142m to the end of the hole at 200m the lithology varies between pyrite-bearing (up to 2%) chlorite schist, dioritic orthogneiss and orthogneiss. Observations would suggest that that the chargeability response can be attributed to lithology in this hole.

In continuation with the 2018 assessment report, a comparison of element correlations to gold is presented (see Table 3). Important to note is the change in assay methods from 2017 to 2018. In 2017 drill core and rocks were assayed using an modified aqua regia digestion (1:1:1 HNO_3:HCl:H_2O). In 2018 the method was switched to a multi-acid digestion (HNO_3, $HClO_4$, HF, HCl) based on the recommendation of a geochemist. A multi-acid digestion has the benefit of attacking silicate minerals which allows for more effective mapping of lithology and alteration (outside the scope of this report). The drawback, however, is that volatilization during fuming may result in the loss of As, S, Se, and Sb.

Of note is the greatly reduced correlation of silver to gold. This appears to be due not to the lack of silver in auriferous zones, but the presence of widespread, low-grade silver in upper zones of limonitic orthogneiss. Much of this oxide zone did not host gold in the 2019 holes but typically did in 2017-2018 when drilling closer to the shear.

Table 3: Comparison of 2017, 2018, and 2019 drilling correlations to gold

2017-2019 Drilling at Monte Carlo - Correlation to Gold						
	2017 Drilling (925 samples, aqua regia digestion)		2018 Drilling (1343 samples, multi-acid digestion*)		2019 Drilling (734 samples, multi-acid digestion*)	
Rank	**Element**	**Correlation**	**Element**	**Correlation**	**Element**	**Correlation**
	Au	1	Au	1	Au	1
1	Te	0.96	Ag	0.53	Te	0.21
2	Hg	0.67	S	0.47	Hg	0.15
3	Ag	0.66	Te	0.37	S	0.14
4	Cd	0.46	W	0.29	Na	0.13
5	Bi	0.27	Mo	0.23	Cd	0.11
6	Se	0.19	Hg	0.22	W	0.09
7	Pb	0.19	Re	0.18	Re	0.06
8	Mn	0.14	Se	0.15	Se	0.05
9	Mo	0.12	Cu	0.08	Mo	0.03
10	Cu	0.10	Pb	0.07	Ag	0.02

*with the exception of Hg which is digested by aqua regia

10.0 CONCLUSIONS AND RECOMMENDATIONS

Results from the 2019 diamond drill program at Lucky Strike suggest that, with some exception, the chargeability anomaly as outlined in the IP survey can be attributed to larger packages of pyrite-bearing chlorite schist and some smaller units of magnetite-bearing amphibolite. This appears to be the case in holes DDLS-19-03 and 19-04. Hole DDLS-19-02 was generally inconclusive, with no lithology or mineralization corresponding to a geophysical response. This can be partly attributed to the downdip nature of the hole.

The exception is DDLS-19-01. A weakly mineralized orthogneiss unit appears to directly correspond with chargeability. The lack of any deeper, large zone of pyrite-bearing chlorite schist discourages a lithological source for the response. Localized silicification with increase sulphide content and higher gold grades at depth is encouraging.

It is evident that further drilling should be done in the vicinity of DDLS-19-01 and 19-02, as well as to the northwest around DDLS-18-10. It is recommended that holes be drilled at a 230 azimuth or normal to this pending further structural investigation.

It is clear that there are mineralized fluid pathways to depth within the orthogneiss package, evidenced by deeper, higher grade intersections of localized pyritiferous, silicified, albitized, faulted orthogneiss. **All future holes should be drilled until intersecting the shear zone** (discussed in more detail in the 2018 assessment report), even if it means a 450m hole.

Another hole should be drilled on IP L5, stepped 100m forward from DDLS-19-03. This is to account for the large nature of the chargeability anomaly, the potential for errors into plotting the IP, and to move away from the magnetic high that this hole was collared in, reducing the likelihood of intercepting large, gold-barren mafic packages.

Beyond the Monte Carlo zone is a 10-kilometer gold trend that remains undrilled. Encouraging results from 2018 trenching at the Belmont zone warrant an IP survey and possibly limited exploratory drilling. Sporadic but high-grade surface values at the Boss Zone could be investigated with one or two well-placed exploratory drill holes. Maverick, while difficult to explore due to topography, warrants additional work due to the prospective grades of the single trench done in 2018.

Beyond the 10-kilometer trend large portions of the property remain unexplored. Conventional ridge-and-spur soil sampling should be done on all unexplored ground (particularly southeast of White Gold's Brew Property) and follow-grid soil sampling and prospecting should be done on existing isolated gold-in-soil anomalies.

REFERENCES

Arseneau, G. 2018**. Independent Mineral Resource Estimate for the White Gold Project, Dawson Range, Yukon, Canada.** Arseneau Consulting Services Inc., April 15, 2018.

Bailey L. A., 2013. **Late Jurassic Fault-Hosted Gold Mineralization of the Golden Saddle Deposit, White Gold District, Yukon Territory.** MSc Thesis. University of British Columbia, Vancouver, BC.

Buitenhuis, E. 2014. **The Latte Gold Zone, Kaminak's Coffee Gold Project, Yukon, Canada: Geology, Geochemistry, and Metallogeny**. MSc Thesis. University of Western Ontario, London, ON. Electronic Thesis and Dissertation Repository. Paper 1858.

Doerksen, G., Pilotto, D., McLeod, K., Sim, R., Levy, M., Sharp, T., Smith, M.E., Kappes, D.W. 2016. **NI 43-101 Feasibility Study Technical Report for the Coffee Gold Project, Yukon Territory, Canada.** JDS Energy & Mining Inc., Vancouver, BC. Report Date: February 18, 2016.

Duk-Rodkin, 2001. **Glacial Limits of Stewart River, Yukon Territory (115-O&N)** (Open file 3801, scale 1:250,000, Geological Survey of Canada).

Ferraro, D. 2018. **Technical Report, 2018 Diamond Drilling, Mechanical Trenching, and IP Survey on the Lucky Strike Property** (Assessment report # 097245)

Jones, C. 2016. **Technical Report, 2016 Surface Exploration Report on the Lucky Strike Property, White Gold District** (Assessment report # 097177)

Mac Gearailt, D. 2011. **Technical Report, Report on the Lucky Strike Property, 2011 prospecting and sampling program, White Gold District** (Assessment report # 096089)

Mac Gearailt, D. 2013. **Technical Report, Surface Exploration Program on the Lucky Strike Project, White Gold District** (Assessment report # 096557)

Mac Gearailt, D. 2014. **Technical Report, Surface Exploration Program on the Lucky Strike Project, White Gold District** (Assessment report # 096820)

Mac Gearailt, D. 2015. **Technical Report, Surface Exploration Program on the Lucky Strike Project, White Gold District** (Assessment report # 096879)

McQueen S.B., 2009. **Geochemical Report on the Golden Fox Project** (Assessment report # 096089)

Pautler J. and Shahkar A., 2014. **NI 43-101 Technical Report on the QV Project White Gold District, Yukon Territory.**

Ryan, J.J., and S. P., Gordey, 2005. **Geology of the Stewart River area (115-N, 115-O and part of 115-J). Yukon Territory** (Open file 4970, scale 1:250,000, Yukon Geological Survey).

REFERENCES (CONTINUED)

Schultze, C. 2017. **Technical Report, 2017 Assessment Report on the Lucky Strike Property, Yukon Territory, Canada** (Assessment report # 097122)

Vivian, G., White, D. and Robinson, J. 2011. **Technical Report Au, Lucky, and Strike Claims, Yukon Territory, Canada.**

STATEMENT OF EXPENDITURES

Costs associated with the 2019 Lucky Strike work program
Worked from July 1st, 2019 to July 30th, 2019

DRILLING	Kluane Drilling (1105.82m)	by invoice	$184,335.49
HELICOPTER	TransNorth A-Star ($1841/hr wet)	88.2 hrs	$162,376.20
HELICOPTER	TransNorth Jet Ranger ($1159/hr wet)	9.8 hrs	$11,358.20
ASSAYS	Drill assays	$44.30*796 samples	$35,262.80
REPORT	assessment report		$5,000.00
	TOTAL		**$398,332.69**

CERTIFICATE OF QUALIFICATIONS

I, Daniel Ferraro, of PO Box 1485 Dawson City, Yukon, Canada, certify that:

1. I am a graduate of Lakehead University, 2008, and a hold an H. B.Sc. Geology degree.
2. I am an independent geological consultant.
3. I am a member of the Ontario Prospectors Association (2010).
4. I have been employed as a geological assistant for the Ontario Geological Survey and the Geological Survey of Canada during the summers of, respectively, 2006 and 2007.
5. I have been working in the mineral exploration industry since 2008 consulting for Pacific North West Capital Corporation, East West Resources Corporation, Rainy Mountain Royalty Corporation, Black Panther Mining Corporation, White Tiger Mining Corporation, Trillium North Minerals Ltd., Nebu Resources Inc., Canoe Mining Ventures Corp., Harte Gold Corp., Goldstrike Resources Ltd., Goldspike Exploration Inc., Nevada Zinc Corp., and Luckystrike Resources Ltd.
6. This report was prepared by myself.
7. I have no personal knowledge from the date of this certificate of any material fact or change not reflected in this report.

Date: Nov. 1, 2019.

Daniel Ferraro, HBSc.

Appendix I: List of Claims

Claim Name	Claim Number	Grant Number	Owner	Status	Expiry Date	District
AB	1	YF04801	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	2	YF04802	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	3	YF04803	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	4	YF04804	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	5	YF04805	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	6	YF04806	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	8	YF04808	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	9	YF04809	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	10	YF04810	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	11	YF04811	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	12	YF04812	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	13	YF04813	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	14	YF04814	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	15	YF04815	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	16	YF04816	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	17	YF04817	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	18	YF04818	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	19	YD155599	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	20	YD155600	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	21	YF04821	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	22	YF04822	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	23	YF04823	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	24	YF04824	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	25	YF04825	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	26	YF04826	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	27	YF04827	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	28	YF04828	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	29	YF04829	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	30	YF04830	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	31	YF04831	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	32	YF04832	Luckystrike Resources Ltd. - 100%	Active	2029-10-02	Dawson
AB	33	YD155593	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	34	YF46604	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	35	YF46605	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	36	YF46606	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	37	YF46607	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	38	YF46608	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	39	YF46609	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	40	YF46610	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	41	YF46611	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	42	YF46612	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	43	YF04703	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	44	YF04704	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	45	YF04705	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	46	YF04706	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	47	YF04707	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	48	YF04708	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	49	YF04709	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	50	YF04710	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson

Claim Name	Claim Number	Grant Number	Owner	Status	Expiry Date	District
AB	51	YF04711	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	52	YF04712	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	53	YF04713	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	54	YF04714	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	55	YF04715	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	56	YF04716	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	57	YF04717	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	58	YF04718	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	59	YF04719	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	60	YF04720	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	61	YF04721	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AB	62	YF04722	Luckystrike Resources Ltd. - 100%	Active	2033-05-09	Dawson
AU	89	YC98689	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	90	YC98690	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	91	YC98691	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	92	YC98692	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	93	YC98693	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	94	YC98694	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	95	YC98695	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	96	YC98696	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	97	YC98697	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	98	YC98698	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	99	YC98699	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	100	YC98700	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	101	YC98801	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	102	YC98802	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	103	YC98803	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	104	YC98804	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	105	YC98805	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	106	YC98806	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	107	YC98807	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	108	YC98808	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	109	YC98809	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	110	YC98810	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	111	YC98811	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	112	YC98812	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	113	YC98813	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	114	YC98814	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	115	YC98815	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
AU	116	YC98816	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
L	1	YF04901	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	2	YF04902	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	3	YF04903	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	4	YF04904	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	5	YF04905	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	6	YF04906	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	7	YF04907	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	8	YF04908	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	9	YF04909	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson

Claim Name	Claim Number	Grant Number	Owner	Status	Expiry Date	District
L	10	YF04910	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	11	YF04911	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	12	YF04912	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	13	YF04913	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	14	YF04914	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	15	YF04915	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	16	YF04916	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	17	YF04917	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	18	YF04918	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	19	YF04919	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	20	YF04920	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	21	YF04921	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	22	YF04922	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	23	YF04923	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	24	YF04924	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	25	YF04925	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	26	YF04926	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	27	YF04927	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	28	YF04928	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	29	YF04929	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	30	YF04930	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	31	YF04931	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	32	YF04932	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	33	YF04933	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	34	YF04934	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	35	YF04935	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	36	YF04936	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	37	YF04937	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	38	YF04938	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	39	YF04939	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	40	YF04940	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	41	YF04941	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	42	YF04942	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	43	YF04943	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	44	YF04944	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	45	YF04945	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	46	YF04946	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	47	YF04947	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	48	YF04948	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	49	YF04949	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	50	YF04950	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	51	YF04951	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	52	YF04952	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	53	YF04953	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	54	YF04954	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	55	YF04955	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	56	YF04956	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	57	YF04957	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	58	YF04958	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson

Claim Name	Claim Number	Grant Number	Owner	Status	Expiry Date	District
L	59	YF04959	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	60	YF04960	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	61	YF04961	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	62	YF04962	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	63	YF04963	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	64	YF04964	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	65	YF04965	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	66	YF04966	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	67	YF04967	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	68	YF04968	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	69	YF04969	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	70	YF04970	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	71	YF04971	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	72	YF04972	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	73	YF04973	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	74	YF04974	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	75	YF04975	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	76	YF04976	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	77	YF04977	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	78	YF04978	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	79	YF04979	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	80	YF04980	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	81	YF04981	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	82	YF04982	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	83	YF04983	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	84	YF04984	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	85	YF04985	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	86	YF04986	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	87	YF04987	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	88	YF04988	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	89	YF04989	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	90	YF04990	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	91	YF04991	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	92	YF04992	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	93	YF04993	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	94	YF04994	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	95	YF04995	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	96	YF04996	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	97	YF04997	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	98	YF04998	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	99	YF04999	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	100	YF05000	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	101	YE78601	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	102	YE78602	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	103	YE78603	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	104	YE78604	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	105	YE78605	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	106	YE78606	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	107	YE78607	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson

Claim Name	Claim Number	Grant Number	Owner	Status	Expiry Date	District
L	108	YE78608	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	109	YE78609	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	110	YE78610	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	111	YE78611	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	112	YE78612	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	113	YE78613	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	114	YE78614	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	115	YE78615	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	116	YE78616	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	117	YE78617	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	118	YE78618	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	119	YE78619	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	120	YE78620	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	121	YE78621	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	122	YE78622	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	123	YE78623	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	124	YE78624	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	125	YE78625	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	126	YE78626	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	127	YE78627	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	128	YE78628	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	129	YE78629	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	130	YE78630	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	131	YE78631	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	132	YE78632	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	133	YE78633	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	134	YE78634	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	135	YE78635	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	136	YE78636	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	137	YE78637	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	138	YE78638	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	139	YE78639	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	140	YE78640	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	141	YE78641	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	142	YE78642	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	143	YE78643	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	144	YE78644	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	145	YE78645	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	146	YE78646	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	147	YE78647	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	148	YE78648	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	149	YE78649	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	150	YE78650	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	151	YE78651	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	152	YE78652	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	153	YE78653	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	154	YE78654	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	155	YE78655	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	156	YE78656	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson

Claim Name	Claim Number	Grant Number	Owner	Status	Expiry Date	District
L	157	YE78657	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	158	YE78658	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	159	YE78659	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	160	YE78660	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	161	YE78661	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	162	YE78662	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	163	YE78663	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	164	YE78664	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	165	YE78665	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	166	YE78666	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	167	YE78667	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	168	YE78668	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	169	YE78669	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	170	YE78670	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	171	YE78671	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	172	YE78672	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	173	YE78673	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	174	YE78674	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	175	YE78675	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	176	YE78676	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	177	YE78677	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	178	YE78678	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	179	YE78679	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	180	YE78680	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	181	YE78681	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	183	YE78683	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	184	YE78684	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	185	YE78685	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	186	YE78686	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	187	YE78687	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	188	YE78688	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	189	YE78689	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	190	YE78690	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	191	YE78691	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	192	YE78692	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	193	YE78693	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	194	YE78694	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	195	YE78695	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	196	YE78696	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	197	YE78697	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	198	YE78698	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	199	YE78699	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
L	200	YE78700	Luckystrike Resources Ltd. - 100%	Pending	2033-06-10	Dawson
LS	1	YF06601	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	2	YF06602	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	3	YF06603	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	4	YF06604	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	5	YF06605	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	6	YF06606	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson

Claim Name	Claim Number	Grant Number	Owner	Status	Expiry Date	District
LS	7	YF06607	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	8	YF06608	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	9	YF06609	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	10	YF06610	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	11	YF06611	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	12	YF06612	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	13	YF06613	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	14	YF06614	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	15	YF06615	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	16	YF06616	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	17	YF06617	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	18	YF06618	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	19	YF06619	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	20	YF06620	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	21	YF06621	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	22	YF06622	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	23	YF06623	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	24	YF06624	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	25	YF06625	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	26	YF06626	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	27	YF06627	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	28	YF06628	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	29	YF06629	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	30	YF06630	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	31	YF06631	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	32	YF06632	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	33	YF06633	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	34	YF06634	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	35	YF06635	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	36	YF06636	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	37	YF06637	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	38	YF06638	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	39	YF06639	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	40	YF06640	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	41	YF06641	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	42	YF06642	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	43	YF06643	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	44	YF06644	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	45	YF06645	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	46	YF06646	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	47	YF06647	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	48	YF06648	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	49	YF06649	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	50	YF06650	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	51	YF06651	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	52	YF06652	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	53	YF06653	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	54	YF06654	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	55	YF06655	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson

Claim Name	Claim Number	Grant Number	Owner	Status	Expiry Date	District
LS	56	YF06656	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	57	YF06657	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	58	YF06658	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	59	YF06659	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	60	YF06660	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	61	YF06661	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	62	YF06662	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	63	YF06663	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	64	YF06664	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	65	YF06665	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	66	YF06666	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	67	YF06667	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	68	YF06668	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	69	YF06669	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	70	YF06670	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	71	YF06671	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	72	YF06672	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	73	YF06673	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	74	YF06674	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	75	YF06675	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	76	YF06676	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	77	YF06677	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	78	YF06678	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	79	YF06679	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	80	YF06680	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	81	YF06681	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	83	YF06683	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	84	YF06684	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	85	YF06685	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	86	YF06686	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	87	YF06687	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	88	YF06688	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	89	YF06689	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	90	YF06690	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	91	YF06691	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	92	YF06692	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	93	YF06693	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	94	YF06694	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	95	YF06695	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	96	YF06696	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	97	YF06697	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	98	YF06698	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	99	YF06699	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	100	YF06700	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	101	YF06701	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	102	YF06702	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	103	YF06703	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	104	YF06704	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	105	YF06705	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson

Claim Name	Claim Number	Grant Number	Owner	Status	Expiry Date	District
LS	106	YF06706	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	107	YF06707	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	108	YF06708	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	109	YF06709	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	110	YF06710	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	111	YF06711	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	112	YF06712	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	113	YF06713	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	114	YF06714	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	115	YF06715	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	116	YF06716	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	117	YF06717	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	118	YF06718	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	119	YF06719	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	120	YF06720	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	121	YF06721	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	122	YF06722	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	123	YF06723	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	124	YF06724	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	125	YF06725	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	126	YF06726	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	127	YF06727	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	128	YF06728	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	129	YF06729	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	130	YF06730	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	131	YF06731	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	132	YF06732	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	133	YF06733	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	134	YF06734	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	135	YF06735	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	136	YF06736	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	137	YF06737	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	138	YF06738	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	139	YF06739	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	140	YF06740	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	141	YF06741	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	142	YF06742	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	143	YF06743	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	144	YF06744	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	145	YF06745	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	146	YF06746	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	147	YF06747	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	148	YF06748	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	149	YF06749	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	150	YF06750	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	151	YF06751	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	152	YF06752	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	153	YF06753	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	154	YF06754	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson

Claim Name	Claim Number	Grant Number	Owner	Status	Expiry Date	District
LS	155	YF06755	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	156	YF06756	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	157	YF06757	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	158	YF06758	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	159	YF06759	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	160	YF06760	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	161	YF06761	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	162	YF06762	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	163	YF06763	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	164	YF06764	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	165	YF06765	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	166	YF06766	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	167	YF06767	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	168	YF06768	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	169	YF06769	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	170	YF06770	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	171	YF06771	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	172	YF06772	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	173	YF06773	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	174	YF06774	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	175	YF06775	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	176	YF06776	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	177	YF06777	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	178	YF06778	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	179	YF06779	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	180	YF06780	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	181	YF06781	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	182	YF06782	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	183	YF06783	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	184	YF06784	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	185	YF06785	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	186	YF06786	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	187	YF06787	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	188	YF06788	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	189	YF06789	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	190	YF06790	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	191	YF06791	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	192	YF06792	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	193	YF06793	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	194	YF06794	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	195	YF06795	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	196	YF06796	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	197	YF06797	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	198	YF06798	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	199	YF06799	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	200	YF06800	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	201	YF06801	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	202	YF06802	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	203	YF06803	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson

Claim Name	Claim Number	Grant Number	Owner	Status	Expiry Date	District
LS	204	YF06804	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	205	YF06805	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	206	YF06806	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	207	YF06807	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	208	YF06808	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	209	YF06809	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	210	YF06810	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	211	YF06811	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	212	YF06812	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	213	YF06813	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	214	YF06814	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	215	YF06815	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	216	YF06816	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	217	YF06817	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	218	YF06818	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	219	YF06819	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	220	YF06820	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	221	YF06821	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	222	YF06822	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	223	YF06823	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	224	YF06824	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	225	YF06825	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	226	YF06826	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	227	YF06827	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	228	YF06828	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	229	YF06829	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LS	230	YF06830	Luckystrike Resources Ltd. - 100%	Active	2029-10-04	Dawson
LUCKY	1	YD155903	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
LUCKY	2	YD155904	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
LUCKY	3	YD155905	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Lucky	1	YC99489	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	2	YC99490	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	3	YC99491	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	4	YC99492	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	5	YC99493	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	6	YC99494	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	7	YC99495	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	8	YC99496	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	9	YC99497	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	10	YC99498	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	11	YC99499	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	12	YC99500	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	13	YD05999	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	14	YD06000	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	15	YD06001	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	16	YD06002	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	17	YD06003	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	18	YD06004	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	19	YD06005	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson

Claim Name	Claim Number	Grant Number	Owner	Status	Expiry Date	District
Lucky	20	YD06006	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	21	YD06007	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	22	YD06008	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	23	YD06009	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	24	YD06010	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	25	YD06011	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	26	YD06012	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	27	YD06013	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	28	YD06014	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	29	YD06015	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	30	YD06016	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	31	YD06017	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	32	YD06018	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	33	YD06019	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	34	YD06020	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	35	YD06021	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	36	YD06022	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	37	YD06023	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	38	YD06024	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	39	YD06025	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	40	YD06026	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	41	YD06027	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	42	YD06028	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	43	YD06029	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	44	YD06030	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	45	YD06031	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	46	YD06032	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	47	YD06033	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	48	YD06034	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	49	YD06035	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	50	YD06036	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	51	YD06037	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	52	YD06038	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	53	YD06039	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	54	YD06040	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	55	YD06041	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	56	YD06042	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	57	YD06043	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	58	YD06044	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	59	YD06045	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	60	YD06046	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	61	YD06047	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	62	YD06048	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	63	YD06049	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	64	YD06050	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	65	YD06051	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	66	YD06052	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	67	YD06053	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	68	YD06054	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson

Claim Name	Claim Number	Grant Number	Owner	Status	Expiry Date	District
Lucky	69	YD06055	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	70	YD06056	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	71	YD06057	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	72	YD06058	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	73	YD06059	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	74	YD06060	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	75	YD06061	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	76	YD06062	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	77	YD06063	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	78	YD06064	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	79	YD06065	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	80	YD06066	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	81	YD06067	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	82	YD06068	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	83	YD06069	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	84	YD06070	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	85	YD06071	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	86	YD06072	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	87	YD06073	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	88	YD06074	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	89	YD06075	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	90	YD06076	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	91	YD06077	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	92	YD06078	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	93	YD06079	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	94	YD06080	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	95	YD06081	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	96	YD06082	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	97	YD06083	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	98	YD06084	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	99	YD06085	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	100	YD06086	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	101	YC91801	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	102	YC91802	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	103	YC91803	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	104	YC91804	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	105	YC91805	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	106	YC91806	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	107	YC91807	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	108	YC91808	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	109	YC91809	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	110	YC91810	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	111	YC91811	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	112	YC91812	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	113	YC91813	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	114	YC91814	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	115	YC91815	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	116	YC91816	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	117	YC91817	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson

Claim Name	Claim Number	Grant Number	Owner	Status	Expiry Date	District
Lucky	118	YC91818	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	119	YC91819	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	120	YC91820	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	121	YC91821	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	122	YC91822	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	123	YC91823	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	124	YC91824	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	129	YC91829	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	130	YC91830	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	131	YC91831	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	132	YC91832	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	133	YC91833	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	134	YC91834	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	135	YC91835	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	136	YC91836	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	137	YC91837	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	138	YC91838	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	139	YC91839	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	140	YC91840	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	141	YC91841	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	142	YC91842	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	143	YC91843	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	144	YC91844	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	145	YC91845	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	146	YC91846	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	147	YC91847	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	148	YC91848	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	149	YC91849	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	150	YC91850	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	151	YC91851	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	152	YC91852	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	153	YC91853	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	154	YC91854	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	155	YC91855	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	156	YC91856	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	157	YC91857	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	158	YC91858	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	159	YC91859	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	160	YC91860	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	161	YC91861	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	162	YC91862	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	163	YC91863	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	164	YC91864	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	165	YC91865	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	166	YC91866	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	169	YC91869	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	170	YC91870	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	171	YC91871	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Lucky	172	YC91872	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson

Claim Name	Claim Number	Grant Number	Owner	Status	Expiry Date	District
Strike	1	YC98701	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	2	YC98702	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	3	YC98703	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	4	YC98704	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	5	YC98705	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	6	YC98706	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	7	YC98707	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	8	YC98708	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	9	YC98709	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	10	YC98710	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	21	YC98721	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	22	YC98722	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	23	YC98723	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	24	YC98724	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	25	YC98725	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	26	YC98726	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	27	YC98727	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	28	YC98728	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	29	YC98729	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	30	YC98730	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	41	YC98741	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	42	YC98742	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	43	YC98743	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	44	YC98744	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	45	YC98745	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	46	YC98746	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	47	YC98747	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	48	YC98748	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	49	YC98749	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	50	YC98750	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	61	YC98761	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	62	YC98762	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	63	YC98763	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	64	YC98764	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	65	YC98765	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	66	YC98766	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	67	YC98767	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	68	YC98768	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	69	YC98769	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	70	YC98770	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	81	YC98781	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	82	YC98782	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	83	YC98783	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	84	YC98784	Luckystrike Resources Ltd. - 100%	Active	2038-12-18	Dawson
Strike	85	YC98785	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	86	YC98786	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	87	YC98787	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	88	YC98788	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	89	YC98789	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson

Claim Name	Claim Number	Grant Number	Owner	Status	Expiry Date	District
Strike	90	YC98790	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	101	YC99475	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	102	YC99476	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	103	YC99477	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	104	YC99478	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	105	YC99479	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	106	YC99480	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	107	YC99481	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	108	YC99482	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	109	YC99483	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	110	YC99484	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	111	YC99485	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	112	YC99486	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	113	YC99487	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson
Strike	114	YC99488	Luckystrike Resources Ltd. - 100%	Active	2039-12-18	Dawson

Appendix II: Data Verification and QA/QC Report



LUCKYSTRIKE
RESOURCES LTD. TSX.V : LUKY

Lucky Strike Property

Data Verification of 2019 Core Samples

Diana M. Benz, Ph.D.

November 07, 2019

Luckystrike Resources Ltd.
Lucky Strike Property Data Verification of 2019 Core Samples

Table of Contents

Summary 1

1.0 Introduction and Terms of Reference 2

1.1 Terms of Reference 2

1.2 Purpose of the Report 2

1.3 Sources of Information 3

2.0 Sampling Survey Methodology 3

2.1 Chain of Custody 3

3.0 Data Verification 4

4.0 Sample Preparation and Analysis 4

3.0 Moving Average 5

4.0 Standard Reference Material Sample Verification 7

4.1 SRM Process Performance 8

5.0 Internal Quality Assurance/Quality Control 13

6.0 Conclusions and Recommendations 13

6.0 References 13

Table of Figures

Figure 1 Average Element Values of Core Samples Run in a Series. 7

Figure 2 SRM Process Performance and Moving Range Evaluation for Pulp Blanks. 9

Figure 3 SRM Process Performance and Moving Range Evaluation for the CDN-CGS-7 SRM 10

Figure 4 SRM Process Performance and Moving Range Evaluation for the CDN-CM-25 Certified SRM 11

Figure 5 SRM Process Performance and Moving Range Evaluation for the CDN-GS-4E SRM 12

Appendix A

Bureau Veritas Commodities Canada Ltd. Internal QC Report with Errors Calculations

Summary

Data quality is important to ensure that the reflection of real-world systems is as accurate and precise as possible for reliable interpretations. The goal of data verification is to determine whether or not to use the data and if the samples need to be re-assayed. If the data verification process locates numerous errors or inconsistencies, then the data is not fit for its intended purpose of modelling natural systems (e.g., locating gold deposits). The data reviewed for this report are the 2019 diamond drill hole (DDH) core samples from Luckystrike Resources' Lucky Strike Project.

The Lucky Strike Project is a White Gold District greenfields project located along the Stewart River in the Yukon Territory. The White Gold District is within the Yukon-Tanana Terrane and is part of the Tintina Gold Province which hosts several gold and base metal deposits in the Yukon and Alaska such as Cantung (tungsten), Keno Hill (silver), Brewery Creek (gold), Fort Knox (gold-USA) and Donlin Creek (gold-USA). Over 50 million ounces of lode gold have been defined within the Tintina Gold Province (Goldfarb, et al., 2007). Luckystrike Resources' exploration work on the Lucky Strike Property began in 2011. Their primary interest is in the discovery of a gold deposit. In 2019, four (4) diamond drill holes totalling 1,105.82 metres were worked resulting in the collection of 734 core samples.

To verify the quality of diamond drill hole (DDH) samples collected in 2019 for the Luckystrike Resources Lucky Strike Project, the author conducted a technical review of 30 blanks and 31 Standard Reference Material (SRM) samples. The samples were analysed at Bureau Veritas Minerals in Vancouver, BC using the following techniques: MA200 four-acid digestion with an inductively-coupled plasma mass spectroscopy (ICP-MS) finish for 45 elements, FA350-Au lead-collection 50 gram fire assay fusion procedure with an inductively-coupled plasma [atomic] emission spectroscopy (ICP-ES) finish for gold and AQ200-Hg 1:1:1 aqua regia digestion of a 15 gram split with an inductively-coupled plasma mass spectroscopy (ICP-MS) finish for mercury.

The quality of the assay program was assessed using the moving average of the samples in a series based on the assay certificates while the SRM performance was assessed based on their recommended values and the standard deviation from their mean. No field or pulp duplicate samples were inserted into the sample stream during the 2019 exploration program.

The moving average is the mean of two samples assayed in sequence including blanks and standard reference materials. This ensures that the variations shown in the running average are aligned with shifts in time to emphasize cross-contamination between samples or differences between batches. Based on the assumed series of the samples, there were no obvious indicators of between-sample contaminations or batch-based differences.

The accuracy and precision of the data was determined by the analysis of SRMs. In this project, pulp blank SRMs (CDN-BL-9), one high gold SRM (4.19 g/t Au in CDN-GS-4E), one mid-gold + copper SRM (0.95 g/t Au with 1.01 % Cu, CDN-CGS-7), one low gold + copper + molybdenum + sulfur (0.228 g/t Au with 0.191 % Cu, 0.019 % Mo and 0.367% S in CDN-CM-25) were used for two assay methods MA200 and FA350. One, very high gold SRM (15.98 g/t Au, CDN-GS-15B) was inserted into the sample stream but the values were above the upper limit of the analytical techniques. The gold values of the SRMs are plotted with respect to ±2 and ±3 standard deviations of the SRM mean to show any failed SRM samples. Samples that are located beyond the 3 sigma error lines signify a SRM sample failure. For single lab SRM quality analysis, 80% of the samples within the 3 sigma error lines are considered acceptable for

exploration programs (as compared to 90-95% for resource modeling). Samples plotted outside the error lines are dependent upon the detection limit values of each element. Although there was an insufficient number of gold and multi-element SRMs assayed (<20) to be considered statistically representative, the overall accuracy and precision of the data is considered to be satisfactory for this stage of development on the Lucky Strike Property.

In conclusion, the accuracy and precision of the data are considered to be satisfactory. Recommendations for future projects include: using a SRM with a matrix that more closely matches the samples to check for digestion inconsistencies (e.g., carbonate SRM was used for silica project), inserting duplicate samples into the sample stream to check accuracy of the data, using a coarse blank to check for cross-contamination during crushing and pulverizing and performing data verification upon receipt of the results.

1.0 Introduction and Terms of Reference

To verify the quality of diamond drill hole (DDH) samples collected in 2019 for the Luckystrike Resources Lucky Strike Project, the author conducted a technical review of 796 core samples including 30 blanks, 4 very high gold, 4 high gold, 7 mid-gold, and 16 low gold standard reference material samples. The samples were analysed at Bureau Veritas Minerals in Vancouver, BC.

1.1 Terms of Reference

The Lucky Strike Project is a White Gold District greenfield project located along the Stewart River in the Yukon Territory. The White Gold District is within the Yukon-Tanana Terrane and is part of the Tintina Gold Province which hosts several gold and base metal deposits in the Yukon and Alaska such as Cantung (tungsten), Keno Hill (silver), Brewery Creek (gold), Fort Knox (gold-USA) and Donlin Creek (gold-USA). Over 50 million ounces of lode gold have been defined within the Tintina Gold Province (Goldfarb, et al., 2007). Luckystrike Resource's exploration work on the Lucky Strike Property began in 2011 with their primary interest in the location of a gold deposit. Luckystrike Resources has currently identified five gold-in-soil anomalous zones along a 10 kilometre northwest-southeast trend (from west to east): Monte Carlo, Belmont, Samson, Boss and Maverick. Mineralization within the Property is typically in the form of free gold spatially related to limonite and pyrite hosted within highly weathered and oxidized units of quartz-veined, sub-brecciated, silicified and carbonate-altered orthogneiss and schists (Jones, 2017).

All the samples were collected from the Monte Carlo Zone located within 115O 03 map sheet area around the Stewart River. Between July 5th and 22nd, 2019, a total of 1,105.82 metres were drilled from four (4) diamond drill holes using a KD 600-2 diamond drill – HTW + NTW core sizes.

1.2 Purpose of the Report

The purpose of this report is to serve as a verification of the quality of the samples collected by Luckystrike Resources during the 2019 Lucky Strike exploration program. This data verification report is intended to provide a quality analysis/quality control (QA/QC) review of 734 core samples with 30 blanks, 4 very high gold, 4 high gold, 7 mid-gold, and 16 low gold standard reference material samples inserted into the core sample stream. Ideally, at least 20 to 50 of each type of QC sample would be inserted into the sample stream to acquire a statistical representation of the quality of the data.

1.3 Sources of Information

The Luckystrike Resource Verification Report is based on technical data, documents, reports and information supplied Luckystrike Resources.

2.0 Sampling Survey Methodology

All drill core and trench samples, collected during the 2019 field season, were selected, sealed and shipped to Bureau Veritas Minerals in Vancouver, BC. All core samples were selected by Druid Exploration site geologists, split, logged and photographed prior to sealing in a core box. Split core samples were individually placed in labeled polythene sample bags tie and stored on-site before transport. Trench samples were also individually placed in labeled polythene sample bags tie and stored on-site before transport. Groups of core samples were then placed into sturdy, labeled, woven-polyethylene bags, sealed with a security tie and stored for shipping to a secure location in Dawson City, YT or directly to the Bureau Veritas Minerals facility in Whitehorse, YT.

On-site samples were monitored by the site geologist but not stored in a locked facility due to the remoteness of the camp's location. All sample packaging for transport was overseen by the site geologist and documented with sample names, sample type, core box number, assay type, security tag number, shipping date and shipping identification. Samples stored at the secure facility in Dawson City were routinely transported by courier to the Bureau Veritas Minerals compound in Whitehorse, YT.

All samples were crushed and pulverized using the PRP70-250 method which crushes 1 kilogram of the sample until 70% passes through a 10 mesh screen (2 mm) then a 250 gram split is pulverized until ≥85 % of material passes through a 200 mesh (75 micron). The resulting sample pulps were analyzed by Bureau Veritas in Vancouver, BC. The remaining coarse reject portions were returned to a secure facility in Dawson City, YT. All the 796 samples were analyzed using the Bureau Veritas assay procedure MA200, a four-acid digestion with an inductively-coupled plasma mass spectroscopy (ICP-MS) finish and the FA350-Au lead-collection 50 g fire assay fusion procedure with an inductively-coupled plasma [atomic] emission spectroscopy (ICP-ES) finish. In addition, Hg was assayed using the AQ200, a 1:1:1 aqua regia digestion of a 50 gram split with an inductively-coupled plasma mass spectroscopy (ICP-MS) finish.

2.1 Chain of Custody

The sampling was conducted, under the supervision of Dan Ferraro, a consulting geologist. Work on the project was conducted project geologists, prospectors and field assistants employed by Druid Exploration and trained with respect to standard procedures and necessary sample documentation relating to sample location and descriptions. The QA/QC protocols were overseen by Stephen Roach, PGeo, who was Luckystrike's in-house Qualified Person. Core samples were placed in labeled core boxes, sealed and stored on-site by the project geologist before transport by helicopter or carrier. The samples were delivered by a geologist or carrier to the Bureau Veritas compound in Dawson City, YT or the Bureau Veritas facility in Whitehorse, YT. All samples were crushed, pulverized and the resulting sample pulps and coarse reject portions of the samples remain in storage at the Bureau Veritas storage facility in Vancouver, BC until their return to a secure facility in Dawson City, YT or disposal.

3.0 Data Verification

All GPS units for collar locations are downloaded to a laptop using DNR Garmin®. The GPS information is transferred into a Microsoft Excel® spreadsheet and the remaining sample information undergoes manual data entry. The database and core logs are checked by the site geologist while in the field, and again in the office prior to submission to the project geologist. The database is checked by trained employees a third time against the sample booklets for errors and omissions. A fourth check of the database is conducted when the results are merged with the database. The fifth and final check of the database is performed by the geologist writing the assessment report on the property.

Data integrity was also verified through routine quality control procedures at the Bureau Veritas Minerals in Vancouver, BC where analytical duplicate samples and control reference materials were inserted into the sample stream at a ratio of approximately 1 in 20 samples. All analytical results are closely monitored and evaluated by Bureau Veritas professional assayers. Bureau Veritas Minerals is accredited for ISO 17025:2005 and ISO 9001:2015. These accreditations mandate the principles and disciplines that are accepted and recognized worldwide as a sound basis for quality management systems as well as ensuring the necessary processes and supervision are established. Verification of assays was performed by Bureau Veritas using internal QA/QC procedures of duplicates, blanks and proprietary reference standards.


4.0 Sample Preparation and Analysis


All samples were crushed, pulverized and a split of the sample pulps were analysed for 45 elements (MA200) plus Au (FA350) and Hg (AQ200): Ag ppm, Al %, As ppm, Ba ppm, Be ppm, Bi ppm, Ca %, Cd ppm, Ce ppm, Co ppm, Cr ppm, Cu ppm, Fe %, Hf ppm, In ppm, K %, La ppm, Li ppm, Mg %, Mn ppm, Mo ppm, Na %, Nb ppm, Ni ppm, P %, Pb ppm, Rb ppm, Re ppm, S %, Sb ppm, Sc ppm, Se ppm, Sn ppm, Sr ppm, Ta ppm, Te ppm, Th ppm, Ti %, Tl ppm, U ppm, V ppm, W ppm, Y ppm, Zn ppm, Zr ppm, Au ppb and Hg ppb. The remaining coarse reject portions and splits of the samples remain in storage at Bureau Veritas storage facility in Vancouver, BC until their return to Druid Exploration's secure compound in Dawson City, YT. The core samples were processed using the Bureau Veritas PPRP70-250 prep code to crush, split and pulverize 500 g rock to 70% passing through a 200 mesh. The samples were assayed using the Bureau Veritas assay procedure MA200, a four-acid digestion of a 0.25 gram split with an inductively-coupled plasma mass spectroscopy (ICP-MS) finish for 45 elements. During the four-acid digestion process, a 0.25 gram split is heated in nitric acid (HNO_3), perchloric acid ($HClO_4$) and hydrofluoric acid (HF) to fuming and taken to dryness with the residue dissolved in hydrochloric acid (HCl). The samples were also analysed by Bureau Veritas FA350-Au lead-collection 50 g fire assay fusion procedure with an inductively-coupled plasma [atomic] emission spectroscopy (ICP-ES) finish for gold as well as the AQ200-Hg, a 1:1:1 aqua regia digestion of a 50 gram split with an inductively-coupled plasma mass spectroscopy (ICP-MS) finish for mercury. No duplicate samples were collected in the field and no reject pulps were requested for re-analysis (i.e., no field or lab duplicates were assayed for this project).


3.0 Moving Average

The moving average is the mean of two samples assumed to be assayed in sequence including blanks and standard reference materials. This ensures that the variations in the running mean are aligned with shifts in time to emphasize cross-contamination between samples or differences between batches. For example, a highly anomalous sample that has contaminated subsequent samples would show up as a very slowly descending slope that causes the moving average to diminish slowly over time. A common moving average batch anomaly may also be produced by incomplete digestion. Often a lab will group samples into batches of 20 to 50 samples, where one batch will be processed under the same conditions at the same time. A batch that has undergone incomplete digestion will show smaller concentrations of the elements in the minerals most resistant to the digestion method used, especially when compared to the same assay conducted at a different lab or to a SRM analysed in the same batch.

Figure 1 is the average element values of the core samples run in an assumed series for each drill hole as determined by the assay certificates for the element of interest: gold (Au). Based on this assumed series, there are no obvious indicators of between-sample contaminations that may have occurred during the preparation of the samples nor are there any obvious incomplete digestion errors.

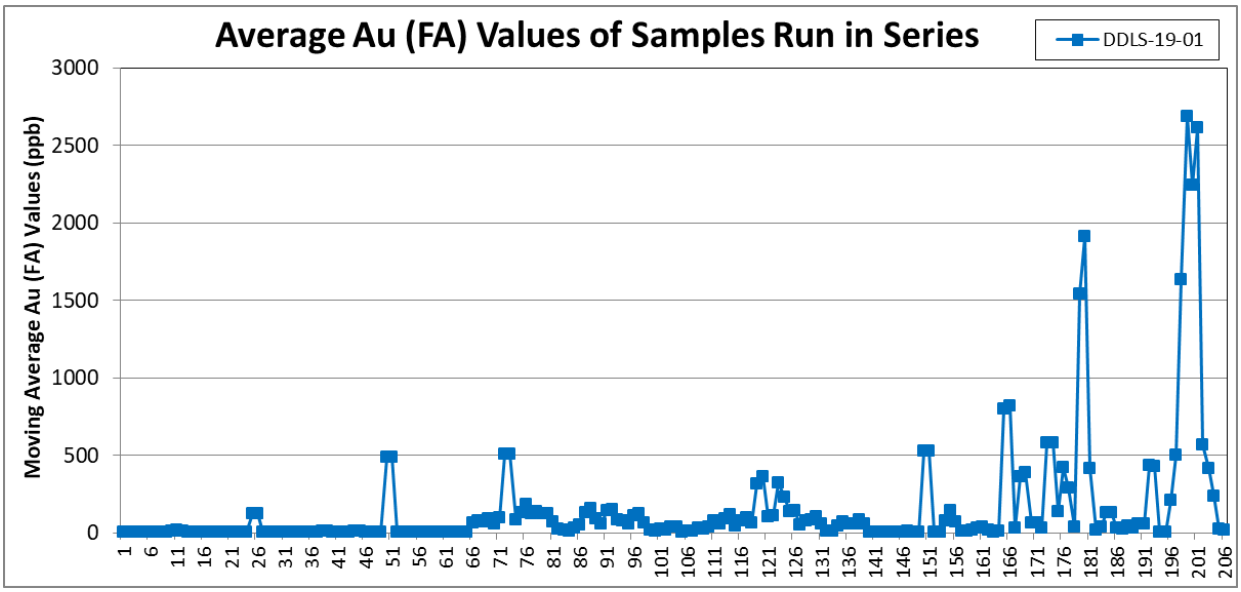

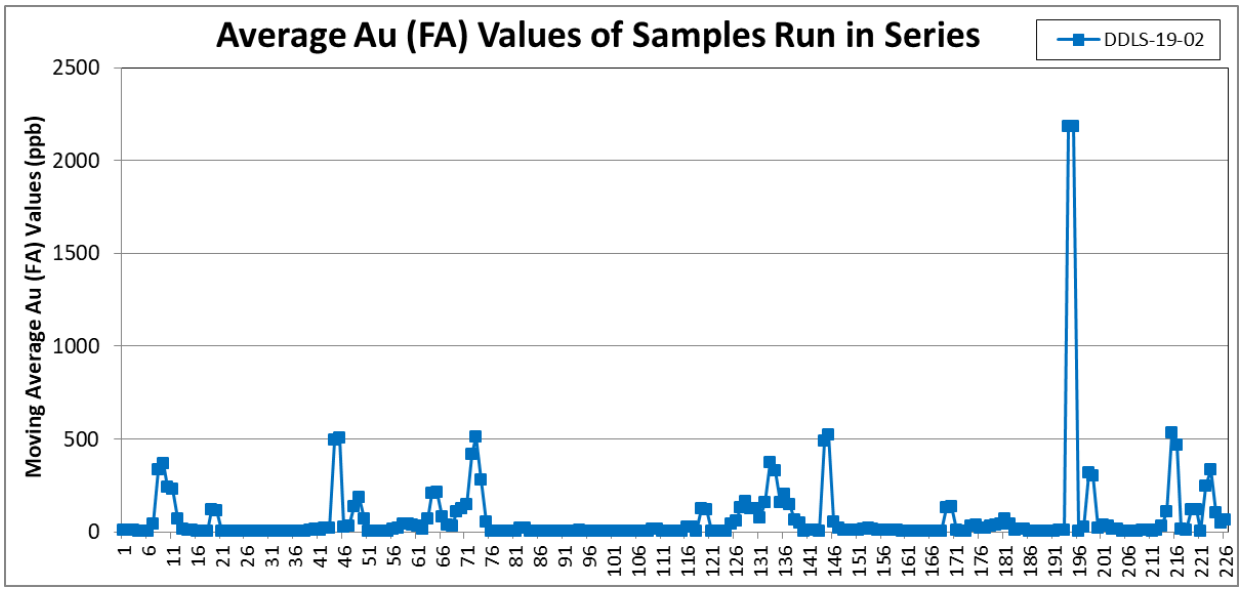
Average Au (FA) Values of Samples Run in Series
DDLS-19-02
Moving Average Au (FA) Values (ppb)
2500
2000
1500
1000
500
0
1 6 11 16 21 26 31 36 41 46 51 56 61 66 71 76 81 86 91 96 101 106 111 116 121 126 131 136 141 146 151 156 161 166 171 176 181 186 191 196 201 206 211 216 221 226

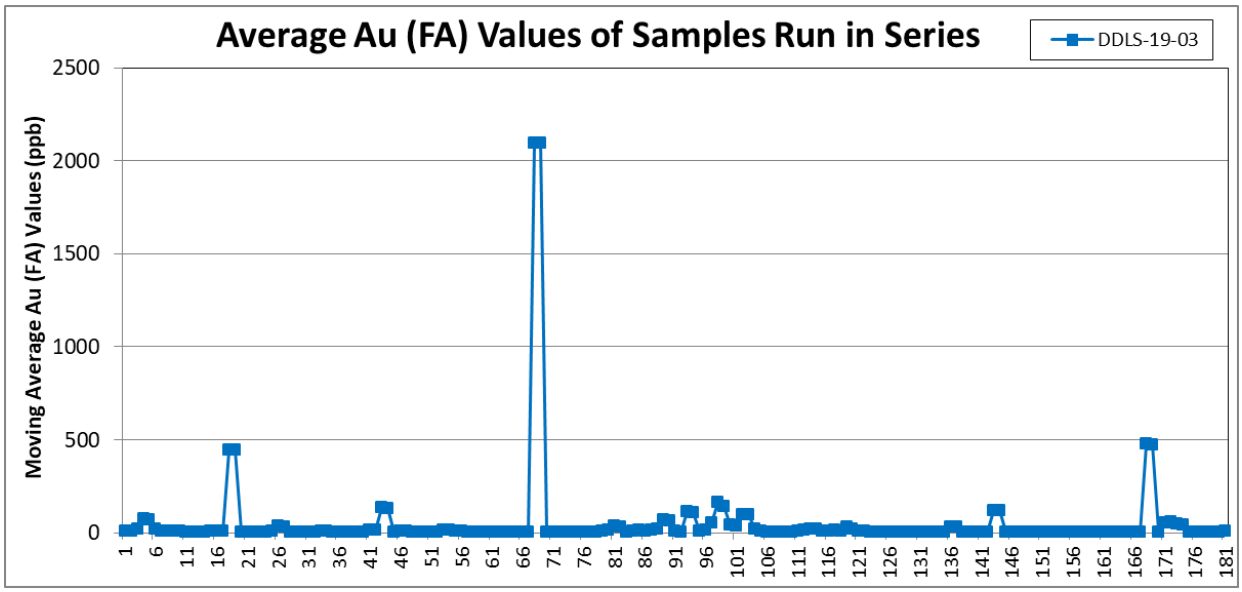
Average Au (FA) Values of Samples Run in Series
DDLS-19-03
Moving Average Au (FA) Values (ppb)
2500
2000
1500
1000
500
0
1 6 11 16 21 26 31 36 41 46 51 56 61 66 71 76 81 86 91 96 101 106 111 116 121 126 131 136 141 146 151 156 161 166 171 176 181

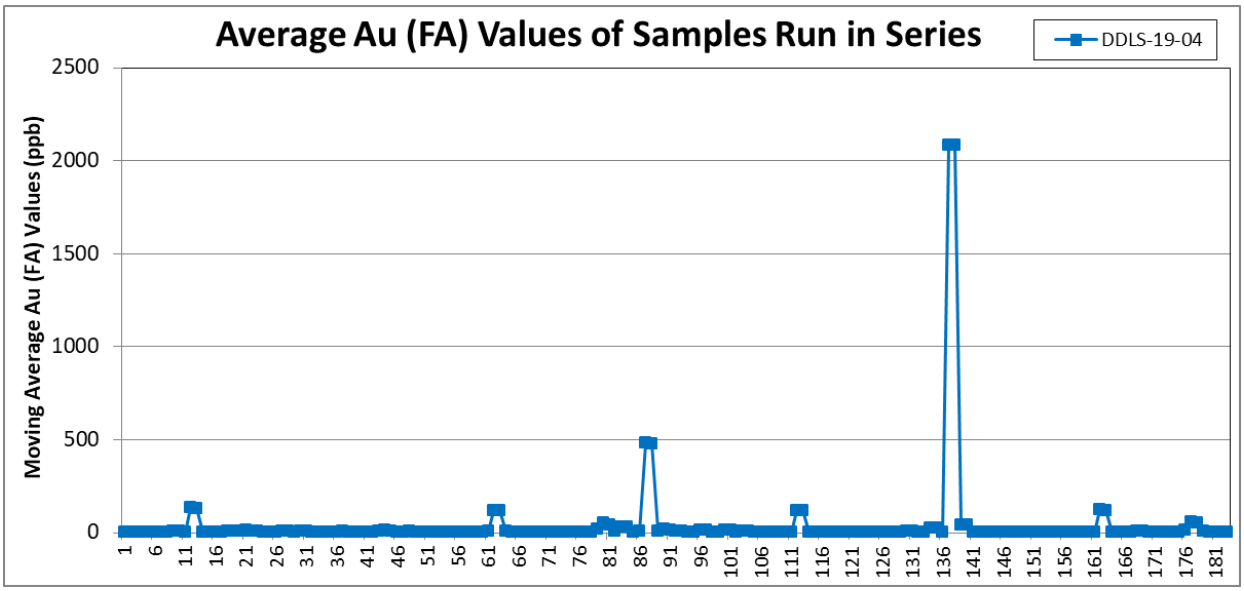


Figure 1 Average Element Values of Core Samples Run in a Series. Based on the series, there are no obvious indicators of between sample contaminations that would typically occur during the preparation of the samples.

4.0 Standard Reference Material Sample Verification

Thirty (30) blanks, 4 very high gold, 4 high gold, 4 mid-gold and 16 low gold standard reference material samples were inserted into the core sample stream for a total of 796 samples. The blank samples were placed into the core sample stream at a ratio of approximately 1 in 25 samples (3.7 %), whereas the low gold SRM was inserted approximately every 25 samples (2 %). The very high gold, high gold and mid-gold were each inserted once for each drill hole for a total insertion rate of 1.5 percent. The total QC sample insertion rate for the core samples is 7 percent.

The CDN-BL-9 blank SRM is a blank granitic material consisting of -270 (<53 micron) material mixed for five days in a double cone blender. The gold concentration for the blank SRM is < 10 ppb Au by fire assay pre-concentration of a 30 gram sub-sample with an atomic absorption (AA) or inductively-coupled plasma (ICP) finish.

The CDN-CM-25 gold-copper-molybdenum-sulfur (low gold) certified SRM is a blended SRM consisting of 793 kg of blended rock with 7 kg of Au-Cu-Mo concentrate. The approximate chemical composition, by whole rock analysis, is 67.6 % SiO_2, 12.6 % Al_2O_3, 6.3 % Fe_2O_3, 3.8 % CaO, 3.0 % Na_2O, 0.1 % C, 2.4 % MgO, 1.1 % K_2O, 0.6 % TiO2 and 0.3 % S. The blended SRM was dried, crushed, pulverized and passed through a 270 mesh screen. The -270 material was mixed for 5 days in a double cone mixer prior to splitting. The recommended value for gold is 0.228 g/t ± 0.030 g/t Au (by 30 g fire assay) with 0.191 % ± 0.006 % Cu (by 4-acid digestion), 0.019 % ± 0.002 % Mo (by 4-acid digestion), and 0.357 % ± 0.028 % S (by Leco).

The CDN-CGS-7 SRM (mid gold) is from the Red Chris Property in BC. The copper and gold mineralization is associated with individual and sheeted quartz (±carbonate) veining and quartz (±carbonate) stockwork as disseminations and fracture coatings. Gold occurs as electrum that is spatially and genetically associated with the copper mineralization principally occurring as chalcopyrite with

lesser bornite. Pyrite is included as a principle sulfide mineral. Reject ore material, from the Red Chris Property, was dried, crushed, pulverized and passed the through a 200 mesh screen then the -200 material was mixed for 5 days in a rotary mixer prior to splitting. The recommended value for gold is 0.95 g/t ± 0.08 g/t Au with copper at 1.01 % ± 0.07 % Cu.

The CDN-GS-4E gold (high gold) SRM is from the Barrick Gold Inc., Carlin-style, Cortez Mine in Nevada, USA. Reject ore was dried, crushed, pulverized and passed the through a 270 mesh screen then the -270 material was mixed for 5 days in a rotary mixer prior to splitting. The recommended value for gold is 4.19 g/t ± 0.19 g/t Au (fire assay with an instrumental finish).

The CDN-GS-15B gold (very high gold) SRM is also from the Barrick Gold Inc., Carlin-style, Cortez Mine in Nevada, USA. The SRM material was collected from the Devonian carbonates of the Popovich Formation where gold is strongly associated with pyrite and other sulfides including orpiment and realgar. Reject ore was dried, crushed, pulverized and passed the through a 200 mesh screen then the -200 material was mixed for 5 days in a rotary mixer prior to splitting. The recommended value for gold is 15.98 g/t ± 0.71 g/t Au (fire assay with a gravimetric finish). The recommended value for this SRM is greater than the upper detection limit of the assay techniques used and therefor its quality could not be evaluated.

4.1 SRM Process Performance

The element concentration of the SRM is plotted with respect to ±2 and ±3 standard deviations (SDs) of the SRM mean to show any failed SRM samples. Samples that are located beyond the 3 sigma error lines signify a SRM sample failure (Tetra Tech, 2012). For within lab SRM quality analysis, 80% of the samples within 3 standard deviations are considered acceptable but this is dependent upon the detection limit values of each element.

Standard reference material failures may be caused by the 'nugget effect', incomplete sample digestion or may be an indication of changes in a lab's methodologies over the course of the sampling period or between different lab worker's shifts. The 'nugget effect' is caused by short-scale variability and random noise that affect the reproducibility of a sample taken at the same location. Samples affected by short-scale sample variability are often shown in the process performance graph with values well beyond the acceptable error. Incomplete sample digestion is the partial chemical disintegration of minerals resistant to the digestion method used during assaying. Partial chemical disintegration of samples is often displayed in a process performance graph by samples with consistently lower element values than expected. Lastly, fundamental differences in a lab's methodology may be caused by differences in sample processing procedures, instrument calibration, lab QA/QC material standards, matrix correction calculations, instrumental drift (gradual change in the zero reading of an instrument) or changes in lab procedures/instruments. Variety of within and between lab methodologies are displayed in the process performance graph as either consistently below or above the 3 sigma values. An absolute difference moving range chart is used in conjunction with the process performance chart to help determine the extent of/or confirm any failed SRMs. Instrumental drift is often indicated by a decrease or increase in the element value over time which may result in a sample failure; with a rebound back to the mean after the drift correction and may not necessarily indicate a complete failure.

Figures 2 through 5 show the graphs of the SRM samples in an assumed series plotted against the mean of the samples analysed, the SDs of the mean and the recommended value of the SRM. These

graphs show the accuracy of the SRM over time compared to the analysed mean and the recommended value. The second graph, of each pairing, shows the absolute average difference of groups of samples in an assumed series. This graph shows if any variations in the running mean are aligned with shifts in time to emphasize cross-contamination between samples or differences between batches. The two graphs are plotted together to identify variations over time between batches of samples. The SRM samples with failed performances, i.e., ± 3 sigma of the mean are depicted with pink circles. The results showed that 80% of the samples fall within 3 sigma of the mean for all the SRMs and are considered satisfactory.

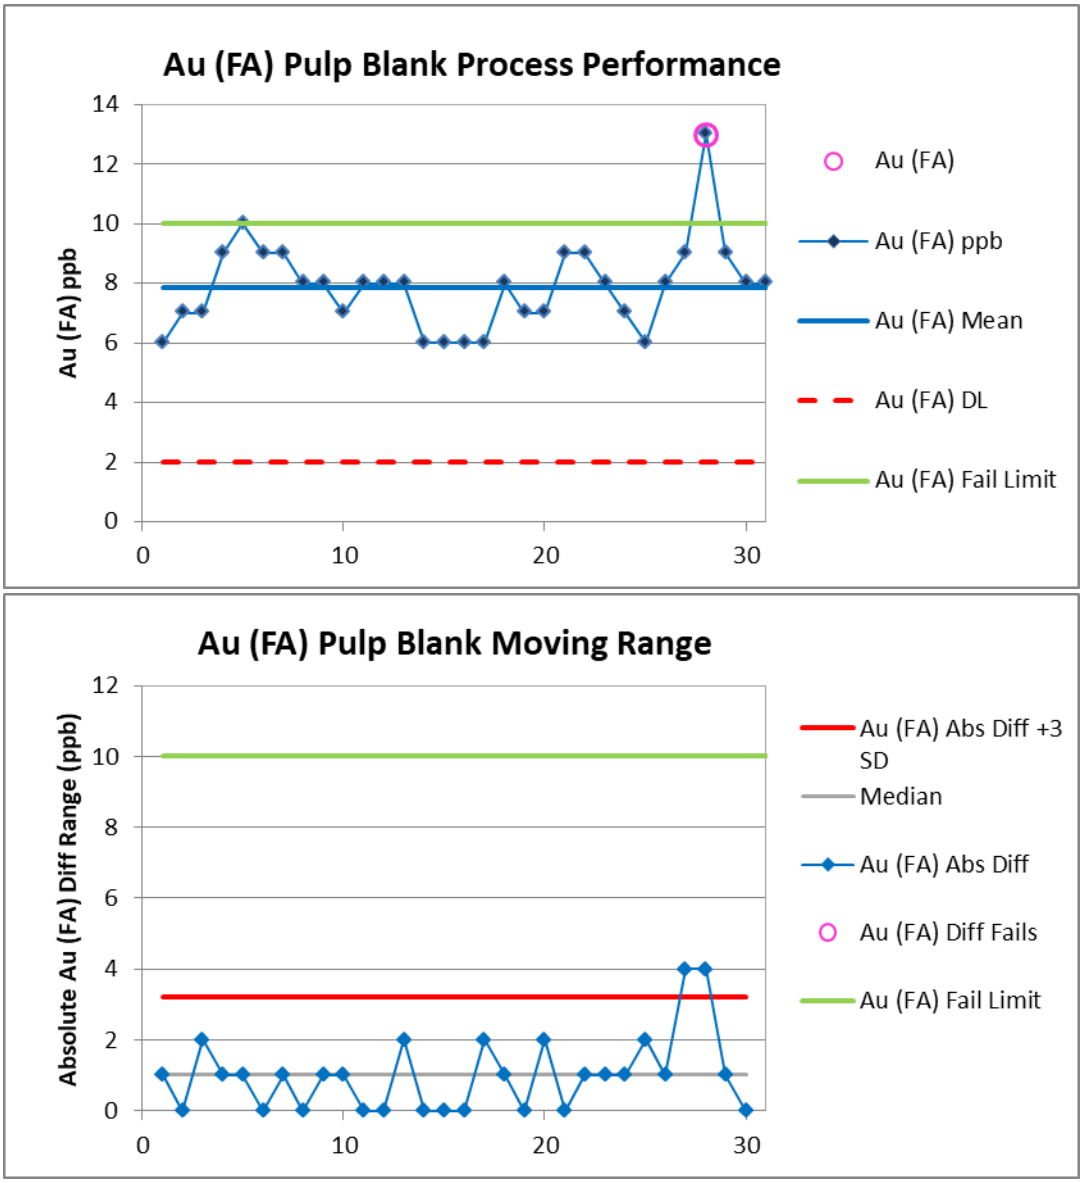


Figure 2 SRM Process Performance and Moving Range Evaluation for Gold Values in Pulp Blanks. The graphs show the pulp blank SRM values are plotted against the mean of the samples analysed in an assumed series, the SDs of the mean and the recommended value of the SRM. The SRM samples with failed performances, i.e., ± 3 sigma of the mean are depicted with pink circles. The fire assay (FA) method showed satisfactory precision.



Figure 3 SRM Process Performance and Moving Range Evaluation for Gold Values in the CDN-CGS-7 SRM. The graphs show the SRM values are plotted against the mean of the samples analysed in an assumed series, the SDs of the mean and the recommended value of the SRM. The SRM samples with failed performances, i.e., ± 3 sigma of the mean are depicted with pink circles. The fire assay (FA) method showed satisfactory precision for gold.

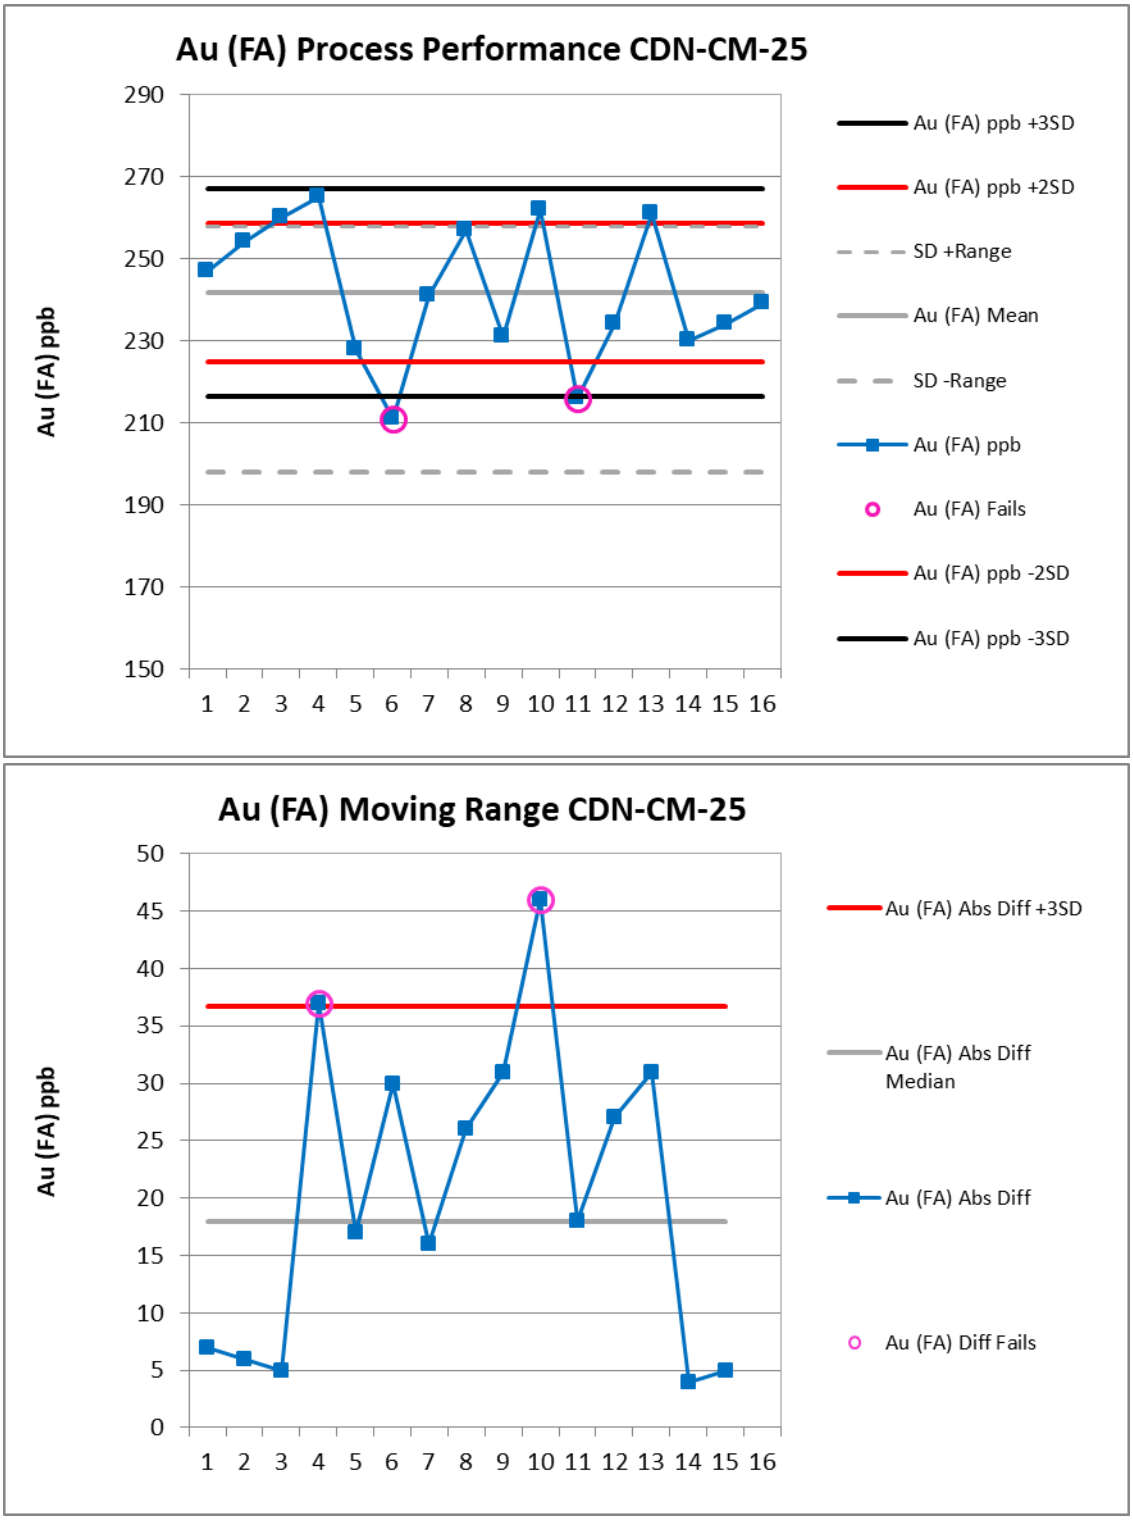


Figure 4 SRM Process Performance and Moving Range Evaluation for Gold Values in the CDN-CM-25 Certified SRM. The graphs show the SRM values are plotted against the mean of the samples analysed in an assumed series, the SDs of the mean and the recommended value of the SRM. The SRM samples with failed performances, i.e., ± 3 sigma of the mean are depicted with pink circles. The fire assay (FA) showed satisfactory precision for gold.

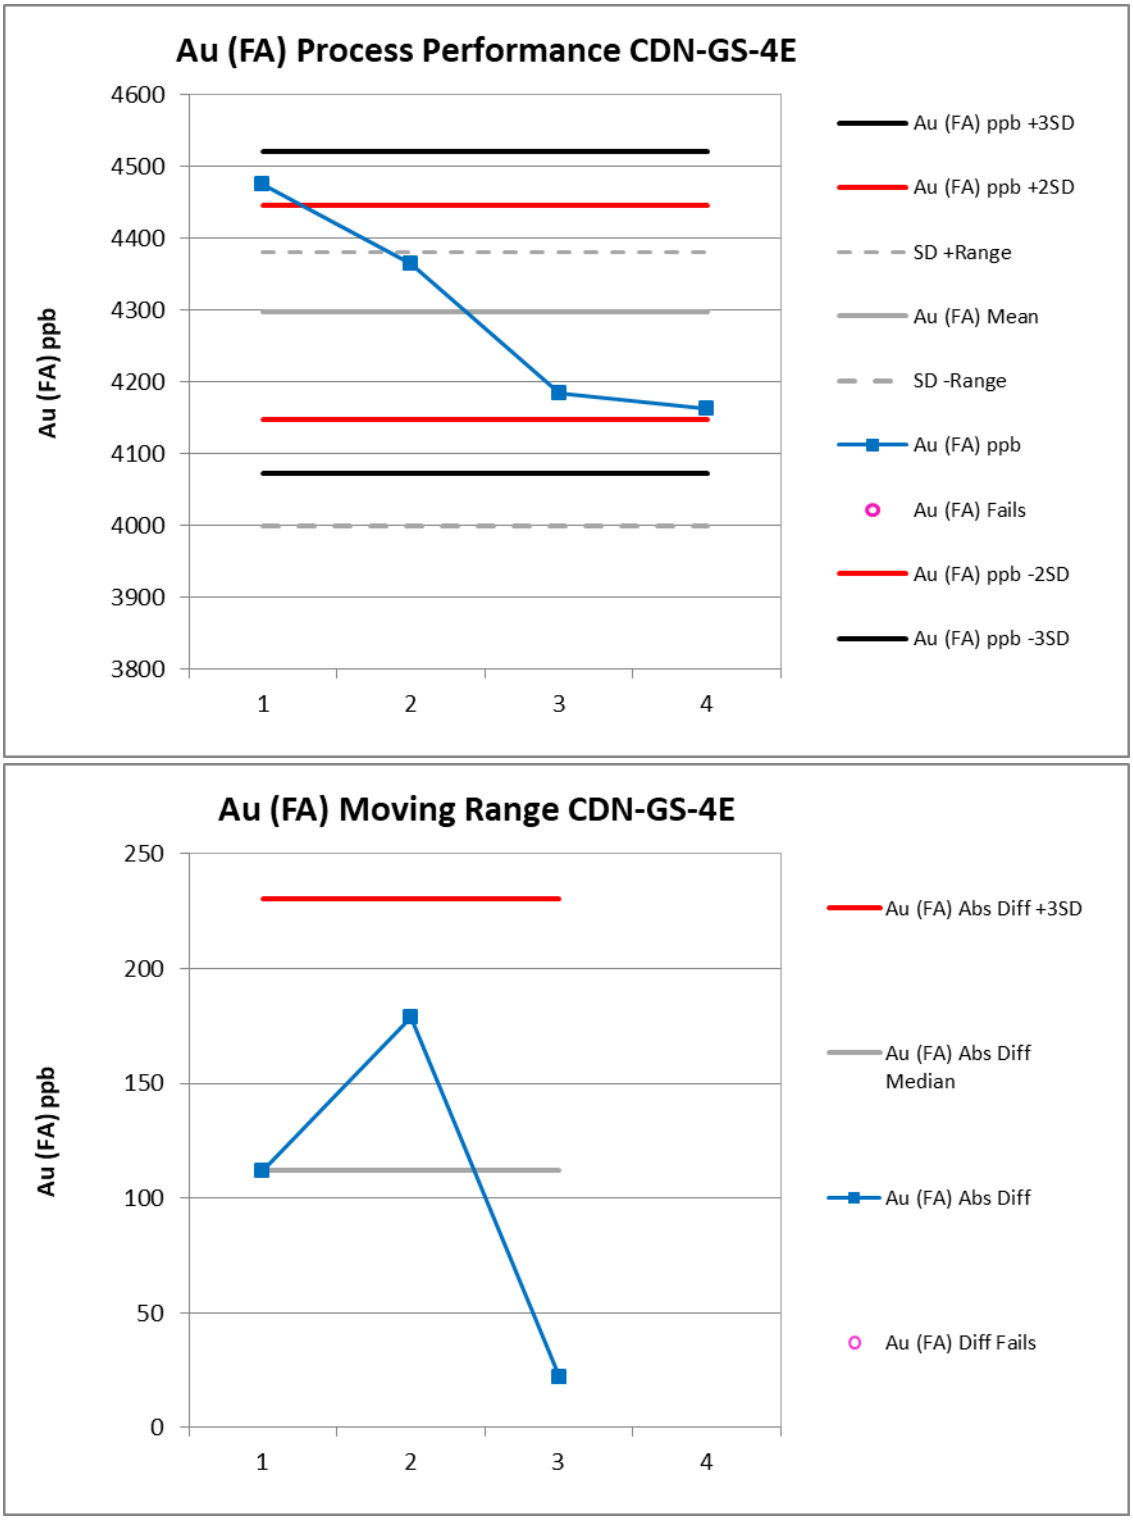


Figure 5 SRM Process Performance and Moving Range Evaluation for Gold Values in the CDN-GS-4E SRM. The graphs show the SRM values are plotted against the mean of the samples analysed in an assumed series, the SDs of the mean and the recommended value of the SRM. The SRM samples with failed performances, i.e., ± 3 sigma of the mean are depicted with pink circles. The fire assay (FA) showed satisfactory precision for gold.

5.0 Internal Quality Assurance/Quality Control

Examining the lab's internal data verification and validation are an important part of a QA/QC program (Appendix A). Bureau Veritas' internal QA/QC procedures include duplicates, blanks and proprietary reference standards. The results of the internal QA/QC are included within the Certificate of Analysis. The percent difference was calculated for the duplicate assays and prep samples. Percent residual standard deviation (%RSD) was used to determine the consistency of the proprietary standard reference materials (where applicable). While the differences were not significant, it is recommended that approximately 5 duplicate samples (reject material) are sent in for certificate WHI19000255, if the logged lithology for this batch is considered to be inconsistent with the geochemical results, due to a significant difference in silver values of one preparation duplicate sample (core reject duplicate 1320362 with 1.4 and 0.2 ppm Ag).

6.0 Conclusions and Recommendations

Figure 1 is the average element values of the samples run in an assumed series based on the sample numbers. Based on the samples series, there are no obvious indicators of between sample contaminations or incomplete digestion. Figures 2 through 5 show the graphs of the SRM samples in a series plotted against the mean of the samples analysed, the SDs of the mean and the recommended value of the SRM to the accuracy of the SRM over time compared to the analysed mean and the recommended value. All three assay methods showed that 80% of the samples fall within 3 sigma of the mean for all the SRMs. Overall the precision of the data is considered to be satisfactory.

In conclusion, the accuracy and precision of the data are considered to be satisfactory. Recommendations for future projects include: using a SRM with a matrix that more closely matches the samples to check for digestion inconsistencies (e.g., carbonate SRM was used for silica project), inserting duplicate samples into the sample stream to check accuracy of the data, using a coarse blank to check for cross-contamination during crushing and pulverizing and performing data verification upon receipt of the results.

6.0 References

2019 core logs from the Lucky Strike Property.

2019 trench logs from the Lucky Strike Property.

Goldfarb, R.J., Marsh, E.E., Hart, C.J.R., Mair, J.L., Miller, M.L. and Johnson, C. (2007). Geology and Origin of Epigenetic Lode Gold Deposits, Tintina Gold Province, Alaska and Yukon. Scientific Investigations Report 2007-5289-A. In: eds. by L.P. Gough and W.C. Day. U.S. Department of the Interior and U.S. Geological Survey. Chapter A of Recent U.S. Geological Survey Studies in the Tintina Gold Province, Alaska, United State, and Yukon, Canada - Results of a 5-Year Project, pp. A1-A18.

Jones, C. (2017). 2016 Surface Exploration Report on the Lucky Strike Property, White Gold District. Luckystrike Resources Ltd. In press.

Tetra Tech (2012). Understanding and running an effective QA/QC program. Mineral Exploration Roundup 2012 Conference, Vancouver, BC.

Appendix A

Bureau Veritas Commodities Canada Ltd. Internal QC Report with Errors Calculations

Bureau Veritas Commodities Canada Ltd. Final Report
Client: Luckystrike Resources Ltd.
File Created: 5-Sep-19
Job Number: WHI19000210
Number of Samples: 138
Project: LUC
Shipment ID: DDLS-19-01
P.O. Number:
Received: 16-Jul-19

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S	Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
	Unit	KG	PPB	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	%	PPM	PPM	%	PPM	%	%	%	%	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	GM/T
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1	0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
Sample	Type																																																
Pulp Duplicates																																																		
1320059	Drill Core	3.4	3	0.4	5.1	4.3	66	<0.1	11.9	10.8	721	3.5	4	0.7	3	158	<0.1	0.6	<0.1	84	2.67	0.042	11.8	18	1.02	552	0.295	7.17	2.003	1.9	0.6	5.8	24	0.9	8	5.8	0.3	1	13	15.4	<0.1	79.1	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320059	REP																																																0.01	
Percent Difference																																																	BDL	
1320094	Drill Core	4.07	104	0.4	8.5	5.1	31	0.2	3	5.2	353	2.18	3	0.3	3	96	<0.1	0.9	<0.1	38	1.73	0.021	12	4	0.32	849	0.127	5.96	2.663	1.61	5.9	5.3	25	0.5	6.1	1.7	<0.1	<1	7	6.8	<0.1	22.7	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320094	REP																																																<0.01	
Percent Difference																																																	
1320129	Drill Core	4.5	69	0.9	10.8	6.4	61	0.1	8.1	8.3	507	3.01	11	0.6	2.3	278	0.2	13.1	<0.1	56	2.21	0.031	11.4	12	1.11	161	0.123	6.79	0.03	1.15	4.3	8.6	25	1.3	7	1.6	0.1	<1	11	34.1	0.4	25.7	0.3	0.06	0.015	<1	<0.5	<0.5	0.05	
1320129	REP																																															0.06	
Percent Difference																																																BDL	
1320028	Drill Core	3.2	4	8.6	113.8	9.5	303	3.2	104.7	10.2	246	2.66	34	4.1	4.1	274	3	2	0.1	445	0.22	0.125	21.8	203	0.28	360	0.254	4.34	0.021	1.41	1.4	35.9	29	1.2	33.7	5.5	0.4	1	12	15.1	<0.1	56.4	0.9	<0.05	<0.005	3	<0.5	0.7	0.28	
1320028	REP			8.6	113.7	9.4	306	3.1	104.8	10.1	242	2.64	34	4.1	4.1	274	3	2	0.1	443	0.22	0.127	21.4	207	0.28	357	0.255	4.34	0.021	1.41	1.4	36.1	29	1.2	33.7	5.5	0.4	1	12	15.1	<0.1	56.3	0.9	<0.05	<0.005	3	<0.5	0.7		
Percent Difference				BDL	BDL	BDL	1%	BDL	BDL	BDL	2%	1%	BDL	BDL	BDL	BDL	BDL	BDL	BDL	0%	BDL	2%	2%	2%	BDL	1%	BDL	BDL	BDL	BDL	BDL	1%	BDL	BDL	BDL	BDL	BDL	BDL	BDL	BDL		0%	BDL			BDL		BDL	
1320063	Drill Core	5.02	2	0.4	27.7	6.7	83	<0.1	11.4	15.3	926	4.29	5	0.8	2.9	145	<0.1	0.6	0.1	124	3.66	0.062	10.6	16	1.65	469	0.385	7.4	1.637	2.09	0.8	5.1	26	1.1	10.1	5.3	0.3	1	16	19	<0.1	64.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320063	REP			0.5	26.9	6.7	81	<0.1	11.2	15.1	918	4.25	5	0.8	2.8	142	<0.1	0.6	0.1	124	3.66	0.063	9.4	17	1.63	461	0.382	7.13	1.648	2.07	0.8	5.1	24	1.1	9.6	5.3	0.3	1	16	18.9	<0.1	56.6	0.3	<0.05	<0.005	<1	<0.5	<0.5		
Percent Difference				BDL	3%	BDL	2%		2%	1%	1%	1%	BDL	BDL	BDL	2%		BDL	BDL	BDL	BDL	12%	BDL	1%	2%	1%	4%	1%	1%	BDL	BDL	8%	BDL	5%	BDL	BDL	BDL	BDL	1%		13%	BDL						
1320025	Rock Pulp	0.06	6	3.2	22.6	4	44	0.4	23.5	11.2	477	2.53	4	0.7	1.7	239	0.2	0.8	<0.1	81	1.84	0.052	8.2	31	0.83	479	0.275	5.34	2.141	0.85	27.3	37.7	17	0.7	12	3.5	0.2	<1	10	12.8	<0.1	21.8	1.1	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320025	REP																																															0.01	
Percent Difference																																																BDL	
1320057	Drill Core	4.56	4	0.3	13.5	6.4	83	<0.1	16.6	16.2	864	4.27	5	1.3	2.2	172	<0.1	0.8	<0.1	119	2.7	0.086	9.6	25	1.25	333	0.462	7.46	1.733	2.04	0.8	6.4	22	1	7.2	7.1	0.4	1	15	22.1	<0.1	69.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320057	REP		3																																															
Percent Difference			BDL																																															
1320133	Drill Core	3.87	17	0.8	46.2	8.3	85	0.1	20.1	22	945	5.76	8	0.4	1.5	193	0.1	14.8	<0.1	232	3.86	0.06	5.8	22	2.05	319	0.284	8.22	0.66	2.29	2.8	6.7	13	0.6	6.8	1	<0.1	1	27	24.4	0.3	62.3	0.3	0.06	<0.005	<1	<0.5	<0.5	0.02	
1320133	REP			0.7	48.4	8.3	85	0.2	20.2	22.5	945	5.75	7	0.3	1.4	192	0.2	14.7	<0.1	231	3.87	0.06	5.1	22	2.02	312	0.286	8.12	0.662	2.26	2.6	6.8	12	0.6	6.6	1	<0.1	1	27	24.4	0.3	52.4	0.3	0.05	<0.005	<1	<0.5	<0.5		
Percent Difference				BDL	5%	BDL	BDL	BDL	BDL	2%	BDL	BDL	BDL	BDL	BDL	BDL	BDL	1%		BDL	0%	BDL	13%	BDL	1%	2%	1%	1%	0%	1%	7%	BDL	BDL	BDL	3%	BDL		BDL	BDL	BDL	BDL	17%	BDL	BDL					
1320098	Drill Core	4.39	95	0.9	8.2	6.1	29	<0.1	2.5	6.7	387	2.16	3	0.4	2.4	171	0.1	0.8	<0.1	37	2.29	0.019	9.2	3	0.41	606	0.128	6.11	3.475	1.09	4.6	7.6	22	0.5	10.7	2	0.1	<1	10	7.2	0.2	19	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320098	REP			0.9	7.5	5.8	30	<0.1	2.4	5.9	392	2.17	3	0.3	2.2	167	<0.1	0.7	<0.1	37	2.28	0.019	8.6	3	0.41	595	0.123	6.26	3.528	1.05	4.3	7.6	20	0.5	10.2	2	0.1	<1	10	6.3	0.2	18.2	0.3	<0.05	<0.005	<1	<0.5	<0.5		
Percent Difference				BDL	9%	5%	BDL		BDL	13%	1%	BDL	BDL	BDL	9%	2%		BDL		BDL	0%	BDL	7%	BDL	BDL	2%	4%	2%	2%	4%	7%	BDL	10%	BDL	5%	BDL	BDL		BDL	13%	BDL	4%	BDL						
1320022	Drill Core	3.15	3	1.2	31	6.1	80	0.3	16	13.1	819	3.65	4	4.9	3.7	303	0.2	0.5	<0.1	109	12.15	0.148	19.9	19	0.4	1750	0.333	7.13	1.206	1.06	0.5	15.5	39	1.3	13.9	13.4	0.7	1	11	20	<0.1	39.7	0.6	<0.05	<0.005	2	<0.5	<0.5	0.02	
1320022	REP		3																																														
Percent Difference			BDL																																														
1320127	Drill Core	5.61	22	0.6	19.2	4.4	72	<0.1	4.6	5.1	618	3.57	5	0.4	2.6	160	0.1	4.2	<0.1	30	2.38	0.024	11.1	5	1.16	87	0.105	5.84	1.183	1.05	1.9	5.9	27	0.9	6.7	1.5	<0.1	<1	13	15.6	1.1	21.7	0.1	0.1	<0.005	<1	<0.5	<0.5	0.06	
1320127	REP		30																																														
Percent Difference			31%																																														
1320094	Drill Core	4.07	104	0.4	8.5	5.1	31	0.2	3	5.2	353	2.18	3	0.3	3	96	<0.1	0.9	<0.1	38	1.73	0.021	12	4	0.32	849	0.127	5.96	2.663	1.61	5.9	5.3	25	0.5	6.1	1.7	<0.1	<1	7	6.8	<0.1	22.7	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320094	REP		89																																														
Percent Difference			16%																																														
Preparation Duplicates																																																	
1320019	Drill Core	4.29	3	1	10.5	6.3	108	0.2	39.3	15.7	729	5.32	13	2.7	2.1	177	0.2	1	<0.1	190	7.33	0.134	11.5	46	0.46	700	0.526	7.84	1.206	2.29	0.5	7.9	24	1	10.4	9.5	0.4	2	20	15.7	<0.1	60.2	0.4	<0.05	<0.005	<1	<0.5	0.5	0.02	
1320019	DUP		3	1	10.6	6.4	109	0.2	40.5	16.2	759	5.41	14	3	2.3	186	0.2	0.9	<0.1	194	7.6	0.137	12.7	48	0.48	872	0.532	8.19	1.194	2.35	0.4	8.2	27	1	10.9	9.5	0.4	2	21	15.9	<0.1	65.5	0.4	<0.05	<0.005	1	<0.5	0.5	0.03	
Percent Difference			BDL	BDL	7%	5%	4%		BDL	BDL	1%	4%	BDL	BDL	11%	4%		BDL		4%	BDL	BDL	11%	BDL	3%	4%	3%	3%	0%	3%	BDL	3%	11%	BDL	6%	4%	BDL	BDL	BDL	4%		7%	BDL						
1320053	Drill Core	5.09	3	0.2	4.4	3.7	46	<0.1	3.5	6.9	494	2.54	4	1	4.4	192	<0.1	0.5	<0.1	53	1.76	0.035	12.7	7	0.63	552	0.227	6.8	2.828	1.39	0.5	7.3	25	1	8.1	5.6	0.4	1	8	10.5	<0.1	59	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320053	DUP		2	0.3	4.1	3.9	48	<0.1	3.6	7	501	2.64	5	1.1	4.9	200	<0.1	0.5	<0.1	55	1.77	0.036	14.2	7	0.65	572	0.233	7.04	2.826	1.43	0.5	7.5	28	1	8.6	5.8	0.4	1	8	10.9	<0.1	63.1	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
Percent Difference			BDL	BDL	7%	5%	4%		BDL	BDL	1%	4%	BDL	BDL	11%	4%		BDL		4%	BDL	BDL	11%	BDL	3%	4%	3%	3%	0%	3%	BDL	3%	11%	BDL	6%	4%	BDL	BDL	BDL	4%		7%	BDL						
1320087	Drill Core	4.57	60	1	53.5	10.3	70	0.1	27.2	22.4	841	4.38	11	1	3.7	178	0.2	3.3	<0.1	166	4.36	0.082	14.7	86	2.11	534	0.269	5.54	0.029	1.85	6.9	9.2	29	0.8	11.4	2.8	0.2	<1	23	20.1	0.1	38.6	0.5	0.08	<0.005	<1	<0.5	<0.5	0.02	
1320087	DUP		98	0.8	50.8	10.1	71	0.1	27.6	21.4	816	4.35	10	1	3.8	179	0.3	3.3	<0.1	162	4.35	0.084	14.6	86	2.12	545	0.276	5.51	0.027	1.88	7.3	9.2	30	0.8	11.4	2.8	0.2	1	24	20.9	0.1	38.6	0.5	0.08	<0.005	<1	<0.5	<0.5	0.02	
Percent Difference			48%	22%	5%	2%	BDL	BDL	1%	5%	3%	1%	BDL	BDL	BDL	BDL	BDL	BDL		2%	0%	2%	BDL	BDL	0%	2%	3%	1%	7%	2%	6%	BDL	BDL	BDL	BDL	BDL	BDL	BDL		BDL	4%	BDL	BDL	BDL	BDL					
1320121	Drill Core	4.95	180	0.6	11.8	4.5	73	0.2	3.9	3.9	514	3.76	6	0.4	2.3	137	0.2	8.5	<0.1	19	1.5	0.014	12.6	2	1.06	201	0.069	5.92	0.033	0.74	2.7	5	28	1.2	5.7	1.3	<0.1	<1	12	30.8	1.1	16.4	0.1	0.07	0.009	<1	<0.5	<0.5	0.05	
1320121	DUP		216	0.6	11.4	4.5	75	0.2	3.9	4	522	3.82	7	0.4	2.2	139	0.2	8.7	<0.1	20	1.52	0.014	12.1	2	1.06	215	0.069	5.93	0.031	0.74	2.7	5.3	27	1.2	5.2	1.3	<0.1	<1	12	30.8	1.1	16.3	0.1	0.07	0.011	<1	<0.5	<0.5	0.06	
Percent Difference			18%	BDL	3%	BDL	3%	BDL	BDL	BDL	2%	2%	BDL	BDL	BDL	1%	BDL	2%		BDL	1%	BDL	4%	BDL	BDL	7%	BDL	BDL	6%	BDL	BDL	6%	BDL	BDL	9%	BDL			BDL	BDL	BDL	BDL	BDL	BDL	BDL					BDL
Reference Materials																																																	
STD AGPROOF	STD																																																<0.9
STD BVGEO01	STD																																															0.1	
STD BVGEO01	STD																																															0.09	
Mean																																																0.10	
Standard Deviation																																															0.01	
%RSD																																																
STD DS11	STD																																															0.27	
STD DS11	STD																																														0.22	
Mean																																															0.25	
Standard Deviation																																															0.04	
%RSD																																															14%	
STD OREAS25A-4A	STD			2.4	30.5	22.6	45	<0.1	46.9	7.7	469	6.39	9	2.5	14	45	<0.1	0.6	0.3	153	0.29	0.048	20.5	109	0.32	142	0.928	8.9	0.131	0.47	1.8	143.9	45	3.8	9.8	19.3	1.4	<1	13	37.1	<0.1	58.7	4	0.09	<0.005	3	<0.5	<0.5		
STD OREAS25A-4A	STD			2.4	30.9	21.8	44	<0.1	47.1	7.7	474	6.34	9	2.5	13.8	44	<0.1	0.6	0.3	153	0.27	0.047	20	114	0.32	140	0.925	9.1	0.132	0.47	1.8	151.5	45	3.6	9.4	19.7	1.4	<1	13	36.5	<0.1	57.3	4.1	0.08	<0.005	3	<0.5	<0.5		
STD OREAS25A-4A	STD			2.4	30.3	22.1	46	<0.1	47.6	7.6	480	6.53	9	2.5	13.7	45	<0.1	0.6	0.3	155	0.29	0.047	20.1	110	0.32	140	0.911	9.1	0.13	0.48	1.8	147.2	45	3.7	9.1	18.2	1.3	<1	13	36.4	<0.1	58	3.9	0.08	<0.005	3	<0.5	<0.5		
STD OREAS25A-4A	STD			2.4	33.3	25.5	39	<0.1	47.1	8	490	6.41	9	2.9	15.4	45	<0.1	0.6	0.3	157	0.26	0.049	19.8	121	0.34	144	0.929	8.49	0.119	0.47	1.9	147.5	45	3.8	9.5	18.9	1.5	<1	12	38.3	<0.1	56.2	4.3	0.05	<0.005	2	<0.5	<0.5		
Mean				2.40	31.25	23.00	43.50		47.18	7.75	478.25	6.42	9.00	2.60	14.23	44.75		0.60	0.30	154.50	0.28	0.05	20.10	113.50	0.33	141.50	0.92	8.90	0.13	0.47	1.83	147.53	45.00	3.73	9.45	19.03	1.40		12.75	37.08		57.55	4.08	0.08		2.75					
Standard Deviation				0.00	1.39	1.70	3.11	0.00	0.30	0.17	9.03	0.08	0.00	0.20	0.79	0.50	0.00	0.00	0.00	1.91	0.02	0.00	0.29	5.45	0.01	1.91	0.01	0.29	0.01	0.01	0.05	3.11	0.00	0.10	0.29	0.64	0.08	0.00	0.50	0.87	0.00	1.07	0.17	0.02	0.00	0.50	0.00	0.00		
%RSD					4%	7%	7%		1%		2%	1%		8%	6%					1%	5%		1%	5%		1%	1%	3%	5%		2%		3%	3%			2%		2%	4%										
STD OREAS262	STD																																															0.16	
STD OREAS262	STD																																														0.17	
STD OREAS262	STD																																														0.16	
STD OREAS262	STD																																														0.16	
Mean																																															0.16	
Standard Deviation																																															0.01	
%RSD																																																
STD OREAS45E	STD			2.5	781.4	17	45	0.2	483.6	60.7	560	23.88	15	2.3	12.1	16	<0.1	1	0.3	342	0.07	0.033	10.7	1065	0.16	244	0.55	7.11	0.063	0.34	0.9	95.7	23	1.4	7.7	6.2	0.5	<1	92	6.7	<0.1	21.8	2.8	0.09	<0.005	3	<0.5	<0.5		
STD OREAS45E	STD			2.4	770.7	16.3	44	0.2	461.9	58.9	549	23.92	15	2.2	11.5	16	<0.1	0.9	0.3	327	0.06	0.032	9.7	1014	0.15	232	0.538	7.03	0.059	0.33	0.9	94.2	22	1.2	7	5.9	0.5	<1	89	6.4	<0.1	20.9	2.8	0.09	<0.005	3	<0.5	<0.5		
STD OREAS45E	STD			2.4	773.9	17	45	0.2	461	60.2	548	24.52	15	2.2	12.1	16	<0.1	0.9	0.3	313	0.06	0.032	10.8	1015	0.15	239	0.53	6.87	0.058	0.33	1	94	23	1.3	7.5	6	0.5	<1	89	6.1	<0.1	21.4	2.8	0.1	<0.005	3	<0.5	<0.5		
STD OREAS45E	STD			2.3	793.9	19	46	0.3	486.9	59.6	577	24.61	16	2.6	14.3	17	<0.1	1	0.2	351	0.07	0.034	11.9	1067	0.17	253	0.56	7.27	0.055	0.33	0.9	93	25	1.1	8.3	6	0.5	<1	91	7.8	<0.1	21.5	2.9	0.08	<0.005	3	<0.5	<0.5		
Mean				2.40	779.98	17.33	45.00	0.23	473.35	59.85	558.50	24.23	15.25	2.33	12.50	16.25		0.95	0.28	333.25	0.07	0.03	10.78	1040.25	0.16	242.00	0.54	7.07	0.06	0.33	0.93	94.23	23.25	1.25	7.63	6.03	0.50		90.25	6.75		21.40	2.83	0.09		3.00					
Standard Deviation				0.08	10.31	1.16	0.82	0.05	13.81	0.78	13.48	0.39	0.50	0.19	1.23	0.50	0.00	0.06	0.05	16.74	0.01	0.00	0.90	29.75	0.01	8.83	0.01	0.17	0.00	0.01	0.05	1.11	1.26	0.13	0.54	0.13	0.00	0.00	1.50	0.74	0.00	0.37	0.05	0.01	0.00	0.00	0.00	0.00		
%RSD					1%	7%			3%	1%	2%	2%		8%	10%					5%			8%	3%		4%	2%	2%	6%			1%	5%	10%	7%	2%			2%	11%		2%								
STD OXC145	STD		220																																														
STD OXC145	STD		225																																														
STD OXC145	STD		226																																														
STD OXC145	STD		208																																														
STD OXC145	STD		211																																														
STD OXC145	STD		223																																														
STD OXC145	STD		209																																														
Mean			217.43																																															
Standard Deviation			7.85																																														
%RSD			4%																																														

Bureau Veritas Commodities Canada Ltd. Final Report
Client: Luckystrike Resources Ltd.
File Created: 5-Sep-19
Job Number: WHI19000210
Number of Samples: 138
Project: LUC
Shipment ID: DDLS-19-01
P.O. Number:
Received: 16-Jul-19

| | Method | WGHT | FA350 | MA200 | MA200 | MA200

Bureau Veritas Commodities Canada Ltd. Final Report

Client: Luckystrike Resources Ltd.
File Created: 5-Sep-19
Job Number: WHI19000211
Number of Samples: 68
Project: LUC
Shipment ID: DDLS-19-01
P.O. Number:
Received: 16-Jul-19

| | Method | WGHT | FA350 | MA200 | MA200 | MA200

Bureau Veritas Commodities Canada Ltd. Final Report
Client: Luckystrike Resources Ltd.
File Created: 5-Sep-19
Job Number: WHI19000254
Number of Samples: 138
Project: LUC
Shipment ID: DDLS-19-02
P.O. Number:
Received: 24-Jul-19

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S	Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
	Unit	KG	PPB	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	%	PPM	PPM	%	PPM	%	%	%	%	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	GM/T
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1	0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
Sample	Type																																																	
Pulp Duplicates																																																			
1320236	Drill Core	5.1	4	1.1	38.2	8.1	78	<0.1	32.1	22.2	1007	5.67	6	1.3	4.1	103	0.1	0.8	0.1	174	4.26	0.041	12.9	52	0.46	2080	0.413	6.54	0.396	1.32	0.7	7	27	1	14.4	5.7	0.4	1	21	18.1	<0.1	47.3	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320236	REP		4																																															
Percent Difference			BDL																																																
1320271	Drill Core	3.18	288	2.1	36.7	4.1	54	0.8	32.8	9	304	2.49	5	0.7	6.4	252	0.1	0.7	<0.1	100	1.97	0.041	21.3	53	0.81	2835	0.223	4.43	0.023	1.01	2.6	4.5	44	0.8	7.6	5.8	0.3	<1	7	16.4	<0.1	25.2	0.1	<0.05	<0.005	<1	0.7	<0.5	0.07	
1320271	REP		291																																														
Percent Difference			1%																																															
1320237	Drill Core	5.09	3	0.6	27.9	10.7	74	<0.1	39.2	26.3	1046	6.64	6	1.2	1	183	0.2	1.8	0.4	275	6.59	0.058	6.4	94	1.29	421	0.68	8.33	0.942	1.71	0.2	8.6	16	1.5	24.6	2.7	0.2	1	37	12.2	0.1	67.5	0.6	0.06	<0.005	1	<0.5	<0.5	<0.01	
1320237	REP			0.6	27.7	10.7	75	<0.1	39.1	26.5	1055	6.67	7	1.3	1	185	0.2	1.7	0.4	283	6.7	0.057	6.6	91	1.3	433	0.68	8.47	0.944	1.72	0.2	8.8	16	1.5	25.1	2.7	0.2	1	37	12.2	0.1	68.7	0.6	0.06	<0.005	1	<0.5	<0.5		
Percent Difference				BDL	1%	BDL	BDL		0%	BDL	1%	0%	BDL	BDL	BDL	1%	BDL	BDL	BDL	3%	2%	BDL	3%	3%	BDL	3%	BDL	2%	0%	BDL	BDL	2%	BDL	BDL	2%	BDL	BDL	BDL	BDL	BDL	2%	BDL	BDL	BDL		BDL					
1320221	Drill Core	4.58	11	1	19.9	5.6	35	<0.1	17.9	9.7	325	1.87	12	0.6	1.9	73	0.1	1.8	<0.1	57	1.54	0.028	6.6	25	0.07	1011	0.099	2.83	0.014	0.39	1	3.9	14	0.3	5.1	1.4	<0.1	<1	6	15.8	<0.1	10.9	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320221	REP																																															0.03	
Percent Difference																																																BDL	
1320256	Drill Core	4.88	137	2.1	52	7.6	69	0.5	40.3	14.4	378	3.66	10	1.1	6.2	209	0.1	1.9	<0.1	158	3.01	0.043	20.9	53	0.55	2461	0.27	5.1	0.047	0.87	4.9	9.1	42	1.3	9.8	4.7	0.3	<1	13	21.9	<0.1	24.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.08	
1320256	REP																																															0.08	
Percent Difference																																																BDL	
1320308	Drill Core	3.48	4	0.4	45.3	6.3	121	0.2	24.6	34.2	1573	8.53	5	0.6	0.8	196	0.1	0.7	<0.1	297	5.87	0.105	8.8	30	2.31	410	0.926	6.98	2.626	0.97	1	9.5	22	1.2	37.2	3.7	0.2	1	31	12.7	0.4	31.8	0.5	0.11	<0.005	<1	0.9	<0.5	<0.01	
1320308	REP			0.5	43	6.1	113	<0.1	22.5	33.4	1579	8.43	5	0.5	0.8	206	0.2	0.8	<0.1	294	5.75	0.103	9.1	30	2.28	428	0.921	6.98	2.607	0.92	1	9.4	22	1.2	38.6	3.7	0.2	<1	28	12.7	0.4	32.8	0.6	0.1	<0.005	<1	1	<0.5		
Percent Difference				BDL	5%	3%	7%		9%	2%	0%	1%	BDL	BDL	BDL	5%	BDL	BDL		1%	2%	2%	3%	BDL	1%	4%	1%	BDL	1%	5%	BDL	BDL	BDL	BDL	4%	BDL	BDL		10%	BDL	BDL	3%	BDL	BDL		BDL					
1320291	Drill Core	4.33	5	0.9	46.6	7.1	63	<0.1	38.3	28.4	1252	4.91	4	1.6	6.9	166	0.3	0.2	<0.1	185	3.29	0.033	19.1	66	1.53	681	0.489	5.94	1.694	1.34	0.4	6.3	38	0.7	22	6.2	0.5	<1	20	8.7	0.3	61.3	0.3	<0.05	<0.005	<1	0.9	<0.5	<0.01	
1320291	REP																																															0.01	
Percent Difference																																																	
1320273	Drill Core	3.19	20	2.6	41.1	6.4	69	0.3	31.4	9.7	323	2.74	7	0.9	6	417	0.1	2	<0.1	106	3.17	0.049	20.1	60	0.81	2125	0.261	4.37	0.02	0.7	1.7	4.2	41	1	9.3	8.1	0.5	<1	8	21.2	<0.1	19.4	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320273	REP			2.6	39.9	6.2	68	0.3	30.1	9.3	309	2.66	7	0.9	5.8	403	0.1	2	<0.1	100	3.08	0.047	19.4	57	0.77	2062	0.26	4.15	0.019	0.67	1.7	4.2	39	1.1	9.1	7.9	0.4	<1	8	20.5	<0.1	18.6	0.1	<0.05	<0.005	<1	<0.5	<0.5		
Percent Difference				BDL	3%	3%	BDL	BDL	4%	4%	4%	3%	BDL	BDL	3%	3%	BDL	BDL		6%	3%	4%	4%	5%	5%	3%	BDL	5%	4%	BDL	BDL	5%	BDL	2%	2%	BDL		BDL	3%		4%	BDL								
1320325	Rock Pulp	0.05	8	3.2	21.1	4.1	42	0.3	21.1	10.2	487	2.5	4	0.8	1.9	227	0.2	0.8	<0.1	82	1.76	0.052	8.7	27	0.8	466	0.26	5	2.052	0.86	26.8	34.6	18	0.6	12.2	3.3	0.2	<1	10	11.7	<0.1	20.1	1.1	0.06	<0.005	<1	0.6	<0.5	0.03	
1320325	REP																																														0.03	
Percent Difference																																															BDL	
1320342	Drill Core	2.66	145	2.2	22.7	5.3	36	0.3	27.9	9	253	2.06	2	1	3.8	134	0.2	0.7	<0.1	68	1.87	0.028	12	28	0.86	158	0.102	4.66	2.284	0.51	2.2	5.3	25	0.1	5.7	1.4	<0.1	<1	6	9	0.7	11.4	0.2	<0.05	<0.005	1	0.9	<0.5	0.04	
1320342	REP			2.2	23.8	5.5	35	0.3	27.2	8.5	244	2.05	3	1	3.8	133	0.1	0.6	<0.1	68	1.87	0.025	11.7	29	0.86	107	0.097	4.68	2.287	0.51	2	4.8	24	0.1	5.6	1.3	<0.1	<1	6	10.1	0.7	11.4	0.2	<0.05	<0.005	1	0.8	<0.5		
Percent Difference				BDL	5%	4%	BDL	BDL	3%	6%	4%	0%	BDL	BDL	BDL	BDL	BDL	BDL		BDL	BDL	11%	3%	BDL	BDL	38%	5%	0%	0%	BDL	10%	10%	BDL	BDL	2%	BDL			BDL	12%	BDL	BDL	BDL				BDL	BDL			
1320341	Drill Core	2.8	177	1.2	23.3	6.9	80	0.3	31.7	16.6	509	3.17	4	6.5	1.6	113	0.4	1	<0.1	132	3.26	0.04	6.8	177	1.58	392	0.196	6.06	1.573	1.21	2.2	4.8	13	1.3	8.5	2.4	0.1	<1	16	13.4	0.7	31.7	0.3	0.05	<0.005	<1	1.2	<0.5	0.05	
1320341	REP		171																																														
Percent Difference			3%																																														
1320306	Drill Core	4.98	3	0.7	48.5	4.9	112	0.1	24	37.3	1640	8.8	5	0.3	0.8	192	<0.1	0.3	<0.1	333	5.68	0.089	8.4	33	2.63	362	1	7.37	2.443	0.9	0.5	11	21	1	40	3.3	0.2	<1	32	14.5	0.4	27.7	0.6	0.11	<0.005	<1	1.6	<0.5	<0.01	
1320306	REP		3																																														
Percent Difference			BDL																																														
1320293	Drill Core	5.14	3	0.2	20.3	12.8	115	<0.1	39.1	35.3	1305	6.99	4	0.6	0.6	256	0.3	0.3	0.3	306	6.03	0.056	5.3	65	2.79	471	0.685	6.77	2.041	1.43	0.6	7.7	12	2.2	25.2	2	0.1	2	34	9.6	0.3	62	0.5	0.1	<0.005	<1	1.4	<0.5	<0.01	
1320293	REP		4																																														
Percent Difference			BDL																																														
Preparation Duplicates																																																	
1320216	Drill Core	2.98	143	1.4	15.4	11.5	82	0.3	37.7	21	970	4.81	8	1	4.9	349	0.7	1.5	<0.1	150	5.51	0.05	18.1	54	0.22	861	0.224	5.95	0.042	0.96	1.7	6.2	37	0.8	11.6	3.3	0.2	<1	18	32	<0.1	23.7	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.08	
1320216	DUP		150	1.5	15.3	11.4	81	0.4	37.4	20.5	956	4.73	9	1	4.8	341	0.7	1.6	<0.1	150	5.39	0.051	17.4	53	0.22	829	0.229	5.94	0.041	0.94	1.8	6.2	36	0.8	11.5	3.4	0.2	<1	18	31.8	<0.1	23.1	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.09	
Percent Difference			5%	BDL	BDL	BDL	BDL	BDL	1%	2%	1%	2%	BDL	BDL	2%	2%	BDL	BDL		BDL	2%	BDL	4%	BDL	BDL	4%	2%	BDL	BDL	2%	BDL	BDL	BDL	BDL	BDL	BDL	BDL	BDL		BDL	1%		3%	BDL						BDL
1320284	Drill Core	5.05	5	0.7	53.6	13.3	103	0.1	39.1	34.6	1261	7.72	7	1.2	0.8	126	0.2	3.9	0.3	378	3.52	0.067	6.9	82	1.75	196	0.919	7.52	0.615	1.87	2.2	10.2	17	2.5	19.7	2.2	0.1	2	41	22.3	0.2	72.8	0.6	0.11	<0.005	<1	0.6	<0.5	0.01	
1320284	DUP		5	0.8	53.5	13.3	106	0.1	40.3	34.4	1227	7.71	7	1.1	0.7	126	0.3	3.9	0.3	376	3.48	0.067	5.9	78	1.73	200	0.898	7.5	0.623	1.87	2	9.9	15	2.3	18.5	2.2	0.1	1	41	23.4	0.2	62.7	0.7	0.12	<0.005	1	<0.5	<0.5	<0.01	
Percent Difference			BDL	BDL	0%	BDL	3%	BDL	3%	1%	3%	BDL	BDL	BDL	BDL	BDL	BDL	BDL		1%	1%	BDL	16%	5%	1%	2%	2%	0%	1%	BDL	10%	3%	13%	8%	6%	BDL	BDL	BDL	BDL	BDL	5%	BDL	15%	BDL	BDL					
1320318	Drill Core	3.06	3	0.5	29.6	5.5	75	<0.1	29	22.8	824	5.21	4	1.1	4.5	188	<0.1	0.3	<0.1	234	3.49	0.05	14.1	46	2.36	1192	0.495	6.7	1.921	1.43	0.9	6.6	28	0.5	17.9	6.3	0.4	<1	21	16.3	0.3	58.6	0.4	<0.05	<0.005	<1	1.1	<0.5	<0.01	
1320318	DUP		4	0.5	30.6	6	73	0.1	27.4	22.9	814	5.18	4	1.2	4.2	181	0.1	0.2	0.1	232	3.48	0.045	14.3	47	2.39	1193	0.487	6.76	1.95	1.3	0.9	6.7	29	0.6	18.2	6.4	0.5	<1	23	15.2	0.3	59.1	0.3	<0.05	<0.005	<1	1.3	<0.5	<0.01	
Percent Difference			BDL	BDL	3%	9%	3%		6%	BDL	1%	1%	BDL	BDL	7%	4%		BDL		1%	0%	11%	1%	BDL	1%	BDL	2%	1%	1%	10%	BDL	2%	BDL	BDL	2%	2%	BDL		9%	7%	BDL	1%	BDL				BDL				
Reference Materials																																																	
STD BVGEO01	STD																																															0.08	
STD BVGEO01	STD																																															0.1	
Mean																																																0.09	
Standard Deviation																																															0.01	
%RSD																																															16%	
STD DS11	STD																																															0.25	
STD DS11	STD																																															0.26	
Mean																																																0.26	
Standard Deviation																																															0.01	
%RSD																																																
STD OREAS25A-4A	STD			2.6	34.1	24.3	48	<0.1	48.3	7.8	504	6.88	9	2.7	15.4	49	<0.1	0.6	0.4	152	0.29	0.048	22.6	109	0.34	159	0.924	9.38	0.135	0.49	1.8	158.1	50	4	10.5	20.4	1.5	<1	14	36.1	<0.1	64.5	4.4	0.09	<0.005	3	<0.5	<0.5		
STD OREAS25A-4A	STD			2.3	37.4	25.4	45	<0.1	45.5	7.9	474	6.44	10	2.9	17.4	49	<0.1	0.6	0.4	151	0.27	0.048	23.1	114	0.33	153	0.945	8.99	0.142	0.47	2	145.6	48	4	11	19.5	1.4	<1	13	38.1	<0.1	61.8	4.3	0.09	<0.005	2	<0.5	<0.5		
STD OREAS25A-4A	STD			2.5	31.8	23.4	46	<0.1	48.1	7.5	493	6.71	9	2.6	14.4	46	<0.1	0.6	0.3	156	0.28	0.046	21	106	0.33	154	1.006	9.15	0.134	0.48	1.9	155.1	48	4	9.9	20.6	1.4	<1	13	34.4	<0.1	59.8	4.2	0.08	<0.005	3	<0.5	<0.5		
STD OREAS25A-4A	STD			2.5	34.1	24.7	46	<0.1	48.9	7.7	500	6.53	10	2.8	16.5	50	<0.1	0.6	0.3	157	0.29	0.047	22	112	0.3	150	0.947	9.24	0.135	0.46	1.9	153.4	48	3.7	11.2	20.5	1.5	<1	12	36.2	<0.1	62.4	4.2	0.1	<0.005	3	<0.5	<0.5		
Mean				2.475	34.35	24.45	46.25		47.7	7.725	492.75	6.64	9.5	2.75	15.925	48.5		0.6	0.35	154	0.2825	0.04725	22.175	110.25	0.325	154	0.9555	9.19	0.1365	0.475	1.9	153.05	48.5	3.925	10.65	20.25	1.45		13	36.2		62.125	4.275	0.09		2.75					
Standard Deviation				0.13	2.30	0.83	1.26	0.00	1.51	0.17	13.30	0.20	0.58	0.13	1.30	1.73	0.00	0.00	0.06	2.94	0.01	0.00	0.90	3.50	0.02	3.74	0.04	0.16	0.00	0.01	0.08	5.33	1.00	0.15	0.58	0.51	0.06	0.00	0.82	1.51	0.00	1.93	0.10	0.01	0.00	0.50	0.00	0.00		
%RSD				5%	7%	3%	3%		3%		3%	3%		5%	8%	4%				2%			4%	3%	5%	2%	4%	2%	3%	3%		3%		4%	5%	3%			4%		3%										
STD OREAS262	STD																																															0.16	
STD OREAS262	STD																																															0.14	
STD OREAS262	STD																																															0.17	
STD OREAS262	STD																																															0.15	
Mean																																																0.155	
Standard Deviation																																															0.01	
%RSD																																															8%	
STD OREAS45E	STD			2.5	775.2	18.1	47	0.3	470.1	61.4	580	26.17	16	2.4	12.9	17	<0.1	1	0.3	312	0.06	0.033	11.2	1005	0.16	262	0.545	7.47	0.063	0.35	1.1	99.8	25	1.3	7.8	6.5	0.6	<1	94	6.7	<0.1	22.9	3	0.11	<0.005	2	<0.5	<0.5		
STD OREAS45E	STD			2.3	766.9	19.2	48	0.3	479.8	62.5	534	23.86	17	2.6	14.5	17	<0.1	1	0.3	333	0.06	0.031	11.9	957	0.15	257	0.536	7.08	0.051	0.32	1.1	94.3	24	1.4	8.3	6.1	0.5	<1	89	6.5	<0.1	22.3	2.9	0.11	<0.005	2	<0.5	<0.5		
Mean				2.4	771.05	18.65	47.5	0.3	474.95	61.95	557	25.015	16.5	2.5	13.7	17		1	0.3	322.5	0.06	0.032	11.55	981	0.155	259.5	0.5405	7.275	0.057	0.335	1.1	97.05	24.5	1.35	8.05	6.3	0.55		91.5	6.6		22.6	2.95	0.11		2					
Standard Deviation				0.14	5.87	0.78	0.71	0.00	6.86	0.78	32.53	1.63	0.71	0.14	1.13	0.00	0.00	0.00	0.00	14.85	0.00	0.00	0.49	33.94	0.01	3.54	0.01	0.28	0.01	0.02	0.00	3.89	0.71	0.07	0.35	0.28	0.07	0.00	3.54	0.14	0.00	0.42	0.07	0.00	0.00	0.00	0.00	0.00		
%RSD				6%	1%	4%			1%	1%	6%	7%		6%	8%					5%		4%	4%	3%		1%	1%	4%	15%	6%		4%			4%	4%			4%	2%		2%									
STD OREAS45H	STD			1.6	783.2	12	42	0.1	463.1	88.8	411	20.24	16	1.6	7	28	<0.1	0.6	0.2	292	0.14	0.022	12.3	691	0.25	351	0.919	8.49	0.095	0.21	0.9	127.5	24	2	9.4	14.6	1	1	58	13.1	<0.1	23	3.5	0.1	<0.005	2	<0.5	<0.5		
STD OREAS45H	STD			1.6	781.3	12.8	42	0.1	439.2	88.3	401	20.63	18	1.8	8	30	<0.1	0.6	0.2	282	0.14	0.025	13.5	620	0.25	348	0.895	8.37	0.1	0.21	0.9	122	25	2	9.9	14.5	1	2	58	15.1	<0.1	23.2	3.5	0.09	<0.005	3	<0.5	<0.5		
Mean				1.60	782.25	12.40	42.00	0.10	451.15	88.55	406.00	20.44	17.00	1.70	7.50	29.00		0.60	0.20	287.00	0.14	0.02	12.90	655.50	0.25	349.50	0.91	8.43	0.10	0.21	0.90	124.75	24.50	2.00	9.65	14.55	1.00	1.50	58.00	14.10		23.10	3.50	0.10		2.50					
Standard Deviation				0.00	1.34	0.57	0.00	0.00	16.90	0.35	7.07	0.28	1.41	0.14	0.71	1.41	0.00	0.00	0.00	7.07	0.00	0.00	0.85	50.20	0.00	2.12	0.02	0.08	0.00	0.00	0.00	3.89	0.71	0.00	0.35	0.07	0.00	0.71	0.00	1.41	0.00	0.14	0.00	0.01	0.00	0.71	0.00	0.00		
%RSD					0%	5%			4%	0%	2%	1%	8%	8%	9%	5%				2%		9%	7%	8%		1%	2%	1%	4%		3%			4%				10%		1%									
STD OXC145	STD		203																																														
STD OXC145	STD		209																																														
STD OXC145	STD		211																																														
STD OXC145	STD		215																																														
STD OXC145	STD		209																																														
Mean			209.40																																															
Standard Deviation			4.34																																														

Bureau Veritas Commodities Canada Ltd. Final Report
Client: Luckystrike Resources Ltd.
File Created: 5-Sep-19
Job Number: WHI19000254
Number of Samples: 138
Project: LUC
Shipment ID: DDLS-19-02
P.O. Number:
Received: 24-Jul-19

| | Method | WGHT | FA350 | MA200 | MA200 | MA200

Bureau Veritas Commodities Canada Ltd. Final Report
Client: Luckystrike Resources Ltd.
File Created: 5-Sep-19
Job Number: WHI19000255
Number of Samples: 88
Project: LUC
Shipment ID: DDLS-19-02
P.O. Number:
Received: 24-Jul-19

| | Method | WGHT | FA350 | MA200 | MA200 | MA200

Bureau Veritas Commodities Canada Ltd. Final Report
Client: Luckystrike Resources Ltd.
File Created: 5-Sep-19
Job Number: WHI19000255
Number of Samples: 88
Project: LUC
Shipment ID: DDLS-19-02
P.O. Number:
Received: 24-Jul-19

| | Method | WGHT | FA350 | MA200 | MA200 | MA200

Bureau Veritas Commodities Canada Ltd. Final Report
Client: Luckystrike Resources Ltd.
File Created: 5-Sep-19
Job Number: WHI19000258
Number of Samples: 138
Project: LUC
Shipment ID: DDLS-19-03
P.O. Number:
Received: 25-Jul-19

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S	Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
	Unit	KG	PPB	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	%	PPM	PPM	%	PPM	%	%	%	%	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	GM/T
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1	0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
Sample	Type																																																
Pulp Duplicates																																																		
1320455	Drill Core	2.6	3	0.9	6.6	4.7	29	<0.1	3	3.4	313	1.81	2	0.4	2.5	260	<0.1	0.2	<0.1	14	1.84	0.018	8.3	3	0.32	511	0.128	6.23	3.616	0.42	0.4	8.4	20	0.7	18.8	3.8	0.2	<1	8	8	<0.1	9.7	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320455	REP			0.8	6.3	5	31	<0.1	2.7	3	316	1.82	2	0.5	2.7	266	0.1	0.2	<0.1	14	1.84	0.019	8.6	3	0.31	511	0.128	6.23	3.577	0.44	0.4	8.6	20	0.7	17.6	3.7	0.2	<1	7	8.3	<0.1	10	0.3	0.11	<0.005	<1	<0.5	<0.5		
Percent Difference				BDL	5%	6%	7%		11%	13%	1%	BDL	BDL	BDL	8%	2%		BDL		BDL	BDL	BDL	4%	BDL	BDL	BDL	1%	1%	0%	1%	BDL	2%	BDL	BDL	7%	BDL	BDL		BDL	4%		3%	BDL							
1320464	Drill Core	3.51	3	4.2	3.7	3.7	17	<0.1	1.8	3.6	327	1.93	3	0.5	2.8	124	0.1	0.1	<0.1	28	2	0.015	8	3	0.23	736	0.123	6.04	2.864	1.24	1.5	5.2	18	0.4	13.1	2	0.1	<1	8	9	<0.1	21.2	0.3	0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320464	REP																																															<0.01	
Percent Difference																																																	
1320491	Drill Core	3.36	10	4.7	78.5	9.6	188	0.8	20.5	33.5	2181	9.11	2	0.4	1.3	255	0.6	0.2	0.1	329	4.76	0.091	6.9	24	2.85	515	0.76	8.06	3.386	0.83	8.4	5.4	17	1	28.7	2.9	0.2	<1	32	8.5	0.7	21.6	0.4	0.1	<0.005	<1	<0.5	<0.5	0.01	
1320491	REP			4.4	77.9	9.5	187	0.7	20.1	33.4	2161	9.13	2	0.4	1.2	254	0.6	0.2	0.1	330	4.7	0.091	6.7	25	2.87	512	0.753	8.08	3.362	0.83	7.8	5.6	17	1	28.6	2.9	0.2	<1	32	8.5	0.7	21.6	0.4	0.1	<0.005	<1	<0.5	<0.5		
Percent Difference				7%	1%	BDL	BDL	BDL	2%	BDL	1%	0%	BDL	BDL	BDL	BDL	BDL	BDL	BDL	BDL	1%	BDL	3%	BDL	1%	1%	1%	0%	1%	BDL	7%	4%	BDL	BDL	BDL	BDL	BDL		BDL	BDL	BDL	BDL	BDL	BDL						
1320570	Drill Core	3.29	5	0.5	33.4	4.9	48	<0.1	7.1	11.1	779	3.52	3	0.7	1.9	148	<0.1	1.1	<0.1	75	4.19	0.03	7.3	21	1.46	1115	0.214	6.75	2.869	0.86	2.3	6.6	16	0.6	9.3	3.5	0.2	<1	12	11.6	0.2	30.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320570	REP																																														<0.01	
Percent Difference																																																
1320560	Drill Core	2.93	3	0.3	7.2	4.7	49	<0.1	2.5	7.5	470	2.82	3	0.6	5.4	151	<0.1	1	<0.1	62	1.56	0.024	14.5	7	0.92	1437	0.191	7.19	1.25	1.62	0.2	6.2	30	1.1	13.5	5.5	0.4	<1	13	22.9	<0.1	51	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320560	REP			0.3	6.8	4.8	50	<0.1	2.4	7.5	472	2.81	4	0.6	5.8	151	<0.1	1	<0.1	61	1.56	0.024	15.4	7	0.91	1441	0.18	7.24	1.239	1.62	0.2	6.5	32	1.1	13.8	5.6	0.4	<1	13	23.1	<0.1	52.1	0.3	<0.05	<0.005	<1	<0.5	<0.5		
Percent Difference				BDL	6%	BDL	BDL		BDL	BDL	0%	BDL	BDL	BDL	7%	BDL		BDL		BDL	BDL	BDL	6%	BDL	BDL	0%	6%	1%	1%	BDL	BDL	5%	6%	BDL	2%	BDL	BDL		BDL	1%		2%	BDL						
1320500	Rock Pulp	0.06	7	3.3	23.9	4.2	46	0.3	24.3	11.1	490	2.63	4	0.7	1.8	244	0.2	0.8	<0.1	88	1.89	0.051	8.5	28	0.85	480	0.281	5.16	2.148	0.87	28.3	38.8	18	0.7	11.9	3.6	0.2	<1	10	12	<0.1	22.1	1.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320500	REP																																														0.02	
Percent Difference																																																
1320535	Drill Core	3.18	171	0.8	28.8	8.1	61	0.2	24	20.1	928	5.08	12	0.7	1.8	178	0.2	2.1	<0.1	210	5.22	0.042	8.1	29	2.03	380	0.455	5.53	0.438	0.96	4.3	7	19	0.8	11.8	3.3	0.2	<1	20	22.6	0.4	20.7	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320535	REP																																														0.05	
Percent Difference																																															BDL	
1320526	Rock Pulp	0.06	216	187.4	1848.9	36.8	253	0.6	37	12.6	736	4.02	14	0.6	1.5	259	0.8	1.7	0.3	113	2.53	0.053	7.7	50	1.28	563	0.352	6.16	2.108	0.84	8.7	30.1	17	1.8	12.3	4.3	0.3	<1	14	14.2	0.3	18.2	1	0.09	0.094	<1	<0.5	<0.5	0.09	
1320526	REP			188.8	1886.3	38.2	267	0.8	38.1	12.7	749	4.13	14	0.6	1.6	265	0.8	1.7	0.3	116	2.56	0.054	8.1	49	1.32	580	0.356	6.2	2.155	0.86	8.6	31.2	18	1.8	12.7	4.4	0.3	<1	14	14.3	0.3	19.5	1	0.1	0.087	1	<0.5	<0.5		
Percent Difference				1%	2%	4%	5%	29%	3%	BDL	2%	3%	BDL	BDL	BDL	2%	BDL	BDL	BDL	3%	1%	BDL	5%	BDL	3%	3%	1%	1%	2%	2%	BDL	4%	BDL	BDL	3%	2%	BDL		BDL	1%	BDL	7%	BDL	BDL	8%					
1320556	Drill Core	2.29	4	0.6	6.8	6.6	45	<0.1	4.1	7.3	632	2.7	5	0.4	5.5	135	<0.1	5.2	<0.1	53	3.61	0.019	15.8	7	1.26	189	0.112	5.76	0.105	0.93	0.7	7.9	32	0.8	10.1	3.2	0.2	<1	10	31.6	0.2	27.8	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320556	REP		4																																														
Percent Difference			BDL																																														
1320522	Drill Core	3.08	115	1	38.6	6	62	0.2	31.9	19.5	568	4.66	7	0.9	5.3	162	<0.1	0.9	<0.1	213	2.11	0.049	16.4	59	1.42	570	0.517	6.42	0.555	1.55	2.9	6	36	1.1	10	5.4	0.4	<1	20	18.3	0.4	50.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320522	REP		126																																														
Percent Difference			9%																																														
1320452	Drill Core	2.65	4	0.7	4.9	4.2	22	<0.1	0.8	2.1	208	1.6	3	0.6	2.4	170	<0.1	0.2	<0.1	6	1.37	0.018	10.8	3	0.12	412	0.126	6.17	3.273	0.43	0.1	10	24	0.7	22	4.6	0.3	<1	9	8.9	<0.1	11.5	0.3	0.06	<0.005	2	<0.5	<0.5	<0.01	
1320452	REP		3																																														
Percent Difference			BDL																																														
1320487	Drill Core	2.72	3	0.5	26.5	3.5	143	<0.1	17	22.9	1436	6.47	2	0.5	1.4	261	0.3	<0.1	<0.1	219	3.49	0.058	8.5	26	2.58	492	0.45	7.53	2.718	0.77	0.4	6	20	1	27.9	2.4	0.1	<1	25	8.7	0.3	16.9	0.4	0.08	<0.005	<1	<0.5	<0.5	<0.01	
1320487	REP		3																																														
Percent Difference			BDL																																														
Preparation Duplicates																																																	
1320442	Drill Core	5.02	9	2.5	40.6	8.2	90	<0.1	18.8	16.2	1313	5.28	15	0.6	1.8	222	0.2	1.1	<0.1	148	4.12	0.057	8	38	0.15	701	0.328	7.4	2.986	0.91	1.3	5.8	17	0.7	13.9	2.6	0.1	<1	19	13.9	<0.1	20.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320442	DUP		7	2.6	41.3	8	85	<0.1	20	16.5	1298	5.27	15	0.6	1.8	216	<0.1	0.9	<0.1	147	4.11	0.055	8.9	37	0.15	738	0.324	7.42	2.944	0.94	1.3	5.7	20	0.7	15	2.8	0.2	<1	20	12.1	<0.1	21.9	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.01	
Percent Difference			BDL	BDL	2%	2%	6%		6%	2%	1%	0%	BDL	BDL	BDL	3%		20%		BDL	BDL	4%	11%	BDL	BDL	5%	1%	0%	1%	3%	BDL	BDL	16%	BDL	8%	7%	BDL		BDL	14%		8%	BDL							BDL
1320510	Drill Core	3.4	3	3.4	15.3	5.7	63	<0.1	7.7	15.4	1049	4.53	4	0.4	0.6	443	<0.1	1.1	<0.1	153	4.13	0.049	4.6	11	1.33	465	0.32	7.32	3.068	1.27	0.6	3.7	11	0.6	10.6	1.9	0.1	<1	20	14.3	0.1	40.9	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320510	DUP		4	3.3	15.3	5.8	65	<0.1	7.8	15.6	1057	4.56	5	0.4	0.7	447	<0.1	1.2	<0.1	152	4.13	0.05	4.8	11	1.34	474	0.317	7.38	2.936	1.28	0.6	3.7	12	0.6	10.7	1.9	0.1	<1	20	14.1	0.1	42.9	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
Percent Difference			BDL	BDL	BDL	BDL	3%		BDL	BDL	1%	1%	BDL	BDL	BDL	1%		BDL		BDL	BDL	BDL	4%	BDL	BDL	2%	1%	1%	4%	BDL	BDL	BDL	BDL	BDL	BDL	BDL	BDL		BDL	1%	BDL	5%	BDL							
1320544	Drill Core	2.84	14	1.8	5.7	4.1	43	<0.1	4.8	7	819	2.59	9	1.1	4.8	73	0.3	19.5	<0.1	28	5.4	0.01	13.6	7	1.95	600	0.049	4.53	0.045	0.34	6.2	9.5	26	0.3	6.6	1.4	0.1	<1	5	45.1	0.1	7.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320544	DUP		13	1.7	6.3	4.2	44	<0.1	4.9	7.2	836	2.61	10	1.1	4.8	74	0.3	20.8	<0.1	27	5.56	0.01	13.8	6	1.98	603	0.05	4.41	0.045	0.34	6.4	9.6	27	0.3	6.6	1.5	0.1	<1	5	45.3	0.2	7.4	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
Percent Difference			BDL	BDL	10%	2%	BDL		2%	BDL	2%	1%	BDL	BDL	BDL	BDL	BDL	6%		BDL	3%	BDL	1%	BDL	2%	0%	BDL	3%	BDL	BDL	3%	BDL	BDL	BDL	BDL	BDL	BDL		BDL	0%	BDL	3%	BDL							
Reference Materials																																																
STD BVGEO01	STD																																															0.1	
STD BVGEO01	STD																																														0.09	
Mean																																															0.095	
Standard Deviation																																															0.01	
%RSD																																																
STD DS11	STD																																															0.25	
STD DS11	STD																																														0.24	
STD DS11	STD																																														0.26	
Mean																																															0.25	
Standard Deviation																																															0.01	
%RSD																																																
STD OREAS25A-4A	STD			2.4	38.7	26.4	51	0.1	49.7	8.3	532	6.76	10	3	17.8	52	<0.1	0.6	0.4	156	0.28	0.048	22.1	115	0.33	157	0.899	9.49	0.122	0.5	1.9	157.5	50	3.6	10.3	19.1	1.4	<1	13	36.2	<0.1	60.1	4.3	0.11	<0.005	2	<0.5	<0.5		
STD OREAS25A-4A	STD			2.6	33.6	24.1	47	<0.1	49.1	7.7	501	6.73	9	2.7	15.2	47	<0.1	0.6	0.4	163	0.28	0.047	22	106	0.33	146	0.972	9.46	0.134	0.49	1.9	159.9	49	3.9	10.4	21.2	1.5	<1	13	35.4	<0.1	62.7	4.4	0.09	<0.005	3	<0.5	<0.5		
STD OREAS25A-4A	STD			2.5	32.6	23.5	48	<0.1	49.3	7.5	507	6.93	8	2.6	14.7	46	<0.1	0.6	0.3	164	0.28	0.048	22.2	112	0.34	156	0.942	9.57	0.139	0.5	1.8	156.7	50	4	10.1	20.5	1.5	<1	14	35.7	<0.1	61.6	4.3	0.09	<0.005	3	<0.5	<0.5		
STD OREAS25A-4A	STD			2.4	30	22.4	45	<0.1	46.7	7	485	6.46	9	2.5	14	44	<0.1	0.6	0.4	155	0.28	0.044	20.7	102	0.32	149	0.966	9.3	0.13	0.47	2.1	157.9	48	4.1	10	21.1	1.5	<1	13	33.1	<0.1	57.4	4.4	0.07	<0.005	3	<0.5	<0.5		
Mean				2.475	33.725	24.1	47.75	0.1	48.7	7.625	506.25	6.72	9	2.7	15.425	47.25		0.6	0.375	159.5	0.28	0.04675	21.75	108.75	0.33	152	0.94475	9.455	0.13125	0.49	1.925	158	49.25	3.9	10.2	20.475	1.475		13.25	35.1		60.45	4.35	0.09		2.75					
Standard Deviation				0.10	3.65	1.69	2.50	0.05	1.36	0.54	19.52	0.19	0.82	0.22	1.66	3.40	0.00	0.00	0.05	4.65	0.00	0.00	0.70	5.85	0.01	5.35	0.03	0.11	0.01	0.01	0.13	1.36	0.96	0.22	0.18	0.97	0.05	0.00	0.50	1.37	0.00	2.30	0.06	0.02	0.00	0.50	0.00	0.00		
%RSD					11%	7%	5%		3%	7%	4%	3%		8%	11%	7%				3%		4%	3%	5%		4%	4%	1%	5%	3%	7%	1%		6%	2%	5%			4%		4%								
STD OREAS262	STD																																															0.14	
STD OREAS262	STD																																														0.17	
STD OREAS262	STD																																														0.15	
STD OREAS262	STD																																														0.18	
STD OREAS262	STD																																														0.18	
Mean																																															0.17	
Standard Deviation																																															0.01	
%RSD																																																8%
STD OREAS45E	STD			2.3	761.7	18.9	44	0.3	457.8	57.7	575	24.69	15	2.5	14.6	18	0.2	1.1	0.3	318	0.06	0.033	10.8	998	0.16	253	0.504	7.07	0.052	0.32	1	92	24	1.1	7.9	5.9	0.5	<1	90	6.7	<0.1	21.2	2.9	0.11	<0.005	3	<0.5	<0.5		
STD OREAS45E	STD			2.4	782.9	16.6	45	0.2	466.1	56.2	556	24.51	16	2.2	11.6	15	<0.1	1	0.3	327	0.06	0.031	10.2	1020	0.16	250	0.551	7.01	0.06	0.33	1	99.8	23	1.3	7.2	6.4	0.5	<1	89	6.2	<0.1	20.1	3.1	0.09	<0.005	3	<0.5	<0.5		
Mean				2.35	772.3	17.75	44.5	0.25	461.95	56.95	565.5	24.6	15.5	2.35	13.1	16.5	0.2	1.05	0.3	322.5	0.06	0.032	10.5	1009	0.16	251.5	0.5275	7.04	0.056	0.325	1	95.9	23.5	1.2	7.55	6.15	0.5		89.5	6.45		20.65	3	0.1		3				
Standard Deviation				0.07	14.99	1.63	0.71	0.07	5.87	1.06	13.44	0.13	0.71	0.21	2.12	2.12	0.14	0.07	0.00	6.36	0.00	0.00	0.42	15.56	0.00	2.12	0.03	0.04	0.01	0.01	0.00	5.52	0.71	0.14	0.49	0.35	0.00	0.00	0.71	0.35	0.00	0.78	0.14	0.01	0.00	0.00	0.00	0.00		
%RSD					2%	9%			1%	2%	2%	1%		9%	16%	13%	71%			2%		4%	4%	2%		1%	6%	1%	10%			6%		12%	7%	6%			5%		4%	5%								
STD OREAS45H	STD			1.6	801.7	12.3	42	0.1	448.3	92.8	417	21.16	17	1.6	7.3	28	<0.1	0.6	0.2	271	0.13	0.022	12.8	660	0.26	338	0.914	8.59	0.099	0.21	0.9	128.7	25	1.9	9.7	14.7	1	1	59	13.3	<0.1	23.6	3.6	0.1	<0.005	2	<0.5	<0.5		
STD OREAS45H	STD			1.6	792.9	11.9	42	0.1	449.4	89.3	411	20.88	16	1.5	6.9	27	<0.1	0.6	0.2	268	0.14	0.022	12.5	674	0.25	356	0.875	8.48	0.097	0.21	0.9	125.2	25	2	9.1	14.1	1	1	58	12.9	<0.1	22.6	3.4	0.09	<0.005	2	<0.5	<0.5		
Mean				1.6	797.3	12.1	42	0.1	448.85	91.05	414	21.02	16.5	1.55	7.1	27.5		0.6	0.2	269.5	0.135	0.022	12.65	667	0.255	347	0.8945	8.535	0.098	0.21	0.9	126.95	25	1.95	9.4	14.4	1	1	58.5	13.1		23.1	3.5	0.095		2				
Standard Deviation				0.00	6.22	0.28	0.00	0.00	0.78	2.47	4.24	0.20	0.71	0.07	0.28	0.71	0.00	0.00	0.00	2.12	0.01	0.00	0.21	9.90	0.01	12.73	0.03	0.08	0.00	0.00	0.00	2.47	0.00	0.07	0.42	0.42	0.00	0.00	0.71	0.28	0.00	0.71	0.14	0.01	0.00	0.00	0.00	0.00		
%RSD					1%	2%			0%	3%	1%	1%			4%					1%		2%	1%			4%	3%	1%	1%			2%		5%	3%				2%		3%	4%								
STD OXC145	STD		221																																														
STD OXC145	STD		220																																														
STD OXC145	STD		199																																														
STD OXC145	STD		204																																														
Mean			211																																															
Standard Deviation			11.17																																														

Bureau Veritas Commodities Canada Ltd. Final Report
Client: Luckystrike Resources Ltd.
File Created: 5-Sep-19
Job Number: WHI19000258
Number of Samples: 138
Project: LUC
Shipment ID: DDLS-19-03
P.O. Number:
Received: 25-Jul-19

| | Method | WGHT | FA350 | MA200 | MA200 | MA200

Bureau Veritas Commodities Canada Ltd. Final Report

Client: Luckystrike Resources Ltd.
File Created: 5-Sep-19
Job Number: WHI19000259
Number of Samples: 43
Project: LUC
Shipment ID: DDLS-19-03
P.O. Number:
Received: 25-Jul-19

| | Method | WGHT | FA350 | MA200 | MA200 | MA200

Bureau Veritas Commodities Canada Ltd. Final Report
Client: Luckystrike Resources Ltd.
File Created: 5-Sep-19
Job Number: WHI19000310
Number of Samples: 138
Project: LUC
Shipment ID: DDLS-19-04
P.O. Number:
Received: 2-Aug-19

| | Method | WGHT | FA350 | MA200 | MA200 | MA200

Bureau Veritas Commodities Canada Ltd. Final Report

Client: Luckystrike Resources Ltd.
File Created: 5-Sep-19
Job Number: WHI19000310
Number of Samples: 138
Project: LUC
Shipment ID: DDLS-19-04
P.O. Number:
Received: 2-Aug-19

| | Method | WGHT | FA350 | MA200 | MA200 | MA200

Bureau Veritas Commodities Canada Ltd. Final Report

Client: Luckystrike Resources Ltd.
File Created: 5-Sep-19
Job Number: WHI19000313
Number of Samples: 45
Project: LUC
Shipment ID: DDLS-19-04
P.O. Number:
Received: 2-Aug-19

| | Method | WGHT | FA350 | MA200 | MA200 | MA200

Appendix III: Drill Logs and Sample Descriptions

Contents

- Legend and Abbreviations
- DDLS-19-01
- DDLS-19-02
- DDLS-19-03
- DDLS-19-04

Code	Lithology
OG	Orthogneiss (monzonite protolith)
BXOG	Brecciated / Sheared Orthogneiss
FROG	Fine Textured Silicified Red Orthogneiss
DCOG	Decomposed orthogneiss
DOG	Dioritic Orthogneiss
SOG	Silicified Orthogneiss
SOGSH	Silicified Orthogneiss with Specular Hematite
SHOG	Silicified Hematitic Orthogneiss
HOG	Hemaitic Orthogneiss
FMV	Felsic Metavolcanic
UMV	Ultramafic Metavolcanic
FP	Felsic porphyry
QPC	Quartz-Pebble Conglomerate
CLBSH	Chlorite Biotite Schist
CLMSH	Chlorite Mica Schist
CLA	Chloritic Amphibolite
MSH	Mica Schist
SSH	Sericite Schist
QSSH	Quartz-Sericite Schist
QTT	Quartzite
DQV	Grey to Dark Grey/Blue Quartz Vein
QV	White - Translucent Quartz Vein
QVBX	Brecciated Quartz Vein
QBX	Silicified Quartz Rich Brecciated zone in Orthogneiss
SHR	Black Plasticine Textured Fault Gouge Breccia
W	Wacke / Volcanoclastic (quartz rich)
S	Siltstone
Clay	Clay
M	Marble

Code	Sulphides & Oxides	Code	
aspy	arsenopyrite	mo	molybdenite
az	azurite	po	pyrrhotite
bis	bismuthinite	py	pyrite
cpy	chalcopyrite	sc	scorordite
gn	galena	sch	scheelite
hem	hematite	sp	sphalerite
lim	limonite	spec hem	specular hematite
mag	magnetite	tel	tellurides
mal	malachite	VG	visible gold
MnO	manganese oxide		

Code	Silicates & Alteration
ab	albite (albititized)
Al-sil	Aluminum silicate
alt	alteration
amp	amphibole class
ad	andalusite
ank	ankerite
arg	argillic
bio	biotite
cal	calcite
cl	amorphous clay alteration
crd	cordierite
cs	calcite stringers
carb	carbonate alteration (unspecified)
chl	chlorite (chloritized)
chltd	chloritoid
dol	dolomite
ep	epidote
fu	fuschite
fd	feldspar
gar	garnet
gf	graphite
ksp	K-feldspar
px	pyroxene class
qcs	quartz-carbonate stringer
qcv	quartz-carbonate vein
qs	quartz stringer
qtz	quartz
qtsw	quartz stockwork
qv	quartz vein
ox/oxi	oxidized
ser	sericite
sid	siderite
sil	silicified
sl	sillimanite
str	stringer
tour	tourmaline
xtls	crystals

Code	Alteration Intensity
w	weak
m	moderate
s	strong
i	intense

Code	Structure
ap	axial plane
bd	bedding
bnd	banding
boud	boudinage
bx	breccia
clvg	cleavage
crn	crenulated/crenulation
cg	coarse-grained
decomp	decomposed
dtca	degrees to core axis
def	deformed
diss	disseminated
drf	drag fold
flt	fault
fltbx	fault breccia
fltg	fault gouge
fg	fine-grained
fol	foliation
frac	fracture
incl	inclusion
jnt	joint/jointed
lam	laminated/lamination
ln	lineament
mg	medium-grained
mega	megacrysts
msv	massive
pheno	phenocrysts
pmorph	pseudomorph
porp	porphyritic
sch	schistosity
sh	shear
slk	slickenside
tr	trace
vfg	very fine grained
vn	vein

LUCKYSTRIKE RESOURCES LTD.

Drill Hole	DDLS-19-01	Property	Lucky Strike	Zone	Monte Carlo

Coordinates (UTM NAD 83)					
Easting	589761	**Northing**	7013075	**Elevation (m)**	557
Survey by	Dan Ferraro	**Survey Method**	GPS Garmin 60CSx	**Date**	July 17, 2019

Summary					
Depth (m)	281.03	**Azimuth**	230	**Dip**	-75
Core Size	HTW + NTW	**Casing (ft)**	20	**Logged By**	Dan Ferraro
Drill Company	Kluane Drilling Ltd.			**Drill Rig**	KD 1000
Drill Start Date	July 5, 2019			**Drill Comp Date**	July 10, 2019
Log Start Date	July 7, 2019			**Log Comp Date**	July 10, 2019
Final casing	removed			**Core Location**	Monte Carlo Camp
Comments	On IP L7			**Claim #**	Au 90

Samples					
Sample Numbers	1320001 - 1320206				
Number	206	**Lab**	Bureau Veritas		
Cut by	Raf, Donald, Mark			**Date Shipped**	July 15, 2019

Down Hole Survey					
Depth (m)	**Measured Azm.**	**Corrected Azm.**	**Dip**	**Magnetic Field (nT)**	**Temperature**
50.00	210.18	229.2	-75.24	57881	
100.00	210.23	229.25	-75.07	57781	
150.00	213.76	232.78	-74.82	57885	
200.00	213.68	232.7	-74.55	57158	
250.00	211.98	231	-74.36	57140	
278.00	211.82	230.84	-74.19	57071	

From	To	Rock Code 1	Rock Code 2	Description
0.00	0.29	OB		Overburden. Mud. Rubble
0.29	31.00	OG		Orthogneiss. Simpson Range. Dark grey-pink, siliceous, biotite-rich. Moderately foliated at 70-75 dtca. Potassic or sodic alteration. Local limonitization. Trace-0.5% fresh pyrite. Very fractured, poor recovered for upper 23m.
				7.6 - 8m: lim fx
			Fault	12.7 - 13.1m: fault gouge, clay
				13.1 - 14.5m: Variable decomposed. Discordant limonitic fx, often shallow to CA
			DOG	19.1 - 21.3m: dioritic. Very fine grained, almost aphanitic. 75 dtca
				21.3 - 22.86m: fractured, very little recovery
				22.86 - 24.6m: medium grained, weakly limonitc OG
				24.6m: gradually finer grained OG w orange lim fx
				30.4 - 31m: decomposed
31.00	38.44	M		Cataclastic dolomitic marble. Limonitic, interlayered with limonitic orthogneiss
				33.9m: black fractured (MnO?) at 40 dtca
				35.1 - 35.65m: well foliated dolomitic marble at 45 dtca
				35.65 - 38.44m: limey OG with limonite
38.44	45.10	OG	DCOG	Dark red/purple and olive green altered, decomposed orthogneiss. Soft. Fractured
				42.67m: becoming more competent
				45.1m: rubbled core, almost gravel
45.10	50.65	S?	Fault	Fault zone. Dark grey-black. Rubble and clay. Orange limonitic fractures. Difficult to discern lithology. Possible shale unit.
50.65	54.10	OG		Orange limonitic orthogneiss. Variable competency. Fractured, some decomposed. Trace limonitic pyrite.
				52.8m: more competent by fractured
				53.5 - 54.1m: competent, consolidated, grading to more reddish hematitic OG
54.10	92.40	OG	HOG	Hematitic orthogneiss. Deep red colour. Fairly fractured, weakly cataclastic. <1cm grey, discordant quartz veins common. 0-trace pyrite.
				59.0 - 59.5m: 30 dtca foliation, small fold
			Fx zone	60.0 - 65.5m: fracture zone, mostly fractured rock
				61.0m: grading out of hematitic zone to more limonitic OG, fol 30-40 dtca.
				67.5m: foliation 15-25 dtca
				70m: back to reddish hematitic OG
				73m: foliation parallel to CA
				73.6m: qtz content in rock increases
				75.14 - 75.33m: dk grey, weakly brecciated qtz vein w fresh py along lower margins, 50 dtca (parallel to foliation)
				Reddish HOG continues, foliation 40-50 dtca, <5% qtz veins <1cm. Fairly consistent, competent, weakly deformed throughout.
				85.0m: 1.5cm deformed qtz vein w minor fresh py, qtz content up to 10%, 0.5% lim py
92.40	106.43	UMV		20cm gradational contact to ultramafic metavolcanic. This unit formerly called FMV (felsic metavolcanic). Very light green-grey colours. Soft. Reddish-purple discordant hematitic fractures. Seen in multiple holes in 2018 and termed FMV. Foliated at 40-50 dtca.
				93.96 - 94.7m: hematitic OG interlayer
				95.80 - 96.08m: silicified pink section w fresh and lim py and brecciated qtz veins up to 1cm. Albite alteration.
			HOG	96.08 - 97.6m: hematitic OG
				97.6m: return to light green UMV. Less hematitic fractures. Well foliated at 50 dtca. Consistent.
				103.10m: 15cm white bull qtz vein
				103.45m: more hematitic UMV
				106m: softer, pebbly green UMV
106.43	112.00	CONG		Conglomerate. Orange-brown fine grained matric. Larger clasts of orthogneis up to 2cm, rounded, elongated. Some quartz clasts. Grades to polymict at 108.7m.
				108.4 - 108.7m: visible foliation at 40 dtca
				108.7m: grades to polymictic conglomerate. Extremely variable clast sizes of dark chert, qtz, and OG from <1cm to 20cm.
				111.48 - 112.0m: section of hematitic UMV
112.00	119.60	OG	BX	Reddish orthogneiss progressively more cataclastic, grading to breccia.
				112.78 - 113.68m: greenish-red amphibolite or diorite as seen above at 38.44m
				113.68m: back to qtz-rich hematitic orthogneiss. Heterogeneous appearance, deformed, cataclastic. No carbonate.
				117.5m: less competent, more brecciated DCOG
119.60	123.75	DOG		Competent dioritic orthogneiss. Red hematite alteration persists but more biotite and chlorite. Well foliated at 60 dtca.
123.75	124.95	FROG		Very fine grained red hematitic orthogneiss with <0.5cm clasts of white feldspar
124.95	145.50	OG		Orthogneiss. Well foliated 55-60 dtca. Variably hematized with qtz veins <1cm.
				128m: grading out of hem zone to yellow-grey-blue OG, well foliated 45 dtca. Medium grained. Albite altered. ~10% 1cm qtz veins. Rusty limonitic fractures.
				135 - 135.6m: semi-silicified w rusty fx
				137.92 - 138m: DCOG

From	To	Rock Code 1	Rock Code 2	Description
				138.1 - 138.5m: qtz-rich zone w minor fresh py blebs
				139.3 - 141.75m: prospective zone of 1-10cm albite-qtz veining especially at 140.9 - 141.55m where it is silicified with discordant rusty fx and abundant specular hematite.
				141.75m: OG continues 55-60 dtca w minor qtz-albite veining
				142.9 - 144m: hem alt
				144.6 - 144.8m: minor fuschite or hydromuscovite (green mica)
145.50	151.80	OG	SOGSH	Start of silicified albite alteration zone. 65 dtca foliated orthogneiss with variably sized creamy pink albite-quartz veins and crosscutting specular hematite veins. No min at start of unit. Fractured.
				148.2 - 148.9m: large qtz-albite vein
				150.2m: 1% lim and fresh py
			Fault	150.75 - 151m: fault rubble/gouge
151.80	155.00	OG	DOG	Dioritic orthogneiss with hematite. Faulted
				152.52 - 153m: large qtz albite vein with trace py
			Fault	153.15 - 153.4m: fault gouge
155.00	168.15	OG	alt	Start of mineralization zone. Altered orthogneiss. Light green-grey colour. 20% quartz-albite veining 1-5cm. 1-8% fresh pyrite, often with foliation (60-65 dtca). Fairly competent.
				157m: 5% pyrite, fg-mg blebs
				160.45 - 162.8m: starting to see black shear planes on core fracture edges similar to that seen in deep min zone of 18-06. >5% py, more fractured.
				161.1 - 161.3m: coarse py blebs 10%
				162.8m: still greenish grey altered OG, but less fractured, less py (<2%). Foliation at 40 dtca. Deformed, ductile.
				163.95m: py band at 40 dtca
				164.5m: less competent, softer, <1% py
168.15	185.00	OG	BOT	Biotite-rich orthogneiss.
				168.15 - 169.08m: chlorite amphibolite, well fol at 35 dtca
			Fx zone	169.08 - 174.75m: fracture zone, rubble
				172.3 - 172.6m: qtz vein, completely fractured
				174.75m: becomes more competent but still fractured. Lightered coloured, less biotite
				Fractured biotite-rich OG continues w occasion pyritic sections and qtz-albite veining. Foliation at 45-50 dtca
				176.2 - 177.1m: 3% pyrite w qtz-albite
				178.31m: SWITCH TO NTW
				180.85m: 5cm qtz-albite vein crosscutting foliation w py seam on lower margin
				181m: gradually more mafic. Fractured. 0.5-3cm qtz-albite veins. 50 dtca foliation.
				184.05m: small breccia zone with brittle fractured qtz veining, leading into more fractured core
185.00	204.15	DOG		More competent, chloritic, darker orthogneiss
			Fault	188.3 - 188.7m: fault, clay seam
				192.94 - 193.6m: fault, clay and sandy rubble.
				193.6m: competent chloritic dioritic OG. Well foliated at 50 dtca. Sporadic hematite fracture-fill
				200.25 - 201.65m: silicified K or Na alteration zone; 0.5% py
				201.65 - 202m: decomposed
				202m: returned to chloritic DOG
204.15	209.40	OG	SOG, fx	Fracture zone of less chloritic, more siliceous gneiss. Still darkish colour
209.40	236.30	OG		Orthogneiss with minor sodic alteration and 1-2cm crosscutting quartz veins. Increasingly biotite-rich, especially at 215m.
				212.45 - 214.88m: loss of about 1m core.
				215.35 - 215.55m: intense albite alteration with silicification and fg pyrite
			Fault	215.55 - 215.75m: fault gouge
				215.75m: variably bleached and altered biotite-rich orthogneiss with frequent zones of completely fractured core. Moderate foliation at 60 dtca. Trace pyrite.
				220.4m: out of fracture zone. Weakly deformed bt-rich OG. Local Na-alt
				221.95 - 222.3m: albite alteration with crosscutting veins
				224.7 - 226.2m: deformation zone, minor py. Mostly ductile
				226.2m: biotite-rich OG continues, variable fracture zone
			Fault	231.5 - 231.6m: fault gouge
				232.1 - 232.6m: multiple 5-10cm breccia veins of unknown mineral (grey-beige w quartz clasts)
				232.6m: increase in alteration w crosscutting veinlets
				233.66m: 8cm grey qtz vein parallel to foliation w minor py
				234.52m: 8cm grey qtz vein parallel to foliation w minor py
236.30	237.75	CLBSH		Fine grained chlorite schist. Fractured
237.75	239.46	OG	CLBSH	Silicified biotite-rich orthogneiss interlayered with fine grained chlorite schist
239.46	245.05	CLBSH		Fine grained chlorite schist. Weak foliation at 65-70 dtca. Fractured.
			Fault	243.6 - 243.84m: clay fault gouge. Completely fractured rock
245.05	250.90	OG	SOG	Silicified alteration zone of biotite-rich orthogneiss. Pink Na-alteration w quartz and 1-2% pyrite. Fractured.
				248.7 - 250.9m: mostly silicified albite-qtz with 3% pyrite, up to 1cm py blebs at 250.2m.
250.90	254.30	CLBSH	OG	Grading to chloritic orthogneiss or chlorite schist. Foliated at 45 dtca.

From	To	Rock Code 1	Rock Code 2	Description
254.30	257.30	OG	SOG	Silicified zone but not as altered as above. Chloritic with white discordant veinlets. Very fractured, trace pyrite.
257.30	267.45	CLBSH		Chlorite-biotite schist. Well foliated 35-40 dtca with localized zones of albite-qtz veining with minor pyrite.
				257.8 - 258.15m: shallow veining w py
				259.3 - 259.9m: silicified with pink albite-qtz
				259.9m: light green chl schist grading to UMV? Foliated at 45 dtca. Fairly competent. Minor qtz veining.
267.45	268.40	OG		5cm white quartz vein marks the start of siliceous pink altered orthogneiss. Trace py
268.40	273.30	CLBSH		Semi-altered gneiss grading back to chlorite schist
273.30	274.18	OG		Grading into weakly silicified biotite-rich orthogneiss with quartz veining. Well foliated at 50 dtca.
274.18	279.30	OG	SOG/alt	Light grey altered orthogneiss with large albite-qtz veins. 2% pyrite.
			QV	274.2 - 274.85m: large cream coloured vein with abundant pyritic seams
				274.85m: fracture zone. Rubble. Still altered
			QV	275.3 - 275.9m: more creamy qtz veining but very fractured, minor py visible
				277.45 - 277.8m: pink-cream qtz veins with minor py
279.30	281.03	CLBSH		Fractured rubble core grading to chlorite biotite schist. Fracturing and fault gouge to end of hole. Minor qtz-albite veining.
281.03		EOH		End of hole

Hole ID	Sample ID	From	To	Length	Rock	Rock	Description	Alteration Intensity (0, tr, w, m, s)					Veinlets (%)		Sulphide %		Certificate	Au	Ag
		(m)	(m)	(m)	Code 1	Code 2		Sil	Ser	Chl	Cb	Ep	QS	QCS	Py	Po		ppb	ppm
DDLS-19-01	1320001	3.05	4.57	1.52	OG	DOG	poor recovery, dark grey OG/DOG, minor fresh py	w							0.5		WHI19000210	3	<0.1
DDLS-19-01	1320002	4.57	6.10	1.53	OG	DOG	poor recovery, dark grey OG/DOG, minor fresh py	w							0.5		WHI19000210	5	<0.1
DDLS-19-01	1320003	6.10	7.62	1.52	OG	DOG	poor recovery, dark grey OG/DOG, minor fresh py	w							0.5		WHI19000210	4	<0.1
DDLS-19-01	1320004	7.62	9.14	1.52	OG	DOG	more limonitic, better recovery								tr		WHI19000210	5	<0.1
DDLS-19-01	1320005	14.00	15.00	1.00	OG		fractured lim OG								tr		WHI19000210	7	0.2
DDLS-19-01	1320006	15.00	16.00	1.00	OG		fractured lim OG								tr		WHI19000210	6	0.4
DDLS-19-01	1320007	16.00	17.00	1.00	OG	fault	fractured lim OG, fault gouge, carb in fault				m						WHI19000210	4	0.2
DDLS-19-01	1320008	17.00	18.00	1.00	OG	fault	fractured lim OG, fault gouge, carb in fault				m						WHI19000210	4	0.4
DDLS-19-01	1320009	18.00	19.00	1.00	OG		competent dk OG w lim fx										WHI19000210	4	0.2
DDLS-19-01	1320010	19.00	20.00	1.00	OG		faulting w dk OG, calcite veinlet, lim py				w			3	0.5		WHI19000210	3	<0.1
DDLS-19-01	1320011	20.00	21.00	1.00	OG		faulting w dk OG, calcite veinlet, lim py				w			3	0.5		WHI19000210	15	<0.1
DDLS-19-01	1320012	21.00	22.86	1.86	OG		fractured dk OG w lim fx, very poor recovery										WHI19000210	20	<0.1
DDLS-19-01	1320013	22.86	24.00	1.14	OG		lim OG, medium grained										WHI19000210	5	0.2
DDLS-19-01	1320014	24.00	25.00	1.00	OG		softer lim OG w lim fx, minor qtz veinlets						2				WHI19000210	4	0.6
DDLS-19-01	1320015	28.00	29.00	1.00	OG		lim OG w lim fx, minor calcite veinlets, tr py				w			2	tr		WHI19000210	4	<0.1
DDLS-19-01	1320016	29.00	30.00	1.00	OG		lim OG w lim fx, minor calcite veinlets, tr py				w			2	tr		WHI19000210	3	0.1
DDLS-19-01	1320017	30.00	31.00	1.00	OG	DCOG	lim OG grading to DCOG										WHI19000210	5	1
DDLS-19-01	1320018	31.00	32.00	1.00	OG	M	OG w dolomitic marble										WHI19000210	3	0.1
DDLS-19-01	1320019	32.00	33.00	1.00	OG		lim OG grading to yellow DCOG, carbonaceous				m						WHI19000210	3	0.2
DDLS-19-01	1320020	33.00	34.00	1.00	M		dolomitic marble w blk fx, qtz-carb veinlets							5			WHI19000210	4	<0.1
DDLS-19-01	1320021	34.00	35.50	1.50	M		dolomitic marble w lim fx										WHI19000210	3	0.1
DDLS-19-01	1320022	35.50	36.30	0.80	OG		contact to strongly lim OG										WHI19000210	3	0.3
DDLS-19-01	1320023	36.30	37.00	0.70	OG		OG w 6cm qtz-carb vein				m			8			WHI19000210	3	0.1
DDLS-19-01	1320024	44.20	45.72	1.52	OG	fault	faulted lim OG and DCOG										WHI19000210	4	1.2
DDLS-19-01	1320025						BLANK - CDN-BL-9										WHI19000210	6	0.4
DDLS-19-01	1320026						STANDARD - CDN-CM-25										WHI19000210	247	0.7
DDLS-19-01	1320027	45.72	47.24	1.52	S?	Fault	blk rubble flt zone. Dk grey w orange lim fx planes. Shale??										WHI19000210	5	2.1
DDLS-19-01	1320028	47.24	48.77	1.53	S?	Fault	blk rubble flt zone. Dk grey w orange lim fx planes. Shale??, more limonitic										WHI19000210	4	3.2
DDLS-19-01	1320029	48.77	50.29	1.52	S?	Fault	blk rubble flt zone. Dk grey w orange lim fx planes. Shale??, more limonitic										WHI19000210	5	3.5
DDLS-19-01	1320030	50.29	51.82	1.53	S?	OG	grading out of flt zone into orange lim fx OG										WHI19000210	9	0.8
DDLS-19-01	1320031	51.82	53.34	1.52	OG		very fractured lim OG										WHI19000210	3	0.2
DDLS-19-01	1320032	53.34	54.86	1.52	OG		less fractured lim hem OG										WHI19000210	2	0.1
DDLS-19-01	1320033	54.86	56.39	1.53	HOG		hematitic OG, lim fx, fractured, minor lim py, fractured qtz						5		0.5		WHI19000210	3	<0.1
DDLS-19-01	1320034	56.39	57.91	1.52	HOG		hematitic OG, lim fx, fractured, minor lim py, fractured qtz						10		0.5		WHI19000210	3	<0.1
DDLS-19-01	1320035	57.91	59.00	1.09	HOG		hematitic OG, tr spec hem						1				WHI19000210	4	<0.1
DDLS-19-01	1320036	59.00	60.00	1.00	HOG		hematitic OG						2				WHI19000210	3	<0.1
DDLS-19-01	1320037	60.00	61.00	1.00	OG		fractured lim OG						5				WHI19000210	4	0.2
DDLS-19-01	1320038	61.00	62.00	1.00	OG		fractured lim OG										WHI19000210	9	0.3
DDLS-19-01	1320039	62.00	63.00	1.00	OG		fractured lim OG										WHI19000210	14	0.4
DDLS-19-01	1320040	63.00	64.00	1.00	OG		fractured lim OG										WHI19000210	5	0.3
DDLS-19-01	1320041	64.00	65.00	1.00	OG	HOG	fractured hem lim OG										WHI19000210	5	0.3
DDLS-19-01	1320042	71.00	72.00	1.00	OG	HOG	hem lim OG								0.5		WHI19000210	4	0.3
DDLS-19-01	1320043	72.00	73.00	1.00	OG	HOG	hem lim OG								0.5		WHI19000210	4	0.2
DDLS-19-01	1320044	73.00	73.50	0.50	OG	HOG	hem lim OG								0.5		WHI19000210	4	0.2
DDLS-19-01	1320045	73.50	74.10	0.60	OG	HOG	hem lim OG w grey qtz veining, brecciated						15		0.5		WHI19000210	13	0.4
DDLS-19-01	1320046	74.10	75.00	0.90	OG	HOG	lim hem OG										WHI19000210	3	0.1
DDLS-19-01	1320047	75.00	75.50	0.50	OG	HOG	10cm grey qtz vein (minor brecciation) with fresh py along lower margin						30		2		WHI19000210	5	0.2
DDLS-19-01	1320048	75.50	76.00	0.50	OG	HOG	lim hem OG						2				WHI19000210	3	<0.1
DDLS-19-01	1320049	76.00	77.00	1.00	OG	HOG	lim hem OG						2				WHI19000210	3	<0.1
DDLS-19-01	1320050						BLANK - CDN-BL-9										WHI19000210	7	0.5
DDLS-19-01	1320051						STANDARD - CDN-CGS-7										WHI19000210	970	3.2
DDLS-19-01	1320052	77.00	78.00	1.00	OG	HOG	lim hem OG										WHI19000210	3	<0.1
DDLS-19-01	1320053	83.90	85.00	1.10	OG	HOG	lim hem og w bx qtz						10				WHI19000210	3	<0.1
DDLS-19-01	1320054	85.00	86.00	1.00	OG	HOG	lim hem og w 2cm qv, soft						2				WHI19000210	3	<0.1
DDLS-19-01	1320055	91.00	92.00	1.00	HOG		hem OG w qtz						5				WHI19000210	4	<0.1
DDLS-19-01	1320056	92.00	93.00	1.00	HOG	UMV	gradational contact to ultramafic metavol										WHI19000210	4	<0.1
DDLS-19-01	1320057	93.00	94.00	1.00	UMV	OG	green-grey UM w interlayered pinkish OG										WHI19000210	4	<0.1
DDLS-19-01	1320058	94.00	95.00	1.00	UMV	OG	green-grey UM w interlayered pinkish OG										WHI19000210	3	<0.1
DDLS-19-01	1320059	95.00	95.80	0.80	UMV	OG	green-grey UM w interlayered pinkish OG										WHI19000210	3	<0.1
DDLS-19-01	1320060	95.80	96.30	0.50	UMV	OG	UMV w two 10cm sections of sil OG w 1-2cm qtz and minor fresh py	w					10		1		WHI19000210	3	<0.1
DDLS-19-01	1320061	96.30	97.00	0.70	UMV	OG	green-grey UM w interlayered pinkish OG	w							0.5		WHI19000210	3	<0.1
DDLS-19-01	1320062	97.00	98.00	1.00	UMV	OG	green-grey UM w interlayered pinkish OG	w							0.5		WHI19000210	3	<0.1
DDLS-19-01	1320063	98.00	99.00	1.00	UMV		UMV w qtz nodules						10				WHI19000210	2	<0.1
DDLS-19-01	1320064	102.00	103.00	1.00	UMV		fractured UMV						5				WHI19000210	3	<0.1
DDLS-19-01	1320065	103.00	103.50	0.50	UMV	QV	UMV w 15cm qtz vein, white, bull						30				WHI19000210	3	<0.1
DDLS-19-01	1320066	103.50	105.00	1.50	UMV		UMV w red hem										WHI19000210	3	<0.1
DDLS-19-01	1320067	109.00	110.00	1.00	CONG		polymictic conglomerate										WHI19000210	120	0.2
DDLS-19-01	1320068	110.00	111.00	1.00	CONG		polymictic conglomerate										WHI19000210	33	<0.1
DDLS-19-01	1320069	111.00	112.00	1.00	CONG	UMV	polymictic conglomerate w section of hem UMV										WHI19000210	111	0.2
DDLS-19-01	1320070	112.00	113.00	1.00	OG?		cataclastic hem OG?						15				WHI19000210	70	<0.1
DDLS-19-01	1320071	113.00	113.85	0.85	OG?	DOG	chl hem zone, 10cm fault gouge			m							WHI19000210	41	0.2
DDLS-19-01	1320072	113.85	115.00	1.15	OG	BXOG	hem bx OG w 30% qtz nodules, minor lim py						30		1		WHI19000210	156	0.2
DDLS-19-01	1320073	115.00	116.00	1.00	OG	BXOG	hem bx OG w 30% qtz nodules, minor lim py						30		1		WHI19000210	857	1
DDLS-19-01	1320074	116.00	117.00	1.00	OG	DOG	dk chl OG w red hem						10				WHI19000210	157	0.2

Hole ID	Sample ID	From	To	Length	Rock	Rock	Description	Alteration Intensity (0, tr, w, m, s)					Veinlets (%)		Sulphide %		Certificate	Au	Ag
		(m)	(m)	(m)	Code 1	Code 2		Sil	Ser	Chl	Cb	Ep	QS	QCS	Py	Po		ppb	ppm
DDLS-19-01	1320075						BLANK - CDN-BL-9										WHI19000210	7	0.3
DDLS-19-01	1320076						STANDARD - CDN-CM-25										WHI19000210	254	0.6
DDLS-19-01	1320077	117.00	118.00	1.00	OG	DCOG	lim hem OG, partially decomposed										WHI19000210	112	0.1
DDLS-19-01	1320078	118.00	119.00	1.00	OG	DCOG	decomposed, semi consolidated										WHI19000210	138	0.5
DDLS-19-01	1320079	119.00	120.00	1.00	OG		grading out of DCOG into more comp OG, less alt						5				WHI19000210	134	0.4
DDLS-19-01	1320080	120.00	121.00	1.00	OG		hem OG w 4cm rusty qv						10				WHI19000210	114	0.3
DDLS-19-01	1320081	121.00	122.00	1.00	OG		hem+chl OG, lim fx			w			2				WHI19000210	127	0.6
DDLS-19-01	1320082	122.00	123.00	1.00	OG		chl OG			w							WHI19000210	18	0.1
DDLS-19-01	1320083	123.00	124.00	1.00	OG		chl OG			w							WHI19000210	36	<0.1
DDLS-19-01	1320084	124.00	125.00	1.00	OG	cong	fine red hem matrix conglomerate										WHI19000210	5	<0.1
DDLS-19-01	1320085	125.00	126.00	1.00	OG	HOG	hem OG										WHI19000210	14	0.1
DDLS-19-01	1320086	126.00	127.00	1.00	OG	HOG	hem OG										WHI19000210	42	0.2
DDLS-19-01	1320087	127.00	128.00	1.00	OG	HOG	hem OG										WHI19000210	60	0.1
DDLS-19-01	1320088	128.00	129.00	1.00	OG		fx with 10cm qv						10				WHI19000210	198	0.3
DDLS-19-01	1320089	129.00	130.00	1.00	OG		OG w crosscutting rusty fx, qtz veining, albite alt						15		tr		WHI19000210	122	<0.1
DDLS-19-01	1320090	130.00	131.00	1.00	OG		OG w crosscutting rusty fx, qtz veining, albite alt						5		tr		WHI19000210	57	<0.1
DDLS-19-01	1320091	131.00	132.00	1.00	OG		OG w crosscutting rusty fx, qtz veining, albite alt						5		tr		WHI19000210	59	0.8
DDLS-19-01	1320092	132.00	133.00	1.00	OG		OG w crosscutting rusty fx, qtz veining, albite alt						5		tr		WHI19000210	232	0.2
DDLS-19-01	1320093	133.00	134.00	1.00	OG		OG w crosscutting rusty fx, qtz veining, albite alt						5		tr		WHI19000210	62	0.1
DDLS-19-01	1320094	134.00	135.00	1.00	OG		fractured OG						1				WHI19000210	104	0.2
DDLS-19-01	1320095	135.00	136.00	1.00	OG		fractured OG, lim fx, qtz veining						15				WHI19000210	50	<0.1
DDLS-19-01	1320096	136.00	137.00	1.00	OG		OG, lim fx						10				WHI19000210	63	<0.1
DDLS-19-01	1320097	137.00	138.00	1.00	OG		OG, lim fx						10				WHI19000210	152	<0.1
DDLS-19-01	1320098	138.00	139.00	1.00	OG		OG, lim fx, qtz-albite veining, minor py blebs						25		1		WHI19000210	95	<0.1
DDLS-19-01	1320099	139.00	140.00	1.00	OG		OG, abundant qtz-albite						25		tr		WHI19000210	28	<0.1
DDLS-19-01	1320100						BLANK - CDN-BL-9										WHI19000210	9	0.3
DDLS-19-01	1320101						STANDARD - CDN-GS-15B										WHI19000210	>10000	1
DDLS-19-01	1320102	140.00	141.00	1.00	OG		OG w 20cm qtz albite vn, lim fx						25		tr		WHI19000210	26	<0.1
DDLS-19-01	1320103	141.00	142.00	1.00	OG		silicified section with 20cm qtz-albite on either side, minor py	w					30		0.5		WHI19000210	9	<0.1
DDLS-19-01	1320104	142.00	143.00	1.00	OG		OG w qtz-albite						5				WHI19000210	63	<0.1
DDLS-19-01	1320105	143.00	144.00	1.00	OG		OG w minor hem alt						5				WHI19000210	6	<0.1
DDLS-19-01	1320106	144.00	145.00	1.00	OG		OG w minor hem alt						5				WHI19000210	7	<0.1
DDLS-19-01	1320107	145.00	146.00	1.00	OG		OG, spec hem, qtz albite veining						15				WHI19000210	11	<0.1
DDLS-19-01	1320108	146.00	147.00	1.00	OG		OG, spec hem, qtz albite veining						10		0.5		WHI19000210	15	<0.1
DDLS-19-01	1320109	147.00	148.00	1.00	OG		fractured OG, spec hem, qtz-albite						30		0.5		WHI19000210	46	<0.1
DDLS-19-01	1320110	148.00	149.00	1.00	OG		mostly quartz-albite veining						80		0.5		WHI19000210	8	<0.1
DDLS-19-01	1320111	149.00	150.00	1.00	OG	SOGSH?	OG w spec hem, qtz albite veining						25		0.5		WHI19000210	66	<0.1
DDLS-19-01	1320112	150.00	151.00	1.00	OG	SOGSH, flt	OG w spec hem, qtz albite veining, half sample is fault gouge						20		1		WHI19000210	91	<0.1
DDLS-19-01	1320113	151.00	152.00	1.00	OG	SOGSH?	OG w spec hem, qtz albite veining						30		1		WHI19000210	28	<0.1
DDLS-19-01	1320114	152.00	153.00	1.00	OG		OG, spec hem, qtz albite veining, minor chl OG			w			50		tr		WHI19000210	151	0.3
DDLS-19-01	1320115	153.00	154.00	1.00	OG	DOG	chl OG w 30cm fault gouge			w			10		tr		WHI19000210	85	0.2
DDLS-19-01	1320116	154.00	155.00	1.00	OG	DOG	chl OG			w			2				WHI19000210	8	<0.1
DDLS-19-01	1320117	155.00	156.00	1.00	OG	alt	start of light green-grey alt OG min zone, fresh py, qtz-albite veining						25		2		WHI19000210	153	0.4
DDLS-19-01	1320118	156.00	157.00	1.00	OG	alt	alt OG, minor py						5		1		WHI19000210	38	0.2
DDLS-19-01	1320119	157.00	158.00	1.00	OG	alt	alt OG, py blebs						5		5		WHI19000210	90	0.2
DDLS-19-01	1320120	158.00	159.00	1.00	OG	alt	bleached alt OG, py blebs						20		5		WHI19000210	547	0.4
DDLS-19-01	1320121	159.00	160.00	1.00	OG	alt	bleached alt OG, py blebs						5		7		WHI19000210	180	0.2
DDLS-19-01	1320122	160.00	161.00	1.00	OG	alt	alt OG w blk shear planes						5		5		WHI19000210	28	0.1
DDLS-19-01	1320123	161.00	162.00	1.00	OG	alt	fractured alt OG w large py blebs						20		6		WHI19000210	197	0.2
DDLS-19-01	1320124	162.00	163.00	1.00	OG	alt	fractured alt OG, py						30		5		WHI19000210	445	0.4
DDLS-19-01	1320125						BLANK - CDN-BL-9										WHI19000210	10	0.6
DDLS-19-01	1320126						STANDARD - CDN-CM-25										WHI19000210	260	0.6
DDLS-19-01	1320127	163.00	164.10	1.10	OG	alt	deformed alt OG w py						15		2		WHI19000210	22	<0.1
DDLS-19-01	1320128	164.10	165.00	0.90	OG	alt	deformed alt OG						5		1		WHI19000210	83	0.3
DDLS-19-01	1320129	165.00	166.00	1.00	OG	alt	softer alt OG								0.5		WHI19000210	69	0.1
DDLS-19-01	1320130	166.00	167.00	1.00	OG	alt	soft alt OG, py in fol								2		WHI19000210	104	<0.1
DDLS-19-01	1320131	167.00	168.00	1.00	OG	alt, QVBX	bleached og w qtz bx						40		0.5		WHI19000210	102	<0.1
DDLS-19-01	1320132	168.00	169.00	1.00	OG		chl bt gneiss			m					0.5		WHI19000210	8	<0.1
DDLS-19-01	1320133	169.00	170.00	1.00	OG		fractured chl bt gneiss			m					tr		WHI19000210	17	0.1
DDLS-19-01	1320134	170.00	171.00	1.00	OG		fractured chl bt gneiss, rubble			m							WHI19000210	5	<0.1
DDLS-19-01	1320135	171.00	172.00	1.00	OG	alt	lighter altered OG, fractured						20		1		WHI19000210	90	<0.1
DDLS-19-01	1320136	172.00	173.00	1.00	OG	alt, QV	fx bleached OG w rubbled QV						50		0.5		WHI19000210	53	0.1
DDLS-19-01	1320137	173.00	174.00	1.00	OG	alt	more competent bleached OG						20		0.5		WHI19000210	68	0.1
DDLS-19-01	1320138	174.00	175.00	1.00	OG	alt	fractured bleached OG						15		0.5		WHI19000210	47	<0.1
DDLS-19-01	1320139	175.00	176.00	1.00	OG	alt	fractured bleached OG						15		0.5		WHI19000211	116	<0.1
DDLS-19-01	1320140	176.00	177.00	1.00	OG	alt	more competent bleached OG, py in fol			w			15		2		WHI19000211	4	0.1
DDLS-19-01	1320141	177.00	178.30	1.30	OG	alt	more competent bleached OG, py in fol			w			15		2		WHI19000211	3	<0.1
DDLS-19-01	1320142	178.30	179.00	0.70	OG	alt	SWITCH TO NTW. Bleached OG						20		1		WHI19000211	3	<0.1
DDLS-19-01	1320143	179.00	180.00	1.00	OG	alt	bleached OG						20		1		WHI19000211	6	0.2
DDLS-19-01	1320144	180.00	181.00	1.00	OG	alt	bleached OG, py w 5cm qtz-albite vn						30		2		WHI19000211	3	<0.1
DDLS-19-01	1320145	181.00	182.00	1.00	OG		bt-rich OG						25				WHI19000211	6	<0.1
DDLS-19-01	1320146	182.00	183.00	1.00	OG		bt-rich OG						10				WHI19000211	6	<0.1
DDLS-19-01	1320147	183.00	184.00	1.00	OG		deformed bt-rich OG						10				WHI19000211	9	0.1
DDLS-19-01	1320148	184.00	185.00	1.00	OG		bt-rich OG w brecciated qtz, fault gouge						20				WHI19000211	10	<0.1

Hole ID	Sample ID	From	To	Length	Rock	Rock	Description	Alteration Intensity (0, tr, w, m, s)					Veinlets (%)		Sulphide %		Certificate	Au	Ag
		(m)	(m)	(m)	Code 1	Code 2		Sil	Ser	Chl	Cb	Ep	QS	QCS	Py	Po		ppb	ppm
DDLS-19-01	1320149	185.00	186.00	1.00	OG		fault gouge with qtz in bt OG						5				WHI19000211	4	0.3
DDLS-19-01	1320150						BLANK - CDN-BL-9										WHI19000211	9	0.4
DDLS-19-01	1320151						STANDARD - CDN-CGS-7										WHI19000211	1045	3.4
DDLS-19-01	1320152	191.50	192.00	0.50	OG	bx	qtz-albite breccia w chl alt OG						20		tr		WHI19000211	5	<0.1
DDLS-19-01	1320153	192.00	193.00	1.00	OG	chl, flt	chl OG, semi-bleached into fault zone			m							WHI19000211	4	0.9
DDLS-19-01	1320154	193.00	194.00	1.00	OG	chl, flt	fault gouge and chl bleached OG			m							WHI19000211	3	5.1
DDLS-19-01	1320155	200.00	201.00	1.00	OG	SOG	grading from chl OG to silicified zone w K or Na alt	w		w			25		tr		WHI19000211	157	0.2
DDLS-19-01	1320156	201.00	201.60	0.60	OG	SOG	silicified zone with pink K or Na alt and abundant qtz. Weak bx	m					40		tr		WHI19000211	134	<0.1
DDLS-19-01	1320157	201.60	202.40	0.80	OG	DOG	out of sil zone into decomposed section and green DOG			w							WHI19000211	7	0.6
DDLS-19-01	1320158	209.00	210.00	1.00	OG	DOG	half fractured rk, half Na-alt chl OG			w			15		tr		WHI19000211	12	0.2
DDLS-19-01	1320159	210.00	211.00	1.00	OG	DOG	chl OG w Na-alt. qtz veining w tourmaline			w			15		tr		WHI19000211	13	<0.1
DDLS-19-01	1320160	211.00	212.00	1.00	OG	DOG	chl OG w Na-alt. qtz veining w tourmaline			w			15		tr		WHI19000211	16	<0.1
DDLS-19-01	1320161	212.00	214.00	2.00	OG	bt	biotite OG w Na-alt. fractured. Loss of core in this run, missing about a meter										WHI19000211	48	0.1
DDLS-19-01	1320162	214.00	215.20	1.20	OG	bt	bt-OG w hem and Na alt										WHI19000211	29	<0.1
DDLS-19-01	1320163	215.20	216.00	0.80	OG	bt	silicified section w Na-alt in OG, some fault gouge. Nice dissem py	w					15		2		WHI19000211	4	0.1
DDLS-19-01	1320164	216.00	217.00	1.00	OG	bt	bt OG, fractured, fault										WHI19000211	6	<0.1
DDLS-19-01	1320165	221.90	222.60	0.70	OG	bt	bt OG w nice NA alt zone, minor sil	w					10		0.5		WHI19000211	19	<0.1
DDLS-19-01	1320166	222.60	223.60	1.00	OG	bt	bt OG w weak Na alt						5		tr		WHI19000211	1580	2.6
DDLS-19-01	1320167	223.60	225.00	1.40	OG	bt	def zone in bt OG						15		0.5		WHI19000211	54	<0.1
DDLS-19-01	1320168	225.00	226.20	1.20	OG	bt	def zone in bt OG						15		0.5		WHI19000211	10	<0.1
DDLS-19-01	1320169	232.00	233.00	1.00	OG	bt	multiple albite? Bx veins 5-10 wide. Or other min, beige creamy colour w clasts of qtz						10		0.5		WHI19000211	717	0.5
DDLS-19-01	1320170	233.00	234.00	1.00	OG	bt	Na alt bt OG w 8cm grey qtz vein						15		1		WHI19000211	61	0.1
DDLS-19-01	1320171	234.00	234.80	0.80	OG	bt	Na alt bt OG w 8cm grey qtz vein						20		1		WHI19000211	67	0.1
DDLS-19-01	1320172	234.80	236.00	1.20	OG	bt	fractured, altered bt og grading to chl schist			w			2		tr		WHI19000211	56	<0.1
DDLS-19-01	1320173	244.00	245.00	1.00	CLBSH		fractured chl schist			m			10				WHI19000211	10	0.2
DDLS-19-01	1320174	245.00	246.00	1.00	OG		fractured, weakly silicified, albite altered OG	w					20		0.5		WHI19000211	1157	15
DDLS-19-01	1320175						BLANK - CDN-BL-9										WHI19000211	9	0.2
DDLS-19-01	1320176						STANDARD - CDN-CM-25										WHI19000211	265	0.6
DDLS-19-01	1320177	246.00	247.00	1.00	OG		altered OG, qtz-albite vning						30		1		WHI19000211	574	0.9
DDLS-19-01	1320178	247.00	248.00	1.00	OG		altered OG, qtz-albite vning						25		1		WHI19000211	3	<0.1
DDLS-19-01	1320179	248.00	249.00	1.00	OG		altered OG, qtz-albite vning						25		1		WHI19000211	66	<0.1
DDLS-19-01	1320180	249.00	250.00	1.00	OG	QV	mostly qtz-albite veining w nice py min	m					70		4		WHI19000211	3019	0.5
DDLS-19-01	1320181	250.00	251.00	1.00	OG	QV	mostly qtz-albite veining w nice py min	m					70		6		WHI19000211	807	0.2
DDLS-19-01	1320182	251.00	252.00	1.00	OG	DOG	chl OG						5		0.5		WHI19000211	25	<0.1
DDLS-19-01	1320183	252.00	253.00	1.00	CLBSH		chl schist w qtz-albite vn			m			10		0.5		WHI19000211	10	<0.1
DDLS-19-01	1320184	253.00	254.00	1.00	CLBSH		chl schist w qtz-albite vn, fractured			m			10		0.5		WHI19000211	66	0.2
DDLS-19-01	1320185	254.00	255.00	1.00	CLBSH		faulted chl schist			m			5				WHI19000211	199	0.2
DDLS-19-01	1320186	255.00	256.00	1.00	CLBSH		weakly silicified chl schist	w		w			5		tr		WHI19000211	61	0.1
DDLS-19-01	1320187	256.00	257.00	1.00	CLBSH		weakly silicified chl schist	w		w			5		tr		WHI19000211	7	0.7
DDLS-19-01	1320188	257.00	258.00	1.00	CLBSH		chl schist w qtz vning			w			15		0.5		WHI19000211	47	<0.1
DDLS-19-01	1320189	258.00	259.00	1.00	CLBSH		chl schist w qtz vning			w			15		0.5		WHI19000211	38	<0.1
DDLS-19-01	1320190	259.00	260.15	1.15	CLBSH		chl schist w qtz vning			w			35		1		WHI19000211	21	<0.1
DDLS-19-01	1320191	267.30	268.00	0.70	CLBSH		Albite altered chl schist w 5cm qv			w			10		tr		WHI19000211	97	0.4
DDLS-19-01	1320192	268.00	269.00	1.00	CLBSH		chl schist w albite-qtz vn			w			15		tr		WHI19000211	16	0.1
DDLS-19-01	1320193	269.00	270.00	1.00	CLBSH		chl schist w albite-qtz vn			w			15		tr		WHI19000211	853	0.2
DDLS-19-01	1320194	270.00	271.00	1.00	CLBSH		semi-bleached chl schist w hem fx			w			2				WHI19000211	9	<0.1
DDLS-19-01	1320195	271.00	272.00	1.00	CLBSH		semi-bleached chl schist w hem fx			w			2				WHI19000211	4	<0.1
DDLS-19-01	1320196	272.00	273.00	1.00	CLBSH		chl schist w qtz vning			w			25		tr		WHI19000211	6	<0.1
DDLS-19-01	1320197	273.00	274.00	1.00	OG		contact w weakly silicified OG w qtz and py	w					20		1		WHI19000211	413	0.1
DDLS-19-01	1320198	274.00	275.00	1.00	OG		weak sil OG, large 60cm qtz vein w py, fault gouge at end of sample	m					65		3		WHI19000211	587	0.2
DDLS-19-01	1320199	275.00	276.00	1.00	OG		weak sil OG but completely fractured, mostly qtz vening	w					65		2		WHI19000211	2683	0.5
DDLS-19-01	1320200						BLANK - CDN-BL-9										WHI19000211	8	0.4
DDLS-19-01	1320201						STANDARD - CDN-GS-4E										WHI19000211	4476	1.7
DDLS-19-01	1320202	276.00	277.00	1.00	OG		weak sil fractured grey OG	w					15		0.5		WHI19000211	750	0.2
DDLS-19-01	1320203	277.00	278.00	1.00	OG	CLBSH	weak sil OG grading to chl schist, qtz-albite veining	w					30		0.5		WHI19000211	379	0.3
DDLS-19-01	1320204	278.00	279.00	1.00	OG		grey weakly silicified OG, fractured	w					25		0.5		WHI19000211	452	0.5
DDLS-19-01	1320205	279.00	280.00	1.00	OG	CLBSH	rubble. Albite-qtz grading to chl schist						25		tr		WHI19000211	17	<0.1
DDLS-19-01	1320206	280.00	281.03	1.03	CLBSH		faulted chl schist						5				WHI19000211	27	0.8

LUCKYSTRIKE RESOURCES LTD.

Drill Hole	DDLS-19-02	Property	Lucky Strike	Zone	Monte Carlo

Coordinates (UTM NAD 83)					
Easting	589710	Northing	7012843	Elevation (m)	523
Survey by	Dan Ferraro	Survey Method	GPS Garmin 60CSx	Date	July 17, 2019

Summary					
Depth (m)	297.18	Azimuth	50	Dip	-65
Core Size	HTW + NTW	Casing (ft)	35	Logged By	Dan Ferraro
Drill Company	Kluane Drilling Ltd.			Drill Rig	KD 1000
Drill Start Date	July 11, 2019			Drill Comp Date	July 16, 2019
Log Start Date	July 12, 2019			Log Comp Date	July 16, 2019
Final casing	removed			Core Location	Monte Carlo Camp
Comments	Drilling under LSTR-18-02, IP L6			Claim #	Au 90

Samples					
Sample Numbers	1320207 - 1320432				
Number	226	Lab	Bureau Veritas		
Cut by	Raf, Mark, Donald			Date Shipped	July 22, 2019

Down Hole Survey					
Depth (m)	Measured Azm.	Corrected Azm.	Dip	Magnetic Field (nT)	Temperature
50.00	31.78	50.8	-65.64		
100.00	32.03	51.05	-66.85	57122	
150.00	32.22	51.24	-67.18	57224	
250.00	33.32	52.34	-67.28	57263	

From	To	Rock Code 1	Rock Code 2	Description
0.00	3.05	OB		Overburden
3.05	4.57	OG		Top of bedrock likely, but very little recovery. Clay.
4.57	63.47	OG		Orthogneiss. Simpson Range. Orange, pervasively limonitized, fine grained, moderate foliation shallow to core axis (20 dtca). 0.5% limonitic pyrite, unless otherwise noted. Sporadic grey quartz veining, often cataclastic.
				4.57 - 6.10m: bedrock; unconsolidated orange gravel and clay
				9.14m: decomposed orthogneiss
				9.3m: solid core, orange limonitic OG, mod fol 20 dtca
				9.95m: 3m qtz vein broken up, extending to 11m
				10 - 17m: fractured core, orange lim micaceous OG, no qtz veining
				15.24 - 15.6m: consolidated DCOG
				17.0 - 17.5m: solid core. Limonitic OG w cataclastic quartz
				17.5m: lim OG, lim fx steeper to CA than foliation generally
			Fault	18.8 - 19.0m: fault, dark clay
				20.9 - 21.2m: black shear zone
			SOG	21.35 - 24.1m: silicified orthogneiss. Zone marked with a quartz vein, then grades to silica flooded OG. Foliated at 20 dtca. Limonitic fractures steeper to CA, 40-90 dtca.
				24.1 - 25.65m: pervasively limonitized fg lim OG, weak to no foliation. 0.5% lim py.
				25.65 - 26.54m: darker grey OG at 10 dtca, lim fx
				26.54 - 26.68m: qtz vein breccia within lim OG
				26.68 - 27.35m: fg lim py w dark grey qtz veining shallow to CA
			SOG	27.35 - 29.85m: perv sil blocky fractured rock
			SOG	29.85 - 32.10m: solid core, perv sil OG, fol <10 dtca. Dark grey w orange lim fx 30-40 dtca
				31.75 - 32.10m: 3cm qtz vein 25 dtca
				32.10 - 32.9m: fg perv lim OG, 0.5% fg lim py
				32.9 - 33.8m: darker mg OG, 20 dtca
				33.8m: orange fractured OG. Steeper foliation at 30-40 dtca
				35.75 - 35.95m: zone of abundant lim py fg-mg with tension gash style qtz veinlets at 50 dtca
				36.3 - 36.9m: dk OG w ductile def
				38.55m: 1cm QV at 40 dtca
				39.10 - 39.65m: zone of albite alteration with qtz veining at 50 dtca, 1-2% py
				40.1 - 40.4m: similar zone of albite alteration with silicification
				40.4 - 41.12m: 4cm qtz vein shallow to CA, fg orange OG
				41.15 - 42m: fx orange OG
				42m: per lim OG continues, not as fine grained
				43.1 - 46.13m: soft OG grading to decomposed. Perv lim, minor QV fragments
			SHR	46.13 - 46.5m: black shear zone material as seen in the main shear zone, but this is solid core. Aphanitic.
				46.5m: perv lim weakly brecciated OG
				47.2 - 47.9m: decomposed with minor black SHR
				47.9m: solid perv lim cataclastic OG w 20% qtz, 1% py
				50.2 - 52m: darker OG w brecciated QV material, 10-15 dtca fol
				52m: perv lim OG w 25% quartz
			MS?	54.1 - 54.8m: darker soft chl DCOG
			MS?	54.8 - 56.3m: solid darker OG w lim
				56.3 - 60.15m: perv lim gf OG, mod fol 35 dtca
				57.2 - 58.1m: fx lim OG
				58.35 - 58.6m: def qtz-albite veinlets w minor fresh py
			MS	60.15 - 61.20m: micaceous OG or schist at 15 dtca w crosscutting veinlets at 35-80 dtca
				61.2 - 63.47m: orange lim OG w 15% def qtz veining
				61.35m: 3cm qtz vein at 30 dtca
63.47	79.90	MS		Mica schist or micaceous orthogneiss. Interlayered of orange limonitic orthogneiss. Well foliated at <15 dtca.
				66.85 - 67.6m: lim OG
			Fault	69.3 - 70.1m: fault gouge gravel
			fx zone	71.1 - 80.0m: fractured core
				72.1 - 72.6m: consolidated decomposed MS
				74.5 - 75.6m: more siliceous blocky OG? Very fractured
				75.6m: still fractured, less blocky ductile deformed mica schist, foliated parallel to CA, qtz-albite veinlets at 45-60 dtca
79.90	83.75	OG	CLBSH	Transitional zone of limonitized orthogneiss grading to chlorite schist. Typically orange solid fg OG with light green fractured sections. 5% def qtz veinlets.
				82.5m: more competent orange fg lim OG at 20 dtca

From	To	Rock Code 1	Rock Code 2	Description
83.75	106.80	CLBSH		Chlorite schist. Light to dark green. Fine grained, well foliated 25-30 dtca for upper part of unit. Upper part of unit also displays contact metamorphic or retrograde minerals (medium grained overprinting garnet, lathes of staurolite or kyanite). Sporadic 1cm quartz veins and limonitic fractures often >60 dtca. Fine grained fresh pyrite common throughout, typically 0.5-1%. Sericite alteration fairly consistent throughout.
				83.75 - 86.0m: limonitic
				88.0 - 88.25m: qtz veinlets
				89.9 - 92.6m: higher concentration of mg garnets w mg plag lathes (?) up to 1cm.
				93.75 - 95.3m: 1-3cm qtz veining running shallow to CA, 0.5-1% fresh py.
				96m: metamorphic minerals disappear
				96.5m: minor hematitic fractures begin, continue throughout unit
				Fairly uniform chlorite schist continues, increased biotite content. Little to no quartz veining. Foliation typically 10-15 dtca. Some thicker hematitic fractures up to 0.5cm at 60 dtca.
				103.85 - 104.05m: qtz veinlets w 2% py, more quartz in general downhole
				105.93 - 106.05m: qtz-albite veins at 80 dtca w fresh py
				106.72 - 107.05m: deformed qtz veins at contact with mica schist, 2-3% py
106.80	123.60	MS		Shallow contact to mica schist. Shiny silvery mica (or possibly graphite?) with strong 15-20 dtca foliation. Quartz veins common throughout (~10%). 1% fine grained pyrite disseminated in country rock and with quartz veins.
				112.8 - 114.3m: consolidated decomposed schist
				115.45 - 115.6m: small siliceous section with abundant dissem fg py
				119.0 - 122.15m: pink and white qtz-feldspar veins 1-5cm running along CA, 1-2% fg py
				119.5 - 120.25m: light green qtz-chl vein material?
123.60	137.56	CLBSH		Deformed contact back to dark green chlorite schist. Fine quartz veinlets and hematitic fractures. Sericite alteration consistent.
				125.4 - 125.9m: 2-3cm qtz vein at 10 dtca with fresh py
				Uniform chlorite schist continues, foliation 10-20 dtca, 0.5% py
				129.7 - 129.9m: 1cm qtz vein w py
				173 - 174m: swarm of veinlets w 3% dissem py in groundmass, vfg-fg. Veinlets crosscut foliation at 40dtca
				135.46 - 136.2m: lt green alteration
				135.64m: SWITCH TO NTW CORE
				137.11 - 137.35m: pink aplite dike or qtz-k-feld vein
137.56	144.32	MS		30 dtca contact to mica schist. Quartz-rich. 20 dtca foliation. Some fractured sections
				141.2 - 142.73m: pink and lt green qtz vein w mica, tr py
144.32	187.45	CLBSH		Chlorite schist as above. Contact marked by deformed quartz vein w pink feldspar and medium grained pyrite up to 144.57m.
				145.42 - 147.8m: dominantly deformed qtz-feld veining shallow to CA. Feldspar looks more recent than white quartz. 1-2% mg py.
				1-3cm qtz vein continues to 151m. 1-2% py in fairly uniformed green chl schist. Foliated at 15 dtca with hematitic fractures.
			fx zone	153.9 - 156m: fracture zone of chl schist and qtz veining
				156.2 - 156.4m: deformed qtz-feld veining at 20 dtca
				158.17 - 158.62m: qtz-chl vein at 45 dtca w 60 dtca hem fx, minor py
				159.50 - 160.12m: diffuse appearing qtz-feld vn with dark grey fx up to 80 dtca. Upper and lower contacts at 25 and 40 dtca respectively
				Consistent dk green chl schist continues, very little qtz veining, 1% fg dissem py
				163.21m: 10cm section of silicified rock or vn
				164.3 - 165.6m: shallow 5cm qtz vein w mg py
				165.78m: 10cm qtz vn w hem fx at 70 dtca w minor py
				167.99 - 168.12m: qtz-chl vn at 75 dtca
			fx zone	168 - 170m: fracture zone
				173m: increased sericite in chl schist. 2% dissem py w veinlets
				174.0 - 174.3m: 1cm pink qtz-feld vein parallel to CA and fol w minor py and up to 4% py after vein
				175.02 - 176.45m: lt green alteration, soft rock, minor qtz-hem vns in competent rock
				178.0 - 178.45m: lt green soft schist with hem fx
				180.25 - 182.2m: lt green alt zone (UMV?) w minor deformed qtz w sericite
			fx zone	182.2m: dk chl schist fx zone. Completely fractured schist w very little qtz veining
				185.2 - 185.5m: 1cm qtz vein in slightly more competent rock, minor py
187.45	197.20	OG	Fault	Large fault zone in schist contact to orthogneiss. Black shear clay with more of a biotite-rich orthogneiss. Orthogneiss is semi-silicified locally.
				189 - 189.8m: consolidated decomposed black and lt grey rock
				192.02 - 195.07m: very little recovery in this run
				195.07 - 195.8m: sand and gravel fault gouge

From	To	Rock Code 1	Rock Code 2	Description
197.20	205.30	OG		Competent core. Light grey silicified orthogneiss. Minor mica, shallow foliation
				198.85 - 199.65m: shallow beige albite vein
				199.9m: more siliceous
				201m: fractured core, deformed quartz-albite veining (25%) with grey siliceous OG
				203.9 - 204.25m: red mineral, rutile? With broken qtz veining
205.30	210.15	OG	fx zone	Large fracture zone.
				205.75 - 206.35m: clay and sand fault gouge
				206.35 - 210.15m: fractured OG w qtz and hem
210.15	297.18	OG		Unoxidized, fresh orthogneiss. Looks more like metamorphosed granite than any orthogneiss previously seen. Very felsic. Light grey and pink with high quartz and k-feldspar content but not much veining. Trace to 0.5% pyrite. Well foliated at 15-20 dtca, biotite-rich. No magnetite. Dark grey fractured of specular hematite (?) throughout. Similar to the red fractures seen above, but these are a dull grey. They will be referred to as specular hematite (spec hem) for now. This grey mineral also occurs on the margins of late-stage quartz veins, typically less than 1cm.
				211.9 - 212.3m: small weak breccia zone. Cataclastic OG with a dark grey matrix of spec hem at 20 dtca
			fx zone	216 - 225.3m: fracture zone, minor qtz running along CA
			Fault	219.46 - 219.7m: sand fault gouge
				222.25 - 223m: deformed qtz veining along CA
			Hybx	223 - 226.3m: hydrothermal breccia zone? Vfg dark grey spec hem with diffuse fragments of silicified OG
				226.3m: return to well foliated pink OG. 40 dtca foliation here, some deformation
				230m: very consistent OG, 45 dtca fol
				231.2 - 231.52m: grey spec hem fx with minor associated py
				232.12 - 233.4m: chl alt w minor spec hem fx
			dike	235.82 - 236.71m: pink aplite dike? Qtz-rich, minor py on lower margin at 30 dtca
				237.8 - 238.4m: qtz-spec hem vn along CA
				239.25 - 240.3m: fx soft core, chl alt
				241.45 - 242.3m: sil zone w spec hem
			dike	242.3 - 243.4m: pink qtz-feld aplite dike at 15 dtca
			fx zone	244 - 250.2m: fx zone, local chl alt
			bx	250.6 - 251.7m: qtz breccia zone. Semi rounded quartz frags up to 2cm, somewhat graded
			fx zone	252 - 254.5m: fractured orthogneiss
				254.5 - 257.75m: return to pink OG, ductile def, fol 5-20 dtca. More quartz veining than above, typically 0.5-2cm wide
				257.75m: fol OG, uniform, 10 dtca
				260.6 - 261.6m: small zone of qtz-spec hem with minor py
				264.6 - 265.0m: white quartz veining at 35 dtca
				265.85 - 266.08m: white quartz vein
				OG w deformed qtz-feld veining continues
				268.22 - 268.56m: spec hem fx at 50 dtca w pyritic seams. Siliceous
			fx zone	270.5 - 271.3m: small fx zone
			sil	272.1 - 274.8m: pink semi-siliceous OG w 3% f-mg py, deformed qtz veining throughout at a fairly shallow angle
				274.8 - 275.8m: fractured siliceous OG, grey w qtz veinlets
			CLBSH	275.8 - 276.4m: small section of chl schist
				276.4m: biotite-rich chloritic OG. Foliation <10 dtca w >50 dtca qtz-spec hem veinlets
				279m: bt-rich OG, very few fractures, competent core, foliation <10 dtca
				285.85m: more spec hem fx at >45 dtca
			Hybx	287.35 - 289.1m: grey hydrothermal breccia as seen at 223m with 1% py
			sil	289.1 - 291.1m: silicified light pink alteration zone with 1% f-mg py
				Well foliated OG continues at 30 dtca
			sil	294.15 - 297.18m: silicified alteration zone. Pink orthogneiss with 10-20cm sections of light grey-pink silicified rock, typically centered around 1-2cm qtz veins running 60 dtca. Up to 3% pyrite. Hole was forced to stop here due to technical reasons.
297.18		EOH		End of hole

Hole ID	Sample ID	From	To	Length	Rock	Rock	Description	Alteration Intensity (0, tr, w, m, s)					Veinlets (%)		Sulphide %		Certificate	Au	Ag
		(m)	(m)	(m)	Code 1	Code 2		Sil	Ser	Chl	Cb	Ep	QS	QCS	Py	Po		ppb	ppm
DDLS-19-02	1320207	4.57	6.10	1.53	OG		poor recovery. Orange clay and gravel, likely bedrock										WHI19000254	10	0.3
DDLS-19-02	1320208	6.10	7.62	1.52	OG		poor recovery. Micaceous fx OG										WHI19000254	9	0.3
DDLS-19-02	1320209	7.62	9.14	1.52	OG		poor recovery. Rubble and clay orange OG										WHI19000254	10	0.2
DDLS-19-02	1320210	9.14	10.67	1.53	OG	DCOG	DCOG to competent OG w grey qtz veining						20				WHI19000254	4	0.2
DDLS-19-02	1320211	10.67	12.19	1.52	OG		fractured brown OG						5				WHI19000254	4	0.3
DDLS-19-02	1320212	12.19	13.72	1.53	OG		mod recovery. Fractured micaceous OG										WHI19000254	5	0.2
DDLS-19-02	1320213	13.72	15.24	1.52	OG		poor recovery, fractured micaceous OG										WHI19000254	7	0.2
DDLS-19-02	1320214	15.24	17.00	1.76	OG		fractured and decomposed OG										WHI19000254	75	0.4
DDLS-19-02	1320215	17.00	18.00	1.00	OG		competent and consolidated lim OG w qtz bx						15		tr		WHI19000254	590	6.6
DDLS-19-02	1320216	18.00	19.00	1.00	OG	DCOG, flt	OG grading to DCOG, minor fault gouge										WHI19000254	143	0.3
DDLS-19-02	1320217	19.00	20.00	1.00	OG		fractured OG, semi decomposed										WHI19000254	339	0.8
DDLS-19-02	1320218	20.00	21.20	1.20	OG		DCOG grading to competent orange OG										WHI19000254	119	0.4
DDLS-19-02	1320219	21.20	22.00	0.80	OG	SOG	pervasive lim orange OG grading to silicified vein zone. Grey quartz veining w lim fx	w					15		tr		WHI19000254	25	0.2
DDLS-19-02	1320220	22.00	23.00	1.00	OG	SOG	silicified grey OG, minor white qtz veins, lim fx	s					10		tr		WHI19000254	9	0.2
DDLS-19-02	1320221	23.00	24.00	1.00	OG	SOG	sil OG, grading to perv lim orange OG at end of sample	m					5		tr		WHI19000254	11	<0.1
DDLS-19-02	1320222	24.00	25.00	1.00	OG		fg pervasive lim OG								tr		WHI19000254	3	<0.1
DDLS-19-02	1320223	25.00	26.00	1.00	OG		perv lim OG grading to dk grey fractured OG								tr		WHI19000254	4	0.1
DDLS-19-02	1320224	26.00	27.00	1.00	OG		darker OG w minor QVBX grading to orange lim OG						15		0.5		WHI19000254	4	0.1
DDLS-19-02	1320225						BLANK - CDN-BL-9										WHI19000254	8	0.5
DDLS-19-02	1320226						STANDARD - CDN-CM-25										WHI19000254	228	0.6
DDLS-19-02	1320227	27.00	28.00	1.00	OG	SOG	perv lim OG w 10cm QV, contact to very fractured silicified OG	w					20		tr		WHI19000254	5	0.1
DDLS-19-02	1320228	28.00	29.00	1.00	OG	SOG	completely fractured silicified OG	w					5		tr		WHI19000254	5	0.1
DDLS-19-02	1320229	29.00	30.00	1.00	OG	SOG	completely fractured silicified OG, shallow QV at end of sample	w					10		tr		WHI19000254	5	0.2
DDLS-19-02	1320230	30.00	31.00	1.00	OG	SOG	solid core, SOG w lim fx	s							tr		WHI19000254	6	0.1
DDLS-19-02	1320231	31.00	32.10	1.10	OG	SOG	SOG w 3cm qtz vein at end of sample at 20 dtca	m					10		tr		WHI19000254	3	<0.1
DDLS-19-02	1320232	32.10	33.00	0.90	OG		orange perv lim OG						12		tr		WHI19000254	4	<0.1
DDLS-19-02	1320233	33.00	34.00	1.00	OG		darker OG grading to perv lim OG at end of sample. Fractured						5				WHI19000254	6	0.2
DDLS-19-02	1320234	34.00	35.00	1.00	OG		perv lim OG w minor qtz breccia						6		tr		WHI19000254	7	0.2
DDLS-19-02	1320235	35.00	36.00	1.00	OG		perv lim OG w 15cm section of mg py and gash-style qtz veinlets						3		2		WHI19000254	4	0.2
DDLS-19-02	1320236	36.00	37.00	1.00	OG		perv lim OG, 50cm section of darker OG										WHI19000254	4	<0.1
DDLS-19-02	1320237	37.00	38.00	1.00	OG		perv lim OG w 20cm section of green alteration (?)										WHI19000254	3	<0.1
DDLS-19-02	1320238	38.00	39.00	1.00	OG		well foliated perv lim OG, 1cm qtz vn						2		tr		WHI19000254	3	<0.1
DDLS-19-02	1320239	39.00	40.00	1.00	OG		perv lim OG w 60cm albite-qtz alt zone and qtz veining						25		2		WHI19000254	4	<0.1
DDLS-19-02	1320240	40.00	41.00	1.00	OG		perv lim OG w 2cm qtz veins, and albite alteration						25		1		WHI19000254	4	0.2
DDLS-19-02	1320241	41.00	42.00	1.00	OG		fractured perv lim OG						5		0.5		WHI19000254	3	0.1
DDLS-19-02	1320242	42.00	43.00	1.00	OG		soft perv lim OG								0.5		WHI19000254	3	<0.1
DDLS-19-02	1320243	43.00	44.00	1.00	OG		very soft but consolidated perv lim OG						2				WHI19000254	4	<0.1
DDLS-19-02	1320244	44.00	45.00	1.00	OG		soft, semi-decomposed perv lim OG										WHI19000254	4	0.1
DDLS-19-02	1320245	45.00	46.00	1.00	OG		soft, semi-decomposed perv lim OG, 1cm qtz vein								0.5		WHI19000254	4	0.1
DDLS-19-02	1320246	46.00	47.00	1.00	OG	DCOG	decomposed OG w 35% dark grey-blk shear rock										WHI19000254	14	0.4
DDLS-19-02	1320247	47.00	48.00	1.00	OG		decomposed OG w 15% dark grey-blk shear rock										WHI19000254	13	0.3
DDLS-19-02	1320248	48.00	49.00	1.00	OG		competent perv lim OG w minor qtz vn breccia						10		1		WHI19000254	10	0.1
DDLS-19-02	1320249	49.00	50.00	1.00	OG		competent perv lim OG w minor qtz vn breccia						25		1		WHI19000254	34	0.1
DDLS-19-02	1320250						BLANK - CDN-BL-9										WHI19000254	7	0.4
DDLS-19-02	1320251						STANDARD - CDN-CGS-7										WHI19000254	984	3.4
DDLS-19-02	1320252	50.00	51.00	1.00	OG	MS	perv lim OG grading to dker og, minor QVBX						15				WHI19000254	33	<0.1
DDLS-19-02	1320253	51.00	52.00	1.00	OG	MS	dk OG and QVBX						15				WHI19000254	18	<0.1
DDLS-19-02	1320254	52.00	53.10	1.10	OG		mostly perv lim OG w QVBX						20		1		WHI19000254	44	0.2
DDLS-19-02	1320255	53.10	54.00	0.90	OG	MS	darker OG, soft (mica schist?)						5				WHI19000254	230	0.6
DDLS-19-02	1320256	54.00	55.00	1.00	OG	DCOG, MS	decomposed mica schist										WHI19000254	137	0.5
DDLS-19-02	1320257	55.00	56.00	1.00	OG	MS	dk OG/mica schist										WHI19000254	5	0.2
DDLS-19-02	1320258	56.00	57.00	1.00	OG		grading to perv lim OG								tr		WHI19000254	8	0.1
DDLS-19-02	1320259	57.00	58.00	1.00	OG		fractured perv lim OG								tr		WHI19000254	4	0.1
DDLS-19-02	1320260	58.00	59.00	1.00	OG		perv lim OG w 15% qtz-albite veinlets, minor fresh py						15		1		WHI19000254	7	0.2
DDLS-19-02	1320261	59.00	60.00	1.00	OG		perv lim OG						6		0.5		WHI19000254	4	0.3
DDLS-19-02	1320262	60.00	61.00	1.00	OG	MS	perv lim OG grading to mica schist										WHI19000254	7	0.1
DDLS-19-02	1320263	61.00	62.00	1.00	OG	QV	grading back to perv lim OG w qtz-albite veinlets and a 3cm qtz vein at 30 dtca						20		0.5		WHI19000254	21	0.2
DDLS-19-02	1320264	62.00	63.00	1.00	OG		perv lim OG										WHI19000254	22	0.2
DDLS-19-02	1320265	63.00	64.00	1.00	OG	MS	lim OG grading to mica schist										WHI19000254	58	0.3
DDLS-19-02	1320266	64.00	65.00	1.00	OG	MS	fractured lim mica schist										WHI19000254	25	0.2
DDLS-19-02	1320267	65.00	66.00	1.00	OG	MS	fractured lim mica schist										WHI19000254	48	0.3
DDLS-19-02	1320268	66.00	67.00	1.00	OG		contact to perv lim OG						5		tr		WHI19000254	20	0.2
DDLS-19-02	1320269	67.00	67.70	0.70	OG		deformed perv lim OG								tr		WHI19000254	12	0.1
DDLS-19-02	1320270	67.70	69.00	1.30	OG	MS	lim mica schist, def qtz veinlet						6				WHI19000254	131	0.4
DDLS-19-02	1320271	69.00	70.10	1.10	OG	MS, fault	lim mica schist w fault gouge gravel										WHI19000254	288	0.8
DDLS-19-02	1320272	70.10	71.00	0.90	OG	MS	lim mica schist										WHI19000254	140	0.4
DDLS-19-02	1320273	71.00	72.00	1.00	OG	MS	fractured lim mica schist										WHI19000254	20	0.3
DDLS-19-02	1320274	72.00	73.00	1.00	OG	MS	fractured lim mica schist										WHI19000254	56	0.3
DDLS-19-02	1320275						BLANK - CDN-BL-9										WHI19000254	8	0.4
DDLS-19-02	1320276						STANDARD - CDN-CM-25										WHI19000254	211	1.6
DDLS-19-02	1320277	73.00	74.00	1.00	OG	MS	fractured lim mica schist										WHI19000254	38	0.2
DDLS-19-02	1320278	74.00	75.00	1.00	OG	MS	fractured, blocky weakly silicified OG or MS w minor qtz	w					6				WHI19000254	261	0.7
DDLS-19-02	1320279	75.00	76.00	1.00	OG	MS	fractured, blocky weakly silicified OG or MS w minor qtz	w					6				WHI19000254	578	1.4
DDLS-19-02	1320280	76.00	77.00	1.00	OG	MS, fault	less sil, fractured mica schist, minor fault gouge						5				WHI19000254	450	1

Hole ID	Sample ID	From	To	Length	Rock	Rock	Description	Alteration Intensity (0, tr, w, m, s)					Veinlets (%)		Sulphide %		Certificate	Au	Ag
		(m)	(m)	(m)	Code 1	Code 2		Sil	Ser	Chl	Cb	Ep	QS	QCS	Py	Po		ppb	ppm
DDLS-19-02	1320281	77.00	78.00	1.00	OG	MS	weakly silicified mica schist w qtz-albite veinlets	w					10				WHI19000254	105	0.3
DDLS-19-02	1320282	78.00	78.90	0.90	OG	MS	fractured mica schist										WHI19000254	4	0.1
DDLS-19-02	1320283	78.90	80.00	1.10	OG		weakly silicified OG and lim OG w qtz veinlets	w					8				WHI19000254	5	0.1
DDLS-19-02	1320284	80.00	81.00	1.00	OG	DCOG	semi decomposed and orange lim OG, minor chl alt, def qtz veinlets			w			6				WHI19000254	5	0.1
DDLS-19-02	1320285	81.00	82.00	1.00	OG	DCOG	decomposed OG minor chl			w							WHI19000254	5	0.1
DDLS-19-02	1320286	82.00	83.00	1.00	OG		grading to more competent perv lim OG										WHI19000254	3	0.2
DDLS-19-02	1320287	83.00	84.00	1.00	OG	CLBSH	lim OG grading to chl schist at end of sample						5				WHI19000254	4	<0.1
DDLS-19-02	1320288	84.00	85.00	1.00	CLBSH		lim chl schist		w	m			3				WHI19000254	3	<0.1
DDLS-19-02	1320289	87.50	88.40	0.90	CLBSH		fx chl schist w qtz-hem vn and fx		w	m			15		tr		WHI19000254	36	0.1
DDLS-19-02	1320290	93.75	94.50	0.75	CLBSH		chl schist 1-3cm qtz veins shallow to CA, fresh py		w	m			35		1		WHI19000254	4	0.1
DDLS-19-02	1320291	94.50	95.35	0.85	CLBSH		chl schist 1-3cm qtz veins shallow to CA, fresh py		w	m			35		1		WHI19000254	5	<0.1
DDLS-19-02	1320292	103.80	104.80	1.00	CLBSH		chl schist w qtz veining and py		w	m			10		2		WHI19000254	3	0.3
DDLS-19-02	1320293	105.20	106.20	1.00	CLBSH		chl schist w qtz veining and py		w	m			10		1		WHI19000254	3	<0.1
DDLS-19-02	1320294	106.70	107.75	1.05	CLBSH	MS	chl schist contact to mica schist, qtz veining		w	m			20		2		WHI19000254	3	0.1
DDLS-19-02	1320295	115.30	115.80	0.50	MS		mica schist w 15cm silicified zone w fresh py	w					10		2		WHI19000254	8	<0.1
DDLS-19-02	1320296	119.00	120.00	1.00	MS		mica schist w 1-5cm pink qtz-feld veins and perv light green chl-qtz material?	w					40		2		WHI19000254	3	<0.1
DDLS-19-02	1320297	120.00	121.00	1.00	MS		mica schist w 1-5cm pink qtz-feld veins						35		2		WHI19000254	4	<0.1
DDLS-19-02	1320298	121.00	122.00	1.00	MS		mica schist w 1cm shallow qtz-feld veins						15		0.5		WHI19000254	3	<0.1
DDLS-19-02	1320299	122.00	123.00	1.00	MS		mica schist w qtz veining						20		1		WHI19000254	4	<0.1
DDLS-19-02	1320300						BLANK - CDN-BL-9										WHI19000254	8	0.3
DDLS-19-02	1320301						STANDARD - CDN-GS-15B										WHI19000254	>10000	1.2
DDLS-19-02	1320302	123.00	124.00	1.00	MS	CLBSH	mica schist contact to chl schist						15		1		WHI19000254	4	<0.1
DDLS-19-02	1320303	124.00	125.00	1.00	CLBSH		chl schist w veinlets and hem fx		w	m			5		0.5		WHI19000254	4	<0.1
DDLS-19-02	1320304	125.00	126.00	1.00	CLBSH		chl schist w 1-3cm qtz vein w py . Hem fx		w	m			35		2		WHI19000254	4	0.1
DDLS-19-02	1320305	132.90	134.00	1.10	CLBSH		chl schist w qtz and py		w	m			15		2		WHI19000254	4	<0.1
DDLS-19-02	1320306	134.00	135.00	1.00	CLBSH		chl schist w qtz veinlets		w	m			5		0.5		WHI19000254	3	0.1
DDLS-19-02	1320307	135.00	135.64	0.64	CLBSH		chl schist w lighter green alt		w	m					tr		WHI19000254	4	<0.1
DDLS-19-02	1320308	135.64	137.00	1.36	CLBSH		SWITCH TO NTW lt green chl schist w dissem py		w	m					2		WHI19000254	4	0.2
DDLS-19-02	1320309	137.00	137.80	0.80	CLBSH	MS	chl schist contact to mica schist, 20cm qtz-kfeld dike or vn		w	m			30		0.5		WHI19000254	3	<0.1
DDLS-19-02	1320310	141.00	142.00	1.00	MS		mica chist w large qtz-feld vn		w				50		0.5		WHI19000254	9	<0.1
DDLS-19-02	1320311	142.00	143.00	1.00	MS		mica chist w large qtz-feld vn		w				40		0.5		WHI19000254	3	0.1
DDLS-19-02	1320312	143.00	144.00	1.00	MS		mica schist w qtz vn						10		0.5		WHI19000254	3	0.7
DDLS-19-02	1320313	144.00	145.00	1.00	CLBSH	MS	contact to chl schist, qtz veining w mg py		w	w			10		1		WHI19000254	4	4.8
DDLS-19-02	1320314	145.00	146.00	1.00	CLBSH		chl schist w large pink-red qtz-feld vn		w	m			55		1		WHI19000254	3	<0.1
DDLS-19-02	1320315	146.00	147.00	1.00	CLBSH		chl schist w large pink-red qtz-feld vn		w	m			70		1		WHI19000254	5	<0.1
DDLS-19-02	1320316	147.00	148.00	1.00	CLBSH		chl schist w large pink-red qtz-feld vn (mostly white qtz) mg py		w	m			40		2		WHI19000254	23	0.4
DDLS-19-02	1320317	148.00	149.00	1.00	CLBSH		1-3cm qtz veins at 20 dtca in chl schist		w	m			30		1		WHI19000254	3	0.1
DDLS-19-02	1320318	149.00	150.00	1.00	CLBSH		chl schist w qtz-feld veins		w	m			15		1		WHI19000254	3	<0.1
DDLS-19-02	1320319	150.00	151.00	1.00	CLBSH		chl schist w 1cm qtz-feld veins, mg py		w	m			15		2		WHI19000254	3	<0.1
DDLS-19-02	1320320	155.00	156.00	1.00	CLBSH		fractured chl schist w 2cm white QV, py		w	m			15		2		WHI19000254	4	0.2
DDLS-19-02	1320321	156.00	157.00	1.00	CLBSH		chl schist, 10cm qtz-feld vn, 2cm vn		w	m			25		2		WHI19000254	3	0.1
DDLS-19-02	1320322	157.00	158.00	1.00	CLBSH		chl schist, qtz-hem fx, 1cm qv, dissem py		w	m			5		2		WHI19000254	3	0.1
DDLS-19-02	1320323	158.00	159.00	1.00	CLBSH		chl schist, 40cm qtz-feld vein w hem fx		w	m			45		1		WHI19000254	46	0.3
DDLS-19-02	1320324	159.00	160.20	1.20	CLBSH		chl schist, fuzzy 55cm qtz vn w dk hem fx steep to CA		w	m			55		0.5		WHI19000254	3	<0.1
DDLS-19-02	1320325						BLANK - CDN-BL-9										WHI19000254	8	0.3
DDLS-19-02	1320326						STANDARD - CDN-CM-25										WHI19000254	241	0.6
DDLS-19-02	1320327	163.00	164.00	1.00	CLBSH		chl schist 10cm sil zone or vn		w	m			10		2		WHI19000254	3	0.2
DDLS-19-02	1320328	164.00	165.00	1.00	CLBSH		chl schist, 5cm qtz vein w mg py		w	m			30		2		WHI19000254	4	0.1
DDLS-19-02	1320329	165.00	166.00	1.00	CLBSH		chl schist, steeper sil or vein		w	m			25		1		WHI19000254	4	0.1
DDLS-19-02	1320330	173.00	174.00	1.00	CLBSH		chl schist w tension qtz veinlets and abundant py		w	m			5		3		WHI19000254	4	0.2
DDLS-19-02	1320331	174.00	175.00	1.00	CLBSH		chl schist w 2cm pink vn at 15 dtca, f-mg py in schist		w	m			10		4		WHI19000254	5	0.2
DDLS-19-02	1320332	187.45	188.98	1.53	OG	CLBSH, flt	faulted contact from chl schist to OG, fx core, black clay shear planes								tr		WHI19000254	80	6.5
DDLS-19-02	1320333	188.98	190.80	1.82	OG	fx	fractured core and DCOG, blk shear planes										WHI19000254	40	0.3
DDLS-19-02	1320334	190.80	192.02	1.22	OG	fx	fractured OG, weak sil	w					5		tr		WHI19000254	225	0.7
DDLS-19-02	1320335	192.02	195.07	3.05	OG	fx	very poor recovery, fractured OG										WHI19000254	100	14.9
DDLS-19-02	1320336	195.07	196.90	1.83	OG	fault	40% sand, 60% fractured OG										WHI19000254	147	36.5
DDLS-19-02	1320337	196.90	198.00	1.10	OG		weak sil OG, minor dissem py, qv, minor qtz-albite	w		w			5		1		WHI19000254	104	0.5
DDLS-19-02	1320338	198.00	199.00	1.00	OG		weak sil OG, qtz-albite vn at end	w					15		0.5		WHI19000254	48	0.3
DDLS-19-02	1320339	199.00	200.00	1.00	OG		weak sil OG w 5cm qtz albite vn	w					65		tr		WHI19000254	266	0.6
DDLS-19-02	1320340	200.00	201.00	1.00	OG		weak sil OG, qtz-albite vn	w					15		tr		WHI19000254	485	1
DDLS-19-02	1320341	201.00	202.00	1.00	OG		sil OG, qtz-albite	m					40		0.5		WHI19000254	177	0.3
DDLS-19-02	1320342	202.00	203.00	1.00	OG		fx sil OG, qtz-albite	m					25		tr		WHI19000254	145	0.3
DDLS-19-02	1320343	203.00	204.00	1.00	OG		weak sil OG, qtz	w					15				WHI19000254	264	0.7
DDLS-19-02	1320344	204.00	205.30	1.30	OG		fx sil OG, red min (rutile?), qtz veinlets	w					10		tr		WHI19000254	36	0.2
DDLS-19-02	1320345	205.30	206.35	1.05	OG	fault	fx OG to clay and sand fault gouge										WHI19000255	89	45.4
DDLS-19-02	1320346	206.35	208.00	1.65	OG		fx OG grading to granite w hem fx						15				WHI19000255	4	147.9
DDLS-19-02	1320347	208.00	209.00	1.00	OG		fx OG								0.5		WHI19000255	3	<0.1
DDLS-19-02	1320348	209.00	210.00	1.00	OG		fx OG						5		0.5		WHI19000255	11	0.3
DDLS-19-02	1320349	210.00	211.00	1.00	OG		weak sil granitic OG, dk spec hem veinlets	w							0.5		WHI19000255	7	<0.1
DDLS-19-02	1320350						BLANK - CDN-BL-9										WHI19000255	6	0.5
DDLS-19-02	1320351						STANDARD - CDN-CGS-7										WHI19000255	972	3.4
DDLS-19-02	1320352	211.00	212.00	1.00	OG		weak sil OG, spec hem								0.5		WHI19000255	74	0.1
DDLS-19-02	1320353	212.00	213.00	1.00	OG	bx	OG bx w spec hem matrix, silicified, dissem py	m							1		WHI19000255	38	<0.1
DDLS-19-02	1320354	213.00	214.00	1.00	OG		OG w spec hem vnlets	w							0.5		WHI19000255	4	<0.1

Hole ID	Sample ID	From	To	Length	Rock	Rock	Description	Alteration Intensity (0, tr, w, m, s)					Veinlets (%)		Sulphide %		Certificate	Au	Ag
		(m)	(m)	(m)	Code 1	Code 2		Sil	Ser	Chl	Cb	Ep	QS	QCS	Py	Po		ppb	ppm
DDLS-19-02	1320355	214.00	215.00	1.00	OG		OG w spec hem vnlets	w							0.5		WHI19000255	15	<0.1
DDLS-19-02	1320356	215.00	216.00	1.00	OG		OG w spec hem vnlets, into fx zone								tr		WHI19000255	5	<0.1
DDLS-19-02	1320357	216.00	217.00	1.00	OG	dike	fx qtz-feld vein or dike w spec hem veinlets								tr		WHI19000255	12	<0.1
DDLS-19-02	1320358	217.00	218.00	1.00	OG	dike	fx qtz-feld vein or dike w spec hem veinlets								tr		WHI19000255	11	0.2
DDLS-19-02	1320359	218.00	219.00	1.00	OG	dike	fx qtz-feld vein or dike w spec hem veinlets								tr		WHI19000255	18	0.7
DDLS-19-02	1320360	219.00	220.00	1.00	OG	fault	OG w fault gouge, qtz veining						15		0.5		WHI19000255	21	>200.0
DDLS-19-02	1320361	220.00	221.00	1.00	OG		weak sil OG, spec hem fx	w									WHI19000255	12	<0.1
DDLS-19-02	1320362	221.00	222.00	1.00	OG		fx OG w spec hem veinlets										WHI19000255	7	1.4
DDLS-19-02	1320363	222.00	223.00	1.00	OG		aplite dike w qtz veining, minor py						20		0.5		WHI19000255	13	<0.1
DDLS-19-02	1320364	223.00	224.00	1.00	OG	hybx	breccia zone of weakly silicified OG and dk grey spec hem								0.5		WHI19000255	8	<0.1
DDLS-19-02	1320365	224.00	225.00	1.00	OG	hybx	breccia zone of weakly silicified OG and dk grey spec hem, fractured								0.5		WHI19000255	7	<0.1
DDLS-19-02	1320366	225.00	226.00	1.00	OG	hybx	breccia zone of weakly silicified OG and dk grey spec hem								0.5		WHI19000255	8	<0.1
DDLS-19-02	1320367	226.00	227.00	1.00	OG		grading to regular OG								tr		WHI19000255	5	<0.1
DDLS-19-02	1320368	227.00	228.00	1.00	OG		plain OG w localized dk spec hem veinlets								tr		WHI19000255	5	<0.1
DDLS-19-02	1320369	231.00	232.00	1.00	OG		plain OG w localized dk spec hem veinlets								tr		WHI19000255	5	<0.1
DDLS-19-02	1320370	232.00	233.00	1.00	OG		chl alt OG			w					tr		WHI19000255	6	<0.1
DDLS-19-02	1320371	233.00	234.00	1.00	OG		chl alt OG w localized hem veinlets			w					tr		WHI19000255	4	<0.1
DDLS-19-02	1320372	234.00	235.00	1.00	OG		chl alt OG w localized hem veinlets, grading to plain OG			w					tr		WHI19000255	5	<0.1
DDLS-19-02	1320373	235.00	236.00	1.00	OG	dike	OG and start of aplite dike								tr		WHI19000255	7	<0.1
DDLS-19-02	1320374	236.00	237.00	1.00	OG	dike	aplite dike w py on lower margin								0.5		WHI19000255	4	<0.1
DDLS-19-02	1320375						BLANK - CDN-BL-9										WHI19000255	6	0.3
DDLS-19-02	1320376						STANDARD - CDN-CM-25										WHI19000255	257	0.6
DDLS-19-02	1320377	237.00	238.00	1.00	OG		OG w qtz veining w spec hem						15		0.5		WHI19000255	13	<0.1
DDLS-19-02	1320378	238.00	239.00	1.00	OG		OG w qtz veining w spec hem						15		0.5		WHI19000255	7	<0.1
DDLS-19-02	1320379	241.30	242.30	1.00	OG		OG into weak sil alt zone	w							tr		WHI19000255	6	<0.1
DDLS-19-02	1320380	242.30	243.30	1.00	OG	dike	aplite dike								tr		WHI19000255	3	<0.1
DDLS-19-02	1320381	250.00	251.00	1.00	OG	bx	fx OG into quartz breccia zone						25		tr		WHI19000255	55	0.3
DDLS-19-02	1320382	251.00	252.00	1.00	OG	bx	qtz breccia zone back to OG						25		tr		WHI19000255	22	<0.1
DDLS-19-02	1320383	252.00	253.00	1.00	OG		fx OG w dk spec hem veinlets						15		tr		WHI19000255	23	<0.1
DDLS-19-02	1320384	253.00	254.00	1.00	OG		fx OG w dk spec hem veinlets						15				WHI19000255	15	<0.1
DDLS-19-02	1320385	254.00	255.00	1.00	OG		less fx OG w spec hem veinlets						10				WHI19000255	48	<0.1
DDLS-19-02	1320386	255.00	256.00	1.00	OG		OG w crosscutting 1-2cm qtz veins and blk spec hem						15		0.5		WHI19000255	28	<0.1
DDLS-19-02	1320387	256.00	257.00	1.00	OG		OG w crosscutting 1-2cm qtz veins and blk spec hem						15		0.5		WHI19000255	58	<0.1
DDLS-19-02	1320388	257.00	258.00	1.00	OG		OG w crosscutting 1-2cm qtz veins and blk spec hem, fractured						25		0.5		WHI19000255	82	<0.1
DDLS-19-02	1320389	258.00	259.00	1.00	OG		OG w qtz-albite alt										WHI19000255	7	<0.1
DDLS-19-02	1320390	259.00	260.00	1.00	OG		OG w qtz-albite alt										WHI19000255	8	<0.1
DDLS-19-02	1320391	260.00	261.00	1.00	OG		OG w qtz-albite alt, dissem py								1		WHI19000255	19	0.1
DDLS-19-02	1320392	261.00	262.00	1.00	OG		OG w qtz-albite alt, dissem py								0.5		WHI19000255	8	<0.1
DDLS-19-02	1320393	262.00	263.00	1.00	OG		OG w qtz-albite alt, dissem py mg								1		WHI19000255	5	<0.1
DDLS-19-02	1320394	263.00	264.00	1.00	OG		OG w more qtz content								0.5		WHI19000255	4	<0.1
DDLS-19-02	1320395	264.00	265.00	1.00	OG		OG w white qtz veining						35		tr		WHI19000255	4	<0.1
DDLS-19-02	1320396	265.00	266.00	1.00	OG		OG w white qtz veining						20		tr		WHI19000255	4	<0.1
DDLS-19-02	1320397	266.00	267.00	1.00	OG		OG w white qtz veining						20		tr		WHI19000255	4	0.1
DDLS-19-02	1320398	267.00	268.00	1.00	OG		OG w qtz-albite vning and blk spec hem fx						25		tr		WHI19000255	4	<0.1
DDLS-19-02	1320399	268.00	269.00	1.00	OG		OG w qtz-albite vning and blk spec hem fx						25		tr		WHI19000255	17	<0.1
DDLS-19-02	1320400						BLANK - CDN-BL-9										WHI19000255	6	0.3
DDLS-19-02	1320401						STANDARD - CDN-GS-4E										WHI19000255	4364	1.6
DDLS-19-02	1320402	269.00	270.00	1.00	OG		OG w minor qtz-albite						10		tr		WHI19000255	5	<0.1
DDLS-19-02	1320403	270.00	271.00	1.00	OG		fx OG										WHI19000255	5	<0.1
DDLS-19-02	1320404	271.00	272.00	1.00	OG		comp OG w qtz veinlets						6		1		WHI19000255	45	0.1
DDLS-19-02	1320405	272.00	273.00	1.00	OG	alt	alt pink OG w def qtz veinlets and abundant dissem f-mg py	w					15		3		WHI19000255	593	0.8
DDLS-19-02	1320406	273.00	274.00	1.00	OG	alt	less alt pink OG w def qtz veinlets and abundant dissem f-mg py	w					15		1		WHI19000255	13	<0.1
DDLS-19-02	1320407	274.00	275.00	1.00	OG	alt	less alt pink OG w def qtz veinlets and abundant dissem f-mg py (1cm py bleb)	w					10		3		WHI19000255	23	0.2
DDLS-19-02	1320408	275.00	275.90	0.90	OG	alt	fx grey weak sil OG w qtz veinlets	w					15		1		WHI19000255	49	0.1
DDLS-19-02	1320409	275.90	277.00	1.10	CLBSH		section of chl schist			w			5				WHI19000255	10	<0.1
DDLS-19-02	1320410	277.00	278.00	1.00	OG	CLBSH	chl schist grading back to bt chl OG, qtz-spec hem veinlets			w			8				WHI19000255	25	0.2
DDLS-19-02	1320411	278.00	279.00	1.00	OG		chl bt OG, qtz-spec hem veinlets			w			5				WHI19000255	8	<0.1
DDLS-19-02	1320412	279.00	280.00	1.00	OG		bt-rich OG						2				WHI19000255	3	<0.1
DDLS-19-02	1320413	280.00	281.00	1.00	OG		bt rich OG w pink k-feld										WHI19000255	4	<0.1
DDLS-19-02	1320414	281.00	282.00	1.00	OG		bt rich OG w pink k-feld										WHI19000255	4	<0.1
DDLS-19-02	1320415	282.00	283.00	1.00	OG		bt rich OG w pink k-feld										WHI19000255	9	<0.1
DDLS-19-02	1320416	283.00	284.00	1.00	OG		OG w spec hem fx, minor hybx						5		tr		WHI19000255	11	<0.1
DDLS-19-02	1320417	284.00	285.00	1.00	OG		OG w minor spec hem fx						2				WHI19000255	4	<0.1
DDLS-19-02	1320418	285.00	286.00	1.00	OG		OG w minor spec hem fx										WHI19000255	8	<0.1
DDLS-19-02	1320419	286.00	287.00	1.00	OG		bt rich OG w qtz-spec hem veinlets						10		tr		WHI19000255	6	<0.1
DDLS-19-02	1320420	287.00	288.00	1.00	OG	hybx	OG w spec hem grey hybx, siliceous	w					20		0.5		WHI19000255	57	<0.1
DDLS-19-02	1320421	288.00	289.00	1.00	OG	hybx	OG w spec hem grey hybx, siliceous	w					20		0.5		WHI19000255	160	0.2
DDLS-19-02	1320422	289.00	290.00	1.00	OG	hybx	OG w spec hem grey hybx, siliceous	w					20		0.5		WHI19000255	911	1.4
DDLS-19-02	1320423	290.00	291.00	1.00	OG	alt	grading out of bx into sil alt OG w qtz veinlets and py	w					15		1		WHI19000255	27	<0.1
DDLS-19-02	1320424	291.00	292.00	1.00	OG		OG w localized weak sil alt zones	w					5		0.5		WHI19000255	8	<0.1
DDLS-19-02	1320425						BLANK - CDN-BL-9										WHI19000255	6	0.4
DDLS-19-02	1320426						STANDARD - CDN-CM-25										WHI19000255	231	0.7
DDLS-19-02	1320427	292.00	293.00	1.00	OG		OG w localized weak sil alt zones	w					5		0.5		WHI19000255	8	<0.1
DDLS-19-02	1320428	293.00	294.00	1.00	OG		OG w localized weak sil alt zones	w					5		0.5		WHI19000255	5	<0.1

Hole ID	Sample ID	From	To	Length	Rock	Rock	Description	Alteration Intensity (0, tr, w, m, s)					Veinlets (%)		Sulphide %		Certificate	Au	Ag
		(m)	(m)	(m)	Code 1	Code 2		Sil	Ser	Chl	Cb	Ep	QS	QCS	Py	Po		ppb	ppm
DDLS-19-02	1320429	294.00	295.00	1.00	OG	alt	alt sil OG w qtz veins and f-mg py	m					15		2		WHI19000255	484	0.2
DDLS-19-02	1320430	295.00	295.50	0.50	OG	alt	alt sil OG w qtz veins and f-mg py	m					15		3		WHI19000255	185	0.2
DDLS-19-02	1320431	295.50	296.30	0.80	OG		less alt OG w minor qtz veining						3		0.5		WHI19000255	25	<0.1
DDLS-19-02	1320432	296.30	297.18	0.88	OG	alt	localized silicified sections in OG w 1-2cm qtz vn and dissem py	m					15		2		WHI19000255	66	<0.1

LUCKYSTRIKE RESOURCES LTD.

Drill Hole	DDLS-19-03	Property	Lucky Strike	Zone	Monte Carlo

Coordinates (UTM NAD 83)					
Easting	590018	**Northing**	7012825	**Elevation (m)**	500
Survey by	Dan Ferraro	**Survey Method**	GPS Garmin 60CSx	**Date**	July 24, 2019

Summary					
Depth (m)	327.36	**Azimuth**	230	**Dip**	-75
Core Size	HTW+NTW	**Casing (ft)**	0	**Logged By**	Dan Ferraro
Drill Company	Kluane Drilling Ltd.			**Drill Rig**	KD 1000
Drill Start Date	July 16, 2019			**Drill Comp Date**	July 21, 2019
Log Start Date	July 17, 2019			**Log Comp Date**	July 22, 2019
Final casing	removed			**Core Location**	Monte Carlo Camp
Comments	IP L5			**Claim #**	Au 90

Samples					
Sample Numbers	1320433 - 1320613				
Number	181	**Lab**	Bureau Veritas		
Cut by	Donald, Mark, Raf			**Date Shipped**	July 24, 2019

Down Hole Survey					
Depth (m)	**Measured Azm.**	**Corrected Azm.**	**Dip**	**Magnetic Field (nT)**	**Temperature**
50.00	204.37	223.39	-74.09	57387	
100.00	203.5	222.52	-73.72	57117	
150.00	202.26	221.28	-72.98	56933	
200.00	202.78	221.8	-72.52	56806	
250.00	204.2	223.22	-72.03	57136	
300.00	202.99	222.01	-71.56	57090	
327.36	200.75	219.77	-71.3		

From	To	Rock Code 1	Rock Code 2	Description
0.00	32.40	OB		Overburden. Permafrost mud. Start with HTW core size (switch to NTW at 50.29m).
32.40	63.80	CLBSH		Chlorite schist? Or a siltstone? Dark grey, fine grained, weak foliation with limonitic fractures and some pervasive limonitization. Brittle fracturing with offsets and cataclastic deformation. Quartz breccias common throughout with beige albite(?) alteration.
				32.4 - 32.6m: rock fragments and gravel, some consolidated
				34.6 - 34.9m: solid core, perv lim
				35.2m: larger core fragments, more consistent bedrock. Foliation at 70 dtca
				36.85 - 37.0m: siliceous section w lim fx
				37.85m: consistent competent core from here down. Limonitic dk grey and brown schist or siltstone. Foliation 55 dtca. Cataclastic brittle deformation. Offset qtz veins and fabric
				40.7 - 41.1m: brittle def qtz-albite vein
				43.1 - 43.4m: perv lim qtz vein? Or sil bedrock
				44.35 - 44.92m: lim qtz vein or sil bedrock at 40 dtca
				45.5 - 45.7m: qtz vn or sil bedrock
				46.4 - 46.8m: fractured translucent qtz vein along CA, no min
			QVBX	46.8 - 48.9m: large quartz vein breccia with beige albite? Cataclastic. 30dtca.
				48.9m: fractured chl schist. 1cm qtz veins w brittle offsets
				50.29m: NTW SWITCH
				Very fractured chlorite schist. Minor lim fx, minor qtz veinlets (5%). Foliation at 38 dtca. 0 to trace py.
				56 - 64m: extremely fractured core
				60.85 - 61.12m: qtz-albite vn, diffuse, no py
63.80	74.95	OG		Contact to orange limonitic orthogneiss. Limonitic fractures. 45 dtca foliation. Fractured core, gradually more competent, especially ay 69m.
			bx	65.3 - 65.9m: siliceous dark breccia zone with minor quartz
				69.38 - 69.8m: more quartz content in OG w veinlet shallow to CA
				71.6 - 74.95m: siliceous OG w discordant lim fx. Blue-grey colour.
74.95	82.60	CLBSH		Contact to chlorite schist. Marked by a 13cm diffuse vein or silica flooded orthogneiss at 74.8m.
			hybx	77.7 - 78.75m: small hydrothermal breccia (?), dk grey spec hem similar to breccias seen lower in 19-02
				82.2 - 82.6m: silica flooding and white qtz veining
82.60	106.70	OG		Hematitic gradational contact to quartz and biotite-rich orthogneiss. Fractured. Well foliated at 48 dtca.
				90.2 - 90.3m: minor silicification
				91.0 - 91.15m: white quartz vein w minor py blebs
				Very fractured core continues
				92.4m: increase in dk grey-blk fine fracture fill, spec hem? Late stage
				96.3 - 98m: chlorite altered, weakly silicified OG, red hem fx
				98 - 99.9m: silicified, semi-bleached OG w minor fresh py
				99.9m: chloritic, quartz-rich silicified OG w red hem fx. Grading to chlorite schist. Foliation 45 dtca
106.70	109.70	CLBSH		Contact to chlorite schist. Minor ductile deformation. Foliation 35-40 dtca. Weakly magnetic.
109.70	114.35	QV		Large white quartz vein with small sections of chlorite schist. Likely primary or early stage. Displays weak foliation (40-45 dtca) with silver mica. Minor red hematite. Trace pyrite. 0.5-1% pyrite in chlorite schist sections.
				110.45 - 110.75m: chlorite schist w 1% pyrite.
114.35	132.50	CLBSH		Return to well foliated chlorite schist (38 dtca). 5% quartz veining <1cm with minor fresh py (0.5-1%). Fairly magnetic throughout.
				117.7 - 121m: localized silicification 10-25cm
			fx zone	121 - 124m: fractured core
			fault	124.0 - 124.2m: fault gouge
				124.2m: increased py in schist (up to 2%)
				125 - 129m: brittle and ductile deformation zone, 6% qtz veinlets with minor discordant calcite veinlets. 25 dtca foliation.
			fx zone	129 - 132m: fracture zone with quartz veining
				130.4 - 130.65m: small silicified zone within fracture zone, tr py
				131.35 - 132.15m: abundant qtz veining
132.50	173.40	CLA		Gradational contact to chlorite amphibolite. More medium grained, white and black/dark green colour, 'salt and pepper' appearance. Strong foliation at 20-35 dtca. Magnetic throughout, sometimes quite strong. Typically less pyrite than the overlying schist (<0.5%). Fairly consistent appearance. ~5% quartz veining, typically parallel to foliation.
				133.75 - 134.2m: completely fractured white quartz vein with minor py blebs
				137.32m: 20cm white qtz vein with chlorite (primary).
				144 - 144.5m: small tension gash style veinlets crosscutting foliation
				147.1m: 10cm qtz-chl vein
				149 - 149.5m: shallow def qtz-hem veining w epidote

From	To	Rock Code 1	Rock Code 2	Description
				149.9m: 10cm qtz-chl vein w epidote, parallel to foliation (30 dtca)
			fx zone	150 - 153.5m: fractured core
				152.2 - 153m: 2% fg dissem py in country rock
				155.0m: 30cm pink qtz-chl-feld vein
				156 - 160m: ductile def, fol parallel to CA in sections. Epidote alteration throughout. 1-2cm QVs.
				160m: fol steepen to 50 dtca, ductile def continues without epidote
				162 - 162.4m: 1-3cm QVs parallel to fol (40 dtca)
			fx zone	163.7 - 172m: intermittent fractured core, 30cm competent sections, 30cm fractured
			fault	164.59 - 164.65m: clay fault gouge
				166.4 - 166.56m: pink qtz-chl vein parallel to fol, minor py blebs
				167.08m: 8cm fx white QV
				Ductile def and fx core continues w 20% primary qtz
			fault	167.64 - 168m: fault gouge
				169.2 - 170.33m: decomposed but consolidated
				170.33m: 13cm sil section w fg py
				170.55 - 170.85m: soft fx light green schist, similar to UMV unit
173.40	176.80	UMV?		Ultramafic metavolvanic? Similar to that seen in other holes. Soft, light green schist with discordant red hematitic fractures (localized).
176.80	178.30	OG		Siliceous orthogneiss with specular hematite and 0.5% very fine grained pyrite. 55-60 dtca foliation. Variable albite alteration.
178.30	186.50	CLBSH		Gradation to chlorite schist or light green ultramafics with minor qtz veining.
				179.6m: more typical well foliated green chl schist. Minor sericite alt. Discordant hem fx. Non-magnetic. 50-65 dtca.
				184m: more gneissic appearance. Biotite-rich.
186.50	187.70	OG	HYBX	Hydrothermal breccia. Siliceous. Magnetite and hematite-rich. Albite-quartz veining. Trace pyrite.
187.70	190.50	CLBSH		45 dtca contact back to chlorite schist. Deformed with hematitic fractures.
				189.20 - 189.95m: weakly silicified with magnetite blebs, possibly replacing pyrite?
				189.95 - 190.50m: decomposed
190.50	191.25	OG		Grey siliceous orthogneiss (?) with brittle deformed qtz veinlets. Very little foliation.
191.25	213.60	CLBSH		Well foliated, relatively undeformed green fine grained chlorite schist continues. Very little quartz veining. Soft. Foliation 40-60 dtca. Localized silicification 10-20cm . Non-magnetic.
				192.10 - 192.25m: white qtz vein
				192.25 - 193.3m: decomposed
				197.25 - 197.54m: OG section? Dk grey, siliceous
				198.5 - 198.8m: OG section? Dk grey, siliceous
				200.28 - 200.46m: siliceous OG
				200.46 - 200.8m: cataclastic OG, hybx
				200.8 - 201.16m: siliceous OG
				Lt-dk green chl schist continues
				207m: increased sericite alteration
				208.9 - 209.2m: py with 1-2cm deformed qtz veins
				210.12 - 210.54m: cream-white qtz vein w chl, spec hem, parallel to fol at 45 dtca
				211.6 - 213.35m: localized sil zones intermittent w schist. Cream-white qtz veins, tr py
213.60	228.00	MS		Gradational contact to mica schist. Silver/white long mica grains. Intermittent with chlorite schist. Strongly silicified sections with very fine grained pyrite.
				215.1 - 215.3m: silicified with 1-2% fg py and translucent qtz veins
				216.7m: mostly mica schist from here down
			sil	217.05 - 217.45m: pervasively silicified mica schist w vfg dissem py (2%)
				217.45m: fractured mica schist
				218.3 - 218.6m: gravel core, siliceous
				218.83 - 219.0m: lt green, fg, weakly silicified schist
				219.90 - 220.15m: lt green, fg, weakly silicified schist
			sil, bx	220.7 - 221.6m: perv sil breccia
				221.6m: very siliceous mica schist, crosscutting qtz veinlets. 0.5% py.
				222.4 - 223.2m: fx dk sil MS
				223.2 - 223.95m: lt green sil schist
			sil	223.95 - 224.4m: perv sil grey schist
			fault	224.4 - 224.6m: red fault gouge
				224.6 - 225.1m: perv sil grey schist
				225.1 - 227.75m: intermittent perv sil grey schist sections w other lt green weakly siliceous sections. Some pink albite alt. foliation 45-65 dtca. White veinlets crosscut fol, typically shallow to CA. Up to 3% vfg py in sil green schist.

From	To	Rock Code 1	Rock Code 2	Description
			fault	227.75 - 228m: fault gouge
228.00	229.30	UMV		Soft green schist or UMV. Red hematitic fractures. 15% quartz veining.
229.30	232.49	OG		Gradational contact to more siliceous gneiss. Well foliated at 60 dtca. 1-3% fg py in foliation and on quartz veins. Biotite-rich. Greenish chloritic alteration. Red hematite alteration.
				230.55 - 230.72m: siliceous green zone with white quartz veining and mg py blebs 231m: ductile deformation, crenulated 232.35 - 232.49m: DCOG
232.49	243.75	OG	sil	Direct 45 dtca contact to strongly silicified gneiss or schist. Pervasive silicification. Hydrothermal breccia textures of varying intensity. Cream colour albite(?) veins running shallow to core axis. 1-2% very fine to fine grained pyrite disseminated throughout, often blebs around quartz veins.
				233.85 - 234m: darker grey brecciation (spec hem?) with fg py
				234.0 - 236.08m: completely fractured, rubble core. Silica rich, almost looks like quartz pebble conglomerate in some consolidated sections.
				236.08m: silica-flooded OG, more OG textures evident. Pervasive albite alteration. Light pink/creamy white colour. 55 dtca foliation w ductile deformation. 1-2% pyrite, especially around deformed 1-5cm qtz veins (15% of rock).
				238.2m: 2cm quartz vein shallow to CA w py blebs and pervasive albite. Leads into grey hybx then fractured core at 238.5m with black shear planes and 2% py
				239.3m: more competent bleached, altered OG
				240.4m: more silicfied OG, perv albite alt, 2% py
				241.55 - 242.1m: fx with black shear planes and abundant py (up to 10%). This looks most like the deep mineralized zone in DDLS-18-06.
				242.1m: more competent, 5% py
				242.66m: 10cm white qtz vein w abundant py blebs
				242.75 - 243.75m: fractured bleached OG, 1% py
243.75	273.37	OG		Biotite-rich orthogneiss. White and black. Fairly consistent foliation with minor crenulations (50 dtca). 10% quartz veining. Localized albite alteration with pyrite.
				245.56 - 245.85m: localized albite alteration w 2% py
				246.25 - 246.5m: decomposed
				248.15 - 248.6m: pink albite-alt w def 1cm qtz veining (10%). Minor py blebs (1-2%) and spec hem.
				250.1m: hem alt. and hem fx shallow to CA
				252m: localized albite alt and intermittent DCOG
				256.34 - 257.08m: greenish DCOG w 6cm white QV
				257.08m: 25cm white vein (feldspar?)
				257.35 - 259.8m: fractured, weakly silicified OG. Hematitic, trace py, trace magnetite
				259.8m; more competent OG. Magnetite blebs. Foliation 40-50 dtca.
				Foliated bt-rich OG continues. Weak albite alteration.
			alt	264.6m: increased alteration, 1% magnetite blebs, increased qtz veining (15%)
				266.5 - 266.8m: 5cm qtz vein shallow to CA w py blebs
				269.2 - 268.2m: deformed qtz veining w py blebs (3%)
				268.5 - 270.4m: silicified w semi-pervasive albite alteration. 1% py. Crosscutting qtz veinlets
				Bt OG continues with weak albite alteration, 2% magnetite blebs, 50 dtca foliation.
273.37	285.55	CLBSH		Contact to chlorite schist. Fine grained, green, well foliated at 40 dtca, non-magnetic. Sericitic. 0.5-1% fine grained pyrite. Some sections of silicified orthogneiss within the upper part of the unit.
				275.9 - 276.55m: siliceous dark OG with fg py
				277m: very consistent chl schist, 40-45 dtca foliation. Small siliceous sections <10cm.
				281.85m: common epidote alteration with 1-2cm qtz veins
				284.6m: pyritic fracture
				284.9 - 285.1m: 1-2% dissem py
285.55	327.36	DOG		2cm epidote vein at 15 dtca with small brittle offsets separates chlorite schist from a more gneissic looking, biotite-rich rock, termed dioritic orthogneiss. Non-magnetic. Chloritic with pink albite alteration.
				288 - 291.1m: fractured w ductile def, especially fractured at 290 to 290.5m.
				291.9 - 292.15m: pink qtz veining parallel to foliation
				293m: much more gneissic texture. Variably chloritic. Some sections just black biotite with qtz/silica. Fg py common throughout <1%. Consistent textures. Foliation 40 dtca.
				300.43m: 10cm qtz-feld vein parallel to fol
				305.7 - 307.1m: increased py in fol, siliceous
				307.77 - 308.25m: large pink and white qtz vein followed by 10cm white qtz vein with py on lower margin.
				Dioritic orthogneiss continues. <0.5% py. Alteration zone with mylonitic(?) sections begins at 317m, chlorite alteration disappears.
				317.12 - 317.45m: weak, light grey alteration. Minor py
				318.28 - 320.6m: light grey alteration

From	To	Rock Code 1	Rock Code 2	Description
				319m: 10cm qtz vein followed by 10cm dark grey vfg rock with abundant mg dissem py (5%)
				321 - 321.92m: dk grey/black siliceous mylonitic zone? Mg diffuse feldspar phenocrysts with small tails. F-mg py. Unit shows up in smaller (10cm) sections down hole.
				321.92 - 322.12m: def qtz veining
				323.9 - 324.09m: another zone of abundant mg py (8%)
				Grey-dark grey foliated DOG continues to end of hole with 1% py.
			fault	326.6 - 326.75m: fault gouge, fractured core, some clay
327.36		EOH		End of hole

Hole ID	Sample ID	From	To	Length	Rock	Rock	Description	Alteration Intensity (0, tr, w, m, s)					Veinlets (%)		Sulphide %		Certificate	Au	Ag
		(m)	(m)	(m)	Code 1	Code 2		Sil	Ser	Chl	Cb	Ep	QS	QCS	Py	Po		ppb	ppm
DDLS-19-03	1320433	33.53	35.05	1.52	CLBSH		bedrock interface. Gravel, clay, 30cm of solid limonitic core										WHI19000258	8	0.2
DDLS-19-03	1320434	35.05	36.58	1.53	CLBSH		fractured dark schist or siltstone and gravel										WHI19000258	9	<0.1
DDLS-19-03	1320435	36.58	38.10	1.52	CLBSH		more competent core w 15cm sil section of lim QVBX?						10				WHI19000258	14	0.2
DDLS-19-03	1320436	38.10	39.00	0.90	CLBSH		competent core, lim chl schist or siltstone, decomposed at end										WHI19000258	32	0.3
DDLS-19-03	1320437	39.00	40.00	1.00	CLBSH		decomposed but consolidated dk schist										WHI19000258	114	0.4
DDLS-19-03	1320438	40.00	41.00	1.00	CLBSH		weak sil brittle def lim schist w qtz vein material	w					10				WHI19000258	24	<0.1
DDLS-19-03	1320439	41.00	42.00	1.00	CLBSH		weak sil brittle def lim schist w qtz vein material, grading to fx schist at end	w					10				WHI19000258	13	<0.1
DDLS-19-03	1320440	42.00	43.00	1.00	CLBSH		lim schist w 15cm lim qvbx						10				WHI19000258	6	<0.1
DDLS-19-03	1320441	43.00	44.00	1.00	CLBSH	QVBX	lim schist w 25cm of sil qvbx	w					20				WHI19000258	8	<0.1
DDLS-19-03	1320442	44.00	45.00	1.00	CLBSH	QVBX	lim schist w abundant qtz vein breccia	w					30				WHI19000258	9	<0.1
DDLS-19-03	1320443	45.00	46.00	1.00	CLBSH		lim schist w minor sil QVBX						10				WHI19000258	8	<0.1
DDLS-19-03	1320444	46.00	47.00	1.00	CLBSH	QVBX	fx chl schist w 30cm white qtz vein along CA then 15cm lim QVBX						35				WHI19000258	5	<0.1
DDLS-19-03	1320445	47.00	48.00	1.00	QVBX		all lim QVBX. Cream/beige albite alt. minor spec hem	m					80				WHI19000258	3	<0.1
DDLS-19-03	1320446	48.00	49.00	1.00	QVBX	CLBSH	60% qtz vein breccia material	w					60				WHI19000258	4	<0.1
DDLS-19-03	1320447	49.00	50.29	1.29	CLBSH		chl schist w minor offset 1cm qtz veins						10				WHI19000258	4	<0.1
DDLS-19-03	1320448	65.00	66.00	1.00	OG	bx	NTW core. Lim OG w dk breccia (clasts of schist?) and 10cm diffuse qtz albite vn	w					10				WHI19000258	13	0.1
DDLS-19-03	1320449	69.00	70.00	1.00	OG		lim OG w lim fx, high qtz-albite content, 1cm qtz vein down CA	w					6				WHI19000258	7	<0.1
DDLS-19-03	1320450						BLANK - CDN-BL-9										WHI19000258	8	0.5
DDLS-19-03	1320451						STANDARD - CDN-CGS-7										WHI19000258	883	3.3
DDLS-19-03	1320452	70.00	71.00	1.00	OG		weak sil OG w lim fx	w									WHI19000258	4	<0.1
DDLS-19-03	1320453	71.00	72.00	1.00	OG		weak sil OG w lim fx	w									WHI19000258	3	<0.1
DDLS-19-03	1320454	72.00	73.00	1.00	OG		sil OG w lim fx, high qtz content	m									WHI19000258	4	<0.1
DDLS-19-03	1320455	73.00	74.00	1.00	OG		sil OG w lim fx, high qtz content	m									WHI19000258	3	<0.1
DDLS-19-03	1320456	74.00	75.00	1.00	OG		fx OG w 13cm diffuse qtz at end contacting chl schist (last 5cm)	w					13				WHI19000258	6	<0.1
DDLS-19-03	1320457	75.00	77.72	2.72	CLBSH		fractured chl schist										WHI19000258	7	<0.1
DDLS-19-03	1320458	77.72	79.25	1.53	CLBSH	hybx	dk grey and beige hybx, grading to weakly silicified chl schist	w					35				WHI19000258	15	<0.1
DDLS-19-03	1320459	82.00	83.00	1.00	CLBSH	OG	chl schist contacting OG (40%) w 15cm white QV and 20cm diffuse pink QV	w					25		tr		WHI19000258	60	<0.1
DDLS-19-03	1320460	83.00	84.00	1.00	OG		weakly silicified hem OG, high qtz content, 15cm vein? Or sil	w					15		tr		WHI19000258	3	0.3
DDLS-19-03	1320461	84.00	85.00	1.00	OG		weakly silicified hem OG, high qtz content, 15cm vein? Or sil	w					15		tr		WHI19000258	3	<0.1
DDLS-19-03	1320462	90.00	91.00	1.00	OG		fx weak sil OG	w									WHI19000258	5	<0.1
DDLS-19-03	1320463	91.00	91.50	0.50	OG		weak sil fx OG w 15cm white QV w fresh py bleb	w					30		0.5		WHI19000258	3	<0.1
DDLS-19-03	1320464	91.50	93.00	1.50	OG		weak sil fx OG, minor dk grey spec hem fx	w							tr		WHI19000258	3	<0.1
DDLS-19-03	1320465	93.00	94.00	1.00	OG		fx OG w dk grey fx								tr		WHI19000258	3	<0.1
DDLS-19-03	1320466	94.00	95.00	1.00	OG		fx OG w dk grey fx								tr		WHI19000258	16	<0.1
DDLS-19-03	1320467	95.00	96.00	1.00	OG		fx OG w dk grey fx, 15cm sil flooded section, minor chl	w		w					0.5		WHI19000258	6	<0.1
DDLS-19-03	1320468	96.00	97.00	1.00	OG		chl alt OG			w					0.5		WHI19000258	3	<0.1
DDLS-19-03	1320469	97.00	98.00	1.00	OG		chl alt OG			w					0.5		WHI19000258	3	<0.1
DDLS-19-03	1320470	98.00	99.00	1.00	OG		more lim OG w fresh py								1		WHI19000258	3	<0.1
DDLS-19-03	1320471	99.00	100.00	1.00	OG		competent sil OG w lim fx grading hem-chl altered OG	w		w							WHI19000258	3	<0.1
DDLS-19-03	1320472	100.00	101.00	1.00	OG		chl-hem and qtz-rich OG	w		w							WHI19000258	2	<0.1
DDLS-19-03	1320473	104.00	105.00	1.00	OG		chl-hem OG w minor fresh py	w		w			6		0.5		WHI19000258	3	<0.1
DDLS-19-03	1320474	105.00	106.00	1.00	OG		chl-hem OG w minor fresh py	w		w			6		0.5		WHI19000258	27	<0.1
DDLS-19-03	1320475						BLANK - CDN-BL-9										WHI19000258	7	0.4
DDLS-19-03	1320476						STANDARD - CDN-CM-25										WHI19000258	262	0.6
DDLS-19-03	1320477	109.50	110.50	1.00	QV	CLBSH	chl schist contacting white qtz vein	m		w			70		0.5		WHI19000258	3	<0.1
DDLS-19-03	1320478	110.50	111.50	1.00	QV	CLBSH	white QV w 30cm section of chl schist w minor py	m		w			70		0.5		WHI19000258	3	<0.1
DDLS-19-03	1320479	111.50	112.50	1.00	QV		white QV, micaceous, primary	m					90				WHI19000258	16	<0.1
DDLS-19-03	1320480	112.50	113.50	1.00	QV		white QV, micaceous, primary	m					100				WHI19000258	2	<0.1
DDLS-19-03	1320481	113.50	114.40	0.90	QV		white QV contact to chl schist in last 5cm	m					95		tr		WHI19000258	3	<0.1
DDLS-19-03	1320482	114.40	115.10	0.70	CLBSH		chl schist, minor py			m			3		0.5		WHI19000258	3	<0.1
DDLS-19-03	1320483	116.00	117.00	1.00	CLBSH		chl schist w 20cm sil zone or qv	w					15		2		WHI19000258	3	0.3
DDLS-19-03	1320484	117.00	118.00	1.00	CLBSH		chl schist w 15cm white QV, weak sil	w					15		1		WHI19000258	3	1.2
DDLS-19-03	1320485	118.00	119.00	1.00	CLBSH		chl schist, localized sil zones	w							0.5		WHI19000258	3	<0.1
DDLS-19-03	1320486	119.00	120.00	1.00	CLBSH		sil chl schist	m							0.5		WHI19000258	29	<0.1
DDLS-19-03	1320487	120.00	121.00	1.00	CLBSH		gradation out of sil zone	w							0.5		WHI19000258	3	<0.1
DDLS-19-03	1320488	121.00	122.00	1.00	CLBSH		fx chl schist, minor fault gouge clay, py								2		WHI19000258	12	<0.1
DDLS-19-03	1320489	122.00	123.00	1.00	CLBSH		fx chl schist, minor fault gouge clay, py								2		WHI19000258	3	<0.1
DDLS-19-03	1320490	123.00	124.00	1.00	CLBSH		fx chl schist, minor fault gouge clay, py								2		WHI19000258	3	0.3
DDLS-19-03	1320491	124.00	125.00	1.00	CLBSH		fx chl schist, minor fault gouge clay, py								2		WHI19000258	10	0.8
DDLS-19-03	1320492	129.00	130.00	1.00	CLBSH		fx sil chl schist w qtz veining	w					30		0.5		WHI19000258	3	<0.1
DDLS-19-03	1320493	130.00	131.00	1.00	CLBSH		fx sil chl schist w qtz veining	w					20		0.5		WHI19000258	4	<0.1
DDLS-19-03	1320494	131.00	132.00	1.00	CLBSH		fx sil chl schist w qtz veining	w					30		0.5		WHI19000258	3	<0.1
DDLS-19-03	1320495	133.60	134.30	0.70	CLA	QV	chl schist or amphibolite w 45cm fx white QV w minor py bleb						45		0.5		WHI19000258	2	0.5
DDLS-19-03	1320496	140.00	141.00	1.00	CLA		amphibolite w more than normal py						3		2		WHI19000258	2	<0.1
DDLS-19-03	1320497	152.00	153.00	1.00	CLA		fx amphibolite, increased dissem py in groundmass								3		WHI19000258	3	0.1
DDLS-19-03	1320498	155.00	156.00	1.00	CLA		CLA w 30cm pink qtz-chl-feld vn and 8cm qtz-chl vein						40		tr		WHI19000258	3	<0.1
DDLS-19-03	1320499	166.20	166.80	0.60	CLA		CLA w 13cm pink qtz vein w minor fresh py and other def qv						45		0.5		WHI19000258	3	<0.1
DDLS-19-03	1320500						BLANK - CDN-BL-9										WHI19000258	7	0.3
DDLS-19-03	1320501						STANDARD - CDN-GS-4E										WHI19000258	4185	1.7
DDLS-19-03	1320502	170.30	171.00	0.70	CLBSH		soft lt green schist w 13cm sil zone, fg py	w		w					0.5		WHI19000258	4	0.2
DDLS-19-03	1320503	173.00	174.00	1.00	CLBSH	UMV	chl schist contact to hematitic UMV? Red hem fx, 10cm white feldspar? Vein						10		tr		WHI19000258	4	<0.1
DDLS-19-03	1320504	174.00	175.00	1.00	CLBSH	UMV	soft white/green/red schist										WHI19000258	4	<0.1
DDLS-19-03	1320505	175.00	176.00	1.00	CLBSH	UMV	soft white/green/red schist										WHI19000258	4	<0.1
DDLS-19-03	1320506	176.00	177.00	1.00	CLBSH	OG	hem/chl schist with 10cm of fx OG at end										WHI19000258	6	<0.1

Hole ID	Sample ID	From	To	Length	Rock	Rock	Description	Alteration Intensity (0, tr, w, m, s)					Veinlets (%)		Sulphide %		Certificate	Au	Ag
		(m)	(m)	(m)	Code 1	Code 2		Sil	Ser	Chl	Cb	Ep	QS	QCS	Py	Po		ppb	ppm
DDLS-19-03	1320507	177.00	178.30	1.30	OG		sil OG, albite alt. qtz veining.	w					20		tr		WHI19000258	4	<0.1
DDLS-19-03	1320508	186.30	187.00	0.70	CLBSH	hybx	chl schist grading into magnetite-rich hydrothermal breccia	w							tr		WHI19000258	3	<0.1
DDLS-19-03	1320509	187.00	188.00	1.00	hybx		magnetite-rich hybx	m							tr		WHI19000258	3	<0.1
DDLS-19-03	1320510	188.00	189.20	1.20	CLBSH		chl schist, hem fx						6		tr		WHI19000258	3	<0.1
DDLS-19-03	1320511	189.20	190.50	1.30	CLBSH		chl schist w local sil zones w magnetite blebs, grading to soft schist at end	w							tr		WHI19000258	4	<0.1
DDLS-19-03	1320512	190.50	191.30	0.80	OG?		grey siliceous OG? Discordant white qtz veinlets	w					25				WHI19000258	14	<0.1
DDLS-19-03	1320513	191.30	192.40	1.10	CLBSH		chl schist w shallow white QV						15				WHI19000258	15	0.4
DDLS-19-03	1320514	200.20	201.20	1.00	CLBSH	OG	small section of sil OG within chl schist, 60cm cataclastic white qtz vein zone	w					25		tr		WHI19000258	55	0.1
DDLS-19-03	1320515	205.00	206.00	1.00	CLBSH	OG	chl schist w multiple 10-20cm sil OG sections, qtz veining and fg py	w					15		1		WHI19000258	3	<0.1
DDLS-19-03	1320516	208.90	210.00	1.10	CLBSH		sericitic chl schist w qtz veinlets w py blebs		w				6		2		WHI19000258	3	0.1
DDLS-19-03	1320517	210.00	211.00	1.00	CLBSH	QV	40cm white qtz-chl vein w minor spec hem						40		0.5		WHI19000258	20	<0.1
DDLS-19-03	1320518	211.00	212.00	1.00	CLBSH		chl schist w local sil zone	w					5		0.5		WHI19000258	5	<0.1
DDLS-19-03	1320519	212.00	213.00	1.00	CLBSH		chl schist w qtz-feld veinlet swarm						10		0.5		WHI19000258	15	<0.1
DDLS-19-03	1320520	213.00	214.00	1.00	CLBSH	MS	chl schist grading to mica schist, local sil zone	w					5		0.5		WHI19000258	18	<0.1
DDLS-19-03	1320521	214.00	215.00	1.00	MS	CLBSH	mica schist and chl schist, 1cm qtz veins						5		0.5		WHI19000258	27	0.1
DDLS-19-03	1320522	215.00	216.00	1.00	MS	CLBSH	mica schist and chl schist, py blebs on qtz veinlets						15		1		WHI19000258	115	0.2
DDLS-19-03	1320523	216.00	217.00	1.00	MS	CLBSH	mica schist and chl schist								tr		WHI19000258	14	0.1
DDLS-19-03	1320524	217.00	217.50	0.50	MS		completely silicified mica schist, vfg dissem py	s							3		WHI19000258	4	<0.1
DDLS-19-03	1320525						BLANK - CDN-BL-9										WHI19000258	9	0.5
DDLS-19-03	1320526						STANDARD - CDN-CM-25										WHI19000258	216	0.6
DDLS-19-03	1320527	217.50	218.30	0.80	MS		fractured mica schist								tr		WHI19000258	5	0.1
DDLS-19-03	1320528	218.30	219.00	0.70	MS	CLS	sil fx MS w sections of sil chl schist	m		w			5		0.5		WHI19000258	16	0.1
DDLS-19-03	1320529	219.00	220.00	1.00	MS	CLS	sil MS and fg chl schist	m		w			8		0.5		WHI19000258	18	<0.1
DDLS-19-03	1320530	220.00	221.00	1.00	MS	CLS, hybx	chl schist, sil MS, and brecciated sil MS	m		w			15		0.5		WHI19000258	92	0.2
DDLS-19-03	1320531	221.00	222.00	1.00	MS	hybx	brecciated sil MS	m					15		0.5		WHI19000258	233	0.3
DDLS-19-03	1320532	222.00	223.00	1.00	MS		fx sil MS	m					5		0.5		WHI19000258	45	0.4
DDLS-19-03	1320533	223.00	224.00	1.00	MS	CLS	sil MS w cataclastic qtz veinlets, section of chl schist	m					5		0.5		WHI19000258	45	<0.1
DDLS-19-03	1320534	224.00	225.00	1.00	MS	fault	perv sil MS w flt gouge	s							0.5		WHI19000258	29	1.2
DDLS-19-03	1320535	225.00	226.00	1.00	MS	OG?	sil MS and OG? Pinkish colour. Qtz veining, dissem py	m					15		1		WHI19000258	171	0.2
DDLS-19-03	1320536	226.00	227.00	1.00	MS	CLS	40% perv sil MS, 60% sil CLS, vfg py dissem and in fol of chl schist	m					5		3		WHI19000258	28	0.5
DDLS-19-03	1320537	227.00	228.00	1.00	MS		perv sil MS w qtz veining and 20cm fx core at end	s					10		0.5		WHI19000258	14	0.3
DDLS-19-03	1320538	228.00	229.00	1.00	CLS		soft green chl schist, fx qtz vning			m			20		tr		WHI19000258	4	<0.1
DDLS-19-03	1320539	229.00	230.30	1.30	CLS	OG	chl schist grading to OG w hem fx			w					tr		WHI19000258	6	<0.1
DDLS-19-03	1320540	230.30	230.80	0.50	OG	CLS	chloritic OG w 15cm albite alt section w py blebs	w		w			10		3		WHI19000258	6	0.1
DDLS-19-03	1320541	230.80	232.00	1.20	OG		ductile def OG/schist, hem fx	w		w			5		0.5		WHI19000258	4	<0.1
DDLS-19-03	1320542	232.00	232.50	0.50	OG		OG w DCOG at end of sample, hematitic								0.5		WHI19000258	4	<0.1
DDLS-19-03	1320543	232.50	233.00	0.50	OG	hybx	perv sil OG, hybx. Albite veinlets, vfg py dissem	s					20		2		WHI19000258	9	<0.1
DDLS-19-03	1320544	233.00	234.00	1.00	OG	hybx	perv sil OG, hybx. Albite veinlets, vfg py dissem	s					20		2		WHI19000258	14	<0.1
DDLS-19-03	1320545	234.00	235.00	1.00	OG	fx	fx rubble of softer hybx grading to QPC? Minor py. Mostly unconsolidated.	w					20		1		WHI19000258	15	0.2
DDLS-19-03	1320546	235.00	236.00	1.00	OG	fx	fx rubble of softer hybx grading to QPC? Minor py. Mostly unconsolidated.	w					20		1		WHI19000258	21	0.2
DDLS-19-03	1320547	236.00	237.00	1.00	OG		albite alt OG w dissem py	m					8		2		WHI19000258	20	0.2
DDLS-19-03	1320548	237.00	238.00	1.00	OG		albite alt OG w dissem py	m					8		2		WHI19000258	4	<0.1
DDLS-19-03	1320549	238.00	239.00	1.00	OG	hybx	albite alt OG grading to hybx. 2cm qv down CA w py. Fx at end of sample	m					10		4		WHI19000258	20	0.2
DDLS-19-03	1320550						BLANK - CDN-BL-9										WHI19000258	9	0.3
DDLS-19-03	1320551						STANDARD - CDN-GS-15B										WHI19000258	>10000	1
DDLS-19-03	1320552	239.00	240.00	1.00	OG		fx, sil alt OG	w					5		2		WHI19000258	31	0.1
DDLS-19-03	1320553	240.00	241.00	1.00	OG		fx, sil alt OG	m					5		2		WHI19000258	7	<0.1
DDLS-19-03	1320554	241.00	242.00	1.00	OG		sil OG, perv albite alt, black shear planes, abundant f-mg dissem py and along fx	m					10		8		WHI19000258	13	0.2
DDLS-19-03	1320555	242.00	243.00	1.00	OG		sil OG, perv albite alt, less blk shear planes. Deformed qtz veining w py and dissem py	m					20		5		WHI19000258	6	<0.1
DDLS-19-03	1320556	243.00	243.75	0.75	OG		fx weak sil , bleached OG	w					2		0.5		WHI19000258	4	<0.1
DDLS-19-03	1320557	243.75	245.00	1.25	OG		bt OG, weak alt, out of zone						5		0.5		WHI19000258	3	<0.1
DDLS-19-03	1320558	245.00	246.00	1.00	OG		def bt OG w local albite alt, py blebs w qtz						15		2		WHI19000258	4	<0.1
DDLS-19-03	1320559	246.00	247.00	1.00	OG		ductile def bt OG, local albite alt, minor DCOG						2		0.5		WHI19000258	3	<0.1
DDLS-19-03	1320560	247.00	248.00	1.00	OG		bt OG, ductile def								tr		WHI19000258	3	<0.1
DDLS-19-03	1320561	248.00	249.00	1.00	OG		bt OG, def qtz veinng, local albite alt						10		1		WHI19000258	4	<0.1
DDLS-19-03	1320562	249.00	250.00	1.00	OG		weak sil fx OG	w					1		0.5		WHI19000258	4	<0.1
DDLS-19-03	1320563	250.00	251.00	1.00	OG		bt OG, hem and chl alt			w					tr		WHI19000258	4	<0.1
DDLS-19-03	1320564	251.00	252.00	1.00	OG		bt OG, hem and chl alt			w					tr		WHI19000258	3	<0.1
DDLS-19-03	1320565	252.00	253.00	1.00	OG		fx OG, local albite alt						10		tr		WHI19000258	5	<0.1
DDLS-19-03	1320566	253.00	254.00	1.00	OG		fx OG, local albite alt						10		tr		WHI19000258	4	<0.1
DDLS-19-03	1320567	254.00	255.00	1.00	OG	DCOG	DCOG grading to OG, weal sil section 10cm	w							tr		WHI19000258	4	<0.1
DDLS-19-03	1320568	255.00	256.00	1.00	OG		bt OG, 20cm DCOG								tr		WHI19000258	4	<0.1
DDLS-19-03	1320569	256.00	257.00	1.00	OG		bt OG, 30cm DCOG, 8cm translucent QV						8		tr		WHI19000258	55	<0.1
DDLS-19-03	1320570	257.00	258.00	1.00	OG		weak sil OH, 25cm qtz-feld vein? White. Small section chl schist	w		w			30		0.5		WHI19000258	5	<0.1
DDLS-19-03	1320571	258.00	259.00	1.00	OG		weak sil fx OG, minor magnetite, hem	w							tr		WHI19000259	4	<0.1
DDLS-19-03	1320572	259.00	260.00	1.00	OG		weak sil fx OG, minor magnetite, hem	w							tr		WHI19000259	4	0.1
DDLS-19-03	1320573	260.00	261.00	1.00	OG		OG, minor albite alt, 1cm qvs, mag blebs						8		tr		WHI19000259	4	<0.1
DDLS-19-03	1320574	261.00	262.00	1.00	OG		weak sil OG	w					3		tr		WHI19000259	3	<0.1
DDLS-19-03	1320575						BLANK - CDN-BL-9										WHI19000259	8	0.6
DDLS-19-03	1320576						STANDARD - CDN-CM-25										WHI19000259	234	0.6
DDLS-19-03	1320577	262.00	263.00	1.00	OG		OG, 5cm qv						5		tr		WHI19000259	4	<0.1
DDLS-19-03	1320578	263.00	264.00	1.00	OG		OG, pinkish alt								tr		WHI19000259	3	<0.1
DDLS-19-03	1320579	264.00	265.00	1.00	OG		OG, pinkish alt, minor magnetite	w					3		tr		WHI19000259	4	<0.1
DDLS-19-03	1320580	265.00	266.00	1.00	OG		OG, pinksh alt, magnetite blebs	w					8		0.5		WHI19000259	4	<0.1

Hole ID	Sample ID	From	To	Length	Rock	Rock	Description	Alteration Intensity (0, tr, w, m, s)					Veinlets (%)		Sulphide %		Certificate	Au	Ag
		(m)	(m)	(m)	Code 1	Code 2		Sil	Ser	Chl	Cb	Ep	QS	QCS	Py	Po		ppb	ppm
DDLS-19-03	1320581	266.00	267.00	1.00	OG	alt	OG, pink albite alt, 2-3cm QVs w py blebs	w					15		3		WHI19000259	4	<0.1
DDLS-19-03	1320582	267.00	268.10	1.10	OG	alt, hybx	OG, pink albite alt, 2-3cm QVs w py blebs, minor hybx	w					15		5		WHI19000259	3	0.1
DDLS-19-03	1320583	268.10	269.00	0.90	OG	alt	alt OG w qtz veinlets, magnetite, py blebs	w					6		2		WHI19000259	3	<0.1
DDLS-19-03	1320584	269.00	270.00	1.00	OG	alt	alt weak sil OG, mag blebs (up to 2%)	w					5		1		WHI19000259	3	<0.1
DDLS-19-03	1320585	270.00	270.70	0.70	OG	alt	alt weak sil OG, mag blebs	w					3		2		WHI19000259	3	<0.1
DDLS-19-03	1320586	270.70	272.00	1.30	OG		less altered OG, minor chl, mag blebs			w			8		tr		WHI19000259	3	<0.1
DDLS-19-03	1320587	272.00	273.00	1.00	OG		less altered OG, minor chl, mag blebs			w			8		tr		WHI19000259	3	<0.1
DDLS-19-03	1320588	273.00	274.00	1.00	OG	CLBSH	half OG, half chl shist		w	w					0.5		WHI19000259	3	<0.1
DDLS-19-03	1320589	274.00	275.00	1.00	CLBSH		chl schist, ser alt, minor ep alt		w	w		w					WHI19000259	3	<0.1
DDLS-19-03	1320590	275.00	276.00	1.00	CLBSH		chl schist, minor OG section		w	w							WHI19000259	3	<0.1
DDLS-19-03	1320591	276.00	277.00	1.00	CLBSH	OG	larger OG section within chl schist (50cm), fg py in OG	w	w	w					0.5		WHI19000259	3	<0.1
DDLS-19-03	1320592	277.00	278.00	1.00	CLBSH		chl schist, 1cm qvs, dissem py			w			5		2		WHI19000259	3	<0.1
DDLS-19-03	1320593	278.00	279.00	1.00	CLBSH		chl schist w small sil OG section 10cm wide, py	w		w					1		WHI19000259	3	<0.1
DDLS-19-03	1320594	282.00	283.00	1.00	CLBSH		ep altered cl schist w deformed qtz veining, mg py			w		m	15		1		WHI19000259	3	<0.1
DDLS-19-03	1320595	283.00	284.00	1.00	CLBSH		ep altered cl schist w deformed qtz veining, mg py			w		m	15		1		WHI19000259	3	<0.1
DDLS-19-03	1320596	284.00	285.00	1.00	CLBSH		ep altered cl schist w deformed qtz veining, mg py			w		m	5		1		WHI19000259	4	<0.1
DDLS-19-03	1320597	285.00	286.00	1.00	CLBSH	DOG	chl schist w 2cm ep vn brittle offsets, contacting dioritic OG			w		m	1		1		WHI19000259	4	<0.1
DDLS-19-03	1320598	299.95	300.95	1.00	DOG		sil DOG, somewhat representative, more pyrite though (dissem)	w		w			7		0.5		WHI19000259	3	<0.1
DDLS-19-03	1320599	305.70	306.70	1.00	DOG		DOG w minor py an 3cm qtz vn			w			5		1		WHI19000259	3	<0.1
DDLS-19-03	1320600						BLANK - CDN-BL-9										WHI19000259	7	0.3
DDLS-19-03	1320601						STANDARD - CDN-CGS-7										WHI19000259	945	3.2
DDLS-19-03	1320602	306.70	307.70	1.00	DOG		DOG w minor py and qtz			w			2		1		WHI19000259	3	<0.1
DDLS-19-03	1320603	307.70	308.70	1.00	DOG		DOG w 20cm pink qtz-chl vein and 10cm white QV, minor py on lower margin			w			35		1		WHI19000259	2	<0.1
DDLS-19-03	1320604	317.00	318.00	1.00	DOG		slightly altered DOG, lighter grey colour, fracturing						6		1		WHI19000259	109	0.3
DDLS-19-03	1320605	318.00	319.00	1.00	DOG		DOG local albite alt?, minor qtz						5		0.5		WHI19000259	12	<0.1
DDLS-19-03	1320606	319.00	320.00	1.00	DOG		DOG local albite alt?, minor qtz						5		0.5		WHI19000259	83	0.2
DDLS-19-03	1320607	320.00	321.00	1.00	DOG		DOG								0.5		WHI19000259	3	<0.1
DDLS-19-03	1320608	321.00	322.00	1.00	DOG		DOG w mylonitic sections, mg py localized						7		1		WHI19000259	3	<0.1
DDLS-19-03	1320609	322.00	323.00	1.00	DOG		DOG w mylonitic sections, much cataclastic brecciation, weak alt						8		1		WHI19000259	5	<0.1
DDLS-19-03	1320610	323.00	324.00	1.00	DOG		deformed DOG, mg py						5		1		WHI19000259	3	<0.1
DDLS-19-03	1320611	324.00	325.00	1.00	DOG		deformed DOG, mg py						5		1		WHI19000259	3	<0.1
DDLS-19-03	1320612	325.00	326.00	1.00	DOG		deformed DOG, mg py						5		1		WHI19000259	4	<0.1
DDLS-19-03	1320613	326.00	327.36	1.36	DOG	fault	deformed DOG, mg py, 15cm fault gouge						5		1		WHI19000259	9	<0.1

LUCKYSTRIKE RESOURCES LTD.

Drill Hole	DDLS-19-04	Property	Lucky Strike	Zone	Monte Carlo

Coordinates (UTM NAD 83)					
Easting	589433	**Northing**	7013410	**Elevation (m)**	537
Survey by	Dan Ferraro	**Survey Method**	GPS Garmin 60CSx	**Date**	July 25, 2019

Summary					
Depth (m)	200.25	**Azimuth**	240	**Dip**	-65
Core Size	HTW+NTW	**Casing (ft)**	15	**Logged By**	Dan Ferraro
Drill Company	Kluane Drilling Ltd.			**Drill Rig**	KD 1000
Drill Start Date	July 22, 2019			**Drill Comp Date**	July 24, 2019
Log Start Date	July 23, 2019			**Log Comp Date**	July 25, 2019
Final casing	removed			**Core Location**	Monte Carlo Camp
Comments	IP L200			**Claim #**	AB 4

Samples					
Sample Numbers	1320614 - 1320796				
Number	183	**Lab**	Bureau Veritas		
Cut by	Raf, Mark			**Date Shipped**	July 31, 2019

Down Hole Survey					
Depth (m)	**Measured Azm.**	**Corrected Azm.**	**Dip**	**Magnetic Field (nT)**	**Temperature**
No survey					

From	To	Rock Code 1	Rock Code 2	Description
0.00	1.00	OB		Overburden. Permafrost mud.
1.00	2.00	QTT		Fractured bedrock interface. Dirt, rock chips. Poor recovery.
2.00	65.85	QTT		Quartzite or silicified orthogneiss(?). Grey-blue grey. Very fine grained, almost aphanitic. Weak-moderate foliation, steep core angles (>65 dtca). Very little quartz veining, no visible sulphides. No carbonate. Orange, discordant limonitic fractures common.
				2 - 4.4m: fractured core
				5.51m: 30cm pink qtz-feld vn
				8.2 - 8.6m: 5cm decomposed followed by lighter grey fx core
			fx zone	9.85 - 11.14m: fractured core
				10.67 - 11.14m: decomposed
				11.14 - 11.54m: increased orange lim fx
			fault	11.54 - 12.05m: fx core, flt gouge
				12.05 - 12.75m: intermittent fx core, epidote alt. 1cm qtz veining w lim at 75 dtca
			fault	13.75 - 14.6m: decomposed/faulted
				14.6 - 17.5m: increased lim fx, <1cm qtz veins (10%) w 10cm DCQTT
			bx	17.5 - 18.55m: more intense cataclastic brecciation. Lim fx crosscutting fol at 45 dtca, fol at 58 dtca
				18.55m: lim fx, less brecciation
			bx	19.45 - 22.20m: another intense bx zone. Deformed qtz-albite veins up to 10cm (15%), lighter grey sil QTT
				22.2 - 24.35m: grading out of bx, lim fx remains as well as lighter grey alteration
			fx zone	24.38 - 25m: decomposed followed by fracture zone, poor recover
				25m: dark grey/blue sil quartzite continues, but with white fx. 5% qtz veining. Weak fol at 65-70 dtca. Localized epidote alteration around zones of increased primary veining. Minor fg yellow sericite. Minor hematitic fractures.
				32.25 - 35.2m: increased epidote veining, epidote in foliation every 10cm. Foliation 70 dtca.
				35.2m: less common ep veining/alt. 65 dtca fol. Grey sil QTT continues with 5-8% 0.5cm qtz veinlets parallel to fol. Veins commonly have purple hematite and black specular hematite
				36.8 - 36.95m: epidote
				37.9m: fractured core, increased lim fx w black specks (?), typically steep to CA, <80 dtca
				37.95m: 5cm pink vn
				40.60m: 10cm DCQTT
				41.65 - 41.83m: extensive lim w purple hem, qtz
				41.83m: 1-2cm qtz veins w hem up to 10% of rock
				43m: lighter grey altered QTT, still silicified but softer
				44.65 - 44.85m: DCQTT
			DC	45.15 - 46.0m: large section of consolidated DCQTT, red hem
			alt	46.55 - 47.13m: bleached white/orange lim sil zone
			dike	47.13 - 48.1m: fine grained dark grey-brown weakly foliated rock, no veining. Likely a dike, but pre-metamorphism
			fx zone	48.1 - 56.5m: grades back to light grey altered QTT w lim fx. Qtz-hem veinlets. 75 dtca fol. Very fractured.
				51.92 - 52.1m: hem
				52.1 - 52.4m: perv lim, black specks
			bx	52.75 - 53.2m: grey, brecciated
				53.2 - 54.15m: fx sil QTT, lim fx
			dike	54.15 - 54.6m: fg brown schist, lim fol, similar to 47.13m, dike
				54.6 - 56.5m: fx sil QTT, lim fx
			dike	56.47 - 59.34m: more competent. Dark grey-brown fine grained possible dike. Lim fx crosscutting fol steep to CA. no veining.
				59.34 - 60.42m: heterQTTeneous, fractured, qtz-rich lim QTT. Foliation 60-65 dtca. Some decomposed rock. 25% qtz veining.
			sil	60.42 - 63.24m: grey-blue silicified QTT as above. Fractured. 10% qtz veining with purple hematite.
			alt	63.24 - 64.1m: perv lim soft, bleached alt QTT. Semi-decomposed.
			alt, HyBx	64.1 - 65.85m: as above but increasingly silicified. Yellow. HyBx? Rippled purple hem veining
65.85	74.45	SSH	schist-phyillite	Light grey siliceous quartzite becomes increasingly limonitic (at 66.6m) and finer grained with finer schistosity, almost phyllitic texture in places. Colours range from light grey to purple to yellow. Softer with localized silicification and fracturing. Very little quartz. Crenulated cleavage. Foliation 65-75 dtca. Very heterogeneous unit.
				67.06m: SWITCH TO NTW CORE
74.45	80.75	QSSH	QVbx	Large orange quartz vein and associated limonitized and silicified quartzite and quartz-sericite schist.
				74.45 - 76.80m: large orange quartz vein. Brecciated, pervasive limonitization. Diffuse texture. Small sections of quartzite and schist within.
				74.96 - 75.0m: soft section of orthogneiss or quartzite
				76.80 - 76.90m: dk grey-blk shear clay

From	To	Rock Code 1	Rock Code 2	Description
				76.90 - 77.85m: soft yellow perv lim schist
				77.85 - 80.75m: qtz-rich, very lim QSSH. Approaching quartz veining at 78.45-79.25m but likely just quartz-rich country rock. Purple hematitic fractures. Weak chlorite alteration.
80.75	83.80	QSSH	red schist	Foliated red, fine grained orthogneiss or schist. Finer schistosity but not as fine as 65.85m. Deformed quartz veining parallel to foliation (48 dtca). Dark specular hematite fractures shallow to foliation as well as quartz-albite veinlets.
83.80	104.10	OG	HOG	Contact to medium grained orthogneiss. Brown-red colour. Looking more like a true orthogneiss here. Well foliated at 55-60 dtca. Limonitic fractures.
				84.5 - 85.35m: more limonitic
				86.87 - 87.2m: dk grey spec hem fx crosscutting fol
				88.8m: increasingly limonitic
			bx	90.0 - 90.75m: perv lim breccia. Rounded clasts up to 2cm leading into lim DCOG
				90.75m: back to reddish OG, mg. 65 dtca fol. 0.5% fresh pyrite after above DCOG
				94.18 - 94.82m: def cataclastic qtz-albite vn, lower contact at 25 dtca
				95.25 - 96.48m: bleached soft alt OG w 25% def qtz-albite veining
				96.48m: red OG
				97.16 - 97.28m: qtz-albite veining w minor fresh py
				98.43 - 98.98m: dk grey spec hem fx w cataclastic qtz-albite veining, offset
				98.98 - 99.12m: qtz-albite vn
				100.06m: 5cm qtz vn w fresh py
				101m: fol 45 dtca
				101.9 - 104m: qtz-hem veinlets running down CA, increased hem in general
104.10	115.80	OG	DOG or CLA	Gradation out of red hematitic orthogneiss to more chloritic, dioritic orthogneiss or amphibolite. Contact marked by magnetite throughout. Foliation 70-75 dtca.
				106.5 - 107.1m: mg magnetite grains
				109m: decrease in magnetite content
				109.9 - 110.07m: qtz-albite
				110.6 - 111.6m: weakly silicified and bleached w abundant hem veinlets/fractures shallow to CA
				111.6 - 113.7m: hem fx continue, shallow to CA in greenish amphibolite (75 dtca). Mo magnetite
				113.7m: hem fx decrease. Green, well foliated DOG or CLA.
115.80	133.50	OG		Gradation out of chloritic zone to brown, limonitic orthogneiss. 5-10% deformed translucent quartz veins (1-5cm) with minor pyrite (0.5%). Ductile and brittle deformation. Hematitic fractures.
				116.62m: 6cm qtz vein w minor fresh py
				121 - 123.3m: lighter green alteration intermittent with lim OG
			alt	123.3 - 127m: fx, softer light grey-beige OG w 15% qtz veining. 0.5% fresh py with qtz-albite veining.
			fx zone	127.7 - 127.9m: fracture zone
			alt	127.9 - 128.95m: grey altered OG w ductile deformation. Specks of black mineral, possibly limonitic pyrite.
				128.25 - 128.45m: qtz-albite vn
				129.95 - 130.21m: white qtz-feld vn w dk grey fx
				130.26m: 3cm translucent qtz vn w abundant py followed by 5cm albite-qtz w minor py
				130.38 - 133.5m: grey-green OG w primary qtz-albite, well foliated at 65-70 dtca. Fine spec hem fx shallow to CA.
			alt	132.12 - 132.65m: lt grey alt zone as at 127.9m with black specks
133.50	142.15	OG	DOG	Gradation to more evenly foliated dioritic orthogneiss (60 dtca). Consistent. No quartz veins at top. Minor hematitic fractures. Non-magnetic.
				136.15m: 5cm qtz-albite vns parallel to fol common
				137.5 - 139.7m: fx core. Weak fault zone. DOG w 15% qtz veining.
				139.30m: 15cm pink qtz-feld vn, spec hem fx
				140.21 - 141m: start of alteration zone. Light green chloritic schist w hem fx
			alt	141 - 142.15m: light grey altered OG, ductile def. 20% translucent def qtz veining w fg py (1%) particularly at 141.65-141.8m
142.15	150.88	CLBSH		Light green-grey chlorite schist. Well foliated at 60 dtca. Non magnetic. Rare quartz veining. Crosscutting hematitic fractures.
				147.15 - 147.3m: small siliceous section, def qtz veining, abundant py along shallow hem fx
				150.55m: 5cm of fg py in foliation
150.88	153.20	OG	alt	Alteration zone. Light grey/beige siliceous zone, fine grained black mineral (lim py?), shallow hematitic fractures.
				152.05 - 152.75m: lt green chlorite schist
153.20	163.15	OG		Biotite-rich orthogneiss. Well foliated with pink qtz-feldspar leucocratic bands to 158.18m. 65-70 dtca.
				155.95 - 156.5m: small siliceous def zone w 2% fg py
				158.18 - 159.75m: finer grained chlorite schist or DOG, 65 dtca, tr py
				159.75 - 163.15m: less chlorite more biotitic OG. 48 dtca. Tr py.

From	To	Rock Code 1	Rock Code 2	Description
163.15	195.10	CLBSH		Fine grained chlorite schist with intermittent 10-20cm sections of orthogneiss. 10cm fracture zones commons. Hematitic fractures throughout.
				168.55m: 20cm sil section w 3% fg py
			fx zone	172 - 176.05m: large fracture zone. Intense fracturing of fg chl schist.
				175.55 - 176.05m: decomposed, consolidated chl schist
				176.05 - 176.35m: 30cm white qtz-feld vn marking end of fx zone.
				176.35m: More competent chl schist w 30cm sections of biotitic orthogneiss. 50-65 dtca fol. Ductile deformation.
			shr	186.13 - 186.4m: black shear planes
				More siliceous green schist downhole 45-50 dtca.
				189m: fractured grey-green schist, soft
			shr	190 - 190.9m: shear zone. Light grey gneiss with black clay shear planes, some loss of recovery here.
			OG	190.9 - 191.15m: silicified orthogneiss
				191.15 - 195.1m: return to light green schist, 1% fg py
				191.88m: 2cm qtz-feld vein parallel to foliation w fg py
			OG	192 - 192.15m: deformed dark grey orthogneiss
			OG	193.32m: 26cm sil grey OG
195.10	197.32	OG		Grey orthogneiss with extensive ductile deformation and tight folding. Intermittent green schist sections.
			shr	196.05 - 196.4m: decomposed, fault, black shear planes
197.32	200.25	CLBSH		Green chlorite schist. Sericitic, minor quartz veinlets. <0.5% pyrite.
				198.12m: semi-fractured core to EOH
			fault	199.75 - 200.0m: fault gouge. Intensely fractured schist.
200.25		EOH		End of hole

Hole ID	Sample ID	From	To	Length	Rock	Rock	Description	Alteration Intensity (0, tr, w, m, s)					Veinlets (%)		Sulphide %		Certificate	Au	Ag
		(m)	(m)	(m)	Code 1	Code 2		Sil	Ser	Chl	Cb	Ep	QS	QCS	Py	Po		ppb	ppm
DDLS-19-04	1320614	1.52	3.05	1.53	QTT		bedrock interface, rubble and fx core, brown dirt										WHI19000310	5	0.2
DDLS-19-04	1320615	3.05	4.57	1.52	QTT		fx core, getting into fully competent core in last 20cm										WHI19000310	6	<0.1
DDLS-19-04	1320616	4.57	6.10	1.53	QTT		fx core, silicified QTT w 30cm pink qtz-feld vn	m					25				WHI19000310	5	<0.1
DDLS-19-04	1320617	6.10	7.00	0.90	QTT		siliceous dark grey/blue quartzite (?), minor fracturing	m									WHI19000310	4	<0.1
DDLS-19-04	1320618	7.00	8.00	1.00	QTT		siliceous quartzite, minor fracturing	m									WHI19000310	4	<0.1
DDLS-19-04	1320619	8.00	9.00	1.00	QTT		weakly altered sil QTT w 5cm DCQTT										WHI19000310	4	<0.1
DDLS-19-04	1320620	9.00	10.00	1.00	QTT		fx sil QTT										WHI19000310	4	<0.1
DDLS-19-04	1320621	10.00	11.00	1.00	QTT		fx sil QTT, 30cm section of DC QTT, poor recovery	w									WHI19000310	5	<0.1
DDLS-19-04	1320622	11.00	12.00	1.00	QTT		fx sil QTT, 10cm DC QTT, poor recovery	w									WHI19000310	4	<0.1
DDLS-19-04	1320623	12.00	13.00	1.00	QTT		fx sil QTT, ep alt, 1cm qtz veins	w				w	5				WHI19000310	12	<0.1
DDLS-19-04	1320624	13.00	14.00	1.00	QTT	DC	fx sil QTT, ep alt, 1cm qtz veins, DCQTT last 20cm	w				w	5				WHI19000310	4	<0.1
DDLS-19-04	1320625						BLANK - CDN-BL-9										WHI19000310	6	0.4
DDLS-19-04	1320626						STANDARD - CDN-CM-25										WHI19000310	261	0.7
DDLS-19-04	1320627	14.00	15.00	1.00	QTT	DC	DCQTT leading into limonitic fractured QTT w qtz veinlets	w					5				WHI19000310	3	<0.1
DDLS-19-04	1320628	15.00	16.00	1.00	QTT		sil QTT w lim fx, DCQTT										WHI19000310	5	0.1
DDLS-19-04	1320629	16.00	17.00	1.00	QTT		sil QTT w minor lim fx						8				WHI19000310	4	<0.1
DDLS-19-04	1320630	17.00	18.00	1.00	QTT	bx	brecciated sil QTT w abundant lim fx, bx qtz	w					6				WHI19000310	4	<0.1
DDLS-19-04	1320631	18.00	19.00	1.00	QTT	bx	BXQTT, grading out of most intense part	w					6				WHI19000310	8	<0.1
DDLS-19-04	1320632	19.00	20.00	1.00	QTT		sil QTT w lim fx	w					6				WHI19000310	6	0.2
DDLS-19-04	1320633	20.00	21.00	1.00	QTT	bx	lim bx QTT and bx def qtz veining, lim fx	w					20				WHI19000310	10	0.4
DDLS-19-04	1320634	21.00	22.00	1.00	QTT	bx	lim bx QTT and bx def qtz veining, lim fx, lighter grey alt	w					10				WHI19000310	13	0.3
DDLS-19-04	1320635	22.00	23.00	1.00	QTT		grading out of bx, still lim fx. Lighter grey/pink alt						3				WHI19000310	13	0.6
DDLS-19-04	1320636	23.00	24.00	1.00	QTT		alt QTT w lim fx										WHI19000310	11	0.2
DDLS-19-04	1320637	24.00	25.00	1.00	QTT		alt QTT w lim fx, minor DCQTT into fracture zone, loss of some recovery										WHI19000310	4	<0.1
DDLS-19-04	1320638	25.00	26.00	1.00	QTT		sil QTT, getting out of lim fx zone, reduced recovery	w					3				WHI19000310	8	<0.1
DDLS-19-04	1320639	26.00	27.00	1.00	QTT		sil QTT, white fx, 5cm DCQTT	m					3				WHI19000310	4	<0.1
DDLS-19-04	1320640	27.00	28.00	1.00	QTT		sil QTT, minor epidote alt	m				w	2				WHI19000310	4	<0.1
DDLS-19-04	1320641	28.00	29.00	1.00	QTT		sil QTT, minor epidote alt	m				w	2				WHI19000310	11	0.1
DDLS-19-04	1320642	29.00	30.00	1.00	QTT		sil QTT, minor ep alt, hem fx	m				w	5				WHI19000310	6	<0.1
DDLS-19-04	1320643	30.00	31.00	1.00	QTT		sil QTT, minor ep alt, white discordant fx	m				w	3				WHI19000310	6	0.1
DDLS-19-04	1320644	31.00	32.00	1.00	QTT		sil QTT, minor ep alt, white discordant fx	m				w	3				WHI19000310	11	<0.1
DDLS-19-04	1320645	32.00	33.00	1.00	QTT		increased ep alt, qtz veinlets <1cm	m				m	5				WHI19000310	4	<0.1
DDLS-19-04	1320646	33.00	34.00	1.00	QTT		sil QTT, epidote alt	m				m	2				WHI19000310	4	<0.1
DDLS-19-04	1320647	34.00	35.00	1.00	QTT		sil QTT, epidote alt, hem fx	m				m	2				WHI19000310	4	<0.1
DDLS-19-04	1320648	35.00	36.00	1.00	QTT		sil QTT, epidote alt, hem fx	m				w	3				WHI19000310	3	<0.1
DDLS-19-04	1320649	36.00	37.00	1.00	QTT		sil QTT, epidote alt, hem fx	m				w	3				WHI19000310	4	<0.1
DDLS-19-04	1320650						BLANK - CDN-BL-9										WHI19000310	8	0.5
DDLS-19-04	1320651						STANDARD - CDN-GS-15B										WHI19000310	>10000	1
DDLS-19-04	1320652	37.00	37.90	0.90	QTT		sil QTT, epidote alt, hem fx	m				w	3				WHI19000310	4	<0.1
DDLS-19-04	1320653	37.90	39.00	1.10	QTT		fx sil QTT increased lim fx, 5cm pink vn	w					6				WHI19000310	6	<0.1
DDLS-19-04	1320654	39.00	40.00	1.00	QTT		fx sil QTT, lim fx, 5cm DCQTT	w									WHI19000310	4	<0.1
DDLS-19-04	1320655	40.00	41.00	1.00	QTT		sil QTT, lim fx, 15cm intense lim/hem zone	w					5				WHI19000310	5	<0.1
DDLS-19-04	1320656	41.00	42.00	1.00	QTT		sil QTT, lim fx	m					5				WHI19000310	4	<0.1
DDLS-19-04	1320657	42.00	43.00	1.00	QTT		sil QTT, lim fx	m					5				WHI19000310	18	0.1
DDLS-19-04	1320658	43.00	44.00	1.00	QTT		alt lighter grey sil QTT, lim fx						5				WHI19000310	10	<0.1
DDLS-19-04	1320659	44.00	45.00	1.00	QTT		alt lighter grey sil QTT, lim fx, minor DCQTT						3				WHI19000310	6	<0.1
DDLS-19-04	1320660	45.00	46.00	1.00	QTT	DC	mostly consolidated decomposed QTT, red, yellow										WHI19000310	4	<0.1
DDLS-19-04	1320661	46.00	47.15	1.15	QTT		lim DCQTT w 50% bleached white/yellow limonitic sections	w					5				WHI19000310	8	<0.1
DDLS-19-04	1320662	47.15	48.00	0.85	QTT	dike	grading to fine grained dike? W lim fx										WHI19000310	7	<0.1
DDLS-19-04	1320663	48.00	49.00	1.00	QTT	sil	fx grey sil QTT, lim fx, hem veinlets						3				WHI19000310	5	<0.1
DDLS-19-04	1320664	49.00	50.00	1.00	QTT	sil	fx grey sil QTT, lim fx, hem veinlets						3				WHI19000310	3	<0.1
DDLS-19-04	1320665	50.00	51.00	1.00	QTT	sil	very fx grey sil QTT, lim fx, hem veinlets						2				WHI19000310	5	<0.1
DDLS-19-04	1320666	51.00	52.00	1.00	QTT	sil	fx grey sil QTT, lim fx	w									WHI19000310	4	<0.1
DDLS-19-04	1320667	52.00	53.00	1.00	QTT	bx, sil	hem bleach lim fx sil QTT, weak bx	w									WHI19000310	4	<0.1
DDLS-19-04	1320668	53.00	54.00	1.00	QTT	bx, sil	weak bx, grey sil QTT, lim fx	w									WHI19000310	4	<0.1
DDLS-19-04	1320669	54.00	55.00	1.00	QTT	dike	fx lim QTT, 50cm dike w lim fx										WHI19000310	9	0.2
DDLS-19-04	1320670	55.00	56.00	1.00	QTT	sil	fx sil grey QTT, lim fx	w									WHI19000310	4	<0.1
DDLS-19-04	1320671	56.00	57.00	1.00	QTT	sil	grading out of fracture zone, sil grey QTT, lim fx	w									WHI19000310	8	<0.1
DDLS-19-04	1320672	57.00	58.00	1.00	QTT	dike?	dk grey chl QTT and/or dike, lim fx			w							WHI19000310	4	<0.1
DDLS-19-04	1320673	58.00	59.00	1.00	QTT	dike?	dk grey chl QTT and/or dike, lim fx			w							WHI19000310	6	0.4
DDLS-19-04	1320674	59.00	60.00	1.00	QTT	sil, DC	contact to sil QTT, 20cm of decomposed QTT, qtz veinlets						5				WHI19000310	5	0.2
DDLS-19-04	1320675						BLANK - CDN-BL-9										WHI19000310	9	0.5
DDLS-19-04	1320676						STANDARD - CDN-CM-25										WHI19000310	230	0.6
DDLS-19-04	1320677	60.00	61.00	1.00	QTT	sil	grading to sil blue/grey QTT, lim qtz vein	w					10				WHI19000310	11	0.3
DDLS-19-04	1320678	61.00	62.00	1.00	QTT	sil	sil blue-grey QTT grading to softer altered QTT/OG, qtz-hem vns	w					10				WHI19000310	3	<0.1
DDLS-19-04	1320679	62.00	63.00	1.00	QTT		alt grey QTT, lim fx						3				WHI19000310	5	<0.1
DDLS-19-04	1320680	63.00	64.00	1.00	QTT		grading to perv lim QTT and DC										WHI19000310	6	<0.1
DDLS-19-04	1320681	64.00	65.00	1.00	QTT	sil, hybx	perv lim QTT w sil sections, hem fx, possible hybx	w					3				WHI19000310	5	<0.1
DDLS-19-04	1320682	65.00	66.00	1.00	QTT	sil, hybx	perv lim QTT w sil sections, hem fx, possible hybx, minor chl	w		w			3				WHI19000310	4	<0.1
DDLS-19-04	1320683	66.00	67.06	1.06	SSH		lt grey-yellow-purple altered SSH, hem fx						3				WHI19000310	4	<0.1
DDLS-19-04	1320684	67.06	68.00	0.94	SSH		NTW SWITCH lt grey-yellow-purple altered SSH, hem fx	w									WHI19000310	4	<0.1
DDLS-19-04	1320685	68.00	69.00	1.00	SSH		lt grey-yellow-purple altered SSH, hem fx	w									WHI19000310	4	<0.1
DDLS-19-04	1320686	69.00	70.00	1.00	SSH		lt grey-yellow-purple altered SSH, hem fx. More schistose, ductile def	w					2				WHI19000310	4	<0.1
DDLS-19-04	1320687	70.00	71.00	1.00	SSH		lt grey-yellow-purple altered SSH, hem fx. Minor ductile def. 5cm qv	w					6				WHI19000310	4	<0.1

Hole ID	Sample ID	From	To	Length	Rock	Rock	Description	Alteration Intensity (0, tr, w, m, s)					Veinlets (%)		Sulphide %		Certificate	Au	Ag
		(m)	(m)	(m)	Code 1	Code 2		Sil	Ser	Chl	Cb	Ep	QS	QCS	Py	Po		ppb	ppm
DDLS-19-04	1320688	71.00	72.00	1.00	SSH		softer lt grey-yellow-purple altered SSH, hem fx. Minor ductile def 5cm qv						6				WHI19000310	4	<0.1
DDLS-19-04	1320689	72.00	73.15	1.15	SSH		softer lt grey-yellow-purple altered SSH, hem fx. Minor ductile def										WHI19000310	4	<0.1
DDLS-19-04	1320690	73.15	74.40	1.25	SSH		soft alt lim SSH to QSSH										WHI19000310	5	<0.1
DDLS-19-04	1320691	74.40	75.00	0.60	QSSH	QVbx	6cm DCOG into orange weakly brecciated qtz vein. Diffuse texture. Perv lim.						80				WHI19000310	4	<0.1
DDLS-19-04	1320692	75.00	76.00	1.00	QSSH	QVbx	perv lim weak bx QV. Orange. 10-20cm section of perv lim OG within						80				WHI19000310	4	<0.1
DDLS-19-04	1320693	76.00	77.00	1.00	QSSH	QVbx	Mostly orange lim bx QV, 10cm blk shear, 10cm perv lim OG						80				WHI19000310	36	0.2
DDLS-19-04	1320694	77.00	78.00	1.00	QSSH		soft, perv lim OG, 20cm sil qtz-rich OG	w									WHI19000310	73	0.3
DDLS-19-04	1320695	78.00	79.00	1.00	QSSH		very qtz-rich schist w lim fx, hem fx	m									WHI19000310	8	<0.1
DDLS-19-04	1320696	79.00	80.00	1.00	QSSH		very qtz-rich schist w lim fx, hem fx	m									WHI19000310	8	<0.1
DDLS-19-04	1320697	80.00	81.00	1.00	QSSH		qtz-rich schist, last 20cm fg red schist, lim fx										WHI19000310	51	<0.1
DDLS-19-04	1320698	81.00	82.00	1.00	QSSH	red schist	fg red schist, lim fx. Qtz albite veinlets						15				WHI19000310	7	<0.1
DDLS-19-04	1320699	82.00	83.00	1.00	QSSH	red schist	fg red schist, lim fx. Qtz albite veinlets						15				WHI19000310	5	0.1
DDLS-19-04	1320700						BLANK - CDN-BL-9										WHI19000310	13	0.5
DDLS-19-04	1320701						STANDARD - CDN-CGS-7										WHI19000310	952	3.3
DDLS-19-04	1320702	83.00	84.00	1.00	OG	HOG	contact to reddish OG, qtz veins						5				WHI19000310	4	<0.1
DDLS-19-04	1320703	84.00	85.00	1.00	OG	HOG	reddish medium grained OG, 35cm of perv lim										WHI19000310	16	<0.1
DDLS-19-04	1320704	85.00	86.00	1.00	OG	HOG	reddish OG, some lim						5				WHI19000310	20	<0.1
DDLS-19-04	1320705	86.00	87.00	1.00	OG	HOG	reddish OG, grey spec hem veinlets along CA										WHI19000310	8	<0.1
DDLS-19-04	1320706	87.00	88.00	1.00	OG	HOG	reddish OG, grey spec hem veinlets along CA										WHI19000310	6	<0.1
DDLS-19-04	1320707	88.00	89.00	1.00	OG		lim OG, somewhat fractured										WHI19000310	8	<0.1
DDLS-19-04	1320708	89.00	90.00	1.00	OG	bx	perv lim OG leading into lim brecciated OG										WHI19000310	5	<0.1
DDLS-19-04	1320709	90.00	91.00	1.00	OG	bx	perv lim breccia, 25cm DCOG, minor fresh py after DCOG in gneiss								0.5		WHI19000310	6	<0.1
DDLS-19-04	1320710	91.00	92.00	1.00	OG		reddish-yellow OG										WHI19000310	19	0.1
DDLS-19-04	1320711	92.00	93.00	1.00	OG		reddish-green OG			w							WHI19000310	8	0.1
DDLS-19-04	1320712	93.00	94.00	1.00	OG		reddish-green OG			w							WHI19000310	5	<0.1
DDLS-19-04	1320713	94.00	95.00	1.00	OG	QVbx	70cm def qtz-albite veining (cataclastic) tr py, minor chl in vein			w			70		tr		WHI19000310	7	<0.1
DDLS-19-04	1320714	95.00	96.00	1.00	OG	QVbx	altered OG and DCOG, 40% qtz-albite brecciated veining						40		tr		WHI19000310	26	0.2
DDLS-19-04	1320715	96.00	97.00	1.00	OG		altered, bleached OG, DCOG, grading to reddish OG for 50% of sample						10				WHI19000310	6	<0.1
DDLS-19-04	1320716	97.00	98.00	1.00	OG	HOG	reddish OG, qtz-albite veins, minor fresh py, hem veinlets						10		0.5		WHI19000310	4	0.1
DDLS-19-04	1320717	98.00	99.00	1.00	OG	HOG	red OG w 40cm dk grey spec hem rich OG						15				WHI19000310	12	0.1
DDLS-19-04	1320718	99.00	100.00	1.00	OG	HOG	red OG, soft, 12cm yellow qtz vein and def qtz veinlets						18				WHI19000310	5	<0.1
DDLS-19-04	1320719	100.00	101.00	1.00	OG	HOG	red OG						10				WHI19000310	3	0.2
DDLS-19-04	1320720	101.00	102.00	1.00	OG	HOG	red OG						10				WHI19000310	3	<0.1
DDLS-19-04	1320721	102.00	103.00	1.00	OG	HOG	red OG, shallow hem fx										WHI19000310	3	<0.1
DDLS-19-04	1320722	103.00	104.00	1.00	OG	HOG	red OG, shallow hem fx										WHI19000310	3	<0.1
DDLS-19-04	1320723	104.00	105.00	1.00	OG	HOG, CLA	red hem grading to chl amphibolite, magnetite-rich, hem fx										WHI19000310	4	<0.1
DDLS-19-04	1320724	105.00	106.00	1.00	OG	CLA	CLA, hem fx			w							WHI19000310	3	<0.1
DDLS-19-04	1320725						BLANK - CDN-BL-9										WHI19000310	9	0.4
DDLS-19-04	1320726						STANDARD - CDN-CM-25										WHI19000310	234	0.6
DDLS-19-04	1320727	106.00	107.00	1.00	OG	CLA	CLA, 2% mag blebs			w							WHI19000310	4	<0.1
DDLS-19-04	1320728	107.00	108.00	1.00	OG	CLA	CLA, hem fx, 1% mag			w			3				WHI19000310	3	0.1
DDLS-19-04	1320729	108.00	109.00	1.00	OG	CLA	CLA, hem fx, 1% mag			w							WHI19000310	3	<0.1
DDLS-19-04	1320730	109.00	110.00	1.00	OG	CLA	CLA, hem fx, qtz vns			w			8				WHI19000310	3	<0.1
DDLS-19-04	1320731	110.00	111.00	1.00	OG	CLA	CLA, hem fx, qtz vns			w			8				WHI19000310	3	<0.1
DDLS-19-04	1320732	111.00	112.00	1.00	OG	CLA	CLA, hem fx, qtz vns			w			5				WHI19000310	4	<0.1
DDLS-19-04	1320733	112.00	113.00	1.00	OG	CLA	CLA, hem fx, qtz vns			w			5				WHI19000310	3	<0.1
DDLS-19-04	1320734	113.00	114.00	1.00	OG	CLA	CLA, hem fx, qtz vns			w			5				WHI19000310	3	<0.1
DDLS-19-04	1320735	114.00	115.00	1.00	OG	CLA	CLA, hem fx, qtz vns			w			2				WHI19000310	4	<0.1
DDLS-19-04	1320736	115.00	116.00	1.00	OG		grading to lim OG, less hem fx										WHI19000310	3	<0.1
DDLS-19-04	1320737	116.00	117.00	1.00	OG		lim OG, altered. 6cm qv w fresh py						8		0.5		WHI19000310	4	<0.1
DDLS-19-04	1320738	117.00	118.00	1.00	OG		lim OG, def qtz veining						15		0.5		WHI19000310	4	0.1
DDLS-19-04	1320739	118.00	119.00	1.00	OG		lim OG, def qtz veining						15		0.5		WHI19000310	3	<0.1
DDLS-19-04	1320740	119.00	120.00	1.00	OG		lim OG, hem fx										WHI19000310	5	<0.1
DDLS-19-04	1320741	120.00	121.00	1.00	OG		lim OG, shallow hem fx, def dark qtz veining						15		tr		WHI19000310	3	<0.1
DDLS-19-04	1320742	121.00	122.00	1.00	OG		alt lim OG, chl alt, hem fx			w							WHI19000310	6	0.2
DDLS-19-04	1320743	122.00	123.00	1.00	OG		alt lim OG, chl alt, hem fx			w			5				WHI19000310	4	0.1
DDLS-19-04	1320744	123.00	124.00	1.00	OG		lim OG, 5cm QV, minor fresh py						10		0.5		WHI19000310	13	<0.1
DDLS-19-04	1320745	124.00	125.00	1.00	OG		alt OG, qtz-albite and spec hem fx						10		0.5		WHI19000310	3	<0.1
DDLS-19-04	1320746	125.00	126.00	1.00	OG		soft alt OG, fractured						5				WHI19000310	4	<0.1
DDLS-19-04	1320747	126.00	127.00	1.00	OG		soft alt OG, fractured						5				WHI19000310	4	<0.1
DDLS-19-04	1320748	127.00	128.00	1.00	OG		soft alt OG, fractured						5				WHI19000310	52	<0.1
DDLS-19-04	1320749	128.00	129.00	1.00	OG	alt	alt light grey OG, fg black specks (?), def qtz vns						15		tr		WHI19000310	5	<0.1
DDLS-19-04	1320750						BLANK - CDN-BL-9										WHI19000310	8	0.5
DDLS-19-04	1320751						STANDARD - CDN-GS-4E										WHI19000310	4163	1.6
DDLS-19-04	1320752	129.00	130.00	1.00	OG	alt	alt light grey OG, fg black specks (?), def qtz vns, weak bx, weak sil	w					20		tr		WHI19000313	4	<0.1
DDLS-19-04	1320753	130.00	130.50	0.50	OG	alt, QV	20cm diffuse qtz-albite vn?, 3cm translucent qtz w abundant py on lower margin						25		1		WHI19000313	77	<0.1
DDLS-19-04	1320754	130.50	131.00	0.50	OG		OG, qtz albite vning						20		tr		WHI19000313	4	<0.1
DDLS-19-04	1320755	131.00	132.00	1.00	OG		OG, abundant spec hem fx										WHI19000313	6	<0.1
DDLS-19-04	1320756	132.00	133.00	1.00	OG	alt	alt lt grey OG, qtz veins, black specks, lim fx						15				WHI19000313	3	<0.1
DDLS-19-04	1320757	133.00	134.00	1.00	OG	DOG	dioritic OG, hem fx			w							WHI19000313	3	<0.1
DDLS-19-04	1320758	134.00	135.00	1.00	OG	DOG	dioritic OG, hem fx			w							WHI19000313	4	<0.1
DDLS-19-04	1320759	135.00	136.00	1.00	OG	DOG	dioritic OG, hem fx			w							WHI19000313	5	<0.1
DDLS-19-04	1320760	136.00	137.00	1.00	OG	DOG	dioritic OG, hem fx, qtz-albite vns			w			15				WHI19000313	4	<0.1
DDLS-19-04	1320761	137.00	138.00	1.00	OG	DOG	dioritic OG, hem fx, qtz-albite vns			w			20				WHI19000313	3	<0.1

Hole ID	Sample ID	From	To	Length	Rock	Rock	Description	Alteration Intensity (0, tr, w, m, s)					Veinlets (%)		Sulphide %		Certificate	Au	Ag
		(m)	(m)	(m)	Code 1	Code 2		Sil	Ser	Chl	Cb	Ep	QS	QCS	Py	Po		ppb	ppm
DDLS-19-04	1320762	138.00	139.00	1.00	OG	DOG	fx DOG, hem fx			w			5				WHI19000313	3	<0.1
DDLS-19-04	1320763	139.00	140.00	1.00	OG	DOG	fx DOG, hem fx, 15cm pink QV			w			15				WHI19000313	3	<0.1
DDLS-19-04	1320764	140.00	141.00	1.00	OG	DOG	DOG grading to chl/hem alt schist			w							WHI19000313	3	<0.1
DDLS-19-04	1320765	141.00	142.10	1.10	OG	alt	light grey alt zone w 1-10 cm QVs and minor fresh py	w		w			35		0.5		WHI19000313	3	<0.1
DDLS-19-04	1320766	142.10	143.00	0.90	OG	DOG	DOG or schist w hem fx			w							WHI19000313	3	<0.1
DDLS-19-04	1320767	143.00	144.00	1.00	OG	DOG	DOG or schist w hem fx			w							WHI19000313	4	0.1
DDLS-19-04	1320768	144.00	145.00	1.00	OG	DOG	DOG or schist w hem fx			w							WHI19000313	5	<0.1
DDLS-19-04	1320769	145.00	146.00	1.00	OG	DOG	DOG or schist w hem fx			w			5		tr		WHI19000313	5	<0.1
DDLS-19-04	1320770	146.00	147.00	1.00	OG	DOG	DOG or schist w hem fx			w			5		tr		WHI19000313	4	<0.1
DDLS-19-04	1320771	147.00	147.70	0.70	OG	DOG	DOG, sil section w py	w		w			5		2		WHI19000313	4	<0.1
DDLS-19-04	1320772	147.70	148.80	1.10	CLBSH		chl schist w hem fx			m			3		0.5		WHI19000313	4	<0.1
DDLS-19-04	1320773	148.80	150.00	1.20	CLBSH		chl schist w hem fx			m					0.5		WHI19000313	3	<0.1
DDLS-19-04	1320774	150.00	150.85	0.85	CLBSH		chl schist w hem fx			m					0.5		WHI19000313	3	<0.1
DDLS-19-04	1320775						BLANK - CDN-BL-9										WHI19000313	8	0.3
DDLS-19-04	1320776						STANDARD - CDN-CM-25										WHI19000313	239	0.6
DDLS-19-04	1320777	150.85	152.00	1.15	OG	alt	alt sil OG w black specks, lim py?	w					5		2		WHI19000313	4	<0.1
DDLS-19-04	1320778	152.00	153.20	1.20	OG	alt	grading out of alt zone with nice sil section at end of sample	w		w			5		2		WHI19000313	3	<0.1
DDLS-19-04	1320779	153.20	154.00	0.80	OG		bt-rich OG w chl			w							WHI19000313	3	<0.1
DDLS-19-04	1320780	154.00	155.00	1.00	OG		bt-rich OG w chl			w			5		0.5		WHI19000313	4	<0.1
DDLS-19-04	1320781	155.00	155.85	0.85	OG		bt-rich OG w chl			w			5		0.5		WHI19000313	4	<0.1
DDLS-19-04	1320782	155.85	156.85	1.00	OG	alt	alt beige OG, fx albite vns, vfg py	w					8		2		WHI19000313	11	<0.1
DDLS-19-04	1320783	156.85	158.00	1.15	CLBSH		weak alt chl schist, def qtz vns			w			15		0.5		WHI19000313	3	<0.1
DDLS-19-04	1320784	165.00	166.00	1.00	CLBSH		chl schist w fg py			w			5		1		WHI19000313	3	<0.1
DDLS-19-04	1320785	166.00	167.00	1.00	CLBSH		chl schist w fg py			w			5		1		WHI19000313	3	<0.1
DDLS-19-04	1320786	168.60	169.90	1.30	CLBSH		chl schist w small sil section and def qvs, vfg py	w		w			10		2		WHI19000313	3	<0.1
DDLS-19-04	1320787	176.00	176.50	0.50	CLBSH	QV	30cm white qtz-feld vein after fracture zone			w			60				WHI19000313	3	<0.1
DDLS-19-04	1320788	186.00	187.00	1.00	CLBSH		chl schist w 25cm shear zone, black clay			w			5		1		WHI19000313	5	0.2
DDLS-19-04	1320789	187.00	188.00	1.00	CLBSH		chl schist			w			6		0.5		WHI19000313	6	<0.1
DDLS-19-04	1320790	188.00	189.00	1.00	CLBSH		chl schist			w			6		0.5		WHI19000313	19	<0.1
DDLS-19-04	1320791	189.00	190.00	1.00	CLBSH	flt	shear zone in fx chl schist			w			5		1		WHI19000313	95	0.2
DDLS-19-04	1320792	190.00	191.00	1.00	CLBSH	flt	shear zone in fx chl schist, black clay seams			w			5		1		WHI19000313	16	0.2
DDLS-19-04	1320793	191.00	192.20	1.20	CLBSH		chl schist w minor shear, fg py			w					2		WHI19000313	4	<0.1
DDLS-19-04	1320794	194.00	195.10	1.10	CLBSH		chl schist w hem fx			w					1		WHI19000313	3	0.1
DDLS-19-04	1320795	195.10	196.30	1.20	CLBSH		chl schist w def OG and shearing			w							WHI19000313	4	0.2
DDLS-19-04	1320796	199.15	200.25	1.10	CLBSH	flt	chl schist, hem fx, 15-20cm fault			w					0.5		WHI19000313	3	<0.1

Appendix IV: Drilling Assay Certificates

Contents

- DDLS-19-01: Certificates WHI19000210.1 and WHI19000211.1
- DDLS-19-02: Certificates WHI19000254.1 and WHI19000255.1
- DDLS-19-03: Certificates WHI19000258.1 and WHI19000259.1
- DDLS-19-04: Certificates WHI19000310.1 and WHI19000313.1

DDLS-19-01 Assay Certificates WHI19000210.1 and WHI19000211.1

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Submitted By: Daithi MacGearailt
Receiving Lab: Canada-Whitehorse
Received: July 16, 2019
Report Date: September 05, 2019
Page: 1 of 6

CERTIFICATE OF ANALYSIS WHI19000210.1

CLIENT JOB INFORMATION

Project: LUC
Shipment ID: DDLS-19-01
P.O. Number
Number of Samples: 138

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	128	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	10	Sort, label and box pulps			WHI
FA350-Au	138	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	138	Environmental disposal charge-Fire assay lead waste			VAN
MA200	138	4 Acid digestion ICP-MS analysis	0.25	Completed	VAN
AQ200-HG	138	Hg by AR digestion ICP-MS analysis	0.5	Completed	VAN
SHP01	138	Per sample shipping charges for branch shipments			VAN
EN001-MA	138	Environmental disposal fee - Multi-acid neutralization			VAN
FA550	0	Lead collection fire assay 50G fusion - Grav finish	50	Completed	VAN

ADDITIONAL COMMENTS

Invoice To: Luckystrike Resources Ltd.
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4
Canada

CC: Dan Ferraro

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000210.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320001	Drill Core	2.19	3	0.3	3.1	10.5	65	<0.1	1.2	2.8	186	1.27	2	0.9	1.6	637	<0.1	0.1	<0.1	36	2.05
1320002	Drill Core	5.41	5	0.3	6.2	10.3	59	<0.1	1.3	2.7	191	1.26	2	0.9	1.5	624	<0.1	0.1	<0.1	36	2.06
1320003	Drill Core	3.64	4	0.2	5.4	10.2	61	<0.1	1.5	2.8	183	1.31	2	0.8	1.7	583	<0.1	0.1	<0.1	37	2.24
1320004	Drill Core	2.77	5	0.3	6.1	9.5	53	<0.1	1.5	2.4	181	1.28	2	0.7	1.9	498	<0.1	0.2	<0.1	36	1.70
1320005	Drill Core	3.87	7	0.2	11.9	9.4	72	0.2	2.8	7.9	439	2.39	4	0.9	2.2	518	<0.1	0.2	<0.1	60	2.22
1320006	Drill Core	2.71	6	0.1	17.9	8.8	70	0.4	3.0	8.4	406	2.64	3	0.9	3.5	434	<0.1	0.2	<0.1	60	1.07
1320007	Drill Core	2.67	4	0.2	2.7	10.2	77	0.2	6.3	11.4	631	2.66	6	1.3	3.4	352	<0.1	0.2	<0.1	65	4.48
1320008	Drill Core	2.80	4	0.2	25.6	8.6	61	0.4	3.3	6.8	455	2.28	6	1.5	2.8	441	<0.1	0.2	<0.1	57	2.55
1320009	Drill Core	4.54	4	0.2	2.1	8.8	68	0.2	5.1	10.2	547	2.41	4	1.9	3.7	378	<0.1	0.2	<0.1	62	3.02
1320010	Drill Core	3.70	3	0.2	2.8	18.3	73	<0.1	7.1	9.3	921	3.34	5	0.9	2.8	218	<0.1	0.6	<0.1	95	3.21
1320011	Drill Core	3.53	15	0.2	2.0	17.3	88	<0.1	9.8	10.8	976	3.36	5	1.1	3.0	191	<0.1	0.5	<0.1	68	2.79
1320012	Drill Core	3.10	20	0.2	6.7	11.0	76	<0.1	6.2	8.4	590	3.03	3	1.2	3.4	265	<0.1	0.2	<0.1	60	1.45
1320013	Drill Core	4.42	5	0.2	11.7	8.7	66	0.2	2.7	5.9	376	2.25	4	0.6	1.9	400	<0.1	0.2	<0.1	43	1.69
1320014	Drill Core	3.72	4	0.2	4.2	9.0	93	0.6	5.2	8.5	824	3.06	5	1.0	3.1	339	0.2	0.3	<0.1	78	2.71
1320015	Drill Core	4.62	4	0.2	3.3	7.5	72	<0.1	5.9	7.0	738	2.36	5	1.1	4.8	299	<0.1	0.3	<0.1	40	3.89
1320016	Drill Core	4.12	3	0.2	11.3	8.1	88	0.1	5.9	8.4	612	2.30	5	0.9	1.7	240	<0.1	0.3	<0.1	56	3.64
1320017	Drill Core	3.45	5	0.7	72.9	7.0	66	1.0	5.1	5.7	387	2.01	6	1.7	1.1	309	0.1	0.4	<0.1	54	2.98
1320018	Drill Core	3.52	3	2.2	21.7	3.8	66	0.1	18.6	10.0	866	2.58	3	8.9	1.1	293	0.3	0.3	<0.1	71	23.36
1320019	Drill Core	4.29	3	1.0	10.5	6.3	108	0.2	39.3	15.7	729	5.32	13	2.7	2.1	177	0.2	1.0	<0.1	190	7.33
1320020	Drill Core	4.35	4	0.6	4.0	5.5	22	<0.1	20.2	2.6	346	0.89	7	2.2	0.5	365	0.7	0.2	<0.1	37	30.36
1320021	Drill Core	6.82	3	0.4	5.6	2.6	38	0.1	11.4	2.1	279	0.76	7	1.8	2.6	323	0.5	0.3	<0.1	43	24.34
1320022	Drill Core	3.15	3	1.2	31.0	6.1	80	0.3	16.0	13.1	819	3.65	4	4.9	3.7	303	0.2	0.5	<0.1	109	12.15
1320023	Drill Core	3.60	3	0.4	12.8	6.2	69	0.1	18.9	15.6	628	4.05	3	4.0	4.0	309	0.1	0.4	<0.1	133	9.26
1320024	Drill Core	5.16	4	0.8	68.8	6.6	201	1.2	50.2	9.9	662	3.25	11	2.7	4.5	507	1.7	1.2	<0.1	212	0.54
1320025	Rock Pulp	0.06	6	3.2	22.6	4.0	44	0.4	23.5	11.2	477	2.53	4	0.7	1.7	239	0.2	0.8	<0.1	81	1.84
1320026	Rock Pulp	0.05	247	191.0	1935.7	39.4	274	0.7	38.8	14.3	767	4.18	16	0.7	1.7	276	0.8	1.8	0.3	119	2.76
1320027	Drill Core	5.16	5	2.7	99.5	8.8	247	2.1	79.8	9.8	509	2.37	18	2.9	3.7	326	1.0	1.0	0.1	279	0.09
1320028	Drill Core	3.20	4	8.6	113.8	9.5	303	3.2	104.7	10.2	246	2.66	34	4.1	4.1	274	3.0	2.0	0.1	445	0.22
1320029	Drill Core	4.16	5	23.0	89.2	11.6	368	3.5	101.9	11.6	362	3.21	55	4.4	4.2	382	5.8	3.9	0.1	431	0.52
1320030	Drill Core	6.39	9	4.6	56.3	78.9	149	0.8	21.9	4.8	202	2.11	48	2.4	9.8	242	1.0	1.9	0.2	80	0.21

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000210.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320001	Drill Core		0.048	5.5	3	0.41	2131	0.173	8.00	3.627	2.39	0.2	8.0	11	0.7	1.9	5.5	0.3	2	2	19.8	<0.1
1320002	Drill Core		0.044	5.1	3	0.45	1790	0.169	7.99	3.533	2.42	0.2	5.8	10	0.7	1.7	5.5	0.3	2	2	23.3	<0.1
1320003	Drill Core		0.047	5.6	3	0.45	1637	0.173	8.18	3.531	2.33	0.3	8.4	11	0.7	1.9	5.5	0.3	2	2	17.2	<0.1
1320004	Drill Core		0.046	5.0	3	0.26	1593	0.167	7.96	3.457	2.32	0.2	13.0	10	0.9	2.6	5.2	0.3	2	2	15.9	<0.1
1320005	Drill Core		0.082	9.4	5	0.27	1231	0.223	7.68	3.670	2.52	0.3	39.2	21	1.0	5.0	6.2	0.3	1	7	8.4	<0.1
1320006	Drill Core		0.073	13.9	5	0.29	915	0.243	7.97	3.887	1.98	0.4	45.3	29	1.0	6.9	6.8	0.4	1	10	8.9	<0.1
1320007	Drill Core		0.046	10.8	8	0.50	1604	0.248	6.63	1.943	3.06	0.7	76.2	24	1.3	9.8	5.6	0.4	1	12	10.8	<0.1
1320008	Drill Core		0.064	11.6	6	0.44	846	0.214	7.81	3.211	2.16	0.4	41.1	25	0.9	7.8	5.3	0.3	1	8	11.4	<0.1
1320009	Drill Core		0.049	11.7	8	0.57	1589	0.248	7.31	2.666	3.56	0.5	77.5	27	1.3	9.8	6.1	0.4	1	12	9.8	<0.1
1320010	Drill Core		0.052	10.2	16	1.31	1288	0.327	7.10	1.576	5.54	0.5	45.1	23	1.1	9.5	3.9	0.3	2	17	12.2	<0.1
1320011	Drill Core		0.054	10.5	23	1.65	791	0.304	7.54	1.392	5.49	0.5	52.5	25	1.0	11.5	4.5	0.3	2	18	17.5	<0.1
1320012	Drill Core		0.066	12.0	10	1.32	881	0.266	8.17	2.627	4.47	0.5	60.6	27	1.3	9.2	4.7	0.3	2	16	17.6	<0.1
1320013	Drill Core		0.063	8.0	4	0.58	901	0.195	7.64	2.990	1.94	0.3	17.5	18	1.3	3.4	4.9	0.3	1	4	12.1	<0.1
1320014	Drill Core		0.049	10.9	10	0.93	1201	0.306	7.92	1.903	3.45	2.5	48.5	26	1.4	8.3	5.7	0.3	1	15	14.8	<0.1
1320015	Drill Core		0.035	14.7	6	0.54	1863	0.188	6.73	0.914	2.42	0.3	58.3	33	1.7	12.5	7.5	0.5	<1	10	19.1	<0.1
1320016	Drill Core		0.060	6.0	6	0.32	545	0.260	7.21	1.356	2.87	0.3	14.3	15	1.0	4.4	5.5	0.3	1	5	14.5	<0.1
1320017	Drill Core		0.068	6.7	4	0.33	424	0.255	7.91	2.701	2.29	0.3	5.3	15	0.7	3.0	5.5	0.3	2	3	8.0	<0.1
1320018	Drill Core		0.054	9.6	27	1.10	342	0.185	3.65	0.111	0.95	0.3	5.5	18	0.5	10.5	3.9	0.2	<1	8	9.3	<0.1
1320019	Drill Core		0.134	11.5	46	0.46	700	0.526	7.84	1.206	2.29	0.5	7.9	24	1.0	10.4	9.5	0.4	2	20	15.7	<0.1
1320020	Drill Core		0.033	4.8	33	0.36	282	0.037	0.80	0.008	0.23	0.2	5.7	6	0.2	10.2	1.2	<0.1	<1	1	2.6	<0.1
1320021	Drill Core		0.070	10.2	9	4.22	173	0.093	2.58	0.013	0.50	0.2	7.7	16	0.5	9.5	7.8	0.5	<1	2	9.4	<0.1
1320022	Drill Core		0.148	19.9	19	0.40	1750	0.333	7.13	1.206	1.06	0.5	15.5	39	1.3	13.9	13.4	0.7	1	11	20.0	<0.1
1320023	Drill Core		0.137	16.8	15	0.40	737	0.400	7.99	1.869	1.20	0.2	9.2	35	1.2	10.9	10.1	0.5	1	14	22.5	<0.1
1320024	Drill Core		0.031	17.7	68	1.64	751	0.231	5.96	0.785	1.26	1.0	34.9	34	1.3	10.0	9.1	0.5	2	9	31.7	<0.1
1320025	Rock Pulp		0.052	8.2	31	0.83	479	0.275	5.34	2.141	0.85	27.3	37.7	17	0.7	12.0	3.5	0.2	<1	10	12.8	<0.1
1320026	Rock Pulp		0.059	9.2	58	1.38	582	0.368	6.65	2.320	0.90	8.9	32.4	20	1.8	14.1	4.5	0.3	<1	15	16.4	0.3
1320027	Drill Core		0.042	20.1	103	0.30	656	0.190	3.43	0.023	1.22	1.5	34.7	29	1.0	21.3	4.6	0.3	<1	8	12.2	<0.1
1320028	Drill Core		0.125	21.8	203	0.28	360	0.254	4.34	0.021	1.41	1.4	35.9	29	1.2	33.7	5.5	0.4	1	12	15.1	<0.1
1320029	Drill Core		0.214	22.3	98	0.30	1189	0.274	5.30	0.028	1.73	1.2	36.4	32	1.2	27.8	5.8	0.4	1	10	16.5	<0.1
1320030	Drill Core		0.065	27.3	31	0.27	799	0.147	6.13	0.900	3.00	1.1	26.8	51	2.4	17.0	8.2	0.6	2	7	14.2	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000210.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320001	Drill Core	53.6	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320002	Drill Core	52.8	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320003	Drill Core	54.6	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320004	Drill Core	62.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320005	Drill Core	51.9	1.1	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320006	Drill Core	51.6	1.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320007	Drill Core	73.0	2.0	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320008	Drill Core	54.4	1.1	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320009	Drill Core	83.9	2.0	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320010	Drill Core	131.2	1.2	<0.05	<0.005	<1	<0.5	0.5	<0.01	
1320011	Drill Core	137.7	1.4	<0.05	<0.005	<1	<0.5	0.6	<0.01	
1320012	Drill Core	125.4	1.7	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320013	Drill Core	56.0	0.6	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320014	Drill Core	94.3	1.3	0.07	<0.005	<1	<0.5	<0.5	<0.01	
1320015	Drill Core	53.1	1.7	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320016	Drill Core	64.4	0.5	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320017	Drill Core	72.0	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320018	Drill Core	30.8	0.2	<0.05	<0.005	1	<0.5	<0.5	<0.01	
1320019	Drill Core	60.2	0.4	<0.05	<0.005	<1	<0.5	0.5	0.02	
1320020	Drill Core	8.6	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320021	Drill Core	16.3	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320022	Drill Core	39.7	0.6	<0.05	<0.005	2	<0.5	<0.5	0.02	
1320023	Drill Core	41.5	0.4	<0.05	<0.005	2	<0.5	<0.5	<0.01	
1320024	Drill Core	55.1	0.9	<0.05	<0.005	2	<0.5	0.5	0.17	
1320025	Rock Pulp	21.8	1.1	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320026	Rock Pulp	21.7	1.0	0.11	0.084	<1	<0.5	<0.5	0.08	
1320027	Drill Core	46.5	0.9	<0.05	<0.005	2	<0.5	0.6	0.27	
1320028	Drill Core	56.4	0.9	<0.05	<0.005	3	<0.5	0.7	0.28	
1320029	Drill Core	66.8	0.9	<0.05	<0.005	8	<0.5	0.7	0.27	
1320030	Drill Core	114.2	0.8	<0.05	<0.005	2	<0.5	0.9	0.14	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000210.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320031	Drill Core	6.09	3	3.9	20.8	28.2	53	0.2	4.2	4.1	474	1.77	13	2.0	17.3	187	0.1	0.6	0.2	23	0.90
1320032	Drill Core	6.51	2	1.3	10.6	16.1	49	0.1	3.6	3.4	366	1.84	5	1.6	15.3	211	<0.1	0.4	0.3	26	1.09
1320033	Drill Core	6.23	3	1.1	8.6	17.0	39	<0.1	2.2	2.9	372	1.65	5	1.7	22.1	197	<0.1	0.4	0.2	18	0.72
1320034	Drill Core	5.39	3	0.9	7.1	14.2	29	<0.1	1.7	2.1	301	1.28	4	1.6	22.8	160	<0.1	0.3	0.1	11	0.67
1320035	Drill Core	5.07	4	0.9	16.0	14.7	35	<0.1	2.2	2.3	325	1.45	4	1.6	20.0	161	<0.1	0.3	0.2	15	1.07
1320036	Drill Core	4.57	3	0.7	10.5	13.9	50	<0.1	2.9	3.1	353	1.89	4	1.8	11.9	199	<0.1	0.3	0.3	31	2.00
1320037	Drill Core	3.75	4	2.3	9.8	20.4	41	0.2	2.1	2.9	231	1.68	8	2.6	14.0	229	<0.1	0.3	0.5	18	1.21
1320038	Drill Core	4.69	9	2.9	37.2	48.9	48	0.3	2.4	3.0	343	1.84	28	2.2	11.8	155	<0.1	0.5	0.4	19	0.26
1320039	Drill Core	4.67	14	2.0	42.7	77.7	80	0.4	4.1	4.0	313	2.02	52	1.7	10.9	178	0.3	0.5	0.3	20	0.29
1320040	Drill Core	4.47	5	2.0	43.7	30.2	86	0.3	6.7	4.6	514	2.06	13	1.8	11.5	182	0.9	0.5	0.4	30	1.86
1320041	Drill Core	4.01	5	1.9	59.8	15.0	53	0.3	2.9	3.3	381	1.94	11	2.3	15.1	194	0.2	0.8	0.6	15	0.59
1320042	Drill Core	4.68	4	3.3	36.0	18.8	40	0.3	1.6	2.8	340	1.80	13	2.3	13.1	236	<0.1	0.7	0.5	15	1.51
1320043	Drill Core	4.76	4	2.4	44.4	17.3	47	0.2	1.6	3.5	323	1.84	19	2.1	13.0	242	<0.1	0.9	0.5	16	1.69
1320044	Drill Core	2.26	4	1.9	35.5	18.7	46	0.2	1.9	3.7	418	1.92	14	1.9	12.4	252	<0.1	0.7	0.4	19	2.60
1320045	Drill Core	2.40	13	1.7	33.4	19.0	36	0.4	2.0	3.1	424	1.57	8	1.8	14.3	220	<0.1	0.7	0.7	12	2.40
1320046	Drill Core	4.57	3	0.8	6.7	13.2	47	0.1	2.6	4.6	465	2.20	5	2.0	9.1	160	<0.1	0.6	0.3	35	1.86
1320047	Drill Core	1.55	5	0.4	55.7	6.3	27	0.2	2.6	11.3	420	1.77	8	1.2	2.4	129	<0.1	0.8	<0.1	21	2.42
1320048	Drill Core	2.25	3	0.3	3.1	7.0	42	<0.1	1.9	5.3	405	2.23	4	0.9	3.4	159	<0.1	0.4	0.1	43	1.93
1320049	Drill Core	4.65	3	0.4	3.9	6.0	42	<0.1	2.0	5.4	519	2.22	4	0.9	3.5	169	<0.1	0.5	<0.1	42	2.25
1320050	Rock Pulp	0.06	7	3.3	22.6	3.9	45	0.5	23.8	11.6	482	2.57	4	0.7	1.6	236	0.2	0.8	<0.1	83	1.82
1320051	Rock Pulp	0.06	970	12.9	9523.1	17.2	119	3.2	610.9	18.7	836	7.85	4	0.3	1.4	122	0.4	14.6	0.6	95	2.09
1320052	Drill Core	4.84	3	0.3	7.2	5.4	43	<0.1	2.0	5.5	619	2.33	4	0.8	3.5	184	<0.1	0.5	<0.1	42	2.53
1320053	Drill Core	5.09	3	0.2	4.4	3.7	46	<0.1	3.5	6.9	494	2.54	4	1.0	4.4	192	<0.1	0.5	<0.1	53	1.76
1320054	Drill Core	4.35	3	0.3	7.5	4.0	46	<0.1	4.1	6.6	511	2.54	5	1.0	4.5	184	<0.1	0.5	<0.1	49	1.89
1320055	Drill Core	3.60	4	0.3	8.0	4.1	53	<0.1	6.4	8.9	613	3.11	4	0.9	3.2	158	<0.1	0.6	<0.1	74	2.50
1320056	Drill Core	3.81	4	0.4	9.8	5.5	72	<0.1	10.5	13.1	810	3.90	5	0.9	3.0	149	<0.1	0.7	<0.1	106	2.91
1320057	Drill Core	4.56	4	0.3	13.5	6.4	83	<0.1	16.6	16.2	864	4.27	5	1.3	2.2	172	<0.1	0.8	<0.1	119	2.70
1320058	Drill Core	4.34	3	0.3	7.3	4.3	54	<0.1	5.7	8.5	571	2.85	4	0.7	3.3	176	<0.1	0.6	<0.1	68	2.00
1320059	Drill Core	3.40	3	0.4	5.1	4.3	66	<0.1	11.9	10.8	721	3.50	4	0.7	3.0	158	<0.1	0.6	<0.1	84	2.67
1320060	Drill Core	1.93	3	0.2	24.4	4.8	66	<0.1	10.5	11.8	798	3.41	3	1.0	3.1	152	<0.1	0.5	<0.1	78	3.37

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000210.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320031	Drill Core		0.028	34.7	4	0.19	725	0.120	6.76	1.806	3.37	0.8	30.4	64	2.1	14.8	11.6	1.0	2	4	9.4	<0.1
1320032	Drill Core		0.037	31.1	5	0.18	1074	0.141	7.20	2.143	3.73	0.8	28.6	60	2.5	12.9	11.2	0.9	2	4	8.4	<0.1
1320033	Drill Core		0.022	37.9	3	0.16	757	0.092	6.58	2.093	3.43	0.7	34.4	72	2.0	12.3	11.6	1.2	2	3	6.3	<0.1
1320034	Drill Core		0.010	35.1	2	0.11	712	0.064	6.10	2.024	3.10	0.4	40.2	67	2.0	12.0	11.3	1.2	1	1	5.8	<0.1
1320035	Drill Core		0.011	33.1	3	0.14	963	0.084	6.20	1.860	3.36	0.5	37.0	62	2.3	13.9	10.7	1.1	1	2	5.5	<0.1
1320036	Drill Core		0.025	23.0	5	0.22	1032	0.155	6.66	1.853	2.66	0.7	27.7	45	2.7	13.3	10.0	0.8	2	5	6.4	<0.1
1320037	Drill Core		0.021	30.0	5	0.20	1654	0.138	7.85	2.397	3.38	0.6	35.1	57	2.6	15.5	11.1	0.9	2	4	5.9	<0.1
1320038	Drill Core		0.017	26.7	6	0.26	1296	0.131	6.12	1.439	2.49	1.3	25.0	54	2.9	13.4	10.2	0.8	2	6	7.0	<0.1
1320039	Drill Core		0.019	25.7	4	0.28	1515	0.129	6.41	1.757	2.32	1.0	17.5	53	3.0	12.4	9.4	0.8	2	6	7.1	<0.1
1320040	Drill Core		0.021	25.4	22	0.33	1108	0.150	6.28	1.289	2.58	1.0	24.8	49	5.2	15.0	8.7	0.7	1	6	12.0	<0.1
1320041	Drill Core		0.021	34.2	3	0.23	1256	0.141	6.78	1.899	2.52	0.9	25.2	65	2.2	13.9	10.9	0.9	2	4	5.1	<0.1
1320042	Drill Core		0.021	27.7	3	0.26	1162	0.141	6.88	1.802	2.45	0.6	24.7	56	2.7	13.4	10.8	0.8	2	4	8.0	<0.1
1320043	Drill Core		0.022	27.2	3	0.24	1207	0.132	6.61	1.672	2.47	0.7	24.0	55	2.2	13.2	10.0	0.8	2	4	9.7	<0.1
1320044	Drill Core		0.025	24.1	3	0.33	1043	0.141	6.31	1.399	2.70	0.8	24.6	50	2.5	12.7	10.0	0.8	2	4	12.2	<0.1
1320045	Drill Core		0.015	26.5	3	0.28	1057	0.098	5.79	1.611	2.29	0.4	28.7	53	6.1	13.8	9.5	0.9	1	3	10.1	<0.1
1320046	Drill Core		0.031	20.0	6	0.34	793	0.187	7.10	1.912	2.55	0.5	16.7	40	2.8	10.2	9.1	0.6	2	6	6.4	<0.1
1320047	Drill Core		0.021	8.0	2	0.25	305	0.109	3.94	1.359	1.06	0.2	4.6	15	0.8	6.0	3.2	0.2	<1	3	5.5	0.3
1320048	Drill Core		0.033	10.0	4	0.32	877	0.220	6.60	2.410	1.96	0.3	6.9	20	0.9	6.0	6.3	0.4	1	6	11.2	<0.1
1320049	Drill Core		0.032	12.8	4	0.47	662	0.216	7.09	2.479	1.92	0.4	6.8	25	0.9	7.0	5.9	0.3	1	7	8.6	<0.1
1320050	Rock Pulp		0.052	7.5	31	0.83	464	0.277	5.25	2.042	0.86	29.7	37.6	16	0.7	11.4	3.4	0.2	<1	10	12.7	<0.1
1320051	Rock Pulp		0.056	3.2	674	1.05	75	0.124	4.93	0.206	2.75	2.7	12.1	7	2.0	4.5	4.2	0.2	<1	7	8.1	1.2
1320052	Drill Core		0.032	12.7	4	0.71	916	0.213	6.76	2.621	1.66	0.3	7.7	25	0.8	8.4	5.6	0.3	1	7	8.4	<0.1
1320053	Drill Core		0.035	12.7	7	0.63	552	0.227	6.80	2.828	1.39	0.5	7.3	25	1.0	8.1	5.6	0.4	1	8	10.5	<0.1
1320054	Drill Core		0.036	12.8	6	0.71	676	0.232	6.61	2.547	1.51	0.7	7.1	26	1.0	8.5	6.3	0.4	1	8	11.5	<0.1
1320055	Drill Core		0.051	10.0	9	0.95	464	0.292	6.90	2.384	1.71	0.8	6.3	21	0.9	7.4	5.3	0.3	1	10	15.7	<0.1
1320056	Drill Core		0.064	10.9	12	1.20	710	0.377	7.34	1.903	2.07	0.7	6.8	25	1.0	8.0	6.8	0.4	1	14	18.5	<0.1
1320057	Drill Core		0.086	9.6	25	1.25	333	0.462	7.46	1.733	2.04	0.8	6.4	22	1.0	7.2	7.1	0.4	1	15	22.1	<0.1
1320058	Drill Core		0.040	11.3	10	0.77	775	0.276	7.10	2.142	1.84	0.4	5.7	23	0.8	6.8	6.0	0.3	1	10	13.2	<0.1
1320059	Drill Core		0.042	11.8	18	1.02	552	0.295	7.17	2.003	1.90	0.6	5.8	24	0.9	8.0	5.8	0.3	1	13	15.4	<0.1
1320060	Drill Core		0.050	10.5	14	1.27	750	0.286	6.87	2.632	1.47	0.9	6.2	22	0.8	8.5	6.0	0.3	1	12	17.5	0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000210.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320031	Drill Core	123.0	1.0	<0.05	<0.005	<1	<0.5	0.7	0.04	
1320032	Drill Core	120.1	0.9	<0.05	<0.005	<1	<0.5	0.7	0.01	
1320033	Drill Core	113.0	1.2	<0.05	<0.005	<1	<0.5	0.6	0.01	
1320034	Drill Core	94.1	1.4	<0.05	<0.005	<1	<0.5	0.5	<0.01	
1320035	Drill Core	111.9	1.3	<0.05	<0.005	<1	<0.5	0.6	<0.01	
1320036	Drill Core	93.7	0.9	<0.05	<0.005	<1	<0.5	0.7	<0.01	
1320037	Drill Core	109.4	1.0	<0.05	<0.005	<1	<0.5	0.8	0.04	
1320038	Drill Core	114.2	0.8	<0.05	<0.005	<1	<0.5	0.9	0.03	
1320039	Drill Core	95.8	0.6	<0.05	<0.005	<1	<0.5	0.8	0.02	
1320040	Drill Core	96.5	0.8	<0.05	<0.005	<1	<0.5	0.6	0.04	
1320041	Drill Core	108.1	0.8	<0.05	<0.005	<1	<0.5	0.8	0.06	
1320042	Drill Core	96.8	0.8	<0.05	<0.005	<1	<0.5	0.6	0.05	
1320043	Drill Core	96.1	0.8	<0.05	<0.005	<1	<0.5	0.5	0.03	
1320044	Drill Core	97.7	0.8	<0.05	<0.005	<1	<0.5	0.6	0.03	
1320045	Drill Core	76.0	0.9	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320046	Drill Core	106.3	0.6	<0.05	<0.005	<1	<0.5	0.6	0.01	
1320047	Drill Core	46.0	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320048	Drill Core	74.2	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320049	Drill Core	75.9	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320050	Rock Pulp	20.6	1.1	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320051	Rock Pulp	54.8	0.4	0.14	0.008	10	<0.5	<0.5	1.25	
1320052	Drill Core	66.3	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320053	Drill Core	59.0	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320054	Drill Core	64.3	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320055	Drill Core	64.6	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320056	Drill Core	76.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320057	Drill Core	69.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320058	Drill Core	71.7	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320059	Drill Core	79.1	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320060	Drill Core	58.6	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000210.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320061	Drill Core	2.39	3	2.3	33.0	3.3	44	<0.1	4.1	7.7	528	2.50	4	0.9	4.3	166	<0.1	0.5	<0.1	55	2.18
1320062	Drill Core	4.98	3	1.6	16.2	4.3	49	<0.1	5.2	8.2	596	2.80	3	1.0	5.4	167	<0.1	0.5	<0.1	64	2.52
1320063	Drill Core	5.02	2	0.4	27.7	6.7	83	<0.1	11.4	15.3	926	4.29	5	0.8	2.9	145	<0.1	0.6	0.1	124	3.66
1320064	Drill Core	3.42	3	0.2	9.9	4.1	30	<0.1	3.0	5.1	332	1.76	4	0.7	6.5	168	<0.1	0.8	<0.1	38	1.94
1320065	Drill Core	1.57	3	0.2	14.6	2.7	15	<0.1	2.1	2.5	234	1.01	4	0.5	6.8	139	<0.1	0.8	<0.1	8	2.38
1320066	Drill Core	5.47	3	0.4	12.6	7.4	59	<0.1	6.4	10.8	698	3.37	5	0.8	3.3	230	<0.1	1.4	<0.1	90	3.26
1320067	Drill Core	4.68	120	13.7	24.4	29.5	70	0.2	15.6	10.2	594	2.77	54	3.9	9.7	783	0.1	24.9	0.4	69	2.29
1320068	Drill Core	4.85	33	4.9	15.7	21.2	70	<0.1	14.4	8.0	655	2.96	37	1.9	11.3	353	<0.1	7.9	0.4	72	3.30
1320069	Drill Core	4.54	111	4.3	39.9	13.5	88	0.2	11.5	12.1	715	3.80	33	2.0	6.4	337	0.6	5.7	0.2	66	2.38
1320070	Drill Core	4.08	70	3.2	25.4	11.4	61	<0.1	8.8	10.0	607	4.16	14	0.6	2.9	277	0.4	3.4	0.1	121	2.67
1320071	Drill Core	3.74	41	9.3	34.4	16.1	46	0.2	9.4	8.5	494	4.86	16	0.6	2.8	255	0.1	4.0	0.3	176	2.15
1320072	Drill Core	4.53	156	11.1	41.9	15.9	90	0.2	17.9	16.4	750	4.07	6	0.4	2.0	200	0.2	2.0	<0.1	104	2.47
1320073	Drill Core	4.34	857	2.3	50.8	18.7	116	1.0	17.6	15.5	832	4.71	6	0.6	2.4	195	0.7	1.7	<0.1	84	2.23
1320074	Drill Core	3.80	157	0.7	49.8	12.5	101	0.2	15.4	21.2	997	5.87	7	0.9	2.5	139	0.5	2.1	0.1	213	3.59
1320075	Rock Pulp	0.06	7	3.1	23.3	4.2	43	0.3	24.2	11.1	510	2.53	4	0.8	2.1	232	0.3	0.8	<0.1	83	1.73
1320076	Rock Pulp	0.06	254	185.4	1903.1	41.7	273	0.6	38.5	14.4	769	4.07	16	0.7	1.8	269	0.8	1.8	0.3	119	2.52
1320077	Drill Core	4.41	112	0.8	24.1	11.5	67	0.1	11.5	13.0	716	3.99	8	0.9	3.0	199	0.2	3.0	<0.1	136	2.72
1320078	Drill Core	3.76	138	0.4	45.4	9.2	47	0.5	8.4	6.4	470	2.46	5	0.6	3.2	89	<0.1	2.1	0.3	58	1.49
1320079	Drill Core	4.92	134	0.4	72.8	12.4	47	0.4	9.4	7.3	436	2.52	5	0.7	4.7	123	<0.1	1.7	<0.1	70	1.42
1320080	Drill Core	4.84	114	0.9	53.7	10.9	65	0.3	18.0	18.3	750	4.26	4	0.7	2.5	108	0.2	1.8	<0.1	147	3.62
1320081	Drill Core	4.14	127	0.7	33.9	12.2	62	0.6	18.4	15.7	763	4.55	5	0.6	3.4	146	0.2	1.8	1.1	120	3.52
1320082	Drill Core	4.54	18	0.4	63.9	12.7	61	0.1	39.9	13.0	621	3.35	7	1.0	7.3	296	<0.1	1.4	<0.1	96	2.14
1320083	Drill Core	4.74	36	0.4	24.8	13.4	54	<0.1	44.9	15.2	602	3.95	9	1.0	8.6	341	<0.1	1.5	<0.1	95	1.97
1320084	Drill Core	5.04	5	0.8	61.0	39.1	81	<0.1	115.7	30.5	991	6.16	19	1.5	16.6	1226	<0.1	2.1	<0.1	200	3.93
1320085	Drill Core	4.94	14	1.2	86.1	12.8	55	0.1	33.6	21.6	813	4.85	6	0.9	3.7	228	<0.1	2.0	<0.1	238	4.06
1320086	Drill Core	4.91	42	0.7	74.5	12.7	73	0.2	31.8	29.9	1030	5.81	8	0.9	2.1	113	0.2	3.3	0.4	278	5.90
1320087	Drill Core	4.57	60	1.0	53.5	10.3	70	0.1	27.2	22.4	841	4.38	11	1.0	3.7	178	0.2	3.3	<0.1	166	4.36
1320088	Drill Core	3.98	198	0.9	33.9	10.3	59	0.3	21.1	18.5	788	4.09	4	0.6	3.4	155	0.1	1.9	<0.1	149	4.19
1320089	Drill Core	4.93	122	1.3	9.6	5.4	31	<0.1	4.2	5.0	329	2.05	4	0.4	2.7	75	<0.1	1.0	<0.1	37	1.08
1320090	Drill Core	4.82	57	0.4	13.2	9.9	34	<0.1	4.1	5.7	343	2.30	4	0.4	2.9	126	<0.1	0.8	<0.1	43	1.04

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000210.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320061	Drill Core		0.038	14.0	6	0.85	470	0.243	6.99	2.695	1.53	0.7	6.3	27	0.8	8.1	5.7	0.3	1	9	12.1	<0.1
1320062	Drill Core		0.042	13.5	8	1.00	833	0.254	6.63	2.130	1.73	0.7	8.2	27	0.9	7.1	5.1	0.3	1	10	12.2	<0.1
1320063	Drill Core		0.062	10.6	16	1.65	469	0.385	7.40	1.637	2.09	0.8	5.1	26	1.1	10.1	5.3	0.3	1	16	19.0	<0.1
1320064	Drill Core		0.035	15.2	6	0.69	439	0.178	6.87	1.653	1.75	0.4	10.4	28	0.6	5.4	4.2	0.3	<1	5	16.9	<0.1
1320065	Drill Core		0.007	15.8	2	0.51	1126	0.040	3.59	0.882	0.84	0.2	10.0	25	0.7	3.3	1.3	0.1	<1	<1	11.7	<0.1
1320066	Drill Core		0.048	10.4	10	1.20	571	0.301	6.96	1.398	2.12	0.8	6.6	23	1.0	7.0	4.8	0.3	1	12	11.1	<0.1
1320067	Drill Core		0.065	23.3	22	0.76	1573	0.229	7.59	0.050	1.25	5.5	115.7	45	1.9	11.2	9.3	0.6	2	8	55.8	<0.1
1320068	Drill Core		0.071	27.6	21	0.96	939	0.221	8.13	0.043	0.91	3.4	123.1	52	1.6	12.4	9.8	0.6	1	7	73.3	<0.1
1320069	Drill Core		0.045	23.3	13	0.89	845	0.206	6.18	0.032	0.66	7.4	31.6	45	0.9	9.8	4.3	0.3	1	14	63.3	<0.1
1320070	Drill Core		0.056	9.7	11	1.08	513	0.285	7.67	0.033	1.58	5.8	8.6	21	1.3	6.6	3.7	0.3	<1	13	47.0	<0.1
1320071	Drill Core		0.067	9.7	26	0.92	563	0.339	9.14	0.041	2.90	4.5	9.9	22	1.8	8.5	4.0	0.3	1	18	40.0	<0.1
1320072	Drill Core		0.039	9.1	27	1.10	508	0.175	6.93	0.028	0.55	8.6	6.0	19	1.5	4.6	1.9	0.1	<1	16	61.9	<0.1
1320073	Drill Core		0.050	10.1	27	1.30	1155	0.239	5.77	0.667	0.91	9.3	4.7	22	1.5	6.7	2.4	0.2	<1	17	33.8	<0.1
1320074	Drill Core		0.066	11.0	15	1.73	361	0.418	7.04	0.694	2.39	11.4	4.7	24	1.9	9.6	2.8	0.2	1	22	20.5	0.2
1320075	Rock Pulp		0.054	9.0	31	0.84	473	0.288	5.11	2.139	0.82	27.4	35.6	19	0.6	13.2	3.4	0.2	<1	10	12.9	<0.1
1320076	Rock Pulp		0.060	9.1	57	1.34	588	0.385	6.50	2.313	0.88	9.0	28.6	18	1.7	14.7	4.4	0.3	1	14	16.1	0.3
1320077	Drill Core		0.055	14.0	14	1.30	931	0.309	6.45	0.034	1.74	5.3	6.2	29	2.1	11.5	2.9	0.2	1	16	25.2	<0.1
1320078	Drill Core		0.033	13.4	7	0.83	793	0.158	6.20	0.027	2.17	4.4	6.1	27	1.2	10.8	2.4	0.1	<1	11	19.4	<0.1
1320079	Drill Core		0.031	15.5	12	0.71	480	0.184	5.67	0.896	1.98	4.8	6.8	33	1.0	12.8	2.8	0.2	<1	11	12.1	<0.1
1320080	Drill Core		0.058	10.1	47	1.74	696	0.293	6.10	0.581	2.59	5.9	6.7	20	1.8	9.7	2.9	0.2	<1	22	15.4	0.1
1320081	Drill Core		0.065	15.3	28	1.61	435	0.265	6.56	0.736	2.33	6.1	8.7	31	1.2	12.2	2.9	0.2	<1	18	15.7	0.1
1320082	Drill Core		0.066	22.6	93	1.24	958	0.327	6.87	0.707	2.32	1.4	21.2	45	3.6	18.5	5.1	0.3	<1	16	13.3	<0.1
1320083	Drill Core		0.070	20.3	96	1.07	769	0.373	7.29	0.536	2.43	1.7	39.9	44	2.3	16.7	6.7	0.4	<1	16	18.3	<0.1
1320084	Drill Core		0.145	31.7	270	1.69	1138	0.657	8.70	0.244	2.40	2.0	86.9	68	3.1	31.3	13.5	0.8	<1	24	33.0	<0.1
1320085	Drill Core		0.112	12.5	107	1.91	617	0.467	6.49	0.180	2.22	3.3	15.3	28	1.2	15.8	4.0	0.2	1	30	17.3	0.1
1320086	Drill Core		0.113	11.0	119	2.90	422	0.477	5.19	0.025	2.20	4.1	7.9	24	1.1	13.5	2.6	0.2	1	37	13.7	0.2
1320087	Drill Core		0.082	14.7	86	2.11	534	0.269	5.54	0.029	1.85	6.9	9.2	29	0.8	11.4	2.8	0.2	<1	23	20.1	0.1
1320088	Drill Core		0.083	14.2	77	1.89	295	0.288	5.22	0.356	1.54	5.2	7.7	29	0.9	9.5	3.2	0.2	<1	21	15.7	0.1
1320089	Drill Core		0.018	11.1	4	0.53	622	0.130	5.48	2.112	1.50	7.0	5.6	23	0.6	8.1	1.5	<0.1	<1	8	9.2	<0.1
1320090	Drill Core		0.024	10.7	5	0.57	637	0.157	6.46	1.979	1.81	4.4	5.8	22	0.8	12.2	2.1	0.1	<1	10	12.8	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000210.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320061	Drill Core	63.2	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320062	Drill Core	59.5	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320063	Drill Core	64.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320064	Drill Core	62.4	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320065	Drill Core	29.7	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320066	Drill Core	57.9	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320067	Drill Core	33.7	2.9	<0.05	0.006	1	<0.5	<0.5	1.00	
1320068	Drill Core	26.0	3.1	<0.05	0.021	<1	<0.5	<0.5	0.72	
1320069	Drill Core	21.9	0.9	0.08	0.005	<1	<0.5	<0.5	0.53	
1320070	Drill Core	26.1	0.4	0.09	<0.005	<1	<0.5	<0.5	0.14	
1320071	Drill Core	48.7	0.4	0.06	<0.005	<1	<0.5	<0.5	0.06	
1320072	Drill Core	11.7	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320073	Drill Core	16.6	0.2	<0.05	<0.005	<1	0.6	<0.5	0.08	
1320074	Drill Core	46.1	0.3	0.05	<0.005	<1	<0.5	<0.5	0.06	
1320075	Rock Pulp	21.2	1.0	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320076	Rock Pulp	20.3	1.0	0.05	0.103	<1	<0.5	<0.5	0.10	
1320077	Drill Core	41.8	0.3	0.07	<0.005	<1	<0.5	<0.5	0.05	
1320078	Drill Core	42.7	0.3	0.10	<0.005	<1	<0.5	<0.5	0.01	
1320079	Drill Core	37.7	0.3	0.07	<0.005	<1	<0.5	<0.5	0.04	
1320080	Drill Core	47.4	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320081	Drill Core	44.4	0.4	<0.05	<0.005	1	<0.5	<0.5	0.02	
1320082	Drill Core	57.9	0.9	0.08	<0.005	<1	<0.5	<0.5	<0.01	
1320083	Drill Core	50.1	1.3	0.10	<0.005	<1	<0.5	<0.5	0.01	
1320084	Drill Core	53.5	3.1	0.11	<0.005	<1	<0.5	0.5	0.02	
1320085	Drill Core	54.4	0.9	0.06	<0.005	<1	0.6	<0.5	<0.01	
1320086	Drill Core	54.1	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320087	Drill Core	38.6	0.5	0.08	<0.005	<1	<0.5	<0.5	0.02	
1320088	Drill Core	37.5	0.5	0.06	<0.005	<1	0.7	<0.5	<0.01	
1320089	Drill Core	24.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320090	Drill Core	34.3	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000210.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320091	Drill Core	4.47	59	0.3	16.5	26.1	43	0.8	10.8	7.8	532	2.82	4	0.4	3.2	134	0.1	0.9	1.1	61	2.21
1320092	Drill Core	5.17	232	0.4	18.2	8.5	44	0.2	13.7	8.0	533	2.79	6	0.4	3.9	170	<0.1	1.4	<0.1	68	2.42
1320093	Drill Core	3.58	62	0.7	27.4	6.1	44	0.1	16.5	8.3	554	2.87	6	0.6	3.8	159	<0.1	1.4	<0.1	71	2.48
1320094	Drill Core	4.07	104	0.4	8.5	5.1	31	0.2	3.0	5.2	353	2.18	3	0.3	3.0	96	<0.1	0.9	<0.1	38	1.73
1320095	Drill Core	5.14	50	0.4	5.3	5.8	35	<0.1	4.5	5.7	455	2.27	4	0.3	3.4	165	<0.1	0.8	<0.1	42	2.34
1320096	Drill Core	4.10	63	1.5	8.5	8.5	39	<0.1	7.3	5.8	443	2.31	6	0.5	2.8	234	<0.1	0.7	<0.1	47	2.12
1320097	Drill Core	4.19	152	0.4	5.1	5.3	32	<0.1	4.1	4.9	382	2.04	4	0.3	2.2	145	<0.1	0.6	<0.1	34	2.03
1320098	Drill Core	4.39	95	0.9	8.2	6.1	29	<0.1	2.5	6.7	387	2.16	3	0.4	2.4	171	0.1	0.8	<0.1	37	2.29
1320099	Drill Core	4.93	28	0.3	11.2	4.7	35	<0.1	6.0	7.1	475	2.22	4	0.3	1.8	152	<0.1	0.9	<0.1	54	2.92
1320100	Rock Pulp	0.05	9	3.3	24.0	4.4	45	0.3	24.7	12.5	511	2.62	4	0.8	2.0	250	0.1	0.7	<0.1	85	1.80
1320101	Rock Pulp	0.05	>10000	13.4	68.2	22.6	75	1.0	22.9	4.2	514	3.59	773	3.5	3.6	40	0.8	160.6	0.6	113	15.11
1320102	Drill Core	4.24	26	0.2	11.3	4.6	25	<0.1	3.9	4.5	354	1.84	4	0.3	1.8	175	0.1	0.7	<0.1	40	2.27
1320103	Drill Core	4.98	9	0.3	7.7	4.0	25	<0.1	2.2	4.2	396	2.06	4	0.3	1.6	152	<0.1	0.6	<0.1	35	1.98
1320104	Drill Core	4.48	63	0.3	8.3	4.5	59	<0.1	3.3	7.5	438	3.15	4	0.8	5.3	186	<0.1	1.1	<0.1	95	2.65
1320105	Drill Core	5.13	6	0.2	15.3	4.2	87	<0.1	4.0	8.1	355	3.18	5	1.9	7.1	231	<0.1	1.2	<0.1	127	3.52
1320106	Drill Core	5.18	7	0.4	7.0	3.5	60	<0.1	2.8	6.6	366	2.84	4	0.9	5.4	227	<0.1	2.1	0.1	82	3.37
1320107	Drill Core	4.88	11	0.6	3.6	3.3	24	<0.1	1.9	4.0	264	2.03	4	0.4	1.9	122	<0.1	1.5	<0.1	33	2.14
1320108	Drill Core	3.32	15	1.9	4.5	4.6	27	<0.1	2.9	4.8	355	2.19	4	0.3	3.3	165	<0.1	2.1	<0.1	43	2.33
1320109	Drill Core	4.65	46	0.5	8.8	3.8	27	<0.1	4.8	5.2	373	2.08	3	0.3	3.0	130	<0.1	1.6	<0.1	40	2.23
1320110	Drill Core	4.60	8	0.4	6.3	2.8	22	<0.1	3.0	3.2	257	1.36	3	0.1	1.0	131	<0.1	1.8	<0.1	26	1.58
1320111	Drill Core	4.93	66	0.4	4.5	3.9	31	<0.1	2.5	5.0	428	2.28	5	0.3	2.1	122	<0.1	2.7	<0.1	37	2.18
1320112	Drill Core	4.06	91	0.8	7.3	4.6	35	<0.1	2.5	6.1	477	2.93	4	0.3	0.9	194	<0.1	1.9	<0.1	43	1.97
1320113	Drill Core	5.00	28	0.4	10.8	3.7	51	<0.1	4.0	8.4	599	3.31	3	0.2	2.2	118	<0.1	1.9	<0.1	52	2.43
1320114	Drill Core	4.24	151	0.4	59.8	5.0	122	0.3	16.5	17.4	1175	4.41	4	0.2	0.4	99	0.4	2.5	<0.1	150	3.24
1320115	Drill Core	4.82	85	0.7	72.5	7.8	152	0.2	22.7	26.0	1545	6.44	5	0.3	0.6	132	0.4	4.6	<0.1	259	4.34
1320116	Drill Core	4.94	8	0.5	48.2	5.8	229	<0.1	22.0	27.2	1788	6.91	4	0.4	1.1	156	0.3	3.5	<0.1	214	3.93
1320117	Drill Core	4.82	153	0.5	63.8	6.7	82	0.4	10.8	7.9	570	3.51	6	0.4	2.1	237	0.1	6.7	0.1	42	2.22
1320118	Drill Core	5.05	38	1.7	74.6	6.1	94	0.2	19.8	18.2	1253	5.16	4	0.5	2.4	272	0.2	3.0	0.1	129	3.46
1320119	Drill Core	4.48	90	1.2	18.6	4.8	50	0.2	5.7	4.4	388	3.37	5	0.4	2.2	193	<0.1	4.7	0.2	24	2.06
1320120	Drill Core	4.12	547	1.3	14.2	5.0	61	0.4	6.8	5.9	487	3.37	6	0.3	1.9	146	0.2	5.6	0.2	23	1.76

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000210.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
	Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320091	Drill Core	0.031	12.7	24	0.79	567	0.190	6.53	1.960	1.80	2.8	6.3	27	0.8	12.7	2.5	0.2	<1	13	13.2	<0.1
1320092	Drill Core	0.035	14.4	26	0.84	675	0.203	6.09	1.826	1.83	2.1	8.9	32	0.8	15.0	3.0	0.2	1	14	10.1	<0.1
1320093	Drill Core	0.030	13.7	38	0.63	586	0.204	6.61	1.690	2.51	4.9	6.8	30	2.5	15.0	2.6	0.2	<1	15	10.6	<0.1
1320094	Drill Core	0.021	12.0	4	0.32	849	0.127	5.96	2.663	1.61	5.9	5.3	25	0.5	6.1	1.7	<0.1	<1	7	6.8	<0.1
1320095	Drill Core	0.034	14.3	4	0.50	894	0.152	6.13	2.942	1.11	6.3	6.3	31	0.4	7.6	2.2	0.1	1	9	7.6	<0.1
1320096	Drill Core	0.039	11.1	9	0.54	827	0.159	6.97	2.334	1.82	4.4	7.7	24	0.8	9.1	2.5	0.1	1	9	11.4	<0.1
1320097	Drill Core	0.022	8.9	8	0.43	1087	0.113	6.36	3.313	1.07	6.4	6.0	20	0.4	7.1	1.6	<0.1	<1	8	7.7	<0.1
1320098	Drill Core	0.019	9.2	3	0.41	606	0.128	6.11	3.475	1.09	4.6	7.6	22	0.5	10.7	2.0	0.1	<1	10	7.2	0.2
1320099	Drill Core	0.023	7.6	24	0.74	495	0.152	6.14	2.288	1.89	3.6	7.7	18	0.5	12.3	2.6	0.1	<1	11	9.6	<0.1
1320100	Rock Pulp	0.055	8.6	37	0.86	487	0.301	5.22	2.247	0.86	27.5	37.3	19	0.7	13.5	3.5	0.2	<1	11	12.6	<0.1
1320101	Rock Pulp	0.065	13.9	43	0.75	34	0.119	2.11	0.016	0.41	>200	25.4	29	1.8	17.4	3.1	0.2	<1	4	42.4	1.8
1320102	Drill Core	0.020	7.8	12	0.47	665	0.128	6.61	3.102	1.62	4.0	6.5	17	0.6	9.8	1.9	0.1	<1	9	9.1	<0.1
1320103	Drill Core	0.025	7.4	3	0.44	709	0.128	6.87	4.313	0.81	3.2	4.7	16	0.7	7.2	1.6	0.1	<1	8	8.2	<0.1
1320104	Drill Core	0.056	19.2	4	0.62	799	0.239	6.52	2.032	1.64	3.3	6.9	40	1.5	11.1	3.6	0.2	<1	11	12.0	<0.1
1320105	Drill Core	0.087	24.5	6	0.52	1531	0.316	6.11	1.103	1.82	0.8	6.5	51	2.3	14.0	4.7	0.3	<1	10	14.2	<0.1
1320106	Drill Core	0.059	17.1	4	0.46	826	0.229	6.17	1.429	1.61	1.1	7.0	36	1.5	15.2	3.6	0.2	<1	10	12.5	<0.1
1320107	Drill Core	0.028	6.8	2	0.38	419	0.122	6.61	1.620	1.64	2.1	9.3	15	0.8	10.6	1.7	0.1	<1	9	14.7	<0.1
1320108	Drill Core	0.026	11.8	3	0.54	412	0.123	6.45	2.483	1.11	2.2	8.3	25	0.8	10.0	2.1	0.1	<1	9	11.4	<0.1
1320109	Drill Core	0.025	12.3	8	0.59	497	0.108	6.16	3.321	0.71	3.6	6.8	26	0.7	7.2	1.7	0.1	<1	8	6.7	<0.1
1320110	Drill Core	0.009	4.0	4	0.53	985	0.060	7.13	3.446	1.06	2.1	4.2	9	0.7	3.1	0.8	<0.1	<1	3	9.6	<0.1
1320111	Drill Core	0.025	10.0	3	0.79	492	0.101	6.14	2.255	1.02	4.3	7.2	24	0.8	6.7	1.6	0.1	<1	9	14.5	0.1
1320112	Drill Core	0.051	7.3	3	0.75	441	0.142	6.97	3.182	0.98	4.6	6.2	17	1.0	7.5	1.9	0.1	<1	10	9.4	0.1
1320113	Drill Core	0.025	10.2	3	1.13	623	0.125	5.86	2.411	1.34	5.5	5.7	24	1.1	7.1	1.5	<0.1	<1	10	8.6	0.3
1320114	Drill Core	0.031	3.1	23	1.37	396	0.235	6.84	1.320	1.57	2.3	3.2	8	0.9	6.8	1.0	<0.1	1	15	14.7	0.3
1320115	Drill Core	0.056	5.5	43	2.16	389	0.298	6.86	0.207	2.53	3.7	4.1	13	0.9	9.7	0.8	<0.1	1	28	16.2	0.4
1320116	Drill Core	0.053	8.0	32	2.50	281	0.320	6.55	0.558	1.93	1.8	5.5	18	1.3	11.5	1.9	0.1	1	26	13.3	0.8
1320117	Drill Core	0.020	9.5	16	1.11	94	0.126	5.79	1.330	0.70	1.4	10.0	23	1.0	10.1	2.1	0.1	<1	11	20.9	1.0
1320118	Drill Core	0.060	9.8	39	1.84	166	0.214	6.67	1.948	1.44	2.6	5.4	22	1.2	9.5	1.9	0.1	<1	19	11.1	1.2
1320119	Drill Core	0.015	10.8	10	0.92	58	0.071	5.69	2.089	0.57	1.8	6.6	27	0.8	6.1	1.3	<0.1	<1	10	13.4	1.6
1320120	Drill Core	0.015	9.0	5	1.06	67	0.064	5.81	1.180	0.55	4.3	6.7	21	0.9	5.0	1.1	<0.1	<1	9	22.0	1.4

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000210.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320091	Drill Core	35.9	0.3	0.06	<0.005	<1	<0.5	<0.5	<0.01	
1320092	Drill Core	38.9	0.5	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320093	Drill Core	43.4	0.3	0.06	<0.005	<1	<0.5	<0.5	0.01	
1320094	Drill Core	22.7	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320095	Drill Core	21.0	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320096	Drill Core	34.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320097	Drill Core	17.3	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320098	Drill Core	19.0	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320099	Drill Core	31.6	0.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320100	Rock Pulp	21.4	1.1	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320101	Rock Pulp	24.4	0.7	<0.05	0.007	2	0.7	4.1	5.12	I.S.
1320102	Drill Core	26.4	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320103	Drill Core	15.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320104	Drill Core	38.2	0.3	0.07	<0.005	<1	<0.5	<0.5	<0.01	
1320105	Drill Core	45.4	0.3	0.09	<0.005	<1	<0.5	<0.5	<0.01	
1320106	Drill Core	36.6	0.3	0.08	<0.005	<1	<0.5	<0.5	<0.01	
1320107	Drill Core	31.4	0.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320108	Drill Core	21.9	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320109	Drill Core	12.5	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320110	Drill Core	16.9	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320111	Drill Core	17.4	0.2	<0.05	0.005	<1	<0.5	<0.5	0.04	
1320112	Drill Core	17.1	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320113	Drill Core	24.3	0.2	0.06	<0.005	<1	<0.5	<0.5	0.03	
1320114	Drill Core	33.5	0.2	0.06	<0.005	<1	<0.5	<0.5	<0.01	
1320115	Drill Core	54.1	0.3	0.10	<0.005	<1	<0.5	<0.5	0.01	
1320116	Drill Core	53.4	0.3	0.17	<0.005	<1	<0.5	<0.5	<0.01	
1320117	Drill Core	16.5	0.3	0.09	<0.005	<1	<0.5	<0.5	0.20	
1320118	Drill Core	38.7	0.2	0.12	<0.005	<1	<0.5	<0.5	0.03	
1320119	Drill Core	12.3	0.2	<0.05	0.006	1	<0.5	<0.5	0.11	
1320120	Drill Core	10.7	0.3	<0.05	0.014	<1	<0.5	<0.5	0.08	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000210.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320121	Drill Core	4.95	180	0.6	11.8	4.5	73	0.2	3.9	3.9	514	3.76	6	0.4	2.3	137	0.2	8.5	<0.1	19	1.50
1320122	Drill Core	4.05	28	0.4	8.9	5.6	75	0.1	3.0	3.0	532	3.70	11	0.5	2.3	194	0.1	33.2	<0.1	19	1.31
1320123	Drill Core	4.56	197	1.2	14.2	5.1	64	0.2	3.6	3.6	541	3.23	8	1.1	1.9	167	0.2	6.5	<0.1	22	1.93
1320124	Drill Core	4.11	445	1.6	21.7	6.1	78	0.4	6.1	6.0	715	3.74	8	0.7	1.8	232	0.3	7.3	<0.1	30	3.36
1320125	Rock Pulp	0.05	10	3.3	23.3	4.1	45	0.6	24.5	11.4	488	2.63	3	0.7	1.8	242	0.2	0.8	<0.1	84	1.88
1320126	Rock Pulp	0.06	260	184.0	1940.4	38.1	268	0.6	39.0	14.1	755	4.21	16	0.6	1.6	269	0.8	1.7	0.3	119	2.62
1320127	Drill Core	5.61	22	0.6	19.2	4.4	72	<0.1	4.6	5.1	618	3.57	5	0.4	2.6	160	0.1	4.2	<0.1	30	2.38
1320128	Drill Core	4.25	83	1.0	69.2	8.1	123	0.3	15.2	17.6	1124	5.10	9	1.0	1.8	264	0.3	10.4	<0.1	118	3.63
1320129	Drill Core	4.50	69	0.9	10.8	6.4	61	0.1	8.1	8.3	507	3.01	11	0.6	2.3	278	0.2	13.1	<0.1	56	2.21
1320130	Drill Core	4.03	104	0.5	12.4	4.2	52	<0.1	4.2	3.7	410	2.69	8	0.3	2.3	118	0.1	22.7	<0.1	31	2.07
1320131	Drill Core	3.60	102	0.4	7.2	5.4	38	<0.1	2.8	2.9	359	2.27	11	0.3	2.0	192	<0.1	29.1	<0.1	16	1.88
1320132	Drill Core	4.70	8	1.3	49.3	6.9	77	<0.1	15.0	18.5	914	5.08	10	0.3	1.6	213	0.1	30.5	<0.1	203	3.79
1320133	Drill Core	3.87	17	0.8	46.2	8.3	85	0.1	20.1	22.0	945	5.76	8	0.4	1.5	193	0.1	14.8	<0.1	232	3.86
1320134	Drill Core	4.28	5	1.0	10.5	9.4	71	<0.1	10.4	11.8	825	4.04	7	0.3	1.5	243	0.1	15.3	<0.1	125	3.69
1320135	Drill Core	3.31	90	1.7	6.4	6.7	67	<0.1	7.7	12.5	624	3.83	15	0.2	1.8	85	0.1	31.9	<0.1	82	1.91
1320136	Drill Core	4.44	53	7.6	12.4	7.7	52	0.1	5.8	9.4	566	2.88	7	0.2	1.3	88	0.2	19.9	<0.1	61	1.99
1320137	Drill Core	4.26	68	1.7	16.1	8.4	50	0.1	6.7	11.8	773	3.83	5	0.2	1.6	85	0.3	10.3	<0.1	92	2.88
1320138	Drill Core	3.34	47	6.6	12.1	9.4	51	<0.1	6.1	10.4	765	3.44	6	0.2	1.1	87	0.3	19.4	<0.1	95	3.10

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000210.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
	Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320121	Drill Core	0.014	12.6	2	1.06	201	0.069	5.92	0.033	0.74	2.7	5.0	28	1.2	5.7	1.3	<0.1	<1	12	30.8	1.1
1320122	Drill Core	0.017	12.6	2	0.92	125	0.070	6.19	0.023	0.78	2.6	5.3	29	1.2	5.7	1.3	<0.1	<1	12	37.3	1.2
1320123	Drill Core	0.015	11.9	2	1.07	136	0.062	5.75	0.025	0.84	3.2	6.4	26	0.9	6.7	1.3	<0.1	<1	11	29.1	1.2
1320124	Drill Core	0.037	12.5	10	1.66	155	0.082	5.82	0.471	0.87	4.6	6.7	28	0.8	5.8	1.2	<0.1	<1	11	28.8	1.1
1320125	Rock Pulp	0.053	8.4	31	0.82	482	0.281	5.34	2.132	0.87	28.2	37.6	18	0.7	11.7	3.4	0.2	<1	10	12.5	<0.1
1320126	Rock Pulp	0.057	8.4	56	1.33	560	0.366	6.55	2.265	0.87	8.5	29.5	18	1.8	13.0	4.2	0.3	<1	15	15.6	0.3
1320127	Drill Core	0.024	11.1	5	1.16	87	0.105	5.84	1.183	1.05	1.9	5.9	27	0.9	6.7	1.5	<0.1	<1	13	15.6	1.1
1320128	Drill Core	0.031	11.0	30	1.75	80	0.141	5.78	0.265	1.29	2.9	8.3	26	1.5	6.5	1.1	<0.1	1	16	22.0	1.4
1320129	Drill Core	0.031	11.4	12	1.11	161	0.123	6.79	0.030	1.15	4.3	8.6	25	1.3	7.0	1.6	0.1	<1	11	34.1	0.4
1320130	Drill Core	0.009	10.2	3	0.99	170	0.085	6.51	0.107	0.63	3.3	7.8	24	1.1	4.4	1.7	0.1	<1	10	36.1	0.9
1320131	Drill Core	0.020	9.2	3	0.78	235	0.065	6.27	0.169	0.63	1.8	7.3	22	1.0	4.6	1.6	0.1	<1	9	36.6	0.8
1320132	Drill Core	0.050	4.9	21	1.76	368	0.255	7.50	0.921	1.42	2.0	7.5	12	0.8	8.0	1.3	<0.1	<1	26	23.0	0.2
1320133	Drill Core	0.060	5.8	22	2.05	319	0.284	8.22	0.660	2.29	2.8	6.7	13	0.6	6.8	1.0	<0.1	1	27	24.4	0.3
1320134	Drill Core	0.053	9.1	7	1.60	668	0.192	7.73	0.256	1.40	2.2	4.0	20	0.6	7.2	1.7	<0.1	<1	15	35.9	0.2
1320135	Drill Core	0.037	8.2	6	1.11	480	0.133	7.03	0.061	0.57	5.2	4.1	18	0.5	4.6	1.2	<0.1	<1	16	60.2	<0.1
1320136	Drill Core	0.037	8.0	4	1.00	1024	0.106	5.33	0.054	0.47	5.2	3.2	17	0.5	4.3	0.9	<0.1	<1	9	42.8	<0.1
1320137	Drill Core	0.040	7.3	6	1.33	443	0.137	7.09	1.395	0.45	5.1	2.8	17	0.8	4.6	1.1	<0.1	<1	13	35.1	0.1
1320138	Drill Core	0.036	6.0	7	1.33	404	0.146	6.50	0.822	0.74	4.3	2.6	14	0.8	4.9	1.1	<0.1	<1	14	35.0	0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000210.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320121	Drill Core	16.4	0.1	0.07	0.009	<1	<0.5	<0.5	0.05	
1320122	Drill Core	17.3	0.1	0.08	0.016	<1	<0.5	<0.5	0.05	
1320123	Drill Core	17.4	0.1	0.07	0.023	<1	<0.5	<0.5	0.07	
1320124	Drill Core	15.8	0.2	0.09	0.020	<1	<0.5	<0.5	0.08	
1320125	Rock Pulp	22.0	1.1	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320126	Rock Pulp	20.0	0.9	0.10	0.092	<1	<0.5	<0.5	0.09	
1320127	Drill Core	21.7	0.1	0.10	<0.005	<1	<0.5	<0.5	0.06	
1320128	Drill Core	31.9	0.2	0.12	0.008	<1	<0.5	<0.5	0.22	
1320129	Drill Core	25.7	0.3	0.06	0.015	<1	<0.5	<0.5	0.05	
1320130	Drill Core	13.3	0.2	0.06	0.015	<1	<0.5	<0.5	0.07	
1320131	Drill Core	13.0	0.2	0.06	0.012	<1	<0.5	<0.5	0.04	
1320132	Drill Core	39.2	0.3	0.06	0.016	<1	<0.5	<0.5	0.02	
1320133	Drill Core	62.3	0.3	0.06	<0.005	<1	<0.5	<0.5	0.02	
1320134	Drill Core	39.4	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320135	Drill Core	12.5	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320136	Drill Core	11.1	0.1	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320137	Drill Core	8.3	0.1	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320138	Drill Core	16.8	0.1	<0.05	<0.005	<1	<0.5	<0.5	<0.01	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000210.1

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
Pulp Duplicates																					
1320022	Drill Core	3.15	3	1.2	31.0	6.1	80	0.3	16.0	13.1	819	3.65	4	4.9	3.7	303	0.2	0.5	<0.1	109	12.15
REP 1320022	QC		3																		
1320025	Rock Pulp	0.06	6	3.2	22.6	4.0	44	0.4	23.5	11.2	477	2.53	4	0.7	1.7	239	0.2	0.8	<0.1	81	1.84
REP 1320025	QC																				
1320028	Drill Core	3.20	4	8.6	113.8	9.5	303	3.2	104.7	10.2	246	2.66	34	4.1	4.1	274	3.0	2.0	0.1	445	0.22
REP 1320028	QC			8.6	113.7	9.4	306	3.1	104.8	10.1	242	2.64	34	4.1	4.1	274	3.0	2.0	0.1	443	0.22
1320057	Drill Core	4.56	4	0.3	13.5	6.4	83	<0.1	16.6	16.2	864	4.27	5	1.3	2.2	172	<0.1	0.8	<0.1	119	2.70
REP 1320057	QC		3																		
1320059	Drill Core	3.40	3	0.4	5.1	4.3	66	<0.1	11.9	10.8	721	3.50	4	0.7	3.0	158	<0.1	0.6	<0.1	84	2.67
REP 1320059	QC																				
1320063	Drill Core	5.02	2	0.4	27.7	6.7	83	<0.1	11.4	15.3	926	4.29	5	0.8	2.9	145	<0.1	0.6	0.1	124	3.66
REP 1320063	QC			0.5	26.9	6.7	81	<0.1	11.2	15.1	918	4.25	5	0.8	2.8	142	<0.1	0.6	0.1	124	3.66
1320094	Drill Core	4.07	104	0.4	8.5	5.1	31	0.2	3.0	5.2	353	2.18	3	0.3	3.0	96	<0.1	0.9	<0.1	38	1.73
REP 1320094	QC		89																		
1320098	Drill Core	4.39	95	0.9	8.2	6.1	29	<0.1	2.5	6.7	387	2.16	3	0.4	2.4	171	0.1	0.8	<0.1	37	2.29
REP 1320098	QC			0.9	7.5	5.8	30	<0.1	2.4	5.9	392	2.17	3	0.3	2.2	167	<0.1	0.7	<0.1	37	2.28
1320127	Drill Core	5.61	22	0.6	19.2	4.4	72	<0.1	4.6	5.1	618	3.57	5	0.4	2.6	160	0.1	4.2	<0.1	30	2.38
REP 1320127	QC		30																		
1320129	Drill Core	4.50	69	0.9	10.8	6.4	61	0.1	8.1	8.3	507	3.01	11	0.6	2.3	278	0.2	13.1	<0.1	56	2.21
REP 1320129	QC																				
1320133	Drill Core	3.87	17	0.8	46.2	8.3	85	0.1	20.1	22.0	945	5.76	8	0.4	1.5	193	0.1	14.8	<0.1	232	3.86
REP 1320133	QC			0.7	48.4	8.3	85	0.2	20.2	22.5	945	5.75	7	0.3	1.4	192	0.2	14.7	<0.1	231	3.87
Core Reject Duplicates																					
1320019	Drill Core	4.29	3	1.0	10.5	6.3	108	0.2	39.3	15.7	729	5.32	13	2.7	2.1	177	0.2	1.0	<0.1	190	7.33
DUP 1320019	QC		3	1.0	10.6	6.4	109	0.2	40.5	16.2	759	5.41	14	3.0	2.3	186	0.2	0.9	<0.1	194	7.60
1320053	Drill Core	5.09	3	0.2	4.4	3.7	46	<0.1	3.5	6.9	494	2.54	4	1.0	4.4	192	<0.1	0.5	<0.1	53	1.76
DUP 1320053	QC		2	0.3	4.1	3.9	48	<0.1	3.6	7.0	501	2.64	5	1.1	4.9	200	<0.1	0.5	<0.1	55	1.77
1320087	Drill Core	4.57	60	1.0	53.5	10.3	70	0.1	27.2	22.4	841	4.38	11	1.0	3.7	178	0.2	3.3	<0.1	166	4.36

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000210.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
	Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
Pulp Duplicates																					
1320022	Drill Core	0.148	19.9	19	0.40	1750	0.333	7.13	1.206	1.06	0.5	15.5	39	1.3	13.9	13.4	0.7	1	11	20.0	<0.1
REP 1320022	QC																				
1320025	Rock Pulp	0.052	8.2	31	0.83	479	0.275	5.34	2.141	0.85	27.3	37.7	17	0.7	12.0	3.5	0.2	<1	10	12.8	<0.1
REP 1320025	QC																				
1320028	Drill Core	0.125	21.8	203	0.28	360	0.254	4.34	0.021	1.41	1.4	35.9	29	1.2	33.7	5.5	0.4	1	12	15.1	<0.1
REP 1320028	QC	0.127	21.4	207	0.28	357	0.255	4.34	0.021	1.41	1.4	36.1	29	1.2	33.7	5.5	0.4	1	12	15.1	<0.1
1320057	Drill Core	0.086	9.6	25	1.25	333	0.462	7.46	1.733	2.04	0.8	6.4	22	1.0	7.2	7.1	0.4	1	15	22.1	<0.1
REP 1320057	QC																				
1320059	Drill Core	0.042	11.8	18	1.02	552	0.295	7.17	2.003	1.90	0.6	5.8	24	0.9	8.0	5.8	0.3	1	13	15.4	<0.1
REP 1320059	QC																				
1320063	Drill Core	0.062	10.6	16	1.65	469	0.385	7.40	1.637	2.09	0.8	5.1	26	1.1	10.1	5.3	0.3	1	16	19.0	<0.1
REP 1320063	QC	0.063	9.4	17	1.63	461	0.382	7.13	1.648	2.07	0.8	5.1	24	1.1	9.6	5.3	0.3	1	16	18.9	<0.1
1320094	Drill Core	0.021	12.0	4	0.32	849	0.127	5.96	2.663	1.61	5.9	5.3	25	0.5	6.1	1.7	<0.1	<1	7	6.8	<0.1
REP 1320094	QC																				
1320098	Drill Core	0.019	9.2	3	0.41	606	0.128	6.11	3.475	1.09	4.6	7.6	22	0.5	10.7	2.0	0.1	<1	10	7.2	0.2
REP 1320098	QC	0.019	8.6	3	0.41	595	0.123	6.26	3.528	1.05	4.3	7.6	20	0.5	10.2	2.0	0.1	<1	10	6.3	0.2
1320127	Drill Core	0.024	11.1	5	1.16	87	0.105	5.84	1.183	1.05	1.9	5.9	27	0.9	6.7	1.5	<0.1	<1	13	15.6	1.1
REP 1320127	QC																				
1320129	Drill Core	0.031	11.4	12	1.11	161	0.123	6.79	0.030	1.15	4.3	8.6	25	1.3	7.0	1.6	0.1	<1	11	34.1	0.4
REP 1320129	QC																				
1320133	Drill Core	0.060	5.8	22	2.05	319	0.284	8.22	0.660	2.29	2.8	6.7	13	0.6	6.8	1.0	<0.1	1	27	24.4	0.3
REP 1320133	QC	0.060	5.1	22	2.02	312	0.286	8.12	0.662	2.26	2.6	6.8	12	0.6	6.6	1.0	<0.1	1	27	24.4	0.3
Core Reject Duplicates																					
1320019	Drill Core	0.134	11.5	46	0.46	700	0.526	7.84	1.206	2.29	0.5	7.9	24	1.0	10.4	9.5	0.4	2	20	15.7	<0.1
DUP 1320019	QC	0.137	12.7	48	0.48	872	0.532	8.19	1.194	2.35	0.4	8.2	27	1.0	10.9	9.5	0.4	2	21	15.9	<0.1
1320053	Drill Core	0.035	12.7	7	0.63	552	0.227	6.80	2.828	1.39	0.5	7.3	25	1.0	8.1	5.6	0.4	1	8	10.5	<0.1
DUP 1320053	QC	0.036	14.2	7	0.65	572	0.233	7.04	2.826	1.43	0.5	7.5	28	1.0	8.6	5.8	0.4	1	8	10.9	<0.1
1320087	Drill Core	0.082	14.7	86	2.11	534	0.269	5.54	0.029	1.85	6.9	9.2	29	0.8	11.4	2.8	0.2	<1	23	20.1	0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000210.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
	Analyte	Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
	MDL	0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
Pulp Duplicates										
1320022	Drill Core	39.7	0.6	<0.05	<0.005	2	<0.5	<0.5	0.02	
REP 1320022	QC									
1320025	Rock Pulp	21.8	1.1	<0.05	<0.005	<1	<0.5	<0.5	0.01	
REP 1320025	QC								0.01	
1320028	Drill Core	56.4	0.9	<0.05	<0.005	3	<0.5	0.7	0.28	
REP 1320028	QC	56.3	0.9	<0.05	<0.005	3	<0.5	0.7		
1320057	Drill Core	69.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
REP 1320057	QC									
1320059	Drill Core	79.1	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01	
REP 1320059	QC								0.01	
1320063	Drill Core	64.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
REP 1320063	QC	56.6	0.3	<0.05	<0.005	<1	<0.5	<0.5		
1320094	Drill Core	22.7	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
REP 1320094	QC								<0.01	
1320098	Drill Core	19.0	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02	
REP 1320098	QC	18.2	0.3	<0.05	<0.005	<1	<0.5	<0.5		
1320127	Drill Core	21.7	0.1	0.10	<0.005	<1	<0.5	<0.5	0.06	
REP 1320127	QC									
1320129	Drill Core	25.7	0.3	0.06	0.015	<1	<0.5	<0.5	0.05	
REP 1320129	QC								0.06	
1320133	Drill Core	62.3	0.3	0.06	<0.005	<1	<0.5	<0.5	0.02	
REP 1320133	QC	52.4	0.3	0.05	<0.005	<1	<0.5	<0.5		
Core Reject Duplicates										
1320019	Drill Core	60.2	0.4	<0.05	<0.005	<1	<0.5	0.5	0.02	
DUP 1320019	QC	65.5	0.4	<0.05	<0.005	1	<0.5	0.5	0.03	
1320053	Drill Core	59.0	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
DUP 1320053	QC	63.1	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320087	Drill Core	38.6	0.5	0.08	<0.005	<1	<0.5	<0.5	0.02	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000210.1

		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
DUP 1320087	QC		98	0.8	50.8	10.1	71	0.1	27.6	21.4	816	4.35	10	1.0	3.8	179	0.3	3.3	<0.1	162	4.35
1320121	Drill Core	4.95	180	0.6	11.8	4.5	73	0.2	3.9	3.9	514	3.76	6	0.4	2.3	137	0.2	8.5	<0.1	19	1.50
DUP 1320121	QC		216	0.6	11.4	4.5	75	0.2	3.9	4.0	522	3.82	7	0.4	2.2	139	0.2	8.7	<0.1	20	1.52
Reference Materials																					
STD AGPROOF	Standard																				
STD BVGEO01	Standard																				
STD BVGEO01	Standard																				
STD DS11	Standard																				
STD DS11	Standard																				
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard			2.4	30.5	22.6	45	<0.1	46.9	7.7	469	6.39	9	2.5	14.0	45	<0.1	0.6	0.3	153	0.29
STD OREAS25A-4A	Standard			2.4	30.9	21.8	44	<0.1	47.1	7.7	474	6.34	9	2.5	13.8	44	<0.1	0.6	0.3	153	0.27
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard			2.4	30.3	22.1	46	<0.1	47.6	7.6	480	6.53	9	2.5	13.7	45	<0.1	0.6	0.3	155	0.29
STD OREAS25A-4A	Standard			2.4	33.3	25.5	39	<0.1	47.1	8.0	490	6.41	9	2.9	15.4	45	<0.1	0.6	0.3	157	0.26
STD OREAS45E	Standard			2.5	781.4	17.0	45	0.2	483.6	60.7	560	23.88	15	2.3	12.1	16	<0.1	1.0	0.3	342	0.07
STD OREAS45E	Standard			2.4	770.7	16.3	44	0.2	461.9	58.9	549	23.92	15	2.2	11.5	16	<0.1	0.9	0.3	327	0.06
STD OREAS45E	Standard			2.4	773.9	17.0	45	0.2	461.0	60.2	548	24.52	15	2.2	12.1	16	<0.1	0.9	0.3	313	0.06
STD OREAS45E	Standard			2.3	793.9	19.0	46	0.3	486.9	59.6	577	24.61	16	2.6	14.3	17	<0.1	1.0	0.2	351	0.07
STD OXC145	Standard		220																		
STD OXC145	Standard		225																		
STD OXC145	Standard		226																		
STD OXC145	Standard		208																		
STD OXC145	Standard		211																		
STD OXC145	Standard		223																		
STD OXC145	Standard		209																		
STD OXH139	Standard		1353																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000210.1

		MA200 P % 0.001	MA200 La ppm 0.1	MA200 Cr ppm 1	MA200 Mg % 0.01	MA200 Ba ppm 1	MA200 Ti % 0.001	MA200 Al % 0.01	MA200 Na % 0.001	MA200 K % 0.01	MA200 W ppm 0.1	MA200 Zr ppm 0.1	MA200 Ce ppm 1	MA200 Sn ppm 0.1	MA200 Y ppm 0.1	MA200 Nb ppm 0.1	MA200 Ta ppm 0.1	MA200 Be ppm 1	MA200 Sc ppm 1	MA200 Li ppm 0.1	MA200 S % 0.1
DUP 1320087	QC	0.084	14.6	86	2.12	545	0.276	5.51	0.027	1.88	7.3	9.2	30	0.8	11.4	2.8	0.2	1	24	20.9	0.1
1320121	Drill Core	0.014	12.6	2	1.06	201	0.069	5.92	0.033	0.74	2.7	5.0	28	1.2	5.7	1.3	<0.1	<1	12	30.8	1.1
DUP 1320121	QC	0.014	12.1	2	1.06	215	0.069	5.93	0.031	0.74	2.7	5.3	27	1.2	5.2	1.3	<0.1	<1	12	30.8	1.1
Reference Materials																					
STD AGPROOF	Standard																				
STD BVGEO01	Standard																				
STD BVGEO01	Standard																				
STD DS11	Standard																				
STD DS11	Standard																				
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard	0.048	20.5	109	0.32	142	0.928	8.90	0.131	0.47	1.8	143.9	45	3.8	9.8	19.3	1.4	<1	13	37.1	<0.1
STD OREAS25A-4A	Standard	0.047	20.0	114	0.32	140	0.925	9.10	0.132	0.47	1.8	151.5	45	3.6	9.4	19.7	1.4	<1	13	36.5	<0.1
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard	0.047	20.1	110	0.32	140	0.911	9.10	0.130	0.48	1.8	147.2	45	3.7	9.1	18.2	1.3	<1	13	36.4	<0.1
STD OREAS25A-4A	Standard	0.049	19.8	121	0.34	144	0.929	8.49	0.119	0.47	1.9	147.5	45	3.8	9.5	18.9	1.5	<1	12	38.3	<0.1
STD OREAS45E	Standard	0.033	10.7	1065	0.16	244	0.550	7.11	0.063	0.34	0.9	95.7	23	1.4	7.7	6.2	0.5	<1	92	6.7	<0.1
STD OREAS45E	Standard	0.032	9.7	1014	0.15	232	0.538	7.03	0.059	0.33	0.9	94.2	22	1.2	7.0	5.9	0.5	<1	89	6.4	<0.1
STD OREAS45E	Standard	0.032	10.8	1015	0.15	239	0.530	6.87	0.058	0.33	1.0	94.0	23	1.3	7.5	6.0	0.5	<1	89	6.1	<0.1
STD OREAS45E	Standard	0.034	11.9	1067	0.17	253	0.560	7.27	0.055	0.33	0.9	93.0	25	1.1	8.3	6.0	0.5	<1	91	7.8	<0.1
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXH139	Standard																				

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000210.1

		MA200 Rb ppm 0.1	MA200 Hf ppm 0.1	MA200 In ppm 0.05	MA200 Re ppm 0.005	MA200 Se ppm 1	MA200 Te ppm 0.5	MA200 Tl ppm 0.5	AQ200 Hg ppm 0.01	FA550 Au gm/t 0.9
DUP 1320087	QC	38.6	0.5	0.08	<0.005	<1	<0.5	<0.5	0.02	
1320121	Drill Core	16.4	0.1	0.07	0.009	<1	<0.5	<0.5	0.05	
DUP 1320121	QC	16.3	0.1	0.07	0.011	<1	<0.5	<0.5	0.06	
Reference Materials										
STD AGPROOF	Standard									<0.9
STD BVGEO01	Standard								0.10	
STD BVGEO01	Standard								0.09	
STD DS11	Standard								0.27	
STD DS11	Standard								0.22	
STD OREAS262	Standard								0.16	
STD OREAS262	Standard								0.17	
STD OREAS262	Standard								0.16	
STD OREAS25A-4A	Standard	58.7	4.0	0.09	<0.005	3	<0.5	<0.5		
STD OREAS25A-4A	Standard	57.3	4.1	0.08	<0.005	3	<0.5	<0.5		
STD OREAS262	Standard								0.16	
STD OREAS25A-4A	Standard	58.0	3.9	0.08	<0.005	3	<0.5	<0.5		
STD OREAS25A-4A	Standard	56.2	4.3	0.05	<0.005	2	<0.5	<0.5		
STD OREAS45E	Standard	21.8	2.8	0.09	<0.005	3	<0.5	<0.5		
STD OREAS45E	Standard	20.9	2.8	0.09	<0.005	3	<0.5	<0.5		
STD OREAS45E	Standard	21.4	2.8	0.10	<0.005	3	<0.5	<0.5		
STD OREAS45E	Standard	21.5	2.9	0.08	<0.005	3	<0.5	<0.5		
STD OXC145	Standard									
STD OXC145	Standard									
STD OXC145	Standard									
STD OXC145	Standard									
STD OXC145	Standard									
STD OXC145	Standard									
STD OXC145	Standard									
STD OXH139	Standard									

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000210.1

		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
STD OXH139	Standard		1376																		
STD OXH139	Standard		1336																		
STD OXH139	Standard		1244																		
STD OXH139	Standard		1281																		
STD OXH139	Standard		1371																		
STD OXH139	Standard		1266																		
STD OXQ114	Standard																				
STD SP49	Standard																				
STD BVGEO01 Expected																					
STD DS11 Expected																					
STD OREAS262 Expected																					
STD OREAS25A-4A Expected				2.41	33.9	25.2	44.4		45.8	7.7	480	6.6	9.94	2.94	15.8	48.5		0.65	0.37	157	0.301
STD OREAS45E Expected				2.4	780	18.2	46.7	0.311	454	57	570	24.12	16.3	2.41	12.9	15.9	0.06	1	0.28	322	0.065
STD AGPROOF Expected																					
STD SP49 Expected																					
STD OXQ114 Expected																					
STD OXC145 Expected			212																		
STD OXH139 Expected			1312																		
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank																				
BLK	Blank		3																		
BLK	Blank		3																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank			0.1	0.4	<0.1	<1	<0.1	<0.1	<0.2	1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank		3																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000210.1

		MA200 P % 0.001	MA200 La ppm 0.1	MA200 Cr ppm 1	MA200 Mg % 0.01	MA200 Ba ppm 1	MA200 Ti % 0.001	MA200 Al % 0.01	MA200 Na % 0.001	MA200 K % 0.01	MA200 W ppm 0.1	MA200 Zr ppm 0.1	MA200 Ce ppm 1	MA200 Sn ppm 0.1	MA200 Y ppm 0.1	MA200 Nb ppm 0.1	MA200 Ta ppm 0.1	MA200 Be ppm 1	MA200 Sc ppm 1	MA200 Li ppm 0.1	MA200 S % 0.1
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OXQ114	Standard																				
STD SP49	Standard																				
STD BVGEO01 Expected																					
STD DS11 Expected																					
STD OREAS262 Expected																					
STD OREAS25A-4A Expected		0.048	21.8	115	0.327	147	0.93	8.87	0.131	0.482	2	155	47.3	4.06	10.5	20.9	1.4	0.93	13.7	36.7	0.047
STD OREAS45E Expected		0.034	11	979	0.156	252	0.559	6.78	0.059	0.324	1.07	97	23.5	1.32	8.28	6.8	0.54		93	6.58	0.046
STD AGPROOF Expected																					
STD SP49 Expected																					
STD OXQ114 Expected																					
STD OXC145 Expected																					
STD OXH139 Expected																					
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank	<0.001	<0.1	1	<0.01	<1	<0.001	<0.01	0.003	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.003	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.003	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.002	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000210.1

		MA200 Rb ppm 0.1	MA200 Hf ppm 0.1	MA200 In ppm 0.05	MA200 Re ppm 0.005	MA200 Se ppm 1	MA200 Te ppm 0.5	MA200 Tl ppm 0.5	AQ200 Hg ppm 0.01	FA550 Au gm/t 0.9
STD OXH139	Standard									
STD OXH139	Standard									
STD OXH139	Standard									
STD OXH139	Standard									
STD OXH139	Standard									
STD OXH139	Standard									
STD OXQ114	Standard									35.4
STD SP49	Standard									18.4
STD BVGEO01 Expected									0.1	
STD DS11 Expected									0.26	
STD OREAS262 Expected									0.17	
STD OREAS25A-4A Expected		61	4.14	0.09		2.4		0.35		
STD OREAS45E Expected		21.2	3.11	0.099		2.97	0.1	0.15		
STD AGPROOF Expected										0
STD SP49 Expected										18.34
STD OXQ114 Expected										35.2
STD OXC145 Expected										
STD OXH139 Expected										
BLK	Blank								<0.01	
BLK	Blank								<0.01	
BLK	Blank								<0.01	
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5		
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5		
BLK	Blank								<0.01	
BLK	Blank									
BLK	Blank									
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5		
BLK	Blank	0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5		
BLK	Blank									

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000210.1

		WGHT Wgt kg 0.01	FA350 Au ppb 2	MA200 Mo ppm 0.1	MA200 Cu ppm 0.1	MA200 Pb ppm 0.1	MA200 Zn ppm 1	MA200 Ag ppm 0.1	MA200 Ni ppm 0.1	MA200 Co ppm 0.2	MA200 Mn ppm 1	MA200 Fe % 0.01	MA200 As ppm 1	MA200 U ppm 0.1	MA200 Th ppm 0.1	MA200 Sr ppm 1	MA200 Cd ppm 0.1	MA200 Sb ppm 0.1	MA200 Bi ppm 0.1	MA200 V ppm 1	MA200 Ca % 0.01
BLK	Blank		3																		
BLK	Blank		3																		
BLK	Blank																				
BLK	Blank		<2																		
BLK	Blank		3																		
Prep Wash																					
ROCK-WHI	Prep Blank		5	0.7	3.8	3.0	34	<0.1	1.2	4.2	624	2.14	3	1.1	2.6	202	<0.1	<0.1	<0.1	37	1.58
ROCK-WHI	Prep Blank		12	0.8	2.2	2.7	32	<0.1	1.2	3.9	600	2.10	3	1.1	2.5	200	<0.1	<0.1	<0.1	34	1.61

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000210.1

		MA200 P % 0.001	MA200 La ppm 0.1	MA200 Cr ppm 1	MA200 Mg % 0.01	MA200 Ba ppm 1	MA200 Ti % 0.001	MA200 Al % 0.01	MA200 Na % 0.001	MA200 K % 0.01	MA200 W ppm 0.1	MA200 Zr ppm 0.1	MA200 Ce ppm 1	MA200 Sn ppm 0.1	MA200 Y ppm 0.1	MA200 Nb ppm 0.1	MA200 Ta ppm 0.1	MA200 Be ppm 1	MA200 Sc ppm 1	MA200 Li ppm 0.1	MA200 S % 0.1
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
Prep Wash																					
ROCK-WHI	Prep Blank	0.042	11.3	3	0.52	756	0.210	7.05	3.457	1.68	0.3	50.1	23	0.8	14.7	5.5	0.4	1	7	3.3	<0.1
ROCK-WHI	Prep Blank	0.042	10.8	3	0.51	753	0.211	6.90	3.433	1.61	0.3	49.8	22	0.8	14.3	5.4	0.4	<1	7	2.8	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000210.1

		MA200 Rb ppm 0.1	MA200 Hf ppm 0.1	MA200 In ppm 0.05	MA200 Re ppm 0.005	MA200 Se ppm 1	MA200 Te ppm 0.5	MA200 Tl ppm 0.5	AQ200 Hg ppm 0.01	FA550 Au gm/t 0.9
BLK	Blank									
BLK	Blank									
BLK	Blank									<0.9
BLK	Blank									
BLK	Blank									
Prep Wash										
ROCK-WHI	Prep Blank	35.6	1.6	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
ROCK-WHI	Prep Blank	32.5	1.6	<0.05	<0.005	<1	<0.5	<0.5	<0.01	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Submitted By: Daithi MacGearailt
Receiving Lab: Canada-Whitehorse
Received: July 16, 2019
Report Date: September 05, 2019
Page: 1 of 4

CERTIFICATE OF ANALYSIS WHI19000211.1

CLIENT JOB INFORMATION

Project: LUC
Shipment ID: DDLS-19-01
P.O. Number
Number of Samples: 68

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	62	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	6	Sort, label and box pulps			WHI
FA350-Au	68	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	68	Environmental disposal charge-Fire assay lead waste			VAN
MA200	68	4 Acid digestion ICP-MS analysis	0.25	Completed	VAN
AQ200-HG	68	Hg by AR digestion ICP-MS analysis	0.5	Completed	VAN
SHP01	68	Per sample shipping charges for branch shipments			VAN
EN001-MA	68	Environmental disposal fee - Multi-acid neutralization			VAN

ADDITIONAL COMMENTS

Invoice To: Luckystrike Resources Ltd.
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4
Canada

CC: Dan Ferraro

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000211.1

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320139	Drill Core	4.02	116	0.7	5.1	10.2	66	<0.1	6.6	13.4	1064	4.31	5	0.2	1.0	116	0.2	5.6	<0.1	125	4.35
1320140	Drill Core	3.99	4	2.1	25.5	13.5	70	0.1	6.8	18.2	653	3.89	7	0.3	0.9	180	<0.1	14.4	<0.1	115	2.23
1320141	Drill Core	4.33	3	1.6	14.6	6.9	67	<0.1	6.3	14.2	569	3.92	5	0.3	0.6	112	<0.1	3.7	<0.1	126	1.92
1320142	Drill Core	1.59	3	1.2	24.9	6.8	78	<0.1	6.4	14.4	946	4.32	5	0.2	0.7	146	0.1	3.8	<0.1	130	3.54
1320143	Drill Core	2.23	6	0.8	13.2	11.7	69	0.2	6.2	12.0	818	3.72	10	0.3	3.2	251	<0.1	33.6	<0.1	108	3.54
1320144	Drill Core	2.99	3	2.2	17.0	9.8	65	<0.1	7.1	13.3	781	3.70	5	0.2	1.5	157	<0.1	5.1	<0.1	121	2.98
1320145	Drill Core	2.80	6	1.0	43.3	9.6	84	<0.1	13.9	19.0	905	4.63	4	0.2	0.9	193	<0.1	2.4	<0.1	170	3.71
1320146	Drill Core	3.12	6	0.9	26.5	7.8	81	<0.1	12.9	18.5	952	4.73	3	0.2	1.0	150	<0.1	2.4	<0.1	191	3.87
1320147	Drill Core	2.62	9	1.1	22.3	9.2	85	0.1	12.7	17.9	950	5.57	4	0.2	1.0	178	<0.1	2.1	<0.1	233	2.87
1320148	Drill Core	2.81	10	3.0	7.0	5.9	93	<0.1	13.6	19.9	1122	5.70	4	0.3	1.2	86	<0.1	2.9	<0.1	206	3.88
1320149	Drill Core	2.20	4	0.9	53.3	6.9	79	0.3	15.2	21.5	902	4.90	4	0.3	1.3	139	<0.1	1.5	<0.1	212	3.22
1320150	Rock Pulp	0.05	9	3.3	23.8	4.1	46	0.4	24.7	11.7	481	2.59	5	0.7	1.8	238	0.2	0.8	<0.1	84	1.85
1320151	Rock Pulp	0.06	1045	13.6	9869.9	18.5	122	3.4	612.2	19.9	861	8.15	6	0.3	1.4	126	0.3	15.1	0.7	98	2.15
1320152	Drill Core	1.49	5	1.3	29.1	8.7	76	<0.1	12.8	20.2	1130	5.06	5	0.2	0.8	236	<0.1	4.9	<0.1	188	6.06
1320153	Drill Core	2.97	4	1.9	30.5	7.3	78	0.9	17.0	23.8	1035	5.52	6	0.4	1.1	109	<0.1	5.8	<0.1	220	4.33
1320154	Drill Core	4.03	3	2.5	65.2	6.4	75	5.1	17.6	24.1	1018	5.54	6	0.5	1.4	106	<0.1	8.2	<0.1	215	3.63
1320155	Drill Core	2.67	157	0.4	30.6	5.5	106	0.2	17.2	25.0	1362	6.10	3	1.0	1.6	75	0.2	2.0	<0.1	147	3.24
1320156	Drill Core	1.59	134	0.3	9.1	4.2	70	<0.1	7.6	13.3	857	3.91	2	0.7	1.3	75	0.1	0.9	<0.1	55	2.36
1320157	Drill Core	2.41	7	0.3	27.9	17.3	62	0.6	6.4	12.8	771	3.52	3	0.5	1.4	116	0.1	1.4	0.2	110	2.53
1320158	Drill Core	3.01	12	0.6	20.9	4.9	60	0.2	5.7	12.7	752	3.76	5	0.3	1.6	218	0.1	0.5	<0.1	113	2.59
1320159	Drill Core	3.10	13	0.3	27.6	4.4	59	<0.1	5.5	11.7	752	3.63	4	0.3	2.2	199	0.1	0.5	<0.1	108	2.62
1320160	Drill Core	2.16	16	1.0	18.4	4.2	55	<0.1	5.7	11.1	702	3.21	4	0.4	2.0	162	0.1	0.8	<0.1	88	2.62
1320161	Drill Core	3.37	48	0.8	55.7	3.7	48	0.1	5.0	11.7	763	3.61	4	0.4	2.2	140	<0.1	0.9	<0.1	108	2.83
1320162	Drill Core	2.31	29	0.5	56.4	6.4	80	<0.1	12.2	18.8	1052	4.90	5	0.3	1.4	166	0.1	1.9	<0.1	164	4.18
1320163	Drill Core	1.93	4	0.7	29.3	9.0	56	0.1	7.1	16.4	685	4.28	5	0.4	2.4	240	<0.1	1.7	0.1	113	3.17
1320164	Drill Core	2.85	6	0.6	14.6	6.9	48	<0.1	5.3	9.3	533	3.33	5	0.3	2.2	229	<0.1	2.0	<0.1	89	2.28
1320165	Drill Core	2.50	19	0.7	18.4	5.7	52	<0.1	6.0	11.2	736	3.59	7	0.3	1.5	160	0.2	2.9	<0.1	100	2.95
1320166	Drill Core	3.07	1580	0.6	29.5	6.3	54	2.6	7.2	11.8	758	3.70	6	0.4	2.4	156	0.2	2.7	<0.1	113	3.32
1320167	Drill Core	4.11	54	0.6	12.8	6.1	53	<0.1	7.4	12.0	785	3.81	5	0.3	1.1	151	0.2	2.1	<0.1	114	3.21
1320168	Drill Core	3.33	10	0.9	22.7	6.4	63	<0.1	6.7	14.4	773	4.03	7	0.3	1.6	162	<0.1	1.7	<0.1	123	2.83

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000211.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320139	Drill Core		0.058	7.4	8	1.82	331	0.163	7.74	2.066	1.01	3.7	2.8	17	0.5	5.7	1.3	<0.1	<1	17	22.7	0.1
1320140	Drill Core		0.057	7.1	9	0.93	348	0.247	7.72	0.345	1.12	1.7	3.5	16	0.8	9.9	2.1	0.1	1	20	35.2	0.4
1320141	Drill Core		0.058	4.8	9	0.86	350	0.268	8.24	0.738	1.52	0.7	2.9	12	0.7	7.4	1.9	0.1	1	18	24.2	0.3
1320142	Drill Core		0.046	5.9	8	1.40	353	0.213	7.19	1.968	1.43	2.1	3.5	13	0.6	11.0	1.6	<0.1	<1	17	13.2	0.1
1320143	Drill Core		0.085	13.9	5	1.44	895	0.184	7.36	0.617	1.00	3.0	3.8	30	1.0	7.3	2.4	0.1	<1	11	39.6	0.1
1320144	Drill Core		0.041	6.7	7	1.40	521	0.163	7.03	2.332	0.99	1.4	3.4	16	0.6	5.0	1.3	<0.1	<1	15	19.6	0.3
1320145	Drill Core		0.040	4.9	30	1.88	282	0.236	7.33	2.775	1.26	3.5	3.2	11	0.7	5.9	1.6	0.1	<1	22	12.5	0.2
1320146	Drill Core		0.039	5.3	31	1.84	327	0.260	7.44	2.997	1.26	3.8	3.1	12	1.1	5.9	1.4	0.1	<1	38	12.9	0.2
1320147	Drill Core		0.045	6.7	38	1.58	236	0.295	8.00	3.715	1.13	3.3	3.3	16	1.2	5.5	1.5	<0.1	1	38	11.1	0.1
1320148	Drill Core		0.039	9.5	32	1.75	268	0.243	7.28	2.176	0.62	4.0	3.2	21	0.6	9.2	1.1	<0.1	<1	26	21.3	<0.1
1320149	Drill Core		0.050	5.6	40	1.33	524	0.358	7.36	2.150	1.32	0.7	4.5	13	0.9	10.4	2.0	0.1	<1	28	11.7	0.1
1320150	Rock Pulp		0.054	8.5	31	0.81	489	0.282	5.24	2.103	0.87	27.4	37.6	18	0.8	12.1	3.4	0.2	<1	10	12.6	<0.1
1320151	Rock Pulp		0.060	3.6	719	1.06	146	0.127	5.05	0.209	2.85	2.9	12.2	7	1.6	4.9	4.3	0.2	<1	7	8.1	1.3
1320152	Drill Core		0.029	5.6	25	2.21	107	0.211	6.14	0.068	0.73	0.8	3.6	12	0.4	10.4	1.1	<0.1	<1	19	29.4	<0.1
1320153	Drill Core		0.046	6.3	41	1.77	351	0.353	8.03	0.178	1.36	4.4	4.2	14	0.7	10.3	1.7	0.1	1	28	21.4	<0.1
1320154	Drill Core		0.050	7.5	39	1.55	252	0.349	7.72	0.660	1.43	19.0	4.7	16	0.8	11.8	1.7	0.1	<1	28	20.7	<0.1
1320155	Drill Core		0.039	5.9	30	2.23	107	0.225	6.70	1.947	2.94	14.8	3.9	13	0.5	8.8	1.3	<0.1	<1	22	8.5	<0.1
1320156	Drill Core		0.039	7.7	8	1.46	112	0.130	6.25	2.910	1.89	12.5	2.0	17	0.6	5.9	1.1	<0.1	<1	13	5.5	<0.1
1320157	Drill Core		0.042	7.1	12	0.94	329	0.225	6.60	1.299	1.60	4.6	2.9	16	0.9	10.8	2.1	0.2	<1	16	13.8	<0.1
1320158	Drill Core		0.044	8.1	9	1.11	271	0.223	7.19	2.946	1.06	2.6	6.0	19	0.7	7.5	2.1	0.1	<1	18	9.6	0.1
1320159	Drill Core		0.039	8.5	8	1.12	288	0.195	7.17	3.024	1.16	2.1	5.4	20	0.9	8.4	1.9	0.1	<1	17	10.4	<0.1
1320160	Drill Core		0.036	8.4	8	1.07	351	0.172	6.99	2.980	0.94	4.0	5.7	19	0.7	6.3	1.9	0.1	<1	15	13.7	<0.1
1320161	Drill Core		0.040	8.3	8	1.14	146	0.187	7.01	2.933	1.10	3.2	4.7	19	0.7	7.0	1.8	0.1	<1	16	12.3	<0.1
1320162	Drill Core		0.039	7.0	24	1.87	107	0.243	7.10	1.164	1.26	4.3	4.4	15	0.9	8.1	1.7	0.1	<1	22	22.1	0.2
1320163	Drill Core		0.067	8.3	9	1.29	95	0.265	8.37	2.600	0.82	1.1	3.7	20	1.2	8.7	3.5	0.2	<1	19	23.2	0.7
1320164	Drill Core		0.063	7.8	10	1.00	133	0.235	7.49	1.606	0.73	2.3	2.5	18	0.8	7.5	2.4	0.2	<1	15	28.2	<0.1
1320165	Drill Core		0.042	7.8	7	1.22	63	0.181	7.13	1.618	0.64	2.4	6.6	18	0.8	5.8	2.1	0.1	<1	15	25.2	<0.1
1320166	Drill Core		0.045	8.6	8	1.44	48	0.241	7.44	0.474	0.84	3.4	7.1	19	0.8	7.1	2.5	0.2	<1	18	32.0	<0.1
1320167	Drill Core		0.037	5.6	8	1.37	167	0.178	6.41	1.301	0.96	2.1	4.3	13	0.8	6.5	1.5	<0.1	<1	16	22.2	<0.1
1320168	Drill Core		0.042	7.4	8	1.38	1842	0.181	6.92	2.869	0.60	1.9	4.2	18	0.8	5.6	1.8	0.1	<1	18	15.6	0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000211.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01
1320139	Drill Core	18.3	0.1	0.05	<0.005	<1	<0.5	<0.5	<0.01
1320140	Drill Core	26.1	0.2	0.05	<0.005	<1	<0.5	<0.5	0.02
1320141	Drill Core	37.4	0.2	0.06	<0.005	<1	<0.5	<0.5	0.01
1320142	Drill Core	35.3	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320143	Drill Core	19.6	0.1	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320144	Drill Core	20.5	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01
1320145	Drill Core	33.4	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320146	Drill Core	35.8	0.2	0.09	<0.005	<1	<0.5	<0.5	0.01
1320147	Drill Core	30.7	0.3	0.10	<0.005	<1	<0.5	<0.5	0.01
1320148	Drill Core	15.9	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01
1320149	Drill Core	41.4	0.3	0.06	<0.005	<1	<0.5	<0.5	<0.01
1320150	Rock Pulp	22.2	1.1	<0.05	<0.005	<1	<0.5	<0.5	0.02
1320151	Rock Pulp	58.2	0.4	0.15	0.011	10	<0.5	<0.5	1.35
1320152	Drill Core	21.9	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320153	Drill Core	45.8	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320154	Drill Core	47.9	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320155	Drill Core	45.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320156	Drill Core	24.1	0.1	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320157	Drill Core	35.1	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01
1320158	Drill Core	26.4	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320159	Drill Core	25.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320160	Drill Core	19.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320161	Drill Core	22.8	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01
1320162	Drill Core	36.5	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.01
1320163	Drill Core	16.3	0.2	0.06	<0.005	<1	<0.5	<0.5	0.01
1320164	Drill Core	14.4	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.01
1320165	Drill Core	11.4	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320166	Drill Core	19.1	0.3	<0.05	<0.005	<1	1.4	<0.5	0.11
1320167	Drill Core	17.9	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01
1320168	Drill Core	12.2	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000211.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320169	Drill Core	3.12	717	1.7	31.3	11.1	60	0.5	26.9	22.4	823	4.48	10	0.8	5.4	332	0.4	2.6	<0.1	148	4.72
1320170	Drill Core	2.86	61	0.6	8.2	6.7	38	0.1	24.9	15.0	914	4.82	3	0.5	4.5	188	0.7	1.5	<0.1	173	4.48
1320171	Drill Core	2.27	67	0.5	32.3	6.6	58	0.1	29.8	21.2	751	4.70	5	0.5	2.0	158	0.4	1.4	<0.1	191	3.15
1320172	Drill Core	3.23	56	0.7	24.5	8.3	52	<0.1	25.3	26.4	1311	7.06	3	0.6	1.6	212	0.7	1.5	<0.1	263	5.24
1320173	Drill Core	2.27	10	0.4	8.8	8.7	49	0.2	5.1	9.6	589	2.94	22	2.0	5.3	196	<0.1	3.3	<0.1	70	4.06
1320174	Drill Core	2.37	1157	11.5	47.9	5.7	41	15.0	10.4	10.0	715	3.01	5	0.6	4.6	145	0.3	2.4	<0.1	76	4.22
1320175	Rock Pulp	0.05	9	3.5	22.4	4.4	46	0.2	22.3	11.8	514	2.62	3	0.8	1.9	257	<0.1	0.8	<0.1	89	1.87
1320176	Rock Pulp	0.05	265	191.1	1871.2	42.0	301	0.6	38.4	14.2	772	4.25	14	0.7	1.8	281	1.1	1.9	0.3	125	2.53
1320177	Drill Core	2.59	574	0.6	7.8	5.7	34	0.9	12.6	9.0	551	2.59	6	0.5	5.3	177	0.1	1.2	<0.1	66	2.79
1320178	Drill Core	2.33	3	1.0	8.5	5.2	35	<0.1	5.3	6.9	392	2.39	4	0.4	5.4	184	<0.1	0.8	<0.1	61	1.63
1320179	Drill Core	3.29	66	0.5	3.6	4.0	26	<0.1	4.5	4.8	448	2.51	3	0.5	4.2	128	0.2	1.3	<0.1	84	1.88
1320180	Drill Core	3.17	3019	0.5	2.8	3.1	25	0.5	5.3	7.7	626	2.75	<1	0.2	2.9	115	0.6	0.9	<0.1	63	2.97
1320181	Drill Core	3.37	807	0.3	3.0	2.7	27	0.2	4.1	6.4	628	2.91	2	0.2	2.3	105	0.4	0.8	<0.1	75	2.70
1320182	Drill Core	3.11	25	1.3	12.6	4.5	56	<0.1	7.6	13.1	548	3.55	4	0.8	4.1	193	0.2	0.5	<0.1	117	1.75
1320183	Drill Core	2.65	10	1.1	24.5	5.8	54	<0.1	9.8	14.6	570	3.58	4	0.7	5.2	269	<0.1	0.5	<0.1	125	2.26
1320184	Drill Core	2.75	66	0.6	18.2	5.7	49	0.2	10.2	13.1	664	3.61	4	0.5	3.8	243	0.3	0.4	<0.1	108	2.78
1320185	Drill Core	2.49	199	1.4	14.4	7.6	67	0.2	12.2	17.5	1371	4.37	18	1.2	1.7	186	0.7	0.6	<0.1	128	6.58
1320186	Drill Core	2.57	61	1.0	30.0	8.7	70	0.1	18.3	22.3	1125	4.90	31	1.2	2.1	254	0.2	0.7	<0.1	126	4.59
1320187	Drill Core	1.69	7	3.3	21.3	6.0	62	0.7	14.7	18.9	1003	4.12	22	1.5	2.4	156	<0.1	0.6	<0.1	123	4.22
1320188	Drill Core	2.91	47	0.9	38.9	5.7	73	<0.1	29.7	25.1	1120	5.72	9	1.2	1.8	195	<0.1	0.5	<0.1	234	4.03
1320189	Drill Core	2.90	38	1.7	21.2	4.3	37	<0.1	10.8	12.3	671	3.41	7	1.0	4.9	182	0.3	0.4	<0.1	96	2.72
1320190	Drill Core	3.23	21	1.4	35.3	5.3	51	<0.1	12.0	14.5	912	4.63	6	0.9	2.9	177	<0.1	0.5	<0.1	162	3.14
1320191	Drill Core	2.49	97	34.9	19.7	6.6	71	0.4	36.0	24.3	979	4.62	19	1.8	2.5	218	0.3	1.1	<0.1	137	4.45
1320192	Drill Core	3.10	16	0.5	28.9	6.3	68	0.1	22.0	24.2	849	5.07	42	3.7	4.3	260	0.4	1.2	<0.1	126	3.21
1320193	Drill Core	2.91	853	0.6	34.3	4.5	69	0.2	30.5	21.9	1019	5.16	2	0.6	1.9	171	0.2	0.6	<0.1	169	4.14
1320194	Drill Core	2.58	9	0.8	37.0	4.6	59	<0.1	19.9	18.0	785	4.45	6	0.7	3.3	188	<0.1	0.8	<0.1	157	3.82
1320195	Drill Core	3.07	4	0.3	13.9	4.1	86	<0.1	25.8	22.3	1029	5.07	6	1.4	3.1	212	<0.1	0.6	<0.1	161	5.17
1320196	Drill Core	3.03	6	0.6	18.9	6.0	87	<0.1	34.2	25.9	1200	5.58	5	1.2	4.1	317	0.1	1.1	<0.1	185	7.73
1320197	Drill Core	3.32	413	0.8	4.6	4.4	39	0.1	12.9	10.4	706	5.13	6	0.3	3.1	89	0.3	3.3	<0.1	161	3.12
1320198	Drill Core	3.04	587	0.4	3.3	2.5	28	0.2	7.2	8.1	569	4.55	2	0.2	2.7	59	<0.1	2.5	<0.1	124	1.81

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000211.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320169	Drill Core		0.052	19.5	37	2.04	667	0.234	6.11	2.343	0.80	2.8	7.3	39	0.7	9.2	2.7	0.2	<1	17	15.1	0.6
1320170	Drill Core		0.055	17.2	50	1.92	429	0.270	5.91	3.353	1.17	10.6	6.1	35	0.9	10.2	1.8	0.1	<1	21	5.0	0.2
1320171	Drill Core		0.041	8.6	40	1.59	376	0.347	4.91	1.860	1.63	7.7	5.9	18	1.4	7.8	1.9	0.1	<1	27	7.0	0.3
1320172	Drill Core		0.061	7.8	33	2.42	209	0.366	6.80	4.244	1.45	10.7	7.1	17	1.1	11.9	1.5	<0.1	<1	31	4.1	0.3
1320173	Drill Core		0.019	15.5	6	1.60	866	0.129	5.64	0.935	1.20	2.5	5.0	28	0.8	11.7	3.5	0.3	<1	10	20.7	0.1
1320174	Drill Core		0.017	13.9	9	1.55	857	0.100	5.41	2.432	1.03	91.3	5.9	28	0.5	8.5	2.8	0.2	<1	9	12.4	0.3
1320175	Rock Pulp		0.054	8.7	27	0.82	548	0.274	5.34	2.182	0.90	26.4	38.6	19	0.5	13.7	3.5	0.2	<1	10	11.8	<0.1
1320176	Rock Pulp		0.059	10.1	53	1.34	665	0.362	6.47	2.307	0.93	8.8	31.6	22	1.8	15.1	4.1	0.3	<1	15	17.4	0.3
1320177	Drill Core		0.023	14.9	47	1.17	919	0.127	6.09	3.208	0.79	1.9	5.6	32	0.8	8.5	3.0	0.3	<1	12	9.8	0.3
1320178	Drill Core		0.024	13.3	8	0.79	1473	0.142	6.51	1.389	1.38	1.6	5.9	27	0.9	9.2	3.9	0.3	<1	10	20.0	<0.1
1320179	Drill Core		0.034	11.8	15	0.81	861	0.131	6.69	3.946	1.06	4.4	6.0	24	0.5	5.5	2.8	0.2	<1	9	10.4	<0.1
1320180	Drill Core		0.041	7.3	9	1.23	336	0.076	7.86	6.507	0.72	3.6	3.8	16	0.1	5.2	1.4	0.1	<1	10	4.8	0.5
1320181	Drill Core		0.026	6.2	8	1.17	468	0.085	7.22	5.953	0.62	3.8	3.7	14	0.3	5.0	1.5	0.1	1	10	4.2	0.2
1320182	Drill Core		0.033	12.4	37	1.10	834	0.193	6.98	1.929	1.50	1.6	4.7	27	1.2	7.6	3.7	0.3	1	20	16.6	0.1
1320183	Drill Core		0.050	16.4	50	1.13	648	0.248	7.06	0.962	1.29	1.1	4.5	35	1.0	9.1	3.9	0.3	2	22	19.1	0.2
1320184	Drill Core		0.041	10.9	42	1.43	524	0.178	7.50	2.371	1.38	2.9	5.5	23	0.5	8.4	3.5	0.3	<1	18	15.3	0.2
1320185	Drill Core		0.051	9.2	36	3.00	157	0.212	6.71	2.915	1.45	6.6	6.6	19	0.5	12.4	1.7	0.1	<1	33	8.0	0.2
1320186	Drill Core		0.055	11.6	34	2.54	594	0.192	7.05	3.820	1.12	7.6	5.9	24	0.6	8.3	1.3	0.1	<1	19	8.1	0.3
1320187	Drill Core		0.052	11.1	39	2.06	398	0.210	7.10	3.394	0.94	3.6	6.4	22	0.7	25.4	1.2	0.1	<1	16	9.8	0.2
1320188	Drill Core		0.089	10.8	212	1.89	888	0.409	6.87	2.026	1.68	1.2	6.0	25	0.8	14.6	3.0	0.2	3	28	8.8	0.3
1320189	Drill Core		0.044	15.0	26	1.35	740	0.265	6.86	3.043	0.95	1.9	9.2	29	0.7	9.7	6.1	0.4	2	16	12.8	0.2
1320190	Drill Core		0.074	10.0	50	1.54	792	0.419	7.42	2.809	1.21	1.9	7.0	23	0.9	11.2	5.6	0.4	2	20	12.6	0.3
1320191	Drill Core		0.054	12.1	122	2.29	571	0.264	6.31	2.435	1.83	4.5	5.9	23	1.2	12.0	3.4	0.2	<1	19	8.1	0.4
1320192	Drill Core		0.056	15.0	31	1.90	1207	0.298	7.21	2.543	1.73	5.0	8.9	31	1.2	12.5	5.7	0.4	1	19	9.7	0.4
1320193	Drill Core		0.049	8.9	100	2.20	716	0.389	7.13	2.612	2.36	3.1	6.4	20	1.3	11.1	2.8	0.1	<1	24	7.5	0.2
1320194	Drill Core		0.070	10.6	54	1.76	495	0.438	7.11	2.109	1.51	1.1	8.1	25	1.8	13.1	6.1	0.4	2	21	13.9	0.1
1320195	Drill Core		0.057	14.0	66	2.50	827	0.418	7.49	2.632	1.71	0.3	7.6	30	1.7	17.4	5.7	0.4	<1	25	9.0	0.1
1320196	Drill Core		0.064	18.2	86	2.60	1743	0.486	6.37	2.272	1.44	0.7	8.2	36	1.5	17.1	6.8	0.5	1	25	6.2	0.2
1320197	Drill Core		0.043	11.6	19	1.40	64	0.156	6.99	5.417	0.35	3.3	8.7	23	0.6	5.2	2.2	0.2	<1	11	8.3	0.2
1320198	Drill Core		0.035	8.0	4	1.08	37	0.124	7.23	5.736	0.15	7.6	7.7	17	0.3	3.4	1.8	0.2	<1	10	10.1	0.3

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000211.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01
1320169	Drill Core	18.1	0.3	<0.05	<0.005	<1	0.7	<0.5	0.14
1320170	Drill Core	11.3	0.2	<0.05	<0.005	<1	0.7	<0.5	0.42
1320171	Drill Core	29.1	0.3	0.06	<0.005	<1	<0.5	<0.5	0.03
1320172	Drill Core	18.9	0.4	<0.05	<0.005	2	0.5	<0.5	0.02
1320173	Drill Core	28.5	0.2	<0.05	<0.005	<1	1.1	<0.5	0.03
1320174	Drill Core	15.8	0.2	<0.05	<0.005	1	1.0	<0.5	0.07
1320175	Rock Pulp	23.7	1.2	0.07	<0.005	1	<0.5	<0.5	0.02
1320176	Rock Pulp	23.5	1.1	0.11	0.085	<1	<0.5	<0.5	0.08
1320177	Drill Core	19.4	0.3	<0.05	<0.005	2	0.7	<0.5	0.05
1320178	Drill Core	38.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320179	Drill Core	15.5	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.03
1320180	Drill Core	6.1	0.1	<0.05	<0.005	1	0.9	<0.5	0.05
1320181	Drill Core	6.6	0.2	<0.05	<0.005	<1	0.5	<0.5	<0.01
1320182	Drill Core	41.4	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320183	Drill Core	36.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320184	Drill Core	34.2	0.3	0.06	<0.005	<1	<0.5	<0.5	0.02
1320185	Drill Core	29.9	0.3	0.09	<0.005	1	0.7	<0.5	0.02
1320186	Drill Core	24.0	0.3	0.05	<0.005	<1	0.5	<0.5	0.03
1320187	Drill Core	22.8	0.3	<0.05	0.007	<1	<0.5	<0.5	0.02
1320188	Drill Core	50.7	0.3	0.06	<0.005	<1	<0.5	<0.5	<0.01
1320189	Drill Core	25.2	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.01
1320190	Drill Core	30.0	0.3	0.06	<0.005	1	<0.5	<0.5	0.02
1320191	Drill Core	35.1	0.3	0.07	0.069	<1	<0.5	<0.5	0.09
1320192	Drill Core	33.9	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.02
1320193	Drill Core	53.6	0.3	0.08	<0.005	1	<0.5	<0.5	0.03
1320194	Drill Core	40.2	0.4	<0.05	<0.005	2	<0.5	<0.5	<0.01
1320195	Drill Core	61.8	0.4	0.14	<0.005	<1	0.8	<0.5	<0.01
1320196	Drill Core	55.1	0.5	0.08	<0.005	<1	<0.5	<0.5	<0.01
1320197	Drill Core	4.1	0.3	<0.05	<0.005	<1	0.5	<0.5	0.09
1320198	Drill Core	0.6	0.2	0.07	<0.005	<1	<0.5	<0.5	0.17

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000211.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320199	Drill Core	2.42	2683	0.3	4.8	2.5	17	0.5	6.5	7.8	251	3.19	2	0.7	2.5	47	<0.1	3.4	<0.1	83	0.94
1320200	Rock Pulp	0.05	8	3.4	23.3	4.4	45	0.4	23.3	11.5	489	2.52	4	0.7	1.8	237	0.2	0.8	<0.1	83	1.81
1320201	Rock Pulp	0.07	4476	23.6	70.2	20.5	194	1.7	79.4	7.4	297	2.81	755	5.2	3.9	50	2.2	28.5	5.5	340	2.01
1320202	Drill Core	2.39	750	0.5	16.7	8.5	26	0.2	6.6	9.8	361	2.48	12	0.7	3.7	197	<0.1	5.0	<0.1	52	1.58
1320203	Drill Core	2.30	379	0.7	11.7	6.2	48	0.3	15.3	11.6	675	3.27	8	0.7	2.2	146	0.2	1.6	<0.1	87	2.77
1320204	Drill Core	2.47	452	2.2	17.9	6.5	47	0.5	15.5	14.4	894	3.98	3	0.7	3.2	177	0.3	2.0	<0.1	77	3.81
1320205	Drill Core	2.53	17	1.4	6.3	7.9	64	<0.1	15.3	13.3	650	3.51	13	0.6	4.1	169	<0.1	3.5	<0.1	90	3.10
1320206	Drill Core	2.15	27	5.4	26.9	8.1	65	0.8	17.7	15.5	936	4.35	5	1.8	3.1	197	0.2	1.4	<0.1	117	4.80

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000211.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
	Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320199	Drill Core	0.026	5.4	3	0.55	32	0.094	7.87	6.414	0.27	8.0	8.4	12	0.3	2.6	1.5	0.2	1	3	8.9	0.6
1320200	Rock Pulp	0.047	8.3	29	0.80	483	0.272	5.12	2.130	0.84	26.0	35.6	18	0.6	11.7	3.4	0.2	<1	9	13.0	<0.1
1320201	Rock Pulp	0.091	17.8	43	0.94	57	0.180	3.32	0.013	1.56	15.4	49.9	33	2.0	14.7	5.7	0.3	1	4	13.3	1.9
1320202	Drill Core	0.033	10.8	4	0.72	348	0.118	6.53	2.571	0.59	5.0	9.9	22	1.0	6.1	3.2	0.2	<1	8	24.7	0.6
1320203	Drill Core	0.042	7.7	45	1.33	392	0.203	7.98	4.001	1.33	5.8	6.9	16	1.3	5.8	3.3	0.3	2	15	12.7	0.3
1320204	Drill Core	0.036	11.8	30	1.77	531	0.140	6.99	4.373	0.87	8.1	6.7	24	0.8	7.9	2.8	0.2	<1	15	7.7	0.4
1320205	Drill Core	0.076	11.0	38	1.55	772	0.258	7.26	1.425	2.39	7.0	8.4	23	0.9	7.3	5.1	0.4	<1	13	22.8	<0.1
1320206	Drill Core	0.051	11.5	51	1.87	539	0.304	6.82	2.043	1.91	13.9	6.1	23	1.0	10.5	4.2	0.3	<1	19	11.1	0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000211.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01
1320199	Drill Core	1.8	0.2	<0.05	0.006	1	<0.5	<0.5	0.14
1320200	Rock Pulp	21.7	1.0	<0.05	<0.005	1	<0.5	<0.5	0.03
1320201	Rock Pulp	103.4	1.4	0.17	0.029	7	1.4	6.6	5.71
1320202	Drill Core	9.5	0.4	0.06	<0.005	<1	<0.5	<0.5	0.06
1320203	Drill Core	24.3	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.09
1320204	Drill Core	11.5	0.3	0.06	0.007	2	0.7	<0.5	0.09
1320205	Drill Core	31.2	0.3	0.06	<0.005	<1	<0.5	<0.5	0.01
1320206	Drill Core	37.5	0.2	<0.05	<0.005	2	<0.5	<0.5	0.01

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000211.1

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
Pulp Duplicates																					
1320139	Drill Core	4.02	116	0.7	5.1	10.2	66	<0.1	6.6	13.4	1064	4.31	5	0.2	1.0	116	0.2	5.6	<0.1	125	4.35
REP 1320139	QC		137																		
1320157	Drill Core	2.41	7	0.3	27.9	17.3	62	0.6	6.4	12.8	771	3.52	3	0.5	1.4	116	0.1	1.4	0.2	110	2.53
REP 1320157	QC			0.2	27.5	17.9	63	0.6	6.5	12.8	790	3.59	4	0.5	1.5	118	0.1	1.4	0.3	112	2.58
1320161	Drill Core	3.37	48	0.8	55.7	3.7	48	0.1	5.0	11.7	763	3.61	4	0.4	2.2	140	<0.1	0.9	<0.1	108	2.83
REP 1320161	QC																				
REP 1320179	QC		61																		
1320190	Drill Core	3.23	21	1.4	35.3	5.3	51	<0.1	12.0	14.5	912	4.63	6	0.9	2.9	177	<0.1	0.5	<0.1	162	3.14
REP 1320190	QC		24																		
1320195	Drill Core	3.07	4	0.3	13.9	4.1	86	<0.1	25.8	22.3	1029	5.07	6	1.4	3.1	212	<0.1	0.6	<0.1	161	5.17
REP 1320195	QC																				
1320204	Drill Core	2.47	452	2.2	17.9	6.5	47	0.5	15.5	14.4	894	3.98	3	0.7	3.2	177	0.3	2.0	<0.1	77	3.81
REP 1320204	QC			1.7	17.4	6.5	48	0.5	16.0	15.0	852	4.06	4	0.7	3.2	168	0.4	2.2	<0.1	78	3.84
Core Reject Duplicates																					
1320145	Drill Core	2.80	6	1.0	43.3	9.6	84	<0.1	13.9	19.0	905	4.63	4	0.2	0.9	193	<0.1	2.4	<0.1	170	3.71
DUP 1320145	QC		23	1.1	48.6	9.9	87	<0.1	14.1	19.5	930	4.73	4	0.3	1.0	199	<0.1	2.4	<0.1	175	3.83
1320179	Drill Core	3.29	66	0.5	3.6	4.0	26	<0.1	4.5	4.8	448	2.51	3	0.5	4.2	128	0.2	1.3	<0.1	84	1.88
DUP 1320179	QC		56	0.2	4.0	4.0	21	<0.1	4.2	4.9	478	2.56	2	0.5	4.3	133	0.3	1.1	<0.1	83	1.94
Reference Materials																					
STD BVGEO01	Standard																				
STD DS11	Standard																				
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard			2.5	32.4	22.7	46	<0.1	48.7	7.9	486	6.58	9	2.6	14.5	46	<0.1	0.6	0.3	157	0.30
STD OREAS25A-4A	Standard			2.4	29.9	22.6	44	<0.1	41.1	7.4	494	6.66	8	2.5	14.2	45	<0.1	0.7	0.3	162	0.28
STD OREAS45E	Standard			2.4	789.8	17.5	46	0.2	470.4	61.8	559	24.96	16	2.4	12.6	16	<0.1	1.0	0.3	323	0.06
STD OREAS45E	Standard			2.3	797.8	17.6	41	0.3	460.9	57.2	562	24.53	15	2.4	12.5	16	<0.1	0.9	0.2	326	0.06
STD OXC145	Standard		214																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000211.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
	Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
Pulp Duplicates																					
1320139	Drill Core	0.058	7.4	8	1.82	331	0.163	7.74	2.066	1.01	3.7	2.8	17	0.5	5.7	1.3	<0.1	<1	17	22.7	0.1
REP 1320139	QC																				
1320157	Drill Core	0.042	7.1	12	0.94	329	0.225	6.60	1.299	1.60	4.6	2.9	16	0.9	10.8	2.1	0.2	<1	16	13.8	<0.1
REP 1320157	QC	0.041	7.1	12	0.96	336	0.235	6.75	1.328	1.63	4.8	3.2	16	0.9	11.3	2.1	0.1	<1	17	14.0	<0.1
1320161	Drill Core	0.040	8.3	8	1.14	146	0.187	7.01	2.933	1.10	3.2	4.7	19	0.7	7.0	1.8	0.1	<1	16	12.3	<0.1
REP 1320161	QC																				
REP 1320179	QC																				
1320190	Drill Core	0.074	10.0	50	1.54	792	0.419	7.42	2.809	1.21	1.9	7.0	23	0.9	11.2	5.6	0.4	2	20	12.6	0.3
REP 1320190	QC																				
1320195	Drill Core	0.057	14.0	66	2.50	827	0.418	7.49	2.632	1.71	0.3	7.6	30	1.7	17.4	5.7	0.4	<1	25	9.0	0.1
REP 1320195	QC																				
1320204	Drill Core	0.036	11.8	30	1.77	531	0.140	6.99	4.373	0.87	8.1	6.7	24	0.8	7.9	2.8	0.2	<1	15	7.7	0.4
REP 1320204	QC	0.037	12.1	30	1.82	513	0.136	7.05	4.428	0.88	7.1	6.5	22	0.7	7.5	2.7	0.3	<1	14	6.7	0.4
Core Reject Duplicates																					
1320145	Drill Core	0.040	4.9	30	1.88	282	0.236	7.33	2.775	1.26	3.5	3.2	11	0.7	5.9	1.6	0.1	<1	22	12.5	0.2
DUP 1320145	QC	0.040	5.2	31	1.93	290	0.242	7.53	2.856	1.29	3.8	3.3	12	0.7	6.1	1.6	0.1	<1	23	12.7	0.2
1320179	Drill Core	0.034	11.8	15	0.81	861	0.131	6.69	3.946	1.06	4.4	6.0	24	0.5	5.5	2.8	0.2	<1	9	10.4	<0.1
DUP 1320179	QC	0.036	12.9	16	0.83	903	0.127	7.24	3.998	1.07	4.1	6.1	27	0.6	5.7	2.8	0.2	<1	9	9.8	<0.1
Reference Materials																					
STD BVGEO01	Standard																				
STD DS11	Standard																				
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard	0.048	22.0	118	0.32	145	0.935	9.21	0.131	0.48	1.8	150.1	47	4.1	9.8	19.2	1.4	<1	13	35.7	<0.1
STD OREAS25A-4A	Standard	0.044	21.5	109	0.32	152	0.935	9.12	0.121	0.47	1.9	147.8	48	3.4	9.8	18.8	1.5	<1	13	37.6	<0.1
STD OREAS45E	Standard	0.033	11.1	1030	0.16	247	0.533	6.99	0.061	0.34	1.0	95.1	24	1.3	7.8	6.2	0.5	<1	92	6.7	<0.1
STD OREAS45E	Standard	0.031	10.4	947	0.16	255	0.518	6.90	0.055	0.34	1.0	92.5	24	1.1	7.1	6.1	0.5	1	90	6.0	<0.1
STD OXC145	Standard																				

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000211.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200
	Analyte	Rb	Hf	In	Re	Se	Te	Tl	Hg
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	MDL	0.1	0.1	0.05	0.005	1	0.5	0.5	0.01
Pulp Duplicates									
1320139	Drill Core	18.3	0.1	0.05	<0.005	<1	<0.5	<0.5	<0.01
REP 1320139	QC								
1320157	Drill Core	35.1	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01
REP 1320157	QC	35.1	0.2	<0.05	<0.005	<1	<0.5	<0.5	
1320161	Drill Core	22.8	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01
REP 1320161	QC								<0.01
REP 1320179	QC								
1320190	Drill Core	30.0	0.3	0.06	<0.005	1	<0.5	<0.5	0.02
REP 1320190	QC								
1320195	Drill Core	61.8	0.4	0.14	<0.005	<1	0.8	<0.5	<0.01
REP 1320195	QC								<0.01
1320204	Drill Core	11.5	0.3	0.06	0.007	2	0.7	<0.5	0.09
REP 1320204	QC	11.4	0.2	<0.05	<0.005	1	<0.5	<0.5	
Core Reject Duplicates									
1320145	Drill Core	33.4	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
DUP 1320145	QC	35.3	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320179	Drill Core	15.5	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.03
DUP 1320179	QC	17.7	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.02
Reference Materials									
STD BVGEO01	Standard								0.12
STD DS11	Standard								0.27
STD OREAS262	Standard								0.15
STD OREAS262	Standard								0.18
STD OREAS25A-4A	Standard	61.2	4.1	0.09	<0.005	3	<0.5	<0.5	
STD OREAS25A-4A	Standard	58.0	4.0	0.12	<0.005	2	<0.5	<0.5	
STD OREAS45E	Standard	22.2	2.8	0.11	<0.005	3	<0.5	<0.5	
STD OREAS45E	Standard	21.0	2.7	<0.05	<0.005	3	<0.5	<0.5	
STD OXC145	Standard								

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000211.1

		WGHT Wgt kg 0.01	FA350 Au ppb 2	MA200 Mo ppm 0.1	MA200 Cu ppm 0.1	MA200 Pb ppm 0.1	MA200 Zn ppm 1	MA200 Ag ppm 0.1	MA200 Ni ppm 0.1	MA200 Co ppm 0.2	MA200 Mn ppm 1	MA200 Fe % 0.01	MA200 As ppm 1	MA200 U ppm 0.1	MA200 Th ppm 0.1	MA200 Sr ppm 1	MA200 Cd ppm 0.1	MA200 Sb ppm 0.1	MA200 Bi ppm 0.1	MA200 V ppm 1	MA200 Ca % 0.01
STD OXC145	Standard		223																		
STD OXC145	Standard		209																		
STD OXH139	Standard		1315																		
STD OXH139	Standard		1335																		
STD OXH139	Standard		1371																		
STD OXH139	Standard		1266																		
STD BVGEO01 Expected																					
STD DS11 Expected																					
STD OREAS262 Expected																					
STD OREAS25A-4A Expected				2.41	33.9	25.2	44.4		45.8	7.7	480	6.6	9.94	2.94	15.8	48.5		0.65	0.37	157	0.301
STD OREAS45E Expected				2.4	780	18.2	46.7	0.311	454	57	570	24.12	16.3	2.41	12.9	15.9	0.06	1	0.28	322	0.065
STD OXC145 Expected			212																		
STD OXH139 Expected			1312																		
BLK	Blank																				
BLK	Blank																				
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank		3																		
BLK	Blank		3																		
BLK	Blank		<2																		
BLK	Blank		3																		
Prep Wash																					
ROCK-WHI	Prep Blank		4	2.2	3.4	2.6	32	<0.1	1.0	3.9	632	2.16	2	1.2	2.7	211	<0.1	<0.1	<0.1	35	1.60
ROCK-WHI	Prep Blank		3	0.9	2.8	2.5	36	<0.1	1.2	4.0	657	2.24	2	1.1	2.6	212	<0.1	<0.1	<0.1	35	1.64

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000211.1

		MA200 P % 0.001	MA200 La ppm 0.1	MA200 Cr ppm 1	MA200 Mg % 0.01	MA200 Ba ppm 1	MA200 Ti % 0.001	MA200 Al % 0.01	MA200 Na % 0.001	MA200 K % 0.01	MA200 W ppm 0.1	MA200 Zr ppm 0.1	MA200 Ce ppm 1	MA200 Sn ppm 0.1	MA200 Y ppm 0.1	MA200 Nb ppm 0.1	MA200 Ta ppm 0.1	MA200 Be ppm 1	MA200 Sc ppm 1	MA200 Li ppm 0.1	MA200 S % 0.1
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD BVGEO01 Expected																					
STD DS11 Expected																					
STD OREAS262 Expected																					
STD OREAS25A-4A Expected		0.048	21.8	115	0.327	147	0.93	8.87	0.131	0.482	2	155	47.3	4.06	10.5	20.9	1.4	0.93	13.7	36.7	0.047
STD OREAS45E Expected		0.034	11	979	0.156	252	0.559	6.78	0.059	0.324	1.07	97	23.5	1.32	8.28	6.8	0.54		93	6.58	0.046
STD OXC145 Expected																					
STD OXH139 Expected																					
BLK	Blank																				
BLK	Blank																				
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.004	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.001	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
Prep Wash																					
ROCK-WHI	Prep Blank	0.041	11.9	2	0.48	782	0.207	7.07	3.271	1.64	0.3	51.3	24	0.8	15.1	5.6	0.4	<1	7	2.9	<0.1
ROCK-WHI	Prep Blank	0.043	12.0	3	0.50	779	0.210	7.14	3.353	1.65	0.4	52.0	25	0.8	15.5	5.7	0.4	<1	7	2.8	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000211.1

		MA200 Rb ppm 0.1	MA200 Hf ppm 0.1	MA200 In ppm 0.05	MA200 Re ppm 0.005	MA200 Se ppm 1	MA200 Te ppm 0.5	MA200 Tl ppm 0.5	AQ200 Hg ppm 0.01
STD OXC145	Standard								
STD OXC145	Standard								
STD OXH139	Standard								
STD OXH139	Standard								
STD OXH139	Standard								
STD OXH139	Standard								
STD BVGEO01 Expected									0.1
STD DS11 Expected									0.26
STD OREAS262 Expected									0.17
STD OREAS25A-4A Expected		61	4.14	0.09		2.4		0.35	
STD OREAS45E Expected		21.2	3.11	0.099		2.97	0.1	0.15	
STD OXC145 Expected									
STD OXH139 Expected									
BLK	Blank								0.02
BLK	Blank								<0.01
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5	
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5	
BLK	Blank								
BLK	Blank								
BLK	Blank								
BLK	Blank								
Prep Wash									
ROCK-WHI	Prep Blank	34.6	1.7	<0.05	<0.005	<1	<0.5	<0.5	<0.01
ROCK-WHI	Prep Blank	34.6	1.7	<0.05	<0.005	<1	<0.5	<0.5	<0.01

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

DDLS-19-02 Assay Certificates WHI19000254.1 and WHI19000255.1

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Submitted By: Dan Ferraro
Receiving Lab: Canada-Whitehorse
Received: July 24, 2019
Report Date: September 05, 2019
Page: 1 of 6

CERTIFICATE OF ANALYSIS WHI19000254.1

CLIENT JOB INFORMATION

Project: LUC
Shipment ID: DDLS-19-02
P.O. Number
Number of Samples: 138

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	128	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	10	Sort, label and box pulps			WHI
FA350-Au	138	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	138	Environmental disposal charge-Fire assay lead waste			VAN
MA200	138	4 Acid digestion ICP-MS analysis	0.25	Completed	VAN
AQ200-HG	138	Hg by AR digestion ICP-MS analysis	0.5	Completed	VAN
SHP01	138	Per sample shipping charges for branch shipments			VAN
EN001-MA	138	Environmental disposal fee - Multi-acid neutralization			VAN
PULSW	128	Extra Wash with Silica between each sample			WHI
FA550	0	Lead collection fire assay 50G fusion - Grav finish	50	Completed	VAN

ADDITIONAL COMMENTS

Invoice To: Luckystrike Resources Ltd.
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4
Canada

CC: Daithi MacGearailt

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000254.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320207	Drill Core	2.18	10	1.8	38.5	15.1	118	0.3	31.8	24.6	1403	6.97	14	1.2	3.7	133	0.3	0.8	0.2	281	0.79
1320208	Drill Core	1.91	9	1.2	37.1	5.5	69	0.3	26.1	13.7	463	3.14	6	0.9	7.4	90	0.1	0.6	<0.1	128	2.04
1320209	Drill Core	2.55	10	1.4	42.6	9.6	126	0.2	40.3	28.2	1148	7.89	10	1.2	2.1	72	0.3	1.1	0.1	255	3.77
1320210	Drill Core	4.73	4	1.2	51.5	7.7	109	0.2	30.6	27.2	982	6.77	10	1.3	4.7	118	0.1	0.7	<0.1	262	0.66
1320211	Drill Core	3.68	4	0.9	34.7	4.9	104	0.3	23.9	17.5	986	5.62	8	1.9	8.2	114	0.1	0.5	0.1	184	0.55
1320212	Drill Core	3.68	5	1.3	40.5	5.2	103	0.2	35.8	18.0	553	5.46	8	1.4	5.5	99	0.2	0.6	<0.1	225	2.21
1320213	Drill Core	3.51	7	1.3	42.0	8.0	68	0.2	30.6	12.3	404	3.73	7	0.9	7.3	104	<0.1	0.5	<0.1	126	1.80
1320214	Drill Core	5.19	75	2.5	37.8	13.6	87	0.4	41.8	20.4	791	5.16	14	2.1	6.7	369	0.2	1.7	<0.1	181	0.40
1320215	Drill Core	4.33	590	1.0	13.8	9.3	58	6.6	29.4	19.4	862	4.09	7	0.7	3.7	263	0.7	1.4	<0.1	118	7.82
1320216	Drill Core	2.98	143	1.4	15.4	11.5	82	0.3	37.7	21.0	970	4.81	8	1.0	4.9	349	0.7	1.5	<0.1	150	5.51
1320217	Drill Core	2.41	339	1.5	10.5	9.3	81	0.8	33.8	20.5	1650	5.52	6	0.8	3.0	230	1.4	1.3	<0.1	138	11.31
1320218	Drill Core	4.67	119	4.1	48.5	14.3	87	0.4	34.7	21.9	838	5.27	13	1.3	4.5	525	0.5	2.3	0.2	198	4.79
1320219	Drill Core	4.08	25	2.5	13.2	7.0	60	0.2	33.5	17.1	1163	4.16	9	0.5	1.5	106	0.4	2.2	0.1	112	9.47
1320220	Drill Core	4.46	9	2.6	38.3	4.0	30	0.2	19.3	8.1	408	1.84	13	0.5	1.4	67	0.2	1.6	0.1	51	3.56
1320221	Drill Core	4.58	11	1.0	19.9	5.6	35	<0.1	17.9	9.7	325	1.87	12	0.6	1.9	73	0.1	1.8	<0.1	57	1.54
1320222	Drill Core	4.34	3	1.7	18.0	13.7	87	<0.1	26.4	21.2	886	5.82	11	1.3	0.6	88	0.1	3.4	0.1	260	2.86
1320223	Drill Core	3.46	4	1.4	40.6	9.3	61	0.1	26.1	12.6	442	3.64	12	1.1	3.4	135	0.1	2.4	<0.1	167	2.81
1320224	Drill Core	4.94	4	1.3	48.5	7.8	70	0.1	31.4	12.6	479	3.67	15	1.3	5.1	133	<0.1	2.0	<0.1	141	2.50
1320225	Rock Pulp	0.06	8	3.0	22.4	3.9	42	0.5	22.4	10.6	463	2.46	4	0.7	1.7	231	0.3	0.8	<0.1	80	1.77
1320226	Rock Pulp	0.06	228	191.1	1889.8	39.6	270	0.6	37.9	13.8	761	4.32	16	0.7	2.1	277	0.9	1.7	0.4	118	2.65
1320227	Drill Core	3.85	5	1.6	17.3	9.4	65	0.1	21.3	15.0	589	4.11	12	1.0	1.6	87	0.1	2.0	0.1	116	2.02
1320228	Drill Core	2.99	5	1.1	19.5	3.5	15	0.1	7.8	2.9	92	0.99	15	0.5	2.2	58	<0.1	1.0	<0.1	34	0.10
1320229	Drill Core	3.19	5	1.0	26.9	6.0	27	0.2	14.3	6.7	227	1.68	14	0.6	1.6	110	<0.1	1.9	<0.1	45	0.30
1320230	Drill Core	4.34	6	1.2	22.3	4.4	21	0.1	14.4	5.4	217	1.41	12	0.5	1.9	79	<0.1	1.4	<0.1	43	1.82
1320231	Drill Core	4.57	3	1.0	16.3	4.8	31	<0.1	19.4	8.2	318	1.99	9	0.5	2.2	67	<0.1	1.6	<0.1	66	2.10
1320232	Drill Core	4.62	4	1.7	41.0	16.9	105	<0.1	49.1	26.1	700	7.45	10	1.3	2.0	69	0.1	2.6	0.2	334	3.10
1320233	Drill Core	3.60	6	2.8	58.7	13.6	86	0.2	41.6	30.6	1137	6.65	16	1.3	3.6	86	0.2	2.3	0.2	258	4.56
1320234	Drill Core	3.94	7	2.0	59.0	15.9	66	0.2	36.1	12.5	426	3.60	13	0.9	5.6	172	0.1	2.2	0.3	142	2.28
1320235	Drill Core	4.06	4	1.0	33.5	43.8	75	0.2	19.2	22.0	692	6.40	9	1.2	2.7	173	0.2	1.2	0.6	288	3.85
1320236	Drill Core	5.10	4	1.1	38.2	8.1	78	<0.1	32.1	22.2	1007	5.67	6	1.3	4.1	103	0.1	0.8	0.1	174	4.26

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000254.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320207	Drill Core		0.083	15.3	49	0.64	1228	0.723	7.67	1.350	1.55	1.5	10.8	32	1.5	22.9	5.1	0.3	1	26	15.6	<0.1
1320208	Drill Core		0.044	23.8	55	0.40	1683	0.296	5.34	0.198	1.38	1.5	8.8	47	1.4	13.9	7.9	0.5	<1	10	18.3	<0.1
1320209	Drill Core		0.071	10.8	55	0.43	547	0.528	6.84	0.858	1.71	5.0	7.2	23	1.0	24.2	3.3	0.2	1	28	17.8	<0.1
1320210	Drill Core		0.121	20.5	50	0.36	1422	0.804	7.69	1.063	1.80	0.8	8.7	44	1.4	21.2	7.8	0.5	1	26	17.8	<0.1
1320211	Drill Core		0.153	30.5	42	0.46	1950	0.509	7.44	0.478	1.96	0.7	6.0	62	1.5	18.9	10.2	0.7	1	19	24.9	<0.1
1320212	Drill Core		0.074	19.5	54	0.48	1374	0.671	7.21	0.236	1.74	1.2	6.5	40	1.5	19.0	7.5	0.5	1	20	20.3	<0.1
1320213	Drill Core		0.056	23.1	61	0.46	2278	0.324	5.82	0.517	1.32	2.2	5.9	47	1.2	14.3	8.1	0.5	<1	10	17.2	<0.1
1320214	Drill Core		0.064	23.6	65	0.21	2248	0.313	6.41	0.067	1.37	2.1	8.3	49	1.2	11.3	3.7	0.2	1	18	29.8	<0.1
1320215	Drill Core		0.045	14.4	48	0.15	1837	0.157	5.01	0.023	0.79	2.3	5.6	30	0.6	11.3	2.0	0.1	<1	21	31.8	<0.1
1320216	Drill Core		0.050	18.1	54	0.22	861	0.224	5.95	0.042	0.96	1.7	6.2	37	0.8	11.6	3.3	0.2	<1	18	32.0	<0.1
1320217	Drill Core		0.040	12.2	28	0.21	1067	0.162	5.10	0.715	0.63	2.3	4.7	27	0.5	12.6	1.5	<0.1	<1	29	20.4	<0.1
1320218	Drill Core		0.063	16.6	40	0.23	1458	0.341	6.22	0.175	0.81	2.6	8.8	35	1.0	11.8	2.6	0.2	<1	20	33.1	<0.1
1320219	Drill Core		0.033	7.5	29	0.20	752	0.119	4.67	0.041	0.92	3.9	3.7	17	0.3	8.0	1.1	<0.1	<1	17	24.6	<0.1
1320220	Drill Core		0.023	5.0	71	0.14	954	0.063	1.67	0.011	0.43	0.9	2.3	11	0.4	4.1	0.9	<0.1	<1	7	13.0	<0.1
1320221	Drill Core		0.028	6.6	25	0.07	1011	0.099	2.83	0.014	0.39	1.0	3.9	14	0.3	5.1	1.4	<0.1	<1	6	15.8	<0.1
1320222	Drill Core		0.060	2.9	41	0.22	821	0.657	10.14	0.019	1.38	1.0	6.1	8	0.9	9.4	4.4	0.3	2	36	33.3	<0.1
1320223	Drill Core		0.050	9.1	50	0.17	797	0.425	6.91	0.019	0.93	0.6	5.2	21	0.9	8.7	5.3	0.3	<1	21	26.7	<0.1
1320224	Drill Core		0.043	14.4	51	0.18	2400	0.274	5.87	0.037	1.07	0.8	5.8	31	1.0	10.2	5.9	0.4	<1	13	23.7	<0.1
1320225	Rock Pulp		0.049	7.3	28	0.81	471	0.265	5.11	2.053	0.82	27.2	36.1	16	0.7	11.3	3.3	0.2	<1	10	11.4	<0.1
1320226	Rock Pulp		0.058	8.7	53	1.35	590	0.366	6.72	2.290	0.88	8.7	30.6	19	1.8	13.9	4.4	0.3	<1	15	15.3	0.3
1320227	Drill Core		0.042	7.1	26	0.13	1145	0.273	4.63	0.076	0.61	0.6	4.4	15	0.5	9.6	2.4	0.1	<1	16	23.1	<0.1
1320228	Drill Core		0.017	6.6	16	0.04	219	0.053	1.38	0.011	0.13	0.7	2.9	13	0.2	3.0	1.1	<0.1	<1	2	10.2	<0.1
1320229	Drill Core		0.018	5.9	41	0.06	220	0.068	1.46	0.008	0.19	0.3	3.2	12	0.3	3.5	1.3	<0.1	<1	4	10.9	<0.1
1320230	Drill Core		0.021	6.5	23	0.04	505	0.057	1.18	0.009	0.12	0.5	3.1	13	0.2	4.8	1.2	<0.1	<1	4	9.1	<0.1
1320231	Drill Core		0.030	7.1	30	0.09	466	0.128	3.37	0.070	0.48	0.5	4.1	15	0.4	5.8	1.9	0.1	<1	7	15.1	<0.1
1320232	Drill Core		0.062	6.8	81	0.40	1638	0.760	8.48	0.022	2.00	0.4	8.9	17	1.5	15.8	3.1	0.2	2	37	20.1	<0.1
1320233	Drill Core		0.056	12.7	61	0.43	1322	0.574	7.50	0.140	1.64	0.4	8.0	28	1.3	18.4	3.8	0.2	2	27	20.6	<0.1
1320234	Drill Core		0.042	18.5	63	0.30	3252	0.263	5.27	0.041	1.15	0.5	5.5	38	1.0	11.1	5.0	0.3	<1	12	20.9	<0.1
1320235	Drill Core		0.047	9.1	23	0.42	3157	0.596	7.48	1.184	1.84	0.3	7.0	22	0.9	14.2	4.4	0.3	1	28	14.1	<0.1
1320236	Drill Core		0.041	12.9	52	0.46	2080	0.413	6.54	0.396	1.32	0.7	7.0	27	1.0	14.4	5.7	0.4	1	21	18.1	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000254.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320207	Drill Core	65.5	0.5	0.09	<0.005	<1	<0.5	<0.5	0.04	
1320208	Drill Core	57.4	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.05	
1320209	Drill Core	56.1	0.4	0.07	<0.005	<1	<0.5	<0.5	0.03	
1320210	Drill Core	65.0	0.5	0.08	<0.005	<1	<0.5	<0.5	0.02	
1320211	Drill Core	91.7	0.3	0.06	<0.005	<1	<0.5	0.5	0.03	
1320212	Drill Core	77.3	0.3	0.06	<0.005	1	<0.5	<0.5	0.03	
1320213	Drill Core	64.3	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320214	Drill Core	35.5	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.13	
1320215	Drill Core	16.0	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.14	
1320216	Drill Core	23.7	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.08	
1320217	Drill Core	14.3	0.2	0.09	<0.005	<1	<0.5	<0.5	0.08	
1320218	Drill Core	24.9	0.3	0.05	<0.005	<1	<0.5	<0.5	0.09	
1320219	Drill Core	28.0	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320220	Drill Core	15.4	<0.1	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320221	Drill Core	10.9	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320222	Drill Core	31.0	0.4	0.06	<0.005	<1	<0.5	<0.5	0.02	
1320223	Drill Core	22.4	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320224	Drill Core	28.9	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320225	Rock Pulp	20.7	1.1	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320226	Rock Pulp	22.2	1.0	0.10	0.095	<1	<0.5	<0.5	0.09	
1320227	Drill Core	19.0	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320228	Drill Core	3.6	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.05	
1320229	Drill Core	5.7	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.07	
1320230	Drill Core	3.2	<0.1	<0.05	<0.005	<1	<0.5	<0.5	0.05	
1320231	Drill Core	15.5	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320232	Drill Core	67.3	0.5	0.10	<0.005	2	<0.5	<0.5	0.01	
1320233	Drill Core	55.2	0.4	0.05	<0.005	<1	<0.5	<0.5	0.04	
1320234	Drill Core	46.1	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320235	Drill Core	57.8	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320236	Drill Core	47.3	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.01	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000254.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320237	Drill Core	5.09	3	0.6	27.9	10.7	74	<0.1	39.2	26.3	1046	6.64	6	1.2	1.0	183	0.2	1.8	0.4	275	6.59
1320238	Drill Core	5.11	3	0.4	16.7	5.7	76	<0.1	34.9	28.7	1067	6.52	5	1.2	0.9	166	0.3	1.5	0.2	244	6.56
1320239	Drill Core	4.69	4	0.7	38.4	5.7	68	<0.1	31.7	26.1	1290	5.79	14	1.0	1.5	103	0.3	2.1	0.1	151	8.45
1320240	Drill Core	3.99	4	0.7	76.6	9.8	77	0.2	31.9	29.2	1018	6.17	16	1.2	2.1	88	0.3	2.2	0.2	242	4.56
1320241	Drill Core	4.11	3	0.6	39.5	7.8	61	0.1	27.8	16.4	626	4.03	12	1.6	4.1	83	0.1	1.5	0.1	147	1.84
1320242	Drill Core	4.25	3	0.9	25.7	6.2	79	<0.1	35.0	24.3	1352	5.50	6	1.2	3.0	107	0.3	1.4	0.1	184	4.55
1320243	Drill Core	4.46	4	0.9	27.3	5.2	77	<0.1	24.8	19.3	1230	6.03	6	1.5	0.9	75	0.3	1.8	0.1	197	6.84
1320244	Drill Core	3.84	4	0.8	29.4	5.6	78	0.1	29.1	26.6	1215	5.98	5	1.2	1.0	76	0.2	1.6	0.1	232	5.03
1320245	Drill Core	4.42	4	1.0	37.9	7.8	81	0.1	31.1	32.1	999	7.19	8	1.4	1.6	76	0.1	2.3	0.2	281	3.56
1320246	Drill Core	4.61	14	3.6	91.4	11.5	87	0.4	39.9	18.1	1054	5.33	19	2.0	3.4	324	0.4	4.9	0.1	206	7.27
1320247	Drill Core	4.13	13	3.2	43.1	11.8	99	0.3	44.9	27.0	1328	6.49	11	2.0	1.7	233	0.2	3.4	0.1	281	6.94
1320248	Drill Core	4.02	10	2.3	24.7	8.0	83	0.1	39.0	20.3	885	4.70	12	1.1	3.9	252	0.2	2.2	<0.1	153	6.20
1320249	Drill Core	3.96	34	2.0	8.3	7.8	87	0.1	28.8	16.5	1032	4.64	12	0.6	1.3	211	0.5	2.7	<0.1	102	10.29
1320250	Rock Pulp	0.06	7	3.3	23.2	4.1	44	0.4	23.4	10.8	489	2.59	4	0.7	1.6	242	0.2	0.8	<0.1	83	1.85
1320251	Rock Pulp	0.06	984	14.1	>10000	20.4	127	3.4	655.0	19.7	925	8.59	5	0.3	1.6	134	0.4	15.8	0.7	105	2.35
1320252	Drill Core	5.08	33	1.3	9.7	7.6	65	<0.1	25.1	11.8	656	3.43	10	0.5	2.5	278	0.3	3.1	<0.1	77	7.27
1320253	Drill Core	3.90	18	1.8	20.7	10.7	52	<0.1	23.1	9.9	464	2.69	11	0.6	3.0	388	0.2	2.6	<0.1	87	4.95
1320254	Drill Core	4.94	44	1.6	22.5	9.2	56	0.2	27.7	13.5	726	3.31	8	0.7	2.9	314	0.4	1.9	<0.1	84	6.16
1320255	Drill Core	3.29	230	2.5	32.9	6.9	60	0.6	39.7	15.6	505	3.67	6	1.1	7.2	221	0.3	1.7	<0.1	128	3.34
1320256	Drill Core	4.88	137	2.1	52.0	7.6	69	0.5	40.3	14.4	378	3.66	10	1.1	6.2	209	0.1	1.9	<0.1	158	3.01
1320257	Drill Core	4.25	5	2.3	38.1	8.5	107	0.2	71.2	20.7	654	4.43	7	1.1	5.1	243	0.1	1.5	<0.1	184	3.12
1320258	Drill Core	3.84	8	3.6	25.2	10.6	111	0.1	47.0	33.3	1534	7.36	5	0.9	3.1	149	0.2	3.0	0.1	301	3.71
1320259	Drill Core	5.08	4	2.8	85.5	8.3	121	0.1	58.2	50.7	1315	8.88	8	0.6	1.0	95	0.2	2.1	0.2	396	3.36
1320260	Drill Core	4.23	7	1.6	83.9	7.0	123	0.2	41.6	32.1	1329	8.35	6	1.1	2.7	143	0.2	0.9	<0.1	371	3.98
1320261	Drill Core	4.62	4	1.4	125.0	9.5	138	0.3	45.9	50.4	1029	11.32	9	1.6	0.8	119	0.2	1.5	0.2	482	2.78
1320262	Drill Core	4.72	7	1.8	41.6	4.1	92	0.1	42.2	19.2	744	5.35	10	1.3	5.9	144	0.1	0.9	<0.1	214	3.88
1320263	Drill Core	4.26	21	1.1	33.2	7.2	84	0.2	32.2	25.3	1430	6.47	5	1.5	2.2	192	0.3	1.8	0.1	298	5.54
1320264	Drill Core	4.23	22	1.8	51.6	11.4	116	0.2	39.4	31.5	1591	9.23	5	2.1	1.1	131	0.4	3.1	0.2	435	5.06
1320265	Drill Core	4.55	58	2.9	59.4	7.8	83	0.3	35.5	19.9	701	5.73	6	1.7	3.6	193	0.2	2.1	0.1	271	2.90
1320266	Drill Core	4.64	25	2.0	34.0	6.1	65	0.2	29.6	8.4	277	2.93	6	0.9	6.8	621	0.1	0.7	<0.1	126	2.08

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000254.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320237	Drill Core		0.058	6.4	94	1.29	421	0.680	8.33	0.942	1.71	0.2	8.6	16	1.5	24.6	2.7	0.2	1	37	12.2	0.1
1320238	Drill Core		0.043	4.8	87	1.43	489	0.553	8.00	1.116	1.81	0.2	8.1	12	1.2	18.6	2.1	0.1	<1	34	13.4	<0.1
1320239	Drill Core		0.045	6.1	36	1.03	471	0.351	4.69	0.433	0.81	0.2	5.4	14	0.9	16.3	1.7	0.1	<1	18	18.3	<0.1
1320240	Drill Core		0.048	7.8	43	0.76	959	0.630	6.65	0.350	1.10	0.6	9.7	18	2.9	20.3	3.4	0.3	1	25	19.0	<0.1
1320241	Drill Core		0.071	12.7	45	0.39	505	0.442	6.89	0.581	0.70	0.2	4.2	29	1.1	13.2	8.0	0.6	1	14	21.8	<0.1
1320242	Drill Core		0.043	10.8	64	0.88	353	0.364	6.25	0.501	1.12	1.7	5.1	23	1.1	14.9	4.9	0.3	1	22	20.6	<0.1
1320243	Drill Core		0.041	5.9	28	0.89	266	0.475	6.57	0.104	1.17	0.6	8.7	14	0.9	16.0	2.8	0.2	1	20	26.8	<0.1
1320244	Drill Core		0.057	5.9	31	0.73	856	0.598	7.48	0.469	1.35	0.9	8.3	14	1.1	14.7	3.4	0.2	1	23	22.7	<0.1
1320245	Drill Core		0.070	8.0	26	0.69	993	0.740	8.48	0.055	1.56	0.6	7.0	20	1.3	18.6	4.7	0.3	1	27	30.7	<0.1
1320246	Drill Core		0.037	13.8	71	1.32	2056	0.344	5.29	0.025	0.91	5.0	7.8	29	0.8	13.3	3.6	0.2	1	16	26.8	<0.1
1320247	Drill Core		0.039	8.6	58	0.99	291	0.583	6.12	0.020	1.08	2.6	7.6	19	0.8	16.7	2.9	0.2	1	24	24.4	<0.1
1320248	Drill Core		0.037	15.1	54	0.80	289	0.287	4.39	0.023	0.54	0.6	6.0	31	0.7	14.2	3.7	0.3	<1	12	31.6	<0.1
1320249	Drill Core		0.015	5.9	19	1.87	3684	0.047	1.95	0.022	0.09	0.5	2.4	12	0.2	10.3	0.5	<0.1	<1	8	26.8	<0.1
1320250	Rock Pulp		0.051	7.8	30	0.85	499	0.277	5.50	2.198	0.87	28.7	38.2	17	0.8	11.6	3.5	0.2	<1	10	11.8	<0.1
1320251	Rock Pulp		0.061	3.6	737	1.13	124	0.131	5.31	0.227	2.92	3.1	13.4	8	1.7	5.1	4.9	0.3	<1	8	8.5	1.2
1320252	Drill Core		0.023	9.7	28	1.54	1920	0.071	2.31	0.019	0.23	0.5	3.6	20	0.3	7.3	1.0	<0.1	<1	6	32.9	<0.1
1320253	Drill Core		0.028	11.9	38	0.63	1872	0.111	2.58	0.017	0.31	0.4	3.5	24	0.4	7.1	1.2	<0.1	<1	6	29.7	<0.1
1320254	Drill Core		0.029	11.8	40	1.24	1508	0.116	3.51	0.028	0.30	1.2	4.9	25	0.5	9.6	1.5	<0.1	<1	11	28.1	<0.1
1320255	Drill Core		0.043	25.0	63	0.72	3659	0.171	5.93	0.073	0.80	2.0	10.0	51	1.0	7.2	3.0	0.2	<1	11	28.7	<0.1
1320256	Drill Core		0.043	20.9	53	0.55	2461	0.270	5.10	0.047	0.87	4.9	9.1	42	1.3	9.8	4.7	0.3	<1	13	21.9	<0.1
1320257	Drill Core		0.062	16.3	315	0.71	1105	0.368	5.48	0.036	1.26	0.5	5.1	34	1.5	12.1	6.3	0.4	1	20	18.8	<0.1
1320258	Drill Core		0.060	12.3	96	0.94	977	0.608	7.35	0.587	1.53	1.2	8.3	27	1.3	17.7	4.1	0.2	1	31	18.7	<0.1
1320259	Drill Core		0.062	6.0	120	0.98	427	0.900	8.43	0.955	2.45	0.5	10.3	16	1.2	21.1	2.9	0.2	2	40	11.0	<0.1
1320260	Drill Core		0.064	11.3	38	1.37	885	0.777	6.83	1.192	1.71	2.2	8.8	26	1.5	18.6	4.1	0.3	1	28	15.0	0.1
1320261	Drill Core		0.087	8.2	27	0.74	524	1.131	7.87	0.494	1.20	0.4	9.7	22	1.9	26.8	3.6	0.2	1	41	17.4	0.3
1320262	Drill Core		0.048	21.1	58	0.90	1574	0.351	5.75	0.128	1.17	0.9	10.1	43	1.1	13.3	3.1	0.2	<1	15	19.0	0.1
1320263	Drill Core		0.061	10.6	52	1.08	483	0.664	6.53	0.035	1.31	5.7	7.9	24	1.1	14.3	3.6	0.2	1	27	25.5	<0.1
1320264	Drill Core		0.102	9.5	28	1.28	328	1.069	8.70	0.032	1.76	9.6	9.4	24	1.4	18.1	4.0	0.2	1	37	25.9	<0.1
1320265	Drill Core		0.084	15.3	33	0.81	1810	0.733	6.96	0.023	0.94	4.7	6.7	34	1.2	13.7	5.5	0.3	1	21	26.7	<0.1
1320266	Drill Core		0.064	22.9	71	0.79	2369	0.323	5.39	0.020	0.82	1.9	4.2	46	1.3	10.7	10.2	0.7	<1	10	21.2	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000254.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320237	Drill Core	67.5	0.6	0.06	<0.005	1	<0.5	<0.5	<0.01	
1320238	Drill Core	66.2	0.5	0.05	<0.005	<1	<0.5	<0.5	0.01	
1320239	Drill Core	30.0	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320240	Drill Core	41.0	0.6	0.09	<0.005	1	<0.5	<0.5	0.03	
1320241	Drill Core	20.2	0.2	0.05	<0.005	<1	<0.5	<0.5	0.06	
1320242	Drill Core	37.4	0.3	0.05	<0.005	<1	<0.5	<0.5	0.02	
1320243	Drill Core	44.6	0.4	0.05	<0.005	<1	<0.5	<0.5	0.01	
1320244	Drill Core	45.6	0.4	0.06	<0.005	<1	<0.5	<0.5	0.03	
1320245	Drill Core	51.0	0.4	0.08	<0.005	<1	<0.5	<0.5	0.07	
1320246	Drill Core	26.3	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.10	
1320247	Drill Core	34.3	0.4	0.05	<0.005	<1	<0.5	<0.5	0.04	
1320248	Drill Core	16.6	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320249	Drill Core	2.4	<0.1	<0.05	<0.005	<1	<0.5	<0.5	0.06	
1320250	Rock Pulp	21.4	1.1	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320251	Rock Pulp	59.5	0.4	0.16	0.010	10	<0.5	<0.5	1.49	
1320252	Drill Core	5.9	<0.1	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320253	Drill Core	8.3	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320254	Drill Core	7.6	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.07	
1320255	Drill Core	20.5	0.3	<0.05	<0.005	<1	0.6	<0.5	0.15	
1320256	Drill Core	24.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.08	
1320257	Drill Core	49.3	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320258	Drill Core	57.2	0.4	0.06	<0.005	1	<0.5	<0.5	0.01	
1320259	Drill Core	85.5	0.6	0.08	<0.005	1	<0.5	0.5	<0.01	
1320260	Drill Core	75.8	0.5	0.08	<0.005	<1	<0.5	<0.5	0.01	
1320261	Drill Core	46.4	0.7	0.14	<0.005	4	<0.5	<0.5	0.02	
1320262	Drill Core	34.3	0.3	<0.05	<0.005	2	<0.5	<0.5	0.02	
1320263	Drill Core	33.5	0.4	0.07	<0.005	<1	<0.5	<0.5	0.01	
1320264	Drill Core	41.1	0.6	0.08	<0.005	2	<0.5	<0.5	0.03	
1320265	Drill Core	29.2	0.4	0.06	<0.005	1	<0.5	<0.5	0.03	
1320266	Drill Core	23.4	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.02	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000254.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320267	Drill Core	3.42	48	2.3	32.9	6.5	68	0.3	29.7	8.4	268	2.99	6	1.0	7.1	733	0.1	0.9	<0.1	135	2.23
1320268	Drill Core	4.70	20	2.7	34.7	8.1	65	0.2	30.6	9.9	359	3.09	7	1.0	6.3	487	<0.1	1.3	0.1	147	3.29
1320269	Drill Core	3.07	12	3.1	30.3	11.5	116	0.1	43.1	24.1	701	7.20	4	1.9	2.1	296	0.2	1.2	0.1	300	2.98
1320270	Drill Core	6.44	131	1.9	34.7	4.2	61	0.4	32.3	8.5	377	3.03	4	0.7	6.7	213	0.2	0.6	<0.1	110	3.45
1320271	Drill Core	3.18	288	2.1	36.7	4.1	54	0.8	32.8	9.0	304	2.49	5	0.7	6.4	252	0.1	0.7	<0.1	100	1.97
1320272	Drill Core	3.66	140	1.7	19.4	4.2	79	0.4	30.0	10.4	550	3.10	4	0.5	4.1	245	0.2	0.6	<0.1	94	6.62
1320273	Drill Core	3.19	20	2.6	41.1	6.4	69	0.3	31.4	9.7	323	2.74	7	0.9	6.0	417	0.1	2.0	<0.1	106	3.17
1320274	Drill Core	2.42	56	4.3	40.0	8.7	73	0.3	38.3	14.2	521	3.56	8	1.3	5.8	311	0.3	2.5	<0.1	121	4.58
1320275	Rock Pulp	0.06	8	3.3	22.5	4.0	44	0.4	23.5	10.6	484	2.59	3	0.7	1.7	243	0.2	0.8	<0.1	83	1.82
1320276	Rock Pulp	0.05	211	191.5	1938.7	45.5	298	1.6	37.7	14.7	771	4.31	18	0.7	2.5	273	1.4	1.8	0.5	118	2.76
1320277	Drill Core	3.02	38	2.9	46.3	6.6	62	0.2	32.9	12.3	324	3.03	6	1.4	7.9	153	0.1	2.1	0.2	113	1.84
1320278	Drill Core	3.28	261	2.3	26.6	6.0	51	0.7	31.3	17.1	567	4.24	6	1.3	6.2	121	0.5	1.2	0.1	121	3.31
1320279	Drill Core	2.63	578	1.3	13.4	5.0	24	1.4	22.3	11.8	418	2.41	5	1.0	6.1	139	0.3	1.8	<0.1	47	2.15
1320280	Drill Core	4.22	450	1.6	30.3	6.7	49	1.0	28.4	12.9	647	3.44	3	0.8	8.2	183	0.4	1.1	<0.1	84	3.03
1320281	Drill Core	3.81	105	2.4	28.6	12.2	61	0.3	33.8	15.2	759	3.91	5	1.1	7.2	184	0.6	2.3	0.1	101	4.39
1320282	Drill Core	3.50	4	1.3	31.4	16.6	66	0.1	25.1	13.7	377	3.10	9	1.3	8.3	413	0.2	2.4	<0.1	118	1.79
1320283	Drill Core	4.21	5	1.1	42.5	22.6	104	0.1	33.5	28.3	1106	6.48	6	1.6	3.3	222	0.2	2.2	0.1	284	5.19
1320284	Drill Core	5.05	5	0.7	53.6	13.3	103	0.1	39.1	34.6	1261	7.72	7	1.2	0.8	126	0.2	3.9	0.3	378	3.52
1320285	Drill Core	3.83	5	0.6	51.0	9.8	97	0.1	39.1	34.7	1177	7.06	6	0.8	0.6	76	0.2	1.7	0.3	337	4.16
1320286	Drill Core	3.78	3	0.9	19.3	7.9	82	0.2	23.4	21.0	747	5.22	6	1.6	6.9	104	<0.1	1.1	0.1	182	3.21
1320287	Drill Core	4.97	4	0.6	22.3	7.0	89	<0.1	13.4	22.7	905	5.82	4	1.3	7.9	122	<0.1	2.0	<0.1	144	3.42
1320288	Drill Core	4.84	3	1.0	15.9	10.1	69	<0.1	7.0	16.2	876	4.81	4	1.6	10.6	200	0.2	1.0	0.2	98	3.68
1320289	Drill Core	3.66	36	1.0	28.7	37.8	63	0.1	21.5	18.2	760	4.46	4	1.4	4.9	168	0.2	1.2	0.4	146	5.79
1320290	Drill Core	3.23	4	1.1	59.9	5.8	57	0.1	26.6	31.3	996	5.42	5	1.2	4.8	141	0.2	0.4	<0.1	187	3.08
1320291	Drill Core	4.33	5	0.9	46.6	7.1	63	<0.1	38.3	28.4	1252	4.91	4	1.6	6.9	166	0.3	0.2	<0.1	185	3.29
1320292	Drill Core	2.21	3	0.2	29.3	47.0	106	0.3	39.5	37.2	1374	7.22	3	0.5	0.6	240	0.4	0.4	0.7	307	6.63
1320293	Drill Core	5.14	3	0.2	20.3	12.8	115	<0.1	39.1	35.3	1305	6.99	4	0.6	0.6	256	0.3	0.3	0.3	306	6.03
1320294	Drill Core	5.00	3	1.3	47.4	9.0	92	0.1	36.4	21.7	771	5.11	4	1.0	5.5	174	0.1	0.5	0.1	189	3.80
1320295	Drill Core	2.38	8	1.3	22.7	5.2	49	<0.1	35.2	10.5	420	3.27	3	0.5	8.2	160	<0.1	0.4	<0.1	125	2.18
1320296	Drill Core	4.05	3	0.5	13.0	9.0	55	<0.1	19.7	8.1	379	2.38	2	0.5	4.4	279	<0.1	0.2	<0.1	77	2.25

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000254.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320267	Drill Core		0.063	23.2	59	0.86	1823	0.341	5.28	0.021	0.79	1.3	4.4	47	1.4	11.1	10.5	0.7	<1	10	21.8	<0.1
1320268	Drill Core		0.048	20.5	51	0.77	2596	0.272	4.51	0.021	0.77	0.9	4.2	42	1.2	11.5	7.6	0.5	<1	9	19.9	<0.1
1320269	Drill Core		0.079	11.8	26	0.85	792	0.882	7.45	0.078	1.10	2.3	7.1	28	1.5	18.5	4.6	0.3	1	28	24.6	<0.1
1320270	Drill Core		0.048	22.5	54	1.24	2821	0.275	4.92	0.026	1.06	2.8	3.9	47	1.0	9.4	7.9	0.5	<1	9	19.0	<0.1
1320271	Drill Core		0.041	21.3	53	0.81	2835	0.223	4.43	0.023	1.01	2.6	4.5	44	0.8	7.6	5.8	0.3	<1	7	16.4	<0.1
1320272	Drill Core		0.026	13.8	38	2.18	1955	0.131	3.07	0.024	0.63	0.8	2.9	29	0.6	9.1	3.8	0.2	<1	6	14.4	<0.1
1320273	Drill Core		0.049	20.1	60	0.81	2125	0.261	4.37	0.020	0.70	1.7	4.2	41	1.0	9.3	8.1	0.5	<1	8	21.2	<0.1
1320274	Drill Core		0.040	20.5	48	0.87	2186	0.210	4.75	0.043	0.76	2.0	8.1	41	0.8	9.6	5.1	0.3	<1	11	25.6	<0.1
1320275	Rock Pulp		0.050	8.0	30	0.81	500	0.273	5.40	2.123	0.86	28.2	37.0	18	0.7	11.6	3.5	0.2	<1	10	11.7	<0.1
1320276	Rock Pulp		0.059	9.8	58	1.35	631	0.396	6.41	2.266	0.88	9.0	31.3	20	2.1	15.9	4.4	0.3	<1	15	17.2	0.3
1320277	Drill Core		0.043	26.5	56	0.81	1758	0.178	5.67	0.129	1.31	1.3	10.7	49	1.0	8.8	2.2	0.1	<1	10	27.8	0.1
1320278	Drill Core		0.051	21.9	51	1.11	713	0.191	5.29	1.384	2.19	3.5	7.9	41	0.7	10.6	1.8	0.1	<1	14	11.9	0.2
1320279	Drill Core		0.035	20.7	38	0.89	236	0.094	3.65	1.031	1.66	1.6	7.6	39	0.2	7.9	1.4	<0.1	<1	8	9.4	0.3
1320280	Drill Core		0.050	25.1	50	1.40	380	0.195	5.39	1.760	1.26	3.0	7.2	48	0.6	10.6	3.4	0.2	<1	14	14.6	0.2
1320281	Drill Core		0.036	22.9	48	1.71	266	0.209	5.05	1.099	0.61	3.8	9.6	44	0.9	11.1	4.3	0.3	1	11	24.7	0.3
1320282	Drill Core		0.043	25.3	51	0.78	569	0.268	5.19	0.046	1.11	0.7	9.4	47	1.3	12.9	5.0	0.3	<1	10	26.6	0.1
1320283	Drill Core		0.051	13.0	52	2.02	752	0.636	6.58	0.395	1.11	2.3	7.0	26	1.3	21.1	4.2	0.3	1	25	31.5	0.2
1320284	Drill Core		0.067	6.9	82	1.75	196	0.919	7.52	0.615	1.87	2.2	10.2	17	2.5	19.7	2.2	0.1	2	41	22.3	0.2
1320285	Drill Core		0.064	6.0	83	2.04	139	0.850	7.40	0.441	2.17	2.3	9.5	15	2.3	19.3	2.0	0.1	2	38	19.9	0.2
1320286	Drill Core		0.074	16.6	59	1.44	649	0.496	7.22	1.055	1.96	1.2	7.3	35	1.0	18.6	7.1	0.5	1	24	14.4	<0.1
1320287	Drill Core		0.060	19.5	21	1.63	492	0.494	6.71	1.521	1.44	0.3	6.5	40	1.0	19.9	7.3	0.5	2	19	13.1	0.2
1320288	Drill Core		0.072	21.9	6	1.28	350	0.481	6.86	2.462	1.19	0.3	9.1	47	0.9	20.9	10.1	0.7	<1	16	10.4	0.2
1320289	Drill Core		0.043	16.8	40	1.93	933	0.423	4.83	1.194	1.15	1.3	5.3	31	0.9	18.4	6.2	0.4	<1	15	7.3	0.3
1320290	Drill Core		0.121	13.6	32	1.39	256	0.592	5.69	1.514	1.28	0.8	6.1	27	0.7	18.6	6.0	0.4	1	22	6.6	0.6
1320291	Drill Core		0.033	19.1	66	1.53	681	0.489	5.94	1.694	1.34	0.4	6.3	38	0.7	22.0	6.2	0.5	<1	20	8.7	0.3
1320292	Drill Core		0.050	5.3	61	2.86	267	0.664	6.49	2.181	1.38	1.6	8.2	13	1.8	23.8	1.8	<0.1	1	34	7.6	0.6
1320293	Drill Core		0.056	5.3	65	2.79	471	0.685	6.77	2.041	1.43	0.6	7.7	12	2.2	25.2	2.0	0.1	2	34	9.6	0.3
1320294	Drill Core		0.051	18.8	60	1.89	140	0.498	5.75	1.895	1.18	1.4	6.3	37	1.6	19.2	4.1	0.2	1	21	7.6	0.7
1320295	Drill Core		0.043	22.4	60	1.09	171	0.231	5.27	1.877	1.13	0.9	6.3	45	1.2	7.5	5.4	0.3	<1	9	12.6	0.5
1320296	Drill Core		0.030	12.1	33	1.06	959	0.213	6.39	2.428	0.91	0.5	5.4	24	0.3	8.3	4.0	0.3	1	6	20.2	0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000254.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320267	Drill Core	21.8	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320268	Drill Core	21.3	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320269	Drill Core	42.2	0.4	0.09	<0.005	6	<0.5	<0.5	<0.01	
1320270	Drill Core	29.4	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320271	Drill Core	25.2	0.1	<0.05	<0.005	<1	0.7	<0.5	0.07	
1320272	Drill Core	16.3	<0.1	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320273	Drill Core	19.4	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320274	Drill Core	21.8	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.09	
1320275	Rock Pulp	22.0	1.1	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320276	Rock Pulp	22.7	1.1	0.14	0.086	<1	0.9	<0.5	0.09	
1320277	Drill Core	35.4	0.3	<0.05	<0.005	<1	0.6	<0.5	0.07	
1320278	Drill Core	31.7	0.3	0.05	<0.005	<1	1.6	<0.5	0.11	
1320279	Drill Core	20.4	0.3	<0.05	<0.005	2	2.3	<0.5	0.16	
1320280	Drill Core	26.8	0.2	0.06	<0.005	2	2.0	<0.5	0.14	
1320281	Drill Core	18.1	0.3	0.07	<0.005	2	1.9	<0.5	0.06	
1320282	Drill Core	35.9	0.3	0.06	<0.005	<1	<0.5	<0.5	0.04	
1320283	Drill Core	44.3	0.4	0.09	<0.005	1	0.9	<0.5	0.03	
1320284	Drill Core	72.8	0.6	0.11	<0.005	<1	0.6	<0.5	0.01	
1320285	Drill Core	78.4	0.6	0.11	<0.005	<1	0.6	<0.5	<0.01	
1320286	Drill Core	68.6	0.4	0.06	<0.005	<1	0.6	<0.5	0.02	
1320287	Drill Core	52.0	0.3	0.08	<0.005	<1	0.6	<0.5	<0.01	
1320288	Drill Core	44.7	0.4	<0.05	<0.005	<1	0.6	<0.5	<0.01	
1320289	Drill Core	43.6	0.2	<0.05	<0.005	<1	0.8	<0.5	<0.01	
1320290	Drill Core	51.8	0.3	0.06	<0.005	<1	0.5	<0.5	<0.01	
1320291	Drill Core	61.3	0.3	<0.05	<0.005	<1	0.9	<0.5	<0.01	
1320292	Drill Core	62.4	0.5	0.08	<0.005	<1	2.0	<0.5	<0.01	
1320293	Drill Core	62.0	0.5	0.10	<0.005	<1	1.4	<0.5	<0.01	
1320294	Drill Core	55.3	0.3	0.06	<0.005	<1	1.1	<0.5	0.01	
1320295	Drill Core	41.4	0.2	0.06	<0.005	<1	0.8	<0.5	0.01	
1320296	Drill Core	35.7	0.1	<0.05	<0.005	<1	<0.5	<0.5	<0.01	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000254.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320297	Drill Core	4.02	4	1.2	34.1	5.7	74	<0.1	27.9	9.9	380	3.08	2	0.7	6.2	169	<0.1	0.2	<0.1	103	2.95
1320298	Drill Core	3.95	3	1.4	36.7	4.7	65	<0.1	28.9	11.1	347	2.89	3	0.9	6.8	140	<0.1	0.3	<0.1	116	1.74
1320299	Drill Core	4.73	4	1.5	31.8	6.7	84	<0.1	34.2	16.8	608	3.92	6	2.0	6.1	120	0.1	0.5	<0.1	179	3.34
1320300	Rock Pulp	0.06	8	3.4	25.3	4.3	43	0.3	21.8	11.3	466	2.51	4	0.8	2.1	238	0.2	0.9	<0.1	79	1.80
1320301	Rock Pulp	0.05	>10000	12.5	75.6	23.0	77	1.2	25.1	4.3	483	3.51	836	3.6	3.2	43	0.6	159.9	0.7	108	14.96
1320302	Drill Core	4.92	4	1.0	39.1	6.2	94	<0.1	37.8	23.6	880	5.52	7	1.0	4.2	156	<0.1	0.6	<0.1	235	3.87
1320303	Drill Core	4.97	4	0.5	29.9	6.9	108	<0.1	23.1	29.3	1519	8.04	9	0.6	1.0	196	0.2	0.7	<0.1	318	5.81
1320304	Drill Core	4.90	4	5.5	52.9	9.8	91	0.1	25.0	29.5	1434	7.30	5	1.0	1.0	207	0.2	0.4	0.2	256	6.28
1320305	Drill Core	5.67	4	1.1	39.3	6.0	108	<0.1	22.0	33.5	1605	8.07	6	0.5	1.3	226	0.2	0.3	<0.1	302	5.55
1320306	Drill Core	4.98	3	0.7	48.5	4.9	112	0.1	24.0	37.3	1640	8.80	5	0.3	0.8	192	<0.1	0.3	<0.1	333	5.68
1320307	Drill Core	3.39	4	1.8	48.7	6.8	109	<0.1	23.0	33.0	1514	8.11	6	0.5	0.8	224	0.1	0.6	<0.1	321	5.88
1320308	Drill Core	3.48	4	0.4	45.3	6.3	121	0.2	24.6	34.2	1573	8.53	5	0.6	0.8	196	0.1	0.7	<0.1	297	5.87
1320309	Drill Core	2.73	3	3.2	35.7	7.4	82	<0.1	25.1	22.1	1021	5.83	6	0.6	2.8	208	0.1	0.7	<0.1	218	4.43
1320310	Drill Core	2.45	9	1.0	19.3	3.8	30	<0.1	19.3	5.4	223	1.80	7	0.7	3.6	235	<0.1	0.2	<0.1	64	1.27
1320311	Drill Core	3.01	3	1.1	23.1	6.2	63	0.1	26.4	7.3	211	2.06	113	1.9	6.5	261	0.1	0.7	0.2	92	0.91
1320312	Drill Core	3.18	3	1.2	39.5	114.9	85	0.7	46.3	21.1	478	3.61	110	3.0	8.8	173	0.1	0.7	1.9	131	1.64
1320313	Drill Core	2.98	4	0.5	27.2	1345.0	88	4.8	21.4	22.3	945	6.14	4	7.5	3.2	206	0.8	0.2	16.7	199	3.85
1320314	Drill Core	3.03	3	0.2	38.3	8.2	84	<0.1	17.7	21.8	986	5.72	3	2.3	2.6	302	<0.1	0.2	0.2	216	4.30
1320315	Drill Core	3.14	5	0.3	19.9	13.5	38	<0.1	13.5	9.7	435	2.18	3	3.1	3.1	219	<0.1	0.1	0.2	72	2.05
1320316	Drill Core	2.95	23	0.6	59.4	48.4	35	0.4	31.5	23.6	621	3.13	2	1.1	5.1	171	0.1	0.2	0.6	82	2.15
1320317	Drill Core	3.29	3	0.7	42.8	5.4	78	0.1	32.7	24.2	814	5.26	3	1.2	4.8	244	0.2	0.2	0.1	224	3.68
1320318	Drill Core	3.06	3	0.5	29.6	5.5	75	<0.1	29.0	22.8	824	5.21	4	1.1	4.5	188	<0.1	0.3	<0.1	234	3.49
1320319	Drill Core	2.99	3	0.8	38.2	6.1	97	<0.1	34.6	18.3	544	4.39	4	1.8	7.3	172	<0.1	0.2	0.1	195	2.39
1320320	Drill Core	2.99	4	1.1	56.4	6.9	94	0.2	31.7	33.3	1154	6.39	6	0.6	2.2	173	0.2	0.2	0.2	259	4.49
1320321	Drill Core	3.04	3	1.0	46.7	7.9	91	0.1	30.1	28.4	870	6.07	5	1.0	3.1	187	0.2	0.2	0.2	262	3.67
1320322	Drill Core	3.31	3	0.3	30.8	12.7	103	0.1	33.2	38.5	1428	7.52	5	0.5	1.2	259	0.4	0.2	0.2	335	5.92
1320323	Drill Core	2.98	46	0.4	11.1	12.6	70	0.3	14.3	22.6	890	5.85	7	0.4	0.6	265	0.3	0.3	0.1	225	3.93
1320324	Drill Core	3.91	3	0.5	14.1	5.1	81	<0.1	16.6	29.9	1366	6.92	3	0.2	0.8	277	0.1	0.1	0.1	309	5.18
1320325	Rock Pulp	0.05	8	3.2	21.1	4.1	42	0.3	21.1	10.2	487	2.50	4	0.8	1.9	227	0.2	0.8	<0.1	82	1.76
1320326	Rock Pulp	0.05	241	185.8	1921.9	41.9	275	0.6	35.7	13.8	720	4.18	16	0.7	1.9	273	1.2	1.7	0.3	117	2.53

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000254.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320297	Drill Core		0.040	18.2	48	1.51	379	0.263	5.82	1.884	1.34	0.8	6.3	36	0.8	10.9	5.4	0.3	1	8	14.0	0.4
1320298	Drill Core		0.053	19.8	59	1.10	227	0.319	5.35	1.275	1.27	1.1	5.4	39	1.2	13.9	6.6	0.4	<1	9	14.2	0.5
1320299	Drill Core		0.048	18.3	84	1.73	562	0.379	6.41	1.221	1.82	1.0	5.6	36	1.0	15.7	6.5	0.4	1	18	17.6	0.4
1320300	Rock Pulp		0.050	9.2	29	0.79	507	0.272	5.20	2.096	0.84	26.6	35.3	18	0.7	13.4	3.3	0.2	<1	10	12.5	<0.1
1320301	Rock Pulp		0.066	14.9	36	0.71	35	0.117	1.96	0.013	0.39	>200	27.1	29	2.1	17.8	3.3	0.2	<1	4	42.1	1.7
1320302	Drill Core		0.057	15.3	64	1.89	355	0.520	6.16	1.205	1.83	0.5	7.6	30	0.9	21.1	5.1	0.3	1	23	14.1	0.4
1320303	Drill Core		0.115	9.0	36	2.26	537	0.989	7.35	1.814	1.52	0.6	10.1	22	1.0	35.1	4.8	0.2	1	31	12.9	0.2
1320304	Drill Core		0.069	7.8	29	1.83	124	0.751	6.03	1.904	0.76	0.7	8.5	19	0.9	32.4	3.4	0.2	<1	23	15.1	0.7
1320305	Drill Core		0.084	8.8	30	2.40	585	0.870	7.10	2.903	0.78	1.4	11.7	21	1.0	35.9	3.5	0.2	<1	30	15.1	0.3
1320306	Drill Core		0.089	8.4	33	2.63	362	1.000	7.37	2.443	0.90	0.5	11.0	21	1.0	40.0	3.3	0.2	<1	32	14.5	0.4
1320307	Drill Core		0.089	8.8	31	2.03	329	0.946	6.96	3.132	1.00	1.3	13.0	22	1.3	37.8	3.2	0.2	1	30	8.5	0.6
1320308	Drill Core		0.105	8.8	30	2.31	410	0.926	6.98	2.626	0.97	1.0	9.5	22	1.2	37.2	3.7	0.2	1	31	12.7	0.4
1320309	Drill Core		0.072	12.8	36	1.44	830	0.607	6.58	2.356	1.38	0.6	8.1	27	0.8	24.8	4.3	0.3	<1	20	12.3	0.3
1320310	Drill Core		0.030	11.8	28	0.68	335	0.177	6.51	2.449	1.91	2.1	7.1	23	0.9	6.2	4.2	0.3	<1	5	12.9	0.4
1320311	Drill Core		0.043	15.4	36	0.83	630	0.255	5.91	1.552	1.83	1.1	7.7	29	1.2	8.2	7.3	0.4	1	6	12.7	0.4
1320312	Drill Core		0.064	22.9	61	1.32	118	0.352	5.61	1.324	1.61	1.1	13.1	47	1.2	15.8	9.5	0.6	1	12	13.7	0.7
1320313	Drill Core		0.068	13.1	39	1.79	158	0.657	5.90	1.446	1.47	0.3	16.1	28	1.4	25.1	6.2	0.4	1	20	13.7	1.2
1320314	Drill Core		0.064	10.1	24	1.67	520	0.689	7.25	2.739	0.87	0.2	13.5	21	0.8	26.6	4.6	0.7	<1	21	9.4	0.4
1320315	Drill Core		0.019	6.1	17	0.82	1209	0.188	5.85	2.729	0.90	0.5	11.3	13	0.5	12.2	4.3	0.7	2	8	12.3	0.2
1320316	Drill Core		0.027	13.7	37	0.77	71	0.218	3.64	1.583	0.72	1.8	5.0	27	0.3	12.0	5.1	0.4	<1	8	8.4	1.0
1320317	Drill Core		0.048	14.5	53	2.33	1361	0.559	7.03	2.214	1.19	0.9	6.8	29	1.0	21.3	5.8	0.4	<1	22	13.4	0.3
1320318	Drill Core		0.050	14.1	46	2.36	1192	0.495	6.70	1.921	1.43	0.9	6.6	28	0.5	17.9	6.3	0.4	<1	21	16.3	0.3
1320319	Drill Core		0.054	19.7	66	2.11	190	0.435	5.74	1.639	1.44	0.6	6.3	40	0.9	16.8	10.1	0.6	1	16	18.5	0.6
1320320	Drill Core		0.062	9.9	39	2.54	622	0.678	6.06	1.395	1.11	0.9	6.7	21	1.0	25.4	3.8	0.2	<1	26	22.6	0.5
1320321	Drill Core		0.056	10.6	39	2.37	685	0.699	6.03	1.597	1.06	0.3	7.9	22	0.9	26.7	4.2	0.3	1	26	19.2	0.5
1320322	Drill Core		0.065	6.7	40	2.91	256	0.861	7.10	2.698	0.84	0.3	9.4	16	0.8	29.6	3.0	0.2	<1	33	16.3	0.9
1320323	Drill Core		0.047	5.0	19	1.63	332	0.541	6.89	3.414	0.60	1.4	6.8	12	0.5	18.3	2.0	0.1	1	20	16.8	0.3
1320324	Drill Core		0.057	5.6	20	2.43	297	0.765	7.29	2.962	0.62	0.3	7.8	14	0.8	27.1	2.3	0.1	<1	26	15.7	0.2
1320325	Rock Pulp		0.052	8.7	27	0.80	466	0.260	5.00	2.052	0.86	26.8	34.6	18	0.6	12.2	3.3	0.2	<1	10	11.7	<0.1
1320326	Rock Pulp		0.059	10.0	51	1.34	583	0.352	6.48	2.216	0.89	8.7	30.3	20	1.7	15.4	4.4	0.3	<1	15	16.3	0.3

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000254.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320297	Drill Core	59.9	0.2	<0.05	<0.005	<1	1.0	<0.5	<0.01	
1320298	Drill Core	55.6	0.2	0.07	<0.005	<1	0.8	<0.5	0.01	
1320299	Drill Core	80.4	0.2	<0.05	<0.005	<1	0.8	<0.5	<0.01	
1320300	Rock Pulp	22.7	1.1	<0.05	<0.005	<1	0.6	<0.5	0.01	
1320301	Rock Pulp	25.5	0.7	0.08	0.005	2	3.2	3.9	5.53	I.S.
1320302	Drill Core	80.0	0.3	0.08	<0.005	<1	0.7	<0.5	0.01	
1320303	Drill Core	60.7	0.6	0.12	<0.005	<1	1.4	<0.5	0.02	
1320304	Drill Core	29.3	0.5	0.11	<0.005	<1	1.8	<0.5	0.02	
1320305	Drill Core	23.3	0.7	0.10	<0.005	<1	1.3	<0.5	0.01	
1320306	Drill Core	27.7	0.6	0.11	<0.005	<1	1.6	<0.5	<0.01	
1320307	Drill Core	35.5	0.6	0.10	<0.005	<1	1.8	<0.5	<0.01	
1320308	Drill Core	31.8	0.5	0.11	<0.005	<1	0.9	<0.5	<0.01	
1320309	Drill Core	55.5	0.5	0.07	<0.005	<1	0.7	<0.5	<0.01	
1320310	Drill Core	60.5	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320311	Drill Core	71.7	0.2	<0.05	<0.005	1	<0.5	<0.5	0.02	
1320312	Drill Core	74.8	0.4	0.07	<0.005	2	<0.5	<0.5	0.01	
1320313	Drill Core	55.2	0.4	0.05	<0.005	4	0.6	<0.5	<0.01	
1320314	Drill Core	28.6	0.7	0.06	<0.005	<1	1.0	<0.5	<0.01	
1320315	Drill Core	32.1	0.6	<0.05	<0.005	<1	0.5	<0.5	<0.01	
1320316	Drill Core	28.2	0.1	<0.05	<0.005	2	<0.5	<0.5	<0.01	
1320317	Drill Core	48.1	0.3	0.07	<0.005	<1	0.8	<0.5	<0.01	
1320318	Drill Core	58.6	0.4	<0.05	<0.005	<1	1.1	<0.5	<0.01	
1320319	Drill Core	60.6	0.3	<0.05	<0.005	<1	0.9	<0.5	<0.01	
1320320	Drill Core	41.2	0.5	0.07	<0.005	1	1.2	<0.5	0.01	
1320321	Drill Core	45.7	0.4	0.08	<0.005	2	0.8	<0.5	0.02	
1320322	Drill Core	35.9	0.5	0.13	<0.005	<1	1.7	<0.5	<0.01	
1320323	Drill Core	21.9	0.4	<0.05	<0.005	<1	1.0	<0.5	0.01	
1320324	Drill Core	18.1	0.5	<0.05	<0.005	<1	0.9	<0.5	<0.01	
1320325	Rock Pulp	20.1	1.1	0.06	<0.005	<1	0.6	<0.5	0.03	
1320326	Rock Pulp	22.4	0.9	0.13	0.093	<1	0.8	<0.5	0.09	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000254.1

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320327	Drill Core	3.43	3	0.1	53.3	5.8	102	0.2	15.8	35.5	1574	8.68	5	0.4	1.2	168	0.3	0.1	0.2	443	4.31
1320328	Drill Core	3.26	4	0.4	60.7	6.0	91	0.1	12.3	33.8	1324	7.16	5	0.5	1.2	241	0.2	0.2	0.2	358	4.27
1320329	Drill Core	3.26	4	0.3	28.8	6.1	86	0.1	13.5	35.3	1433	8.23	7	0.5	1.2	188	0.2	0.3	0.2	404	4.90
1320330	Drill Core	3.46	4	0.5	82.5	9.3	105	0.2	25.3	40.6	1410	7.83	12	0.4	1.1	216	0.2	0.2	0.1	324	5.26
1320331	Drill Core	3.53	5	0.7	20.7	10.6	95	0.2	26.9	41.2	1413	7.59	5	0.4	0.9	287	0.3	0.4	0.1	308	6.20
1320332	Drill Core	3.11	80	3.2	33.0	8.7	72	6.5	32.1	20.6	783	4.30	8	2.1	3.3	131	0.4	2.1	<0.1	178	4.10
1320333	Drill Core	4.86	40	1.2	20.8	8.7	77	0.3	17.5	16.9	683	4.26	7	2.4	3.7	145	0.4	2.3	<0.1	187	3.14
1320334	Drill Core	3.09	225	1.8	20.1	10.7	56	0.7	31.9	16.6	617	3.57	3	1.0	4.8	145	0.5	1.0	<0.1	105	3.07
1320335	Drill Core	1.53	100	23.3	60.9	6.6	64	14.9	28.9	13.6	718	3.72	5	1.2	2.7	109	0.4	1.6	<0.1	115	3.62
1320336	Drill Core	5.00	147	30.1	110.5	7.1	58	36.5	34.3	15.5	693	3.94	4	1.2	3.5	127	0.4	1.7	<0.1	114	3.84
1320337	Drill Core	3.05	104	2.3	26.7	4.1	39	0.5	24.8	7.8	225	1.76	3	0.8	3.3	80	0.2	1.0	<0.1	75	1.55
1320338	Drill Core	2.84	48	2.6	35.0	6.8	55	0.3	26.9	10.8	332	2.50	5	1.7	3.7	99	0.3	1.5	<0.1	116	1.80
1320339	Drill Core	2.87	266	2.4	10.2	5.3	31	0.6	18.6	6.7	299	1.51	2	0.9	2.3	130	0.2	1.0	<0.1	45	2.51
1320340	Drill Core	3.20	485	1.4	12.0	6.6	52	1.0	33.0	22.4	718	2.85	3	2.0	2.5	149	0.6	0.7	<0.1	88	4.40
1320341	Drill Core	2.80	177	1.2	23.3	6.9	80	0.3	31.7	16.6	509	3.17	4	6.5	1.6	113	0.4	1.0	<0.1	132	3.26
1320342	Drill Core	2.66	145	2.2	22.7	5.3	36	0.3	27.9	9.0	253	2.06	2	1.0	3.8	134	0.2	0.7	<0.1	68	1.87
1320343	Drill Core	2.80	264	2.5	29.4	5.7	34	0.7	28.3	8.3	278	1.78	5	8.2	2.8	106	0.3	2.0	<0.1	53	2.14
1320344	Drill Core	3.87	36	1.8	24.1	5.6	34	0.2	25.8	7.5	149	1.45	8	10.1	2.9	89	<0.1	1.0	<0.1	71	1.48

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000254.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320327	Drill Core		0.080	7.6	12	2.68	341	1.086	7.22	2.699	0.90	0.3	9.9	19	1.1	34.2	3.8	0.2	1	30	11.5	0.6
1320328	Drill Core		0.072	8.2	9	2.08	392	1.001	7.17	3.738	0.70	0.3	8.7	19	1.1	30.6	5.6	0.4	<1	24	8.5	1.0
1320329	Drill Core		0.078	8.0	10	2.12	387	1.083	6.65	3.556	0.45	1.6	10.1	19	1.3	31.3	4.2	0.3	1	27	9.2	1.0
1320330	Drill Core		0.088	8.2	29	2.71	340	0.902	7.65	2.567	0.81	0.2	9.4	19	0.9	30.7	4.0	0.2	<1	32	10.8	0.9
1320331	Drill Core		0.073	6.9	25	2.20	336	0.871	7.38	3.295	0.65	0.3	10.7	17	0.9	30.8	4.4	0.2	<1	29	6.1	1.4
1320332	Drill Core		0.048	12.7	36	1.67	300	0.402	4.55	0.542	0.55	20.4	7.2	26	0.7	15.9	3.7	0.2	<1	16	23.4	0.8
1320333	Drill Core		0.070	13.8	23	1.44	380	0.447	6.18	0.762	0.97	3.2	7.5	27	0.8	12.2	5.5	0.3	1	16	29.1	0.5
1320334	Drill Core		0.044	16.4	57	1.51	104	0.206	4.87	2.840	0.56	5.0	4.9	33	0.5	9.8	3.2	0.2	<1	13	6.8	0.9
1320335	Drill Core		0.042	10.5	76	1.48	535	0.221	3.68	1.038	0.70	96.7	4.6	21	0.5	10.8	2.9	0.2	<1	12	13.8	0.5
1320336	Drill Core		0.042	12.1	58	1.54	160	0.223	3.91	1.370	0.55	>200	5.1	25	0.5	11.4	3.1	0.2	<1	12	13.0	0.7
1320337	Drill Core		0.033	12.3	31	0.73	186	0.113	2.73	0.892	0.54	3.4	5.5	23	<0.1	6.2	2.6	0.2	<1	4	9.8	0.5
1320338	Drill Core		0.051	12.5	35	0.80	376	0.186	3.32	0.628	0.53	2.2	7.0	25	0.2	8.8	3.9	0.3	<1	7	11.3	0.5
1320339	Drill Core		0.023	7.5	16	1.01	818	0.074	4.43	2.286	0.47	3.2	4.8	14	<0.1	5.6	2.0	0.1	<1	4	10.4	0.3
1320340	Drill Core		0.029	8.6	128	1.93	72	0.109	4.07	2.688	0.54	5.3	7.8	17	1.0	11.3	2.0	0.1	<1	26	5.1	1.0
1320341	Drill Core		0.040	6.8	177	1.58	392	0.196	6.06	1.573	1.21	2.2	4.8	13	1.3	8.5	2.4	0.1	<1	16	13.4	0.7
1320342	Drill Core		0.028	12.0	28	0.86	158	0.102	4.66	2.284	0.51	2.2	5.3	25	0.1	5.7	1.4	<0.1	<1	6	9.0	0.7
1320343	Drill Core		0.036	9.8	27	0.91	77	0.069	2.25	0.831	0.32	1.6	4.2	20	0.1	7.2	1.4	<0.1	<1	5	7.8	0.6
1320344	Drill Core		0.023	8.9	23	0.60	277	0.097	3.03	0.558	0.40	1.3	6.5	17	0.2	5.8	2.0	0.2	<1	4	11.0	0.4

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000254.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320327	Drill Core	24.6	0.6	0.07	<0.005	1	1.0	<0.5	<0.01	
1320328	Drill Core	17.5	0.5	0.06	<0.005	1	0.7	<0.5	<0.01	
1320329	Drill Core	12.6	0.6	0.10	<0.005	1	0.8	<0.5	<0.01	
1320330	Drill Core	21.4	0.7	0.08	<0.005	1	1.4	<0.5	0.05	
1320331	Drill Core	20.5	0.5	0.09	<0.005	1	1.2	<0.5	<0.01	
1320332	Drill Core	19.5	0.3	0.06	0.007	2	2.3	<0.5	0.14	
1320333	Drill Core	28.4	0.3	<0.05	<0.005	1	0.9	<0.5	0.07	
1320334	Drill Core	15.1	0.2	0.06	<0.005	1	2.2	<0.5	0.09	
1320335	Drill Core	21.5	0.2	<0.05	<0.005	1	1.7	<0.5	0.06	
1320336	Drill Core	17.0	0.2	<0.05	0.006	1	1.0	<0.5	0.08	
1320337	Drill Core	15.6	0.2	<0.05	<0.005	2	1.1	<0.5	0.03	
1320338	Drill Core	18.0	0.3	<0.05	<0.005	1	0.8	<0.5	0.03	
1320339	Drill Core	10.0	0.2	<0.05	0.006	<1	1.4	<0.5	0.03	
1320340	Drill Core	9.2	0.3	0.07	0.005	1	2.0	<0.5	0.07	
1320341	Drill Core	31.7	0.3	0.05	<0.005	<1	1.2	<0.5	0.05	
1320342	Drill Core	11.4	0.2	<0.05	<0.005	1	0.9	<0.5	0.04	
1320343	Drill Core	7.6	0.1	<0.05	<0.005	2	1.2	<0.5	0.06	
1320344	Drill Core	9.9	0.2	<0.05	<0.005	2	1.5	<0.5	0.08	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000254.1

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
Pulp Duplicates																					
1320221	Drill Core	4.58	11	1.0	19.9	5.6	35	<0.1	17.9	9.7	325	1.87	12	0.6	1.9	73	0.1	1.8	<0.1	57	1.54
REP 1320221	QC																				
1320236	Drill Core	5.10	4	1.1	38.2	8.1	78	<0.1	32.1	22.2	1007	5.67	6	1.3	4.1	103	0.1	0.8	0.1	174	4.26
REP 1320236	QC		4																		
1320237	Drill Core	5.09	3	0.6	27.9	10.7	74	<0.1	39.2	26.3	1046	6.64	6	1.2	1.0	183	0.2	1.8	0.4	275	6.59
REP 1320237	QC			0.6	27.7	10.7	75	<0.1	39.1	26.5	1055	6.67	7	1.3	1.0	185	0.2	1.7	0.4	283	6.70
1320256	Drill Core	4.88	137	2.1	52.0	7.6	69	0.5	40.3	14.4	378	3.66	10	1.1	6.2	209	0.1	1.9	<0.1	158	3.01
REP 1320256	QC																				
1320271	Drill Core	3.18	288	2.1	36.7	4.1	54	0.8	32.8	9.0	304	2.49	5	0.7	6.4	252	0.1	0.7	<0.1	100	1.97
REP 1320271	QC		291																		
1320273	Drill Core	3.19	20	2.6	41.1	6.4	69	0.3	31.4	9.7	323	2.74	7	0.9	6.0	417	0.1	2.0	<0.1	106	3.17
REP 1320273	QC			2.6	39.9	6.2	68	0.3	30.1	9.3	309	2.66	7	0.9	5.8	403	0.1	2.0	<0.1	100	3.08
1320291	Drill Core	4.33	5	0.9	46.6	7.1	63	<0.1	38.3	28.4	1252	4.91	4	1.6	6.9	166	0.3	0.2	<0.1	185	3.29
REP 1320291	QC																				
1320293	Drill Core	5.14	3	0.2	20.3	12.8	115	<0.1	39.1	35.3	1305	6.99	4	0.6	0.6	256	0.3	0.3	0.3	306	6.03
REP 1320293	QC		4																		
1320306	Drill Core	4.98	3	0.7	48.5	4.9	112	0.1	24.0	37.3	1640	8.80	5	0.3	0.8	192	<0.1	0.3	<0.1	333	5.68
REP 1320306	QC		3																		
1320308	Drill Core	3.48	4	0.4	45.3	6.3	121	0.2	24.6	34.2	1573	8.53	5	0.6	0.8	196	0.1	0.7	<0.1	297	5.87
REP 1320308	QC			0.5	43.0	6.1	113	<0.1	22.5	33.4	1579	8.43	5	0.5	0.8	206	0.2	0.8	<0.1	294	5.75
1320325	Rock Pulp	0.05	8	3.2	21.1	4.1	42	0.3	21.1	10.2	487	2.50	4	0.8	1.9	227	0.2	0.8	<0.1	82	1.76
REP 1320325	QC																				
1320341	Drill Core	2.80	177	1.2	23.3	6.9	80	0.3	31.7	16.6	509	3.17	4	6.5	1.6	113	0.4	1.0	<0.1	132	3.26
REP 1320341	QC		171																		
1320342	Drill Core	2.66	145	2.2	22.7	5.3	36	0.3	27.9	9.0	253	2.06	2	1.0	3.8	134	0.2	0.7	<0.1	68	1.87
REP 1320342	QC			2.2	23.8	5.5	35	0.3	27.2	8.5	244	2.05	3	1.0	3.8	133	0.1	0.6	<0.1	68	1.87
Core Reject Duplicates																					
1320216	Drill Core	2.98	143	1.4	15.4	11.5	82	0.3	37.7	21.0	970	4.81	8	1.0	4.9	349	0.7	1.5	<0.1	150	5.51

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000254.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
	Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
Pulp Duplicates																					
1320221	Drill Core	0.028	6.6	25	0.07	1011	0.099	2.83	0.014	0.39	1.0	3.9	14	0.3	5.1	1.4	<0.1	<1	6	15.8	<0.1
REP 1320221	QC																				
1320236	Drill Core	0.041	12.9	52	0.46	2080	0.413	6.54	0.396	1.32	0.7	7.0	27	1.0	14.4	5.7	0.4	1	21	18.1	<0.1
REP 1320236	QC																				
1320237	Drill Core	0.058	6.4	94	1.29	421	0.680	8.33	0.942	1.71	0.2	8.6	16	1.5	24.6	2.7	0.2	1	37	12.2	0.1
REP 1320237	QC	0.057	6.6	91	1.30	433	0.680	8.47	0.944	1.72	0.2	8.8	16	1.5	25.1	2.7	0.2	1	37	12.2	0.1
1320256	Drill Core	0.043	20.9	53	0.55	2461	0.270	5.10	0.047	0.87	4.9	9.1	42	1.3	9.8	4.7	0.3	<1	13	21.9	<0.1
REP 1320256	QC																				
1320271	Drill Core	0.041	21.3	53	0.81	2835	0.223	4.43	0.023	1.01	2.6	4.5	44	0.8	7.6	5.8	0.3	<1	7	16.4	<0.1
REP 1320271	QC																				
1320273	Drill Core	0.049	20.1	60	0.81	2125	0.261	4.37	0.020	0.70	1.7	4.2	41	1.0	9.3	8.1	0.5	<1	8	21.2	<0.1
REP 1320273	QC	0.047	19.4	57	0.77	2062	0.260	4.15	0.019	0.67	1.7	4.2	39	1.1	9.1	7.9	0.4	<1	8	20.5	<0.1
1320291	Drill Core	0.033	19.1	66	1.53	681	0.489	5.94	1.694	1.34	0.4	6.3	38	0.7	22.0	6.2	0.5	<1	20	8.7	0.3
REP 1320291	QC																				
1320293	Drill Core	0.056	5.3	65	2.79	471	0.685	6.77	2.041	1.43	0.6	7.7	12	2.2	25.2	2.0	0.1	2	34	9.6	0.3
REP 1320293	QC																				
1320306	Drill Core	0.089	8.4	33	2.63	362	1.000	7.37	2.443	0.90	0.5	11.0	21	1.0	40.0	3.3	0.2	<1	32	14.5	0.4
REP 1320306	QC																				
1320308	Drill Core	0.105	8.8	30	2.31	410	0.926	6.98	2.626	0.97	1.0	9.5	22	1.2	37.2	3.7	0.2	1	31	12.7	0.4
REP 1320308	QC	0.103	9.1	30	2.28	428	0.921	6.98	2.607	0.92	1.0	9.4	22	1.2	38.6	3.7	0.2	<1	28	12.7	0.4
1320325	Rock Pulp	0.052	8.7	27	0.80	466	0.260	5.00	2.052	0.86	26.8	34.6	18	0.6	12.2	3.3	0.2	<1	10	11.7	<0.1
REP 1320325	QC																				
1320341	Drill Core	0.040	6.8	177	1.58	392	0.196	6.06	1.573	1.21	2.2	4.8	13	1.3	8.5	2.4	0.1	<1	16	13.4	0.7
REP 1320341	QC																				
1320342	Drill Core	0.028	12.0	28	0.86	158	0.102	4.66	2.284	0.51	2.2	5.3	25	0.1	5.7	1.4	<0.1	<1	6	9.0	0.7
REP 1320342	QC	0.025	11.7	29	0.86	107	0.097	4.68	2.287	0.51	2.0	4.8	24	0.1	5.6	1.3	<0.1	<1	6	10.1	0.7
Core Reject Duplicates																					
1320216	Drill Core	0.050	18.1	54	0.22	861	0.224	5.95	0.042	0.96	1.7	6.2	37	0.8	11.6	3.3	0.2	<1	18	32.0	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000254.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01
Pulp Duplicates									
1320221	Drill Core	10.9	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.04
REP 1320221	QC								0.03
1320236	Drill Core	47.3	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.01
REP 1320236	QC								
1320237	Drill Core	67.5	0.6	0.06	<0.005	1	<0.5	<0.5	<0.01
REP 1320237	QC	68.7	0.6	0.06	<0.005	1	<0.5	<0.5	
1320256	Drill Core	24.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.08
REP 1320256	QC								0.08
1320271	Drill Core	25.2	0.1	<0.05	<0.005	<1	0.7	<0.5	0.07
REP 1320271	QC								
1320273	Drill Core	19.4	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.04
REP 1320273	QC	18.6	0.1	<0.05	<0.005	<1	<0.5	<0.5	
1320291	Drill Core	61.3	0.3	<0.05	<0.005	<1	0.9	<0.5	<0.01
REP 1320291	QC								0.01
1320293	Drill Core	62.0	0.5	0.10	<0.005	<1	1.4	<0.5	<0.01
REP 1320293	QC								
1320306	Drill Core	27.7	0.6	0.11	<0.005	<1	1.6	<0.5	<0.01
REP 1320306	QC								
1320308	Drill Core	31.8	0.5	0.11	<0.005	<1	0.9	<0.5	<0.01
REP 1320308	QC	32.8	0.6	0.10	<0.005	<1	1.0	<0.5	
1320325	Rock Pulp	20.1	1.1	0.06	<0.005	<1	0.6	<0.5	0.03
REP 1320325	QC								0.03
1320341	Drill Core	31.7	0.3	0.05	<0.005	<1	1.2	<0.5	0.05
REP 1320341	QC								
1320342	Drill Core	11.4	0.2	<0.05	<0.005	1	0.9	<0.5	0.04
REP 1320342	QC	11.4	0.2	<0.05	<0.005	1	0.8	<0.5	
Core Reject Duplicates									
1320216	Drill Core	23.7	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.08

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000254.1

		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
DUP 1320216	QC		150	1.5	15.3	11.4	81	0.4	37.4	20.5	956	4.73	9	1.0	4.8	341	0.7	1.6	<0.1	150	5.39
1320284	Drill Core	5.05	5	0.7	53.6	13.3	103	0.1	39.1	34.6	1261	7.72	7	1.2	0.8	126	0.2	3.9	0.3	378	3.52
DUP 1320284	QC		5	0.8	53.5	13.3	106	0.1	40.3	34.4	1227	7.71	7	1.1	0.7	126	0.3	3.9	0.3	376	3.48
1320318	Drill Core	3.06	3	0.5	29.6	5.5	75	<0.1	29.0	22.8	824	5.21	4	1.1	4.5	188	<0.1	0.3	<0.1	234	3.49
DUP 1320318	QC		4	0.5	30.6	6.0	73	0.1	27.4	22.9	814	5.18	4	1.2	4.2	181	0.1	0.2	0.1	232	3.48
Reference Materials																					
STD BVGEO01	Standard																				
STD BVGEO01	Standard																				
STD DS11	Standard																				
STD DS11	Standard																				
STD OREAS25A-4A	Standard			2.6	34.1	24.3	48	<0.1	48.3	7.8	504	6.88	9	2.7	15.4	49	<0.1	0.6	0.4	152	0.29
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard			2.3	37.4	25.4	45	<0.1	45.5	7.9	474	6.44	10	2.9	17.4	49	<0.1	0.6	0.4	151	0.27
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard			2.5	31.8	23.4	46	<0.1	48.1	7.5	493	6.71	9	2.6	14.4	46	<0.1	0.6	0.3	156	0.28
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard			2.5	34.1	24.7	46	<0.1	48.9	7.7	500	6.53	10	2.8	16.5	50	<0.1	0.6	0.3	157	0.29
STD OREAS45E	Standard			2.5	775.2	18.1	47	0.3	470.1	61.4	580	26.17	16	2.4	12.9	17	<0.1	1.0	0.3	312	0.06
STD OREAS45E	Standard			2.3	766.9	19.2	48	0.3	479.8	62.5	534	23.86	17	2.6	14.5	17	<0.1	1.0	0.3	333	0.06
STD OREAS45H	Standard			1.6	783.2	12.0	42	0.1	463.1	88.8	411	20.24	16	1.6	7.0	28	<0.1	0.6	0.2	292	0.14
STD OREAS45H	Standard			1.6	781.3	12.8	42	0.1	439.2	88.3	401	20.63	18	1.8	8.0	30	<0.1	0.6	0.2	282	0.14
STD OXC145	Standard		203																		
STD OXC145	Standard		209																		
STD OXC145	Standard		211																		
STD OXC145	Standard		215																		
STD OXC145	Standard		209																		
STD OXH139	Standard		1259																		
STD OXH139	Standard		1322																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000254.1

		MA200 P % 0.001	MA200 La ppm 0.1	MA200 Cr ppm 1	MA200 Mg % 0.01	MA200 Ba ppm 1	MA200 Ti % 0.001	MA200 Al % 0.01	MA200 Na % 0.001	MA200 K % 0.01	MA200 W ppm 0.1	MA200 Zr ppm 0.1	MA200 Ce ppm 1	MA200 Sn ppm 0.1	MA200 Y ppm 0.1	MA200 Nb ppm 0.1	MA200 Ta ppm 0.1	MA200 Be ppm 1	MA200 Sc ppm 1	MA200 Li ppm 0.1	MA200 S % 0.1
DUP 1320216	QC	0.051	17.4	53	0.22	829	0.229	5.94	0.041	0.94	1.8	6.2	36	0.8	11.5	3.4	0.2	<1	18	31.8	<0.1
1320284	Drill Core	0.067	6.9	82	1.75	196	0.919	7.52	0.615	1.87	2.2	10.2	17	2.5	19.7	2.2	0.1	2	41	22.3	0.2
DUP 1320284	QC	0.067	5.9	78	1.73	200	0.898	7.50	0.623	1.87	2.0	9.9	15	2.3	18.5	2.2	0.1	1	41	23.4	0.2
1320318	Drill Core	0.050	14.1	46	2.36	1192	0.495	6.70	1.921	1.43	0.9	6.6	28	0.5	17.9	6.3	0.4	<1	21	16.3	0.3
DUP 1320318	QC	0.045	14.3	47	2.39	1193	0.487	6.76	1.950	1.30	0.9	6.7	29	0.6	18.2	6.4	0.5	<1	23	15.2	0.3
Reference Materials																					
STD BVGEO01	Standard																				
STD BVGEO01	Standard																				
STD DS11	Standard																				
STD DS11	Standard																				
STD OREAS25A-4A	Standard	0.048	22.6	109	0.34	159	0.924	9.38	0.135	0.49	1.8	158.1	50	4.0	10.5	20.4	1.5	<1	14	36.1	<0.1
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard	0.048	23.1	114	0.33	153	0.945	8.99	0.142	0.47	2.0	145.6	48	4.0	11.0	19.5	1.4	<1	13	38.1	<0.1
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard	0.046	21.0	106	0.33	154	1.006	9.15	0.134	0.48	1.9	155.1	48	4.0	9.9	20.6	1.4	<1	13	34.4	<0.1
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard	0.047	22.0	112	0.30	150	0.947	9.24	0.135	0.46	1.9	153.4	48	3.7	11.2	20.5	1.5	<1	12	36.2	<0.1
STD OREAS45E	Standard	0.033	11.2	1005	0.16	262	0.545	7.47	0.063	0.35	1.1	99.8	25	1.3	7.8	6.5	0.6	<1	94	6.7	<0.1
STD OREAS45E	Standard	0.031	11.9	957	0.15	257	0.536	7.08	0.051	0.32	1.1	94.3	24	1.4	8.3	6.1	0.5	<1	89	6.5	<0.1
STD OREAS45H	Standard	0.022	12.3	691	0.25	351	0.919	8.49	0.095	0.21	0.9	127.5	24	2.0	9.4	14.6	1.0	1	58	13.1	<0.1
STD OREAS45H	Standard	0.025	13.5	620	0.25	348	0.895	8.37	0.100	0.21	0.9	122.0	25	2.0	9.9	14.5	1.0	2	58	15.1	<0.1
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000254.1

		MA200 Rb ppm 0.1	MA200 Hf ppm 0.1	MA200 In ppm 0.05	MA200 Re ppm 0.005	MA200 Se ppm 1	MA200 Te ppm 0.5	MA200 Tl ppm 0.5	AQ200 Hg ppm 0.01
DUP 1320216	QC	23.1	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.09
1320284	Drill Core	72.8	0.6	0.11	<0.005	<1	0.6	<0.5	0.01
DUP 1320284	QC	62.7	0.7	0.12	<0.005	1	<0.5	<0.5	<0.01
1320318	Drill Core	58.6	0.4	<0.05	<0.005	<1	1.1	<0.5	<0.01
DUP 1320318	QC	59.1	0.3	<0.05	<0.005	<1	1.3	<0.5	<0.01
Reference Materials									
STD BVGEO01	Standard								0.08
STD BVGEO01	Standard								0.10
STD DS11	Standard								0.25
STD DS11	Standard								0.26
STD OREAS25A-4A	Standard	64.5	4.4	0.09	<0.005	3	<0.5	<0.5	
STD OREAS262	Standard								0.16
STD OREAS262	Standard								0.14
STD OREAS25A-4A	Standard	61.8	4.3	0.09	<0.005	2	<0.5	<0.5	
STD OREAS262	Standard								0.17
STD OREAS25A-4A	Standard	59.8	4.2	0.08	<0.005	3	<0.5	<0.5	
STD OREAS262	Standard								0.15
STD OREAS25A-4A	Standard	62.4	4.2	0.10	<0.005	3	<0.5	<0.5	
STD OREAS45E	Standard	22.9	3.0	0.11	<0.005	2	<0.5	<0.5	
STD OREAS45E	Standard	22.3	2.9	0.11	<0.005	2	<0.5	<0.5	
STD OREAS45H	Standard	23.0	3.5	0.10	<0.005	2	<0.5	<0.5	
STD OREAS45H	Standard	23.2	3.5	0.09	<0.005	3	<0.5	<0.5	
STD OXC145	Standard								
STD OXC145	Standard								
STD OXC145	Standard								
STD OXC145	Standard								
STD OXC145	Standard								
STD OXH139	Standard								
STD OXH139	Standard								

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000254.1

		WGHT Wgt kg 0.01	FA350 Au ppb 2	MA200 Mo ppm 0.1	MA200 Cu ppm 0.1	MA200 Pb ppm 0.1	MA200 Zn ppm 1	MA200 Ag ppm 0.1	MA200 Ni ppm 0.1	MA200 Co ppm 0.2	MA200 Mn ppm 1	MA200 Fe % 0.01	MA200 As ppm 1	MA200 U ppm 0.1	MA200 Th ppm 0.1	MA200 Sr ppm 1	MA200 Cd ppm 0.1	MA200 Sb ppm 0.1	MA200 Bi ppm 0.1	MA200 V ppm 1	MA200 Ca % 0.01
STD OXH139	Standard		1267																		
STD OXH139	Standard		1307																		
STD OXH139	Standard		1242																		
STD OREAS45E Expected				2.4	780	18.2	46.7	0.311	454	57	570	24.12	16.3	2.41	12.9	15.9	0.06	1	0.28	322	0.065
STD DS11 Expected																					
STD BVGEO01 Expected																					
STD OREAS262 Expected																					
STD OREAS25A-4A Expected				2.41	33.9	25.2	44.4		45.8	7.7	480	6.6	9.94	2.94	15.8	48.5		0.65	0.37	157	0.301
STD OREAS45H Expected				1.55	767	11.9	39.7	0.147	423	88	380	19.52	16.9	1.68	7.26	27.1		0.63	0.17	263	0.135
STD OXC145 Expected			212																		
STD OXH139 Expected			1312																		
BLK	Blank		3																		
BLK	Blank		3																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank																				
BLK	Blank																				
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank																				
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank																				
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank		3																		
BLK	Blank		3																		
BLK	Blank		4																		
Prep Wash																					
ROCK-WHI	Prep Blank		3	1.3	2.8	2.9	33	<0.1	1.3	3.2	577	1.90	2	1.0	2.4	190	<0.1	0.2	<0.1	30	1.45
ROCK-WHI	Prep Blank		3	1.1	2.6	3.0	31	<0.1	1.3	3.3	566	1.96	2	1.1	2.6	187	<0.1	0.2	<0.1	31	1.49

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000254.1

		MA200 P % 0.001	MA200 La ppm 0.1	MA200 Cr ppm 1	MA200 Mg % 0.01	MA200 Ba ppm 1	MA200 Ti % 0.001	MA200 Al % 0.01	MA200 Na % 0.001	MA200 K % 0.01	MA200 W ppm 0.1	MA200 Zr ppm 0.1	MA200 Ce ppm 1	MA200 Sn ppm 0.1	MA200 Y ppm 0.1	MA200 Nb ppm 0.1	MA200 Ta ppm 0.1	MA200 Be ppm 1	MA200 Sc ppm 1	MA200 Li ppm 0.1	MA200 S % 0.1
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OREAS45E Expected		0.034	11	979	0.156	252	0.559	6.78	0.059	0.324	1.07	97	23.5	1.32	8.28	6.8	0.54		93	6.58	0.046
STD DS11 Expected																					
STD BVGEO01 Expected																					
STD OREAS262 Expected																					
STD OREAS25A-4A Expected		0.048	21.8	115	0.327	147	0.93	8.87	0.131	0.482	2	155	47.3	4.06	10.5	20.9	1.4	0.93	13.7	36.7	0.047
STD OREAS45H Expected		0.023	12.4	602	0.238	332	0.878	7.99	0.09	0.205	0.99	131	23.6	1.93	10.4	14.8	1.08	1.09	57	13.1	
STD OXC145 Expected																					
STD OXH139 Expected																					
BLK	Blank																				
BLK	Blank																				
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.003	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				
BLK	Blank																				
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.003	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.002	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.002	<0.01	<0.1	0.2	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
Prep Wash																					
ROCK-WHI	Prep Blank	0.036	11.3	2	0.47	742	0.186	6.84	3.404	1.49	0.2	47.2	23	0.7	13.5	5.0	0.4	<1	6	2.8	<0.1
ROCK-WHI	Prep Blank	0.036	10.6	2	0.46	759	0.185	7.01	3.589	1.57	0.2	50.8	22	0.7	13.8	5.1	0.4	<1	6	3.6	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000254.1

		MA200 Rb ppm 0.1	MA200 Hf ppm 0.1	MA200 In ppm 0.05	MA200 Re ppm 0.005	MA200 Se ppm 1	MA200 Te ppm 0.5	MA200 Tl ppm 0.5	AQ200 Hg ppm 0.01
STD OXH139	Standard								
STD OXH139	Standard								
STD OXH139	Standard								
STD OREAS45E Expected		21.2	3.11	0.099		2.97	0.1	0.15	
STD DS11 Expected									0.26
STD BVGEO01 Expected									0.1
STD OREAS262 Expected									0.17
STD OREAS25A-4A Expected		61	4.14	0.09		2.4		0.35	
STD OREAS45H Expected		22.5	3.6	0.1		2.02			
STD OXC145 Expected									
STD OXH139 Expected									
BLK	Blank								
BLK	Blank								
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5	
BLK	Blank								<0.01
BLK	Blank								<0.01
BLK	Blank	0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5	
BLK	Blank								<0.01
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5	
BLK	Blank								<0.01
BLK	Blank	0.2	<0.1	<0.05	<0.005	1	<0.5	<0.5	
BLK	Blank								
BLK	Blank								
BLK	Blank								
Prep Wash									
ROCK-WHI	Prep Blank	31.3	1.5	<0.05	<0.005	<1	<0.5	<0.5	<0.01
ROCK-WHI	Prep Blank	33.4	1.7	<0.05	<0.005	<1	<0.5	<0.5	<0.01

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Submitted By: Dan Ferraro
Receiving Lab: Canada-Whitehorse
Received: July 24, 2019
Report Date: September 05, 2019
Page: 1 of 4

CERTIFICATE OF ANALYSIS WHI19000255.1

CLIENT JOB INFORMATION

Project: LUC
Shipment ID: DDLS-19-02
P.O. Number
Number of Samples: 88

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	80	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	8	Sort, label and box pulps			WHI
FA350-Au	88	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	88	Environmental disposal charge-Fire assay lead waste			VAN
MA200	88	4 Acid digestion ICP-MS analysis	0.25	Completed	VAN
AQ200-HG	88	Hg by AR digestion ICP-MS analysis	0.5	Completed	VAN
SHP01	88	Per sample shipping charges for branch shipments			VAN
EN001-MA	88	Environmental disposal fee - Multi-acid neutralization			VAN
PULSW	80	Extra Wash with Silica between each sample			WHI

ADDITIONAL COMMENTS

Invoice To: Luckystrike Resources Ltd.
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4
Canada

CC: Daithi MacGearailt

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000255.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320345	Drill Core	3.92	89	16.5	109.7	7.3	47	45.4	40.5	11.4	398	2.78	7	8.6	4.8	131	0.3	1.7	<0.1	131	2.21
1320346	Drill Core	4.02	4	1.5	294.8	6.3	38	147.9	37.3	5.7	350	2.14	4	0.5	6.5	145	<0.1	1.1	<0.1	40	1.46
1320347	Drill Core	2.67	3	0.4	4.2	6.9	37	<0.1	1.7	5.3	424	2.32	5	0.7	7.9	138	<0.1	1.3	<0.1	43	1.49
1320348	Drill Core	3.91	11	43.1	3.7	8.6	35	0.3	2.2	5.7	392	2.14	4	0.7	7.0	171	<0.1	1.2	0.2	48	1.54
1320349	Drill Core	2.54	7	0.5	8.5	5.5	35	<0.1	2.4	6.7	480	2.45	3	0.6	7.2	118	0.2	1.2	<0.1	50	1.89
1320350	Rock Pulp	0.05	6	3.1	24.2	4.2	45	0.5	21.9	11.3	496	2.61	4	0.7	1.9	248	0.1	0.9	<0.1	86	1.85
1320351	Rock Pulp	0.05	972	13.1	>10000	20.1	128	3.4	631.0	20.9	919	8.54	4	0.3	1.8	145	0.3	15.4	0.7	104	2.20
1320352	Drill Core	2.98	74	0.3	16.6	4.0	24	0.1	1.5	6.7	410	2.09	2	0.6	6.2	98	0.2	1.1	<0.1	43	1.87
1320353	Drill Core	2.79	38	0.4	4.7	3.5	18	<0.1	1.6	4.5	392	1.87	2	0.3	6.5	88	0.1	1.4	<0.1	35	1.99
1320354	Drill Core	3.02	4	0.2	4.2	3.6	17	<0.1	1.2	2.4	255	1.50	3	0.4	11.3	90	<0.1	1.0	<0.1	24	1.18
1320355	Drill Core	2.92	15	0.1	5.5	4.8	17	<0.1	1.5	2.8	291	1.47	4	0.4	10.3	82	<0.1	1.6	<0.1	23	1.31
1320356	Drill Core	2.84	5	0.2	4.4	3.7	24	<0.1	1.3	3.5	287	1.66	3	0.4	7.3	76	<0.1	1.0	<0.1	27	0.92
1320357	Drill Core	2.87	12	0.3	9.7	5.2	36	<0.1	1.8	7.1	474	2.27	3	0.5	8.4	93	0.1	2.0	<0.1	43	1.92
1320358	Drill Core	2.97	11	1.2	35.2	6.1	31	0.2	1.7	10.7	318	2.17	2	0.4	6.8	119	<0.1	1.3	<0.1	34	1.35
1320359	Drill Core	3.02	18	1.3	6.4	5.0	38	0.7	2.0	5.6	409	2.17	3	0.5	6.5	114	0.2	1.3	<0.1	47	1.96
1320360	Drill Core	2.21	21	12.0	2008.7	5.7	40	>200	262.9	20.1	572	3.17	3	0.7	6.4	124	0.2	1.7	<0.1	68	2.30
1320361	Drill Core	2.59	12	0.4	4.2	7.2	33	<0.1	2.0	5.9	375	2.30	5	0.6	8.4	172	0.1	1.5	<0.1	57	1.68
1320362	Drill Core	3.19	7	0.3	18.4	5.3	30	1.4	2.5	5.9	431	2.24	2	0.5	7.6	109	0.1	1.9	<0.1	47	2.05
1320363	Drill Core	2.76	13	0.4	6.5	4.7	23	<0.1	1.8	4.3	372	1.76	3	0.8	4.7	100	0.1	1.7	<0.1	35	2.10
1320364	Drill Core	2.88	8	1.5	3.8	3.9	20	<0.1	2.1	5.6	436	2.29	2	1.2	6.4	89	<0.1	2.7	<0.1	45	2.97
1320365	Drill Core	2.41	7	0.6	3.5	4.0	19	<0.1	1.8	4.5	403	2.14	5	0.5	6.8	78	0.1	7.3	<0.1	44	2.14
1320366	Drill Core	3.04	8	0.3	2.5	3.4	15	<0.1	2.0	4.3	351	2.05	3	0.4	6.7	72	0.1	5.1	<0.1	41	1.86
1320367	Drill Core	2.85	5	0.4	4.1	5.0	26	<0.1	3.2	5.2	322	2.05	4	0.4	6.2	104	0.1	2.8	<0.1	44	1.52
1320368	Drill Core	3.02	5	0.6	3.0	5.3	39	<0.1	2.0	5.9	418	2.37	3	0.5	7.5	130	<0.1	1.3	<0.1	49	1.70
1320369	Drill Core	3.22	5	0.4	4.1	5.3	36	<0.1	1.9	6.4	470	2.41	3	0.4	6.8	134	0.1	1.6	<0.1	46	2.35
1320370	Drill Core	3.13	6	0.2	4.3	8.0	44	<0.1	2.5	6.5	486	2.37	10	1.0	6.8	158	<0.1	11.4	<0.1	48	2.66
1320371	Drill Core	3.27	4	<0.1	4.1	5.3	40	<0.1	2.8	6.3	440	2.37	5	0.5	7.1	103	<0.1	4.5	<0.1	53	1.92
1320372	Drill Core	2.75	5	0.3	3.7	5.5	35	<0.1	2.0	4.5	371	1.92	4	0.8	8.4	112	0.1	3.2	<0.1	41	1.54
1320373	Drill Core	2.85	7	0.3	4.0	4.6	26	<0.1	2.2	5.0	447	1.99	3	0.7	6.0	87	<0.1	3.5	<0.1	33	1.96
1320374	Drill Core	2.72	4	0.3	4.1	4.1	12	<0.1	0.7	1.3	156	0.70	2	0.3	1.8	102	<0.1	1.0	<0.1	11	0.64

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000255.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320345	Drill Core		0.041	14.9	78	0.90	644	0.248	3.92	0.479	0.70	>200	7.0	30	0.6	8.3	4.9	0.2	<1	10	15.6	0.7
1320346	Drill Core		0.017	13.6	5	0.65	1607	0.121	6.16	1.590	1.46	>200	9.7	26	0.9	10.8	4.6	0.2	<1	8	21.2	<0.1
1320347	Drill Core		0.016	16.9	5	0.57	1318	0.126	6.58	1.973	1.73	0.9	8.8	33	1.2	13.8	4.1	0.3	<1	10	20.5	<0.1
1320348	Drill Core		0.020	15.3	5	0.68	1507	0.129	6.61	2.173	1.66	1.5	8.9	31	1.0	10.7	4.1	0.4	<1	10	16.5	0.1
1320349	Drill Core		0.014	15.5	5	0.74	1662	0.119	6.16	2.508	1.10	2.4	9.2	31	1.0	9.2	3.2	0.2	<1	9	16.1	0.1
1320350	Rock Pulp		0.050	7.4	28	0.82	470	0.275	5.23	2.072	0.85	26.7	35.8	17	0.5	11.9	3.3	0.2	1	9	12.1	<0.1
1320351	Rock Pulp		0.062	3.7	701	1.11	168	0.138	5.20	0.227	2.94	3.1	12.8	8	1.5	5.3	4.4	0.3	<1	8	9.0	1.3
1320352	Drill Core		0.013	12.7	4	0.70	480	0.092	5.72	3.316	0.82	3.0	10.7	25	0.6	6.3	3.1	0.3	<1	8	8.9	0.3
1320353	Drill Core		0.011	13.9	2	0.73	670	0.069	6.33	4.114	0.86	3.0	10.1	24	0.4	3.5	2.1	0.1	<1	6	6.7	0.2
1320354	Drill Core		0.011	19.1	2	0.44	1473	0.064	6.27	3.253	1.15	1.9	14.0	31	0.8	3.6	2.5	0.1	<1	4	6.3	<0.1
1320355	Drill Core		0.010	17.5	2	0.47	1836	0.058	6.04	3.175	1.59	2.9	12.9	31	0.9	4.2	2.7	0.2	<1	4	7.1	<0.1
1320356	Drill Core		0.012	14.2	2	0.38	2110	0.072	6.38	2.909	1.90	4.5	8.9	24	0.9	3.9	2.7	0.2	<1	4	7.9	<0.1
1320357	Drill Core		0.014	19.2	4	0.71	916	0.102	6.65	2.894	1.73	4.1	11.6	34	0.9	7.6	3.7	0.3	<1	7	11.6	0.3
1320358	Drill Core		0.010	13.0	4	0.56	164	0.091	6.87	2.597	1.99	2.4	10.8	24	0.6	5.0	3.8	0.4	1	6	10.0	0.7
1320359	Drill Core		0.014	14.0	5	0.74	1165	0.106	6.41	2.716	1.51	2.2	6.6	26	0.8	8.7	4.0	0.3	<1	8	8.4	0.1
1320360	Drill Core		0.016	14.1	49	0.83	1022	0.136	5.88	2.553	1.72	>200	7.2	28	1.3	10.7	2.3	<0.1	<1	11	8.0	0.1
1320361	Drill Core		0.021	16.7	6	0.67	1038	0.167	7.39	3.328	1.84	2.6	7.4	32	1.6	11.3	5.0	0.3	<1	11	8.7	<0.1
1320362	Drill Core		0.018	16.7	6	0.78	1398	0.137	6.24	3.156	0.89	9.1	6.9	33	0.9	7.2	3.6	0.2	<1	8	10.3	0.2
1320363	Drill Core		0.011	10.0	3	0.69	1204	0.086	6.40	3.986	0.72	1.6	6.7	19	0.4	4.4	2.6	0.2	<1	5	5.7	0.1
1320364	Drill Core		0.012	13.5	4	0.75	1108	0.099	5.69	3.860	0.16	2.0	11.8	25	0.7	5.7	2.8	0.2	<1	7	9.9	0.1
1320365	Drill Core		0.015	17.4	4	0.76	1225	0.089	5.39	2.414	0.39	3.6	10.1	33	0.4	4.8	2.5	0.2	<1	6	29.8	0.1
1320366	Drill Core		0.011	16.2	4	0.66	1463	0.079	5.77	3.530	0.28	1.7	9.3	30	0.3	3.7	2.3	0.2	<1	5	13.5	0.1
1320367	Drill Core		0.016	13.4	6	0.60	999	0.109	6.13	1.944	1.17	1.3	7.7	26	0.9	7.8	3.4	0.4	<1	8	14.8	0.1
1320368	Drill Core		0.019	16.7	5	0.65	1653	0.140	6.61	2.428	1.48	1.3	8.0	33	1.1	12.1	4.2	0.3	<1	10	10.5	0.1
1320369	Drill Core		0.015	17.5	5	0.84	1953	0.132	6.34	2.908	1.34	2.6	7.4	34	0.9	12.3	3.8	0.3	<1	9	9.7	0.1
1320370	Drill Core		0.014	16.5	5	0.94	1009	0.132	6.23	0.079	1.90	0.7	7.9	31	0.9	12.3	4.2	0.3	<1	10	25.6	<0.1
1320371	Drill Core		0.018	14.6	7	0.79	1271	0.146	6.76	0.936	1.75	1.1	10.5	29	1.1	10.3	4.4	0.3	1	10	21.7	<0.1
1320372	Drill Core		0.018	12.6	5	0.67	1520	0.125	6.14	0.671	2.30	1.5	8.4	24	1.3	8.9	4.3	0.3	<1	9	17.3	<0.1
1320373	Drill Core		0.011	11.7	4	0.69	1786	0.097	5.96	2.102	1.47	3.5	12.6	23	0.9	5.0	3.3	0.2	<1	7	15.4	<0.1
1320374	Drill Core		0.003	3.0	1	0.23	2405	0.032	6.56	3.415	2.62	1.8	5.6	5	0.4	1.8	1.3	0.1	<1	2	5.7	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000255.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01
1320345	Drill Core	23.0	0.2	<0.05	0.015	2	<0.5	<0.5	<0.01
1320346	Drill Core	49.0	0.3	<0.05	0.010	<1	<0.5	<0.5	<0.01
1320347	Drill Core	56.4	0.3	0.06	<0.005	<1	<0.5	<0.5	0.03
1320348	Drill Core	48.5	0.4	<0.05	0.049	<1	<0.5	<0.5	<0.01
1320349	Drill Core	32.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320350	Rock Pulp	24.3	1.1	<0.05	<0.005	<1	<0.5	<0.5	0.03
1320351	Rock Pulp	72.4	0.4	0.17	0.010	12	<0.5	<0.5	1.51
1320352	Drill Core	19.3	0.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320353	Drill Core	13.7	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320354	Drill Core	25.9	0.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320355	Drill Core	30.8	0.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320356	Drill Core	35.5	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320357	Drill Core	33.7	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.03
1320358	Drill Core	48.6	0.3	<0.05	<0.005	1	<0.5	<0.5	0.01
1320359	Drill Core	44.5	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320360	Drill Core	40.5	0.3	<0.05	0.020	<1	<0.5	<0.5	<0.01
1320361	Drill Core	48.2	0.3	<0.05	<0.005	2	<0.5	<0.5	<0.01
1320362	Drill Core	29.3	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.03
1320363	Drill Core	17.5	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320364	Drill Core	3.4	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.02
1320365	Drill Core	8.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320366	Drill Core	6.2	0.3	<0.05	<0.005	1	<0.5	<0.5	<0.01
1320367	Drill Core	38.3	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02
1320368	Drill Core	48.9	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320369	Drill Core	37.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320370	Drill Core	62.9	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.01
1320371	Drill Core	54.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320372	Drill Core	53.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320373	Drill Core	24.3	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320374	Drill Core	41.3	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000255.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320375	Rock Pulp	0.06	6	3.1	23.3	4.2	43	0.3	20.8	10.9	482	2.49	3	0.7	1.9	243	0.2	0.8	<0.1	79	1.77
1320376	Rock Pulp	0.06	257	191.9	1887.0	41.7	275	0.6	35.7	13.7	800	4.12	15	0.7	2.0	280	0.8	2.0	0.3	114	2.68
1320377	Drill Core	2.90	13	<0.1	22.9	4.1	22	<0.1	1.2	2.9	319	1.46	3	0.4	6.8	75	<0.1	1.3	<0.1	19	1.08
1320378	Drill Core	3.20	7	0.3	2.5	4.8	24	<0.1	2.1	4.4	346	1.83	5	0.6	11.6	115	0.2	2.9	<0.1	27	1.25
1320379	Drill Core	3.57	6	0.4	2.9	3.7	16	<0.1	1.3	2.7	294	1.52	2	0.4	7.2	92	0.1	1.4	<0.1	24	1.33
1320380	Drill Core	2.63	3	0.3	1.9	4.0	11	<0.1	0.8	1.4	112	0.68	2	0.1	1.5	99	<0.1	0.9	<0.1	10	0.47
1320381	Drill Core	2.91	55	0.7	2.7	5.9	35	0.3	4.1	6.2	779	2.44	4	0.6	8.9	122	0.7	3.8	<0.1	43	4.02
1320382	Drill Core	3.46	22	0.2	3.2	3.5	21	<0.1	2.1	4.3	428	1.99	2	1.6	5.2	92	0.3	2.4	<0.1	40	1.81
1320383	Drill Core	3.24	23	0.4	4.2	5.5	30	<0.1	2.2	6.5	524	2.51	3	0.9	6.3	98	0.1	1.6	<0.1	53	2.25
1320384	Drill Core	3.22	15	0.3	5.6	5.4	26	<0.1	1.7	5.2	333	2.04	2	0.5	6.7	122	<0.1	1.3	<0.1	48	1.18
1320385	Drill Core	3.10	48	0.2	3.8	4.9	34	<0.1	2.4	5.7	407	2.27	3	0.4	7.3	93	0.2	1.2	<0.1	51	1.36
1320386	Drill Core	3.04	28	0.4	3.0	4.7	31	<0.1	3.4	5.8	667	2.64	2	0.3	6.1	107	0.3	1.9	<0.1	54	2.84
1320387	Drill Core	2.84	58	0.2	2.6	3.9	26	<0.1	2.9	5.6	536	2.42	2	0.3	6.2	88	0.4	1.8	<0.1	48	2.19
1320388	Drill Core	2.98	82	<0.1	2.0	5.8	60	<0.1	6.3	9.7	1253	3.08	1	0.5	5.4	153	1.0	1.6	<0.1	67	5.82
1320389	Drill Core	2.72	7	0.1	6.5	5.5	35	<0.1	2.1	5.9	412	2.30	2	0.5	6.1	89	<0.1	1.1	<0.1	48	1.17
1320390	Drill Core	2.77	8	0.2	3.9	5.7	30	<0.1	2.2	5.4	409	2.22	3	0.4	7.2	115	0.1	1.1	<0.1	48	1.69
1320391	Drill Core	3.09	19	0.1	3.8	4.6	29	0.1	2.4	5.5	377	2.11	2	0.4	7.0	91	0.2	1.2	<0.1	41	1.46
1320392	Drill Core	2.79	8	0.4	4.1	5.0	33	<0.1	1.8	4.8	387	2.13	2	0.4	6.3	123	<0.1	1.0	<0.1	43	1.63
1320393	Drill Core	3.05	5	0.3	5.5	5.3	32	<0.1	1.6	4.9	340	2.11	3	0.5	6.6	145	<0.1	1.0	<0.1	45	0.95
1320394	Drill Core	3.02	4	0.7	5.4	5.6	28	<0.1	2.2	4.5	337	1.85	2	0.4	6.4	146	<0.1	1.2	<0.1	40	1.22
1320395	Drill Core	3.03	4	0.4	2.1	5.5	31	<0.1	2.4	4.5	425	2.01	3	0.4	5.9	110	<0.1	1.1	<0.1	41	1.77
1320396	Drill Core	2.95	4	0.3	12.7	6.4	36	<0.1	1.6	5.5	303	1.95	3	0.5	7.8	147	<0.1	1.4	<0.1	47	1.09
1320397	Drill Core	2.60	4	0.1	4.8	4.5	28	0.1	1.8	4.1	347	1.71	1	0.3	5.2	90	<0.1	1.7	<0.1	29	1.41
1320398	Drill Core	3.17	4	0.3	4.0	5.4	21	<0.1	1.8	3.4	305	1.54	3	0.3	8.4	118	<0.1	1.6	<0.1	25	1.25
1320399	Drill Core	2.92	17	0.6	4.9	5.4	18	<0.1	1.4	2.8	214	1.35	3	1.5	8.5	113	0.1	1.0	<0.1	23	0.89
1320400	Rock Pulp	0.05	6	3.3	23.1	4.2	41	0.3	22.6	11.0	496	2.49	3	0.7	2.1	241	0.2	0.8	<0.1	78	1.76
1320401	Rock Pulp	0.07	4364	23.3	69.2	20.6	189	1.6	71.8	7.0	288	2.63	716	5.3	4.4	47	2.4	25.8	5.6	341	1.88
1320402	Drill Core	2.78	5	0.2	1.8	5.4	24	<0.1	1.4	2.7	245	1.40	2	1.2	8.1	108	<0.1	0.7	<0.1	19	0.90
1320403	Drill Core	2.61	5	0.4	1.9	5.8	23	<0.1	1.4	2.9	258	1.51	3	0.7	8.8	121	<0.1	1.0	<0.1	19	1.04
1320404	Drill Core	2.53	45	0.2	3.5	5.3	26	0.1	1.8	2.9	256	1.44	3	0.4	7.9	117	<0.1	1.5	<0.1	25	1.15

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000255.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
	Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320375	Rock Pulp	0.050	7.7	30	0.79	467	0.275	5.17	2.092	0.82	26.0	35.4	16	0.6	11.1	3.3	0.2	<1	10	11.1	<0.1
1320376	Rock Pulp	0.058	8.5	52	1.30	577	0.375	6.21	2.226	0.83	9.1	35.1	19	1.7	14.0	4.1	0.3	<1	14	15.3	0.3
1320377	Drill Core	0.009	11.8	2	0.46	1995	0.072	5.62	2.221	2.51	4.1	16.1	20	0.8	4.2	3.0	0.3	<1	3	6.3	<0.1
1320378	Drill Core	0.012	20.2	3	0.51	2169	0.083	5.94	1.670	1.91	3.1	23.6	33	1.3	6.4	3.3	0.3	<1	4	16.2	0.1
1320379	Drill Core	0.010	13.2	3	0.46	1636	0.069	6.31	4.085	0.52	1.8	18.0	22	0.6	4.0	2.6	0.3	<1	5	7.8	<0.1
1320380	Drill Core	0.002	2.3	1	0.21	2428	0.021	6.88	2.633	2.64	1.1	5.9	4	0.2	1.0	0.9	0.1	<1	1	12.7	<0.1
1320381	Drill Core	0.011	15.6	6	1.50	975	0.079	6.59	2.904	0.92	5.5	22.6	27	0.3	5.4	2.0	0.2	<1	14	17.1	<0.1
1320382	Drill Core	0.017	12.0	4	0.63	1676	0.100	5.96	3.152	0.57	5.7	6.8	24	0.6	4.2	2.4	0.2	<1	7	13.6	<0.1
1320383	Drill Core	0.017	14.9	6	0.81	1221	0.109	6.00	2.007	1.30	4.1	7.2	29	0.8	8.4	3.0	0.2	<1	10	14.8	0.1
1320384	Drill Core	0.020	15.0	6	0.59	1591	0.135	6.57	2.331	1.56	2.5	7.1	29	1.0	5.9	4.2	0.3	<1	7	10.9	0.1
1320385	Drill Core	0.021	14.9	6	0.67	1217	0.121	6.21	2.204	1.88	4.3	6.7	29	0.9	7.5	3.4	0.2	<1	10	7.5	0.1
1320386	Drill Core	0.016	14.4	6	1.14	1279	0.110	5.78	3.432	0.88	4.1	6.8	29	0.8	7.7	2.8	0.2	<1	12	5.7	<0.1
1320387	Drill Core	0.017	16.0	5	0.93	1055	0.100	5.94	3.283	1.36	5.6	5.9	32	0.5	5.8	2.4	0.1	<1	10	6.2	<0.1
1320388	Drill Core	0.015	14.5	6	2.60	783	0.086	5.15	2.661	1.23	11.7	5.1	27	0.4	13.9	2.0	0.1	<1	25	4.0	<0.1
1320389	Drill Core	0.018	13.6	6	0.62	1282	0.141	6.27	2.403	1.58	4.1	8.5	27	0.9	7.3	4.1	0.3	<1	9	8.2	<0.1
1320390	Drill Core	0.018	13.8	5	0.73	1401	0.135	6.41	2.175	1.51	2.1	8.6	28	0.8	7.7	3.8	0.3	<1	9	10.1	<0.1
1320391	Drill Core	0.016	13.7	6	0.63	1460	0.106	5.93	2.462	0.98	2.4	7.1	27	0.6	7.2	2.9	0.2	<1	9	9.0	0.1
1320392	Drill Core	0.015	13.2	5	0.63	1689	0.110	6.23	3.099	0.91	1.8	6.8	27	0.7	7.7	2.9	0.2	<1	10	9.4	0.1
1320393	Drill Core	0.016	15.5	5	0.51	1428	0.136	6.31	3.045	1.09	1.1	7.2	29	0.9	8.5	3.6	0.2	<1	8	9.3	0.1
1320394	Drill Core	0.017	13.5	5	0.57	2050	0.111	6.64	2.735	1.27	0.9	6.3	26	0.8	7.0	2.8	0.2	<1	9	8.0	0.1
1320395	Drill Core	0.014	13.4	5	0.65	934	0.103	5.85	3.019	0.70	1.8	6.8	26	0.7	7.4	2.8	0.2	<1	9	5.8	<0.1
1320396	Drill Core	0.019	15.5	5	0.54	1512	0.136	6.73	2.592	1.64	1.8	8.1	30	1.0	7.4	4.1	0.2	1	9	7.6	0.1
1320397	Drill Core	0.011	11.0	4	0.51	1413	0.085	5.92	3.377	0.93	2.2	9.7	20	0.6	4.9	2.5	0.2	<1	6	5.4	<0.1
1320398	Drill Core	0.011	15.3	3	0.47	1671	0.084	6.30	3.026	1.15	0.7	17.2	26	0.7	4.5	3.0	0.3	<1	5	7.9	<0.1
1320399	Drill Core	0.011	15.0	3	0.31	1506	0.077	6.22	3.018	1.29	0.8	17.8	25	0.7	4.1	2.7	0.2	<1	3	6.3	<0.1
1320400	Rock Pulp	0.049	8.3	28	0.79	451	0.276	5.04	2.052	0.78	26.6	34.5	17	0.5	11.5	3.1	0.2	<1	9	11.8	<0.1
1320401	Rock Pulp	0.087	16.6	41	0.90	77	0.172	3.22	0.012	1.35	14.7	45.9	33	1.9	14.5	5.4	0.3	1	5	12.4	1.7
1320402	Drill Core	0.010	12.8	3	0.27	1820	0.080	6.58	2.632	1.95	0.8	17.9	20	0.8	4.5	3.3	0.3	<1	4	8.1	<0.1
1320403	Drill Core	0.011	14.2	3	0.31	1831	0.086	6.20	2.141	1.73	0.9	17.8	23	0.9	5.4	3.3	0.3	<1	4	11.0	<0.1
1320404	Drill Core	0.010	13.3	2	0.35	2081	0.075	6.23	2.593	1.72	1.9	18.3	22	0.7	3.9	2.7	0.2	<1	4	8.8	0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000255.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01
1320375	Rock Pulp	19.3	1.1	<0.05	<0.005	<1	<0.5	<0.5	0.03
1320376	Rock Pulp	18.9	0.9	0.06	0.089	<1	<0.5	<0.5	0.10
1320377	Drill Core	40.0	0.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320378	Drill Core	40.4	0.7	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320379	Drill Core	8.7	0.5	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320380	Drill Core	40.0	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320381	Drill Core	13.0	0.6	<0.05	<0.005	1	<0.5	<0.5	0.02
1320382	Drill Core	8.7	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320383	Drill Core	21.8	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.01
1320384	Drill Core	31.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.01
1320385	Drill Core	32.5	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320386	Drill Core	13.4	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320387	Drill Core	15.6	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320388	Drill Core	23.4	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320389	Drill Core	35.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320390	Drill Core	30.5	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320391	Drill Core	21.7	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.02
1320392	Drill Core	20.5	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320393	Drill Core	28.5	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320394	Drill Core	27.7	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320395	Drill Core	15.7	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320396	Drill Core	40.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320397	Drill Core	18.3	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320398	Drill Core	24.2	0.6	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320399	Drill Core	29.1	0.5	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320400	Rock Pulp	19.2	1.1	<0.05	<0.005	<1	<0.5	<0.5	0.01
1320401	Rock Pulp	98.9	1.3	0.19	0.034	4	1.1	6.2	5.21
1320402	Drill Core	46.2	0.5	<0.05	<0.005	1	<0.5	<0.5	0.03
1320403	Drill Core	44.8	0.5	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320404	Drill Core	33.6	0.6	<0.05	<0.005	<1	<0.5	<0.5	0.02

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000255.1

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320405	Drill Core	3.01	593	0.3	1.8	4.0	17	0.8	2.0	3.7	335	1.51	2	0.4	9.0	92	0.2	1.2	<0.1	25	1.48
1320406	Drill Core	2.71	13	0.2	4.4	6.5	18	<0.1	1.5	2.9	238	1.27	4	1.1	11.7	151	<0.1	0.9	<0.1	17	0.93
1320407	Drill Core	2.81	23	0.9	10.8	5.7	18	0.2	1.6	6.8	296	1.77	3	0.8	9.0	109	0.1	1.4	<0.1	21	1.08
1320408	Drill Core	2.53	49	0.7	3.9	6.1	30	0.1	3.9	7.9	522	2.52	3	0.5	6.2	105	0.3	1.5	<0.1	65	1.98
1320409	Drill Core	3.32	10	0.5	10.6	10.7	67	<0.1	10.3	12.9	650	3.83	5	0.8	4.5	125	<0.1	1.4	<0.1	166	2.56
1320410	Drill Core	3.02	25	<0.1	6.3	6.5	31	0.2	3.1	5.8	368	2.18	3	1.1	5.3	145	0.2	0.8	<0.1	54	1.40
1320411	Drill Core	3.20	8	0.5	10.6	6.5	36	<0.1	6.0	7.2	438	2.37	5	0.8	5.6	157	<0.1	0.6	<0.1	57	1.79
1320412	Drill Core	3.06	3	0.3	7.5	6.6	33	<0.1	2.1	6.7	387	2.32	4	1.1	6.1	153	<0.1	0.5	<0.1	54	1.60
1320413	Drill Core	2.98	4	0.3	6.5	5.3	36	<0.1	3.0	6.4	363	2.30	4	0.5	6.3	114	<0.1	0.7	<0.1	56	1.05
1320414	Drill Core	3.12	4	0.4	16.9	5.5	37	<0.1	4.2	7.5	411	2.50	3	0.8	7.3	142	<0.1	0.8	<0.1	58	1.29
1320415	Drill Core	3.22	9	0.6	59.0	4.9	61	<0.1	3.0	9.9	641	3.97	2	0.9	6.9	145	<0.1	0.6	<0.1	77	1.70
1320416	Drill Core	2.99	11	0.8	37.0	5.7	43	<0.1	2.5	7.3	476	2.49	3	0.5	5.9	128	0.1	1.2	<0.1	54	1.86
1320417	Drill Core	2.98	4	1.0	5.9	6.3	46	<0.1	1.9	7.1	458	2.48	3	0.5	5.8	127	<0.1	0.8	<0.1	56	1.46
1320418	Drill Core	4.00	8	1.0	5.4	5.3	38	<0.1	1.9	6.1	393	2.23	3	0.4	5.2	123	0.2	0.6	<0.1	52	1.45
1320419	Drill Core	2.28	6	1.7	5.5	4.4	35	<0.1	2.0	6.0	411	2.27	3	0.4	5.4	103	0.1	0.7	<0.1	52	1.54
1320420	Drill Core	2.60	57	0.8	4.7	3.8	23	<0.1	2.2	5.7	370	2.27	2	0.3	5.1	86	0.2	1.3	<0.1	48	1.77
1320421	Drill Core	3.39	160	0.7	2.2	3.2	19	0.2	2.4	4.7	423	2.44	1	0.3	5.2	96	0.3	1.8	<0.1	62	1.78
1320422	Drill Core	3.29	911	0.2	3.0	3.0	18	1.4	2.9	4.7	493	1.79	3	0.5	7.0	102	0.4	1.1	<0.1	29	1.99
1320423	Drill Core	2.76	27	0.2	2.1	3.3	19	<0.1	2.2	3.8	314	1.53	2	0.5	9.1	93	0.1	1.2	<0.1	32	1.19
1320424	Drill Core	2.85	8	0.2	4.4	6.7	25	<0.1	1.1	3.1	255	1.52	4	1.2	8.4	142	<0.1	1.1	<0.1	31	1.33
1320425	Rock Pulp	0.06	6	3.5	23.9	4.3	44	0.4	22.9	10.6	467	2.49	5	0.8	2.0	252	0.1	0.9	<0.1	79	1.76
1320426	Rock Pulp	0.05	231	194.0	1871.1	42.1	281	0.7	37.3	14.5	750	4.23	17	0.7	2.0	288	1.0	1.9	0.3	118	2.74
1320427	Drill Core	3.26	8	0.4	4.1	6.1	25	<0.1	1.0	3.2	256	1.68	3	0.7	7.9	130	<0.1	1.0	<0.1	33	1.09
1320428	Drill Core	2.96	5	0.2	3.6	4.6	21	<0.1	1.1	2.6	256	1.56	3	0.8	9.6	107	<0.1	0.9	<0.1	28	0.92
1320429	Drill Core	2.72	484	0.4	4.5	4.5	30	0.2	3.9	6.5	659	1.99	2	0.5	9.0	126	0.6	1.0	<0.1	24	3.18
1320430	Drill Core	1.55	185	0.2	3.9	4.6	14	0.2	1.9	3.3	235	1.28	3	1.0	8.7	147	<0.1	1.0	<0.1	19	0.99
1320431	Drill Core	2.59	25	0.3	2.6	6.5	17	<0.1	1.4	2.2	181	1.18	4	0.7	10.4	136	<0.1	1.3	<0.1	19	0.82
1320432	Drill Core	2.55	66	0.4	3.2	4.1	15	<0.1	1.4	3.2	251	1.36	2	0.7	8.1	120	<0.1	1.8	<0.1	23	1.13

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000255.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320405	Drill Core		0.011	17.2	3	0.52	1550	0.060	6.14	3.450	1.56	4.3	17.8	31	0.4	3.8	2.0	0.2	<1	4	4.7	0.2
1320406	Drill Core		0.010	18.8	2	0.33	2001	0.066	6.35	2.095	2.22	1.6	20.2	29	0.9	4.4	2.8	0.3	<1	3	8.2	0.1
1320407	Drill Core		0.011	14.0	3	0.40	181	0.081	5.97	3.463	1.12	4.0	22.1	24	0.6	4.8	3.3	0.4	<1	5	6.2	0.5
1320408	Drill Core		0.027	13.1	10	0.80	1371	0.159	5.93	3.666	0.83	3.9	10.7	26	0.8	7.8	3.6	0.2	<1	12	5.8	0.2
1320409	Drill Core		0.051	10.4	43	1.16	1140	0.392	6.65	1.599	2.04	1.5	9.8	21	1.1	11.1	5.3	0.3	2	23	10.3	0.1
1320410	Drill Core		0.020	12.6	7	0.57	1317	0.143	6.03	2.825	1.62	1.7	8.6	26	0.9	9.8	4.7	0.3	1	10	11.1	0.1
1320411	Drill Core		0.023	12.8	13	0.68	1153	0.179	6.51	2.822	1.70	1.0	8.4	26	1.0	11.2	5.6	0.4	<1	12	9.6	<0.1
1320412	Drill Core		0.020	13.2	6	0.52	1137	0.176	6.21	2.459	1.64	0.7	9.4	26	1.1	13.3	5.9	0.4	<1	11	12.0	<0.1
1320413	Drill Core		0.018	14.3	6	0.58	1177	0.173	6.02	2.125	1.58	0.3	8.5	28	1.0	9.7	5.6	0.3	<1	9	15.2	<0.1
1320414	Drill Core		0.023	16.7	9	0.71	1285	0.191	6.49	2.853	1.66	0.8	9.4	32	1.2	11.5	6.2	0.4	<1	12	12.2	0.1
1320415	Drill Core		0.020	16.7	11	1.39	1375	0.225	8.40	4.618	1.93	2.3	18.4	34	2.0	11.1	7.1	0.5	2	17	7.1	0.3
1320416	Drill Core		0.023	15.1	7	0.92	1589	0.165	7.00	3.391	1.30	2.3	11.3	29	0.9	6.6	4.8	0.3	<1	12	7.8	0.2
1320417	Drill Core		0.021	15.2	7	0.88	1859	0.168	6.30	2.441	2.09	2.3	6.6	29	0.9	8.8	5.1	0.3	<1	12	9.3	<0.1
1320418	Drill Core		0.022	12.7	5	0.66	1491	0.133	6.17	2.733	1.55	2.0	6.0	25	0.7	7.4	4.1	0.3	<1	11	12.4	<0.1
1320419	Drill Core		0.021	13.6	5	0.63	1424	0.122	6.02	3.099	1.53	5.5	6.6	26	0.6	6.4	3.3	0.2	<1	10	6.5	<0.1
1320420	Drill Core		0.020	13.2	6	0.62	1015	0.110	6.11	4.387	0.69	8.0	7.0	26	0.7	4.9	3.1	0.2	<1	9	4.4	<0.1
1320421	Drill Core		0.022	13.2	6	0.67	1131	0.120	6.73	5.467	0.28	12.6	7.7	26	0.6	4.4	3.2	0.3	<1	8	3.5	<0.1
1320422	Drill Core		0.016	16.5	8	0.82	538	0.060	5.70	4.064	0.41	6.1	17.4	28	0.4	4.5	1.8	0.2	<1	9	3.4	0.2
1320423	Drill Core		0.011	17.4	3	0.49	2059	0.080	6.06	3.466	1.56	7.0	24.4	29	0.7	4.4	3.2	0.3	<1	6	4.1	<0.1
1320424	Drill Core		0.024	13.0	2	0.38	2353	0.107	6.64	2.397	2.14	2.9	22.6	22	0.9	4.6	4.8	0.4	1	4	9.1	<0.1
1320425	Rock Pulp		0.052	9.2	27	0.81	536	0.267	5.08	2.104	0.82	29.0	41.5	19	0.6	13.8	3.7	0.2	<1	10	13.0	<0.1
1320426	Rock Pulp		0.053	9.0	51	1.35	640	0.355	6.44	2.252	0.86	9.3	33.1	20	2.0	15.2	4.5	0.3	<1	15	16.5	0.3
1320427	Drill Core		0.029	12.9	2	0.39	2533	0.120	6.75	3.008	1.85	3.8	19.4	22	0.9	4.4	4.8	0.4	<1	4	5.3	<0.1
1320428	Drill Core		0.010	14.5	2	0.37	2711	0.076	6.27	3.332	1.54	4.2	23.4	24	0.8	4.1	3.2	0.3	<1	4	5.6	<0.1
1320429	Drill Core		0.008	15.0	2	1.36	1456	0.054	5.94	4.205	0.52	4.0	22.8	25	0.5	6.7	2.0	0.3	<1	16	2.3	0.3
1320430	Drill Core		0.011	12.6	2	0.35	1117	0.058	6.70	3.764	1.15	3.5	24.5	21	0.7	4.1	2.5	0.3	<1	5	3.8	0.3
1320431	Drill Core		0.010	15.4	2	0.29	1770	0.062	6.35	2.368	2.38	2.4	24.5	25	0.9	4.3	2.9	0.4	<1	4	6.8	<0.1
1320432	Drill Core		0.010	14.9	3	0.43	1285	0.071	6.11	3.341	1.49	4.6	18.0	25	0.7	3.3	2.9	0.2	<1	5	3.7	0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000255.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01
1320405	Drill Core	22.8	0.5	<0.05	<0.005	<1	0.7	<0.5	0.02
1320406	Drill Core	42.0	0.6	<0.05	<0.005	<1	<0.5	<0.5	0.02
1320407	Drill Core	20.9	0.6	0.07	<0.005	<1	<0.5	<0.5	0.01
1320408	Drill Core	17.0	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320409	Drill Core	52.2	0.3	0.08	<0.005	<1	<0.5	<0.5	<0.01
1320410	Drill Core	35.4	0.3	0.06	<0.005	<1	<0.5	<0.5	0.10
1320411	Drill Core	40.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02
1320412	Drill Core	41.4	0.4	0.05	<0.005	<1	<0.5	<0.5	<0.01
1320413	Drill Core	43.9	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320414	Drill Core	47.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320415	Drill Core	45.2	0.6	0.05	<0.005	1	<0.5	<0.5	<0.01
1320416	Drill Core	31.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320417	Drill Core	46.0	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320418	Drill Core	35.8	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320419	Drill Core	25.8	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320420	Drill Core	7.7	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320421	Drill Core	3.4	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.02
1320422	Drill Core	7.2	0.4	<0.05	<0.005	<1	1.0	<0.5	0.03
1320423	Drill Core	26.8	0.6	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320424	Drill Core	48.6	0.6	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320425	Rock Pulp	23.2	1.6	0.08	<0.005	<1	<0.5	<0.5	0.02
1320426	Rock Pulp	20.7	1.2	0.08	0.095	1	<0.5	<0.5	0.10
1320427	Drill Core	42.7	0.6	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320428	Drill Core	30.3	0.6	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320429	Drill Core	7.9	0.7	<0.05	<0.005	<1	0.7	<0.5	<0.01
1320430	Drill Core	22.2	0.7	<0.05	<0.005	<1	<0.5	<0.5	0.01
1320431	Drill Core	47.1	0.8	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320432	Drill Core	22.2	0.5	<0.05	<0.005	<1	<0.5	<0.5	<0.01

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000255.1

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
Pulp Duplicates																					
1320352	Drill Core	2.98	74	0.3	16.6	4.0	24	0.1	1.5	6.7	410	2.09	2	0.6	6.2	98	0.2	1.1	<0.1	43	1.87
REP 1320352	QC																				
1320365	Drill Core	2.41	7	0.6	3.5	4.0	19	<0.1	1.8	4.5	403	2.14	5	0.5	6.8	78	0.1	7.3	<0.1	44	2.14
REP 1320365	QC		8																		
1320374	Drill Core	2.72	4	0.3	4.1	4.1	12	<0.1	0.7	1.3	156	0.70	2	0.3	1.8	102	<0.1	1.0	<0.1	11	0.64
REP 1320374	QC			0.4	4.1	4.3	11	<0.1	0.9	1.3	154	0.73	2	0.3	1.8	106	<0.1	1.1	<0.1	11	0.67
1320384	Drill Core	3.22	15	0.3	5.6	5.4	26	<0.1	1.7	5.2	333	2.04	2	0.5	6.7	122	<0.1	1.3	<0.1	48	1.18
REP 1320384	QC																				
1320399	Drill Core	2.92	17	0.6	4.9	5.4	18	<0.1	1.4	2.8	214	1.35	3	1.5	8.5	113	0.1	1.0	<0.1	23	0.89
REP 1320399	QC		15																		
1320408	Drill Core	2.53	49	0.7	3.9	6.1	30	0.1	3.9	7.9	522	2.52	3	0.5	6.2	105	0.3	1.5	<0.1	65	1.98
REP 1320408	QC			0.6	4.2	6.0	30	0.2	3.4	7.8	517	2.51	8	0.5	6.4	103	0.3	1.5	<0.1	66	2.02
1320416	Drill Core	2.99	11	0.8	37.0	5.7	43	<0.1	2.5	7.3	476	2.49	3	0.5	5.9	128	0.1	1.2	<0.1	54	1.86
REP 1320416	QC																				
1320427	Drill Core	3.26	8	0.4	4.1	6.1	25	<0.1	1.0	3.2	256	1.68	3	0.7	7.9	130	<0.1	1.0	<0.1	33	1.09
REP 1320427	QC		29																		
1320429	Drill Core	2.72	484	0.4	4.5	4.5	30	0.2	3.9	6.5	659	1.99	2	0.5	9.0	126	0.6	1.0	<0.1	24	3.18
REP 1320429	QC			0.4	4.1	4.6	29	0.6	4.0	7.1	695	1.99	2	0.6	9.5	130	0.5	1.0	<0.1	25	3.22
1320432	Drill Core	2.55	66	0.4	3.2	4.1	15	<0.1	1.4	3.2	251	1.36	2	0.7	8.1	120	<0.1	1.8	<0.1	23	1.13
REP 1320432	QC		64																		
Core Reject Duplicates																					
1320362	Drill Core	3.19	7	0.3	18.4	5.3	30	1.4	2.5	5.9	431	2.24	2	0.5	7.6	109	0.1	1.9	<0.1	47	2.05
DUP 1320362	QC		7	0.3	16.8	5.6	32	0.2	1.7	5.7	443	2.24	2	0.5	8.1	118	0.1	1.7	<0.1	48	2.09
1320396	Drill Core	2.95	4	0.3	12.7	6.4	36	<0.1	1.6	5.5	303	1.95	3	0.5	7.8	147	<0.1	1.4	<0.1	47	1.09
DUP 1320396	QC		4	0.4	11.7	6.3	32	<0.1	1.5	5.2	295	1.87	2	0.4	7.5	135	<0.1	1.3	<0.1	44	1.05
1320430	Drill Core	1.55	185	0.2	3.9	4.6	14	0.2	1.9	3.3	235	1.28	3	1.0	8.7	147	<0.1	1.0	<0.1	19	0.99
DUP 1320430	QC		267	0.2	3.9	4.6	15	<0.1	1.6	3.2	229	1.26	3	1.0	8.7	138	<0.1	1.0	<0.1	19	0.97
Reference Materials																					

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000255.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
	Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
Pulp Duplicates																					
1320352	Drill Core	0.013	12.7	4	0.70	480	0.092	5.72	3.316	0.82	3.0	10.7	25	0.6	6.3	3.1	0.3	<1	8	8.9	0.3
REP 1320352	QC																				
1320365	Drill Core	0.015	17.4	4	0.76	1225	0.089	5.39	2.414	0.39	3.6	10.1	33	0.4	4.8	2.5	0.2	<1	6	29.8	0.1
REP 1320365	QC																				
1320374	Drill Core	0.003	3.0	1	0.23	2405	0.032	6.56	3.415	2.62	1.8	5.6	5	0.4	1.8	1.3	0.1	<1	2	5.7	<0.1
REP 1320374	QC	0.003	3.2	1	0.23	2504	0.033	6.96	3.413	2.69	2.0	6.1	5	0.4	1.8	1.4	0.1	<1	2	5.9	<0.1
1320384	Drill Core	0.020	15.0	6	0.59	1591	0.135	6.57	2.331	1.56	2.5	7.1	29	1.0	5.9	4.2	0.3	<1	7	10.9	0.1
REP 1320384	QC																				
1320399	Drill Core	0.011	15.0	3	0.31	1506	0.077	6.22	3.018	1.29	0.8	17.8	25	0.7	4.1	2.7	0.2	<1	3	6.3	<0.1
REP 1320399	QC																				
1320408	Drill Core	0.027	13.1	10	0.80	1371	0.159	5.93	3.666	0.83	3.9	10.7	26	0.8	7.8	3.6	0.2	<1	12	5.8	0.2
REP 1320408	QC	0.026	13.8	10	0.80	1332	0.167	6.07	3.764	0.94	4.0	11.6	27	0.7	7.9	3.7	0.2	<1	12	5.9	0.2
1320416	Drill Core	0.023	15.1	7	0.92	1589	0.165	7.00	3.391	1.30	2.3	11.3	29	0.9	6.6	4.8	0.3	<1	12	7.8	0.2
REP 1320416	QC																				
1320427	Drill Core	0.029	12.9	2	0.39	2533	0.120	6.75	3.008	1.85	3.8	19.4	22	0.9	4.4	4.8	0.4	<1	4	5.3	<0.1
REP 1320427	QC																				
1320429	Drill Core	0.008	15.0	2	1.36	1456	0.054	5.94	4.205	0.52	4.0	22.8	25	0.5	6.7	2.0	0.3	<1	16	2.3	0.3
REP 1320429	QC	0.008	14.8	2	1.37	1423	0.054	6.00	4.279	0.54	3.8	23.4	26	0.5	7.3	2.0	0.3	<1	16	2.1	0.3
1320432	Drill Core	0.010	14.9	3	0.43	1285	0.071	6.11	3.341	1.49	4.6	18.0	25	0.7	3.3	2.9	0.2	<1	5	3.7	0.2
REP 1320432	QC																				
Core Reject Duplicates																					
1320362	Drill Core	0.018	16.7	6	0.78	1398	0.137	6.24	3.156	0.89	9.1	6.9	33	0.9	7.2	3.6	0.2	<1	8	10.3	0.2
DUP 1320362	QC	0.022	17.4	6	0.83	1412	0.135	6.45	3.337	0.99	3.0	7.3	34	0.8	8.3	3.5	0.2	<1	8	9.4	0.2
1320396	Drill Core	0.019	15.5	5	0.54	1512	0.136	6.73	2.592	1.64	1.8	8.1	30	1.0	7.4	4.1	0.2	1	9	7.6	0.1
DUP 1320396	QC	0.018	15.1	5	0.51	1411	0.129	6.33	2.430	1.49	1.8	7.8	29	1.0	7.1	3.6	0.2	<1	9	7.4	0.1
1320430	Drill Core	0.011	12.6	2	0.35	1117	0.058	6.70	3.764	1.15	3.5	24.5	21	0.7	4.1	2.5	0.3	<1	5	3.8	0.3
DUP 1320430	QC	0.011	13.2	2	0.36	1409	0.059	6.53	3.690	1.12	3.5	22.5	21	0.8	4.0	2.4	0.3	<1	5	3.9	0.3
Reference Materials																					

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000255.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200
		Analyte	Rb	Hf	In	Re	Se	Te	Tl	Hg
		Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
		MDL	0.1	0.1	0.05	0.005	1	0.5	0.5	0.01
Pulp Duplicates										
1320352	Drill Core		19.3	0.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01
REP 1320352	QC									<0.01
1320365	Drill Core		8.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
REP 1320365	QC									
1320374	Drill Core		41.3	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
REP 1320374	QC		41.1	0.1	<0.05	<0.005	<1	<0.5	<0.5	
1320384	Drill Core		31.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.01
REP 1320384	QC									<0.01
1320399	Drill Core		29.1	0.5	<0.05	<0.005	<1	<0.5	<0.5	<0.01
REP 1320399	QC									
1320408	Drill Core		17.0	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
REP 1320408	QC		17.8	0.4	<0.05	<0.005	<1	<0.5	<0.5	
1320416	Drill Core		31.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
REP 1320416	QC									<0.01
1320427	Drill Core		42.7	0.6	<0.05	<0.005	<1	<0.5	<0.5	<0.01
REP 1320427	QC									
1320429	Drill Core		7.9	0.7	<0.05	<0.005	<1	0.7	<0.5	<0.01
REP 1320429	QC		8.5	0.6	0.06	<0.005	<1	0.6	<0.5	
1320432	Drill Core		22.2	0.5	<0.05	<0.005	<1	<0.5	<0.5	<0.01
REP 1320432	QC									
Core Reject Duplicates										
1320362	Drill Core		29.3	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.03
DUP 1320362	QC		26.3	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.03
1320396	Drill Core		40.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
DUP 1320396	QC		37.0	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320430	Drill Core		22.2	0.7	<0.05	<0.005	<1	<0.5	<0.5	0.01
DUP 1320430	QC		20.9	0.7	<0.05	<0.005	<1	<0.5	<0.5	<0.01
Reference Materials										

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000255.1

		WGHT Wgt kg 0.01	FA350 Au ppb 2	MA200 Mo ppm 0.1	MA200 Cu ppm 0.1	MA200 Pb ppm 0.1	MA200 Zn ppm 1	MA200 Ag ppm 0.1	MA200 Ni ppm 0.1	MA200 Co ppm 0.2	MA200 Mn ppm 1	MA200 Fe % 0.01	MA200 As ppm 1	MA200 U ppm 0.1	MA200 Th ppm 0.1	MA200 Sr ppm 1	MA200 Cd ppm 0.1	MA200 Sb ppm 0.1	MA200 Bi ppm 0.1	MA200 V ppm 1	MA200 Ca % 0.01
STD BVGEO01	Standard																				
STD DS11	Standard																				
STD DS11	Standard																				
STD OREAS25A-4A	Standard			2.6	36.3	23.8	43	<0.1	43.7	7.3	499	6.53	9	2.9	16.6	46	<0.1	0.6	0.3	159	0.28
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard			2.2	35.2	26.1	49	<0.1	44.8	7.8	495	6.32	9	2.9	17.5	48	0.2	0.6	0.4	146	0.26
STD OREAS25A-4A	Standard			2.2	32.4	22.7	43	<0.1	43.6	7.5	452	6.35	9	2.6	14.6	40	<0.1	0.6	0.3	153	0.26
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard			2.3	35.8	24.2	42	<0.1	46.6	8.2	488	6.39	9	2.8	15.7	50	<0.1	0.6	0.3	152	0.29
STD OREAS25A-4A	Standard			2.5	34.5	24.7	42	<0.1	46.2	8.0	475	6.73	11	2.8	16.2	44	<0.1	0.6	0.3	158	0.27
STD OREAS25A-4A	Standard			2.6	33.7	24.3	43	<0.1	46.5	7.6	492	6.62	10	2.8	16.6	49	<0.1	0.7	0.3	163	0.29
STD OREAS45E	Standard			2.4	766.3	19.4	48	0.3	465.8	61.5	580	25.21	16	2.6	15.1	17	<0.1	1.0	0.3	324	0.06
STD OREAS45H	Standard			1.4	766.6	13.3	43	0.2	455.5	91.2	417	20.14	16	1.7	8.5	29	<0.1	0.6	0.2	277	0.14
STD OREAS45E	Standard			2.3	750.0	17.3	46	0.3	469.0	57.6	576	24.38	17	2.3	12.5	16	<0.1	1.0	0.2	340	0.08
STD OREAS45E	Standard			2.3	787.4	18.7	49	0.3	469.2	59.6	574	24.16	17	2.6	13.7	18	<0.1	1.2	0.3	328	0.06
STD OREAS45E	Standard			2.1	784.1	18.4	48	0.3	454.9	58.1	559	24.85	18	2.5	14.4	16	<0.1	1.1	0.3	310	0.06
STD OREAS45E	Standard			2.3	765.5	18.6	48	0.3	471.7	57.2	566	23.53	17	2.7	14.4	17	<0.1	0.9	0.2	348	0.07
STD OXC145	Standard		222																		
STD OXC145	Standard		215																		
STD OXC145	Standard		219																		
STD OXC145	Standard		214																		
STD OXH139	Standard		1300																		
STD OXH139	Standard		1310																		
STD OXH139	Standard		1308																		
STD OXH139	Standard		1306																		
STD OREAS45H Expected				1.55	767	11.9	39.7	0.147	423	88	380	19.52	16.9	1.68	7.26	27.1		0.63	0.17	263	0.135
STD DS11 Expected																					
STD BVGEO01 Expected																					

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000255.1

		MA200 P % 0.001	MA200 La ppm 0.1	MA200 Cr ppm 1	MA200 Mg % 0.01	MA200 Ba ppm 1	MA200 Ti % 0.001	MA200 Al % 0.01	MA200 Na % 0.001	MA200 K % 0.01	MA200 W ppm 0.1	MA200 Zr ppm 0.1	MA200 Ce ppm 1	MA200 Sn ppm 0.1	MA200 Y ppm 0.1	MA200 Nb ppm 0.1	MA200 Ta ppm 0.1	MA200 Be ppm 1	MA200 Sc ppm 1	MA200 Li ppm 0.1	MA200 S % 0.1
STD BVGEO01	Standard																				
STD DS11	Standard																				
STD DS11	Standard																				
STD OREAS25A-4A	Standard	0.044	20.5	114	0.32	144	0.955	8.99	0.114	0.45	1.8	141.7	47	3.7	9.6	19.2	1.4	1	12	36.8	<0.1
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard	0.043	20.3	108	0.32	152	0.933	8.50	0.114	0.47	1.9	150.4	45	4.5	9.2	18.8	1.4	<1	12	36.1	<0.1
STD OREAS25A-4A	Standard	0.048	18.7	110	0.35	137	0.973	8.63	0.127	0.48	2.0	150.0	40	3.2	9.2	19.7	1.4	<1	12	37.1	<0.1
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard	0.049	22.5	109	0.33	141	0.925	9.28	0.141	0.45	1.8	145.8	48	4.1	10.9	19.8	1.4	1	13	36.1	<0.1
STD OREAS25A-4A	Standard	0.047	19.8	110	0.35	148	0.924	8.83	0.137	0.49	1.9	138.6	41	4.1	9.5	19.0	1.4	<1	12	39.2	<0.1
STD OREAS25A-4A	Standard	0.049	22.0	116	0.33	145	0.973	9.03	0.141	0.50	1.9	151.0	46	3.6	10.2	18.9	1.4	1	13	34.4	<0.1
STD OREAS45E	Standard	0.033	11.1	975	0.16	253	0.546	6.86	0.054	0.33	0.9	95.9	24	1.0	7.7	6.4	0.5	<1	95	7.0	<0.1
STD OREAS45H	Standard	0.023	13.0	662	0.25	326	0.858	8.14	0.082	0.20	0.9	119.2	24	2.0	9.4	13.1	0.9	<1	58	14.0	<0.1
STD OREAS45E	Standard	0.032	8.7	955	0.16	252	0.520	7.01	0.060	0.35	1.0	101.8	20	1.2	7.0	6.4	0.5	<1	93	7.1	<0.1
STD OREAS45E	Standard	0.034	11.5	898	0.15	264	0.547	7.08	0.055	0.33	1.0	97.3	26	1.4	8.4	6.5	0.6	<1	93	6.6	<0.1
STD OREAS45E	Standard	0.036	12.2	957	0.19	260	0.538	7.02	0.071	0.35	0.9	95.2	24	1.2	7.8	5.7	0.5	<1	94	7.1	<0.1
STD OREAS45E	Standard	0.033	11.2	948	0.15	243	0.544	7.10	0.055	0.34	1.0	92.8	24	1.1	8.2	6.0	0.5	<1	91	7.3	<0.1
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OREAS45H Expected		0.023	12.4	602	0.238	332	0.878	7.99	0.09	0.205	0.99	131	23.6	1.93	10.4	14.8	1.08	1.09	57	13.1	
STD DS11 Expected																					
STD BVGEO01 Expected																					

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000255.1

		MA200 Rb ppm 0.1	MA200 Hf ppm 0.1	MA200 In ppm 0.05	MA200 Re ppm 0.005	MA200 Se ppm 1	MA200 Te ppm 0.5	MA200 Tl ppm 0.5	AQ200 Hg ppm 0.01
STD BVGEO01	Standard								0.09
STD DS11	Standard								0.33
STD DS11	Standard								0.26
STD OREAS25A-4A	Standard	60.6	4.0	0.13	<0.005	3	<0.5	<0.5	
STD OREAS262	Standard								0.15
STD OREAS25A-4A	Standard	55.9	4.0	0.06	<0.005	3	<0.5	<0.5	
STD OREAS25A-4A	Standard	51.3	4.1	0.09	<0.005	3	<0.5	<0.5	
STD OREAS262	Standard								0.19
STD OREAS262	Standard								0.22
STD OREAS25A-4A	Standard	61.4	3.9	0.08	<0.005	2	<0.5	<0.5	
STD OREAS25A-4A	Standard	56.3	4.0	0.09	<0.005	2	<0.5	<0.5	
STD OREAS25A-4A	Standard	59.6	3.9	0.08	<0.005	3	<0.5	<0.5	
STD OREAS45E	Standard	22.2	3.1	0.10	<0.005	2	<0.5	<0.5	
STD OREAS45H	Standard	21.4	3.5	0.08	<0.005	2	<0.5	<0.5	
STD OREAS45E	Standard	20.4	2.7	0.09	<0.005	3	<0.5	<0.5	
STD OREAS45E	Standard	22.7	2.9	0.10	<0.005	2	<0.5	<0.5	
STD OREAS45E	Standard	21.2	2.9	0.08	<0.005	2	<0.5	<0.5	
STD OREAS45E	Standard	21.8	2.7	0.14	<0.005	3	<0.5	<0.5	
STD OXC145	Standard								
STD OXC145	Standard								
STD OXC145	Standard								
STD OXC145	Standard								
STD OXH139	Standard								
STD OXH139	Standard								
STD OXH139	Standard								
STD OXH139	Standard								
STD OREAS45H Expected		22.5	3.6	0.1		2.02			
STD DS11 Expected									0.26
STD BVGEO01 Expected									0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000255.1

		WGHT Wgt kg 0.01	FA350 Au ppb 2	MA200 Mo ppm 0.1	MA200 Cu ppm 0.1	MA200 Pb ppm 0.1	MA200 Zn ppm 1	MA200 Ag ppm 0.1	MA200 Ni ppm 0.1	MA200 Co ppm 0.2	MA200 Mn ppm 1	MA200 Fe % 0.01	MA200 As ppm 1	MA200 U ppm 0.1	MA200 Th ppm 0.1	MA200 Sr ppm 1	MA200 Cd ppm 0.1	MA200 Sb ppm 0.1	MA200 Bi ppm 0.1	MA200 V ppm 1	MA200 Ca % 0.01
STD OREAS262 Expected																					
STD OXC145 Expected			212																		
STD OXH139 Expected			1312																		
STD OREAS25A-4A Expected				2.41	33.9	25.2	44.4		45.8	7.7	480	6.6	9.94	2.94	15.8	48.5		0.65	0.37	157	0.301
STD OREAS45E Expected				2.4	780	18.2	46.7	0.311	454	57	570	24.12	16.3	2.41	12.9	15.9	0.06	1	0.28	322	0.065
BLK	Blank			<0.1	0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank																				
BLK	Blank			<0.1	0.2	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank			<0.1	0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank		3																		
BLK	Blank		3																		
BLK	Blank		3																		
BLK	Blank																				
BLK	Blank																				
BLK	Blank			<0.1	0.3	<0.1	<1	<0.1	0.2	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank			<0.1	0.2	<0.1	<1	<0.1	<0.1	<0.2	1	<0.01	1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank		3																		
BLK	Blank			<0.1	0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
Prep Wash																					
ROCK-WHI	Prep Blank		3	1.4	3.6	2.6	38	<0.1	0.6	3.8	627	2.12	<1	1.2	3.0	214	<0.1	0.1	<0.1	36	1.64
ROCK-WHI	Prep Blank		4	1.2	4.3	2.6	34	<0.1	1.0	3.6	636	2.13	<1	1.2	3.0	206	<0.1	0.1	<0.1	35	1.57

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000255.1

		MA200 P % 0.001	MA200 La ppm 0.1	MA200 Cr ppm 1	MA200 Mg % 0.01	MA200 Ba ppm 1	MA200 Ti % 0.001	MA200 Al % 0.01	MA200 Na % 0.001	MA200 K % 0.01	MA200 W ppm 0.1	MA200 Zr ppm 0.1	MA200 Ce ppm 1	MA200 Sn ppm 0.1	MA200 Y ppm 0.1	MA200 Nb ppm 0.1	MA200 Ta ppm 0.1	MA200 Be ppm 1	MA200 Sc ppm 1	MA200 Li ppm 0.1	MA200 S % 0.1
STD OREAS262 Expected																					
STD OXC145 Expected																					
STD OXH139 Expected																					
STD OREAS25A-4A Expected		0.048	21.8	115	0.327	147	0.93	8.87	0.131	0.482	2	155	47.3	4.06	10.5	20.9	1.4	0.93	13.7	36.7	0.047
STD OREAS45E Expected		0.034	11	979	0.156	252	0.559	6.78	0.059	0.324	1.07	97	23.5	1.32	8.28	6.8	0.54		93	6.58	0.046
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.003	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.004	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.003	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank	<0.001	<0.1	1	<0.01	<1	<0.001	<0.01	0.004	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	0.1	<0.1
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.004	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.003	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
Prep Wash																					
ROCK-WHI	Prep Blank	0.042	11.4	2	0.50	793	0.204	6.97	3.339	1.58	0.2	49.3	23	0.5	15.1	5.2	0.4	1	7	3.4	<0.1
ROCK-WHI	Prep Blank	0.036	11.4	2	0.48	788	0.205	6.88	3.266	1.61	0.2	49.4	23	0.7	14.9	5.3	0.4	<1	6	3.2	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000255.1

		MA200 Rb ppm 0.1	MA200 Hf ppm 0.1	MA200 In ppm 0.05	MA200 Re ppm 0.005	MA200 Se ppm 1	MA200 Te ppm 0.5	MA200 Tl ppm 0.5	AQ200 Hg ppm 0.01
STD OREAS262 Expected									0.17
STD OXC145 Expected									
STD OXH139 Expected									
STD OREAS25A-4A Expected		61	4.14	0.09		2.4		0.35	
STD OREAS45E Expected		21.2	3.11	0.099		2.97	0.1	0.15	
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5	
BLK	Blank								<0.01
BLK	Blank	<0.1	<0.1	<0.05	<0.005	1	<0.5	<0.5	
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5	
BLK	Blank								
BLK	Blank								
BLK	Blank								
BLK	Blank								<0.01
BLK	Blank								<0.01
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5	
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5	
BLK	Blank								
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5	
Prep Wash									
ROCK-WHI	Prep Blank	39.5	1.7	<0.05	<0.005	<1	<0.5	<0.5	0.02
ROCK-WHI	Prep Blank	40.9	1.7	<0.05	<0.005	<1	<0.5	<0.5	<0.01

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

DDLS-19-03 Assay Certificates WHI19000258.1 and WHI19000259.1

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Submitted By: Dan Ferraro
Receiving Lab: Canada-Whitehorse
Received: July 25, 2019
Report Date: September 05, 2019
Page: 1 of 6

CERTIFICATE OF ANALYSIS WHI19000258.1

CLIENT JOB INFORMATION

Project: LUC
Shipment ID: DDLS-19-03
P.O. Number
Number of Samples: 138

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	128	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	10	Sort, label and box pulps			WHI
FA350-Au	138	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	138	Environmental disposal charge-Fire assay lead waste			VAN
MA200	138	4 Acid digestion ICP-MS analysis	0.25	Completed	VAN
AQ200-HG	138	Hg by AR digestion ICP-MS analysis	0.5	Completed	VAN
SHP01	138	Per sample shipping charges for branch shipments			VAN
EN001-MA	138	Environmental disposal fee - Multi-acid neutralization			VAN
PULSW	128	Extra Wash with Silica between each sample			WHI
FA550	0	Lead collection fire assay 50G fusion - Grav finish	50	Completed	VAN

ADDITIONAL COMMENTS

Invoice To: Luckystrike Resources Ltd.
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4
Canada

CC: Daithi MacGearailt

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000258.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320433	Drill Core	5.71	8	5.6	78.5	12.6	90	0.2	57.6	12.6	299	2.65	22	1.2	6.0	192	0.2	3.1	<0.1	180	2.47
1320434	Drill Core	5.69	9	6.9	35.5	12.2	70	<0.1	61.3	8.0	349	1.97	18	1.2	3.5	287	0.4	1.7	<0.1	406	4.14
1320435	Drill Core	5.75	14	8.5	48.4	11.6	112	0.2	59.4	16.5	781	3.44	31	1.3	11.5	258	0.6	4.7	<0.1	123	4.59
1320436	Drill Core	4.02	32	8.7	125.6	13.2	83	0.3	50.9	16.5	811	3.31	35	2.0	7.5	430	0.4	8.3	0.3	105	2.21
1320437	Drill Core	4.36	114	13.7	97.3	17.8	87	0.4	54.2	20.9	1258	3.70	23	1.8	8.7	384	0.8	4.5	0.2	105	7.18
1320438	Drill Core	3.99	24	4.9	36.7	8.2	88	<0.1	30.4	13.1	891	3.52	14	0.9	3.5	274	0.4	1.9	0.1	136	5.15
1320439	Drill Core	4.12	13	3.0	59.5	6.8	72	<0.1	25.8	11.3	912	3.69	9	0.6	3.9	309	0.4	1.9	<0.1	126	3.76
1320440	Drill Core	4.48	6	6.3	31.2	6.1	56	<0.1	20.1	9.5	438	3.54	10	0.6	5.4	282	0.1	1.1	<0.1	116	1.90
1320441	Drill Core	3.85	8	4.7	53.8	7.3	64	<0.1	17.7	10.1	998	3.46	13	0.4	1.9	241	0.2	0.9	<0.1	105	4.10
1320442	Drill Core	5.02	9	2.5	40.6	8.2	90	<0.1	18.8	16.2	1313	5.28	15	0.6	1.8	222	0.2	1.1	<0.1	148	4.12
1320443	Drill Core	4.01	8	3.3	40.2	10.3	143	<0.1	22.0	26.7	1920	7.96	12	0.8	1.1	149	0.3	1.3	<0.1	311	5.01
1320444	Drill Core	4.77	5	1.3	28.8	5.5	57	<0.1	5.2	7.8	706	2.75	5	0.5	0.3	272	<0.1	0.3	<0.1	85	1.60
1320445	Drill Core	4.85	3	1.0	8.5	6.6	30	<0.1	3.0	4.4	979	1.39	4	0.2	0.2	253	<0.1	0.5	<0.1	33	4.05
1320446	Drill Core	3.97	4	1.2	31.5	5.6	57	<0.1	5.9	11.4	1022	4.16	5	0.6	0.5	166	0.2	0.4	<0.1	152	3.77
1320447	Drill Core	5.02	4	1.0	33.9	4.0	105	<0.1	17.0	27.8	1479	6.73	5	0.5	1.1	313	0.4	0.2	<0.1	232	5.32
1320448	Drill Core	2.97	13	2.0	21.8	12.7	116	0.1	10.1	12.0	1177	4.74	4	0.5	1.4	133	1.0	1.1	<0.1	123	4.08
1320449	Drill Core	2.54	7	0.7	11.8	5.1	23	<0.1	1.6	3.1	410	2.32	3	0.6	2.2	164	0.1	0.4	<0.1	22	1.91
1320450	Rock Pulp	0.06	8	3.0	23.5	4.2	42	0.5	21.7	11.1	474	2.46	4	0.8	2.0	236	0.3	0.8	<0.1	80	1.74
1320451	Rock Pulp	0.06	883	12.8	9779.5	20.7	127	3.3	605.6	20.1	917	8.21	<1	0.3	1.7	140	0.4	16.0	0.7	97	2.09
1320452	Drill Core	2.65	4	0.7	4.9	4.2	22	<0.1	0.8	2.1	208	1.60	3	0.6	2.4	170	<0.1	0.2	<0.1	6	1.37
1320453	Drill Core	2.74	3	0.4	4.5	3.7	23	<0.1	0.9	1.8	236	1.57	3	0.5	0.9	163	<0.1	0.1	<0.1	5	1.25
1320454	Drill Core	2.79	4	0.4	7.0	4.6	18	<0.1	1.3	1.4	191	1.32	2	0.4	1.4	272	<0.1	0.2	<0.1	9	1.58
1320455	Drill Core	2.60	3	0.9	6.6	4.7	29	<0.1	3.0	3.4	313	1.81	2	0.4	2.5	260	<0.1	0.2	<0.1	14	1.84
1320456	Drill Core	3.28	6	1.1	9.7	5.4	40	<0.1	4.8	5.0	424	2.08	2	0.5	2.5	248	<0.1	0.2	<0.1	26	2.26
1320457	Drill Core	4.01	7	1.0	41.3	7.0	222	<0.1	19.1	20.9	1218	5.84	3	0.7	1.9	293	0.2	0.2	<0.1	173	3.65
1320458	Drill Core	3.27	15	1.1	13.5	5.7	22	<0.1	4.8	9.0	610	2.85	2	0.5	1.6	130	0.3	0.4	<0.1	86	3.61
1320459	Drill Core	2.52	60	0.9	37.8	11.7	52	<0.1	13.5	12.9	626	3.20	2	0.8	2.1	241	0.2	0.3	0.1	106	2.79
1320460	Drill Core	2.76	3	1.4	2.9	37.4	18	0.3	3.5	2.6	207	1.40	3	0.6	1.5	328	<0.1	0.2	0.8	21	1.86
1320461	Drill Core	2.26	3	0.8	4.0	5.2	20	<0.1	1.6	3.9	287	1.64	3	0.6	2.2	243	<0.1	0.1	<0.1	29	2.03
1320462	Drill Core	2.12	5	1.9	6.1	4.4	24	<0.1	1.3	5.2	380	2.16	3	0.7	3.5	132	<0.1	0.2	<0.1	32	1.78

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000258.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320433	Drill Core		0.115	18.3	48	0.14	1431	0.195	5.48	0.868	0.83	1.3	11.8	36	0.5	18.0	5.8	0.4	1	13	24.1	<0.1
1320434	Drill Core		0.200	15.5	65	0.15	3451	0.238	4.95	0.737	1.10	4.3	9.8	21	0.7	23.4	5.3	0.4	<1	9	18.7	<0.1
1320435	Drill Core		0.075	34.0	42	0.21	1383	0.179	5.38	0.526	1.11	1.8	14.9	67	0.6	15.5	5.3	0.3	<1	12	26.0	<0.1
1320436	Drill Core		0.056	25.1	41	0.15	2507	0.157	4.80	0.024	0.69	1.4	18.5	49	0.3	13.2	2.3	0.2	<1	15	26.9	<0.1
1320437	Drill Core		0.053	24.4	46	0.21	1353	0.150	4.98	0.599	0.73	1.7	22.1	50	0.5	14.3	3.0	0.2	<1	17	21.6	<0.1
1320438	Drill Core		0.047	10.6	38	0.18	1724	0.280	6.83	2.232	1.06	1.7	13.6	22	1.1	11.1	3.4	0.2	1	15	18.0	<0.1
1320439	Drill Core		0.067	12.6	40	0.17	788	0.233	6.99	4.408	0.65	2.3	14.1	28	0.3	10.1	5.8	0.4	<1	11	9.0	<0.1
1320440	Drill Core		0.053	14.1	32	0.18	1678	0.250	7.08	3.133	0.85	1.4	8.7	29	0.6	11.9	3.9	0.2	1	12	14.4	<0.1
1320441	Drill Core		0.038	6.9	36	0.16	2925	0.188	7.10	4.058	0.57	0.8	4.9	13	0.5	10.5	2.6	0.2	1	12	12.1	<0.1
1320442	Drill Core		0.057	8.0	38	0.15	701	0.328	7.40	2.986	0.91	1.3	5.8	17	0.7	13.9	2.6	0.1	<1	19	13.9	<0.1
1320443	Drill Core		0.083	9.4	38	0.58	867	0.703	8.17	2.175	1.55	2.0	7.4	22	0.9	33.3	3.9	0.3	1	31	10.6	<0.1
1320444	Drill Core		0.024	1.7	13	0.43	614	0.262	6.05	2.702	0.99	0.6	6.5	4	0.7	5.5	4.4	0.4	<1	10	8.0	<0.1
1320445	Drill Core		0.006	1.1	3	0.08	274	0.078	5.65	3.449	0.56	0.4	7.0	2	0.2	5.3	1.8	0.2	<1	3	6.4	<0.1
1320446	Drill Core		0.042	3.3	11	0.31	308	0.321	6.41	3.263	1.34	2.8	10.9	8	0.6	11.3	2.9	0.3	<1	14	10.0	<0.1
1320447	Drill Core		0.075	10.4	43	1.79	623	0.477	7.00	2.239	0.88	0.5	6.0	24	1.1	35.0	2.6	0.2	<1	25	11.6	<0.1
1320448	Drill Core		0.056	7.6	22	0.48	511	0.207	6.59	3.985	0.71	3.6	8.8	19	0.5	16.0	1.8	0.1	<1	17	10.4	<0.1
1320449	Drill Core		0.022	10.4	2	0.17	433	0.135	5.49	2.950	0.56	2.7	6.7	23	1.2	19.2	3.4	0.2	<1	8	10.2	<0.1
1320450	Rock Pulp		0.047	8.3	29	0.78	463	0.266	5.13	2.032	0.79	27.8	35.6	18	0.5	12.2	3.2	0.2	<1	10	11.0	<0.1
1320451	Rock Pulp		0.058	3.8	690	1.06	435	0.129	4.96	0.208	2.85	3.2	12.2	8	1.4	5.3	4.4	0.2	<1	8	7.5	1.2
1320452	Drill Core		0.018	10.8	3	0.12	412	0.126	6.17	3.273	0.43	0.1	10.0	24	0.7	22.0	4.6	0.3	<1	9	8.9	<0.1
1320453	Drill Core		0.017	8.1	2	0.17	429	0.130	5.90	3.028	0.47	0.2	12.4	20	0.4	21.1	4.0	0.2	<1	10	9.7	<0.1
1320454	Drill Core		0.015	6.4	2	0.14	558	0.099	6.41	3.941	0.43	0.9	9.0	15	0.3	13.7	3.2	0.2	<1	6	6.3	<0.1
1320455	Drill Core		0.018	8.3	3	0.32	511	0.128	6.23	3.616	0.42	0.4	8.4	20	0.7	18.8	3.8	0.2	<1	8	8.0	<0.1
1320456	Drill Core		0.022	8.6	5	0.48	752	0.153	6.01	3.466	0.49	0.3	7.7	20	0.7	17.4	4.0	0.3	<1	9	7.7	<0.1
1320457	Drill Core		0.070	9.1	49	2.16	1003	0.438	7.17	2.407	1.30	1.0	5.7	20	1.0	21.0	2.8	0.1	<1	23	13.3	0.4
1320458	Drill Core		0.036	7.8	6	0.69	466	0.177	5.88	4.495	0.95	6.6	5.9	18	0.9	9.2	1.8	0.1	<1	10	4.5	0.2
1320459	Drill Core		0.033	7.7	23	1.20	891	0.215	5.84	3.219	1.01	2.3	5.3	17	0.9	13.8	2.1	0.2	<1	13	7.6	0.2
1320460	Drill Core		0.013	5.8	6	0.35	852	0.108	6.55	3.432	0.71	0.2	4.0	14	0.8	13.2	2.0	0.1	<1	6	8.9	<0.1
1320461	Drill Core		0.012	7.7	3	0.26	685	0.131	6.41	3.519	0.81	0.3	5.1	18	0.8	17.3	2.5	0.1	1	7	8.4	<0.1
1320462	Drill Core		0.018	9.3	3	0.32	485	0.146	6.35	3.113	0.91	0.7	5.7	21	0.7	16.1	2.6	0.1	<1	8	9.8	0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000258.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320433	Drill Core	21.0	0.4	<0.05	<0.005	1	<0.5	<0.5	0.09	
1320434	Drill Core	21.4	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.05	
1320435	Drill Core	29.8	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.11	
1320436	Drill Core	20.2	0.5	<0.05	<0.005	2	<0.5	<0.5	0.20	
1320437	Drill Core	20.9	0.6	0.05	<0.005	3	0.5	<0.5	0.19	
1320438	Drill Core	26.7	0.4	0.06	<0.005	<1	<0.5	<0.5	0.05	
1320439	Drill Core	15.0	0.5	<0.05	<0.005	2	<0.5	<0.5	0.03	
1320440	Drill Core	23.9	0.3	<0.05	<0.005	2	<0.5	<0.5	0.02	
1320441	Drill Core	12.6	0.2	<0.05	<0.005	1	<0.5	<0.5	0.02	
1320442	Drill Core	20.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320443	Drill Core	50.1	0.5	0.13	<0.005	<1	<0.5	<0.5	<0.01	
1320444	Drill Core	33.5	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320445	Drill Core	11.0	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320446	Drill Core	24.3	0.5	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320447	Drill Core	23.3	0.4	0.07	<0.005	<1	<0.5	<0.5	<0.01	
1320448	Drill Core	12.0	0.3	0.06	<0.005	1	<0.5	<0.5	0.02	
1320449	Drill Core	10.9	0.2	0.07	<0.005	2	<0.5	<0.5	<0.01	
1320450	Rock Pulp	21.3	0.9	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320451	Rock Pulp	56.7	0.4	0.15	0.012	9	<0.5	<0.5	1.44	
1320452	Drill Core	11.5	0.3	0.06	<0.005	2	<0.5	<0.5	<0.01	
1320453	Drill Core	13.6	0.4	0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320454	Drill Core	9.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320455	Drill Core	9.7	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320456	Drill Core	12.1	0.3	0.06	<0.005	<1	<0.5	<0.5	<0.01	
1320457	Drill Core	34.0	0.3	0.07	<0.005	<1	<0.5	<0.5	0.01	
1320458	Drill Core	8.0	0.2	0.06	<0.005	<1	<0.5	<0.5	<0.01	
1320459	Drill Core	20.4	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320460	Drill Core	15.9	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320461	Drill Core	21.3	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320462	Drill Core	21.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000258.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320463	Drill Core	1.28	3	1.6	5.2	3.5	20	<0.1	1.5	4.6	249	1.77	2	0.6	3.1	93	<0.1	0.1	<0.1	19	1.25
1320464	Drill Core	3.51	3	4.2	3.7	3.7	17	<0.1	1.8	3.6	327	1.93	3	0.5	2.8	124	0.1	0.1	<0.1	28	2.00
1320465	Drill Core	1.73	3	1.0	4.9	3.7	13	<0.1	3.6	3.8	243	1.81	2	0.5	3.2	119	<0.1	0.3	<0.1	30	1.64
1320466	Drill Core	1.42	16	1.1	6.5	3.9	19	<0.1	8.2	4.9	369	2.24	4	0.5	2.8	131	<0.1	0.2	<0.1	43	2.74
1320467	Drill Core	1.95	6	0.6	10.8	4.6	26	<0.1	8.9	4.5	280	1.82	11	0.5	2.3	193	<0.1	0.2	<0.1	32	1.97
1320468	Drill Core	2.07	3	0.4	14.9	3.5	28	<0.1	4.7	4.4	295	1.99	5	0.6	2.4	185	<0.1	0.1	<0.1	35	1.81
1320469	Drill Core	1.98	3	0.3	6.7	3.9	26	<0.1	1.8	3.4	255	1.80	3	0.6	2.0	252	<0.1	<0.1	<0.1	30	1.71
1320470	Drill Core	1.73	3	0.3	7.8	3.2	14	<0.1	1.1	2.2	238	1.46	3	0.7	2.3	148	<0.1	<0.1	<0.1	14	1.77
1320471	Drill Core	2.06	3	1.7	3.7	4.1	23	<0.1	1.8	2.9	290	1.59	4	0.6	1.7	215	<0.1	<0.1	<0.1	29	2.54
1320472	Drill Core	2.05	2	1.0	4.3	5.6	28	<0.1	2.8	3.2	279	1.79	6	0.8	2.1	243	<0.1	0.1	<0.1	39	2.49
1320473	Drill Core	1.87	3	0.3	15.0	4.6	45	<0.1	3.4	5.4	397	2.68	2	1.5	3.3	395	<0.1	<0.1	<0.1	69	2.68
1320474	Drill Core	1.84	27	0.4	5.4	3.7	29	<0.1	5.4	3.1	309	1.59	2	0.8	2.2	260	<0.1	<0.1	<0.1	30	2.03
1320475	Rock Pulp	0.06	7	3.1	22.8	3.9	43	0.4	23.1	10.7	473	2.54	4	0.7	1.7	233	0.2	0.8	<0.1	85	1.80
1320476	Rock Pulp	0.06	262	186.4	1918.0	38.1	260	0.6	37.5	13.7	746	4.16	17	0.7	1.7	266	0.8	1.7	0.3	119	2.54
1320477	Drill Core	2.06	3	0.3	13.1	4.8	58	<0.1	3.4	4.0	267	1.47	2	0.5	0.8	420	0.1	<0.1	<0.1	49	2.09
1320478	Drill Core	2.63	3	0.4	38.4	5.7	167	<0.1	0.9	1.6	412	1.35	2	0.1	0.5	451	0.3	<0.1	<0.1	19	1.62
1320479	Drill Core	2.05	16	0.3	11.8	5.4	19	<0.1	1.0	1.7	161	0.80	2	0.3	0.2	600	<0.1	<0.1	<0.1	17	1.87
1320480	Drill Core	2.41	2	0.2	2.3	6.6	8	<0.1	0.6	0.9	88	0.55	2	<0.1	<0.1	603	<0.1	<0.1	<0.1	9	1.32
1320481	Drill Core	2.53	3	0.4	9.9	5.8	14	<0.1	0.7	1.1	113	0.72	<1	<0.1	<0.1	595	<0.1	<0.1	<0.1	14	1.29
1320482	Drill Core	2.20	3	0.6	44.5	5.8	128	<0.1	8.3	13.8	1112	4.69	3	0.4	1.0	292	0.2	<0.1	<0.1	137	4.24
1320483	Drill Core	2.57	3	0.5	90.6	4.0	200	0.3	14.2	27.0	1406	7.62	3	0.5	1.5	304	0.6	<0.1	<0.1	212	2.94
1320484	Drill Core	2.63	3	0.3	27.9	4.1	90	1.2	12.2	20.7	1107	5.81	2	0.5	1.0	336	0.1	<0.1	<0.1	196	3.24
1320485	Drill Core	2.52	3	0.3	27.6	5.0	109	<0.1	15.1	23.1	1060	5.79	3	0.6	1.4	341	0.1	0.2	<0.1	187	3.96
1320486	Drill Core	2.50	29	0.2	4.2	3.3	24	<0.1	6.9	4.5	351	1.95	2	1.0	2.5	271	<0.1	0.1	<0.1	57	2.26
1320487	Drill Core	2.72	3	0.5	26.5	3.5	143	<0.1	17.0	22.9	1436	6.47	2	0.5	1.4	261	0.3	<0.1	<0.1	219	3.49
1320488	Drill Core	2.52	12	0.6	40.3	4.9	194	<0.1	37.5	32.7	2017	8.22	3	0.5	1.2	255	0.3	<0.1	<0.1	274	4.42
1320489	Drill Core	2.56	3	0.5	50.0	4.0	154	<0.1	18.6	27.1	1847	8.18	2	0.4	0.9	259	0.2	<0.1	<0.1	291	3.85
1320490	Drill Core	2.53	3	2.3	66.9	6.6	124	0.3	11.0	23.7	1531	7.40	3	0.4	0.9	317	0.2	0.1	<0.1	186	3.24
1320491	Drill Core	3.36	10	4.7	78.5	9.6	188	0.8	20.5	33.5	2181	9.11	2	0.4	1.3	255	0.6	0.2	0.1	329	4.76
1320492	Drill Core	3.36	3	0.3	6.2	3.3	31	<0.1	2.0	2.9	443	2.17	2	0.3	1.2	213	<0.1	<0.1	<0.1	14	1.65

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000258.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320463	Drill Core		0.012	7.6	3	0.24	379	0.104	4.73	2.098	0.71	0.5	3.6	17	0.4	12.0	1.8	0.1	<1	6	7.6	0.3
1320464	Drill Core		0.015	8.0	3	0.23	736	0.123	6.04	2.864	1.24	1.5	5.2	18	0.4	13.1	2.0	0.1	<1	8	9.0	<0.1
1320465	Drill Core		0.016	9.1	2	0.22	262	0.116	6.33	3.433	0.77	1.5	4.2	20	0.4	10.5	2.0	<0.1	<1	7	7.0	0.1
1320466	Drill Core		0.024	9.1	7	0.47	232	0.128	6.39	4.074	0.53	2.3	5.5	20	0.7	9.6	2.0	0.1	<1	9	4.8	<0.1
1320467	Drill Core		0.022	10.0	8	0.44	835	0.135	5.91	2.832	1.03	0.9	6.9	23	0.6	16.6	2.7	0.1	<1	6	9.8	<0.1
1320468	Drill Core		0.022	9.7	3	0.43	872	0.155	6.62	2.868	1.01	0.1	7.3	23	0.7	17.3	3.0	0.1	<1	7	11.3	<0.1
1320469	Drill Core		0.020	9.3	2	0.35	749	0.144	6.63	3.201	0.79	0.2	7.7	22	1.6	19.2	2.5	0.1	<1	7	8.4	<0.1
1320470	Drill Core		0.012	10.0	1	0.20	514	0.108	6.37	3.024	0.55	0.1	9.1	22	1.0	20.5	2.7	0.2	<1	5	9.6	<0.1
1320471	Drill Core		0.025	8.6	1	0.32	584	0.142	7.13	3.150	0.58	0.2	5.6	20	1.0	21.0	2.7	0.2	<1	6	11.9	<0.1
1320472	Drill Core		0.035	8.6	4	0.47	618	0.169	7.47	3.812	0.86	0.2	4.7	19	1.4	18.1	2.9	0.2	<1	8	8.6	<0.1
1320473	Drill Core		0.070	13.1	7	0.75	1058	0.227	6.84	3.186	0.76	0.2	5.7	29	1.1	19.8	4.1	0.2	<1	7	8.6	0.2
1320474	Drill Core		0.019	9.3	9	0.45	548	0.132	6.21	3.531	0.62	<0.1	5.7	21	1.3	22.5	2.9	0.2	<1	6	6.4	<0.1
1320475	Rock Pulp		0.049	7.8	29	0.81	462	0.272	5.16	2.076	0.84	27.1	37.4	17	0.7	11.4	3.4	0.2	<1	10	11.6	<0.1
1320476	Rock Pulp		0.055	8.9	51	1.31	551	0.361	6.51	2.220	0.86	8.5	30.2	19	1.7	13.4	4.4	0.3	<1	14	14.8	0.3
1320477	Drill Core		0.015	3.5	4	0.45	632	0.112	7.39	3.490	1.01	0.6	2.1	8	0.5	5.8	1.3	<0.1	<1	5	6.3	<0.1
1320478	Drill Core		0.012	2.3	<1	0.39	874	0.096	7.08	3.677	0.93	0.2	1.9	6	0.4	7.5	1.7	<0.1	<1	5	5.5	0.2
1320479	Drill Core		0.006	1.0	1	0.15	808	0.064	7.09	4.094	0.66	0.2	2.0	2	0.2	1.5	0.8	<0.1	<1	1	3.7	<0.1
1320480	Drill Core		0.003	0.3	<1	0.10	695	0.044	7.74	4.575	0.68	0.1	0.8	<1	0.2	0.6	0.7	<0.1	<1	<1	3.3	<0.1
1320481	Drill Core		0.005	0.9	<1	0.15	1234	0.052	7.54	4.182	0.92	0.2	1.0	2	0.4	2.0	1.1	<0.1	<1	2	3.5	<0.1
1320482	Drill Core		0.069	8.7	18	1.39	541	0.307	7.30	2.401	0.97	0.1	4.6	21	0.9	25.2	2.6	0.2	<1	22	8.5	0.4
1320483	Drill Core		0.080	9.5	21	2.30	353	0.570	7.87	2.660	1.19	3.6	3.1	22	1.2	23.7	4.5	0.3	1	24	13.3	0.9
1320484	Drill Core		0.053	6.1	16	2.14	475	0.465	7.98	3.182	0.69	12.9	4.1	14	0.8	18.4	2.0	0.1	<1	20	8.9	0.3
1320485	Drill Core		0.074	10.5	23	2.13	248	0.630	7.63	2.772	0.31	1.0	7.0	24	1.0	26.6	4.1	0.2	<1	24	9.6	0.4
1320486	Drill Core		0.019	9.6	13	0.45	613	0.145	6.10	3.341	0.51	0.3	7.5	22	1.1	26.9	2.7	0.2	<1	8	2.8	<0.1
1320487	Drill Core		0.058	8.5	26	2.58	492	0.450	7.53	2.718	0.77	0.4	6.0	20	1.0	27.9	2.4	0.1	<1	25	8.7	0.3
1320488	Drill Core		0.069	6.5	65	4.19	289	0.563	8.28	2.701	0.54	0.5	7.5	15	0.8	24.1	1.2	0.1	<1	33	11.7	0.3
1320489	Drill Core		0.088	7.3	22	2.89	357	0.767	7.85	2.637	0.66	0.6	5.5	18	1.1	33.5	2.5	0.2	<1	28	10.0	0.4
1320490	Drill Core		0.090	10.8	14	2.21	545	0.502	7.63	2.809	0.96	2.4	5.1	24	0.8	22.8	2.9	0.2	<1	22	9.9	0.5
1320491	Drill Core		0.091	6.9	24	2.85	515	0.760	8.06	3.386	0.83	8.4	5.4	17	1.0	28.7	2.9	0.2	<1	32	8.5	0.7
1320492	Drill Core		0.023	8.3	2	0.43	200	0.177	6.08	3.428	0.60	0.4	7.6	19	0.7	18.6	2.7	0.1	<1	12	3.1	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000258.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320463	Drill Core	17.7	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320464	Drill Core	21.2	0.3	0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320465	Drill Core	17.8	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320466	Drill Core	11.7	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320467	Drill Core	22.8	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320468	Drill Core	25.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320469	Drill Core	19.3	0.4	0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320470	Drill Core	13.7	0.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320471	Drill Core	15.0	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320472	Drill Core	23.2	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320473	Drill Core	15.7	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320474	Drill Core	13.4	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320475	Rock Pulp	21.4	1.2	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320476	Rock Pulp	22.2	0.9	0.11	0.087	<1	<0.5	<0.5	0.09	
1320477	Drill Core	30.2	<0.1	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320478	Drill Core	24.6	<0.1	0.07	<0.005	<1	<0.5	<0.5	0.02	
1320479	Drill Core	17.9	<0.1	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320480	Drill Core	16.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320481	Drill Core	20.6	<0.1	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320482	Drill Core	28.8	0.3	0.12	<0.005	<1	<0.5	<0.5	<0.01	
1320483	Drill Core	35.2	0.2	0.11	<0.005	<1	<0.5	<0.5	<0.01	
1320484	Drill Core	17.0	0.3	0.07	<0.005	<1	<0.5	<0.5	<0.01	
1320485	Drill Core	7.1	0.4	0.06	<0.005	<1	<0.5	<0.5	<0.01	
1320486	Drill Core	8.8	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320487	Drill Core	16.9	0.4	0.08	<0.005	<1	<0.5	<0.5	<0.01	
1320488	Drill Core	13.6	0.5	0.10	<0.005	<1	<0.5	<0.5	<0.01	
1320489	Drill Core	16.8	0.4	0.11	<0.005	<1	<0.5	<0.5	<0.01	
1320490	Drill Core	27.5	0.3	0.07	<0.005	<1	<0.5	<0.5	<0.01	
1320491	Drill Core	21.6	0.4	0.10	<0.005	<1	<0.5	<0.5	0.01	
1320492	Drill Core	13.6	0.3	0.06	<0.005	<1	<0.5	<0.5	<0.01	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000258.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320493	Drill Core	3.09	4	0.6	24.5	4.8	90	<0.1	4.8	9.8	798	3.72	2	0.4	1.2	208	<0.1	<0.1	<0.1	98	1.84
1320494	Drill Core	2.80	3	1.1	65.6	5.0	79	<0.1	21.0	7.7	730	2.86	3	0.3	1.0	209	0.2	0.1	<0.1	72	3.19
1320495	Drill Core	2.23	2	1.7	11.2	4.9	23	0.5	7.1	3.9	276	1.20	1	0.3	0.2	74	<0.1	<0.1	<0.1	36	1.53
1320496	Drill Core	3.42	2	0.3	32.0	3.8	101	<0.1	20.1	25.8	1308	6.49	3	0.6	1.2	356	0.2	<0.1	0.4	246	5.05
1320497	Drill Core	3.29	3	0.4	146.6	4.2	136	0.1	17.0	33.3	1452	7.32	3	0.3	0.4	298	0.2	0.1	<0.1	233	3.97
1320498	Drill Core	3.27	3	0.9	48.7	5.2	51	<0.1	4.7	10.6	640	3.13	3	0.3	0.7	329	0.1	0.1	<0.1	94	2.95
1320499	Drill Core	1.66	3	0.5	14.4	3.5	59	<0.1	5.2	11.5	711	3.43	2	0.5	1.5	253	<0.1	0.1	<0.1	113	2.37
1320500	Rock Pulp	0.06	7	3.3	23.9	4.2	46	0.3	24.3	11.1	490	2.63	4	0.7	1.8	244	0.2	0.8	<0.1	88	1.89
1320501	Rock Pulp	0.07	4185	24.5	71.5	20.4	204	1.7	80.7	7.3	280	2.80	745	5.1	3.6	50	2.4	28.4	5.7	346	2.02
1320502	Drill Core	2.06	4	0.6	56.4	5.2	151	0.2	8.0	8.7	828	3.22	4	0.6	1.3	220	0.5	0.4	<0.1	61	5.14
1320503	Drill Core	2.68	4	0.3	26.6	5.9	60	<0.1	7.4	14.5	992	4.41	2	0.4	1.0	288	<0.1	0.4	<0.1	147	4.94
1320504	Drill Core	3.30	4	1.0	38.3	7.8	92	<0.1	8.6	11.7	848	3.81	4	0.5	1.4	148	0.2	0.7	<0.1	104	4.73
1320505	Drill Core	3.02	4	0.9	36.8	9.3	109	<0.1	11.6	12.8	870	3.98	6	0.5	0.6	180	0.2	1.0	<0.1	155	5.43
1320506	Drill Core	2.32	6	0.5	20.6	12.6	82	<0.1	11.4	12.7	703	3.74	9	0.6	4.5	256	0.2	1.2	<0.1	153	3.16
1320507	Drill Core	4.26	4	0.8	23.3	6.4	45	<0.1	6.0	9.0	649	3.35	6	0.3	3.8	175	<0.1	0.4	<0.1	89	3.11
1320508	Drill Core	1.91	3	1.3	17.6	4.2	54	<0.1	9.4	12.8	743	4.59	6	0.4	1.1	164	<0.1	0.6	<0.1	142	2.67
1320509	Drill Core	2.68	3	6.1	10.8	4.4	78	<0.1	12.5	18.6	1126	5.22	5	0.3	0.9	140	<0.1	0.5	<0.1	182	2.90
1320510	Drill Core	3.40	3	3.4	15.3	5.7	63	<0.1	7.7	15.4	1049	4.53	4	0.4	0.6	443	<0.1	1.1	<0.1	153	4.13
1320511	Drill Core	3.60	4	0.4	17.5	5.8	53	<0.1	8.6	12.0	715	3.78	6	0.4	1.2	413	<0.1	2.4	<0.1	130	3.02
1320512	Drill Core	1.94	14	1.3	50.0	11.6	85	<0.1	25.1	30.0	1812	6.90	11	0.3	1.0	232	0.3	4.0	<0.1	278	5.75
1320513	Drill Core	3.14	15	1.4	41.8	10.6	80	0.4	28.4	20.7	892	5.06	8	0.4	3.2	176	0.1	5.6	1.0	184	3.08
1320514	Drill Core	3.32	55	1.1	11.7	4.4	48	0.1	26.9	15.3	849	4.21	5	0.8	6.3	167	0.2	3.7	<0.1	143	4.57
1320515	Drill Core	2.77	3	0.2	28.4	7.0	69	<0.1	31.7	18.6	936	4.96	5	0.7	4.3	240	0.1	0.4	<0.1	193	3.03
1320516	Drill Core	3.60	3	8.4	32.7	7.5	81	0.1	23.4	23.2	1106	6.29	6	0.8	2.4	225	0.1	0.7	<0.1	232	3.34
1320517	Drill Core	3.15	20	1.3	18.6	5.9	53	<0.1	21.7	9.9	517	3.05	4	0.5	4.0	303	0.1	0.5	<0.1	113	2.35
1320518	Drill Core	3.03	5	1.8	42.8	7.9	69	<0.1	47.7	19.1	685	4.46	5	0.6	3.4	165	0.1	0.9	0.2	207	2.86
1320519	Drill Core	2.82	15	0.5	16.5	9.7	76	<0.1	33.8	19.1	1104	5.35	8	0.5	3.5	290	0.4	1.2	<0.1	202	5.49
1320520	Drill Core	2.95	18	2.5	23.0	5.9	67	<0.1	34.6	18.1	677	5.06	8	0.7	4.7	190	<0.1	0.8	<0.1	201	2.45
1320521	Drill Core	2.88	27	1.0	27.4	5.4	64	0.1	37.5	14.2	457	3.88	9	0.7	6.8	276	<0.1	0.6	<0.1	151	2.43
1320522	Drill Core	3.08	115	1.0	38.6	6.0	62	0.2	31.9	19.5	568	4.66	7	0.9	5.3	162	<0.1	0.9	<0.1	213	2.11

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000258.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320493	Drill Core		0.050	7.7	6	1.03	424	0.363	6.77	3.485	1.10	1.0	5.4	18	0.9	19.5	3.7	0.2	<1	17	6.3	0.2
1320494	Drill Core		0.019	7.2	40	0.92	647	0.149	6.33	3.230	0.89	0.7	3.4	17	0.6	15.7	2.4	0.2	<1	8	6.4	0.2
1320495	Drill Core		0.008	1.4	12	0.36	762	0.064	1.52	0.720	0.14	4.1	1.0	3	0.3	3.5	0.5	<0.1	<1	5	5.7	0.1
1320496	Drill Core		0.052	6.7	35	2.84	285	0.291	8.52	2.713	0.79	0.3	4.9	16	0.7	21.3	0.7	<0.1	<1	33	7.4	0.1
1320497	Drill Core		0.039	5.7	42	2.61	732	0.344	8.20	2.162	1.26	0.5	3.7	11	0.7	12.5	1.6	0.1	<1	31	13.1	0.7
1320498	Drill Core		0.032	4.5	5	0.90	479	0.220	7.28	3.370	0.92	0.3	2.8	10	0.5	9.8	1.9	0.1	<1	12	5.8	0.1
1320499	Drill Core		0.033	5.6	7	1.12	509	0.234	7.61	4.057	0.85	0.3	3.8	13	0.6	14.0	2.0	0.1	<1	14	7.4	<0.1
1320500	Rock Pulp		0.051	8.5	28	0.85	480	0.281	5.16	2.148	0.87	28.3	38.8	18	0.7	11.9	3.6	0.2	<1	10	12.0	<0.1
1320501	Rock Pulp		0.089	19.1	45	0.97	50	0.173	3.35	0.015	1.45	15.7	54.0	36	2.0	14.2	6.2	0.3	<1	5	11.9	1.9
1320502	Drill Core		0.022	8.2	9	1.27	370	0.169	5.65	0.886	0.74	3.5	3.8	19	0.9	13.2	2.1	0.1	<1	11	16.8	0.5
1320503	Drill Core		0.048	5.7	14	1.27	300	0.288	7.22	2.029	0.80	0.3	3.5	13	0.6	11.8	1.8	0.1	<1	20	18.0	<0.1
1320504	Drill Core		0.032	6.7	10	1.23	478	0.234	6.09	0.872	0.71	0.4	4.4	16	0.9	13.3	2.3	0.2	<1	17	22.0	0.2
1320505	Drill Core		0.038	6.1	17	0.98	436	0.342	6.32	0.793	1.24	0.5	3.9	15	0.8	13.9	2.3	0.2	<1	19	19.7	0.2
1320506	Drill Core		0.036	9.1	21	1.05	207	0.230	7.00	0.800	1.26	0.4	5.4	19	1.0	8.3	2.9	0.3	<1	19	21.9	<0.1
1320507	Drill Core		0.033	9.7	9	1.14	190	0.158	6.76	3.124	0.74	1.4	5.1	20	0.6	6.1	2.3	0.2	<1	11	12.9	0.1
1320508	Drill Core		0.039	4.4	16	1.12	169	0.228	7.38	5.004	0.35	0.3	9.0	12	0.8	8.3	2.3	0.1	<1	17	6.4	<0.1
1320509	Drill Core		0.050	3.8	23	1.43	204	0.325	7.06	4.921	0.53	0.3	9.2	11	0.9	7.5	2.8	0.1	<1	25	6.2	<0.1
1320510	Drill Core		0.049	4.6	11	1.33	465	0.320	7.32	3.068	1.27	0.6	3.7	11	0.6	10.6	1.9	0.1	<1	20	14.3	0.1
1320511	Drill Core		0.047	6.2	16	1.11	545	0.317	7.66	3.094	1.19	1.1	3.9	15	0.9	10.6	2.7	0.2	<1	20	14.7	<0.1
1320512	Drill Core		0.062	7.3	19	2.56	620	0.351	6.33	2.451	0.64	4.4	4.9	18	1.0	9.0	1.1	<0.1	<1	24	16.0	0.5
1320513	Drill Core		0.058	13.6	31	1.55	282	0.331	5.38	1.139	1.15	2.0	7.5	29	1.1	9.1	2.2	0.1	<1	17	16.5	0.6
1320514	Drill Core		0.044	20.1	42	1.87	651	0.210	5.88	2.538	0.97	2.7	9.5	44	0.5	9.6	2.1	0.2	<1	12	14.8	0.1
1320515	Drill Core		0.050	14.4	50	1.97	1244	0.453	5.93	2.020	1.40	0.2	6.5	32	0.8	14.1	3.5	0.2	<1	19	9.3	0.3
1320516	Drill Core		0.071	11.1	34	1.87	525	0.636	7.31	2.444	1.34	0.3	5.6	26	1.0	16.9	4.2	0.2	1	25	9.8	0.5
1320517	Drill Core		0.031	12.6	26	1.25	514	0.263	6.45	2.708	0.93	0.7	6.8	27	0.7	7.4	3.2	0.2	<1	10	12.2	0.2
1320518	Drill Core		0.039	11.7	100	1.57	457	0.421	6.29	0.797	1.69	0.9	9.3	26	0.8	9.2	2.6	0.2	1	25	12.2	0.2
1320519	Drill Core		0.071	16.1	58	2.21	152	0.318	5.89	2.000	0.75	4.4	7.9	36	0.7	11.6	2.2	0.1	<1	19	14.0	0.2
1320520	Drill Core		0.050	14.8	51	1.55	707	0.431	5.96	0.948	1.29	1.8	8.7	33	0.9	10.3	3.1	0.2	<1	19	15.1	0.2
1320521	Drill Core		0.044	20.6	54	1.44	1446	0.298	6.37	0.133	1.61	1.8	9.9	45	1.4	9.3	4.5	0.3	<1	15	17.8	0.2
1320522	Drill Core		0.049	16.4	59	1.42	570	0.517	6.42	0.555	1.55	2.9	6.0	36	1.1	10.0	5.4	0.4	<1	20	18.3	0.4

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000258.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320493	Drill Core	23.4	0.2	0.08	<0.005	<1	<0.5	<0.5	<0.01	
1320494	Drill Core	24.3	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320495	Drill Core	5.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320496	Drill Core	14.0	0.4	0.06	<0.005	<1	<0.5	<0.5	0.02	
1320497	Drill Core	39.7	0.2	0.07	<0.005	1	<0.5	<0.5	<0.01	
1320498	Drill Core	26.5	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320499	Drill Core	21.5	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320500	Rock Pulp	22.1	1.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320501	Rock Pulp	105.5	1.6	0.20	0.040	7	1.0	6.4	5.46	
1320502	Drill Core	20.9	0.2	0.08	<0.005	<1	<0.5	<0.5	0.20	
1320503	Drill Core	22.9	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320504	Drill Core	22.5	0.3	0.06	<0.005	<1	<0.5	<0.5	0.06	
1320505	Drill Core	46.7	0.2	0.16	<0.005	<1	<0.5	<0.5	0.06	
1320506	Drill Core	34.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320507	Drill Core	18.7	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320508	Drill Core	9.8	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320509	Drill Core	11.2	0.4	0.06	0.009	<1	<0.5	<0.5	<0.01	
1320510	Drill Core	40.9	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320511	Drill Core	32.8	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320512	Drill Core	17.8	0.3	0.06	<0.005	<1	<0.5	<0.5	0.12	
1320513	Drill Core	38.9	0.3	<0.05	<0.005	1	<0.5	<0.5	0.06	
1320514	Drill Core	24.5	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.06	
1320515	Drill Core	56.4	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320516	Drill Core	49.6	0.4	0.05	0.015	<1	<0.5	<0.5	0.01	
1320517	Drill Core	30.0	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320518	Drill Core	62.1	0.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320519	Drill Core	20.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320520	Drill Core	40.9	0.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320521	Drill Core	43.0	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320522	Drill Core	50.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.03	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000258.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320523	Drill Core	2.96	14	2.2	32.3	5.4	72	0.1	33.3	15.9	469	4.48	4	1.1	6.4	195	<0.1	0.9	<0.1	180	1.90
1320524	Drill Core	1.22	4	0.7	14.4	2.6	24	<0.1	16.2	6.7	172	1.42	9	0.9	3.3	120	<0.1	0.4	<0.1	43	1.10
1320525	Rock Pulp	0.05	9	3.2	21.5	3.8	42	0.5	22.7	9.9	465	2.48	4	0.7	1.6	233	0.2	0.7	<0.1	80	1.76
1320526	Rock Pulp	0.06	216	187.4	1848.9	36.8	253	0.6	37.0	12.6	736	4.02	14	0.6	1.5	259	0.8	1.7	0.3	113	2.53
1320527	Drill Core	2.56	5	1.1	32.2	4.9	54	0.1	31.2	10.4	323	3.04	6	1.0	7.5	353	<0.1	0.7	<0.1	101	2.07
1320528	Drill Core	1.62	16	0.8	36.1	4.5	47	0.1	21.2	12.2	420	3.18	5	3.1	3.3	171	<0.1	1.1	<0.1	175	1.36
1320529	Drill Core	3.11	18	1.5	22.2	4.9	66	<0.1	30.3	13.3	613	3.85	6	0.9	6.6	249	0.2	0.9	<0.1	139	2.82
1320530	Drill Core	2.91	92	1.1	18.0	7.9	63	0.2	26.0	18.8	789	4.93	9	1.0	3.3	267	0.2	1.6	<0.1	231	3.72
1320531	Drill Core	2.71	233	1.0	10.0	6.2	54	0.3	30.7	15.9	701	3.86	7	0.6	2.7	212	0.4	2.3	<0.1	178	4.69
1320532	Drill Core	3.05	45	3.7	41.3	10.7	48	0.4	31.5	10.8	318	2.21	24	2.5	3.7	296	0.3	5.5	<0.1	87	1.76
1320533	Drill Core	2.95	45	0.8	13.3	10.3	94	<0.1	42.1	25.9	1086	6.28	17	1.2	1.3	199	0.2	3.6	0.1	289	4.31
1320534	Drill Core	3.77	29	1.1	16.1	3.7	38	1.2	12.9	8.2	579	2.34	11	0.7	1.7	146	0.1	2.1	<0.1	69	4.04
1320535	Drill Core	3.18	171	0.8	28.8	8.1	61	0.2	24.0	20.1	928	5.08	12	0.7	1.8	178	0.2	2.1	<0.1	210	5.22
1320536	Drill Core	3.26	28	1.2	132.5	9.7	80	0.5	20.9	26.5	1309	7.00	21	2.2	1.0	148	0.3	2.0	0.2	253	4.37
1320537	Drill Core	3.13	14	1.4	105.9	7.0	51	0.3	17.1	11.2	711	3.19	21	0.9	2.2	228	0.2	1.3	<0.1	140	6.57
1320538	Drill Core	3.46	4	0.9	10.1	12.7	82	<0.1	85.6	21.4	982	4.95	7	1.6	1.1	238	0.2	7.5	<0.1	200	5.98
1320539	Drill Core	3.67	6	0.7	17.5	7.4	62	<0.1	15.9	11.9	686	4.40	6	0.6	2.1	139	<0.1	3.0	<0.1	132	3.18
1320540	Drill Core	1.55	6	1.7	45.6	8.2	70	0.1	8.1	23.5	799	4.88	5	0.9	2.7	200	<0.1	3.3	0.2	107	4.27
1320541	Drill Core	3.91	4	1.4	18.8	9.4	54	<0.1	8.0	10.6	600	3.42	11	0.6	3.1	158	<0.1	14.4	<0.1	120	3.06
1320542	Drill Core	1.65	4	1.5	14.0	6.1	55	<0.1	7.6	12.1	677	3.71	6	0.6	3.5	116	<0.1	5.0	<0.1	113	2.89
1320543	Drill Core	1.82	9	0.4	6.9	26.2	45	<0.1	4.8	8.5	767	2.66	12	0.8	4.3	498	0.2	15.8	<0.1	41	4.98
1320544	Drill Core	2.84	14	1.8	5.7	4.1	43	<0.1	4.8	7.0	819	2.59	9	1.1	4.8	73	0.3	19.5	<0.1	28	5.40
1320545	Drill Core	2.32	15	1.1	4.7	9.2	72	0.2	6.6	9.9	1374	3.85	8	4.2	3.0	184	0.5	16.6	<0.1	37	9.27
1320546	Drill Core	2.51	21	2.9	5.6	10.3	41	0.2	4.5	7.0	1108	2.59	14	1.2	4.0	312	0.7	15.2	<0.1	33	6.03
1320547	Drill Core	2.96	20	1.1	5.5	3.1	20	0.2	3.1	4.5	479	1.84	3	0.4	5.8	127	0.2	4.2	<0.1	40	2.25
1320548	Drill Core	3.12	4	0.2	5.0	3.7	20	<0.1	2.2	3.3	418	1.89	4	0.3	6.3	124	0.2	2.7	<0.1	46	1.85
1320549	Drill Core	3.20	20	0.9	3.2	4.9	34	0.2	4.6	7.1	909	2.25	4	0.8	5.5	127	0.6	3.3	<0.1	29	4.80
1320550	Rock Pulp	0.06	9	3.2	22.1	3.9	44	0.3	23.1	10.4	483	2.58	3	0.7	1.6	241	0.2	0.8	<0.1	83	1.84
1320551	Rock Pulp	0.05	>10000	12.6	64.4	20.1	70	1.0	25.2	3.9	486	3.51	927	3.1	2.8	39	0.6	149.5	0.6	113	15.07
1320552	Drill Core	2.93	31	0.4	2.6	2.5	17	0.1	2.2	4.2	355	1.70	2	0.3	5.9	79	0.2	1.7	<0.1	25	1.60

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000258.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
Unit		%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320523	Drill Core	0.061	19.2	82	1.38	597	0.434	6.89	0.550	1.59	1.5	9.0	42	1.1	10.5	5.5	0.4	1	17	20.8	0.3
1320524	Drill Core	0.025	10.3	20	0.52	279	0.094	2.19	0.061	0.45	0.3	6.7	22	0.3	5.1	2.0	0.1	<1	3	12.3	0.1
1320525	Rock Pulp	0.047	7.3	27	0.80	470	0.264	5.14	2.014	0.81	26.6	37.5	17	0.7	10.9	3.4	0.2	<1	10	10.9	<0.1
1320526	Rock Pulp	0.053	7.7	50	1.28	563	0.352	6.16	2.108	0.84	8.7	30.1	17	1.8	12.3	4.3	0.3	<1	14	14.2	0.3
1320527	Drill Core	0.048	22.9	47	1.02	803	0.224	5.12	0.101	1.41	1.1	8.0	48	1.2	8.4	4.5	0.3	<1	9	17.1	0.3
1320528	Drill Core	0.053	11.9	28	0.73	536	0.517	4.99	0.030	1.01	1.1	6.5	27	0.8	7.9	2.6	0.2	<1	15	15.3	0.3
1320529	Drill Core	0.049	21.0	41	1.37	873	0.290	5.33	0.091	1.28	1.0	8.2	45	0.9	9.7	3.7	0.2	<1	12	20.3	0.3
1320530	Drill Core	0.048	12.6	33	1.62	507	0.451	5.26	0.371	1.20	4.8	8.0	28	0.7	10.8	2.5	0.2	<1	18	21.5	0.3
1320531	Drill Core	0.046	10.3	48	1.83	708	0.270	5.23	1.740	1.46	12.6	10.3	22	1.2	8.9	2.3	0.1	<1	25	12.0	0.2
1320532	Drill Core	0.033	12.7	49	0.71	313	0.152	3.52	0.027	0.75	1.1	4.3	26	0.5	7.1	3.0	0.2	<1	7	20.2	0.4
1320533	Drill Core	0.036	6.7	78	1.92	223	0.567	5.85	0.032	1.13	3.3	8.1	15	1.0	12.4	2.1	0.1	1	28	24.3	0.2
1320534	Drill Core	0.021	7.1	15	1.19	505	0.097	2.46	0.173	0.41	11.0	3.8	15	0.4	8.1	1.3	<0.1	<1	6	14.3	0.1
1320535	Drill Core	0.042	8.1	29	2.03	380	0.455	5.53	0.438	0.96	4.3	7.0	19	0.8	11.8	3.3	0.2	<1	20	22.6	0.4
1320536	Drill Core	0.061	7.2	16	1.91	184	0.686	5.91	0.167	0.83	3.7	6.2	18	1.1	18.9	4.3	0.3	<1	22	23.4	0.6
1320537	Drill Core	0.020	8.6	22	2.47	224	0.097	1.76	0.032	0.26	0.9	2.7	18	0.5	12.5	1.5	0.1	<1	6	14.3	0.2
1320538	Drill Core	0.033	6.8	224	2.41	271	0.514	6.03	0.036	1.61	0.3	6.1	15	0.9	14.6	2.7	0.2	1	24	23.8	0.2
1320539	Drill Core	0.039	6.3	25	1.34	206	0.350	6.90	0.858	1.44	0.9	4.4	15	0.7	10.3	4.5	0.3	1	21	21.1	<0.1
1320540	Drill Core	0.035	10.2	13	1.73	303	0.211	6.82	0.994	1.32	0.4	5.1	21	0.8	13.7	3.9	0.2	<1	22	25.5	0.9
1320541	Drill Core	0.033	8.3	36	1.25	284	0.243	7.32	0.046	1.64	1.2	5.0	18	1.0	9.6	4.4	0.3	1	23	35.4	<0.1
1320542	Drill Core	0.028	9.1	19	1.24	338	0.231	7.38	0.037	1.35	0.7	5.6	19	1.0	10.7	4.6	0.3	1	21	33.3	<0.1
1320543	Drill Core	0.028	15.0	5	1.72	149	0.061	4.74	0.037	0.68	4.5	7.8	29	0.4	7.3	1.5	<0.1	<1	7	38.1	0.1
1320544	Drill Core	0.010	13.6	7	1.95	600	0.049	4.53	0.045	0.34	6.2	9.5	26	0.3	6.6	1.4	0.1	<1	5	45.1	0.1
1320545	Drill Core	0.009	10.4	3	3.02	52	0.030	3.53	0.048	0.23	4.7	5.9	21	0.2	13.6	0.8	<0.1	<1	8	37.8	0.1
1320546	Drill Core	0.018	15.0	5	2.22	80	0.040	4.96	0.063	0.28	4.7	8.5	28	0.3	8.3	1.1	<0.1	<1	14	47.8	0.2
1320547	Drill Core	0.019	14.6	6	0.89	714	0.087	6.35	2.576	0.44	9.1	8.4	30	0.7	4.8	3.0	0.2	<1	9	24.8	0.2
1320548	Drill Core	0.017	12.8	4	0.81	2196	0.080	6.59	2.074	1.17	4.4	10.4	26	0.7	4.9	2.4	0.2	<1	9	20.7	<0.1
1320549	Drill Core	0.012	13.7	3	2.02	585	0.041	5.61	1.138	0.40	3.8	16.0	25	0.3	6.6	1.3	0.1	<1	16	28.5	0.3
1320550	Rock Pulp	0.049	7.7	29	0.81	490	0.270	5.22	2.098	0.85	27.3	36.2	17	0.7	11.3	3.4	0.2	<1	10	11.7	<0.1
1320551	Rock Pulp	0.062	13.2	33	0.72	39	0.105	1.99	0.020	0.40	>200	26.2	27	2.0	14.7	3.0	0.1	<1	4	39.0	1.8
1320552	Drill Core	0.015	12.0	3	0.66	772	0.047	6.16	2.244	0.48	3.1	16.5	23	0.4	3.7	1.4	0.1	<1	5	19.9	0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000258.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320523	Drill Core	52.9	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320524	Drill Core	14.0	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320525	Rock Pulp	20.0	1.1	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320526	Rock Pulp	18.2	1.0	0.09	0.094	<1	<0.5	<0.5	0.09	
1320527	Drill Core	37.2	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320528	Drill Core	27.8	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320529	Drill Core	31.8	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320530	Drill Core	27.7	0.3	<0.05	<0.005	<1	0.5	<0.5	0.05	
1320531	Drill Core	18.9	0.4	0.05	<0.005	<1	<0.5	<0.5	0.09	
1320532	Drill Core	20.3	0.1	<0.05	0.005	<1	<0.5	<0.5	0.06	
1320533	Drill Core	37.4	0.4	0.06	<0.005	<1	<0.5	<0.5	0.03	
1320534	Drill Core	12.3	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320535	Drill Core	20.7	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320536	Drill Core	23.2	0.4	0.06	<0.005	<1	<0.5	<0.5	0.04	
1320537	Drill Core	7.6	0.1	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320538	Drill Core	63.6	0.4	0.06	<0.005	<1	<0.5	<0.5	0.01	
1320539	Drill Core	49.0	0.2	0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320540	Drill Core	46.3	0.3	<0.05	<0.005	1	<0.5	<0.5	<0.01	
1320541	Drill Core	61.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320542	Drill Core	46.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320543	Drill Core	19.5	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320544	Drill Core	7.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320545	Drill Core	6.2	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320546	Drill Core	7.1	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320547	Drill Core	9.8	0.3	<0.05	<0.005	1	<0.5	<0.5	0.01	
1320548	Drill Core	24.7	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320549	Drill Core	8.3	0.4	<0.05	<0.005	1	<0.5	<0.5	0.03	
1320550	Rock Pulp	21.3	1.1	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320551	Rock Pulp	23.2	0.7	0.05	0.007	2	<0.5	3.7	6.10	I.S.
1320552	Drill Core	9.1	0.5	<0.05	<0.005	<1	<0.5	<0.5	0.02	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000258.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320553	Drill Core	3.34	7	0.2	6.0	4.2	36	<0.1	2.2	5.5	491	2.32	10	0.5	5.6	96	<0.1	4.0	<0.1	55	2.14
1320554	Drill Core	3.03	13	5.8	18.9	6.7	22	0.2	2.3	5.9	368	2.16	6	0.8	4.8	112	<0.1	10.7	0.2	26	1.91
1320555	Drill Core	2.62	6	2.7	7.9	3.7	25	<0.1	2.2	6.1	361	1.95	3	0.3	4.4	84	<0.1	2.6	<0.1	31	1.86
1320556	Drill Core	2.29	4	0.6	6.8	6.6	45	<0.1	4.1	7.3	632	2.70	5	0.4	5.5	135	<0.1	5.2	<0.1	53	3.61
1320557	Drill Core	3.67	3	0.3	3.8	5.5	37	<0.1	3.0	5.4	324	2.07	7	0.4	5.9	249	<0.1	2.4	<0.1	48	1.49
1320558	Drill Core	3.23	4	0.6	4.1	9.3	44	<0.1	4.1	8.2	433	2.52	9	0.4	5.1	244	<0.1	5.0	<0.1	51	2.55
1320559	Drill Core	3.17	3	0.5	5.1	5.6	39	<0.1	2.9	6.8	456	2.51	3	0.4	5.1	156	<0.1	1.6	<0.1	56	2.41
1320560	Drill Core	2.93	3	0.3	7.2	4.7	49	<0.1	2.5	7.5	470	2.82	3	0.6	5.4	151	<0.1	1.0	<0.1	62	1.56
1320561	Drill Core	3.36	4	0.6	4.8	5.4	42	<0.1	2.0	6.5	410	2.43	3	0.8	6.1	151	<0.1	0.6	<0.1	56	1.66
1320562	Drill Core	2.88	4	0.5	10.3	5.5	46	<0.1	2.1	7.0	452	2.68	4	0.8	4.7	140	<0.1	0.9	<0.1	63	1.88
1320563	Drill Core	3.07	4	0.2	5.7	4.6	45	<0.1	2.1	6.5	426	2.44	4	0.8	5.7	111	<0.1	0.9	<0.1	56	1.69
1320564	Drill Core	2.77	3	0.6	4.2	5.1	41	<0.1	2.1	6.8	476	2.66	5	0.8	5.2	176	<0.1	1.0	<0.1	58	2.17
1320565	Drill Core	3.41	5	4.6	7.8	3.8	46	<0.1	2.3	7.2	521	2.66	5	0.5	4.4	123	<0.1	1.2	<0.1	57	2.59
1320566	Drill Core	2.09	4	0.3	5.8	3.7	49	<0.1	2.5	8.1	424	2.91	3	0.7	5.4	100	<0.1	1.1	<0.1	71	1.32
1320567	Drill Core	3.31	4	1.2	6.5	6.1	42	<0.1	2.7	8.0	532	2.75	7	0.9	5.5	174	<0.1	1.7	<0.1	65	3.11
1320568	Drill Core	3.08	4	0.9	10.3	4.4	45	<0.1	3.6	9.0	610	3.28	4	0.7	3.9	154	<0.1	0.8	<0.1	87	3.43
1320569	Drill Core	2.97	55	0.7	5.7	5.3	44	<0.1	3.6	8.0	568	2.75	6	0.7	3.7	137	<0.1	2.1	<0.1	77	3.25
1320570	Drill Core	3.29	5	0.5	33.4	4.9	48	<0.1	7.1	11.1	779	3.52	3	0.7	1.9	148	<0.1	1.1	<0.1	75	4.19

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000258.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320553	Drill Core		0.033	13.3	3	0.87	1690	0.140	6.52	0.423	0.97	7.1	15.3	25	0.7	5.7	3.6	0.3	<1	6	31.6	0.3
1320554	Drill Core		0.015	11.0	4	0.69	172	0.061	5.64	1.819	0.58	4.8	8.5	22	0.4	4.5	2.4	0.2	<1	6	28.1	0.9
1320555	Drill Core		0.015	10.5	4	0.69	372	0.084	5.88	1.687	0.69	1.0	7.3	22	0.5	5.6	2.8	0.2	<1	5	21.0	0.5
1320556	Drill Core		0.019	15.8	7	1.26	189	0.112	5.76	0.105	0.93	0.7	7.9	32	0.8	10.1	3.2	0.2	<1	10	31.6	0.2
1320557	Drill Core		0.023	16.3	7	0.75	726	0.147	7.24	0.073	1.35	0.3	6.7	32	1.0	10.9	4.6	0.3	<1	11	39.9	<0.1
1320558	Drill Core		0.025	13.3	10	0.96	1264	0.145	6.78	0.625	1.29	0.5	5.7	27	1.1	12.1	4.3	0.3	<1	11	42.5	0.2
1320559	Drill Core		0.021	11.7	8	0.92	484	0.142	6.31	0.851	1.07	0.5	5.7	25	1.1	11.3	4.4	0.3	<1	11	25.8	<0.1
1320560	Drill Core		0.024	14.5	7	0.92	1437	0.191	7.19	1.250	1.62	0.2	6.2	30	1.1	13.5	5.5	0.4	<1	13	22.9	<0.1
1320561	Drill Core		0.024	14.9	7	0.72	1587	0.162	7.10	1.522	1.59	0.3	8.0	30	1.3	12.1	4.9	0.3	<1	12	21.5	<0.1
1320562	Drill Core		0.029	12.1	8	0.74	1396	0.191	7.65	1.680	1.79	0.3	5.9	27	1.2	12.9	5.7	0.4	1	12	27.6	<0.1
1320563	Drill Core		0.021	13.5	7	0.65	1265	0.168	6.93	1.585	1.74	0.3	5.9	28	1.1	12.5	5.5	0.4	<1	12	21.6	<0.1
1320564	Drill Core		0.021	13.5	8	0.77	1280	0.164	6.62	1.286	1.66	0.5	6.2	28	1.0	13.4	4.9	0.3	<1	12	19.7	<0.1
1320565	Drill Core		0.020	11.1	8	1.02	1316	0.140	5.91	0.948	1.26	1.2	5.9	23	0.9	10.6	4.0	0.3	<1	11	23.8	<0.1
1320566	Drill Core		0.027	15.1	10	0.86	974	0.179	7.36	1.232	1.74	0.4	6.9	31	1.0	11.5	4.9	0.3	<1	14	31.1	<0.1
1320567	Drill Core		0.019	13.4	8	0.89	1164	0.146	6.12	0.773	1.31	1.0	7.5	27	0.9	12.2	4.2	0.3	<1	12	22.7	<0.1
1320568	Drill Core		0.028	10.2	11	0.97	1072	0.173	6.50	1.281	1.40	0.7	5.3	22	0.8	12.3	4.0	0.3	<1	14	19.7	<0.1
1320569	Drill Core		0.022	11.8	10	1.05	736	0.152	6.11	0.666	1.69	1.9	5.1	24	0.7	11.8	3.8	0.3	<1	14	18.8	<0.1
1320570	Drill Core		0.030	7.3	21	1.46	1115	0.214	6.75	2.869	0.86	2.3	6.6	16	0.6	9.3	3.5	0.2	<1	12	11.6	0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000258.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320553	Drill Core	28.5	0.5	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320554	Drill Core	15.9	0.3	<0.05	<0.005	2	<0.5	<0.5	0.03	
1320555	Drill Core	18.2	0.2	<0.05	<0.005	1	<0.5	<0.5	0.01	
1320556	Drill Core	27.8	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320557	Drill Core	43.8	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320558	Drill Core	38.6	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320559	Drill Core	29.0	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320560	Drill Core	51.0	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320561	Drill Core	43.9	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320562	Drill Core	49.0	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320563	Drill Core	50.5	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320564	Drill Core	49.4	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320565	Drill Core	38.2	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320566	Drill Core	52.0	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320567	Drill Core	37.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320568	Drill Core	40.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320569	Drill Core	54.4	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320570	Drill Core	30.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000258.1

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
Pulp Duplicates																					
1320452	Drill Core	2.65	4	0.7	4.9	4.2	22	<0.1	0.8	2.1	208	1.60	3	0.6	2.4	170	<0.1	0.2	<0.1	6	1.37
REP 1320452	QC		3																		
1320455	Drill Core	2.60	3	0.9	6.6	4.7	29	<0.1	3.0	3.4	313	1.81	2	0.4	2.5	260	<0.1	0.2	<0.1	14	1.84
REP 1320455	QC			0.8	6.3	5.0	31	<0.1	2.7	3.0	316	1.82	2	0.5	2.7	266	0.1	0.2	<0.1	14	1.84
1320464	Drill Core	3.51	3	4.2	3.7	3.7	17	<0.1	1.8	3.6	327	1.93	3	0.5	2.8	124	0.1	0.1	<0.1	28	2.00
REP 1320464	QC																				
1320487	Drill Core	2.72	3	0.5	26.5	3.5	143	<0.1	17.0	22.9	1436	6.47	2	0.5	1.4	261	0.3	<0.1	<0.1	219	3.49
REP 1320487	QC		3																		
1320491	Drill Core	3.36	10	4.7	78.5	9.6	188	0.8	20.5	33.5	2181	9.11	2	0.4	1.3	255	0.6	0.2	0.1	329	4.76
REP 1320491	QC			4.4	77.9	9.5	187	0.7	20.1	33.4	2161	9.13	2	0.4	1.2	254	0.6	0.2	0.1	330	4.70
1320500	Rock Pulp	0.06	7	3.3	23.9	4.2	46	0.3	24.3	11.1	490	2.63	4	0.7	1.8	244	0.2	0.8	<0.1	88	1.89
REP 1320500	QC																				
1320522	Drill Core	3.08	115	1.0	38.6	6.0	62	0.2	31.9	19.5	568	4.66	7	0.9	5.3	162	<0.1	0.9	<0.1	213	2.11
REP 1320522	QC		126																		
1320526	Rock Pulp	0.06	216	187.4	1848.9	36.8	253	0.6	37.0	12.6	736	4.02	14	0.6	1.5	259	0.8	1.7	0.3	113	2.53
REP 1320526	QC			188.8	1886.3	38.2	267	0.8	38.1	12.7	749	4.13	14	0.6	1.6	265	0.8	1.7	0.3	116	2.56
1320535	Drill Core	3.18	171	0.8	28.8	8.1	61	0.2	24.0	20.1	928	5.08	12	0.7	1.8	178	0.2	2.1	<0.1	210	5.22
REP 1320535	QC																				
1320556	Drill Core	2.29	4	0.6	6.8	6.6	45	<0.1	4.1	7.3	632	2.70	5	0.4	5.5	135	<0.1	5.2	<0.1	53	3.61
REP 1320556	QC		4																		
1320560	Drill Core	2.93	3	0.3	7.2	4.7	49	<0.1	2.5	7.5	470	2.82	3	0.6	5.4	151	<0.1	1.0	<0.1	62	1.56
REP 1320560	QC			0.3	6.8	4.8	50	<0.1	2.4	7.5	472	2.81	4	0.6	5.8	151	<0.1	1.0	<0.1	61	1.56
1320570	Drill Core	3.29	5	0.5	33.4	4.9	48	<0.1	7.1	11.1	779	3.52	3	0.7	1.9	148	<0.1	1.1	<0.1	75	4.19
REP 1320570	QC																				
Core Reject Duplicates																					
1320442	Drill Core	5.02	9	2.5	40.6	8.2	90	<0.1	18.8	16.2	1313	5.28	15	0.6	1.8	222	0.2	1.1	<0.1	148	4.12
DUP 1320442	QC		7	2.6	41.3	8.0	85	<0.1	20.0	16.5	1298	5.27	15	0.6	1.8	216	<0.1	0.9	<0.1	147	4.11
1320510	Drill Core	3.40	3	3.4	15.3	5.7	63	<0.1	7.7	15.4	1049	4.53	4	0.4	0.6	443	<0.1	1.1	<0.1	153	4.13

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000258.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
	Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
Pulp Duplicates																					
1320452	Drill Core	0.018	10.8	3	0.12	412	0.126	6.17	3.273	0.43	0.1	10.0	24	0.7	22.0	4.6	0.3	<1	9	8.9	<0.1
REP 1320452	QC																				
1320455	Drill Core	0.018	8.3	3	0.32	511	0.128	6.23	3.616	0.42	0.4	8.4	20	0.7	18.8	3.8	0.2	<1	8	8.0	<0.1
REP 1320455	QC	0.019	8.6	3	0.31	511	0.128	6.23	3.577	0.44	0.4	8.6	20	0.7	17.6	3.7	0.2	<1	7	8.3	<0.1
1320464	Drill Core	0.015	8.0	3	0.23	736	0.123	6.04	2.864	1.24	1.5	5.2	18	0.4	13.1	2.0	0.1	<1	8	9.0	<0.1
REP 1320464	QC																				
1320487	Drill Core	0.058	8.5	26	2.58	492	0.450	7.53	2.718	0.77	0.4	6.0	20	1.0	27.9	2.4	0.1	<1	25	8.7	0.3
REP 1320487	QC																				
1320491	Drill Core	0.091	6.9	24	2.85	515	0.760	8.06	3.386	0.83	8.4	5.4	17	1.0	28.7	2.9	0.2	<1	32	8.5	0.7
REP 1320491	QC	0.091	6.7	25	2.87	512	0.753	8.08	3.362	0.83	7.8	5.6	17	1.0	28.6	2.9	0.2	<1	32	8.5	0.7
1320500	Rock Pulp	0.051	8.5	28	0.85	480	0.281	5.16	2.148	0.87	28.3	38.8	18	0.7	11.9	3.6	0.2	<1	10	12.0	<0.1
REP 1320500	QC																				
1320522	Drill Core	0.049	16.4	59	1.42	570	0.517	6.42	0.555	1.55	2.9	6.0	36	1.1	10.0	5.4	0.4	<1	20	18.3	0.4
REP 1320522	QC																				
1320526	Rock Pulp	0.053	7.7	50	1.28	563	0.352	6.16	2.108	0.84	8.7	30.1	17	1.8	12.3	4.3	0.3	<1	14	14.2	0.3
REP 1320526	QC	0.054	8.1	49	1.32	580	0.356	6.20	2.155	0.86	8.6	31.2	18	1.8	12.7	4.4	0.3	<1	14	14.3	0.3
1320535	Drill Core	0.042	8.1	29	2.03	380	0.455	5.53	0.438	0.96	4.3	7.0	19	0.8	11.8	3.3	0.2	<1	20	22.6	0.4
REP 1320535	QC																				
1320556	Drill Core	0.019	15.8	7	1.26	189	0.112	5.76	0.105	0.93	0.7	7.9	32	0.8	10.1	3.2	0.2	<1	10	31.6	0.2
REP 1320556	QC																				
1320560	Drill Core	0.024	14.5	7	0.92	1437	0.191	7.19	1.250	1.62	0.2	6.2	30	1.1	13.5	5.5	0.4	<1	13	22.9	<0.1
REP 1320560	QC	0.024	15.4	7	0.91	1441	0.180	7.24	1.239	1.62	0.2	6.5	32	1.1	13.8	5.6	0.4	<1	13	23.1	<0.1
1320570	Drill Core	0.030	7.3	21	1.46	1115	0.214	6.75	2.869	0.86	2.3	6.6	16	0.6	9.3	3.5	0.2	<1	12	11.6	0.2
REP 1320570	QC																				
Core Reject Duplicates																					
1320442	Drill Core	0.057	8.0	38	0.15	701	0.328	7.40	2.986	0.91	1.3	5.8	17	0.7	13.9	2.6	0.1	<1	19	13.9	<0.1
DUP 1320442	QC	0.055	8.9	37	0.15	738	0.324	7.42	2.944	0.94	1.3	5.7	20	0.7	15.0	2.8	0.2	<1	20	12.1	<0.1
1320510	Drill Core	0.049	4.6	11	1.33	465	0.320	7.32	3.068	1.27	0.6	3.7	11	0.6	10.6	1.9	0.1	<1	20	14.3	0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000258.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
	Analyte	Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
	MDL	0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
Pulp Duplicates										
1320452	Drill Core	11.5	0.3	0.06	<0.005	2	<0.5	<0.5	<0.01	
REP 1320452	QC									
1320455	Drill Core	9.7	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
REP 1320455	QC	10.0	0.3	0.11	<0.005	<1	<0.5	<0.5		
1320464	Drill Core	21.2	0.3	0.05	<0.005	<1	<0.5	<0.5	<0.01	
REP 1320464	QC								<0.01	
1320487	Drill Core	16.9	0.4	0.08	<0.005	<1	<0.5	<0.5	<0.01	
REP 1320487	QC									
1320491	Drill Core	21.6	0.4	0.10	<0.005	<1	<0.5	<0.5	0.01	
REP 1320491	QC	21.6	0.4	0.10	<0.005	<1	<0.5	<0.5		
1320500	Rock Pulp	22.1	1.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
REP 1320500	QC								0.02	
1320522	Drill Core	50.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.03	
REP 1320522	QC									
1320526	Rock Pulp	18.2	1.0	0.09	0.094	<1	<0.5	<0.5	0.09	
REP 1320526	QC	19.5	1.0	0.10	0.087	1	<0.5	<0.5		
1320535	Drill Core	20.7	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.04	
REP 1320535	QC								0.05	
1320556	Drill Core	27.8	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.01	
REP 1320556	QC									
1320560	Drill Core	51.0	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
REP 1320560	QC	52.1	0.3	<0.05	<0.005	<1	<0.5	<0.5		
1320570	Drill Core	30.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
REP 1320570	QC								<0.01	
Core Reject Duplicates										
1320442	Drill Core	20.2	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02	
DUP 1320442	QC	21.9	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320510	Drill Core	40.9	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000258.1

		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
DUP 1320510	QC		4	3.3	15.3	5.8	65	<0.1	7.8	15.6	1057	4.56	5	0.4	0.7	447	<0.1	1.2	<0.1	152	4.13
1320544	Drill Core	2.84	14	1.8	5.7	4.1	43	<0.1	4.8	7.0	819	2.59	9	1.1	4.8	73	0.3	19.5	<0.1	28	5.40
DUP 1320544	QC		13	1.7	6.3	4.2	44	<0.1	4.9	7.2	836	2.61	10	1.1	4.8	74	0.3	20.8	<0.1	27	5.56
Reference Materials																					
STD BVGEO01	Standard																				
STD BVGEO01	Standard																				
STD DS11	Standard																				
STD DS11	Standard																				
STD DS11	Standard																				
STD OREAS25A-4A	Standard			2.4	38.7	26.4	51	0.1	49.7	8.3	532	6.76	10	3.0	17.8	52	<0.1	0.6	0.4	156	0.28
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard			2.6	33.6	24.1	47	<0.1	49.1	7.7	501	6.73	9	2.7	15.2	47	<0.1	0.6	0.4	163	0.28
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard			2.5	32.6	23.5	48	<0.1	49.3	7.5	507	6.93	8	2.6	14.7	46	<0.1	0.6	0.3	164	0.28
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard			2.4	30.0	22.4	45	<0.1	46.7	7.0	485	6.46	9	2.5	14.0	44	<0.1	0.6	0.4	155	0.28
STD OREAS262	Standard																				
STD OREAS45E	Standard			2.3	761.7	18.9	44	0.3	457.8	57.7	575	24.69	15	2.5	14.6	18	0.2	1.1	0.3	318	0.06
STD OREAS45H	Standard			1.6	801.7	12.3	42	0.1	448.3	92.8	417	21.16	17	1.6	7.3	28	<0.1	0.6	0.2	271	0.13
STD OREAS45H	Standard			1.6	792.9	11.9	42	0.1	449.4	89.3	411	20.88	16	1.5	6.9	27	<0.1	0.6	0.2	268	0.14
STD OREAS45E	Standard			2.4	782.9	16.6	45	0.2	466.1	56.2	556	24.51	16	2.2	11.6	15	<0.1	1.0	0.3	327	0.06
STD OXC145	Standard		221																		
STD OXC145	Standard		220																		
STD OXC145	Standard		199																		
STD OXC145	Standard		204																		
STD OXH139	Standard		1368																		
STD OXH139	Standard		1285																		
STD OXH139	Standard		1266																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000258.1

		MA200 P % 0.001	MA200 La ppm 0.1	MA200 Cr ppm 1	MA200 Mg % 0.01	MA200 Ba ppm 1	MA200 Ti % 0.001	MA200 Al % 0.01	MA200 Na % 0.001	MA200 K % 0.01	MA200 W ppm 0.1	MA200 Zr ppm 0.1	MA200 Ce ppm 1	MA200 Sn ppm 0.1	MA200 Y ppm 0.1	MA200 Nb ppm 0.1	MA200 Ta ppm 0.1	MA200 Be ppm 1	MA200 Sc ppm 1	MA200 Li ppm 0.1	MA200 S % 0.1
DUP 1320510	QC	0.050	4.8	11	1.34	474	0.317	7.38	2.936	1.28	0.6	3.7	12	0.6	10.7	1.9	0.1	<1	20	14.1	0.1
1320544	Drill Core	0.010	13.6	7	1.95	600	0.049	4.53	0.045	0.34	6.2	9.5	26	0.3	6.6	1.4	0.1	<1	5	45.1	0.1
DUP 1320544	QC	0.010	13.8	6	1.98	603	0.050	4.41	0.045	0.34	6.4	9.6	27	0.3	6.6	1.5	0.1	<1	5	45.3	0.2
Reference Materials																					
STD BVGEO01	Standard																				
STD BVGEO01	Standard																				
STD DS11	Standard																				
STD DS11	Standard																				
STD DS11	Standard																				
STD OREAS25A-4A	Standard	0.048	22.1	115	0.33	157	0.899	9.49	0.122	0.50	1.9	157.5	50	3.6	10.3	19.1	1.4	<1	13	36.2	<0.1
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard	0.047	22.0	106	0.33	146	0.972	9.46	0.134	0.49	1.9	159.9	49	3.9	10.4	21.2	1.5	<1	13	35.4	<0.1
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard	0.048	22.2	112	0.34	156	0.942	9.57	0.139	0.50	1.8	156.7	50	4.0	10.1	20.5	1.5	<1	14	35.7	<0.1
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard	0.044	20.7	102	0.32	149	0.966	9.30	0.130	0.47	2.1	157.9	48	4.1	10.0	21.1	1.5	<1	13	33.1	<0.1
STD OREAS262	Standard																				
STD OREAS45E	Standard	0.033	10.8	998	0.16	253	0.504	7.07	0.052	0.32	1.0	92.0	24	1.1	7.9	5.9	0.5	<1	90	6.7	<0.1
STD OREAS45H	Standard	0.022	12.8	660	0.26	338	0.914	8.59	0.099	0.21	0.9	128.7	25	1.9	9.7	14.7	1.0	1	59	13.3	<0.1
STD OREAS45H	Standard	0.022	12.5	674	0.25	356	0.875	8.48	0.097	0.21	0.9	125.2	25	2.0	9.1	14.1	1.0	1	58	12.9	<0.1
STD OREAS45E	Standard	0.031	10.2	1020	0.16	250	0.551	7.01	0.060	0.33	1.0	99.8	23	1.3	7.2	6.4	0.5	<1	89	6.2	<0.1
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000258.1

		MA200 Rb ppm 0.1	MA200 Hf ppm 0.1	MA200 In ppm 0.05	MA200 Re ppm 0.005	MA200 Se ppm 1	MA200 Te ppm 0.5	MA200 Tl ppm 0.5	AQ200 Hg ppm 0.01	FA550 Au gm/t 0.9
DUP 1320510	QC	42.9	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320544	Drill Core	7.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
DUP 1320544	QC	7.4	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
Reference Materials										
STD BVGEO01	Standard								0.10	
STD BVGEO01	Standard								0.09	
STD DS11	Standard								0.25	
STD DS11	Standard								0.24	
STD DS11	Standard								0.26	
STD OREAS25A-4A	Standard	60.1	4.3	0.11	<0.005	2	<0.5	<0.5		
STD OREAS262	Standard								0.14	
STD OREAS25A-4A	Standard	62.7	4.4	0.09	<0.005	3	<0.5	<0.5		
STD OREAS262	Standard								0.17	
STD OREAS25A-4A	Standard	61.6	4.3	0.09	<0.005	3	<0.5	<0.5		
STD OREAS262	Standard								0.15	
STD OREAS262	Standard								0.18	
STD OREAS25A-4A	Standard	57.4	4.4	0.07	<0.005	3	<0.5	<0.5		
STD OREAS262	Standard								0.18	
STD OREAS45E	Standard	21.2	2.9	0.11	<0.005	3	<0.5	<0.5		
STD OREAS45H	Standard	23.6	3.6	0.10	<0.005	2	<0.5	<0.5		
STD OREAS45H	Standard	22.6	3.4	0.09	<0.005	2	<0.5	<0.5		
STD OREAS45E	Standard	20.1	3.1	0.09	<0.005	3	<0.5	<0.5		
STD OXC145	Standard									
STD OXC145	Standard									
STD OXC145	Standard									
STD OXC145	Standard									
STD OXH139	Standard									
STD OXH139	Standard									
STD OXH139	Standard									

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000258.1

		WGHT Wgt kg 0.01	FA350 Au ppb 2	MA200 Mo ppm 0.1	MA200 Cu ppm 0.1	MA200 Pb ppm 0.1	MA200 Zn ppm 1	MA200 Ag ppm 0.1	MA200 Ni ppm 0.1	MA200 Co ppm 0.2	MA200 Mn ppm 1	MA200 Fe % 0.01	MA200 As ppm 1	MA200 U ppm 0.1	MA200 Th ppm 0.1	MA200 Sr ppm 1	MA200 Cd ppm 0.1	MA200 Sb ppm 0.1	MA200 Bi ppm 0.1	MA200 V ppm 1	MA200 Ca % 0.01
STD OXH139	Standard		1254																		
STD OREAS45H Expected				1.55	767	11.9	39.7	0.147	423	88	380	19.52	16.9	1.68	7.26	27.1		0.63	0.17	263	0.135
STD BVGEO01 Expected																					
STD OREAS25A-4A Expected				2.41	33.9	25.2	44.4		45.8	7.7	480	6.6	9.94	2.94	15.8	48.5		0.65	0.37	157	0.301
STD OREAS45E Expected				2.4	780	18.2	46.7	0.311	454	57	570	24.12	16.3	2.41	12.9	15.9	0.06	1	0.28	322	0.065
STD OXC145 Expected			212																		
STD OXH139 Expected			1312																		
STD DS11 Expected																					
STD OREAS262 Expected																					
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank																				
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank																				
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank																				
BLK	Blank																				
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank		4																		
BLK	Blank		3																		
BLK	Blank		3																		
BLK	Blank		2																		
BLK	Blank																				
BLK	Blank																				
Prep Wash																					
ROCK-WHI	Prep Blank		3	1.2	3.7	3.1	37	<0.1	0.9	3.8	693	2.14	2	1.4	5.6	218	0.2	0.2	<0.1	34	1.64
ROCK-WHI	Prep Blank		3	1.0	2.1	2.6	35	<0.1	1.0	3.6	674	2.09	<1	1.3	3.4	207	<0.1	0.3	<0.1	33	1.53

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000258.1

		MA200 P % 0.001	MA200 La ppm 0.1	MA200 Cr ppm 1	MA200 Mg % 0.01	MA200 Ba ppm 1	MA200 Ti % 0.001	MA200 Al % 0.01	MA200 Na % 0.001	MA200 K % 0.01	MA200 W ppm 0.1	MA200 Zr ppm 0.1	MA200 Ce ppm 1	MA200 Sn ppm 0.1	MA200 Y ppm 0.1	MA200 Nb ppm 0.1	MA200 Ta ppm 0.1	MA200 Be ppm 1	MA200 Sc ppm 1	MA200 Li ppm 0.1	MA200 S % 0.1
STD OXH139	Standard																				
STD OREAS45H Expected		0.023	12.4	602	0.238	332	0.878	7.99	0.09	0.205	0.99	131	23.6	1.93	10.4	14.8	1.08	1.09	57	13.1	
STD BVGEO01 Expected																					
STD OREAS25A-4A Expected		0.048	21.8	115	0.327	147	0.93	8.87	0.131	0.482	2	155	47.3	4.06	10.5	20.9	1.4	0.93	13.7	36.7	0.047
STD OREAS45E Expected		0.034	11	979	0.156	252	0.559	6.78	0.059	0.324	1.07	97	23.5	1.32	8.28	6.8	0.54		93	6.58	0.046
STD OXC145 Expected																					
STD OXH139 Expected																					
STD DS11 Expected																					
STD OREAS262 Expected																					
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.004	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.004	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.003	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				
BLK	Blank																				
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.005	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
Prep Wash																					
ROCK-WHI	Prep Blank	0.044	12.9	2	0.50	849	0.209	7.31	3.660	1.60	0.3	54.1	27	0.9	17.0	5.8	0.4	2	7	3.9	<0.1
ROCK-WHI	Prep Blank	0.042	12.7	3	0.50	785	0.211	7.10	3.596	1.54	0.3	51.4	26	0.7	16.1	5.7	0.4	1	6	3.2	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000258.1

		MA200 Rb ppm 0.1	MA200 Hf ppm 0.1	MA200 In ppm 0.05	MA200 Re ppm 0.005	MA200 Se ppm 1	MA200 Te ppm 0.5	MA200 Tl ppm 0.5	AQ200 Hg ppm 0.01	FA550 Au gm/t 0.9
STD OXH139	Standard									
STD OREAS45H Expected		22.5	3.6	0.1		2.02				
STD BVGEO01 Expected									0.1	
STD OREAS25A-4A Expected		61	4.14	0.09		2.4		0.35		
STD OREAS45E Expected		21.2	3.11	0.099		2.97	0.1	0.15		
STD OXC145 Expected										
STD OXH139 Expected										
STD DS11 Expected									0.26	
STD OREAS262 Expected									0.17	
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5		
BLK	Blank								<0.01	
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5		
BLK	Blank								<0.01	
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5		
BLK	Blank								<0.01	
BLK	Blank								0.02	
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5		
BLK	Blank									
BLK	Blank									
BLK	Blank									
BLK	Blank									
BLK	Blank								<0.01	
BLK	Blank									
Prep Wash										
ROCK-WHI	Prep Blank	35.3	1.8	<0.05	<0.005	<1	<0.5	<0.5	0.01	
ROCK-WHI	Prep Blank	32.2	1.7	<0.05	<0.005	<1	<0.5	<0.5	<0.01	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Submitted By: Dan Ferraro
Receiving Lab: Canada-Whitehorse
Received: July 25, 2019
Report Date: September 05, 2019
Page: 1 of 3

CERTIFICATE OF ANALYSIS WHI19000259.1

CLIENT JOB INFORMATION

Project: LUC
Shipment ID: DDLS-19-03
P.O. Number
Number of Samples: 43

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	39	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	4	Sort, label and box pulps			WHI
FA350-Au	43	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	43	Environmental disposal charge-Fire assay lead waste			VAN
MA200	43	4 Acid digestion ICP-MS analysis	0.25	Completed	VAN
AQ200-HG	43	Hg by AR digestion ICP-MS analysis	0.5	Completed	VAN
SHP01	43	Per sample shipping charges for branch shipments			VAN
EN001-MA	43	Environmental disposal fee - Multi-acid neutralization			VAN
PULSW	39	Extra Wash with Silica between each sample			WHI

ADDITIONAL COMMENTS

Invoice To: Luckystrike Resources Ltd.
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4
Canada

CC: Daithi MacGearailt

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000259.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320571	Drill Core	3.05	4	0.7	14.7	4.4	40	<0.1	1.6	5.3	437	3.03	5	0.8	3.7	151	<0.1	0.8	<0.1	14	1.78
1320572	Drill Core	3.31	4	0.3	20.1	7.2	68	0.1	6.8	8.5	772	3.95	7	1.3	4.2	203	<0.1	1.0	<0.1	36	3.35
1320573	Drill Core	3.23	4	0.5	26.8	9.3	54	<0.1	7.3	7.1	649	3.55	5	0.9	3.4	187	<0.1	2.0	0.2	38	2.33
1320574	Drill Core	3.39	3	0.3	14.9	4.7	50	<0.1	3.8	7.1	657	3.46	3	0.9	4.4	109	<0.1	0.8	<0.1	25	2.44
1320575	Rock Pulp	0.06	8	3.6	24.8	4.4	45	0.6	23.1	11.3	485	2.58	5	0.8	2.1	249	0.3	0.8	<0.1	85	1.84
1320576	Rock Pulp	0.06	234	191.1	1855.9	39.7	280	0.6	37.4	14.1	765	4.18	18	0.7	2.0	277	1.0	1.7	0.3	119	2.56
1320577	Drill Core	3.31	4	0.4	54.7	3.6	48	<0.1	3.1	6.7	582	3.39	4	0.8	4.8	86	<0.1	0.6	0.1	27	1.88
1320578	Drill Core	3.54	3	0.5	12.8	4.3	55	<0.1	3.1	6.5	535	3.24	6	1.0	5.5	86	<0.1	1.9	<0.1	33	1.66
1320579	Drill Core	3.41	4	0.4	12.1	5.9	56	<0.1	4.1	8.0	560	3.35	7	0.8	5.4	121	<0.1	3.1	<0.1	42	2.06
1320580	Drill Core	2.41	4	0.9	12.1	6.5	41	<0.1	3.2	5.9	502	2.98	8	1.0	4.5	156	<0.1	4.8	<0.1	29	2.24
1320581	Drill Core	3.21	4	0.4	70.9	5.0	31	<0.1	2.5	7.8	495	2.83	6	1.0	4.7	140	<0.1	1.9	<0.1	29	1.63
1320582	Drill Core	3.56	3	7.7	48.7	3.6	33	0.1	2.1	8.6	486	2.78	5	0.7	4.1	256	<0.1	0.6	<0.1	29	1.85
1320583	Drill Core	2.58	3	5.8	17.7	5.7	46	<0.1	3.2	7.2	519	3.43	8	0.9	5.0	205	<0.1	0.5	<0.1	30	2.67
1320584	Drill Core	3.50	3	0.8	14.1	4.6	43	<0.1	2.5	6.4	608	3.51	8	0.9	5.0	140	<0.1	0.8	<0.1	26	2.55
1320585	Drill Core	2.14	3	0.8	21.5	6.4	50	<0.1	3.6	10.1	845	3.99	7	1.2	5.1	159	0.1	1.8	0.1	24	3.58
1320586	Drill Core	4.06	3	0.5	24.0	5.5	58	<0.1	3.6	6.3	737	3.40	6	1.5	4.6	125	<0.1	1.0	<0.1	22	3.20
1320587	Drill Core	3.25	3	0.3	13.1	4.8	69	<0.1	1.7	5.7	649	3.53	5	1.4	4.2	113	<0.1	0.4	<0.1	15	2.11
1320588	Drill Core	3.48	3	0.3	32.5	5.2	68	<0.1	9.6	18.2	1064	5.31	5	0.9	3.2	186	<0.1	0.5	0.2	137	4.53
1320589	Drill Core	3.39	3	1.6	68.3	4.5	89	<0.1	19.6	29.7	1274	6.69	4	0.8	2.0	256	0.2	0.4	0.4	243	5.93
1320590	Drill Core	3.41	3	0.4	38.5	4.9	99	<0.1	9.8	30.7	1345	7.06	4	0.8	2.1	235	0.2	0.4	<0.1	255	5.17
1320591	Drill Core	3.61	3	0.4	32.4	4.9	76	<0.1	8.9	21.9	1144	5.69	4	0.9	3.5	282	0.2	0.4	<0.1	183	4.50
1320592	Drill Core	3.39	3	0.5	65.8	4.0	84	<0.1	13.3	29.6	1322	6.82	3	0.7	2.0	196	0.1	0.3	<0.1	244	5.24
1320593	Drill Core	3.67	3	0.6	33.9	3.5	60	<0.1	14.5	22.3	987	5.30	4	1.0	3.4	255	<0.1	0.3	<0.1	167	4.44
1320594	Drill Core	3.55	3	2.1	6.9	9.0	56	<0.1	18.2	21.4	977	5.46	5	1.1	2.7	350	0.1	0.3	<0.1	191	5.37
1320595	Drill Core	3.36	3	2.2	51.4	7.1	54	<0.1	16.1	19.4	973	5.19	5	1.0	3.5	290	<0.1	0.4	0.1	186	5.01
1320596	Drill Core	3.58	4	1.2	73.6	5.1	67	<0.1	20.1	27.2	1202	6.00	6	0.7	1.8	251	0.1	0.4	<0.1	237	5.66
1320597	Drill Core	3.46	4	1.4	104.8	4.7	83	<0.1	13.8	24.2	1132	6.12	9	0.8	3.0	212	0.1	0.5	<0.1	182	3.74
1320598	Drill Core	3.35	3	0.2	36.1	3.1	45	<0.1	4.7	16.8	907	4.34	5	0.6	2.3	253	<0.1	0.1	<0.1	142	2.41
1320599	Drill Core	3.38	3	0.9	103.5	3.0	40	<0.1	11.2	23.5	824	5.21	4	0.8	2.3	274	<0.1	0.3	<0.1	155	3.37
1320600	Rock Pulp	0.06	7	3.3	22.7	4.3	46	0.3	22.1	11.0	479	2.50	5	0.8	2.0	235	0.1	0.6	<0.1	82	1.77

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000259.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320571	Drill Core		0.034	9.4	2	0.60	527	0.186	6.22	2.509	1.16	1.1	12.0	20	0.7	13.1	5.5	0.4	<1	13	13.6	0.2
1320572	Drill Core		0.038	13.4	28	1.20	780	0.224	6.56	1.720	1.43	1.5	8.2	28	1.0	18.7	6.6	0.5	1	17	17.7	0.2
1320573	Drill Core		0.037	10.8	24	0.85	768	0.207	6.13	2.652	1.09	0.5	6.8	24	1.0	13.3	5.1	0.3	<1	15	12.2	0.2
1320574	Drill Core		0.032	13.4	7	0.61	771	0.186	6.24	2.580	1.22	1.3	6.2	27	0.9	13.1	5.2	0.3	<1	14	8.5	0.3
1320575	Rock Pulp		0.053	9.0	31	0.84	502	0.290	5.35	2.172	0.86	28.2	36.3	18	0.6	12.8	3.4	0.2	<1	10	13.4	<0.1
1320576	Rock Pulp		0.055	9.6	54	1.35	604	0.377	6.64	2.262	0.86	8.0	30.4	20	2.0	15.1	4.3	0.3	<1	15	15.6	0.3
1320577	Drill Core		0.031	13.4	5	0.53	977	0.198	6.12	2.460	1.21	1.1	4.9	27	1.5	12.2	5.8	0.4	<1	14	10.1	0.3
1320578	Drill Core		0.036	12.6	6	0.53	669	0.215	6.79	1.970	1.56	2.1	5.3	25	1.3	16.4	6.3	0.4	<1	15	22.5	0.1
1320579	Drill Core		0.035	15.0	6	0.62	886	0.236	6.85	1.879	1.61	6.2	4.9	30	1.2	20.0	6.1	0.4	<1	15	31.3	0.1
1320580	Drill Core		0.029	10.7	5	0.54	757	0.167	6.07	2.952	1.00	2.8	3.9	22	0.5	14.6	4.5	0.4	<1	11	19.5	0.1
1320581	Drill Core		0.023	12.9	5	0.41	682	0.161	5.63	3.041	0.63	2.7	4.7	25	0.6	14.1	3.5	0.3	<1	12	16.2	0.3
1320582	Drill Core		0.030	12.6	5	0.36	192	0.154	5.92	3.792	0.42	2.7	4.8	24	0.5	10.9	3.7	0.2	<1	11	9.2	0.3
1320583	Drill Core		0.034	14.4	5	0.46	308	0.205	6.81	3.433	0.72	1.2	7.9	28	0.9	18.1	6.0	0.4	<1	15	16.3	0.2
1320584	Drill Core		0.033	14.0	5	0.40	569	0.187	6.48	3.245	0.81	1.2	7.6	28	0.8	17.8	5.1	0.3	<1	15	13.7	0.2
1320585	Drill Core		0.036	15.5	6	0.54	402	0.203	6.76	3.051	0.97	3.3	8.1	32	1.5	24.5	5.4	0.3	<1	16	20.6	0.4
1320586	Drill Core		0.032	13.4	7	0.47	999	0.200	5.95	1.914	1.12	2.5	6.7	27	0.7	22.0	5.4	0.3	<1	14	22.3	0.2
1320587	Drill Core		0.035	11.5	4	0.39	684	0.220	6.24	2.694	1.10	0.1	8.8	25	0.8	20.1	6.5	0.4	<1	14	12.7	0.2
1320588	Drill Core		0.054	11.1	21	1.30	615	0.411	7.15	2.241	1.33	0.1	8.3	23	1.2	22.8	4.4	0.3	<1	25	13.5	0.2
1320589	Drill Core		0.057	8.9	42	2.73	581	0.508	8.08	2.133	1.26	0.1	10.3	18	0.8	20.2	3.4	0.2	<1	31	17.2	0.2
1320590	Drill Core		0.057	9.2	21	2.89	517	0.539	8.16	2.307	1.12	0.2	6.3	18	0.7	22.7	3.3	0.2	<1	33	13.2	0.2
1320591	Drill Core		0.066	12.7	26	2.31	668	0.454	7.93	2.477	1.19	0.2	5.3	27	1.0	20.0	5.2	0.3	<1	24	15.5	0.2
1320592	Drill Core		0.049	8.1	32	3.00	502	0.497	7.87	2.192	1.03	0.2	5.8	17	0.5	19.6	3.2	0.2	<1	33	10.8	0.3
1320593	Drill Core		0.054	10.5	34	2.37	874	0.388	8.04	2.219	1.21	0.2	5.4	22	0.9	16.0	4.7	0.3	<1	24	13.6	0.1
1320594	Drill Core		0.054	11.0	50	2.38	257	0.459	8.08	2.740	0.44	0.4	6.7	21	1.0	18.3	4.5	0.3	<1	28	10.7	0.3
1320595	Drill Core		0.049	11.8	46	2.45	255	0.405	7.68	2.905	0.53	0.4	6.1	23	1.3	18.0	4.5	0.3	<1	25	9.1	0.2
1320596	Drill Core		0.045	8.1	64	3.59	323	0.449	7.96	2.869	0.91	0.3	6.9	17	1.2	16.4	2.9	0.2	<1	32	9.0	0.3
1320597	Drill Core		0.063	10.1	39	2.78	520	0.491	7.90	2.916	1.23	0.8	7.4	22	1.3	18.5	4.2	0.3	<1	24	19.1	0.4
1320598	Drill Core		0.035	5.7	8	2.24	547	0.256	7.92	3.272	1.57	0.2	2.7	11	0.9	10.5	1.9	0.1	<1	22	14.3	0.2
1320599	Drill Core		0.047	9.0	31	2.02	359	0.274	7.49	3.091	1.25	0.1	4.5	20	1.1	14.8	2.2	0.1	<1	22	8.9	0.9
1320600	Rock Pulp		0.055	8.7	29	0.82	487	0.285	5.12	2.046	0.88	27.9	35.5	17	0.6	12.6	3.3	0.2	<1	11	12.7	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000259.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01
1320571	Drill Core	34.6	0.3	0.08	<0.005	2	<0.5	<0.5	0.01
1320572	Drill Core	44.2	0.3	0.07	<0.005	<1	<0.5	<0.5	0.02
1320573	Drill Core	40.3	0.3	0.10	<0.005	1	<0.5	<0.5	<0.01
1320574	Drill Core	46.3	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02
1320575	Rock Pulp	21.8	1.1	0.05	<0.005	<1	<0.5	<0.5	0.01
1320576	Rock Pulp	22.6	0.9	0.10	0.088	1	<0.5	<0.5	0.11
1320577	Drill Core	44.1	0.3	0.06	<0.005	<1	<0.5	<0.5	0.01
1320578	Drill Core	50.6	0.2	0.07	<0.005	1	<0.5	<0.5	<0.01
1320579	Drill Core	54.8	0.2	0.09	<0.005	2	<0.5	<0.5	<0.01
1320580	Drill Core	31.2	0.2	<0.05	<0.005	1	<0.5	<0.5	<0.01
1320581	Drill Core	18.7	0.2	<0.05	<0.005	1	<0.5	<0.5	0.02
1320582	Drill Core	12.2	0.2	<0.05	0.010	<1	<0.5	<0.5	<0.01
1320583	Drill Core	22.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320584	Drill Core	24.8	0.3	0.05	<0.005	<1	<0.5	<0.5	<0.01
1320585	Drill Core	31.1	0.3	0.08	<0.005	1	<0.5	<0.5	<0.01
1320586	Drill Core	33.9	0.2	<0.05	<0.005	1	<0.5	<0.5	<0.01
1320587	Drill Core	29.7	0.3	0.08	<0.005	1	<0.5	<0.5	<0.01
1320588	Drill Core	41.5	0.4	0.08	<0.005	<1	<0.5	<0.5	<0.01
1320589	Drill Core	42.9	0.4	<0.05	<0.005	<1	0.5	<0.5	0.02
1320590	Drill Core	35.0	0.6	0.06	<0.005	<1	0.6	<0.5	<0.01
1320591	Drill Core	27.9	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.01
1320592	Drill Core	24.7	0.4	0.06	<0.005	<1	<0.5	<0.5	<0.01
1320593	Drill Core	28.5	0.3	0.09	<0.005	<1	<0.5	<0.5	<0.01
1320594	Drill Core	12.0	0.7	0.07	<0.005	<1	<0.5	<0.5	<0.01
1320595	Drill Core	14.7	0.4	0.08	<0.005	<1	0.7	<0.5	<0.01
1320596	Drill Core	24.3	0.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320597	Drill Core	23.1	0.4	0.08	<0.005	<1	<0.5	<0.5	<0.01
1320598	Drill Core	37.4	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320599	Drill Core	19.6	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02
1320600	Rock Pulp	21.2	1.1	0.08	<0.005	<1	<0.5	<0.5	<0.01

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000259.1

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320601	Rock Pulp	0.06	945	13.9	9571.2	20.9	127	3.2	615.2	19.9	863	7.77	3	0.3	1.9	127	0.2	15.2	0.7	94	2.11
1320602	Drill Core	3.54	3	1.0	75.0	3.6	48	<0.1	9.5	19.6	922	5.53	3	0.9	2.4	302	0.2	0.2	<0.1	204	3.18
1320603	Drill Core	3.47	2	0.3	31.5	5.2	42	<0.1	3.0	14.5	742	3.74	4	0.5	1.2	307	<0.1	0.3	<0.1	125	2.53
1320604	Drill Core	3.49	109	2.0	28.3	5.7	57	0.3	17.3	17.0	977	3.85	2	1.1	4.4	335	0.3	0.3	<0.1	125	4.61
1320605	Drill Core	3.46	12	2.1	2.9	3.5	47	<0.1	17.3	10.1	602	2.57	1	1.7	7.8	167	0.1	0.1	<0.1	85	2.59
1320606	Drill Core	3.54	83	1.3	13.5	4.0	67	0.2	52.8	25.6	1281	4.72	2	1.3	3.9	316	0.2	0.3	<0.1	185	4.86
1320607	Drill Core	3.24	3	2.1	8.6	2.7	40	<0.1	38.1	20.2	880	4.01	2	1.8	5.5	194	<0.1	0.2	<0.1	130	2.85
1320608	Drill Core	3.44	3	1.4	12.3	17.4	64	<0.1	28.7	17.0	949	4.06	2	1.6	5.2	257	0.4	0.2	<0.1	149	4.26
1320609	Drill Core	3.32	5	3.7	13.9	11.2	55	<0.1	21.7	14.3	920	3.66	3	1.8	5.2	241	0.4	0.3	<0.1	114	4.51
1320610	Drill Core	3.39	3	4.1	34.4	5.9	72	<0.1	40.7	33.4	1273	8.03	2	0.9	2.1	221	<0.1	0.3	<0.1	325	4.23
1320611	Drill Core	3.40	3	0.4	13.5	6.0	80	<0.1	18.6	21.4	1206	5.80	1	1.0	3.8	216	<0.1	0.3	<0.1	170	2.84
1320612	Drill Core	3.70	4	4.4	6.3	5.4	78	<0.1	23.8	25.0	1199	6.64	1	1.3	3.2	259	0.2	0.3	0.2	252	3.68
1320613	Drill Core	4.53	9	0.6	28.1	5.0	39	<0.1	21.1	23.7	967	5.66	2	1.1	3.3	216	<0.1	0.3	0.1	205	3.97

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000259.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
	Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320601	Rock Pulp	0.058	3.8	699	1.06	109	0.131	4.91	0.185	2.81	3.0	12.5	7	1.7	5.5	4.3	0.3	<1	8	7.8	1.2
1320602	Drill Core	0.050	10.5	34	2.39	526	0.359	7.68	2.914	1.26	0.2	5.4	22	1.4	20.0	2.8	0.2	<1	26	10.9	0.5
1320603	Drill Core	0.027	4.8	7	1.43	728	0.247	7.11	3.363	1.52	0.2	2.9	10	0.4	9.4	2.3	0.1	<1	15	8.8	0.1
1320604	Drill Core	0.043	14.3	62	1.51	330	0.183	7.06	4.055	0.72	1.1	14.2	30	1.2	12.7	2.3	0.2	1	19	9.9	0.3
1320605	Drill Core	0.027	18.8	45	1.35	379	0.149	7.26	4.574	0.52	0.5	29.9	37	1.5	11.8	2.2	0.2	2	13	8.2	<0.1
1320606	Drill Core	0.044	15.2	159	2.71	686	0.309	6.63	3.025	0.96	0.8	14.7	29	1.4	20.7	1.4	0.1	2	24	12.6	0.2
1320607	Drill Core	0.041	15.1	97	2.72	529	0.308	7.28	3.432	0.86	0.2	17.0	32	1.8	22.6	2.7	0.2	<1	18	10.7	<0.1
1320608	Drill Core	0.050	14.6	68	1.68	364	0.319	7.40	5.066	0.54	1.5	11.5	30	1.4	14.9	3.7	0.2	<1	20	8.3	0.2
1320609	Drill Core	0.047	15.3	51	1.61	350	0.291	7.15	4.541	0.47	1.3	10.6	30	1.2	15.8	4.4	0.3	<1	17	9.1	0.2
1320610	Drill Core	0.067	15.2	73	3.72	712	0.653	7.59	3.518	1.30	0.4	8.7	29	2.1	31.6	3.7	0.3	<1	35	12.2	0.4
1320611	Drill Core	0.073	12.4	42	2.34	396	0.494	7.79	4.667	0.95	0.6	9.5	27	1.7	25.0	6.8	0.5	1	26	8.3	0.2
1320612	Drill Core	0.082	13.4	44	2.68	434	0.657	7.91	3.828	1.12	0.4	7.7	30	1.7	32.9	5.4	0.4	1	25	8.9	0.1
1320613	Drill Core	0.071	13.4	48	2.17	286	0.543	7.69	3.979	0.86	1.4	7.5	28	1.3	25.4	4.8	0.4	<1	22	9.6	0.3

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000259.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01
1320601	Rock Pulp	57.9	0.4	0.15	0.010	9	<0.5	0.5	1.43
1320602	Drill Core	26.7	0.3	0.06	<0.005	<1	<0.5	<0.5	0.01
1320603	Drill Core	35.9	0.2	0.05	<0.005	<1	<0.5	<0.5	<0.01
1320604	Drill Core	17.9	0.5	<0.05	<0.005	<1	0.7	<0.5	<0.01
1320605	Drill Core	13.0	1.0	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320606	Drill Core	30.8	0.6	0.07	<0.005	<1	0.8	<0.5	<0.01
1320607	Drill Core	23.9	0.6	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320608	Drill Core	18.1	0.6	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320609	Drill Core	13.1	0.5	<0.05	0.005	<1	<0.5	<0.5	<0.01
1320610	Drill Core	50.7	0.5	0.07	0.008	<1	<0.5	<0.5	<0.01
1320611	Drill Core	29.8	0.5	0.07	<0.005	<1	<0.5	<0.5	<0.01
1320612	Drill Core	31.1	0.5	0.08	0.005	<1	0.5	<0.5	<0.01
1320613	Drill Core	21.2	0.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000259.1

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
Pulp Duplicates																					
1320580	Drill Core	2.41	4	0.9	12.1	6.5	41	<0.1	3.2	5.9	502	2.98	8	1.0	4.5	156	<0.1	4.8	<0.1	29	2.24
REP 1320580	QC			0.7	11.2	6.1	41	<0.1	3.2	5.3	486	2.86	8	0.8	3.9	148	<0.1	4.3	<0.1	28	2.16
1320595	Drill Core	3.36	3	2.2	51.4	7.1	54	<0.1	16.1	19.4	973	5.19	5	1.0	3.5	290	<0.1	0.4	0.1	186	5.01
REP 1320595	QC		3																		
1320596	Drill Core	3.58	4	1.2	73.6	5.1	67	<0.1	20.1	27.2	1202	6.00	6	0.7	1.8	251	0.1	0.4	<0.1	237	5.66
REP 1320596	QC																				
1320613	Drill Core	4.53	9	0.6	28.1	5.0	39	<0.1	21.1	23.7	967	5.66	2	1.1	3.3	216	<0.1	0.3	0.1	205	3.97
REP 1320613	QC			0.5	26.6	4.9	37	<0.1	18.9	23.9	975	5.44	3	1.1	3.3	215	<0.1	0.3	0.1	200	3.80
Core Reject Duplicates																					
1320597	Drill Core	3.46	4	1.4	104.8	4.7	83	<0.1	13.8	24.2	1132	6.12	9	0.8	3.0	212	0.1	0.5	<0.1	182	3.74
DUP 1320597	QC		4	1.0	101.5	4.5	81	<0.1	12.4	23.4	1103	6.03	9	0.9	3.3	204	<0.1	0.4	<0.1	175	3.60
Reference Materials																					
STD BVGEO01	Standard																				
STD DS11	Standard																				
STD OREAS25A-4A	Standard			2.4	34.3	24.4	44	<0.1	46.9	7.9	508	6.49	9	2.8	15.6	45	<0.1	0.5	0.4	159	0.26
STD OREAS25A-4A	Standard			2.5	34.5	24.7	42	<0.1	46.2	8.0	475	6.73	11	2.8	16.2	44	<0.1	0.6	0.3	158	0.27
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard			2.6	33.7	24.3	43	<0.1	46.5	7.6	492	6.62	10	2.8	16.6	49	<0.1	0.7	0.3	163	0.29
STD OREAS45H	Standard			1.5	798.4	13.7	39	<0.1	456.2	92.4	431	21.27	16	1.9	8.2	30	<0.1	0.6	0.2	284	0.14
STD OREAS45E	Standard			2.1	784.1	18.4	48	0.3	454.9	58.1	559	24.85	18	2.5	14.4	16	<0.1	1.1	0.3	310	0.06
STD OREAS45E	Standard			2.3	765.5	18.6	48	0.3	471.7	57.2	566	23.53	17	2.7	14.4	17	<0.1	0.9	0.2	348	0.07
STD OXC145	Standard		210																		
STD OXC145	Standard		222																		
STD OXH139	Standard		1318																		
STD OXH139	Standard		1339																		
STD OREAS45H Expected				1.55	767	11.9	39.7	0.147	423	88	380	19.52	16.9	1.68	7.26	27.1		0.63	0.17	263	0.135
STD BVGEO01 Expected																					

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000259.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
	Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
Pulp Duplicates																					
1320580	Drill Core	0.029	10.7	5	0.54	757	0.167	6.07	2.952	1.00	2.8	3.9	22	0.5	14.6	4.5	0.4	<1	11	19.5	0.1
REP 1320580	QC	0.027	9.5	5	0.52	709	0.165	5.66	2.859	0.99	2.6	4.0	20	0.7	13.1	4.3	0.3	<1	11	19.3	0.1
1320595	Drill Core	0.049	11.8	46	2.45	255	0.405	7.68	2.905	0.53	0.4	6.1	23	1.3	18.0	4.5	0.3	<1	25	9.1	0.2
REP 1320595	QC																				
1320596	Drill Core	0.045	8.1	64	3.59	323	0.449	7.96	2.869	0.91	0.3	6.9	17	1.2	16.4	2.9	0.2	<1	32	9.0	0.3
REP 1320596	QC																				
1320613	Drill Core	0.071	13.4	48	2.17	286	0.543	7.69	3.979	0.86	1.4	7.5	28	1.3	25.4	4.8	0.4	<1	22	9.6	0.3
REP 1320613	QC	0.063	12.4	49	2.09	282	0.511	7.41	3.890	0.89	1.4	7.4	27	1.3	25.0	4.9	0.3	1	21	8.5	0.3
Core Reject Duplicates																					
1320597	Drill Core	0.063	10.1	39	2.78	520	0.491	7.90	2.916	1.23	0.8	7.4	22	1.3	18.5	4.2	0.3	<1	24	19.1	0.4
DUP 1320597	QC	0.058	11.5	37	2.68	491	0.476	7.73	2.694	1.15	0.8	6.0	24	1.5	19.5	4.3	0.3	<1	25	16.8	0.4
Reference Materials																					
STD BVGEO01	Standard																				
STD DS11	Standard																				
STD OREAS25A-4A	Standard	0.050	19.5	116	0.34	150	0.942	8.80	0.125	0.49	1.9	149.4	43	4.0	9.7	19.7	1.4	1	12	38.1	<0.1
STD OREAS25A-4A	Standard	0.047	19.8	110	0.35	148	0.924	8.83	0.137	0.49	1.9	138.6	41	4.1	9.5	19.0	1.4	<1	12	39.2	<0.1
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard	0.049	22.0	116	0.33	145	0.973	9.03	0.141	0.50	1.9	151.0	46	3.6	10.2	18.9	1.4	1	13	34.4	<0.1
STD OREAS45H	Standard	0.022	13.1	666	0.28	359	0.937	8.54	0.099	0.21	0.9	129.3	26	2.1	10.2	14.6	1.0	1	58	15.7	<0.1
STD OREAS45E	Standard	0.036	12.2	957	0.19	260	0.538	7.02	0.071	0.35	0.9	95.2	24	1.2	7.8	5.7	0.5	<1	94	7.1	<0.1
STD OREAS45E	Standard	0.033	11.2	948	0.15	243	0.544	7.10	0.055	0.34	1.0	92.8	24	1.1	8.2	6.0	0.5	<1	91	7.3	<0.1
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OREAS45H Expected		0.023	12.4	602	0.238	332	0.878	7.99	0.09	0.205	0.99	131	23.6	1.93	10.4	14.8	1.08	1.09	57	13.1	
STD BVGEO01 Expected																					

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000259.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200
	Analyte	Rb	Hf	In	Re	Se	Te	Tl	Hg
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	MDL	0.1	0.1	0.05	0.005	1	0.5	0.5	0.01
Pulp Duplicates									
1320580	Drill Core	31.2	0.2	<0.05	<0.005	1	<0.5	<0.5	<0.01
REP 1320580	QC	28.8	0.1	<0.05	<0.005	1	<0.5	<0.5	
1320595	Drill Core	14.7	0.4	0.08	<0.005	<1	0.7	<0.5	<0.01
REP 1320595	QC								
1320596	Drill Core	24.3	0.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01
REP 1320596	QC								<0.01
1320613	Drill Core	21.2	0.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01
REP 1320613	QC	21.3	0.5	0.08	<0.005	<1	<0.5	<0.5	
Core Reject Duplicates									
1320597	Drill Core	23.1	0.4	0.08	<0.005	<1	<0.5	<0.5	<0.01
DUP 1320597	QC	26.3	0.4	0.11	<0.005	<1	<0.5	<0.5	<0.01
Reference Materials									
STD BVGEO01	Standard								0.09
STD DS11	Standard								0.23
STD OREAS25A-4A	Standard	55.5	4.3	0.14	<0.005	3	<0.5	<0.5	
STD OREAS25A-4A	Standard	56.3	4.0	0.09	<0.005	2	<0.5	<0.5	
STD OREAS262	Standard								0.16
STD OREAS262	Standard								0.19
STD OREAS25A-4A	Standard	59.6	3.9	0.08	<0.005	3	<0.5	<0.5	
STD OREAS45H	Standard	23.9	3.6	0.15	<0.005	1	<0.5	<0.5	
STD OREAS45E	Standard	21.2	2.9	0.08	<0.005	2	<0.5	<0.5	
STD OREAS45E	Standard	21.8	2.7	0.14	<0.005	3	<0.5	<0.5	
STD OXC145	Standard								
STD OXC145	Standard								
STD OXH139	Standard								
STD OXH139	Standard								
STD OREAS45H Expected		22.5	3.6	0.1		2.02			
STD BVGEO01 Expected									0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000259.1

		WGHT Wgt kg 0.01	FA350 Au ppb 2	MA200 Mo ppm 0.1	MA200 Cu ppm 0.1	MA200 Pb ppm 0.1	MA200 Zn ppm 1	MA200 Ag ppm 0.1	MA200 Ni ppm 0.1	MA200 Co ppm 0.2	MA200 Mn ppm 1	MA200 Fe % 0.01	MA200 As ppm 1	MA200 U ppm 0.1	MA200 Th ppm 0.1	MA200 Sr ppm 1	MA200 Cd ppm 0.1	MA200 Sb ppm 0.1	MA200 Bi ppm 0.1	MA200 V ppm 1	MA200 Ca % 0.01
STD DS11 Expected																					
STD OREAS262 Expected																					
STD OXC145 Expected			212																		
STD OXH139 Expected			1312																		
STD OREAS25A-4A Expected				2.41	33.9	25.2	44.4		45.8	7.7	480	6.6	9.94	2.94	15.8	48.5		0.65	0.37	157	0.301
STD OREAS45E Expected				2.4	780	18.2	46.7	0.311	454	57	570	24.12	16.3	2.41	12.9	15.9	0.06	1	0.28	322	0.065
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank			<0.1	0.2	<0.1	<1	<0.1	<0.1	<0.2	1	<0.01	1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank																				
BLK	Blank																				
BLK	Blank		3																		
BLK	Blank		3																		
BLK	Blank			<0.1	0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
Prep Wash																					
ROCK-WHI	Prep Blank		3	1.0	3.1	3.1	35	<0.1	0.7	3.6	618	2.00	3	1.2	3.1	205	<0.1	0.2	<0.1	32	1.46
ROCK-WHI	Prep Blank		3	1.0	3.1	2.7	38	<0.1	1.8	4.4	677	2.12	3	1.2	3.1	203	<0.1	0.2	<0.1	37	1.51

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000259.1

		MA200 P % 0.001	MA200 La ppm 0.1	MA200 Cr ppm 1	MA200 Mg % 0.01	MA200 Ba ppm 1	MA200 Ti % 0.001	MA200 Al % 0.01	MA200 Na % 0.001	MA200 K % 0.01	MA200 W ppm 0.1	MA200 Zr ppm 0.1	MA200 Ce ppm 1	MA200 Sn ppm 0.1	MA200 Y ppm 0.1	MA200 Nb ppm 0.1	MA200 Ta ppm 0.1	MA200 Be ppm 1	MA200 Sc ppm 1	MA200 Li ppm 0.1	MA200 S % 0.1
STD DS11 Expected																					
STD OREAS262 Expected																					
STD OXC145 Expected																					
STD OXH139 Expected																					
STD OREAS25A-4A Expected		0.048	21.8	115	0.327	147	0.93	8.87	0.131	0.482	2	155	47.3	4.06	10.5	20.9	1.4	0.93	13.7	36.7	0.047
STD OREAS45E Expected		0.034	11	979	0.156	252	0.559	6.78	0.059	0.324	1.07	97	23.5	1.32	8.28	6.8	0.54		93	6.58	0.046
BLK	Blank	<0.001	<0.1	1	<0.01	<1	<0.001	<0.01	<0.001	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.004	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.003	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
Prep Wash																					
ROCK-WHI	Prep Blank	0.040	11.8	2	0.48	847	0.210	6.71	3.510	1.65	0.3	52.0	24	0.7	15.7	5.7	0.4	1	6	4.3	<0.1
ROCK-WHI	Prep Blank	0.042	13.2	5	0.59	891	0.216	6.83	3.525	1.64	0.2	50.1	24	0.7	15.7	5.3	0.4	1	7	3.8	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000259.1

		MA200 Rb ppm 0.1	MA200 Hf ppm 0.1	MA200 In ppm 0.05	MA200 Re ppm 0.005	MA200 Se ppm 1	MA200 Te ppm 0.5	MA200 Tl ppm 0.5	AQ200 Hg ppm 0.01
STD DS11 Expected									0.26
STD OREAS262 Expected									0.17
STD OXC145 Expected									
STD OXH139 Expected									
STD OREAS25A-4A Expected		61	4.14	0.09		2.4		0.35	
STD OREAS45E Expected		21.2	3.11	0.099		2.97	0.1	0.15	
BLK	Blank	0.2	<0.1	<0.05	<0.005	<1	<0.5	<0.5	
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5	
BLK	Blank								<0.01
BLK	Blank								0.01
BLK	Blank								
BLK	Blank								
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5	
Prep Wash									
ROCK-WHI	Prep Blank	34.9	1.7	<0.05	<0.005	2	<0.5	<0.5	<0.01
ROCK-WHI	Prep Blank	34.3	1.9	<0.05	<0.005	<1	<0.5	<0.5	0.02

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

DDLS-19-04 Assay Certificates WHI19000310.1 and WHI19000313.1

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Submitted By: Daithi MacGearailt
Receiving Lab: Canada-Whitehorse
Received: August 02, 2019
Report Date: September 05, 2019
Page: 1 of 6

CERTIFICATE OF ANALYSIS WHI19000310.1

CLIENT JOB INFORMATION

Project: LUC
Shipment ID: DDLS-19-04
P.O. Number
Number of Samples: 138

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	126	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	12	Sort, label and box pulps			WHI
FA350-Au	138	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	138	Environmental disposal charge-Fire assay lead waste			VAN
MA200	138	4 Acid digestion ICP-MS analysis	0.25	Completed	VAN
AQ200-HG	138	Hg by AR digestion ICP-MS analysis	0.5	Completed	VAN
SHP01	138	Per sample shipping charges for branch shipments			VAN
EN001-MA	138	Environmental disposal fee - Multi-acid neutralization			VAN
PULSW	126	Extra Wash with Silica between each sample			WHI
FA550	0	Lead collection fire assay 50G fusion - Grav finish	50	Completed	VAN

ADDITIONAL COMMENTS

Invoice To: Luckystrike Resources Ltd.
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4
Canada

CC: Dan Ferraro

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000310.1

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320614	Drill Core	3.78	5	0.4	4.1	14.9	39	0.2	2.4	5.6	403	1.86	5	0.8	6.2	159	<0.1	0.2	<0.1	37	0.74
1320615	Drill Core	3.77	6	0.3	4.0	16.8	61	<0.1	11.3	9.2	408	2.48	3	1.2	4.3	415	<0.1	0.1	<0.1	67	1.70
1320616	Drill Core	5.10	5	0.2	3.5	14.1	43	<0.1	1.1	4.4	250	1.78	2	0.9	3.7	266	<0.1	<0.1	<0.1	36	0.95
1320617	Drill Core	4.43	4	0.2	11.2	14.4	65	<0.1	1.9	5.4	299	2.18	1	0.9	4.0	500	<0.1	<0.1	<0.1	53	1.78
1320618	Drill Core	4.42	4	0.2	14.2	10.2	51	<0.1	1.9	4.8	247	1.92	2	1.1	4.2	395	<0.1	<0.1	<0.1	51	1.67
1320619	Drill Core	4.22	4	0.4	12.5	9.7	47	<0.1	6.6	8.1	369	2.52	3	1.0	4.6	306	<0.1	<0.1	<0.1	63	2.09
1320620	Drill Core	3.29	4	0.1	2.5	8.4	36	<0.1	1.2	3.4	194	1.67	2	0.8	4.5	264	<0.1	<0.1	<0.1	35	1.32
1320621	Drill Core	2.67	5	0.3	1.8	11.4	70	<0.1	3.4	11.3	1162	2.69	4	1.3	2.9	320	<0.1	0.8	<0.1	78	5.70
1320622	Drill Core	4.43	4	0.3	1.6	6.4	33	<0.1	3.7	10.0	406	1.95	3	0.8	4.2	164	<0.1	0.2	<0.1	47	1.46
1320623	Drill Core	5.11	12	0.2	2.2	10.1	44	<0.1	6.9	14.7	952	3.13	4	1.0	3.3	270	<0.1	0.3	<0.1	59	3.35
1320624	Drill Core	4.49	4	0.2	3.0	10.6	53	<0.1	6.1	13.0	762	2.98	3	1.0	3.5	286	<0.1	0.2	<0.1	73	2.85
1320625	Rock Pulp	0.05	6	3.1	22.0	4.2	44	0.4	21.7	11.2	463	2.56	4	0.8	2.0	228	0.1	0.8	<0.1	80	1.78
1320626	Rock Pulp	0.06	261	189.9	1857.3	39.9	285	0.7	35.8	14.6	726	4.11	14	0.7	1.8	261	1.0	1.8	0.3	116	2.60
1320627	Drill Core	4.41	3	0.2	2.6	7.3	53	<0.1	2.1	7.4	438	2.68	3	1.0	3.8	172	<0.1	0.2	<0.1	66	2.21
1320628	Drill Core	4.53	5	0.2	53.3	6.0	58	0.1	1.4	5.8	417	2.67	3	1.3	4.1	174	<0.1	0.1	<0.1	70	2.29
1320629	Drill Core	4.30	4	0.2	14.8	4.5	67	<0.1	1.4	6.3	411	2.38	2	1.3	4.2	157	<0.1	<0.1	<0.1	55	1.60
1320630	Drill Core	5.02	4	0.2	8.3	4.3	48	<0.1	1.3	5.1	447	2.29	3	1.2	4.3	191	<0.1	<0.1	<0.1	52	2.41
1320631	Drill Core	5.02	8	0.2	10.9	6.8	67	<0.1	1.7	7.7	407	2.68	4	1.3	3.7	212	<0.1	0.2	<0.1	72	1.75
1320632	Drill Core	4.71	6	0.2	31.9	6.2	60	0.2	1.6	6.1	413	2.75	4	1.3	4.7	200	<0.1	0.2	<0.1	69	1.64
1320633	Drill Core	5.13	10	0.2	85.8	5.6	48	0.4	1.5	4.3	349	2.47	4	1.2	4.7	210	<0.1	0.1	<0.1	59	1.53
1320634	Drill Core	4.77	13	0.2	54.8	4.3	30	0.3	1.2	2.7	274	2.40	4	1.2	4.7	163	<0.1	<0.1	<0.1	44	1.21
1320635	Drill Core	4.90	13	0.2	76.2	6.3	80	0.6	1.6	7.0	462	3.34	5	1.4	4.3	200	<0.1	0.1	<0.1	84	1.74
1320636	Drill Core	5.03	11	0.1	23.5	8.6	83	0.2	1.6	7.9	520	2.86	4	1.2	3.1	242	<0.1	0.2	<0.1	81	2.01
1320637	Drill Core	3.32	4	0.2	6.6	5.5	59	<0.1	1.5	6.2	439	2.49	4	0.9	3.7	246	<0.1	0.1	<0.1	66	2.82
1320638	Drill Core	3.45	8	0.2	8.2	7.0	84	<0.1	2.2	8.5	492	2.79	3	0.7	3.0	256	<0.1	0.1	<0.1	78	1.32
1320639	Drill Core	5.67	4	0.1	8.1	7.4	116	<0.1	2.9	11.3	563	3.01	2	0.7	2.5	244	<0.1	0.1	<0.1	79	1.45
1320640	Drill Core	5.22	4	0.2	6.4	7.4	94	<0.1	2.5	9.5	495	2.97	2	0.7	3.1	227	<0.1	0.2	<0.1	82	1.43
1320641	Drill Core	5.63	11	0.2	10.6	11.1	75	0.1	2.5	10.3	692	2.98	3	1.1	3.2	358	<0.1	0.2	<0.1	83	2.71
1320642	Drill Core	5.27	6	0.2	7.1	7.9	66	<0.1	2.2	10.3	813	2.83	3	0.9	2.9	301	<0.1	0.2	<0.1	77	2.73
1320643	Drill Core	5.02	6	0.2	5.9	9.1	65	0.1	2.2	9.1	561	2.63	2	0.9	2.8	380	<0.1	<0.1	<0.1	71	2.26

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000310.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320614	Drill Core		0.041	15.7	3	0.51	827	0.171	7.43	3.122	2.76	1.0	47.5	30	0.9	11.7	5.7	0.4	1	7	10.1	<0.1
1320615	Drill Core		0.068	14.2	40	1.02	966	0.227	7.69	3.059	2.78	0.7	25.7	28	0.8	8.1	7.0	0.4	<1	10	12.1	<0.1
1320616	Drill Core		0.046	8.4	2	0.44	883	0.176	7.12	3.017	2.66	0.3	32.5	17	0.6	6.6	6.3	0.4	1	5	9.8	<0.1
1320617	Drill Core		0.069	13.5	3	0.52	1007	0.235	7.63	3.237	2.44	0.5	21.1	29	0.9	6.3	7.5	0.4	1	5	11.2	<0.1
1320618	Drill Core		0.054	13.2	3	0.42	873	0.212	7.33	3.371	2.20	0.4	40.0	28	1.0	6.3	6.9	0.4	1	4	8.9	<0.1
1320619	Drill Core		0.067	12.9	29	0.77	766	0.225	7.26	3.152	2.16	0.4	45.7	26	0.6	10.0	6.0	0.4	2	10	11.7	<0.1
1320620	Drill Core		0.044	10.4	2	0.33	620	0.158	6.68	3.750	1.78	0.3	57.8	21	0.7	7.4	5.1	0.4	1	5	6.7	<0.1
1320621	Drill Core		0.052	12.2	6	2.85	897	0.283	7.05	2.473	2.22	1.1	24.1	25	0.7	12.0	4.8	0.3	<1	11	21.9	<0.1
1320622	Drill Core		0.047	11.2	7	0.69	560	0.171	6.64	3.419	1.67	0.3	55.5	22	0.6	10.9	3.5	0.3	<1	10	8.0	<0.1
1320623	Drill Core		0.078	14.0	13	1.39	743	0.271	7.46	2.641	2.58	0.5	37.3	30	0.6	15.3	4.5	0.3	<1	19	14.8	<0.1
1320624	Drill Core		0.063	11.3	9	1.46	937	0.265	7.90	2.346	2.78	0.5	28.8	26	0.8	11.8	5.1	0.3	<1	15	19.1	<0.1
1320625	Rock Pulp		0.051	9.1	30	0.83	483	0.287	5.40	2.021	0.85	27.1	36.4	18	0.7	13.0	3.3	0.2	<1	10	11.2	<0.1
1320626	Rock Pulp		0.058	8.4	56	1.32	571	0.367	6.34	2.212	0.83	8.2	30.7	18	1.6	14.5	4.3	0.3	1	14	13.9	0.3
1320627	Drill Core		0.056	13.7	5	0.89	722	0.272	7.54	2.648	2.23	0.7	44.0	30	0.9	11.4	5.0	0.3	<1	14	12.8	<0.1
1320628	Drill Core		0.075	12.3	4	0.82	670	0.285	7.34	2.479	2.15	0.6	49.7	29	0.9	10.7	4.9	0.3	<1	15	11.1	<0.1
1320629	Drill Core		0.068	12.4	3	1.01	492	0.256	6.52	2.711	1.63	0.4	58.6	25	0.9	7.6	4.6	0.2	<1	14	12.0	<0.1
1320630	Drill Core		0.069	15.2	3	0.67	551	0.226	6.45	2.595	1.64	0.5	60.3	32	1.0	9.7	4.1	0.2	<1	13	11.6	<0.1
1320631	Drill Core		0.097	11.9	4	1.03	642	0.303	7.85	3.623	2.12	0.5	45.4	28	1.0	10.2	4.3	0.2	1	16	12.9	<0.1
1320632	Drill Core		0.078	13.5	3	1.01	596	0.299	7.54	3.166	2.01	0.7	55.9	34	1.0	10.3	4.5	0.3	<1	15	12.6	<0.1
1320633	Drill Core		0.066	15.0	3	0.80	639	0.243	7.02	3.104	1.60	0.6	60.5	33	0.9	9.8	4.5	0.3	<1	11	12.2	<0.1
1320634	Drill Core		0.051	15.7	3	0.52	479	0.193	6.30	2.914	1.23	0.4	56.5	31	0.8	9.2	3.9	0.3	<1	10	8.2	<0.1
1320635	Drill Core		0.082	13.8	4	0.84	978	0.360	7.85	3.002	2.33	0.7	55.6	31	1.1	11.7	5.6	0.3	1	16	11.4	<0.1
1320636	Drill Core		0.085	11.4	4	1.24	890	0.335	8.05	3.297	2.52	0.7	42.6	25	1.0	9.1	5.0	0.3	<1	14	13.5	<0.1
1320637	Drill Core		0.071	13.8	4	1.23	2062	0.297	7.39	2.324	2.48	0.7	51.1	30	1.0	10.4	4.7	0.3	<1	15	17.1	<0.1
1320638	Drill Core		0.087	10.8	4	1.62	808	0.316	7.61	2.664	3.20	0.4	23.0	25	0.7	11.0	4.8	0.3	<1	14	22.6	<0.1
1320639	Drill Core		0.092	9.6	4	1.83	635	0.338	7.34	2.219	3.48	0.7	21.3	21	0.7	12.0	4.7	0.3	1	17	27.0	<0.1
1320640	Drill Core		0.087	10.4	4	1.66	665	0.323	7.50	2.219	3.49	0.7	27.0	23	0.9	13.0	4.9	0.3	<1	16	26.0	<0.1
1320641	Drill Core		0.103	12.6	4	1.17	740	0.318	7.44	2.111	3.54	0.6	14.5	30	1.0	12.4	5.6	0.3	<1	13	19.0	<0.1
1320642	Drill Core		0.076	10.0	5	1.00	652	0.303	7.04	1.928	3.06	0.7	14.4	22	0.8	15.3	4.7	0.3	2	13	16.7	<0.1
1320643	Drill Core		0.078	10.2	5	0.89	885	0.277	7.79	3.027	3.11	0.5	16.2	22	0.7	11.4	4.9	0.2	2	12	16.6	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000310.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320614	Drill Core	76.0	1.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320615	Drill Core	73.5	0.7	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320616	Drill Core	64.2	0.9	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320617	Drill Core	60.6	0.5	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320618	Drill Core	50.0	0.9	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320619	Drill Core	56.6	1.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320620	Drill Core	32.4	1.5	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320621	Drill Core	52.0	0.6	<0.05	<0.005	<1	0.8	<0.5	<0.01	
1320622	Drill Core	45.4	1.5	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320623	Drill Core	67.0	1.0	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320624	Drill Core	64.3	0.9	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320625	Rock Pulp	23.1	1.0	0.06	<0.005	<1	<0.5	<0.5	0.02	
1320626	Rock Pulp	19.2	1.0	0.11	0.085	<1	<0.5	<0.5	0.09	
1320627	Drill Core	58.7	1.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320628	Drill Core	56.7	1.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320629	Drill Core	52.4	1.8	0.06	<0.005	<1	<0.5	<0.5	<0.01	
1320630	Drill Core	42.7	1.6	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320631	Drill Core	48.5	1.2	0.06	<0.005	<1	<0.5	<0.5	<0.01	
1320632	Drill Core	51.7	1.6	0.06	<0.005	<1	<0.5	<0.5	<0.01	
1320633	Drill Core	42.3	1.6	0.06	<0.005	<1	<0.5	<0.5	<0.01	
1320634	Drill Core	31.8	1.7	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320635	Drill Core	58.7	1.6	0.06	<0.005	<1	<0.5	<0.5	<0.01	
1320636	Drill Core	52.5	1.2	0.08	<0.005	<1	<0.5	<0.5	<0.01	
1320637	Drill Core	63.6	1.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320638	Drill Core	68.9	0.6	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320639	Drill Core	62.7	0.6	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320640	Drill Core	70.7	0.8	0.07	<0.005	<1	<0.5	<0.5	<0.01	
1320641	Drill Core	71.1	0.4	0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320642	Drill Core	68.2	0.4	0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320643	Drill Core	66.4	0.5	<0.05	<0.005	<1	<0.5	<0.5	<0.01	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000310.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320644	Drill Core	4.69	11	0.2	4.1	10.0	56	<0.1	4.3	11.6	737	3.46	3	1.1	3.0	316	<0.1	0.2	<0.1	97	2.30
1320645	Drill Core	5.18	4	0.2	4.0	7.9	65	<0.1	2.7	11.6	868	3.24	3	1.1	2.8	241	<0.1	0.2	<0.1	95	2.58
1320646	Drill Core	5.48	4	0.2	2.7	8.4	66	<0.1	2.3	13.6	850	3.62	4	1.3	2.7	224	<0.1	0.3	<0.1	106	2.77
1320647	Drill Core	5.59	4	0.2	2.1	8.3	63	<0.1	3.3	16.8	851	3.29	3	1.3	3.2	199	<0.1	0.4	<0.1	109	2.73
1320648	Drill Core	5.18	3	0.1	1.7	8.2	36	<0.1	2.2	7.6	814	2.70	6	0.8	3.9	304	<0.1	0.8	<0.1	70	2.94
1320649	Drill Core	5.41	4	0.1	1.7	7.2	33	<0.1	2.4	8.2	853	3.05	13	0.5	3.7	192	<0.1	1.6	<0.1	63	2.01
1320650	Rock Pulp	0.06	8	3.3	25.1	4.6	45	0.5	23.6	11.6	529	2.62	3	0.9	2.1	274	0.3	0.8	<0.1	88	1.88
1320651	Rock Pulp	0.05	>10000	12.6	69.7	23.1	77	1.0	23.5	4.0	522	3.62	587	3.7	3.7	44	0.7	170.2	0.7	116	15.01
1320652	Drill Core	4.91	4	<0.1	2.6	10.6	35	<0.1	2.4	8.5	893	3.14	11	0.6	3.6	214	<0.1	2.8	<0.1	56	1.94
1320653	Drill Core	5.82	6	0.2	1.7	12.3	22	<0.1	1.9	5.8	644	2.78	6	1.5	3.3	210	<0.1	0.7	<0.1	57	1.62
1320654	Drill Core	5.01	4	0.2	2.1	9.9	45	<0.1	3.8	12.9	665	3.21	3	1.3	3.7	238	<0.1	0.4	<0.1	81	2.00
1320655	Drill Core	5.76	5	0.2	2.0	9.0	52	<0.1	3.5	10.6	517	3.03	3	1.1	4.2	195	<0.1	0.3	<0.1	75	1.69
1320656	Drill Core	5.30	4	0.1	1.7	7.4	57	<0.1	3.5	12.3	423	2.92	2	1.2	4.3	171	<0.1	0.2	<0.1	63	1.59
1320657	Drill Core	4.59	18	0.2	3.1	9.1	52	0.1	3.7	11.6	672	3.17	5	1.5	3.6	296	<0.1	0.4	<0.1	88	2.16
1320658	Drill Core	5.17	10	0.2	2.0	8.2	29	<0.1	3.3	8.5	929	2.89	9	1.1	3.6	237	<0.1	1.1	<0.1	69	2.81
1320659	Drill Core	5.15	6	<0.1	1.3	7.6	30	<0.1	2.6	7.8	788	2.82	10	0.8	3.5	207	<0.1	0.7	<0.1	79	2.65
1320660	Drill Core	4.67	4	0.2	1.5	8.3	32	<0.1	3.4	8.3	704	2.94	7	1.0	3.7	191	<0.1	0.4	<0.1	84	3.92
1320661	Drill Core	5.59	8	0.1	2.7	8.8	34	<0.1	4.2	8.2	653	2.44	4	0.9	3.3	313	<0.1	0.3	<0.1	70	2.89
1320662	Drill Core	4.75	7	0.3	5.0	10.4	70	<0.1	3.9	11.8	776	3.43	7	1.2	3.2	254	<0.1	0.4	0.1	79	2.78
1320663	Drill Core	5.12	5	0.3	3.5	7.4	41	<0.1	2.4	6.7	752	2.70	13	0.9	4.3	218	<0.1	1.4	<0.1	47	2.93
1320664	Drill Core	5.53	3	0.4	1.9	8.4	22	<0.1	1.4	3.5	511	2.41	14	0.9	4.7	178	<0.1	2.0	<0.1	34	2.07
1320665	Drill Core	4.77	5	0.3	4.2	9.3	33	<0.1	1.9	5.0	624	2.63	5	1.0	4.3	247	<0.1	0.5	<0.1	52	1.72
1320666	Drill Core	4.65	4	0.3	3.9	7.2	24	<0.1	2.2	5.0	644	2.50	6	1.1	5.1	218	<0.1	0.6	<0.1	46	1.84
1320667	Drill Core	5.28	4	0.2	6.6	7.6	28	<0.1	4.2	6.2	605	2.34	7	1.3	4.9	180	<0.1	0.5	<0.1	42	2.66
1320668	Drill Core	5.20	4	0.3	1.2	8.7	16	<0.1	1.3	3.7	534	2.18	8	1.1	5.4	166	<0.1	0.5	<0.1	27	1.55
1320669	Drill Core	4.63	9	0.6	69.5	7.6	49	0.2	4.4	8.0	754	2.90	6	1.2	5.7	189	<0.1	0.3	<0.1	73	3.38
1320670	Drill Core	5.02	4	0.3	2.9	7.6	19	<0.1	1.0	3.5	423	2.51	4	1.7	6.6	180	<0.1	0.1	<0.1	35	0.95
1320671	Drill Core	5.04	8	0.2	4.2	10.2	83	<0.1	5.2	13.5	906	3.52	4	0.9	3.1	255	<0.1	0.2	<0.1	96	3.34
1320672	Drill Core	5.39	4	0.1	5.8	7.2	77	<0.1	6.1	11.7	579	3.55	4	0.8	2.7	303	<0.1	0.2	<0.1	96	2.65
1320673	Drill Core	5.17	6	0.4	86.7	8.2	102	0.4	10.3	15.0	580	3.84	6	1.1	2.9	370	<0.1	0.3	<0.1	125	2.74

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000310.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
	Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320644	Drill Core	0.093	11.4	8	1.44	896	0.329	7.23	1.943	3.66	0.8	11.6	25	0.9	14.7	5.7	0.3	<1	16	22.0	<0.1
1320645	Drill Core	0.104	11.0	5	1.31	800	0.373	7.45	2.536	3.13	0.7	36.2	26	0.8	17.0	5.7	0.3	1	17	23.8	<0.1
1320646	Drill Core	0.119	12.2	4	1.29	811	0.459	8.42	2.711	3.47	0.8	34.6	27	1.0	18.4	6.5	0.3	1	20	23.5	<0.1
1320647	Drill Core	0.098	12.5	7	1.32	856	0.389	8.00	1.872	3.47	1.3	44.0	28	0.9	16.1	5.3	0.3	1	20	23.8	<0.1
1320648	Drill Core	0.069	13.6	7	0.85	1276	0.262	6.99	2.982	2.52	0.3	32.9	29	0.5	15.6	3.7	0.2	<1	16	17.5	<0.1
1320649	Drill Core	0.090	11.1	7	0.83	1052	0.312	7.64	3.126	2.75	0.2	10.8	25	0.6	13.6	3.4	0.2	2	16	17.0	<0.1
1320650	Rock Pulp	0.054	9.4	34	0.86	513	0.294	5.51	2.142	0.95	26.4	39.9	19	0.8	13.5	3.4	0.2	<1	11	13.5	<0.1
1320651	Rock Pulp	0.065	15.3	43	0.76	34	0.118	2.11	0.015	0.40	>200	27.9	30	2.3	16.9	3.3	0.2	<1	4	44.7	1.8
1320652	Drill Core	0.096	11.9	8	0.78	1139	0.331	7.66	2.845	2.97	0.4	10.8	27	2.0	13.5	4.1	0.3	<1	17	13.8	<0.1
1320653	Drill Core	0.090	9.0	7	0.66	1131	0.247	7.54	3.176	2.49	0.2	47.8	21	3.0	12.2	3.4	0.4	<1	14	12.8	<0.1
1320654	Drill Core	0.087	10.8	7	1.13	1001	0.297	7.56	1.898	2.79	0.9	61.3	24	1.1	13.0	5.1	0.3	2	14	20.3	<0.1
1320655	Drill Core	0.060	12.6	7	1.02	741	0.298	7.57	1.690	3.12	0.7	77.7	24	1.2	13.9	4.6	0.3	1	16	19.1	<0.1
1320656	Drill Core	0.054	11.6	6	1.09	854	0.276	7.24	0.858	3.64	0.9	76.0	23	1.1	11.7	5.1	0.3	2	16	15.1	<0.1
1320657	Drill Core	0.095	12.3	15	1.08	992	0.295	7.63	2.169	2.59	0.7	64.1	27	1.4	12.6	4.9	0.3	1	13	13.3	<0.1
1320658	Drill Core	0.093	10.2	8	0.83	1078	0.346	7.62	2.959	3.03	0.4	29.4	24	1.8	13.1	4.2	0.3	<1	18	9.8	<0.1
1320659	Drill Core	0.091	9.4	8	0.85	1121	0.330	7.58	2.558	3.11	0.5	34.1	22	1.7	11.9	3.8	0.2	<1	18	11.3	<0.1
1320660	Drill Core	0.075	11.4	10	0.84	1212	0.313	7.02	1.482	3.14	0.6	51.1	26	0.8	13.0	4.6	0.3	<1	16	11.6	<0.1
1320661	Drill Core	0.054	9.3	8	0.88	1225	0.231	7.58	2.219	3.37	0.4	50.4	20	1.0	9.4	3.7	0.2	<1	12	15.4	<0.1
1320662	Drill Core	0.108	12.3	6	1.18	936	0.338	7.83	0.967	3.18	1.1	18.1	26	0.7	9.9	4.6	0.3	<1	14	18.1	<0.1
1320663	Drill Core	0.072	13.4	6	0.79	956	0.308	7.34	1.853	3.13	0.6	23.0	31	0.3	12.7	5.3	0.3	1	15	15.0	<0.1
1320664	Drill Core	0.054	14.7	5	0.43	1353	0.276	6.93	1.700	2.76	0.4	27.0	33	0.3	11.5	5.6	0.3	<1	13	9.0	<0.1
1320665	Drill Core	0.064	12.5	8	0.49	1442	0.236	7.16	1.875	2.69	0.4	47.2	27	0.5	8.8	5.7	0.3	1	12	9.4	<0.1
1320666	Drill Core	0.056	13.1	6	0.57	1388	0.241	7.01	2.613	2.71	0.3	73.3	30	0.3	11.1	4.8	0.3	<1	13	7.1	<0.1
1320667	Drill Core	0.047	13.4	8	0.68	1537	0.206	6.30	1.074	2.25	0.4	63.2	30	0.6	12.0	4.6	0.3	<1	12	8.2	<0.1
1320668	Drill Core	0.034	14.9	3	0.38	1224	0.197	6.41	2.040	2.50	0.3	79.2	33	0.5	11.3	4.0	0.3	<1	10	6.9	<0.1
1320669	Drill Core	0.077	16.3	9	0.75	1030	0.274	6.74	1.317	2.53	0.8	64.6	35	1.0	10.2	6.2	0.4	1	11	7.5	<0.1
1320670	Drill Core	0.032	19.1	3	0.37	1143	0.221	6.95	3.208	2.41	0.3	138.0	40	1.1	10.6	4.5	0.3	<1	11	6.4	<0.1
1320671	Drill Core	0.080	10.9	14	1.61	752	0.338	7.44	1.245	2.77	1.2	48.5	24	0.9	11.4	5.5	0.3	1	15	15.2	<0.1
1320672	Drill Core	0.077	10.0	13	1.54	757	0.351	7.07	2.381	2.47	0.7	48.0	23	0.8	13.8	4.9	0.3	1	17	12.6	<0.1
1320673	Drill Core	0.066	7.9	24	1.65	944	0.415	6.84	1.866	2.42	0.8	42.4	20	0.9	11.5	6.1	0.4	<1	19	15.9	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000310.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320644	Drill Core	73.6	0.4	0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320645	Drill Core	58.5	1.1	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320646	Drill Core	70.4	1.0	0.08	<0.005	<1	<0.5	<0.5	<0.01	
1320647	Drill Core	83.9	1.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320648	Drill Core	54.5	0.9	0.06	<0.005	<1	<0.5	<0.5	<0.01	
1320649	Drill Core	57.1	0.3	0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320650	Rock Pulp	22.3	1.1	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320651	Rock Pulp	24.7	0.8	0.07	<0.005	<1	1.3	4.6	5.68	I.S.
1320652	Drill Core	58.1	0.3	0.10	<0.005	<1	<0.5	0.6	<0.01	
1320653	Drill Core	54.2	1.3	0.08	<0.005	<1	<0.5	<0.5	<0.01	
1320654	Drill Core	66.4	1.6	<0.05	<0.005	<1	<0.5	0.8	<0.01	
1320655	Drill Core	79.2	1.9	0.06	<0.005	<1	<0.5	0.7	<0.01	
1320656	Drill Core	93.6	2.4	0.06	<0.005	<1	<0.5	0.7	<0.01	
1320657	Drill Core	53.5	1.8	<0.05	<0.005	<1	<0.5	0.6	<0.01	
1320658	Drill Core	56.1	0.8	0.07	<0.005	<1	<0.5	<0.5	<0.01	
1320659	Drill Core	62.0	1.0	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320660	Drill Core	59.8	1.5	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320661	Drill Core	72.0	1.5	<0.05	<0.005	<1	<0.5	0.5	<0.01	
1320662	Drill Core	85.5	0.5	0.06	<0.005	<1	<0.5	0.7	<0.01	
1320663	Drill Core	78.0	0.6	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320664	Drill Core	62.7	0.7	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320665	Drill Core	59.7	1.4	0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320666	Drill Core	52.0	2.1	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320667	Drill Core	53.3	1.7	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320668	Drill Core	61.4	2.0	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320669	Drill Core	68.6	1.6	0.08	<0.005	<1	<0.5	0.6	<0.01	
1320670	Drill Core	53.9	3.8	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320671	Drill Core	65.1	1.3	0.06	<0.005	<1	<0.5	0.7	<0.01	
1320672	Drill Core	57.7	1.3	0.08	<0.005	<1	<0.5	<0.5	<0.01	
1320673	Drill Core	52.8	1.2	0.07	<0.005	<1	<0.5	0.5	0.01	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000310.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320674	Drill Core	5.14	5	0.4	31.3	6.3	88	0.2	5.2	9.3	569	3.30	6	1.1	3.3	353	<0.1	0.3	<0.1	106	2.85
1320675	Rock Pulp	0.06	9	4.0	24.4	4.5	47	0.5	23.5	11.9	535	2.62	2	0.9	2.1	254	0.2	0.7	<0.1	85	1.85
1320676	Rock Pulp	0.06	230	203.1	2060.1	44.9	290	0.6	40.3	15.8	766	4.37	15	0.7	2.0	272	0.9	2.0	0.4	128	2.81
1320677	Drill Core	4.22	11	<0.1	9.6	7.8	99	0.3	3.6	10.1	837	3.73	8	0.8	2.8	205	<0.1	0.6	<0.1	77	3.02
1320678	Drill Core	5.25	3	0.2	2.0	7.9	52	<0.1	1.4	5.9	704	2.95	6	0.8	3.5	290	<0.1	0.5	<0.1	53	1.77
1320679	Drill Core	5.07	5	0.4	1.4	6.6	52	<0.1	2.9	6.2	738	2.69	8	0.7	3.4	247	<0.1	0.7	<0.1	41	2.13
1320680	Drill Core	4.85	6	0.3	0.7	5.7	52	<0.1	6.3	4.9	590	2.07	6	0.8	2.2	476	<0.1	0.6	<0.1	31	2.45
1320681	Drill Core	4.11	5	0.2	0.9	5.0	52	<0.1	2.7	4.6	507	1.83	4	0.8	2.6	352	<0.1	0.5	<0.1	33	2.00
1320682	Drill Core	4.79	4	0.4	0.9	9.1	52	<0.1	3.1	5.8	559	2.78	6	1.7	5.1	356	<0.1	0.5	0.1	43	2.21
1320683	Drill Core	4.83	4	0.2	1.2	8.7	30	<0.1	2.1	2.8	280	1.94	5	1.2	7.2	302	<0.1	0.5	0.1	29	1.08
1320684	Drill Core	3.05	4	0.2	1.0	8.7	44	<0.1	2.8	4.5	479	2.45	5	1.2	6.6	328	<0.1	0.4	<0.1	38	1.87
1320685	Drill Core	3.13	4	0.1	1.3	8.3	33	<0.1	2.3	4.3	393	2.07	8	1.0	6.8	295	<0.1	0.6	0.1	26	1.42
1320686	Drill Core	2.86	4	<0.1	1.1	9.6	46	<0.1	3.7	5.0	501	2.47	6	1.0	5.3	298	<0.1	0.7	0.2	34	1.67
1320687	Drill Core	3.05	4	0.1	1.0	8.1	66	<0.1	4.9	8.1	881	3.36	6	0.9	4.6	280	<0.1	0.5	0.1	52	2.99
1320688	Drill Core	3.54	4	0.2	0.9	7.4	67	<0.1	10.6	6.3	583	2.68	7	1.3	5.6	223	<0.1	0.6	<0.1	32	2.69
1320689	Drill Core	3.65	4	0.2	0.8	6.9	66	<0.1	6.7	7.7	680	2.58	9	1.1	5.2	209	<0.1	0.9	0.2	39	2.97
1320690	Drill Core	4.03	5	0.7	0.9	7.3	58	<0.1	6.5	9.6	703	3.75	8	1.3	4.7	366	<0.1	1.0	<0.1	63	3.34
1320691	Drill Core	2.01	4	1.0	7.6	8.3	39	<0.1	7.4	3.9	565	1.08	5	1.4	1.2	490	0.4	0.6	<0.1	22	22.44
1320692	Drill Core	3.17	4	1.5	20.4	7.3	45	<0.1	16.4	5.4	470	1.32	7	1.9	3.6	474	0.5	1.2	<0.1	45	18.37
1320693	Drill Core	2.37	36	2.3	11.8	11.0	26	0.2	8.9	8.0	294	0.81	16	1.6	2.6	728	0.3	2.3	<0.1	33	25.88
1320694	Drill Core	3.25	73	9.2	27.6	20.4	89	0.3	21.8	11.6	898	3.57	19	2.6	3.1	771	0.8	10.4	<0.1	102	6.20
1320695	Drill Core	3.27	8	0.6	4.3	3.9	35	<0.1	5.4	4.2	342	1.58	8	0.9	0.8	123	0.1	7.8	<0.1	38	2.24
1320696	Drill Core	3.20	8	0.9	2.4	5.7	36	<0.1	4.6	5.3	378	2.06	8	1.1	1.3	127	0.1	9.6	<0.1	43	2.11
1320697	Drill Core	3.01	51	0.3	3.4	6.1	38	<0.1	5.3	7.5	593	2.64	8	0.5	1.0	114	0.1	10.2	<0.1	67	3.00
1320698	Drill Core	3.29	7	0.6	34.6	13.1	119	<0.1	23.2	30.3	1473	7.50	9	0.7	1.3	182	0.3	11.2	<0.1	256	5.63
1320699	Drill Core	3.41	5	0.5	85.1	12.1	104	0.1	17.0	30.0	1456	7.03	7	0.5	2.2	227	0.4	10.1	<0.1	213	5.52
1320700	Rock Pulp	0.05	13	3.1	23.7	4.6	46	0.5	23.7	11.5	524	2.55	4	0.9	2.2	248	0.1	0.9	<0.1	82	1.82
1320701	Rock Pulp	0.06	952	13.1	9891.1	20.6	133	3.3	611.4	19.8	889	8.17	2	0.3	1.7	131	0.4	15.8	0.8	100	2.11
1320702	Drill Core	3.16	4	0.6	46.8	9.9	95	<0.1	18.8	17.2	1020	5.18	11	0.6	3.1	195	<0.1	7.6	<0.1	150	4.20
1320703	Drill Core	3.28	16	0.5	47.7	7.4	58	<0.1	4.7	6.2	595	2.74	14	0.7	3.3	155	0.2	7.5	<0.1	32	2.67

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000310.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320674	Drill Core		0.069	11.6	13	1.38	802	0.435	7.07	1.470	2.76	0.8	45.5	26	0.8	13.1	5.2	0.3	1	18	15.2	<0.1
1320675	Rock Pulp		0.051	8.9	41	0.86	475	0.303	5.29	2.172	0.87	29.3	40.6	19	0.8	13.1	3.6	0.2	<1	10	13.0	<0.1
1320676	Rock Pulp		0.062	8.8	68	1.45	576	0.398	6.65	2.352	0.85	9.9	32.8	18	1.9	15.4	4.6	0.3	<1	15	16.8	0.3
1320677	Drill Core		0.083	10.2	10	1.37	787	0.363	6.81	2.409	2.18	0.6	35.2	24	0.7	11.6	3.2	0.2	1	20	11.6	<0.1
1320678	Drill Core		0.078	14.0	4	0.80	874	0.292	7.19	3.368	1.62	0.4	43.6	30	0.5	11.1	3.9	0.2	<1	17	7.9	<0.1
1320679	Drill Core		0.086	11.4	5	0.86	667	0.292	6.95	2.816	1.76	0.6	40.4	27	1.0	10.8	3.7	0.2	<1	16	7.4	<0.1
1320680	Drill Core		0.054	8.6	13	0.79	778	0.226	7.81	2.960	1.44	0.4	16.4	18	0.5	6.8	4.1	0.2	2	8	9.5	<0.1
1320681	Drill Core		0.042	8.8	5	0.63	581	0.227	6.90	3.078	1.55	0.4	27.9	19	1.8	6.2	6.7	0.4	2	5	6.2	<0.1
1320682	Drill Core		0.048	16.9	8	0.63	866	0.327	7.22	1.995	2.17	0.9	49.0	35	1.1	14.7	7.7	0.6	2	12	8.5	<0.1
1320683	Drill Core		0.033	18.5	6	0.40	466	0.194	7.05	2.336	1.60	0.5	28.9	35	0.7	9.0	6.8	0.6	1	5	10.1	<0.1
1320684	Drill Core		0.041	18.7	7	0.61	696	0.253	6.72	1.875	1.94	1.3	36.4	36	0.9	12.6	7.4	0.6	2	9	9.6	<0.1
1320685	Drill Core		0.027	17.1	4	0.53	1012	0.173	6.59	1.981	1.58	0.6	39.4	34	0.9	9.9	6.0	0.5	<1	6	17.9	<0.1
1320686	Drill Core		0.035	16.7	8	0.68	918	0.245	7.46	1.534	2.63	0.8	34.4	36	1.8	12.7	7.9	0.6	1	9	15.3	<0.1
1320687	Drill Core		0.055	16.3	8	0.85	968	0.353	7.11	0.837	2.41	0.8	27.3	35	1.4	15.4	7.0	0.4	1	14	16.1	<0.1
1320688	Drill Core		0.050	18.9	24	0.85	813	0.314	7.63	0.313	2.78	0.6	75.8	42	1.9	16.3	9.5	0.6	<1	13	23.3	<0.1
1320689	Drill Core		0.033	13.2	12	0.93	950	0.256	6.50	1.027	2.05	0.6	48.7	29	2.0	12.7	6.7	0.5	<1	10	16.1	<0.1
1320690	Drill Core		0.072	20.0	12	0.62	686	0.357	7.42	1.481	1.60	1.0	55.9	45	1.4	17.2	8.4	0.5	2	15	21.2	<0.1
1320691	Drill Core		0.028	5.9	7	1.52	131	0.084	2.15	0.013	0.34	0.4	17.2	11	0.2	9.2	1.0	<0.1	<1	4	14.1	<0.1
1320692	Drill Core		0.034	11.4	29	0.74	492	0.168	4.16	0.013	0.73	0.5	22.4	23	0.7	12.4	3.3	0.2	1	8	19.3	<0.1
1320693	Drill Core		0.032	8.7	16	1.32	118	0.090	2.55	0.014	0.41	2.5	14.5	16	0.2	6.1	2.1	0.1	1	3	15.0	<0.1
1320694	Drill Core		0.051	13.1	45	1.82	582	0.221	5.89	0.024	0.99	15.9	11.6	27	0.9	9.8	2.8	0.2	1	16	39.2	<0.1
1320695	Drill Core		0.016	3.2	2	0.75	861	0.118	7.26	0.018	1.11	6.2	4.9	8	0.5	4.4	1.9	0.1	<1	5	47.2	<0.1
1320696	Drill Core		0.025	5.2	4	0.71	910	0.146	6.75	0.020	1.22	5.8	5.3	12	0.8	5.5	2.1	0.1	1	7	37.8	<0.1
1320697	Drill Core		0.030	5.1	5	1.02	897	0.189	6.81	0.035	0.93	3.2	5.1	11	0.6	5.3	1.8	0.1	1	10	43.8	<0.1
1320698	Drill Core		0.075	8.1	34	2.24	395	0.489	6.92	1.120	1.29	6.5	4.6	19	1.3	11.3	2.1	0.1	2	25	27.0	0.2
1320699	Drill Core		0.068	11.4	23	2.29	375	0.337	6.44	0.425	1.58	1.5	3.4	25	1.2	9.8	1.8	0.1	1	20	75.3	0.6
1320700	Rock Pulp		0.059	9.0	37	0.80	489	0.289	5.43	2.119	0.82	28.4	38.8	19	0.7	13.2	3.4	0.2	<1	10	11.8	<0.1
1320701	Rock Pulp		0.065	3.6	720	1.05	126	0.139	5.02	0.192	2.74	3.0	12.6	8	1.4	5.2	4.6	0.3	<1	7	9.0	1.2
1320702	Drill Core		0.076	11.9	38	1.60	559	0.353	7.00	0.334	1.39	1.1	4.5	27	1.0	12.2	2.7	0.2	2	19	42.1	0.2
1320703	Drill Core		0.020	9.5	8	0.97	527	0.132	5.92	1.091	1.23	0.9	7.2	21	1.0	6.9	2.1	0.1	1	11	27.3	0.5

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000310.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320674	Drill Core	74.7	1.3	0.06	<0.005	<1	<0.5	<0.5	<0.01	
1320675	Rock Pulp	21.4	1.2	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320676	Rock Pulp	18.4	1.0	0.17	0.093	<1	<0.5	<0.5	0.10	
1320677	Drill Core	54.5	1.0	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320678	Drill Core	42.7	1.4	0.07	<0.005	<1	<0.5	<0.5	<0.01	
1320679	Drill Core	44.8	1.1	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320680	Drill Core	43.6	0.5	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320681	Drill Core	52.0	0.8	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320682	Drill Core	80.3	1.5	0.11	<0.005	<1	<0.5	<0.5	<0.01	
1320683	Drill Core	67.8	0.9	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320684	Drill Core	74.0	1.0	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320685	Drill Core	63.0	1.2	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320686	Drill Core	92.4	0.9	0.08	<0.005	<1	<0.5	0.6	0.02	
1320687	Drill Core	84.3	0.7	<0.05	<0.005	<1	<0.5	0.5	0.01	
1320688	Drill Core	95.8	2.0	0.05	<0.005	1	<0.5	0.6	<0.01	
1320689	Drill Core	72.1	1.3	0.06	<0.005	<1	<0.5	0.6	0.02	
1320690	Drill Core	59.1	1.3	0.08	<0.005	<1	<0.5	<0.5	0.01	
1320691	Drill Core	10.8	0.6	<0.05	<0.005	<1	1.7	<0.5	0.11	
1320692	Drill Core	35.4	0.6	<0.05	<0.005	2	0.9	<0.5	0.25	
1320693	Drill Core	15.7	0.5	<0.05	<0.005	<1	2.8	<0.5	0.36	
1320694	Drill Core	33.0	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.25	
1320695	Drill Core	22.7	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.05	
1320696	Drill Core	27.2	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.05	
1320697	Drill Core	23.5	0.2	0.05	<0.005	<1	<0.5	<0.5	0.05	
1320698	Drill Core	54.4	0.3	0.09	<0.005	<1	<0.5	<0.5	0.03	
1320699	Drill Core	60.7	0.2	0.09	<0.005	<1	0.5	<0.5	0.06	
1320700	Rock Pulp	22.8	1.2	0.05	<0.005	<1	<0.5	<0.5	0.01	
1320701	Rock Pulp	57.6	0.5	0.18	0.009	9	<0.5	<0.5	1.52	
1320702	Drill Core	42.9	0.2	0.15	<0.005	<1	<0.5	<0.5	0.03	
1320703	Drill Core	30.1	0.3	0.10	<0.005	1	<0.5	<0.5	0.30	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000310.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320704	Drill Core	2.99	20	0.5	19.8	5.0	53	<0.1	2.0	4.5	483	2.65	4	0.7	2.6	169	<0.1	13.8	<0.1	13	2.09
1320705	Drill Core	3.01	8	1.0	12.3	5.9	44	<0.1	1.3	3.4	597	2.47	4	0.6	3.4	248	0.3	6.1	<0.1	22	2.82
1320706	Drill Core	3.01	6	1.9	26.5	5.0	43	<0.1	1.3	4.3	443	3.10	4	0.7	3.2	223	<0.1	3.8	<0.1	19	1.82
1320707	Drill Core	2.39	8	2.9	9.7	4.8	50	<0.1	2.6	6.5	428	3.01	3	0.9	3.2	209	0.1	7.9	<0.1	34	2.12
1320708	Drill Core	2.81	5	1.8	9.4	5.6	34	<0.1	3.2	3.5	384	2.22	4	0.5	2.6	246	<0.1	10.1	<0.1	20	2.03
1320709	Drill Core	3.06	6	2.3	43.1	7.6	54	<0.1	6.8	5.0	554	2.59	5	0.9	2.4	230	0.3	12.7	<0.1	28	3.22
1320710	Drill Core	3.13	19	3.4	94.1	4.6	73	0.1	3.0	4.5	535	3.59	4	0.9	2.5	141	0.2	10.5	<0.1	21	2.16
1320711	Drill Core	3.35	8	1.4	24.6	8.1	104	0.1	6.9	13.1	1103	6.04	8	1.0	2.4	169	0.4	15.3	<0.1	105	2.65
1320712	Drill Core	3.47	5	1.0	24.7	10.6	101	<0.1	6.0	14.3	970	5.03	9	0.8	3.1	245	0.2	12.1	<0.1	116	2.78
1320713	Drill Core	3.17	7	0.5	14.0	13.1	50	<0.1	3.8	5.2	696	2.43	5	0.4	2.0	255	0.2	5.6	<0.1	42	3.02
1320714	Drill Core	3.08	26	0.9	38.9	13.8	50	0.2	5.9	8.3	710	2.78	4	0.6	2.4	279	0.4	9.0	<0.1	51	3.93
1320715	Drill Core	3.31	6	0.7	43.3	18.9	82	<0.1	15.8	19.4	984	4.87	7	0.4	2.0	234	0.2	15.0	0.1	189	4.68
1320716	Drill Core	3.01	4	0.3	87.4	17.0	78	0.1	15.6	24.8	901	5.52	6	0.5	0.9	201	<0.1	6.6	0.2	218	3.47
1320717	Drill Core	3.20	12	0.3	63.9	8.7	84	0.1	14.1	23.1	1131	5.26	4	0.4	1.2	172	0.3	12.0	<0.1	196	6.30
1320718	Drill Core	3.40	5	0.6	28.0	18.1	107	<0.1	15.4	23.7	1089	5.04	16	0.8	1.1	208	0.4	73.2	<0.1	191	6.23
1320719	Drill Core	3.45	3	0.6	75.5	9.9	76	0.2	16.5	26.3	987	5.48	10	0.5	1.2	174	0.1	17.9	0.6	215	4.66
1320720	Drill Core	3.14	3	0.7	34.7	6.5	72	<0.1	13.3	21.7	945	4.70	5	0.3	0.6	224	<0.1	5.0	<0.1	193	5.04
1320721	Drill Core	3.53	3	0.8	16.6	6.4	97	<0.1	16.3	26.5	1094	5.81	4	0.5	0.9	289	<0.1	2.4	0.1	229	6.23
1320722	Drill Core	2.89	3	0.4	52.6	5.0	76	<0.1	14.4	24.8	947	5.36	4	0.2	0.9	198	<0.1	2.9	<0.1	210	4.83
1320723	Drill Core	2.86	4	0.9	45.3	5.3	51	<0.1	3.5	18.7	575	3.93	7	0.3	1.6	207	<0.1	1.3	<0.1	92	3.16
1320724	Drill Core	3.21	3	0.3	44.6	5.5	44	<0.1	11.4	13.6	642	3.79	7	0.7	2.2	256	<0.1	1.3	<0.1	96	3.30
1320725	Rock Pulp	0.06	9	3.4	24.9	4.4	44	0.4	23.6	12.5	499	2.59	3	0.8	1.9	234	0.2	0.9	<0.1	88	1.83
1320726	Rock Pulp	0.06	234	201.9	2010.6	43.9	286	0.6	38.1	15.5	778	4.37	15	0.8	2.1	278	1.2	1.8	0.4	126	2.83
1320727	Drill Core	3.31	4	<0.1	29.3	9.2	46	<0.1	2.2	12.8	514	3.76	4	0.5	1.7	275	<0.1	0.7	<0.1	98	2.15
1320728	Drill Core	3.19	3	2.5	42.7	14.9	86	0.1	12.2	20.9	936	5.33	7	0.5	1.1	240	0.1	1.8	0.2	191	3.19
1320729	Drill Core	3.55	3	0.3	6.2	5.2	37	<0.1	2.9	8.5	507	3.80	6	0.5	2.3	214	<0.1	0.7	<0.1	99	2.11
1320730	Drill Core	3.20	3	0.6	28.7	9.9	39	<0.1	1.9	9.2	564	3.64	5	0.5	1.6	203	<0.1	1.6	<0.1	88	2.49
1320731	Drill Core	3.50	3	0.3	10.9	7.5	57	<0.1	3.4	13.2	746	4.18	5	0.5	1.8	137	<0.1	3.4	<0.1	113	3.40
1320732	Drill Core	3.36	4	0.2	6.1	6.9	53	<0.1	3.0	12.5	746	4.03	4	0.5	2.2	90	<0.1	3.5	<0.1	114	3.46
1320733	Drill Core	3.35	3	0.2	11.7	7.0	56	<0.1	3.6	12.2	778	3.95	3	0.8	2.7	105	<0.1	3.8	<0.1	113	2.93

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000310.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320704	Drill Core		0.014	12.3	2	0.79	308	0.085	5.61	0.685	1.21	0.6	9.1	28	1.1	4.9	1.9	0.1	<1	9	29.5	0.6
1320705	Drill Core		0.016	12.9	2	1.18	500	0.088	5.59	1.361	0.78	0.8	7.6	30	0.7	5.0	1.8	<0.1	1	12	21.7	0.4
1320706	Drill Core		0.014	14.0	3	0.82	113	0.106	5.75	1.223	0.87	0.5	7.2	31	1.0	5.2	1.8	0.1	<1	10	17.6	1.0
1320707	Drill Core		0.016	14.3	8	0.89	204	0.107	5.75	0.031	0.83	0.7	8.2	32	1.0	5.0	1.8	0.1	<1	11	30.6	0.7
1320708	Drill Core		0.019	11.9	2	0.77	504	0.087	5.83	0.018	0.71	1.1	8.5	27	0.9	5.6	2.8	0.2	<1	10	35.6	0.1
1320709	Drill Core		0.018	12.4	16	0.95	348	0.106	4.99	0.022	0.70	0.9	8.8	27	0.8	6.2	2.2	0.2	<1	10	27.5	0.5
1320710	Drill Core		0.015	10.3	5	0.75	67	0.091	5.65	0.021	0.65	0.5	6.5	25	0.6	5.7	1.7	0.1	<1	10	29.9	1.2
1320711	Drill Core		0.026	9.7	7	1.38	46	0.167	6.20	0.394	1.32	1.1	5.0	24	1.3	8.1	1.9	0.1	<1	19	51.3	2.4
1320712	Drill Core		0.064	10.7	11	1.42	343	0.270	6.80	1.347	1.39	0.7	7.8	25	1.3	11.5	3.1	0.2	1	18	48.2	0.9
1320713	Drill Core		0.023	6.5	5	1.10	252	0.111	5.12	1.846	0.49	1.4	7.7	16	0.5	7.0	2.2	0.1	<1	10	20.4	0.4
1320714	Drill Core		0.033	9.5	4	1.22	313	0.132	5.77	1.601	0.33	2.8	10.3	21	0.5	6.8	2.4	0.2	<1	11	17.2	0.3
1320715	Drill Core		0.047	6.2	35	1.58	750	0.294	7.09	1.353	1.45	1.2	5.9	14	0.5	9.2	1.9	0.1	1	24	27.4	0.1
1320716	Drill Core		0.046	3.1	39	1.48	403	0.332	7.08	3.057	1.47	0.3	4.7	9	0.6	10.0	1.7	<0.1	<1	23	14.2	0.2
1320717	Drill Core		0.029	4.7	32	2.48	296	0.279	7.12	2.848	1.15	3.3	4.4	10	0.7	11.5	2.2	<0.1	<1	26	18.8	<0.1
1320718	Drill Core		0.036	5.7	32	2.17	585	0.307	6.88	1.218	2.05	2.7	6.1	11	0.5	11.4	1.7	<0.1	<1	26	26.0	<0.1
1320719	Drill Core		0.042	4.8	38	1.84	413	0.333	7.44	2.639	1.64	0.8	4.7	11	0.5	12.8	1.6	0.1	1	26	21.8	0.1
1320720	Drill Core		0.036	3.2	35	1.60	301	0.298	7.44	3.117	1.17	0.3	4.6	7	0.5	11.5	1.7	<0.1	<1	24	14.8	<0.1
1320721	Drill Core		0.044	5.5	46	1.83	972	0.347	7.91	2.862	1.18	0.2	5.9	12	0.4	14.8	1.7	0.1	<1	28	11.6	<0.1
1320722	Drill Core		0.038	4.3	41	1.78	521	0.310	7.76	3.208	1.46	0.5	4.4	9	0.5	12.7	1.6	<0.1	<1	26	13.0	<0.1
1320723	Drill Core		0.060	5.1	5	0.73	341	0.308	7.50	5.015	0.99	0.3	3.6	12	0.9	13.6	3.1	0.2	<1	18	12.2	0.6
1320724	Drill Core		0.058	10.7	32	1.12	364	0.319	8.27	4.342	0.70	0.3	4.9	22	0.9	20.2	3.4	0.2	<1	19	13.8	0.2
1320725	Rock Pulp		0.052	8.7	41	0.86	524	0.305	5.14	2.167	0.86	29.5	40.0	17	0.7	12.8	3.6	0.2	<1	10	12.8	<0.1
1320726	Rock Pulp		0.056	10.3	67	1.43	641	0.398	6.74	2.344	0.92	9.0	32.7	20	1.8	15.4	4.4	0.3	<1	15	16.5	0.3
1320727	Drill Core		0.057	5.1	3	0.84	292	0.349	7.62	6.076	0.61	0.2	3.9	12	1.0	15.7	3.4	0.2	<1	16	8.1	0.2
1320728	Drill Core		0.054	5.4	34	1.82	418	0.371	7.65	4.365	1.14	0.2	4.8	12	0.6	13.9	2.6	0.2	<1	24	11.8	0.3
1320729	Drill Core		0.078	9.3	7	1.19	394	0.309	7.64	3.631	1.00	0.3	2.5	20	0.7	14.2	2.6	0.1	<1	20	15.9	<0.1
1320730	Drill Core		0.069	10.0	6	1.02	426	0.284	7.25	3.700	0.93	0.2	2.9	19	0.7	14.2	2.2	0.2	<1	17	14.4	<0.1
1320731	Drill Core		0.058	8.3	5	1.41	747	0.322	7.95	2.234	0.98	0.3	3.5	18	0.7	15.9	3.2	0.3	<1	18	21.9	<0.1
1320732	Drill Core		0.066	7.7	5	1.30	225	0.348	8.14	1.844	0.80	0.5	4.2	17	0.9	16.2	3.0	0.2	<1	20	22.6	<0.1
1320733	Drill Core		0.054	10.5	7	1.17	439	0.343	7.51	1.606	0.92	0.4	4.4	24	0.7	19.9	2.9	0.2	<1	20	21.4	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000310.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320704	Drill Core	38.0	0.3	0.08	<0.005	1	<0.5	<0.5	0.09	
1320705	Drill Core	21.9	0.3	0.14	<0.005	<1	<0.5	<0.5	0.05	
1320706	Drill Core	27.1	0.2	0.09	<0.005	2	<0.5	<0.5	0.07	
1320707	Drill Core	24.2	0.2	0.08	<0.005	1	<0.5	<0.5	0.12	
1320708	Drill Core	16.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320709	Drill Core	22.9	0.2	0.05	<0.005	<1	<0.5	<0.5	0.07	
1320710	Drill Core	18.2	0.2	0.08	<0.005	3	<0.5	<0.5	0.09	
1320711	Drill Core	44.5	0.2	0.11	<0.005	1	<0.5	<0.5	0.13	
1320712	Drill Core	48.1	0.3	0.17	<0.005	<1	<0.5	<0.5	0.04	
1320713	Drill Core	14.6	0.2	0.07	<0.005	<1	<0.5	<0.5	0.03	
1320714	Drill Core	9.5	0.4	<0.05	<0.005	2	<0.5	<0.5	0.04	
1320715	Drill Core	47.6	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320716	Drill Core	35.9	0.3	0.06	<0.005	<1	<0.5	<0.5	0.06	
1320717	Drill Core	41.1	0.3	0.07	<0.005	<1	1.2	<0.5	0.04	
1320718	Drill Core	94.1	0.3	<0.05	<0.005	1	<0.5	0.6	0.03	
1320719	Drill Core	63.0	0.3	0.08	<0.005	1	<0.5	0.5	0.10	
1320720	Drill Core	39.5	0.3	<0.05	<0.005	1	0.7	<0.5	0.04	
1320721	Drill Core	43.8	0.4	<0.05	<0.005	<1	0.7	<0.5	0.04	
1320722	Drill Core	38.0	0.3	0.05	<0.005	<1	0.6	<0.5	0.03	
1320723	Drill Core	14.4	0.2	<0.05	<0.005	1	<0.5	<0.5	0.22	
1320724	Drill Core	17.8	0.3	0.06	<0.005	1	<0.5	<0.5	0.07	
1320725	Rock Pulp	21.2	1.2	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320726	Rock Pulp	21.7	1.0	0.15	0.100	1	0.6	<0.5	0.09	
1320727	Drill Core	5.8	0.2	0.06	<0.005	<1	<0.5	<0.5	0.10	
1320728	Drill Core	26.1	0.3	0.07	<0.005	<1	<0.5	<0.5	0.10	
1320729	Drill Core	27.8	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320730	Drill Core	26.0	0.1	0.05	<0.005	<1	<0.5	<0.5	0.03	
1320731	Drill Core	30.6	0.3	0.09	<0.005	1	<0.5	<0.5	0.02	
1320732	Drill Core	19.7	0.3	0.06	<0.005	<1	<0.5	<0.5	<0.01	
1320733	Drill Core	24.4	0.2	0.08	<0.005	<1	<0.5	<0.5	<0.01	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000310.1

Method		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320734	Drill Core	3.35	3	0.5	20.3	8.9	54	<0.1	5.0	13.0	688	3.33	4	0.8	2.0	195	<0.1	1.2	<0.1	108	3.19
1320735	Drill Core	3.28	4	0.6	36.8	7.0	62	<0.1	5.7	14.7	723	3.81	5	0.6	1.7	214	<0.1	1.0	<0.1	130	2.99
1320736	Drill Core	3.33	3	0.4	21.7	9.2	63	<0.1	5.3	14.4	858	4.15	5	0.6	1.6	188	<0.1	1.2	<0.1	137	3.73
1320737	Drill Core	3.52	4	0.5	21.5	8.5	66	<0.1	5.5	15.6	936	4.09	4	0.6	1.3	186	<0.1	0.8	<0.1	131	4.78
1320738	Drill Core	2.94	4	0.3	57.5	8.5	51	0.1	5.0	12.9	810	3.74	3	0.4	1.1	189	0.1	1.1	<0.1	130	4.25
1320739	Drill Core	3.41	3	0.8	30.6	7.6	59	<0.1	4.8	13.5	813	3.58	4	0.3	1.0	183	0.1	1.1	<0.1	116	4.11
1320740	Drill Core	3.51	5	0.3	26.9	9.3	75	<0.1	5.6	15.0	783	3.86	8	0.5	1.6	245	0.1	1.4	<0.1	120	3.99
1320741	Drill Core	3.26	3	3.1	11.8	7.0	55	<0.1	4.7	13.4	851	3.88	4	0.4	1.0	240	<0.1	1.5	<0.1	122	4.30
1320742	Drill Core	3.39	6	0.5	16.2	11.8	56	0.2	6.3	15.6	864	4.18	4	0.4	1.4	229	<0.1	2.0	0.4	130	4.42
1320743	Drill Core	3.46	4	0.6	38.2	15.6	73	0.1	7.7	15.2	741	4.21	19	3.0	1.4	198	0.3	46.5	<0.1	140	3.42
1320744	Drill Core	3.65	13	0.3	15.1	13.4	68	<0.1	11.2	17.0	706	3.86	39	4.2	1.1	141	0.2	45.8	<0.1	137	3.99
1320745	Drill Core	3.29	3	0.5	7.5	5.5	32	<0.1	2.5	7.2	367	2.42	7	0.5	2.0	249	<0.1	3.3	<0.1	73	2.05
1320746	Drill Core	3.19	4	0.8	17.0	5.3	42	<0.1	3.3	8.8	469	2.64	6	0.4	2.2	274	<0.1	2.0	<0.1	82	2.50
1320747	Drill Core	3.31	4	0.1	30.0	5.7	58	<0.1	4.8	12.4	839	3.64	5	0.4	1.7	218	<0.1	2.8	<0.1	101	3.79
1320748	Drill Core	3.57	52	0.6	17.7	8.6	58	<0.1	5.5	14.2	1082	4.06	8	0.5	1.4	201	0.2	16.0	<0.1	124	4.94
1320749	Drill Core	3.38	5	0.9	16.4	7.1	62	<0.1	5.1	12.7	907	3.78	8	0.6	1.3	210	0.1	13.1	<0.1	121	4.44
1320750	Rock Pulp	0.05	8	3.6	24.0	4.4	45	0.5	22.3	11.8	478	2.66	3	0.8	2.0	247	0.2	0.9	<0.1	88	1.92
1320751	Rock Pulp	0.07	4163	23.2	71.3	20.3	202	1.6	76.6	7.4	297	2.79	667	5.2	4.8	49	2.2	26.8	5.4	363	1.98

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000310.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
	Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320734	Drill Core	0.041	6.8	10	0.95	968	0.302	7.07	3.010	1.23	0.2	4.5	16	0.6	13.2	2.8	0.2	<1	15	19.1	0.1
1320735	Drill Core	0.047	7.4	11	1.32	570	0.302	7.46	2.932	1.31	0.1	3.6	16	0.6	18.1	2.5	0.1	<1	19	21.6	<0.1
1320736	Drill Core	0.050	7.2	15	1.22	835	0.312	7.05	2.706	1.36	0.2	3.6	16	0.7	16.4	2.6	0.1	<1	19	18.1	<0.1
1320737	Drill Core	0.043	7.4	10	1.40	457	0.286	6.98	2.663	1.10	0.3	4.6	15	0.5	16.7	2.3	0.1	1	18	13.9	0.1
1320738	Drill Core	0.048	6.7	9	1.33	260	0.299	6.61	3.532	0.62	0.5	3.5	14	0.5	14.7	2.1	0.1	<1	17	9.7	0.1
1320739	Drill Core	0.037	6.1	10	1.06	751	0.271	6.33	2.999	0.77	0.2	3.4	13	0.6	13.9	2.1	0.1	<1	15	9.8	0.1
1320740	Drill Core	0.041	7.6	11	0.87	678	0.261	6.75	2.263	1.41	0.3	4.2	16	0.5	14.9	2.2	0.1	<1	16	18.2	<0.1
1320741	Drill Core	0.042	6.0	9	1.09	667	0.271	6.89	2.986	0.96	0.3	3.6	13	0.4	13.7	1.8	<0.1	<1	17	14.8	<0.1
1320742	Drill Core	0.042	6.6	11	0.88	770	0.277	6.81	2.319	1.58	0.4	3.6	14	0.4	14.7	1.9	0.1	<1	18	13.3	0.1
1320743	Drill Core	0.050	6.4	11	0.97	443	0.328	7.49	2.456	1.44	1.4	4.0	15	0.5	13.0	2.3	0.2	<1	19	25.0	0.2
1320744	Drill Core	0.046	4.9	9	1.32	432	0.296	6.90	1.539	1.86	2.6	4.9	12	0.6	11.6	2.5	0.1	<1	18	40.4	0.1
1320745	Drill Core	0.031	8.3	5	0.69	567	0.206	6.97	2.978	0.79	0.6	6.8	18	0.4	10.9	2.5	0.1	<1	11	19.0	<0.1
1320746	Drill Core	0.034	8.0	6	0.80	682	0.207	6.55	2.428	0.75	0.4	5.6	17	0.5	11.7	2.4	0.1	<1	11	19.8	<0.1
1320747	Drill Core	0.036	7.2	7	1.32	881	0.205	7.07	2.215	1.20	0.2	3.4	17	0.5	16.2	1.9	0.1	1	13	21.4	<0.1
1320748	Drill Core	0.042	8.6	10	1.66	503	0.242	6.75	2.704	0.83	1.5	7.5	18	0.5	14.1	2.0	0.1	1	18	29.7	<0.1
1320749	Drill Core	0.037	7.5	8	1.48	304	0.225	6.77	2.188	0.88	1.3	6.9	16	0.5	13.3	2.0	0.1	1	17	22.3	<0.1
1320750	Rock Pulp	0.056	9.0	34	0.87	495	0.289	5.49	2.160	0.85	28.2	39.2	18	0.7	13.9	3.5	0.2	<1	11	12.2	<0.1
1320751	Rock Pulp	0.091	18.3	59	0.97	41	0.184	3.42	0.014	1.48	14.6	53.0	33	1.7	13.8	5.8	0.4	<1	5	11.7	1.8

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000310.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
1320734	Drill Core	32.1	0.2	0.05	<0.005	1	<0.5	<0.5	<0.01	
1320735	Drill Core	34.1	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
1320736	Drill Core	35.8	0.2	0.06	<0.005	<1	<0.5	<0.5	0.02	
1320737	Drill Core	30.1	0.2	<0.05	<0.005	1	<0.5	<0.5	0.03	
1320738	Drill Core	13.7	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320739	Drill Core	14.9	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320740	Drill Core	33.2	0.2	<0.05	<0.005	1	<0.5	<0.5	<0.01	
1320741	Drill Core	27.3	0.2	<0.05	0.007	<1	<0.5	<0.5	0.01	
1320742	Drill Core	43.5	0.3	<0.05	<0.005	1	<0.5	<0.5	0.03	
1320743	Drill Core	49.3	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.19	
1320744	Drill Core	54.4	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.19	
1320745	Drill Core	22.9	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320746	Drill Core	21.8	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.03	
1320747	Drill Core	32.1	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.04	
1320748	Drill Core	32.1	0.3	0.05	<0.005	<1	<0.5	<0.5	0.06	
1320749	Drill Core	28.2	0.3	0.05	0.006	<1	<0.5	<0.5	0.04	
1320750	Rock Pulp	23.6	1.2	<0.05	<0.005	<1	<0.5	<0.5	0.02	
1320751	Rock Pulp	103.3	1.5	0.21	0.036	7	1.2	6.5	5.12	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000310.1

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
Pulp Duplicates																					
1320622	Drill Core	4.43	4	0.3	1.6	6.4	33	<0.1	3.7	10.0	406	1.95	3	0.8	4.2	164	<0.1	0.2	<0.1	47	1.46
REP 1320622	QC																				
1320627	Drill Core	4.41	3	0.2	2.6	7.3	53	<0.1	2.1	7.4	438	2.68	3	1.0	3.8	172	<0.1	0.2	<0.1	66	2.21
REP 1320627	QC																				
1320630	Drill Core	5.02	4	0.2	8.3	4.3	48	<0.1	1.3	5.1	447	2.29	3	1.2	4.3	191	<0.1	<0.1	<0.1	52	2.41
REP 1320630	QC			0.1	8.0	4.4	50	<0.1	1.5	4.9	459	2.36	3	1.3	4.6	200	<0.1	<0.1	<0.1	54	2.47
1320637	Drill Core	3.32	4	0.2	6.6	5.5	59	<0.1	1.5	6.2	439	2.49	4	0.9	3.7	246	<0.1	0.1	<0.1	66	2.82
REP 1320637	QC		4																		
1320655	Drill Core	5.76	5	0.2	2.0	9.0	52	<0.1	3.5	10.6	517	3.03	3	1.1	4.2	195	<0.1	0.3	<0.1	75	1.69
REP 1320655	QC																				
1320664	Drill Core	5.53	3	0.4	1.9	8.4	22	<0.1	1.4	3.5	511	2.41	14	0.9	4.7	178	<0.1	2.0	<0.1	34	2.07
REP 1320664	QC			0.2	1.7	7.6	21	<0.1	1.3	3.5	471	2.29	13	0.9	4.9	170	<0.1	2.0	<0.1	32	2.02
1320671	Drill Core	5.04	8	0.2	4.2	10.2	83	<0.1	5.2	13.5	906	3.52	4	0.9	3.1	255	<0.1	0.2	<0.1	96	3.34
REP 1320671	QC		7																		
1320690	Drill Core	4.03	5	0.7	0.9	7.3	58	<0.1	6.5	9.6	703	3.75	8	1.3	4.7	366	<0.1	1.0	<0.1	63	3.34
REP 1320690	QC																				
1320699	Drill Core	3.41	5	0.5	85.1	12.1	104	0.1	17.0	30.0	1456	7.03	7	0.5	2.2	227	0.4	10.1	<0.1	213	5.52
REP 1320699	QC			0.6	85.1	12.2	103	0.1	17.1	30.9	1438	6.81	10	0.5	2.2	230	0.2	11.4	<0.1	208	5.34
1320706	Drill Core	3.01	6	1.9	26.5	5.0	43	<0.1	1.3	4.3	443	3.10	4	0.7	3.2	223	<0.1	3.8	<0.1	19	1.82
REP 1320706	QC		7																		
1320725	Rock Pulp	0.06	9	3.4	24.9	4.4	44	0.4	23.6	12.5	499	2.59	3	0.8	1.9	234	0.2	0.9	<0.1	88	1.83
REP 1320725	QC																				
1320734	Drill Core	3.35	3	0.5	20.3	8.9	54	<0.1	5.0	13.0	688	3.33	4	0.8	2.0	195	<0.1	1.2	<0.1	108	3.19
REP 1320734	QC			0.7	20.5	8.3	53	<0.1	4.3	14.2	685	3.33	4	0.8	1.8	189	0.1	1.3	<0.1	109	3.17
1320741	Drill Core	3.26	3	3.1	11.8	7.0	55	<0.1	4.7	13.4	851	3.88	4	0.4	1.0	240	<0.1	1.5	<0.1	122	4.30
REP 1320741	QC		4																		
Core Reject Duplicates																					
1320647	Drill Core	5.59	4	0.2	2.1	8.3	63	<0.1	3.3	16.8	851	3.29	3	1.3	3.2	199	<0.1	0.4	<0.1	109	2.73

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000310.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
	Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
Pulp Duplicates																					
1320622	Drill Core	0.047	11.2	7	0.69	560	0.171	6.64	3.419	1.67	0.3	55.5	22	0.6	10.9	3.5	0.3	<1	10	8.0	<0.1
REP 1320622	QC																				
1320627	Drill Core	0.056	13.7	5	0.89	722	0.272	7.54	2.648	2.23	0.7	44.0	30	0.9	11.4	5.0	0.3	<1	14	12.8	<0.1
REP 1320627	QC																				
1320630	Drill Core	0.069	15.2	3	0.67	551	0.226	6.45	2.595	1.64	0.5	60.3	32	1.0	9.7	4.1	0.2	<1	13	11.6	<0.1
REP 1320630	QC	0.066	15.6	2	0.69	552	0.239	6.66	2.717	1.75	0.5	64.6	33	0.8	10.3	4.3	0.2	1	14	11.5	<0.1
1320637	Drill Core	0.071	13.8	4	1.23	2062	0.297	7.39	2.324	2.48	0.7	51.1	30	1.0	10.4	4.7	0.3	<1	15	17.1	<0.1
REP 1320637	QC																				
1320655	Drill Core	0.060	12.6	7	1.02	741	0.298	7.57	1.690	3.12	0.7	77.7	24	1.2	13.9	4.6	0.3	1	16	19.1	<0.1
REP 1320655	QC																				
1320664	Drill Core	0.054	14.7	5	0.43	1353	0.276	6.93	1.700	2.76	0.4	27.0	33	0.3	11.5	5.6	0.3	<1	13	9.0	<0.1
REP 1320664	QC	0.050	14.6	5	0.42	1289	0.260	6.83	1.619	3.07	0.4	25.6	33	0.3	11.1	5.4	0.4	1	13	9.0	<0.1
1320671	Drill Core	0.080	10.9	14	1.61	752	0.338	7.44	1.245	2.77	1.2	48.5	24	0.9	11.4	5.5	0.3	1	15	15.2	<0.1
REP 1320671	QC																				
1320690	Drill Core	0.072	20.0	12	0.62	686	0.357	7.42	1.481	1.60	1.0	55.9	45	1.4	17.2	8.4	0.5	2	15	21.2	<0.1
REP 1320690	QC																				
1320699	Drill Core	0.068	11.4	23	2.29	375	0.337	6.44	0.425	1.58	1.5	3.4	25	1.2	9.8	1.8	0.1	1	20	75.3	0.6
REP 1320699	QC	0.066	11.5	23	2.27	376	0.318	6.33	0.406	1.51	1.6	3.3	24	1.1	9.9	1.9	0.1	2	21	70.9	0.6
1320706	Drill Core	0.014	14.0	3	0.82	113	0.106	5.75	1.223	0.87	0.5	7.2	31	1.0	5.2	1.8	0.1	<1	10	17.6	1.0
REP 1320706	QC																				
1320725	Rock Pulp	0.052	8.7	41	0.86	524	0.305	5.14	2.167	0.86	29.5	40.0	17	0.7	12.8	3.6	0.2	<1	10	12.8	<0.1
REP 1320725	QC																				
1320734	Drill Core	0.041	6.8	10	0.95	968	0.302	7.07	3.010	1.23	0.2	4.5	16	0.6	13.2	2.8	0.2	<1	15	19.1	0.1
REP 1320734	QC	0.044	6.9	10	0.95	906	0.303	7.00	2.986	1.26	0.2	4.0	15	0.6	12.3	2.6	0.2	<1	16	18.3	0.1
1320741	Drill Core	0.042	6.0	9	1.09	667	0.271	6.89	2.986	0.96	0.3	3.6	13	0.4	13.7	1.8	<0.1	<1	17	14.8	<0.1
REP 1320741	QC																				
Core Reject Duplicates																					
1320647	Drill Core	0.098	12.5	7	1.32	856	0.389	8.00	1.872	3.47	1.3	44.0	28	0.9	16.1	5.3	0.3	1	20	23.8	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000310.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200	FA550
	Analyte	Rb	Hf	In	Re	Se	Te	Tl	Hg	Au
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	gm/t
	MDL	0.1	0.1	0.05	0.005	1	0.5	0.5	0.01	0.9
Pulp Duplicates										
1320622	Drill Core	45.4	1.5	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
REP 1320622	QC								<0.01	
1320627	Drill Core	58.7	1.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
REP 1320627	QC								0.01	
1320630	Drill Core	42.7	1.6	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
REP 1320630	QC	47.2	1.6	<0.05	<0.005	<1	<0.5	<0.5		
1320637	Drill Core	63.6	1.4	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
REP 1320637	QC									
1320655	Drill Core	79.2	1.9	0.06	<0.005	<1	<0.5	0.7	<0.01	
REP 1320655	QC								<0.01	
1320664	Drill Core	62.7	0.7	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
REP 1320664	QC	68.9	0.7	<0.05	<0.005	1	<0.5	<0.5		
1320671	Drill Core	65.1	1.3	0.06	<0.005	<1	<0.5	0.7	<0.01	
REP 1320671	QC									
1320690	Drill Core	59.1	1.3	0.08	<0.005	<1	<0.5	<0.5	0.01	
REP 1320690	QC								0.03	
1320699	Drill Core	60.7	0.2	0.09	<0.005	<1	0.5	<0.5	0.06	
REP 1320699	QC	60.1	0.2	0.10	<0.005	<1	0.7	<0.5		
1320706	Drill Core	27.1	0.2	0.09	<0.005	2	<0.5	<0.5	0.07	
REP 1320706	QC									
1320725	Rock Pulp	21.2	1.2	<0.05	<0.005	<1	<0.5	<0.5	0.03	
REP 1320725	QC								0.03	
1320734	Drill Core	32.1	0.2	0.05	<0.005	1	<0.5	<0.5	<0.01	
REP 1320734	QC	31.0	0.2	<0.05	<0.005	1	<0.5	<0.5		
1320741	Drill Core	27.3	0.2	<0.05	0.007	<1	<0.5	<0.5	0.01	
REP 1320741	QC									
Core Reject Duplicates										
1320647	Drill Core	83.9	1.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000310.1

		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
DUP 1320647	QC		4	0.2	2.5	8.4	62	<0.1	3.6	18.0	873	3.55	2	1.4	3.4	230	<0.1	0.5	<0.1	117	2.88
1320681	Drill Core	4.11	5	0.2	0.9	5.0	52	<0.1	2.7	4.6	507	1.83	4	0.8	2.6	352	<0.1	0.5	<0.1	33	2.00
DUP 1320681	QC		5	0.2	0.8	5.0	53	<0.1	2.5	4.8	477	1.90	4	0.9	2.8	354	<0.1	0.4	<0.1	32	2.01
1320715	Drill Core	3.31	6	0.7	43.3	18.9	82	<0.1	15.8	19.4	984	4.87	7	0.4	2.0	234	0.2	15.0	0.1	189	4.68
DUP 1320715	QC		6	0.5	42.3	18.2	83	<0.1	14.9	19.1	977	4.99	7	0.5	2.1	220	0.3	15.4	<0.1	184	4.72
1320749	Drill Core	3.38	5	0.9	16.4	7.1	62	<0.1	5.1	12.7	907	3.78	8	0.6	1.3	210	0.1	13.1	<0.1	121	4.44
DUP 1320749	QC		4	0.7	17.4	7.3	62	<0.1	5.2	12.7	890	3.80	8	0.7	1.4	217	0.2	13.3	<0.1	118	4.46
Reference Materials																					
STD AGPROOF	Standard																				
STD BVGEO01	Standard																				
STD BVGEO01	Standard																				
STD DS11	Standard																				
STD DS11	Standard																				
STD OREAS25A-4A	Standard			2.1	33.0	26.0	40	<0.1	43.7	7.8	476	6.23	9	2.7	15.8	45	<0.1	0.6	0.3	150	0.26
STD OREAS25A-4A	Standard			2.5	32.3	23.6	39	<0.1	44.0	7.6	483	6.53	9	2.7	16.0	45	<0.1	0.6	0.3	161	0.28
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard			2.5	35.1	25.3	41	<0.1	46.6	8.0	496	6.42	10	3.0	15.6	43	<0.1	0.5	0.3	159	0.25
STD OREAS25A-4A	Standard			2.4	33.0	23.9	41	<0.1	43.9	7.7	469	6.21	10	2.7	16.2	43	<0.1	0.5	0.3	149	0.25
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS45E	Standard			2.3	778.4	18.5	44	0.3	472.1	58.6	556	24.74	17	2.5	13.3	17	<0.1	1.0	0.2	324	0.06
STD OREAS45H	Standard			1.4	808.1	13.2	39	0.1	468.1	96.1	433	19.90	16	1.8	8.4	29	<0.1	0.7	0.1	289	0.14
STD OREAS45H	Standard			1.6	799.3	13.2	37	0.1	459.2	88.0	426	19.92	15	1.9	8.3	30	<0.1	0.7	0.1	287	0.14
STD OREAS45E	Standard			2.3	784.9	18.8	46	0.3	489.5	59.8	569	23.62	16	2.5	12.1	17	<0.1	1.1	0.3	346	0.06
STD OXC145	Standard		211																		
STD OXC145	Standard		213																		
STD OXC145	Standard		222																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000310.1

		MA200 P % 0.001	MA200 La ppm 0.1	MA200 Cr ppm 1	MA200 Mg % 0.01	MA200 Ba ppm 1	MA200 Ti % 0.001	MA200 Al % 0.01	MA200 Na % 0.001	MA200 K % 0.01	MA200 W ppm 0.1	MA200 Zr ppm 0.1	MA200 Ce ppm 1	MA200 Sn ppm 0.1	MA200 Y ppm 0.1	MA200 Nb ppm 0.1	MA200 Ta ppm 0.1	MA200 Be ppm 1	MA200 Sc ppm 1	MA200 Li ppm 0.1	MA200 S % 0.1
DUP 1320647	QC	0.092	11.8	7	1.33	845	0.399	7.88	1.938	2.52	1.3	44.7	26	1.3	15.7	5.5	0.3	2	20	28.8	<0.1
1320681	Drill Core	0.042	8.8	5	0.63	581	0.227	6.90	3.078	1.55	0.4	27.9	19	1.8	6.2	6.7	0.4	2	5	6.2	<0.1
DUP 1320681	QC	0.040	9.8	5	0.65	559	0.226	7.08	3.129	1.47	0.6	28.0	21	1.6	6.6	6.8	0.4	2	5	7.4	<0.1
1320715	Drill Core	0.047	6.2	35	1.58	750	0.294	7.09	1.353	1.45	1.2	5.9	14	0.5	9.2	1.9	0.1	1	24	27.4	0.1
DUP 1320715	QC	0.043	6.3	32	1.56	746	0.288	7.16	1.332	1.39	1.3	5.9	14	0.6	9.1	1.8	0.1	<1	24	27.3	0.1
1320749	Drill Core	0.037	7.5	8	1.48	304	0.225	6.77	2.188	0.88	1.3	6.9	16	0.5	13.3	2.0	0.1	1	17	22.3	<0.1
DUP 1320749	QC	0.040	7.5	8	1.48	312	0.229	6.82	2.110	0.89	1.0	7.4	16	0.5	13.5	2.1	0.1	1	17	25.9	<0.1
Reference Materials																					
STD AGPROOF	Standard																				
STD BVGEO01	Standard																				
STD BVGEO01	Standard																				
STD DS11	Standard																				
STD DS11	Standard																				
STD OREAS25A-4A	Standard	0.043	20.5	107	0.33	135	0.899	8.91	0.124	0.48	1.8	147.4	46	3.7	10.2	18.6	1.3	<1	11	35.6	<0.1
STD OREAS25A-4A	Standard	0.046	21.1	115	0.33	147	1.014	8.90	0.129	0.46	1.7	151.3	44	3.9	9.9	20.2	1.4	<1	12	36.6	<0.1
STD OREAS262	Standard																				
STD OREAS25A-4A	Standard	0.046	18.2	123	0.34	135	0.966	8.34	0.124	0.45	2.0	154.8	42	3.9	9.1	20.8	1.5	2	11	38.0	<0.1
STD OREAS25A-4A	Standard	0.051	18.9	111	0.34	143	0.907	8.34	0.113	0.44	1.9	143.6	43	3.5	9.1	18.7	1.4	<1	12	37.8	<0.1
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS45E	Standard	0.033	11.7	963	0.17	256	0.554	7.20	0.056	0.35	1.1	103.0	27	1.3	8.6	6.6	0.6	<1	94	6.6	<0.1
STD OREAS45H	Standard	0.024	14.4	668	0.29	361	0.977	8.73	0.101	0.22	1.1	127.8	27	2.0	10.7	15.3	1.0	2	59	14.1	<0.1
STD OREAS45H	Standard	0.025	13.5	667	0.26	332	0.955	8.37	0.091	0.21	1.0	124.4	25	1.8	10.3	14.3	1.0	1	58	14.6	<0.1
STD OREAS45E	Standard	0.034	6.2	989	0.17	258	0.552	6.88	0.057	0.34	1.1	99.3	18	1.3	5.9	6.1	0.5	<1	85	6.4	<0.1
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXC145	Standard																				

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000310.1

		MA200 Rb ppm 0.1	MA200 Hf ppm 0.1	MA200 In ppm 0.05	MA200 Re ppm 0.005	MA200 Se ppm 1	MA200 Te ppm 0.5	MA200 Tl ppm 0.5	AQ200 Hg ppm 0.01	FA550 Au gm/t 0.9
DUP 1320647	QC	60.2	1.3	0.05	<0.005	<1	<0.5	0.6	<0.01	
1320681	Drill Core	52.0	0.8	<0.05	<0.005	<1	<0.5	<0.5	<0.01	
DUP 1320681	QC	54.9	0.7	<0.05	<0.005	<1	<0.5	<0.5	0.01	
1320715	Drill Core	47.6	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.04	
DUP 1320715	QC	51.3	0.3	0.07	<0.005	<1	<0.5	<0.5	0.03	
1320749	Drill Core	28.2	0.3	0.05	0.006	<1	<0.5	<0.5	0.04	
DUP 1320749	QC	30.3	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.03	
Reference Materials										
STD AGPROOF	Standard									<0.9
STD BVGEO01	Standard								0.11	
STD BVGEO01	Standard								0.10	
STD DS11	Standard								0.27	
STD DS11	Standard								0.26	
STD OREAS25A-4A	Standard	57.8	3.9	0.09	<0.005	2	<0.5	<0.5		
STD OREAS25A-4A	Standard	59.0	4.0	0.10	<0.005	3	<0.5	<0.5		
STD OREAS262	Standard								0.17	
STD OREAS25A-4A	Standard	52.1	4.3	0.12	<0.005	2	<0.5	<0.5		
STD OREAS25A-4A	Standard	53.8	4.1	0.15	<0.005	2	<0.5	<0.5		
STD OREAS262	Standard								0.16	
STD OREAS262	Standard								0.16	
STD OREAS262	Standard								0.16	
STD OREAS262	Standard								0.14	
STD OREAS45E	Standard	22.6	3.7	0.10	<0.005	2	<0.5	<0.5		
STD OREAS45H	Standard	24.3	3.7	0.14	<0.005	3	<0.5	<0.5		
STD OREAS45H	Standard	22.8	3.6	0.16	<0.005	3	<0.5	<0.5		
STD OREAS45E	Standard	18.1	3.0	0.08	<0.005	2	<0.5	<0.5		
STD OXC145	Standard									
STD OXC145	Standard									
STD OXC145	Standard									

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000310.1

		WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
STD OXC145	Standard		217																		
STD OXH139	Standard		1320																		
STD OXH139	Standard		1273																		
STD OXH139	Standard		1339																		
STD OXH139	Standard		1349																		
STD OXQ114	Standard																				
STD SP49	Standard																				
STD OREAS45H Expected				1.55	767	11.9	39.7	0.147	423	88	380	19.52	16.9	1.68	7.26	27.1		0.63	0.17	263	0.135
STD OREAS25A-4A Expected				2.41	33.9	25.2	44.4		45.8	7.7	480	6.6	9.94	2.94	15.8	48.5		0.65	0.37	157	0.301
STD OREAS45E Expected				2.4	780	18.2	46.7	0.311	454	57	570	24.12	16.3	2.41	12.9	15.9	0.06	1	0.28	322	0.065
STD BVGEO01 Expected																					
STD OXC145 Expected			212																		
STD OXH139 Expected			1312																		
STD DS11 Expected																					
STD OREAS262 Expected																					
STD AGPROOF Expected																					
STD SP49 Expected																					
STD OXQ114 Expected																					
BLK	Blank		3																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	0.1	<0.2	1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank																				
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank			<0.1	<0.1	<0.1	1	<0.1	0.4	<0.2	<1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank		4																		
BLK	Blank		3																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000310.1

		MA200 P % 0.001	MA200 La ppm 0.1	MA200 Cr ppm 1	MA200 Mg % 0.01	MA200 Ba ppm 1	MA200 Ti % 0.001	MA200 Al % 0.01	MA200 Na % 0.001	MA200 K % 0.01	MA200 W ppm 0.1	MA200 Zr ppm 0.1	MA200 Ce ppm 1	MA200 Sn ppm 0.1	MA200 Y ppm 0.1	MA200 Nb ppm 0.1	MA200 Ta ppm 0.1	MA200 Be ppm 1	MA200 Sc ppm 1	MA200 Li ppm 0.1	MA200 S % 0.1
STD OXC145	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OXQ114	Standard																				
STD SP49	Standard																				
STD OREAS45H Expected		0.023	12.4	602	0.238	332	0.878	7.99	0.09	0.205	0.99	131	23.6	1.93	10.4	14.8	1.08	1.09	57	13.1	
STD OREAS25A-4A Expected		0.048	21.8	115	0.327	147	0.93	8.87	0.131	0.482	2	155	47.3	4.06	10.5	20.9	1.4	0.93	13.7	36.7	0.047
STD OREAS45E Expected		0.034	11	979	0.156	252	0.559	6.78	0.059	0.324	1.07	97	23.5	1.32	8.28	6.8	0.54		93	6.58	0.046
STD BVGEO01 Expected																					
STD OXC145 Expected																					
STD OXH139 Expected																					
STD DS11 Expected																					
STD OREAS262 Expected																					
STD AGPROOF Expected																					
STD SP49 Expected																					
STD OXQ114 Expected																					
BLK	Blank																				
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.003	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.003	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	0.1	<0.1
BLK	Blank																				
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.002	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank	<0.001	<0.1	<1	<0.01	<1	<0.001	<0.01	0.003	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000310.1

		MA200 Rb ppm 0.1	MA200 Hf ppm 0.1	MA200 In ppm 0.05	MA200 Re ppm 0.005	MA200 Se ppm 1	MA200 Te ppm 0.5	MA200 Tl ppm 0.5	AQ200 Hg ppm 0.01	FA550 Au gm/t 0.9
STD OXC145	Standard									
STD OXH139	Standard									
STD OXH139	Standard									
STD OXH139	Standard									
STD OXH139	Standard									
STD OXQ114	Standard									35.1
STD SP49	Standard									18.3
STD OREAS45H Expected		22.5	3.6	0.1		2.02				
STD OREAS25A-4A Expected		61	4.14	0.09		2.4		0.35		
STD OREAS45E Expected		21.2	3.11	0.099		2.97	0.1	0.15		
STD BVGEO01 Expected									0.1	
STD OXC145 Expected										
STD OXH139 Expected										
STD DS11 Expected									0.26	
STD OREAS262 Expected									0.17	
STD AGPROOF Expected										0
STD SP49 Expected										18.34
STD OXQ114 Expected										35.2
BLK	Blank									
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5		
BLK	Blank	<0.1	<0.1	<0.05	<0.005	1	<0.5	<0.5		
BLK	Blank								<0.01	
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5		
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5		
BLK	Blank								<0.01	
BLK	Blank								<0.01	
BLK	Blank								<0.01	
BLK	Blank									
BLK	Blank									

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000310.1

		WGHT Wgt kg 0.01	FA350 Au ppb 2	MA200 Mo ppm 0.1	MA200 Cu ppm 0.1	MA200 Pb ppm 0.1	MA200 Zn ppm 1	MA200 Ag ppm 0.1	MA200 Ni ppm 0.1	MA200 Co ppm 0.2	MA200 Mn ppm 1	MA200 Fe % 0.01	MA200 As ppm 1	MA200 U ppm 0.1	MA200 Th ppm 0.1	MA200 Sr ppm 1	MA200 Cd ppm 0.1	MA200 Sb ppm 0.1	MA200 Bi ppm 0.1	MA200 V ppm 1	MA200 Ca % 0.01
BLK	Blank		4																		
BLK	Blank																				
BLK	Blank																				
Prep Wash																					
ROCK-WHI	Prep Blank		4	1.0	3.9	28.1	74	<0.1	0.9	4.3	662	2.21	2	1.3	3.1	207	<0.1	0.2	<0.1	36	1.57
ROCK-WHI	Prep Blank		3	0.9	4.0	54.1	48	<0.1	1.1	4.1	618	2.12	2	1.1	3.0	209	<0.1	0.2	<0.1	34	1.62

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000310.1

		MA200 P % 0.001	MA200 La ppm 0.1	MA200 Cr ppm 1	MA200 Mg % 0.01	MA200 Ba ppm 1	MA200 Ti % 0.001	MA200 Al % 0.01	MA200 Na % 0.001	MA200 K % 0.01	MA200 W ppm 0.1	MA200 Zr ppm 0.1	MA200 Ce ppm 1	MA200 Sn ppm 0.1	MA200 Y ppm 0.1	MA200 Nb ppm 0.1	MA200 Ta ppm 0.1	MA200 Be ppm 1	MA200 Sc ppm 1	MA200 Li ppm 0.1	MA200 S % 0.1
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
Prep Wash																					
ROCK-WHI	Prep Blank	0.042	11.7	2	0.51	835	0.223	6.81	3.225	1.53	0.6	54.4	24	0.9	16.2	5.9	0.4	1	7	3.1	<0.1
ROCK-WHI	Prep Blank	0.036	13.1	2	0.49	783	0.214	6.89	3.231	1.54	0.3	49.8	25	0.8	15.6	5.7	0.4	<1	7	2.6	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000310.1

		MA200 Rb ppm 0.1	MA200 Hf ppm 0.1	MA200 In ppm 0.05	MA200 Re ppm 0.005	MA200 Se ppm 1	MA200 Te ppm 0.5	MA200 Tl ppm 0.5	AQ200 Hg ppm 0.01	FA550 Au gm/t 0.9
BLK	Blank									
BLK	Blank								<0.01	
BLK	Blank									<0.9
Prep Wash										
ROCK-WHI	Prep Blank	32.8	1.7	<0.05	<0.005	<1	<0.5	<0.5	0.01	
ROCK-WHI	Prep Blank	33.2	1.6	<0.05	<0.005	<1	<0.5	<0.5	0.02	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Submitted By: Daithi MacGearailt
Receiving Lab: Canada-Whitehorse
Received: August 02, 2019
Report Date: September 05, 2019
Page: 1 of 3

CERTIFICATE OF ANALYSIS WHI19000313.1

CLIENT JOB INFORMATION

Project: LUC
Shipment ID: DDLS-19-04
P.O. Number
Number of Samples: 45

SAMPLE DISPOSAL

STOR-PLP Store After 90 days Invoice for Storage
STOR-RJT Store After 60 days Invoice for Storage

Bureau Veritas does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Procedure Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
PRP70-250	45	Crush, split and pulverize 250 g rock to 200 mesh			WHI
SLBHP	45	Sort, label and box pulps			WHI
FA350-Au	45	50g Fire assay fusion Au by ICP-ES	50	Completed	VAN
EN002	45	Environmental disposal charge-Fire assay lead waste			VAN
MA200	45	4 Acid digestion ICP-MS analysis	0.25	Completed	VAN
AQ200-HG	45	Hg by AR digestion ICP-MS analysis	0.5	Completed	VAN
SHP01	45	Per sample shipping charges for branch shipments			VAN
EN001-MA	45	Environmental disposal fee - Multi-acid neutralization			VAN
PULSW	45	Extra Wash with Silica between each sample			WHI

ADDITIONAL COMMENTS

Invoice To: Luckystrike Resources Ltd.
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4
Canada

CC: Dan Ferraro

BRITISH COLUMBIA CERTIFIED ASSAYER
MARCUS LAU
Production Manager

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Bureau Veritas assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000313.1

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320752	Drill Core	3.65	4	1.6	37.1	7.2	50	<0.1	3.8	13.8	692	3.35	5	0.3	1.8	329	<0.1	1.8	<0.1	102	2.68
1320753	Drill Core	1.49	77	0.6	19.3	6.3	40	<0.1	3.5	9.2	752	2.57	4	0.2	0.9	230	0.1	3.4	<0.1	67	2.82
1320754	Drill Core	1.78	4	0.3	10.3	6.7	65	<0.1	4.9	12.6	629	3.32	6	0.3	1.6	311	<0.1	1.3	<0.1	107	2.00
1320755	Drill Core	3.40	6	0.5	18.2	5.9	57	<0.1	4.6	10.9	780	3.37	6	0.5	2.0	280	0.1	1.5	<0.1	102	3.07
1320756	Drill Core	3.34	3	0.4	22.0	6.2	57	<0.1	5.7	12.9	822	3.68	6	0.6	2.3	205	<0.1	3.0	<0.1	110	3.16
1320757	Drill Core	3.23	3	1.0	35.1	6.1	66	<0.1	5.7	14.8	823	4.10	4	0.6	2.5	149	<0.1	4.8	<0.1	127	2.44
1320758	Drill Core	3.06	4	0.2	25.3	4.8	60	<0.1	5.1	12.7	726	3.55	4	0.8	2.8	217	<0.1	0.8	<0.1	105	2.33
1320759	Drill Core	3.49	5	0.6	56.4	4.8	92	<0.1	5.2	13.4	850	3.93	6	0.7	2.1	252	0.2	0.6	<0.1	118	2.74
1320760	Drill Core	3.38	4	0.2	39.5	6.7	70	<0.1	4.5	10.8	672	3.23	4	1.1	1.9	279	<0.1	0.5	<0.1	92	1.93
1320761	Drill Core	3.61	3	0.5	45.9	7.1	97	<0.1	18.4	20.2	899	4.44	8	0.7	1.9	197	0.1	3.1	<0.1	174	3.53
1320762	Drill Core	3.33	3	0.3	32.6	6.1	66	<0.1	8.5	15.6	829	3.90	7	0.6	1.8	151	<0.1	2.4	<0.1	125	2.83
1320763	Drill Core	3.40	3	0.6	22.1	5.9	60	<0.1	4.6	11.9	763	3.69	5	0.7	2.3	200	<0.1	1.2	<0.1	108	2.49
1320764	Drill Core	3.70	3	0.4	17.0	7.8	68	<0.1	7.5	13.4	897	3.62	7	0.5	2.1	158	<0.1	6.4	<0.1	113	3.56
1320765	Drill Core	3.53	3	2.6	24.8	7.0	47	<0.1	5.0	10.8	662	3.41	6	0.7	1.9	180	<0.1	0.9	<0.1	126	2.67
1320766	Drill Core	2.95	3	1.1	27.7	5.2	56	<0.1	4.7	12.3	680	3.44	3	0.7	2.1	199	<0.1	0.6	<0.1	112	1.86
1320767	Drill Core	3.73	4	0.2	135.5	4.5	59	0.1	4.1	10.6	723	3.47	2	0.7	2.4	202	<0.1	0.7	<0.1	100	1.88
1320768	Drill Core	3.53	5	0.3	24.1	4.3	60	<0.1	4.7	12.1	726	3.58	3	0.6	2.2	239	<0.1	0.7	<0.1	123	2.12
1320769	Drill Core	3.17	5	0.2	44.5	5.4	78	<0.1	5.6	15.0	670	3.89	4	0.7	2.2	225	<0.1	0.9	<0.1	117	1.66
1320770	Drill Core	3.14	4	0.2	41.4	6.2	62	<0.1	4.3	11.7	732	3.68	4	0.6	2.1	236	<0.1	0.7	<0.1	118	2.09
1320771	Drill Core	2.05	4	0.3	8.7	10.6	52	<0.1	4.1	13.5	778	3.37	4	1.7	2.1	254	<0.1	0.9	<0.1	94	3.45
1320772	Drill Core	4.01	4	0.9	35.5	10.4	72	<0.1	8.3	18.0	865	4.56	6	0.6	1.9	229	<0.1	13.5	<0.1	160	3.82
1320773	Drill Core	4.56	3	2.8	40.4	8.0	77	<0.1	11.4	21.4	1274	5.41	4	0.9	2.2	253	0.1	1.1	0.1	197	4.99
1320774	Drill Core	2.62	3	0.5	64.5	9.2	89	<0.1	14.6	24.3	841	5.08	5	1.1	2.6	412	<0.1	1.0	<0.1	198	3.29
1320775	Rock Pulp	0.05	8	3.2	24.3	4.2	39	0.3	21.7	10.7	499	2.50	4	0.7	1.9	227	0.2	0.7	<0.1	80	1.77
1320776	Rock Pulp	0.05	239	181.8	1821.9	42.0	267	0.6	35.5	14.3	738	4.06	15	0.8	2.0	266	0.9	1.6	0.4	116	2.52
1320777	Drill Core	4.19	4	0.6	17.4	5.6	36	<0.1	3.1	8.3	754	2.98	2	1.3	4.7	209	<0.1	0.8	<0.1	67	3.84
1320778	Drill Core	3.92	3	0.4	30.6	4.8	52	<0.1	6.2	15.0	695	4.07	4	1.3	4.3	192	<0.1	0.6	<0.1	140	1.91
1320779	Drill Core	2.68	3	0.5	28.8	6.1	54	<0.1	11.9	10.7	708	3.48	2	1.0	3.5	221	<0.1	0.4	<0.1	89	2.31
1320780	Drill Core	3.39	4	0.3	29.6	6.4	66	<0.1	16.2	17.9	896	4.66	3	1.0	2.7	272	<0.1	0.7	<0.1	152	3.24
1320781	Drill Core	2.63	4	0.9	23.9	8.7	61	<0.1	15.0	13.0	809	3.88	3	1.1	3.6	259	0.1	0.7	<0.1	107	2.50

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000313.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320752	Drill Core		0.038	7.5	8	0.84	258	0.203	6.69	3.970	0.40	0.4	7.5	17	0.7	11.7	2.2	0.1	<1	16	8.5	0.2
1320753	Drill Core		0.026	4.8	5	0.98	338	0.124	6.17	4.228	0.36	0.7	4.3	11	0.3	8.4	1.3	<0.1	<1	9	6.4	0.2
1320754	Drill Core		0.043	6.2	8	0.78	257	0.234	6.80	3.375	0.73	0.2	6.4	14	0.5	9.4	2.1	0.1	<1	16	10.9	<0.1
1320755	Drill Core		0.040	7.4	9	1.09	373	0.236	6.59	3.201	0.66	1.4	6.4	17	0.8	11.0	2.4	0.1	<1	15	11.5	<0.1
1320756	Drill Core		0.045	8.6	12	1.05	541	0.287	7.03	2.875	0.61	0.3	7.3	19	0.9	16.7	2.9	0.2	1	18	14.6	0.1
1320757	Drill Core		0.046	7.5	10	1.12	297	0.313	7.05	2.528	1.04	0.2	5.9	17	0.8	16.9	3.0	0.2	<1	17	17.2	0.2
1320758	Drill Core		0.043	6.8	8	1.09	411	0.274	6.99	2.985	1.25	0.1	4.4	15	0.8	17.6	2.6	0.1	<1	17	12.8	<0.1
1320759	Drill Core		0.041	8.2	8	1.22	438	0.291	7.08	2.859	1.21	0.1	5.4	19	0.8	21.8	2.5	0.1	<1	19	15.3	<0.1
1320760	Drill Core		0.035	6.2	7	1.01	641	0.253	7.32	3.427	1.21	0.1	4.5	15	0.8	16.1	2.9	0.2	<1	16	12.4	<0.1
1320761	Drill Core		0.060	7.1	67	1.60	473	0.430	7.01	2.731	1.51	0.2	5.2	15	0.8	20.7	3.8	0.3	1	24	17.0	<0.1
1320762	Drill Core		0.043	6.7	26	1.21	360	0.324	6.54	2.826	1.39	0.3	5.5	14	0.9	15.9	2.7	0.2	<1	20	11.7	<0.1
1320763	Drill Core		0.040	6.9	9	1.20	463	0.289	7.45	3.454	1.58	0.3	5.3	15	0.7	15.0	2.8	0.2	<1	16	11.3	<0.1
1320764	Drill Core		0.040	7.4	38	1.25	208	0.269	6.78	3.106	0.94	0.4	4.2	16	0.7	15.4	2.9	0.2	<1	19	14.7	<0.1
1320765	Drill Core		0.038	7.3	12	0.98	272	0.268	6.49	4.367	0.34	0.3	4.9	16	0.6	16.5	2.4	0.1	<1	15	5.8	0.1
1320766	Drill Core		0.040	7.6	10	0.88	249	0.299	6.96	3.825	0.92	0.3	6.2	16	0.7	13.9	3.1	0.2	<1	18	10.1	0.1
1320767	Drill Core		0.038	9.7	7	0.92	240	0.282	6.98	3.337	1.17	0.2	6.9	22	0.8	20.8	3.1	0.2	<1	18	11.0	<0.1
1320768	Drill Core		0.046	8.1	9	0.91	234	0.312	7.53	3.614	1.20	0.2	5.2	18	0.8	17.7	2.8	0.1	<1	19	11.2	<0.1
1320769	Drill Core		0.051	6.8	8	1.07	289	0.309	7.19	3.483	1.27	0.2	6.6	16	0.7	15.7	2.8	0.2	<1	18	13.1	<0.1
1320770	Drill Core		0.043	7.3	8	0.83	218	0.304	7.05	4.178	0.94	0.3	8.2	17	0.9	16.2	3.2	0.2	<1	18	9.9	<0.1
1320771	Drill Core		0.045	8.1	8	0.64	381	0.270	6.35	4.148	0.56	0.2	6.7	18	0.7	21.1	3.1	0.2	1	15	6.5	0.5
1320772	Drill Core		0.043	7.2	19	1.01	147	0.303	7.23	3.610	0.88	0.6	6.5	16	0.6	16.9	2.3	0.2	<1	23	11.3	0.1
1320773	Drill Core		0.047	8.0	16	1.48	356	0.314	7.39	2.759	1.24	0.4	5.5	16	0.7	19.0	1.6	0.1	<1	26	11.5	0.2
1320774	Drill Core		0.056	7.6	20	1.62	635	0.339	8.25	2.957	1.45	0.3	5.5	16	0.7	13.0	3.3	0.2	1	23	18.3	0.2
1320775	Rock Pulp		0.048	9.3	28	0.80	441	0.272	5.16	1.997	0.80	25.8	31.7	18	0.7	13.0	3.1	0.2	<1	11	10.0	<0.1
1320776	Rock Pulp		0.053	10.4	51	1.28	525	0.350	6.63	2.262	0.85	8.0	27.4	20	1.5	14.8	4.0	0.2	<1	14	15.5	0.3
1320777	Drill Core		0.034	10.9	5	1.23	87	0.177	6.89	4.496	0.22	0.2	8.2	21	0.5	17.7	2.3	0.2	<1	12	5.9	0.2
1320778	Drill Core		0.046	10.8	12	1.06	195	0.262	8.17	3.933	0.76	0.3	9.2	21	0.5	18.1	2.5	0.2	<1	19	8.7	0.2
1320779	Drill Core		0.076	10.8	32	1.09	563	0.267	7.73	4.140	0.96	0.1	5.1	23	0.6	21.0	2.6	0.2	<1	17	10.1	0.2
1320780	Drill Core		0.072	10.0	41	1.61	953	0.336	7.43	3.250	1.45	0.2	3.6	20	0.7	16.9	2.3	0.2	<1	20	11.7	0.2
1320781	Drill Core		0.049	12.1	31	1.48	779	0.307	7.53	3.158	1.64	0.1	4.6	24	0.8	19.0	2.9	0.1	<1	17	10.0	0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000313.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01
1320752	Drill Core	10.7	0.4	0.05	<0.005	<1	<0.5	<0.5	0.02
1320753	Drill Core	10.3	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.02
1320754	Drill Core	26.0	0.2	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320755	Drill Core	20.7	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.04
1320756	Drill Core	17.6	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.02
1320757	Drill Core	28.0	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.03
1320758	Drill Core	30.7	0.3	0.06	<0.005	1	<0.5	<0.5	0.02
1320759	Drill Core	35.1	0.3	0.09	<0.005	1	<0.5	<0.5	0.01
1320760	Drill Core	34.3	0.3	0.06	<0.005	<1	<0.5	<0.5	<0.01
1320761	Drill Core	52.8	0.3	<0.05	<0.005	<1	<0.5	<0.5	<0.01
1320762	Drill Core	40.1	0.3	0.06	<0.005	<1	<0.5	<0.5	<0.01
1320763	Drill Core	40.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.02
1320764	Drill Core	33.8	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01
1320765	Drill Core	7.9	0.2	<0.05	<0.005	<1	<0.5	<0.5	0.01
1320766	Drill Core	26.3	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.04
1320767	Drill Core	33.7	0.4	0.11	<0.005	<1	<0.5	<0.5	0.03
1320768	Drill Core	38.5	0.3	0.06	<0.005	<1	<0.5	<0.5	0.06
1320769	Drill Core	40.3	0.3	0.06	<0.005	<1	<0.5	<0.5	0.06
1320770	Drill Core	26.9	0.4	0.07	<0.005	<1	<0.5	<0.5	0.12
1320771	Drill Core	12.0	0.3	<0.05	<0.005	1	<0.5	<0.5	0.13
1320772	Drill Core	31.6	0.3	0.08	<0.005	1	<0.5	<0.5	0.18
1320773	Drill Core	45.3	0.4	0.09	0.007	1	<0.5	<0.5	0.12
1320774	Drill Core	47.4	0.4	<0.05	<0.005	1	0.6	<0.5	0.05
1320775	Rock Pulp	21.4	1.0	0.09	<0.005	1	<0.5	<0.5	<0.01
1320776	Rock Pulp	20.9	0.9	0.10	0.082	1	<0.5	<0.5	0.11
1320777	Drill Core	5.8	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.06
1320778	Drill Core	25.3	0.5	<0.05	<0.005	<1	<0.5	<0.5	0.04
1320779	Drill Core	29.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.07
1320780	Drill Core	41.3	0.2	0.06	<0.005	<1	<0.5	<0.5	0.03
1320781	Drill Core	43.7	0.3	0.08	<0.005	1	<0.5	<0.5	0.01

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000313.1

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
1320782	Drill Core	3.70	11	2.5	22.6	7.2	42	<0.1	7.9	11.8	735	3.48	3	0.9	3.1	176	0.1	2.2	<0.1	90	3.22
1320783	Drill Core	3.95	3	0.7	13.3	6.5	55	<0.1	14.2	10.0	707	3.10	3	1.2	3.9	179	0.1	0.5	<0.1	96	2.41
1320784	Drill Core	3.77	3	3.6	79.6	6.7	109	<0.1	28.7	32.8	1673	7.15	5	1.0	2.7	160	0.3	0.2	<0.1	297	3.20
1320785	Drill Core	3.59	3	4.5	38.6	16.3	86	<0.1	36.1	25.7	1219	5.78	5	2.2	5.1	215	0.2	0.2	<0.1	230	3.00
1320786	Drill Core	5.00	3	1.4	15.0	8.9	89	<0.1	34.2	29.1	1461	6.22	4	2.2	4.0	229	<0.1	0.2	<0.1	256	3.23
1320787	Drill Core	2.17	3	0.6	10.3	5.1	40	<0.1	17.8	10.5	5756	4.32	4	1.0	3.9	225	0.2	0.2	<0.1	91	14.68
1320788	Drill Core	3.92	5	4.2	59.0	29.3	77	0.2	30.9	21.3	792	5.08	9	1.5	4.0	133	0.2	7.9	0.1	190	4.85
1320789	Drill Core	3.47	6	1.6	38.7	8.6	94	<0.1	35.0	18.5	612	4.15	7	1.5	4.6	152	0.2	1.3	<0.1	123	2.72
1320790	Drill Core	3.54	19	1.3	42.1	8.2	89	<0.1	33.8	23.2	736	5.13	7	0.9	3.8	183	0.1	2.5	<0.1	216	3.73
1320791	Drill Core	2.63	95	1.3	38.3	9.7	71	0.2	41.0	18.2	623	4.01	6	1.2	5.2	110	0.2	2.3	<0.1	141	4.27
1320792	Drill Core	3.43	16	3.0	26.1	12.3	67	0.2	25.8	12.3	657	2.93	8	1.5	4.1	106	0.2	3.8	<0.1	137	3.97
1320793	Drill Core	3.78	4	1.4	33.6	7.2	104	<0.1	17.7	27.9	1078	6.92	6	0.9	2.3	206	0.2	2.2	<0.1	329	4.42
1320794	Drill Core	3.39	3	0.6	27.3	7.1	95	0.1	37.4	25.9	995	5.53	5	1.2	1.8	207	0.4	1.3	<0.1	244	4.85
1320795	Drill Core	4.37	4	1.8	38.9	10.4	96	0.2	35.2	15.6	622	3.95	30	2.1	6.2	102	0.3	2.2	0.1	158	3.61
1320796	Drill Core	3.63	3	1.5	37.3	12.2	107	<0.1	100.6	46.4	1159	7.12	4	0.8	1.3	338	0.4	1.6	0.2	295	6.48

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000313.1

		Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
		Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
		Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
1320782	Drill Core		0.054	12.0	18	0.85	335	0.225	7.05	3.921	1.16	0.9	5.0	24	0.7	17.0	2.7	0.1	<1	15	7.8	0.4
1320783	Drill Core		0.040	12.7	25	0.99	652	0.266	7.31	3.694	1.35	0.3	5.2	26	0.8	18.5	3.5	0.2	1	14	9.0	0.2
1320784	Drill Core		0.095	11.6	42	2.59	103	0.552	7.15	3.713	0.85	0.4	11.7	25	1.3	32.4	2.9	0.2	1	24	11.1	0.8
1320785	Drill Core		0.072	17.9	62	2.09	212	0.490	6.45	2.969	1.13	0.3	7.5	34	1.0	28.9	3.8	0.2	1	19	12.4	0.7
1320786	Drill Core		0.071	16.2	79	2.18	574	0.486	7.81	4.267	0.99	0.3	6.2	32	1.0	23.9	3.8	0.3	2	26	13.7	0.4
1320787	Drill Core		0.027	19.7	34	2.94	335	0.233	3.38	1.293	0.56	0.1	2.8	37	0.6	39.9	2.9	0.2	<1	9	8.3	<0.1
1320788	Drill Core		0.056	15.8	43	1.45	541	0.334	5.32	0.849	1.30	0.9	5.7	31	0.8	17.0	2.2	0.1	<1	15	22.4	0.7
1320789	Drill Core		0.058	16.7	66	1.56	468	0.340	6.54	1.055	1.82	0.4	3.0	32	0.9	15.4	5.0	0.3	1	16	24.1	0.5
1320790	Drill Core		0.053	14.2	55	1.58	700	0.379	6.83	1.340	1.87	0.8	4.6	27	0.7	15.4	3.1	0.2	1	19	30.4	0.4
1320791	Drill Core		0.051	17.9	73	1.33	189	0.274	5.97	0.708	1.59	1.6	4.4	34	1.1	14.0	3.3	0.2	<1	13	19.9	0.8
1320792	Drill Core		0.042	14.1	34	1.33	144	0.244	4.00	0.116	0.95	0.9	5.6	28	0.6	13.4	2.8	0.1	<1	9	21.7	0.5
1320793	Drill Core		0.061	10.6	23	1.84	258	0.611	6.53	1.852	1.00	0.6	7.7	23	1.0	24.3	2.7	0.2	1	22	21.9	0.7
1320794	Drill Core		0.040	9.7	96	2.10	624	0.485	6.32	1.721	1.03	0.3	6.6	19	0.9	20.5	2.3	0.1	1	26	14.4	0.3
1320795	Drill Core		0.043	20.0	73	1.69	129	0.355	5.37	0.039	1.01	0.6	6.1	39	1.1	17.5	4.5	0.2	<1	14	21.6	0.4
1320796	Drill Core		0.054	7.8	146	2.85	463	0.719	7.46	2.016	0.91	0.4	8.3	17	0.9	28.6	2.7	0.2	1	32	10.3	0.6

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

CERTIFICATE OF ANALYSIS WHI19000313.1

Method		MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200
Analyte		Rb	Hf	In	Re	Se	Te	Tl	Hg
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
MDL		0.1	0.1	0.05	0.005	1	0.5	0.5	0.01
1320782	Drill Core	29.2	0.2	0.06	<0.005	<1	<0.5	<0.5	0.02
1320783	Drill Core	35.2	0.2	<0.05	<0.005	1	<0.5	<0.5	0.02
1320784	Drill Core	28.5	0.5	<0.05	0.007	2	<0.5	<0.5	0.02
1320785	Drill Core	39.8	0.3	0.06	0.007	2	<0.5	<0.5	0.06
1320786	Drill Core	36.8	0.3	0.05	<0.005	<1	<0.5	<0.5	<0.01
1320787	Drill Core	18.4	0.1	<0.05	<0.005	<1	1.7	<0.5	0.04
1320788	Drill Core	52.8	0.2	<0.05	0.007	<1	<0.5	<0.5	0.04
1320789	Drill Core	71.1	0.1	<0.05	<0.005	2	<0.5	<0.5	0.03
1320790	Drill Core	69.4	0.3	<0.05	<0.005	<1	0.6	<0.5	0.04
1320791	Drill Core	52.9	0.2	<0.05	<0.005	1	<0.5	<0.5	0.10
1320792	Drill Core	35.9	0.2	<0.05	<0.005	2	<0.5	<0.5	0.18
1320793	Drill Core	46.6	0.5	0.07	0.006	1	<0.5	<0.5	0.02
1320794	Drill Core	40.7	0.4	<0.05	<0.005	2	<0.5	<0.5	0.02
1320795	Drill Core	36.2	0.2	0.07	<0.005	1	1.1	<0.5	0.30
1320796	Drill Core	35.4	0.5	<0.05	<0.005	<1	0.9	<0.5	<0.01

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000313.1

	Method	WGHT	FA350	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	U	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.2	1	0.01	1	0.1	0.1	1	0.1	0.1	0.1	1	0.01
Pulp Duplicates																					
1320766	Drill Core	2.95	3	1.1	27.7	5.2	56	<0.1	4.7	12.3	680	3.44	3	0.7	2.1	199	<0.1	0.6	<0.1	112	1.86
REP 1320766	QC		4																		
1320767	Drill Core	3.73	4	0.2	135.5	4.5	59	0.1	4.1	10.6	723	3.47	2	0.7	2.4	202	<0.1	0.7	<0.1	100	1.88
REP 1320767	QC																				
1320781	Drill Core	2.63	4	0.9	23.9	8.7	61	<0.1	15.0	13.0	809	3.88	3	1.1	3.6	259	0.1	0.7	<0.1	107	2.50
REP 1320781	QC			0.7	23.3	8.5	64	<0.1	13.5	14.7	844	3.98	3	1.1	3.5	258	0.1	0.6	<0.1	109	2.54
1320790	Drill Core	3.54	19	1.3	42.1	8.2	89	<0.1	33.8	23.2	736	5.13	7	0.9	3.8	183	0.1	2.5	<0.1	216	3.73
REP 1320790	QC		31																		
1320791	Drill Core	2.63	95	1.3	38.3	9.7	71	0.2	41.0	18.2	623	4.01	6	1.2	5.2	110	0.2	2.3	<0.1	141	4.27
REP 1320791	QC																				
Core Reject Duplicates																					
1320779	Drill Core	2.68	3	0.5	28.8	6.1	54	<0.1	11.9	10.7	708	3.48	2	1.0	3.5	221	<0.1	0.4	<0.1	89	2.31
DUP 1320779	QC		3	0.4	29.3	5.7	52	<0.1	11.8	10.9	674	3.49	3	1.0	3.2	220	<0.1	0.4	<0.1	87	2.26
Reference Materials																					
STD BVGEO01	Standard																				
STD DS11	Standard																				
STD OREAS25A-4A	Standard			2.2	36.6	25.9	46	<0.1	48.0	8.2	516	6.82	10	2.9	16.5	49	<0.1	0.5	0.4	156	0.30
STD OREAS25A-4A	Standard			2.4	34.3	24.4	44	<0.1	46.9	7.9	508	6.49	9	2.8	15.6	45	<0.1	0.5	0.4	159	0.26
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS45E	Standard			2.6	795.8	19.9	50	0.3	470.7	61.4	572	26.35	16	2.6	13.9	18	<0.1	0.6	0.3	342	0.07
STD OREAS45H	Standard			1.5	798.4	13.7	39	<0.1	456.2	92.4	431	21.27	16	1.9	8.2	30	<0.1	0.6	0.2	284	0.14
STD OXC145	Standard		209																		
STD OXC145	Standard		210																		
STD OXH139	Standard		1253																		
STD OXH139	Standard		1318																		
STD OREAS45E Expected				2.4	780	18.2	46.7	0.311	454	57	570	24.12	16.3	2.41	12.9	15.9	0.06	1	0.28	322	0.065
STD OREAS25A-4A Expected				2.41	33.9	25.2	44.4		45.8	7.7	480	6.6	9.94	2.94	15.8	48.5		0.65	0.37	157	0.301

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000313.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200	MA200
	Analyte	P	La	Cr	Mg	Ba	Ti	Al	Na	K	W	Zr	Ce	Sn	Y	Nb	Ta	Be	Sc	Li	S
	Unit	%	ppm	ppm	%	ppm	%	%	%	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.001	0.1	1	0.01	1	0.001	0.01	0.001	0.01	0.1	0.1	1	0.1	0.1	0.1	0.1	1	1	0.1	0.1
Pulp Duplicates																					
1320766	Drill Core	0.040	7.6	10	0.88	249	0.299	6.96	3.825	0.92	0.3	6.2	16	0.7	13.9	3.1	0.2	<1	18	10.1	0.1
REP 1320766	QC																				
1320767	Drill Core	0.038	9.7	7	0.92	240	0.282	6.98	3.337	1.17	0.2	6.9	22	0.8	20.8	3.1	0.2	<1	18	11.0	<0.1
REP 1320767	QC																				
1320781	Drill Core	0.049	12.1	31	1.48	779	0.307	7.53	3.158	1.64	0.1	4.6	24	0.8	19.0	2.9	0.1	<1	17	10.0	0.2
REP 1320781	QC	0.051	11.7	33	1.51	764	0.309	7.87	3.315	1.61	0.1	4.4	22	0.8	18.7	2.8	0.2	<1	18	11.4	0.2
1320790	Drill Core	0.053	14.2	55	1.58	700	0.379	6.83	1.340	1.87	0.8	4.6	27	0.7	15.4	3.1	0.2	1	19	30.4	0.4
REP 1320790	QC																				
1320791	Drill Core	0.051	17.9	73	1.33	189	0.274	5.97	0.708	1.59	1.6	4.4	34	1.1	14.0	3.3	0.2	<1	13	19.9	0.8
REP 1320791	QC																				
Core Reject Duplicates																					
1320779	Drill Core	0.076	10.8	32	1.09	563	0.267	7.73	4.140	0.96	0.1	5.1	23	0.6	21.0	2.6	0.2	<1	17	10.1	0.2
DUP 1320779	QC	0.069	9.7	31	1.08	563	0.262	7.43	4.054	0.90	0.1	5.1	19	0.6	19.2	2.5	0.2	1	16	9.1	0.2
Reference Materials																					
STD BVGEO01	Standard																				
STD DS11	Standard																				
STD OREAS25A-4A	Standard	0.047	24.0	115	0.38	148	0.869	9.86	0.131	0.49	1.4	144.1	51	3.8	10.8	17.9	1.2	<1	14	35.4	<0.1
STD OREAS25A-4A	Standard	0.050	19.5	116	0.34	150	0.942	8.80	0.125	0.49	1.9	149.4	43	4.0	9.7	19.7	1.4	1	12	38.1	<0.1
STD OREAS262	Standard																				
STD OREAS262	Standard																				
STD OREAS45E	Standard	0.033	12.5	1050	0.18	245	0.511	7.25	0.062	0.36	0.8	87.8	27	1.3	8.7	5.8	0.5	<1	96	6.4	<0.1
STD OREAS45H	Standard	0.022	13.1	666	0.28	359	0.937	8.54	0.099	0.21	0.9	129.3	26	2.1	10.2	14.6	1.0	1	58	15.7	<0.1
STD OXC145	Standard																				
STD OXC145	Standard																				
STD OXH139	Standard																				
STD OXH139	Standard																				
STD OREAS45E Expected		0.034	11	979	0.156	252	0.559	6.78	0.059	0.324	1.07	97	23.5	1.32	8.28	6.8	0.54		93	6.58	0.046
STD OREAS25A-4A Expected		0.048	21.8	115	0.327	147	0.93	8.87	0.131	0.482	2	155	47.3	4.06	10.5	20.9	1.4	0.93	13.7	36.7	0.047

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000313.1

	Method	MA200	MA200	MA200	MA200	MA200	MA200	MA200	AQ200
	Analyte	Rb	Hf	In	Re	Se	Te	Tl	Hg
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	MDL	0.1	0.1	0.05	0.005	1	0.5	0.5	0.01
Pulp Duplicates									
1320766	Drill Core	26.3	0.4	<0.05	<0.005	<1	<0.5	<0.5	0.04
REP 1320766	QC								
1320767	Drill Core	33.7	0.4	0.11	<0.005	<1	<0.5	<0.5	0.03
REP 1320767	QC								0.06
1320781	Drill Core	43.7	0.3	0.08	<0.005	1	<0.5	<0.5	0.01
REP 1320781	QC	42.7	0.3	<0.05	<0.005	<1	<0.5	<0.5	
1320790	Drill Core	69.4	0.3	<0.05	<0.005	<1	0.6	<0.5	0.04
REP 1320790	QC								
1320791	Drill Core	52.9	0.2	<0.05	<0.005	1	<0.5	<0.5	0.10
REP 1320791	QC								0.12
Core Reject Duplicates									
1320779	Drill Core	29.1	0.3	<0.05	<0.005	<1	<0.5	<0.5	0.07
DUP 1320779	QC	26.7	0.3	0.06	<0.005	<1	<0.5	<0.5	0.07
Reference Materials									
STD BVGEO01	Standard								0.09
STD DS11	Standard								0.29
STD OREAS25A-4A	Standard	60.6	4.3	0.14	<0.005	3	<0.5	<0.5	
STD OREAS25A-4A	Standard	55.5	4.3	0.14	<0.005	3	<0.5	<0.5	
STD OREAS262	Standard								0.17
STD OREAS262	Standard								0.16
STD OREAS45E	Standard	22.1	2.7	0.08	<0.005	3	<0.5	<0.5	
STD OREAS45H	Standard	23.9	3.6	0.15	<0.005	1	<0.5	<0.5	
STD OXC145	Standard								
STD OXC145	Standard								
STD OXH139	Standard								
STD OXH139	Standard								
STD OREAS45E Expected		21.2	3.11	0.099		2.97	0.1	0.15	
STD OREAS25A-4A Expected		61	4.14	0.09		2.4		0.35	

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000313.1

		WGHT Wgt kg 0.01	FA350 Au ppb 2	MA200 Mo ppm 0.1	MA200 Cu ppm 0.1	MA200 Pb ppm 0.1	MA200 Zn ppm 1	MA200 Ag ppm 0.1	MA200 Ni ppm 0.1	MA200 Co ppm 0.2	MA200 Mn ppm 1	MA200 Fe % 0.01	MA200 As ppm 1	MA200 U ppm 0.1	MA200 Th ppm 0.1	MA200 Sr ppm 1	MA200 Cd ppm 0.1	MA200 Sb ppm 0.1	MA200 Bi ppm 0.1	MA200 V ppm 1	MA200 Ca % 0.01
STD OREAS45H Expected				1.55	767	11.9	39.7	0.147	423	88	380	19.52	16.9	1.68	7.26	27.1		0.63	0.17	263	0.135
STD DS11 Expected																					
STD BVGEO01 Expected																					
STD OREAS262 Expected																					
STD OXC145 Expected			212																		
STD OXH139 Expected			1312																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	2	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.2	1	<0.01	<1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01
BLK	Blank		3																		
BLK	Blank																				
BLK	Blank																				
BLK	Blank		3																		
Prep Wash																					
ROCK-WHI	Prep Blank		3	1.1	3.1	5.8	40	<0.1	0.9	3.7	605	1.95	2	1.2	2.9	196	<0.1	0.2	<0.1	32	1.54
ROCK-WHI	Prep Blank		3	1.0	3.6	6.0	38	<0.1	1.0	3.8	659	2.02	2	1.1	2.8	194	<0.1	0.1	<0.1	34	1.56

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.
9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000313.1

		MA200 P % 0.001	MA200 La ppm 0.1	MA200 Cr ppm 1	MA200 Mg % 0.01	MA200 Ba ppm 1	MA200 Ti % 0.001	MA200 Al % 0.01	MA200 Na % 0.001	MA200 K % 0.01	MA200 W ppm 0.1	MA200 Zr ppm 0.1	MA200 Ce ppm 1	MA200 Sn ppm 0.1	MA200 Y ppm 0.1	MA200 Nb ppm 0.1	MA200 Ta ppm 0.1	MA200 Be ppm 1	MA200 Sc ppm 1	MA200 Li ppm 0.1	MA200 S % 0.1
STD OREAS45H Expected		0.023	12.4	602	0.238	332	0.878	7.99	0.09	0.205	0.99	131	23.6	1.93	10.4	14.8	1.08	1.09	57	13.1	
STD DS11 Expected																					
STD BVGEO01 Expected																					
STD OREAS262 Expected																					
STD OXC145 Expected																					
STD OXH139 Expected																					
BLK	Blank	<0.001	<0.1	1	<0.01	<1	<0.001	<0.01	0.004	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank	<0.001	<0.1	1	<0.01	<1	<0.001	<0.01	<0.001	<0.01	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<0.1	<1	<1	<0.1	<0.1
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
BLK	Blank																				
Prep Wash																					
ROCK-WHI	Prep Blank	0.035	12.2	4	0.46	772	0.207	6.51	3.241	1.59	0.3	51.4	23	0.9	16.4	5.2	0.4	<1	6	2.4	<0.1
ROCK-WHI	Prep Blank	0.042	12.1	4	0.47	811	0.211	6.59	3.231	1.61	0.3	51.1	24	0.8	15.9	5.3	0.4	1	6	2.7	<0.1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

BUREAU VERITAS MINERAL LABORATORIES Canada

www.bureauveritas.com/um

Bureau Veritas Commodities Canada Ltd.

9050 Shaughnessy St Vancouver British Columbia V6P 6E5 Canada
PHONE (604) 253-3158

Client: **Luckystrike Resources Ltd.**
1010 – 1130 West Pender Street
Vancouver British Columbia V6E 4A4 Canada

Project: LUC
Report Date: September 05, 2019

QUALITY CONTROL REPORT WHI19000313.1

		MA200 Rb ppm 0.1	MA200 Hf ppm 0.1	MA200 In ppm 0.05	MA200 Re ppm 0.005	MA200 Se ppm 1	MA200 Te ppm 0.5	MA200 Tl ppm 0.5	AQ200 Hg ppm 0.01
STD OREAS45H Expected		22.5	3.6	0.1		2.02			
STD DS11 Expected									0.26
STD BVGEO01 Expected									0.1
STD OREAS262 Expected									0.17
STD OXC145 Expected									
STD OXH139 Expected									
BLK	Blank	<0.1	<0.1	<0.05	<0.005	<1	<0.5	<0.5	
BLK	Blank	0.2	<0.1	<0.05	<0.005	<1	<0.5	<0.5	
BLK	Blank								
BLK	Blank								<0.01
BLK	Blank								<0.01
BLK	Blank								
Prep Wash									
ROCK-WHI	Prep Blank	32.8	1.7	<0.05	<0.005	<1	<0.5	<0.5	<0.01
ROCK-WHI	Prep Blank	31.9	1.7	<0.05	<0.005	<1	<0.5	<0.5	<0.01

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.


Appendix V: Drill Sections

Contents

- Monte Carlo Drill Plan Section
- DDLS-19-01
- DDLS-19-02
- DDLS-19-03
- DDLS-19-04

LUCKYSTRIKE

RESOURCES LTD. TSX.V : LUKY

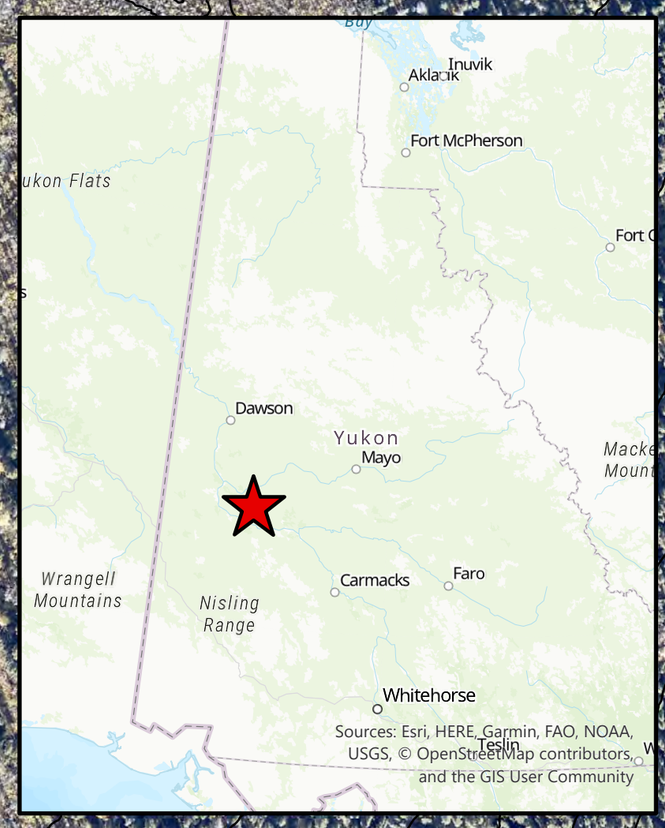

DDLS-18-10
DDLS-18-11
DDLS-17-05
DDLS-19-01
DDLS-18-09
DDLS-18-07
DDLS-18-06
DDLS-17-04
DDLS-17-09
DDLS-17-01
DDLS-18-01
DDLS-18-03
DDLS-19-02
DDLS-19-03
DDLS-18-04
DDLS-18-08

Legend

Drilling

- Diamond Drill Collars
- Drill Trace


Topography


- 5m Contours


0.03 0.01 0 0.03 0.05 0.08 0.1 Kilometers

COORDINATE SYSTEM: NAD 1983 UTM ZONE 7N

DATE CREATED: 2/21/2020

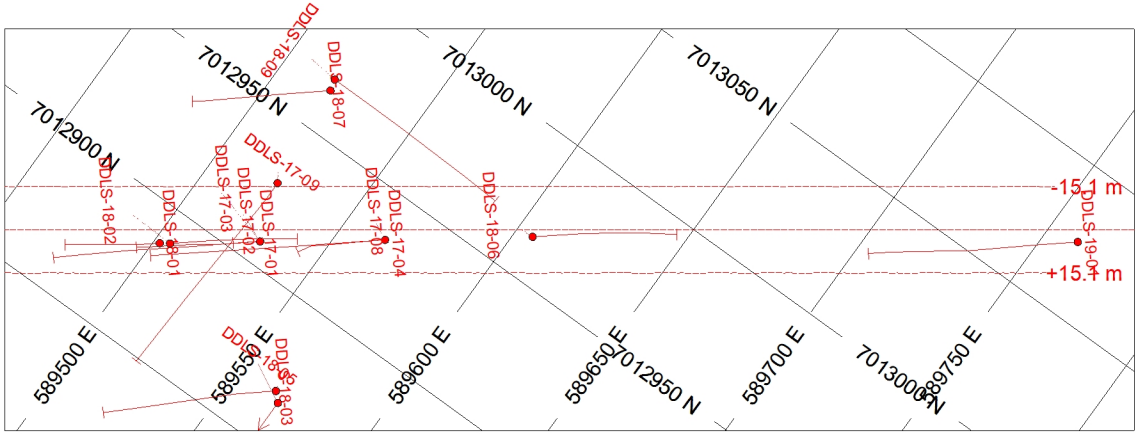

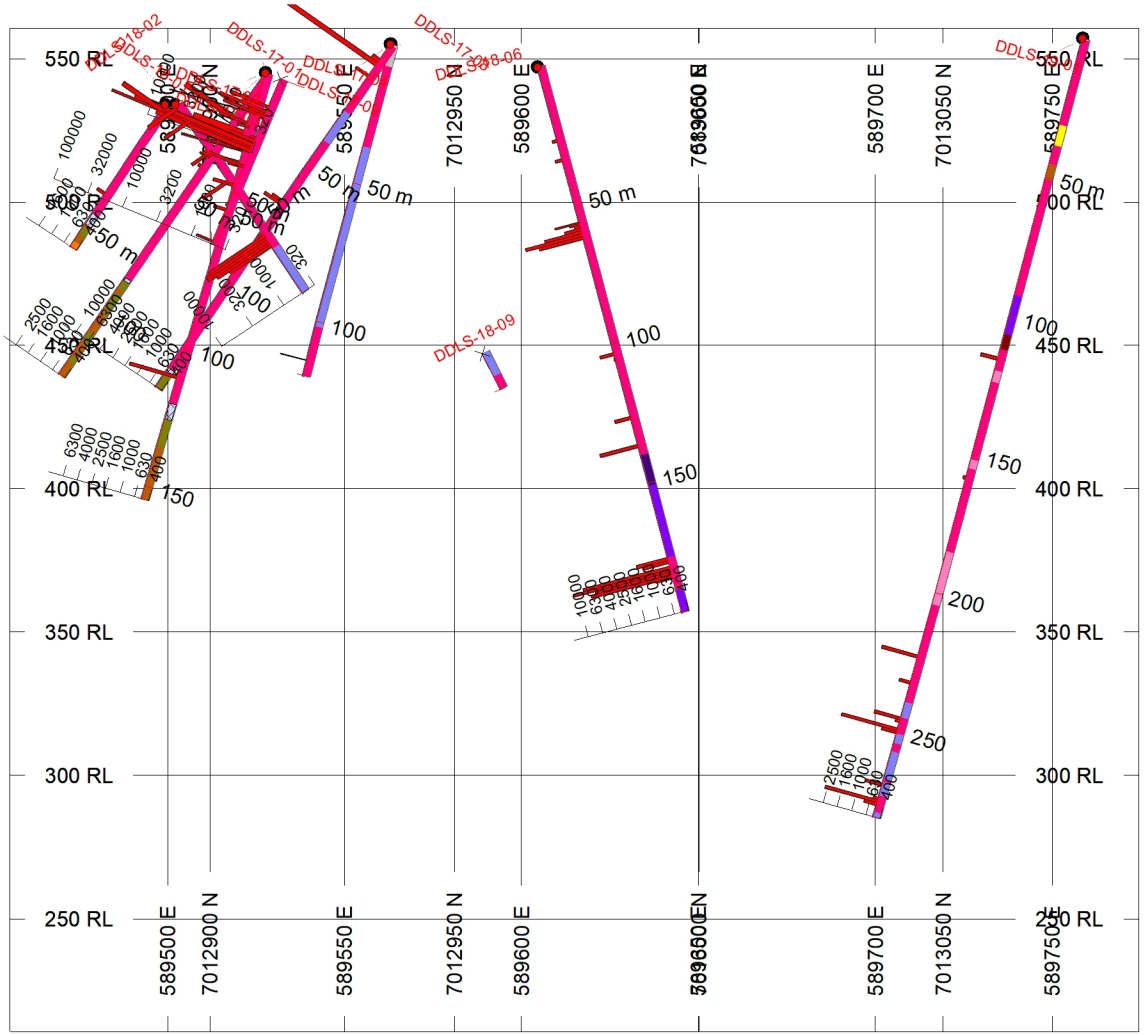

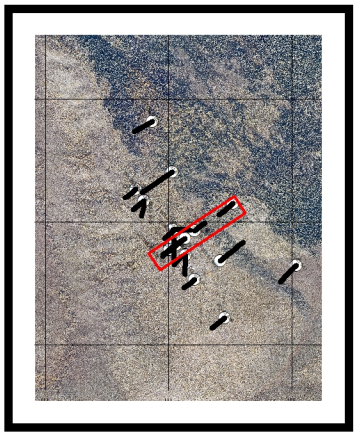

LUCKYSTRIKE RESOURCES LTD. TSX.V : LUKY

BAR GRAPHS	L/R	COL	RANGE
Au_ppb	L		Min 500

ROCK CODES	PAT	LABEL	DESCRIPTION
Lith_1		CONG	Conglomerate
		CLBSH	CHL-BIO-SCH
		DOG	Dioritic Orthogneiss
		M	Marble
		OB	Overburden
		OG	Orthogneiss
		QPC	Quartz-pebble Conglomerate
		S	Siltstone
		SHR	Shear Zone
		UMV	Ultramafic Metavolcanic
		UMV+OG	Ultramafic Meta Volcanic - Orthogneiss
		W	Wacke

SCALE


(m)


-20 0 20 40 60 80 100 120

*unknown


AZIMUTH = 54.1°

N W E S

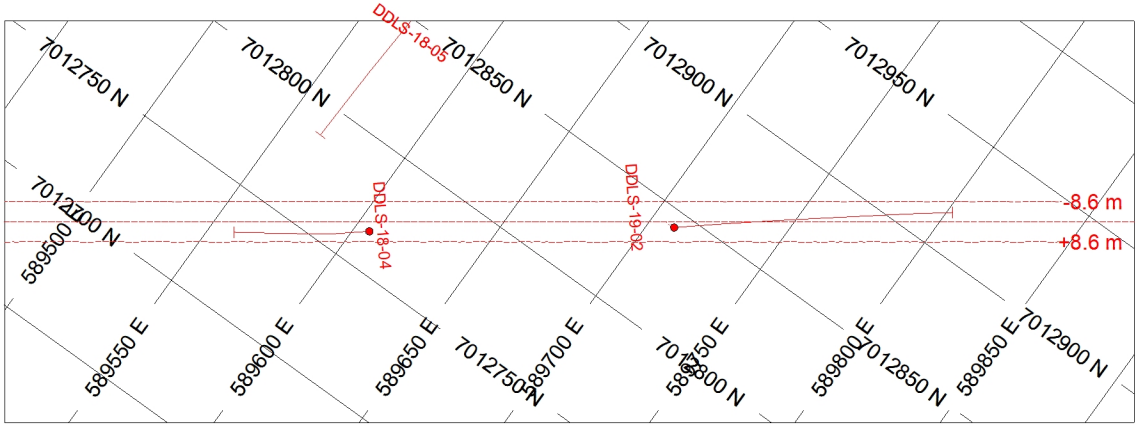

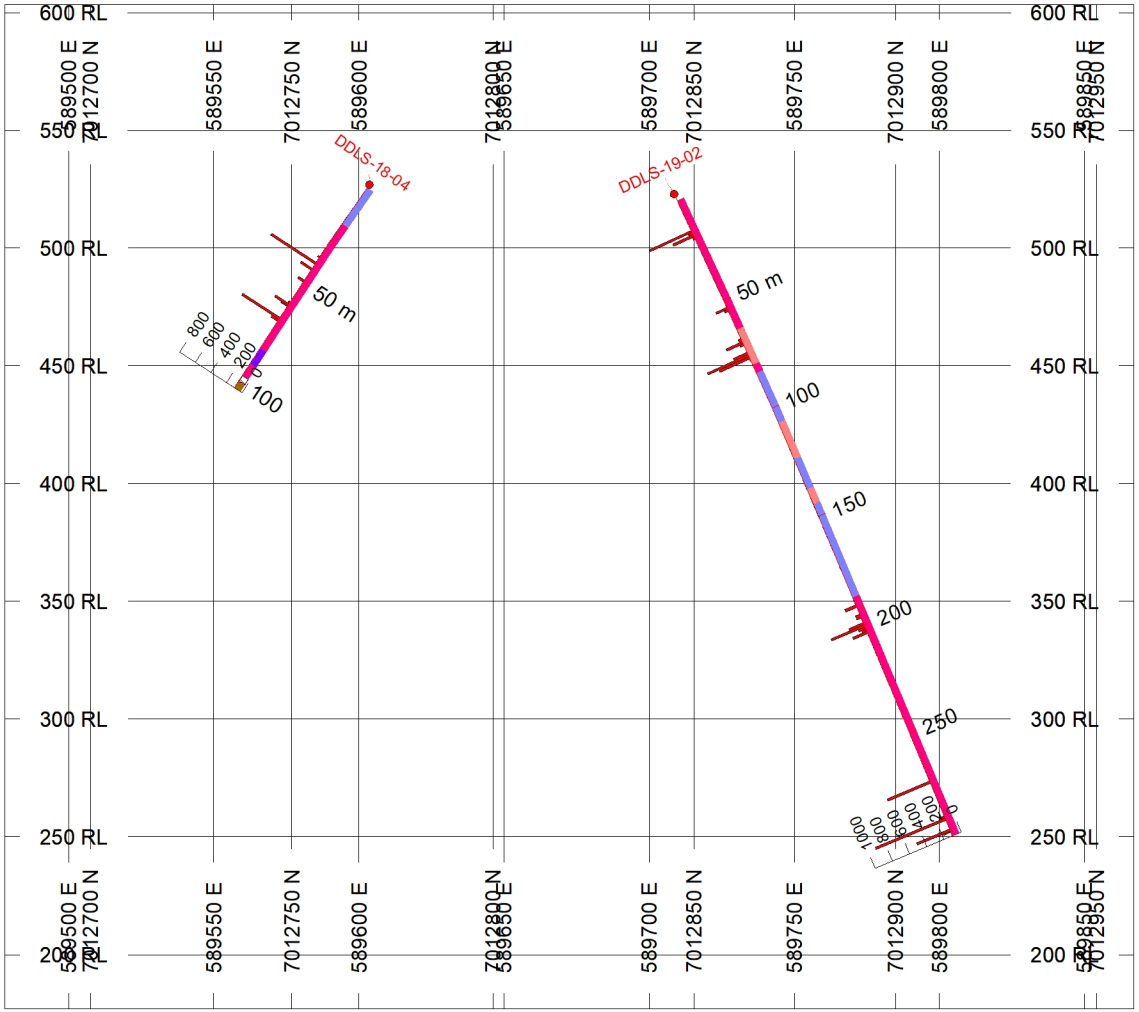

LUCKYSTRIKE
RESOURCES LTD. TSX.V : LUKY

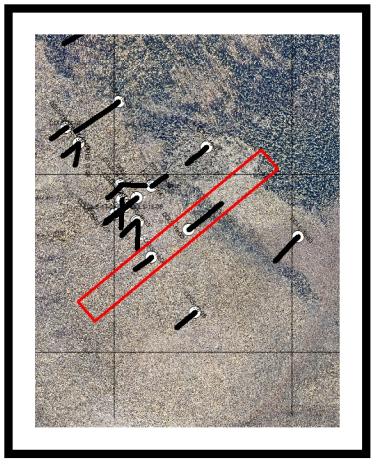

BAR GRAPHS	L/R	COL	RANGE
Au_ppb	L		Min 100

ROCK CODES	PAT	LABEL	DESCRIPTION
Lith_1		CLBSH	CHL-BIO-SCH
		FP	Felsic Porphyry
		MS	Mica Schist
		OG	Orthogneiss
		S	Siltstone
		SHR	Shear Zone
		UMV	Ultramafic Metavolcanic
		W	Wacke

SCALE

(m)

-40 0 40 80 120


*unknown


AZIMUTH = 54.2°

N

W E

S

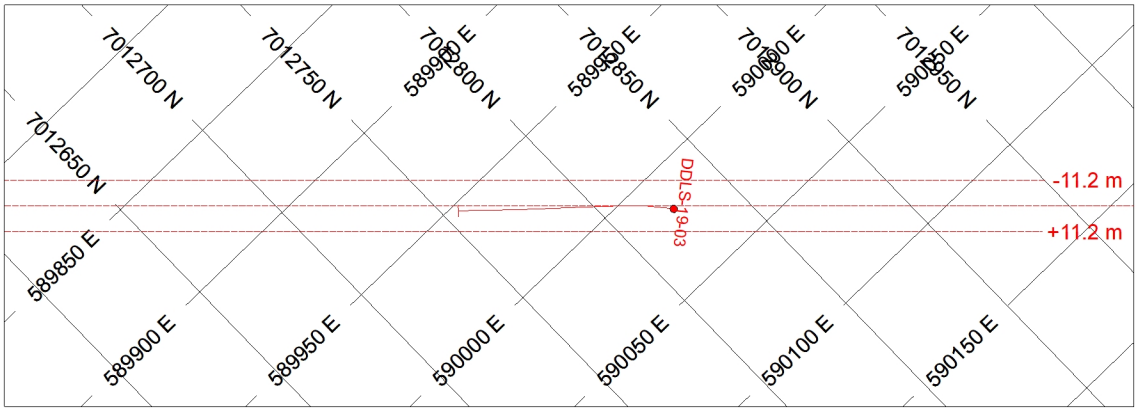

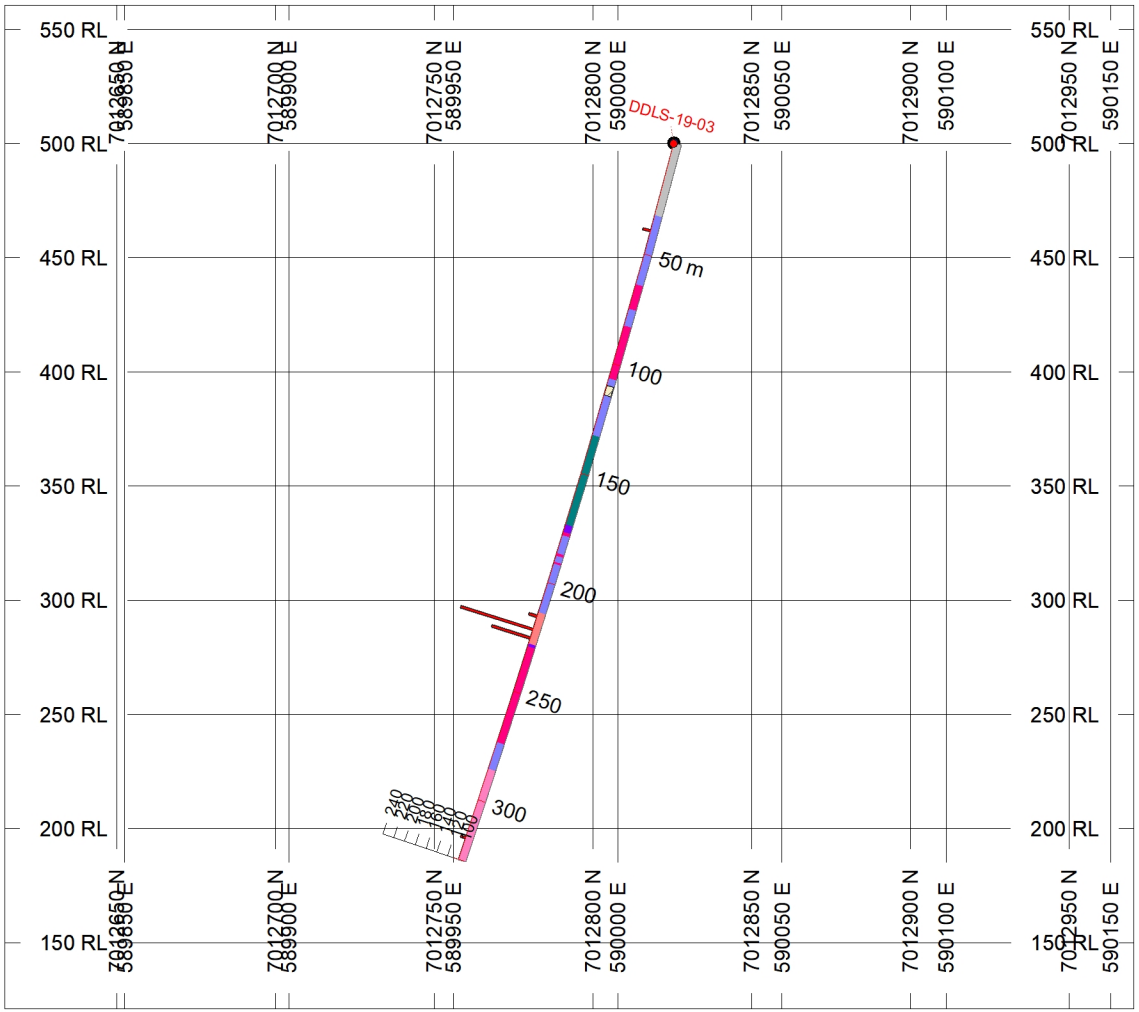

LUCKYSTRIKE
RESOURCES LTD. TSX.V : LUKY



BAR GRAPHS	L/R	COL	RANGE
Au_ppb	L		Min 100

ROCK CODES	PAT	LABEL	DESCRIPTION
Lith_1		CLA	Amphibolite
		CLBSH	CHL-BIO-SCH
		DOG	Dioritic Orthogneiss
		MS	Mica Schist
		OB	Overburden
		OG	Orthogneiss
		QV	Quartz Vein
		UMV	Ultramafic Metavolcanic

SCALE


(m)


-40 0 40 80 120

*unknown


AZIMUTH = 44°

N W E S

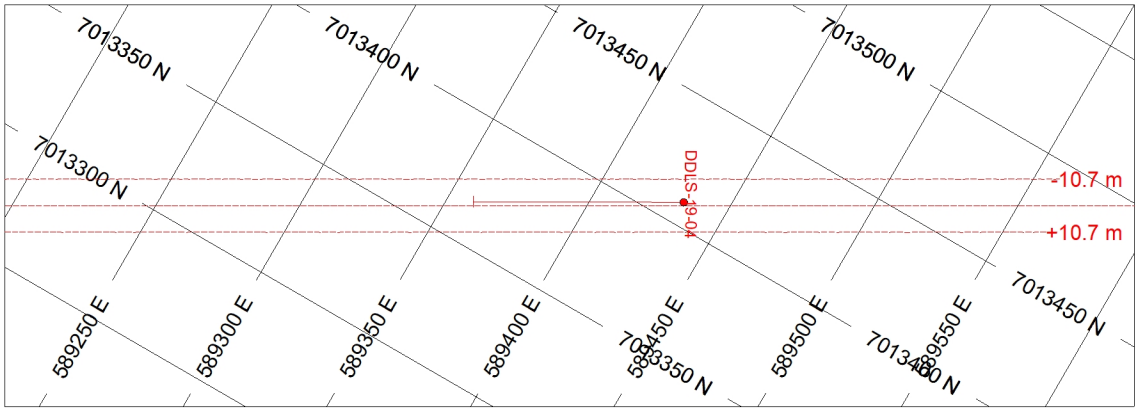

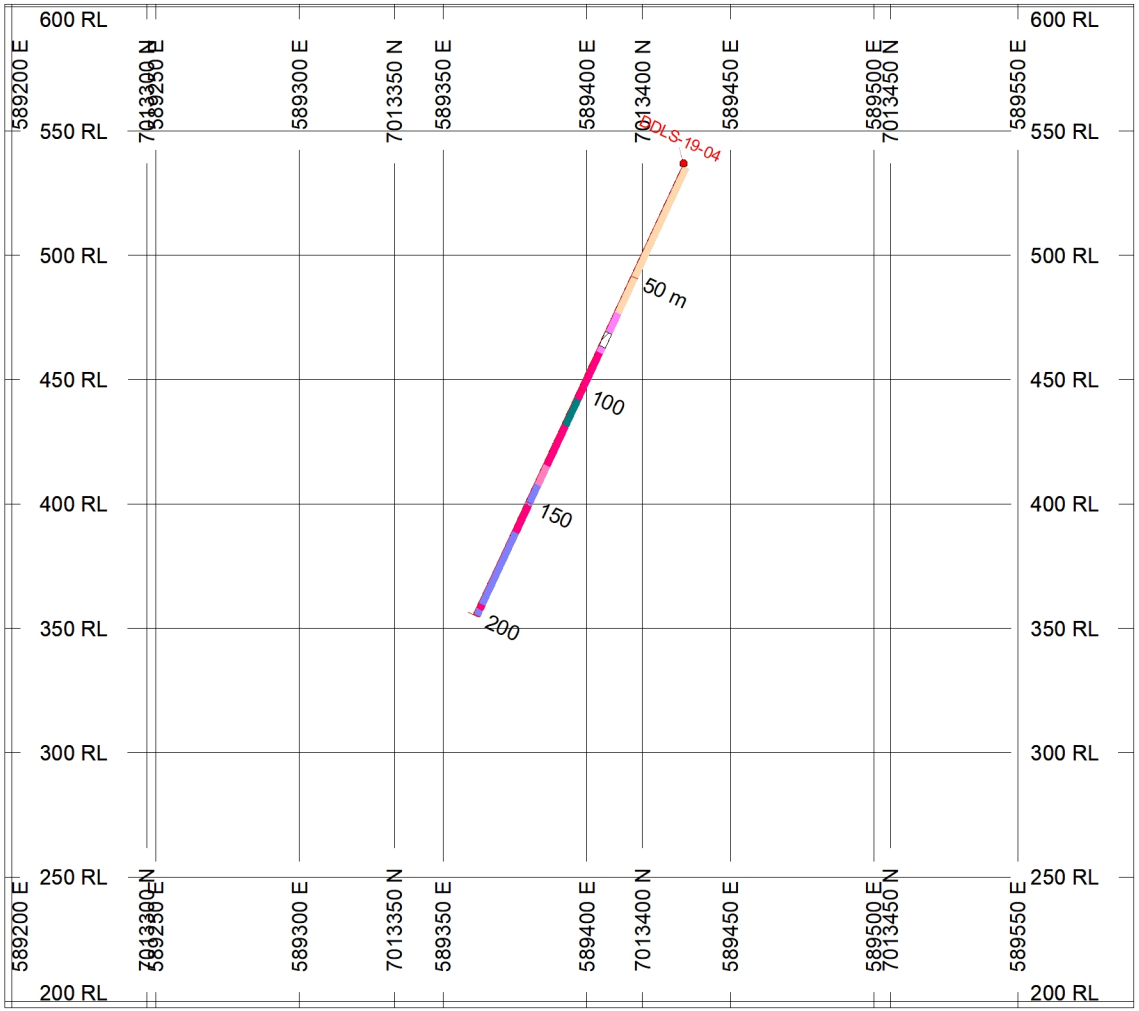

LUCKYSTRIKE
RESOURCES LTD. TSX.V : LUKY

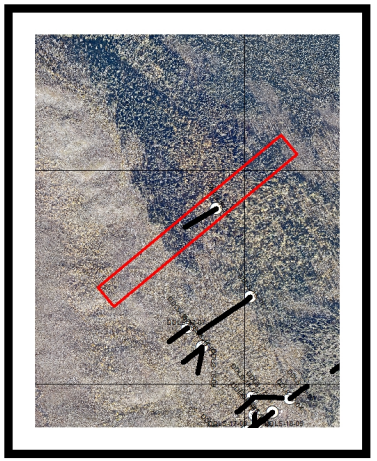

BAR GRAPHS	L/R	COL	RANGE
Au_ppb	L		Min 100

ROCK CODES	PAT	LABEL	DESCRIPTION
Lith_1		CLA	Amphibolite
		CLBSH	CHL-BIO-SCH
		DOG	Dioritic Orthogneiss
		OG	Orthogneiss
		QTT	Quartzite
		QV	Quartz Vein
		SSH	Sericite Schist

SCALE

(m)

-40 0 40 80 120

*unknown

AZIMUTH = 59.9°

N

W E

S