PLACER TESTING PROGRAM

JAMIE #6

PLACER LEASE 5570

DAWSON MINING DIVISION

NTS 115 P/14

63°55.4' LATITUDE, 137°04.8' LONGITUDE

Owned by:

CANADA TUNGSTEN MINING CORPORATION LTD.
Executive Office
Box 12525, Oceanic Plaza
Ste. 1600-1066 W. Hastings St.
Vancouver, B.C. V6E 3X1

Work by:

BEMA INDUSTRIES LTD.
19945-56th Avenue
Langley, B.C. V3A 3Y2

KEN HANSEN

SEPTEMBER, 1981

TABLE OF CONTENTS

		Page
1.0	Introduction	1
1.1	Location and Access	1
2.0	The Placer Testing Program	2
2.1	Trenching	2
2.2	Hand Excavated Trenches and Pits	2
2.3	Concentration Procedure	2
2.4	Visual Examination	3
3.0	Results	5
4.0	Conclusions	7
	Appendix I	8
	Figures	

LIST OF FIGURES

FIGURE 1	Location and Access Map	Scale 1:250,000
FIGURE 2	Topography Map	Scale 1:50,000
FIGURE 3	Claim Map	Scale 1 inch to ½ mile
FIGURE 4	Sample Site Plan	Scale 1 inch to 10 feet
FIGURE 5	Sluice (Longtom) Diagram	

APPENDIX

APPENDIX I Statement of Direct Costs

PLACER TESTING PROGRAM

JAMIE #6

PLACER LEASE 5570

1.0 INTRODUCTION

Bema Industries Ltd. was contracted by Canada Tungsten Mining Corporation Limited to carry out a placer testing program on their thirteen leases in the Clear Creek area. The purpose of the program was to define the heavy mineral potential and to fulfill their assessment requirements for each lease.

1.1 LOCATION AND ACCESS

The West Ridge camp is situated in the Yukon Territory approximately 40 miles northwest of Stewart Crossing (see Fig. 1). Access is by travelling east along the Klondike highway for 47 miles then turn north along the Clear Creek road for 18 miles.

The leases are then accessible by a 4 X 4 road which follows Left Clear Creek. Since the leases are located well off the roadway a Bell 47 was used to reach the leases.

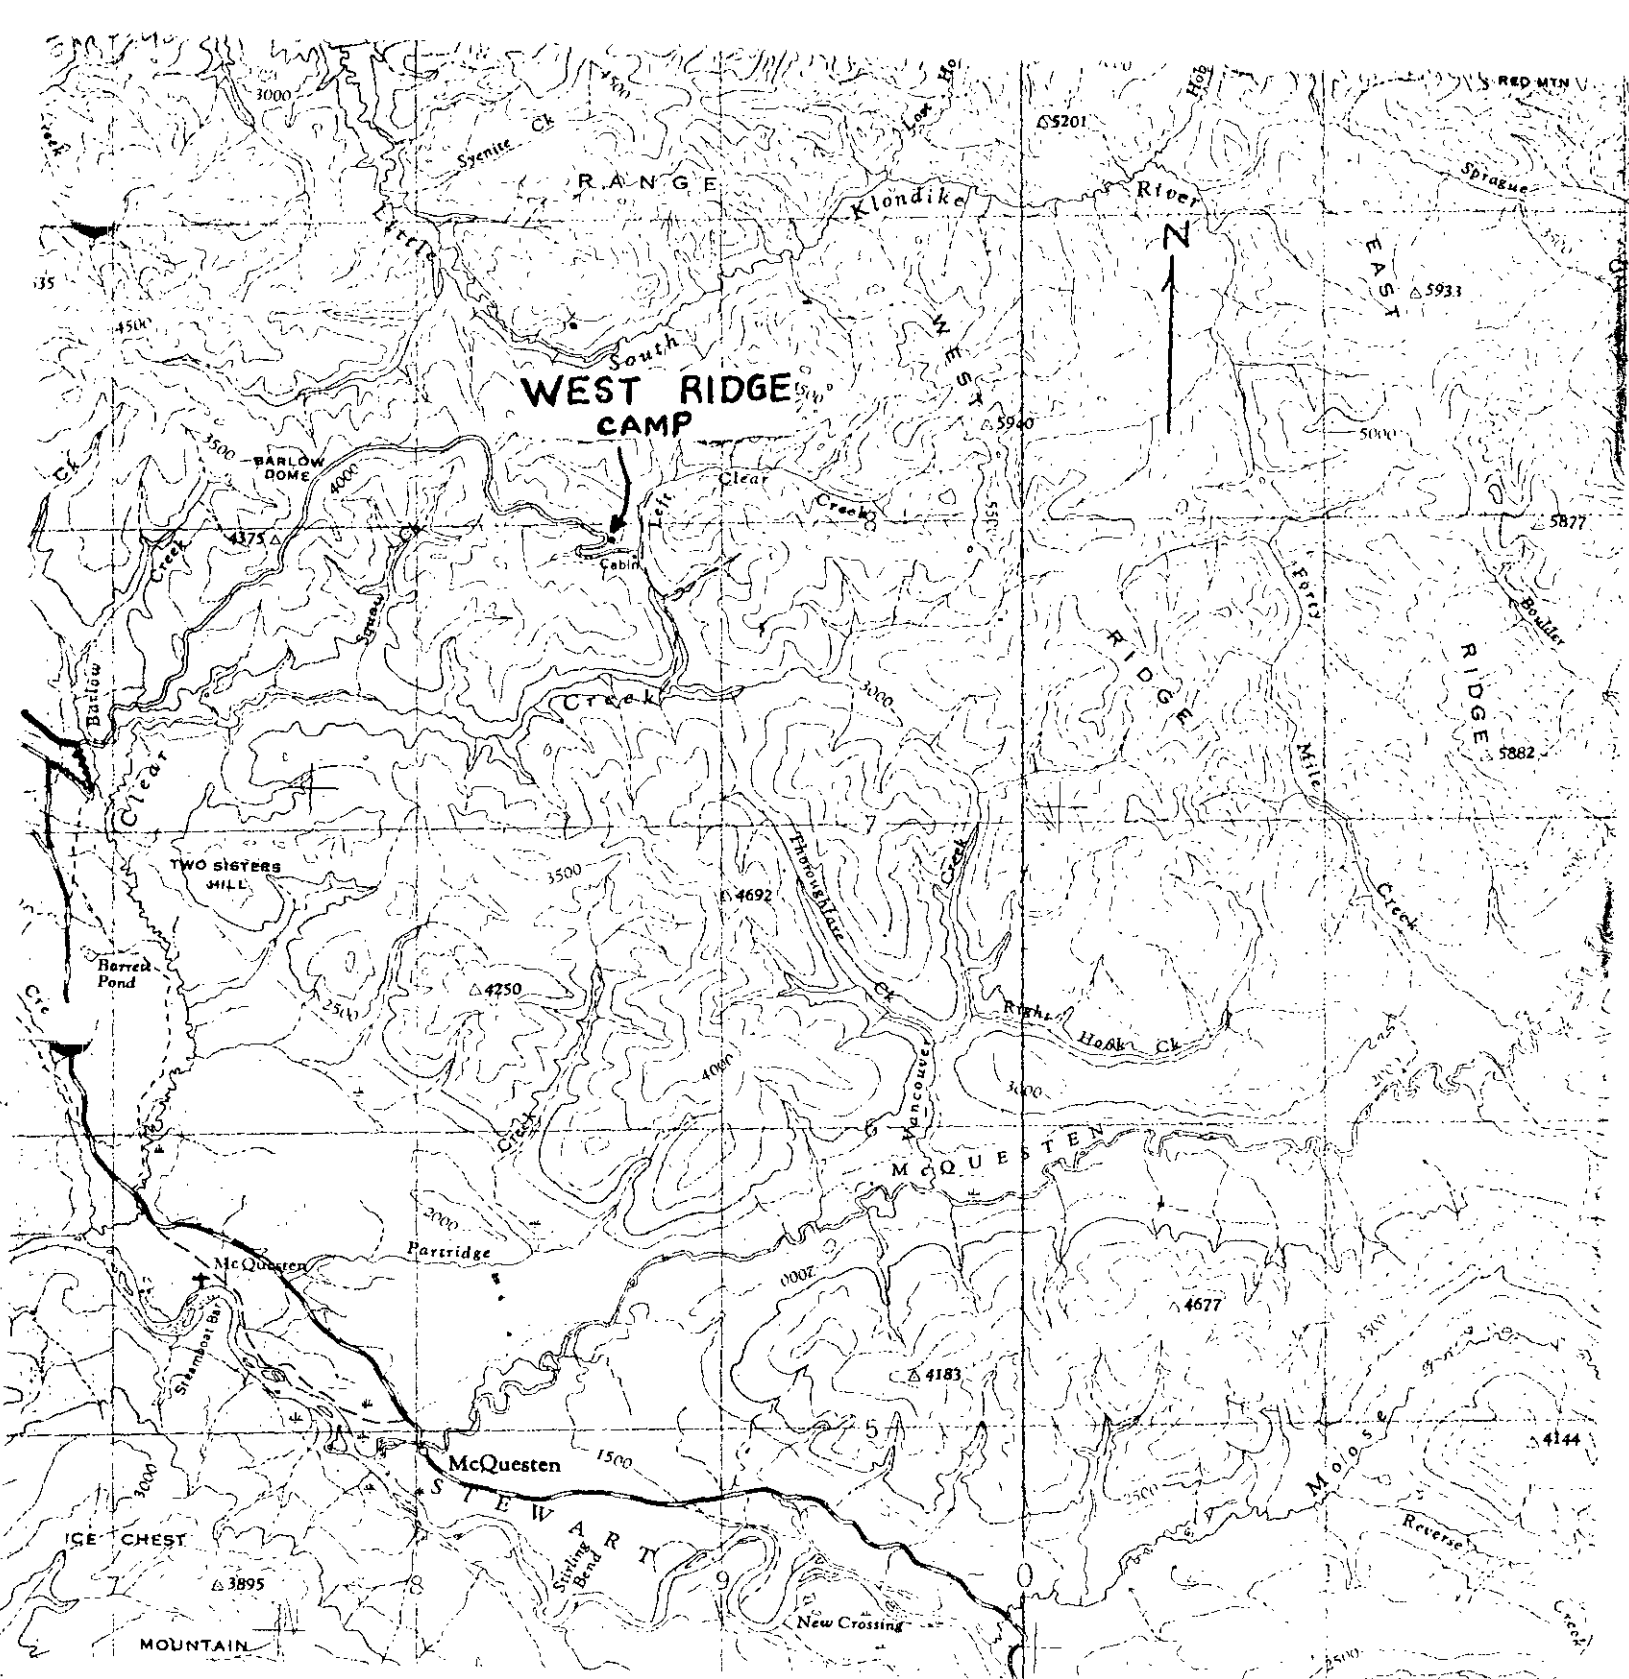

McQUESTEN

YUKON TERRITORY

115 P

FIGURE 1

Scale 1:250,000 Échelle

2.0 THE PLACER TESTING PROGRAM

The program consisted of trenching, concentration of trenched material, visual examination, assay and geochemical analysis, and calculations of gold, scheelite, and cassiterite values per cubic yard.

2.1 TRENCHING

Two methods of trenching were used depending upon access to the lease. Upon easy access a D7G cat was used to excavate a trench. Where access was not possible by cat a two to three man crew was flown in by a Bell 47 to excavate a trench or test pits.

2.2 HAND EXCAVATED TRENCHES AND PITS

The hand trenches were dug as deep as possible though all trenches experienced water problems. Therefore the trenches reached a maximum depth of three to five feet. The trenches were dug perpendicular to the active creek.

The trenches were placed in the most favourable locations for heavy mineral concentration, usually below a steep gradient or on the inside curve of a creek.

2.3 CONCENTRATION PROCEDURE

The concentration process involves running all material from the hand dug trench through a small sluice.

Large rocks which were part of the sample were washed in a tub, then the residual material run through the sluice. After each sluice clean up a one half to one cubic foot concentrate was taken.

The sluice material was panned to approximately an eight and one half ounce concentrate. This final concentrate was dried for visual inspection.

The small sluice or longtom (see Fig. 5) consisted of a pump, trough, grizzly, and sluice box. A Monark pump was used to supply water at 70 gallons per minute. The grizzly was setup at a forty-five degree angle with one quarter inch by eight inch slotted openings. The oversize gravel was rejected off the side of the grizzly.

(a) The water flows through the four foot trough.

(b) The gravel is placed in the trough.

(c) It is washed and self-fed at a constant rate over the grizzly.

(d) The sized gravel goes in an eight foot by eight inch sluice. The bottom of the sluice has a layer of rubber matting, and on top of this three quarter inch expanded metal.

(e) Panning: the panning of the sluice concentrates were done at base camp. Each sample was panned twice. The final concentrates were placed on trays to dry. An eight ounce panning tails sample was taken for geochemical analysis to ensure accuracy.

2.4 VISUAL EXAMINATION

The visual examination procedure is as follows:

(a) Dry panned, concentrate and tails.

(b) Weigh concentrate and tails.

(c) Sieve dried concentrate using a ten and twenty mesh screen (Tyler series).

(d) Take counts on scheelite grains larger than twenty mesh with the aid of an ultraviolet lamp; at the same time note the presence of barite.

(e) Take counts on gold using the following scale:

coarse gold (cg) - larger than ten mesh
medium gold (mg) - smaller than ten mesh but larger than twenty mesh
fine gold (fg) - smaller than twenty mesh but larger than forty mesh
very fine gold (vfg) - smaller than forty mesh.

(f) Examine each sieved portion under a binocular microscope. Take general overall counts on scheelite, barite, arsenopyrite pyrite, hematite and magnetite using the following scale:

0 - no mineral grains were observed
1 - trace
2 - low
3 - moderate
4 - high
5 - abundant

Note: Originally cassiterite counts were to be taken but field tests failed to provide any positive results of suspect grains.

3.0 RESULTS

JAMIE #6

PLACER LEASE 5570

	GOLD	SCHEELITE	BARITE	ARSENOPYRITE	PYRITE	HEMATITE	MAGNETITE
J6-T1 concentrate	0	1	1	0	1	1	2
J6-T1 tails	0	0	0	0	0	0	1
J6-T2 concentrate	0	1	1	0	1	1	2
J6-T2 tails	0	0	0	0	0	0	1
J6-T3 concentrate	0	1	1	0	1	1	2
J6-T3 tails	0	0	0	0	0	0	1

3.0 RESULTS

GOLD

Coarse Gold	(cg)	-	larger than 10 mesh
Medium Gold	(mg)	-	smaller than 10 mesh but larger than 20 mesh
Fine Gold	(fg)	-	smaller than 20 mesh but larger than 40 mesh
Very Fine Gold	(vfg)	-	smaller than 40 mesh

SCALE

0	-	denotes no mineral grains present
1	-	trace
2	-	low
3	-	moderate
4	-	high
5	-	abundant

4.0 CONCLUSIONS

Conclusions pending Chemex Geochemical Analyses.

- APPENDIX -

JAMIE #6
Placer Lease 5570

STATEMENT OF DIRECT COSTS

LABOUR

Ken Hansen, Supervisor			
	$175.00 per day	August 4 (0.5 day) 22 (0.3 day)	
		Total Days 0.8 x $175.00 =	$140.00
Tom Borthwick, Geological Assistant			
	$125.00 per day	August 13 (1.0 day) 14 (1.0 day) 18 (1.0 day)	
		Total Days 3.0 x $125.00 =	$375.00
Sean Butler, Geological Assistant			
	$125.00 per day	August 14 (1.0 day) 18 (1.0 day)	
		Total Days 2.0 x $125.00 =	$250.00
Alan Morrison			
	$200.00 per day	August 13 (1.0 day)	
		Total Day 1.0 x $200.00 =	$200.00
		TOTAL LABOUR	$965.00

DISBURSEMENTS

Gas $2.00 per gallon X .5 gallon per day X 3 days =	$ 3.00
3 yds^3 4.5 X $1.52 per $yard^3$ =	$ 6.84
Chemex Geochemical Analyses	
Preparation $0.65 per sample X 6 samples =	$ 3.90
Each sample tested for Gold ($5.75)	
Tin ($4.00)	
Tungsten ($4.00)	
$13.75 per sample X 6 samples =	$ 82.50
TOTAL DISBURSEMENTS	$ 96.24
TOTAL COST APPLIED TO ASSESSMENT WORK	$1,061.24

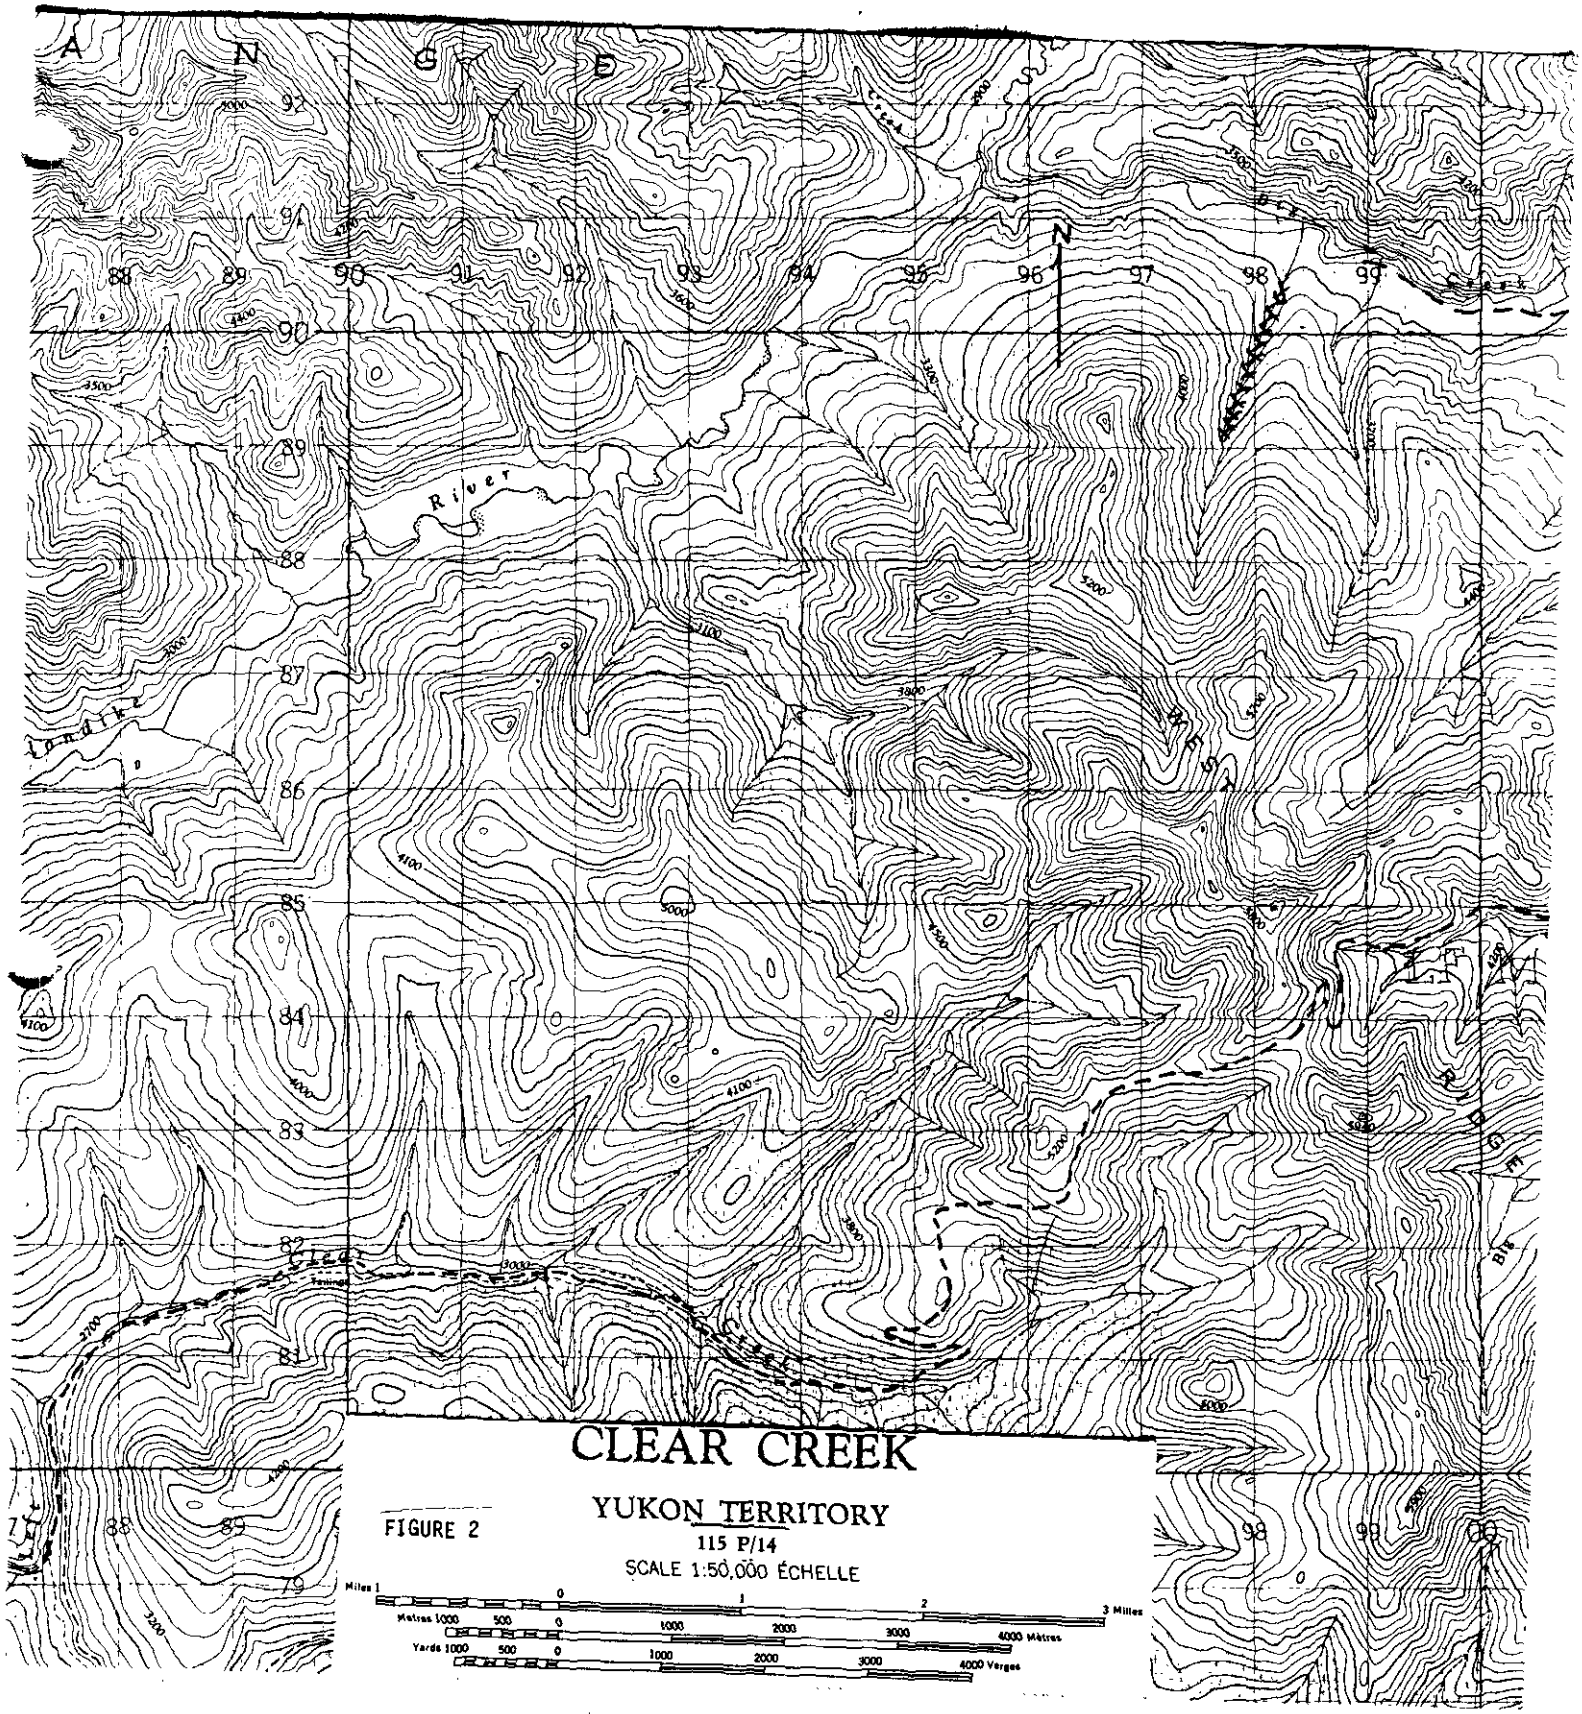

CLEAR CREEK

YUKON TERRITORY

FIGURE 2

115 P/14

SCALE 1:50,000 ÉCHELLE

Miles 1 0 1 2 3 Miles

Metres 1000 500 0 1000 2000 3000 4000 Mètres

Yards 1000 500 0 1000 2000 3000 4000 Verges

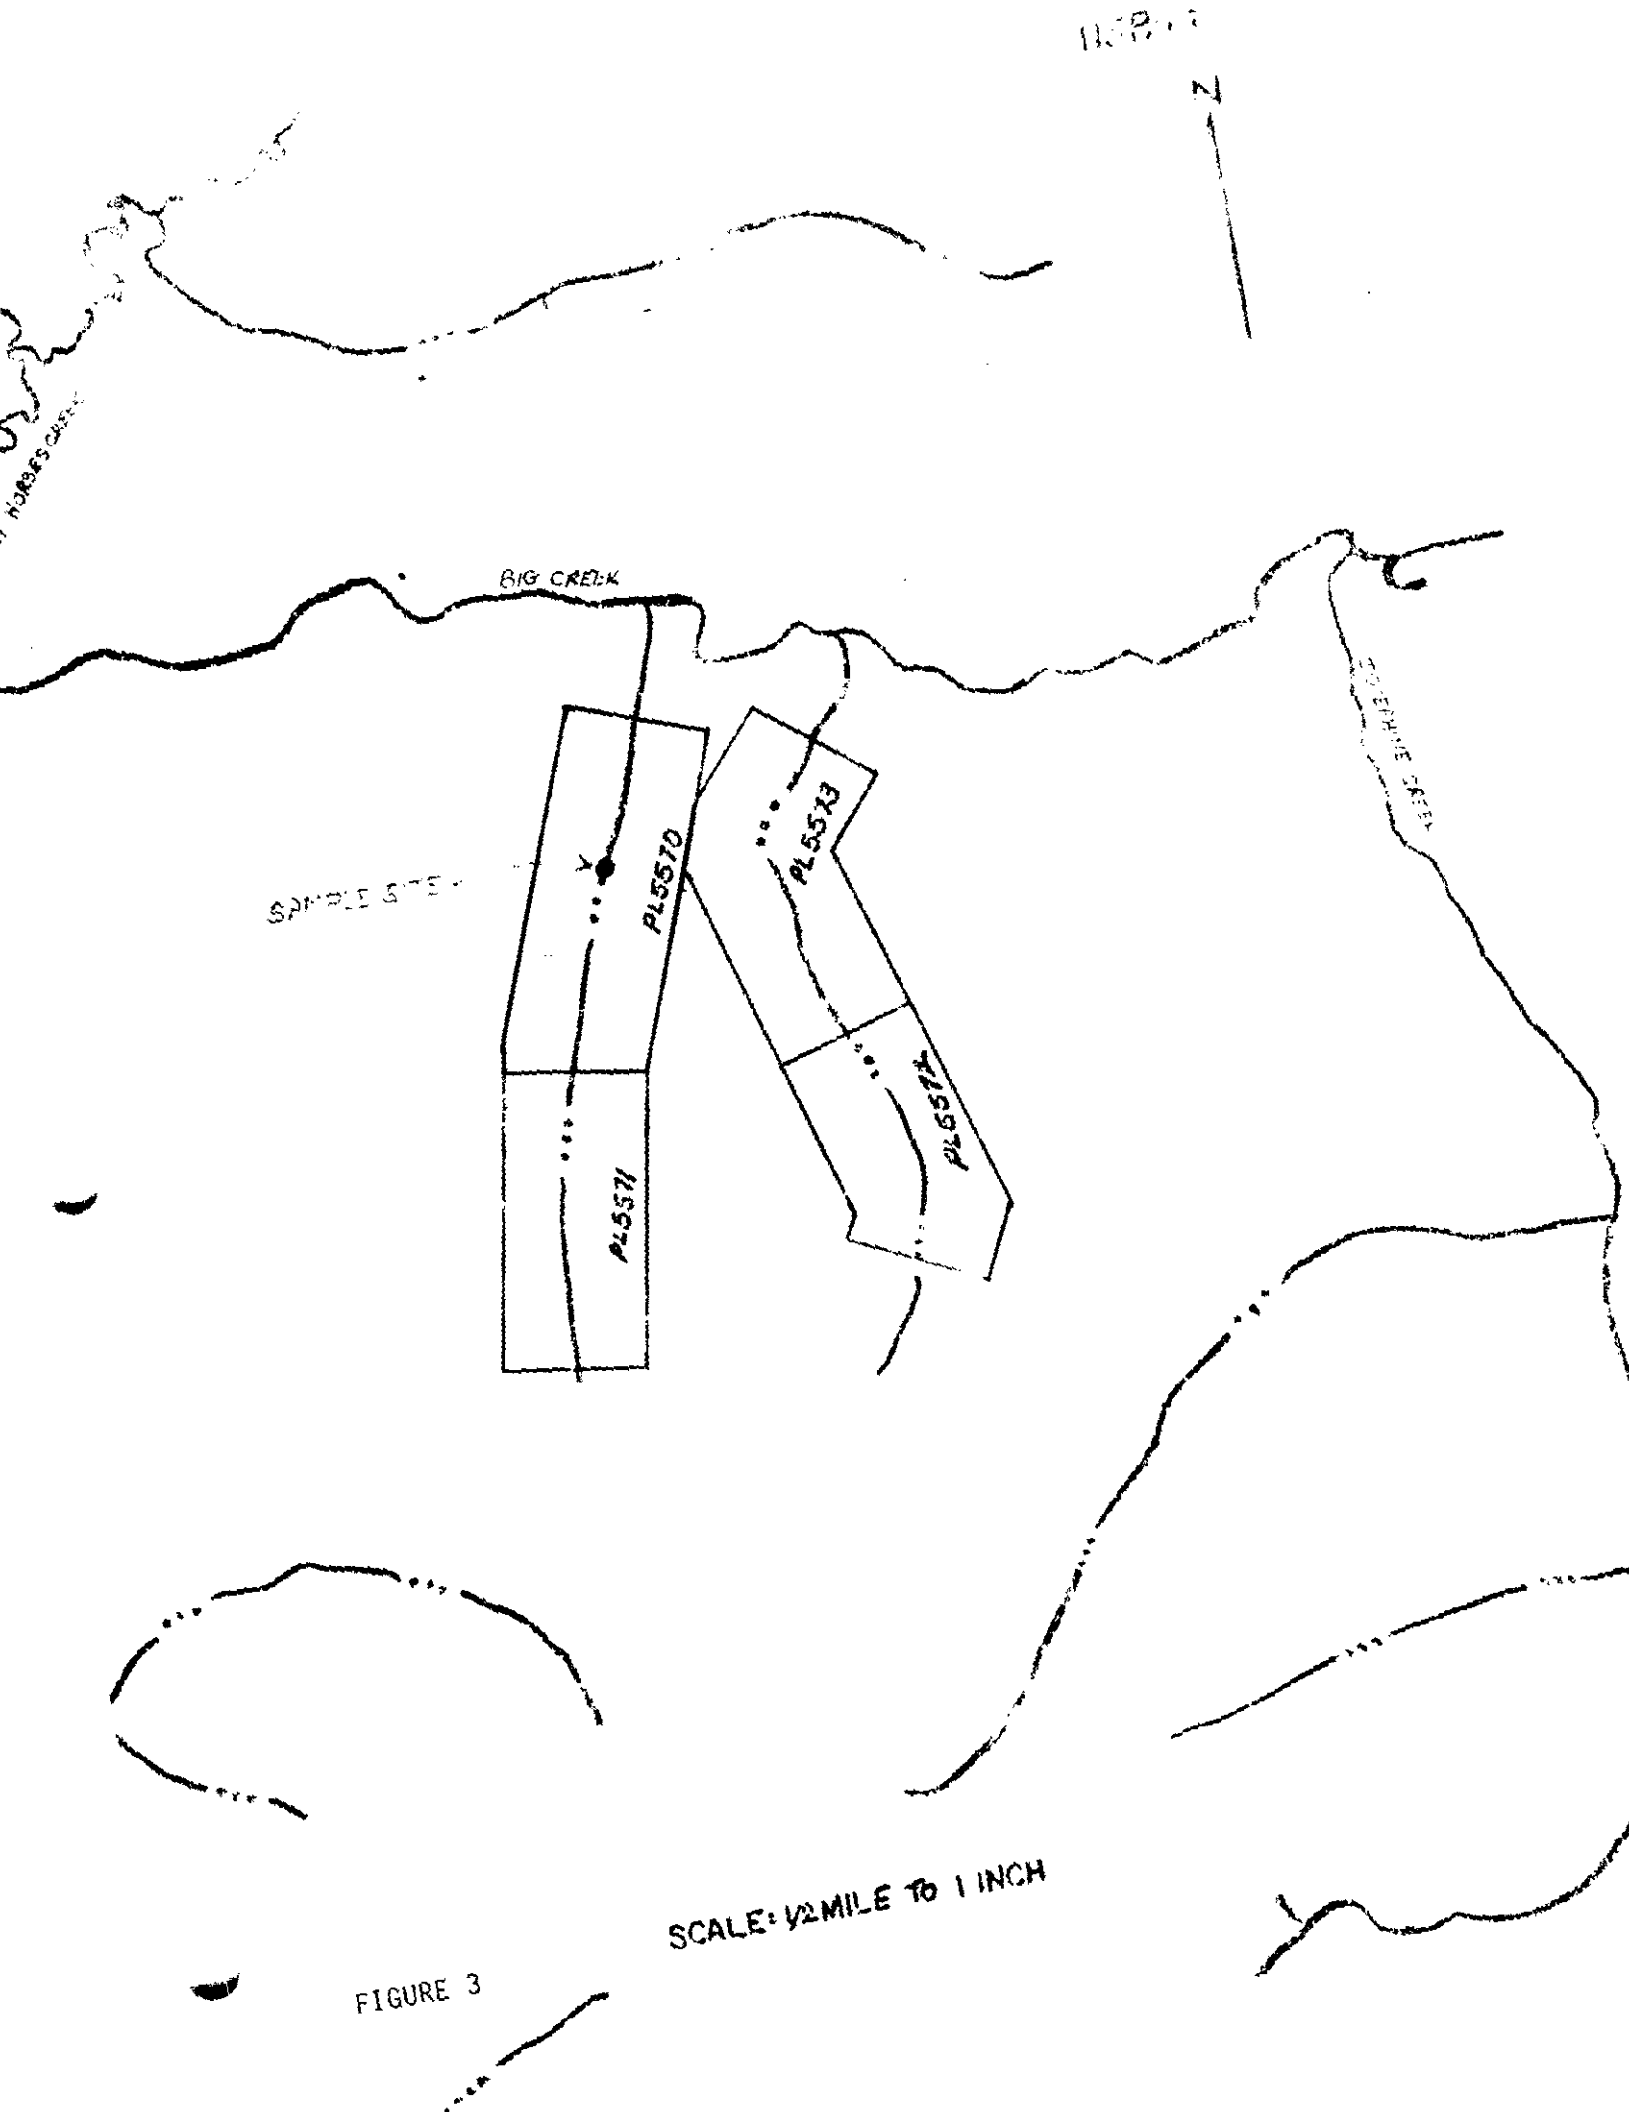
N
BIG CREEK
SAMPLE SITE
PL5570
PL5573
PL5571
PL5574
SCALE: ½ MILE TO 1 INCH

FIGURE 3

JAMIE 6
SAMPLE SITE PLAN

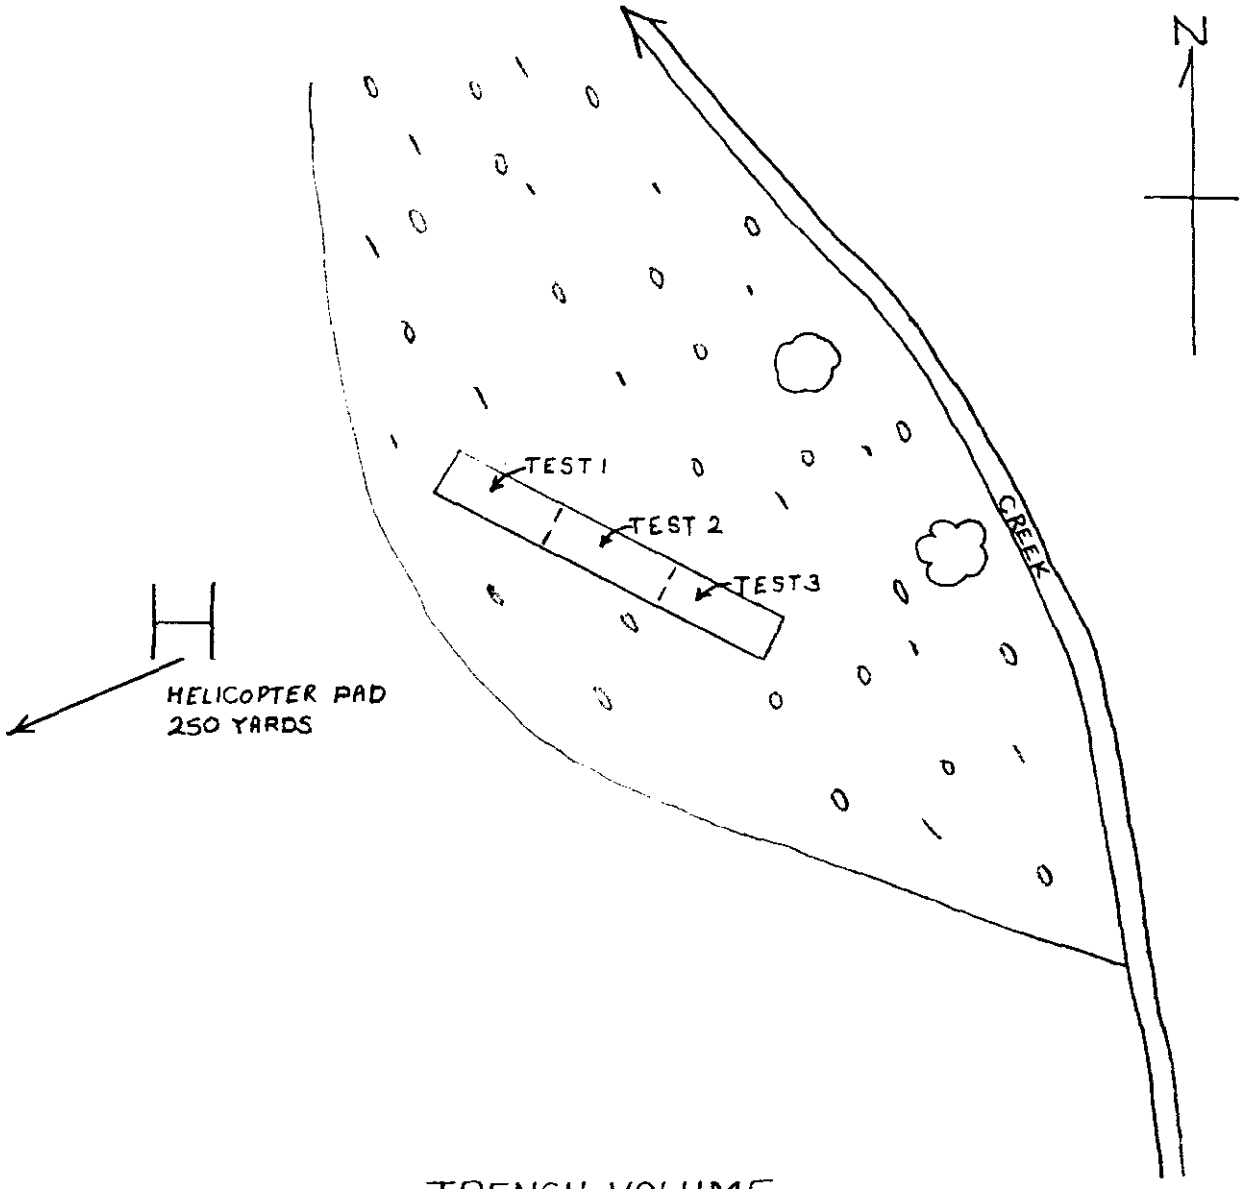

TRENCH VOLUME

$19.5' \times 2.5' \times 2.5' = 121.8'^3 \div 27'^3 = 4.5\ YD^3$

SCALE 1 INCH TO 10 FEET

TRENCH IS 1600 YARDS UPSTREAM FROM POST #1.

FIGURE 4

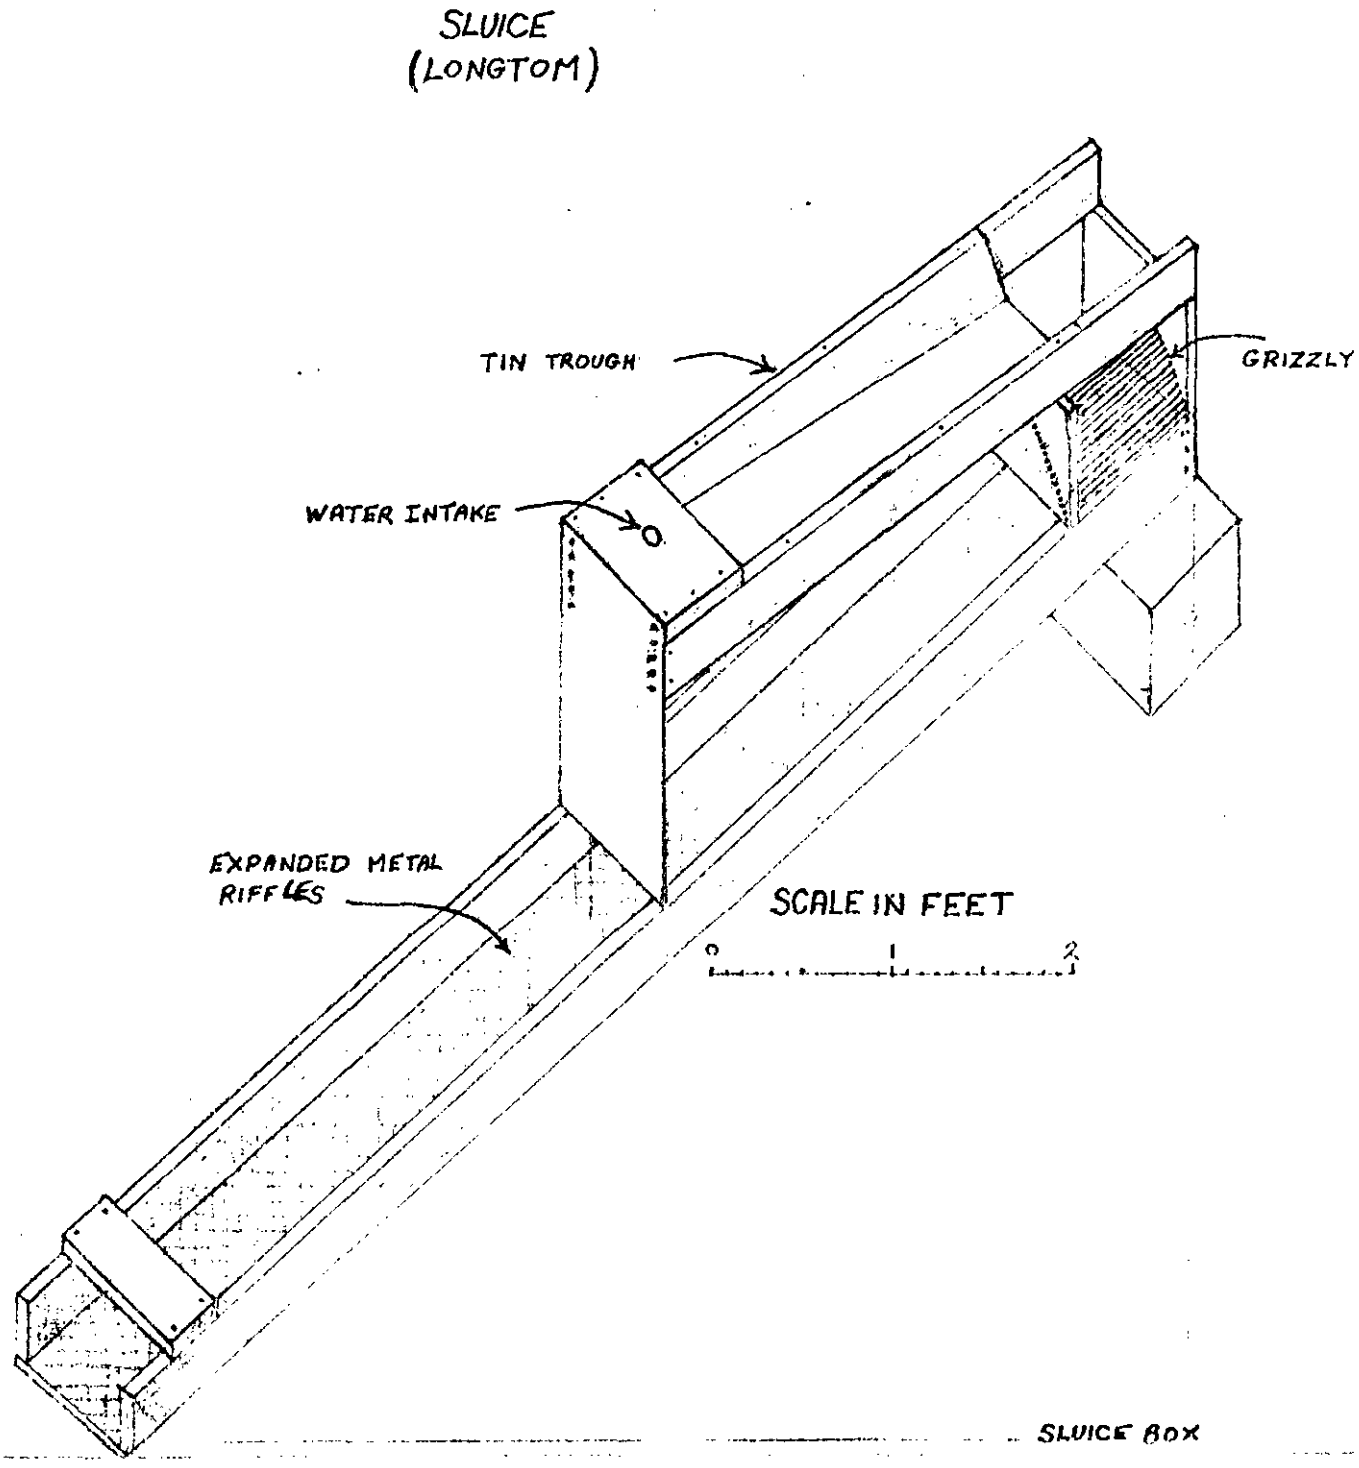
SLUICE
(LONGTOM)
TIN TROUGH
GRIZZLY
WATER INTAKE
EXPANDED METAL
RIFFLES
SCALE IN FEET
0
1
2
SLUICE BOX

FIGURE 5

PLACER TESTING PROGRAM

JAMIE #7

PLACER LEASE 5571

RECEIVED
OCT 15 1981
MINING RECORDER
DAWSON, Y.T.
I.A. & N.D.

PLACER TESTING PROGRAM

JAMIE #7

PLACER LEASE 5571

DAWSON MINING DIVISION

NTS 115 P/14

63°54.6' LATITUDE, 137°05.3' LONGITUDE

Owned by:

CANADA TUNGSTEN MINING CORPORATION LTD.
Executive Office
Box 12525, Oceanic Plaza
Ste. 1600-1066 W. Hastings St.
Vancouver, B.C. V6E 3X1

Work by:

BEMA INDUSTRIES LTD.
19945-56th Avenue
Langley, B.C. V3A 3Y2

KEN HANSEN

SEPTEMBER, 1981

TABLE OF CONTENTS

		Page
1.0	Introduction	1
1.1	Location and Access	1
2.0	The Placer Testing Program	2
2.1	Trenching	2
2.2	Hand Excavated Trenches and Pits	2
2.3	Concentration Procedure	2
2.4	Visual Examination	3
3.0	Results	5
4.0	Conclusions	7
	Appendix I	8
	Figures	

LIST OF FIGURES

FIGURE 1	Location and Access Map	Scale 1:250,000
FIGURE 2	Topography Map	Scale 1:50,000
FIGURE 3	Claim Map	Scale 1 inch to ½ mile
FIGURE 4	Sample Site Plan	Scale 1 inch to 10 feet
FIGURE 5	Sluice (Longtom) Diagram	

APPENDIX

APPENDIX I Statement of Direct Costs

PLACER TESTING PROGRAM

JAMIE #7

PLACER LEASE 5571

1.0 INTRODUCTION

Bema Industries Ltd. was contracted by Canada Tungsten Mining Corporation Limited to carry out a placer testing program on their thirteen leases in the Clear Creek area. The purpose of the program was to define the heavy mineral potential and to fulfill their assessment requirements for each lease.

1.1 LOCATION AND ACCESS

The West Ridge camp is situated in the Yukon Territory approximately 40 miles northwest of Stewart Crossing (see Fig. 1). Access is by travelling east along the Klondike highway for 47 miles then turn north along the Clear Creek road for 18 miles.

The leases are then accessible by a 4 X 4 road which follows Left Clear Creek. Since the leases are located well off the roadway a Bell 47 was used to reach the leases.

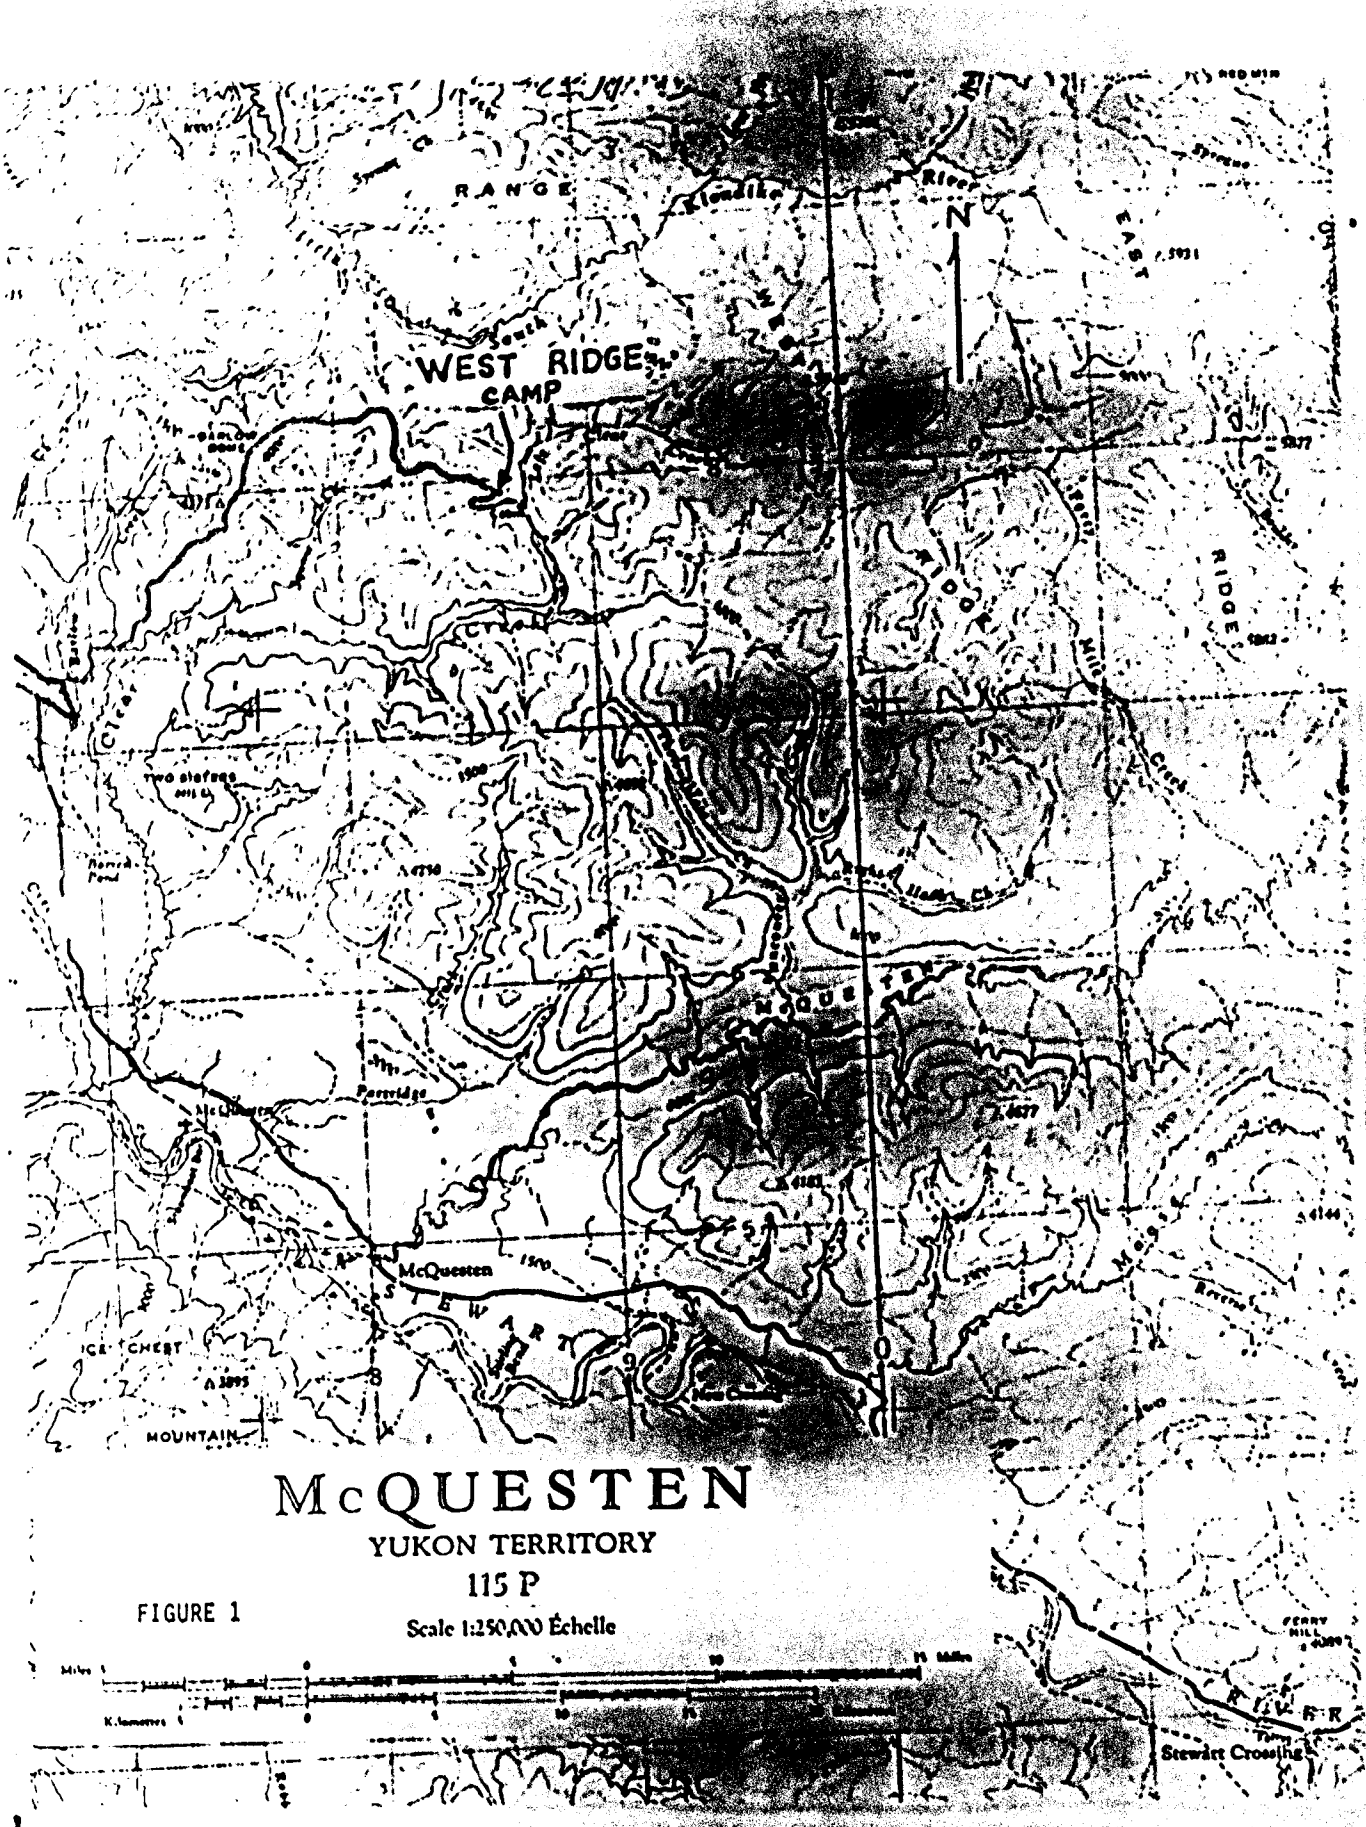

McQUESTEN

YUKON TERRITORY

115 P

FIGURE 1

Scale 1:250,000 Échelle

2.0 THE PLACER TESTING PROGRAM

The program consisted of trenching, concentration of trenched material, visual examination, assay and geochemical analysis, and calculations of gold, scheelite, and cassiterite values per cubic yard.

2.1 TRENCHING

Two methods of trenching were used depending upon access to the lease. Upon easy access a D7G cat was used to excavate a trench. Where access was not possible by cat a two to three man crew was flown in by a Bell 47 to excavate a trench or test pits.

2.2 HAND EXCAVATED TRENCHES AND PITS

The hand trenches were dug as deep as possible though all trenches experienced water problems. Therefore the trenches reached a maximum depth of three to five feet. The trenches were dug perpendicular to the active creek.

The trenches were placed in the most favourable locations for heavy mineral concentration, usually below a steep gradient or on the inside curve of a creek.

2.3 CONCENTRATION PROCEDURE

The concentration process involves running all material from the hand dug trench through a small sluice.

Large rocks which were part of the sample were washed in a tub, then the residual material run through the sluice. After each sluice clean up a one half to one cubic foot concentrate was taken.

The sluice material was panned to approximately an eight and one half ounce concentrate. This final concentrate was dried for visual inspection.

The small sluice or longtom (see Fig. 5) consisted of a pump, trough, grizzly, and sluice box. A Monark pump was used to supply water at 70 gallons per minute. The grizzly was setup at a forty-five degree angle with one quarter inch by eight inch slotted openings. The oversize gravel was rejected off the side of the grizzly.

(a) The water flows through the four foot trough.

(b) The gravel is placed in the trough.

(c) It is washed and self-fed at a constant rate over the grizzly.

(d) The sized gravel goes in an eight foot by eight inch sluice. The bottom of the sluice has a layer of rubber matting, and on top of this three quarter inch expanded metal.

(e) Panning: the panning of the sluice concentrates were done at base camp. Each sample was panned twice. The final concentrates were placed on trays to dry. An eight ounce panning tails sample was taken for geochemical analysis to ensure accuracy.

2.4 VISUAL EXAMINATION

The visual examination procedure is as follows:

(a) Dry panned, concentrate and tails.

(b) Weigh concentrate and tails.

(c) Sieve dried concentrate using a ten and twenty mesh screen (Tyler series).

(d) Take counts on scheelite grains larger than twenty mesh with the aid of an ultraviolet lamp; at the same time note the presence of barite.

(e) Take counts on gold using the following scale:

coarse gold (cg) - larger than ten mesh
medium gold (mg) - smaller than ten mesh but larger than twenty mesh
fine gold (fg) - smaller than twenty mesh but larger than forty mesh
very fine gold (vfg) - smaller than forty mesh.

(f) Examine each sieved portion under a binocular microscope. Take general overall counts on scheelite, barite, arsenopyrite pyrite, hematite and magnetite using the following scale:

0 - no mineral grains were observed
1 - trace
2 - low
3 - moderate
4 - high
5 - abundant

Note: Originally cassiterite counts were to be taken but field tests failed to provide any positive results of suspect grains.

3.0 RESULTS

JAMIE #7
PLACER LEASE 5571

	GOLD	SCHEELITE	BARITE	ARSENOPYRITE	PYRITE	HEMATITE	MAGNETITE
J7-T1 concentrate	0	1	1	0	1	1	2
J7-T1 tails	0	0	0	0	0	0	1
J7-T2 concentrate	0	1	1	0	1	1	2
J7-T2 tails	0	0	0	0	0	0	1
J7-T3 concentrate	0	1	1	0	1	1	2
J7-T3 tails	0	0	0	0	0	0	1

3.0 RESULTS

GOLD

Coarse Gold	(cg)	-	larger than 10 mesh
Medium Gold	(mg)	-	smaller than 10 mesh but larger than 20 mesh
Fine Gold	(fg)	-	smaller than 20 mesh but larger than 40 mesh
Very Fine Gold	(vfg)	-	smaller than 40 mesh

SCALE

0	-	denotes no mineral grains present
1	-	trace
2	-	low
3	-	moderate
4	-	high
5	-	abundant

4.0 CONCLUSIONS

Conclusions pending Chemex Geochemical Analyses.

- APPENDIX I -

JAMIE #7
Placer Lease 5571

STATEMENT OF DIRECT COSTS

LABOUR

Ken Hansen, Supervisor
$175.00 per day — August 7 (1.0 day) 10 (1.0 day)
Total Days 2.0 x $175.00 = $ 350.00

Sean Butler, Geological Assistant
$125.00 per day — August 7 (1.0 day)
Total Days 1.0 x $125.00 = $ 125.00

Bill Mann, Geological Assistant
$125.00 per day — August 6 (1.0 day) 7 (1.0 day)
Total Days 2.0 x $125.00 = $ 250.00

Tim Olson, Geological Assistant
$85.00 per day — August 6 (1.0 day)
Total Days 1.0 x $85.00 = $ 85.00

Bob Cahill, Geological Assistant
$125.00 per day — August 10 (1.0 day)
Total Days 1.0 x $125.00 = $ 125.00

Tom Borthwick, Geological Assistant
$125.00 per day — August 10 (1.0 day)
Total Days 1.0 x $125.00 = $ 125.00

TOTAL LABOUR $1,060.00

DISBURSEMENTS

Gas $2.00 per gallon X .5 gallon per day X 3 days =	$ 3.00
yds^3 9.2 x $1.52 per $yard^3$ =	$ 13.95
Chemex Geochemical Analyses Preparation $0.65 per sample X 6 samples =	$ 3.90
Each tested for Gold ($5.75) Tin ($4.00) Tungsten ($4.00) $13.75 per sample X 6 samples =	$ 82.50
TOTAL DISBURSEMENTS	$ 103.35
TOTAL COST APPLIED FOR ASSESSMENT WORK	$1,163.35

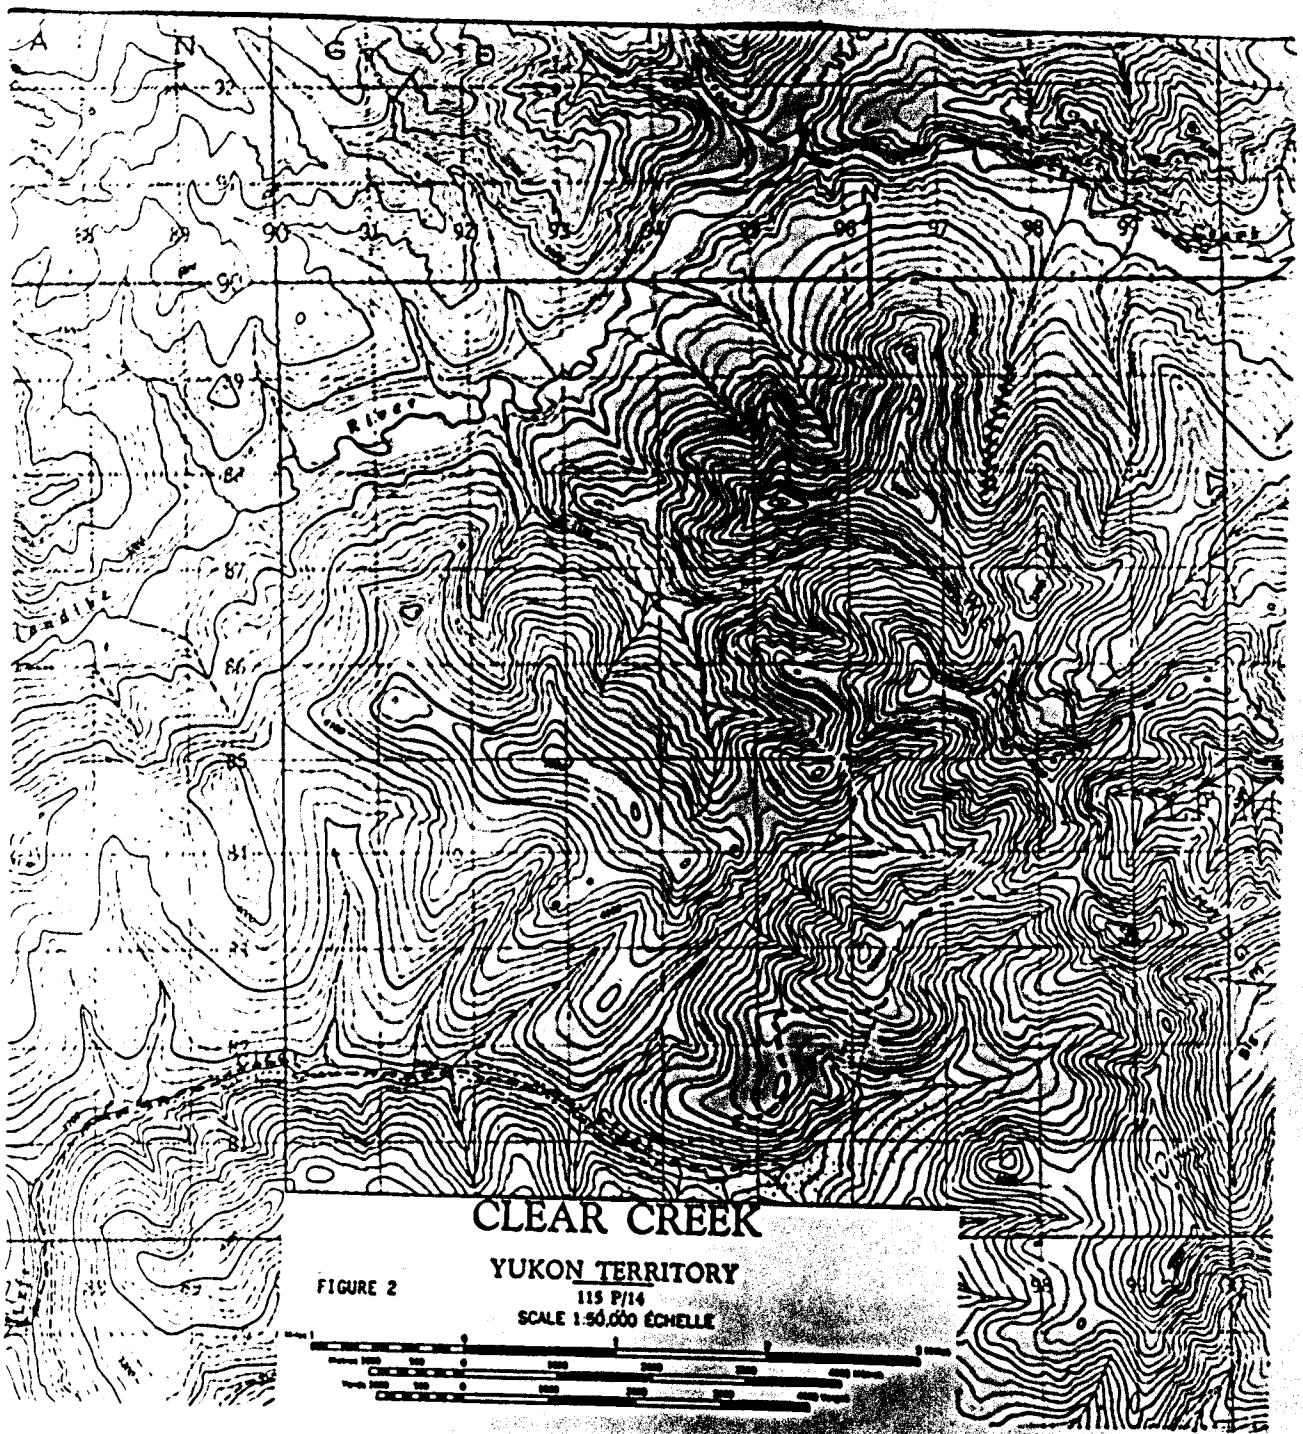

FIGURE 2

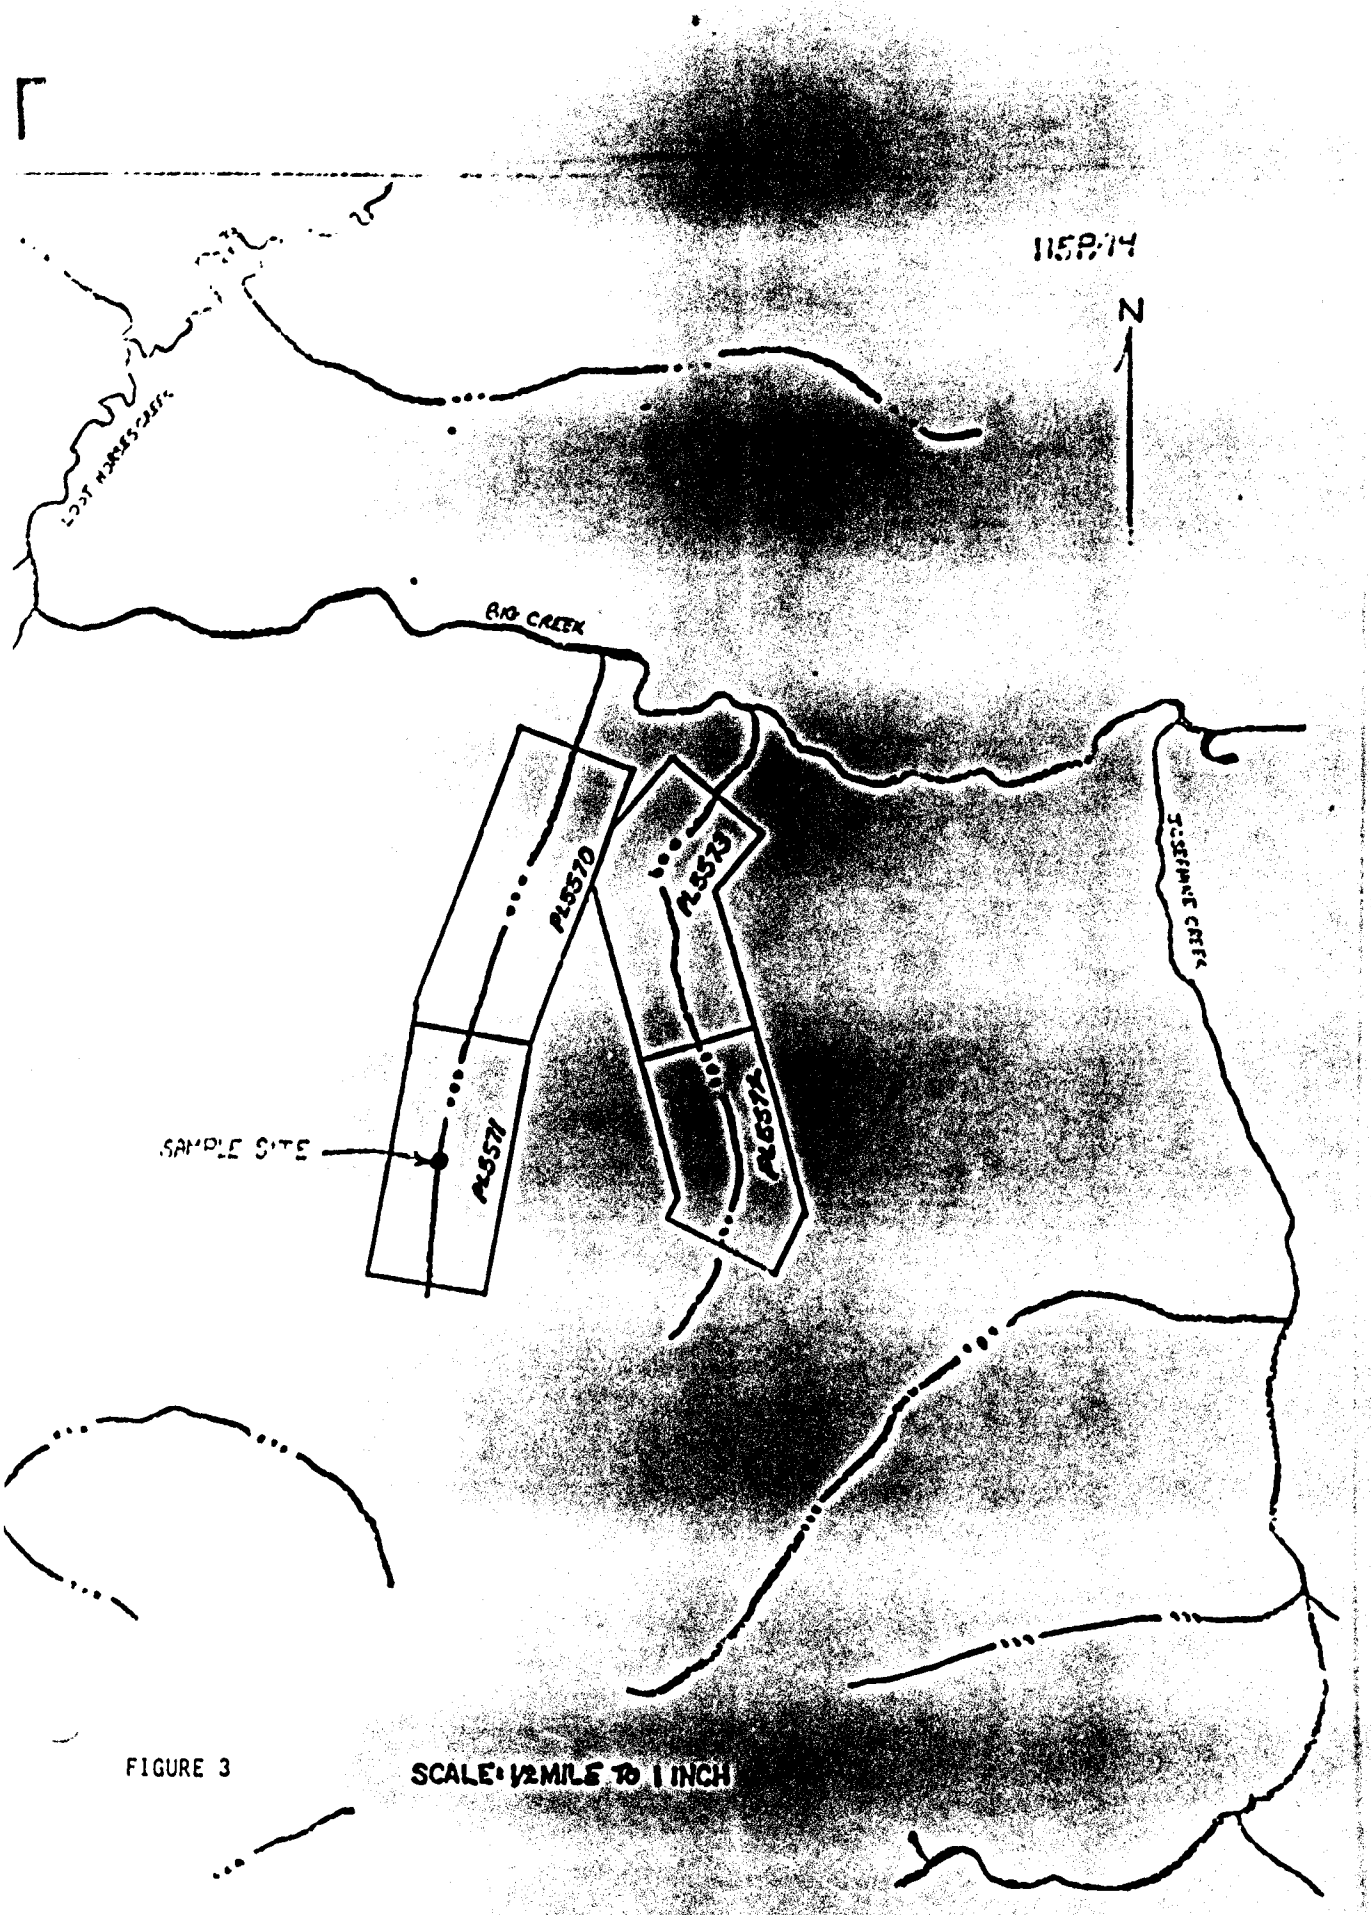

FIGURE 3

SCALE: ½ MILE TO 1 INCH

JAMIE /

SAMPLE SITE PLAN

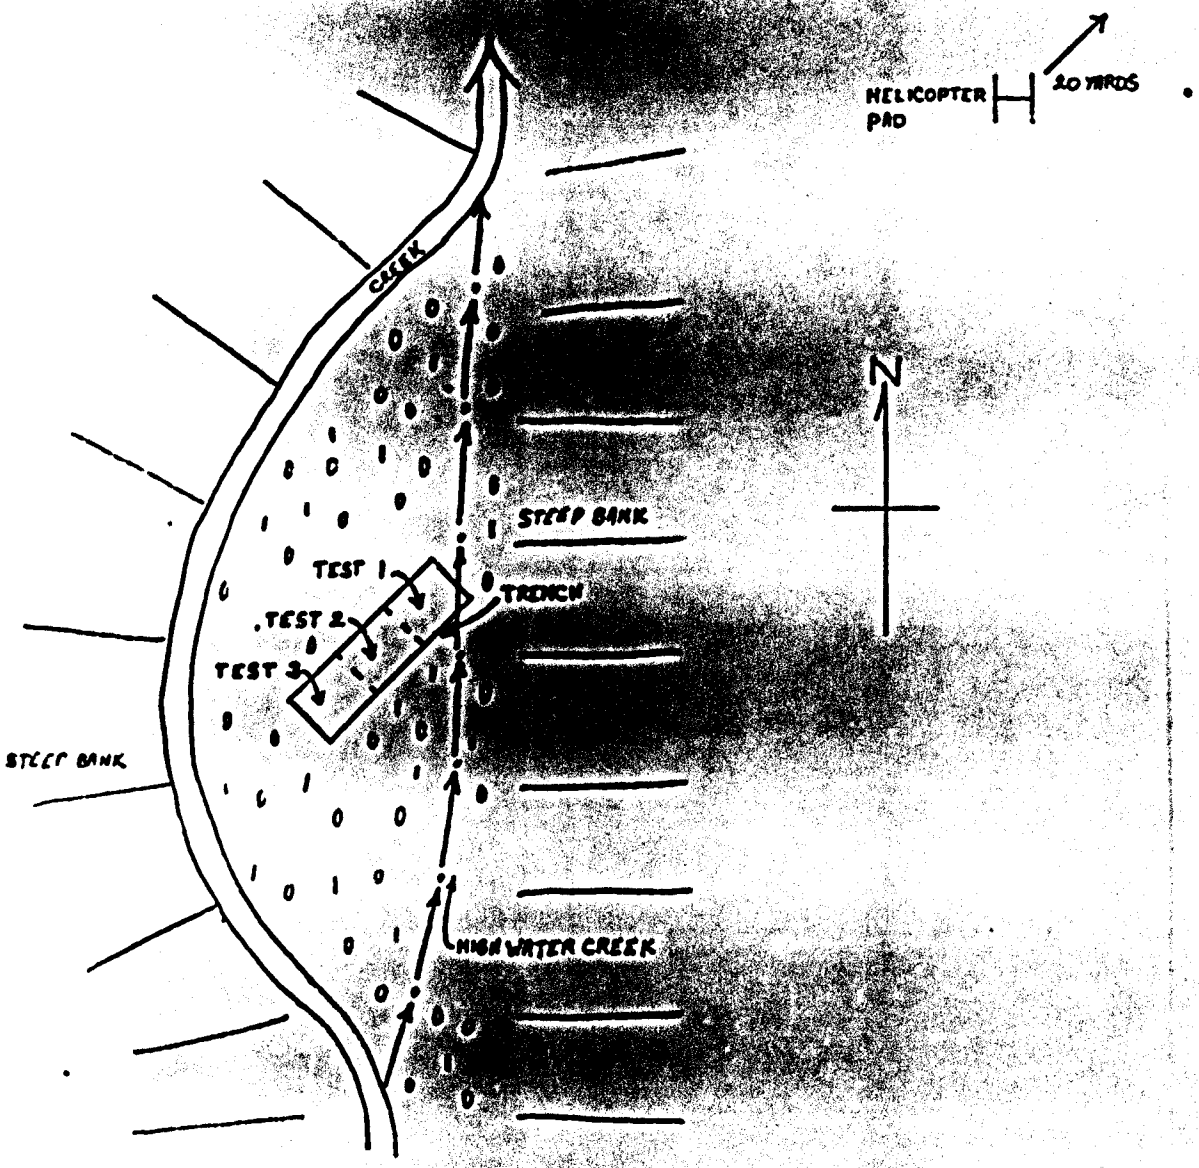

TRENCH VOLUME

$12.5' \times 5.5' \times 3.6' = 247^3 + 27^3 = 9.2 YD_3^3$

TRENCH IS 820 YARDS UPSTREAM FROM POST #1.

SCALE 1 INCH TO 10 FEET

FIGURE 4

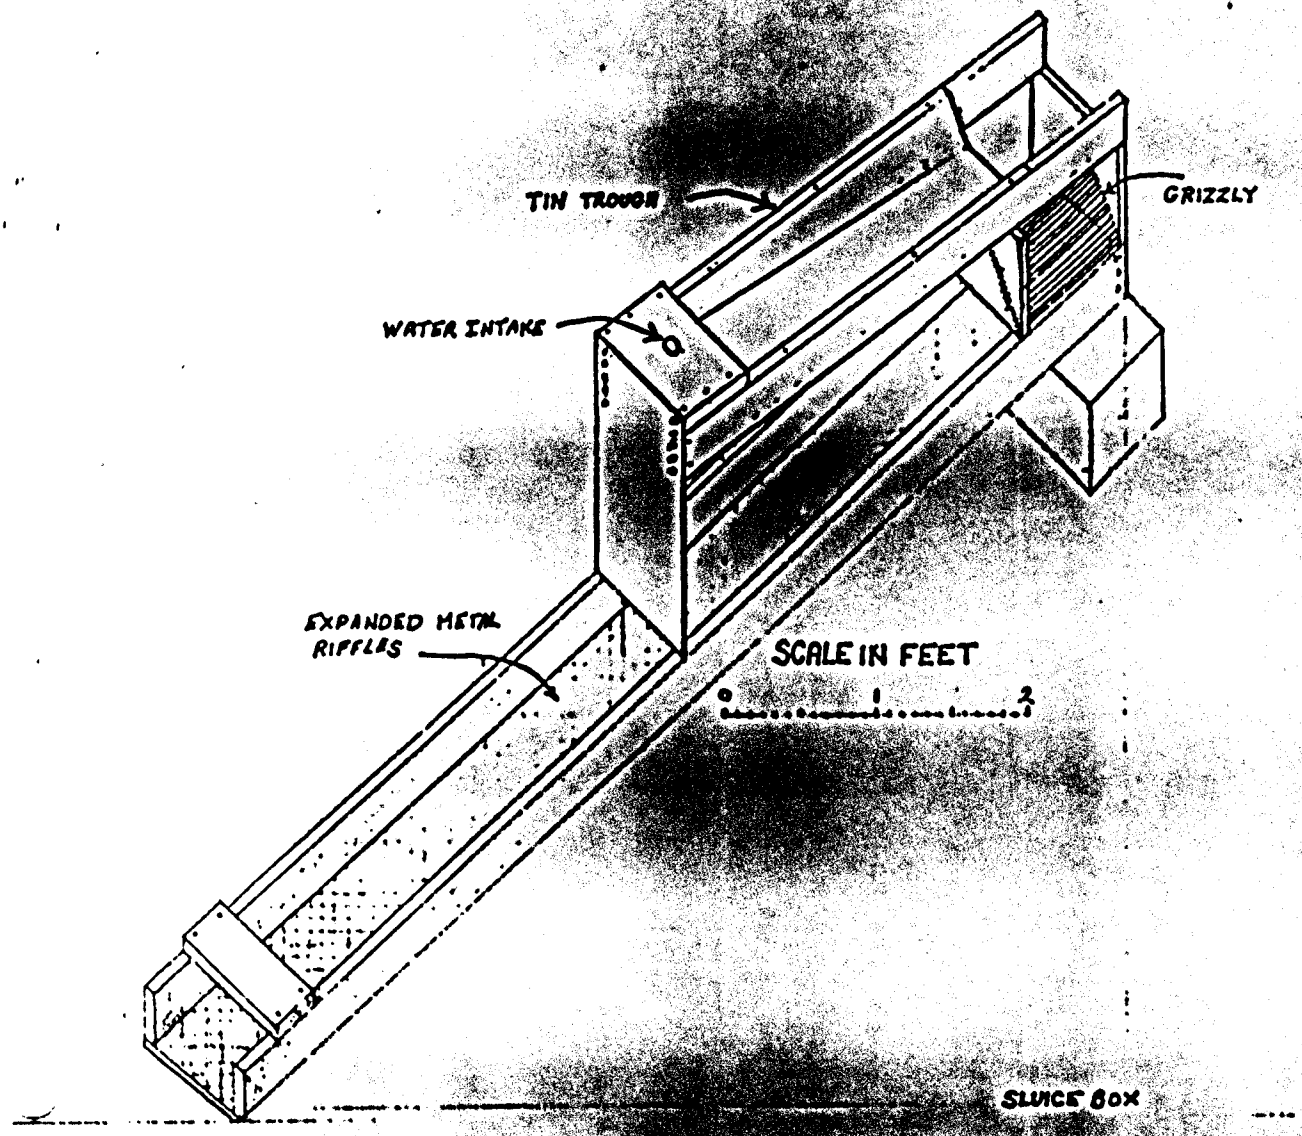
SLUICE
(LONGTOM)
TIN TROUGH
GRIZZLY
WATER INTAKE
EXPANDED METAL
RIFFLES
SCALE IN FEET
0
1
2
SLUICE BOX

FIGURE 5

PLACER TESTING PROGRAM

JAMIE #9

PLACER LEASE 5572



PLACER TESTING PROGRAM

JAMIE #9

PLACER LEASE 5572

DAWSON MINING DIVISION

NTS 115 P/14

63°54.6' LATITUDE, 137°03.5' LONGITUDE

Owned by:

CANADA TUNGSTEN MINING CORPORATION LTD.
Executive Office
Box 12525, Oceanic Plaza
Ste. 1600-1066 W. Hastings St.
Vancouver, B.C. V6E 3X1

Work by:

BEMA INDUSTRIES LTD.
19945-56th Avenue
Langley, B.C. V3A 3Y2

KEN HANSEN

SEPTEMBER 1981

TABLE OF CONTENTS

		Page
1.0	Introduction	1
1.1	Location and Access	1
2.0	The Placer Testing Program	2
2.1	Trenching	2
2.2	D7G Trenches	2
2.3	Concentration Procedure	2
2.4	Visual Examination	3
3.0	Results	5
4.0	Conclusions	8
	Appendix I	
	Figures	

LIST OF FIGURES

FIGURE 1	Location and Access Map	Scale 1:250,000
FIGURE 2	Topography Map	Scale 1:50,000
FIGURE 3	Claim Map	Scale 1 inch to ½ mile
FIGURE 4	Sample Site Plan	Scale 1 inch to 20 feet
FIGURE 5	Sluice (Longtom) Diagram	

APPENDIX

APPENDIX I Statement of Direct Costs

PLACER TESTING PROGRAM

JAMIE #9

PLACER LEASE 5572

1.0 INTRODUCTION

Bema Industries Ltd. was contracted by Canada Tungsten Mining Corporation Limited to carry out a placer testing program on their thirteen leases in the Clear Creek area. The purpose of the program was to define the heavy mineral potential and to fulfill their assessment requirements for each lease.

1.1 LOCATION AND ACCESS

The West Ridge Camp is situated in the Yukon Territory approximately 40 miles northwest of Stewart Crossing (see Fig. 1). Access is by travelling east along the Klondike highway for 47 miles then turn north along the Clear Creek road for 18 miles.

The leases are then accessible by a 4 X 4 road which follows Left Clear Creek. Since the leases are located well of the roadway a Bell 47 was used to reach the leases.

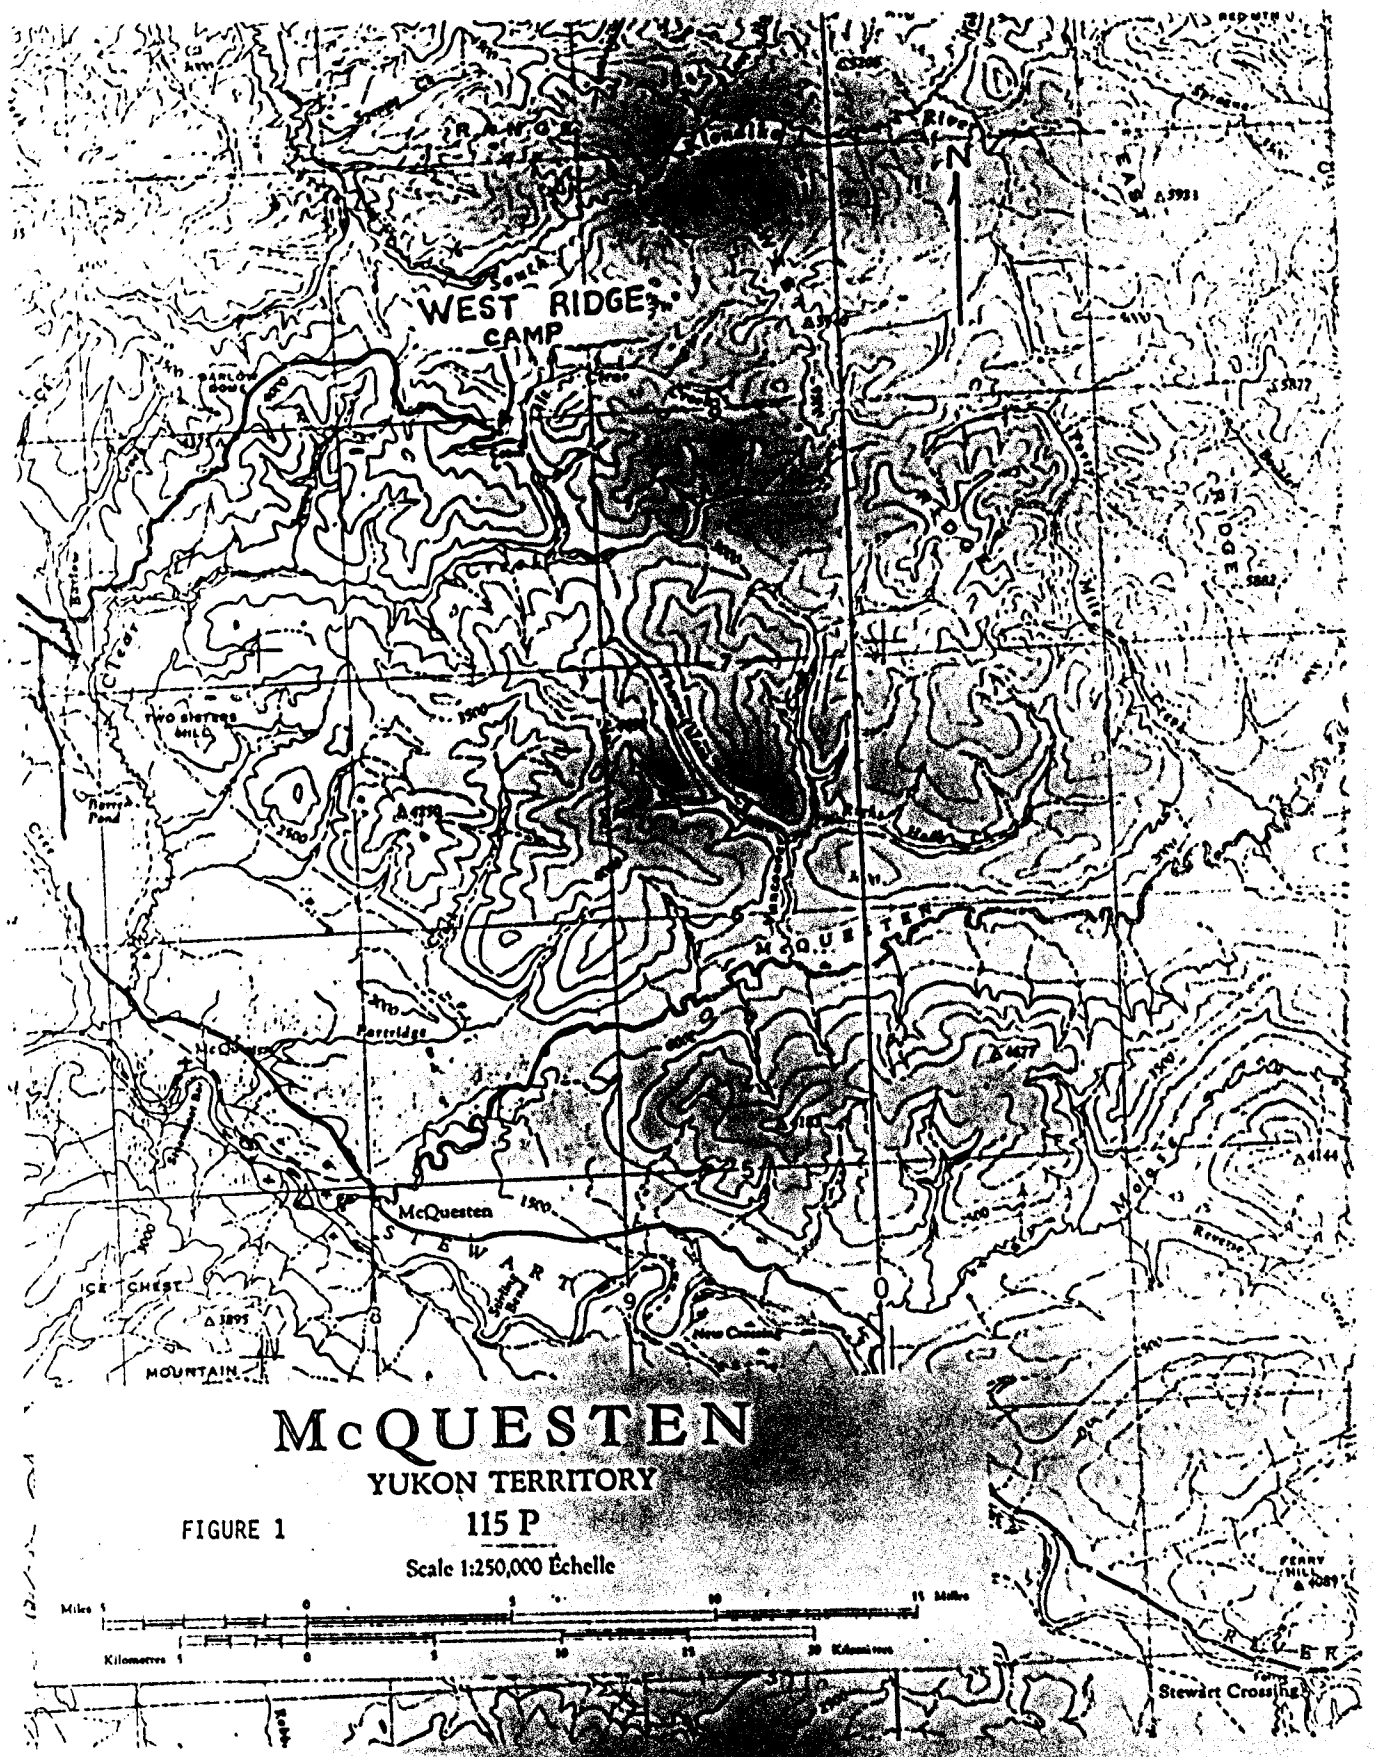
WEST RIDGE
CAMP
McQuesten
McQUESTEN
YUKON TERRITORY
115 P
Scale 1:250,000 Échelle
Miles
Kilometres
Stewart Crossing

FIGURE 1

2.0 THE PLACER TESTING PROGRAM

The program consisted of trenching, concentration of trenched material, visual examination, assay and geochemical analysis, and calculations of gold, scheelite, and cassiterite values per cubic yard.

2.1 TRENCHING

Two methods of trenching were used depending upon access to the lease. Upon easy access a D7G cat was used to excavate a trench. Where access was not possible by cat a two to three man crew was flown in by a Bell 47 to excavate a trench or test pits.

2.2 D7G TRENCHES

The cat trenches were dug as deep as possible within an alotted time period. Once the trench reached bedrock or its maximum depth a sample was taken. The cat would push a blade load of material (one to two cubic yards in volume) from the lowest portion of the trench and deposit it on the tails pile to be tested later.

The cat would then refill the trench with surrounding material.

The trenches were sub-parallel to the active creek due to the restrictions in the available work areas.

2.3 CONCENTRATION PROCEDURE

The concentration process involves running as much material as possible from the cat trench through a small sluice.

Large rocks which were part of the sample were washed in a tub, then the residual material run through the sluice. After each sluice clean up a one half to one cubic foot concentrate was taken.

The sluice material was panned to approximately an eight and one half ounce concentrate. This final concentrate was dried for visual inspection.

The small sluice or longtom (see Fig. 5) consisted of a pump, trough, grizzly, and sluice box. A Monark pump was used to supply water at 70 gallons per minute. The grizzly was setup at a forty-five degree angle with one quarter inch by eight inch slotted openings. The oversize gravel was rejected off the side of the grizzly.

(a) The water flows through the four feet trough.

(b) The gravel is placed in the trough.

(c) It is washed and self-fed at a constant rate over the grizzly.

(d) The sized gravel goes in an eight foot by eight inch sluice. The bottom of the sluice has a layer of rubber matting, and on top of this three quarter inch expanded metal.

(e) Panning: the panning of the sluice concentrates were done at base camp. Each sample was panned twice. The final concentrates were placed on trays to dry. An eight ounce panning tails sample was taken for geochemical analysis to ensure accuracy.

2.4 VISUAL EXAMINATION

The visual examination procedure is as follows:

(a) Dry panned, concentrate and tails.

(b) Weigh concentrate and tails.

(c) Sieve dried concentrate using a ten and twenty mesh screen (Tyler series).

(d) Take counts on scheelite grains larger than twenty mesh with the aid of an ultraviolet lamp. At the same time note the presence of barite.

(e) Take counts on gold using the following scale:

coarse gold (cg) - larger than ten mesh
medium gold (mg) - smaller than ten mesh but larger than twenty mesh
fine gold (fg) - smaller than twenty mesh but larger than forty mesh
very fine gold (vfg) - smaller than forty mesh.

(f) Examine each sieved portion under a binocular microscope. Take general overall counts on scheelite, barite, arsenopyrite, pyrite, hematite and magnetite using the following scale:

0 - no mineral grains were observed
1 - trace
2 - low
3 - moderate
4 - high
5 - abundant

Note: Originally cassiterite counts were to be taken but field tests failed to provide any positive results of suspect grains.

3.0 RESULTS

JAMIE #9
PLACER LEASE 5572

	GOLD	SCHEELITE	BARITE	ARSENOPYRITE	PYRITE	HEMATITE	MAGNETITE
J9-T1 concentrate	0	1	2	0	0	2	2
J9-T1 tails	0	0	1	0	0	1	1

3.0 RESULTS

GOLD

Coarse Gold	(cg)	-	larger than 10 mesh
Medium Gold	(mg)	-	smaller than 10 mesh but larger than 20 mesh
Fine Gold	(fg)	-	smaller than 20 mesh but larger than 40 mesh
Very Fine Gold	(vfg)	-	smaller than 40 mesh

SCALE

0	-	denotes no mineral grains present
1	-	trace
2	-	low
3	-	moderate
4	-	high
5	-	abundant

4.0 CONCLUSIONS

Conclusions pending Chemex Geochemical Analyses.

- APPENDIX I -

JAMIE #9
Placer Lease 5572

STATEMENT OF DIRECT COSTS

LABOUR

Ken Hansen, Supervisor			
$175.00 per day	August 12 (1.0 day)		
	Total Days 1.0 x $175.00 =		$175.00
Mike Philpot, Geologist			
$275.00 per day	August 9 (0.5 day)		
	Total Days 0.5 x $275.00 =		$137.50
Hugh Astley, Cat Operator			
$15.50 per hour	August 9 (5.0 hours)		
	Total Hours 5.0 x $15.50 =		$ 77.50
Bob Cahill, Geological Assistant			
$125.00 per day	August 12 (1.0 day)		
	Total Days 1.0 x $125.00 =		$125.00
Tom Borthwick, Geological Assistant			
$125.00 per day	August 12 (1.0 day)		
	Total Days 1.0 x $125.00 =		$125.00
		TOTAL LABOUR	$640.00

DISBURSEMENTS

D7G $52.50 per hour X 5 hours =	$ 262.50
Diesel 6 gallons per hour x $2.30 per gallon x 5 hours =	$ 69.00
YDs^3 315 x $1.00 per yd^3 =	$ 315.00
Chemex Geochemical Analysis	
Preparation $0.65 per sample X 2	$ 1.30
Each sample tested for Gold ($5.75) Tin ($4.00) Tungsten ($4.00) $13.75 X 2 samples	$ 27.50
TOTAL DISBURSEMENTS	$ 675.30
TOTAL COST APPLIED TO ASSESSMENT WORK	$1,315.30

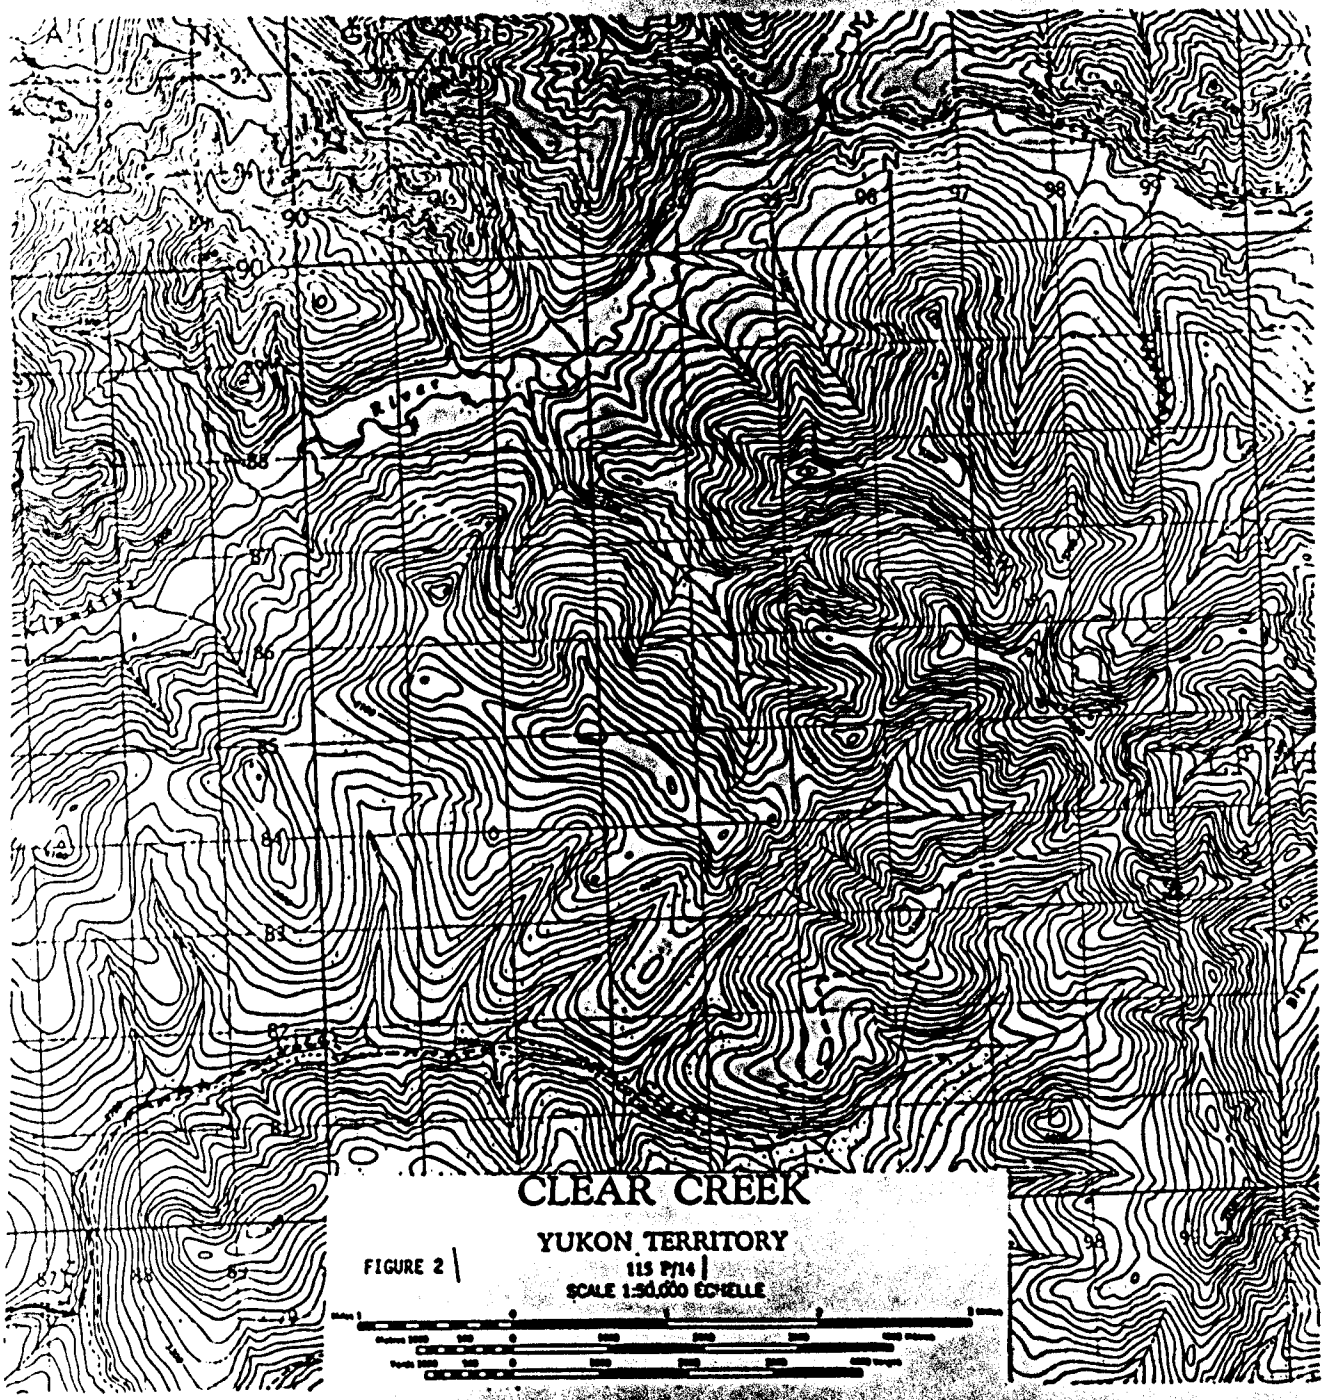

FIGURE 2

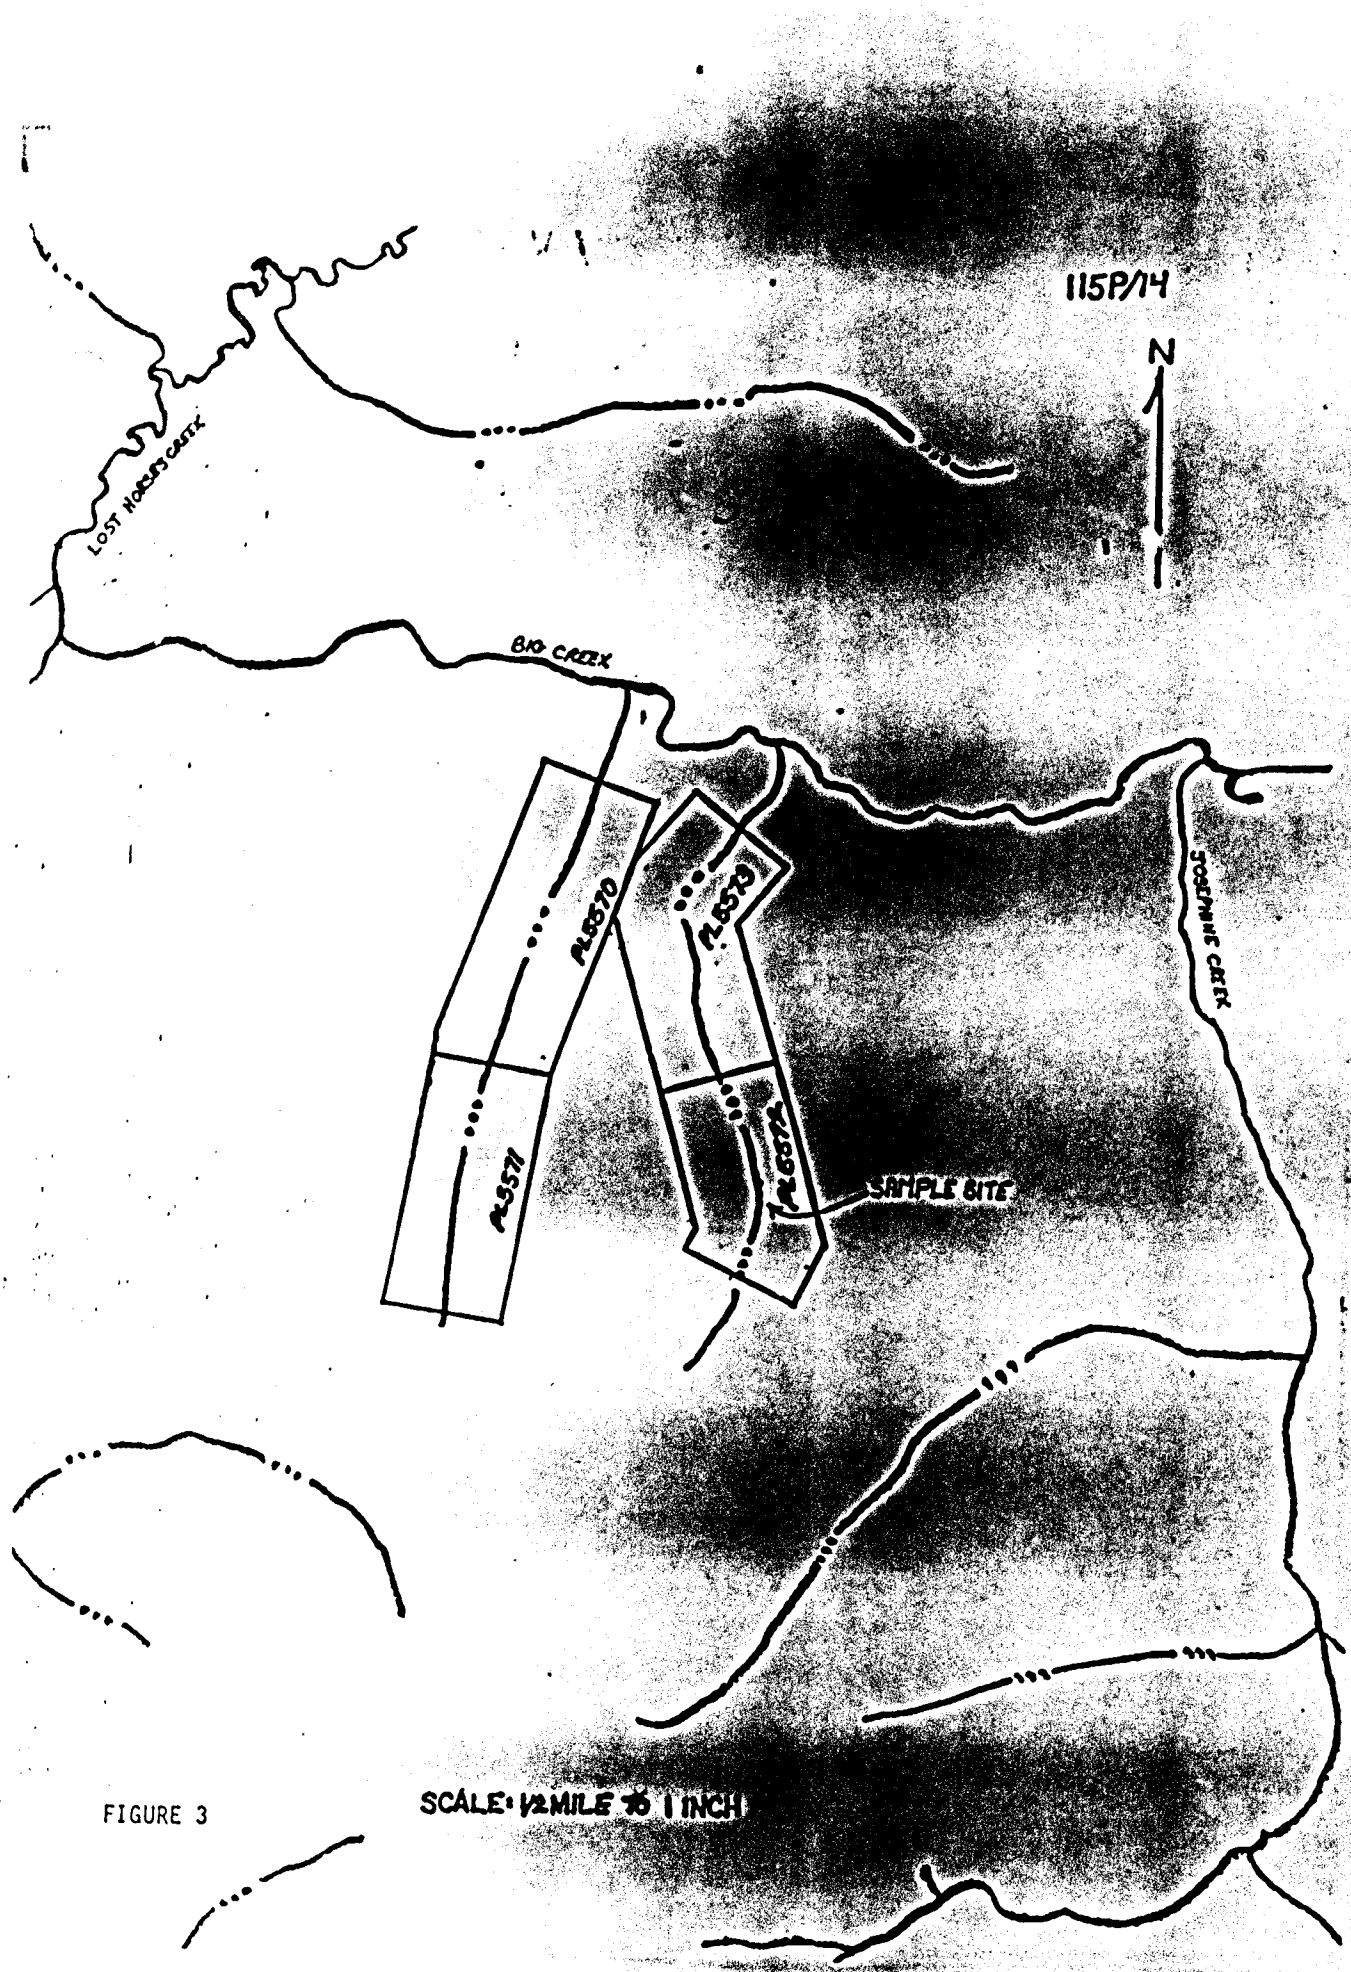
115P/14
N
LOST HORSE CREEK
BIG CREEK
AL570
AL573
AL571
AL572
SAMPLE SITE
JOSEPHINE CREEK
SCALE: 1/2 MILE TO 1 INCH

FIGURE 3

JAMIE 9
SAMPLE SITE PLAN

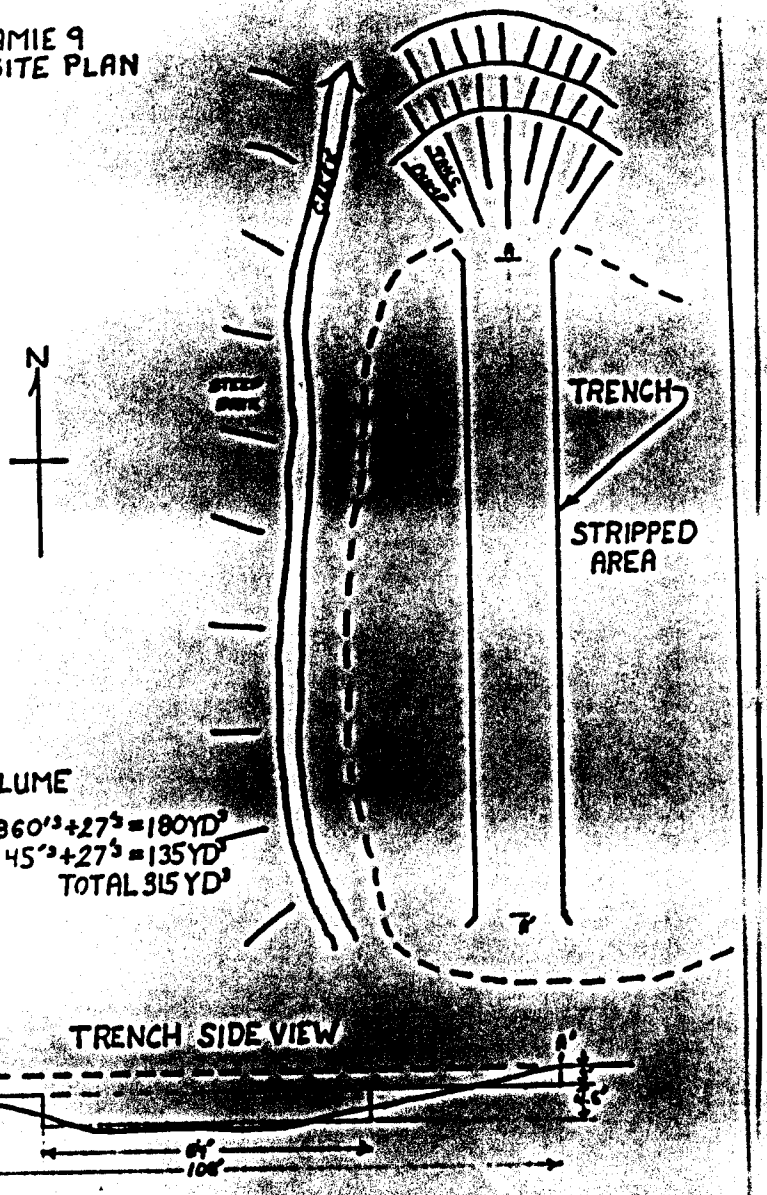

TRENCH VOLUME

108'x 15'x 3' = 4860'³ ÷ 27³ = 180YD³
54'x 15'x 4.5' = 3645'³ ÷ 27³ = 135YD³
TOTAL 315 YD³

TRENCH SIDE VIEW



SCALE 1 INCH TO 20 FEET

TRENCH IS 800 YARDS UPSTREAM FROM POST #1.

FIGURE 4

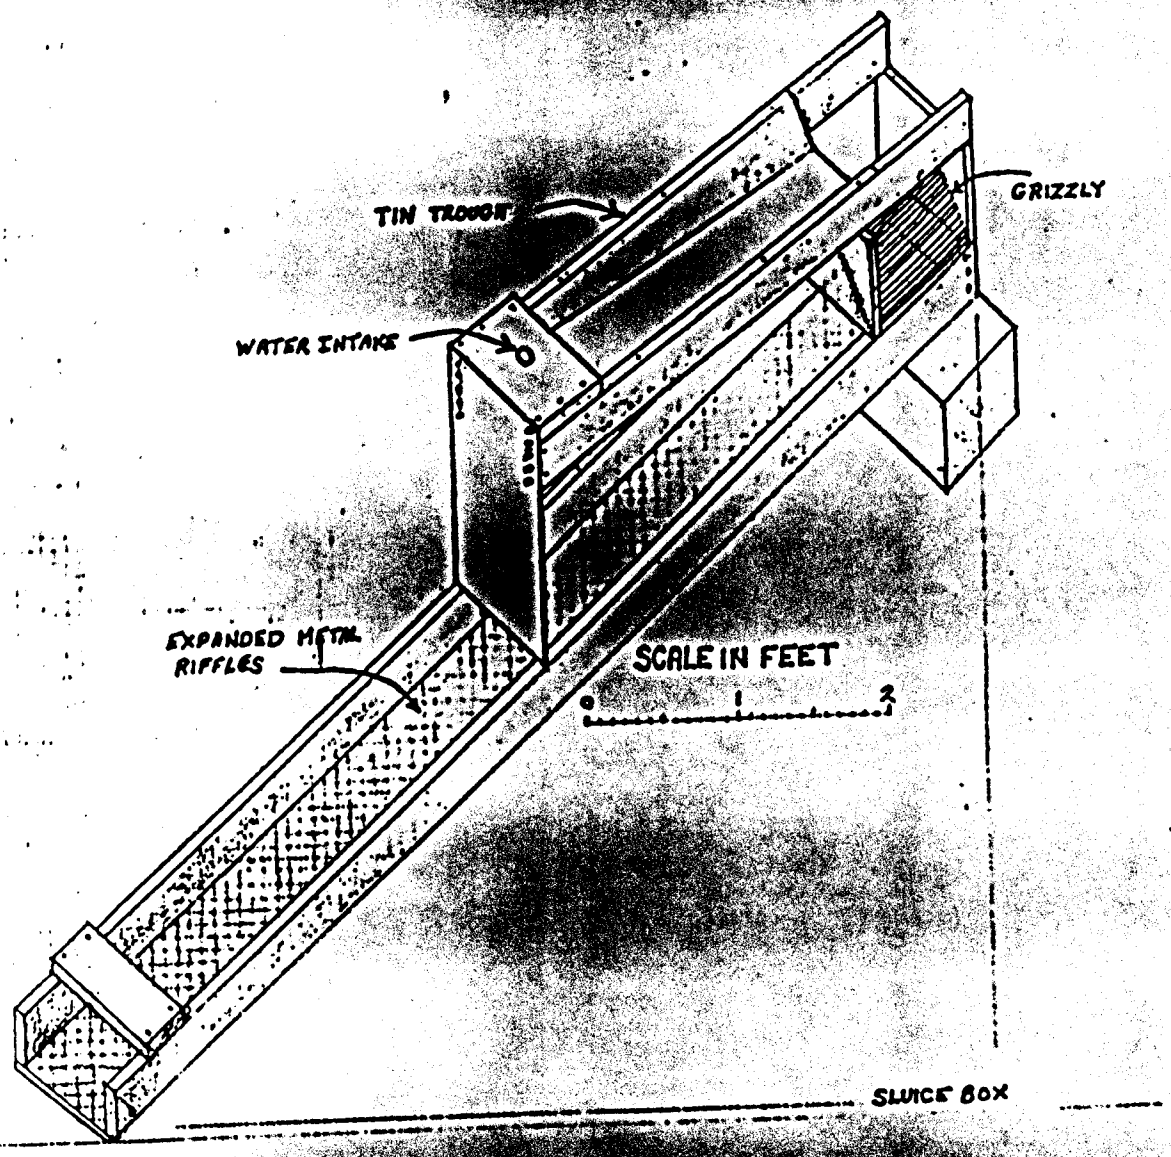
SLUICE
(LONGTOM)
TIN TROUGH
GRIZZLY
WATER INTAKE
EXPANDED METAL
RIFFLES
SCALE IN FEET
0
1
2
SLUICE BOX

FIGURE 5

PLACER TESTING PROGRAM

JAMIE #10

PLACER LEASE 5574

PLACER TESTING PROGRAM

JAMIE #10

PLACER LEASE 5574

DAWSON MINING DIVISION

NTS 115 P/14

63°51.2' LATITUDE, 137°13.7' LONGITUDE

Owned by:

CANADA TUNGSTEN MINING CORPORATION LTD.
Executive Office
Box 12525, Oceanic Plaza
Ste. 1600-1066 W. Hastings St.
Vancouver, B.C. V6E 3X1

Work by:

BEMA INDUSTRIES LTD.
19945-56th Avenue
Langley, B.C. V3A 3Y2

KEN HANSEN

SEPTEMBER 1981

TABLE OF CONTENTS

		Page
1.0	Introduction	1
1.1	Location and Access	1
2.0	The Placer Testing Program	2
2.1	Trenching	2
2.2	D7G Trenches	2
2.3	Concentration Procedure	2
2.4	Visual Examination	3
3.0	Results	5
4.0	Conclusions	
	Appendix I	8
	Figures	

LIST OF FIGURES

FIGURE 1	Location and Access Map	Scale 1:250,000
FIGURE 2	Topography Map	Scale 1:50,000
FIGURE 3	Claim Map	Scale 1 inch to ½ mile
FICURE 4	Sample Site Plan	Scale 1 inch to 20 feet
FIGURE 5	Sluice (Longtom) Diagram	

APPENDIX

APPENDIX I Statement of Direct Costs

PLACER TESTING PROGRAM

JAKIE #10

PLACER LEASE 5574

1.0 INTRODUCTION

Bema Industries Ltd. was contracted by Canada Tungsten Mining Corporation Limited to carry out a placer testing program on their thirteen leases in the Clear Creek area. The purpose of the program was to define the heavy mineral potential and to fulfill their assessment requirements for each lease.

1.1 LOCATION AND ACCESS

The West Ridge Camp is situated in the Yukon Territory approximately 40 miles northwest of Stewart Crossing (see Fig. 1). Access is by travelling east along the Klondike highway for 47 miles then turn north along the Clear Creek road for 18 miles.

The leases are then accessible by a 4 X 4 road which follows Left Clear Creek. Since the leases are located well of the roadway a Bell 47 was used to reach the leases.

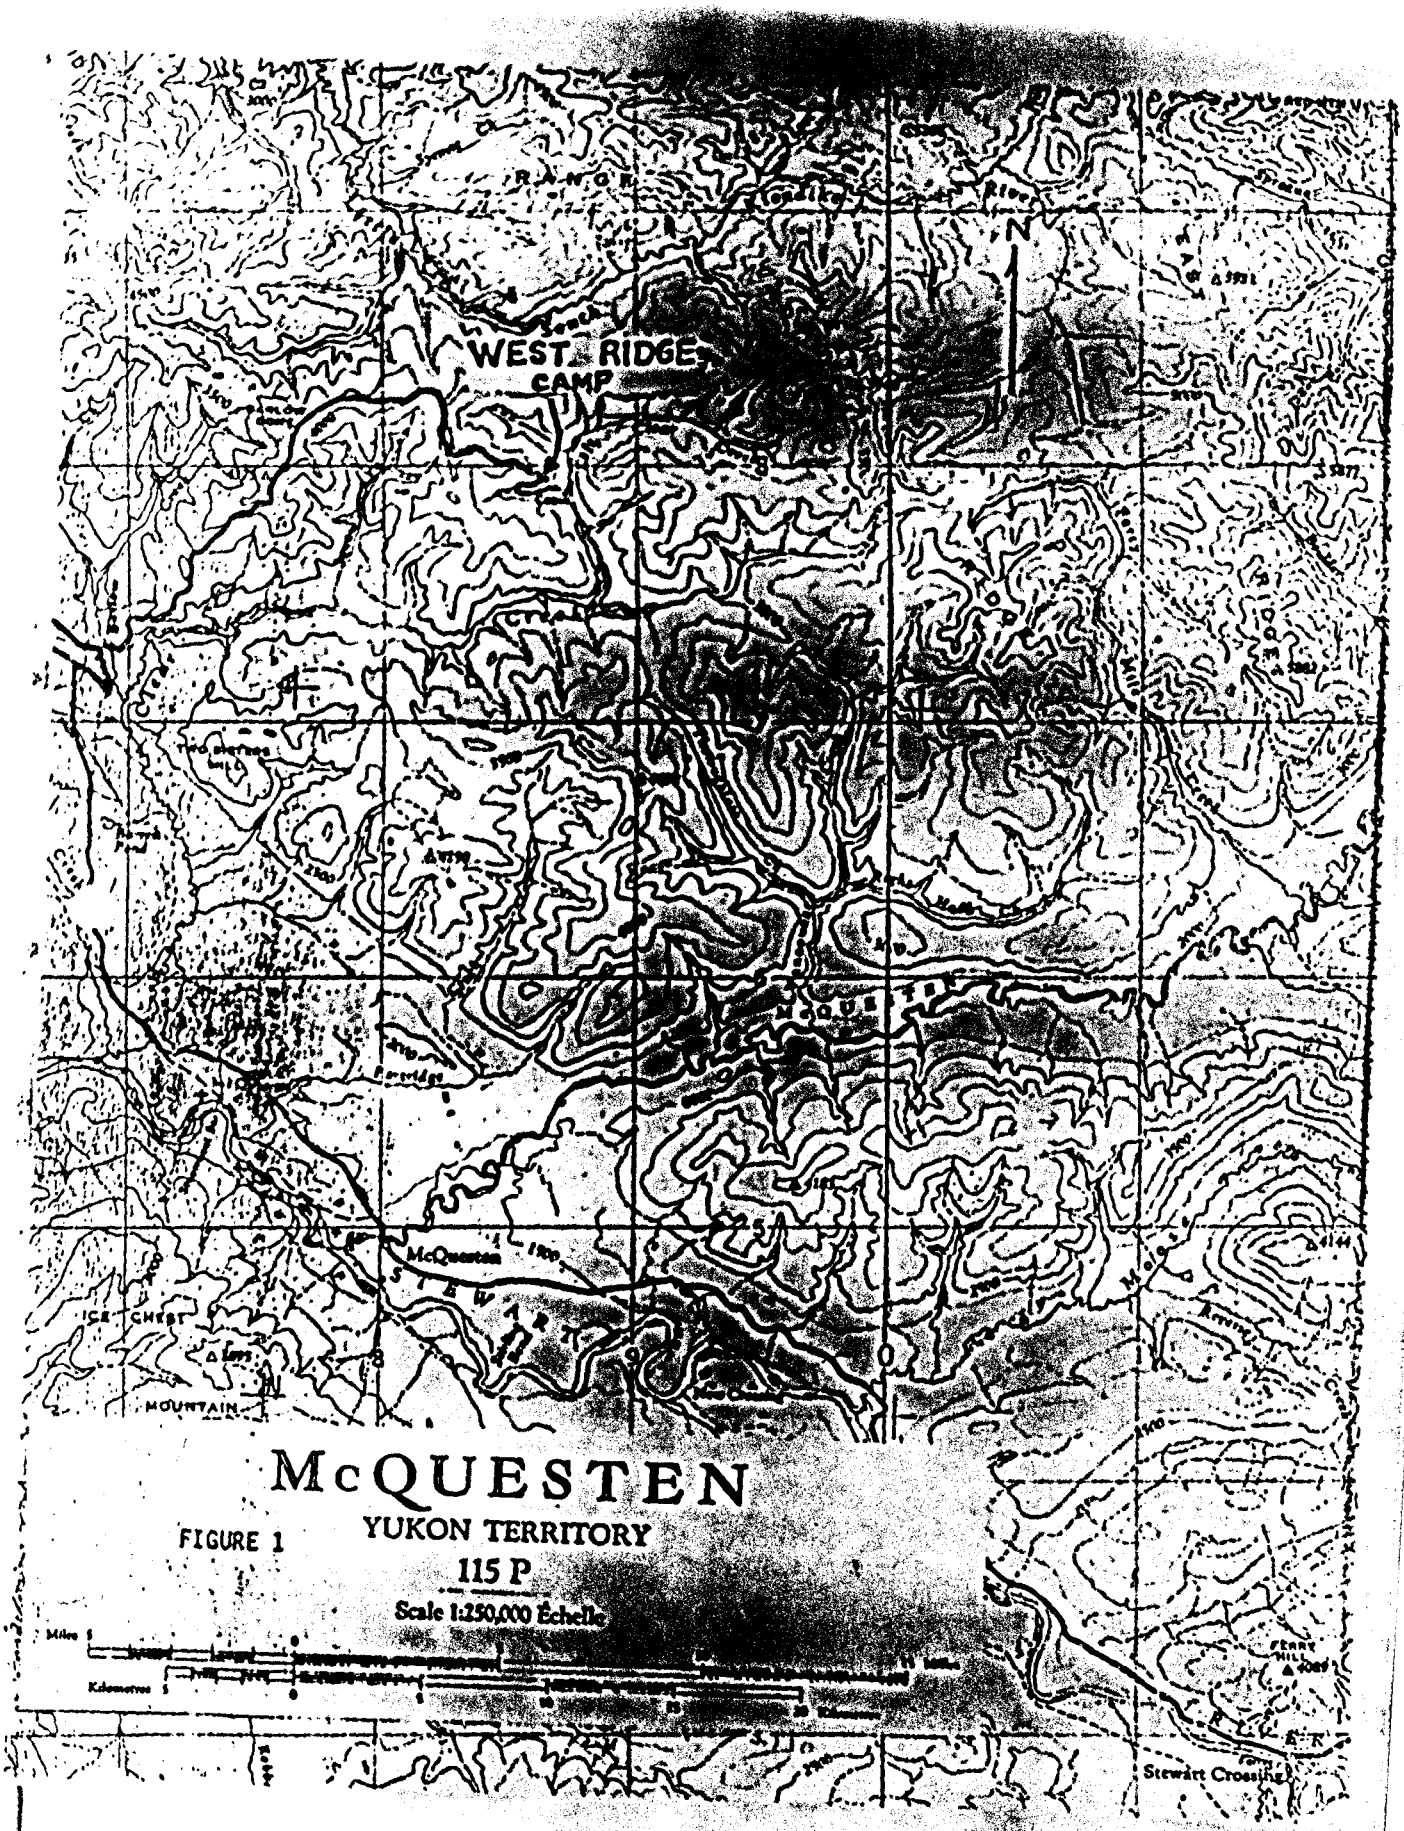
WEST RIDGE
CAMP
McQuesten
ICE CHEST
MOUNTAIN
Stewart Crossing
McQUESTEN
YUKON TERRITORY
115 P
Scale 1:250,000 Échelle
Miles
Kilometres

FIGURE 1

2.0 THE PLACER TESTING PROGRAM

The program consisted of trenching, concentration of trenched material, visual examination, assay and geochemical analysis, and calculations of gold, scheelite, and cassiterite values per cubic yard.

2.1 TRENCHING

Two methods of trenching were used depending upon access to the lease. Upon easy access a D7G cat was used to excavate a trench. Where access was not possible by cat a two to three man crew was flown in by a Bell 47 to excavate a trench or test pits.

2.2 D7G TRENCHES

The cat trenches were dug as deep as possible within an alotted time period. Once the trench reached bedrock or its maximum depth a sample was taken. The cat would push a blade load of material (one to two cubic yards in volume) from the lowest portion of the trench and deposit it on the tails pile to be tested later.

The cat would then refill the trench with surrounding material.

The trenches were sub-parallel to the active creek due to the restrictions in the available work areas.

2.3 CONCENTRATION PROCEDURE

The concentration process involves running as much material as possible from the cat trench through a small sluice.

Large rocks which were part of the sample were washed in a tub, then the residual material run through the sluice. After each sluice clean up a one half to one cubic foot concentrate was taken.

The sluice material was panned to approximately an eight and one half ounce concentrate. This final concentrate was dried for visual inspection.

The small sluice or longtom (see Fig. 5) consisted of a pump, trough, grizzly, and sluice box. A Monark pump was used to supply water at 70 gallons per minute. The grizzly was setup at a forty-five degree angle with one quarter inch by eight inch slotted openings. The oversize gravel was rejected off the side of the grizzly.

(a) The water flows through the four feet trough.

(b) The gravel is placed in the trough.

(c) It is washed and self-fed at a constant rate over the grizzly.

(d) The sized gravel goes in an eight foot by eight inch sluice. The bottom of the sluice has a layer of rubber matting, and on top of this three quarter inch expanded metal.

(e) Panning: the panning of the sluice concentrates were done at base camp. Each sample was panned twice. The final concentrates were placed on trays to dry. An eight ounce panning tails sample was taken for geochemical analysis to ensure accuracy.

2.4 VISUAL EXAMINATION

The visual examination procedure is as follows:

(a) Dry panned, concentrate and tails.

(b) Weigh concentrate and tails.

(c) Sieve dried concentrate using a ten and twenty mesh screen (Tyler series).

(d) Take counts on scheelite grains larger than twenty mesh with the aid of an ultraviolet lamp. At the same time note the presence of barite.

(e) Take counts on gold using the following scale:

coarse gold (cg) - larger than ten mesh
medium gold (mg) - smaller than ten mesh but larger than twenty mesh
fine gold (fg) - smaller than twenty mesh but larger than forty mesh
very fine gold (vfg) - smaller than forty mesh.

(f) Examine each sieved portion under a binocular microscope. Take general overall counts on scheelite, barite, arsenopyrite, pyrite, hematite and magnetite using the following scale:

0 - no mineral grains were observed
1 - trace
2 - low
3 - moderate
4 - high
5 - abundant

Note: Originally cassiterite counts were to be taken but field tests failed to provide any positive results of suspect grains.

3.0 RESULTS

JAKIE J10
PLACER LEASE 6574

	GOLD	SCHEELITE	BARITE	ARSENOPYRITE	PYRITE	HEMATITE	MAGNETI
		1 gr.> 20 mesh					
J10-T1 concentrate	10 vfg	2	1	0	0	2	2
J10-T1 tails	0	1	0	0	0	0	1

3.0 RESULTS

GOLD

Coarse Gold	(cg)	-	larger than 10 mesh
Medium Gold	(mg)	-	smaller than 10 mesh but larger than 20 mesh
Fine Gold	(fg)	-	smaller than 20 mesh but larger than 40 mesh
Very Fine Gold	(vfg)	-	smaller than 40 mesh

SCALE

0	-	denotes no mineral grains present
1	-	trace
2	-	low
3	-	moderate
4	-	high
5	-	abundant

4.0 CONCLUSIONS

Conclusions pending Chemex Geochemical Analysis

- APPENDIX I -

JAMIE #10
Placer Lease 5574

STATEMENT OF DIRECT COSTS

LABOUR

Ken Hansen, Supervisor		
$175.00 per day	August 19 (0.2 day) 20 (0.3 day) 22 (0.14 day) 23 (0.14 day) 24 (0.14 day)	
	Total Days 0.92 x $175.00 =	$161.00
Sean Butler, Geological Assistant		
$125.00 per day	August 21 (1.0 day)	
	Total Days 1.0 x $125.00 =	$125.00
Paul Jones, Geological Assistant		
$95.00 per day	August 21 (1.0 day)	
	Total Days 1.0 x $95.00 =	$ 95.00
Hugh Astley, Cat Operator		
$15.50 per hour	August 19 (2 hours) 20 (3 hours) September 8 (1 hour)	
	Total Hours 6 x $15.50 =	$ 93.00
Mike Philpot, Geologist		
$275.00 per day	September 8 (0.1 day)	
	Total Days 0.1 x $275.00 =	$ 27.50
	TOTAL LABOUR	$501.50

DISBURSEMENTS

D7G $52.50 per hour X 6 hours =	$ 315.00
Diesel 6 gallons per hour X $2.30 per gallon X 6 hours =	$ 82.80
YDs^3 166.6 x $1.00 per YD^3 =	$ 166.60
Chemex Geochemical Analyses	
Preparation $0.65 per sample X 2	$ 1.30
Each sample tested for Gold ($5.75) Tin ($4.00) Tungsten ($4.00)	
$13.75 X 2 samples	$ 27.50
TOTAL DISBURSEMENTS	$ 593.20
TOTAL COST APPLIED TO ASSESSMENT WORK	$1,094.70

FIGURE 2

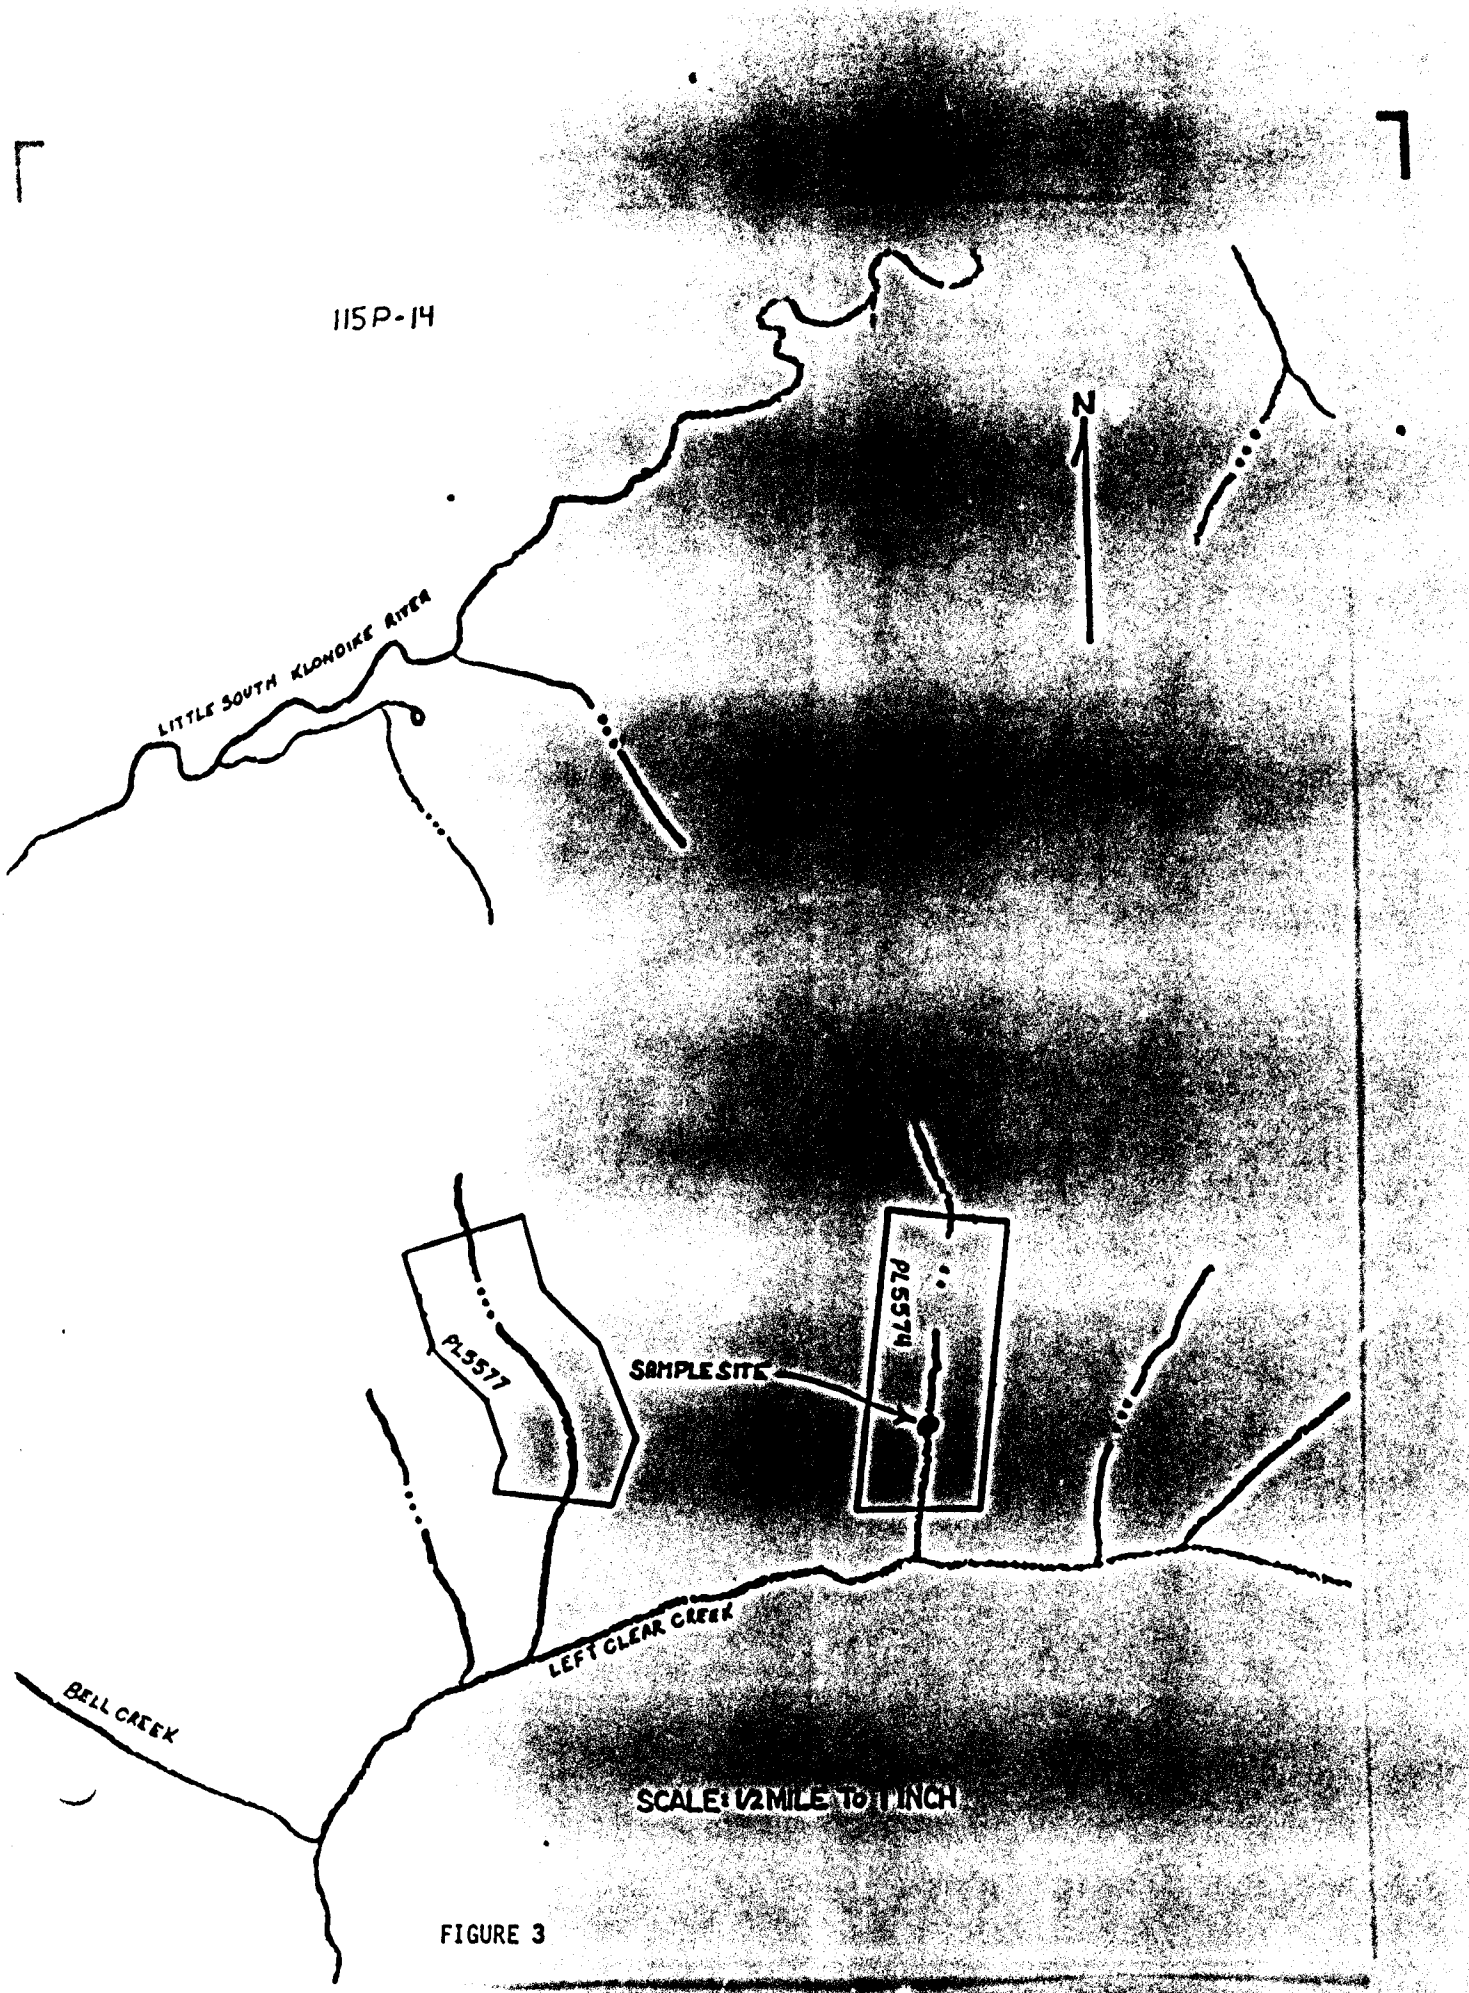
115P-14
N
LITTLE SOUTH KLONDIKE RIVER
PL5574
PL5571
SAMPLE SITE
LEFT CLEAR CREEK
BELL CREEK
SCALE: 1/2 MILE TO 1 INCH

FIGURE 3

JAMIE 10 SAMPLE SITE PLAN
TRENCH 10



TRENCH SIDE VIEW

TRENCH VOLUME
30' x 10' x 4.5' = 1350' ÷ 27' = 50 YD³
25' x 10' x 9' = 2550' ÷ 27' = 83 YD³
TOTAL 133 YD³

TRENCH IS 700 YARDS UPSTREAM FROM POST #1.

TRENCH 2



TRENCH SIDE VIEW

TRENCH VOLUME
45' x 10' x 2' = 900' ÷ 27' = 33.3 YD³

TRENCH IS 450 YARDS UPSTREAM FROM POST #1.

SCALE 1 INCH TO 20 FEET

FIGURE 4

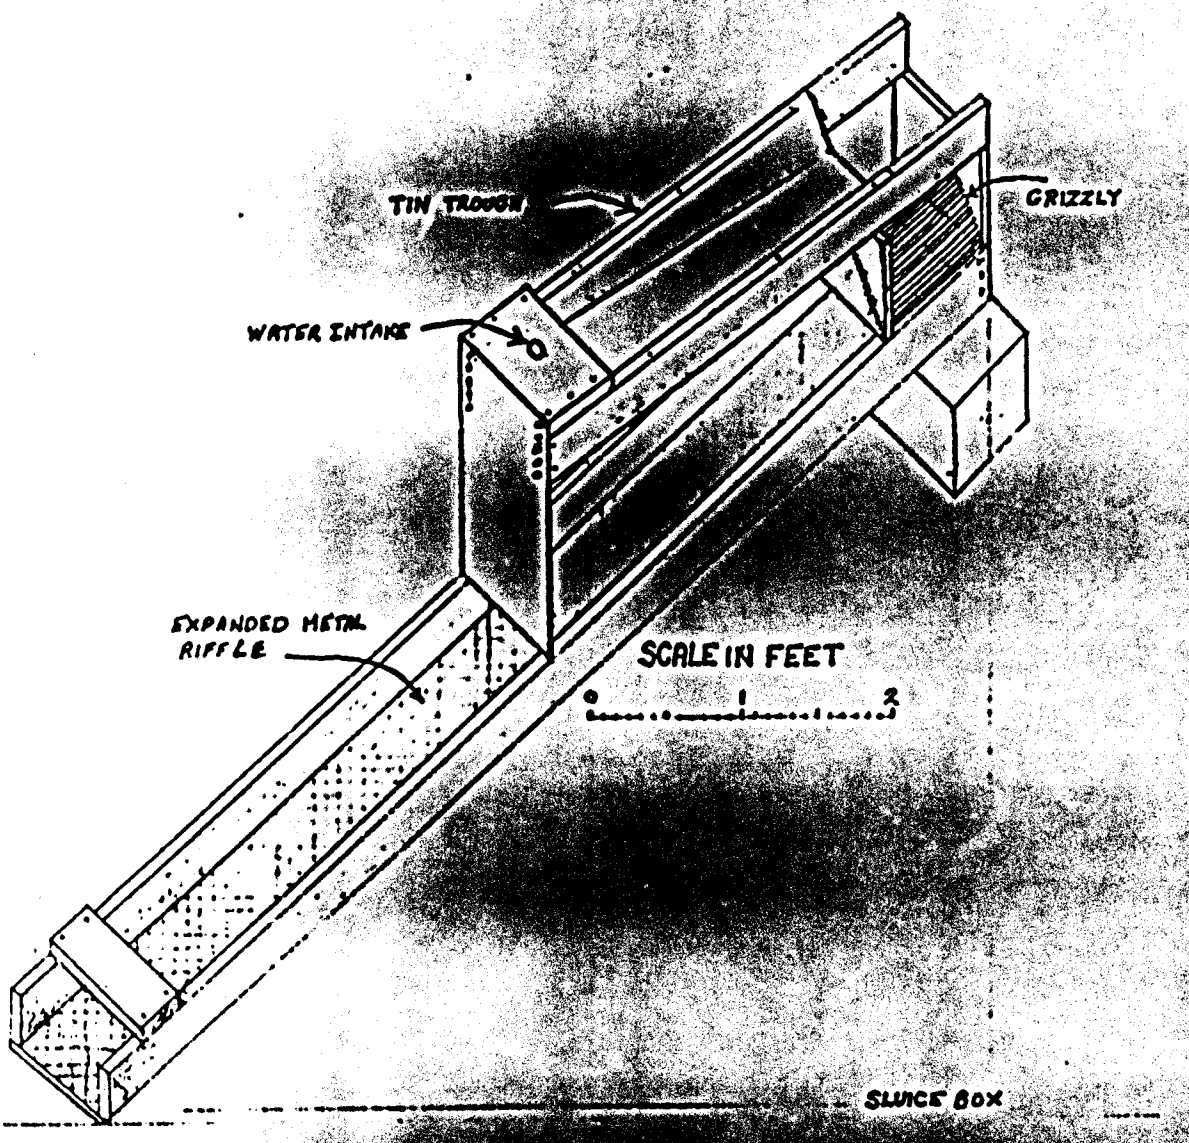
SLUICE
(LONGTOM)
TIN TROUGH
GRIZZLY
WATER INTAKE
EXPANDED METAL
RIFFLE
SCALE IN FEET
0
1
2
SLUICE BOX

FIGURE 5

PLACER TESTING PROGRAM

JAMIE 11

PLACER LEASE 5576

PLACER TESTING PROGRAM

JAMIE 11

PLACER LEASE 5576

DAWSON MINING DIVISION

N.T.S. 115 P/14

Latitude: 63°52.3'; Longitude: 137°07.1'

Owned by:

CANADA TUNGSTEN MINING CORPORATION LIMITED
Executive Office
Box 12525, Oceanic Plaza
Ste. 1600-1066 W. Hastings Street
Vancouver, B.C. V6E 3X1

Work by:

BEMA INDUSTRIES LTD.
19945-56th Avenue
Langley, B.C. V3A 3Y2

Ken Hansen

September, 1981

TABLE OF CONTENTS

		PAGE
1.0	INTRODUCTION	1
1.1	LOCATION AND ACCESS	1
2.0	PLACER TESTING PROGRAM	2
2.1	TRENCHING	2
2.2	D-7G TRENCHES	2
2.3	CONCENTRATION PROCEDURE	2
2.4	VISUAL EXAMINATION	3
3.0	RESULTS	5
4.0	CONCLUSIONS	7
	Appendix I	8
	Figures	

LIST OF FIGURES

FIGURE 1	Location and Access Map	Scale 1:250,000
FIGURE 2	Topography Map	Scale 1:50,000
FIGURE 3	Claim Map	Scale 1 inch to ½ mile
FIGURE 4	Sample Site Plan	Scale 1 inch to 10 feet
FIGURE 5	Sluice (Longtom) Diagram	

APPENDIX

APPENDIX I Statement of Direct Costs

PLACER TESTING PROGRAM

JAMIE 11

PLACER LEASE 5576

1.0 INTRODUCTION

Bema Industries Ltd. was contracted by Canada Tungsten Mining Corporation Limited to carry out a placer testing program on their thirteen leases in the Clear Creek area. The purpose of the program was to define the heavy mineral potential and to fulfill their assessment requirements for each lease.

1.1 LOCATION AND ACCESS

The West Ridge camp is situated in the Yukon Territory approximately 40 miles northwest of Stewart Crossing. (See Figure 1.) Access is by travelling east along the Klondike Highway for 47 miles then turning north along the Clear Creek road for 18 miles.

The leases are then accessible by a 4x4 road which follows Left Clear Creek. Since the leases are located well off the roadway a Bell 47 was used to reach the leases.

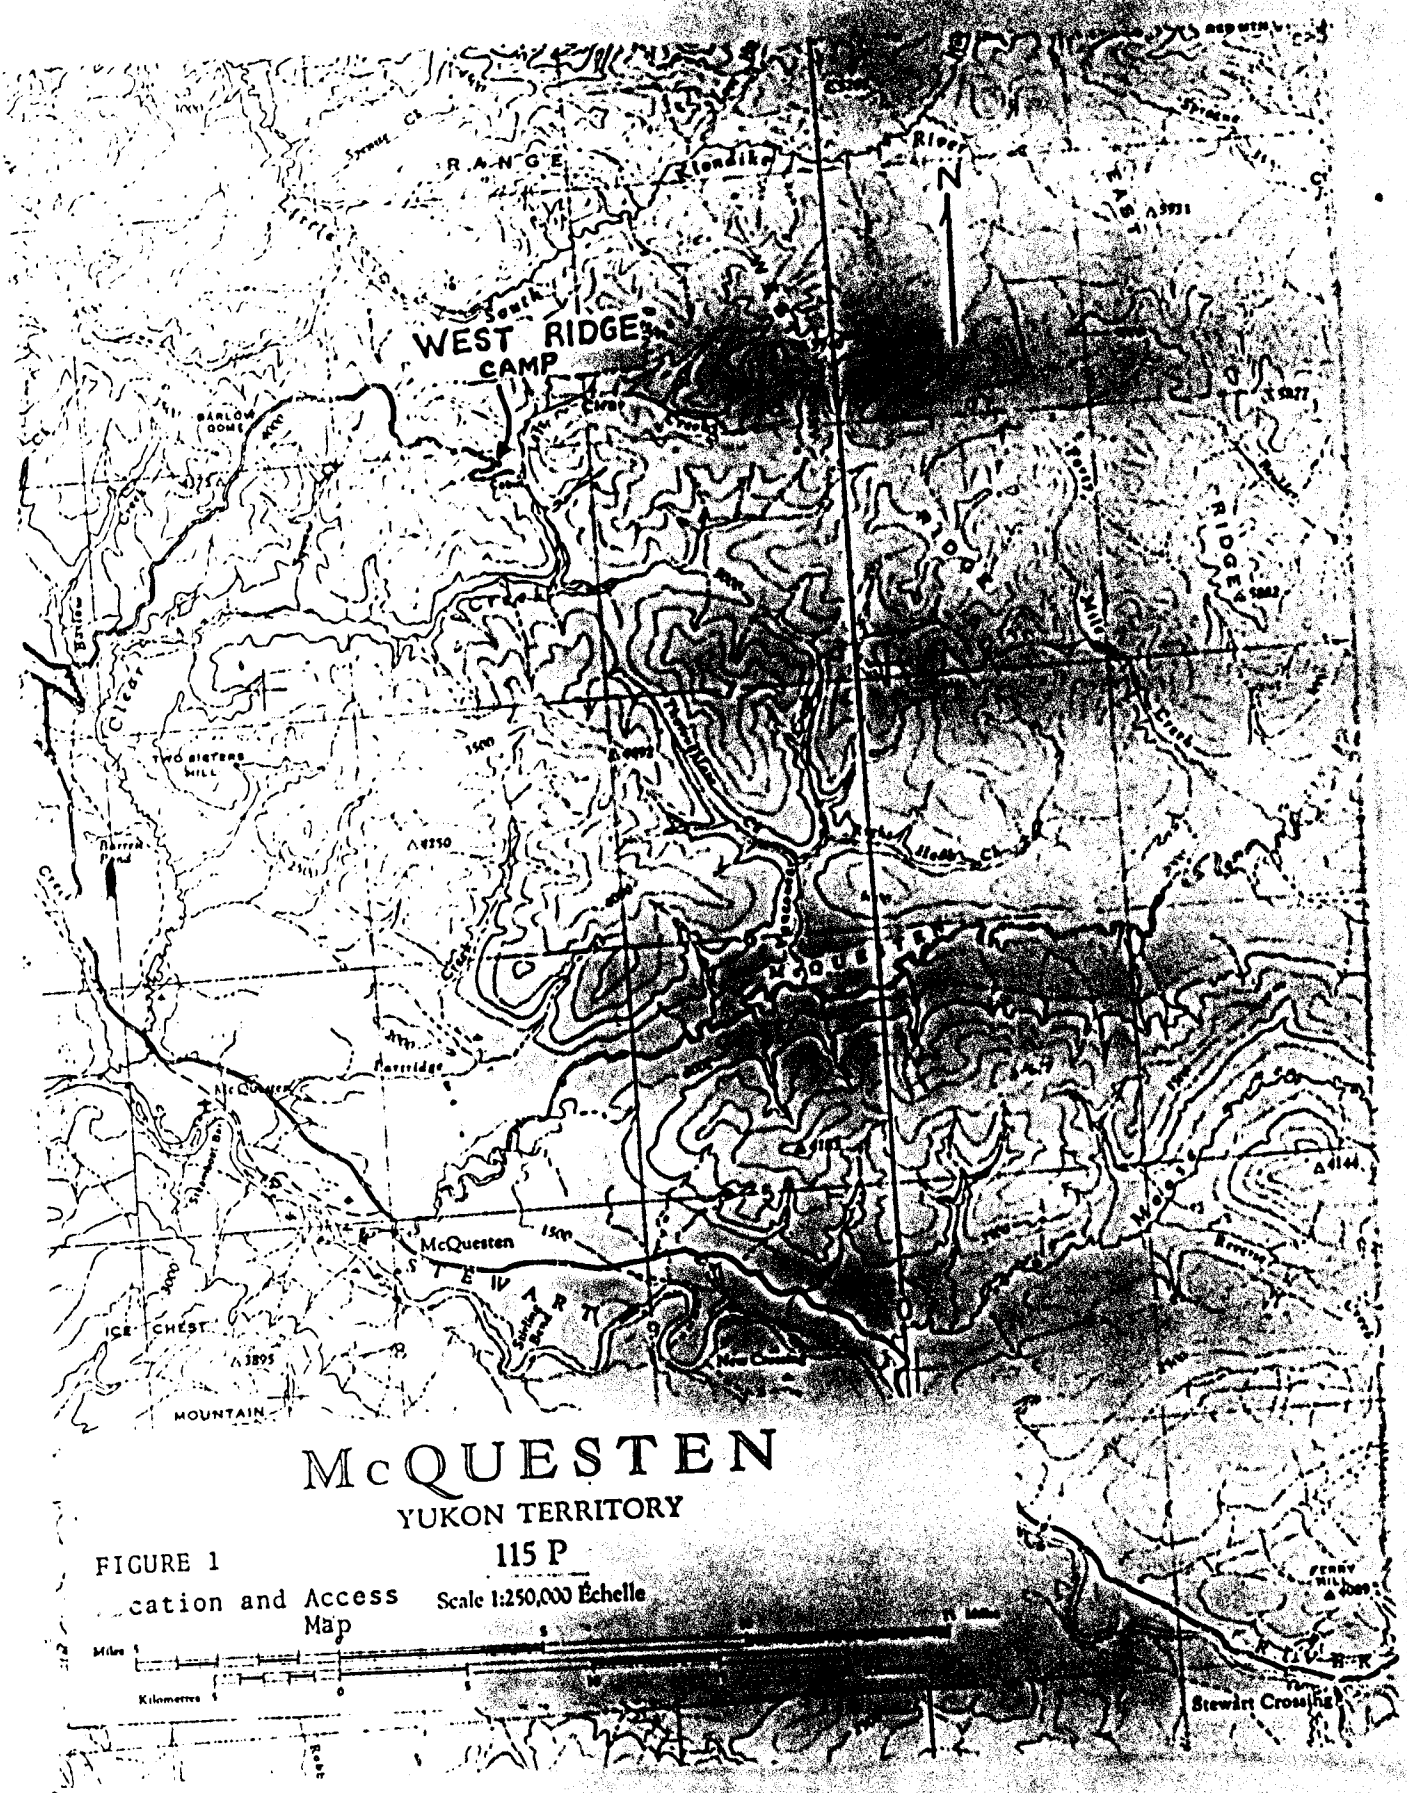

FIGURE 1

...cation and Access Map

2.0 PLACER TESTING PROGRAM

The program consisted of trenching, concentration of trenched material, visual examination, assay and geochemical analysis, and calculations of gold, scheelite and cassiterite values per cubic yard.

2.1 TRENCHING

Two methods of trenching were used depending upon access to the lease. Upon easy access a D-7G cat was used to excavate a trench. Where access was not possible by cat a two to three man crew was flown in by a Bell 47 to excavate a trench or test pits.

2.2 D-7G TRENCHES

The cat trenches were dug as deep as possible within an alotted time period. Once the trench reached bedrock, or its maximum depth, a sample was taken. The cat would push a blade load of material (one to two cubic yards in volume) from the lowest portion of the trench and deposit it on the tails pile to be tested later.

The cat would then refill the trench with surrounding material.

The trenches were sub-parallel to the active creek due to the restrictions in the available work areas.

2.3 CONCENTRATION PROCEDURE

The concentration process involves running as much material as possible from the cat trench through a small sluice.

Large rocks which were part of the sample were washed in a tub, then the residual material was run through the sluice. After each sluice clean-up a one half to one cubic foot concentrate was taken.

The sluice material was panned to approximately an eight and one half ounce concentrate. This final concentrate was dried for visual inspection.

The small sluice, or Longtom (see Figure 5) consisted of a pump, trough, grizzly and sluice box. A Monark pump was used to supply water at 70 gallons per minute. The grizzly was set up at a forty-five degree angle with one quarter inch by eight inch slotted openings. The oversize gravel was rejected off the side of the grizzly.

(a) The water flows through the four foot trough.

(b) The gravel is placed in the trough.

(c) It is washed and self-fed at a constant rate over the grizzly.

(d) The sized gravel goes in an eight foot by eight inch sluice. The bottom of the sluice has a layer of rubber matting, and on top of this three quarter inch expanded metal.

(e) Panning: the panning of the sluice concentrates were done at base camp. Each sample was panned twice. The final concentrates were placed on trays to dry. An eight ounce panning tails sample was taken for geochemical analysis to ensure accuracy.

2.4 VISUAL EXAMINATION

The visual examination procedure is as follows:

(a) Dry panned concentrate and tails.

(b) Weigh concentrate and tails.

(c) Sieve dried concentrate using a ten and twenty mesh screen (Tyler series).

(d) Take counts on scheelite grains larger than twenty mesh with the aid of an ultra violet lamp. At the same time note the presence of barite.

(e) Take counts on gold using the following scale:

coarse gold (cg) -larger than ten mesh

medium gold (mg) -smaller than ten mesh but larger than twenty mesh

fine gold (fg) -smaller than twenty mesh but larger than forty mesh

very fine gold (vfg)-smaller than forty mesh

(f) Examine each sieved portion under a binocular microscope. Take general overall counts on scheelite, barite, arsenopyrite, pyrite, hematite and magnetite using the following scale:

0 - no mineral grains were observed

1 - trace

2 - low

3 - moderate

4 - high

5 - abundant

NOTE: Originally cassiterite counts were to be taken but field tests failed to provide any positive results of suspect grains.