

Hot 1-20
GRR 1-24
GRR 37-42
Dad 1-16
Wet 1-4

GEOLOGICAL INVESTIGATION

OF THE

093440

FLAT CREEK CLAIMS

NTS 115 O 16

138' 20" West

63' 20" North

**Work done
June 1 through July 21
1995**




BY

G.S. HARTLEY P. GEOL.

for
Claim Owners

G. Hartley and A. Hartley

SEPTEMBER 21, 1995

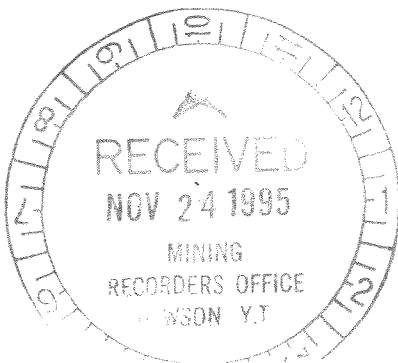

A handwritten signature in black ink, appearing to be "G.S. Hartley".

TABLE OF CONTENTS

I.	Summary.....	5
II.	History.....	6
III.	Location.....	6
IV.	Physiography.....	6
V.	Regional Geology.....	7
VI.	Geochemistry.....	8
VII.	Drilling.....	9
VIII.	Conclusions.....	10
IX.	Statement of Costs.....	11
IIX.	References.....	12
IIIX.	Certificate.....	13

LIST of APPENDICES

Appendix I Assay Sheets and Cumulative Frequency Plots

Appendix II Drill Logs with Assay Data

List of Maps

- Map I Location and Claim Map
- Map II Regional Geology Map 711 A (Bostock 1937)
- Map III Soil Surveys
- a. Gold
 - b. Arsenic
 - c. Silver
 - d. Lead
- Map IV Drill Hole Locations

I. Summary

The Flat Creek project claims lie along the Tintina Trench approximately 65 km (35 miles) east of Dawson City. The claim area is bounded by Flat Creek to the south and highway #2 to the North, the claims ajoin the highway.

The claims are approximately 10 km south of the Brewery Creek gold deposit, known to contain 18.9 Million tons at an approximate grade of .042 oz/ton(Northern Miner Press).


The area of the claims contains no outcrop. Geochemical survey data (GSC Open File 1364) indicated the presence of anomalous mercury, arsenic, barium, magnesium, and tin, in an area where strong structural features have been identified (Mortensen et al 1992).

During the 1994 season, a short field program, conducted by the author, yielded encouraging values of 1.1 ppm silver with associated lead, arsenic and mercury, within stream sediment samples.

During 1995, a total of 47 soil samples were collected, access roads and drill sites were also constructed. A short drilling program totaling 250 feet of percussion drilling in six holes was done using an Nodwell mounted Atlas Copco BRE 5701 pneumatic drill. Drilling was supported by a Case 1150 crawler and a Ingersol Rand 750 CFM compressor.

Results of the soil geochemical survey were encouraging, values up to 828 ppm lead occur with associated silver (to 1 ppm), only low gold and arsenic values were returned. In all cases lead was associated with higher silver values. Estimated background values were; lead 18 ppm, silver .1 ppm.

Drilling failed to reach bedrock, however interesting values were found to occur in tills, the best hole returned values in excess of 500 ppm lead and 2 ppm silver over 20 feet within tills.

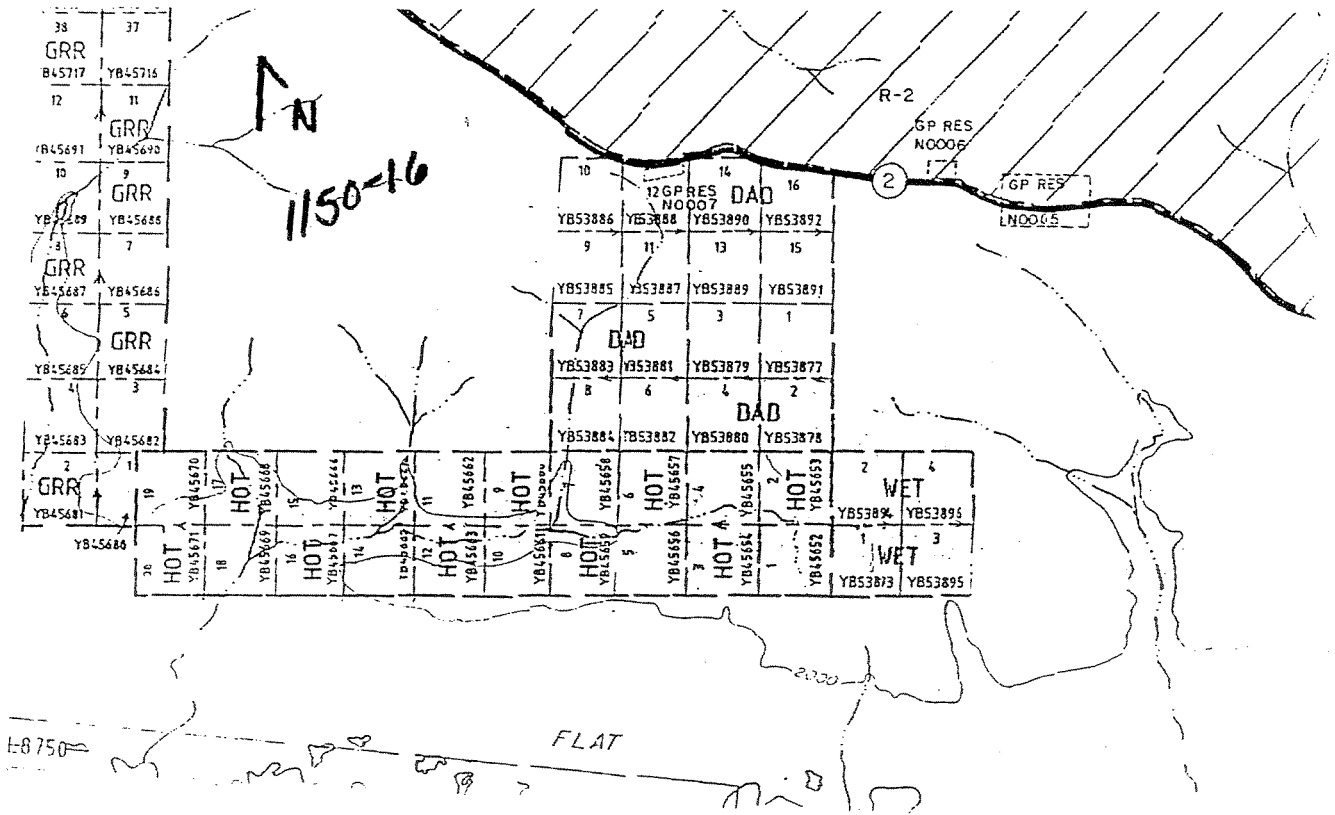


CLAIM MAP SHOWING
FLAT CREEK PROJECT
LANDS

0 3000 6000



SCALE IN FEET

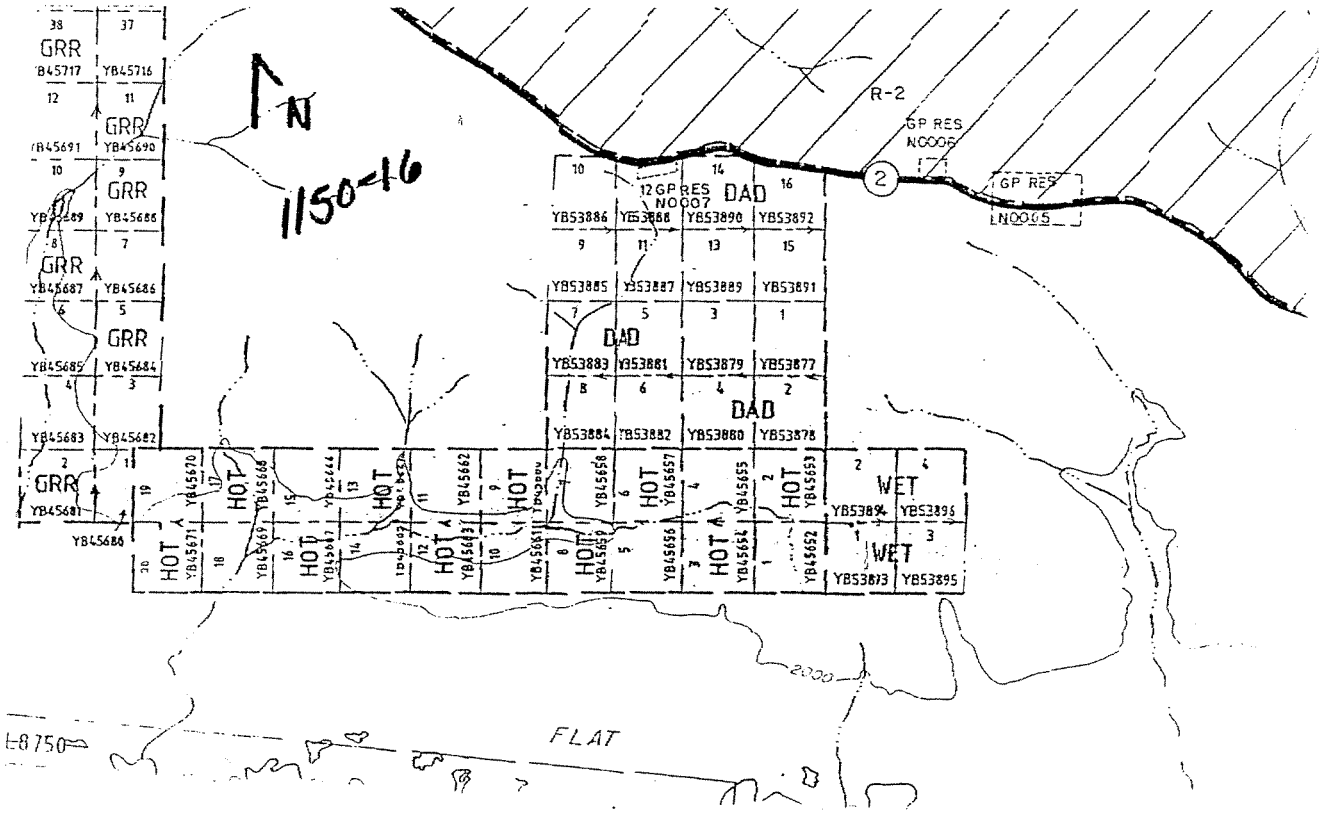

CLAIM MAP SHOWING
 FLAT CREEK PROJECT
 LANDS

CLAIMS WITHIN THIS PROJECT

CLAIM	NUMBER	OWNERSHIP
HOT #1 TO #20	YB45652 TO YB45671	G. HARTLEY 50% A. HARTLEY 50%
GRR#1 TO GRR#24	YB45680 TO YB45703	G. HARTLEY 50% A. HARTLEY 50%
GRR#37 TO GRR#44	YB45716 TO YB45723	G. HARTLEY 50% A. HARTLEY 50%
DAD#1 TO DAD#16	YB53877 TO YB53892	G. HARTLEY 100%
WET#1 TO WET#44	YB53893 TO YB53896	G.HARTLEY 100%

II. History

There is no record of lode or placer claims within the area, old placer workings, possibly well in excess of eighty years old were noted in one location. The Yukon Minfile indicated no known mineralization in the area. GSC Open File 1364 indicated the presence of anomalous levels of mercury, arsenic, barium, magnesium and tin in the area.

III. Location

The claims are located north of Flat Creek, and immediately south of Highway #2 , on NTS sheet 115 O 16, near latitude 63'53 North and longitude 138'20 West.

Access to the property is by paved Highway #2 approximately 65 km east of Dawson City. Field crew accommodation during the six week program was established in a trailer parked on the property.

IV. Physiography

The region is dominated by the Tintina Trench. Thick glacial deposits mantle Paleozoic subcrop (Bostock 1964). Outcrops are not present. The area is designated as a continuous permafrost zone. Topography slopes gently to the south.


V. Regional Geology

The Geology of the region, although poorly exposed, is known to consist of Paleozoic carbonates and shales and related rocks of the Earn and Road River groups intruded by felsic dykes and sills, of Cretaceous to Tertiary age (Bostock 1964).

The project lies within the Tintina Trench structural zone. Lineament studies utilizing Landsat TM thermal imagery, indicate a number of well defined fault splays near the property, the study suggests further evaluation of the region for structurally controlled epithermal gold deposits. (Mortensen and Von Gaza 1992).

Published geology (GSC Map 711A, Bostock 1937) indicates that the area is underlain by gravels, now classified as a pre Reed glacial terrace (B. Lebarge, personal communication).

The claim area does not contain outcrop. It can be speculated that shallow subcrop is present on the basis of the occurrence three small ponds within active drainage features on the claims.

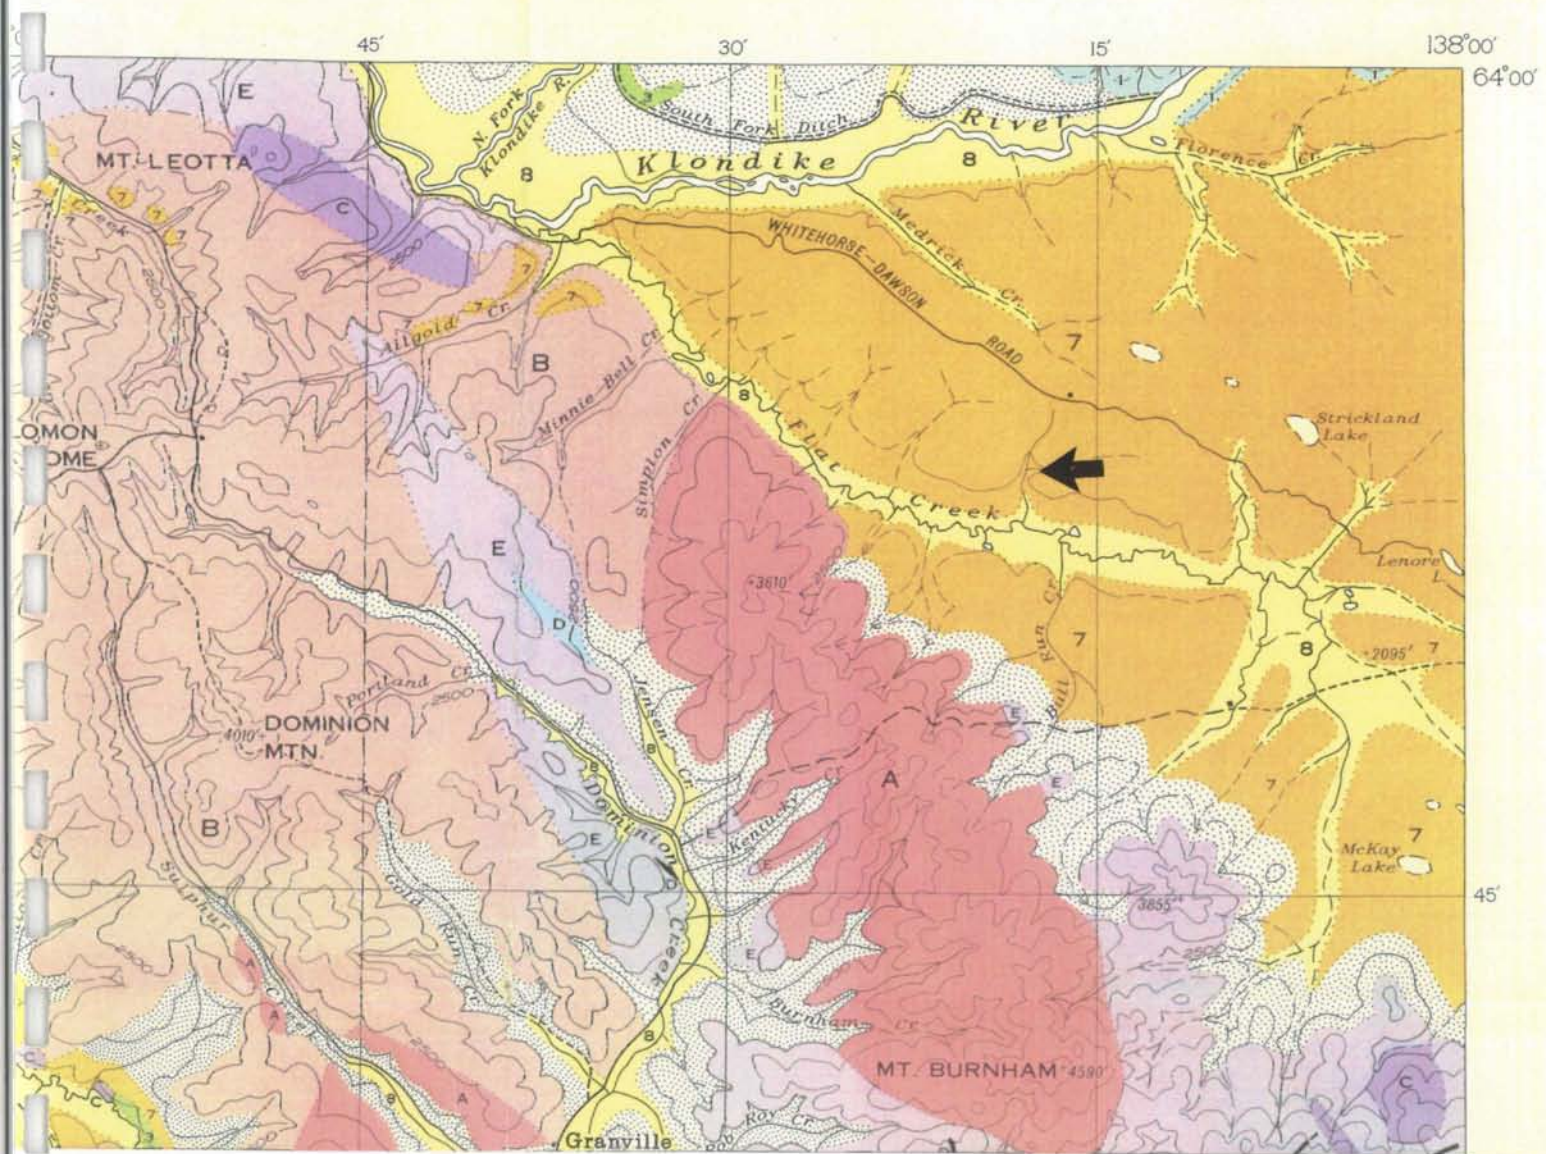

Portion of
 Geological Survey of Canada
 Map 711A
 H.S Bostock 1937

LEGEND

- | | |
|---|--|
| A | GNEISSIC GRANITE |
| B | KLONDIKE SCHIST |
| C | GABBRO, SERPENTINE |
| D | LIMESTONE |
| E | GNEISS, SCHIST |
| 8 | STREAM DEPOSITS |
| 7 | GRAVEL (PRE-REI D GLACIAL TERRACE, B. LABARGE, PERSONAL COMMUNICATION) |
| 3 | EOCENE CONGLOMERATE, SHALE |
| 1 | ORDVICIAN ARGILLITES (ROAD RIVER FORMATION; GREEN AND REDDICK 1961) |

VI. Geochemistry

Regional stream sediment sampling data (GSC open file 1364) indicated elevated levels of arsenic, barium, cadmium, mercury, and fluorine occur on the property. Anomalous values occur along drainage exhibiting strong structural control.

Following an initial stream sediment survey conducted by the author in 1994, the Hot Creek area was targeted for further investigation. During early June 1995, an additional 47 soil samples at 30 meter spacing were collected. soils were analyzed by Northern Analytical Laboratories of Whitehorse. Analysis was for the elements gold, silver, lead, and arsenic, all by atomic adsorption (Maps 3a through 3d).


The survey confirmed the values first indicated in 1994. Lead and silver data was evaluated by means of a cumulative frequency plot. The 90 th percentile of the lead data is approximately 26 ppm and silver is approximately .3 ppm.

The sample data indicates uniformly low gold and arsenic values and a strong correlation between high leads (maximum value was 828 ppm) and high silvers (maximum value was 1 ppm).



claim boundary

to camp

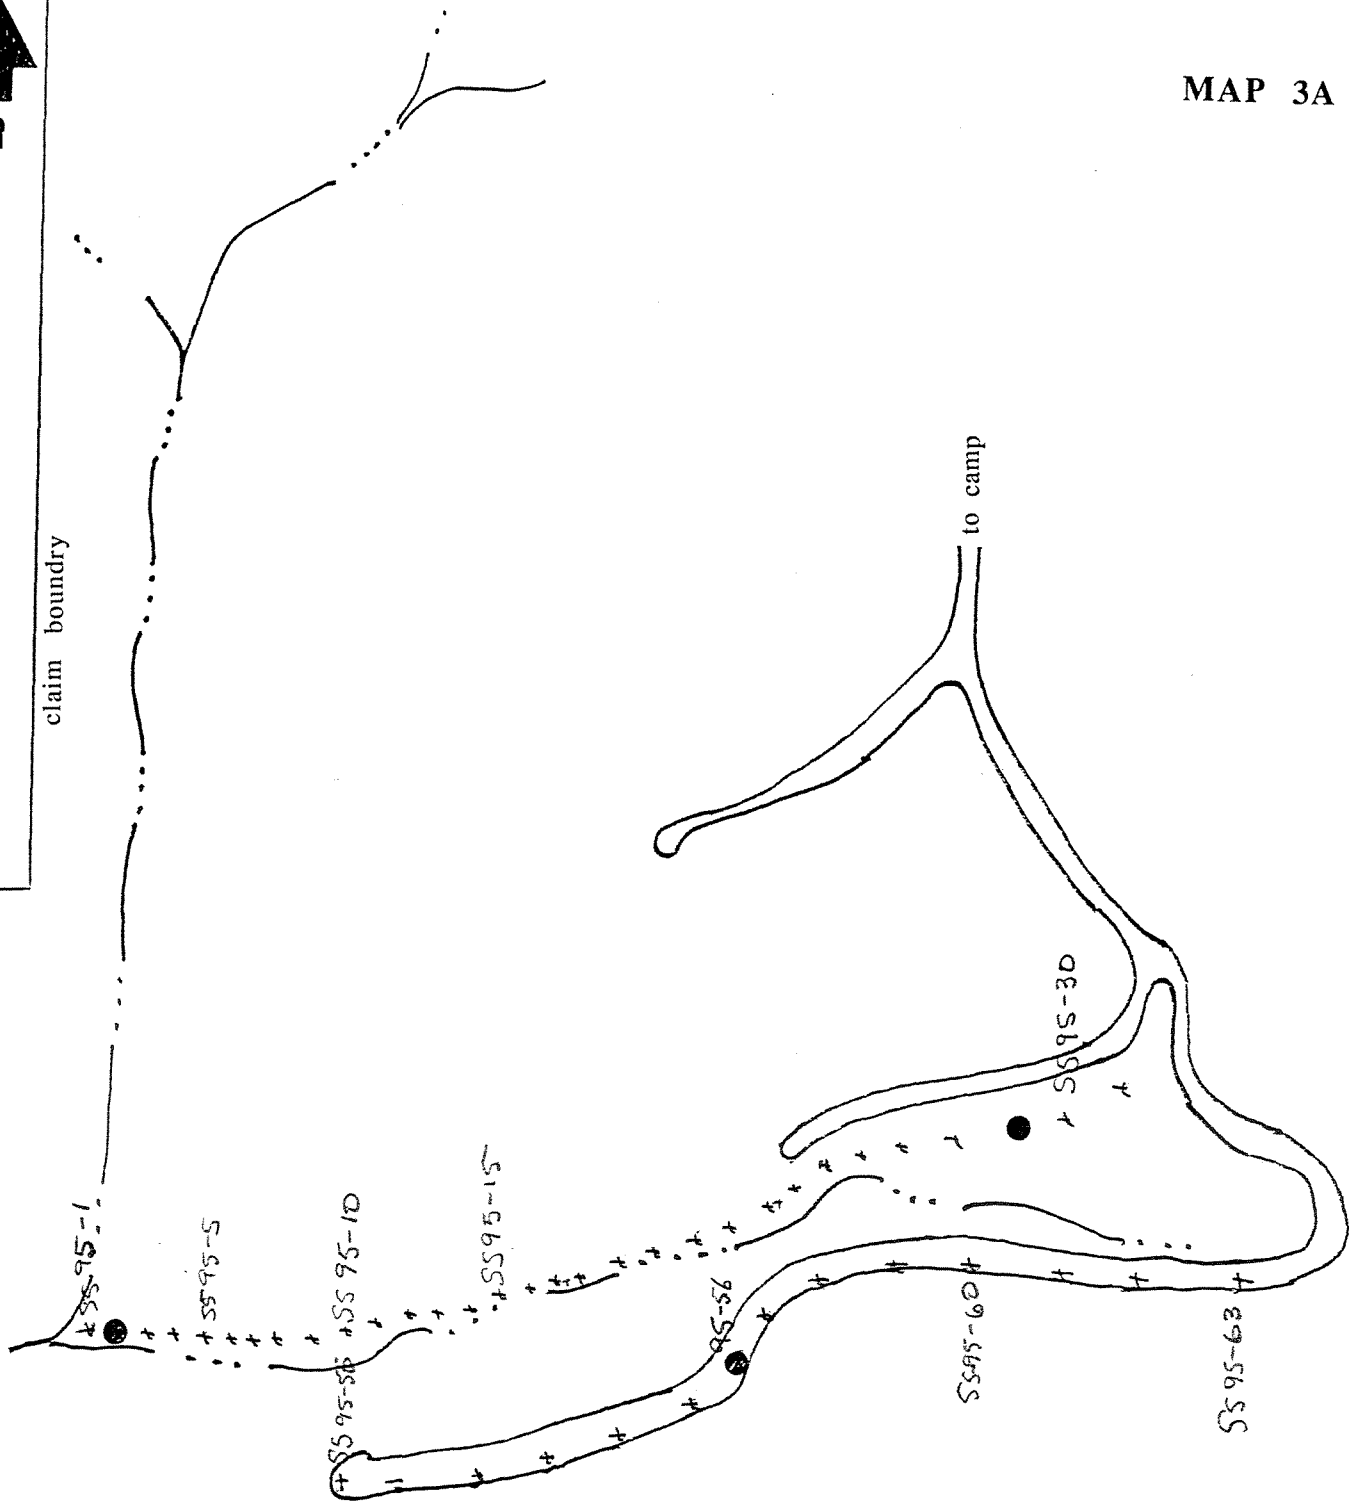

legend

+ less than 10 ppb

● 10 to 20 ppb

SOIL SAMPLE LOCATIONS

AU IN PPB

NTS 115 O 16

scale 4.75 cm equals 500 m

Sept 21, 1995

GSH



claim boundary

to camp

legend

+ less than 10 ppm


● 10 to 20 ppm


SOIL SAMPLE LOCATIONS

AS IN PPM

NTS 115 O 16
scale 4.75 cm equals 500 m
Sept 21,1995

GSH

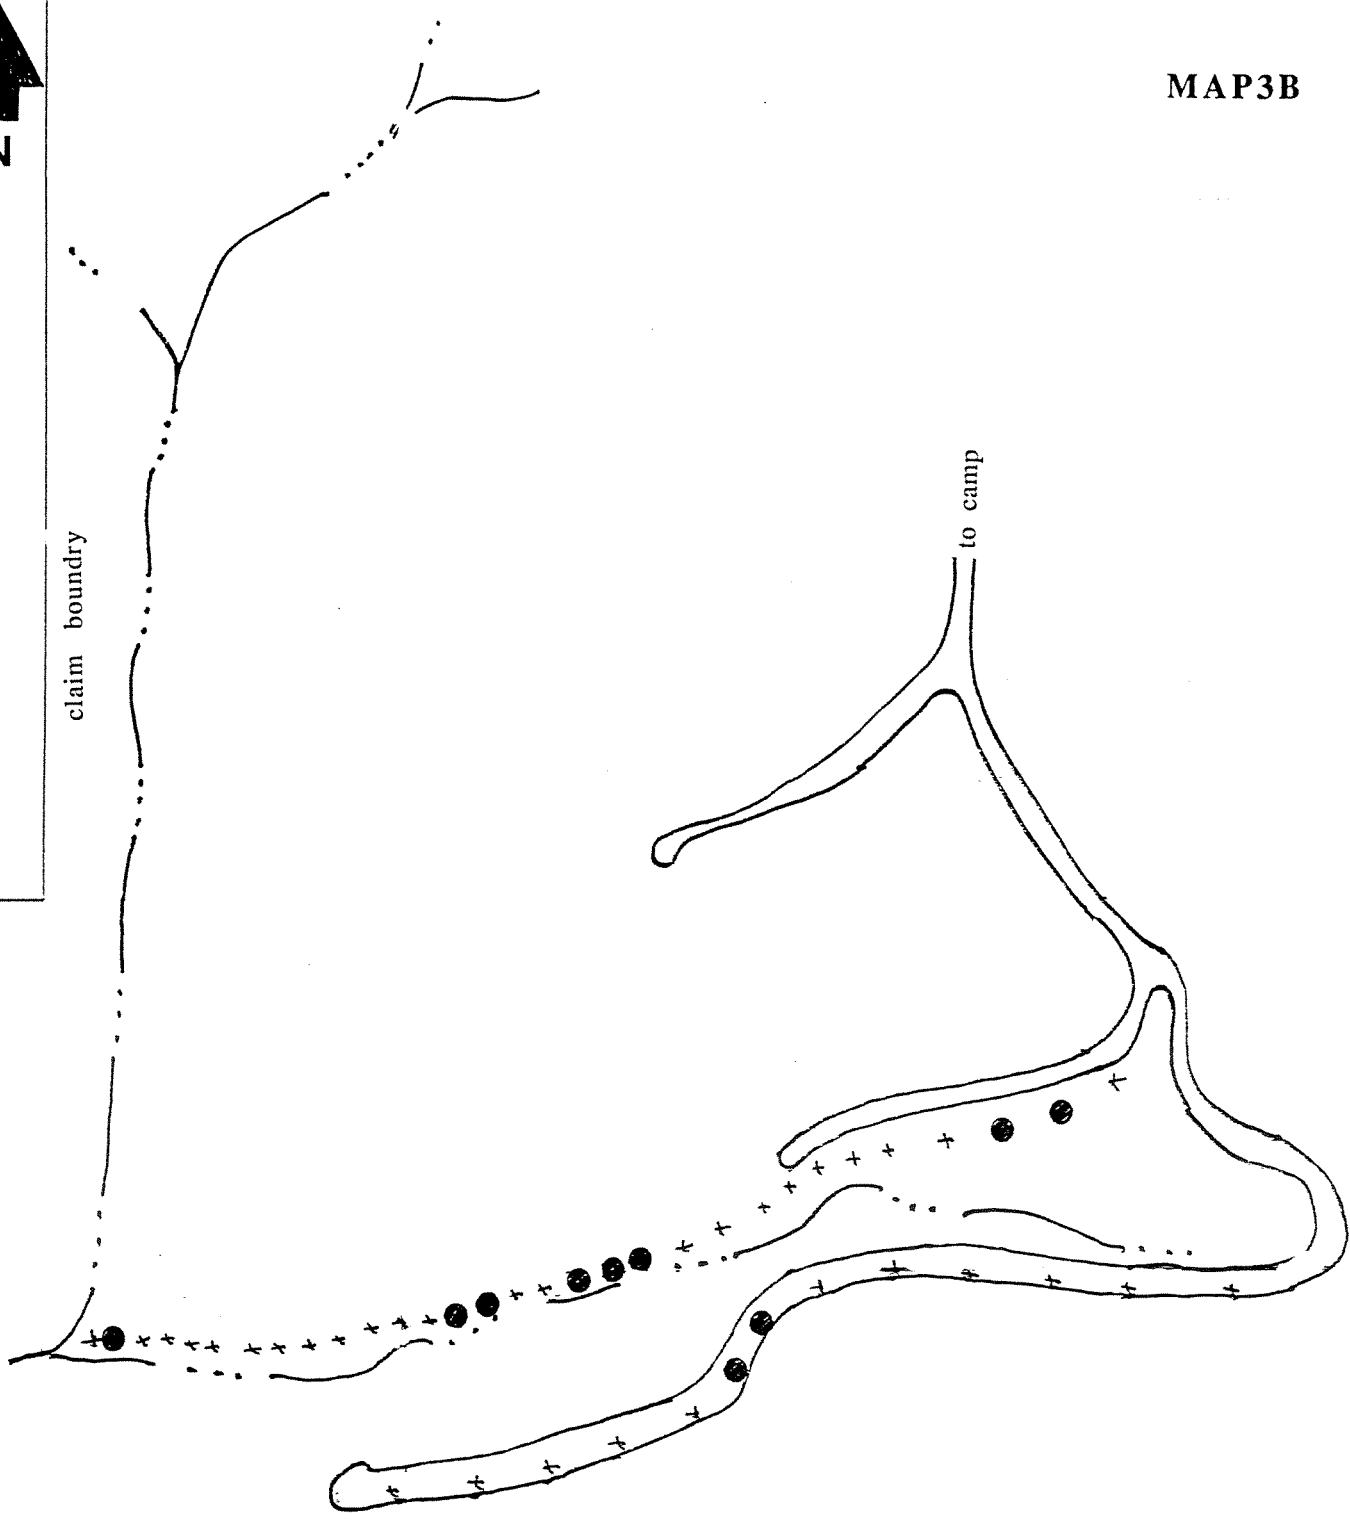

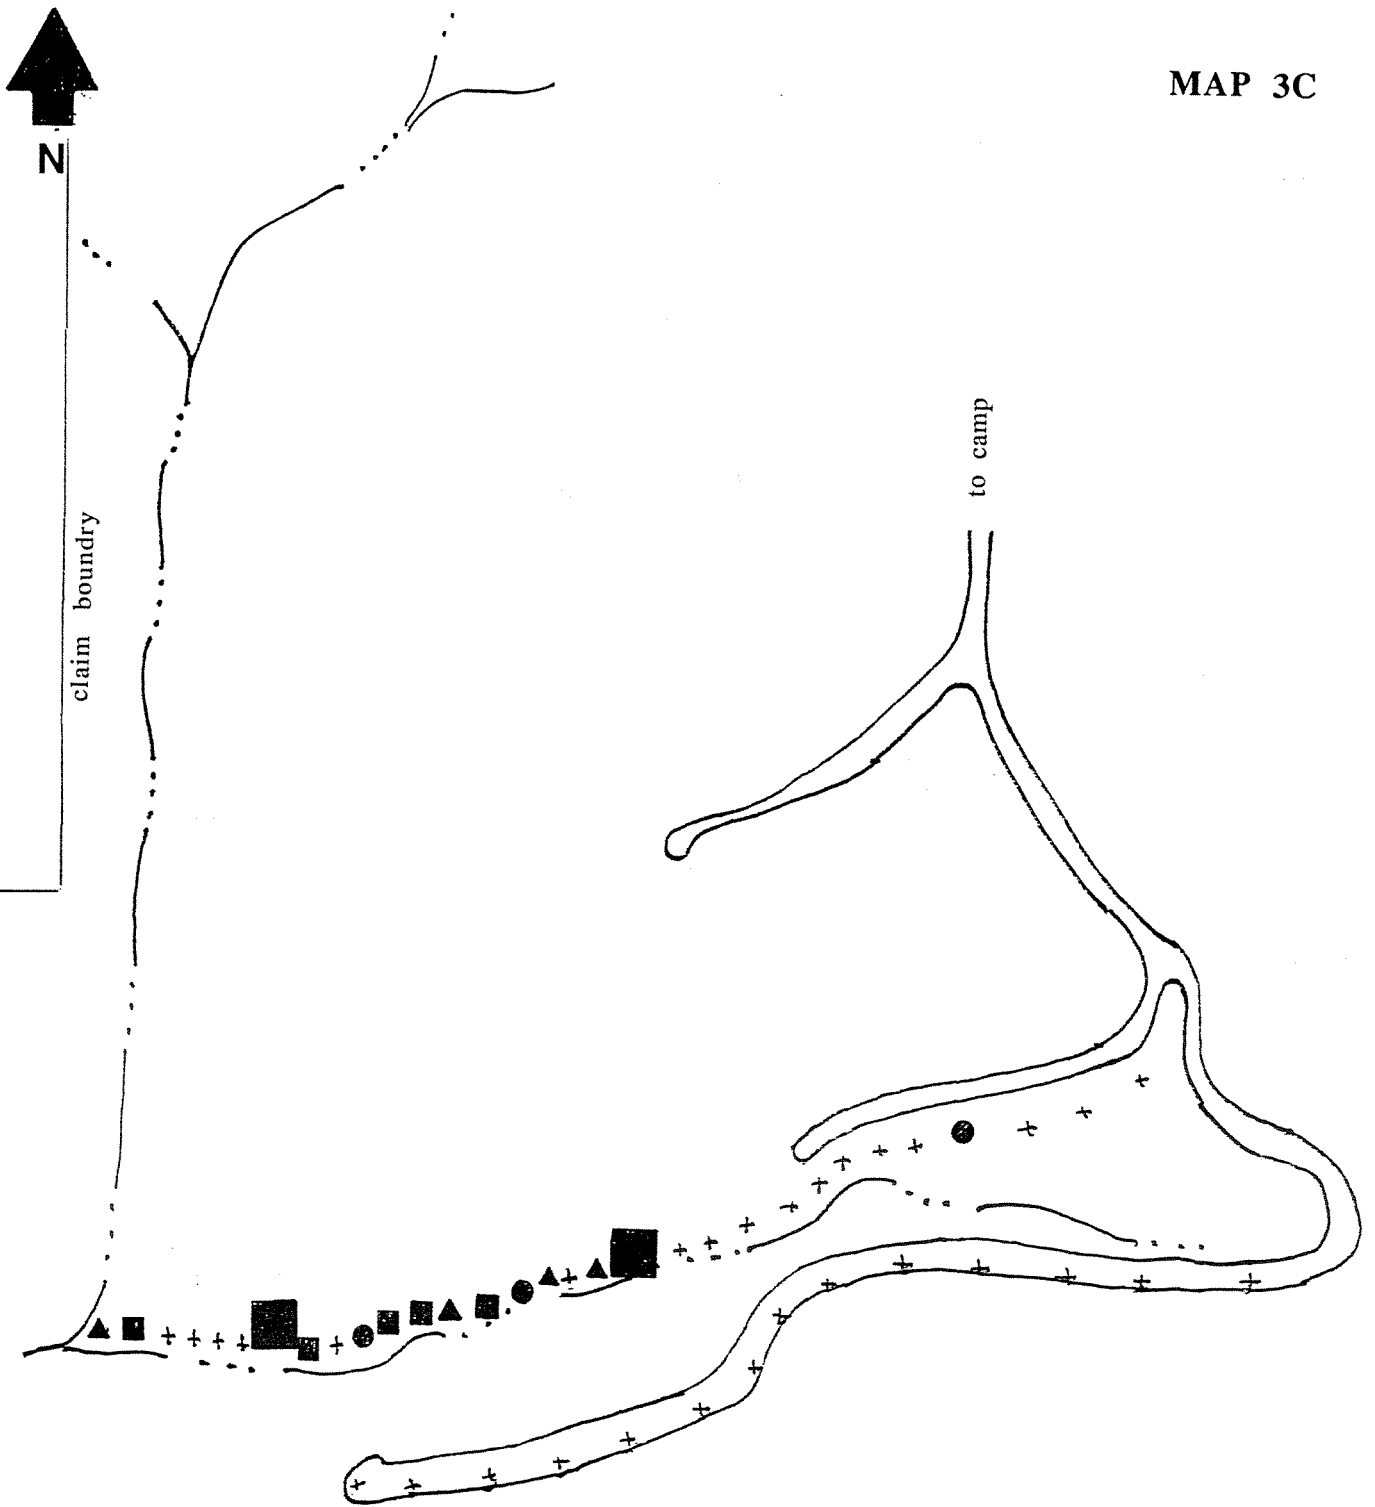

legend

- + 0.1 ppm or less
- 0.2 ppm
- ▲ 0.3 ppm
- 0.4 ppm
- 0.5 ppm or more

SOIL SAMPLE LOCATIONS

AG IN PPM

NTS 115 O 16
scale 4.75 cm equals 500 m
Sept 21,1995

GSH



claim boundary

to camp

legend


- + 19 ppm or less
- 20 to 39 ppm
- 40 to 59 ppm
- ▲ 60 to 79 ppm
- 80 to 99 ppm
- ⬡ 100 ppm or more

SOIL SAMPLE LOCATIONS

PB IN PPM

NTS 115 O 16
scale 4.75 cm equals 500 m
Sept 21, 1995

GSH

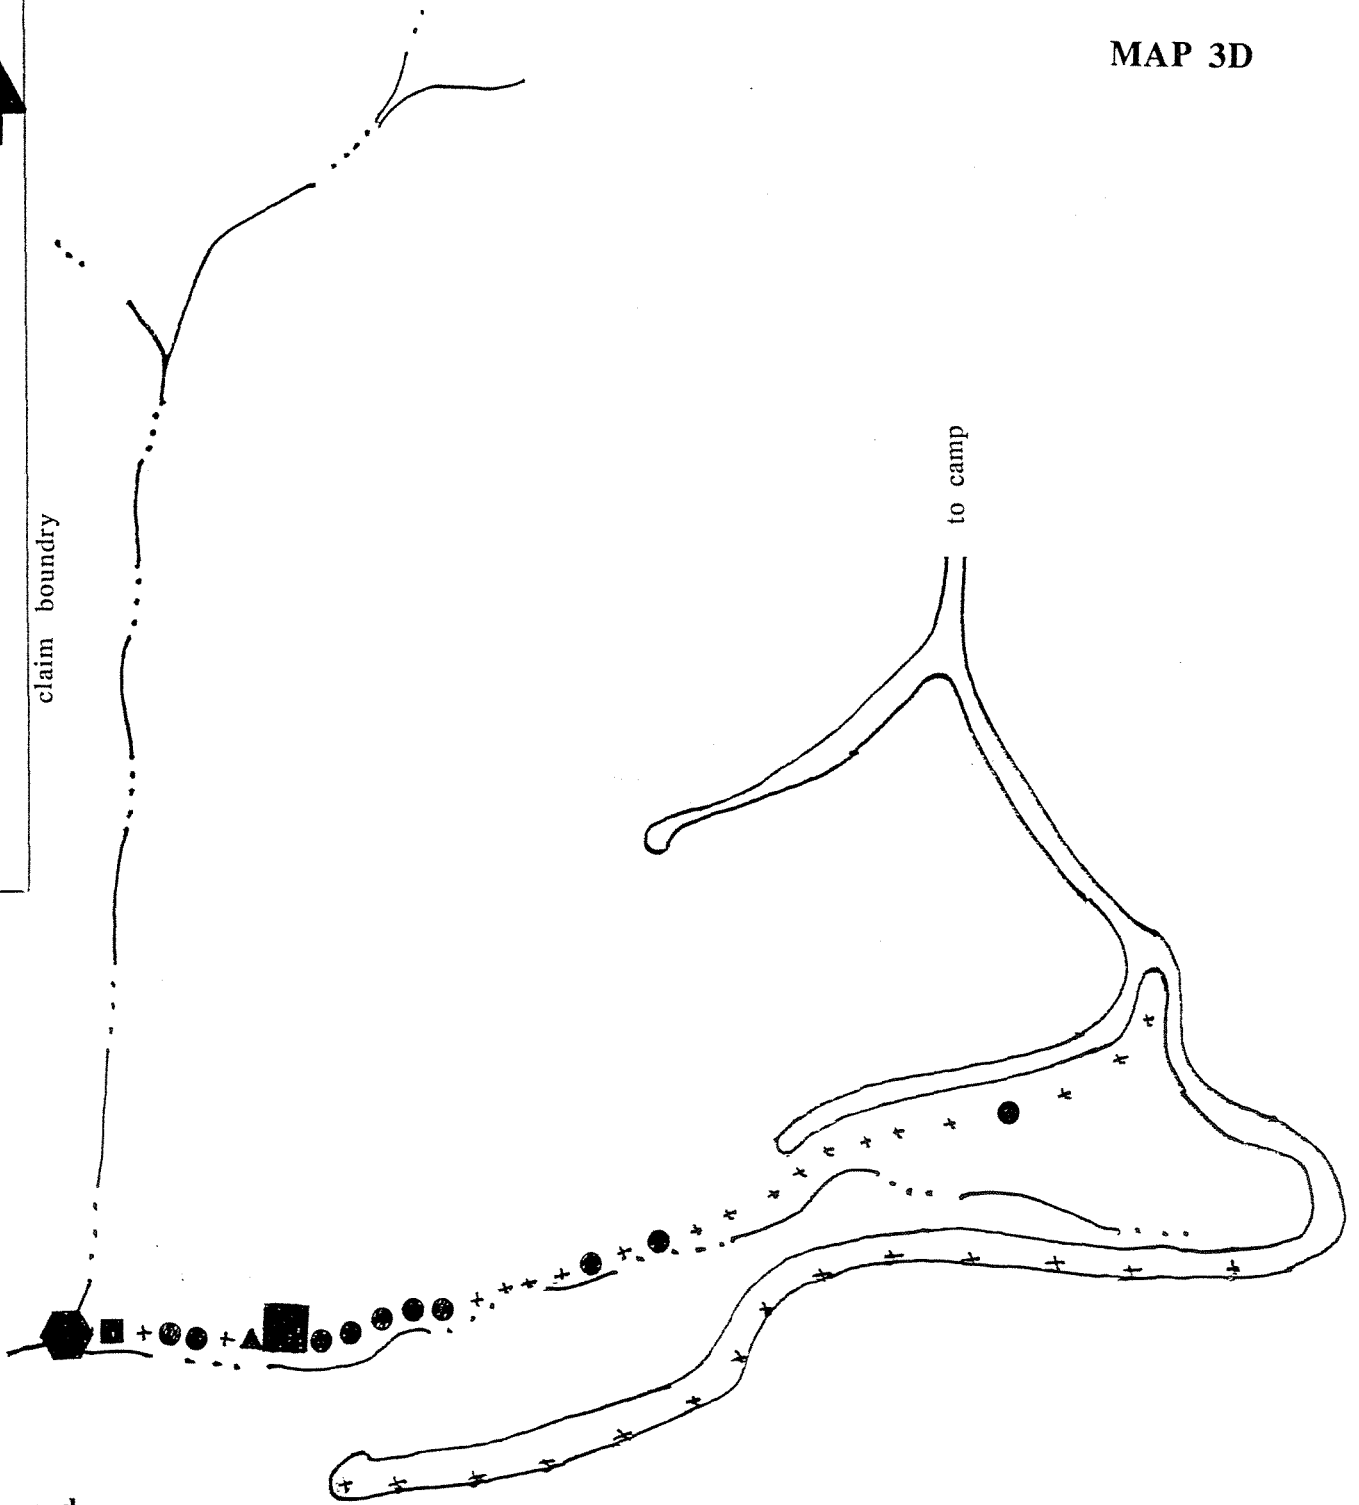

VII. Drilling

In order to evaluate the significance of geochemical results of the 1994 program, an Atlas Copco BRE 5701 percussion drill was mobilized to the property.

The drill was mounted on a Flextrack Nodwell carrier. Air pressure for the system, was provided by a trailer mounted, Ingersol Rand compressor, powered by a 6V71 diesel engine, capable of producing 750 cfm.

The drilling method involves driving 3.5 inch casing, tipped with a hollow ring bit, large enough to allow a conventional 2 inch carbide insert bit on the end of standard drill steel to drill inside the casing as well as passing through the ring bit to drill ahead of the casing string. The sample is lifted to the surface, between the drill rods and the casing using compressor air.

The casing was advanced by pneumatic hammering with rotation. The rods and 2 inch bit were then lowered in the hole and the chips in the casing were drilled out. Drilling then continued ahead of the casing until sample return was insufficient, and the process was repeated.

The drill program consisted of 250 feet of drilling in six holes, no hole exceeded 50 feet in depth. Wet conditions in some holes served to limit sample recovery and total depth. Much time was required to drill and later recover casing, using this method.

Drill site construction, compressor moves and service functions were accomplished using a Case 1150 crawler tractor. Personnel were transported using a GMC Suburban.


Samples were collected at 10 foot intervals using a shallow tub and split to a manageable size (approximately 2 kilograms). The excess sample was panned to evaluate the placer gold potential of the tills.

Samples were sent to Northern Analytical Laboratories of Whitehorse for analysis. Assays for gold, silver, lead, and arsenic were done using the atomic adsorption method.



Plate 1: Nodwell mounted Atlas Copco BRE 5701




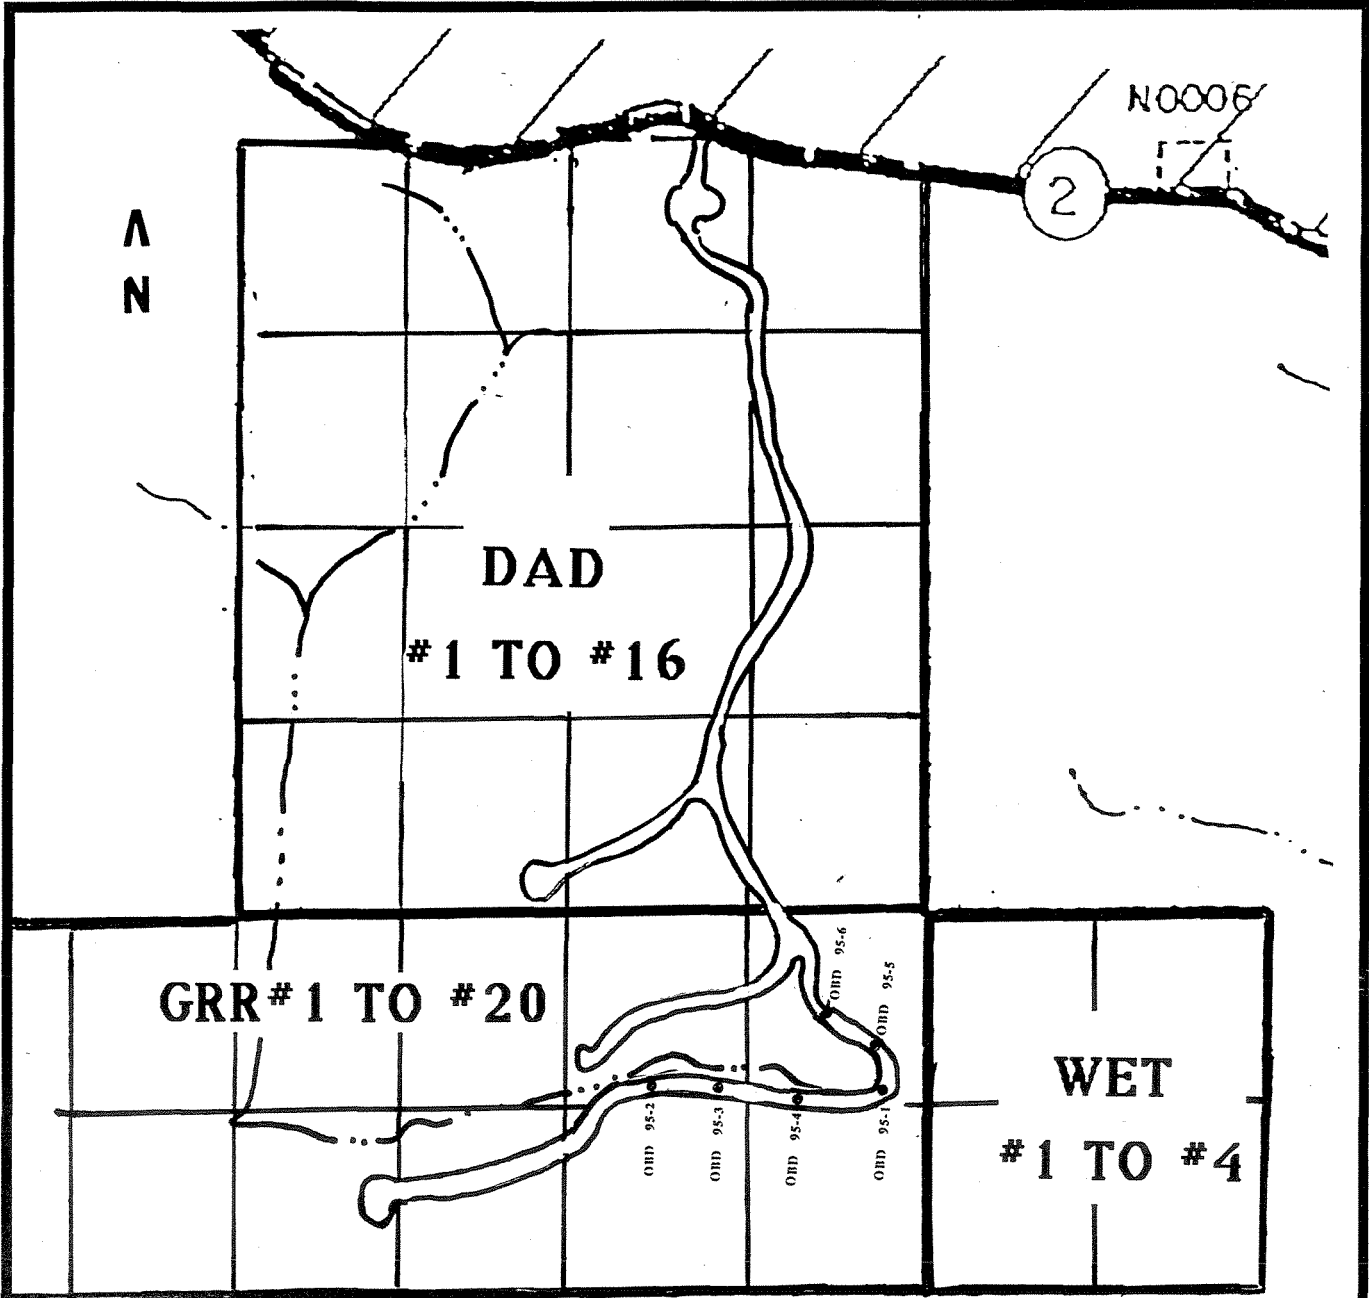

legend

● drill hole location

0 1500 3000 4500



FEET

DRILL HOLE LOCATIONS

NTS 115 O 16


Sept 21,1995

GSH



claim boundary

to camp

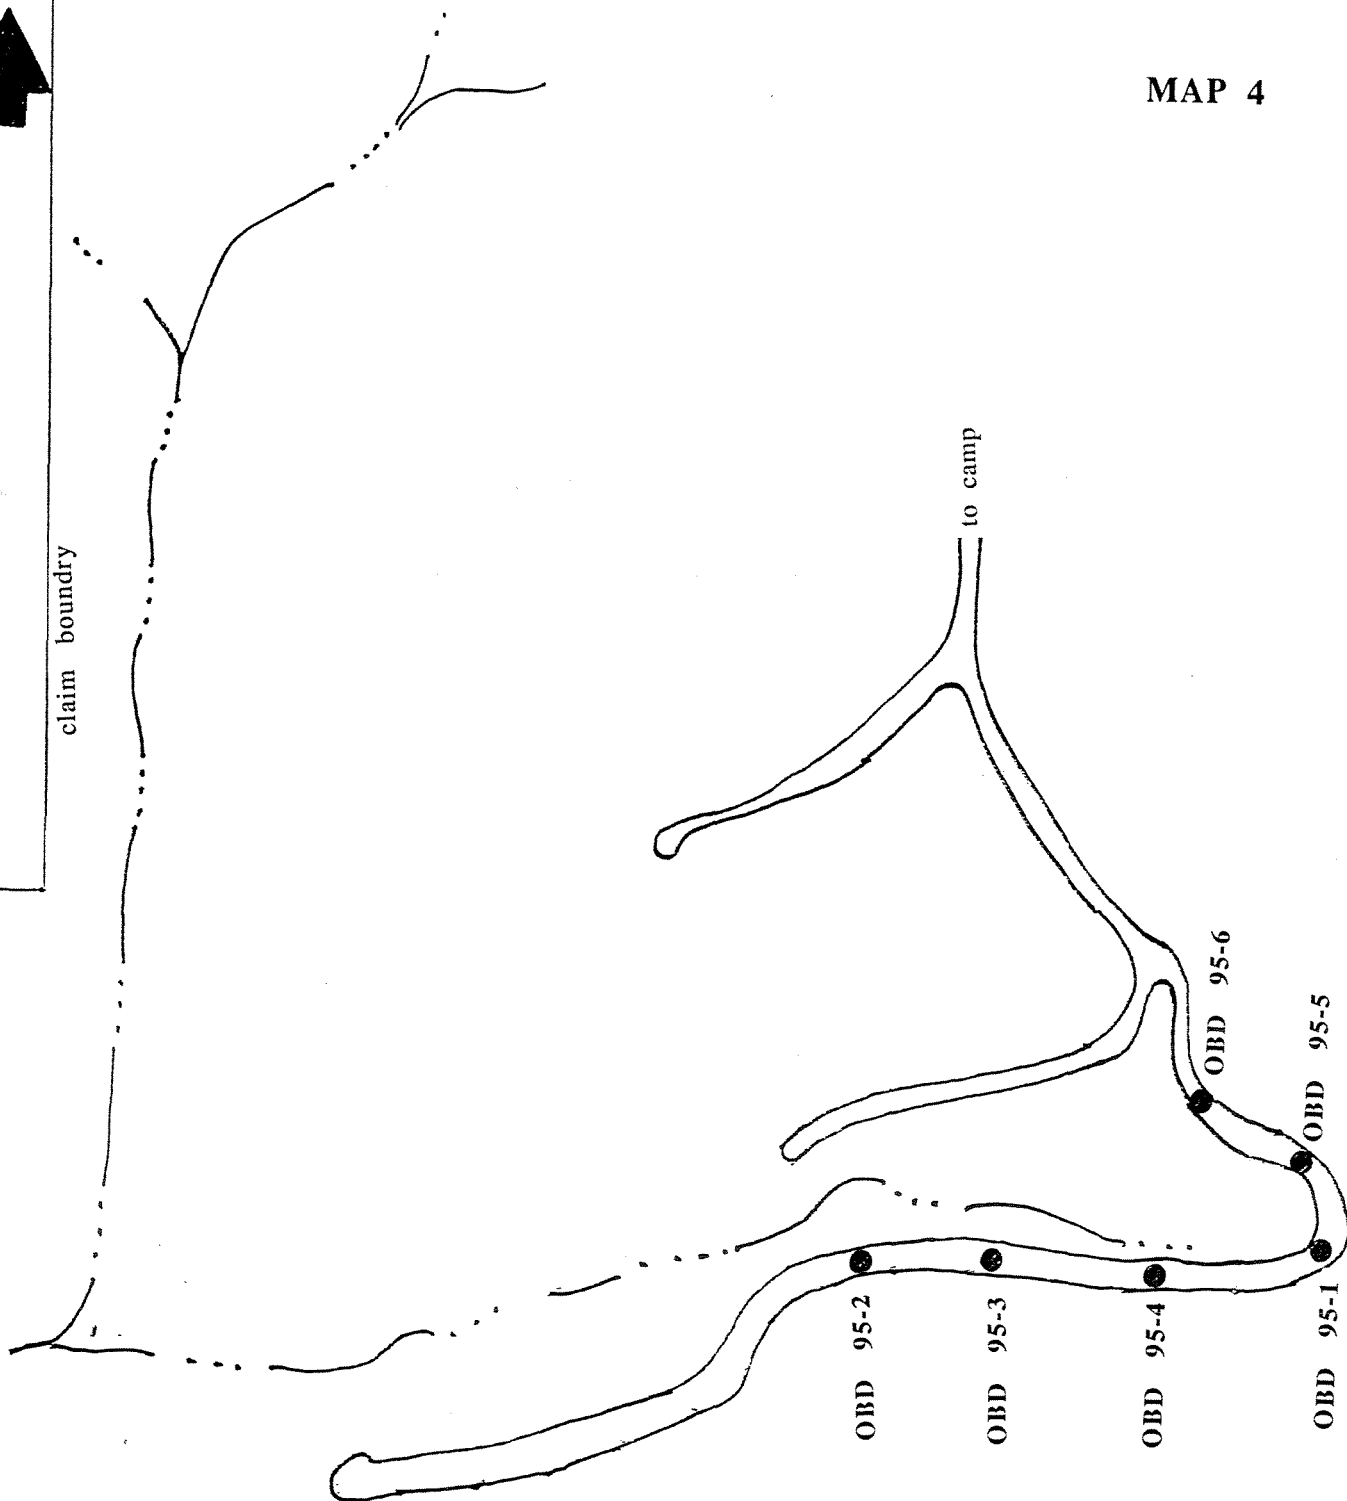

legend

● drill hole location

DRILL HOLE LOCATIONS

NTS 115 O 16
scale 4.75 cm equals 500 m
Sept 21,1995

GSH

VIII. Conclusions

a. Soil studies

The extent of the geochemical study consists of one line of samples along a linear drainage feature. Due to the limited nature of the survey and the thick glacial deposits of this region, the data may not lend itself to conventional interpretation, for this reason calculation of background and threshold values must be regarded as speculative.

The soil survey confirmed the presence of unusually high values of lead and silver indicated in 1994.

Based on the very limited nature of the data, only the following observations can be made. Soil geochemical sample data from the claims indicates only very low values of gold and arsenic are present in the area, coincident "above average" values of silver, lead, occur along a well defined, linear drainage feature.

Soil sample SS-95-1 containing lead (828 ppm) and silver (.3 ppm) is located approximately 1.5 km west of Hole 95-1 where 875 ppm lead and 4.1 ppm silver was recovered from a 10 foot sample of till.

Soil samples, (SS-95-7 through 19), between the two high leads appear to be above average, containing lead to 96 ppm and silver to 1 ppm.

b. Drilling

All drilling was done as overburden sampling, in glacial/fluvial debris. The direction of transport and possible component fluvial reworking of the tills is unknown, thus values encountered may reflect regionally rather than locally.

Drill samples were pulverized and treated as rock chips by the lab thus it is not known if the values obtained represent true geochemical dispersion or are the unique result of distant glacial transport of detrital minerals, upgraded somewhat by fluvial action.

Hole 95-1 returned 875 ppm lead and 4.1 ppm silver over 10 feet. Hole 95-3 located 500 meters west returned 202 ppm lead and 384 ppb gold from a ten foot interval. All holes except 95-5 contained values greater than 26 ppm lead (the 90 th percentile of soil data).

In general the property contains only very low arsenic and gold values, thus a direct analogy to the Brewery Creek lode gold deposit is unlikely.

Further work should be directed toward evaluation of the property as a lead silver target and should include a hammer seismic survey, to establish depth to bedrock, till studies, and additional deep overburden drilling, if warranted.

IX. Statement of Expenditure

Truck travel in the Yukon (5000 km).....	1500.00
Food and consumables.....	500.00
Assay costs.....	1247.14
Access road and drill site preparation 100 hr@ \$120.00/hr	12000.00
P. Geol fees \$500/day/10 days.....	5000.00
Drilling 250 hr @ \$100/hr.....	25000.00
Trucking(mob and demob).....	8398.00
Report preparation	500.00

\$54145.14

References

Bostock, H.S., 1964. Geology, McQuesten, Yukon territory.
Geological Survey of Canada, Map 1143A.

Geological Survey of Canada " Open file 1364" Stream
Sediment Geochemistry NTS 115 N,0.

Mortensen , J and G. Von Gaza 1992 . Application of Landsat
TM thermal Imagery to Structural Interpretations of
the Tintina Trench . In Yukon Geology, Vol.3; EGSD,
Yukon, Indian and Northern Affairs Canada, p.214-
222


CERTIFICATE

I, Glenn S. Hartley of 7302-118 A street Edmonton, hereby state that:

1. I am a graduate of the University of Alberta, Department of Geology (B. Sc. Specialization 1977).
2. I am a registered Professional Geologist in the province of Alberta.
3. Since 1970, I have been employed by various exploration firms and have conducted field programs in Alberta, British Columbia, Saskatchewan, Northwest Territories, and the Yukon.
4. I have a direct interest in the lode claims of this report.

Respectfully submitted,

Glenn S. Hartley, P. Geol.

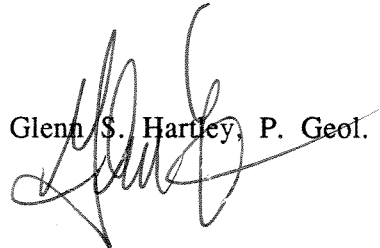A handwritten signature in black ink, appearing to read 'Glenn S. Hartley', written over the typed name.

Appendix I

28/07/95

Assay Certificate


Page 1

Glenn Hartley

WO#27994

Sample #	Au ppb	Ag ppm	Pb ppm	As ppm
SS-95-1	<5	0.3	828	<10
SS-95-2	12	0.4	44	19
SS-95-3	<5	<0.1	15	<10
SS-95-4	<5	<0.1	23	<10
SS-95-5	<5	<0.1	20	<10
SS-95-6	6	<0.1	11	<10
SS-95-7	I.S.	0.7	60	<10
SS-95-8	I.S.	0.4	96	<10
SS-95-9	<5	<0.1	20	<10
SS-95-10	<5	0.2	24	<10
SS-95-11	<5	0.4	25	<10
SS-95-12	<5	0.4	20	<10
SS-95-13	I.S.	0.3	25	<10
SS-95-14	<5	0.4	18	15
SS-95-15	<5	0.2	18	11
SS-95-16	<5	0.3	17	<10
SS-95-17	<5	0.1	19	<10
SS-95-17.5	6	0.3	22	13
SS-95-18	6	0.3	17	11
SS-95-19	<5	1.0	20	11
SS-95-20	8	<0.1	10	<10
SS-95-21	8	0.1	13	<10
SS-95-22	<5	0.1	16	<10
SS-95-23	<5	0.1	16	<10
SS-95-23.5	6	0.1	12	<10
SS-95-24	<5	0.1	13	10
SS-95-25	<5	0.1	13	<10
SS-95-26	<5	0.1	17	10
SS-95-27	10	0.2	25	15
SS-95-28	<5	0.1	18	15
SS-95-29	<5	<0.1	10	<10
SS-95-30	<5	<0.1	11	<10
SS-95-31	<5	<0.1	13	<10
SS-95-50	<5	<0.1	11	<10

Certified by




28/07/95

Assay Certificate

Page 2


Glenn Hartley

WO#27994

Sample #	Au ppb	Ag ppm	Pb ppm	As ppm
SS-95-51	5	<0.1	16	<10
SS-95-52	<5	<0.1	7	<10
SS-95-53	<5	<0.1	6	<10
SS-95-54	<5	<0.1	8	<10
SS-95-55	<5	<0.1	14	<10
SS-95-56	13	<0.1	12	10
SS-95-57	<5	0.1	7	<10
SS-95-58	<5	<0.1	9	<10
SS-95-59	<5	<0.1	12	11
SS-95-60	<5	<0.1	12	<10
SS-95-61	<5	0.1	17	<10
SS-95-62	<5	<0.1	11	<10
SS-95-63	9	<0.1	13	<10

Note: I.S. means insufficient sample (fines) for analysis.


Certified by




DISTRIBUTION OF GROUP DATA FOR SILVER CONTENT					
	MIDPOINT				
CLASS	OF	RELATIVE	CLASS	CUMULATIVE	CUMULATIVE
INTERVAL	INTERVAL	FREQUENCY	FREQUENCY	FREQUENCY	FREQUENCY
(PPB)	(PPB)				(%)
0-60	30	0.45	21	21	45
60-120	90	0.23	11	32	68
120-180	150	0.00	0	32	68
180-240	210	0.06	3	35	74
240-300	270	0.00	0	35	74
300-360	330	0.11	5	40	85
360-420	390	0.11	5	45	96
420-480	450	0.00	0	45	96
480-540	510	0.00	0	45	96
540-600	570	0.00	0	45	96
660-720	690	0.02	1	46	98
720-780	750	0.00	0	46	98
780-840	810	0.00	0	46	98
840-900	870	0.00	0	46	98
900-960	930	0.00	0	46	98
960-1020	990	0.02	1	47	100
		1.00	47		

DISTRIBUTION OF GROUP DATA FOR LEAD CONTENT					
	MIDPOINT				
CLASS	OF	RELATIVE	CLASS	CUMULATIVE	CUMULATIVE
INTERVAL	INTERVAL	FREQUENCY	FREQUENCY	FREQUENCY	FREQUENCY
(PPM)	(PPM)				(%)
0-6	3	0.02	1	1	2
6-12	9	0.21	10	11	23
12-18	15	0.38	18	29	62
18-24	21	0.21	10	39	83
24-30	27	0.09	4	43	91
30-36	33	0.00	0	43	91
36-42	39	0.00	0	43	91
42-48	45	0.02	1	44	94
48-52	51	0.00	0	44	94
52-56	57	0.00	0	44	94
56-62	63	0.02	1	45	96
62-68	69	0.00	0	45	96
68-74	75	0.00	0	45	96
74-80	81	0.00	0	45	96
80-86	87	0.00	0	45	96
86-92	93	0.00	0	45	96
92-98	99	0.02	1	46	98
828	828	0.02	1	47	100
			47		

CUMULATIVE FREQUENCY CHART FOR LEAD

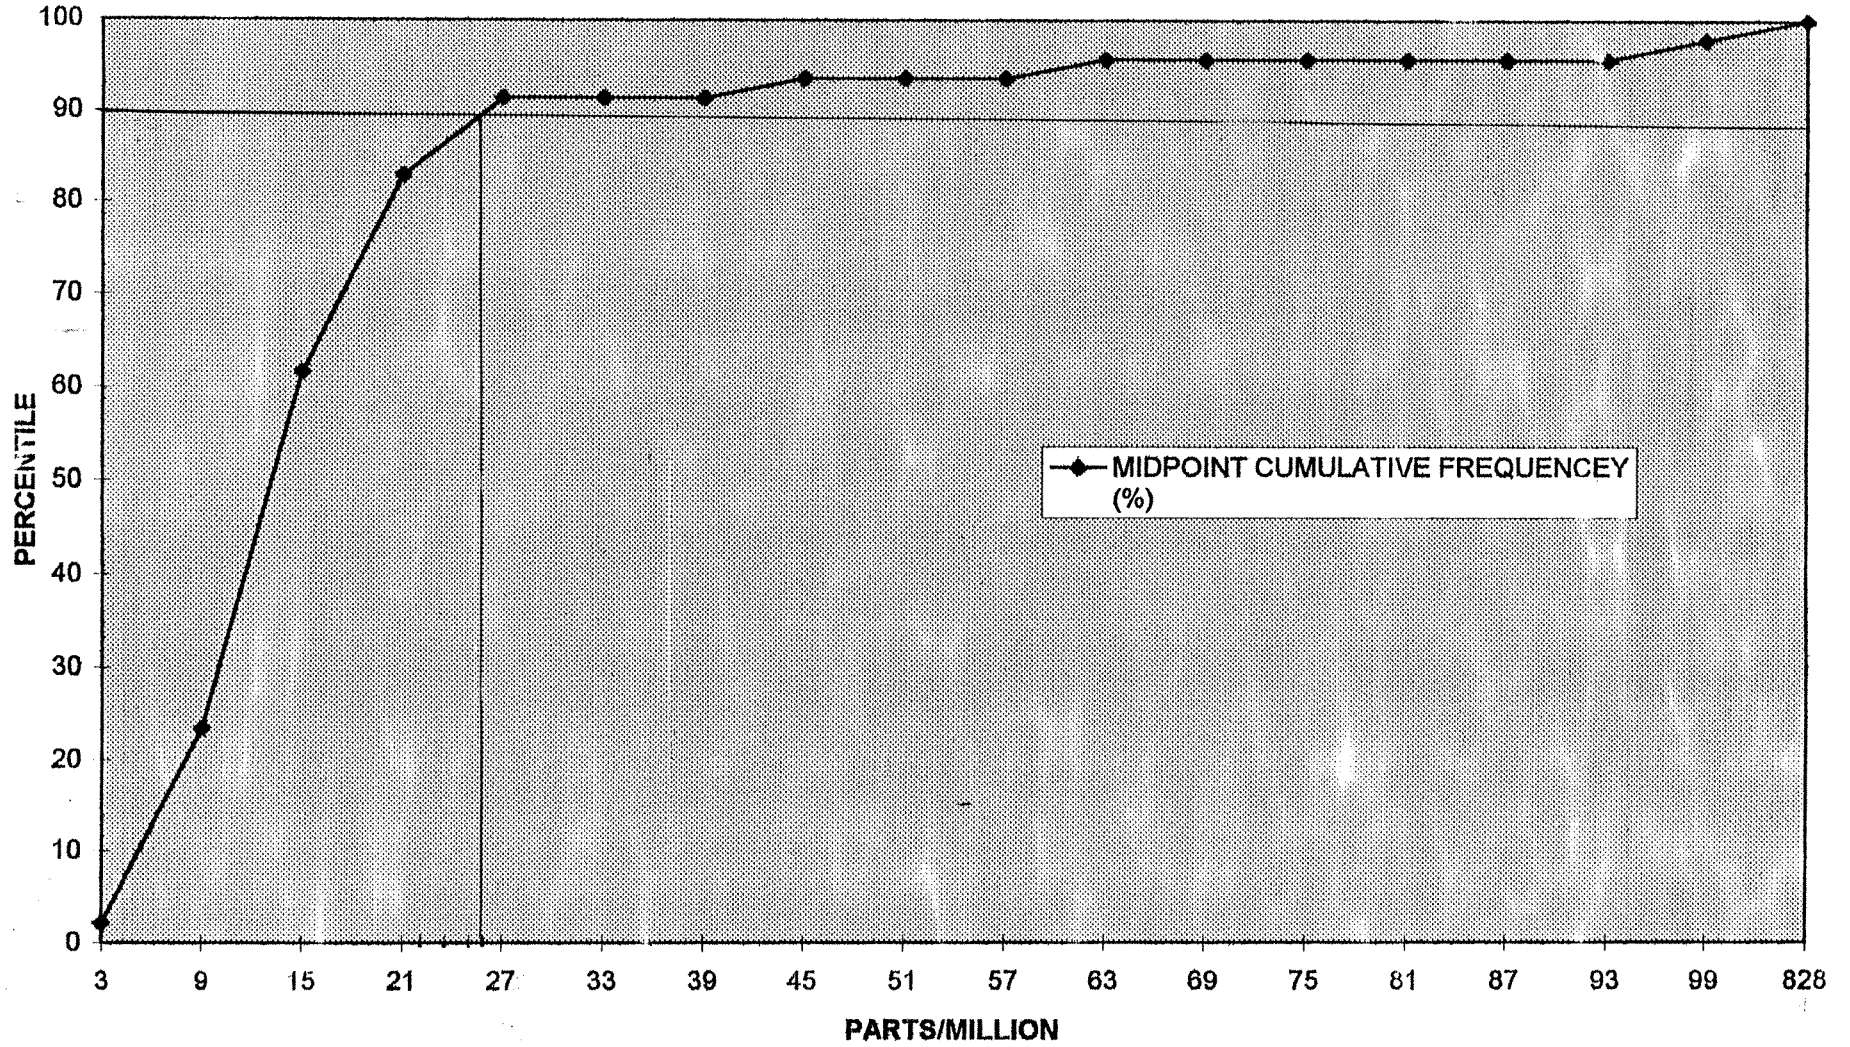

CUMULATIVE FREQUENCY CHART FOR SILVER

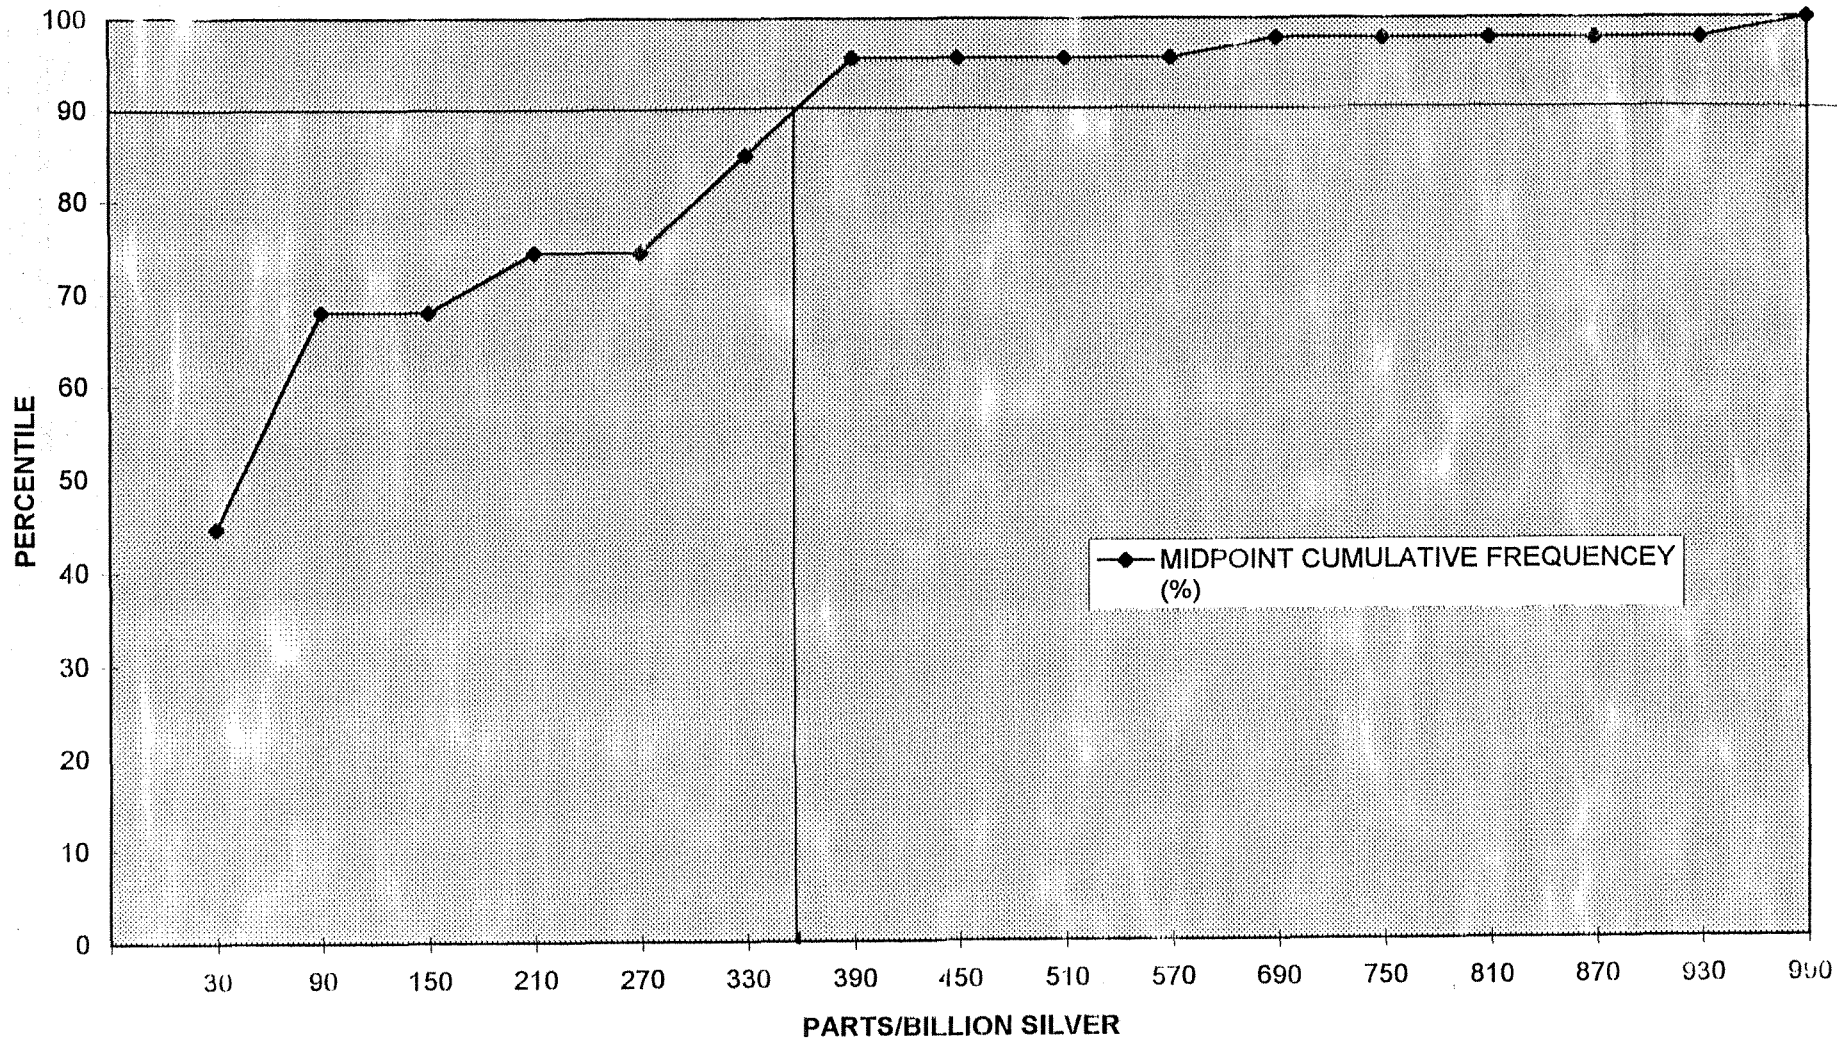

28/08/95

Assay Certificate

Page 1


Glenn Hartley

WO#15323

Sample #	Au ppb	Ag ppm	Pb ppm	As ppm
OBD 95-1 0-10	8	4.1	875	13
OBD 95-1 10-20	8	0.2	162	23
OBD 95-1 20-30	<5	<0.1	24	<10
OBD 95-1 30-40	5	<0.1	30	20
OBD 95-1 40-50	<5	<0.1	19	10
OBD 95-2 0-10	16	<0.1	23	27
OBD 95-2 10-20	9	<0.1	30	<10
OBD 95-2 20-30	8	<0.1	34	13
OBD 95-2 30-40	5	<0.1	16	19
OBD 95-3 0-10	<5	<0.1	19	13
OBD 95-3 10-20	5	<0.1	202	<10
OBD 95-3 20-30	384	<0.1	18	19
OBD 95-3 30-40	16	<0.1	21	14
OBD 95-3 40-50	12	<0.1	19	14
OBD 95-4 0-10	10	<0.1	23	13
OBD 95-4 10-20	7	<0.1	67	17
OBD 95-4 20-30	5	<0.1	16	20
OBD 95-4 30-40	15	<0.1	16	17
OBD 95-5 0-10	7	0.1	20	16
OBD 95-5 10-20	5	<0.1	18	28
OBD 95-5 20-30	14	<0.1	16	12
OBD 95-6 0-20	16	0.1	30	14
OBD 95-6 20-30	10	<0.1	24	11
OBD 95-6 30-40	5	<0.1	21	<10

Note: These soil samples (?) contained insufficient fine material for analysis so were pulverized.

Certified by




Appendix II

OVERBURDEN DRILLING PROGRAM 1995

Flat Ceek project nts 115 O 16

SAMPLE DESCRIPTIONS AND ASSAY DATA

SAMPLE FROM (FT) TO (FT)		Rock Description		Au ppb	Pb ppm	Ag ppm	As ppm	
OBD 95-1	0	10	gray to brown gravels,	ND colors in pan HMC	8	875	4.1	13
	10	20	"	"	8	162	0.2	23
	20	30	"	"	<5	24	<0.1	<10
	30	40	"	"	5	30	<0.1	20
	40	50	"	"	<5	19	<0.1	10
OBD 95-2	0	10	Brown gravel		16	23	<0.1	27
	10	20	"	trace colors in pan HMC	9	30	<0.1	<10
	20	30	"	ND colors in HMC	8	34	<0.1	13
	30	40	"	"	5	16	<0.1	19
OBD 95-3	0	10	Brown gravels	ND colors in pan HMC	<5	19	<0.1	13
	10	20	gray to brown gravels,	trace colors in HMC	5	202	<0.1	<10
	20	30	"	"	384	18	<0.1	19
	30	40	"	"	16	21	<0.1	14
	40	50	"	ND colors in HMC	12	19	<0.1	14
OBD 95-4	0	10	Brown gravels,	ND colors in pan HMC	10	23	<0.1	13
	10	20	grey gravels	"	7	67	<0.1	17
	20	30	"	"	5	16	<0.1	20
	30	40	"	"	15	16	<0.1	17
OBD 95-5	0	10	grey gravels	ND colors in pan HMC	7	20	0.1	16
	10	20	"	"	5	18	<0.1	28
	20	30	"	"	14	16	<0.1	12
OBD 95-6	0	20	grey brown gravels	ND colors in pan HMC	16	30	0.1	14
	20	30	"	"	10	24	<0.1	11
	30	40	"	"	5	21	0.1	10

Au ppb Pb ppm Ag ppm As ppm