



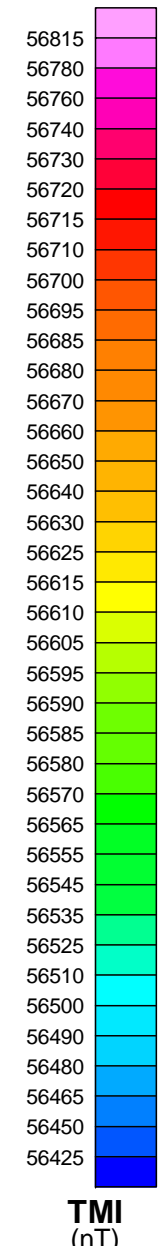

SURVEY SPECIFICATIONS:
 Survey Date: August 2nd to August 18th, 2008
 Survey Base: White River Camp, Yukon
 Aircraft: Aerospacel A-Star 350 B3 (C-FOYA)
 Nominal Survey Line Spacing: 50 Meters
 Nominal Survey Line Direction: N 20° E
 Nominal Tie Line Spacing: 485 Meters
 Nominal Tie Line Direction: N 11° E
 Nominal Terrain Clearance: 75 Meters (where possible due to rugged terrain)
 EM Loop: Towed at a mean distance of 35 meters below the Helicopter
 Magnetic Sensor: Towed at a mean distance of 13 meters below the Helicopter


INSTRUMENTS:
 Geotech Time Domain Electromagnetic System (VTEM)
 Concentric Roll Geometry
 Transmitter Loop: Diameter 26 Meters, Base Frequency 30 Hz
 Dipole Moment: 543,396 nA
 Transmitter Wave Form: Trapezoidal, Pulse Width: 4.5 ms.
 Geometrics High Sensitivity Cesium Magnetometer
 Map Resolution: 0.02 nT at 10 samples/sec

MAP PROJECTION:
 Datum: NAD 83
 Projection: Universal Transverse Mercator
 Central Meridian: 141°W (Zone 7)
 Central Scale Factor: 0.9996
 False Easting/Northing: 500,000m/0m
 Major Axis: 6378137.000
 Eccentricity: 0.081819191
 NTS: 115K02

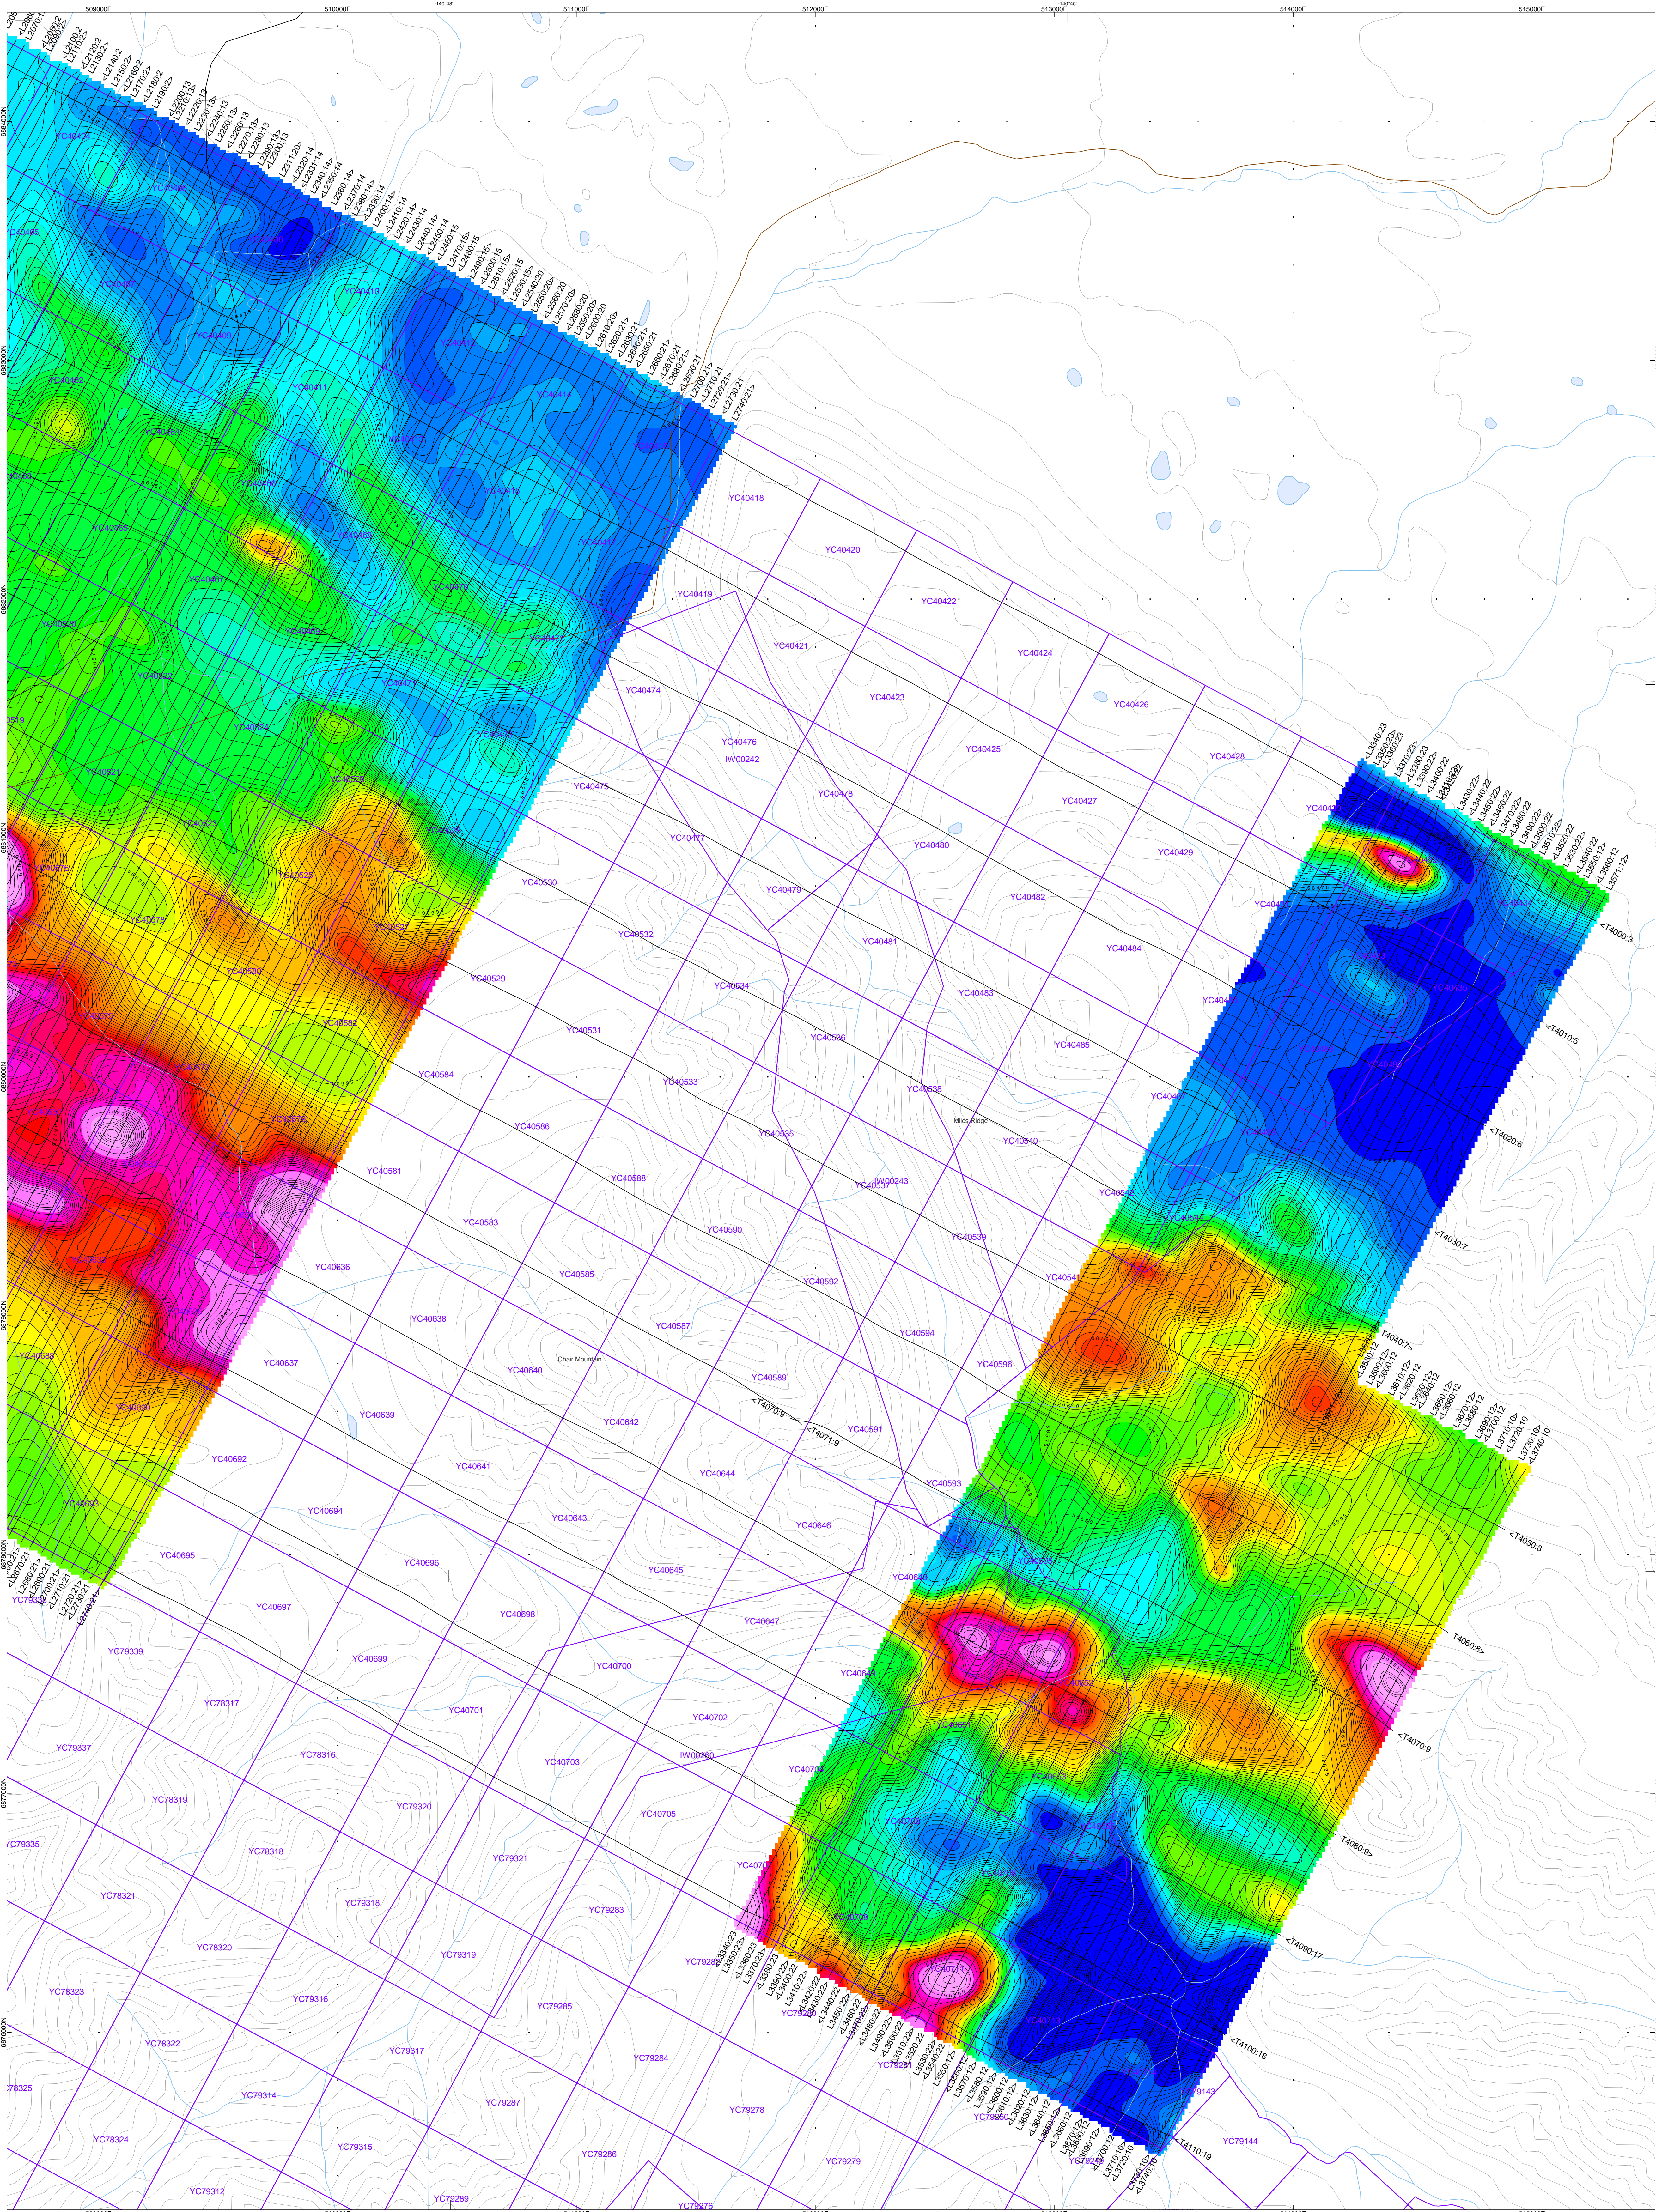

Contour Intervals (nT):
 5
 25
 125

TOPOGRAPHIC LEGEND:
 Roads
 Trails
 Contours
 Rivers & Streams
 Lakes
 Wetlands
 Mining Rights



Scale 1:10000
 100 0 100 200 300 400 500
 Meters / Feet

The topographic data base was derived from 1:50,000 NRC (Natural Resources Canada) NTDB data. Background shading is derived from NRC's 1:50,000 Shuttle Radar Topography Mission data. Inset data derived from Geocommunities 1:250,000 Canadian National Topographic database. Mineral Exploration License & Mining Claims are derived from the Government of Yukon, Geomatics Branch (http://geomatics.yukon.ca/datas_download.html).

**White River Resources
 Block A - East
 White River Area, Yukon**
 Geotech VTEM System
**TOTAL MAGNETIC INTENSITY
 (TMI)**

Flown and processed by Geotech Ltd.
 245 Industrial Parkway North,
 Aurora, Ontario, Canada L4G 4C4
 www.geotech.ca

February 2009