





GEOTECH LTD.

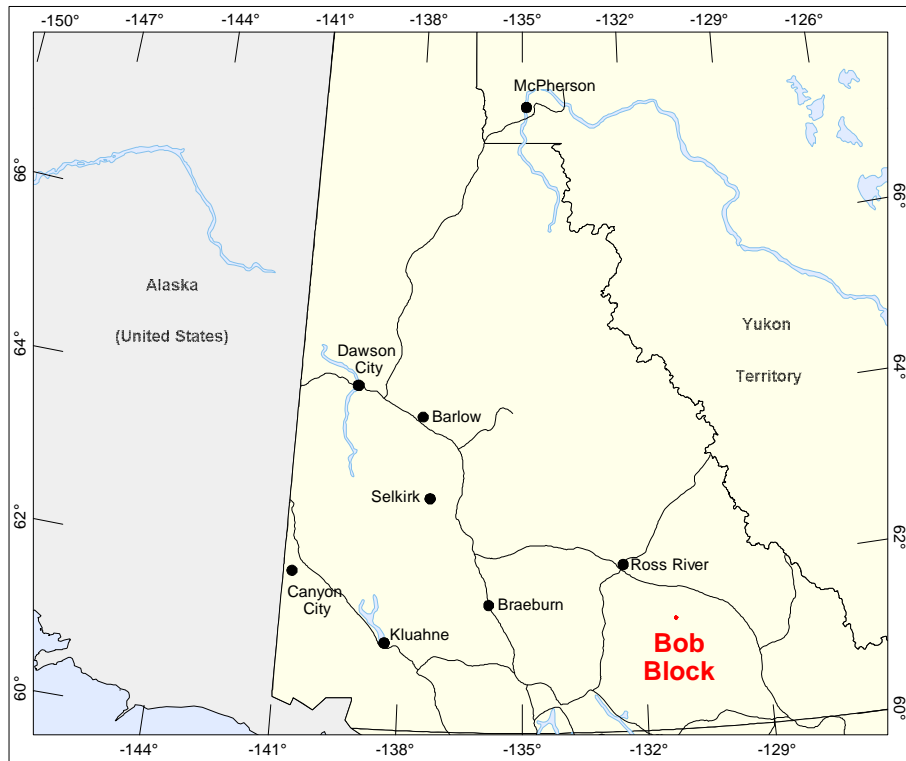

SURVEY SPECIFICATIONS:
Survey Date: July 20th to July 22nd, 2008
Survey Base: Ross River, Yukon
Aircraft: Aerospatiale A-Star 350 B3 (C-GRK)
Nominal Survey Line Spacing: 100 Meters
Nominal Survey Line Direction: N 40° E
Nominal Tie Line Spacing: 500 Meters
Nominal Tie Line Direction: N 130° E
Nominal Terrain Clearance: 72 Meters
EM Loop: Towed at a mean distance of 35 meters below the Helicopter
Magnetic Sensor: Towed at a mean distance of 13 meters below the Helicopter

INSTRUMENTS
Geotech Time Domain Electromagnetic System (VTEM)
Concentric Tx/Tx Geometry
Transmitter Loop: Diameter 26 Meters, Base Frequency 30 Hz
Dipole Moment: 556,400 nA
Transmitter Wave Form: Trapezoid, Pulse Width 4.2 ms.
Geometrics High Sensitivity Cesium Magnetometer
Mag Resolution: 0.02 nT at 10 samples/sec


MAP PROJECTION
Datum: NAD 83
Projection: Universal Transverse Mercator
Central Meridian: 129°W (Zone 9)
Central Scale Factor: 0.9996
False Easting/Northing: 500,000m/0m
Major Axis: 6378137.000
Eccentricity: 0.081819191
NTS: 105506

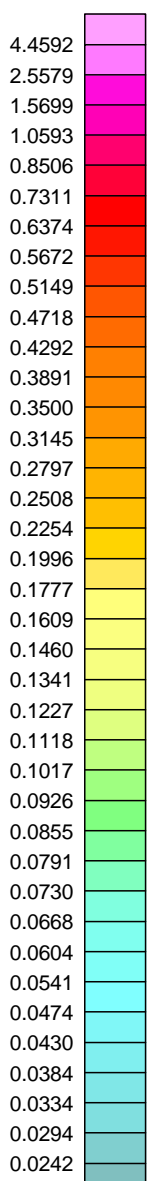

B-Field Channel 25
(pV*ms/(A*m⁴))

TOPOGRAPHIC LEGEND:

- Roads
- Trails
- Contours
- Rivers & Streams
- Lakes
- Wetlands
- Mining Rights



Scale 1:10000
(meters)
NAD83 / UTM zone 9N

The topographic data base was derived from 1:50,000 NRC (Natural Resources Canada) NTDB data.
Background shading is derived from NASA SRTM (Shuttle Radar Topography Mission) data.
Inset data derived from Geocommunities 1:250,000 Canadian National Topographic database.
Mineral Exploration Licences & Mining Claims are derived from the Government of Yukon, Geomatics Branch.
www.geocomm.com/www.geomatics.ca
(http://geomatics.yukon.ca/data_download.html)

Archer Cathro & Associates Ltd.
Bob Block
Finlayson Lake Area, Yukon

Geotech VTEM System
VTEM B-FIELD CHANNEL 25
TIME GATE 1.641 ms



Flown and processed by Geotech Ltd.
245 Industrial Parkway North,
Aurora, Ontario, Canada L4G 4C4
www.geotech.ca

November 2008