



SURVEY SPECIFICATIONS:
 Survey Date: July 20th to July 22nd, 2008
 Survey Base: Ross River, Yukon
 Aircraft: Aerospatiale A-Star 350 B3 (C-GTRK)
 Nominal Survey Line Spacing: 100 Meters
 Nominal Survey Line Direction: N 40° E
 Nominal Tie Line Spacing: 390 Meters
 Nominal Tie Line Direction: N 130° E
 Nominal Terrain Clearance: 72 Meters
 EM Loop: Towed at a mean distance of 35 meters below the Helicopter
 Magnetic Sensor: Towed at a mean distance of 13 meters below the Helicopter

INSTRUMENTS
 Geotech Time Domain Electromagnetic System (VTEM)
 Concentric Rx/Tx Geometry
 Transmitter Loop: Diameter 26 Meters, Base Frequency 30 Hz
 Dipole Moment: 556,400 nA
 Transmitter Wave Form: Trapezoid, Pulse Width 4.2 ms.
 Geometrics High Sensitivity Cesium Magnetometer
 Mag Resolution: 0.02 nT at 10 samples/sec

MAP PROJECTION
 Datum: NAD 83
 Projection: Universal Transverse Mercator
 Central Meridian: 129°W (Zone 9)
 Central Scale Factor: 0.9996
 False Easting/Northing: 500,000m/0m
 Major Axis: 6378137.000
 Eccentricity: 0.081819191
 NTS: 105506





Contour Intervals (nT):



TOPOGRAPHIC LEGEND:

- Roads
- Trails
- Contours
- Rivers & Streams
- Lakes
- Wetlands
- Mining Rights

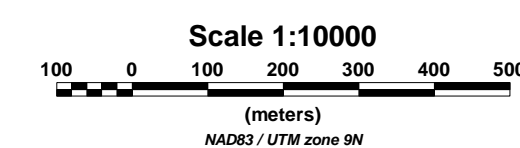

The topographic data base was derived from 1:50,000 NRC (Natural Resources Canada) NTDB data.
 Background shading is derived from NASA SRTM (Shuttle Radar Topography Mission) data.
 Inset data derived from Geocommunities 1:250,000 Canadian National Topographic database.
 Mineral Exploration Licenses & Mining Claims are derived from the Government of Yukon, Geomatics Branch.
www.geocomm.com (www.geomatics.ca)
http://geomatics.yukon.ca/data_download.html

Archer Cathro & Associates Ltd.
Bob Block
Finlayson Lake Area, Yukon
 Geotech VTEM System
TOTAL MAGNETIC INTENSITY (TMI)

Flown and processed by Geotech Ltd.
 245 Industrial Parkway North,
 Aurora, Ontario, Canada L4G 4C4
www.geotech.ca

November 2008

