




TECHNICAL SUMMARY

Navigation Differentially-corrected GPS
Date reduction grid interval 40 metres
Terrain clearance Helicopter 60 m
Electromagnetic sensor 35 m
Magnetometer 35 m
Data sampling interval 0.1 second
Magnetometer / sensitivity Cesium / 0.01 nT
Electromagnetic system DIGHEM[®]


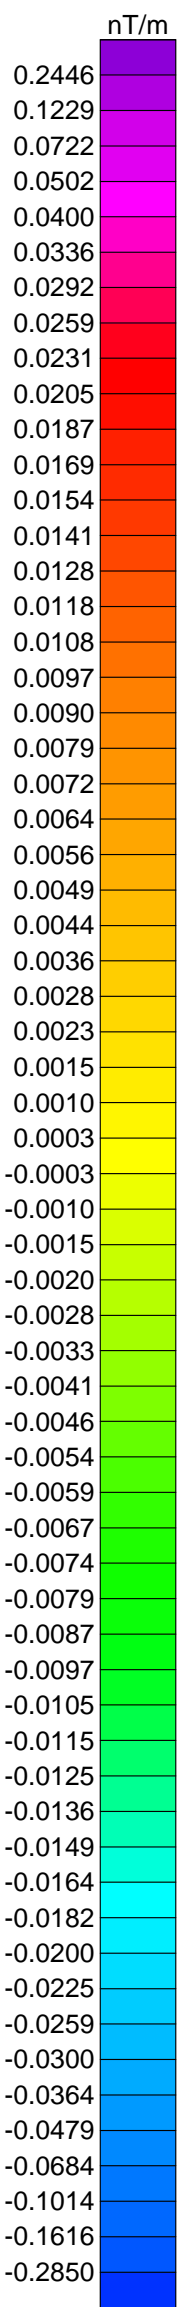


Frequency	Sensitivity	Coil Orientation
1000 Hz	.06 ppm	Vertical coaxial
5500 Hz	.12 ppm	Vertical coaxial
900 Hz	.12 ppm	Horizontal coplanar
7200 Hz	.24 ppm	Horizontal coplanar
56000 Hz	.50 ppm	Horizontal coplanar

FLIGHT LINES

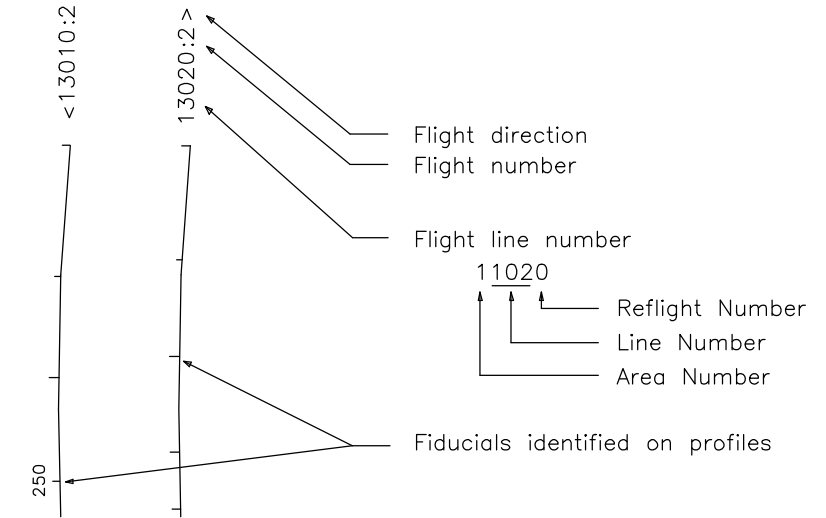

CALCULATED VERTICAL GRADIENT CONTOURS

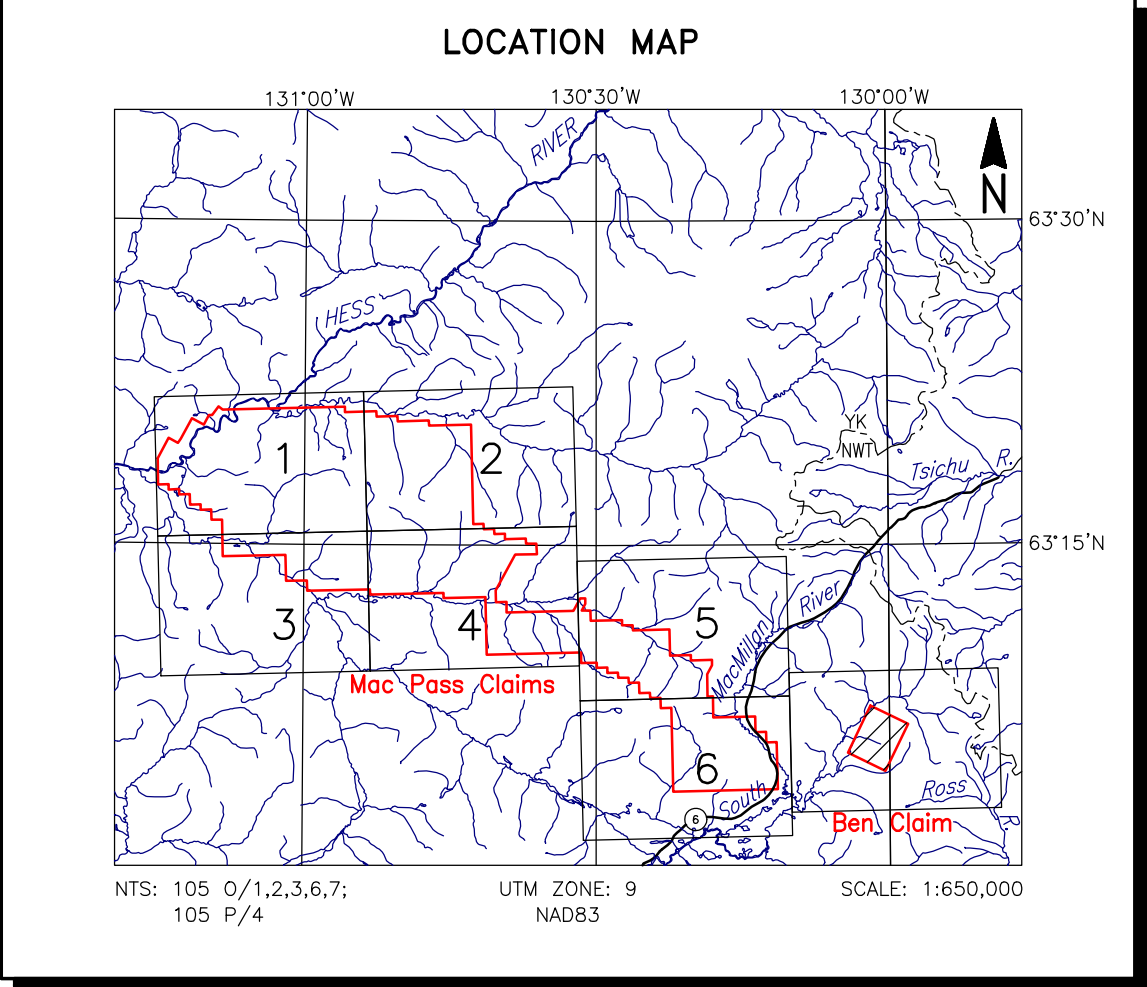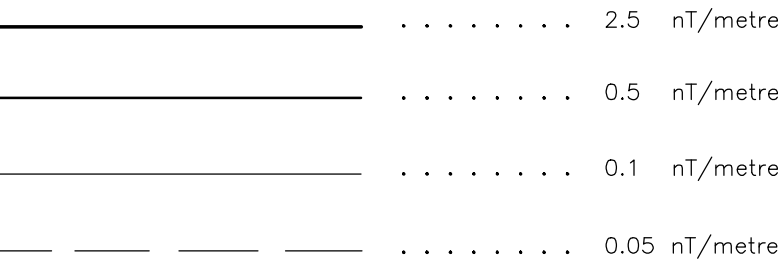

COLORADO RESOURCES LTD.
BEN CLAIM, YUKON

CALCULATED VERTICAL
MAGNETIC GRADIENT

FUGRO DIGHEM [®] SURVEY	NTS: 105 O/1; 105 P/4	GEOPHYSICIST:
DATE: OCTOBER, 2011	JOB: 11046	SHEET: 1

Fugro Airborne Surveys

