



SURVEY SPECIFICATIONS:
Survey Date: June 24th to June 25th and July 14th, 2008
Survey Base: Dawson City, Yukon
Altitude: Aerostationary A-Site 350 B3 (C-OTW)
Nominal Survey Line Spacing: 300 Meters
Nominal Survey Line Direction: N 26° E
Nominal Tie Line Spacing: 230 Meters
Nominal Tie Line Direction: N 116° E
Nominal Terrain Clearance: 75 Meters where possible
EM Loop: Towed at a mean distance of 35 meters below the Helicopter
Magnetic Sensor: Towed at a mean distance of 13 meters below the Helicopter
INSTRUMENTS:
Geotech Time Domain Electromagnetic System (VTEM)
Concentric Rx/Tx Geometry
Transmitter Loop: Diameter 26 Meters, Base Frequency 30 Hz
Dipole Moment: 556,800 nA
Transmitter Wave Form: Triangular, Pulse Width 4.2 ms
Geometrics High Sensitivity Cesium Magnetometer
Mag Resolution: 0.02 nT at 10 samples/sec
MAP PROJECTION:
Datum: NAD 83
Projection: Universal Transverse Mercator
Central Meridian: 135°W (Zone 8)
Central Scale Factor: 0.9998
False Easting/Northing: 500,000m/0m
Map Axis: 6378137.000
Eccentricity: 0.081818181
NTS: 1:60611, 1:60612, 1:60613, 1:60614

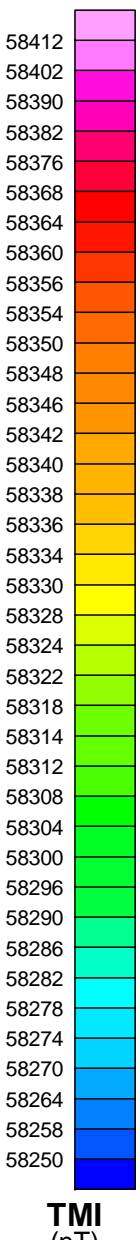

Contour Intervals (nT):
2
5
10

TOPOGRAPHIC LEGEND:
Roads
Trails
Contours
Rivers & Streams
Lakes
Wetlands
Mining Rights



Scale 1:20000
0 250 500 750 1000
meters
Scale: UTM Zone 8N

The topographic data base was derived from 1:50,000 NRC (Natural Resources Canada) NTDB data.
Background shading is derived from NASIS 50M (Shaded Relief Topographic Map) data.
Inset data derived from Geocommunities 1:250,000 Canadian National Topographic database.
Mining Exploration Licences & Mining Claims are derived from the Government of Yukon, Geomatics Branch.
(<http://geomatics.com/yukon/geomatics/Download.html>)

Archer Cathro & Associates Ltd.
Nick Block
Keno Hill Area, Yukon
Geotech VTEM System
TOTAL MAGNETIC INTENSITY (TMI)

Flown and processed by Geotech Ltd.
245 Industrial Parkway North,
Aurora, Ontario, Canada L4G 4C4
www.geotech.ca

February 2009