



TECHNICAL SUMMARY

Navigation Differentially-corrected GPS
Date reduction grid interval 40 metres
Terrain clearance Helicopter 60 m
Electromagnetic sensor 35 m
Magnetometer 35 m
Data sampling interval 0.1 second
Magnetometer / sensitivity Cesium / 0.01 nT
Electromagnetic system DIGHEM[®]


| Frequency | Sensitivity | Coil Orientation |
|-----------|-------------|---------------------|
| 1000 Hz | .06 ppm | Vertical coaxial |
| 5500 Hz | .12 ppm | Vertical coaxial |
| 900 Hz | .12 ppm | Horizontal coplanar |
| 7200 Hz | .24 ppm | Horizontal coplanar |
| 56000 Hz | .50 ppm | Horizontal coplanar |

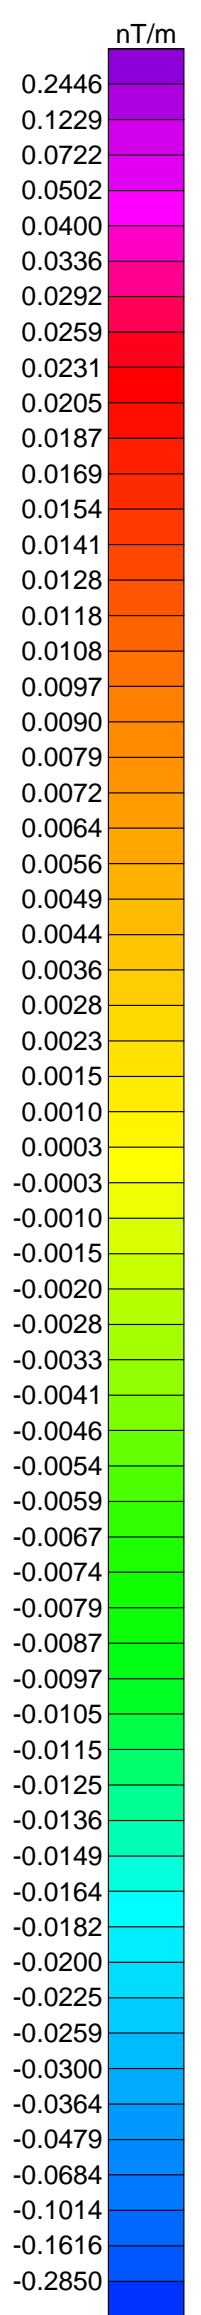


FLIGHT LINES

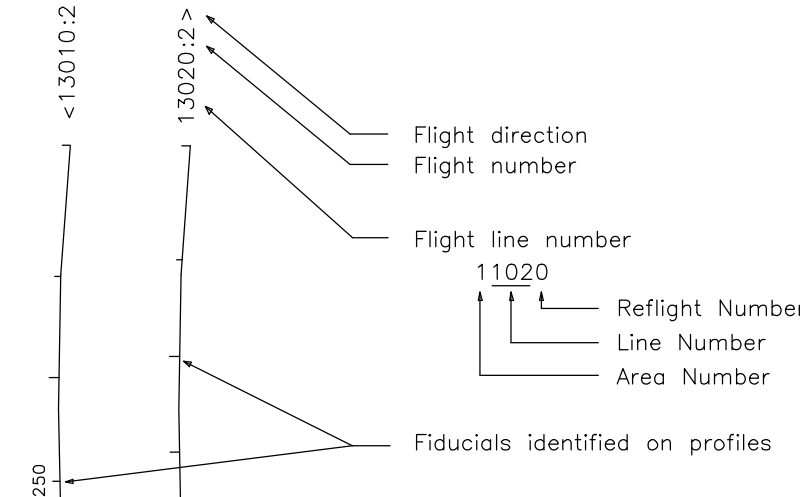

CALCULATED VERTICAL GRADIENT CONTOURS

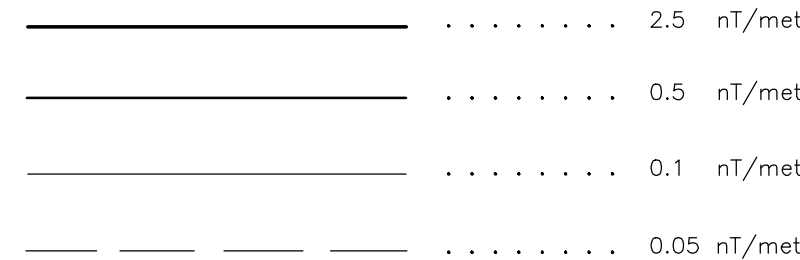


LOCATION MAP

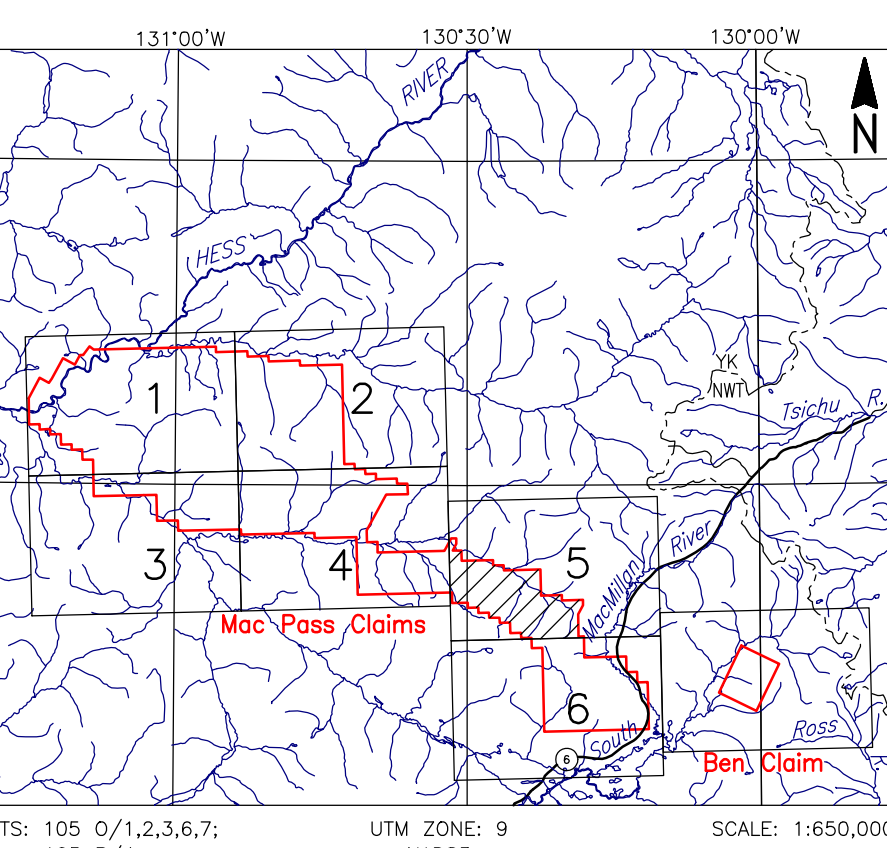

COLORADO RESOURCES LTD.
MAC PASS CLAIMS, YUKON

CALCULATED VERTICAL
MAGNETIC GRADIENT

| | | |
|----------------------------------|----------------------|---------------|
| FUGRO DIGHEM [®] SURVEY | NTS: 105 0/1,2,3,6,7 | GEOPHYSICIST: |
| DATE: OCTOBER, 2011 | JOB: 11046 | SHEET: 5 |
| Fugro Airborne Surveys | | |

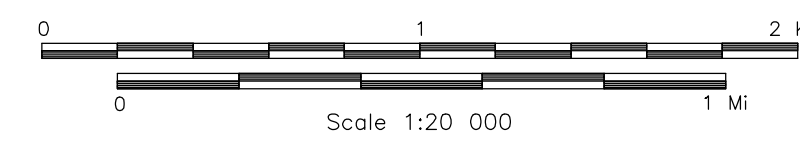

FUGRO AIRBORNE SURVEYS

