
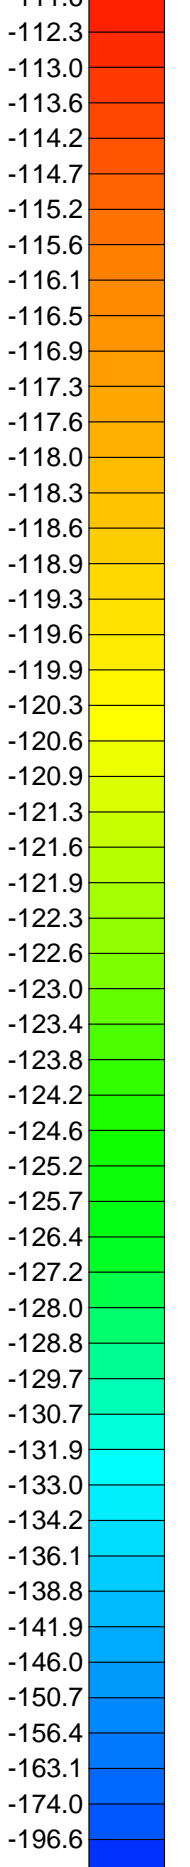



TECHNICAL SUMMARY

Navigation
Date reduction grid interval : 40 metres
Terrain clearance : 60 m
Electromagnetic sensor : 35 m
Magnetometer : 35 m
Data sampling interval : 0.1 second
Magnetometer / sensitivity : Cesium / 0.01 nT
Electromagnetic system : DIGHEM[®]


Frequency	Sensitivity	Coil Orientation
1000 Hz	.06 ppm	Vertical coaxial
5500 Hz	.12 ppm	Vertical coaxial
900 Hz	.12 ppm	Horizontal coplanar
7200 Hz	.24 ppm	Horizontal coplanar
56000 Hz	.60 ppm	Horizontal coplanar



FLIGHT LINES

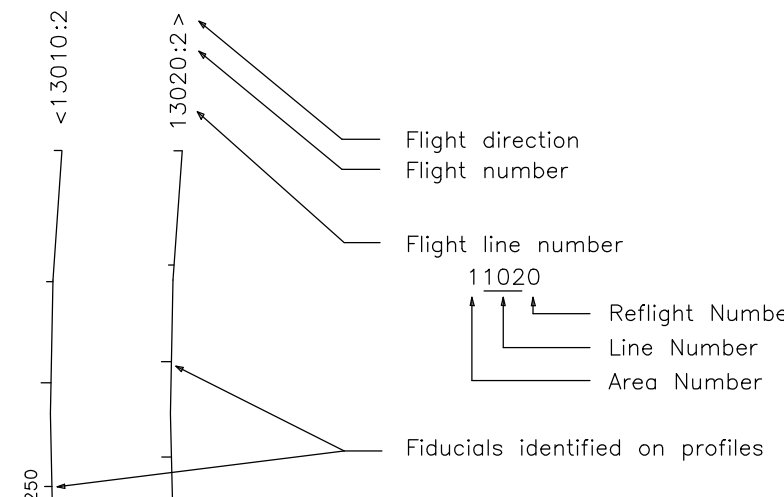


RESIDUAL MAGNETIC FIELD CONTOURS

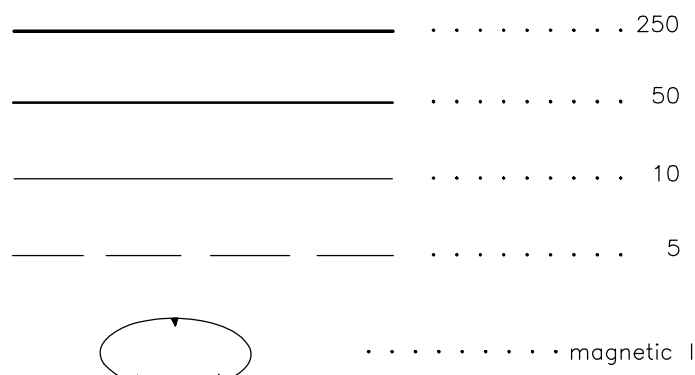

Magnetic inclination within the survey area: 79 degrees N
Magnetic declination within the survey area: 23 degrees E


LOCATION MAP

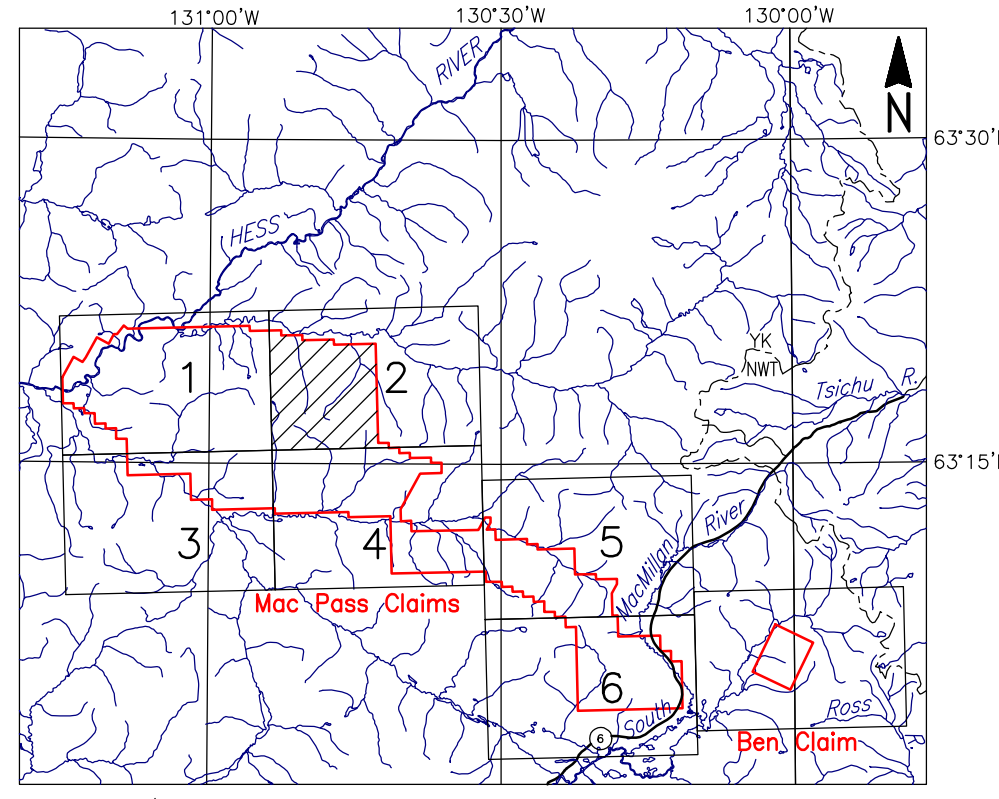

COLORADO RESOURCES LTD.
MAC PASS CLAIMS, YUKON

RESIDUAL MAGNETIC FIELD
IGRF Removed

FUGRO DIGHEM [®] SURVEY	NTS: 105 0/1,2,3,6,7	GEOPHYSICIST:
DATE: OCTOBER, 2011	JOB: 11046	SHEET: 2
Fugro Airborne Surveys		

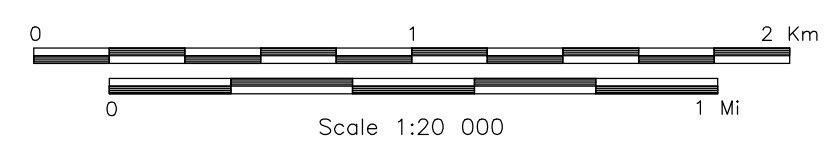

FUGRO AIRBORNE SURVEYS

