

# LEGEND ELEVATION CONTOUR INTERVALS (m) 30

## TOTAL MAGNETIC FIELD

CONTOUR INTERVALS (nT)

250

1000

2000

REFERENCE FIELD : 55,700 nT

INSTRUMENT : GEM 19 MAGNETOMETER

GRIDDING ALGORITHM : GEOSOFT RANGRID

GRID CELL SIZE : 20 m

GRID HANNING FILTER : 0 PASSES

DATA FILE : Wellgreen East MagVLF.GDB

## VLF PROFILES


FREQUENCY : 20.4 kHz Cutler, Maine, USA

INSTRUMENT : GEM 19 MAG/VLF

PROFILE SCALE : 1 cm = 60%

IN PHASE :

OUT PHASE :

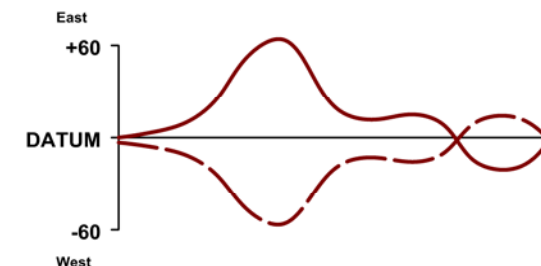

VLF DATUM : 0%

DATA FILE : Wellgreen East MagVLF.gdb


FILTERS: NON LINEAR and LOW PASS

OPERATORS : MC, JB, GT

STATION SEPERATION : 10 M

LINE-KM SURVEYED THIS SHEET : 30.19 km

Scale 1:10000



# FIELD

## PROPECY PLATINUM

**WELLGREEN MAG VLF  
WELLGREEN EAST GRID  
TOTAL MAGNETIC FIELD WITH NAA PROFILES**

WHITEHORSE MINING DISTRICT, YT, CANADA / NTS 115 G/06, G/05  
DATUM: NAD 83 / PROJECTION: UTM Zn 7N  
DATE SURVEYED: JUNE, JULY 2012 / SURVEYED BY: MC, JB, GT  
DATE DRAWN: JULY 2012 / DRAWN BY: MC

**AURORA GEOSCIENCES LTD.**