

**AN ASSESSMENT REPORT
OF THE
HESS RIVER CLAIM BLOCK,
MAYO MINING DISTRICT,
YUKON TERRITORY, CANADA
FOR
CANTEX MINE DEVELOPMENT CORP.
CENTRAL POINT (NAD83 ZONE 9V):
411517 E, 7031949 N
NTS: 105007**

Prepared by
Chad Ulansky P. Geo.

Assisted by
Shadi Morton P. Geo.

Date: August 2013

TABLE OF CONTENTS

1.	SUMMARY	3
2.	INTRODUCTION AND TERMS OF REFERENCE	3
2.1	INTRODUCTION	3
2.2	UNITS AND CURRENCY	3
3.	PROPERTY DESCRIPTION AND LOCATION	4
3.1	LOCATION	4
3.2	PROPERTY DESCRIPTION	4
4.	ACCESS, CLIMATE, LOCAL RESOURCES, INFRASTRUCTURE AND PHYSIOGRAPHY	7
4.1	ACCESS	7
4.2	CLIMATE	7
4.3	LOCAL RESOURCES AND INFRASTRUCTURE	8
4.4	PHYSIOGRAPHY	8
5.	HISTORY	8
6.	GEOLOGICAL SETTING	8
6.1	REGIONAL GEOLOGY	8
6.2	PROPERTY GEOLOGY	11
7.	MINERALIZATION	14
8.	EXPLORATION	14
9.	SAMPLING METHOD AND APPROACH	14
9.1	HEAVY MINERAL SAMPLING	14
9.2	ROCK SAMPLING	15
10.	SAMPLE PREPARATION, ANALYSIS AND SECURITY	16
10.1a	HEAVY MINERAL SAMPLE PROCESSING	16
10.1b	PROCESSING ROCK SAMPLES	16
10.2	QAQC	17
10.3	SECURITY	17
11.	RESULTS	17
12.	CONCLUSIONS AND RECOMMENDATIONS	18
13.	EXPLORATION EXPENDITURES	18
	REFERENCES	19
	APPENDICES	
	APPENDIX 1: TABLE OF CLAIMS	
	APPENDIX 2: ASSAY RESULTS	
	APPENDIX 3: SAMPLE LOCATIONS	

1. SUMMARY

During the summers and autumns of 2012 and 2013, Cantex Mine Development Corporation ("**Cantex**") carried out an extensive early stage exploration program on its various claim blocks in the Yukon Territory, Canada. In 2012 this work focussed on heavy mineral sampling. In 2013 the program included an extensive soil-sampling program, limited heavy mineral sampling, and a prospecting and rock sampling program.

2. INTRODUCTION AND TERMS OF REFERENCE

2.1 INTRODUCTION

Cantex is a publically traded company based in Kelowna, BC trading on TSX Venture Exchange as CD.V.

The data supporting the statements made in this report have been verified for accuracy and completeness by the author. No meaningful errors or omissions were noted. The sources for the data are given in the "Reference" section of this report.

2.2 UNITS AND CURRENCY

Throughout this report, measurements are in metric units, unless the historic context dictates that the use of Imperial units is appropriate. Tonnages are shown as tonnes ("t"), equivalent to 1,000 kg, linear measurements are metres ("m"), or kilometres ("km") and precious metal values are as grams per tonne ("g Au/t") or troy ounces per ton ("oz Au/T" or "opt"). Grams are converted to ounces based on $31.104 \text{ g} = 1 \text{ troy ounce}$ and $34.29 \text{ g/t} = 1 \text{ oz/T}$.

3. PROPERTY DESCRIPTION AND LOCATION

3.1 LOCATION

The Hess River property is located approximately 255 km east of the Town of Mayo and is approximately 40 km west north west of McMillan Pass. The location of the property relative to the town of Mayo and the Company's Rackla camp is shown in Figure 1. Also portrayed on the map are Cantex's other claim blocks in the central Yukon region.

3.2 PROPERTY DESCRIPTION

The Hess River Property is comprised of 20 contiguous Quartz Claims with which this report is concerned. These Claims are HR 1 - HR 20 with Grant Numbers YF43939 to YF43958.

Figure 2 shows the individual claims plotted on topography. Details of the individual claims are presented in Appendix 1.

These Claims are currently in various stakers' names and the application for transfer is still pending. Once the transfer has completed, these claims will be owned 100% by Cantex. The approximate centre of the property has an easting of 411517 and northing of 7031949 (UTM zone 9, NAD 83).

Figure 1. Property Location Map of Hess River Claim Block


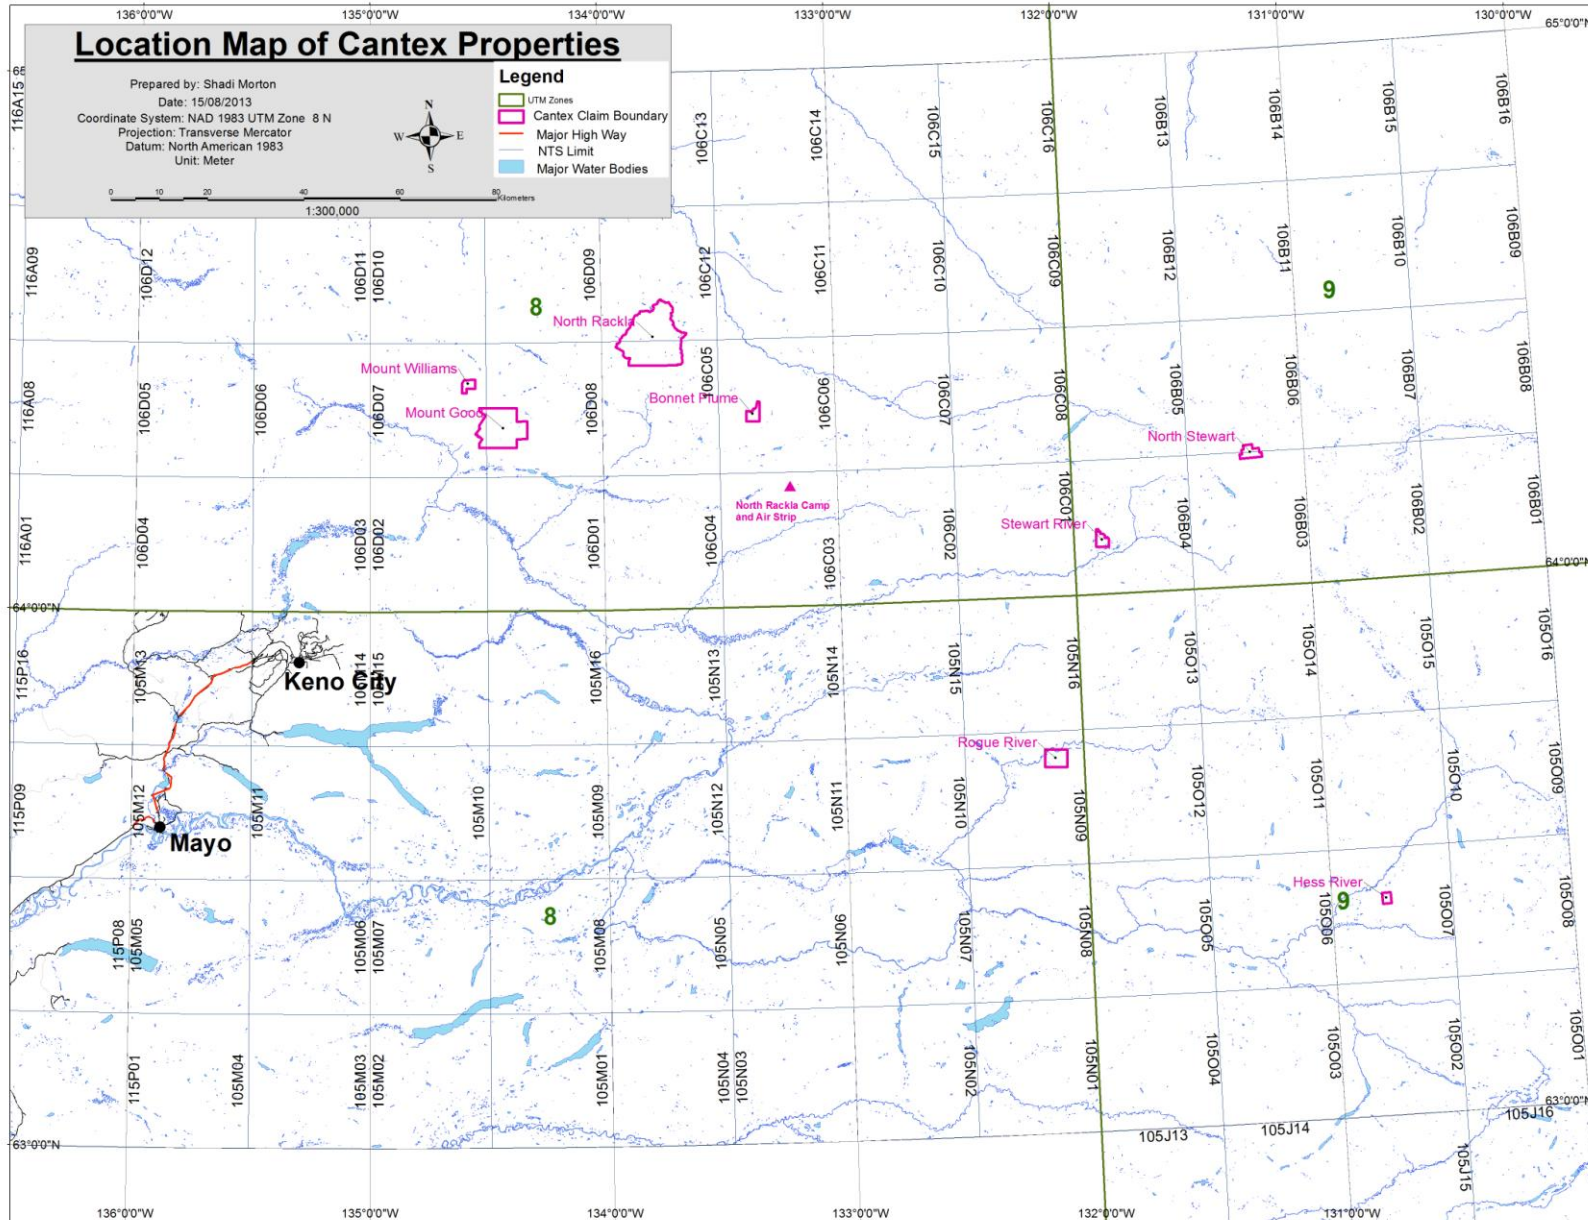


Figure 2. 2013 Hess River Claims Map

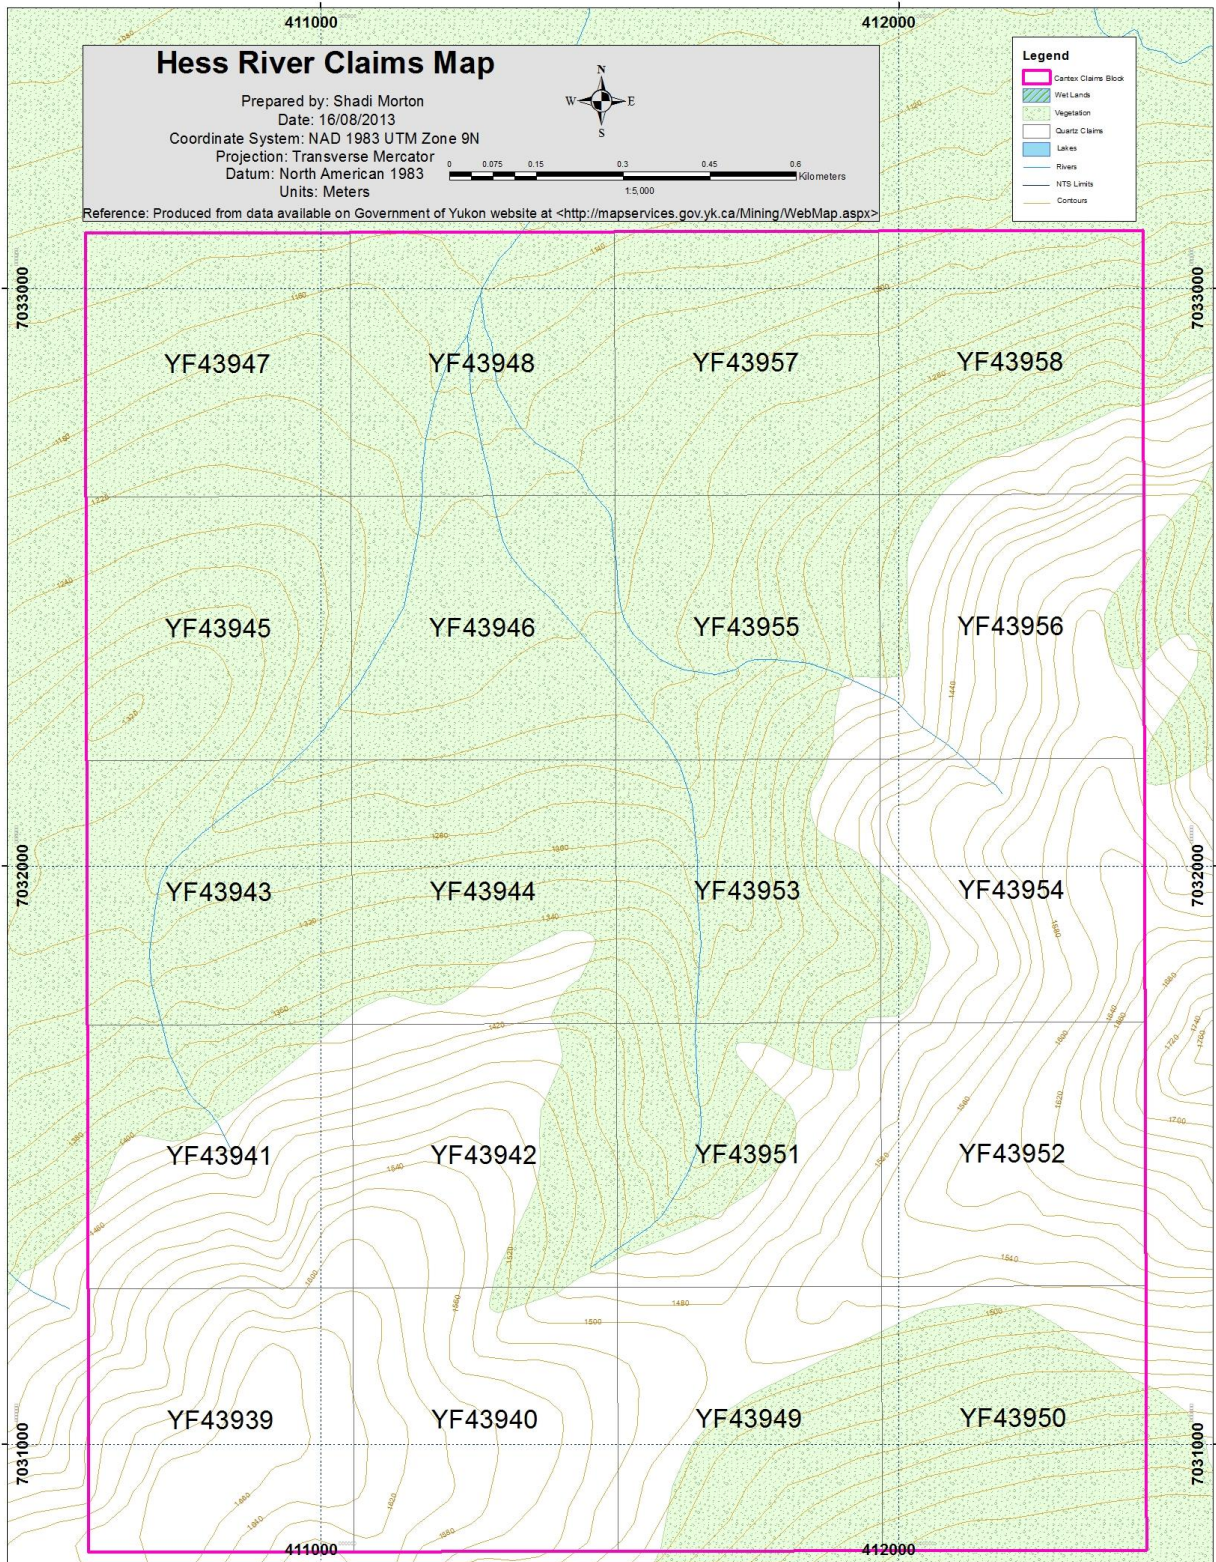

4. ACCESS, CLIMATE, LOCAL RESOURCES, INFRASTRUCTURE AND PHYSIOGRAPHY

4.1 ACCESS

The Hess River claim group is best accessed by helicopter. The 2012 and 2013 field programs were based from the Rackla airstrip where Cantex maintains a camp. The camp is located at 64° 13.4' N 133° 12.2' W. The Hess River claim group is 150 kilometers southeast from the Rackla camp.

4.2 CLIMATE

The following information was sourced from weatherspark.com.

The data in this report is generated by the weather station at the Mayo Airport (Mayo, Yukon Territory, Canada) which is the nearest major centre with historic meteorological records. The climatic data presented is based on the historical records from 1977 to 2012.

Mayo has a continental climate with short dry cool summers. The area within 40 km of this station is covered by forests (79%), tundra (18%), and lakes and rivers (4%). Mayo experiences dramatic temperature swings through the course of a year, with average temperatures varying from -29°C to 22°C. However, temperatures can fall below -46°C or climb to above 27°C on rare occasions. The warm season lasts from mid May to mid September with an average daily high temperature above 14°C. Typically the hottest portion of the year is mid July when daytime highs average 22°C and night time lows fall to 10°C.

The cold season lasts from mid November to late February with an average daily high temperature below -11°C. The coldest part of the year is early January when average lows fall to -29°C and daily highs only reach -20°C.

The median cloud cover ranges from 77% (partly cloudy) to 95% (overcast). The sky is cloudiest in late October and clearest in mid March. The clearer part of the year begins around January 23. The cloudier part of the year begins around May 12.

The probability of precipitation is highest in mid November, occurring on 69% of days. Precipitation is least likely in mid April, occurring on 36% of days.

During the warm season there is a 52% chance that precipitation will be observed at some point during a given day. When precipitation does occur it is most often in the form of light rain (66%), thunderstorms (17%), or moderate rain (12%).

During the cold season there is typically a 61% chance of precipitation. When precipitation does occur it is most often in the form of light snow (83%) and moderate snow (15%).

4.3 LOCAL RESOURCES AND INFRASTRUCTURE

The claims are located in a mountainous region which is remote from permanent infrastructure. Elsa and Keno are the closest towns to the project area. With no aviation companies based from either Elsa or Keno, Mayo was used as the location for supplies to be mobilized to camp and samples from camp.

Mayo is a small town and as such has limited availability of goods and services (beyond fixed wing air support) needed to support an exploration program. The bulk of the project's needs were sourced in Whitehorse.

4.4 PHYSIOGRAPHY

As noted in Figure 2, majority of the property lies above the tree line in the mountains of the Yukon Territory. The claim block is drained by a small tributary that is a portion of the watershed of the Hess River which is located within the Interior Hydrologic Region.

5. HISTORY

The company is not aware of any significant previous work completed within the claims area. The claims were staked in August of 2012.

6. GEOLOGICAL SETTING


6.1 REGIONAL GEOLOGY

The Hess River Property is located within the 1050 map sheet and the following is retrieved from a geoprocesed file by government of Yukon.

This region is part of the foreland belt. The bedrock geology is mainly that of the Mackenzie platform of ancient North America. Three pre-550 million year old rock packages dominate the area: 1) the Backbone Ranges in the Northeastern map area that are underlain by sandstone, conglomerate, shale, slate, quartzite, limestone and dolomite of the Sekwi Formation, Backbone Ranges and Atan Group; 2) the Wernecke Mountains and Rackla Range, in the central map area, are underlain by Wernecke Super-group (Gillespie, Quartet and Fairchild Lakes Groups) quartzite, conglomerate, sandstone, siltstone, limestone and dolomite, and Pinguicula Group sedimentary rocks; 3) the Nadaleen Range, in the southern map area, is largely underlain by Hyland Group siltstone, conglomerate, sandstone, quartzite and limestone.

A regional geologic map is presented in Figure 3. The geologic legend for the map is presented on the following page.

Figure 3. Regional Geological Map of the Hess River Property

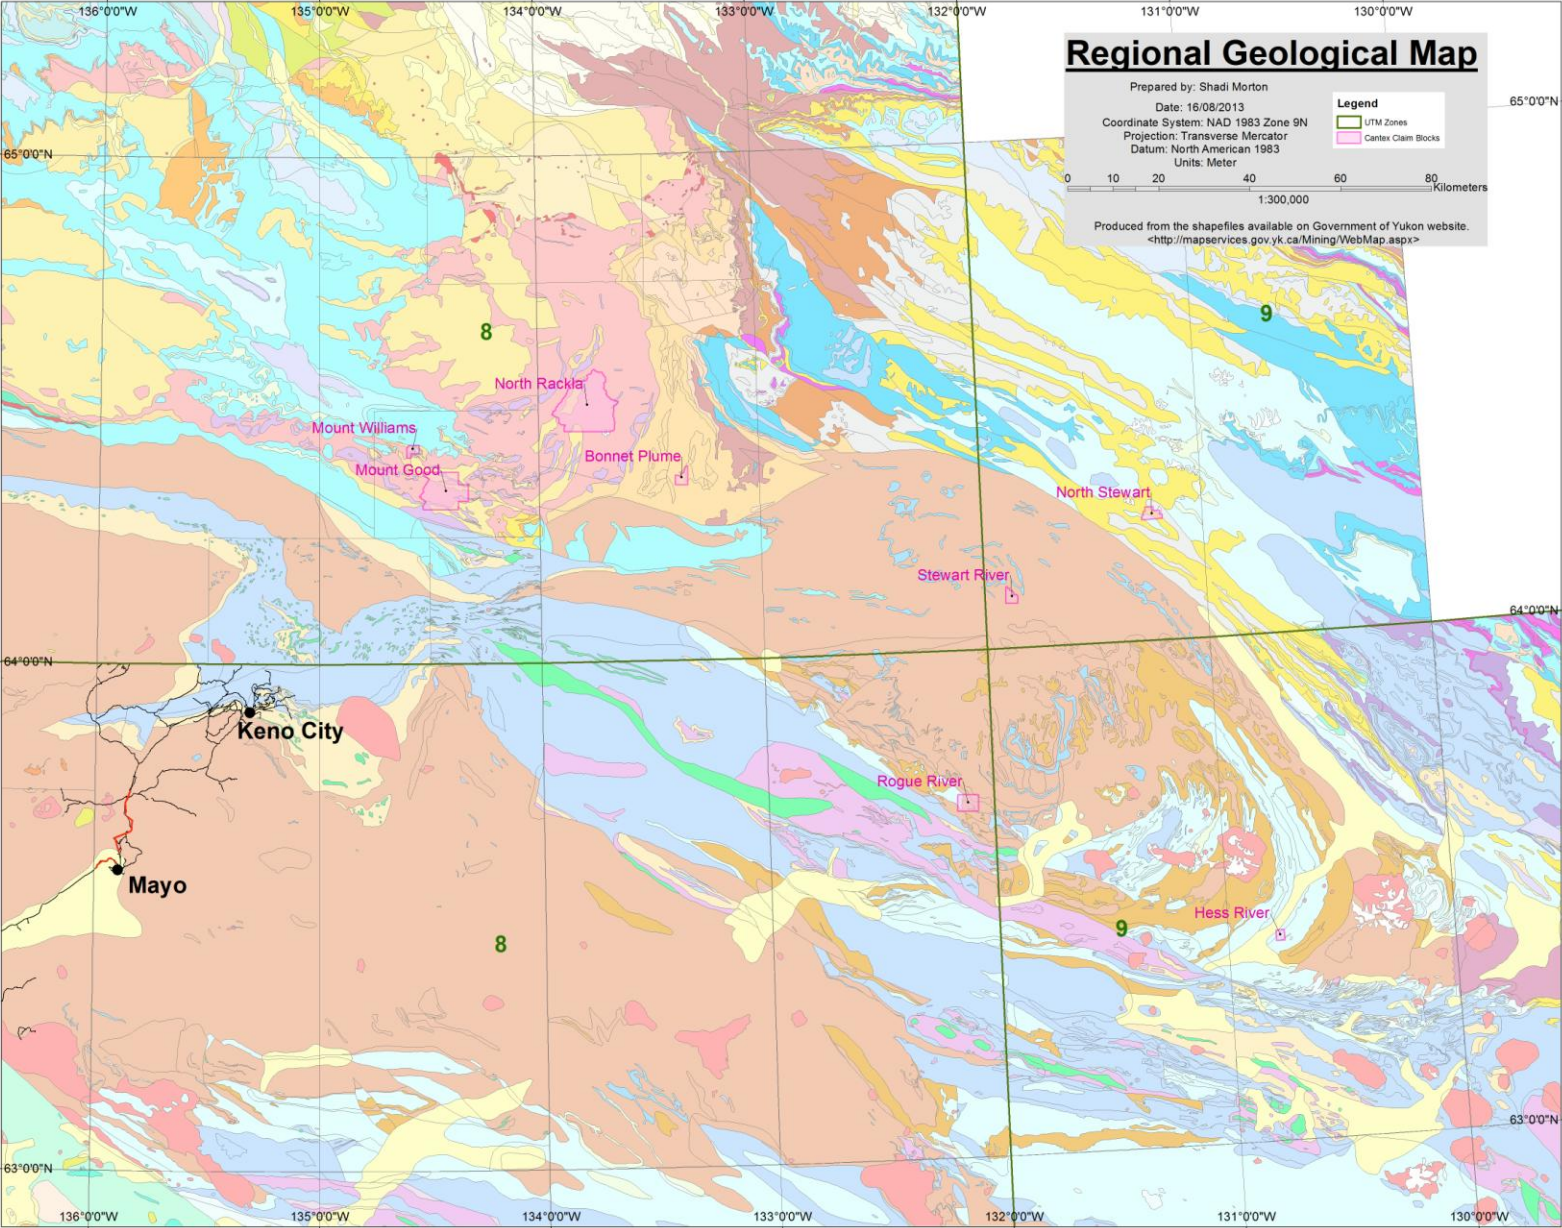



6.2 PROPERTY GEOLOGY

Detailed geological mapping of the project area has not yet been undertaken by Cantex staff. Unfortunately, a search of publications has not yielded any focused mapping on the area.

In general the property covers the lower proterozoic clastic, sedimentary rocks, comprised of mudstone, shale, siltstone, sandstone, conglomerate (Blusson 1974) and are thought to be part of the Wernecke super-group.

The exploration area occurs within the Omineca morphogeological belt of east-central Yukon. The claims are underlain by a sequence of variably metamorphosed sedimentary rocks deposited on the ancient North American craton margin between 300Ma and 1,000Ma BP.

The sediments were deposited in the Selwyn Basin. Black shales and cherts were deposited in deeper waters while the rarer carbonate rocks were deposited in a shallower environment. (Hart, nd; Monger, 1989; Wheeler and McFeely, 1991; Wheeler et al, 1991).

As this region was beyond the extent of the northward extending glaciation there is typically extensive soil development. Geochemical anomalies detected in such an environment are likely to be of local provenance.

Figure 4. Hess River Property Geology


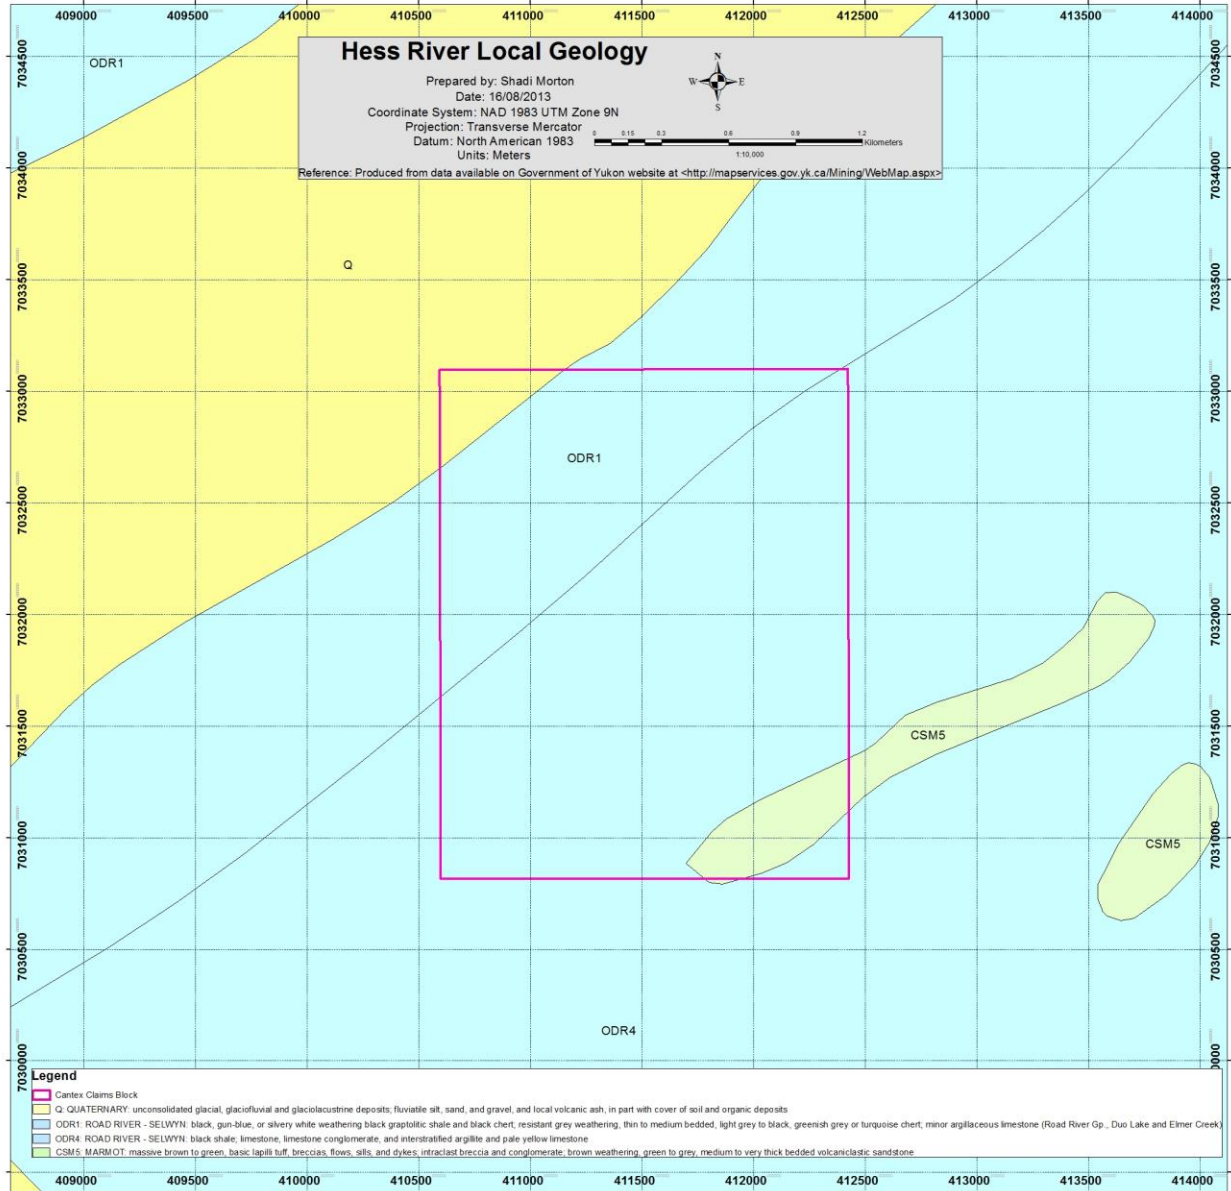


Figure 5: Hess River 2013 Work Program

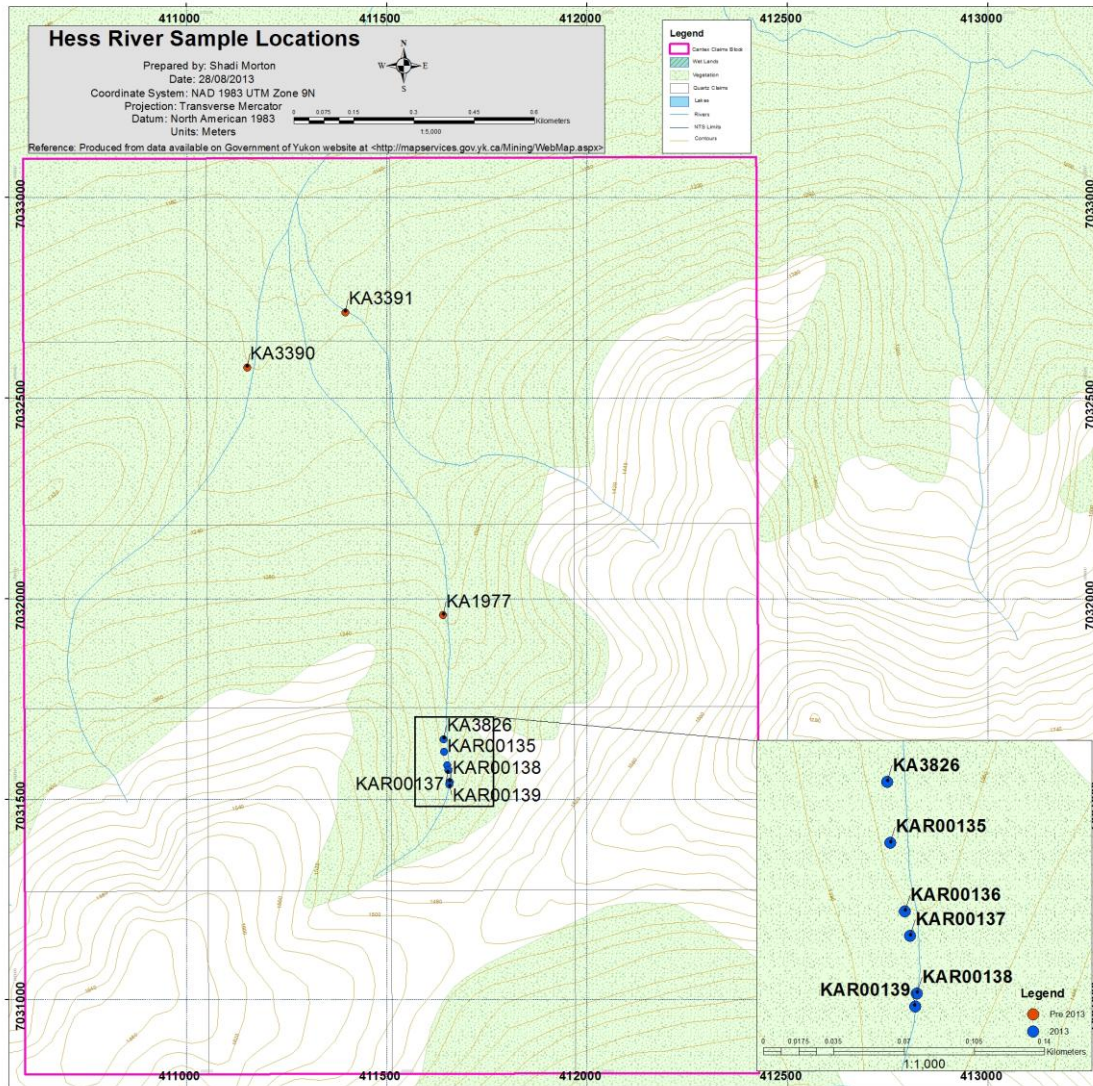

7. MINERALIZATION

The majority of the reported mineral deposits in the Nadaleen River area consist of Mississippi Valley type and associated vein lead-zinc-silver deposit. Any conclusion on the possible minerals on the property are pending the current exploration results.

8. EXPLORATION

The property was first staked by the company in August of 2012, and little is known of any prior exploration activity within the claim block. In late 2012, a detailed heavy mineral sampling program was undertaken which included three samples on the claim block. In 2013, the property was once again visited by geologists Charles Fipke and Chad Ulansky. A day was spent prospecting and one heavy mineral sample and five rock samples were collected. Locations of these samples are presented in Figure 5 and are also contained within Appendix 2.

9. SAMPLING METHOD AND APPROACH

9.1 HEAVY MINERAL SAMPLING

Cantex has developed expertise in heavy mineral sampling techniques targeting gold mineralization. The successful application of these techniques has been demonstrated in exploration programs in both Nevada, USA and the Republic of Yemen.

Successful sampling requires a systematic approach which accounts for local variations in geology, geomorphology, climate and target properties. Using the proprietary techniques developed by CF Mineral Research, minerals considered pathfinders for gold mineralization are concentrated to for subsequent analysis.

Evaluation of the results allows the company to focus its time and assets on exploring areas of potential economic significance.

Sampling procedures utilized for the heavy mineral sampling program were as follows:

- Sample locations were chosen prior to the field program by senior technical staff. These were then digitized and plotted on topographic maps at a suitable scale for field operations. The sample sites were located based on the following factors:
 - Historical data available in the public domain
 - The drainage network
 - Claim locations

- During field operations technicians were transported to the field by helicopter. After completing a sample the technician would be moved to the next proposed location by helicopter.
- The technician chose the specific sample site once the local conditions were evaluated at the digitized location. The technicians selected a site where heavy minerals would naturally be concentrated.
- Once the specific site was selected a 10 kilogram sample of sediments sieved to -20 mesh was collected. The site was then plotted on the field map and the coordinates saved in a handheld GPS. Field maps and GPS coordinates were collected at the end of each day.
- At the end of each day the collected samples were transported to the base of operations by helicopter and then stored in a secure location. At the end of the program the samples were shipped in sealed megabags to Kelowna, BC for processing.

9.2 ROCK SAMPLING

A prospecting program was undertaken on the license. This location of the areas to be prospected was driven by several factors including past sample results, local geology, and any mineralization seen by technicians previously on the property. Should potential mineralization be encountered while prospecting it was sampled. The following procedures were used for the prospecting / rock sampling program:

- Field access by the geologists was by helicopter. Once in the area of interest the geologists completed traverses of the selected area.
- When a sample was found that was of interest the geologist followed the following protocol:
 - A photo of the sample was taken
 - Coordinates of the sample were recorded in a GPS
 - A description of the sample was recorded
 - A grab sample was collected of approximately 1 to 2 kg for analysis.
- At the end of each day this information was collected and compiled.
- At the end of each day the collected samples were transported to the camp by helicopter and then stored in a secure location. Periodically the samples were flown from camp to Mayo where they were stored in a secure sea-can before being trucked in security sealed mega-bags to CF Minerals Research Ltd in Kelowna, BC for processing.
- Five rock samples have been collected as a part of this program

10. SAMPLE PREPARATION, ANALYSE AND SECURITY

10.1a HEAVY MINERAL SAMPLE PROCESSING

The till samples are washed and wet sieved in a multi-stage jig to obtain -20 +35, -35 +60 and -60 mesh fraction samples, followed by drying and re-sieving of the same size fractions.

Various density and magnetic separation techniques are used to prepare the heavy mineral concentrates. The minerals of interest include: arsenopyrite and its weathering products scorodite and goethite; stibnite and its weathering product stibiconite; realgar, galkhaite, cinnabar and pyrite.

Once the samples are reduced to the size, density and magnetic fraction required for analysis the procedure is as follows:

- A heavy liquid separation was carried out using the desired fraction. The heavy liquids used are tetrabromoethane (TBE, SG = 2.9 g/cm³), followed by methylene iodide (MI, SG = 3.09 to 3.20 g/cm³). The final product of the heavy liquid separation is the desired fraction split into light (SG < 2.9 g/cm³), intermediate (2.9 g/cm³ < SG < 3.2 g/cm³), and heavy portions (SG > 3.2 g/cm³).
- Magnetic Separation (3 to 4 stages at various magnetic intensities) using a Franz separator to yield fractions with the desired magnetic properties.
- -20+32 HP (Heavy Paramagnetic) and -60 HN (Heavy Nonmagnetic) fractions were prepared for assay.
- The -20+32 HP fraction was digested using a sodium peroxide fusion with a ICPMS finish. The concentrations of 57 elements were determined.
- The -60 HN fraction was assayed using INAA for 34 elements.

10.1b PROCESSING ROCK SAMPLES

The processing of the rock samples is much less involved than the heavy mineral samples. Upon receipt by the CF Mineral Research laboratory the samples are first weighed. Thereafter a small portion of the sample is selected as a reference sample and the remainder of the sample is crushed to 90% passing a 10 mesh sieve. The sample is then homogenized before an approximately 500 gram split of the crushed material was then pulverized to 95% passing through an 80 mesh sieve. A portion of the pulverized material is then vialled and weighed in grams to three decimal places to be sent for assay.

The analysis is to be conducted at Activation Laboratories Ltd. where the Code 1D Enhanced analysis will be performed using INAA. At the time of writing Cantex is still awaiting results.

10.2 QAQC

During field operations approximately one in every hundred samples was a blank. An empty bag was submitted with the samples to be filled with barren quartz. The barren quartz is to be run as a normal sample to test for any contamination in the preparation and analytical processes.

10.3 SECURITY

Chain of custody procedures were implemented as an integral part of the program. As the samples were collected in the field they were placed in a rice bag. Every 10 to 20 samples the rice bags were sealed with a cable tie and then flown to a staging point and then on back to the camp at the Rackla airstrip. During the period Cantex was operating we were the only people to be using the airstrip.

Alkan Air was used to service the camp, and on their backhauls they would ferry out samples. When the samples arrived in Mayo they were stored in a secure sea container awaiting onward transport. The samples were either driven to Kelowna by Cantex staff or were driven to Whitehorse where the samples were placed in one ton mega bags closed with a numbered tamper proof security seal prior to being shipped with the commercial carrier Manitoulin Transport.

11. RESULTS

11.1 HEAVY MINERAL SAMPLE RESULTS

Sample results for the 3 heavy mineral samples collected in 2012 are presented in Appendix 3. Significantly the -60HN fractions of samples KA1977 and KA3390 were highly anomalous in gold with 16,000ppb and 3,310ppb respectively. In the -20 +32 HP fraction samples KA3390 and KA3391 were anomalous in the pathfinder elements arsenic and antimony - which are pathfinder elements for Carlin style mineralization.

12. CONCLUSIONS AND RECOMMENDATIONS

The results of the heavy mineral samples show that the claim block has the potential to host gold mineralization.

It is recommended that once the rock samples collected during prospecting have been assayed the results from the claim block be assessed to best determine what the next phase of exploration entails. Possible next steps include a detailed prospecting program, a soil sampling program, a geophysical survey or detailed mapping.

13. EXPLORATION EXPENDITURES

The work undertaken on the claim group was a part of a much larger exploration program. As such the work on the claims benefited significantly from economies of scale. Mobilization, camp set-up, equipment, shipping, logistical support and planning were far cheaper than if the work program had occurred in isolation.

The costs associated with the collection of heavy mineral samples in 2012 were \$662.61 per sample. This includes all helicopter, fixed wing, fuel, wages, supplies, mobilization, shipping and other field related costs. Processing and analysis of a heavy mineral sample costs \$365.64.

In 2013 the claims were visited on one day for a prospecting program. Helicopter costs are for access from the Rackla camp. \$1700 is allocated for wages, field costs, travel, etc. Processing costs for the samples collected in 2013 are not included as results are not yet available.

In total \$7,553.75 was spent on the claim group.

Table 1. Claim Group Share of Field Program Costs

Yukon Field Program Costs			
Category	Unit Cost	#	Claim Group Cost
2012 Sample collection costs (per sample)	662.61	3.00	1,984.83
2012 Heavy mineral processing cost (per sample)	365.64	3.00	1,096.92
2013 Helicopter costs (incl fuel per hour)	1,260.00	2.20	2,772.00
2013 Field costs	1,700.00	1.00	1,700.00
Total			<u>7,553.75</u>

REFERENCES

Blusson, S. L. Five geological maps of northern Selwyn Basin (Operation Stewart), Yukon Territory and District of Mackenzie, N.W.T. Geological Survey of Canada, Open File 205. 1974.

Hart, C. (nd) The Geological Framework of the Yukon Territory. Yukon Department of Energy, Mines and Resources website. www.geology.gov.yk.ca/publications/summaries/quaternary.html

Monger, J.W.H. (1989) Overview of Cordilleran Geology; Chapter 2: *In:* B.D. Ricketts, (ed.). Western Canadian Sedimentary Basin; Canadian Society of Petroleum Geologists, 9-32.

Roots, C. F. Geology of the Mayo Map Area, Yukon Territory (105 M)

Wheeler, J.O. and McFeely, P. (1991) Tectonic Assemblage Map of the Canadian Cordillera. Geological Survey of Canada Map 1712A, 1:2 000 000 scale with legend.

Wheeler, J.O., Brookfield, A.J., Gabrielse, H., Monger, J.W.H., Tipper, H.W. and Woodsworth, G.J. (1991) Terrane Map of the Canadian Cordillera. Geological Survey of Canada Map 1713, 1:2 000 000 scale with legend.


Also see:

<http://ygsftp.gov.yk.ca/publications/openfile/2002/of2002_8d_geoprocess_file/documents/map_specific/106c.pdf>

< http://www.emr.gov.yk.ca/oilandgas/pdf/yukon_overview.pdf>

< <http://weatherspark.com/history/28297/2013/Mayo-Yukon-Territory-Canada>>

<<http://mapservices.gov.yk.ca/Mining/WebMap.aspx>>

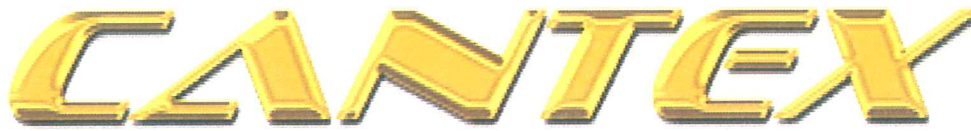

Mine Development Corporation

203-1634 Harvey Ave
Kelowna, B.C.
Canada V1Y 6G2
Tel 250.860.8582
Fax 250.860.1362

August 30, 2013

RE: Statement of Qualifications

I, Chad Stanley Ulansky, geologist with business address in Kelowna, British Columbia and residential address in West Kelowna, British Columbia, do hereby certify that:

1. I graduated from the University of Cape Town, South Africa in 1998 with a B.Sc. (Honours) in Geology.
2. I am a member of the Association of Professional Engineers and Geoscientists of British Columbia (registration number 37150).
3. I am a member of the Association of Professional Geoscientists of Ontario (registration number 1800).
4. I have been actively involved in mineral exploration since 1991.
5. I have personally participated in and supervised the work reported herein.

Signed,

Chad Stanley Ulansky
B.Sc., P.Geo.

APPENDIX 1: TABLE OF CLAIMS

Claim Details for Hess River Claims Block

District	Grant Number	Reg. Type	Claim Name	Claim No.	Staking Date	Claim Expiry Date	NTS Map Number
Mayo	YF43939	Quartz	HR	1	01/08/2012	31/08/2013	105007
Mayo	YF43940	Quartz	HR	2	01/08/2012	31/08/2013	105007
Mayo	YF43941	Quartz	HR	3	01/08/2012	31/08/2013	105007
Mayo	YF43942	Quartz	HR	4	01/08/2012	31/08/2013	105007
Mayo	YF43943	Quartz	HR	5	01/08/2012	31/08/2013	105007
Mayo	YF43944	Quartz	HR	6	01/08/2012	31/08/2013	105007
Mayo	YF43945	Quartz	HR	7	01/08/2012	31/08/2013	105007
Mayo	YF43946	Quartz	HR	8	01/08/2012	31/08/2013	105007
Mayo	YF43947	Quartz	HR	9	01/08/2012	31/08/2013	105007
Mayo	YF43948	Quartz	HR	10	01/08/2012	31/08/2013	105007
Mayo	YF43949	Quartz	HR	11	01/08/2012	31/08/2013	105007
Mayo	YF43950	Quartz	HR	12	01/08/2012	31/08/2013	105007
Mayo	YF43951	Quartz	HR	13	01/08/2012	31/08/2013	105007
Mayo	YF43952	Quartz	HR	14	01/08/2012	31/08/2013	105007
Mayo	YF43953	Quartz	HR	15	01/08/2012	31/08/2013	105007
Mayo	YF43954	Quartz	HR	16	01/08/2012	31/08/2013	105007
Mayo	YF43955	Quartz	HR	17	01/08/2012	31/08/2013	105007
Mayo	YF43956	Quartz	HR	18	01/08/2012	31/08/2013	105007
Mayo	YF43957	Quartz	HR	19	01/08/2012	31/08/2013	105007
Mayo	YF43958	Quartz	HR	20	01/08/2012	31/08/2013	105007

APPENDIX 2: SAMPLE LOCATIONS

Locations of the samples in Hess River Claims Block

Sample ID	Type	Latitude	Longitude	Datum	Year
KA1977	Heavy Mineral	63.40522	-130.769	NAD83	2012
KA3390	Heavy Mineral	63.41064	-130.779	NAD83	2012
KA3391	Heavy Mineral	63.411928	-130.774	NAD83	2012
KA3826	Heavy Mineral	63.402445	-130.769	NAD83	2013
KAR00135	Rock	63.402172	-130.769	NAD83	2013
KAR00136	Rock	63.401868	-130.769	NAD83	2013
KAR00137	Rock	63.401758	-130.769	NAD83	2013
KAR00138	Rock	63.401501	-130.769	NAD83	2013
KAR00139	Rock	63.401443	-130.769	NAD83	2013

APPENDIX 3: ASSAY RESULTS

Sample Name	Analysis and Fraction	Au (ppb)	Ag (ppm)	As (ppm)	Ba (ppm)	Br (ppm)	Ca (%)	Co (ppm)	Cr (ppm)
KA1977	INAA -20+32 HP	-5	-5	206	-200	145	6.3	62.3	176
KA3390	INAA -20+32 HP	-5	-5	288	-200	379	-1	111	318
KA3391	INAA -20+32 HP	-5	-5	396	-200	525	-1	114	475

Sample Name	Analysis and Fraction	Cs (ppm)	Fe (%)	Hf (ppm)	Hg (ppm)	Ir (ppm)	Mo (ppm)	Na (%)	Ni (ppm)
KA1977	INAA -20+32 HP	-2	16.9	-1	-5	-50	-20	0.357	-200
KA3390	INAA -20+32 HP	-2	34.8	-1	-5	-50	-20	0.251	-200
KA3391	INAA -20+32 HP	-2	32.4	-1	-5	-50	-20	0.223	-200

Sample Name	Analysis and Fraction	Rb (ppm)	Sb (ppm)	Sc (ppm)	Se (ppm)	Sr (%)	Ta (ppm)	Th (ppm)	U (ppm)
KA1977	INAA -20+32 HP	-50	6.72	32.9	-20	-0.2	-1	12.3	-0.5
KA3390	INAA -20+32 HP	-50	40.7	52	-20	-0.2	-1	690	15.9
KA3391	INAA -20+32 HP	-50	54.8	44	-20	-0.2	-1	525	-0.5

Sample Name	Analysis and Fraction	W (ppm)	Zn (ppm)	La (ppm)	Ce (ppm)	Nd (ppm)	Sm (ppm)	Eu (ppm)	Tb (ppm)
KA1977	INAA -20+32 HP	-4	251	64.4	142	54.6	11.3	1.68	-2
KA3390	INAA -20+32 HP	-4	1110	1410	2740	1230	85.9	4.06	-2
KA3391	INAA -20+32 HP	-4	839	1690	3020	973	96.4	5.04	-2

Sample Name	Analysis and Fraction	Yb (ppm)	Lu (ppm)	Cert #
KA1977	INAA -20+32 HP	3.29	0.525	#PW12MA45002535
KA3390	INAA -20+32 HP	-0.2	0.385	#PW12MA45002535
KA3391	INAA -20+32 HP	-0.2	0.25	#PW12MA45002535

Sample Name	Analysis and Fraction types	Au (ppb)	Ag (ppm)	As (ppm)	Ba (ppm)	Br (ppm)	Ca (%)	Co (ppm)	Cr (ppm)
KA1977	INAA -60 HN	16000	-5	166	8400	-5	-9	26.4	241
KA3390	INAA -60 HN	3310	-5	28.7	195000	85.3	-1	-5	456
KA3391	INAA -60 HN	-5	-5	138	93800	81.7	-1	-5	490

Sample Name	Analysis and Fraction types	Cs (ppm)	Fe (%)	Hf (ppm)	Hg (ppm)	Ir (ppm)	Mo (ppm)	Na (%)	Ni (ppm)
KA1977	INAA -60 HN	-2	6.5	308	-5	-50	-46	0.462	-200
KA3390	INAA -60 HN	-2	1.4	623	-5	-50	-41	-0.05	-200
KA3391	INAA -60 HN	-2	-0.02	630	-5	-50	-20	-0.05	-200

Sample Name	Analysis and Fraction types	Rb (ppm)	Sb (ppm)	Sc (ppm)	Se (ppm)	Sr (%)	Ta (ppm)	Th (ppm)	U (ppm)
KA1977	INAA -60 HN	-50	10.3	34.4	-20	-0.2	28.8	339	56.8
KA3390	INAA -60 HN	-50	6.47	24.5	-20	-0.2	-1	191	135
KA3391	INAA -60 HN	-50	72.1	30.8	-20	-0.2	-1	264	175

Sample Name	Analysis and Fraction types	W (ppm)	Zn (ppm)	La (ppm)	Ce (ppm)	Nd (ppm)	Sm (ppm)	Eu (ppm)	Tb (ppm)
KA1977	INAA -60 HN	1730	-200	3440	6850	2680	458	69.2	21
KA3390	INAA -60 HN	867	-200	1790	3640	1540	167	33.7	13.8
KA3391	INAA -60 HN	1620	-200	2170	4520	1820	272	48.2	-2

Sample Name	Analysis and Fraction types	Yb (ppm)	Lu (ppm)	Cert #
KA1977	INAA -60 HN	43.6	5.88	#PW12MA45002535
KA3390	INAA -60 HN	42.2	2.18	#PW12MA45002535
KA3391	INAA -60 HN	69.1	8.21	#PW12MA45002535

Sample Name	Analysis and Fraction	Cu (ppm)	Ni (ppm)	Cr (ppm)	Co (ppm)	Se (ppm)	Zn (ppm)	Pb (ppm)	Cd (ppm)
KA1977	UT7 -20+32 HP	872	280	290	108	65.5	2030	106	22
KA3390	UT7 -20+32 HP	257	250	250	93.7	23.9	1430	78.7	19
KA3391	UT7 -20+32 HP	577	240	210	115	42	1380	130	14

Sample Name	Analysis and Fraction	As (ppm)	Sn (ppm)	Sb (ppm)	Mo (ppm)	B (ppm)	Li (ppm)	Be (ppm)	V (ppm)
KA1977	UT7 -20+32 HP	529	6.2	91	120	20	8	4	235
KA3390	UT7 -20+32 HP	255	7.6	34	50	130	13	4	244
KA3391	UT7 -20+32 HP	339	3.6	60	80	30	19	3	214

Sample Name	Analysis and Fraction	Mn (ppm)	Ga (ppm)	Ge (ppm)	Rb (ppm)	Sr (ppm)	Y (ppm)	Nb (ppm)	In (ppm)
KA1977	UT7 -20+32 HP	3590	6.9	11.3	11.7	49	53.7	11.4	-0.2
KA3390	UT7 -20+32 HP	4880	28.1	35	18.7	69	139	28.6	0.3
KA3391	UT7 -20+32 HP	3630	25.3	32.7	14.2	63	110	13.5	0.2

Sample Name	Analysis and Fraction	Te (ppm)	Cs (ppm)	Ba (ppm)	La (ppm)	Ce (ppm)	Pr (ppm)	Nd (ppm)	Sm (ppm)
KA1977	UT7 -20+32 HP	-6	1.5	1390	100	185	22.7	91.2	17.1
KA3390	UT7 -20+32 HP	-6	1.4	641	1680	3360	381	1170	128
KA3391	UT7 -20+32 HP	-6	1.2	348	1440	2880	304	920	97.8

Sample Name	Analysis and Fraction	Eu (ppm)	Gd (ppm)	Tb (ppm)	Dy (ppm)	Ho (ppm)	Er (ppm)	Tm (ppm)	Yb (ppm)
KA1977	UT7 -20+32 HP	2.6	13	1.4	8.6	1.6	4.8	0.7	4.2
KA3390	UT7 -20+32 HP	8.3	80.3	7	28.5	5.1	14.9	1.7	8.5
KA3391	UT7 -20+32 HP	6.5	62.5	5.2	21.1	3.9	11.8	1.4	6.9

Sample Name	Analysis and Fraction types	Hf (ppm)	Ta (ppm)	W (ppm)	Tl (ppm)	Bi (ppm)	Th (ppm)	U (ppm)	Al (%)
KA1977	UT7 -20+32 HP	-10	1.1	2.9	0.6	-2	28.9	9.1	1.46
KA3390	UT7 -20+32 HP	10	1.8	-0.7	0.2	-2	653	10.9	2.79
KA3391	UT7 -20+32 HP	-10	1.5	-0.7	0.3	-2	548	12.2	2.3

Sample Name	Analysis and Fraction types	Ca (%)	Fe (%)	K (%)	Mg (%)	P (%)	S (%)	Si (%)	Ti (%)
KA1977	UT7 -20+32 HP	0.69	46.6	0.3	0.48	0.27	0.45	4.67	0.16
KA3390	UT7 -20+32 HP	3.71	33.7	0.5	2.18	0.197	0.34	10.3	0.39
KA3391	UT7 -20+32 HP	3.09	36.6	0.4	1.97	0.219	0.32	8.8	0.32

Sample Name	CERT #
KA1977	5102-UT7
KA3390	PW12MA45002535
KA3391	PW12MA45002535