


LEGEND

Map Projection:

Projection: Universal Transverse Mercator
Central Meridian: 219 Zone 7N
Datum: WGS 84

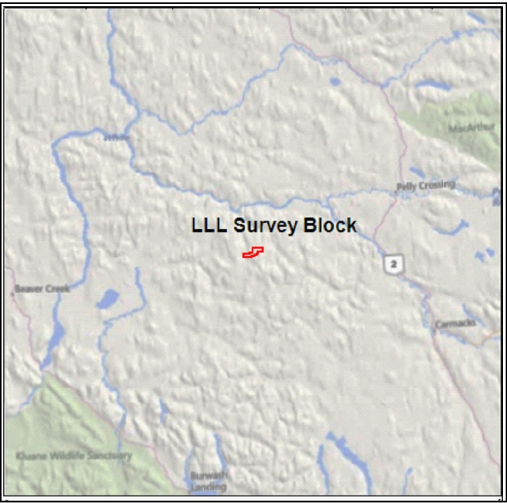

Survey Dates: March 30, 2015
Survey Base: Minto Airstrip, Yukon
Helicopter Type: Eurocopter AS350
Registration: C-GOHK
Survey Technology: Magnetic and Radiometric survey.

SURVEY PARAMETERS:

Helicopter: 35.0 meters
Magnetometer: 35.0 meters
Radiometric: 35.0 meters
Actual Mean Terrain Clearance: 35.2 meters


LLL Survey Block

Survey Line Spacing: 100 meters
Survey Line Direction: 090°/270°
Tie Line Spacing: 900 meters
Tie Line Direction: 000°/180°

AIRBORNE SYSTEMS:

Scintrex CS-3 Magnetometer Sensor
Configuration: Stinger with 3 axis compensation
Sample Rate: 10 Hz
Sensitivity: 0.01 nT

Gamma Ray Spectrometer
Pico Envirotec GRS-10 Gamma Spectrometer
8.4 litres of NaI(Tl) synthetic "downward looking" crystals
Sample Rate: 1 Hz






Archer, Cathro & Associates (1981) Limited

Overview Map

LLL Survey Block
Actual Flight Lines
Created By: Precision GeoSurveys Inc.
April 7, 2015




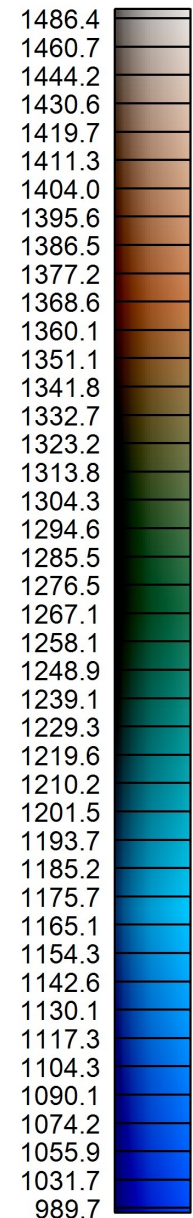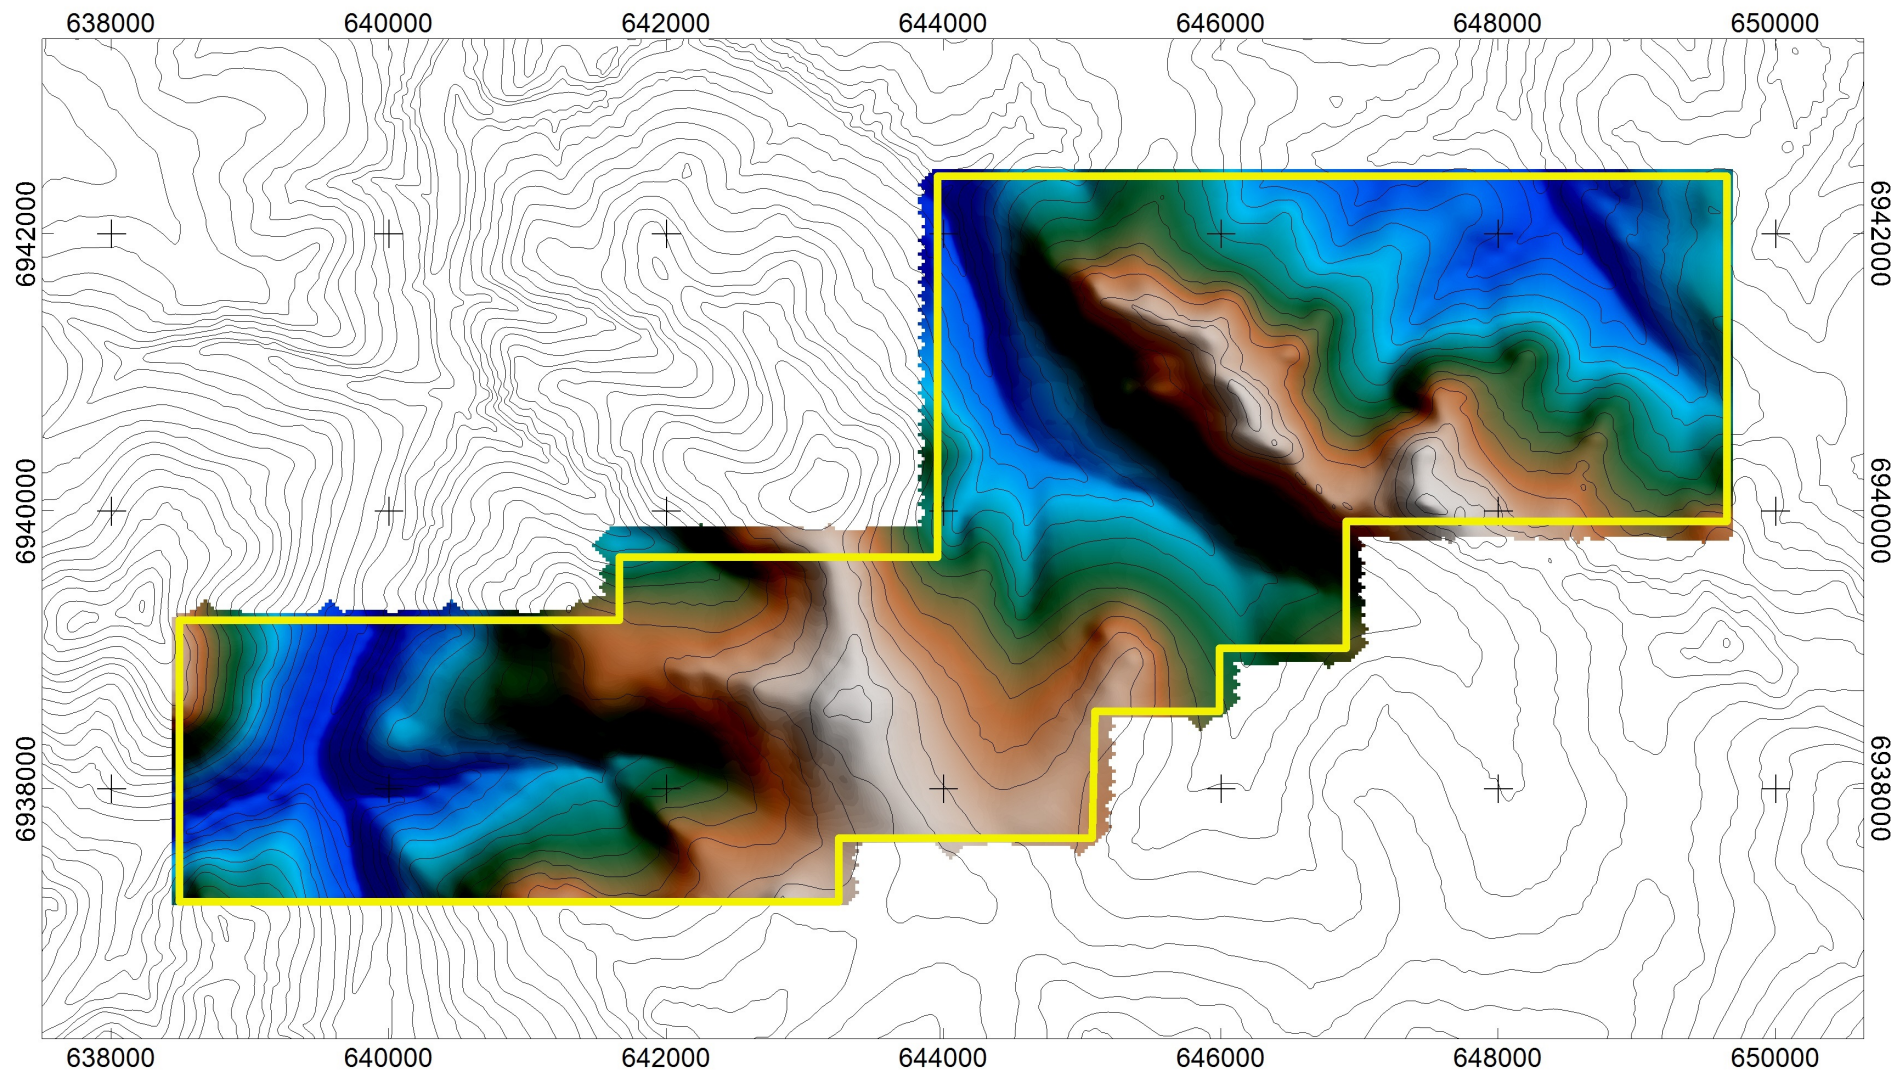

DTM (m)

LEGEND
Map Projection:

Projection: Universal Transverse Mercator
Central Meridian: 219 Zone 7N
Datum: WGS 84

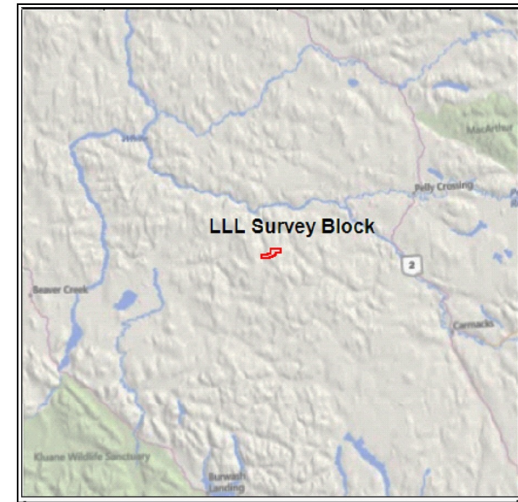

Survey Dates: March 30, 2015
Survey Base: Minto Airstrip, Yukon
Helicopter Type: Eurocopter AS350
Registration: C-GOHK
Survey Technology: Magnetic and Radiometric survey.

SURVEY PARAMETERS:

Helicopter: 35.0 meters
Magnetometer: 35.0 meters
Radiometric: 35.0 meters
Actual Mean Terrain Clearance: 35.2 meters

LLL Survey Block


Survey Line Spacing: 100 meters
Survey Line Direction: 090°/270°
Tie Line Spacing: 900 meters
Tie Line Direction: 000°/180°

AIRBORNE SYSTEMS:

Scintrex CS-3 Magnetometer Sensor
Configuration: Stinger with 3 axis compensation
Sample Rate: 10 Hz
Sensitivity: 0.01 nT

Gamma Ray Spectrometer

Pico Envirotec GRS-10 Gamma Spectrometer
8.4 litres of NaI(Tl) synthetic "downward looking" crystals
Sample Rate: 1 Hz






Archer, Cathro & Associates (1981) Limited Overview Map

LLL Survey Block
Digital Terrain Model
Created By: Precision GeoSurveys Inc.
April 7, 2015




DTM

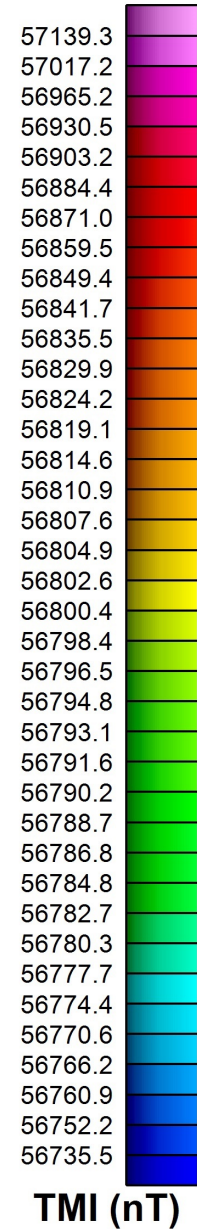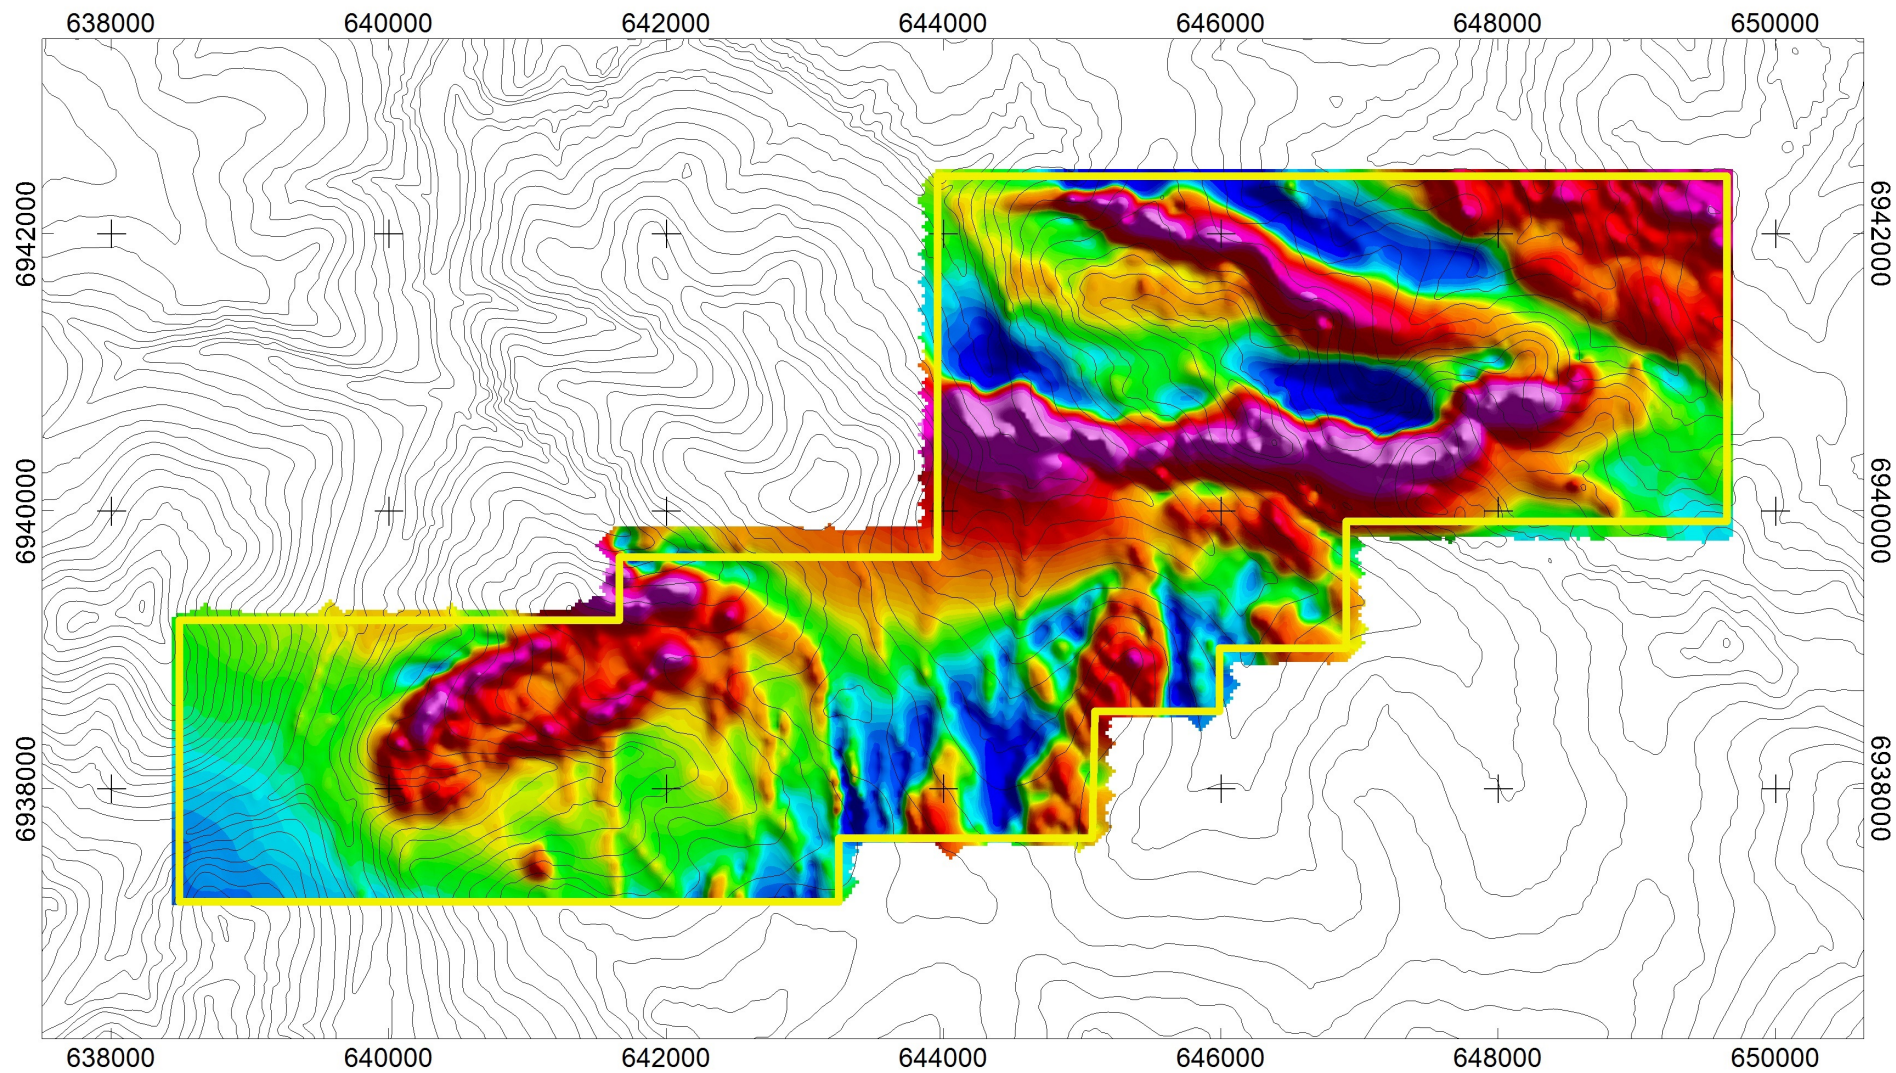

LEGEND

Map Projection:

Projection: Universal Transverse Mercator
Central Meridian: 219 Zone 7N
Datum: WGS 84

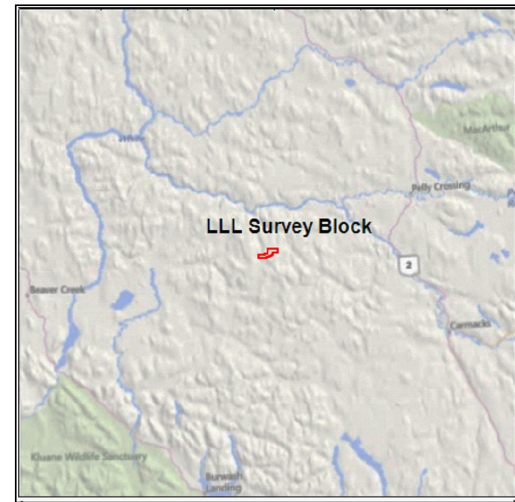

Survey Dates: March 30, 2015
Survey Base: Minto Airstrip, Yukon
Helicopter Type: Eurocopter AS350
Registration: C-GOHK
Survey Technology: Magnetic and Radiometric survey.

SURVEY PARAMETERS:

Helicopter: 35.0 meters
Magnetometer: 35.0 meters
Radiometric: 35.0 meters
Actual Mean Terrain Clearance: 35.2 meters

LLL Survey Block


Survey Line Spacing: 100 meters
Survey Line Direction: 090°/270°
Tie Line Spacing: 900 meters
Tie Line Direction: 000°/180°

AIRBORNE SYSTEMS:

Scintrex CS-3 Magnetometer Sensor
Configuration: Stinger with 3 axis compensation
Sample Rate: 10 Hz
Sensitivity: 0.01 nT

Gamma Ray Spectrometer

Pico Envirotec GRS-10 Gamma Spectrometer
8.4 litres of NaI(Tl) synthetic "downward looking" crystals
Sample Rate: 1 Hz






Archer, Cathro & Associates (1981) Limited

Magnetic Map

LLL Survey Block
Total Magnetic Intensity
Created By: Precision GeoSurveys Inc.
April 7, 2015




TMI

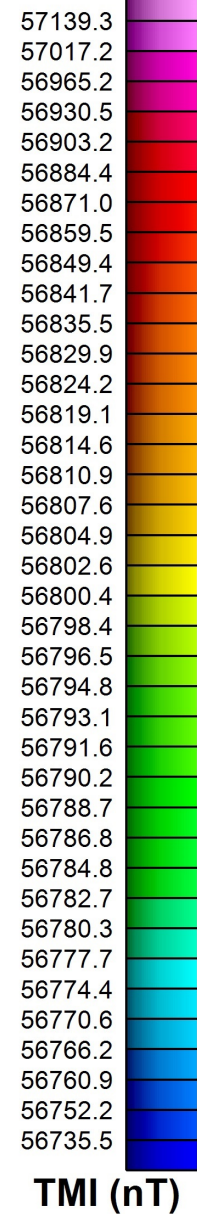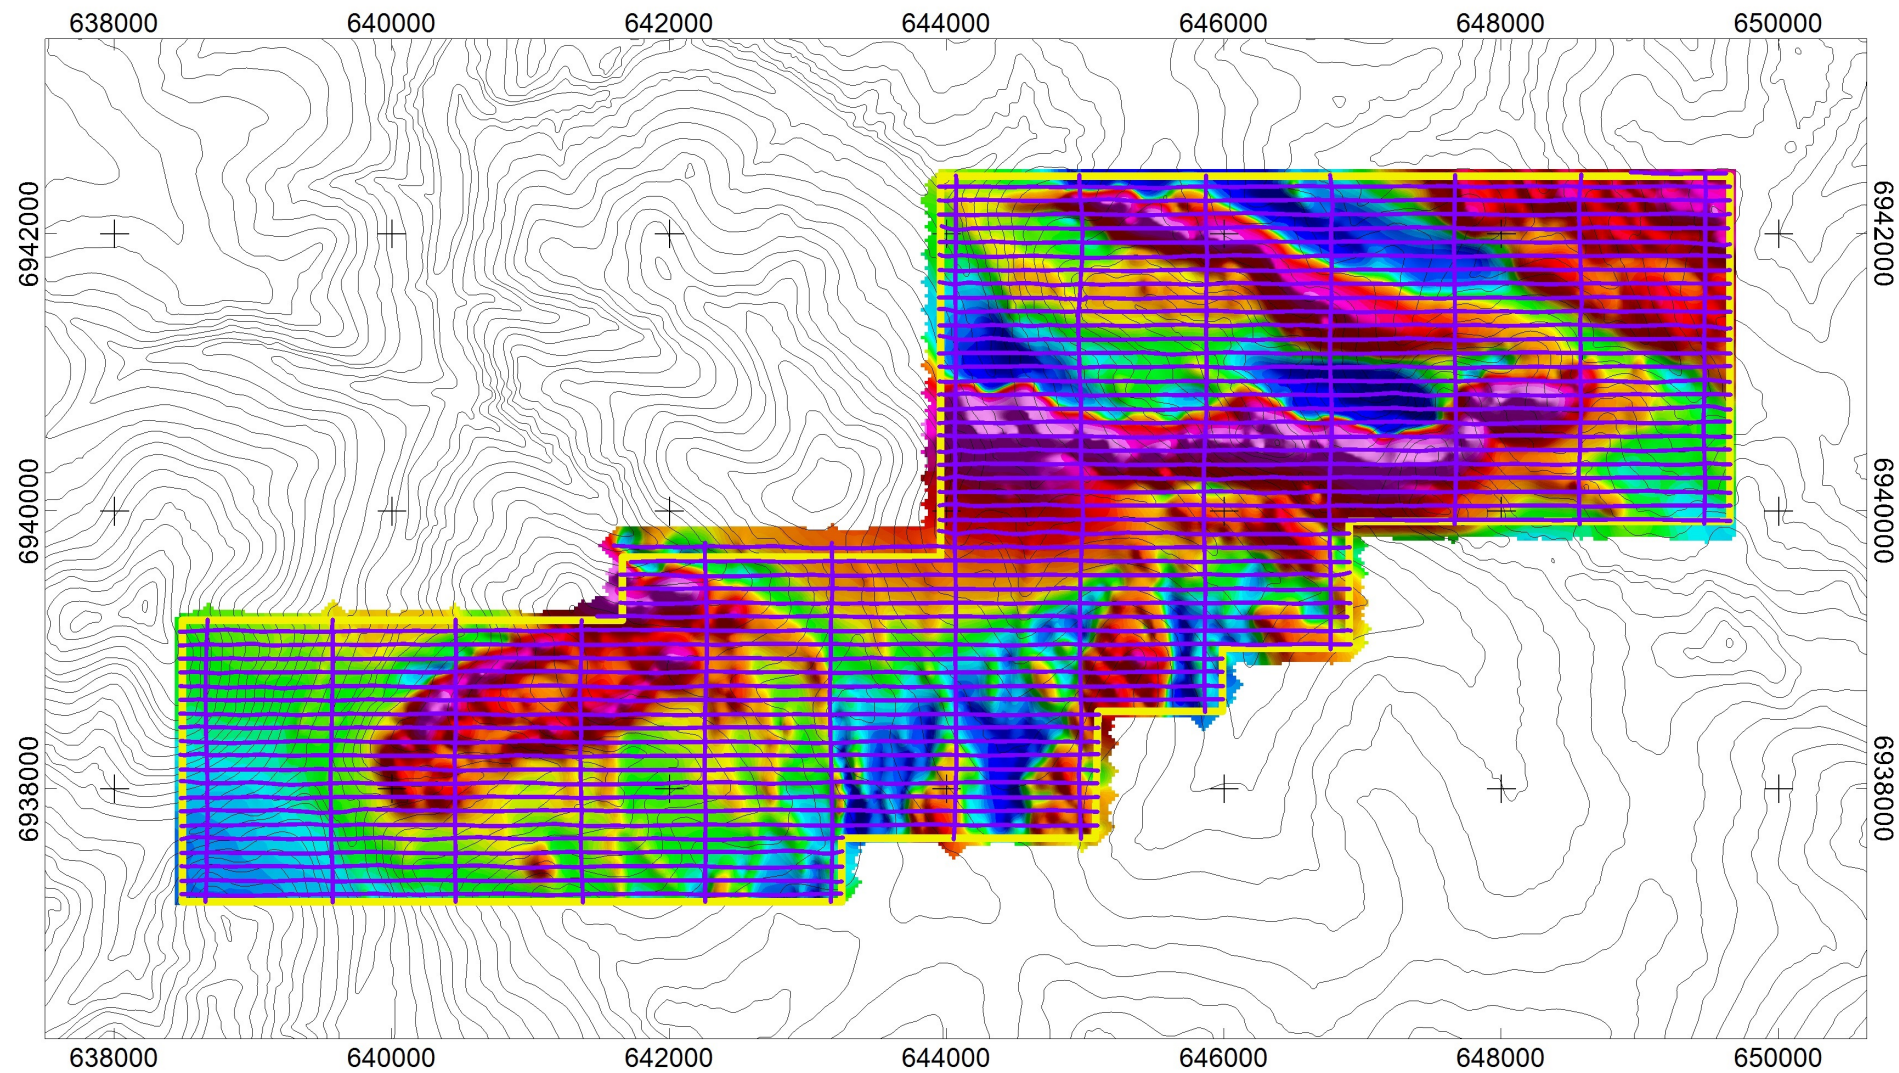

LEGEND

Map Projection:

Projection: Universal Transverse Mercator
Central Meridian: 219 Zone 7N
Datum: WGS 84

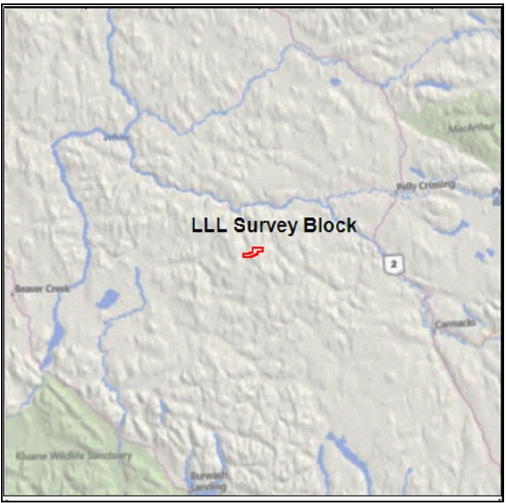

Survey Dates: March 30, 2015
Survey Base: Minto Airstrip, Yukon
Helicopter Type: Eurocopter AS350
Registration: C-GOJK
Survey Technology: Magnetic and Radiometric survey.

SURVEY PARAMETERS:

Helicopter: 35.0 meters
Magnetometer: 35.0 meters
Radiometric: 35.0 meters
Actual Mean Terrain Clearance: 35.2 meters

LLL Survey Block

Survey Line Spacing: 100 meters
Survey Line Direction: 090°/270°
Tie Line Spacing: 900 meters
Tie Line Direction: 000°/180°


AIRBORNE SYSTEMS:

Scintrex CS-3 Magnetometer Sensor

Configuration: Stinger with 3 axis compensation
Sample Rate: 10 Hz
Sensitivity: 0.01 nT

Gamma Ray Spectrometer

Pico Envirotec GRS-10 Gamma Spectrometer
8.4 litres of NaI(Tl) synthetic "downward looking" crystals
Sample Rate: 1 Hz






Archer, Cathro & Associates (1981) Limited

Magnetic Map

LLL Survey Block
Total Magnetic Intensity with Flight Lines
Created By: Precision GeoSurveys Inc.
April 7, 2015




TMI_wFL

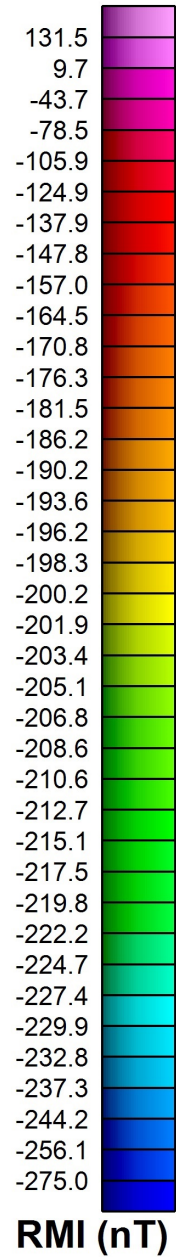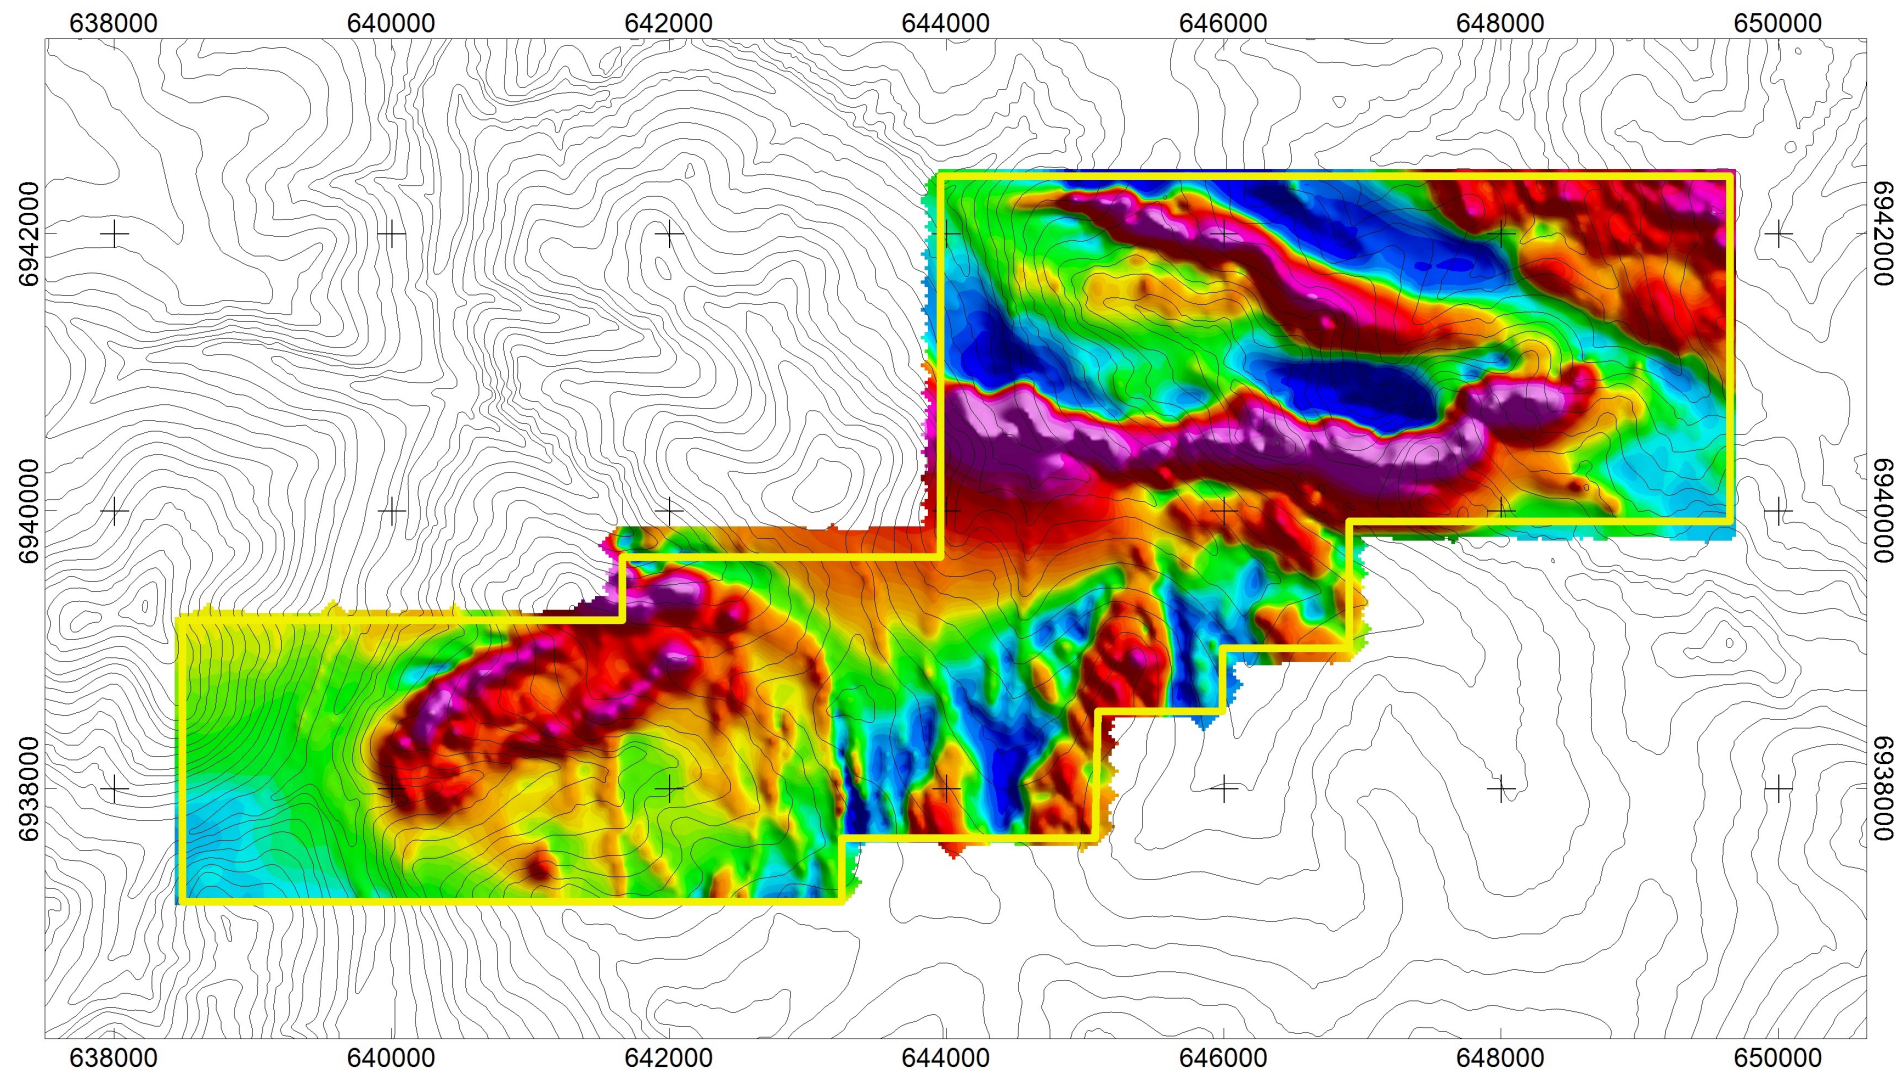

LEGEND

Map Projection:

Projection: Universal Transverse Mercator
Central Meridian: 219 Zone 7N
Datum: WGS 84

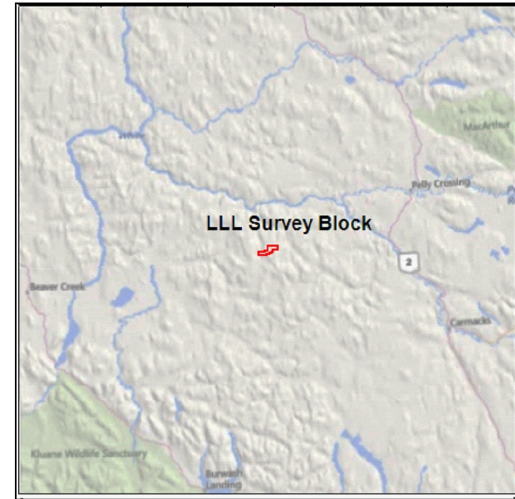

Survey Dates: March 30, 2015
Survey Base: Minto Airstrip, Yukon
Helicopter Type: Eurocopter AS350
Registration: C-GOJK
Survey Technology: Magnetic and Radiometric survey.

SURVEY PARAMETERS:

Helicopter: 35.0 meters
Magnetometer: 35.0 meters
Radiometric: 35.0 meters
Actual Mean Terrain Clearance: 35.2 meters

LLL Survey Block


Survey Line Spacing: 100 meters
Survey Line Direction: 090°/270°
Tie Line Spacing: 900 meters
Tie Line Direction: 000°/180°

AIRBORNE SYSTEMS:

Scintrex CS-3 Magnetometer Sensor
Configuration: Stinger with 3 axis compensation
Sample Rate: 10 Hz
Sensitivity: 0.01 nT

Gamma Ray Spectrometer

Pico Envirotec GRS-10 Gamma Spectrometer
8.4 litres of NaI(Tl) synthetic "downward looking" crystals
Sample Rate: 1 Hz






Archer, Cathro & Associates (1981) Limited Magnetic Map

LLL Survey Block
Residual Magnetic Intensity
Created By: Precision GeoSurveys Inc.
April 7, 2015

Precision
GeoSurveys

RMI

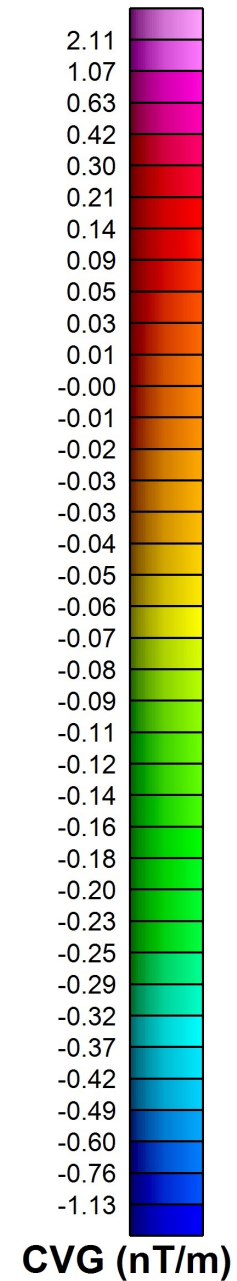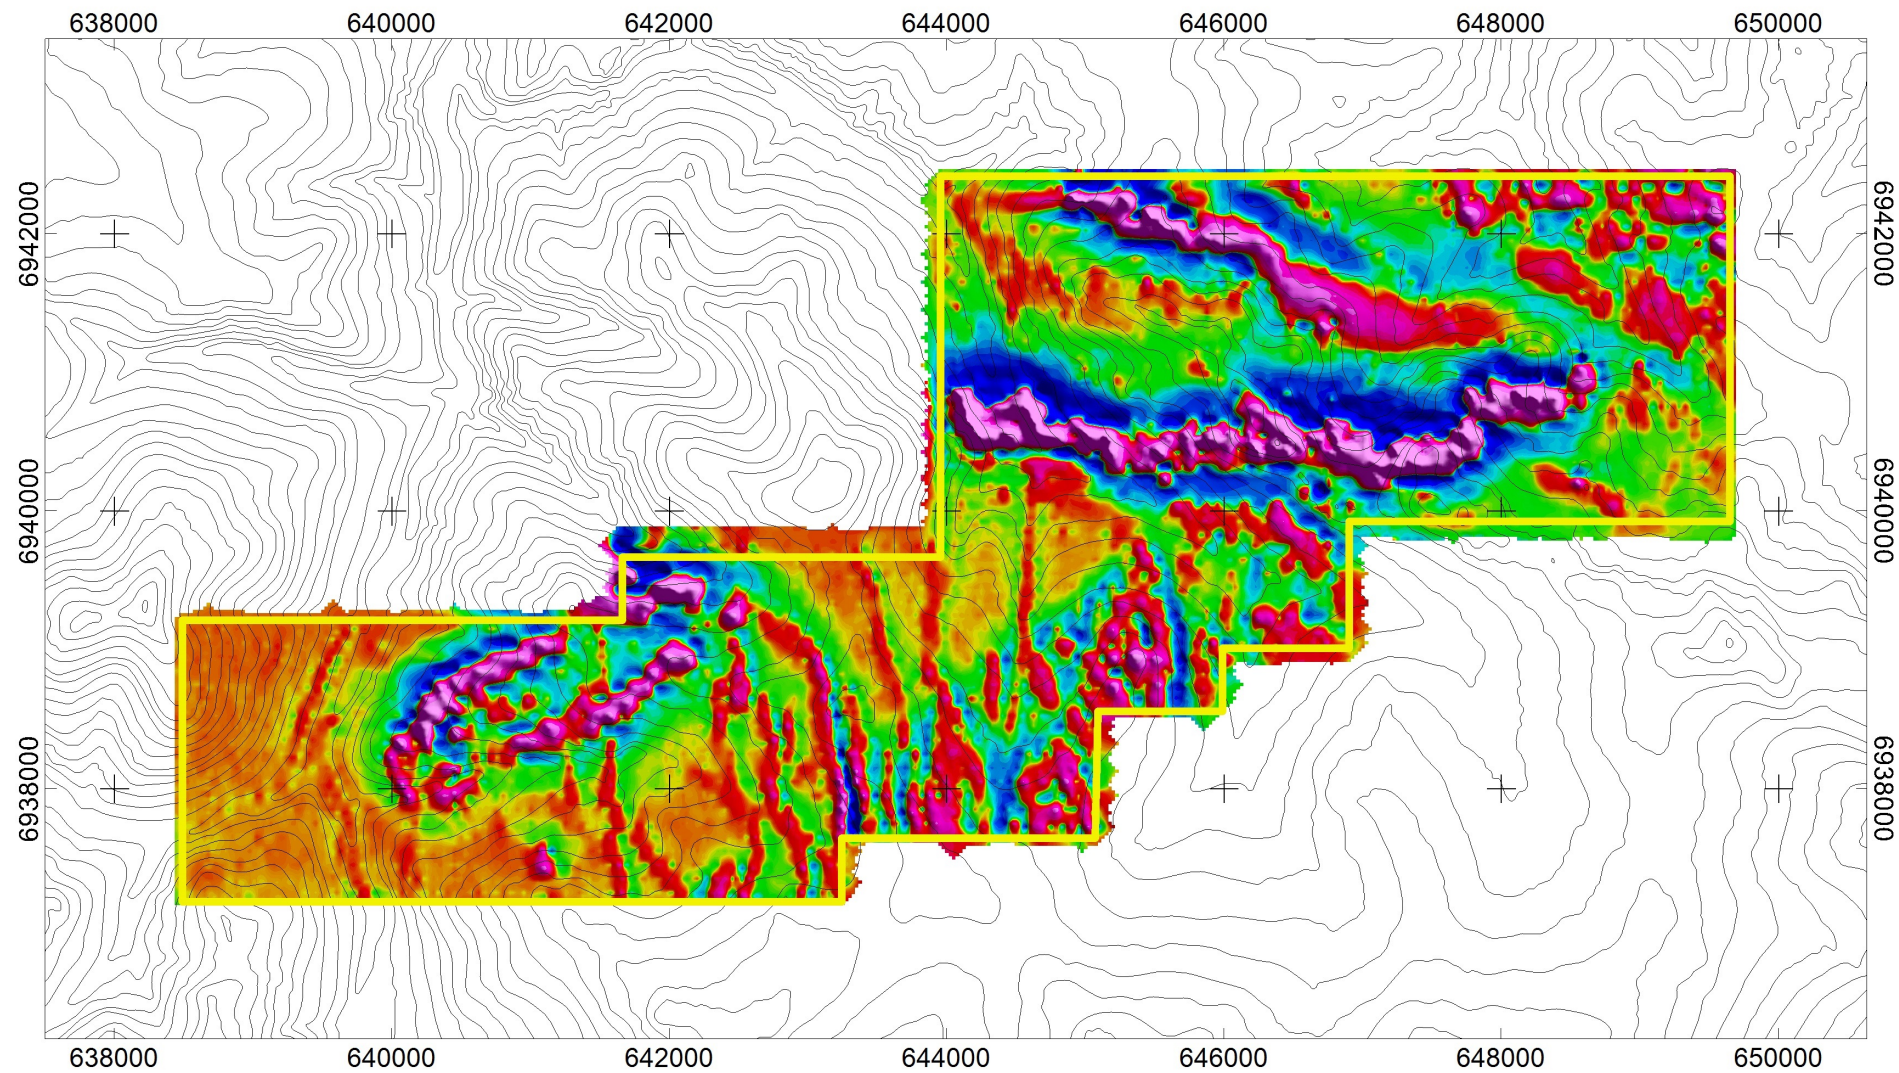


CVG (nT/m)

LEGEND

Map Projection:

Projection: Universal Transverse Mercator
Central Meridian: 219 Zone 7N
Datum: WGS 84

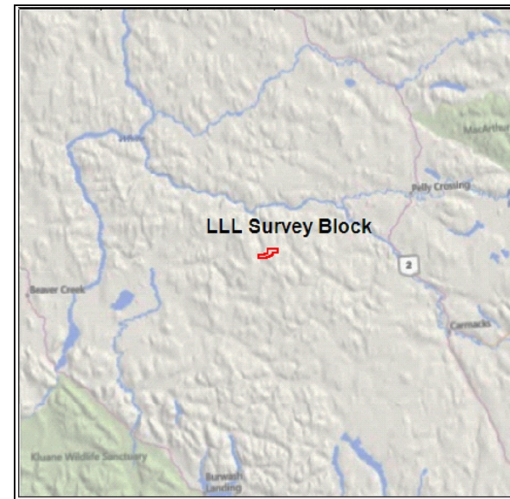

Survey Dates: March 30, 2015
Survey Base: Minto Airstrip, Yukon
Helicopter Type: Eurocopter AS350
Registration: C-GOHK
Survey Technology: Magnetic and Radiometric survey.

SURVEY PARAMETERS:

Helicopter: 35.0 meters
Magnetometer: 35.0 meters
Radiometric: 35.0 meters
Actual Mean Terrain Clearance: 35.2 meters

LLL Survey Block


Survey Line Spacing: 100 meters
Survey Line Direction: 090°/270°
Tie Line Spacing: 900 meters
Tie Line Direction: 000°/180°

AIRBORNE SYSTEMS:

Scintrex CS-3 Magnetometer Sensor
Configuration: Stinger with 3 axis compensation
Sample Rate: 10 Hz
Sensitivity: 0.01 nT

Gamma Ray Spectrometer

Pico Envirotec GRS-10 Gamma Spectrometer
8.4 litres of NaI(Tl) synthetic "downward looking" crystals
Sample Rate: 1 Hz



Archer, Cathro & Associates (1981) Limited

Magnetic Map

LLL Survey Block
Calculated Vertical Gradient
Created By: Precision GeoSurveys Inc.
April 7, 2015

Precision
GeoSurveys

CVG