



Contours

Level 1 :	5 %
Level 2 :	15 %
Level 3 :	30 %

Technical Specifications

Line azimuth :	N090
Line spacing :	100 m
Station spacing :	25 m
Instrument :	EM-16, Geonics
Operators :	M. Huber & J. Judson
VLF Antenna # 1 :	NPM Lualualei, Hawaii
Frequency :	21.4 kHz
Distance :	4900 km
Azimuth :	N206
VLF Antenna # 2 :	NLK Seattle, Washington
Frequency :	24.8 kHz
Distance :	2040 km
Azimuth :	N142

Fraser-Filtered In-Phase (%)

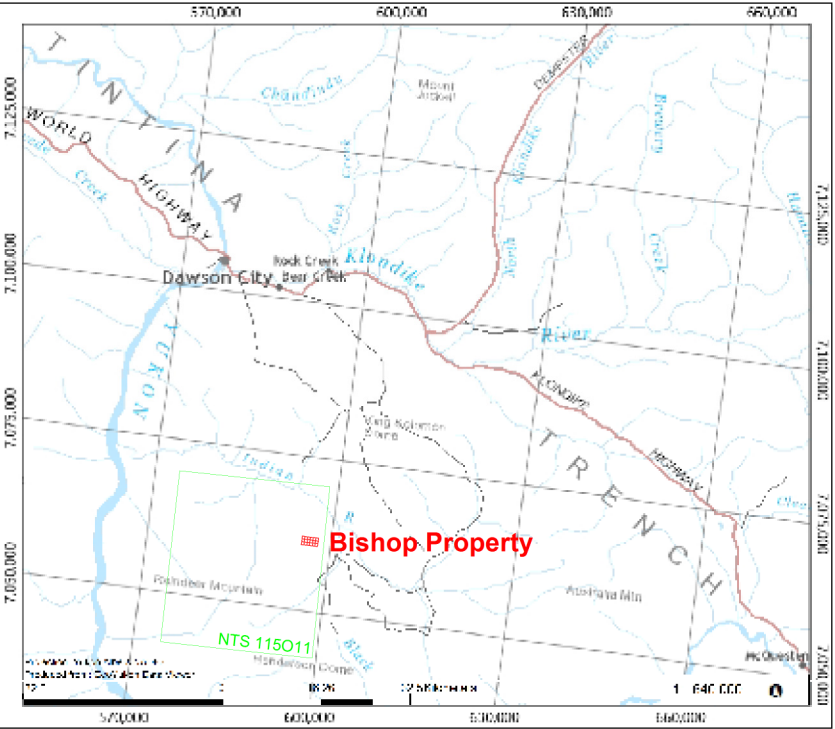

TAKU GOLD CORPORATION
Bishop Project, Yukon

**FRASER FILTERED VLF-EM IN-PHASE
CONTOURS, NPM HAWAII**

VLF-EM SURVEY

Surveyed by : Breakaway Exploration Management Inc.
August 2016
Compiled by : Joël Dubé, P. Eng.
May 2017

Dynamic
Discovery
Geoscience