


- Profiles**
- In-Phase
Profile scale : 2 % = 1 mm
Base level : 0 %
 - Out-of-Phase
Profile scale : 2 % = 1 mm
Base level : 0 %

Technical Specifications

Line azimuth : N090
Line spacing : 100 m
Station spacing : 25 m
Instrument : EM-16, Geonics
Operators : M. Huber & J. Judson
VLF Antenna # 1 : NPM Lualualei, Hawaii
Frequency : 21.4 kHz
Distance : 4900 km
Azimuth : N206
VLF Antenna # 2 : NLK Seattle, Washington
Frequency : 24.8 kHz
Distance : 2040 km
Azimuth : N142

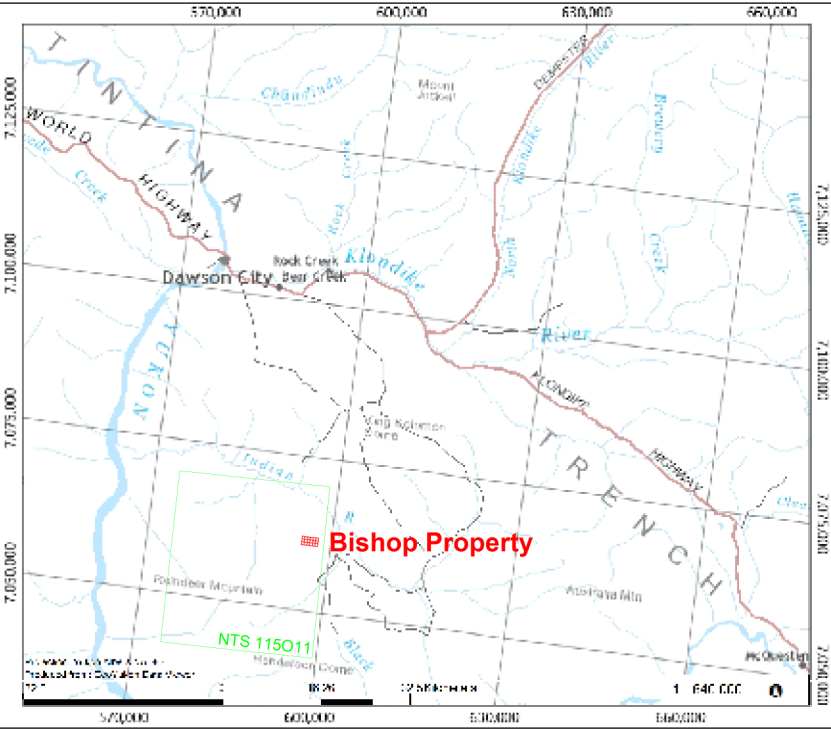

TAKU GOLD CORPORATION
Bishop Project, Yukon

**VLF-EM IN-PHASE AND OUT-OF-PHASE
PROFILES, NPM HAWAII**

VLF-EM SURVEY

Surveyed by : Breakaway Exploration Management Inc.
August 2016
Compiled by : Joël Dubé, P. Eng.
May 2017

Dynamic
Discovery
Geoscience

