Silver Quest Resources Ltd.

2010 GEOLOGICAL, GEOCHEMICAL, GEOPHYSICAL AND DIAMOND DRILLING REPORT ON THE BOULEVARD PROPERTY, YUKON

Volume I – Text

Located in the North Dawson Range
Whitehorse Mining District
NTS 115J/13, 115J/14
62˚ 49' N Latitude; 139˚ 31' W Longitude
UTM 6,966,030N, 575,600E (NAD 83 Zone 7)
Work conducted May 21 to Sept. 29, 2010 on the following claims:

AVE 1-4	SOL 1-84	XT 361-378
BDW 1-104	TIGER 1-8	XY 1-21
BLVD 1-202	XT 235-244	XY 23-54
DRIVE 1-32	XT 269-286	XY 311-315
GRT 1-36	XT 301-328	XY 56-300
HAN 1-8	XT 331-358	XZ 1-32

-prepared for-

SILVER QUEST RESOURCES LTD.
Suite 1410, 650 West Georgia Street
Vancouver, British Columbia, Canada V6B 4N8

-prepared by-

Darcy Baker, Ph.D., P.Geo.
EQUITY EXPLORATION CONSULTANTS LTD.
Suite 200, 900 West Hastings Street
Vancouver, British Columbia, Canada, V6C 1E5

February 11, 2011

EQUITY

TABLE OF CONTENTS

TABLE OF CONTENTS 1
TABLES 2
CHARTS 2
FIGURES 2
APPENDICES 3
1.0 SUMMARY 4
2.0 INTRODUCTION 5
3.0 RELIANCE ON OTHER EXPERTS 5
4.0 PROPERTY DESCRIPTION AND LOCATION 5
5.0 ACCESSIBILITY, CLIMATE, LOCAL RESOURCES, INFRASTRUCTURE, PHYSIOGRAPHY 6
6.0 HISTORY 8
6.1 2010 Exploration Program 9
7.0 GEOLOGICAL SETTING 9
7.1 Regional Geology 9
7.2 Regional Metallogeny 10
7.3 Property Geology 12
7.4 Property Mineralization 12
7.5 Mineralization in Drilling 12
8.0 GEOCHEMISTRY 15
8.1 Silt Geochemistry 15
8.2 Soil Geochemistry 15
8.2.1 Geochemical Variation between Soil Horizons 15
8.2.2 Identifying Poor Quality Soil Samples 16
8.2.3 Anomaly Determination 17
8.2.4 Significant Results 18
8.2.4.1 Toni Tiger / Boulevard 18
8.2.4.2 Wilshire 18
8.2.4.3 Independence 18
8.2.5 X-ray Florescence (XRF) Soil Geochemistry 19
8.2.5.1 Sunset trend 22
8.2.5.2 Vegas trend 22
8.2.5.3 Hollywood trend 22
8.2.6 ICP versus XRF analyses 22
8.3 Rock Geochemistry 23
9.0 GEOPHYSICS 23
10.0 TRENCHING 23
11.0 DIAMOND DRILLING 25
11.1 Drill Holes BV10-08 and BV10-09 26
11.2 Drill Holes BV10-10, BV10-11 and BV10-20 27
11.3 Drill Holes BV10-12 and BV10-13 27
11.4 Drill Holes BV10-14 and BV10-19 27
11.5 Drill Hole BV10-15 27
11.6 Drill Hole BV10-16 28
11.7 Drill Holes BV10-17 and BV10-18 28
11.8 Drill Hole BV10-21 28
11.9 Drill Hole BV10-22 and BV10-23 28

11.10 Drill Holes BV10-24 and BV10-25 28
11.11 Drill Hole BV10-26 28
11.12 Drill Hole BV10-27 29
12.0 DISCUSSION AND CONCLUSIONS 29
12.1 Drilling 29
12.2 Future Targeting 29
12.3 Recommendations 31
1.0 QUALITY ASSURANCE / QUALITY CONTROL i
1.1 Chain of Custody i
1.2 Blanks i
1.3 Analytical Accuracy: Standard Performance i
1.4 Analytical Precision: Duplicate Analysis ii
1.5 Conclusions v

TABLES

Table 1: Boulevard Property Claims 6
Table 2: Boulevard Exploration Programs 8
Table 3: Soil Horizon Sampled as Reported in Database 15
Table 4: Soil Threshold Values for Suspected A Horizon Samples 17
Table 5: Soil Geochemistry Percentiles for Boulevard Property 19
Table 6: Soil Geochemistry Correlation Matrix 19
Table 7: 2010 Diamond Drilling Location Data 25
Table 8: 2010 Drill Intercepts 26

CHARTS

Chart 1: Box and Whisker Plots of Soil Data by Soil Horizon Sampled 16
Chart 2: Soil Data Probability Plots 18
Chart 3: Log/log plots of XRF versus ICP analyses for As and Sb in soil 23
Chart 4: Boulevard Drill Intercepts Compared with Coffee Property Drill Intercepts 30

FIGURES

Figure 1: Boulevard Project Location Map 7
Figure 2: Boulevard Project Tenure ..... volume II
Figure 3: Boulevard Project Regional Geology 11
Figure 4: Boulevard Property Interpreted Geology and Drill Plan ..... volume II
Figure 5: Core photographs 14
Figure 6: Sample Locations ..... volume II
Figure 7a: Au Geochemistry ..... volume II
Figure 7b: As Geochemistry ..... volume II
Figure 7c: Sb Geochemistry ..... volume II
Figure 7d: Mo Geochemistry ..... volume II
Figure 7e: Bi Geochemistry ..... volume II
Figure 8: Ground Magnetic Map 24
Figure 9a: As XRF soil Geochemistry 20
Figure 9a: Sb XRF soil Geochemistry 21

Figure 10a: Drill Section BV10-08 & BV10-09.....volume II
Figure 10b: Drill Section BV10-10 & BV10-11 & BV10-20 .....volume II
Figure 10c: Drill Section BV10-12.....volume II
Figure 10d: Drill Section BV10-13.....volume II
Figure 10e: Drill Section BV10-14.....volume II
Figure 10f: Drill Section BV10-15.....volume II
Figure 10g: Drill Section BV10-16.....volume II
Figure 10h: Drill Section BV10-17 & BV10-18.....volume II
Figure 10i: Drill Section BV10-19.....volume II
Figure 10j: Drill Section BV10-21.....volume II
Figure 10k: Drill Section BV10-22 & BV10-23.....volume II
Figure 10l: Drill Section BV10-24.....volume II
Figure 10m: Drill Section BV10-25.....volume II
Figure 10n: Drill Section BV10-26.....volume II
Figure 10o: Drill Section BV10-27.....volume II

APPENDICES

Appendix A: Bibliography
Appendix B: Statement of Expenditures
Appendix C: Claim Data
Appendix D-1: Geochemical Certificates (Rock Samples)
Appendix D-2: Geochemical Certificates(Core Samples)
Appendix E: Rock Sample Descriptions
Appendix F: Drill Logs
Appendix G: Geophysical Logistical Report
Appendix H: Quality Control / Quality Assurance
Appendix I: Compact Disc (including soil certificates)
Appendix J: Geologist’s Certificate

1.0 SUMMARY

The Boulevard property is a gold prospect located in the White Gold district, Yukon which was discovered in 2006 from step-wise grassroots exploration including regional targeting, focused regional silt sampling, soil sampling, trenching and finally drilling in 2008 (seven shallow holes). After acquiring the project in mid-2009, Silver Quest Resources Ltd. ("Silver Quest") focused on advancing the property through additional drilling and surface geochemistry which is the focus of this report.

Silver Quest expanded the property to the west, north and south, expanded the detailed soil grid coverage and covered much of the rest of the property with reconnaissance soil lines. 20 drill holes (for 3006 m) were completed within the main Boulevard soil anomalies (Sunset, Vegas and Hollywood soil anomaly trends) beginning near the best drill results from 2008. Minor mapping and prospecting of the property was also completed.

Results from the drilling demonstrate that a moderately southwest-dipping, planar mineralized system exists below the Sunset and Vegas soil trends which are likely part of the same structure. Drilling beneath the Hollywood trend failed to encounter elevated gold values and, as such, this anomaly remains unexplained. The mineralized intervals are hosted by biotite-chlorite and lesser chlorite-biotite schist which are cut by undeformed (and therefore tectonically late), planar quartz-carbonate veins. This hydrothermal system is characterised by narrow (cm-scale) sericite alteration adjacent to veins and by the presence of rare sulphide phases including (in decreasing abundance) arsenopyrite, pyrite, stibnite and sphalerite. This mineralogy is consistent with elevated As-Sb and local Zn pathfinder metals in soil.

Gold-bearing drill intervals generally returned low values and much variability is apparent within the system. The best drill intervals returned in the 2010 drilling are 2.43 g/t Au over 6.43 m from the Vegas trend (hole BV10-23) and 1.65 g/t Au over 10.55 m from the Sunset trend (hole BV10-15). The broadest interval returned 0.64 g/t Au over 37.62 m (also from BV10-23). Follow-up drilling about 50 m away from the highest-grade intervals failed to return similar results indicating that vein density (and therefore gold grade) is erratic and difficult to predict.

Soil sampling across the property shows potential for further gold mineralization outside the Sunset and Vegas trends. A broad, poorly-defined trend of spotty Au-As-Sb soil anomalies occurs along a 20 km long trend, however, much of this trend only has widely-spaced soil coverage. Follow-up, more tightly spaced sampling is warranted over individual soil anomalies.

Drilling at the Boulevard failed to encounter high-grade mineralization. But, most holes (apart from those testing the Hollywood trend) did encounter elevated gold values associated with a tectonically late hydrothermal vein system. Compared with other mineral properties within the White Gold district (e.g. the Golden Saddle deposit and the Coffee prospects), the Boulevard system has a similar late tectonic timing and grossly similar metal association. The best gold grades at these well-endowed mineralized systems, however, generally occur within granitic or quartzite host-rocks. Mineralization occurs within a range of host rocks at both Golden Saddle and Coffee including schists, but the schist-hosted drill intercepts tend to be lower grade or more sporadically mineralized. The challenge at Boulevard is to determine where on the property the Sunset and Vegas systems (or other similarly-aged gold-bearing structures) cut better host-rocks.

2.0 INTRODUCTION

Equity Exploration Consultants Ltd. ("Equity") was contracted by Silver Quest to carry out an exploration program in the summer of 2010 on the Boulevard property. This program was carried out under the author's direction and Silver Quest requested that Equity compile, interpret and report on the results. Information used in this report comprises government reports and maps, data from earlier assessment reports and data collected during the 2010 field program.

3.0 RELIANCE ON OTHER EXPERTS

In writing this report, I have not relied on a report, opinion or statement of any expert for information concerning legal, environmental, political or other issues.

4.0 PROPERTY DESCRIPTION AND LOCATION

The Boulevard property lies within the Whitehorse Mining District, in the North Dawson Range of west-central Yukon (Figure 1). It is centred at 62^{o} 50' north latitude and 139^{o} 31' west longitude. It comprises 915 contiguous quartz mineral claims (Table 1) covering 180.1 km^{2}, as summarized in Appendix C and shown on Figure 2. The claim boundaries are defined by the locations of claim posts on the ground, which have not been surveyed.

Silver Quest was granted the right to acquire a 100% interest in 238 contiguous quartz claims which form the core of the Boulevard property by Rimfire Minerals Corporation (now Kiska Metals Corporation "Kiska") and Northgate Minerals Corporation ("Northgate") in July, 2009. Under the terms of this agreement, Silver Quest must: a) make staged cash payments totalling $200,000, b) issue 1,000,000 shares and c) complete $3,000,000 in exploration work on the property. The vendors retain a 2% net smelter royalty on the property of which 0.5% can be bought back for $750,000.

In a separate option agreement, Silver Quest acquired a 100% interest in the eight Tiger claims in September 2010. Under the terms of the agreement, Silver Quest must initially issue 250,000 shares followed by a second share issuance equal to $50,000. The agreement is subject to a 2% net smelter return (half may be purchased back for $2 million) in favour of the vendor.

Subsequently, Silver Quest expanded the Boulevard property through several campaigns of ground-staking.

Surface rights over the Boulevard property are owned by the Yukon Territory. No significant surface disturbance, other than the current trenching program, nor any major environmental liabilities was noted during the author's field visits. Depending on the nature of the program, exploration permits may be required from the Yukon Department of Energy, Mines and Resources prior to carrying out further exploration on the property. A five-year, Class 3 Permit (LQ00246) was granted for the Boulevard property on October 3, 2008.

Table 1: Boulevard Property Claims

Claim series	No. of Claims
AVE 1-4	4
BDW 1-104	104
BLVD 1-202	202
DRIVE 1-32	32
GRT 1-36	36
HAN 1-8	8
SOL 1-84	84
TIGER 1-8	8
XT 235-244	10
XT 269-286	18
XT 301-328	28
XT 331-358	28
XT 361-378	18
XY 1-21	21
XY 23-54	32
XY 311-315	5
XY 56-300	245
XZ 1-32	32
total	915

5.0 ACCESSIBILITY, CLIMATE, LOCAL RESOURCES, INFRASTRUCTURE, PHYSIOGRAPHY

The Boulevard property is located in west-central Yukon, approximately 135 km south of Dawson City. Direct access to the property is only possible by helicopter with the nearest helicopter base at Dawson City. The nearest airstrip is Independence Strip, located about 8 km away from the main mineralized area on the property on a saddle above the headwaters of Independence Creek. Other nearby airstrips include Ballarat airstrip near the mouth of Ballarat Creek, Thistle airstrip and Casino airstrip. Fixed wing operators from Dawson City and Whitehorse run Otter, Beaver and Cessna 206 aircraft capable of servicing these airstrips.

Additionally, several boat operators in Dawson City and a barge operating out of Minto Landing are available for hire to transport supplies to points along the Yukon River such as the mouth of Independence Creek or the barge landing at Ballarat Creek, where they can be subsequently mobilized by helicopter to the property.

The topography of the area is characterized by rolling hills typical of the Dawson Ranges, with elevations ranging between 600 and 1250 m. Vegetation is sparse, with lower elevations covered by spruce, birch, aspen, alder and willow, whereas higher elevations have thick moss, grasses and scrub birch. Further south, hills are generally more subdued and more thickly vegetated with spruce on slopes and thick willow and alder in creek valleys. North-facing slopes locally exhibit permafrost complicating soil sampling. South-facing slopes are more typically vegetated by deciduous trees such as aspen and birch. Drainage systems vary from well channelled, discrete streams to swamps in broader, flat-bottomed valleys.

The area has a sub-arctic continental climate, with cold winters and cool, wet summers. Exploration can be effectively carried out on the Boulevard property from May until October.



Silver Quest Resources Ltd.

Boulevard Project

LOCATION MAP

EQUITY	Date: JAN 2011	Scale: 1:7,000,000	Figure 1
	U.T.M. Zone: UTM7 - NAD83	Mining District: WHITEHORSE	
	N.T.S.: 115J/13	State/Province: YUKON	

6.0 HISTORY

Table 2 summarizes all known exploration work carried out on the ground currently comprising the Boulevard property.

Table 2: Boulevard Exploration Programs

Geochemistry	Geophysics	Trenching and Drilling	Reference
Dawson Range JV (1969-70)			
176 soils (Cu, Mo, Au, Ag only)	-	7 trenches (720 m)	Ogilvie (1970)
Rimfire/Northgate JV (2006)			
~400 soils	-	-	Roberts & Baker (2007)
Rimfire/Northgate JV (2007)			
1707 soils, 38 rocks	-	-	Roberts (2008)
Rimfire/Northgate JV (2008)			
Phase 1: 857 soils 47 rocks,18 silts	45 km magnetics, 4.85 km IP	3 trenches (225 m) 7 DDH (525 m)	Lehtinen & Lui (2009)
Silver Quest (2009)			
56 soils	-	-	Smith (2010)
Silver Quest (2010)			
4362 soils 62 rocks 8 silts	62.5 km magnetics	20 DDH (3006 m)	this report
Total ~7500 soils, 147 rocks, 26 silts	107.5 km magnetics, 4.85 km IP	10 trenches (945 m) 27 DDH (3531 m)	

The first work recorded on the property was carried out in 1969 and 1970 by the Dawson Range Joint Venture. Regional silt sampling in July and August of 1969 – directed at finding Casino-style Cu-Mo porphyry deposits – led to staking and grid-based soil sampling of an area near the eastern end of the current Boulevard property. The soil survey showed a 12-hectare >10 ppm Mo anomaly, with a maximum value of 185 ppm, which was tested the following year by seven tractor trenches. Ogilvie (1970) describes two mineralized units (collectively Minfile 115J-052 – Toni Tiger):

1. Skarn, green siliceous rock with molybdenite, chalcopyrite and scheelite as disseminations and in quartz veins;
2. “Southern Sulphide Zone”, with gneissic float containing (disseminated?) arsenopyrite, pyrite, chalcopyrite and minor molybdenite and scheelite.

A Rimfire/Northgate Joint Venture carried out a regional silt sampling program in selected areas of the Dawson Range in June 2006, directed at locating Pogo-style intrusion-related gold targets. This silt blitz style program identified elevated gold values in some streams including a sample which returned 323 ppb Au from a small creek draining the area west of Toni Tiger. These were followed up in August by prospecting, geological mapping and reconnaissance soil sampling for approximately 400 samples at 100 metre sample spacing (Roberts and Baker, 2007). On the basis of these results, the Boulevard property was staked in March of 2007.

In 2007, further mapping and prospecting were carried out on the Boulevard property and 1664 soil samples were taken along NE-bearing lines over an area of 4.0 x 2.4 km, with 100 m line-spacing and 50 m sample spacing (Roberts, 2008). An additional 43 soil samples were taken over the Toni Tiger skarn occurrence for comparison. The soil grid results delineated an elongate, NW-trending, 1.2 km x 450 m Au-As anomaly, defined by the 95th percentiles for Au (>21 ppb) and As (>21 ppm), that remained open to the SE. This Au-As soil anomaly is also coincident with tight linear clusters of elevated Sb, Te and Bi soil values. Soil

samples taken from over the Toni Tiger skarn were characterized by consistently high Mo (50-300 ppm), Cu (>100 ppm), and W (3-8 ppm) but generally low Au, As, Ag, Sb and Te.

In 2008, the Rimfire/Northgate JV completed two phases of exploration described by Lehtinen & Lui (2009). A program during June and July focused on staking, mechanical trenching, prospecting, soil sampling and reconnaissance geological mapping. A follow-up program during September and October extended the soil grid to the southeast, completed 45 line-km of ground magnetic surveying, 4.85 line-km induced polarization (IP) surveying, an orientation auger soil sampling survey and seven diamond drill holes (525 m). The budgets of the Phase 1 and Phase 2 work programs were $250,000 and $850,000, respectively.

Silver Quest completed a small soil sampling program on the HAN property which is now a contiguous part of the Boulevard Property in 2009 (Smith, 2010).

6.1 2010 Exploration Program

The 2010 exploration program included staking, mechanical trenching, prospecting, soil sampling, geological mapping, 62.5 line-km of ground magnetic surveying and drilling of 20 diamond drill holes (3005.79 m). Equity Exploration Consultants Ltd. of Vancouver, B.C. managed the 2010 exploration. A field camp was established at the 2008 camp location beginning May 21, 2010. Mobilization into the property was via Beaver (Tintina Air) and Otter (Alkan Air) aircraft to a staging area at Independence strip. From there, gear and crew were flown to the camp location via Hughes 500D helicopter on contract from Prism Helicopters.

Trenching was completed using a Kubota KH-41 rubber tracked excavator contracted from Stewart Basin Exploration of Whitehorse, YK.

Wherever possible, soil samples were collected from the red-brown B horizon at 15-40 cm depth, and each site was marked with orange flagging and a Tyvek tag. Silt samples were collected from the active parts of streams. Rock samples were taken from mineralized and altered outcrop and float boulders during the course of prospecting and mapping. Rock sample descriptions are attached in Appendix E. Both silt and rock sample sites were marked in the field by pink and blue flagging and aluminum tags. A magnetic declination of 23° E was used for all compass measurements. All maps and UTM coordinates are referenced to the 1983 North American Datum (NAD-83).

Equity personnel – under direction of Francis Moul, Silver Quest geophysicist – carried out a ground magnetic survey totalling 62.5 line km. A geophysical logistics and interpretation report is included in Appendix G.

20 drill holes, consisting of 3005.79 m of NQ core, were drilled from 17 sites by Ridgeline Diamond drilling of Smithers, B. C. Core was logged at the camp and selected portions were sawn, with half submitted for analysis. Drill logs are attached in Appendix F. Core has been cross-stacked for storage at the 2008 / 2010 camp site (6968465N, 573530E).

All samples were analyzed by ALS Laboratory Group of North Vancouver for Au and 51-element high resolution ICP, using an aqua regia digestion (Appendices D1 and D2 and Appendix I for soil certificates). The procedures, results and conclusions of the sampling quality control/quality assurance program are summarized in Appendix H.

7.0 GEOLOGICAL SETTING

7.1 Regional Geology

The Boulevard property is located within the Yukon-Tanana Terrane in west-central Yukon (Colpron, 2006), a pericratonic terrane of continental affinity that occupies a position between the ancestral continental margin of North America and outboard accreted terranes. The pericratonic terranes were accreted in the Early Jurassic, while subsequent outboard exotic terranes began accreting in the Early to mid-Cretaceous. At this time, the pericratonic package was intruded by a voluminous, northwest-to southeast-trending plutonic


suite, referred to as the Dawson Range batholith by Hart et al. (2004) (Klotassin batholith of Templeman-Kluit, 1974), which lies along the northern and southern edges of the Boulevard property (Figure 3). This plutonic belt is characterized by coarse-grained, hornblende-biotite granodiorite, with local phases of mafic diorite, gabbro, quartz monzonite and biotite granite (Hart et al., 2004). This plutonic belt is dated at 106-99 Ma and therefore belongs to the metallogenically important mid-Cretaceous suite of plutonic rocks in the northern Cordillera associated with intrusion-related base and precious metal deposits.

Regional-scale geological compilation maps (Figure 3) (Gordey and Makepeace, 1999) show that the Boulevard claims are underlain by undivided metamorphic rocks of the Nasina sub-terrane that include pre- to late-Devonian rocks of the continental margin (Snowcap Assemblage: quartzite, psammite, pelite, marble, amphibolite) superposed by Late Devonian to Early Mississippian rocks derived from a continental arc system (Finlayson Assemblage: mafic to felsic volcanic rocks, coeval plutonic rocks, carbonaceous pelite, chert, quartzite, volcaniclastic rocks, marble). More recent and detailed mapping to the north on the Stewart River 1:250,000 map sheet (Gordey and Ryan, 2005), however, suggests that the Boulevard metamorphic rocks are part of the Klondike Schist (J. Ryan pers. comm. 2010). The Permian Klondike Schist is widespread in the Dawson area and is characterized by low to medium-grade muscovite-quartz and chlorite-quartz schist. This unit is derived from a combination of volcanic, volcaniclastic and plutonic protolith rocks (Gordey and Ryan, 2005).

7.2 Regional Metallogeny

Several creeks in the region have been mined for placer gold for many decades but the significant bedrock sources of gold have been only been discovered in recent years. The Golden Saddle deposit (located 40 km north of the Boulevard property) was discovered in 2008 by a junior explorer and subsequently acquired by Kinross Gold on June 30, 2010. Pre-2010 drilling defined an indicated open pit mine resource of 9.7 M tonnes at 3.19 g/t Au for 990,840 contained ounces for the Golden Saddle deposit (2011). Mineralization at the Golden Saddle is associated with an E-W, steeply north-dipping normal fault formed during middle Cretaceous to early Tertiary extension (MacKenzie et al., 2010). This structure is tectonically late (post-dates ductile deformation fabrics) and forms the boundary between two broadly different Permian amphibolite-facies metamorphic rock packages – one to the south of predominantly quartzite (with minor marble and quartz-pebble conglomerate) and one to the north comprising hornblende, biotite and felsic gneiss. Gold mineralization and associated alteration are strongly controlled by rock type with more brittle and coherent quartzite and felsic gneiss units hosting much higher grade gold (MacKenzie et al., 2010). Hornblende and biotite gneissic rocks seemingly did not fracture as proficiently and therefore are much poorer host-rocks for gold. Quartz veins are not common at the Golden Saddle but gold is hosted predominantly in fractures and minor quartz breccias with a strong pyrite-gold association.

A second significant gold discovery in the region was announced in spring 2010 at the Coffee property (Carpenter, 2011) which lies immediately to the north of the Boulevard property. No resource has been calculated for the Coffee but early drill results include intercepts of 17.1 g/t Au over 15.5 m and 6.3 g/t Au over 35 m within a 15 km long Au in soil anomaly. Unlike at Golden Saddle, however, gold is hosted in both N-S and E-W trending structures at Coffee (Carpenter, 2011) but at both locations gold-bearing structures overprint regional gneissic and schistose deformation fabrics indicating that gold is tectonically late. Gold-bearing zones at Coffee are characterised by silicification plus sericite-clay alteration with variable As-Ag-Sb-Ba-Mo enrichment but the dominant sulphide phase is arsenic-rich pyrite. Like at the Golden Saddle, gold mineralization at Coffee is hosted by many different rock-types including augen orthogneiss, hornblende-biotite granite, schist and dacite dykes.

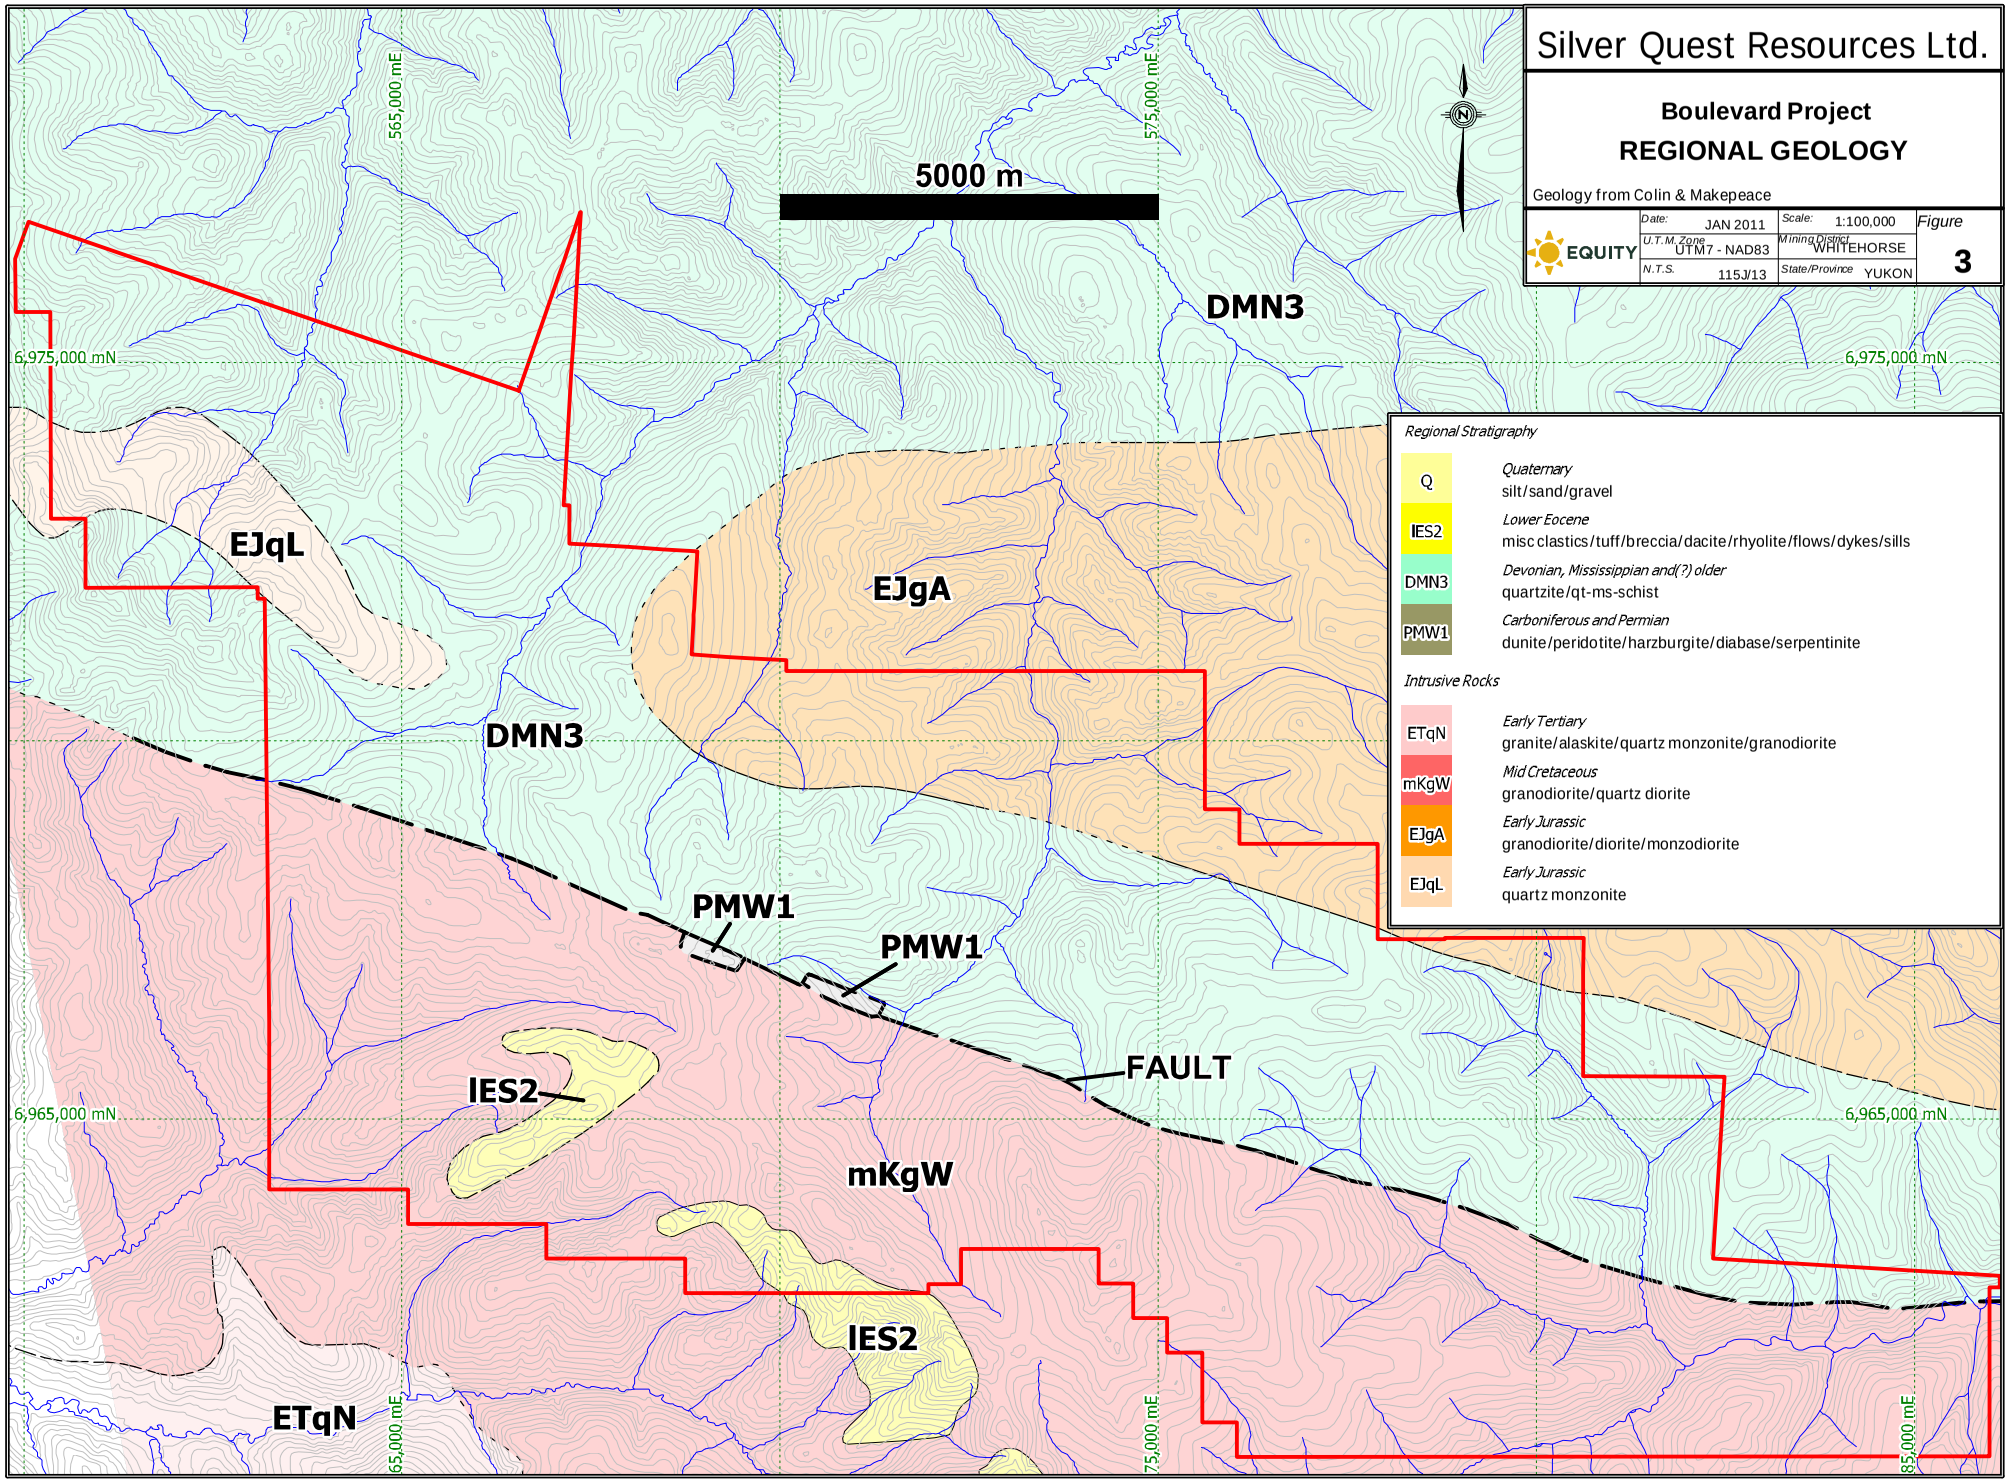
Silver Quest Resources Ltd.
Boulevard Project
REGIONAL GEOLOGY
Geology from Colin & Makepeace
EQUITY
Date: JAN 2011
Scale: 1:100,000
Figure 3
U.T.M. Zone UTM7 - NAD83
Mining District WHITEHORSE
N.T.S. 115J/13
State/Province YUKON
5000 m
565,000 mE
575,000 mE
6,975,000 mN
6,965,000 mN
DMN3
EJqL
EJgA
DMN3
PMW1
PMW1
FAULT
IES2
mKgW
IES2
ETqN
Regional Stratigraphy
Q
Quaternary
silt/sand/gravel
IES2
Lower Eocene
misc clastics/tuff/breccia/dacite/rhyolite/flows/dykes/sills
DMN3
Devonian, Mississippian and(?) older
quartzite/qt-ms-schist
PMW1
Carboniferous and Permian
dunite/peridotite/harzburgite/diabase/serpentinite
Intrusive Rocks
ETqN
Early Tertiary
granite/alaskite/quartz monzonite/granodiorite
mKgW
Mid Cretaceous
granodiorite/quartz diorite
EJgA
Early Jurassic
granodiorite/diorite/monzodiorite
EJqL
Early Jurassic
quartz monzonite

7.3 Property Geology

The Boulevard property is centred on a poorly-exposed 3 km-wide belt of highly strained schistose and gneissic rocks lying between two undeformed Cretaceous granite bodies of the Dawson Range Batholith including the Coffee Creek granite to the NE and an un-named plutonic body to the SW (Figure 4). The highly-strained rocks are dominantly biotite-chlorite schists with subordinate quartz-mica schist (ranging from quartz-rich to biotite-rich to muscovite-rich), chlorite-sericite schists (mafic schists?), calcareous schists or marbles and quartzites and rare augen orthogneiss and ultramafic rocks. The dominant schistosity is NW-trending and steeply SW-dipping. Isoclinally folded and sheared, glassy, recrystallised quartz veins are wide-spread within the strongly deformed rocks and are likely associated with progressive regional deformation.

The schists at Boulevard have previously been mapped as Nasina assemblage rocks (Gordey and Makepeace, 1999) but are probably Klondike schist as described above (J. Ryan pers. comm. 2010). Similarly, the plutonic body along the north part of the property was previously thought to be early Jurassic (Gordey and Makepeace, 1999) but a sample of undeformed biotite granite from the contact near the Toni Tiger showing returned an U-Pb laser ablation age of 99.4±0.9 Ma (Jim Mortensen unpublished data) indicating that the Coffee Creek granite is Cretaceous.

The Cretaceous intrusive rocks are undeformed and comprise medium to coarse-grained (3-8 mm) equigranular quartz-plagioclase-alkali feldspar with about 10% biotite. At the contact, sub-cropping boulders display intrusive relations, whereby the younger plutonic rocks cut sharply across strong tectonic fabrics. Minor pegmatite (with muscovite and garnet) and aplite occur locally within 100 m of the pluton margin and within 500 m of the Toni Tiger Mo-W-Cu skarn occurrence. These pegmatites contain trace molybdenite, and hence link the emplacement of the Cretaceous granite to the skarn occurrence. The contact of the south-western granitoid body is characterised by a strong alignment of hornblende which is interpreted as a primary (magmatic) flow foliation.

7.4 Property Mineralization

The only historic showing recorded on the property comprises sheeted to stockwork quartz veining and associated garnet-diopside-actinolite skarn in schistose rocks at the Toni Tiger occurrence (Ogilvie, 1970), located approximately 750 m south of the Coffee Creek granite contact. Milky to glassy quartz ± calcite veins, generally 2 to 5 cm wide, but also up to 1 metre wide, have a strong preferred NW-trending and steeply-dipping (75-90 degrees to the SW) orientation, roughly sub-parallel to the local schistosity, with a second set striking to the NE and cross-cutting the fabric. Veins contain trace to minor molybdenite ± chalcopyrite ± pyrite ± pyrrhotite ± scheelite. Where these veins cross-cut micaceous schists (varying from biotite to muscovite to quartz rich), they are associated with bleaching (silicification and sericitization) and/or chloritic selvages. Where these veins cross-cut calcareous sediments, garnet-diopside-actinolite skarn is developed within and adjacent to the veins. Sampling in 2007 across these veins returned 24 to 234 ppm Mo, and 14 to 108 ppm Cu with low Au and As values (Roberts, 2008).

During the 2008 trenching program gold mineralization was identified in deep trenches within oxidized C horizon characterized by strongly silica-sericite-clay-hematite altered chlorite-biotite schist. This alteration is associated with planar quartz carbonate veins. The trend of the mineralized zone was thought to follow the west-northwest-trending regional foliation, which is concordant to lithological contacts identified in the trenches (Lehtinen and Lui, 2009). Disseminated to semi-massive arsenopyrite and stibnite are present locally within the sericite-clay-hematite altered zone. Rock chip sampling from 2008 indicates a strong correlation between Au and As-Ag-Sb.

7.5 Mineralization in Drilling

Within drill core, several generations of hydrothermal veins are present and are most meaningfully divided into deformed (early) and undeformed (late, post-tectonic) veins (Figure 5). The early veins are typified by variably boudinaged and/or folded, glassy, grey to white quartz veins. These have been recrystallised and likely formed during progressive deformation which developed the strong schistosity in the mica-rich host rock. There is some indication that the early veins formed during two events since some veins are less deformed and more planar than others, but this relation is not widespread. These early veins

generally contain minor blebs of pyrrhotite with trace anhedral chalcopyrite but do not have any apparent link with the gold-mineralization event since no samples of these veins returned elevated gold values. Generally, they are as common distal to the gold mineralized intervals as they are near gold-bearing zones.

Later, undeformed veins include at least three styles. The main type consists of planar, cm-scale quartz-carbonate veins which cut the tectonic foliation, typically form as parallel sets and are associated with gold mineralization. It is not clear if the veins are oriented similarly to the overall mineralized zone (i.e. dipping about 45^{o} to the southwest) or if they formed oblique to this structure. Locally these veins have cm-scale bleached sericite alteration selvedges and have euhedral arsenopyrite, pyrite and rare stibnite within adjacent wall rock. They are believed to be associated with the majority or all gold mineralization. In at least two locations, these veins are cut by concordant veins with crustiform banded silica textures but it is not clear if this style of vein is widespread or introduced gold. All vein types are cut by common, hairline fractures with minor calcite that have no apparent association with gold mineralization.



Figure 5: Core photographs from Boulevard. Top photo shows planar, undeformed quartz-carbonate veins associated with the gold event cutting biotite schist with early boudinaged quartz veins. Bottom photo shows a narrow late vein with a particularly wide sericite alteration selvedge. Photos from 2008 drill core archived at drill camp site.

8.0 GEOCHEMISTRY

8.1 Silt Geochemistry

A total of eight silt samples were taken from the Boulevard property in 2010. Most of these were reconnaissance samples taken during the course of mapping and prospecting. Only one sample (I034310) returned above detection Au (7 ppb) but other pathfinder values are low. This sample was collected from an upper tributary to Independence Creek along the western part of the property.

8.2 Soil Geochemistry

During the 2010 program 4362 soil samples were collected from reconnaissance ridge and spur and contour soil lines and from grid lines added to the existing 2007 and 2008 Boulevard soil grid. Infill and detailed grid sampling was completed at 50 m intervals along lines 100 m apart. Eastern and western extensions to the grid were completed at 200 to 500 m spaced lines with samples spaced 100 m apart.

For statistical analysis, geochemical data for the 2010 soil samples has been merged with an existing soil database for Boulevard and other Dawson Range properties held by Silver Quest for a total of 14,751 samples. This database also includes sample descriptions (soil horizon, colour, depth, slope, etc.) for 12,200 of the samples. Some care must be taken when interpreting these data since the same analytical techniques have not been completed on all samples. In particular, the detection levels for pathfinder elements of interest are not the same resulting in apparently anomalous samples from surveys which used the lower precision method (some 2008 and 2009 samples). ALS Mineral Services lists the following detection limits for two different ICP analyses in the dataset:

- **ME-ICP41**: As (2 ppm), Bi (2 ppm), Sb (2 ppm), Mo (1 ppm)
- **ME-MS41**: As (0.1 ppm) Bi (0.1 ppm), Sb (0.5 ppm), Mo (0.05 ppm)

ME-MS41 was used for the 2006, 2007, some 2008 and 2010 samples but ME-ICP41 was used for some 2008 and 2009 samples. It is recommended that the higher precision ME-MS41 be used in subsequent soil surveys.

8.2.1 Geochemical Variation between Soil Horizons

Systematic differences in chemistry between A and B/C soil horizons is evident in ICP data and, locally, clusters of samples considered poor quality A horizon seem to mask soil anomalies. These are characteristically low Fe-Mg-K-Al relative to B/C soils. These low Fe samples have been considered when interpreting soil anomalies. Bubble plots for the main Au pathfinder elements (As, Bi, Mo and Sb) were used to outline regions of anomalous samples which are outlined on Figures 7a-e. Anomalous threshold levels were determined by inflection points on probability plots rather than by using percentile values.

Field descriptions are included for 12,200 of the soil samples in the dataset including a field observation of the soil horizon sampled. Most of the samples are reportedly collected from the B horizon (Table 3).

Table 3: Soil Horizon Sampled as Reported in Database

Soil Horizon Sampled	No. of Samples
Ae (dark organic-rich)	285
Ah (leached organic material)	342
B (mineral soil)	11,254
C (broken rock)	320

Geochemistry of soil samples reportedly collected from Ae, Ah, B and C horizons show distinct differences for some elements. Box and whisker plots (Chart 1) show that the Ae and Ah horizons have lower K, Fe, Mg and Al in spite of a wide range of compositions. This is to be expected since the B and C horizons

should be sampling predominantly bedrock-derived material and these elements are some of the most abundant in crustal rocks.

By contrast, Mn, Ca (especially in Ah), Na, P and S are more elevated in the Ae and Ah horizons consistent with higher organic contents. These data suggest that the field-recorded observations describing the material collected are, on average, accurate.

When compared on a soil horizon by horizon basis, correlation coefficients do not show appreciable differences. For example, Fe shows similar strong positive correlations with Al, Co, Ga, Mg, Sc, and V in Ae, Ah, B and C horizon datasets. Thus, comparison of correlation coefficients is not an effective way to discriminate soil collected from high-quality mineral soil with that collected from poor-quality organic-rich material.

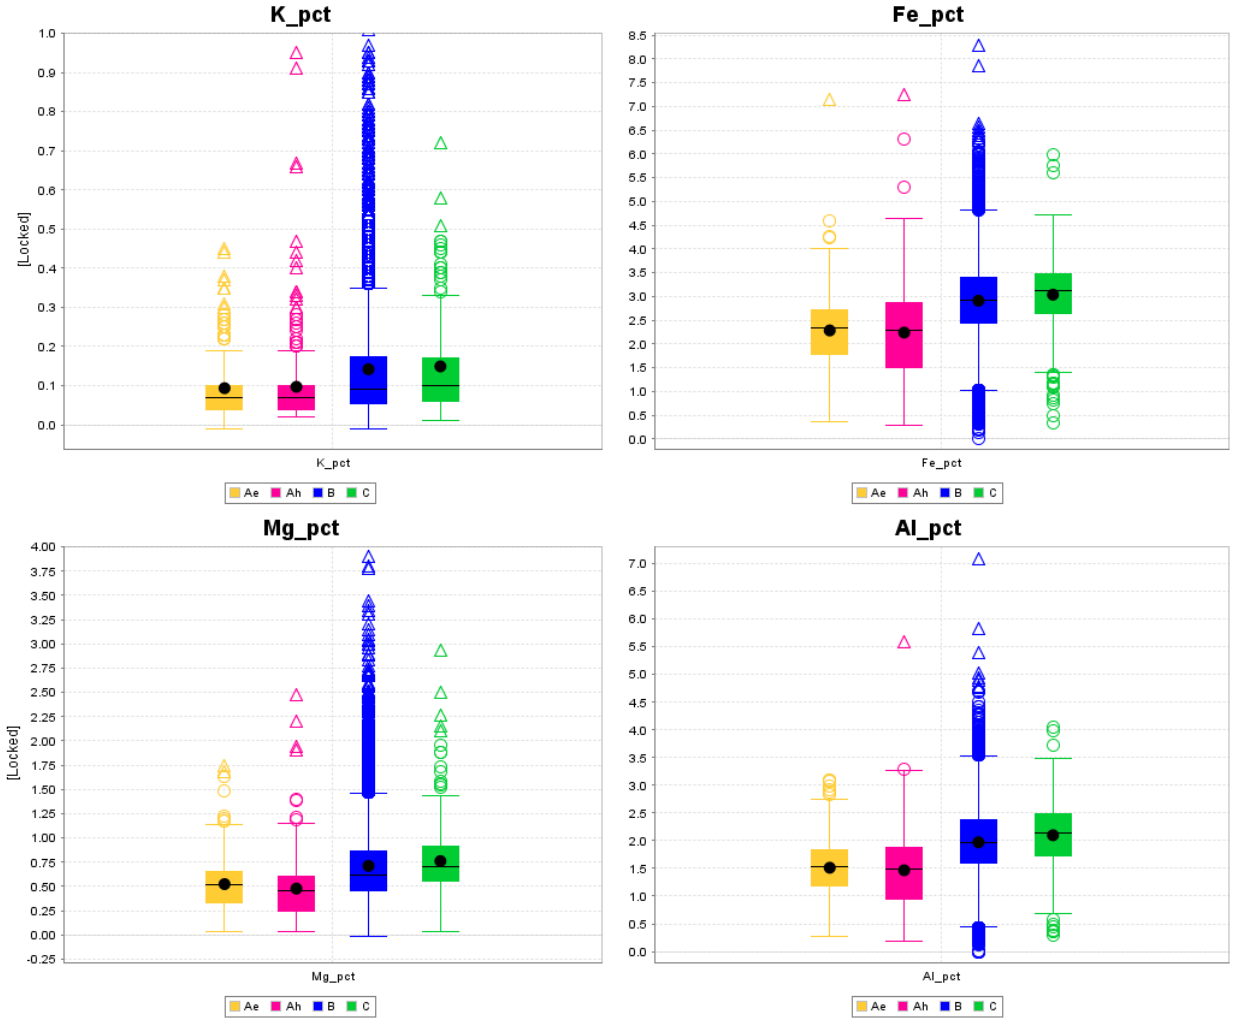


Chart 1: Box and whisker plots for selected elements based on soil horizon sampled for 12,201 soil samples in the Dawson/ Boulevard database. Coloured box denotes 50% of dataset (i.e. 2nd and 3rd quartiles) whereas the whiskers are the lower and upper quartiles. Circles and triangles outside of whiskers are outliers. The black circle is the mean and the horizontal black line is the median.

8.2.2 Identifying Poor Quality Soil Samples

The quality of soil samples – that is, how closely the sampled material reflects values of underlying bedrock – rely on many factors. In general, organic-rich material will not provide good indications of underlying bedrock mineralization compared with more mineral-rich (e.g. B or C horizon) samples. Thus, sampling in the Dawson Ranges typically aims to sample material below the organic layer. North-facing

slopes present a major problem in the Dawson Range owing to permanently frozen soil making digging difficult. Furthermore, these slopes are commonly characterized by surficial features such as sheet-flow where surface water flows above frozen ground so B soil horizons are poorly developed.

Based on average compositions of the different soil horizons, it is possible to query the database to identify samples returning compositions resembling A horizon. This technique is admittedly circular given that it uses field-reported observations to determine average differences, and then uses those differences to back-query the entire database. It could be argued that all samples reported from the Ae and Ah horizons should be discarded and deemed “poor” quality samples. On the other hand, it is not possible that the 30-40 individual soil samplers who collected samples comprising this database were consistent in field description. The ICP analysis, however, is unbiased and relatively consistent for all samples collected. The cut-off point for samples with low values was selected as the Q1 (1st quartile) value indicated by the bottom of the coloured boxes in the plots above (Chart 1) as listed in Table 4. Since the database is dominantly comprised of samples reported as B horizon, it is not surprising that about one quarter of the sample population falls below the Q1 value calculated from the B horizon samples.

1,298 samples returned below Q1 values for all of Al, Fe, K and Mg. This population was used in interpretation of the surface soil results.

Table 4: Soil Threshold Values for Suspected A Horizon Samples

	Al	Fe	K	Mg
Total population with ICP data	13,905	13,905	13,905	13,905
Q1 cut-off	1.60%	2.45%	0.05%	0.46%
No. Samples < Q1	3,672	3,543	3,289	3,559

It should be noted that this anaylsis does not account for underlying bedrock type. This could be a further step in levelling the data whereby the regional geology could be used to consider separate sample populations based on major bedrock types (e.g. granite versus schist).

8.2.3 Anomaly Determination

Anomaly thresholds for As, Bi, Sb and Mo (the main gold pathfinders at Boulevard) were determined from probability plots (Chart 2). Because of the large number of samples returning below detection (generally 5 ppb) for Au, the probability plot is harder to interpret so Au anomalies were considered as regions with samples returning >90th percentile. In this way, samples are considered anomalous if exceeding these thresholds: Au >10 ppb, As >11 ppm, Bi > 0.2 ppm, Sb >0.8 ppm and Mo >2.0 ppm. When compared with the soil percentile levels for the Boulevard-only soil samples, these values are equivalent to 90th percentile for Au, 80th percentile for As, 70th percentile for Bi, 88th percentile for Sb and 85th percentile for Mo (Table 5).

As described above, interpretation of some elements needs to be completed with care owing to high detection limits of some ICP analyses. Specially, samples submitted in 2008 and 2009 generally were analyzed by ME-ICP41 which has detection levels above the Bi and Sb anomalous threshold and half of the anomalous threshold for Mo.

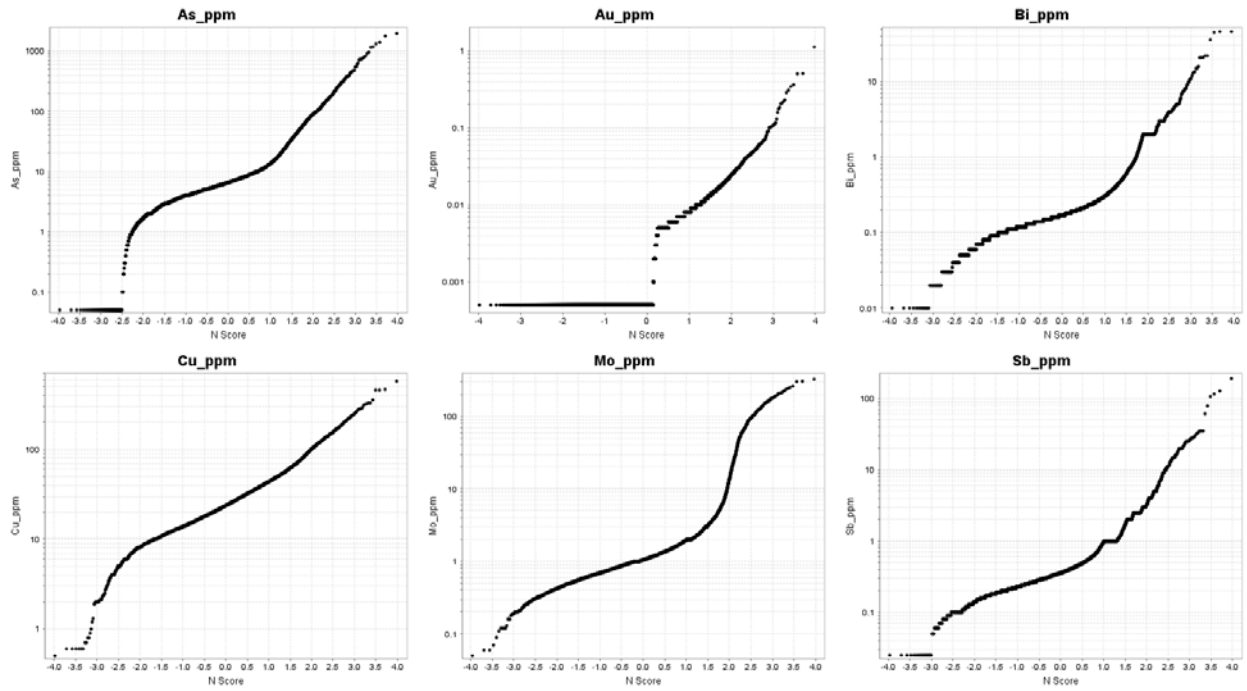


Chart 2: Probability plots for Au and several pathfinder metals and Cu for the entire Dawson soil dataset (n=14,751 samples). Natural distributions plot as straight lines on probability plots whereas deflections indicate a deviation from a true natural distribution. Thus anomaly thresholds are estimated from deflection points. Note that Cu closely resembles a natural distribution consistent with a lack of Cu-bearing hydrothermal systems in the area.

8.2.4 Significant Results

The Boulevard soil results delineate three main areas (Tony Tiger/Boulevard, Wilshire, Independence) of interest characterized by broad (at least km-scale) multi-element soil anomalies. Typically Mo and As form the largest anomalies with more restricted areas of anomalous Sb and Au. Other elements (e.g. Zn, Bi, V) are locally elevated with the other main pathfinder metals.

At a property scale, however, a weakly-defined trend of scattered Au, As, Sb or Mo anomalies occurs along the length of the Boulevard soil grid and numerous single element anomalies within this region are worthy of follow-up sampling and prospecting.

8.2.4.1 Toni Tiger / Boulevard

- Large Mo anomaly at centre of Toni Tiger
- As-Sb-Au peripheral and strong Bi to east
- Appears to be a metal-zoned system implying that the Toni Tiger skarn and the Boulevard Au systems are contemporaneous, although they could also be separate overlapping systems

8.2.4.2 Wilshire

- Intriguing Au values to east and west (several samples >100 ppb) but cored in centre by area with low Au and pathfinder values
- Samples from N to NW-facing slopes returned consistently low Fe (Mg-Al-K) so likely the geochemistry is masked by frozen soil
- Has been previously prospected with no significant samples returned
- Good target for power auger sampling and/or trenching

8.2.4.3 Independence

- New soil anomaly near Kaminak's Coffee Property 6 km west of the Americano prospect
- Scattered Au (up to 89 ppb) and Sb with larger regions of As and Mo
- Anomaly is split by a region of low Fe-Mg-K-Al soils (A horizon masking anomaly?)

Table 5: Soil Geochemistry Percentiles for Boulevard Property

	Ag_ppm	As_ppm	Au_ppb	Bi_ppm	Cu_ppm	Mo_ppm	Pb_ppm	Sb_ppm	Zn_ppm
Population	14751	14751	14751	14751	14751	14751	14751	14751	14751
Maximum	4.2	1950	1120	46	579	324	1230	191	888
Percentile98	0.79	97	26	2	107	17.16	32.5	3.9962	140
Percentile95	0.5	46	15	0.75	70	3.83	21.545	1.89	112
Percentile90	0.37	22	10	0.4	53	2.31	16	0.86	94
Percentile85	0.3	14	8	0.3	45	1.98	13.6	0.63	85
Percentile70	0.2	9	6	0.21	33	1.35	10.2	0.43	72

As previously described (Lehtinen and Lui, 2009), the strongest geochemical correlations with Au on a property-wide basis are with As and Sb and these are among the highest correlations between any elements of interest (Table 6). Mo shows a strong correlation with Cu and a moderate correlation with W, likely owing to the samples across the Toni Tiger Mo-W skarn.


Table 6: Soil Geochemistry Correlation Matrix

	Ag	As	Au	Ba	Bi	Cu	Fe	Mo	Pb	Sb	Sn	W	Zn
Ag	1.00												
As	0.21	1.00											
Au	0.20	0.60	1.00										
Ba	0.27	0.17	0.10	1.00									
Bi	0.16	-0.04	-0.03	-0.10	1.00								
Cu	0.28	0.12	0.08	0.20	0.10	1.00							
Fe	0.10	0.20	0.08	0.54	0.02	0.20	1.00						
Mo	0.05	0.05	0.01	0.03	0.04	0.50	0.06	1.00					
Pb	0.14	0.12	0.07	0.11	-0.08	-0.04	0.18	-0.05	1.00				
Sb	0.22	0.45	0.40	0.11	0.07	0.06	0.09	0.00	0.07	1.00			
Sn	0.00	-0.11	-0.07	-0.17	0.68	0.01	-0.03	0.03	-0.18	0.04	1.00		
W	0.18	-0.04	-0.05	-0.15	0.56	0.21	-0.05	0.23	-0.08	0.09	0.44	1.00	
Zn	0.17	0.16	0.10	0.57	-0.09	0.21	0.62	0.02	0.26	0.08	-0.18	-0.14	1.00

8.2.5 X-ray Florescence (XRF) Soil Geochemistry

Detailed analysis of soils directly in the field using a handheld, portable X-ray Florescence (XRF) analyser was completed at 2157 locations on Boulevard Property (Figures 9a and 9b). These analyses were completed generally on orange-brown B or C horizon soils from within the small excavated trenches, hand-dug holes or material retrieved using a gas-powered soil auger. Spacing between analyses varied according to results. Traverse lines were generally analysed at 10 m spacing but where elevated As, Mo or Sb were encountered, in-fill analyses at 5 or 2 m spacing was added to the survey.

This method identified three main As-in-soil trends referred to as Sunset, Vegas and Hollywood (Figure 7). Drilling (as described in Section 11.0) encountered gold mineralization underlying the Sunset and Vegas trends but drilling below the Hollywood trend failed to encountered elevated gold. These three trends are described in detail below.

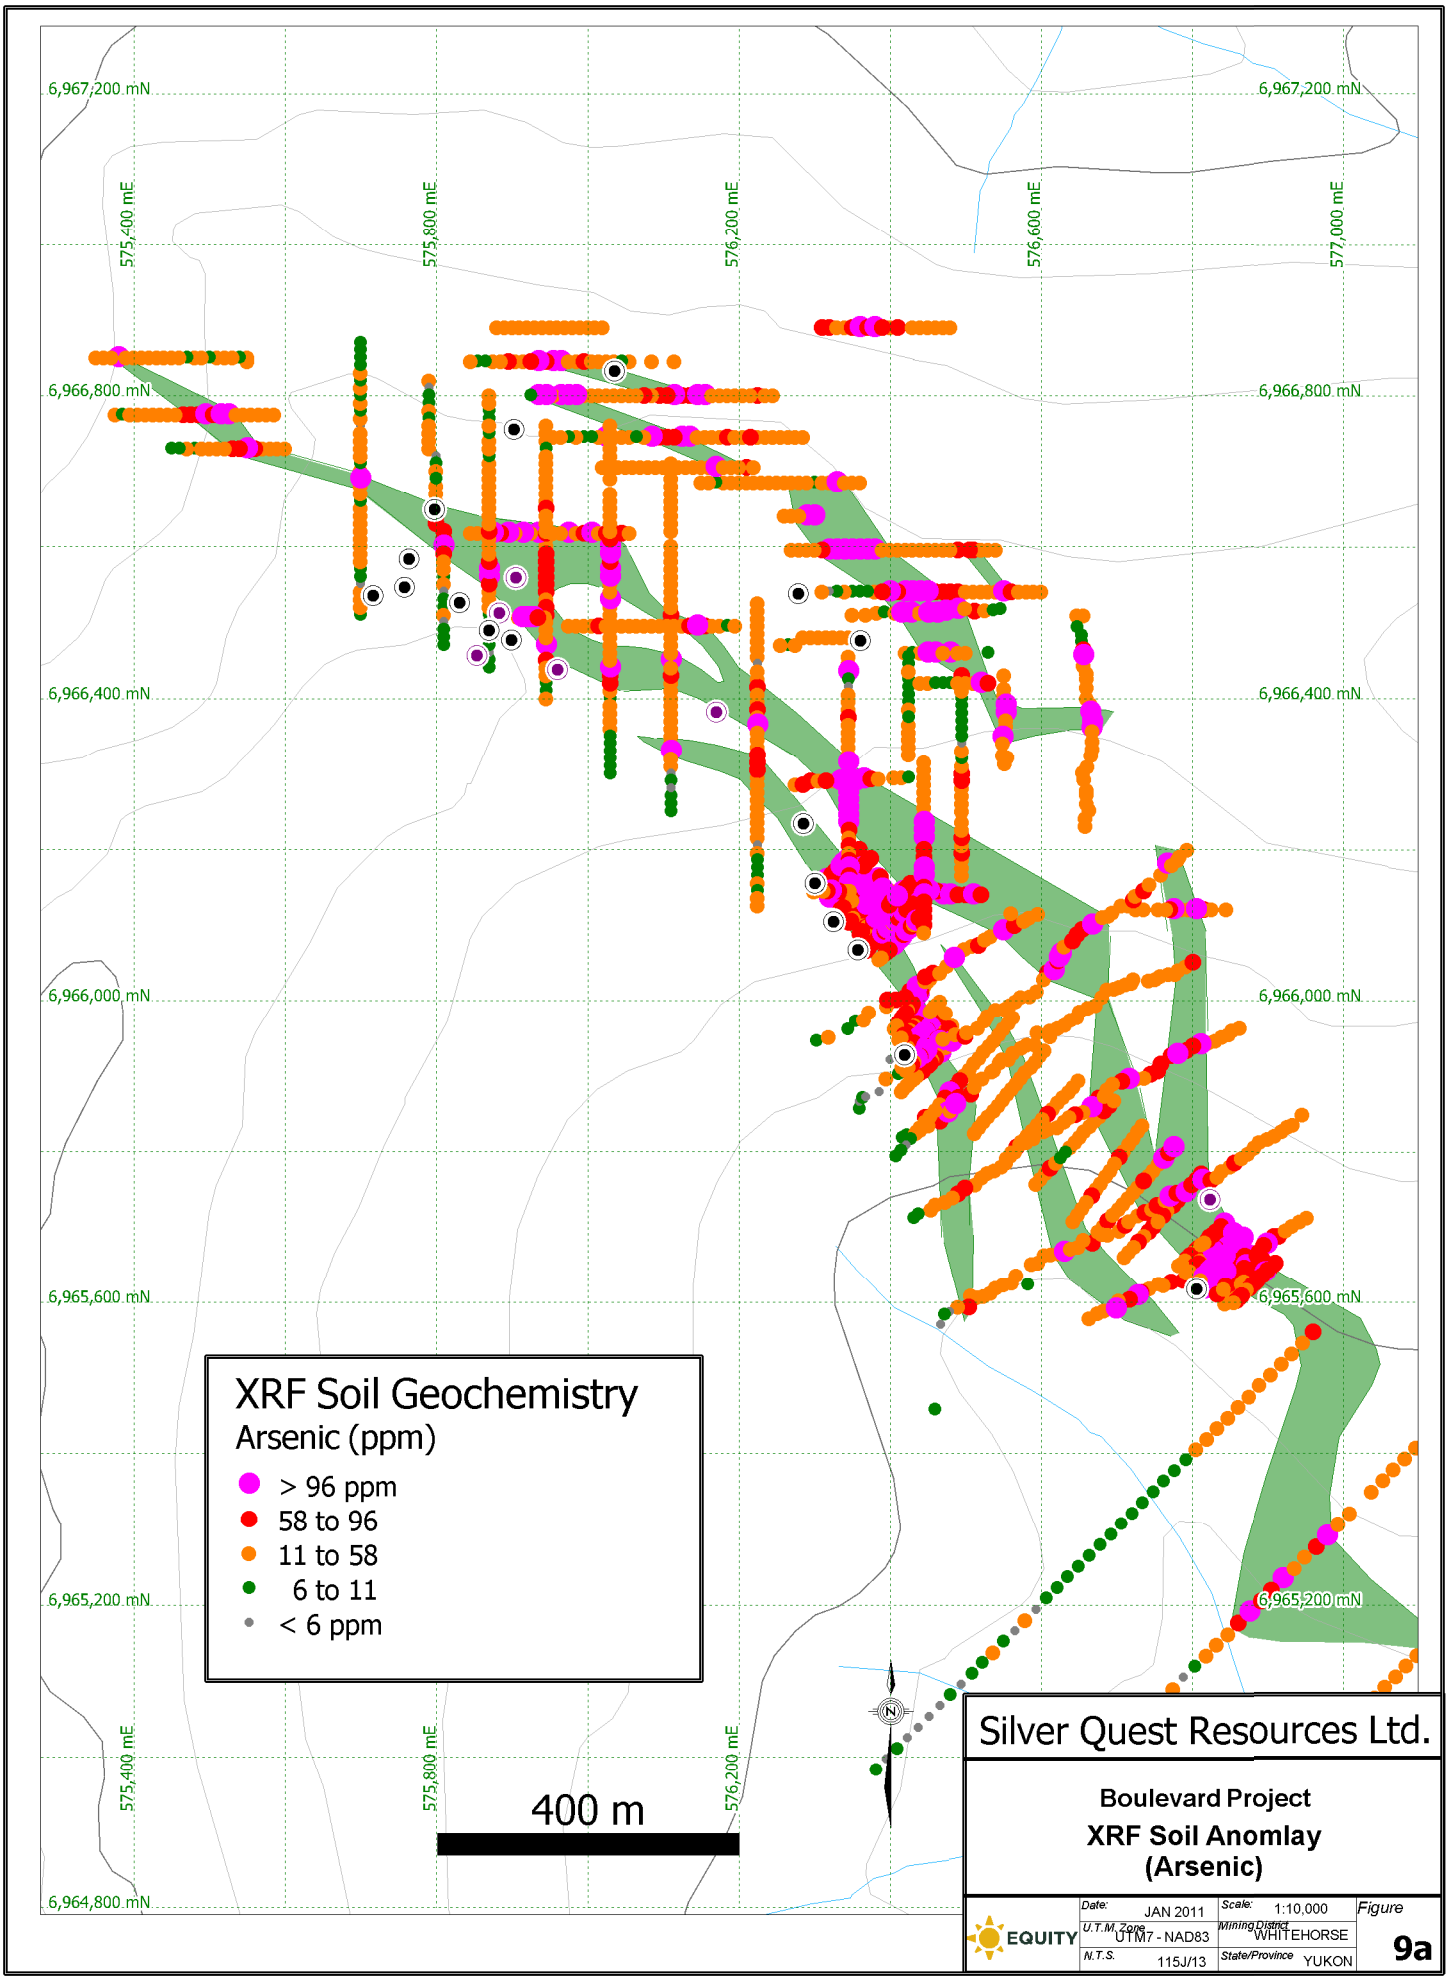


Silver Quest Resources Ltd.

Boulevard Project

XRF Soil Anomlay (Arsenic)

EQUITY	Date: JAN 2011	Scale: 1:10,000	Figure 9a
	U.T.M. Zone: UTM7 - NAD83	Mining District: WHITEHORSE	
	N.T.S.: 115J/13	State/Province: YUKON	

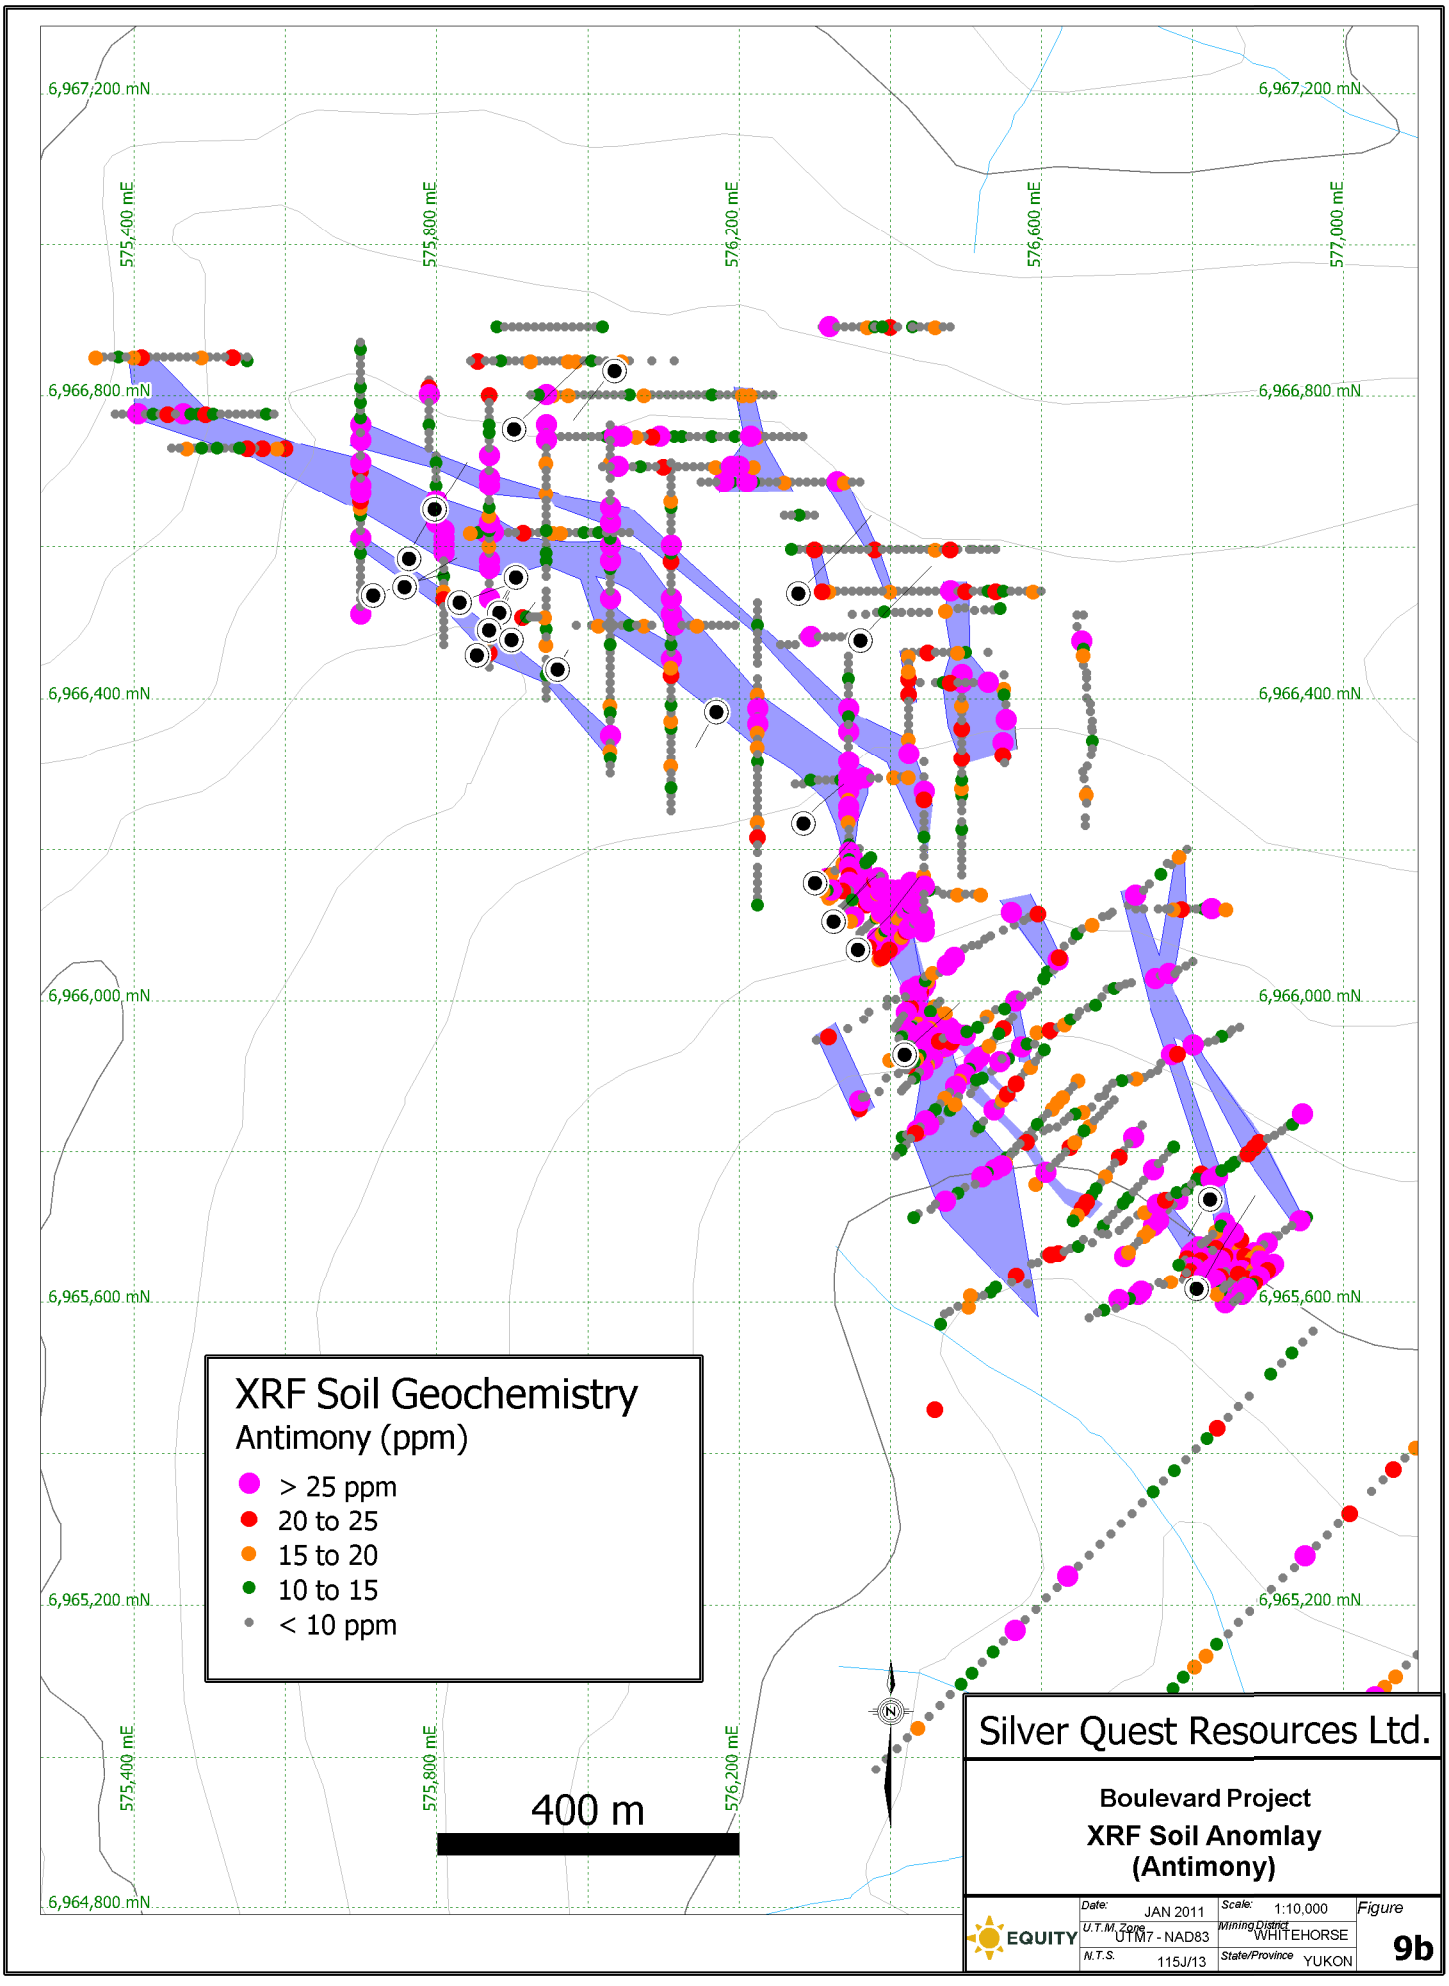

Silver Quest Resources Ltd.

Boulevard Project

XRF Soil Anomlay (Antimony)

EQUITY	Date: JAN 2011	Scale: 1:10,000	Figure 9b
	U.T.M. Zone: UTM7 - NAD83	Mining District: WHITEHORSE	
	N.T.S.: 115J/13	State/Province: YUKON	

8.2.5.1 Sunset trend

The Sunset trend is the longest and thickest of the three XRF soil trends but its characteristics change somewhat along trend so that it is divided into a central, SE and NW segment.

Bedrock gold mineralization within drill holes BV08-3 and BV10-15 has been encountered below the central Sunset trend. As-in-soils form a NW-trending anomaly that is 490 m long and 120 m wide, although the width includes a "doughnut" hole of low As-in-soils. A Sb-in-soil coincides with the As-in-soil. About 74% of soil samples analyzed by ICP have gold values that lie above the 85th percentile. Other anomalously abundant elements include Fe, Ba and Mo whereas Mo and Bi are enriched along part of the trend.

The 630 m by 90 m SE Sunset trend is defined by an As-in-soil anomaly that is only partially coincident with Sb-in-soil, and that is oriented ~NNW. Au-in-soil assay data shows that ~80% of all samples lie above the 85th percentile. Other anomalously abundant elements in soils include Fe, Cu and Bi whereas parts of the trend are also enriched in Ca, Ba and Mo.

The NW Sunset trend is NW-trending, 520 m long and 40 m wide, and also comprises a coincident As- and Sb-in-soil anomaly. Around 60% of soil samples have Au above the 85th percentile and 80% lie above the 75th.

8.2.5.2 Vegas trend

Bedrock gold mineralization within drill holes BV10-22 and other nearby drill holes has been encountered below the Vegas trend. It lies southeast of the Sunset trend and is characterized by an As-in-soil anomaly with a partially coincident Sb-in-soil anomaly. This anomaly trends ~NNW and measures 670 m in length and 50 m in width. Au-in-soil data by ICP shows that ~90% of all samples lie above the 85th percentile, making it one of the most Au-enriched As-in-soil trends on the Boulevard Property. Fe, Ba and Bi are also enriched on the Vegas trend whereas Mo is enriched on part of it. Drilling has shown that the Sunset and Vegas are likely part of the same southwest dipping gold-bearing structure.

8.2.5.3 Hollywood trend

The Hollywood trend comprises an As-in-soil anomaly that lies to the NW of the Sunset trend, and consists of a NW and SE segment separated by low As-in-soil values.

The NW segment of the Hollywood trend is 260 m long and 80 m wide. Au-in-soil assay results from this trend all exceed the 85th percentile, making it the most gold-enriched trend on the Boulevard Property. The only other element that shows enrichment in this soil zone is Bi.

The SE segment is 320 m long and 60 m wide, and is defined by a coincident As- and Sb-in-soil anomaly. Gold values by fire assay are low relative to the other trends, with only ~15% of all samples yielding Au values higher than the 85th percentile. Other elements showing anomalously high abundances in the SE Hollywood trend include Ca- and Ba-in-soils.

Both segments were tested with drill holes in the 2010 season with very low gold results so the Hollywood trend remains unexplained.

8.2.6 ICP versus XRF analyses

In addition to using the portable XRF analyser in the field, 4859 soil samples were analysed onsite in Boulevard camp. These comprised a mix of Boulevard property samples and samples collected on Silver Quest's regional properties. These samples were submitted to ALS for gold fire assay and multi-element ICP analysis.

Plots of the XRF versus ICP data (Chart 3) for As and Mo (other elements such as Sb and Ag were not typically present in quantities to be detected by XRF technology) show reasonably good correlation although the XRF slightly under reports As and Mo. Additionally, at lower values (<18 ppm As and <11 ppm Mo) the XRF reproducibility is very poor as evidenced by the vertical "striping" of the ICP data. In spite of this, the XRF is effective at the Boulevard property in detecting some pathfinder metals since 18 ppm As ranks at about 88th percentile and 11 ppm Mo ranks at about 96th percentile.

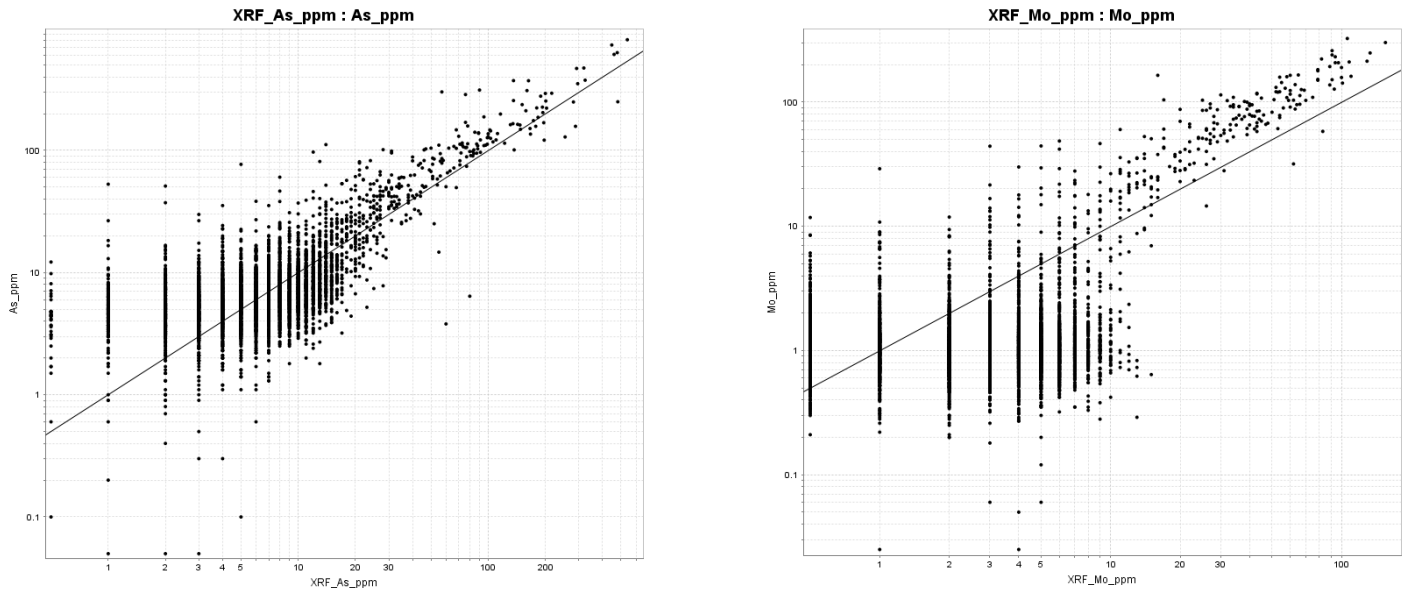


Chart 3: Log/log plots of ICP As versus XRF As data and ICP Mo versus XRF Mo data for the same samples. The black slanted line indicates x = y.

8.3 Rock Geochemistry

During the course of mapping and prospecting, 62 rock samples were taken from the Boulevard property in 2010. Rock descriptions are attached in Appendix E and geochemical certificates are in Appendix D-1. Surface rock samples collected from the Boulevard property in the summer of 2010 did not return significant concentrations of precious or base metals (highest gold value returned was 24 ppb).


9.0 GEOPHYSICS

Equity personnel completed a ground magnetic survey (62.5 line km) across the core area of the Boulevard property using Silver Quest's equipment. The survey was coordinated and interpreted by Francis Moul who has detailed the survey in Appendix G. Figure 8 shows the interpretation of the survey.

10.0 TRENCHING

During the 2008 field program at Boulevard, a Kubota KH-41 min-excavator was used to dig three trenches (345 m length). This trenching program attempted to reach solid bedrock in order to collect representative samples and to determine the orientation of mineralized zones. This approach proved effective in locating gold in bedrock but production was very slow owing to thick weathering and solid bedrock was not reached.

In 2010, the same Kubota KH-41 equipment was used for additional trenching but given the strong correlation between Au and the pathfinder elements As and Sb, and the addition of portable XRF technology, the focus turned to trenching production rather than digging to bedrock. Trenches were only dug about 30-50 cm wide by 30-80 cm deep. None of the 2010 trenches reached solid bedrock, although generally the trenches reached C soil horizon depths. Systematic rock chip sampling and mapping was not completed but the soil from the trenches was analysed with the portable XRF analyser every 2 to 10 m as described above. This detailed approach delineated several anomalous soil trends in much more refined manner than the broadly spaced soil grid.

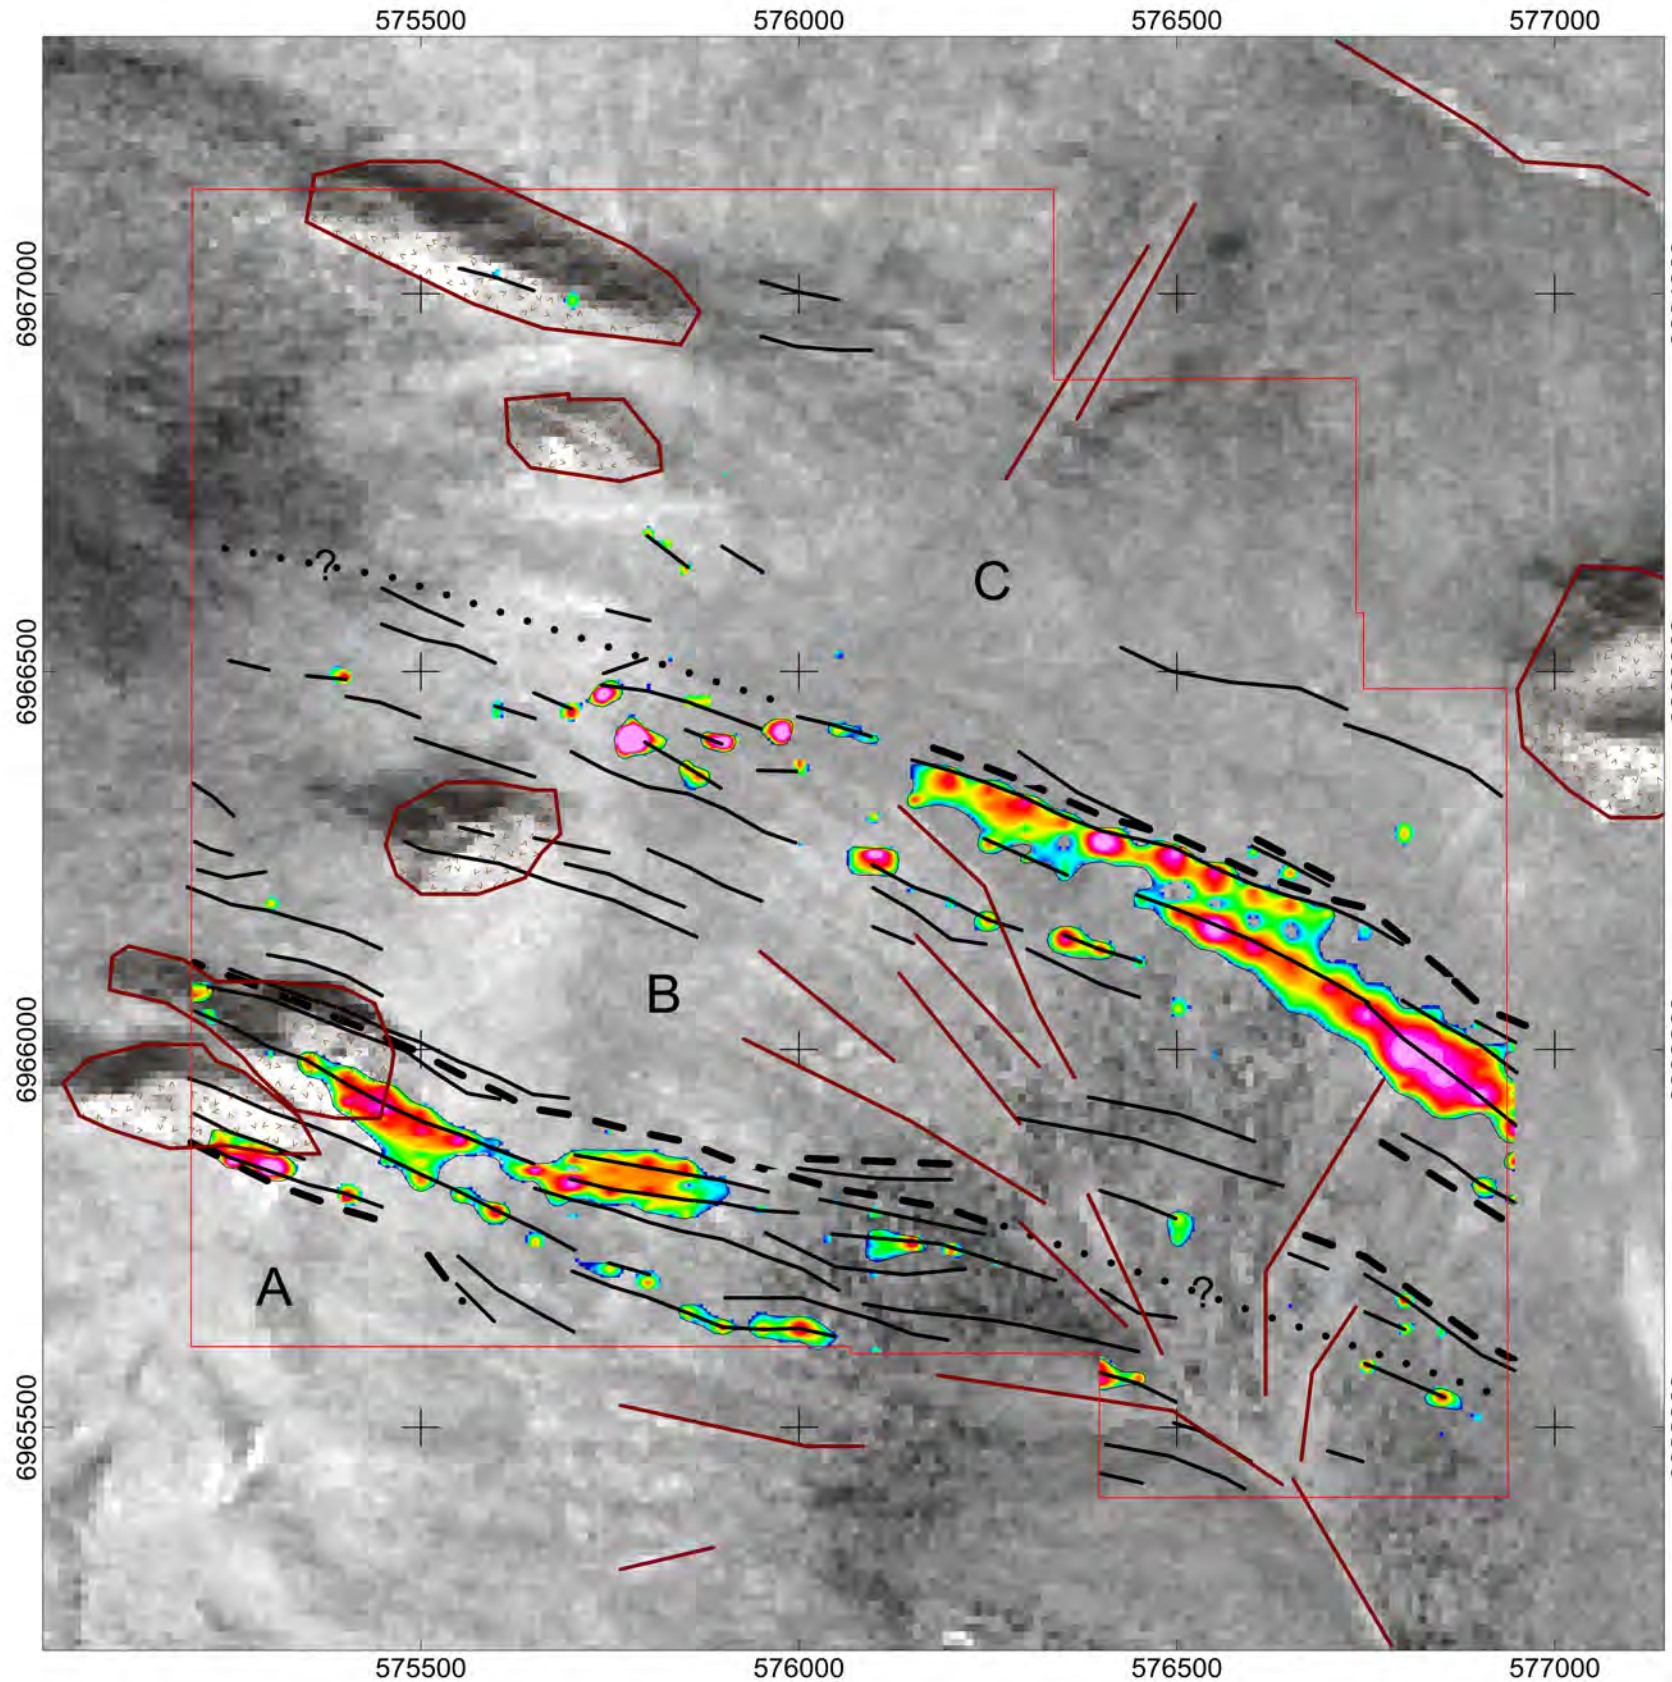

588.1
418.5
353.3
305.6
267.4
236.5
209.3
185.5
164.7
146.1
128.8
115.2
102.5
91.5
82.4
73.9
66.1
59.4
53.5
48.0
42.2
36.5
31.0
25.8
20.2
14.8
9.6
4.1
-1.1
-6.1
-10.9
-15.7
-20.7
-25.7
-30.5
-35.3
-40.3
-45.5
-50.1
-54.6
-58.9
-63.1
-67.4
-72.2
-77.0
-82.0
-87.0
-92.5
-97.7
-103.1
-108.7
-115.3
-122.5
-130.4
-138.6
-147.2
-157.1
-168.9
-183.8
-200.5
-222.1
-250.8
-286.7
-349.2

RMI
(nT)

Company: Silver Quest Resources Ltd.
Project: Boulevard Project
Location: Approx. 135 km south of Dawson City, YT

Survey:

Method: Total Magnetic Field
Rover 1: GSM-19W v7 SN. 7052314 (1), 2 Hz
Rover 2: GSM-19W v7 SN. 7052316 (3), 2 Hz
Base 1: GSM-19TG v5 SN. 705699 (4), 0.33 Hz
Survey Dates: June 23, 2010 - June 27, 2010
Traverse Line Orientation: 0 deg.
Traverse Line Separation: 25 m - 50 m
Trimmed Line Length: 62.5 lkm

Processing

Magnetic Data: Manual Despiking, Diurnal Correction
Position Data: Non-linear filter despiking, Running Mean

Grid

Cell Size: 10 m
Filters: Residual resulting from removal of first order trend from grid.

Map

Contour Interval: 280 nT
Colour levels below 280 nT are white

Base image is SPOT 10 m Panchromatic Image

- Satellite Image Lineament
- Magnetic Lineament (High or Low)
- Magnetic Contact
- Inferred Contact (Weak support)
- Satellite Image Apparent Outcrop
- Ground Survey Boundary
- Grid Contour
- A Region Label

Scale 1:10000

100 0 100 200 300 400 500 600
(meters)
NAD83 / UTM zone 7N

Silver Quest Resources Ld.

Boulevard Project, YT
2010 Exploration Program
Ground Total Magnetic Intensity Survey

Residual Magnetic Intensity with Interpretation

F. Moul, February 8, 2011

11.0 DIAMOND DRILLING

During the 2010 program, 20 diamond drill holes for 3006 m were completed from 17 drill set-ups along the Sunset, Vegas and Hollywood soil anomaly trends (inset Figure 4). Collar locations and survey information are provided in Table 7 and drill logs in Appendix F. Intervals of geochemically significant mineralization are summarized in Table 8.

Table 7: 2010 Diamond Drilling Location Data

Hole ID	Target / objective	Easting	Northing	Elev. (m)	Depth (m)	Azimuth	Dip
BV10-08	Sunset trend; step out NW from BV08-3 intercept	575830	6966527	1337	102.7	70	-50
BV10-09	Sunset trend; step out NW from BV08-3 intercept	575830	6966528	1337	99	70	-85
BV10-10	Sunset trend; step-out NW from BV10-08	575757	6966549	1333	121.3	70	-50
BV10-11	Sunset trend; step-out NW from BV10-08	575757	6966550	1333	154.83	70	-82
BV10-12	Hollywood trend	576278	6966540	1314	203.3	45	-50
BV10-13	Hollywood trend	576360	6966478	1311	203.33	45	-50
BV10-14	Hollywood trend	575902	6966758	1311	208.88	45	-50
BV10-15	Sunset trend; down dip test below BV08-3	575869	6966492	1341	93.57	30	-50
BV10-16	Sunset trend, step out SE from BV10-15	575899	6966479	1340	87.78	30	-50
BV10-17	Sunset trend, complete fence across broad anomaly with BV10-18	575762	6966589	1329	127.1	30	-50
BV10-18	Sunset trend, complete fence across broad anomaly with BV10-17	575801	6966650	1324	108.81	30	-50
BV10-19	Hollywood trend, test for NE dip to zone	576038	6966836	1295	136.55	225	-50
BV10-20	Sunset trend; completes fence with BV10-10 and tests 50 m deeper than BV10-01	575719	6966537	1332	241.71	70	-65
BV10-21	Test Vegas trend near Sunset trend	576283	6966236	1308	118.69	45	-50
BV10-22	Vegas trend	576326	6966111	1288	124.11	45	-50
BV10-23	Vegas trend; steeper test from same set-up as BV10-22	576326	6966111	1288	200.5	45	-70
BV10-24	Vegas trend, step-out SE from BV10-22, -23	576358	6966071	1282	185.03	45	-50
BV10-25	Vegas trend, step-out NW from BV10-22, -23	576300	6966158	1296	120.7	45	-50
BV10-26	Test Sunset trend at far SE part of trend in area with high Au in soils	576809	6965621	1207	216.41	30	-50
BV10-27	Vegas trend; step-out SE from BV10-24	576421	6965932	1254	151.49	45	-50
				total	3005.79 m		

Table 8: 2010 Drill Intercepts

Hole ID	From (m)	To (m)	Interval (m)	Au (g/t)	Comments
BV10-08	27.30	44.80	17.50	0.20	
incl.	36.60	44.80	8.20	0.30	
BV10-09	41.60	49.60	8.00	0.11	
BV10-09	55.50	59.70	4.20	0.67	
BV10-10	57.00	62.80	5.80	0.35	
incl.	57.40	60.00	2.60	0.60	
BV10-11	74.90	77.80	2.90	0.38	
BV10-11	110.90	113.10	2.20	0.92	
BV10-12	-	-	-	-	minor Au, highest 0.29 g/t Au
BV10-13	-	-	-	-	minor Au, highest 0.35 g/t Au
BV10-14	-	-	-	-	no elevated Au
BV10-15	29.21	39.76	10.55	1.65	
BV10-16	18.10	22.60	4.50	0.48	
BV10-17	28.60	32.60	4.00	0.72	
BV10-18	-	-	-	-	no elevated Au
BV10-19	-	-	-	-	no elevated Au
BV10-20	95.05	100.05	5.00	0.74	
BV10-20	108.05	114.05	6.00	0.21	
BV10-21	17.07	20.60	3.53	0.19	
BV10-21	45.68	46.28	0.60	0.65	
BV10-22	56.00	75.20	19.20	0.36	
incl.	57.00	66.85	9.85	0.43	
BV10-22	89.28	98.28	9.00	0.13	
BV10-23	62.00	99.62	37.62	0.64	
incl.	62.00	68.26	6.26	2.43	
and incl.	78.00	85.90	7.90	0.74	
BV10-24	81.14	85.14	4.00	0.48	
BV10-24	95.00	96.40	1.40	3.09	
BV10-25	-	-	-	-	minor, highest 0.26 g/t Au
BV10-26	52.05	56.73	4.68	0.44	
BV10-26	134.50	136.50	2.00	1.12	
BV10-27	-	-	-	-	minor, highest 0.50 g/t Au

11.1 Drill Holes BV10-08 and BV10-09

These two holes were completed from the same drill setup at -50 and -85 degree inclinations (Figure 10a). The drill site was chosen 50 m NW from the section which includes the 2008 trench TRBV08-01 (7.04 g/t Au over 6.0 m) and drill holes BV08-1, BV08-2 and BV08-3 at a point along the suspected strike of the mineralized zone encountered in BV08-3 which returned the best intercept of the 2008 program (1.69 g/t Au over 1.8 m). These three 2008 drill holes were drilled either at 030^{o} or 210^{o} and results were difficult to interpret – the first hole (BV08-1) apparently missed the zone as did the second hole drilled in the opposite direction. Only the very shallow BV08-3 intersected the mineralization sampled in the trench so the interpretation in 2008 was that the zone must be faulted off (Lehtinen and Lui, 2009). In light of this, the 2010

holes were drilled towards 045° perpendicular to a detailed As in soil trend detected via XRF analyses. The targeted area returned anomalous Au-As-Sb in standard soil analyses.

Both drill holes intersected the mineralized zone hosted by biotite-chlorite schist and characterised by late quartz-carbonate veins with associated pyrite and trace arsenopyrite, minor silicification, hydrothermal breccias and late fault gouge zones. Together these two drill holes define the dip of the zone at -45° and indicate that the mineralized / veined zone is about 15 m thick. The best intercepts, however, are 0.20 g/t Au over 17.50 m in BV10-08 and 6.67 g/t Au over 4.20 m in BV10-09. These intercepts are consistent with a planar mineralized zone striking 120° and dipping to the SW. Additionally, results also suggest that the 2008 drill holes to the SE intersected the zone at a near perpendicular angle and that both BV08-1 and BV08-3 intersected the zone (see more below in section describing BV10-15).

11.2 Drill Holes BV10-10, BV10-11 and BV10-20

These three holes were drilled on the same section (Figure 10b) from two set-ups and were all drilled towards 070° to be perpendicular to a jog in the As-in soil anomaly. All three holes encountered predominantly biotite-chlorite schist throughout with minor chlorite schist at the bottom of BV10-10 and minor chert and limestone in BV10-20.

All three holes encountered minor gold mineralization within quartz-carbonate veins with associated pyrite and arsenopyrite. The zone of veining dips about 50° to the SW and is about 5 m wide near surface where BV10-10 returned 0.35 g/t Au over 5.80 m. BV10-20, however, intersected the zone at about 100 m below surface where it is more diffuse with lower-grade mineralization over about 40 m width. A thick interval of late fault gouge truncates the bottom of the interval.

11.3 Drill Holes BV10-12 and BV10-13

These holes tested the Hollywood soil trend located about 350 m northeast of the Sunset trend. This area is characterized by anomalous As-Sb with less consistent anomalous Au-in-soil including a discrete trend defined by XRF field analyses. Neither drill hole returned significant gold values (Figures 10 c & d) so the soil anomaly remains unexplained. The two holes – which were drilled 100 m apart – did intersect similar lithologies throughout. Both holes collared in distinct quartz-muscovite schist with diffuse feldspar grains (presumably phenocrysts) above biotite-chlorite schist with two interleaved intervals of chlorite-biotite schist. Although most of the surface and sub-surface work has failed to delineate mappable, consistent units, these two holes have encountered this apparently consistent sequence of units suggesting that in spite of the strong deformation (and presumably folding), at least locally units are consistent.

11.4 Drill Holes BV10-14 and BV10-19

BV10-14 tested the Hollywood trend about 400 m NW of holes BV10-12 and BV10-13 and like these earlier holes, tested the zone assuming that any mineralized zone was likely dipping to the SW (like at Sunset). This hole failed to intersect any mineralization and encountered biotite-chlorite schist throughout (Figure 10e).

BV10-19 was drilled near BV10-14 but tested for a NE-dipping Hollywood trend causative structure (i.e. directed towards the SW). Similar to BV10-14, this hole failed to intersect gold mineralization or pathfinder sulfides (Figure 10i). As such, the Hollywood soil anomaly remains unexplained.

11.5 Drill Hole BV10-15

This hole was drilled in between BV08-1 and BV08-3 (Figure 10f). The earlier hole failed to encountered significant mineralization whereas the upper BV08-3 encountered the best interval of the 2008 program. BV10-15 also encountered a mineralized interval that returned 1.65 g/t Au over 10.55 m within a planar zone dipping 45° SW. The 2010 intercept is only about 20 m up-dip of BV08-1 so two possible interpretations exist for this section. Firstly, the mineralized zone may pinch-out between these two holes (note that the lower, 2008 hole returned a very narrow interval of elevated gold), or, possibly the mineralization zone is fault-offset as suggested by Lehtinen and Lui (2009).

11.6 Drill Hole BV10-16

This drill hole is a 40 m step-out along strike to the SE from BV10-15 and encountered biotite-chlorite schist throughout (Figure 10g). It also intersected the Sunset mineralized zone at about 20 m downhole. This interval returned 0.48 g/t Au over 4.50 m.

11.7 Drill Holes BV10-17 and BV10-18

These two holes were drilled on the same section and designed to complete a fence across the likely north-western extension of the Sunset zone which was encountered in several holes to the south-east (Figure 10h). These holes encountered predominantly biotite-chlorite schist with minor chlorite and quartz-muscovite schist. Hole BV10-17 encountered the Sunset zone at about 26 m down hole where it graded 0.72 g/t over 4.0 m. Very rare late veins with arsenopyrite were intersected further down hole. Hole BV10-18 did not intersect the Sunset Zone or any significant mineralization.

11.8 Drill Hole BV10-21

This is the first hole to test the Vegas trend soil anomaly and was collared about 500 m ESE of the main part of the Sunset trend at TRBV08-01. BV10-21 encountered biotite-chlorite schist above more chlorite-rich schists and generally returned low gold values. The best result was a 3.53 m interval that returned 0.19 g/t Au.

11.9 Drill Hole BV10-22 and BV10-23

These two holes were completed from the same setup in the core of the Vegas Zone (Figure 10k). After encountering a broad (~40 m wide) interval of quartz-carbonate veins in BV10-22, the steeper BV10-23 hole was added to the program. Both holes encountered predominantly chlorite-biotite schist. Although the mineralized interval in BV10-22 is logged as biotite-chlorite schist, the hostrock is probably the same in both holes given that the distinction between the two types of schist is gradational. BV10-22 returned 19.20 m of 0.36 g/t Au but the deeper drill hole returned a more consistently mineralized interval of 37.62 m at 0.64 g/t Au including a higher-grade zone of 2.43 g/t Au over 6.26 m.

These mineralized intervals are associated with similar, late-stage quartz-carbonate veins as the drill intercepts in the Sunset trend but stibnite and sphalerite are conspicuously more abundant in the Vegas drilling. Some minor veining was encountered near the bottom of BV10-23 suggesting that multiple, stacked mineralized zones likely occur.

11.10 Drill Holes BV10-24 and BV10-25

As follow-up tests to the significant intercepts in BV10-22 and -23, holes BV10-24 and -25 were drilled 50 m respectively to the southeast and northwest. Both holes encountered chlorite-biotite and minor biotite-chlorite or chlorite schist and each hole encountered the broad zone of mineralized veins. Results, however, are less significant than in BV10-23 with the highest interval returning 3.09 g/t over 1.40 m in BV10-24 from within a broader (~55 m wide) low grade interval. The highest grade sample from BV10-25 returned 0.26 g/t Au.

11.11 Drill Hole BV10-26

With the mineralization in BV10-23 apparently closed off by BV10-24 and -25, the drill was moved further southeast near hole BV08-7. Given that the 2010 drilling has shown the mineralized zones to be southwest-dipping, we suspected that BV08-7 likely did not encounter significant mineralization because it was drilled down-dip. As such, BV10-26 was collared 50 m off-section from BV08-7 but oriented in the opposite direction (i.e. drilled towards 030^{o}).

Three narrow, low-grade mineralized intervals were encountered between 50 and 200 m down hole. The best intercepts returned are 1.12 g/t Au over 2.0 m and 0.44 g/t over 4.68 m. Although disappointing, these results do suggest that there is a broad southeast-dipping zone of mineralization in this little-drilled area. Additionally, late-season, detailed soil sampling in 2010 near this drill holes indicates a 200 m by 400 m

cluster of +25 ppb Au-in-soil samples with many samples returning >50 ppb. Given that BV08-7 apparently drilled down-dip, this is still a viable drill target since it has only been effectively tested by one drill hole.

11.12 Drill Hole BV10-27

This final drill hole of the 2010 program was designed to test the Vegas trend 200 m southeast of BV10-22 along the trend of anomalous Au-As-Sb in soils. Several nearby soil samples returned 27 to 45 ppb Au. This hole encountered biotite-chlorite and chlorite-biotite schist throughout with several zones of low density planar quartz carbonate veins. Gold grades, however, were generally low with a highest value of 0.50 g/t Au.

12.0 DISCUSSION AND CONCLUSIONS

12.1 Drilling

The drilling succeeded in intersecting intervals of gold-bearing veins beneath soil anomalies at Sunset and Vegas, but the returned intercepts are low-grade. All mineralized intervals are characterized by rare to common (up to about 8 per metre), planar, undeformed, cm-scale quartz-carbonate veins with minor sericite altered vein selvedges. Sulphide phases include pyrite, arsenopyrite, stibnite and sphalerite but in general sulphide phases do not make up more than 2% of the rock. The host-rock is either biotite-chlorite or chlorite-biotite schist in all drill holes where gold-bearing veins were intersected.

Drilling started proximal to the best drill intercepts from the 2008 drilling campaign at the Sunset trend. Gold mineralization at Sunset is hosted within a planar, southeast-striking zone that dips 45 to 50^{o}. Drilling to date has indicated this structure is at least 270 m long, however, the best intercept from 2010 is 1.65 g/t Au over 10.55 m.

Later in the drilling campaign, the Vegas trend was drill-tested for the first time. Broad intervals of veining were encountered but again, low gold grades were generally encountered. BV10-23 returned the best results but follow-up drilling along strike returned low values. Like the Sunset trend, the Vegas soil anomaly is explained by a 45 to 50^{o}, southwest-dipping, southeast-striking planar zone. In all likelihood, the Sunset and Vegas trends are one in the same. The Vegas has been distinguished because it has a more northerly orientation but now that drilling has shown the moderately shallow attitude of these zones, this more northernly trend is likely due to an apparent deflection of this planar structure as it is incised by the valley hillside.

Four drill holes testing the Hollywood soil trend failed to encounter significant mineralization so this anomaly remains unexplained.

12.2 Future Targeting

The exploration techniques applied at Boulevard in 2008 and 2010 – specifically soil sampling, trenching anomalies and drilling beneath them – have proved successful in encountering gold mineralization in drill core. Unfortunately, high-grade gold and/or broad drill intercepts have been elusive in the first 27 drill holes testing the Boulevard property. Recent information available for the Golden Saddle and Coffee properties (Carpenter, 2011; MacKenzie et al., 2010; MacKenzie et al., 2008) indicate that the best gold intervals at these promising gold prospects are hosted by granite, orthogneiss or quartzite. By contrast, nearly all drilling at Boulevard, and all mineralized intervals encountered, are hosted by biotite-chlorite or chlorite-biotite schist. Chart 4 quantifies the drill intercepts at Boulevard and Coffee and shows that, in general, host-rock strongly influences gold grade. Importantly, in spite of some very promising drill results from the Coffee property, drill intercepts are highly variable and many are narrow and low-grade. This implies that these gold systems are prone to erratic widths and gold grades.

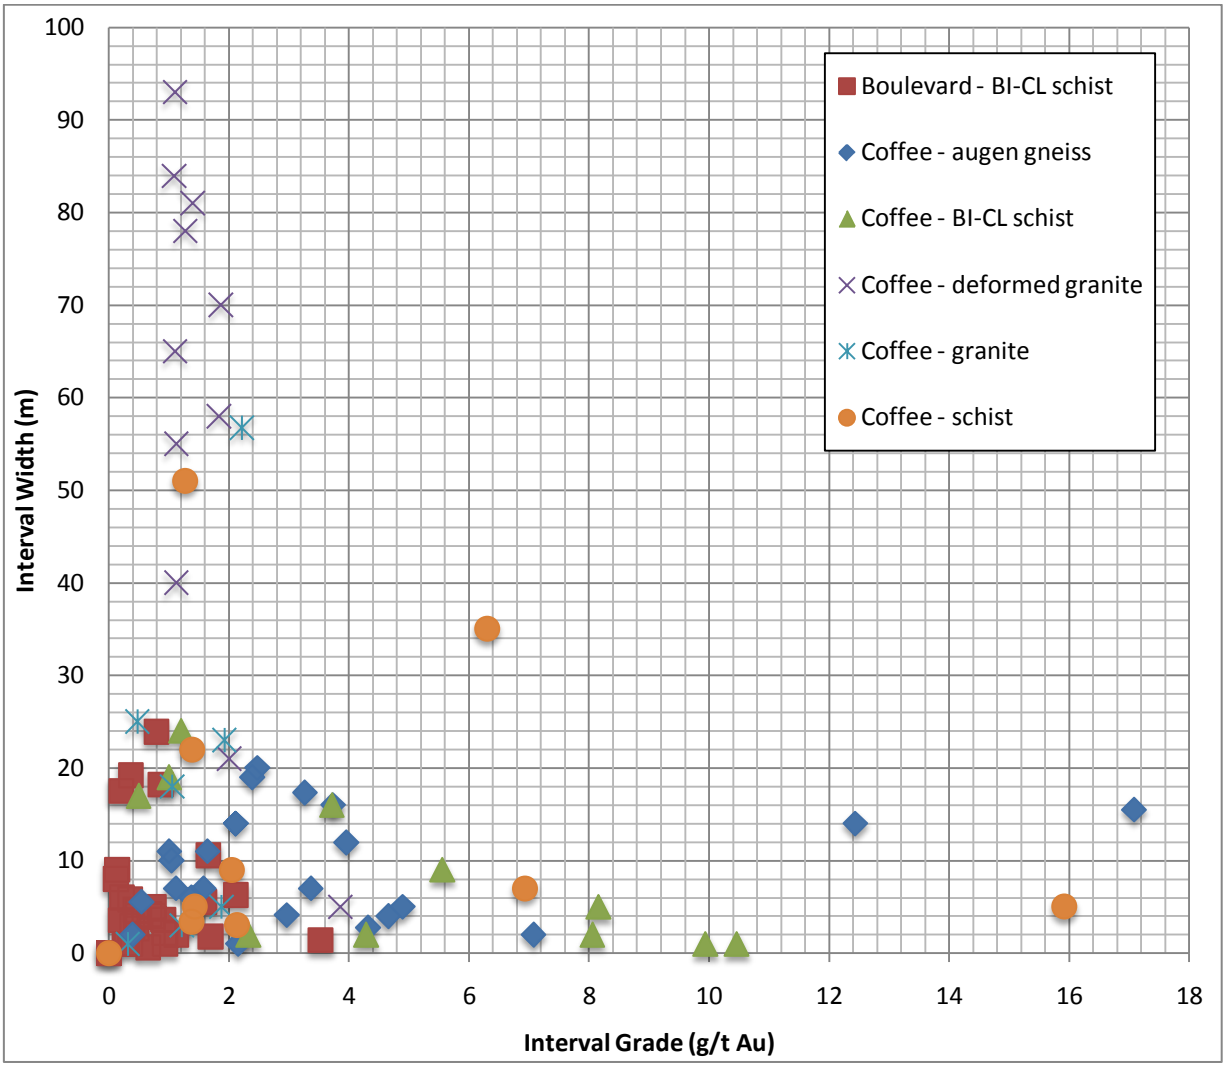


Chart 4: Plot of gold grade versus interval width for drill intercepts from the Boulevard and Coffee properties. Intercepts are plotted according to host-rock type which shows that the better intercepts at Coffee are hosted by orthogneiss and granite. Coffee intercepts are not true width but are estimated to be 50 to 90% of true width. Sources: Kaminak Gold website, this report, Lehtinen & Lui (2009).

Other characteristics such as metal association and timing of gold mineralization appear to be similar for Golden Saddle, Coffee and Boulevard so it is probable that the Boulevard gold zones formed similarly to Coffee and Golden Saddle. The key to better drill intercepts seems to be host-rock. Thus, the challenge at Boulevard is to locate where the gold-bearing system that has already been identified intersects a more prospective host-rock type. If the Boulevard is hosted by Klondike schist as suggested (J. Ryan pers. comm. 2010) it may be difficult to identify large regions of prospective orthogneiss. By contrast, this seems to be a widespread rock type further to the northeast where much of the Dawson Range is underlain by Nasina rocks. Nonetheless, the Klondike schist is interpreted to be derived from volcanic, volcaniclastic and plutonic rock so some host-rocks beside biotite schist are present. One possible example is the feldspar-phyric quartz-muscovite unit encountered near the top of the Hollywood trend drill holes. Unfortunately these holes failed to return any anomalous gold values.

Given the recent revelation of the importance of bedrock type and the poor exposure at Boulevard, mapping has not been widely used. Limited mapping in 2010, however, has also shown that some augen gneiss is present on the Boulevard property. Localities include near the Toni Tiger showing and along a ridge northwest of the camp site. It is possible to conduct detailed float / subcrop mapping and define geological contacts. For example, a narrow amphibolite unit occurs near the Toni Tiger and the extents of this unit seem

to be delineated reasonably well by very rare patches of float cobbles exposed among grass tussocks. Use of detailed magnetic survey data and in-field magnetic susceptibility data (see Appendix G) could significantly aid bedrock geological mapping.

Future programs should focus on detailed surface mapping prior to drilling. Soil geochemistry and ground magnetic surveys should be expanded and in-filled and mapping should focus on soil anomalies and use the magnetic data as much as possible to interpret the surface outcrop / subcrop observations.

12.3 Recommendations

The following is recommended for future exploration at Boulevard:

- Expand the magnetic coverage (ground and/or airborne) across the main soil anomalies
- Complete detailed geological mapping of outcrop, subcrop and float material. Extra attention should be paid to identifying areas underlain by orthogneiss or other granitic rock especially if soil geochemistry indicates elevated pathfinder metals are present
- Complete in-fill soil sampling of the Boulevard grid especially in areas with isolated Au, As or Sb anomalies
- Mechanical trenching is not recommended
- Power augers should be used for sampling north-facing slopes where existing soil geochemistry indicates the presence of elevated pathfinder metals. This technique should be employed at the Wilshire and Independence targets.
- Portable XRF analysers could be used for pre-screening soil samples for multi-element ICP analysis to save analytical costs, although every sample should be submitted to the lab for Au by fire assay analysis.
- No strong drill targets currently exist at Boulevard. Follow-up drilling could be completed at Sunset or Vegas but step-out holes from the best drill intercepts (e.g. BV10-22) have already been completed with poor results. The Boulevard property still remains little-explored, however, but detailed mapping and magnetic surveys should be completed to refine the next round of drill targets. Using soil geochemistry alone for drill targeting generally resulted in drill holes that intersected gold mineralization. To succeed in drilling high-grade and/or broad intervals of gold mineralization, however, bedrock geology must be better understood.

Respectfully submitted,

_____

Darcy Baker, Ph.D., P.Geo.

EQUITY EXPLORATION CONSULTANTS LTD.

Vancouver, British Columbia

Appendix A: Bibliography

Kinross Gold Corporation (2011), White Gold Exploration Project, http://www.kinross.com/operations/dp-white-gold,-yukon.aspx.

Carpenter, R. (2011), Geology of New Lode Gold Discoveries in the Coffee Creek Area; White Gold District, West-Central Yukon: Mineral Exploration Roundup 2011, Vancouver, BC, 2011, p. 48-50.

Colpron, M. (2006), Tectonic assembly map of the Yukon -- Tanana and related terranes in Yukon and British Columbia (1:1,000,000), Yukon Geological Survey Open File 2006-1.

Gordey, S. P., and Makepeace, A. J. (1999), Yukon digital geology, Geological Survey of Canada, Open File D3826.

Gordey, S. P., and Ryan, J. J. (2005), Geology, Stewart River Area (115N, 115O and part of 115J, Yukon Territory, Geological Survey of Canada Open File 4970.

Hart, J. R., Goldfarb, R., Lewis, L. L., and Mair, J. L. (2004), The northern Cordilleran mid-Cretaceous plutonic province: Ilmenite/magnetite-series granitoids and intrusion-related mineralization: Resource Geology, v. 54, p. 253-280.

Lehtinen, J., and Lui, D. (2009), 2008 Geological, Geochemical, Geophysical, Trenching and Diamond Drilling Report on the Boulevard Property, Equity Exploration Consultants Ltd., Assessment Report, p. 45.

MacKenzie, D., Craw, D., Cooley, M., and Fleming, A. (2010), Lithogeochemical localization of disseminated gold in the White River area, Yukon, Canada: Mineralium Deposita, v. 45, p. 683-705.

MacKenzie, D. J., Craw, D., and Mortensen, J. (2008), Structural controls on orogenic gold mineralisation in the Klondike goldfield, Canada: Mineralium Deposita, v. 43, p. 435-448.

Ogilvie, A. C. (1970), Dawson Range Joint Venture, Coffee Creek Area, Yukon, Assessment Report 060249.

Roberts, M., and Baker, D. (2007), 2006 Geological and Geochemical Report on the Rimfire-Northgate Alliance; Stewart River area, Yukon, unpublished company report, p. 53.

Roberts, M. D. (2008), 2007 Geological And Geochemical Report On The BLVD Property, Rimfire Minerals Corporation, Assessment Report.

Smith, H. (2010), Assessment Report describing Soil Geochemical Sampling at the HAN Property, Silver Quest Resources Ltd and ATAC Resources Ltd., Assessment Report, p. 23.

Templeman-Kluit, D. J. (1974), Reconnaissance geology of Aishihik Lake, Snag and part of Stewart River am-areas, west-central Yukon (115H, 115K-J and 115N-O), Geological Survey of Canada, Paper 73-41, p. 97.

Appendix B: Statement of Expenditures

STATEMENT OF EXPENDITURES
BOULEVARD PROPERTY
Fieldwork: May 21 to Sept. 29, 2010

PROFESSIONAL FEES AND WAGES:

Henry Awmack, P. Eng.	
0.38 days @ $650/day	$ 247.00
Darcy Baker, Project Geologist	
64.40 days @ $650/day	41,860.00
Paul Baxter, P. Geo.	
14.00 days @ $650/day	9,100.00
Robin Black, P. Geo.	
0.38 days @ $650/day	247.00
Tom Bell, Prospector	
14.50 days @ $475/day	6,887.50
Thomas Branson, Geologist	
2.13 days @ $525/day	1,118.25
Joseph Byrne, Sampler	
4.00 days @ $275/day	1,100.00
Sarah Fromme, Sampler	
11.00 days @ $275/day	3,025.00
Kyle Flynn, Sampler	
1.00 day @ $275/day	275.00
Warren Gregory, Sampler	
22.00 days @ $275/day	6,050.00
Stewart Harris, P. Geo.	
0.50 days @ $650/day	325.00
William James, Sampler	
19.50 days @ $275/day	5,362.50
Allen Joe, Sampler	
15.00 days @ $275/day	4,125.00
Danny McCreery, Sampler	
1.00 day @ $275/day	275.00
Brendan McGuigan, Sampler	
1.00 day @ $275/day	275.00
Gregory McKenzie, Sr. Sampler	
9.00 days @ $325/day	2,925.00
Scott Parker, GIS/Logistics	
38.50 hours @ $75/hour	2,887.50
Neil Perk, Geologist	
15.46 days @ $525/day	8,114.75
Michael Ross, Sampler	
5.00 days @ $275/day	1,375.00
Colin Slauenwhite, Project Manager	
11.34 day @ $575/day	6,520.50
Tashina Scurvey, Sampler	
27.00 days @ $275/day	7,425.00
Phil Seccombe, PhD.	
1.00 day @ $650/day	650.00
Denis Severino, Sampler	
6.00 days @ $275/day	1,650.00
Richard Sullivan, Sampler	
2.00 days @ $275/day	550.00
Tim Sullivan, Prospector	
12.00 days @ $475/day	5,700.00
Sean Suttie, Senior Sampler	

STATEMENT OF EXPENDITURES
BOULEVARD PROPERTY
Fieldwork: May 21 to Sept. 29, 2010

31.50 days @ $325/day	10,237.50		
Dave Swanton, Geologist			
1.00 day @ $575/day	575.00		
Sydney Vanloon, Sampler			
4.50 days @ $275/day	1,237.50		
Laragh Taylor, Sampler			
16.50 days @ $275/day	4,537.50		
Gavin Titley, Sampler			
7.00 days @ $275/day	1,925.00		
Ryan Toole, Geologist			
45.50 days @ $525/day	23,887.50		
Christina Vandentillaart, Sampler			
15.09 days @ $275/day	4,150.00		
William VanZanten, Prospector			
4.00 days @ $475/day	1,900.00		
Ron Voordouw, Project Geologist			
54.00 days @ $650/day	35,100.00		
Tyler Woyiwada, Sampler			
4.00 days @ $275/day	1,100.00		
Agata Zurek, GIS			
40.75 hours @ $75/hour	3,056.25		
Clerical			
120.00 hours @ $35/hour	4,200.00	$	209,976.25
EQUIPMENT RENTALS			
Field Computers			
44 days @ $40/day	$ 1,760.00		
Micromine Software			
40 hours @ $25/hour	987.50		
Power Soil Auger			
22 days @ $30/day	660.00		3,407.50
EXPENSES:			
Chemical Analyses	$ 41,085.06		
Field Consumables	2,624.74		
Materials and Supplies	1,203.75		
Plot Charges	208.96		
Camp Food	1,892.51		
Meals	164.16		
Accommodation	939.41		
Taxis and Airporters	80.29		
Truck Rental (Non-Equity)	180.00		
Automotive Fuel	196.74		
Aircraft Charters	75,590.50		
Helicopter Charters	144,485.00		
Telephone Distance Charges	46.40		
Freight	7,313.01		
Bulk Fuel	27,443.99		
Drum Deposits	5,160.00		
Geophysical Equipment Rental	625.00		
Radio Rental (Non-Equity)	1,583.20		
Generator Rental (Non-Equity)	120.00		
Excavator	3,500.06		

STATEMENT OF EXPENDITURES
BOULEVARD PROPERTY
Fieldwork: May 21 to Sept. 29, 2010

Drilling: Mob/Demob	13,840.00		
Drilling: Footage	287,150.43		
Drilling: Materials	12,794.75		
Drilling: Coreboxes	11,120.00		
Expediting	189.46		
Storage Rental	500.00		
Course Fees	238.10		640,275.52
SUB-TOTAL:		$	853,659.27
PROJECT SUPERVISION CHARGES:			82,054.37
TOTAL:		**$**	**935,713.64**

Appendix C: Claim Data

Name	No.	Grant No.	Name	No.	Grant No.	Name	No.	Grant No.
AVE	1	YC65316	BDW	43	YD49133	BDW	89	YD49179
AVE	2	YC65317	BDW	44	YD49134	BDW	90	YD49180
AVE	3	YC65318	BDW	45	YD49135	BDW	91	YD49181
AVE	4	YC65319	BDW	46	YD49136	BDW	92	YD49182
BDW	1	YD51801	BDW	47	YD49137	BDW	93	YD49183
BDW	2	YD51802	BDW	48	YD49138	BDW	94	YD49184
BDW	3	YD51803	BDW	49	YD49139	BDW	95	YD49185
BDW	4	YD51804	BDW	50	YD49140	BDW	96	YD49186
BDW	5	YD51805	BDW	51	YD49141	BDW	97	YD49187
BDW	6	YD51806	BDW	52	YD49142	BDW	98	YD49188
BDW	7	YD51807	BDW	53	YD49143	BDW	99	YD49189
BDW	8	YD51808	BDW	54	YD49144	BDW	100	YD49190
BDW	9	YD51809	BDW	55	YD49145	BDW	101	YD49191
BDW	10	YD51810	BDW	56	YD49146	BDW	102	YD49192
BDW	11	YD49101	BDW	57	YD49147	BDW	103	YD49193
BDW	12	YD49102	BDW	58	YD49148	BDW	104	YD49194
BDW	13	YD49103	BDW	59	YD49149	BLVD	1	YC64776
BDW	14	YD49104	BDW	60	YD49150	BLVD	2	YC64777
BDW	15	YD49105	BDW	61	YD49151	BLVD	3	YC64778
BDW	16	YD49106	BDW	62	YD49152	BLVD	4	YC64779
BDW	17	YD49107	BDW	63	YD49153	BLVD	5	YC64780
BDW	18	YD49108	BDW	64	YD49154	BLVD	6	YC64781
BDW	19	YD49109	BDW	65	YD49155	BLVD	7	YC64782
BDW	20	YD49110	BDW	66	YD49156	BLVD	8	YC64783
BDW	21	YD49111	BDW	67	YD49157	BLVD	9	YC64784
BDW	22	YD49112	BDW	68	YD49158	BLVD	10	YC64785
BDW	23	YD49113	BDW	69	YD49159	BLVD	11	YC64786
BDW	24	YD49114	BDW	70	YD49160	BLVD	12	YC64787
BDW	25	YD49115	BDW	71	YD49161	BLVD	13	YC64788
BDW	26	YD49116	BDW	72	YD49162	BLVD	14	YC64789
BDW	27	YD49117	BDW	73	YD49163	BLVD	15	YC64790
BDW	28	YD49118	BDW	74	YD49164	BLVD	16	YC64791
BDW	29	YD49119	BDW	75	YD49165	BLVD	17	YC64792
BDW	30	YD49120	BDW	76	YD49166	BLVD	18	YC64793
BDW	31	YD49121	BDW	77	YD49167	BLVD	19	YC64794
BDW	32	YD49122	BDW	78	YD49168	BLVD	20	YC64795
BDW	33	YD49123	BDW	79	YD49169	BLVD	21	YC64796
BDW	34	YD49124	BDW	80	YD49170	BLVD	22	YC64797
BDW	35	YD49125	BDW	81	YD49171	BLVD	23	YC64798
BDW	36	YD49126	BDW	82	YD49172	BLVD	24	YC64799
BDW	37	YD49127	BDW	83	YD49173	BLVD	25	YC64800
BDW	38	YD49128	BDW	84	YD49174	BLVD	26	YC64801
BDW	39	YD49129	BDW	85	YD49175	BLVD	27	YC64802
BDW	40	YD49130	BDW	86	YD49176	BLVD	28	YC64803
BDW	41	YD49131	BDW	87	YD49177	BLVD	29	YC64804
BDW	42	YD49132	BDW	88	YD49178	BLVD	30	YC64805

Name	No.	Grant No.	Name	No.	Grant No.	Name	No.	Grant No.
BLVD	31	YC64806	BLVD	77	YC64852	BLVD	123	YC82952
BLVD	32	YC64807	BLVD	78	YC64853	BLVD	124	YC82953
BLVD	33	YC64808	BLVD	79	YC64854	BLVD	125	YC82954
BLVD	34	YC64809	BLVD	80	YC64855	BLVD	126	YC82955
BLVD	35	YC64810	BLVD	81	YC64856	BLVD	127	YC82956
BLVD	36	YC64811	BLVD	82	YC64857	BLVD	128	YC82957
BLVD	37	YC64812	BLVD	83	YC64858	BLVD	129	YC82958
BLVD	38	YC64813	BLVD	84	YC64859	BLVD	130	YC82959
BLVD	39	YC64814	BLVD	85	YC64860	BLVD	131	YC82960
BLVD	40	YC64815	BLVD	86	YC64861	BLVD	132	YC82961
BLVD	41	YC64816	BLVD	87	YC64862	BLVD	133	YC82962
BLVD	42	YC64817	BLVD	88	YC64863	BLVD	134	YC82963
BLVD	43	YC64818	BLVD	89	YC64864	BLVD	135	YC82964
BLVD	44	YC64819	BLVD	90	YC64865	BLVD	136	YC82965
BLVD	45	YC64820	BLVD	91	YC64866	BLVD	137	YC82966
BLVD	46	YC64821	BLVD	92	YC64867	BLVD	138	YC82967
BLVD	47	YC64822	BLVD	93	YC64868	BLVD	139	YC82968
BLVD	48	YC64823	BLVD	94	YC64869	BLVD	140	YC82969
BLVD	49	YC64824	BLVD	95	YC64870	BLVD	141	YC82970
BLVD	50	YC64825	BLVD	96	YC64871	BLVD	142	YC82971
BLVD	51	YC64826	BLVD	97	YC82926	BLVD	143	YC82972
BLVD	52	YC64827	BLVD	98	YC82927	BLVD	144	YC82973
BLVD	53	YC64828	BLVD	99	YC82928	BLVD	145	YC82974
BLVD	54	YC64829	BLVD	100	YC82929	BLVD	146	YC82975
BLVD	55	YC64830	BLVD	101	YC82930	BLVD	147	YC82976
BLVD	56	YC64831	BLVD	102	YC82931	BLVD	148	YC82977
BLVD	57	YC64832	BLVD	103	YC82932	BLVD	149	YC82978
BLVD	58	YC64833	BLVD	104	YC82933	BLVD	150	YC82979
BLVD	59	YC64834	BLVD	105	YC82934	BLVD	151	YC82980
BLVD	60	YC64835	BLVD	106	YC82935	BLVD	152	YC82981
BLVD	61	YC64836	BLVD	107	YC82936	BLVD	153	YC82982
BLVD	62	YC64837	BLVD	108	YC82937	BLVD	154	YC82983
BLVD	63	YC64838	BLVD	109	YC82938	BLVD	155	YC82984
BLVD	64	YC64839	BLVD	110	YC82939	BLVD	156	YC82985
BLVD	65	YC64840	BLVD	111	YC82940	BLVD	157	YC82986
BLVD	66	YC64841	BLVD	112	YC82941	BLVD	158	YC82987
BLVD	67	YC64842	BLVD	113	YC82942	BLVD	159	YC82988
BLVD	68	YC64843	BLVD	114	YC82943	BLVD	160	YC82989
BLVD	69	YC64844	BLVD	115	YC82944	BLVD	161	YC82990
BLVD	70	YC64845	BLVD	116	YC82945	BLVD	162	YC82991
BLVD	71	YC64846	BLVD	117	YC82946	BLVD	163	YC82992
BLVD	72	YC64847	BLVD	118	YC82947	BLVD	164	YC82993
BLVD	73	YC64848	BLVD	119	YC82948	BLVD	165	YC82994
BLVD	74	YC64849	BLVD	120	YC82949	BLVD	166	YC82995
BLVD	75	YC64850	BLVD	121	YC82950	BLVD	167	YC82996
BLVD	76	YC64851	BLVD	122	YC82951	BLVD	168	YC82997

Name	No.	Grant No.	Name	No.	Grant No.	Name	No.	Grant No.
BLVD	169	YC82998	DRIVE	13	YC81296	GRT	27	YD15277
BLVD	170	YC82999	DRIVE	14	YC81297	GRT	28	YD15278
BLVD	171	YC83000	DRIVE	15	YC81298	GRT	29	YD15279
BLVD	172	YC83001	DRIVE	16	YC81299	GRT	30	YD15280
BLVD	173	YC83002	DRIVE	17	YC81300	GRT	31	YD15281
BLVD	174	YC83003	DRIVE	18	YC81301	GRT	32	YD15282
BLVD	175	YC83004	DRIVE	19	YC81302	GRT	33	YD15283
BLVD	176	YC83005	DRIVE	20	YC81303	GRT	34	YD15284
BLVD	177	YC83006	DRIVE	21	YC81304	GRT	35	YD15285
BLVD	178	YC83007	DRIVE	22	YC81305	GRT	36	YD15286
BLVD	179	YC83008	DRIVE	23	YC81306	HAN	1	YC98845
BLVD	180	YC83009	DRIVE	24	YC81307	HAN	2	YC98846
BLVD	181	YC83010	DRIVE	25	YC81308	HAN	3	YC98847
BLVD	182	YC83011	DRIVE	26	YC81309	HAN	4	YC98848
BLVD	183	YC83012	DRIVE	27	YC81310	HAN	5	YC98849
BLVD	184	YC83013	DRIVE	28	YC81311	HAN	6	YC98850
BLVD	185	YC83014	DRIVE	29	YC81312	HAN	7	YC98851
BLVD	186	YC83015	DRIVE	30	YC81313	HAN	8	YC98852
BLVD	187	YC83016	DRIVE	31	YC81314	SOL	1	YD08611
BLVD	188	YC83017	DRIVE	32	YC81315	SOL	2	YD08612
BLVD	189	YC83018	GRT	1	YD15231	SOL	3	YD08613
BLVD	190	YC83019	GRT	2	YD15232	SOL	4	YD08614
BLVD	191	YC83020	GRT	3	YD15233	SOL	5	YD08615
BLVD	192	YC83021	GRT	4	YD15234	SOL	6	YD08616
BLVD	193	YC83022	GRT	5	YD15235	SOL	7	YD08617
BLVD	194	YC83023	GRT	6	YD15236	SOL	8	YD08618
BLVD	195	YC83024	GRT	7	YD15237	SOL	9	YD08619
BLVD	196	YC83025	GRT	8	YD15238	SOL	10	YD08620
BLVD	197	YC83026	GRT	9	YD15239	SOL	11	YD08621
BLVD	198	YC83027	GRT	10	YD15240	SOL	12	YD08622
BLVD	199	YC83028	GRT	11	YD15241	SOL	13	YD08623
BLVD	200	YC83029	GRT	12	YD15242	SOL	14	YD08624
BLVD	201	YC83030	GRT	13	YD15243	SOL	15	YD08625
BLVD	202	YC83031	GRT	14	YD15244	SOL	16	YD08626
DRIVE	1	YC81284	GRT	15	YD15245	SOL	17	YD08627
DRIVE	2	YC81285	GRT	16	YD15246	SOL	18	YD08628
DRIVE	3	YC81286	GRT	17	YD15247	SOL	19	YD08629
DRIVE	4	YC81287	GRT	18	YD15248	SOL	20	YD08630
DRIVE	5	YC81288	GRT	19	YD15269	SOL	21	YD08631
DRIVE	6	YC81289	GRT	20	YD15270	SOL	22	YD08632
DRIVE	7	YC81290	GRT	21	YD15271	SOL	23	YD08633
DRIVE	8	YC81291	GRT	22	YD15272	SOL	24	YD08634
DRIVE	9	YC81292	GRT	23	YD15273	SOL	25	YD08635
DRIVE	10	YC81293	GRT	24	YD15274	SOL	26	YD08636
DRIVE	11	YC81294	GRT	25	YD15275	SOL	27	YD08637
DRIVE	12	YC81295	GRT	26	YD15276	SOL	28	YD08638

Name	No.	Grant No.	Name	No.	Grant No.	Name	No.	Grant No.
SOL	29	YD08639	SOL	75	YD08685	XT	301	YD51301
SOL	30	YD08640	SOL	76	YD08686	XT	302	YD51302
SOL	31	YD08641	SOL	77	YD08687	XT	303	YD51303
SOL	32	YD08642	SOL	78	YD08688	XT	304	YD51304
SOL	33	YD08643	SOL	79	YD08689	XT	305	YD51305
SOL	34	YD08644	SOL	80	YD08690	XT	306	YD51306
SOL	35	YD08645	SOL	81	YD08691	XT	307	YD51307
SOL	36	YD08646	SOL	82	YD08692	XT	308	YD51308
SOL	37	YD08647	SOL	83	YD08693	XT	309	YD51309
SOL	38	YD08648	SOL	84	YD08694	XT	310	YD51310
SOL	39	YD08649	TIGER	1	YC46726	XT	311	YD51311
SOL	40	YD08650	TIGER	2	YC46727	XT	312	YD51312
SOL	41	YD08651	TIGER	3	YC46728	XT	313	YD51313
SOL	42	YD08652	TIGER	4	YC46729	XT	314	YD51314
SOL	43	YD08653	TIGER	5	YC46730	XT	315	YD51315
SOL	44	YD08654	TIGER	6	YC46731	XT	316	YD51316
SOL	45	YD08655	TIGER	7	YC46732	XT	317	YD51317
SOL	46	YD08656	TIGER	8	YC46733	XT	318	YD51318
SOL	47	YD08657	XT	235	YD51235	XT	319	YD51319
SOL	48	YD08658	XT	236	YD51236	XT	320	YD51320
SOL	49	YD08659	XT	237	YD51237	XT	321	YD51321
SOL	50	YD08660	XT	238	YD51238	XT	322	YD51322
SOL	51	YD08661	XT	239	YD51239	XT	323	YD51323
SOL	52	YD08662	XT	240	YD51240	XT	324	YD51324
SOL	53	YD08663	XT	241	YD51241	XT	325	YD51325
SOL	54	YD08664	XT	242	YD51242	XT	326	YD51326
SOL	55	YD08665	XT	243	YD51243	XT	327	YD51327
SOL	56	YD08666	XT	244	YD51244	XT	328	YD51328
SOL	57	YD08667	XT	269	YD51269	XT	331	YD51331
SOL	58	YD08668	XT	270	YD51270	XT	332	YD51332
SOL	59	YD08669	XT	271	YD51271	XT	333	YD51333
SOL	60	YD08670	XT	272	YD51272	XT	334	YD51334
SOL	61	YD08671	XT	273	YD51273	XT	335	YD51335
SOL	62	YD08672	XT	274	YD51274	XT	336	YD51336
SOL	63	YD08673	XT	275	YD51275	XT	337	YD51337
SOL	64	YD08674	XT	276	YD51276	XT	338	YD51338
SOL	65	YD08675	XT	277	YD51277	XT	339	YD51339
SOL	66	YD08676	XT	278	YD51278	XT	340	YD51340
SOL	67	YD08677	XT	279	YD51279	XT	341	YD51341
SOL	68	YD08678	XT	280	YD51280	XT	342	YD51342
SOL	69	YD08679	XT	281	YD51281	XT	343	YD51343
SOL	70	YD08680	XT	282	YD51282	XT	344	YD51344
SOL	71	YD08681	XT	283	YD51283	XT	345	YD51345
SOL	72	YD08682	XT	284	YD51284	XT	346	YD51346
SOL	73	YD08683	XT	285	YD51285	XT	347	YD51347
SOL	74	YD08684	XT	286	YD51286	XT	348	YD51348

Name	No.	Grant No.	Name	No.	Grant No.	Name	No.	Grant No.
XT	349	YD51349	XY	18	YD50719	XY	66	YD50766
XT	350	YD51350	XY	19	YD50720	XY	67	YD50767
XT	351	YD51351	XY	20	YD50721	XY	68	YD50768
XT	352	YD51352	XY	21	YD50722	XY	69	YD50769
XT	353	YD51353	XY	23	YD50723	XY	70	YD50770
XT	354	YD51354	XY	24	YD50724	XY	71	YD50771
XT	355	YD51355	XY	25	YD50725	XY	72	YD50772
XT	356	YD51356	XY	26	YD50726	XY	73	YD50773
XT	357	YD51357	XY	27	YD50727	XY	74	YD50774
XT	358	YD51358	XY	28	YD50728	XY	75	YD50775
XT	361	YD51361	XY	29	YD50729	XY	76	YD50776
XT	362	YD51362	XY	30	YD50730	XY	77	YD50777
XT	363	YD51363	XY	31	YD50731	XY	78	YD50778
XT	364	YD51364	XY	32	YD50732	XY	79	YD50779
XT	365	YD51365	XY	33	YD50733	XY	80	YD50780
XT	366	YD51366	XY	34	YD50734	XY	81	YD51581
XT	367	YD51367	XY	35	YD50735	XY	82	YD51582
XT	368	YD51368	XY	36	YD50736	XY	83	YD51583
XT	369	YD51369	XY	37	YD50737	XY	84	YD51584
XT	370	YD51370	XY	38	YD50738	XY	85	YD51585
XT	371	YD51371	XY	39	YD50739	XY	86	YD51586
XT	372	YD51372	XY	40	YD50740	XY	87	YD51587
XT	373	YD51373	XY	41	YD50741	XY	88	YD51588
XT	374	YD51374	XY	42	YD50742	XY	89	YD51589
XT	375	YD51375	XY	43	YD50743	XY	90	YD51590
XT	376	YD51376	XY	44	YD50744	XY	91	YD51591
XT	377	YD51377	XY	45	YD50745	XY	92	YD51592
XT	378	YD51378	XY	46	YD50746	XY	93	YD51593
XY	1	YD50701	XY	47	YD50747	XY	94	YD51594
XY	2	YD50702	XY	48	YD50748	XY	95	YD51595
XY	3	YD50703	XY	49	YD50749	XY	96	YD51596
XY	4	YD50704	XY	50	YD50750	XY	97	YD51597
XY	5	YD50705	XY	51	YD50751	XY	98	YD51598
XY	6	YD50706	XY	52	YD50752	XY	99	YD51599
XY	7	YD50707	XY	53	YD50753	XY	100	YD51600
XY	8	YD50708	XY	54	YD50754	XY	101	YD51601
XY	9	YD50709	XY	56	YD50756	XY	102	YD51602
XY	10	YD50710	XY	57	YD50757	XY	103	YD51603
XY	11	YD50711	XY	58	YD50758	XY	104	YD51604
XY	12	YD50712	XY	59	YD50759	XY	105	YD51605
XY	13	YD50713	XY	60	YD50760	XY	106	YD51606
XY	14	YD50714	XY	61	YD50761	XY	107	YD51607
XY	15	YD50715	XY	62	YD50762	XY	108	YD51608
XY	16	YD50716	XY	63	YD50763	XY	109	YD51609
XY	17	YD50717	XY	64	YD50764	XY	110	YD51610
XY	18	YD50718	XY	65	YD50765	XY	111	YD51611

Name	No.	Grant No.	Name	No.	Grant No.	Name	No.	Grant No.
XY	112	YD51612	XY	158	YD51658	XY	204	YD51704
XY	113	YD51613		159	YD51659	XY	205	YD51705
XY	114	YD51614	XY	160	YD51660	XY	206	YD51706
XY	115	YD51615	XY	161	YD51661	XY	207	YD51707
XY	116	YD51616	XY	162	YD51662	XY	208	YD51708
XY	117	YD51617	XY	163	YD51663	XY	209	YD51709
XY	118	YD51618	XY	164	YD51664	XY	210	YD51710
XY	119	YD51619	XY	165	YD51665	XY	211	YD51711
XY	120	YD51620	XY	166	YD51666	XY	212	YD51712
XY	121	YD51621	XY	167	YD51667	XY	213	YD51713
XY	122	YD51622	XY	168	YD51668	XY	214	YD51714
XY	123	YD51623	XY	169	YD51669	XY	215	YD51715
XY	124	YD51624	XY	170	YD51670	XY	216	YD51716
XY	125	YD51625	XY	171	YD51671	XY	217	YD51717
XY	126	YD51626	XY	172	YD51672	XY	218	YD51718
XY	127	YD51627	XY	173	YD51673	XY	219	YD51719
XY	128	YD51628	XY	174	YD51674	XY	220	YD51720
XY	129	YD51629	XY	175	YD51675	XY	221	YD51721
XY	130	YD51630	XY	176	YD51676	XY	222	YD51722
XY	131	YD51631	XY	177	YD51677	XY	223	YD51723
XY	132	YD51632	XY	178	YD51678	XY	224	YD51724
XY	133	YD51633	XY	179	YD51679	XY	225	YD51725
XY	134	YD51634	XY	180	YD51680	XY	226	YD51726
XY	135	YD51635	XY	181	YD51681	XY	227	YD51727
XY	136	YD51636	XY	182	YD51682	XY	228	YD51728
XY	137	YD51637	XY	183	YD51683	XY	229	YD51729
XY	138	YD51638	XY	184	YD51684	XY	230	YD51730
XY	139	YD51639	XY	185	YD51685	XY	231	YD51731
XY	140	YD51640	XY	186	YD51686	XY	232	YD51732
XY	141	YD51641	XY	187	YD51687	XY	233	YD51733
XY	142	YD51642	XY	188	YD51688	XY	234	YD51734
XY	143	YD51643	XY	189	YD51689	XY	235	YD51735
XY	144	YD51644	XY	190	YD51690	XY	236	YD51736
XY	145	YD51645	XY	191	YD51691	XY	237	YD51737
XY	146	YD51646	XY	192	YD51692	XY	238	YD51738
XY	147	YD51647	XY	193	YD51693	XY	239	YD51739
XY	148	YD51648	XY	194	YD51694	XY	240	YD51740
XY	149	YD51649	XY	195	YD51695	XY	241	YD51741
XY	150	YD51650	XY	196	YD51696	XY	242	YD51742
XY	151	YD51651	XY	197	YD51697	XY	243	YD51743
XY	152	YD51652	XY	198	YD51698	XY	244	YD51744
XY	153	YD51653	XY	199	YD51699	XY	245	YD51745
XY	154	YD51654	XY	200	YD51700	XY	246	YD51746
XY	155	YD51655	XY	201	YD51701	XY	247	YD51747
XY	156	YD51656	XY	202	YD51702	XY	248	YD51748
XY	157	YD51657	XY	203	YD51703	XY	249	YD51749

Name	No.	Grant No.	Name	No.	Grant No.	Name	No.	Grant No.
XY	250	YD51750	XY	296	YD51796			
XY	251	YD51751	XY	297	YD51797			
XY	252	YD51752	XY	298	YD51798			
XY	253	YD51753	XY	299	YD51799			
XY	254	YD51754	XY	300	YD51800			
XY	255	YD51755	XY	311	YD51811			
XY	256	YD51756	XY	312	YD51812			
XY	257	YD51757	XY	313	YD51813			
XY	258	YD51758	XY	314	YD51814			
XY	259	YD51759	XY	315	YD51815			
XY	260	YD51760	XZ	1	YD51901			
XY	261	YD51761	XZ	2	YD51902			
XY	262	YD51762	XZ	3	YD51903			
XY	263	YD51763	XZ	4	YD51904			
XY	264	YD51764	XZ	5	YD51905			
XY	265	YD51765	XZ	6	YD51906			
XY	266	YD51766	XZ	7	YD51907			
XY	267	YD51767	XZ	8	YD51908			
XY	268	YD51768	XZ	9	YD51909			
XY	269	YD51769	XZ	10	YD51910			
XY	270	YD51770	XZ	11	YD51911			
XY	271	YD51771	XZ	12	YD51912			
XY	272	YD51772	XZ	13	YD51913			
XY	273	YD51773	XZ	14	YD51914			
XY	274	YD51774	XZ	15	YD51915			
XY	275	YD51775	XZ	16	YD51916			
XY	276	YD51776	XZ	17	YD51917			
XY	277	YD51777	XZ	18	YD51918			
XY	278	YD51778	XZ	19	YD51919			
XY	279	YD51779	XZ	20	YD51920			
XY	280	YD51780	XZ	21	YD51921			
XY	281	YD51781	XZ	22	YD51922			
XY	282	YD51782	XZ	23	YD51923			
XY	283	YD51783	XZ	24	YD51924			
XY	284	YD51784	XZ	25	YD51925			
XY	285	YD51785	XZ	26	YD51926			
XY	286	YD51786	XZ	27	YD51927			
XY	287	YD51787	XZ	28	YD51928			
XY	288	YD51788	XZ	29	YD51929			
XY	289	YD51789	XZ	30	YD51930			
XY	290	YD51790	XZ	31	YD51931			
XY	291	YD51791	XZ	32	YD51932			
XY	292	YD51792						
XY	293	YD51793						
XY	294	YD51794						
XY	295	YD51795						

Appendix D-1: Geochemical Certificates

(Rock Samples)

Rock Sample Descriptions Dawson

Operator: Silver Quest Resources Ltd. **Project:** SQI11-03 2010 **NTS:**

G092272 Boulevard

Grid North: UTM 6966838 N | Grid East: UTM 575526 E | Elevation | Sample Width:

Type: Float | Strike Length Exp: | True Width: | Host : Gneiss

Alteration: Qz | Metallics: | Secondaries: Ja

Au (ppm)	Ag (ppm)	As (ppm)	Bi (ppm)
<0.005	0.01	0.3	0.06
Cu (ppm)	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
2.9	0.18	0.06	3

Sampled By: TB 17-Jul-10

Sampled sugary, glassy Qtz in trench

G092273 Boulevard

Grid North: UTM 6966836 N | Grid East: UTM 575490 E | Elevation | Sample Width:

Type: Float | Strike Length Exp: | True Width: | Host : Gneiss

Alteration: Qz | Metallics: | Secondaries: Ja

Au (ppm)	Ag (ppm)	As (ppm)	Bi (ppm)
<0.005	0.05	0.8	0.13
Cu (ppm)	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
12.1	0.75	0.16	6

Sampled By: TB 17-Jul-10

Sampled sugary, glassy Qtz in trench

G092274 Boulevard

Grid North: UTM 6966773 N | Grid East: UTM 575403 E | Elevation | Sample Width:

Type: Float | Strike Length Exp: | True Width: | Host : Gneiss

Alteration: Ms | Metallics: | Secondaries: Ja

Au (ppm)	Ag (ppm)	As (ppm)	Bi (ppm)
0.005	0.13	1.4	0.18
Cu (ppm)	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
18.7	0.24	2.11	5

Sampled By: TB 17-Jul-10

Sampled quartz with gniess. Good jarosite

G092275 Boulevard

Grid North: UTM 6966776 N | Grid East: UTM 575418 E | Elevation | Sample Width:

Type: Float | Strike Length Exp: | True Width: | Host : Gneiss

Alteration: Ms | Metallics: Py | Secondaries: Ja

Au (ppm)	Ag (ppm)	As (ppm)	Bi (ppm)
0.014	0.42	0.4	1.02
Cu (ppm)	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
246	0.45	0.11	73

Sampled By: TB 17-Jul-10

Sampled sugary, glassy Qtz in gneiss with minor Py

G092276 Boulevard

Grid North: UTM 6966776 N | Grid East: UTM 575427 E | Elevation | Sample Width:

Type: Float | Strike Length Exp: | True Width: | Host : Gneiss

Alteration: Ms | Metallics: | Secondaries: Ja

Au (ppm)	Ag (ppm)	As (ppm)	Bi (ppm)
<0.005	0.09	0.8	0.2
Cu (ppm)	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
8.6	0.37	0.39	8

Sampled By: TB 17-Jul-10

Glassy Qtz with gneiss in trench. Good jarosite

G092277 Boulevard

Grid North: UTM 6966773 N | Grid East: UTM 575526 E | Elevation | Sample Width:

Type: Float | Strike Length Exp: | True Width: | Host : Gneiss

Alteration: Ms | Metallics: Py | Secondaries: Ja

Au (ppm)	Ag (ppm)	As (ppm)	Bi (ppm)
0.007	0.4	2.4	0.17
Cu (ppm)	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
19	1.14	0.68	14

Sampled By: TB 17-Jul-10

Sampled big block of sugary Qtz with minor Py in trench

Rock Sample Descriptions Dawson

Operator: Silver Quest Resources Ltd. **Project:** SQI11-03 2010 **NTS:**

G092278 Boulevard

Grid North: UTM 6966841 N | Grid East: UTM 575948 E | Elevation | Sample Width:
Type: Float | Strike Length Exp: | True Width: | Host : Gneiss
Alteration: Qz | Metallics: | Secondaries: Ja

Au (ppm)	Ag (ppm)	As (ppm)	Bi (ppm)
0.007	0.22	2.8	0.06
Cu (ppm)	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
18.1	0.16	0.2	2

Sampled By: TB 17-Jul-10

Sampled sugary, vuggy Qtz in trench

G092279 Boulevard

Grid North: UTM 6966342 N | Grid East: UTM 576347 E | Elevation | Sample Width:
Type: Float | Strike Length Exp: | True Width: | Host : Gneiss
Alteration: Ms | Metallics: | Secondaries: Ja

Au (ppm)	Ag (ppm)	As (ppm)	Bi (ppm)
0.009	0.14	13.5	0.19
Cu (ppm)	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
16	0.2	0.72	14

Sampled By: TB 17-Jul-10

Sampled gneiss float with Qtz and good jarosite

G092280 Boulevard

Grid North: UTM 6966253 N | Grid East: UTM 576359 E | Elevation | Sample Width:
Type: Float | Strike Length Exp: | True Width: | Host : Gneiss
Alteration: Ms | Metallics: Py | Secondaries: Ja, He,

Au (ppm)	Ag (ppm)	As (ppm)	Bi (ppm)
0.023	0.72	3.3	1.18
Cu (ppm)	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
41.6	11.7	0.29	29

Sampled By: TB 17-Jul-10

Gneiss and Qtz with minor Py. Good oxides

G092281 Boulevard

Grid North: UTM 6966162 N | Grid East: UTM 576360 E | Elevation | Sample Width:
Type: Float | Strike Length Exp: | True Width: | Host : Gneiss
Alteration: Ms | Metallics: Hs | Secondaries: Ja, He,

Au (ppm)	Ag (ppm)	As (ppm)	Bi (ppm)
0.01	0.09	45	0.08
Cu (ppm)	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
16.4	1.05	4.81	24

Sampled By: TB 17-Jul-10

Sampled sugary Qtz float in trench

G092282 Boulevard

Grid North: UTM 6966110 N | Grid East: UTM 576434 E | Elevation | Sample Width:
Type: Float | Strike Length Exp: | True Width: | Host : Gneiss
Alteration: Ms | Metallics: Py | Secondaries: Ja, He,

Au (ppm)	Ag (ppm)	As (ppm)	Bi (ppm)
0.008	0.07	6.2	0.05
Cu (ppm)	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
12.9	0.2	1.32	8

Sampled By: TB 17-Jul-10

Sugary Qtz float in trench

G092283 Boulevard

Grid North: UTM 6966194 N | Grid East: UTM 576442 E | Elevation | Sample Width:
Type: Float | Strike Length Exp: | True Width: | Host : Gneiss
Alteration: Cl | Metallics: Po | Secondaries: Ja, He,

Au (ppm)	Ag (ppm)	As (ppm)	Bi (ppm)
0.005	0.25	4.5	0.08
Cu (ppm)	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
27.2	0.37	0.66	11

Sampled By: TB 17-Jul-10

Sampled gneiss float with Po in trench

Rock Sample Descriptions Dawson

Operator: Silver Quest Resources Ltd. **Project:** SQI11-03 2010 **NTS:**

G092284 Boulevard	Grid North:		Grid East:		Type: Float	Alteration:	**Au (ppm)**	**Ag (ppm)**	**As (ppm)**	**Bi (ppm)**
	UTM 6966277	N	UTM 576441	E	Strike Length Exp:	Metallics: Py	0.007	0.24	1	0.68
	Elevation		Sample Width:		True Width:	Secondaries: Ja, He,	**Cu (ppm)**	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
					Host : Gneiss		56.5	0.57	0.17	103
Sampled By: TB 17-Jul-10	Sampled sugary vuggy Qtz float in trench									
G092285 Boulevard	Grid North:		Grid East:		Type: Float	Alteration: Ms	**Au (ppm)**	**Ag (ppm)**	**As (ppm)**	**Bi (ppm)**
	UTM 6966409	N	UTM 576493	E	Strike Length Exp:	Metallics: Py	0.007	0.22	1.8	0.34
	Elevation		Sample Width:		True Width:	Secondaries: Ja, He,	**Cu (ppm)**	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
					Host : Gneiss		11.8	0.14	0.12	19
Sampled By: TB 17-Jul-10	Sampled sugary Qtz in gneiss with some Py									
G092286 Boulevard	Grid North:		Grid East:		Type: Float	Alteration: Ms	**Au (ppm)**	**Ag (ppm)**	**As (ppm)**	**Bi (ppm)**
	UTM 6966211	N	UTM 576490	E	Strike Length Exp:	Metallics: Py	<0.005	0.1	0.8	0.43
	Elevation		Sample Width:		True Width:	Secondaries: Ja, He,	**Cu (ppm)**	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
					Host : Gneiss		12.3	0.21	0.09	16
Sampled By: TB 17-Jul-10	Gneiss with Qtz and minor Py in trench									

Rock Sample Descriptions Dawson

Operator: Silver Quest Resources Ltd. **Project:** SQI11-03 2010 **NTS:**

I031061 Boulevard	Grid North:		Grid East:		Type: Float	Alteration: Qz, Ms,	**Au (ppm)**	**Ag (ppm)**	**As (ppm)**	**Bi (ppm)**
	UTM 6966556	N	UTM 574338	E	Strike Length Exp:	Metallics: Py, As,	0.01	0.22	15.4	0.39
	Elevation		Sample Width: 20		True Width:	Secondaries: Ge, He, Ja	**Cu (ppm)**	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
					Host : shistose mafic		94.7	15.2	1.32	45
Sampled By: TS 19-Jun-10	Subcrop; Strongly pyritic.									

Rock Sample Descriptions Dawson

Operator: Silver Quest Resources Ltd. **Project:** SQI11-03 2010 **NTS:**

I034151 Boulevard	Grid North:		Grid East:		Type: Grab	Alteration: Ms	**Au (ppm)**	**Ag (ppm)**	**As (ppm)**	**Bi (ppm)**
	UTM 6962905	N	UTM 579165	E	Strike Length Exp:	Metallics: Po, Cp,	<0.005	0.35	3	0.12
	Elevation		Sample Width: 30		True Width:	Secondaries:	**Cu (ppm)**	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
					Host : CL-BI schist		24.1	3.19	0.26	36
Sampled By: DB 01-Aug-10	series of 4 planar veins (1-15 mm) cutting CL-BI schist over 30 cm width. Bleached alteration selvedges (sericite) surround vein. Vein phases = calcite-qtz+/-CL+/-PO.									
I034152 Boulevard	Grid North:		Grid East:		Type: Float	Alteration:	**Au (ppm)**	**Ag (ppm)**	**As (ppm)**	**Bi (ppm)**
	UTM 6967312	N	UTM 577750	E	Strike Length Exp:	Metallics:	<0.005	0.01	0.3	0.11
	Elevation		Sample Width:		True Width:	Secondaries:	**Cu (ppm)**	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
					Host : amphibolite		8.3	0.47	0.05	4
Sampled By: DB 08-Aug-10	FL-QZ-TO dyke. 50x40x40 cm angular bldrs. No foliation, miarolitic cavities									
I034153 Boulevard	Grid North:		Grid East:		Type: Float	Alteration:	**Au (ppm)**	**Ag (ppm)**	**As (ppm)**	**Bi (ppm)**
	UTM 6966870	N	UTM 577778	E	Strike Length Exp:	Metallics: As	<0.005	0.14	0.1	0.17
	Elevation		Sample Width:		True Width:	Secondaries:	**Cu (ppm)**	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
					Host : QZ-MS schist		37	16.7	<0.05	<2
Sampled By: DB 08-Aug-10	Subcrop; vuggy, 4 cm thick Q.V. float. Abundatn post schistosity QZ veins in float. Near Tony Tiger old trench.									
I034154 Boulevard	Grid North:		Grid East:		Type: Float	Alteration:	**Au (ppm)**	**Ag (ppm)**	**As (ppm)**	**Bi (ppm)**
	UTM 6965497	N	UTM 577742	E	Strike Length Exp:	Metallics: Cp, Py,	<0.005	0.02	0.6	0.27
	Elevation		Sample Width:		True Width:	Secondaries:	**Cu (ppm)**	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
					Host : BI schist		22	4.79	0.06	<2
Sampled By: DB 08-Aug-10	several lg angular bldrs just S of S. Ryan ground. Comprises sugary QZ w. patchs of f.g. PY (where fresh). CP coating one fract surface. Similar to MO2-bearing rock in old trench to N (sampled by Tim S in 2007).									

Rock Sample Descriptions Dawson

Operator: Silver Quest Resources Ltd. **Project:** SQI11-03 2010 **NTS:**

I034495 Boulevard	Grid North:		Grid East:		Type: Select	Alteration:	**Au (ppm)**	**Ag (ppm)**	**As (ppm)**	**Bi (ppm)**
	UTM 6973393	N	UTM 566942	E	Strike Length Exp:	Metallics: Mo	<0.005	0.01	1.9	0.08
	Elevation		Sample Width:		True Width:	Secondaries:	**Cu (ppm)**	**Mo (ppm)**	**Sb (ppm)**	**Zn (ppm)**
					Host : Orthogneiss		5.4	36.4	0.05	66

Sampled By: DB
22-Sep-10

small hairline QZ veins w. trace MO2 (could possibly be stibnite as it is v.f.g). Cut foliation in gneiss. Discovered while staking GRT claims.

Appendix D-2: Geochemical Certificates

(Core Samples)

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

CERTIFICATE TR10103479

Project: SQI10-03

P.O. No.:

This report is for 112 Drill Core samples submitted to our lab in Terrace, BC, Canada on 10-AUG-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10103479

Sample Description	Method / Analyte / Units / LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-AA23 Au Check ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02
I031326		4.34	<0.005			0.10	2.49	1.8	<0.2	<10	350	0.13	0.14	0.92	0.04	8.82
I031327		3.16	0.011			0.18	2.97	11.6	<0.2	<10	350	0.21	0.15	1.21	0.05	12.50
I031328		1.97	0.209			2.42	2.87	446	0.2	<10	110	0.42	0.33	3.45	1.93	14.85
I031329		1.97	1.385		1.18	12.80	3.04	141.0	0.7	<10	190	0.30	0.52	3.49	16.65	14.45
I031330		0.39	4.22		4.10	1.51	1.78	8890	3.7	10	90	0.25	80.6	5.14	0.61	22.5
I031331		2.44	0.070			1.21	3.38	171.0	<0.2	<10	120	0.22	0.92	2.84	1.28	7.90
I031332		2.69	0.015			0.21	4.16	86.1	<0.2	<10	320	0.21	0.27	2.39	0.17	5.88
I031333		3.04	0.392			2.83	2.18	971	0.4	<10	50	0.37	0.36	4.01	3.00	11.30
I031334		1.34	0.169			1.52	2.70	71.0	0.2	<10	80	0.26	0.45	3.30	0.39	13.05
I031335		2.28	0.173			0.98	3.11	855	0.2	<10	180	0.22	0.15	3.03	0.37	8.18
I031336		2.96	0.174			1.22	3.00	733	0.2	<10	140	0.23	0.17	2.92	0.42	7.91
I031337		2.36	0.738			6.84	1.10	1940	1.2	<10	100	0.26	0.16	3.32	2.76	12.15
I031338		4.73	0.015			0.27	4.32	41.7	<0.2	<10	380	0.40	0.23	4.15	0.34	10.50
I031339		4.32	0.037			0.68	4.44	335	<0.2	<10	90	0.47	0.29	3.42	0.21	19.00
I031340		0.65	<0.005			0.04	2.26	4.1	<0.2	<10	320	0.24	0.03	0.65	0.05	26.5
I031341		4.48	0.096			0.52	4.36	129.5	<0.2	<10	230	0.48	0.28	3.98	0.24	12.85
I031342		0.98	2.96	3.88	4.03	1.18	1.19	1495	1.8	<10	70	0.34	0.26	3.03	0.33	24.9
I031343		2.64	0.337			0.82	2.45	1555	0.3	<10	70	0.38	0.33	2.64	0.48	18.30
I031344		2.50	0.591			2.32	4.12	356	0.6	<10	110	0.40	0.44	3.59	0.43	13.60
I031345		4.63	0.005			0.30	4.26	4.4	<0.2	<10	150	0.27	0.37	2.85	0.14	9.61
I031346		4.65	<0.005			0.26	5.36	11.1	<0.2	<10	130	0.47	0.32	3.39	0.15	8.21
I031347		4.93	<0.005			0.31	5.17	0.9	<0.2	<10	170	0.38	0.46	2.88	0.12	7.88
I031348		5.66	0.022			0.38	6.39	16.4	<0.2	<10	80	0.68	0.38	3.59	0.14	7.46
I031349		2.10	0.006			0.29	5.49	18.7	<0.2	<10	180	0.46	0.37	3.23	0.13	9.66
I031350		2.09	0.034			0.30	5.48	50.1	<0.2	<10	250	0.48	0.37	3.80	0.14	10.65
I031351		4.77	<0.005			0.25	5.71	1.0	<0.2	<10	250	0.48	0.31	3.12	0.10	11.40
I031352		1.50	<0.005			0.20	4.30	8.7	<0.2	<10	270	0.50	0.27	2.63	0.08	17.05
I031353		1.23	0.121			0.21	3.90	1165	<0.2	<10	230	0.41	0.27	3.91	0.15	13.85
I031354		1.58	0.014			0.20	3.93	26.5	<0.2	<10	290	0.47	0.32	4.23	0.12	17.70
I031355		1.90	0.528			0.22	3.93	1270	0.6	<10	250	0.41	0.32	5.16	0.12	12.10
I031356		5.12	<0.005			0.17	6.44	14.9	<0.2	<10	340	0.61	0.24	4.20	0.10	7.30
I031357		4.40	0.084			0.87	4.96	325	<0.2	<10	130	0.49	0.27	3.32	0.34	11.45
I031358		4.50	0.013			0.28	5.95	54.3	<0.2	<10	320	0.47	0.30	3.80	0.15	6.25
I031359		2.85	0.152			1.15	4.26	314	0.2	<10	220	0.33	0.28	3.42	0.46	4.84
I031360		2.45	0.078			0.83	4.72	211	<0.2	<10	260	0.33	0.26	3.35	0.38	4.99
I031361		4.67	0.015			0.19	5.67	5.9	<0.2	<10	280	0.53	0.36	2.28	0.10	7.82
I031362		4.94	<0.005			0.14	5.46	0.5	<0.2	<10	460	0.34	0.29	1.69	0.05	5.62
I031363		4.92	<0.005			0.11	4.19	0.6	<0.2	<10	440	0.21	0.18	1.77	0.06	9.69
I031364		4.14	<0.005			0.14	5.22	0.5	<0.2	<10	490	0.52	0.22	2.88	0.05	8.36
I031365		5.30	<0.005			0.10	5.05	0.5	<0.2	<10	610	0.31	0.17	2.24	0.04	5.62

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10103479

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Co	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn
	Units	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm
	LOR	0.1	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5
I031326		14.8	74	1.14	38.3	3.20	8.32	0.09	0.03	<0.01	0.020	0.50	3.9	10.6	2.22	558
I031327		14.4	27	1.50	53.8	3.69	9.10	0.09	0.03	0.01	0.028	0.74	5.7	14.2	2.52	699
I031328		24.2	48	1.79	73.3	5.09	8.36	0.07	0.02	0.07	0.058	0.57	5.9	17.2	2.40	1080
I031329		24.6	37	2.69	129.0	5.29	8.75	0.09	0.03	0.08	0.174	0.76	5.9	22.5	2.80	1240
I031330		117.5	35	1.28	272	4.88	6.03	0.16	0.27	0.12	0.533	0.18	12.4	12.2	0.56	862
I031331		26.3	27	3.25	85.3	5.53	9.93	0.10	0.04	0.01	0.058	1.00	3.2	24.3	3.04	1070
I031332		24.4	54	4.06	63.8	5.45	12.90	0.13	0.03	0.01	0.046	1.40	2.4	36.7	2.93	826
I031333		24.9	22	2.02	137.0	4.89	6.09	0.06	0.02	0.08	0.071	0.23	4.4	10.5	2.93	1190
I031334		26.3	31	2.07	49.5	4.78	7.56	0.09	0.02	0.02	0.051	0.29	5.2	14.6	2.80	1260
I031335		27.7	52	3.15	61.8	5.24	8.95	0.08	0.04	0.02	0.043	0.92	3.4	17.1	3.00	971
I031336		28.9	55	3.21	78.4	5.31	8.50	0.07	0.04	0.03	0.044	0.89	3.3	17.6	2.98	994
I031337		18.2	20	1.28	98.4	4.29	2.97	0.06	0.03	0.18	0.048	0.51	5.0	5.7	1.96	1200
I031338		22.2	115	4.46	42.9	4.77	11.80	0.10	0.04	<0.01	0.044	1.57	4.5	36.4	2.88	1200
I031339		18.4	77	3.21	56.6	4.50	12.40	0.10	0.04	0.04	0.040	1.47	8.8	26.5	2.11	922
I031340		8.3	8	2.05	4.9	2.93	7.34	0.13	0.14	<0.01	0.014	1.14	12.9	25.9	0.98	638
I031341		18.0	95	3.69	38.6	4.53	11.85	0.10	0.04	0.02	0.045	1.52	5.6	29.2	2.38	982
I031342		19.2	28	1.40	62.8	3.94	3.69	0.07	0.10	0.10	0.024	0.50	12.3	6.3	1.20	702
I031343		16.8	39	1.95	61.3	4.13	6.94	0.07	0.06	0.13	0.039	0.81	8.4	13.9	1.51	823
I031344		19.8	56	2.49	59.7	4.76	11.95	0.10	0.05	0.05	0.039	1.33	6.2	18.5	2.14	851
I031345		20.4	51	2.51	62.0	4.77	12.45	0.11	0.04	0.01	0.031	1.52	4.3	21.1	1.94	807
I031346		19.1	65	2.58	45.3	4.78	14.55	0.13	0.03	<0.01	0.033	1.74	3.5	26.1	2.34	765
I031347		17.1	67	2.21	31.4	4.60	14.40	0.12	0.03	<0.01	0.029	1.70	3.3	22.9	2.16	715
I031348		22.7	119	2.12	61.1	5.24	15.10	0.13	0.03	<0.01	0.033	1.58	3.2	23.8	2.28	662
I031349		22.2	57	2.99	42.4	5.04	15.45	0.13	0.03	0.01	0.043	1.79	4.0	24.7	2.36	815
I031350		22.0	63	3.40	40.4	5.07	15.05	0.14	0.04	0.01	0.044	1.83	4.4	24.6	2.41	899
I031351		18.8	55	2.66	35.9	4.74	16.30	0.14	0.03	<0.01	0.039	2.00	4.8	24.3	2.32	761
I031352		11.4	22	2.00	30.2	3.87	13.45	0.10	0.03	<0.01	0.063	1.36	7.2	20.7	1.63	710
I031353		15.7	51	2.39	35.9	4.20	11.40	0.10	0.04	0.01	0.043	1.16	5.8	20.8	1.98	956
I031354		20.7	77	6.14	43.9	4.60	12.60	0.13	0.04	0.01	0.066	1.59	7.5	19.5	2.34	1080
I031355		22.0	42	3.15	41.5	4.98	11.95	0.12	0.04	0.07	0.056	1.47	5.1	18.1	2.47	1320
I031356		21.6	129	2.84	35.2	4.49	15.60	0.15	0.02	0.01	0.032	2.04	2.9	26.7	2.48	930
I031357		21.6	80	3.18	52.6	4.76	13.20	0.11	0.03	0.05	0.043	1.55	4.6	27.3	2.28	962
I031358		25.8	128	3.34	51.2	5.05	15.05	0.12	0.03	<0.01	0.035	1.96	2.5	37.1	2.84	986
I031359		24.3	135	2.65	54.2	4.33	10.40	0.10	0.04	0.04	0.035	1.22	1.9	23.7	2.24	837
I031360		25.2	154	3.22	53.2	4.33	11.75	0.11	0.04	0.02	0.032	1.50	2.0	26.7	2.48	836
I031361		24.7	48	4.26	28.5	5.17	15.60	0.16	0.03	<0.01	0.034	2.53	3.4	30.1	3.07	852
I031362		28.6	30	3.61	24.4	4.99	14.85	0.14	0.02	0.01	0.048	2.69	2.5	28.0	3.43	667
I031363		26.1	67	5.34	31.0	4.57	11.30	0.12	0.08	0.03	0.030	2.02	4.0	21.0	2.55	624
I031364		26.2	96	2.37	46.8	3.97	12.55	0.11	0.03	0.01	0.018	1.43	3.6	14.4	1.82	519
I031365		23.7	80	2.81	38.4	4.10	12.40	0.13	0.02	<0.01	0.019	1.82	2.3	16.6	2.22	517

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10103479

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Mo	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.05	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01
I031326		0.54	0.07	0.10	22.0	490	2.3	15.1	0.001	0.30	1.54	7.4	0.3	0.4	25.2	<0.01
I031327		0.67	0.04	0.08	10.4	500	5.0	23.0	0.001	0.48	1.96	7.8	0.3	0.5	31.4	<0.01
I031328		0.36	0.03	0.05	27.1	570	63.1	24.4	0.001	2.22	11.70	12.6	0.4	0.4	40.6	<0.01
I031329		0.51	0.05	0.05	18.9	590	1030	33.6	0.001	1.98	21.4	16.0	1.0	0.2	45.5	<0.01
I031330		25.8	0.12	0.58	52.7	870	27.2	8.3	0.036	1.21	30.7	5.0	6.2	33.6	93.5	0.01
I031331		1.34	0.14	0.07	18.7	590	37.4	43.2	0.002	1.99	4.22	17.3	0.4	0.7	43.5	<0.01
I031332		0.69	0.21	0.06	23.4	520	8.7	54.8	0.002	0.76	1.74	20.6	0.3	0.4	39.8	<0.01
I031333		0.36	0.02	<0.05	18.7	490	73.0	12.1	0.001	2.34	35.0	15.7	0.4	0.2	87.6	<0.01
I031334		0.59	0.01	<0.05	19.7	550	29.8	13.9	0.003	1.56	3.61	15.6	0.4	0.2	52.3	<0.01
I031335		0.48	0.10	0.05	22.0	620	12.9	41.5	0.001	1.24	8.34	19.8	0.3	0.3	56.3	<0.01
I031336		0.50	0.09	0.05	23.0	600	16.6	41.7	0.001	1.58	10.50	19.6	0.3	0.3	56.8	<0.01
I031337		1.13	0.01	0.06	15.5	510	75.7	25.6	0.001	3.80	45.5	7.8	0.6	0.2	74.1	<0.01
I031338		1.51	0.16	0.06	35.3	490	19.9	66.4	0.003	0.84	6.00	17.7	0.2	0.5	48.4	<0.01
I031339		0.91	0.28	0.07	25.9	610	15.1	58.9	0.001	1.32	4.76	15.9	0.4	0.6	51.2	<0.01
I031340		0.28	0.20	0.23	2.6	510	5.5	63.7	<0.001	<0.01	0.37	5.8	<0.2	0.8	40.5	<0.01
I031341		0.59	0.23	0.06	27.6	460	16.1	64.9	0.001	1.36	7.00	16.2	0.3	0.6	50.7	<0.01
I031342		0.79	0.02	0.09	16.1	500	20.3	22.8	0.001	3.07	40.3	6.8	0.5	0.3	58.8	<0.01
I031343		0.58	0.13	0.09	20.8	540	19.4	37.0	0.001	2.51	19.85	10.2	0.4	0.4	42.9	<0.01
I031344		0.49	0.20	0.07	20.8	590	259	55.7	0.001	1.67	38.7	15.0	0.6	0.6	56.7	<0.01
I031345		0.49	0.25	0.10	19.3	660	7.1	62.2	0.001	1.28	3.15	14.4	0.4	0.6	33.2	<0.01
I031346		0.37	0.32	0.10	22.3	640	10.1	71.9	<0.001	1.11	0.86	15.8	0.4	0.7	41.7	<0.01
I031347		0.34	0.36	0.10	18.4	560	8.7	69.8	<0.001	1.25	0.36	16.0	0.2	0.7	37.8	<0.01
I031348		0.45	0.37	0.10	41.0	590	10.0	63.0	0.001	1.68	1.66	16.6	0.3	0.7	52.8	0.01
I031349		0.32	0.36	0.11	21.7	650	7.9	73.5	0.001	1.24	0.71	16.2	0.2	0.8	43.0	<0.01
I031350		0.36	0.37	0.10	22.6	630	8.6	75.5	0.001	1.27	1.56	16.3	0.3	0.8	49.2	<0.01
I031351		0.36	0.40	0.11	19.6	530	6.2	81.7	0.001	1.01	0.12	13.9	0.2	0.8	37.0	0.01
I031352		0.37	0.37	0.11	9.4	380	5.6	57.4	<0.001	0.91	0.19	9.7	0.2	0.8	31.9	<0.01
I031353		0.39	0.30	0.08	27.1	390	6.0	49.8	<0.001	1.23	2.04	10.1	0.2	0.6	49.0	<0.01
I031354		0.41	0.17	<0.05	33.2	480	6.9	66.8	0.001	0.90	0.87	18.7	0.3	0.8	77.8	<0.01
I031355		0.49	0.26	0.06	20.0	500	6.2	59.6	0.001	1.32	2.61	18.9	0.3	0.6	74.4	<0.01
I031356		0.40	0.44	0.07	40.5	520	6.9	80.1	0.001	0.80	0.20	14.9	<0.2	0.6	48.4	<0.01
I031357		0.40	0.35	0.07	28.2	550	12.9	65.8	0.001	1.45	7.68	14.5	0.3	0.6	53.5	<0.01
I031358		0.40	0.31	0.09	61.5	550	7.8	77.7	0.001	1.08	1.57	16.8	0.2	0.5	46.6	<0.01
I031359		0.42	0.30	0.05	68.8	460	22.6	52.5	0.001	1.37	12.90	13.5	0.2	0.5	50.7	<0.01
I031360		0.42	0.32	0.06	72.2	480	13.4	63.5	0.001	1.06	6.98	14.8	0.2	0.5	50.9	<0.01
I031361		0.26	0.38	0.08	14.3	570	7.7	103.0	<0.001	0.81	0.27	22.7	0.2	0.7	43.2	<0.01
I031362		0.36	0.31	0.06	14.1	560	5.9	103.5	0.001	0.60	0.16	24.2	<0.2	0.7	30.0	<0.01
I031363		0.46	0.29	0.07	28.0	690	6.9	89.9	0.001	0.48	2.62	19.3	0.3	0.5	41.5	<0.01
I031364		0.53	0.47	0.10	41.1	560	7.1	61.6	0.001	0.75	2.48	13.5	0.4	0.5	65.4	<0.01
I031365		0.62	0.35	0.08	34.4	560	5.0	72.0	0.001	0.51	0.23	14.0	0.3	0.4	36.2	<0.01

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10103479

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Te	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031326		0.02	1.5	0.121	0.13	0.36	69	0.14	7.86	46	0.5
I031327		0.04	2.0	0.109	0.17	0.51	70	0.14	9.90	54	0.5
I031328		0.46	2.0	0.040	0.26	0.66	83	0.18	10.65	170	<0.5
I031329		3.59	1.3	0.062	0.35	0.28	119	0.10	12.35	970	<0.5
I031330		15.45	2.8	0.115	1.20	1.94	59	26.7	8.08	70	9.6
I031331		0.48	1.1	0.104	0.38	0.17	149	0.48	9.68	163	0.9
I031332		0.09	0.9	0.154	0.37	0.21	194	0.17	8.75	124	0.9
I031333		0.72	1.1	0.007	0.14	0.28	96	0.26	11.10	203	0.5
I031334		0.65	1.4	0.018	0.15	0.66	117	0.12	9.50	113	<0.5
I031335		0.11	1.1	0.083	0.40	0.16	135	0.10	9.69	117	1.1
I031336		0.17	1.1	0.078	0.42	0.16	133	0.22	10.00	113	1.1
I031337		1.46	2.6	0.018	0.26	0.34	33	0.69	11.35	173	0.9
I031338		0.10	2.4	0.130	0.46	0.43	132	0.13	10.85	147	1.0
I031339		0.13	3.2	0.145	0.34	0.67	122	0.23	12.40	106	1.2
I031340		0.01	8.3	0.234	0.42	3.32	71	0.26	8.20	59	1.8
I031341		0.20	3.1	0.114	0.43	0.60	114	0.16	12.35	123	1.0
I031342		0.62	4.8	0.027	0.21	1.14	42	0.26	13.60	57	3.7
I031343		0.19	3.2	0.071	0.35	0.80	71	0.22	11.45	94	1.8
I031344		0.58	2.6	0.126	0.30	0.49	120	0.21	11.95	111	1.4
I031345		0.08	2.2	0.206	0.29	0.45	125	0.26	11.55	112	1.0
I031346		0.10	2.3	0.215	0.35	0.41	143	0.32	9.77	110	0.9
I031347		0.09	2.3	0.198	0.38	0.32	124	0.38	10.15	106	0.6
I031348		0.15	2.1	0.168	0.32	0.35	134	0.57	8.01	106	0.8
I031349		0.08	2.2	0.237	0.40	0.27	160	0.35	11.10	113	1.0
I031350		0.10	2.1	0.232	0.40	0.28	158	0.32	11.95	114	0.8
I031351		0.08	2.2	0.250	0.44	0.27	145	0.45	10.00	115	0.6
I031352		0.06	3.4	0.161	0.30	0.45	76	0.21	13.45	83	0.8
I031353		0.12	2.8	0.114	0.28	0.33	89	0.24	12.45	100	0.8
I031354		0.06	2.9	0.116	0.32	0.51	134	0.12	18.95	122	0.8
I031355		0.07	1.8	0.119	0.40	0.27	138	0.17	17.55	125	0.9
I031356		0.04	1.4	0.197	0.39	0.15	137	0.27	8.92	120	0.5
I031357		0.13	1.5	0.149	0.39	0.24	124	0.28	11.70	120	0.7
I031358		0.07	1.0	0.207	0.45	0.12	165	0.44	9.14	122	0.6
I031359		0.14	0.8	0.159	0.31	0.19	119	1.17	9.32	116	0.9
I031360		0.08	0.9	0.176	0.36	0.17	129	0.50	9.45	119	1.0
I031361		0.03	3.3	0.223	0.56	0.52	213	0.14	6.94	117	1.0
I031362		0.02	2.8	0.227	0.55	0.40	201	0.15	5.20	103	0.7
I031363		0.01	3.8	0.230	0.69	0.77	163	0.18	7.74	74	2.8
I031364		0.02	2.2	0.223	0.36	0.38	128	0.40	7.27	57	0.9
I031365		0.02	1.0	0.211	0.44	0.17	131	0.15	5.97	66	0.5

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10103479

Sample Description	Method	WEI-21	Au-AA23	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Au Check	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce
	Units	kg	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm
	LOR	0.02	0.005	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02
I031366		5.46	<0.005			0.08	5.34	0.5	<0.2	<10	480	0.20	0.26	3.87	0.05	5.92
I031367		4.59	<0.005			0.13	7.32	0.6	<0.2	<10	80	0.14	0.13	5.05	0.10	1.81
I031368		4.99	<0.005			0.08	6.32	2.2	<0.2	<10	940	0.34	0.18	4.30	0.08	7.59
I031369		4.97	<0.005			0.05	7.27	2.2	<0.2	<10	980	0.36	0.10	5.31	0.08	2.01
I031370		0.07	1.225		1.37	0.45	1.70	1895	1.2	30	90	0.15	35.5	4.04	0.39	17.90
I031371		5.23	<0.005			0.11	7.24	8.2	<0.2	<10	710	0.33	0.28	5.25	0.11	3.19
I031372		1.96	<0.005			0.20	5.42	1.2	<0.2	<10	330	0.16	0.21	5.59	0.32	1.37
I031373		4.04	0.005			0.27	2.10	6.7	<0.2	<10	310	0.62	0.20	1.51	0.71	28.6
I031374		4.79	<0.005			0.32	3.34	2.3	<0.2	<10	180	1.22	0.27	2.13	1.47	27.2
I031375		2.01	<0.005			0.24	2.26	1.7	<0.2	<10	300	0.72	0.18	1.20	0.65	24.0
I031376		5.47	<0.005			0.09	2.50	0.5	<0.2	<10	480	0.19	0.18	1.79	0.09	12.85
I031377		5.46	<0.005			0.12	2.56	0.6	<0.2	<10	520	0.19	0.19	0.95	0.07	11.60
I031378		3.50	<0.005			0.10	2.51	3.6	<0.2	<10	430	0.21	0.13	1.25	0.31	12.10
I031379		4.68	<0.005			0.07	2.36	3.0	<0.2	<10	390	0.15	0.14	1.27	0.08	7.25
I031380		0.24	<0.005			0.02	2.03	0.5	<0.2	<10	280	0.19	0.03	0.63	0.04	41.3
I031381		4.64	<0.005			0.08	2.73	0.5	<0.2	<10	420	0.12	0.18	0.90	0.07	8.71
I031382		4.82	<0.005			0.08	2.48	0.7	<0.2	<10	370	0.17	0.20	1.02	0.16	10.90
I031383		5.05	<0.005			0.15	2.90	3.3	<0.2	<10	490	0.26	0.35	2.11	0.31	11.70
I031384		5.05	<0.005			0.24	2.66	8.4	<0.2	<10	420	0.29	0.40	1.99	1.33	13.95
I031385		5.08	<0.005			0.18	2.78	0.8	<0.2	<10	480	0.19	0.25	1.42	0.11	9.72
I031386		4.58	<0.005			0.06	2.54	0.6	<0.2	<10	420	0.18	0.18	1.28	0.04	11.20
I031387		5.13	<0.005			0.27	3.61	0.5	<0.2	<10	630	0.30	0.33	1.63	0.14	8.28
I031388		4.80	<0.005			0.19	2.74	0.6	<0.2	<10	540	0.23	0.32	1.54	0.35	9.48
I031389		2.33	<0.005			0.19	2.42	1.5	<0.2	<10	400	0.22	0.33	2.31	2.48	8.41
I031390		2.42	<0.005			0.12	2.53	1.1	<0.2	<10	470	0.22	0.20	3.06	0.27	7.57
I031391		4.79	<0.005			0.09	3.08	0.5	<0.2	<10	850	0.25	0.24	2.53	0.15	8.08
I031392		4.74	<0.005			0.07	1.87	0.7	<0.2	<10	380	0.12	0.18	1.03	0.07	14.20
I031393		3.44	0.039			0.33	2.31	148.5	<0.2	<10	360	0.14	0.85	1.85	0.55	20.8
I031394		3.17	<0.005			0.11	2.40	1.2	<0.2	<10	430	0.17	0.34	1.45	0.12	21.2
I031395		5.15	<0.005			0.14	2.78	0.9	<0.2	<10	390	0.15	0.25	0.94	0.05	12.65
I031396		5.11	<0.005			0.10	2.81	1.9	<0.2	<10	510	0.34	0.14	2.10	0.12	16.10
I031397		2.07	0.043			0.16	0.70	277	<0.2	<10	120	0.22	0.18	3.34	0.27	23.5
I031398		6.36	<0.005			0.13	1.71	4.3	<0.2	<10	360	0.14	0.16	1.48	0.11	16.15
I031399		2.15	<0.005			0.03	2.02	0.7	<0.2	<10	350	0.15	0.07	0.86	0.03	14.55
I031400		2.37	<0.005			0.05	2.39	0.4	<0.2	<10	380	0.16	0.10	1.06	0.04	12.85
I031401		4.18	<0.005			0.08	2.54	0.5	<0.2	<10	320	0.10	0.15	1.00	0.04	7.40
I031402		4.52	<0.005			0.07	2.00	0.7	<0.2	<10	140	0.07	0.16	0.83	0.05	9.88
I031403		3.58	<0.005			0.11	1.59	1.2	<0.2	<10	110	0.08	0.20	0.91	0.06	11.95
I031404		3.58	<0.005			0.08	1.87	2.4	<0.2	<10	230	0.14	0.17	1.16	0.08	11.60
I031405		4.05	<0.005			0.18	1.95	3.0	<0.2	<10	270	0.10	1.97	0.74	0.09	11.20

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10103479

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Co	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn
	Units	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm
	LOR	0.1	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5
I031366		21.3	39	1.92	48.7	3.09	8.95	0.11	0.02	<0.01	0.016	0.87	2.7	9.6	1.64	433
I031367		22.3	32	1.58	76.7	2.68	10.10	0.12	<0.02	<0.01	0.011	0.13	1.0	5.6	1.58	383
I031368		22.3	60	2.16	59.0	2.78	10.05	0.11	0.02	0.01	0.012	0.80	4.1	9.4	1.72	393
I031369		22.4	49	1.91	32.0	2.93	10.70	0.12	<0.02	0.01	0.009	0.98	1.0	10.6	1.94	449
I031370		57.7	21	0.89	112.5	3.49	4.98	0.14	0.22	0.04	0.135	0.16	11.3	9.1	0.53	865
I031371		24.7	107	2.33	79.6	2.92	9.88	0.11	<0.02	0.01	0.009	1.12	1.6	11.0	2.35	394
I031372		21.3	40	1.07	113.5	2.21	6.95	0.09	<0.02	0.01	0.008	0.33	0.8	5.6	1.43	434
I031373		12.8	51	2.52	74.1	2.60	7.09	0.07	0.18	0.01	0.039	0.74	14.0	9.3	1.10	632
I031374		13.3	100	3.66	56.1	2.90	11.15	0.14	0.25	0.01	0.052	1.09	14.1	11.2	1.52	543
I031375		11.0	56	2.68	51.8	2.64	7.98	0.09	0.17	<0.01	0.039	0.87	12.1	9.5	1.04	564
I031376		15.4	50	1.72	14.2	3.04	8.17	0.09	0.05	<0.01	0.015	1.15	5.7	11.6	1.89	402
I031377		17.1	53	1.23	38.1	3.36	8.70	0.09	0.05	0.01	0.010	1.16	5.2	11.5	2.08	317
I031378		19.8	80	2.14	20.5	3.05	7.96	0.10	0.05	0.01	0.017	0.97	5.4	13.8	2.21	404
I031379		19.6	89	1.27	9.6	2.68	6.25	0.11	0.05	<0.01	0.014	0.87	3.1	12.3	2.04	325
I031380		9.3	7	1.70	4.5	2.96	6.87	0.14	0.13	<0.01	0.017	1.02	22.0	17.4	0.86	573
I031381		23.5	78	1.47	16.3	3.23	8.25	0.13	0.06	0.01	0.013	1.09	3.8	14.5	2.54	384
I031382		19.2	75	2.01	10.8	2.89	7.61	0.11	0.06	<0.01	0.013	0.96	4.8	14.4	2.28	417
I031383		19.8	68	3.27	24.6	3.28	8.75	0.10	0.05	<0.01	0.015	1.18	5.2	15.3	2.10	485
I031384		16.8	49	1.54	49.6	3.09	7.53	0.08	0.04	0.02	0.020	1.12	6.3	14.4	1.86	504
I031385		19.4	68	1.21	49.5	3.06	7.36	0.12	0.04	<0.01	0.015	1.15	4.3	11.5	2.19	371
I031386		18.6	60	1.07	12.1	2.75	6.99	0.11	0.05	<0.01	0.016	1.05	4.9	10.3	2.03	331
I031387		21.4	63	1.43	73.8	3.61	9.11	0.10	0.03	0.01	0.014	1.46	3.6	12.5	2.37	416
I031388		19.1	41	1.18	27.5	3.23	8.70	0.09	0.04	0.01	0.011	1.30	4.1	11.3	1.87	422
I031389		16.1	42	1.06	36.2	2.89	7.28	0.08	0.03	0.02	0.019	1.11	3.7	10.0	1.67	491
I031390		15.5	46	1.15	19.3	2.86	7.56	0.08	0.03	0.01	0.012	1.21	3.4	11.2	1.78	594
I031391		18.1	80	1.57	7.2	3.23	8.85	0.11	0.04	<0.01	0.017	1.45	3.5	14.1	2.31	547
I031392		17.2	49	1.23	9.1	2.48	6.63	0.09	0.07	<0.01	0.018	0.89	6.2	10.2	1.71	330
I031393		21.0	58	2.03	24.1	3.76	7.97	0.09	0.05	0.01	0.033	0.80	9.4	12.8	2.25	586
I031394		18.4	39	1.71	13.2	3.42	8.63	0.11	0.05	0.01	0.026	0.85	9.7	12.8	1.99	446
I031395		24.2	40	1.58	14.5	4.30	9.92	0.11	0.04	<0.01	0.016	1.09	5.7	13.2	2.33	353
I031396		15.2	44	2.01	13.4	3.03	9.07	0.09	0.05	<0.01	0.018	1.40	7.3	13.8	1.91	446
I031397		12.8	8	1.54	9.8	2.81	2.43	0.06	0.04	0.02	0.030	0.29	10.8	4.3	1.67	782
I031398		14.3	33	1.41	21.6	2.36	5.87	0.08	0.06	0.01	0.017	0.64	7.3	10.4	1.52	373
I031399		13.0	31	1.08	4.3	2.53	7.60	0.10	0.06	<0.01	0.012	0.87	6.7	12.9	1.85	301
I031400		14.5	33	1.17	7.7	2.84	8.13	0.12	0.05	<0.01	0.031	0.97	5.9	14.0	2.07	339
I031401		20.7	35	1.25	31.7	3.11	7.31	0.13	0.04	0.01	0.011	0.94	3.3	12.4	2.04	300
I031402		17.0	35	0.77	27.3	2.97	6.49	0.12	0.05	<0.01	0.011	0.41	4.4	9.7	1.85	317
I031403		14.7	23	0.61	33.1	2.74	5.13	0.10	0.05	<0.01	0.014	0.34	5.5	7.1	1.40	313
I031404		15.5	36	1.48	16.4	2.79	6.30	0.12	0.08	<0.01	0.018	0.64	5.2	10.1	1.51	336
I031405		20.8	29	1.20	55.6	3.12	6.30	0.13	0.07	<0.01	0.013	0.61	5.0	10.5	1.55	297

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10103479

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Mo	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.05	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01
I031366		0.71	0.31	0.16	26.6	250	4.0	36.5	0.002	0.45	0.18	12.6	0.5	0.3	90.6	0.01
I031367		0.09	0.37	0.06	22.5	20	4.2	5.9	0.001	0.22	0.20	14.3	0.2	<0.2	207	<0.01
I031368		2.17	0.37	0.17	30.2	290	4.8	33.3	0.004	0.28	0.20	15.0	0.7	0.2	125.0	0.01
I031369		0.18	0.39	0.08	18.2	60	6.0	41.6	0.002	0.18	0.21	18.9	0.3	<0.2	145.0	<0.01
I031370		7.53	0.14	0.26	24.0	850	12.6	6.7	0.012	0.35	4.67	4.1	3.4	2.5	104.5	<0.01
I031371		0.32	0.39	0.08	31.1	60	4.9	45.2	0.001	0.28	0.20	16.4	0.5	<0.2	128.0	<0.01
I031372		0.11	0.52	<0.05	24.0	10	6.4	14.4	0.001	0.33	0.32	9.7	0.4	<0.2	208	<0.01
I031373		4.54	0.12	0.07	41.8	660	7.0	39.5	0.006	0.93	1.61	7.9	2.5	0.6	56.3	<0.01
I031374		12.45	0.28	0.09	58.3	1070	21.9	59.3	0.017	1.00	0.48	10.4	4.3	0.9	90.0	<0.01
I031375		5.08	0.16	0.09	40.2	710	9.7	43.8	0.008	0.85	0.32	7.6	2.3	0.7	44.0	<0.01
I031376		0.64	0.18	0.16	21.7	460	3.2	46.1	0.001	0.30	0.41	7.3	0.4	0.6	25.4	<0.01
I031377		0.67	0.14	0.15	27.0	550	2.7	44.2	0.002	0.39	0.30	5.8	0.5	0.6	17.0	<0.01
I031378		0.60	0.13	0.11	35.3	450	5.0	40.2	0.001	0.21	0.33	8.0	0.4	0.5	24.5	<0.01
I031379		0.36	0.12	0.09	31.5	410	2.8	34.9	0.001	0.19	0.28	6.6	0.3	0.3	45.0	<0.01
I031380		0.20	0.19	0.23	2.9	470	4.7	58.5	<0.001	0.01	0.15	6.4	<0.2	0.7	37.7	<0.01
I031381		0.36	0.10	0.12	28.6	460	2.4	42.8	0.002	0.21	0.25	7.4	0.4	0.4	27.5	<0.01
I031382		0.62	0.13	0.12	27.3	510	2.8	37.5	0.002	0.19	0.29	8.2	0.4	0.5	18.3	<0.01
I031383		0.81	0.18	0.12	27.6	530	6.6	46.8	0.002	0.47	0.32	8.5	0.4	0.5	34.2	<0.01
I031384		1.17	0.18	0.13	23.5	460	5.1	44.6	0.002	0.68	0.70	6.1	0.4	0.6	31.6	<0.01
I031385		0.80	0.16	0.17	30.7	560	2.7	43.4	0.001	0.34	0.55	6.0	0.3	0.5	38.4	<0.01
I031386		0.57	0.15	0.16	28.1	540	2.5	40.1	0.001	0.21	0.53	6.1	0.2	0.5	37.0	<0.01
I031387		1.40	0.24	0.12	28.1	470	5.1	54.4	0.002	0.51	0.41	6.8	0.5	0.6	30.6	<0.01
I031388		1.04	0.18	0.17	21.4	510	7.0	48.7	0.002	0.57	0.31	6.0	0.4	0.6	21.6	<0.01
I031389		0.73	0.15	0.13	19.4	450	3.2	42.4	0.001	0.70	0.49	5.5	0.5	0.6	28.8	<0.01
I031390		0.60	0.14	0.12	21.4	440	3.3	45.4	0.001	0.60	0.35	5.5	0.4	0.5	33.9	<0.01
I031391		0.95	0.18	0.13	32.6	500	3.2	53.6	0.002	0.35	0.39	6.3	0.3	0.6	43.8	<0.01
I031392		0.44	0.12	0.11	21.5	580	2.3	34.5	0.001	0.25	0.36	7.1	0.3	0.5	17.6	<0.01
I031393		0.42	0.12	0.14	26.2	560	14.8	33.2	0.001	0.85	2.98	9.5	0.6	0.6	31.1	<0.01
I031394		0.28	0.12	0.17	18.5	480	4.0	34.6	0.001	0.47	0.71	8.5	0.4	0.5	28.0	<0.01
I031395		0.22	0.12	0.17	23.1	530	2.4	42.9	<0.001	0.61	0.38	8.7	0.4	0.4	31.4	<0.01
I031396		0.78	0.17	0.12	23.9	470	2.7	54.8	0.001	0.36	0.46	6.2	0.3	0.8	32.0	<0.01
I031397		0.67	0.04	0.07	10.9	310	12.5	14.2	0.001	1.39	3.17	5.7	0.4	0.2	70.3	<0.01
I031398		0.91	0.11	0.15	17.3	550	3.3	25.2	0.002	0.29	0.41	5.6	0.3	0.6	31.0	<0.01
I031399		0.42	0.11	0.15	14.0	540	2.1	32.6	0.001	0.08	0.21	4.7	0.2	0.5	22.2	<0.01
I031400		0.36	0.12	0.14	15.7	550	2.4	36.2	0.001	0.12	0.21	5.4	0.3	0.5	25.5	<0.01
I031401		0.46	0.15	0.10	20.6	590	2.3	36.1	0.001	0.27	0.25	6.4	0.4	0.3	30.7	<0.01
I031402		0.40	0.07	0.14	15.3	560	2.2	16.2	0.001	0.22	0.37	6.1	0.3	0.3	23.5	<0.01
I031403		0.91	0.10	0.16	12.3	590	1.7	13.4	0.002	0.48	0.49	4.8	0.4	0.3	23.6	<0.01
I031404		0.78	0.10	0.12	16.0	590	2.1	26.5	0.001	0.28	1.22	7.4	0.3	0.5	33.2	<0.01
I031405		0.64	0.09	0.13	15.7	630	2.6	25.9	0.001	0.41	3.14	6.0	0.5	0.4	58.3	<0.01

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10103479

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Te	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031366		0.01	1.2	0.106	0.24	0.35	105	0.23	3.67	38	0.5
I031367		0.01	0.4	0.066	0.04	0.14	94	0.16	1.31	24	<0.5
I031368		0.02	1.8	0.095	0.27	0.66	135	0.24	3.00	36	0.6
I031369		0.01	0.5	0.098	0.32	0.23	146	0.16	1.78	35	<0.5
I031370		4.13	2.2	0.108	0.06	2.06	56	17.70	8.17	59	7.7
I031371		0.03	0.7	0.064	0.36	0.53	133	0.21	1.37	33	<0.5
I031372		0.02	0.2	0.044	0.13	0.10	69	0.12	1.18	20	<0.5
I031373		0.06	5.4	0.075	0.38	1.30	97	0.10	8.18	74	8.1
I031374		0.07	7.6	0.094	0.53	2.50	162	0.15	14.70	131	10.9
I031375		0.06	5.5	0.094	0.36	1.42	108	0.15	9.98	85	7.1
I031376		0.02	2.9	0.227	0.30	0.33	90	0.89	7.13	63	1.2
I031377		0.02	3.0	0.210	0.25	0.38	91	0.47	6.44	57	1.1
I031378		0.02	2.6	0.223	0.31	0.36	92	0.30	8.01	101	1.2
I031379		0.02	1.4	0.231	0.22	0.20	72	0.25	6.19	51	1.1
I031380		<0.01	15.1	0.212	0.40	2.72	64	0.14	8.00	45	1.8
I031381		0.02	1.6	0.257	0.27	0.22	89	0.26	6.50	94	1.2
I031382		0.02	2.2	0.252	0.28	0.30	92	0.30	8.17	109	1.4
I031383		0.05	2.7	0.207	0.32	0.35	87	0.20	8.07	109	1.1
I031384		0.04	3.1	0.163	0.28	0.47	64	0.35	7.22	186	0.9
I031385		0.03	2.1	0.229	0.24	0.29	69	0.33	5.87	46	1.0
I031386		0.02	2.2	0.228	0.23	0.31	73	0.26	6.12	37	1.2
I031387		0.04	1.9	0.217	0.31	0.26	89	0.26	5.71	85	0.8
I031388		0.04	2.4	0.205	0.29	0.31	78	0.21	6.48	119	0.8
I031389		0.04	1.7	0.177	0.24	0.28	71	0.36	5.95	311	0.7
I031390		0.03	1.8	0.180	0.27	0.26	72	0.16	5.51	97	0.6
I031391		0.02	1.7	0.223	0.35	0.35	88	0.25	5.55	76	0.7
I031392		0.02	2.6	0.254	0.23	0.38	85	0.26	9.37	69	1.5
I031393		0.25	3.7	0.201	0.28	0.52	95	0.35	9.93	112	1.3
I031394		0.05	4.3	0.201	0.25	0.60	99	0.15	9.01	69	1.0
I031395		0.06	2.9	0.223	0.27	0.40	134	0.12	6.73	38	0.9
I031396		0.03	3.9	0.182	0.32	0.56	74	0.20	7.81	52	1.5
I031397		0.07	6.0	0.014	0.13	1.08	22	0.13	11.45	34	1.1
I031398		0.03	3.4	0.191	0.20	0.48	69	0.22	9.28	49	1.3
I031399		0.01	2.8	0.196	0.18	0.48	71	0.21	7.19	44	1.4
I031400		0.01	2.5	0.206	0.20	0.51	80	0.19	6.83	51	1.2
I031401		0.03	1.4	0.222	0.21	0.22	88	0.18	5.90	43	0.8
I031402		0.02	1.8	0.175	0.09	0.30	79	0.13	6.84	49	1.0
I031403		0.07	1.7	0.129	0.09	0.30	54	0.33	6.56	31	1.0
I031404		0.05	1.9	0.187	0.16	0.37	80	0.12	8.44	51	1.6
I031405		1.17	1.9	0.222	0.15	0.55	76	0.15	7.93	54	1.6

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10103479

Sample Description	Method	WEI-21	Au-AA23	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Au Check	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce
	Units	kg	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm
	LOR	0.02	0.005	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02
I031406		3.31	<0.005			0.07	1.36	2.6	<0.2	<10	510	0.12	1.03	0.81	0.05	11.70
I031407		3.45	<0.005			0.11	1.74	1.6	<0.2	<10	250	0.14	0.20	0.93	0.07	13.10
I031408		1.85	2.61		2.71	12.45	1.18	373	2.7	<10	90	0.29	0.45	3.03	1.58	14.55
I031409		3.14	0.391			0.96	2.33	1940	0.3	<10	130	0.33	0.30	1.74	0.31	23.1
I031410		0.07	3.98		4.25	1.40	1.61	8340	4.0	<10	80	0.22	78.3	4.79	0.42	19.60
I031411		2.59	0.373			1.13	2.17	647	0.4	<10	200	0.26	0.85	1.54	0.85	26.9
I031412		1.22	0.175			1.11	2.03	745	0.2	<10	100	0.30	0.37	1.71	0.32	27.3
I031413		3.35	7.31	>10.0	5.93	4.88	1.09	748	2.5	<10	120	0.25	0.53	2.72	5.22	19.20
I031414		2.70	0.035			0.48	2.96	319	<0.2	<10	250	0.31	0.30	1.07	0.21	12.30
I031415		2.90	0.005			0.10	2.75	13.1	<0.2	<10	90	0.09	0.13	2.24	0.12	4.72
I031416		2.14	0.110			0.75	2.29	149.5	0.2	<10	160	0.18	0.30	2.88	0.95	8.10
I031417		4.65	0.080			0.21	2.34	104.0	<0.2	<10	250	0.16	0.29	1.35	0.09	8.00
I031418		4.66	0.054			0.34	3.41	79.6	<0.2	<10	350	0.24	0.32	0.94	0.16	10.25
I031419		2.28	0.149			0.23	4.05	224	0.2	<10	270	0.24	0.34	1.65	0.09	7.36
I031420		0.39	<0.005			0.03	2.20	3.8	<0.2	<10	320	0.17	0.03	0.63	0.04	31.0
I031421		1.94	3.02		2.39	17.80	1.31	3230	2.3	<10	80	0.22	0.52	3.25	11.95	13.85
I031422		4.00	0.359			0.94	4.21	481	0.4	<10	400	0.33	0.48	1.62	0.27	9.46
I031423		2.73	0.145			0.24	1.92	2450	<0.2	<10	250	0.18	0.16	1.36	0.09	24.5
I031424		4.60	0.586			1.88	1.41	1860	0.6	<10	220	0.23	0.21	2.48	0.72	14.40
I031425		2.72	0.296			2.60	2.46	221	0.4	<10	80	0.25	0.26	3.66	1.66	10.80
I031426		4.47	0.005			0.22	3.10	4.8	<0.2	<10	200	0.22	0.33	1.03	0.07	7.30
I031427		5.02	<0.005			0.13	3.30	4.6	<0.2	<10	510	0.21	0.20	1.09	0.05	7.46
I031428		4.91	0.099			0.43	2.00	245	<0.2	<10	200	0.21	0.20	1.94	0.11	9.67
I031429		1.51	<0.005			0.06	3.38	3.5	<0.2	<10	250	0.05	0.09	0.84	0.03	4.13
I031430		1.16	<0.005			0.05	3.67	1.1	<0.2	<10	250	0.06	0.11	0.90	0.02	4.31
I031431		4.27	0.075			0.11	3.13	506	<0.2	<10	390	0.22	0.13	1.56	0.06	8.08
I031432		4.91	0.245			0.70	1.77	693	0.3	<10	180	0.30	0.29	1.86	0.38	12.60
I031433		4.32	0.684			0.76	2.30	1260	0.7	<10	170	0.39	0.44	2.98	0.32	19.80
I031434		5.19	<0.005			0.06	2.97	14.6	<0.2	<10	410	0.23	0.15	0.94	0.03	13.55
I031435		4.83	<0.005			0.09	2.99	3.7	<0.2	<10	560	0.14	0.13	0.96	0.03	9.69
I031436		4.91	0.037			0.06	2.86	90.0	<0.2	<10	490	0.12	0.10	0.99	0.02	10.30
I031437		4.67	<0.005			0.11	2.90	2.5	<0.2	<10	350	0.09	0.22	0.94	0.03	6.81

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10103479

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Co	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn
	Units	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm
	LOR	0.1	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5
I031406		9.3	37	0.67	14.2	1.81	3.98	0.09	0.08	<0.01	0.012	0.35	5.1	6.4	1.00	271
I031407		16.7	19	1.54	33.9	2.70	6.01	0.13	0.09	<0.01	0.013	0.66	5.8	10.4	1.39	296
I031408		20.1	15	1.26	90.1	4.94	3.68	0.07	0.05	0.04	0.041	0.36	6.6	6.9	1.80	1190
I031409		14.4	11	1.25	57.5	4.23	6.63	0.08	0.03	0.03	0.038	0.57	9.6	11.4	2.28	795
I031410		116.0	32	1.11	258	4.43	5.51	0.17	0.25	0.09	0.440	0.17	10.8	9.3	0.51	776
I031411		11.8	11	1.60	111.0	3.86	7.03	0.08	0.03	0.03	0.049	0.62	11.7	16.5	2.04	676
I031412		10.1	3	1.50	45.9	3.93	6.37	0.08	0.02	0.03	0.030	0.67	11.5	12.1	1.60	674
I031413		8.3	4	1.32	56.8	3.22	3.56	0.06	0.02	0.15	0.072	0.38	7.8	5.3	1.37	937
I031414		23.4	75	1.87	83.3	4.64	8.11	0.10	0.03	0.04	0.050	0.42	4.8	16.7	2.28	607
I031415		20.5	186	3.53	30.6	3.23	7.14	0.11	0.06	<0.01	0.024	0.24	1.9	17.3	2.94	797
I031416		20.4	53	1.49	75.0	4.14	6.01	0.07	0.04	0.02	0.061	0.33	3.5	15.5	2.65	1080
I031417		20.4	64	0.82	110.0	3.32	6.35	0.09	0.03	0.01	0.020	0.33	3.5	12.8	1.96	579
I031418		24.6	43	1.15	227	3.85	9.39	0.13	0.02	<0.01	0.025	0.70	4.3	14.2	2.33	573
I031419		18.0	80	1.25	109.0	4.10	9.59	0.11	0.02	<0.01	0.026	0.85	3.2	15.6	2.52	644
I031420		9.0	8	1.83	5.4	3.02	7.22	0.14	0.13	<0.01	0.015	1.10	16.5	20.9	0.95	617
I031421		15.2	20	0.71	191.5	3.58	3.76	0.05	0.02	0.71	0.141	0.32	5.9	7.1	1.30	926
I031422		22.7	24	3.00	56.6	4.84	10.60	0.11	0.02	0.02	0.037	1.23	4.1	24.8	3.23	874
I031423		10.9	6	1.10	16.4	2.79	6.37	0.06	0.02	0.05	0.032	0.50	11.2	14.9	1.51	519
I031424		10.5	20	1.31	35.9	2.95	3.96	0.06	0.03	0.10	0.034	0.51	6.6	9.5	1.22	760
I031425		18.7	13	1.77	83.1	4.14	6.65	0.07	0.03	0.03	0.050	0.61	4.5	15.1	1.90	1210
I031426		22.5	57	1.67	112.0	3.98	8.20	0.10	0.03	<0.01	0.019	0.83	3.2	17.2	2.27	568
I031427		13.5	14	1.87	46.9	3.61	8.82	0.11	0.03	<0.01	0.024	1.35	3.2	15.8	2.21	679
I031428		12.2	8	1.14	57.1	3.01	5.44	0.05	0.03	0.04	0.023	0.57	4.3	11.4	1.47	576
I031429		24.0	33	0.81	28.3	4.25	8.71	0.12	0.02	<0.01	0.012	0.47	1.7	17.7	3.33	659
I031430		25.0	37	0.83	24.3	4.61	9.41	0.15	0.02	<0.01	0.034	0.48	1.8	18.4	3.64	708
I031431		21.0	28	1.45	33.6	3.89	8.00	0.09	0.04	0.04	0.025	0.67	3.3	15.0	2.43	706
I031432		12.6	24	1.76	67.6	3.06	4.86	0.06	0.03	0.05	0.030	0.55	5.4	11.4	1.27	691
I031433		13.4	22	1.82	56.9	3.84	5.69	0.08	0.03	0.08	0.043	0.51	8.3	10.1	2.15	821
I031434		10.9	12	1.51	18.0	3.51	8.73	0.10	0.03	0.01	0.026	0.98	5.7	14.7	1.99	709
I031435		14.4	22	1.54	23.5	3.88	9.29	0.09	0.03	0.01	0.020	1.09	4.2	14.1	2.28	819
I031436		14.3	14	1.13	12.5	3.67	8.92	0.12	0.03	<0.01	0.017	0.92	4.5	12.2	2.03	649
I031437		23.9	28	1.09	43.1	4.02	8.24	0.13	0.03	0.01	0.012	0.68	3.0	11.2	2.42	576

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10103479

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Mo	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.05	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01
I031406		0.47	0.10	0.16	15.7	520	2.3	13.9	0.001	0.14	1.05	4.2	0.3	0.5	53.4	<0.01
I031407		0.46	0.09	0.14	11.1	630	2.5	28.0	0.001	0.35	1.06	6.4	0.4	0.4	29.7	<0.01
I031408		0.29	0.02	0.12	17.1	570	339	21.2	0.001	4.29	22.8	6.7	1.4	0.2	51.3	<0.01
I031409		0.71	0.02	0.10	5.5	840	14.5	23.1	0.001	1.61	13.90	8.4	0.7	0.3	50.7	<0.01
I031410		24.3	0.10	0.66	56.0	820	18.5	8.0	0.033	1.17	27.8	4.4	6.2	27.3	84.6	0.01
I031411		1.10	0.02	0.12	6.0	850	23.0	23.4	0.001	1.24	22.3	8.9	0.7	0.6	45.7	<0.01
I031412		1.04	0.05	0.13	2.6	950	23.9	24.5	0.001	1.96	22.6	7.3	0.7	0.4	45.4	<0.01
I031413		1.42	0.01	0.12	3.3	590	310	15.6	0.002	1.90	693	5.3	0.9	0.3	56.4	<0.01
I031414		0.56	0.05	0.06	30.3	400	9.6	17.5	0.001	0.73	21.7	15.9	0.5	0.3	45.1	<0.01
I031415		0.13	0.09	0.05	43.6	390	4.6	22.7	<0.001	0.19	3.75	15.4	0.2	0.2	39.1	<0.01
I031416		0.32	0.04	0.07	19.6	350	21.5	17.0	<0.001	1.49	7.36	11.0	0.5	0.2	59.1	<0.01
I031417		0.60	0.10	0.11	20.1	400	2.7	11.9	0.001	0.78	11.20	7.3	0.7	0.3	30.7	<0.01
I031418		0.84	0.17	0.16	16.7	520	3.0	22.1	0.003	0.70	6.87	7.8	1.3	0.5	34.6	<0.01
I031419		0.30	0.30	0.10	31.9	470	4.9	26.3	0.001	0.88	3.69	8.1	1.2	0.3	43.7	<0.01
I031420		0.24	0.19	0.22	2.8	510	4.9	63.9	<0.001	<0.01	0.20	5.8	0.2	0.7	38.9	<0.01
I031421		0.55	0.02	0.06	19.4	400	289	14.1	0.001	2.42	197.0	8.9	1.1	0.2	44.6	<0.01
I031422		0.30	0.14	0.09	10.0	560	8.4	40.9	0.001	0.75	11.35	11.9	0.6	0.4	42.1	<0.01
I031423		0.12	0.05	0.15	3.5	630	3.9	17.0	<0.001	0.59	4.63	5.6	0.3	0.5	27.3	<0.01
I031424		0.70	0.05	0.09	8.7	330	30.4	21.5	0.001	1.36	20.2	6.1	0.5	0.2	43.2	<0.01
I031425		0.53	0.08	0.08	7.1	430	52.9	24.8	0.001	2.02	17.10	9.0	0.6	0.2	49.8	<0.01
I031426		0.16	0.17	0.09	14.7	390	2.8	28.2	<0.001	0.89	2.51	7.5	0.5	0.3	32.3	<0.01
I031427		0.79	0.20	0.09	4.7	460	2.5	42.7	0.001	0.53	0.60	7.8	0.5	0.4	30.2	<0.01
I031428		0.75	0.11	0.09	3.5	320	7.2	20.7	0.001	0.99	5.15	6.5	0.6	0.3	39.4	<0.01
I031429		0.15	0.07	0.11	13.1	600	1.3	15.2	<0.001	0.17	1.21	6.2	0.2	<0.2	25.7	<0.01
I031430		0.12	0.07	0.10	13.5	620	1.3	15.5	<0.001	0.12	0.90	6.8	0.2	0.2	28.2	<0.01
I031431		0.55	0.08	0.07	12.0	480	2.5	22.8	0.001	0.43	4.50	9.0	0.3	0.3	40.4	<0.01
I031432		1.59	0.06	0.08	11.6	290	11.9	24.6	0.001	1.40	10.20	7.9	0.6	0.3	40.5	<0.01
I031433		0.75	0.09	0.08	15.5	440	19.7	21.7	0.002	1.55	12.35	10.0	0.6	0.4	81.1	<0.01
I031434		0.27	0.16	0.14	5.5	770	2.7	28.5	0.001	0.59	4.55	7.6	0.3	0.5	37.5	<0.01
I031435		0.32	0.13	0.16	9.8	730	2.5	31.1	0.001	0.69	2.96	6.8	0.3	0.4	29.6	<0.01
I031436		0.26	0.17	0.18	6.3	760	2.1	25.7	<0.001	0.50	0.61	6.2	0.3	0.4	37.2	<0.01
I031437		0.15	0.11	0.12	17.9	750	2.0	20.6	0.001	0.56	3.14	6.9	0.2	0.3	37.0	<0.01

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10103479

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Te	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031406		0.42	2.4	0.159	0.09	0.45	47	0.15	7.45	37	2.1
I031407		0.07	2.3	0.216	0.21	0.55	71	0.13	9.33	46	1.7
I031408		5.79	3.0	0.027	0.25	0.49	36	0.18	12.80	131	1.2
I031409		0.32	3.2	0.042	0.23	0.48	49	0.12	11.45	72	0.5
I031410		13.20	2.6	0.108	1.13	1.77	55	23.3	7.42	62	8.7
I031411		0.35	3.3	0.054	0.20	0.54	39	0.33	13.55	96	0.6
I031412		0.24	3.6	0.050	0.24	0.45	23	0.22	11.60	57	0.5
I031413		0.88	2.4	0.024	0.18	0.53	21	0.23	10.40	348	0.5
I031414		0.07	2.0	0.047	0.24	0.56	97	0.11	9.58	70	0.5
I031415		0.02	0.6	0.087	0.33	0.28	110	0.11	7.81	63	1.4
I031416		0.21	1.5	0.055	0.21	0.47	82	0.11	9.49	118	0.7
I031417		0.08	1.2	0.096	0.10	0.39	67	0.09	7.55	56	0.5
I031418		0.08	1.7	0.112	0.15	0.28	63	0.20	7.96	61	<0.5
I031419		0.17	1.1	0.126	0.16	0.16	82	0.10	5.83	56	<0.5
I031420		<0.01	10.5	0.230	0.39	3.12	68	0.12	7.93	54	1.7
I031421		1.04	2.8	0.009	0.23	0.37	28	0.27	10.55	792	<0.5
I031422		0.34	1.1	0.173	0.33	0.28	132	0.12	9.52	125	<0.5
I031423		0.13	3.6	0.042	0.18	0.44	27	0.11	11.65	39	<0.5
I031424		0.35	2.5	0.033	0.22	0.55	34	0.18	11.55	86	0.5
I031425		0.60	1.5	0.063	0.23	0.42	70	0.12	12.00	162	<0.5
I031426		0.10	1.4	0.156	0.21	0.46	84	0.17	7.33	69	0.5
I031427		0.04	1.3	0.175	0.26	0.34	91	0.12	9.11	66	<0.5
I031428		0.11	2.1	0.074	0.17	0.71	50	0.14	9.88	46	0.7
I031429		0.01	0.4	0.181	0.11	0.13	110	0.10	4.93	79	<0.5
I031430		0.02	0.4	0.201	0.10	0.13	122	0.09	5.25	86	<0.5
I031431		0.03	1.0	0.103	0.19	0.35	94	0.08	8.56	74	0.5
I031432		0.22	2.4	0.040	0.22	0.67	41	0.14	10.90	70	<0.5
I031433		0.21	3.1	0.033	0.26	0.52	45	0.24	13.85	82	0.5
I031434		0.02	1.8	0.149	0.16	0.32	56	0.10	10.20	50	<0.5
I031435		0.01	1.5	0.181	0.20	0.21	71	0.13	7.70	62	<0.5
I031436		0.02	1.5	0.170	0.16	0.22	65	0.14	7.40	49	<0.5
I031437		0.03	0.8	0.178	0.14	0.18	106	0.10	5.78	62	0.6

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10103479

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 26-AUG-2010
Account: EIASQI

CERTIFICATE TR10110650

Project: SQI10-03

P.O. No.:

This report is for 42 Drill Core samples submitted to our lab in Terrace, BC, Canada on 11-AUG-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
PUL-QC	Pulverizing QC Test
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
SPL-21d	Split sample - duplicate
PUL-31d	Pulverize Split - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature: 

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 26-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110650

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I031259		4.43	<0.005		0.41	3.45	5.9	<0.2	<10	750	0.45	0.26	0.77	0.92	11.35	21.9
I031260		0.69	<0.005		0.04	1.18	1.4	<0.2	<10	210	0.12	0.03	0.31	0.04	20.2	5.3
I031261		1.12	0.005		0.48	3.23	1.3	<0.2	<10	400	0.12	0.47	0.59	0.28	3.56	28.1
I031262		2.27	0.024		0.64	3.30	9.0	<0.2	<10	600	0.89	0.48	1.00	1.58	22.2	10.8
I031263		1.27	<0.005		0.39	2.46	6.4	<0.2	<10	800	0.74	0.30	0.83	0.72	13.80	10.8
I031264		1.40	0.017		0.29	3.69	7.9	<0.2	<10	650	0.33	0.39	1.02	0.46	13.45	14.3
I031265		2.92	0.220		0.35	1.94	8.2	<0.2	<10	370	0.19	2.19	1.37	4.06	23.5	11.5
I031266		2.69	0.151		1.02	2.98	1325	0.2	<10	140	0.15	0.46	2.91	0.36	9.76	23.7
I031267		3.36	<0.005		0.10	5.58	0.9	<0.2	<10	370	0.19	0.07	1.39	0.04	7.30	25.3
I031268		5.19	0.005		0.57	3.68	3.1	<0.2	<10	150	0.16	0.46	2.00	0.47	3.95	22.5
I031269		4.34	0.006		0.45	2.99	2.5	<0.2	<10	160	0.27	0.39	1.38	0.37	12.20	16.6
I031270		1.02	<0.005		0.39	3.71	0.8	<0.2	<10	170	0.25	0.32	1.43	0.25	8.88	18.5
I031271		4.63	0.006		0.35	5.27	1.5	<0.2	<10	400	0.12	0.33	1.23	0.09	4.22	29.2
I031272		4.92	0.035		0.30	5.12	0.7	<0.2	<10	350	0.15	0.45	1.65	0.06	3.41	30.5
I031273		4.32	0.016		0.21	2.80	2.0	<0.2	<10	200	0.07	0.73	1.13	0.05	3.10	28.8
I031274		3.82	<0.005		0.15	2.71	1.6	<0.2	<10	120	<0.05	0.44	0.57	0.03	3.33	29.1
I031275		5.03	<0.005		0.13	2.84	1.0	<0.2	<10	120	<0.05	0.40	0.59	0.03	2.55	29.1
I031276		5.01	<0.005		0.13	3.01	0.9	<0.2	<10	240	0.05	0.61	0.66	0.02	3.20	27.6
I031277		5.01	<0.005		0.10	3.14	0.8	<0.2	<10	160	0.06	0.73	0.70	0.02	1.96	28.9
I031278		1.33	<0.005		0.08	3.24	0.7	<0.2	<10	80	<0.05	0.58	0.60	0.02	1.81	29.8
I031279		2.48	0.008		0.07	3.26	0.8	<0.2	<10	60	0.06	0.86	1.14	0.03	2.19	28.6
I031280		<0.02	<0.005		0.08	3.24	0.8	<0.2	<10	60	0.05	0.54	1.10	0.03	2.10	27.5
I031281		4.10	<0.005		0.08	2.99	1.0	<0.2	<10	120	0.05	0.43	0.64	0.02	2.87	26.2
I031282		3.09	0.005		0.14	3.69	3.5	<0.2	<10	100	0.07	0.50	1.63	0.06	5.14	29.4
I031283		1.92	0.649		0.73	2.75	2380	0.8	<10	60	0.17	0.75	4.31	0.23	5.71	27.0
I031284		2.59	0.017		0.66	3.90	18.1	<0.2	<10	90	0.20	0.70	1.56	0.26	8.37	28.7
I031285		4.73	0.008		0.25	4.68	18.4	<0.2	<10	110	0.23	0.51	1.64	0.10	5.13	22.3
I031286		2.32	0.007		0.32	3.42	7.3	<0.2	<10	120	0.16	0.52	0.88	0.20	4.30	22.5
I031287		4.89	0.005		0.24	5.16	1.7	<0.2	<10	360	0.21	1.20	1.22	0.09	7.46	25.8
I031288		3.51	<0.005		0.21	4.27	0.8	<0.2	<10	590	0.19	0.81	0.89	0.04	6.43	20.6
I031289		4.71	0.005		0.15	4.36	1.7	<0.2	<10	690	0.36	0.51	1.57	0.10	39.2	17.8
I031290		0.08	1.215	1.12	9.00	3.39	1545	1.3	<10	90	0.11	53.4	0.04	0.10	103.5	2.8
I031291		5.20	0.005		0.22	5.47	1.6	<0.2	<10	600	0.23	0.98	1.41	0.07	8.65	22.4
I031292		3.47	0.005		0.25	4.75	0.9	<0.2	<10	520	0.19	2.87	1.37	0.06	7.64	23.8
I031293		5.84	0.006		0.23	5.37	1.6	<0.2	<10	570	0.29	3.95	1.58	0.05	10.95	22.1
I031294		4.96	<0.005		0.15	4.13	1.0	<0.2	<10	460	0.25	1.10	1.36	0.06	9.42	16.0
I031295		4.27	<0.005		0.07	2.99	1.1	<0.2	<10	360	0.16	0.55	0.85	0.02	17.65	12.2
I031296		5.64	0.006		0.36	3.01	0.7	<0.2	<10	210	0.08	0.68	0.99	0.06	3.96	29.7
I031297		3.73	0.005		0.19	3.81	0.3	<0.2	<10	270	0.10	0.36	0.90	0.03	4.85	34.0
I031298		2.80	0.006		0.20	3.52	3.5	<0.2	<10	320	0.10	0.26	1.41	0.07	8.49	25.9

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 26-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110650

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031259		129	1.86	63.2	3.90	11.65	0.15	0.14	<0.01	0.029	0.96	5.7	12.6	2.48	433	2.00
I031260		6	1.90	3.5	2.13	4.58	0.09	0.15	<0.01	0.009	0.61	7.5	22.3	0.49	483	0.18
I031261		108	1.09	76.2	4.20	9.50	0.15	0.02	<0.01	0.025	0.64	1.8	10.3	2.67	382	0.80
I031262		83	2.20	63.1	3.23	11.20	0.16	0.41	<0.01	0.038	1.10	11.7	14.2	1.53	614	6.00
I031263		56	1.56	52.4	2.56	8.69	0.11	0.42	<0.01	0.030	0.73	7.6	9.3	1.08	485	5.43
I031264		51	1.86	67.5	3.53	11.65	0.15	0.04	<0.01	0.037	1.34	7.1	12.7	1.99	401	0.45
I031265		37	0.73	55.9	2.91	7.32	0.10	0.05	<0.01	0.046	0.52	11.7	10.0	1.09	363	1.01
I031266		40	1.49	78.1	5.46	8.50	0.11	0.03	0.04	0.054	0.62	4.5	13.0	2.81	841	0.42
I031267		38	1.47	22.8	5.02	14.45	0.19	0.02	<0.01	0.029	0.88	3.4	21.4	4.43	553	0.18
I031268		14	0.68	87.0	5.23	8.68	0.12	<0.02	<0.01	0.025	0.41	1.7	11.9	1.35	422	0.95
I031269		54	0.77	47.7	4.26	8.12	0.09	0.04	<0.01	0.019	0.56	6.1	12.3	1.35	398	1.68
I031270		46	0.88	46.4	4.62	9.34	0.10	0.03	<0.01	0.020	0.64	4.5	11.6	1.94	407	1.41
I031271		58	1.21	104.5	5.35	13.35	0.18	0.02	<0.01	0.049	0.94	1.9	15.7	4.16	473	0.74
I031272		142	1.14	83.3	4.71	11.95	0.16	<0.02	<0.01	0.039	0.91	1.4	14.3	3.33	458	0.42
I031273		164	0.63	78.0	3.52	7.70	0.14	0.02	<0.01	0.016	0.31	1.3	11.1	2.48	435	0.51
I031274		159	0.46	53.3	3.78	7.55	0.13	0.02	<0.01	0.012	0.14	1.5	9.8	3.08	439	0.40
I031275		219	0.48	59.3	3.79	7.86	0.12	0.02	<0.01	0.012	0.15	1.1	10.4	3.30	451	0.48
I031276		217	0.73	49.9	3.71	8.04	0.13	0.02	<0.01	0.013	0.26	1.4	12.6	3.42	463	0.45
I031277		195	0.86	31.0	3.91	7.62	0.14	0.02	<0.01	0.015	0.20	0.8	14.4	3.49	506	0.58
I031278		211	0.77	23.0	3.92	7.94	0.14	0.02	<0.01	0.015	0.14	0.7	14.0	3.78	506	0.56
I031279		232	0.65	25.0	4.00	8.50	0.14	0.02	<0.01	0.020	0.10	0.9	18.0	3.83	563	0.79
I031280		231	0.64	25.1	3.93	8.17	0.13	0.02	<0.01	0.018	0.10	0.9	17.3	3.81	549	0.75
I031281		227	0.69	26.5	3.52	8.11	0.13	0.02	<0.01	0.014	0.19	1.2	13.4	3.58	460	0.53
I031282		127	1.32	57.7	4.93	9.93	0.15	0.03	<0.01	0.030	0.18	2.3	19.1	3.96	785	0.27
I031283		63	1.00	86.8	4.77	6.60	0.09	0.02	0.01	0.067	0.17	2.5	10.8	3.30	1100	1.40
I031284		66	1.45	146.0	5.05	11.75	0.16	0.04	<0.01	0.046	1.07	3.4	14.2	2.62	564	6.87
I031285		57	1.31	55.1	4.68	11.45	0.14	0.02	<0.01	0.023	1.22	2.2	19.7	3.09	599	1.92
I031286		26	0.77	108.0	4.09	9.00	0.13	0.02	<0.01	0.016	0.98	1.9	15.0	2.39	446	2.28
I031287		52	0.85	37.2	5.31	12.60	0.15	<0.02	<0.01	0.028	0.90	3.2	14.6	4.40	812	1.67
I031288		68	0.95	25.4	4.37	10.70	0.13	<0.02	<0.01	0.025	0.90	2.7	12.8	3.72	739	1.16
I031289		48	0.88	27.0	4.20	11.35	0.15	0.66	0.01	0.039	1.06	18.5	13.5	3.17	730	1.06
I031290		34	0.17	79.4	3.22	150.0	0.93	0.34	33.2	0.557	1.29	25.9	0.4	0.03	11	16.95
I031291		52	1.06	46.1	4.87	14.70	0.17	0.02	0.01	0.040	1.16	3.7	14.8	4.06	821	0.65
I031292		48	0.94	55.8	4.80	13.10	0.15	0.02	<0.01	0.034	0.93	3.3	14.5	3.91	754	0.57
I031293		47	1.29	37.2	4.51	14.00	0.16	0.02	<0.01	0.029	1.16	4.8	16.4	3.92	680	2.63
I031294		22	1.35	28.5	3.67	12.05	0.14	0.02	<0.01	0.024	1.04	4.2	15.9	2.87	510	2.12
I031295		19	1.23	5.1	3.08	9.58	0.12	0.02	<0.01	0.015	0.99	7.8	17.3	2.30	348	1.82
I031296		30	0.88	112.0	4.95	8.76	0.13	0.03	<0.01	0.020	0.63	1.6	12.8	2.36	473	0.50
I031297		55	1.49	57.0	5.08	11.10	0.17	0.02	<0.01	0.018	1.01	2.0	16.5	3.26	578	0.73
I031298		22	1.95	50.9	5.01	11.05	0.15	0.02	<0.01	0.025	1.25	3.5	18.8	3.22	642	0.45

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 26-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110650

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031259		0.16	0.12	61.1	640	6.8	39.1	0.003	0.43	0.79	13.8	1.7	0.8	44.5	<0.01	0.08
I031260		0.13	0.44	2.2	280	6.8	49.3	<0.001	0.01	0.18	3.2	0.2	0.8	21.2	<0.01	<0.01
I031261		0.17	0.09	57.0	350	4.9	23.5	0.002	0.76	0.90	18.4	1.5	0.4	27.5	<0.01	0.12
I031262		0.15	0.12	45.9	880	15.5	54.9	0.006	0.49	3.42	9.2	3.0	1.4	79.4	<0.01	0.10
I031263		0.12	0.11	45.6	940	6.4	38.6	0.007	0.37	1.28	7.1	2.3	1.2	41.3	<0.01	0.07
I031264		0.25	0.11	19.7	450	5.4	53.3	0.003	0.53	5.94	16.5	0.9	1.0	36.3	<0.01	0.11
I031265		0.10	0.16	14.8	480	6.5	18.5	0.002	0.63	2.06	10.9	0.8	0.7	32.9	<0.01	0.62
I031266		0.10	0.12	22.7	340	21.9	23.5	0.001	2.25	3650	14.5	1.5	0.5	65.9	<0.01	0.20
I031267		0.23	0.13	13.2	610	3.2	31.7	<0.001	0.26	4.12	20.2	0.4	0.4	26.8	<0.01	0.01
I031268		0.28	0.12	12.5	330	7.8	13.5	0.002	2.41	7.69	10.3	1.3	0.3	58.5	<0.01	0.08
I031269		0.22	0.09	17.2	440	4.9	19.9	0.002	1.99	4.19	7.6	0.6	0.4	33.1	<0.01	0.06
I031270		0.24	0.11	14.3	450	4.1	22.0	0.002	1.79	0.80	9.4	0.6	0.4	33.6	<0.01	0.05
I031271		0.22	0.12	28.6	630	3.1	28.2	0.003	0.97	3.03	21.4	3.8	0.5	25.2	<0.01	0.10
I031272		0.30	0.10	66.5	500	3.8	25.0	<0.001	0.91	0.64	17.6	2.8	0.5	42.1	<0.01	0.19
I031273		0.13	0.11	81.5	440	2.2	10.4	0.001	0.53	1.21	6.9	1.0	0.3	27.0	<0.01	0.35
I031274		0.06	0.09	78.8	510	1.4	5.3	<0.001	0.47	1.24	5.3	0.7	0.2	13.9	<0.01	0.18
I031275		0.06	0.08	100.0	450	1.8	5.4	<0.001	0.41	0.72	5.1	0.7	0.2	14.0	<0.01	0.15
I031276		0.07	0.09	103.5	500	1.2	9.8	<0.001	0.30	0.86	5.4	0.6	0.3	15.7	<0.01	0.26
I031277		0.06	0.09	89.0	390	1.2	7.9	<0.001	0.33	0.58	5.4	0.5	0.3	18.4	<0.01	0.32
I031278		0.05	0.08	97.8	390	1.0	6.0	<0.001	0.21	0.54	5.5	0.3	0.3	15.6	<0.01	0.24
I031279		0.05	0.08	99.3	330	1.1	4.4	<0.001	0.17	0.45	8.4	0.4	0.3	18.3	<0.01	0.35
I031280		0.05	0.07	98.1	330	1.1	4.4	<0.001	0.16	0.47	7.9	0.3	0.3	17.3	<0.01	0.20
I031281		0.06	0.08	105.5	460	0.9	7.5	<0.001	0.14	1.85	6.1	0.4	0.3	13.0	<0.01	0.20
I031282		0.06	0.10	66.9	510	2.1	7.9	<0.001	0.47	0.65	9.9	0.9	0.4	24.1	<0.01	0.20
I031283		0.03	0.09	43.9	250	10.1	8.5	0.002	1.60	2.98	11.1	1.1	0.3	79.4	<0.01	0.65
I031284		0.24	0.12	24.9	340	4.5	36.1	0.106	1.83	0.57	19.1	3.9	1.4	33.0	<0.01	0.29
I031285		0.25	0.11	23.2	480	4.2	39.5	0.016	1.33	0.40	13.2	2.7	0.9	36.2	<0.01	0.19
I031286		0.18	0.11	15.2	340	4.0	31.9	0.006	1.55	0.32	9.3	3.3	0.8	25.7	<0.01	0.29
I031287		0.16	0.10	17.6	550	2.6	30.6	0.004	1.01	0.32	14.7	1.4	1.0	42.1	<0.01	0.68
I031288		0.15	0.10	18.6	390	2.2	30.3	0.001	0.72	0.33	13.7	1.0	0.8	49.0	<0.01	0.42
I031289		0.22	0.13	20.8	1120	5.1	36.6	0.001	0.53	0.45	14.4	0.8	1.3	165.0	<0.01	0.20
I031290		0.05	0.44	2.3	1150	61.2	1.7	<0.001	2.88	362	8.6	18.8	2.7	2200	0.02	2.03
I031291		0.27	0.14	19.7	630	4.5	41.9	<0.001	0.76	0.39	15.0	1.0	1.1	39.6	<0.01	0.39
I031292		0.20	0.12	19.7	600	3.8	32.5	<0.001	0.83	0.24	14.2	0.9	0.7	27.9	<0.01	1.48
I031293		0.25	0.12	16.0	610	4.8	40.3	0.001	0.59	0.43	16.4	0.8	0.8	34.9	<0.01	2.20
I031294		0.21	0.12	9.2	570	3.3	38.4	0.002	0.43	0.32	13.1	0.7	0.8	26.9	<0.01	0.60
I031295		0.13	0.10	7.6	630	2.3	35.7	0.001	0.16	0.47	11.0	0.4	0.5	17.1	<0.01	0.25
I031296		0.17	0.10	23.3	360	2.4	22.0	0.001	1.34	0.28	8.6	1.2	0.4	35.1	0.01	0.26
I031297		0.20	0.14	35.4	480	2.0	34.7	0.003	0.75	0.25	9.0	0.7	0.3	30.7	<0.01	0.11
I031298		0.19	0.13	8.7	540	2.8	43.0	0.001	0.76	0.24	11.7	0.5	0.4	25.8	<0.01	0.10

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 26-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110650

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031259		2.1	0.137	0.32	0.97	164	0.47	6.04	109	6.3
I031260		13.9	0.138	0.35	1.94	40	0.12	5.17	35	2.9
I031261		0.9	0.113	0.22	0.52	170	0.16	3.41	67	0.7
I031262		5.2	0.103	0.39	2.01	149	0.33	8.70	193	19.0
I031263		4.8	0.065	0.31	1.39	113	0.17	8.19	70	18.4
I031264		3.3	0.118	0.39	0.67	95	0.53	5.84	111	1.1
I031265		5.4	0.065	0.14	1.31	61	0.70	7.19	134	1.7
I031266		1.0	0.053	0.29	0.24	108	0.18	9.78	118	0.5
I031267		1.4	0.117	0.25	0.21	177	0.09	5.03	75	<0.5
I031268		0.5	0.044	0.11	0.21	116	0.09	4.86	71	<0.5
I031269		2.8	0.036	0.17	0.47	73	0.14	4.97	101	1.5
I031270		2.1	0.058	0.18	0.33	97	0.08	4.19	57	1.1
I031271		0.7	0.113	0.23	0.10	200	0.15	3.58	63	<0.5
I031272		0.5	0.110	0.19	0.07	164	0.13	3.02	63	<0.5
I031273		0.4	0.137	0.09	0.14	88	0.15	4.28	43	0.5
I031274		0.4	0.141	0.05	0.11	91	0.11	3.78	40	<0.5
I031275		0.3	0.135	0.06	0.07	90	0.14	3.45	45	<0.5
I031276		0.3	0.150	0.08	0.08	80	0.13	3.41	42	<0.5
I031277		0.2	0.141	0.06	0.05	72	0.14	2.97	46	<0.5
I031278		0.2	0.140	0.05	0.06	81	0.10	3.09	50	<0.5
I031279		0.2	0.123	0.03	0.07	102	0.09	4.22	44	<0.5
I031280		0.2	0.118	0.04	0.06	100	0.08	4.03	44	<0.5
I031281		0.3	0.130	0.07	0.08	90	0.09	3.15	43	<0.5
I031282		0.5	0.109	0.06	0.15	127	0.07	5.15	52	0.5
I031283		0.7	0.013	0.09	0.35	93	0.09	7.71	80	<0.5
I031284		0.8	0.139	0.24	0.28	120	0.10	7.98	89	0.7
I031285		0.6	0.160	0.25	0.27	111	0.13	5.57	85	<0.5
I031286		0.7	0.141	0.19	0.20	73	0.12	4.02	68	<0.5
I031287		0.9	0.111	0.21	0.20	129	0.06	6.89	64	<0.5
I031288		0.9	0.118	0.22	0.21	104	0.08	4.86	72	<0.5
I031289		3.6	0.176	0.30	0.89	85	0.15	12.75	91	35.4
I031290		2.6	0.116	0.47	15.20	47	11.55	1.64	8	23.1
I031291		1.1	0.158	0.27	0.19	130	0.13	7.25	110	0.5
I031292		0.9	0.122	0.21	0.14	121	0.09	6.40	89	<0.5
I031293		1.3	0.140	0.28	0.22	138	0.59	6.74	89	<0.5
I031294		1.3	0.127	0.26	0.19	92	0.26	5.45	58	0.5
I031295		2.2	0.118	0.24	0.29	70	0.15	6.15	29	<0.5
I031296		0.5	0.156	0.16	0.09	92	0.28	3.56	55	<0.5
I031297		0.5	0.209	0.27	0.10	129	0.21	3.87	68	<0.5
I031298		1.0	0.194	0.37	0.18	166	0.13	6.28	95	<0.5

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 26-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110650

Sample Description	Method / Analyte / Units / LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I031299		3.14	<0.005		0.17	3.24	0.1	<0.2	<10	270	0.06	0.93	0.80	0.03	7.43	26.3
I031300		0.20	<0.005		0.04	1.19	0.7	<0.2	<10	170	0.13	0.04	0.38	0.03	13.15	4.5

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 26-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110650

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031299		25	1.86	41.7	4.77	10.40	0.16	0.02	<0.01	0.018	1.15	3.1	15.8	3.04	476	0.41
I031300		5	1.63	4.2	2.36	4.33	0.09	0.14	<0.01	0.011	0.53	5.8	18.8	0.44	454	0.17

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 26-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110650

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031299		0.16	0.14	11.2	600	2.0	37.1	0.001	0.75	0.27	8.8	0.8	0.3	16.1	<0.01	0.37
I031300		0.17	0.45	2.0	210	7.6	41.3	<0.001	0.02	0.19	3.1	<0.2	0.7	27.8	<0.01	0.01

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 26-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110650

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031299		0.9	0.209	0.33	0.17	152	0.42	4.68	75	<0.5
I031300		11.5	0.113	0.30	2.39	34	0.16	4.90	30	2.7

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 26-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110650

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

CERTIFICATE TR10110651

Project: SQI10-03

P.O. No.:

This report is for 111 Drill Core samples submitted to our lab in Terrace, BC, Canada on 11-AUG-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
PUL-QC	Pulverizing QC Test
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
SPL-21d	Split sample - duplicate
PUL-31d	Pulverize Split - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature: 

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110651

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I031438		3.92	<0.005		0.23	2.91	1.3	<0.2	<10	270	0.10	0.30	0.93	0.04	5.29	26.5
I031439		5.72	<0.005		0.16	2.53	0.4	<0.2	<10	230	0.07	0.34	0.62	0.05	5.67	25.9
I031440		<0.02	<0.005		0.17	2.53	0.6	<0.2	<10	250	0.05	0.32	0.63	0.04	5.77	24.9
I031441		4.03	<0.005		0.14	2.96	1.1	<0.2	<10	420	0.09	0.26	0.99	0.03	5.61	24.6
I031442		5.82	0.059		0.30	2.33	227	<0.2	<10	320	0.08	0.25	1.37	0.08	6.67	21.7
I031443		5.38	<0.005		0.18	2.38	6.5	<0.2	<10	310	0.07	0.40	1.08	0.05	6.06	21.8
I031444		4.29	<0.005		0.18	2.66	2.0	<0.2	<10	380	0.08	0.33	1.16	0.05	5.12	27.8
I031445		4.26	0.037		0.32	1.55	219	<0.2	<10	300	0.08	0.16	2.90	0.40	7.35	18.9
I031446		5.05	<0.005		0.17	2.64	3.2	<0.2	<10	350	0.05	0.29	1.26	0.08	6.93	25.1
I031447		5.01	<0.005		0.12	4.02	1.2	<0.2	<10	360	0.20	0.27	1.69	0.06	5.49	23.6
I031448		5.39	<0.005		0.12	4.53	0.4	<0.2	<10	390	0.22	0.30	1.83	0.04	5.00	28.3
I031449		5.30	0.005		0.10	4.42	0.7	<0.2	<10	360	0.23	0.23	1.81	0.04	4.26	23.3
I031450		0.07	4.16	4.24	1.54	1.58	8070	4.9	20	80	0.19	69.6	4.86	0.43	18.60	116.0
I031451		4.78	0.007		0.24	3.83	44.0	<0.2	<10	260	0.14	0.86	1.63	0.05	5.44	31.4
I031452		4.18	<0.005		0.11	4.83	0.8	<0.2	<10	360	0.26	0.22	1.87	0.04	4.75	25.5
I031453		5.04	<0.005		0.13	3.48	1.8	<0.2	<10	210	0.17	0.23	1.73	0.08	4.24	22.1
I031454		5.16	0.017		0.21	4.23	100.5	<0.2	<10	390	0.21	0.28	2.33	0.07	5.58	28.6
I031455		5.65	<0.005		0.11	4.11	1.1	<0.2	<10	350	0.22	0.27	1.89	0.04	3.47	22.9
I031456		5.75	<0.005		0.08	4.32	0.7	<0.2	<10	480	0.16	0.15	1.53	0.03	5.79	23.5
I031457		5.54	<0.005		0.09	3.75	0.1	<0.2	<10	370	0.15	0.28	1.43	0.04	4.66	26.3
I031458		4.85	0.018		0.12	4.02	0.7	<0.2	<10	260	0.17	0.45	1.98	0.05	4.63	24.1
I031459		5.31	0.097		0.13	4.64	0.2	<0.2	<10	340	0.20	1.18	1.80	0.04	4.17	30.7
I031460		1.03	<0.005		0.02	1.02	0.4	<0.2	<10	160	0.08	0.04	0.26	0.02	13.40	4.5
I031461		5.37	0.023		0.09	3.91	0.2	<0.2	<10	270	0.18	0.43	1.73	0.04	4.45	21.0
I031462		5.23	0.017		0.11	3.69	0.3	<0.2	<10	280	0.19	0.49	1.77	0.04	4.90	24.6
I031463		5.11	0.015		0.21	4.60	0.5	<0.2	<10	380	0.21	0.44	1.77	0.04	7.00	29.9
I031464		5.05	0.024		0.22	4.07	0.3	<0.2	<10	320	0.17	0.83	1.80	0.06	5.74	30.5
I031465		5.40	0.007		0.13	3.18	0.4	<0.2	<10	310	0.13	0.34	1.39	0.05	3.67	23.9
I031466		4.95	0.042		0.23	3.95	1.2	<0.2	<10	270	0.22	1.01	1.65	0.06	6.64	32.9
I031467		5.29	<0.005		0.17	3.39	0.6	<0.2	<10	330	0.20	0.27	1.84	0.06	5.83	24.2
I031468		3.48	<0.005		0.13	3.44	1.2	<0.2	<10	300	0.17	0.20	2.29	0.13	4.32	23.4
I031469		5.55	<0.005		0.15	4.45	0.5	<0.2	<10	510	0.18	0.23	1.81	0.05	6.15	30.1
I031470		1.57	<0.005		0.12	3.96	0.3	<0.2	<10	410	0.11	0.21	1.14	0.04	4.32	28.3
I031471		1.45	0.013		0.12	4.02	0.4	<0.2	<10	440	0.11	0.20	1.05	0.03	4.89	28.9
I031472		1.09	0.369		0.70	1.05	2220	0.4	<10	100	0.19	0.25	5.35	0.25	8.94	21.4
I031473		4.59	0.012		0.17	3.75	14.7	<0.2	<10	400	0.30	0.39	1.99	0.07	17.95	16.9
I031474		5.13	0.139		0.19	4.24	2.2	<0.2	<10	380	0.30	2.20	2.19	0.06	5.04	20.3
I031475		5.59	<0.005		0.14	4.59	0.4	<0.2	<10	620	0.35	0.31	1.98	0.05	11.30	22.7
I031476		4.68	0.009		0.15	4.88	0.5	<0.2	<10	460	0.22	0.30	1.79	0.06	5.38	27.6
I031477		4.23	0.138		0.34	3.42	711	<0.2	<10	280	0.20	0.37	3.28	0.27	6.04	26.3

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110651

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031438		33	1.33	39.4	4.63	9.02	0.15	0.02	0.02	0.015	0.77	2.2	11.8	2.68	664	0.14
I031439		28	1.10	33.8	3.86	7.96	0.13	0.03	<0.01	0.029	0.68	2.3	12.4	2.44	428	0.17
I031440		28	1.10	34.5	3.85	7.88	0.14	0.03	0.01	0.014	0.68	2.4	12.7	2.42	430	0.18
I031441		67	1.87	26.0	4.16	9.23	0.15	0.03	<0.01	0.014	1.19	2.3	18.1	2.35	490	0.44
I031442		34	2.07	28.8	3.88	7.39	0.09	0.03	0.01	0.017	0.93	2.7	13.8	1.96	511	0.21
I031443		44	1.56	41.7	3.68	7.45	0.12	0.03	0.01	0.019	0.88	2.5	12.2	1.73	421	0.23
I031444		60	2.69	66.3	4.15	8.52	0.13	0.03	<0.01	0.019	1.08	2.1	16.6	2.24	566	0.35
I031445		29	2.02	52.0	3.22	5.06	0.08	0.04	0.01	0.029	0.47	3.0	13.2	2.25	924	0.07
I031446		26	3.15	61.0	4.35	8.30	0.15	0.04	<0.01	0.020	0.75	2.9	19.3	2.82	740	0.38
I031447		112	2.55	41.6	4.01	11.15	0.14	0.03	<0.01	0.018	1.23	2.2	16.7	2.27	557	0.49
I031448		119	2.05	48.0	4.75	13.30	0.16	0.02	0.01	0.024	1.34	1.9	17.9	2.57	644	0.69
I031449		135	2.06	45.5	4.12	12.40	0.14	0.02	<0.01	0.017	1.46	1.7	15.7	2.22	468	0.54
I031450		31	1.06	251	4.60	5.81	0.19	0.24	0.08	0.439	0.17	10.5	8.5	0.50	773	24.5
I031451		40	1.95	109.5	5.23	12.05	0.17	0.03	<0.01	0.021	1.37	2.1	13.6	1.87	431	0.40
I031452		88	2.31	54.9	4.57	13.85	0.15	0.02	0.01	0.020	1.67	1.8	18.0	2.52	507	0.67
I031453		173	1.57	61.8	3.60	9.90	0.12	0.04	<0.01	0.018	0.93	1.7	17.6	1.67	429	0.72
I031454		83	2.53	76.3	4.89	12.55	0.13	0.02	0.01	0.027	1.36	2.2	17.5	2.38	600	0.49
I031455		148	2.54	60.5	3.98	11.75	0.13	0.02	0.01	0.023	1.19	1.3	14.5	2.03	534	0.61
I031456		56	2.75	36.3	4.20	12.55	0.14	0.02	<0.01	0.020	1.59	2.3	17.4	2.45	510	0.52
I031457		101	2.18	52.7	3.91	10.85	0.12	0.02	<0.01	0.017	1.27	1.8	15.3	2.06	474	0.49
I031458		117	2.03	52.9	3.96	11.00	0.14	0.02	0.01	0.025	1.04	1.8	14.7	2.04	565	0.62
I031459		192	2.17	61.8	4.51	12.75	0.14	<0.02	<0.01	0.020	1.30	1.6	15.9	2.32	508	0.60
I031460		6	1.70	3.1	1.75	4.12	0.08	0.13	<0.01	0.009	0.51	6.2	20.7	0.42	386	0.09
I031461		123	2.08	27.5	3.29	10.15	0.12	0.02	<0.01	0.017	1.11	1.8	13.5	1.80	409	0.77
I031462		107	2.01	35.1	3.48	9.99	0.13	0.03	<0.01	0.016	1.11	1.9	12.6	1.62	428	0.31
I031463		61	2.80	77.1	5.60	14.70	0.18	0.02	<0.01	0.027	1.81	2.9	19.9	2.10	504	0.15
I031464		64	2.44	80.1	5.13	12.45	0.16	0.03	0.02	0.026	1.44	2.4	16.2	1.90	554	0.14
I031465		115	2.30	51.0	3.64	9.56	0.13	0.03	<0.01	0.014	1.14	1.5	13.3	1.76	412	0.32
I031466		51	2.56	76.0	5.59	13.10	0.18	0.02	<0.01	0.029	1.41	2.8	19.0	1.79	519	0.09
I031467		85	2.22	61.0	3.99	10.30	0.13	0.03	<0.01	0.021	1.11	2.3	13.5	1.89	552	0.19
I031468		134	2.73	46.4	4.21	9.89	0.13	0.04	<0.01	0.023	0.99	1.7	18.8	2.49	745	0.71
I031469		63	3.05	57.7	4.71	12.65	0.14	0.02	<0.01	0.023	1.59	2.5	20.0	2.63	613	1.03
I031470		45	3.45	50.0	4.88	12.30	0.15	0.02	<0.01	0.021	1.83	1.7	23.6	2.81	533	0.25
I031471		39	3.86	47.7	5.11	12.55	0.16	0.02	<0.01	0.023	2.00	1.9	25.3	2.96	551	0.30
I031472		20	1.13	77.6	4.56	3.26	0.08	0.03	0.01	0.039	0.27	3.8	7.8	2.44	1360	0.51
I031473		81	2.08	54.3	3.91	11.30	0.12	0.05	0.01	0.035	1.09	8.3	18.1	1.68	539	0.70
I031474		46	1.66	75.0	3.71	11.15	0.13	0.03	0.01	0.027	1.16	2.0	12.3	1.46	483	0.59
I031475		79	2.66	44.7	4.01	12.95	0.16	0.11	<0.01	0.024	1.66	4.6	16.9	2.03	514	0.81
I031476		117	3.55	44.9	4.78	14.10	0.15	0.03	<0.01	0.024	1.94	2.2	21.8	2.44	531	0.61
I031477		70	3.02	72.8	5.40	10.35	0.13	0.04	<0.01	0.038	1.21	2.4	22.3	2.79	884	0.39

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110651

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031438		0.09	0.12	20.4	620	2.7	23.7	0.001	1.26	5.59	8.1	0.2	0.2	33.8	<0.01	0.03
I031439		0.09	0.09	21.2	530	1.7	22.3	0.001	0.81	2.65	7.6	<0.2	0.2	25.0	<0.01	0.03
I031440		0.09	0.10	21.0	530	1.8	22.2	0.001	0.80	2.72	7.7	<0.2	0.2	25.3	<0.01	0.03
I031441		0.15	0.10	29.5	680	2.0	39.9	0.001	0.66	1.44	9.0	<0.2	0.3	26.5	<0.01	0.03
I031442		0.13	0.09	21.3	690	3.7	34.3	0.001	0.96	3.30	7.9	<0.2	0.2	33.0	<0.01	0.06
I031443		0.19	0.10	25.6	600	2.5	30.4	0.001	0.86	0.83	7.7	<0.2	0.3	27.4	<0.01	0.06
I031444		0.18	0.11	30.6	580	2.4	39.6	0.001	0.81	0.40	9.7	<0.2	0.3	24.9	<0.01	0.05
I031445		0.08	0.11	23.9	510	4.7	22.2	0.001	0.90	3.38	9.3	<0.2	0.2	49.4	<0.01	0.05
I031446		0.08	0.10	20.4	510	2.3	29.7	0.003	0.77	0.40	11.7	<0.2	0.2	19.8	<0.01	0.04
I031447		0.33	0.08	48.1	540	4.1	45.5	0.002	0.54	0.79	11.9	<0.2	0.3	43.8	<0.01	0.03
I031448		0.33	0.09	53.3	540	4.7	48.0	0.003	0.63	0.75	16.7	<0.2	0.3	43.3	<0.01	0.03
I031449		0.37	0.09	56.8	550	5.3	53.7	0.002	0.47	0.29	12.0	<0.2	0.3	32.3	<0.01	0.03
I031450		0.11	0.64	57.3	780	15.9	8.2	0.030	1.09	26.2	4.2	6.2	26.3	84.0	0.01	12.50
I031451		0.34	0.11	24.7	990	4.6	49.7	0.001	1.22	0.85	11.9	0.5	0.5	29.2	<0.01	0.12
I031452		0.39	0.09	39.2	630	6.2	61.3	0.002	0.52	0.19	14.6	<0.2	0.4	32.7	<0.01	0.02
I031453		0.34	0.09	90.5	510	6.3	34.6	0.001	0.65	4.84	8.8	0.2	0.3	30.8	<0.01	0.03
I031454		0.32	0.09	40.9	630	6.4	53.4	0.001	0.94	2.50	16.0	<0.2	0.3	37.2	<0.01	0.03
I031455		0.34	0.07	68.5	480	6.0	46.7	0.001	0.53	0.23	14.8	<0.2	0.4	33.8	<0.01	0.03
I031456		0.33	0.10	22.5	590	5.6	61.7	0.001	0.28	0.15	17.9	<0.2	0.3	29.5	0.03	0.01
I031457		0.29	0.08	43.9	500	5.8	49.0	0.001	0.44	0.27	14.6	<0.2	0.3	26.7	<0.01	0.04
I031458		0.30	0.09	51.0	460	6.1	40.1	0.001	0.47	0.22	13.9	<0.2	0.3	37.7	<0.01	0.06
I031459		0.33	0.09	76.2	500	6.5	49.0	0.001	0.62	0.16	14.6	<0.2	0.3	34.3	<0.01	0.19
I031460		0.11	0.37	2.4	210	7.1	43.0	<0.001	0.02	0.12	2.9	<0.2	0.7	18.7	<0.01	0.01
I031461		0.33	0.08	45.1	520	5.5	42.0	0.002	0.29	0.38	11.3	<0.2	0.3	32.5	<0.01	0.06
I031462		0.32	0.08	47.1	500	5.3	42.9	0.001	0.41	0.20	11.3	<0.2	0.3	32.0	<0.01	0.08
I031463		0.33	0.12	32.0	800	6.7	69.7	<0.001	1.01	0.55	17.5	<0.2	0.6	35.9	<0.01	0.06
I031464		0.34	0.10	34.1	670	6.2	55.4	0.001	1.12	0.19	15.9	<0.2	0.5	37.1	<0.01	0.13
I031465		0.26	0.08	49.2	500	4.8	44.5	0.001	0.58	0.22	11.8	<0.2	0.3	25.4	<0.01	0.05
I031466		0.29	0.12	30.7	730	5.7	55.2	0.001	1.16	0.19	16.8	<0.2	0.5	26.9	<0.01	0.17
I031467		0.33	0.07	45.9	540	5.2	43.6	0.001	0.71	0.34	13.0	<0.2	0.3	37.3	<0.01	0.05
I031468		0.27	0.07	60.4	410	7.7	41.8	0.002	0.68	0.52	17.1	<0.2	0.2	48.0	<0.01	0.03
I031469		0.33	0.08	26.4	550	6.7	67.4	0.002	0.65	0.16	21.5	0.4	0.3	35.4	<0.01	0.04
I031470		0.27	0.08	24.0	540	4.3	75.5	0.001	0.51	0.15	20.9	0.3	0.3	25.1	<0.01	0.04
I031471		0.28	0.09	20.7	570	4.2	82.0	0.001	0.50	0.13	21.2	0.3	0.3	23.7	<0.01	0.03
I031472		0.06	0.09	24.1	470	6.5	15.4	0.001	2.11	16.05	12.7	0.6	<0.2	102.5	<0.01	0.15
I031473		0.26	0.11	33.7	640	8.4	47.6	0.002	0.73	0.49	14.3	0.4	0.7	37.6	<0.01	0.05
I031474		0.34	0.13	20.7	440	6.7	52.1	0.002	0.84	0.17	12.6	0.5	0.6	40.7	0.01	0.49
I031475		0.39	0.13	34.7	750	6.1	79.4	0.001	0.54	0.13	13.7	0.5	0.7	56.8	0.01	0.03
I031476		0.37	0.10	46.7	560	6.7	77.1	0.002	0.68	0.23	17.9	0.7	0.5	37.0	<0.01	0.03
I031477		0.19	0.10	37.4	720	12.0	52.8	0.001	1.55	2.79	16.3	0.7	0.4	66.3	<0.01	0.12

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110651

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031438		0.5	0.195	0.16	0.13	120	0.13	5.42	77	0.5
I031439		0.5	0.151	0.15	0.16	122	0.08	4.64	66	0.5
I031440		0.5	0.156	0.16	0.15	122	0.08	4.75	66	0.5
I031441		0.6	0.218	0.27	0.15	129	0.16	6.23	72	0.5
I031442		0.6	0.167	0.30	0.17	102	0.15	5.97	68	0.5
I031443		0.6	0.182	0.22	0.14	95	0.15	5.23	60	0.7
I031444		0.5	0.185	0.33	0.12	120	0.12	5.18	73	0.8
I031445		0.7	0.093	0.25	0.14	76	0.17	7.26	90	0.9
I031446		0.6	0.143	0.29	0.15	131	0.10	5.71	91	0.8
I031447		0.7	0.184	0.31	0.11	133	0.17	5.87	91	0.8
I031448		0.7	0.191	0.29	0.09	177	0.16	6.12	104	0.6
I031449		0.6	0.208	0.31	0.08	143	0.47	5.43	94	0.6
I031450		2.7	0.106	1.19	1.65	55	27.3	7.47	62	9.2
I031451		0.7	0.221	0.29	0.13	170	0.99	6.75	88	0.7
I031452		0.7	0.214	0.36	0.10	158	0.39	6.26	95	0.5
I031453		0.7	0.160	0.21	0.11	108	0.61	6.15	172	0.8
I031454		0.8	0.170	0.31	0.10	169	0.27	5.89	99	0.5
I031455		0.4	0.157	0.27	0.07	150	0.23	4.20	91	0.5
I031456		0.9	0.188	0.35	0.08	173	0.31	4.17	106	<0.5
I031457		0.7	0.167	0.27	0.08	144	0.38	3.65	101	<0.5
I031458		0.7	0.156	0.25	0.08	145	4.23	4.57	92	0.5
I031459		0.6	0.177	0.29	0.08	154	0.57	3.84	105	<0.5
I031460		13.1	0.119	0.32	2.53	34	0.22	4.52	30	2.3
I031461		0.8	0.164	0.26	0.10	121	0.43	3.77	88	<0.5
I031462		0.7	0.186	0.25	0.09	128	0.64	5.22	82	0.6
I031463		1.0	0.249	0.39	0.15	185	0.45	6.41	110	0.5
I031464		0.8	0.218	0.32	0.13	162	0.26	7.03	99	0.7
I031465		0.5	0.183	0.26	0.08	129	0.25	4.90	87	0.6
I031466		0.9	0.211	0.35	0.14	187	0.29	6.94	95	0.6
I031467		0.8	0.187	0.25	0.11	136	0.15	7.74	83	0.8
I031468		0.6	0.138	0.32	0.07	144	0.11	7.00	109	0.9
I031469		1.1	0.183	0.42	0.11	175	0.14	4.69	98	0.6
I031470		0.7	0.217	0.44	0.06	186	0.14	4.52	103	0.5
I031471		0.7	0.232	0.48	0.07	194	0.12	4.64	107	<0.5
I031472		1.2	0.011	0.15	0.15	50	0.17	13.80	78	0.7
I031473		3.1	0.151	0.27	0.57	106	0.20	10.70	93	1.6
I031474		1.1	0.177	0.25	0.14	102	4.32	6.86	78	0.7
I031475		4.1	0.264	0.41	0.80	130	0.57	7.72	96	4.7
I031476		0.9	0.263	0.42	0.12	176	0.81	6.09	117	0.6
I031477		0.9	0.157	0.34	0.12	154	0.31	8.35	123	0.9

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110651

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I031478		4.88	0.066		0.27	4.03	317	<0.2	<10	440	0.27	0.65	1.93	0.18	5.71	25.0
I031479		4.06	0.006		0.19	6.36	2.4	<0.2	<10	460	0.57	0.46	3.85	0.10	4.75	27.2
I031480		<0.02	<0.005		0.20	6.46	0.9	<0.2	<10	460	0.54	0.49	3.85	0.09	5.03	27.2
I031481		3.62	<0.005		0.22	4.18	1.9	<0.2	<10	320	0.29	0.38	2.73	0.09	8.82	20.9
I031482		5.32	0.009		0.36	3.17	13.4	<0.2	<10	200	0.23	0.39	2.03	0.25	8.88	19.5
I031483		1.82	0.103		0.52	3.11	534	<0.2	<10	210	0.23	0.39	2.63	0.79	11.40	22.2
I031484		4.25	<0.005		0.24	4.44	7.4	<0.2	<10	320	0.28	0.33	2.52	0.10	9.69	18.3
I031485		4.79	0.027		0.18	3.73	2.0	<0.2	<10	350	0.24	0.81	2.01	0.07	6.66	20.0
I031486		3.63	<0.005		0.14	4.85	0.5	<0.2	<10	470	0.24	0.33	1.99	0.04	6.67	27.9
I031487		5.65	0.011		0.22	4.43	1.4	<0.2	<10	340	0.33	0.53	2.12	0.09	11.40	22.5
I031488		4.21	0.017		0.14	3.71	4.5	<0.2	<10	490	0.26	0.77	2.32	0.07	16.40	20.0
I031489		3.75	0.016		0.23	6.14	0.3	<0.2	<10	400	0.53	0.86	2.88	0.05	9.36	24.4
I031490		0.07	1.180	1.14	8.46	3.55	1585	1.2	<10	90	0.13	47.3	0.05	0.10	106.5	2.6
I031491		3.70	0.014		0.18	4.97	6.8	<0.2	<10	310	0.36	1.15	2.50	0.05	8.75	20.0
I031492		4.81	0.005		0.25	3.94	1.1	<0.2	<10	230	0.26	0.46	2.11	0.08	10.55	17.3
I031493		2.15	0.008		0.16	5.22	0.7	<0.2	<10	300	0.31	0.39	2.55	0.06	6.01	22.9
I031494		2.26	0.006		0.24	2.55	11.0	<0.2	<10	390	0.17	0.26	0.66	0.18	15.60	14.7
I031495		3.02	0.008		0.11	2.52	2.6	<0.2	<10	490	0.28	0.65	0.82	0.50	15.40	11.9
I031496		3.50	0.005		0.20	2.47	3.8	<0.2	<10	450	0.25	0.26	0.70	0.67	15.45	16.4
I031497		4.81	0.028		0.12	2.14	1.6	<0.2	<10	490	0.19	0.16	0.68	0.15	11.50	13.0
I031498		3.59	<0.005		0.08	2.62	1.2	<0.2	<10	510	0.14	0.09	0.65	0.08	8.87	16.7
I031499		3.63	0.007		0.09	2.66	0.4	<0.2	<10	470	0.13	0.13	0.86	0.04	12.60	19.6
I031500		0.62	<0.005		0.03	0.98	0.5	<0.2	<10	160	0.09	0.03	0.26	0.03	20.5	3.7
I031501		3.48	<0.005		0.06	3.39	0.2	<0.2	<10	580	0.17	0.06	0.65	0.02	13.10	20.2
I031502		3.63	0.006		0.08	2.61	0.9	<0.2	<10	460	0.13	0.12	0.88	0.04	10.40	20.2
I031503		4.31	<0.005		0.10	2.56	0.5	<0.2	<10	430	0.09	0.14	0.72	0.03	10.70	21.3
I031504		4.41	<0.005		0.11	2.56	0.5	<0.2	<10	500	0.12	0.13	0.94	0.04	13.45	21.0
I031505		4.39	<0.005		0.15	2.55	0.7	<0.2	<10	370	0.15	0.16	0.73	0.04	10.55	24.0
I031506		2.95	<0.005		0.11	2.77	2.0	<0.2	<10	640	0.29	0.20	1.64	0.51	9.92	16.4
I031507		4.06	<0.005		0.10	2.25	0.8	<0.2	<10	420	0.17	0.19	1.15	0.62	10.70	13.5
I031508		2.64	<0.005		0.05	2.56	1.0	<0.2	<10	390	0.22	0.09	1.47	0.07	9.34	12.6
I031509		2.09	<0.005		0.14	2.60	2.1	<0.2	<10	430	0.26	0.34	1.39	0.14	8.57	16.4
I031510		2.18	0.021		0.19	2.53	28.7	<0.2	<10	340	0.23	0.38	1.68	0.30	10.95	16.4
I031511		3.59	0.244		4.68	1.55	823	0.3	<10	160	0.21	0.34	2.64	0.97	15.50	13.7
I031512		4.16	0.340		2.31	1.76	1460	0.4	<10	190	0.18	0.36	1.98	0.73	13.25	19.4
I031513		3.89	0.007		0.20	2.40	12.8	<0.2	<10	320	0.21	0.40	1.20	0.06	12.95	16.6
I031514		3.00	0.007		0.18	2.35	17.2	<0.2	<10	420	0.13	0.17	1.17	0.42	9.62	20.4
I031515		3.56	0.035		0.34	2.58	181.0	<0.2	<10	480	0.21	0.18	1.67	0.15	9.80	17.1
I031516		2.86	0.005		0.30	3.02	3.2	<0.2	<10	290	0.35	1.69	1.71	0.11	5.64	22.0
I031517		3.65	0.020		0.25	2.57	9.2	<0.2	<10	260	0.22	0.32	1.91	0.24	5.76	20.7

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110651

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031478		70	2.55	62.4	4.26	11.40	0.11	0.04	0.02	0.035	1.49	2.3	17.7	2.03	595	0.69
I031479		73	2.26	65.3	4.46	16.60	0.16	0.03	<0.01	0.033	1.91	1.9	18.8	2.06	735	1.19
I031480		72	2.23	65.4	4.50	16.80	0.16	0.03	<0.01	0.036	1.93	2.0	18.8	2.08	744	1.21
I031481		34	1.97	38.1	4.39	14.20	0.15	0.05	0.03	0.041	1.35	3.6	15.3	1.65	697	0.94
I031482		36	1.94	58.8	4.23	10.45	0.11	0.05	0.08	0.042	0.84	3.6	15.5	1.49	627	0.77
I031483		47	3.15	57.0	4.43	9.95	0.10	0.03	0.10	0.055	1.01	4.6	20.3	1.97	836	0.68
I031484		57	2.15	30.2	4.37	14.25	0.14	0.03	0.01	0.040	1.62	4.1	17.2	1.77	692	1.18
I031485		60	1.78	43.8	3.70	11.05	0.13	0.04	0.01	0.033	1.06	2.7	12.5	1.50	559	0.87
I031486		108	2.80	44.6	4.50	14.30	0.15	0.02	<0.01	0.032	1.66	2.7	20.4	2.27	528	0.70
I031487		48	2.34	54.5	4.02	13.45	0.15	0.04	<0.01	0.036	1.28	4.9	13.5	1.52	486	1.06
I031488		90	1.78	36.8	3.18	10.10	0.15	0.15	<0.01	0.025	0.97	7.3	11.9	1.48	460	0.81
I031489		56	3.52	56.6	4.70	17.20	0.18	0.03	<0.01	0.044	1.75	3.9	17.9	2.08	617	0.29
I031490		34	0.19	75.5	3.27	142.0	0.84	0.20	30.1	0.651	1.37	25.7	0.3	0.03	13	15.90
I031491		93	2.36	39.9	3.74	14.55	0.14	0.04	0.10	0.031	1.39	3.6	12.9	1.64	544	0.87
I031492		37	1.95	35.4	4.15	13.40	0.13	0.04	0.01	0.040	1.43	4.4	13.7	1.49	579	1.55
I031493		68	2.90	35.8	4.38	14.70	0.13	0.03	0.01	0.032	1.80	2.5	15.6	2.11	674	1.41
I031494		51	1.61	42.9	2.92	7.53	0.11	0.05	0.01	0.023	0.49	7.2	12.8	1.99	392	0.82
I031495		32	1.76	15.6	2.59	8.38	0.09	0.05	<0.01	0.022	0.84	7.1	12.3	1.55	391	0.64
I031496		33	1.47	32.5	2.76	8.30	0.09	0.04	<0.01	0.017	0.80	7.2	12.6	1.59	407	0.81
I031497		25	1.35	9.6	2.54	7.35	0.08	0.04	<0.01	0.014	0.87	5.1	10.8	1.46	282	0.64
I031498		15	1.64	8.0	3.58	9.14	0.13	0.04	<0.01	0.015	0.97	3.8	15.3	2.18	303	0.51
I031499		40	1.90	10.6	3.49	8.78	0.14	0.05	<0.01	0.015	1.11	5.5	12.8	2.12	277	0.32
I031500		6	1.63	2.5	1.62	3.69	0.07	0.14	<0.01	0.009	0.48	9.8	18.8	0.39	355	0.09
I031501		52	2.34	5.7	4.08	11.45	0.17	0.04	<0.01	0.015	1.51	5.9	19.5	3.02	335	0.34
I031502		61	1.88	9.3	3.36	8.39	0.14	0.04	<0.01	0.015	1.16	4.4	14.5	2.28	292	0.18
I031503		56	2.07	11.5	3.47	8.51	0.14	0.04	<0.01	0.014	1.19	4.6	15.0	2.40	288	0.16
I031504		48	2.12	8.8	3.55	8.87	0.13	0.04	<0.01	0.013	1.27	5.9	15.4	2.31	319	0.29
I031505		46	1.95	18.2	3.66	8.69	0.13	0.04	0.01	0.013	1.15	4.6	14.3	2.07	264	0.28
I031506		41	1.96	22.5	2.84	9.29	0.10	0.04	0.01	0.015	1.49	4.5	16.1	1.96	494	0.69
I031507		38	1.56	13.6	2.55	7.26	0.10	0.04	0.01	0.014	1.07	4.8	13.7	1.68	376	0.39
I031508		44	2.04	4.6	2.55	7.62	0.08	0.03	<0.01	0.025	1.42	4.1	11.1	1.92	458	0.91
I031509		57	2.04	20.9	3.04	8.36	0.11	0.03	<0.01	0.013	1.04	3.7	13.4	1.97	436	0.41
I031510		48	1.84	32.7	3.13	7.80	0.11	0.04	0.01	0.014	0.93	4.9	12.1	1.78	440	0.52
I031511		35	1.67	80.5	2.94	4.93	0.07	0.05	0.07	0.031	0.46	7.1	8.4	1.70	675	0.36
I031512		20	2.55	54.1	3.45	6.07	0.09	0.05	0.04	0.025	0.66	5.9	10.7	1.91	557	0.29
I031513		48	1.83	44.5	3.17	8.18	0.12	0.05	<0.01	0.013	0.85	5.9	14.9	1.84	329	0.59
I031514		36	2.31	45.3	3.18	7.63	0.11	0.05	<0.01	0.012	1.16	4.3	15.7	1.95	370	0.43
I031515		46	2.18	29.4	3.05	8.01	0.09	0.04	0.01	0.011	1.18	4.3	17.2	2.06	425	0.39
I031516		34	1.38	47.2	2.83	7.65	0.10	0.05	0.01	0.015	0.61	2.3	11.3	1.51	324	0.33
I031517		41	1.64	42.5	2.93	6.90	0.09	0.04	<0.01	0.019	0.65	2.4	11.6	1.62	444	0.59

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110651

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031478		0.30	0.08	29.1	520	8.8	64.9	0.001	0.78	2.22	18.8	0.4	0.5	38.7	<0.01	0.07
I031479		0.43	0.14	28.5	600	10.7	87.1	0.001	0.77	0.12	21.6	0.5	0.5	52.9	<0.01	0.03
I031480		0.45	0.14	28.2	610	10.8	87.9	0.001	0.79	0.11	22.0	0.4	0.6	53.4	0.01	0.04
I031481		0.32	0.13	17.7	480	7.6	59.7	0.001	0.98	0.27	15.6	0.5	0.8	41.7	<0.01	0.03
I031482		0.25	0.13	19.6	630	9.3	39.3	0.001	1.18	0.60	13.8	0.5	0.7	37.1	<0.01	0.05
I031483		0.18	0.11	31.2	540	16.6	49.7	0.001	1.34	10.25	15.5	0.6	0.6	48.5	<0.01	0.11
I031484		0.29	0.16	28.3	450	6.4	72.0	0.001	0.79	0.20	17.0	0.4	0.9	39.7	0.01	0.04
I031485		0.29	0.12	24.4	500	5.1	47.6	0.001	0.71	0.22	14.2	0.3	0.7	35.6	<0.01	0.09
I031486		0.32	0.11	38.3	530	5.2	71.2	0.001	0.68	0.17	19.8	0.4	0.6	34.7	<0.01	0.03
I031487		0.38	0.14	23.4	600	6.3	57.7	0.001	0.89	0.36	14.3	0.5	0.8	45.3	<0.01	0.08
I031488		0.35	0.25	42.4	980	4.6	43.5	0.001	0.46	0.61	10.6	0.4	0.6	117.0	<0.01	0.15
I031489		0.45	0.18	27.4	650	6.8	77.4	0.001	0.91	0.16	19.6	0.5	0.7	52.7	0.01	0.07
I031490		0.05	0.34	2.1	1200	57.1	1.7	0.001	2.86	366	8.5	18.4	2.6	2170	0.02	1.65
I031491		0.37	0.16	43.3	410	5.2	63.3	0.001	0.66	1.56	14.9	0.5	0.7	47.3	0.01	0.11
I031492		0.31	0.16	18.5	510	5.7	64.5	0.001	0.94	0.19	14.5	0.4	0.9	25.5	<0.01	0.04
I031493		0.33	0.09	34.4	490	5.5	79.8	0.001	0.68	0.13	18.9	0.4	0.6	33.6	<0.01	0.03
I031494		0.14	0.17	20.7	410	3.2	23.1	0.001	0.04	2.56	8.6	0.5	0.5	26.1	<0.01	0.10
I031495		0.19	0.12	16.3	480	3.3	38.6	0.001	0.10	2.00	7.8	0.3	0.6	28.2	<0.01	0.23
I031496		0.15	0.12	17.8	500	2.8	37.5	0.001	0.22	2.61	7.0	0.5	0.5	26.4	<0.01	0.08
I031497		0.12	0.12	14.5	480	2.3	38.0	0.002	0.29	1.85	6.8	0.4	0.4	23.4	<0.01	0.02
I031498		0.09	0.15	7.9	560	2.2	41.9	0.001	0.18	1.20	7.1	0.3	0.4	27.3	<0.01	0.01
I031499		0.15	0.16	18.4	650	1.9	46.6	0.001	0.32	1.06	7.0	0.3	0.4	32.9	<0.01	0.04
I031500		0.12	0.42	1.4	210	7.3	40.6	<0.001	0.01	0.15	2.9	<0.2	0.7	20.0	<0.01	<0.01
I031501		0.15	0.16	22.0	590	1.7	63.4	0.001	0.15	0.36	9.5	0.3	0.4	25.4	<0.01	0.02
I031502		0.15	0.16	22.1	620	1.7	49.6	0.001	0.31	0.61	7.7	0.3	0.4	24.8	<0.01	0.04
I031503		0.12	0.13	23.5	550	1.5	50.6	0.001	0.37	0.43	7.8	0.3	0.3	18.9	<0.01	0.05
I031504		0.14	0.14	22.2	590	1.7	53.2	0.001	0.45	0.40	7.6	0.4	0.4	23.4	<0.01	0.05
I031505		0.14	0.12	22.7	530	1.8	46.1	<0.001	0.61	0.53	6.7	0.4	0.3	23.7	<0.01	0.07
I031506		0.17	0.12	18.9	520	2.7	55.6	0.002	0.32	0.53	5.6	0.4	0.6	33.3	<0.01	0.03
I031507		0.15	0.12	16.6	400	2.4	39.5	0.001	0.28	0.37	5.2	0.3	0.5	22.6	<0.01	0.04
I031508		0.15	0.07	16.2	370	2.3	53.2	0.001	0.20	0.38	7.3	0.3	0.4	22.1	<0.01	0.02
I031509		0.17	0.08	22.4	300	2.6	39.7	0.001	0.51	1.15	8.8	0.5	0.5	23.5	<0.01	0.15
I031510		0.18	0.10	18.6	300	2.9	36.0	0.001	0.72	1.43	9.7	0.7	0.6	27.9	<0.01	0.21
I031511		0.08	0.11	22.3	400	17.6	22.8	0.001	1.19	35.8	7.5	0.5	0.3	44.5	<0.01	0.26
I031512		0.07	0.10	13.3	420	20.2	33.3	0.001	1.36	23.3	9.0	0.7	0.4	36.9	<0.01	0.48
I031513		0.16	0.13	25.1	540	2.6	34.0	<0.001	0.73	1.32	7.2	0.8	0.5	24.1	<0.01	0.22
I031514		0.11	0.08	19.8	490	2.7	43.9	<0.001	0.42	1.25	6.8	0.5	0.4	26.1	<0.01	0.06
I031515		0.12	0.09	23.0	510	5.6	46.2	0.001	0.46	3.45	5.9	0.4	0.3	27.8	<0.01	0.11
I031516		0.30	0.08	20.8	460	5.7	25.8	0.001	0.79	6.59	7.4	0.8	0.5	37.2	<0.01	0.67
I031517		0.20	0.08	21.7	420	7.5	28.7	0.001	0.75	2.60	7.0	0.6	0.3	31.0	<0.01	0.21

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110651

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031478		1.4	0.196	0.37	0.19	136	0.29	7.65	106	1.2
I031479		1.3	0.225	0.38	0.16	162	0.34	7.16	105	0.8
I031480		1.4	0.230	0.38	0.17	163	0.34	7.47	105	0.7
I031481		2.4	0.206	0.28	0.30	113	0.30	11.95	88	1.1
I031482		2.3	0.150	0.23	0.28	87	0.27	12.40	87	1.2
I031483		2.5	0.116	0.40	0.31	89	0.20	12.15	141	0.8
I031484		3.5	0.206	0.34	0.42	110	0.29	10.30	91	0.9
I031485		1.8	0.181	0.23	0.25	103	0.50	8.93	87	1.0
I031486		1.6	0.203	0.37	0.20	139	0.19	7.87	99	0.6
I031487		3.4	0.206	0.29	0.43	107	0.57	10.30	78	1.1
I031488		2.7	0.265	0.23	0.38	98	0.29	9.73	66	5.3
I031489		2.9	0.248	0.37	0.42	149	0.34	9.69	95	0.8
I031490		2.3	0.115	0.47	14.75	49	8.99	1.72	12	14.0
I031491		2.6	0.195	0.31	0.38	106	0.40	9.16	82	1.0
I031492		3.1	0.188	0.32	0.41	87	0.35	11.35	72	0.9
I031493		2.0	0.216	0.40	0.24	135	0.27	8.55	90	0.8
I031494		2.8	0.180	0.16	0.51	83	0.21	8.47	58	1.2
I031495		3.5	0.172	0.24	0.47	83	0.21	8.49	118	1.1
I031496		4.2	0.157	0.24	0.36	81	1.15	6.82	169	0.9
I031497		2.6	0.165	0.23	0.34	71	0.20	6.99	71	1.0
I031498		1.5	0.216	0.26	0.21	99	0.16	6.96	58	0.8
I031499		2.0	0.249	0.29	0.33	107	0.51	7.20	40	1.0
I031500		14.4	0.109	0.30	2.61	31	0.11	4.92	27	2.6
I031501		2.5	0.265	0.37	0.32	123	0.38	6.67	29	0.8
I031502		1.4	0.275	0.30	0.22	112	0.27	6.98	40	0.8
I031503		1.5	0.254	0.32	0.24	111	0.19	6.60	40	0.8
I031504		2.7	0.249	0.30	0.31	104	0.34	6.81	42	0.8
I031505		2.2	0.217	0.27	0.27	99	0.34	5.42	35	0.9
I031506		2.2	0.201	0.33	0.33	80	0.21	5.96	129	0.9
I031507		2.1	0.174	0.23	0.35	65	0.21	6.33	118	0.7
I031508		1.6	0.160	0.31	0.35	71	0.11	8.09	77	0.6
I031509		1.9	0.142	0.28	0.27	80	0.27	6.03	72	0.7
I031510		2.5	0.135	0.25	0.36	73	0.29	7.57	78	0.9
I031511		3.1	0.065	0.25	0.48	52	0.33	8.12	109	1.0
I031512		2.1	0.112	0.37	0.34	68	0.22	9.47	93	1.0
I031513		2.2	0.167	0.25	0.37	76	0.35	7.87	54	1.1
I031514		1.5	0.213	0.29	0.36	82	0.15	7.80	63	1.2
I031515		1.9	0.178	0.33	0.39	79	0.22	6.71	52	1.0
I031516		1.0	0.153	0.19	0.20	80	0.65	6.22	44	1.0
I031517		0.9	0.125	0.21	0.18	76	0.54	5.24	59	0.9

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110651

Sample Description	Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
	Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I031518		6.02	0.010		0.17	3.06	28.1	<0.2	<10	420	0.18	0.23	1.27	0.09	10.05	22.9
I031519		Not Recvd														
I031520		Not Recvd														
I031521		3.69	0.034		0.26	3.10	71.6	<0.2	<10	300	0.24	0.29	1.93	0.12	13.95	18.4
I031522		2.13	0.928		2.60	0.39	1495	1.2	<10	40	0.17	0.17	3.36	0.45	9.22	11.9
I031523		2.41	0.020		0.23	3.51	204	<0.2	<10	250	0.18	0.27	0.71	0.07	8.02	23.9
I031524		3.16	<0.005		0.12	3.14	3.3	<0.2	<10	410	0.16	0.18	0.78	0.05	11.50	18.9
I031525		3.01	0.011		0.09	2.15	54.9	<0.2	<10	190	0.16	0.19	1.34	0.04	17.45	10.8
I031526		3.72	0.079		0.42	2.12	316	<0.2	<10	180	0.19	0.26	1.39	0.12	23.6	12.6
I031527		3.60	<0.005		0.31	3.05	4.1	<0.2	<10	190	0.17	0.34	1.26	0.06	13.80	13.9
I031528		4.21	0.005		0.11	2.68	4.5	<0.2	<10	280	0.25	0.24	1.52	0.04	15.55	11.7
I031529		4.92	<0.005		0.18	2.60	1.2	<0.2	<10	250	0.21	0.37	1.35	0.07	15.75	12.8
I031530		0.08	1.200	1.30	8.20	3.23	1515	1.3	<10	100	0.10	39.9	0.04	0.11	102.0	2.7
I031531		3.93	0.006		0.15	3.60	1.7	<0.2	<10	300	0.27	0.33	1.24	0.43	8.65	18.3
I031532		2.06	<0.005		0.13	3.36	1.9	<0.2	<10	200	0.20	0.23	1.55	0.06	11.40	16.6
I031533		2.53	0.257		0.52	2.10	1345	0.2	<10	140	0.42	0.36	2.04	0.13	26.9	12.5
I031534		3.38	0.698		1.87	0.96	2010	0.7	<10	100	0.25	0.27	3.18	0.61	22.2	8.8
I031535		3.82	0.079		0.74	2.15	139.0	<0.2	<10	150	0.21	0.42	2.71	0.61	18.85	16.9
I031536		3.85	0.020		0.30	3.27	41.1	<0.2	<10	170	0.11	0.24	1.10	0.52	5.41	27.5
I031537		3.64	<0.005		0.18	2.94	2.2	<0.2	<10	420	0.11	0.27	1.21	0.66	7.87	22.5
I031538		3.53	0.009		0.27	2.40	7.9	<0.2	<10	410	0.16	0.75	1.72	0.29	12.85	15.5
I031539		3.33	0.173		0.68	0.92	923	<0.2	<10	150	0.22	0.19	2.57	0.24	13.95	9.9
I031540		0.65	<0.005		0.03	1.13	5.7	<0.2	<10	200	0.10	0.03	0.28	0.03	25.9	5.0
I031541		1.97	3.09	3.52	1.72	0.37	1115	3.2	<10	40	0.24	0.11	5.18	0.52	6.43	9.2
I031542		3.86	0.023		0.23	2.86	11.7	<0.2	<10	250	0.11	0.35	1.19	0.07	9.07	19.5
I031543		4.32	0.005		0.14	3.05	1.6	<0.2	<10	450	0.08	0.27	0.84	0.03	4.86	23.5
I031544		4.52	<0.005		0.18	3.97	0.6	<0.2	<10	400	0.21	0.34	1.58	0.05	4.87	27.8
I031545		4.94	0.012		0.18	3.41	12.1	<0.2	<10	390	0.14	0.27	1.43	0.07	4.90	25.1
I031546		4.71	0.008		0.26	3.29	29.3	<0.2	<10	240	0.18	0.46	2.95	0.21	4.66	28.9
I031547		5.58	<0.005		0.11	4.58	4.4	<0.2	<10	540	0.16	0.22	1.73	0.06	5.33	27.8
I031548		4.14	<0.005		0.07	4.20	2.0	<0.2	<10	490	0.12	0.13	1.36	0.04	5.68	23.4

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110651

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031518		38	2.22	46.4	4.12	9.19	0.11	0.03	<0.01	0.022	0.83	4.2	17.8	2.84	644	0.36
I031519																
I031520																
I031521		17	2.14	53.7	4.42	9.57	0.12	0.02	0.01	0.033	0.65	6.0	19.3	2.59	890	0.21
I031522		2	0.28	24.9	3.38	1.12	0.08	0.02	0.04	0.018	0.20	3.7	1.7	1.62	1100	0.18
I031523		13	2.41	55.9	5.20	10.45	0.15	0.02	<0.01	0.033	0.92	3.3	16.5	3.27	791	0.38
I031524		9	1.73	34.1	4.69	10.60	0.15	0.03	<0.01	0.027	0.85	4.7	16.0	2.83	710	0.22
I031525		33	1.75	22.9	2.82	6.84	0.09	0.03	0.01	0.028	0.54	7.5	11.4	1.96	537	0.06
I031526		22	1.89	57.9	3.52	7.28	0.09	0.03	0.01	0.042	0.53	10.6	12.4	2.01	626	0.07
I031527		59	1.52	108.5	5.06	9.11	0.14	0.04	0.01	0.024	0.58	6.2	18.6	2.61	666	0.11
I031528		46	1.77	34.8	3.40	8.85	0.11	0.02	<0.01	0.031	0.70	6.9	15.1	1.84	720	0.20
I031529		20	1.62	85.1	3.44	8.67	0.10	0.03	<0.01	0.043	0.59	6.9	14.2	1.68	588	0.28
I031530		32	0.19	74.4	3.21	137.0	0.78	0.20	29.1	0.617	1.24	25.0	0.4	0.03	12	15.65
I031531		97	1.71	50.0	4.47	9.64	0.13	0.03	0.01	0.034	0.76	4.0	11.7	2.46	704	0.42
I031532		108	1.85	45.3	4.53	10.05	0.13	0.02	0.01	0.042	0.53	4.9	17.7	2.87	777	0.35
I031533		37	2.31	65.6	3.73	6.30	0.08	0.02	0.05	0.065	0.33	11.6	9.0	1.71	616	0.34
I031534		11	0.92	46.7	3.21	2.92	0.07	0.02	0.04	0.043	0.31	9.9	4.5	1.56	847	0.33
I031535		56	2.34	107.0	3.88	6.76	0.09	0.03	0.02	0.051	0.46	8.2	14.3	1.86	861	0.40
I031536		9	1.98	71.2	4.88	9.64	0.11	0.03	0.01	0.022	0.59	2.3	16.7	3.05	686	0.37
I031537		24	2.06	60.3	4.31	9.19	0.14	0.03	0.01	0.021	0.85	3.2	14.9	2.50	604	0.57
I031538		17	1.82	96.6	3.90	8.49	0.12	0.03	<0.01	0.036	0.63	5.4	16.1	1.74	723	0.34
I031539		7	1.69	31.2	2.50	2.78	0.06	0.03	0.09	0.034	0.36	6.0	6.1	1.08	731	1.23
I031540		7	2.16	3.2	2.07	4.61	0.10	0.18	<0.01	0.011	0.61	13.4	23.6	0.52	464	0.09
I031541		4	0.36	57.7	2.75	1.32	0.05	0.02	0.15	0.032	0.17	2.6	1.9	2.49	1240	0.14
I031542		102	2.74	92.7	4.99	9.63	0.15	0.04	0.01	0.029	0.89	3.9	14.0	2.28	624	0.27
I031543		55	1.98	32.1	4.20	9.91	0.13	0.02	0.01	0.011	1.33	2.0	16.8	2.46	435	0.36
I031544		80	2.32	61.1	4.48	11.20	0.14	0.03	0.01	0.014	1.54	2.0	16.9	2.17	521	0.39
I031545		97	3.37	48.3	4.31	10.15	0.14	0.03	0.01	0.015	1.61	2.0	20.3	2.34	557	0.14
I031546		119	2.79	73.4	4.34	9.11	0.12	0.03	<0.01	0.019	0.95	1.8	16.8	1.94	678	0.19
I031547		63	3.67	35.9	4.83	13.05	0.15	0.02	0.01	0.020	2.03	2.1	24.9	2.91	576	0.48
I031548		70	4.03	15.0	4.43	12.00	0.14	0.02	0.01	0.017	2.13	2.3	25.7	2.87	556	0.96

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110651

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031518		0.07	0.11	17.9	570	3.4	31.9	0.001	0.60	5.73	7.7	0.5	0.3	24.9	<0.01	0.08
I031519																
I031520																
I031521		0.05	0.10	9.6	840	5.0	24.9	<0.001	0.82	4.15	8.6	0.6	0.4	36.2	<0.01	0.05
I031522		0.01	0.07	7.1	500	38.8	10.2	<0.001	3.08	14.40	2.5	0.8	<0.2	82.5	<0.01	0.92
I031523		0.08	0.12	9.7	630	3.0	33.3	<0.001	1.08	5.77	9.2	0.8	0.3	24.0	<0.01	0.09
I031524		0.08	0.13	5.8	830	2.4	29.1	<0.001	0.62	2.37	9.2	0.4	0.5	26.6	<0.01	0.03
I031525		0.10	0.11	14.7	630	2.1	20.0	<0.001	0.50	1.12	5.9	0.3	0.4	33.2	<0.01	0.03
I031526		0.07	0.13	13.9	660	4.5	20.1	<0.001	0.99	4.46	8.3	0.6	0.5	37.1	<0.01	0.07
I031527		0.11	0.17	27.0	590	2.8	21.1	<0.001	1.41	2.03	7.9	1.1	0.5	25.6	0.01	0.16
I031528		0.13	0.12	17.8	540	2.9	23.9	<0.001	0.43	0.74	7.2	0.4	0.5	32.9	<0.01	0.04
I031529		0.13	0.13	9.5	580	3.2	20.4	0.001	0.47	1.43	7.6	0.4	0.5	32.3	<0.01	0.04
I031530		0.04	0.32	2.0	1100	54.0	1.6	0.001	2.59	352	8.3	17.4	2.5	2040	0.02	1.57
I031531		0.16	0.14	35.4	500	2.8	31.0	<0.001	0.70	2.74	8.0	0.5	0.5	30.5	<0.01	0.10
I031532		0.09	0.10	37.1	420	3.0	20.0	0.001	0.40	1.79	9.8	0.4	0.3	33.2	<0.01	0.05
I031533		0.02	0.07	19.8	610	6.9	14.6	0.001	0.85	5.51	9.7	0.6	0.4	56.6	<0.01	0.23
I031534		0.03	0.08	10.0	560	34.6	14.1	<0.001	1.84	7.37	5.7	0.6	0.2	72.1	<0.01	0.78
I031535		0.05	0.09	24.6	570	19.2	20.4	0.001	1.56	5.89	10.7	1.0	0.4	49.1	<0.01	0.19
I031536		0.09	0.07	15.9	560	3.0	21.8	0.001	0.76	4.43	10.2	0.4	0.2	30.8	<0.01	0.09
I031537		0.11	0.10	16.0	580	2.4	28.7	0.002	0.66	7.41	8.7	0.4	0.3	27.5	<0.01	0.04
I031538		0.10	0.14	10.5	590	2.6	22.9	0.001	0.66	2.50	10.1	0.4	0.4	40.8	<0.01	0.25
I031539		0.03	0.08	5.5	270	13.7	19.8	0.001	1.35	9.74	6.5	0.5	0.2	54.2	<0.01	0.16
I031540		0.10	0.35	1.5	300	6.5	49.4	<0.001	<0.01	0.19	3.3	<0.2	0.8	18.2	<0.01	<0.01
I031541		0.02	0.06	4.2	190	51.7	9.5	<0.001	1.87	20.1	3.8	0.5	<0.2	110.0	<0.01	0.15
I031542		0.16	0.13	35.8	670	2.8	33.5	<0.001	1.21	3.01	10.2	0.5	0.4	28.8	<0.01	0.06
I031543		0.17	0.08	23.9	770	3.1	43.9	0.002	0.56	0.37	9.7	0.3	0.3	19.6	<0.01	0.02
I031544		0.36	0.07	34.6	580	3.4	53.0	0.002	0.90	0.26	11.5	0.6	0.3	27.7	<0.01	0.06
I031545		0.23	0.07	37.0	610	4.2	56.7	0.001	0.65	0.48	11.3	0.4	0.3	25.2	<0.01	0.06
I031546		0.26	0.08	57.8	490	5.2	39.1	0.001	1.08	0.87	11.7	0.5	0.3	32.5	<0.01	0.08
I031547		0.28	0.07	23.1	650	5.0	75.3	0.002	0.48	0.31	19.6	0.4	0.3	31.1	<0.01	0.01
I031548		0.23	0.08	20.6	560	4.2	82.7	0.002	0.19	0.22	19.4	0.2	0.4	28.0	<0.01	0.01

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110651

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031518		1.2	0.150	0.25	0.26	95	0.23	6.78	72	0.6
I031519										
I031520										
I031521		1.5	0.082	0.18	0.27	73	0.13	10.15	64	<0.5
I031522		2.2	<0.005	0.09	0.17	5	0.31	10.85	36	<0.5
I031523		0.8	0.165	0.26	0.20	124	0.11	7.20	103	<0.5
I031524		1.3	0.136	0.19	0.28	99	0.09	9.54	68	<0.5
I031525		2.2	0.080	0.14	0.23	38	0.15	9.12	46	0.5
I031526		3.0	0.051	0.15	0.36	44	0.08	11.90	60	0.5
I031527		1.6	0.115	0.17	0.24	62	5.29	10.15	61	0.7
I031528		1.7	0.084	0.15	0.31	46	0.11	11.80	43	<0.5
I031529		1.9	0.087	0.13	0.31	56	0.09	10.10	40	0.5
I031530		2.2	0.110	0.47	13.55	46	9.72	1.82	11	13.7
I031531		1.2	0.128	0.16	0.23	70	0.12	7.33	106	0.5
I031532		1.3	0.089	0.15	0.27	75	0.07	9.22	76	0.5
I031533		3.4	0.016	0.13	0.53	41	0.16	15.40	47	<0.5
I031534		3.1	0.009	0.13	0.45	19	0.18	14.00	55	0.6
I031535		2.1	0.042	0.23	0.45	63	0.10	13.80	86	0.6
I031536		0.4	0.155	0.17	0.12	139	0.09	6.39	237	0.6
I031537		1.0	0.158	0.19	0.27	111	0.11	7.14	176	0.6
I031538		1.5	0.105	0.18	0.31	78	0.11	10.25	60	0.6
I031539		2.8	0.020	0.24	0.81	23	0.18	12.90	38	0.6
I031540		13.6	0.143	0.36	2.99	43	0.14	6.25	37	3.3
I031541		0.9	<0.005	0.13	0.26	18	0.30	8.99	51	0.9
I031542		0.9	0.165	0.23	0.20	120	0.85	8.01	78	0.9
I031543		0.5	0.231	0.29	0.11	135	0.14	5.19	82	<0.5
I031544		0.6	0.256	0.34	0.11	142	0.24	6.27	83	0.5
I031545		0.5	0.249	0.39	0.11	139	0.20	5.84	86	0.6
I031546		0.6	0.190	0.30	0.07	121	0.22	7.66	90	0.8
I031547		0.8	0.216	0.48	0.07	177	0.36	5.65	113	0.5
I031548		0.9	0.241	0.53	0.08	166	0.31	5.99	125	0.6

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110651

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-AUG-2010
Account: EIASQI

CERTIFICATE TR10110652

Project: SQI10-03

P.O. No.:

This report is for 66 Drill Core samples submitted to our lab in Terrace, BC, Canada on 11-AUG-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
SPL-21d	Split sample - duplicate
PUL-31d	Pulverize Split - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature: 

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110652

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I031586		6.24	0.008		0.19	3.31	1.3	<0.2	<10	550	0.26	0.49	1.36	0.08	14.05	21.8
I031587		5.21	0.017		0.15	2.27	1.1	<0.2	<10	390	0.11	1.02	0.90	0.06	10.75	22.9
I031588		5.40	0.006		0.17	3.05	1.0	<0.2	<10	290	0.08	0.86	0.77	0.06	5.15	27.5
I031589		2.93	0.008		0.30	4.13	1.7	<0.2	<10	120	0.10	1.00	0.91	0.09	3.14	31.0
I031590		2.33	0.006		0.33	4.01	2.0	<0.2	<10	170	0.07	0.98	0.86	0.12	3.13	30.3
I031591		5.41	<0.005		0.13	2.65	0.6	<0.2	<10	170	0.08	0.49	0.89	0.06	7.09	24.6
I031592		5.67	<0.005		0.09	2.46	0.2	<0.2	<10	270	<0.05	0.37	0.60	0.04	6.10	22.8
I031593		5.47	<0.005		0.16	3.15	0.7	<0.2	<10	370	0.14	0.50	1.12	0.08	6.75	25.3
I031594		4.02	<0.005		0.16	3.16	0.9	<0.2	<10	260	<0.05	0.75	0.58	0.04	2.68	27.6
I031595		5.49	0.005		0.18	4.35	7.8	<0.2	<10	350	0.25	0.26	2.57	0.13	7.71	24.3
I031596		4.29	0.035		0.37	2.89	76.2	<0.2	<10	330	0.24	0.20	2.49	0.73	9.34	23.7
I031597		4.13	0.034		0.35	2.65	78.1	<0.2	<10	190	0.28	0.11	4.10	0.42	13.45	18.8
I031598		4.26	<0.005		0.16	4.11	4.8	<0.2	<10	310	0.73	0.15	2.04	0.24	28.7	17.4
I031599		3.62	<0.005		0.25	3.23	5.6	<0.2	<10	400	0.85	0.16	1.22	0.60	29.7	13.0
I031600		<0.02	<0.005		0.25	3.25	5.8	<0.2	<10	370	0.89	0.15	1.26	0.60	30.0	12.9
I031601		4.48	0.006		0.29	1.97	7.1	<0.2	<10	430	0.47	0.18	0.86	0.46	38.0	7.5
I031602		4.11	0.009		0.36	3.22	21.3	<0.2	<10	510	0.59	0.31	3.24	3.34	25.0	18.5
I031603		3.74	0.006		0.31	2.35	19.7	<0.2	<10	220	0.69	0.23	3.10	0.98	31.4	14.5
I031604		4.42	<0.005		0.42	2.26	19.5	<0.2	<10	390	0.81	0.18	1.83	1.10	31.7	11.8
I031605		3.04	<0.005		0.26	3.58	2.1	<0.2	<10	290	0.97	0.21	1.55	1.12	32.7	14.3
I031606		4.20	<0.005		0.21	2.26	6.4	<0.2	<10	460	0.59	0.15	1.78	0.19	26.8	7.3
I031607		5.31	0.031		0.26	2.25	103.5	<0.2	<10	290	0.57	0.22	1.99	0.65	27.6	8.3
I031608		4.56	0.262		0.40	1.89	1420	0.3	<10	180	0.70	0.20	2.33	0.31	27.8	10.5
I031609		4.59	0.017		0.40	2.35	95.2	<0.2	<10	250	0.98	0.42	1.72	1.29	41.1	13.3
I031610		0.08	1.070	1.29	8.40	3.52	1615	1.3	<10	80	0.10	50.7	0.05	0.12	109.0	2.7
I031611		2.98	0.177		0.87	1.09	717	<0.2	<10	210	0.47	0.30	7.02	1.46	29.8	10.6
I031612		3.20	0.022		0.50	2.63	96.6	<0.2	<10	310	1.26	0.21	3.43	1.61	46.2	13.1
I031613		6.03	0.006		0.45	3.02	29.3	<0.2	<10	290	1.25	0.41	2.35	2.33	48.1	13.6
I031614		3.64	<0.005		0.36	2.41	25.2	<0.2	<10	330	0.80	0.39	2.15	1.03	43.2	13.4
I031615		4.51	0.050		0.51	1.53	187.5	<0.2	<10	250	0.60	0.33	3.95	2.68	29.6	13.7
I031616		3.98	<0.005		0.31	2.26	18.2	<0.2	<10	450	0.79	0.28	2.46	0.97	35.8	13.5
I031617		4.42	0.074		1.55	1.35	248	<0.2	<10	290	0.47	0.13	3.41	0.61	25.3	10.7
I031618		3.33	0.029		0.48	1.82	169.5	<0.2	<10	180	0.64	0.16	3.12	1.08	33.5	12.6
I031619		3.51	<0.005		0.38	2.47	12.8	<0.2	<10	320	0.94	0.18	3.01	1.55	45.5	14.6
I031620		0.41	<0.005		0.03	1.01	0.9	<0.2	<10	180	0.11	0.03	0.29	0.04	23.2	4.1
I031621		1.74	<0.005		0.32	2.06	6.8	<0.2	<10	340	0.72	0.27	3.24	1.77	45.5	13.5
I031622		3.57	0.201		0.93	0.78	631	<0.2	<10	180	0.39	0.17	3.86	0.82	23.4	10.2
I031623		0.98	0.007		0.47	0.76	46.9	<0.2	<10	330	0.44	0.15	1.27	0.90	25.1	10.2
I031624		2.11	0.010		0.44	0.57	29.4	<0.2	<10	380	0.30	0.18	1.96	1.76	21.3	7.9
I031625		2.10	0.141		1.21	0.76	509	<0.2	<10	150	0.34	0.25	4.65	2.92	18.85	10.1

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110652

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031586		57	1.50	56.8	3.72	9.54	0.13	0.03	0.01	0.017	0.82	6.5	11.9	2.08	402	1.20
I031587		44	1.59	53.1	3.66	7.51	0.12	0.03	<0.01	0.012	0.59	4.8	12.1	2.00	402	1.23
I031588		119	1.38	100.5	4.37	8.52	0.14	0.02	0.01	0.014	0.52	2.1	13.1	3.01	505	0.62
I031589		70	1.79	179.0	5.87	10.15	0.18	0.02	0.02	0.030	0.63	1.3	16.6	3.89	718	0.71
I031590		64	1.79	178.0	5.69	9.71	0.16	0.02	0.02	0.025	0.61	1.3	16.8	3.85	721	0.67
I031591		45	1.13	55.8	4.00	7.97	0.14	0.03	0.01	0.012	0.30	3.1	11.7	2.61	480	0.22
I031592		45	1.34	35.1	4.04	7.84	0.13	0.02	<0.01	0.006	0.41	2.6	10.7	2.61	579	0.19
I031593		65	1.85	80.8	4.29	8.82	0.15	0.03	<0.01	0.019	0.60	2.8	12.1	2.86	684	0.78
I031594		80	1.19	118.5	4.63	8.49	0.16	<0.02	0.01	0.013	0.42	1.1	10.5	3.32	553	0.78
I031595		58	3.08	41.2	4.59	12.35	0.14	0.04	<0.01	0.020	1.53	3.2	26.4	2.30	661	0.98
I031596		53	1.65	50.7	3.90	8.15	0.09	0.05	0.01	0.021	0.89	4.1	15.9	1.46	591	1.01
I031597		30	1.28	40.0	3.66	6.90	0.08	0.04	0.01	0.028	0.71	6.2	14.8	1.45	782	0.97
I031598		99	1.96	56.7	3.51	12.25	0.13	0.25	<0.01	0.028	1.19	14.5	17.9	1.95	498	4.55
I031599		100	2.47	45.6	3.09	10.95	0.12	0.43	<0.01	0.038	1.10	15.0	16.6	1.77	478	5.02
I031600		103	2.47	45.4	3.07	10.90	0.12	0.47	<0.01	0.035	1.10	15.3	16.4	1.79	483	5.09
I031601		39	1.62	30.5	2.81	7.19	0.08	0.42	<0.01	0.041	0.70	20.2	11.3	0.95	340	1.28
I031602		103	2.75	42.2	4.43	10.20	0.11	0.31	0.02	0.058	0.95	12.8	16.6	1.85	794	5.57
I031603		93	2.14	53.5	3.23	8.66	0.11	0.21	0.01	0.041	0.78	17.1	14.5	1.56	667	5.52
I031604		85	3.14	44.2	2.67	8.86	0.10	0.48	0.01	0.051	0.96	17.0	12.3	1.37	544	6.56
I031605		147	4.08	43.2	3.31	12.20	0.15	0.53	0.01	0.047	1.53	16.8	17.1	2.39	572	6.03
I031606		58	2.16	27.5	2.72	7.93	0.09	0.29	0.01	0.040	0.85	13.7	11.8	1.14	440	2.11
I031607		41	2.20	33.6	3.30	8.24	0.09	0.30	0.01	0.054	0.79	13.8	13.8	1.16	505	1.93
I031608		49	1.71	38.4	3.30	6.60	0.07	0.43	0.03	0.038	0.71	14.3	12.6	1.04	531	4.95
I031609		80	2.75	55.2	3.12	9.12	0.11	0.49	0.03	0.048	0.95	21.6	13.7	1.37	528	7.45
I031610		35	0.20	75.4	3.34	139.0	0.78	0.18	32.2	0.685	1.34	27.5	0.4	0.03	11	15.95
I031611		37	1.24	43.5	3.05	4.90	0.08	0.36	0.16	0.037	0.47	16.0	4.2	0.58	948	5.81
I031612		81	3.09	49.5	3.58	9.71	0.10	0.32	0.04	0.053	1.01	24.1	11.6	1.52	740	9.59
I031613		103	3.41	55.6	3.33	11.40	0.15	0.51	0.02	0.065	1.25	24.9	14.0	1.65	753	7.56
I031614		92	2.34	55.4	3.11	9.79	0.11	0.39	0.02	0.048	1.07	23.1	9.8	1.45	629	6.03
I031615		66	1.77	57.5	2.85	6.36	0.09	0.40	0.18	0.056	0.62	15.1	6.3	1.15	751	10.55
I031616		92	2.61	44.9	3.26	8.71	0.12	0.41	0.05	0.044	0.91	18.8	12.6	1.42	592	5.63
I031617		32	1.38	46.6	2.86	5.69	0.08	0.24	0.04	0.043	0.55	12.4	8.5	1.17	702	4.35
I031618		82	2.30	46.5	3.14	7.55	0.10	0.41	0.03	0.050	0.73	18.3	11.7	1.34	648	6.93
I031619		123	3.78	50.6	2.79	10.20	0.15	0.45	0.01	0.049	1.13	24.7	11.4	1.77	591	10.15
I031620		5	1.75	3.4	1.78	3.98	0.08	0.14	<0.01	0.010	0.49	10.1	18.4	0.38	390	0.19
I031621		106	3.11	48.8	2.64	8.66	0.11	0.44	0.01	0.050	0.90	24.9	9.7	1.37	544	7.73
I031622		29	0.91	48.0	2.59	2.88	0.07	0.16	0.07	0.032	0.27	11.7	3.1	0.52	604	2.41
I031623		37	0.67	64.4	2.50	2.83	0.07	0.17	0.03	0.023	0.19	11.8	2.6	0.31	192	6.03
I031624		30	0.66	59.4	2.01	2.26	0.06	0.20	0.03	0.023	0.16	10.3	2.8	0.24	350	4.42
I031625		21	0.68	52.2	2.72	2.38	0.06	0.35	0.05	0.034	0.19	10.4	2.9	0.43	1120	2.23

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110652

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031586		0.28	0.11	33.1	590	4.3	32.5	0.003	0.68	0.55	9.1	1.2	0.5	52.7	<0.01	0.10
I031587		0.16	0.13	19.4	610	2.6	21.9	0.002	0.74	0.54	6.1	0.4	0.3	29.3	<0.01	0.07
I031588		0.12	0.11	57.2	570	3.2	18.2	0.002	0.96	0.60	6.0	1.2	0.3	26.5	<0.01	0.15
I031589		0.12	0.09	40.2	400	3.5	22.6	0.002	1.78	0.51	7.9	2.5	0.5	31.3	<0.01	0.34
I031590		0.11	0.10	36.7	410	3.5	22.1	0.002	1.64	0.50	7.4	2.2	0.5	28.8	<0.01	0.38
I031591		0.11	0.15	21.1	620	2.6	11.0	0.001	0.49	0.74	6.5	0.3	0.2	29.5	<0.01	0.03
I031592		0.08	0.12	18.8	610	1.7	14.4	0.001	0.39	0.60	5.5	<0.2	0.2	23.3	<0.01	0.01
I031593		0.15	0.11	30.5	630	3.1	20.8	0.004	0.66	0.66	8.4	0.5	0.4	49.7	<0.01	0.04
I031594		0.09	0.08	36.3	340	2.6	13.9	0.002	1.10	0.62	6.8	1.5	0.3	18.4	<0.01	0.08
I031595		0.28	0.10	24.6	570	10.6	66.8	0.002	0.93	0.49	15.9	0.7	0.4	50.8	<0.01	0.05
I031596		0.15	0.09	29.8	540	11.5	43.5	0.004	0.86	4.86	10.6	1.7	0.3	50.0	<0.01	0.09
I031597		0.12	0.08	24.9	280	12.6	30.8	0.003	1.27	1.05	13.4	1.0	0.3	49.5	<0.01	0.14
I031598		0.24	0.09	49.2	740	5.7	48.7	0.012	0.66	1.61	14.6	3.4	0.6	59.8	<0.01	0.07
I031599		0.14	0.10	54.1	800	9.0	50.2	0.010	0.57	2.96	10.9	2.9	0.8	58.3	<0.01	0.05
I031600		0.14	0.10	54.4	790	9.0	50.0	0.010	0.59	2.90	10.7	3.0	0.8	59.8	0.01	0.05
I031601		0.06	0.14	23.3	480	9.3	36.1	0.002	0.54	1.90	7.4	1.4	0.7	24.4	<0.01	0.03
I031602		0.03	0.07	56.2	920	14.1	44.0	0.009	0.87	4.82	15.4	2.2	0.7	53.7	<0.01	0.06
I031603		0.02	0.07	63.4	1020	9.9	38.4	0.010	0.84	3.52	9.9	3.6	0.6	54.4	<0.01	0.06
I031604		0.03	0.06	50.4	880	12.7	50.7	0.009	0.80	2.40	10.8	3.0	0.8	35.0	<0.01	0.05
I031605		0.14	0.07	62.6	840	10.8	66.8	0.010	0.74	2.04	13.6	2.9	0.9	57.7	<0.01	0.06
I031606		0.05	0.10	23.9	510	6.8	40.2	0.003	0.70	4.20	9.3	1.3	0.8	55.2	<0.01	0.05
I031607		0.06	0.09	20.7	550	7.7	38.6	0.003	1.01	5.14	10.1	1.6	0.7	85.5	<0.01	0.05
I031608		0.02	0.10	36.0	760	11.3	34.1	0.008	1.62	9.62	8.1	2.5	0.6	33.9	<0.01	0.15
I031609		0.03	0.08	53.4	1020	19.7	47.1	0.013	1.08	5.62	9.2	3.9	0.9	37.1	<0.01	0.10
I031610		0.04	0.26	2.1	1200	64.0	1.7	0.002	2.89	359	8.0	18.5	2.7	2280	0.02	1.77
I031611		0.01	0.10	46.3	770	13.9	25.6	0.011	2.25	18.20	6.4	3.7	0.4	77.8	<0.01	0.12
I031612		0.03	0.07	51.8	1000	17.0	53.4	0.017	1.30	7.51	10.9	4.2	0.9	55.9	<0.01	0.07
I031613		0.09	0.07	52.8	1030	13.8	62.2	0.014	1.11	4.18	12.5	3.5	1.2	53.6	<0.01	0.10
I031614		0.08	0.07	52.8	880	9.4	49.2	0.011	1.06	5.11	11.1	3.7	0.9	46.5	<0.01	0.09
I031615		0.02	0.09	63.1	1020	17.9	29.6	0.016	1.38	13.05	9.8	4.4	0.6	75.4	<0.01	0.15
I031616		0.05	0.08	56.3	860	9.1	42.8	0.012	1.00	7.49	11.9	3.2	0.7	52.1	<0.01	0.06
I031617		0.03	0.12	36.4	680	9.4	26.5	0.008	1.34	18.10	9.1	2.5	0.4	69.6	<0.01	0.07
I031618		0.04	0.09	51.7	890	13.2	34.7	0.011	1.29	5.29	10.2	3.8	0.5	57.3	<0.01	0.05
I031619		0.03	0.08	69.1	1180	10.7	53.9	0.016	1.10	3.74	10.8	5.3	0.8	79.3	<0.01	0.05
I031620		0.12	0.51	2.4	220	7.7	42.0	<0.001	0.02	0.18	2.9	<0.2	0.7	23.9	<0.01	0.01
I031621		0.01	0.09	62.5	1060	9.0	43.5	0.013	1.07	6.08	10.0	4.7	0.6	53.2	<0.01	0.06
I031622		0.01	0.09	43.7	580	15.3	15.0	0.005	1.43	51.7	4.9	2.4	0.3	57.1	<0.01	0.09
I031623		0.01	0.05	60.0	1400	6.2	10.7	0.010	1.03	18.25	3.9	4.1	0.3	37.4	<0.01	0.09
I031624		0.01	0.05	50.6	800	7.7	9.3	0.006	0.96	13.20	2.8	4.2	0.3	33.7	<0.01	0.11
I031625		0.02	0.06	44.5	660	21.9	10.2	0.004	1.52	12.05	5.1	2.9	0.2	48.3	<0.01	0.13

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110652

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031586		2.4	0.158	0.20	0.60	111	0.25	5.65	80	0.7
I031587		1.6	0.148	0.17	0.27	91	0.26	4.87	82	0.6
I031588		0.6	0.152	0.12	0.10	97	0.29	3.74	94	<0.5
I031589		0.3	0.161	0.15	0.08	134	0.18	3.70	84	<0.5
I031590		0.4	0.147	0.16	0.08	130	0.19	3.57	84	<0.5
I031591		0.9	0.152	0.08	0.16	101	0.13	4.70	85	0.6
I031592		0.8	0.143	0.10	0.13	104	0.06	4.23	86	0.5
I031593		0.7	0.152	0.14	0.12	100	0.13	6.36	84	0.6
I031594		0.3	0.113	0.09	0.07	116	0.12	2.65	67	<0.5
I031595		1.6	0.206	0.45	0.24	141	0.31	7.68	87	0.9
I031596		1.5	0.162	0.30	0.48	101	0.31	8.57	78	1.4
I031597		2.2	0.059	0.27	0.55	89	0.12	8.53	62	1.0
I031598		5.3	0.110	0.36	1.92	149	0.11	9.68	104	11.5
I031599		6.9	0.089	0.45	1.72	125	0.17	10.15	115	19.2
I031600		6.9	0.091	0.43	1.72	126	0.15	10.40	116	19.9
I031601		7.4	0.062	0.29	1.57	61	0.15	8.94	101	17.7
I031602		4.4	0.074	0.38	1.36	151	0.29	12.80	185	14.2
I031603		6.3	0.059	0.37	1.29	115	0.25	13.15	129	11.9
I031604		6.3	0.070	0.54	1.23	115	0.49	10.45	126	21.1
I031605		7.0	0.112	0.68	1.21	145	0.19	13.70	143	23.2
I031606		5.5	0.059	0.36	0.83	83	0.20	10.05	78	12.0
I031607		6.4	0.061	0.35	1.00	79	0.13	12.50	104	11.9
I031608		7.7	0.043	0.36	1.59	70	0.14	10.60	99	17.7
I031609		8.6	0.065	0.48	1.67	123	0.13	12.70	134	22.5
I031610		2.6	0.118	0.53	15.05	49	7.56	1.83	10	13.1
I031611		7.0	0.021	0.35	1.87	61	0.19	12.45	128	16.2
I031612		8.6	0.061	0.64	2.37	130	0.18	14.85	149	17.7
I031613		8.6	0.087	0.71	2.26	146	0.13	15.15	160	22.5
I031614		6.9	0.072	0.53	2.72	128	0.32	13.60	127	17.0
I031615		5.3	0.033	0.53	2.46	111	0.18	13.75	182	18.7
I031616		6.2	0.057	0.53	1.94	113	0.13	13.10	131	18.5
I031617		4.6	0.034	0.32	1.79	55	0.16	12.30	93	10.1
I031618		5.7	0.046	0.43	2.12	100	0.11	13.15	122	17.5
I031619		6.9	0.062	0.57	2.25	160	0.13	16.00	138	21.7
I031620		14.9	0.112	0.30	2.00	32	0.13	5.10	28	2.5
I031621		6.3	0.052	0.47	2.06	146	0.09	16.05	143	20.4
I031622		4.4	0.012	0.24	1.67	39	0.13	10.65	109	7.5
I031623		5.1	0.009	0.23	3.13	91	0.22	9.34	121	8.1
I031624		4.0	0.009	0.18	2.12	64	0.20	9.66	144	8.7
I031625		4.0	0.007	0.12	1.30	30	1.02	12.50	132	14.7

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110652

Sample Description	Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
	Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I031626		2.13	<0.005		0.44	2.10	11.1	<0.2	<10	580	0.66	0.19	0.82	1.03	18.90	11.2
I031627		2.87	<0.005		0.33	2.21	9.7	<0.2	<10	610	0.67	0.23	0.60	0.66	22.9	11.8
I031628		3.13	0.062		0.32	1.04	4.5	<0.2	<10	310	0.30	0.57	0.54	0.59	21.2	9.2
I031629		1.58	0.062		0.36	1.14	6.4	<0.2	<10	200	0.40	0.57	0.47	0.72	28.1	11.6
I031630		1.53	0.024		0.29	0.94	7.7	<0.2	<10	290	0.31	0.48	0.39	0.56	30.0	9.4
I031631		3.23	<0.005		0.21	3.73	2.5	<0.2	<10	360	0.45	0.24	1.58	0.09	22.2	14.4
I031632		1.65	0.010		0.24	4.76	1.4	<0.2	<10	220	0.32	0.27	2.04	0.07	12.60	23.4
I031633		2.12	0.117		0.86	2.66	376	<0.2	<10	190	0.49	0.25	2.16	1.14	14.50	16.3
I031634		2.31	0.051		0.35	1.61	12.6	<0.2	<10	360	0.55	0.30	0.97	0.93	29.3	10.2
I031635		1.23	<0.005		0.44	1.98	3.2	<0.2	<10	200	0.72	0.21	1.00	1.09	22.2	10.0
I031636		3.33	0.011		0.46	3.64	0.9	<0.2	<10	130	0.25	0.65	1.10	0.53	10.35	23.1
I031637		2.85	0.010		0.29	3.28	0.6	<0.2	<10	350	0.14	0.40	0.92	0.06	5.59	25.5
I031638		5.56	0.010		0.26	3.62	5.5	<0.2	<10	400	0.17	0.29	1.09	0.05	7.25	23.2
I031639		3.15	0.005		0.21	3.16	2.1	<0.2	<10	530	0.74	0.21	1.58	0.21	32.2	9.9
I031640		<0.02	0.006		0.22	3.27	1.6	<0.2	<10	790	0.73	0.23	1.64	0.22	29.6	10.1
I031641		3.86	<0.005		0.21	3.34	1.5	<0.2	<10	550	0.86	0.19	1.52	0.10	31.4	9.4
I031642		3.94	0.005		0.38	2.76	1.4	<0.2	<10	470	0.71	0.27	1.32	0.41	29.6	8.6
I031643		3.63	0.005		0.22	2.31	0.7	<0.2	<10	670	0.68	0.16	1.79	0.13	35.0	6.7
I031644		3.23	0.008		0.22	2.43	0.5	<0.2	<10	760	0.65	0.25	0.78	0.15	34.3	8.1
I031645		4.59	0.010		0.19	3.18	0.8	<0.2	<10	430	0.75	0.19	1.25	0.19	24.8	9.6
I031646		3.80	<0.005		0.49	2.53	0.8	<0.2	<10	200	0.95	0.60	2.05	3.19	25.1	12.4
I031647		3.28	0.008		0.24	2.62	5.4	<0.2	<10	570	0.41	0.36	1.18	0.60	25.7	14.4
I031648		2.95	<0.005		0.14	1.93	4.2	<0.2	<10	680	0.27	0.18	0.43	1.61	39.5	10.3
I031649		3.48	0.009		0.14	1.70	3.6	<0.2	<10	410	0.34	0.44	0.72	3.82	39.4	10.1
I031650		0.08	1.135	1.32	8.11	3.48	1570	1.1	<10	90	0.10	46.0	0.04	0.10	91.1	2.7

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110652

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031626		59	2.91	59.7	2.97	7.82	0.09	0.39	0.01	0.040	0.91	9.2	8.6	1.17	445	2.68
I031627		87	2.78	49.5	2.75	8.02	0.09	0.37	<0.01	0.035	0.96	11.6	12.4	1.27	426	4.28
I031628		38	0.91	68.8	2.30	3.67	0.07	0.17	0.01	0.016	0.38	10.5	4.6	0.60	228	2.82
I031629		46	1.06	78.8	2.54	4.10	0.07	0.23	0.01	0.017	0.43	14.5	5.1	0.63	218	4.18
I031630		45	0.89	67.6	2.31	3.73	0.07	0.20	<0.01	0.017	0.36	15.6	4.4	0.57	198	2.90
I031631		70	2.19	51.6	3.46	11.70	0.15	0.06	<0.01	0.036	1.21	10.3	11.9	1.73	502	1.69
I031632		68	2.89	66.7	4.51	13.25	0.15	0.03	<0.01	0.041	1.37	5.4	14.1	2.37	535	0.84
I031633		95	1.62	68.6	2.98	8.00	0.09	0.16	0.01	0.028	0.73	7.0	8.6	1.34	465	4.76
I031634		62	1.92	57.0	2.72	5.79	0.07	0.26	0.02	0.034	0.65	15.0	7.5	0.85	366	3.64
I031635		75	2.26	61.4	2.64	7.88	0.10	0.24	0.01	0.037	0.77	11.4	10.0	1.06	410	4.53
I031636		76	1.70	110.5	4.95	11.25	0.15	0.05	0.01	0.050	0.95	4.7	13.8	2.73	584	1.86
I031637		93	1.38	106.5	4.46	10.15	0.15	0.02	<0.01	0.034	0.72	2.3	13.7	2.61	443	0.70
I031638		71	1.42	95.8	4.38	11.15	0.16	0.02	<0.01	0.033	0.76	3.0	14.5	2.72	460	0.70
I031639		62	2.22	36.7	3.06	10.95	0.13	0.11	<0.01	0.040	1.07	16.6	13.0	1.26	445	2.91
I031640		62	2.20	37.4	3.02	10.95	0.11	0.12	<0.01	0.037	1.09	15.1	12.7	1.29	430	3.13
I031641		71	2.44	36.4	3.13	11.00	0.12	0.11	0.01	0.032	1.12	16.0	12.4	1.31	403	2.17
I031642		65	2.02	37.8	3.07	9.56	0.10	0.15	0.01	0.037	0.97	15.2	10.1	1.12	478	1.59
I031643		47	1.82	29.4	2.83	8.26	0.09	0.24	0.01	0.033	0.84	18.7	9.1	1.04	468	1.47
I031644		55	2.25	38.1	3.02	8.32	0.09	0.29	0.01	0.030	1.04	17.8	10.6	1.22	321	1.49
I031645		71	2.66	37.5	3.27	10.70	0.12	0.16	<0.01	0.037	1.19	12.7	11.2	1.35	407	1.64
I031646		84	2.51	64.9	2.99	9.83	0.11	0.39	0.01	0.062	0.95	13.0	9.2	1.34	542	6.81
I031647		73	1.37	43.8	3.45	9.78	0.11	0.09	<0.01	0.045	0.73	12.5	9.0	1.43	385	2.11
I031648		45	0.68	21.2	3.25	9.65	0.11	0.06	<0.01	0.063	0.46	19.8	7.5	1.02	205	0.28
I031649		34	0.87	25.9	2.91	6.18	0.08	0.06	0.01	0.067	0.55	20.6	8.9	0.66	242	0.41
I031650		34	0.18	79.1	3.26	138.5	0.79	0.18	30.4	0.625	1.32	25.8	0.3	0.03	10	15.80

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110652

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031626		0.02	0.08	44.0	580	8.9	47.6	0.007	0.66	3.48	8.9	3.3	0.6	24.2	<0.01	0.08
I031627		0.03	0.07	52.3	670	7.4	50.7	0.012	0.50	7.99	8.0	2.3	0.6	32.2	<0.01	0.08
I031628		0.05	0.07	44.7	690	8.2	18.7	0.008	0.90	8.40	4.1	2.9	0.3	20.9	<0.01	0.09
I031629		0.04	0.06	54.3	670	7.9	21.3	0.013	1.07	14.15	4.4	3.7	0.3	24.8	<0.01	0.12
I031630		0.04	0.06	44.6	610	4.9	18.0	0.008	0.89	13.90	4.3	3.0	0.3	22.3	<0.01	0.08
I031631		0.30	0.08	51.0	560	3.9	49.3	0.003	0.75	1.91	12.9	1.4	0.7	49.5	<0.01	0.06
I031632		0.37	0.08	32.0	410	4.7	52.6	0.002	0.90	2.40	19.2	0.5	0.6	58.8	<0.01	0.07
I031633		0.18	0.07	77.8	890	9.8	30.3	0.009	0.96	6.46	10.2	3.1	0.4	52.4	<0.01	0.42
I031634		0.02	0.07	48.7	730	5.2	33.3	0.005	0.76	4.35	6.1	2.6	0.4	29.8	<0.01	0.12
I031635		0.02	0.08	48.6	1020	12.4	41.4	0.007	0.97	5.22	8.8	3.5	0.6	27.6	<0.01	0.10
I031636		0.22	0.10	38.2	520	8.0	36.1	0.005	1.52	0.66	15.5	2.5	0.8	36.7	<0.01	0.30
I031637		0.19	0.08	46.1	420	3.8	25.9	0.003	0.94	0.48	12.1	1.0	0.4	26.2	<0.01	0.16
I031638		0.19	0.08	37.6	420	4.1	26.5	0.002	0.73	0.37	15.4	0.8	0.4	35.4	<0.01	0.13
I031639		0.25	0.14	30.5	600	9.4	51.4	0.004	0.55	0.14	10.8	1.5	0.9	75.2	<0.01	0.07
I031640		0.26	0.15	31.4	630	10.6	52.8	0.004	0.58	0.11	10.8	1.6	0.8	80.4	<0.01	0.07
I031641		0.21	0.14	33.0	660	8.2	56.4	0.003	0.64	0.32	10.3	1.6	0.8	79.4	<0.01	0.06
I031642		0.18	0.12	30.0	620	8.7	50.5	0.002	0.81	0.13	9.2	1.3	0.9	67.1	<0.01	0.17
I031643		0.12	0.11	26.6	520	7.8	42.5	0.002	0.62	0.13	7.3	1.2	0.7	118.0	<0.01	0.09
I031644		0.10	0.21	31.6	590	8.6	52.1	0.003	0.57	0.09	6.4	1.5	0.9	42.8	<0.01	0.11
I031645		0.21	0.17	31.4	640	7.8	58.1	0.003	0.58	0.08	10.4	1.4	0.9	71.8	<0.01	0.04
I031646		0.10	0.09	63.6	1150	16.2	53.8	0.008	1.29	0.14	7.6	4.1	1.8	80.3	<0.01	0.13
I031647		0.12	0.16	35.0	640	5.4	34.9	0.003	0.63	0.65	11.1	1.2	1.1	64.2	<0.01	0.05
I031648		0.06	0.24	12.8	560	4.9	20.5	0.001	0.15	0.30	12.2	0.3	1.1	18.2	<0.01	0.02
I031649		0.05	0.20	16.1	600	5.6	24.5	0.002	0.32	0.28	8.1	0.6	0.7	29.5	<0.01	0.06
I031650		0.04	0.31	2.3	1180	60.7	1.6	0.001	2.86	358	8.2	18.6	2.5	2260	0.02	1.70

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110652

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031626		5.4	0.069	0.40	0.84	113	0.30	8.01	127	16.7
I031627		5.7	0.069	0.38	2.37	104	0.21	7.16	112	15.1
I031628		4.8	0.028	0.14	1.94	54	0.10	5.46	52	7.2
I031629		5.8	0.030	0.16	2.05	60	0.13	7.21	57	9.5
I031630		5.0	0.028	0.15	2.18	58	0.13	6.49	47	8.4
I031631		3.8	0.117	0.35	1.17	107	0.20	10.50	76	2.6
I031632		1.9	0.148	0.40	1.37	161	0.11	9.49	95	0.8
I031633		3.0	0.077	0.30	2.76	143	0.21	8.37	110	7.3
I031634		5.7	0.045	0.32	1.13	86	0.09	8.70	107	11.7
I031635		4.8	0.056	0.33	1.82	148	0.39	9.78	128	10.9
I031636		1.5	0.142	0.22	0.69	154	0.39	7.66	85	1.9
I031637		0.7	0.130	0.17	0.18	143	0.17	4.09	75	0.5
I031638		1.1	0.126	0.17	0.30	152	0.13	4.91	66	0.5
I031639		6.3	0.111	0.32	1.74	102	0.17	9.71	87	4.6
I031640		6.4	0.114	0.34	1.72	108	0.16	9.33	88	4.6
I031641		6.5	0.109	0.37	1.73	112	0.22	9.62	86	4.5
I031642		5.7	0.088	0.32	1.52	101	0.12	9.03	95	6.3
I031643		7.4	0.070	0.29	2.23	73	0.18	10.65	70	9.9
I031644		9.7	0.104	0.32	2.73	82	0.55	8.17	90	11.0
I031645		6.8	0.120	0.35	1.77	113	0.26	7.09	102	6.0
I031646		6.2	0.078	0.39	3.09	161	0.23	12.10	216	17.2
I031647		5.4	0.096	0.23	1.18	91	0.21	8.35	97	3.2
I031648		7.9	0.082	0.11	1.43	78	0.07	10.45	118	2.2
I031649		7.3	0.066	0.16	1.92	49	0.08	12.95	178	2.2
I031650		2.4	0.118	0.46	13.85	48	8.14	1.73	13	14.2

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10110652

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 29-SEP-2010
Account: EIASQI

CERTIFICATE TR10127846

Project: SQI10-03

P.O. No.:

This report is for 2 Other samples submitted to our lab in Terrace, BC, Canada on 8-SEP-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
FND-03	Find Reject for Addn Analysis
SPL-21	Split sample - riffle splitter
PUL-32	Pulverize 1000g to 85% < 75 um
SCR-21	Screen to -100 um

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-SCR21	Au Screen Fire Assay - 100 um	WST-SIM
Au-AA25	Ore Grade Au 30g FA AA finish	AAS
Au-AA25D	Ore Grade Au 30g FA AA Dup	AAS

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature: 
Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 29-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS TR10127846

Sample Description	Method Analyte Units LOR	Au-SCR21 Au Total ppm 0.05	Au-SCR21 Au (+) F ppm 0.05	Au-SCR21 Au (-) F ppm 0.05	Au-SCR21 Au (+) m mg 0.001	Au-SCR21 WT. + Fr g 0.01	Au-SCR21 WT. - Fr g 0.1	Au-AA25 Au ppm 0.01	Au-AA25D Au ppm 0.01
I031342		4.73	60.7	3.90	0.648	10.67	721.7	3.86	3.94
I031413		4.39	237	2.89	1.573	6.64	1029.0	2.96	2.81

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 2-AUG-2010
Account: EIASQI

CERTIFICATE VA10099468

Project: SQI10-03

P.O. No.: SQI10-03_9

This report is for 1 Other sample submitted to our lab in Vancouver, BC, Canada on 21-JUL-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
FND-03	Find Reject for Addn Analysis
PUL-32	Pulverize 1000g to 85% < 75 um
SPL-21	Split sample - riffle splitter
BAG-01	Bulk Master for Storage
SCR-21	Screen to -100 um

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-SCR21	Au Screen Fire Assay - 100 um	WST-SIM
Au-AA25	Ore Grade Au 30g FA AA finish	AAS
Au-AA25D	Ore Grade Au 30g FA AA Dup	AAS

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 2-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS VA10099468

Sample Description	Method	Au-SCR21	Au-SCR21	Au-SCR21	Au-SCR21	Au-SCR21	Au-SCR21	Au-AA25	Au-AA25D
	Analyte	Au Total	Au (+) F	Au (-) F	Au (+) m	WT. + Fr	WT. - Fr	Au	Au
	Units	ppm	ppm	ppm	mg	g	g	ppm	ppm
	LOR	0.05	0.05	0.05	0.001	0.01	0.1	0.01	0.01
I030962		19.40	20.2	19.40	0.085	4.21	1220.0	20.2	18.55

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 19-AUG-2010
Account: EIASQI

CERTIFICATE VA10106009

Project: SQI10-04

P.O. No.: SQI10-01_04

This report is for 1 Other sample submitted to our lab in Vancouver, BC, Canada on 4-AUG-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
FND-03	Find Reject for Addn Analysis
BAG-01	Bulk Master for Storage
SPL-21	Split sample - riffle splitter
PUL-32	Pulverize 1000g to 85% < 75 um
SCR-21	Screen to -100 um

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-SCR21	Au Screen Fire Assay - 100 um	WST-SIM
Au-AA25	Ore Grade Au 30g FA AA finish	AAS
Au-AA25D	Ore Grade Au 30g FA AA Dup	AAS

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 19-AUG-2010
Account: EIASQI

Project: SQI10-04

CERTIFICATE OF ANALYSIS VA10106009

Sample Description	Method	Au-SCR21	Au-SCR21	Au-SCR21	Au-SCR21	Au-SCR21	Au-SCR21	Au-AA25	Au-AA25D
	Analyte	Au Total	Au (+) F	Au (-) F	Au (+) m	WT. + Fr	WT. - Fr	Au	Au
	Units	ppm	ppm	ppm	mg	g	g	ppm	ppm
	LOR	0.05	0.05	0.05	0.001	0.01	0.1	0.01	0.01
I31060		5.97	115.5	3.30	2.114	18.31	750.6	3.28	3.32

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-JUL-2010
Account: EIASQI

CERTIFICATE WH10084658

Project: Boulevard

P.O. No.: SQI10-03

This report is for 66 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 30-JUN-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION


ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
LOG-22d	Sample login - Rcd w/o BarCode dup
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature: 

Colin Ramshaw, Vancouver Laboratory Manager

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-JUL-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10084658

Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
Sample Description LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I030550	2.39	0.007		0.23	3.61	0.5	<0.2	<10	410	0.77	0.16	1.33	0.18	25.8	13.6
I030551	4.03	0.007		0.27	4.11	0.3	<0.2	<10	430	0.57	0.43	3.37	0.16	14.50	22.3
I030552	3.81	0.008		0.36	3.84	0.7	<0.2	<10	300	0.44	0.64	3.43	0.19	12.25	28.8
I030553	2.73	0.011		0.33	2.77	5.0	<0.2	<10	330	0.72	0.29	1.82	0.64	21.7	14.0
I030554	3.50	0.049		0.88	3.26	3.4	<0.2	<10	230	0.47	0.76	3.27	0.35	18.75	18.1
I030555	3.51	0.005		0.23	1.62	0.6	<0.2	<10	490	0.47	0.10	0.96	0.13	20.9	12.1
I030556	3.29	0.006		0.26	0.62	1.3	<0.2	<10	210	0.18	0.08	0.73	0.05	12.65	6.1
I030557	3.82	0.006		0.14	2.52	0.7	<0.2	<10	640	0.67	0.10	1.23	0.07	33.1	10.2
I030558	4.81	0.005		0.24	4.74	1.4	<0.2	<10	360	0.75	0.16	3.98	0.18	18.10	25.7
I030559	4.40	0.006		0.12	4.22	2.8	<0.2	<10	760	0.32	0.11	3.86	0.12	3.92	28.3
I030560	0.09	3.96	4.01	1.46	1.68	8230	3.8	20	80	0.18	80.7	5.06	0.42	19.15	121.0
I030561	4.48	<0.005		0.13	2.45	6.1	<0.2	<10	400	0.12	0.08	2.07	0.09	5.60	25.5
I030562	2.65	<0.005		0.15	3.01	1.4	<0.2	<10	820	0.14	0.06	2.12	0.08	4.27	24.8
I030563	3.67	0.009		0.35	2.49	63.5	<0.2	<10	160	0.25	0.24	3.03	0.65	11.45	22.4
I030564	1.97	0.193		1.05	0.22	315	0.2	<10	80	0.13	0.07	4.80	0.34	5.50	7.1
I030565	2.26	0.358		2.11	0.39	822	0.4	<10	120	0.15	0.06	4.22	0.52	10.80	8.2
I030566	0.73	1.015	1.13	0.36	0.42	3610	1.1	<10	210	0.19	0.07	2.32	0.04	19.90	10.3
I030567	2.28	<0.005		0.21	1.21	36.3	<0.2	<10	400	0.41	0.21	1.16	0.02	30.6	11.4
I030568	3.95	0.019		0.27	0.95	46.6	<0.2	<10	280	0.32	0.33	1.54	0.04	16.25	10.3
I030569	5.19	0.046		0.45	0.67	86.2	<0.2	<10	240	0.22	0.13	1.33	0.24	16.85	8.8
I030570	0.77	<0.005		0.03	1.22	1.6	<0.2	<10	230	0.09	0.03	0.34	0.02	20.1	5.3
I030571	4.56	0.011		0.22	1.87	18.1	<0.2	<10	480	0.43	0.16	1.06	0.08	42.7	14.4
I030572	5.01	0.246		0.50	1.37	1140	0.3	<10	300	0.35	0.06	1.23	0.06	65.4	13.5
I030573	4.20	0.169		0.19	1.26	942	0.2	<10	260	0.38	0.16	1.41	0.02	46.3	16.2
I030574	4.32	0.287		0.24	1.44	582	0.3	<10	90	0.46	0.15	1.06	0.03	41.4	15.7
I030575	3.16	0.358		0.61	1.16	1780	0.4	<10	70	0.57	0.28	1.84	0.09	34.9	18.9
I030576	0.47	0.866		5.24	0.62	5070	1.0	<10	90	0.18	0.09	5.04	0.60	11.05	29.2
I030577	1.86	0.499		2.43	3.18	1805	0.5	<10	100	0.53	0.09	5.25	0.38	34.3	32.8
I030578	4.35	<0.005		0.43	6.19	19.6	<0.2	<10	150	0.75	0.36	4.01	0.35	12.25	25.4
I030579	2.30	<0.005		0.32	5.47	1.8	<0.2	<10	480	0.20	0.45	4.99	0.48	5.38	32.8
I030580	2.55	<0.005		0.31	4.94	0.9	<0.2	<10	410	0.14	0.41	4.93	0.58	5.67	30.5
I030581	4.55	0.008		0.71	4.11	0.6	<0.2	<10	100	<0.05	1.00	5.58	5.13	3.25	32.2
I030582	4.91	0.105		0.57	5.51	0.4	<0.2	<10	440	0.20	1.97	5.98	1.58	4.43	33.5
I030583	4.08	0.005		0.86	5.15	0.3	<0.2	<10	250	0.08	2.05	5.76	0.89	4.97	33.4
I030584	2.98	0.014		0.23	3.84	0.7	<0.2	<10	600	0.58	0.30	2.22	0.07	18.70	16.7
I030585	1.97	0.045		0.86	1.90	0.4	<0.2	<10	380	0.35	8.09	2.99	0.32	17.10	11.2
I030586	4.62	0.006		0.24	2.86	0.8	<0.2	<10	350	0.50	1.08	1.44	0.05	33.2	18.8
I030587	5.36	<0.005		0.25	3.91	0.3	<0.2	<10	270	0.78	0.26	1.63	0.04	26.0	14.2
I030588	5.01	<0.005		0.22	2.30	0.1	<0.2	<10	460	0.40	0.15	8.19	0.14	16.55	10.7
I030589	1.31	<0.005		0.13	3.52	0.1	<0.2	<10	660	0.60	0.15	9.59	0.20	24.7	7.4

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-JUL-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10084658

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I030550		73	1.70	79.4	3.45	11.10	0.09	0.07	<0.01	0.029	1.17	12.9	8.6	1.68	439	1.82
I030551		149	1.57	59.5	4.26	13.30	0.13	0.05	<0.01	0.048	0.96	7.2	8.9	2.60	786	1.64
I030552		143	1.92	67.4	4.41	12.75	0.15	0.05	<0.01	0.040	0.95	5.8	8.2	2.70	783	1.60
I030553		74	1.80	74.2	3.09	10.05	0.09	0.16	<0.01	0.039	0.79	11.2	9.3	1.32	758	5.77
I030554		88	2.13	61.5	3.65	10.05	0.11	0.06	0.01	0.038	0.95	9.4	9.6	1.97	900	1.62
I030555		36	1.21	55.7	2.12	6.04	0.06	0.14	0.01	0.023	0.62	9.9	7.3	0.77	803	2.13
I030556		16	0.51	50.2	1.27	2.46	<0.05	0.11	0.01	0.013	0.22	5.3	2.7	0.36	698	0.72
I030557		45	1.84	40.1	2.49	8.02	0.08	0.18	<0.01	0.025	0.79	16.6	11.2	0.96	845	2.21
I030558		125	3.17	48.3	4.80	14.20	0.16	0.05	<0.01	0.045	1.18	8.9	13.4	2.70	1100	1.77
I030559		125	2.58	28.2	4.02	9.24	0.14	0.07	<0.01	0.029	1.24	1.7	10.7	2.15	978	0.45
I030560		32	1.14	256	4.69	5.98	0.16	0.22	0.10	0.489	0.18	10.8	8.2	0.51	821	24.3
I030561		52	1.43	32.7	3.20	5.85	0.14	0.10	<0.01	0.031	0.69	2.5	10.3	1.28	702	0.20
I030562		89	2.75	28.1	3.73	8.06	0.13	0.05	<0.01	0.022	1.32	2.0	10.2	1.83	755	0.25
I030563		82	2.13	60.2	4.00	7.12	0.10	0.10	0.04	0.043	0.90	5.7	10.1	1.76	914	4.53
I030564		8	0.50	16.9	2.54	0.76	0.05	0.10	0.08	0.010	0.10	2.7	0.6	0.15	974	3.70
I030565		10	0.88	38.6	2.04	1.06	0.05	0.08	0.11	0.020	0.13	5.2	1.9	0.50	1200	2.30
I030566		14	0.46	39.3	2.41	1.50	0.06	0.06	0.06	0.023	0.17	9.8	2.7	0.89	751	0.81
I030567		27	1.50	55.2	2.74	4.40	0.08	0.16	0.04	0.021	0.46	14.8	11.0	0.75	646	1.62
I030568		19	1.40	48.8	2.59	3.41	0.07	0.13	0.06	0.056	0.26	7.5	7.4	0.83	921	0.94
I030569		17	0.55	50.0	1.93	2.22	0.06	0.09	0.05	0.019	0.22	8.1	7.1	0.62	648	2.82
I030570		9	2.02	3.2	2.04	4.37	0.11	0.17	<0.01	0.013	0.60	10.0	22.5	0.53	468	0.15
I030571		26	1.62	59.0	3.41	6.27	0.11	0.12	0.02	0.029	0.62	21.6	15.7	1.07	1280	1.81
I030572		19	1.22	33.3	3.54	4.46	0.12	0.06	0.02	0.022	0.46	32.1	9.4	1.04	916	0.61
I030573		19	1.13	50.3	3.76	4.38	0.12	0.06	0.03	0.031	0.37	23.4	10.0	0.79	942	1.55
I030574		37	1.33	75.3	3.82	5.24	0.13	0.15	0.04	0.045	0.55	20.3	9.7	0.96	900	2.97
I030575		36	1.17	52.0	4.27	4.09	0.12	0.14	0.10	0.058	0.40	16.3	6.2	1.06	1220	2.53
I030576		10	1.49	121.5	5.67	1.65	0.13	0.04	0.14	0.043	0.25	4.8	1.7	2.10	1380	1.08
I030577		35	2.16	80.0	5.99	9.89	0.14	0.03	0.08	0.065	0.59	15.6	11.4	2.50	1280	0.64
I030578		70	2.71	73.2	5.13	15.85	0.19	0.04	0.01	0.043	1.64	5.9	9.6	2.38	802	1.24
I030579		71	1.74	33.0	5.84	14.75	0.21	0.03	<0.01	0.042	1.04	2.4	11.8	3.61	1050	0.31
I030580		63	1.57	32.4	5.80	14.20	0.22	0.03	0.01	0.044	0.93	2.6	11.0	3.41	973	0.29
I030581		168	0.65	57.3	4.87	10.65	0.22	0.03	0.01	0.055	0.34	1.4	8.6	4.13	961	0.17
I030582		194	2.06	47.7	4.92	13.25	0.20	0.02	<0.01	0.046	1.05	2.0	11.0	3.92	1060	0.12
I030583		213	1.63	38.0	4.90	12.50	0.21	0.02	<0.01	0.051	0.72	2.2	13.2	4.44	978	0.26
I030584		73	1.77	44.7	3.36	10.35	0.12	0.06	<0.01	0.034	1.05	9.0	10.0	1.99	731	2.01
I030585		45	1.62	58.7	2.58	6.49	0.08	0.16	0.01	0.031	0.61	8.3	7.7	1.16	609	5.45
I030586		38	1.64	63.6	3.71	8.83	0.11	0.09	<0.01	0.029	1.01	14.5	10.8	1.74	873	4.48
I030587		47	1.67	54.1	3.52	11.50	0.12	0.03	<0.01	0.035	1.21	12.5	9.3	1.67	909	2.29
I030588		26	1.14	44.1	2.13	6.80	0.08	0.03	<0.01	0.024	0.75	7.9	4.9	1.20	886	1.70
I030589		16	1.48	10.0	1.77	9.33	0.06	0.05	<0.01	0.026	0.93	12.2	7.2	1.79	718	0.83

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-JUL-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10084658

Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I030550	0.14	0.18	49.1	340	4.4	53.9	0.004	0.66	0.06	7.8	2.0	0.7	39.2	<0.01	0.09
I030551	0.17	0.18	59.1	490	4.9	45.0	0.003	0.72	0.06	14.2	1.5	1.1	59.4	<0.01	0.14
I030552	0.17	0.18	57.3	620	5.3	41.2	0.003	0.89	0.08	15.6	1.7	1.6	117.0	<0.01	0.08
I030553	0.11	0.26	67.6	930	3.9	35.0	0.008	0.81	0.11	7.4	2.8	0.7	62.5	<0.01	0.23
I030554	0.12	0.17	48.8	590	7.1	40.5	0.003	0.95	0.15	12.0	1.4	0.8	77.1	<0.01	1.02
I030555	0.04	0.19	34.8	280	2.6	27.7	0.002	0.46	0.17	5.0	1.0	0.6	24.2	<0.01	0.12
I030556	0.01	0.16	15.9	110	1.9	12.0	0.001	0.31	1.39	1.9	0.3	0.3	10.8	<0.01	0.05
I030557	0.09	0.27	30.3	450	3.7	34.9	0.002	0.45	0.10	6.2	0.7	0.7	40.3	<0.01	0.06
I030558	0.16	0.24	56.0	770	3.4	53.5	0.003	0.74	0.13	14.8	1.5	1.4	65.1	<0.01	0.07
I030559	0.32	0.15	41.2	430	2.5	55.5	0.001	0.41	0.10	8.7	0.6	1.1	52.8	<0.01	0.04
I030560	0.12	0.71	55.1	790	17.4	8.6	0.032	1.11	29.5	3.5	6.6	32.0	87.0	0.01	14.20
I030561	0.22	0.06	25.6	490	2.3	30.2	0.001	0.46	0.11	9.2	0.8	0.8	40.1	<0.01	0.05
I030562	0.23	0.14	28.3	480	2.3	54.6	0.001	0.36	0.19	7.2	0.5	0.7	35.5	<0.01	0.03
I030563	0.12	0.14	46.7	700	3.3	37.7	0.007	1.20	10.40	10.8	2.4	0.8	44.3	<0.01	0.07
I030564	0.01	0.13	29.5	350	7.0	5.7	0.002	2.44	17.20	1.9	1.5	<0.2	48.4	<0.01	0.18
I030565	0.01	<0.05	17.9	420	12.1	6.6	0.003	1.42	29.5	2.8	0.7	0.2	89.5	<0.01	0.32
I030566	0.02	0.05	28.3	320	2.6	8.0	0.002	0.92	44.3	2.9	0.8	0.2	59.2	<0.01	0.14
I030567	0.02	0.10	31.7	560	3.4	20.4	0.002	0.79	37.5	4.8	1.2	0.5	29.5	<0.01	0.25
I030568	0.02	0.12	22.8	600	3.1	12.0	0.002	0.86	24.0	4.3	0.9	0.8	38.5	<0.01	0.35
I030569	0.02	0.12	19.9	630	5.8	9.9	0.006	0.99	12.85	3.0	0.8	0.3	30.8	<0.01	0.12
I030570	0.14	0.37	2.1	300	7.0	42.0	<0.001	0.02	0.44	3.7	<0.2	0.9	23.0	<0.01	<0.01
I030571	0.03	0.22	31.3	1030	5.1	24.0	0.005	0.85	27.9	4.9	1.0	0.6	26.0	<0.01	0.12
I030572	0.02	0.22	24.0	610	5.9	20.2	0.001	0.96	25.9	3.7	0.7	0.4	35.3	<0.01	0.11
I030573	0.02	0.22	26.6	1380	4.8	16.3	0.002	1.06	115.0	4.6	1.2	0.5	31.4	<0.01	0.07
I030574	0.02	0.13	33.2	1000	3.5	20.6	0.004	1.40	34.4	7.6	1.8	0.7	23.0	<0.01	0.17
I030575	0.02	0.09	45.4	730	4.7	17.8	0.003	2.05	35.3	7.2	2.0	0.5	44.9	<0.01	0.36
I030576	0.02	0.07	48.1	1360	11.8	13.3	0.001	5.80	105.5	8.1	1.5	0.2	137.5	<0.01	0.55
I030577	0.07	0.12	38.1	1400	6.5	26.3	0.002	2.36	231	17.0	1.1	0.7	106.0	0.01	0.18
I030578	0.40	0.11	39.4	640	5.8	68.6	0.002	1.41	2.00	20.7	2.5	1.7	82.9	<0.01	0.16
I030579	0.29	0.11	28.2	520	12.9	41.2	<0.001	0.60	0.80	25.1	0.7	1.3	64.9	<0.01	0.06
I030580	0.23	0.11	24.8	590	13.2	36.0	0.001	0.66	0.18	23.1	0.7	1.2	58.0	<0.01	0.05
I030581	0.08	0.09	53.8	420	63.4	13.6	0.001	0.46	0.34	15.2	0.6	0.7	60.5	<0.01	0.24
I030582	0.28	0.09	57.5	520	59.9	44.2	0.001	0.83	0.17	22.6	0.7	0.9	106.5	<0.01	0.47
I030583	0.13	0.08	57.9	370	35.8	27.6	0.002	0.46	0.16	28.1	0.6	0.6	80.2	<0.01	0.19
I030584	0.18	0.12	36.8	570	6.0	40.2	0.003	0.60	0.10	11.1	1.0	0.7	71.5	<0.01	0.17
I030585	0.02	0.11	25.2	680	9.8	25.9	0.004	0.99	0.50	6.7	1.4	0.6	32.6	<0.01	7.08
I030586	0.06	0.19	44.1	490	4.5	36.2	0.004	0.92	0.24	6.2	1.2	0.7	30.2	<0.01	0.87
I030587	0.21	0.16	34.1	470	4.6	46.6	0.002	0.91	0.15	8.6	1.1	0.9	62.0	<0.01	0.27
I030588	0.14	0.11	25.0	560	5.4	29.6	0.003	0.71	0.07	5.1	0.9	0.7	128.5	<0.01	0.13
I030589	0.24	0.08	13.0	430	7.0	37.7	0.001	0.30	0.08	6.0	0.6	0.8	168.5	<0.01	0.08

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-JUL-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10084658

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I030550		5.8	0.108	0.28	1.50	79	0.17	7.18	90	4.1
I030551		3.4	0.152	0.21	0.96	136	0.26	8.81	79	1.7
I030552		2.5	0.167	0.20	0.90	144	0.19	10.65	86	1.5
I030553		4.0	0.114	0.19	2.80	176	0.18	11.75	102	8.5
I030554		2.8	0.095	0.23	1.13	110	0.25	11.00	76	2.8
I030555		3.3	0.064	0.16	1.01	46	0.14	6.64	50	5.8
I030556		2.0	0.014	0.08	0.32	15	0.08	3.58	17	4.5
I030557		5.9	0.098	0.19	1.68	55	0.19	11.05	50	6.8
I030558		2.8	0.179	0.27	0.88	149	0.25	10.85	92	1.8
I030559		0.5	0.270	0.30	0.16	127	0.20	7.19	81	1.1
I030560		2.6	0.109	1.30	1.74	56	24.9	7.36	62	9.4
I030561		0.6	0.269	0.16	0.18	99	0.16	9.40	63	1.4
I030562		0.6	0.268	0.28	0.26	115	0.22	6.96	80	0.8
I030563		2.1	0.134	0.23	1.54	116	0.14	10.25	119	4.3
I030564		2.0	<0.005	0.10	1.37	11	0.18	6.62	26	4.9
I030565		2.5	<0.005	0.08	1.05	18	0.21	7.03	40	3.3
I030566		3.9	<0.005	0.11	0.70	15	0.12	4.43	40	2.8
I030567		5.3	0.028	0.15	1.43	40	0.08	6.56	46	6.7
I030568		2.6	0.019	0.12	0.75	31	0.48	7.05	43	6.0
I030569		3.4	0.012	0.09	1.51	31	0.15	5.61	43	4.1
I030570		12.9	0.137	0.36	2.49	42	0.10	5.87	37	3.1
I030571		8.3	0.050	0.18	2.01	57	0.18	9.34	65	5.5
I030572		16.6	0.022	0.12	1.86	25	0.15	9.03	66	2.3
I030573		6.9	0.020	0.12	1.50	41	0.18	12.35	70	2.6
I030574		6.2	0.040	0.14	1.56	66	0.22	10.55	69	6.9
I030575		6.9	0.014	0.19	1.74	53	0.14	9.66	81	6.9
I030576		1.7	<0.005	0.15	0.89	22	0.76	17.05	65	1.2
I030577		5.1	0.040	0.17	0.93	108	0.36	18.75	90	0.6
I030578		2.9	0.186	0.37	1.05	187	0.29	9.62	94	1.6
I030579		0.8	0.216	0.19	0.16	211	0.14	8.62	83	0.5
I030580		0.8	0.203	0.18	0.15	209	0.14	8.51	81	0.5
I030581		0.4	0.180	0.06	0.11	154	0.19	6.57	198	0.5
I030582		0.7	0.162	0.24	0.30	183	0.18	7.31	129	<0.5
I030583		0.6	0.111	0.14	0.21	183	0.07	9.54	97	<0.5
I030584		4.3	0.103	0.22	1.23	85	0.19	7.78	80	2.6
I030585		3.3	0.049	0.17	0.81	68	0.30	8.55	57	6.6
I030586		7.5	0.102	0.21	1.75	52	0.21	9.89	77	4.0
I030587		5.8	0.125	0.26	1.38	67	0.36	8.74	83	1.1
I030588		4.2	0.062	0.15	1.70	42	0.11	7.41	56	1.1
I030589		7.4	0.065	0.18	2.22	26	0.12	12.75	74	1.7

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-JUL-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10084658

Sample Description	Method / Analyte / Units / LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I030590		<0.02	<0.005		0.12	3.43	0.4	<0.2	<10	600	0.57	0.12	9.73	0.19	24.3	7.5
I030591		3.37	<0.005		0.03	0.84	3	<0.2	<10	180	0.08	0.04	16.85	0.30	7.80	3.5
I030592		4.96	<0.005		0.34	2.55	0.4	<0.2	<10	300	0.64	0.40	2.02	0.73	14.65	8.3
I030593		5.29	0.030		0.63	4.15	<0.1	<0.2	<10	510	0.79	0.86	3.72	0.14	16.15	14.7
I030594		5.22	0.049		1.32	6.79	<0.1	<0.2	<10	270	0.61	2.84	4.91	0.21	8.96	30.0
I030595		4.58	0.021		0.70	3.33	0.4	<0.2	<10	290	0.82	1.21	2.45	4.52	17.80	11.3
I030596		3.93	<0.005		0.34	2.41	0.3	<0.2	<10	350	0.66	0.95	1.44	0.45	12.70	8.4
I030597		1.89	0.007		0.35	2.87	1.7	<0.2	<10	200	0.73	0.83	1.66	0.39	12.20	9.5
I030598		1.90	<0.005		0.24	1.07	1.0	<0.2	<10	390	0.31	0.35	1.65	0.20	7.97	5.3
I030599		5.21	0.008		0.29	2.89	0.2	<0.2	<10	230	0.77	0.51	1.74	0.80	10.60	9.4
I030600		2.27	<0.005		0.22	2.26	0.8	<0.2	<10	360	0.60	0.26	0.93	0.35	12.60	8.6
I030601		0.07	1.220	1.17	0.46	1.64	1930	1.2	30	80	0.12	37.7	3.82	0.39	16.90	60.0
I030602		2.81	<0.005		0.24	0.96	18.9	<0.2	<10	500	0.25	0.55	1.99	0.04	7.40	7.2
I030603		3.25	0.005		0.18	2.31	1.0	<0.2	<10	430	0.71	0.15	1.07	0.07	24.7	9.9
I034451		0.93	<0.005		0.25	1.00	43.6	<0.2	<10	70	0.38	2.15	0.51	0.42	49.7	13.9
I034452		0.92	0.019		0.18	2.40	5820	0.2	<10	50	0.81	4.69	1.39	0.38	50.1	25.9
I034453		1.04	<0.005		9.21	0.18	56.1	<0.2	20	70	0.30	215	0.05	0.16	31.4	0.9
I031051		0.79	<0.005		0.06	0.53	4.4	<0.2	<10	90	0.65	0.35	0.12	0.17	87.6	0.9
I031052		1.37	<0.005		0.07	1.26	0.8	<0.2	<10	670	0.09	0.89	0.90	0.05	6.27	15.3
I031053		1.37	<0.005		0.04	0.04	1.5	<0.2	<10	10	<0.05	0.07	0.12	0.03	0.48	0.9
I031054		0.88	<0.005		0.76	0.10	0.6	<0.2	<10	20	<0.05	0.34	0.02	0.17	3.53	4.6
I031055		1.28	0.024		8.58	2.07	16.7	<0.2	<10	130	0.53	1.67	0.87	1.57	23.9	30.4
I031056		0.81	0.006		6.39	0.66	85.5	<0.2	10	50	0.61	224	1.18	4.05	63.4	3.4
I031057		1.29	0.006		5.41	0.12	2710	<0.2	<10	20	0.28	1.33	0.12	5.03	11.60	1.7
I031058		1.03	0.007		4.10	0.16	4120	<0.2	10	30	0.52	1.84	0.15	5.06	15.80	2.7
I031059		0.78	<0.005		0.84	0.15	4080	<0.2	<10	30	0.31	2.42	0.35	1.25	9.58	1.3

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-JUL-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10084658

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I030590		15	1.44	10.4	1.67	9.12	0.07	0.05	<0.01	0.027	0.89	12.0	6.9	1.70	682	0.79
I030591		7	0.66	2.8	1.03	2.60	0.06	0.02	<0.01	0.028	0.31	4.1	2.6	5.12	1580	0.49
I030592		44	1.16	59.6	2.45	8.51	0.08	0.08	<0.01	0.026	0.71	7.4	6.2	1.01	478	5.81
I030593		61	2.07	68.0	3.32	12.05	0.14	0.03	<0.01	0.037	1.21	8.0	8.0	1.70	1200	2.73
I030594		143	3.60	67.6	4.93	15.60	0.20	0.02	<0.01	0.047	2.06	4.2	12.6	3.18	1030	0.75
I030595		47	2.08	64.2	2.84	10.10	0.10	0.08	0.01	0.049	0.88	8.8	9.8	1.28	793	4.20
I030596		42	1.34	53.1	2.27	7.20	0.07	0.14	<0.01	0.019	0.69	6.4	8.2	0.99	425	2.17
I030597		49	1.63	56.1	2.65	8.84	0.08	0.10	<0.01	0.026	0.86	6.0	8.9	1.21	484	2.64
I030598		31	0.66	28.6	1.61	3.79	0.05	0.06	<0.01	0.012	0.36	4.0	4.0	0.65	385	1.24
I030599		54	1.35	58.9	2.57	9.05	0.07	0.09	<0.01	0.033	0.83	5.3	7.8	1.14	494	2.39
I030600		48	1.96	55.8	2.45	7.34	0.08	0.25	<0.01	0.029	0.83	6.3	8.2	1.13	432	2.33
I030601		21	0.86	117.0	3.36	5.41	0.15	0.21	0.02	0.104	0.15	11.0	9.6	0.53	858	7.95
I030602		31	0.94	39.6	1.50	3.99	0.05	0.09	<0.01	<0.005	0.35	4.1	4.4	0.68	614	0.76
I030603		40	2.57	50.3	2.85	8.35	0.09	0.32	<0.01	0.029	0.91	11.6	13.4	1.30	497	1.76
I034451		6	11.15	91.5	3.24	4.52	0.12	0.15	<0.01	0.045	0.11	25.6	35.3	0.52	178	0.52
I034452		7	8.47	23.6	3.08	5.85	0.14	0.10	<0.01	0.053	0.18	27.2	19.0	0.42	192	0.46
I034453		8	1.39	6.0	0.51	0.68	<0.05	0.05	0.01	<0.005	0.10	14.9	1.8	0.01	45	0.86
I031051		2	0.75	2.7	1.89	3.09	0.07	0.52	<0.01	0.050	0.14	24.2	3.2	0.03	303	1.78
I031052		92	0.66	76.3	2.58	4.87	0.12	0.04	<0.01	0.018	0.47	2.6	17.8	1.05	411	0.10
I031053		16	<0.05	29.8	0.37	0.18	<0.05	<0.02	0.01	<0.005	0.01	0.2	0.7	0.01	95	0.33
I031054		19	0.11	883	0.68	0.44	<0.05	<0.02	<0.01	0.038	0.01	1.5	0.4	0.03	57	0.18
I031055		22	42.9	1985	4.64	10.45	0.16	0.04	<0.01	0.234	0.86	12.1	46.8	1.20	331	1.05
I031056		4	7.27	177.0	0.90	2.44	0.07	0.10	<0.01	0.036	0.29	35.1	16.3	0.18	462	4.04
I031057		13	4.58	277	0.71	0.61	0.20	0.02	1.72	<0.005	0.08	9.2	2.9	0.02	84	1.29
I031058		10	5.95	278	0.98	0.79	0.15	0.04	0.28	0.006	0.13	10.9	3.9	0.03	183	1.54
I031059		7	4.42	129.5	1.02	0.56	0.07	0.02	77.1	<0.005	0.07	9.0	1.9	0.01	85	0.93

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-JUL-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10084658

Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I030590	0.24	0.08	13.3	430	7.1	36.6	0.001	0.31	0.09	6.0	0.7	0.8	172.0	<0.01	0.06
I030591	0.02	0.09	7.9	610	5.4	13.9	0.001	0.06	0.11	2.8	0.4	0.3	204	<0.01	0.02
I030592	0.14	0.07	42.7	480	3.9	28.5	0.006	0.94	0.15	5.5	2.8	0.6	63.4	<0.01	0.33
I030593	0.22	0.11	35.7	570	5.5	45.8	0.002	0.91	0.13	10.4	1.1	0.9	102.5	<0.01	0.95
I030594	0.39	0.08	53.0	590	9.0	75.0	0.001	1.06	0.11	23.8	1.0	1.1	147.5	<0.01	2.27
I030595	0.16	0.07	33.8	490	14.3	35.1	0.005	1.05	0.13	8.1	1.7	0.8	68.0	<0.01	1.15
I030596	0.10	0.07	40.3	580	3.7	27.7	0.003	0.79	0.15	4.9	1.8	0.6	43.0	<0.01	0.85
I030597	0.11	0.07	42.6	410	3.6	35.7	0.005	0.99	0.16	6.0	2.1	0.7	58.7	<0.01	0.73
I030598	0.05	0.05	27.0	310	4.8	16.7	0.002	0.77	0.17	2.9	1.2	0.3	40.8	<0.01	0.11
I030599	0.16	0.08	41.4	490	4.1	36.9	0.004	1.05	0.14	6.7	2.3	0.8	61.2	<0.01	0.12
I030600	0.07	0.09	40.8	620	2.9	35.7	0.005	0.83	0.24	5.5	1.9	0.7	36.0	<0.01	0.10
I030601	0.15	0.32	24.1	880	11.7	7.7	0.013	0.36	4.91	3.1	3.9	2.8	106.0	<0.01	3.84
I030602	0.02	0.13	27.5	290	3.9	20.7	0.002	0.47	0.34	3.2	1.0	0.3	33.8	<0.01	0.17
I030603	0.03	0.18	30.4	1420	2.8	46.3	0.005	0.49	0.72	6.2	1.1	0.8	34.0	<0.01	0.08
I034451	0.10	0.73	3.7	690	24.8	16.8	<0.001	1.18	1.88	4.6	0.8	2.0	25.2	<0.01	0.23
I034452	0.32	0.34	4.6	480	5.7	25.2	<0.001	1.41	6.13	2.0	0.9	0.8	103.5	<0.01	1.74
I034453	0.01	0.20	2.3	240	71.5	12.5	<0.001	<0.01	40.6	0.5	0.2	<0.2	6.8	<0.01	1.58
I031051	0.05	0.16	1.0	290	11.3	9.0	<0.001	<0.01	0.40	2.6	<0.2	1.0	9.6	<0.01	<0.01
I031052	0.05	0.27	39.4	520	0.6	17.5	<0.001	<0.01	0.75	4.9	0.3	0.3	15.3	<0.01	0.01
I031053	<0.01	0.08	1.7	10	0.3	0.3	<0.001	<0.01	0.83	0.3	<0.2	<0.2	1.5	<0.01	0.02
I031054	0.02	0.17	6.8	70	1.6	0.5	<0.001	0.01	0.70	1.4	0.5	<0.2	2.0	<0.01	0.02
I031055	0.11	0.54	29.0	310	9.6	194.0	0.001	1.58	1.47	13.8	4.6	3.5	28.5	<0.01	0.15
I031056	0.02	0.28	4.9	70	193.0	51.1	<0.001	0.03	15.35	2.2	1.3	0.5	30.0	<0.01	0.55
I031057	<0.01	0.13	4.6	140	118.5	15.5	<0.001	2.00	>10000	0.5	1.9	1.1	10.9	<0.01	0.01
I031058	0.01	0.17	5.7	250	106.0	23.8	<0.001	1.96	>10000	0.8	2.1	1.1	11.9	0.06	<0.01
I031059	0.01	0.07	4.6	160	94.4	10.1	<0.001	3.05	>10000	<0.1	1.9	0.9	31.3	<0.01	<0.01

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-JUL-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10084658

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I030590		7.5	0.061	0.17	2.12	26	0.12	12.40	71	1.4
I030591		1.6	0.017	0.05	0.94	19	0.15	11.00	61	<0.5
I030592		5.2	0.056	0.15	2.28	119	0.56	6.65	80	3.5
I030593		4.1	0.102	0.25	1.59	88	0.34	10.25	85	0.9
I030594		1.9	0.191	0.43	0.60	183	0.32	9.83	110	0.5
I030595		4.7	0.065	0.21	1.37	85	12.55	7.99	184	3.4
I030596		5.0	0.046	0.16	1.70	69	0.91	5.39	64	6.6
I030597		4.3	0.054	0.20	2.15	79	0.27	6.28	73	5.3
I030598		1.7	0.018	0.07	0.56	34	0.09	3.33	29	2.7
I030599		3.4	0.060	0.20	1.06	78	0.19	5.59	90	4.3
I030600		3.8	0.059	0.21	1.17	83	0.13	6.11	87	12.7
I030601		1.9	0.099	0.05	1.83	54	18.15	7.97	65	7.5
I030602		1.1	0.019	0.08	0.54	33	0.32	5.50	25	4.3
I030603		4.7	0.075	0.23	1.42	77	0.16	10.35	55	13.8
I034451		24.8	0.079	0.52	10.15	38	0.69	11.70	30	2.3
I034452		26.9	0.063	0.72	15.75	19	0.38	8.08	23	2.4
I034453		5.5	<0.005	0.31	2.17	4	0.47	2.41	8	2.0
I031051		9.6	<0.005	0.05	2.57	4	0.09	7.20	49	22.1
I031052		0.8	0.172	0.06	0.18	90	0.08	6.17	31	0.9
I031053		<0.2	<0.005	<0.02	<0.05	1	2.70	0.42	<2	<0.5
I031054		0.5	<0.005	<0.02	0.45	7	<0.05	0.98	9	<0.5
I031055		6.6	0.106	3.21	1.50	30	0.14	10.95	127	1.6
I031056		29.7	<0.005	0.75	2.40	4	0.17	10.00	173	3.7
I031057		1.7	<0.005	1.63	3.55	1	0.10	1.95	537	1.0
I031058		3.5	<0.005	1.00	4.35	2	0.95	2.75	659	1.4
I031059		<0.2	<0.005	17.55	2.56	1	<0.05	3.16	61	<0.5

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 27-JUL-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10084658

Method	CERTIFICATE COMMENTS
ME-MS41	Interference: Ca>10% on ICP-MS As,ICP-AES results shown.
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

CERTIFICATE WH10084852

Project: SQI10-03

P.O. No.: SQI10-03_3

This report is for 190 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 24-JUN-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION


ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
SPL-21d	Split sample - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature: 

Colin Ramshaw, Vancouver Laboratory Manager

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
Sample Description LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I030604	3.10	<0.005		0.13	1.17	5	<0.2	<10	250	0.37	0.21	13.90	0.25	27.2	6.6
I030605	3.40	0.107		0.32	0.50	411	<0.2	<10	210	0.24	0.30	3.51	0.41	21.9	6.2
I030606	2.22	0.019		0.34	0.78	21.3	<0.2	<10	60	0.36	0.33	9.48	0.17	30.5	13.7
I030607	1.31	0.554		1.23	0.40	1965	0.4	<10	80	0.18	0.18	6.41	0.76	12.05	18.6
I030608	4.67	0.040		0.51	0.63	177.5	<0.2	<10	130	0.41	0.59	1.69	0.13	26.4	12.7
I030609	4.84	0.104		1.82	0.24	256	<0.2	<10	70	0.14	0.37	1.09	1.52	11.50	7.5
I030610	4.49	0.040		1.08	0.20	5.3	<0.2	<10	60	0.10	0.34	0.75	0.41	8.68	7.0
I030611	4.20	<0.005		0.36	0.30	4.3	<0.2	<10	80	0.12	0.05	0.63	0.14	15.30	8.7
I030612	1.25	<0.005		0.03	1.21	0.7	<0.2	<10	200	0.12	0.03	0.31	0.03	25.4	5.3
I030613	4.26	<0.005		0.27	0.30	7.6	<0.2	<10	80	0.14	0.08	0.82	0.12	18.45	11.3
I030614	4.45	0.587		1.59	0.56	1290	0.5	<10	70	0.33	0.16	2.26	0.62	21.9	15.0
I030615	3.95	0.757		1.57	0.25	996	0.8	<10	60	0.14	0.09	1.52	0.72	15.55	7.7
I030616	1.86	2.35	2.43	2.68	0.43	1150	2.5	<10	90	0.23	0.18	1.51	0.88	23.5	14.3
I030617	4.42	0.045		0.17	0.68	28.7	<0.2	<10	180	0.21	0.05	1.12	0.09	14.05	7.6
I030618	4.68	0.005		0.09	2.72	3.6	<0.2	<10	760	0.49	0.07	1.01	0.02	42.4	15.7
I030619	2.28	<0.005		0.09	1.46	7.6	<0.2	<10	360	0.33	0.15	0.78	0.04	33.2	16.3
I030620	2.59	<0.005		0.09	1.54	5.9	<0.2	<10	370	0.38	0.11	0.76	0.04	37.0	15.8
I030621	1.87	0.007		0.10	1.71	1.2	<0.2	<10	400	0.38	0.10	0.77	0.05	34.8	11.7
I030622	4.06	0.006		0.11	0.80	4.3	<0.2	<10	220	0.23	0.12	0.87	0.04	18.15	9.6
I030623	3.30	0.007		0.12	0.99	2.6	<0.2	<10	250	0.24	0.09	1.10	0.08	24.4	9.0
I030624	4.38	0.007		0.20	1.87	7.0	<0.2	<10	390	0.45	0.24	0.88	0.10	29.8	16.0
I030625	2.33	0.006		0.10	0.30	3.7	<0.2	<10	100	0.14	0.06	1.03	0.03	10.20	5.1
I030626	0.54	0.006		0.07	0.24	4.7	<0.2	<10	50	0.18	0.04	3.70	0.03	21.6	6.6
I030627	3.99	0.007		0.11	1.25	8.3	<0.2	<10	270	0.28	0.14	0.60	0.10	36.0	11.0
I030628	4.54	0.005		0.06	0.15	7.4	<0.2	<10	40	0.06	0.05	0.49	0.03	5.49	4.7
I030629	5.09	0.006		0.05	0.35	5.9	<0.2	<10	80	0.11	0.06	0.57	0.04	10.50	6.8
I030629D	<0.02	<0.005		0.06	0.32	6.3	<0.2	<10	80	0.08	0.06	0.57	0.04	10.50	7.2
I030630	0.91	<0.005		0.02	1.16	0.6	<0.2	<10	210	0.12	0.04	0.33	0.04	28.5	5.3
I030631	4.64	0.007		0.14	1.77	1.8	<0.2	<10	310	0.45	0.20	0.81	0.13	66.3	10.7
I030632	3.39	0.005		0.12	2.00	1.3	<0.2	<10	320	0.46	0.10	0.78	0.10	88.4	11.0
I030633	4.70	0.006		0.10	0.78	3.2	<0.2	<10	150	0.20	0.10	0.69	0.07	18.10	8.9
I030634	4.44	0.005		0.13	1.23	8.8	<0.2	<10	200	0.29	0.12	0.86	0.20	20.0	12.1
I030635	4.24	0.011		0.25	1.78	3.5	<0.2	<10	230	0.44	0.18	1.69	0.57	44.4	16.3
I030636	4.41	0.008		0.29	1.91	3.2	<0.2	<10	360	0.52	0.28	0.65	0.52	34.9	18.8
I030637	4.37	0.009		0.31	2.31	1.5	<0.2	<10	220	0.56	0.15	1.10	0.20	25.4	16.8
I030638	3.93	0.047		0.97	2.75	1.5	<0.2	<10	210	0.69	1.18	2.14	0.53	27.8	21.7
I030639	4.50	0.018		0.57	2.62	1.1	<0.2	<10	210	0.82	0.56	2.37	2.02	39.9	13.4
I030640	0.08	4.02	4.28	1.46	1.62	8150	4.2	20	80	0.15	74.8	4.63	0.41	18.55	119.0
I030641	3.24	0.008		0.28	2.95	28.2	<0.2	<10	250	0.80	0.36	1.60	0.79	35.5	14.9
I030642	4.37	0.043		0.34	1.22	231	<0.2	<10	290	0.49	0.14	3.63	0.13	42.3	16.1

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
Sample Description LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I030604	21	1.23	34.3	1.75	4.75	0.06	0.12	0.03	0.020	0.43	14.8	6.1	1.23	905	1.97
I030605	16	0.61	50.1	1.81	2.57	0.05	0.11	0.05	0.024	0.12	11.0	2.9	0.22	613	2.80
I030606	38	0.54	44.5	2.33	2.95	0.07	0.08	0.07	0.042	0.06	15.1	5.2	0.83	907	1.58
I030607	15	0.64	66.8	3.71	1.25	0.06	0.05	0.06	0.028	0.17	5.8	1.5	1.36	1860	0.90
I030608	34	0.50	67.8	2.86	2.69	<0.05	0.04	0.12	0.019	0.17	12.2	4.8	0.69	715	2.46
I030609	16	0.17	68.2	1.41	1.06	<0.05	0.02	0.08	0.018	0.08	4.3	1.9	0.41	711	1.23
I030610	16	0.10	28.0	0.81	0.96	<0.05	0.02	0.01	0.008	0.06	2.8	2.2	0.25	643	0.49
I030611	16	0.15	71.1	1.35	1.34	<0.05	0.02	0.06	0.013	0.08	5.5	3.3	0.21	670	1.46
I030612	8	1.96	3.4	2.10	4.63	0.06	0.17	<0.01	0.013	0.57	12.1	22.2	0.51	450	0.12
I030613	19	0.19	68.2	1.48	1.28	<0.05	0.04	0.06	0.014	0.08	6.8	3.1	0.16	801	2.98
I030614	9	0.80	96.9	3.46	1.95	<0.05	0.05	0.04	0.035	0.18	9.7	2.5	0.92	1360	1.53
I030615	10	0.33	57.3	1.80	0.88	<0.05	0.03	0.02	0.017	0.14	7.0	0.8	0.58	782	0.99
I030616	7	0.53	93.8	3.25	1.20	0.07	0.04	0.02	0.020	0.29	11.5	1.5	0.61	927	0.49
I030617	16	0.61	28.3	1.51	2.68	<0.05	0.07	0.01	0.016	0.30	6.5	5.2	0.50	878	1.23
I030618	37	2.42	41.7	3.22	9.58	0.09	0.04	<0.01	0.030	1.28	19.8	14.7	1.40	1290	1.43
I030619	25	1.09	51.4	2.09	5.91	0.07	0.07	<0.01	0.022	0.67	15.2	8.7	0.70	978	1.49
I030620	24	1.16	50.3	2.16	6.16	0.07	0.06	<0.01	0.023	0.73	16.7	8.8	0.74	979	1.45
I030621	25	1.26	46.0	2.61	6.69	0.06	0.09	<0.01	0.020	0.81	16.4	9.7	0.82	963	1.27
I030622	22	0.53	41.3	1.45	3.38	<0.05	0.06	<0.01	0.012	0.33	8.2	4.4	0.40	814	1.08
I030623	24	0.78	51.6	1.83	3.96	0.05	0.05	<0.01	0.013	0.47	11.7	5.0	0.42	751	0.93
I030624	31	1.46	91.4	2.93	7.03	0.08	0.08	<0.01	0.022	0.79	14.6	10.5	0.90	1040	2.03
I030625	17	0.17	32.5	0.90	1.08	<0.05	0.03	<0.01	0.005	0.11	4.7	2.6	0.21	449	0.42
I030626	12	0.12	27.6	1.07	1.15	<0.05	0.02	<0.01	0.008	0.06	10.0	1.4	0.32	1050	0.25
I030627	26	0.90	58.9	2.12	4.62	0.06	0.08	<0.01	0.016	0.58	17.0	7.0	0.51	680	1.43
I030628	19	0.09	16.5	0.58	0.70	<0.05	<0.02	<0.01	<0.005	0.06	2.2	1.0	0.08	438	0.27
I030629	17	0.20	22.7	0.79	1.44	<0.05	0.02	<0.01	0.005	0.14	4.3	2.9	0.16	510	0.38
I030629D	18	0.19	24.4	0.91	1.41	<0.05	<0.02	<0.01	0.005	0.13	4.3	2.5	0.15	524	0.38
I030630	10	1.85	3.5	2.01	4.74	0.10	0.14	<0.01	0.012	0.57	13.0	24.8	0.48	458	0.14
I030631	25	1.13	38.4	2.67	6.29	0.09	0.07	<0.01	0.015	0.73	31.9	8.8	0.67	517	2.27
I030632	26	1.05	30.6	2.79	7.12	0.11	0.07	<0.01	0.018	0.76	42.4	10.3	0.70	522	0.27
I030633	22	0.49	46.5	1.64	2.70	<0.05	0.03	<0.01	0.008	0.33	8.2	4.8	0.35	634	0.59
I030634	26	0.77	54.5	2.08	4.69	0.06	0.06	<0.01	0.019	0.50	8.7	6.6	0.67	1110	1.65
I030635	29	1.15	98.2	3.48	6.33	0.11	0.10	<0.01	0.027	0.67	20.6	8.7	0.83	988	3.70
I030636	38	1.18	112.0	3.34	6.46	0.11	0.17	<0.01	0.024	0.83	18.6	11.2	0.93	579	3.13
I030637	39	1.66	119.5	3.81	8.10	0.12	0.09	<0.01	0.028	1.05	14.0	12.5	1.12	883	2.07
I030638	34	1.59	126.0	4.37	10.00	0.12	0.14	<0.01	0.040	1.02	15.6	13.3	1.30	998	4.32
I030639	31	1.10	69.2	2.90	9.24	0.10	0.07	<0.01	0.035	0.78	20.2	9.2	0.82	812	2.64
I030640	32	1.03	244	4.52	5.84	0.20	0.21	0.08	0.443	0.17	10.5	8.4	0.50	771	23.7
I030641	35	1.24	57.7	3.31	10.05	0.11	0.06	<0.01	0.038	1.03	17.9	9.3	0.96	591	4.64
I030642	26	0.89	53.5	3.54	4.87	0.09	0.07	0.16	0.024	0.37	20.7	7.3	1.59	869	2.75

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I030604	0.03	0.13	22.8	500	4.8	24.9	0.004	0.62	5.26	4.5	1.3	0.4	245	<0.01	0.04
I030605	0.02	0.05	23.4	390	5.0	6.1	0.005	0.67	15.35	3.5	1.6	0.3	51.3	<0.01	0.15
I030606	0.04	0.10	32.5	600	8.9	3.4	0.003	0.98	14.05	9.5	1.0	0.7	147.5	0.01	0.32
I030607	0.02	0.08	38.9	480	15.1	9.7	0.002	3.13	24.5	5.3	1.0	<0.2	89.7	<0.01	0.36
I030608	0.01	0.06	34.9	580	4.1	7.1	0.006	0.80	20.5	5.0	1.1	0.4	40.5	<0.01	0.56
I030609	0.01	<0.05	21.7	170	8.9	3.4	0.001	0.57	13.20	1.7	0.7	0.2	26.6	<0.01	1.24
I030610	<0.01	<0.05	17.8	80	10.4	2.4	0.001	0.20	17.45	1.5	0.3	0.2	17.4	<0.01	0.95
I030611	<0.01	<0.05	27.5	170	2.2	3.2	0.001	0.55	23.7	2.0	0.6	0.2	12.5	<0.01	0.10
I030612	0.12	0.42	2.0	280	6.3	45.3	<0.001	0.05	0.42	3.7	0.3	0.8	21.2	<0.01	<0.01
I030613	<0.01	0.05	33.0	180	1.8	3.5	0.002	0.67	24.7	2.1	0.7	0.2	15.3	<0.01	0.09
I030614	0.02	0.07	24.2	610	19.8	9.3	0.003	2.14	16.40	3.3	0.9	0.2	90.3	<0.01	0.35
I030615	0.01	0.06	16.2	390	15.8	6.9	0.002	1.31	21.5	1.4	0.6	<0.2	41.3	<0.01	0.30
I030616	0.02	0.08	27.2	400	37.1	12.6	0.001	3.54	29.8	1.8	0.8	<0.2	44.9	<0.01	0.92
I030617	<0.01	0.12	17.3	250	4.4	13.7	0.002	0.29	4.09	3.1	0.4	0.3	27.5	<0.01	0.07
I030618	0.08	0.18	30.9	430	4.5	55.0	0.004	0.28	1.45	8.2	0.4	0.9	52.7	<0.01	0.06
I030619	0.03	0.28	29.6	410	5.3	31.3	0.003	0.23	1.01	4.4	0.5	0.5	27.2	<0.01	0.09
I030620	0.03	0.22	29.6	390	5.0	33.3	0.002	0.24	1.11	4.4	0.5	0.5	27.5	<0.01	0.06
I030621	0.02	0.25	23.5	520	4.2	37.4	0.003	0.26	0.78	4.8	0.6	0.6	28.8	<0.01	0.05
I030622	0.01	0.19	23.4	410	3.2	15.2	0.003	0.22	0.63	2.8	0.5	0.3	23.5	<0.01	0.07
I030623	0.01	0.21	20.0	390	3.5	21.4	0.002	0.28	3.55	3.1	0.7	0.4	36.0	<0.01	0.05
I030624	0.01	0.21	36.8	930	7.3	37.2	0.005	0.52	2.47	5.4	1.3	0.6	27.7	<0.01	0.09
I030625	0.01	0.12	9.8	130	1.5	5.0	<0.001	0.14	1.19	1.4	0.3	<0.2	19.2	<0.01	0.05
I030626	0.01	0.06	16.0	90	2.6	2.6	0.001	0.26	2.13	2.1	0.3	0.2	48.3	<0.01	0.03
I030627	0.01	0.22	25.3	730	6.2	26.9	0.003	0.27	1.80	3.8	0.8	0.4	21.1	<0.01	0.06
I030628	<0.01	0.07	9.1	120	1.6	2.6	<0.001	0.04	0.96	0.9	0.2	<0.2	9.2	<0.01	0.04
I030629	<0.01	0.12	14.0	130	2.4	6.3	<0.001	0.08	1.25	1.6	0.3	<0.2	14.5	<0.01	0.02
I030629D	<0.01	0.12	14.1	130	2.5	5.8	0.001	0.08	1.26	1.5	0.2	<0.2	14.6	<0.01	0.03
I030630	0.13	0.45	2.3	270	6.4	45.5	<0.001	0.01	0.17	4.0	0.2	0.8	23.0	<0.01	<0.01
I030631	0.03	0.25	21.9	480	11.6	35.8	0.006	0.25	6.49	3.4	0.8	0.4	23.9	<0.01	0.08
I030632	0.05	0.34	21.0	350	13.6	34.2	<0.001	0.24	29.2	3.2	0.8	0.5	23.3	<0.01	0.03
I030633	0.02	0.22	16.5	270	5.1	16.1	0.001	0.26	6.71	1.9	0.6	0.3	20.1	<0.01	0.05
I030634	0.02	0.23	31.7	380	6.7	23.9	0.002	0.32	4.13	3.0	0.6	0.6	20.8	<0.01	0.07
I030635	0.02	0.29	40.4	1050	6.8	31.0	0.007	1.01	16.40	3.8	1.8	0.5	28.5	<0.01	0.15
I030636	0.02	0.54	41.2	1550	7.6	32.8	0.009	0.71	5.51	4.5	2.6	0.5	20.8	<0.01	0.21
I030637	0.02	0.41	32.4	1900	5.5	42.1	0.006	0.96	11.50	5.9	2.5	0.6	34.3	<0.01	0.14
I030638	0.02	0.44	39.3	1730	7.6	44.0	0.010	1.53	10.30	6.8	2.4	0.8	41.4	<0.01	1.48
I030639	0.10	0.22	24.9	790	14.8	37.0	0.005	0.89	10.05	5.1	1.4	0.8	63.5	0.01	0.58
I030640	0.12	0.72	53.6	800	14.9	8.1	0.032	1.12	26.0	3.4	6.2	30.1	83.9	0.01	13.50
I030641	0.15	0.27	27.8	810	8.6	49.8	0.007	0.81	2.83	6.1	1.4	1.1	76.0	<0.01	0.15
I030642	0.04	0.26	29.3	830	8.7	18.0	0.003	1.08	18.85	5.6	1.1	0.4	85.5	<0.01	0.16

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I030604		3.7	0.024	0.11	1.43	52	0.14	11.10	45	5.0
I030605		4.6	<0.005	0.14	1.13	37	0.20	8.03	52	4.8
I030606		4.3	<0.005	0.21	1.63	63	0.21	15.65	72	3.1
I030607		2.2	<0.005	0.14	0.73	18	0.33	14.05	69	1.5
I030608		4.0	0.008	0.13	1.48	42	0.31	8.92	56	1.5
I030609		1.5	<0.005	0.05	0.34	12	0.21	3.56	51	1.2
I030610		0.9	<0.005	0.04	0.14	9	0.06	2.39	19	0.9
I030611		1.8	<0.005	0.07	0.38	13	0.13	3.37	23	0.9
I030612		12.1	0.136	0.36	2.23	41	0.13	6.36	33	3.0
I030613		2.4	<0.005	0.08	0.71	13	0.18	4.36	21	1.7
I030614		5.8	<0.005	0.14	1.37	22	0.53	9.06	78	1.7
I030615		3.5	<0.005	0.08	0.95	7	0.76	5.68	58	1.2
I030616		10.7	<0.005	0.12	1.17	4	0.17	6.77	80	1.5
I030617		2.7	0.015	0.09	0.65	20	0.13	4.26	36	3.1
I030618		6.6	0.094	0.27	0.99	62	0.12	8.27	66	1.7
I030619		6.3	0.061	0.15	1.16	41	0.10	6.83	45	3.2
I030620		6.7	0.065	0.16	1.25	40	0.08	6.73	49	2.5
I030621		6.6	0.064	0.16	1.55	43	0.09	8.14	64	3.4
I030622		3.0	0.020	0.09	0.95	28	0.09	5.80	29	2.6
I030623		4.3	0.030	0.11	0.95	30	0.10	7.47	36	2.7
I030624		6.7	0.054	0.20	1.54	61	0.21	11.30	72	3.8
I030625		1.1	0.007	0.04	0.34	9	0.07	3.88	13	1.3
I030626		2.9	<0.005	0.04	0.59	11	0.07	8.25	17	0.8
I030627		8.0	0.035	0.17	1.31	37	0.16	7.72	55	3.4
I030628		0.6	<0.005	0.02	0.24	3	<0.05	1.81	8	<0.5
I030629		1.3	0.007	0.04	0.29	7	0.08	2.70	16	0.6
I030629D		1.3	0.007	0.04	0.30	7	0.08	2.71	16	0.6
I030630		14.9	0.132	0.36	2.02	39	0.09	6.34	35	2.6
I030631		15.7	0.055	0.21	3.04	31	0.08	12.00	66	2.6
I030632		18.6	0.047	0.22	1.85	26	0.07	11.90	81	2.2
I030633		3.8	0.021	0.10	0.75	17	0.10	4.46	31	1.3
I030634		3.2	0.032	0.14	1.11	30	0.17	4.66	55	2.6
I030635		7.5	0.042	0.19	2.36	50	0.25	10.95	100	4.7
I030636		7.3	0.073	0.23	2.13	72	0.19	13.90	130	9.1
I030637		5.4	0.093	0.29	2.16	88	0.24	15.40	100	4.6
I030638		5.8	0.118	0.29	3.31	111	0.55	16.30	107	6.8
I030639		11.8	0.077	0.20	2.70	55	0.33	14.50	95	2.4
I030640		2.5	0.110	1.17	1.61	54	21.9	7.47	61	9.0
I030641		11.0	0.103	0.25	2.78	67	0.30	13.25	99	2.6
I030642		7.2	0.022	0.21	1.76	48	0.19	12.45	64	3.0

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
Sample Description LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I030643	5.41	0.045		0.32	1.34	90.9	<0.2	<10	220	0.45	0.14	1.80	0.09	36.5	16.8
I030644	3.71	0.007		0.21	3.18	2.8	<0.2	<10	160	0.73	0.12	2.90	0.07	37.5	26.1
I030645	0.80	0.219		1.13	0.48	554	0.3	<10	150	0.33	0.16	1.32	0.54	16.20	13.4
I030646	2.29	1.090	1.26	4.77	0.26	461	1.1	<10	100	0.15	0.27	1.51	3.96	11.50	6.4
I030647	1.93	0.244		7.36	0.35	1255	0.2	<10	140	0.19	0.18	3.57	7.48	11.35	13.4
I030648	1.29	0.391		4.30	0.31	968	0.4	<10	130	0.14	0.12	2.92	1.95	11.30	10.8
I030649	2.07	0.062		0.43	1.24	119.0	<0.2	<10	80	0.43	0.13	1.90	0.19	34.8	17.3
I030650	1.31	0.005		0.04	1.25	2.2	<0.2	<10	230	0.13	0.04	0.35	0.04	22.0	5.8
I030651	4.14	0.165		1.56	0.82	559	<0.2	<10	250	0.35	0.21	2.15	0.42	37.7	13.4
I030652	4.80	0.016		0.19	1.00	34.9	<0.2	<10	370	0.33	0.11	1.04	0.08	24.7	6.4
I030653	4.83	<0.005		0.16	1.40	4.4	<0.2	<10	410	0.43	0.13	0.86	0.05	21.3	7.3
I030654	4.51	0.005		0.21	1.72	0.9	<0.2	<10	380	0.50	0.15	0.89	0.06	22.1	7.9
I030655	4.50	0.016		0.26	1.31	132.5	<0.2	<10	300	0.39	0.26	1.18	0.29	23.5	7.9
I030656	5.24	0.014		0.18	3.75	7.5	<0.2	<10	310	0.40	0.42	3.82	0.10	7.72	25.2
I030657	4.92	0.014		0.23	2.75	15.4	<0.2	<10	550	0.61	0.38	2.35	0.12	26.9	13.8
I030658	4.41	0.009		0.11	3.09	2.1	<0.2	<10	630	0.59	0.22	3.73	0.11	32.3	17.6
I030659	3.00	0.006		0.07	2.75	6.8	<0.2	<10	1300	0.40	0.29	2.27	0.08	20.1	19.7
I030660	3.02	0.006		0.08	2.59	6.5	<0.2	<10	1300	0.38	0.31	2.34	0.08	22.6	18.9
I030661	4.63	0.026		0.09	3.40	6.5	<0.2	<10	1010	0.36	1.19	2.37	0.09	18.95	23.5
I030662	4.08	<0.005		0.22	1.46	1.2	<0.2	<10	480	0.50	0.24	0.91	0.19	24.4	9.2
I030663	1.78	<0.005		0.21	1.51	1.1	<0.2	<10	690	0.42	0.18	0.69	0.52	22.3	10.3
I030664	0.63	0.018		0.33	2.05	3.3	<0.2	<10	630	0.71	2.24	4.32	3.66	51.8	10.0
I030665	2.11	0.013		0.32	2.77	3.0	<0.2	<10	1080	0.73	0.64	1.29	0.44	40.9	11.1
I030666	3.49	0.006		0.18	3.17	1.0	<0.2	<10	280	0.95	0.16	3.21	0.16	27.0	15.7
I030667	2.20	0.006		0.24	6.67	<0.1	<0.2	<10	290	0.42	0.07	4.40	0.11	1.61	35.0
I030668	0.59	0.104		0.88	5.99	1245	<0.2	<10	60	0.39	0.42	4.39	0.23	3.71	39.5
I030669	2.38	<0.005		0.29	5.72	0.7	<0.2	<10	410	0.29	0.12	3.74	0.09	1.02	37.2
I030669D	<0.02	<0.005		0.30	5.92	1.9	<0.2	<10	280	0.41	0.11	3.85	0.09	0.98	37.8
I030670	2.58	<0.005		0.27	5.69	0.5	<0.2	<10	460	0.24	0.09	3.33	0.09	0.88	37.1
I030671	4.46	0.006		0.51	2.85	0.5	<0.2	<10	300	0.53	0.86	2.35	0.30	20.2	21.5
I030672	4.10	0.020		0.71	1.51	0.4	<0.2	<10	220	0.53	0.40	1.53	0.42	28.1	12.3
I030673	4.84	<0.005		0.13	0.33	0.6	<0.2	<10	50	<0.05	0.05	0.73	0.05	6.02	4.3
I030674	6.05	<0.005		0.09	0.34	1.0	<0.2	<10	70	0.08	0.04	0.60	0.06	4.89	4.0
I030675	5.97	<0.005		0.29	0.76	0.5	<0.2	<10	180	0.18	0.15	0.83	0.18	7.11	6.3
I030676	5.96	<0.005		0.24	2.16	0.4	<0.2	<10	270	0.58	0.21	1.15	0.18	20.2	15.3
I030677	6.01	<0.005		0.14	2.22	0.7	<0.2	<10	480	0.59	0.10	1.17	0.12	20.3	15.1
I030678	7.02	<0.005		0.16	5.00	1.7	<0.2	<10	960	0.94	0.38	2.94	0.10	29.6	26.3
I030679	5.67	<0.005		0.19	5.78	5.3	<0.2	<10	640	0.49	0.36	3.42	0.20	22.9	30.7
I030680	0.08	1.245	1.36	0.47	1.98	2170	1.0	30	100	0.21	43.8	4.61	0.42	16.55	62.8
I030681	5.67	<0.005		0.17	5.14	5.4	<0.2	<10	780	0.72	0.69	3.40	0.18	22.3	27.7

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
Sample Description LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I030643	36	1.30	68.7	3.51	5.69	0.10	0.08	0.04	0.029	0.53	18.0	8.2	1.12	848	2.39
I030644	106	3.83	54.7	4.88	11.90	0.16	0.06	0.04	0.051	1.27	18.6	16.5	2.44	1310	1.11
I030645	16	1.20	64.4	3.01	1.83	0.07	0.06	0.37	0.019	0.14	7.8	2.3	0.56	587	1.43
I030646	10	0.41	69.5	1.91	0.94	0.05	0.03	0.35	0.039	0.12	5.4	1.3	0.66	535	0.95
I030647	10	0.45	268	2.69	1.16	0.06	0.03	0.51	0.083	0.22	5.1	1.0	1.33	1310	1.34
I030648	7	0.37	97.0	2.58	1.03	0.05	0.04	0.26	0.028	0.18	5.3	0.8	1.21	933	1.41
I030649	42	1.37	85.9	3.89	5.00	0.11	0.06	0.11	0.031	0.47	16.9	7.8	1.05	805	1.66
I030650	7	2.04	3.6	2.18	5.19	0.11	0.17	<0.01	0.013	0.64	11.2	26.3	0.56	499	0.11
I030651	28	0.68	78.2	3.04	3.46	0.10	0.06	0.17	0.027	0.25	19.0	4.9	0.90	682	2.07
I030652	30	0.88	55.8	1.86	4.83	0.07	0.04	<0.01	0.014	0.38	11.0	8.7	0.63	320	0.58
I030653	38	1.08	68.3	1.89	6.42	0.08	0.04	<0.01	0.012	0.53	9.5	11.2	0.74	279	0.93
I030654	48	1.24	73.5	2.22	7.22	0.08	0.05	<0.01	0.023	0.60	11.2	9.3	0.80	294	3.42
I030655	44	0.74	73.5	2.12	5.35	0.09	0.09	<0.01	0.015	0.40	13.0	6.6	0.72	286	8.04
I030656	108	1.55	57.3	3.75	10.55	0.13	0.04	0.01	0.022	0.95	3.9	11.4	2.12	793	0.93
I030657	71	1.66	41.3	2.66	8.93	0.09	0.05	<0.01	0.022	0.88	14.4	10.8	1.22	497	1.17
I030658	71	2.35	29.3	3.25	9.78	0.13	0.05	0.01	0.024	1.25	17.7	12.2	1.68	662	0.53
I030659	96	1.89	19.3	2.47	7.31	0.09	0.05	<0.01	0.018	1.03	10.8	12.4	1.32	456	0.27
I030660	93	1.85	19.8	2.42	6.84	0.10	0.05	<0.01	0.015	0.99	12.1	11.9	1.27	458	0.21
I030661	112	1.95	22.6	2.71	8.34	0.11	0.09	<0.01	0.018	1.15	10.0	10.7	1.47	546	0.16
I030662	32	0.95	57.2	2.03	6.13	0.07	0.07	<0.01	0.019	0.55	11.8	7.1	0.72	502	2.42
I030663	33	0.94	63.0	2.14	6.58	0.07	0.04	<0.01	0.018	0.71	10.6	7.7	0.92	470	1.01
I030664	59	5.21	73.1	2.75	10.25	0.11	0.12	0.03	0.067	0.56	26.0	7.5	1.04	684	6.99
I030665	63	1.64	33.3	3.26	11.20	0.11	0.09	0.02	0.024	0.83	20.4	14.1	1.54	521	3.58
I030666	58	1.20	70.5	3.00	11.00	0.11	0.06	<0.01	0.025	0.91	13.3	9.2	1.66	1020	3.56
I030667	38	2.42	35.1	6.29	13.65	0.17	<0.02	<0.01	0.013	1.68	0.8	20.5	3.62	1320	0.11
I030668	10	2.43	90.7	8.01	14.50	0.18	<0.02	0.04	0.033	1.24	1.5	22.2	2.83	1200	0.10
I030669	133	1.54	41.9	6.22	10.00	0.09	<0.02	0.01	0.007	1.17	0.5	13.3	3.70	1240	0.19
I030669D	138	1.55	42.9	6.35	10.20	0.09	<0.02	0.01	0.008	1.19	0.5	13.4	3.79	1270	0.15
I030670	137	1.56	40.6	6.09	9.77	0.09	<0.02	<0.01	0.007	1.22	0.4	13.6	3.71	1160	0.15
I030671	65	1.50	93.9	4.11	8.91	0.09	0.09	0.06	0.029	0.84	10.2	10.4	1.91	769	1.70
I030672	22	1.26	55.0	3.15	5.13	0.06	0.15	0.11	0.020	0.58	15.3	5.0	0.60	973	2.31
I030673	17	0.10	18.0	0.83	1.19	<0.05	<0.02	<0.01	0.005	0.07	2.4	2.1	0.17	461	0.23
I030674	19	0.17	18.3	0.84	1.21	<0.05	0.02	<0.01	0.005	0.10	2.1	2.0	0.17	334	0.18
I030675	21	0.46	57.4	1.40	2.47	<0.05	0.06	<0.01	0.012	0.29	3.5	3.6	0.38	396	0.55
I030676	49	1.04	84.1	3.16	6.48	0.07	0.09	<0.01	0.022	0.68	10.1	7.5	0.98	613	2.05
I030677	62	1.34	52.5	2.95	6.95	0.08	0.07	0.01	0.021	0.90	10.2	10.2	1.19	740	1.51
I030678	156	2.87	67.3	4.89	13.30	0.15	0.05	0.01	0.041	1.79	15.2	15.8	3.08	1400	1.02
I030679	201	2.05	40.0	5.56	14.65	0.20	0.04	<0.01	0.059	1.47	12.1	13.9	4.06	1230	1.12
I030680	25	0.83	121.5	3.88	5.55	0.11	0.21	0.03	0.121	0.18	10.9	10.2	0.62	1000	8.01
I030681	181	2.91	59.8	5.15	12.80	0.15	0.06	0.01	0.042	1.69	12.1	17.9	3.39	1500	2.33

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I030643		0.02	0.31	39.1	780	6.1	26.7	0.003	1.18	8.18	6.9	1.6	0.6	42.3	<0.01	0.22
I030644		0.02	0.12	60.9	970	3.9	53.6	0.003	1.05	8.39	18.6	1.6	1.3	48.8	<0.01	0.13
I030645		0.01	0.06	32.7	380	44.8	8.5	0.002	1.14	35.1	3.8	1.2	0.2	39.2	<0.01	0.21
I030646		0.01	0.06	22.2	240	192.5	6.5	0.002	1.55	58.2	1.8	0.8	0.2	65.1	<0.01	0.68
I030647		0.02	0.06	36.0	520	91.2	11.3	0.003	2.44	154.0	3.3	1.2	<0.2	59.9	<0.01	0.36
I030648		0.02	0.06	28.1	590	42.3	9.5	0.002	2.24	61.1	1.8	1.0	<0.2	53.5	<0.01	0.47
I030649		0.02	0.15	38.5	610	5.8	24.3	0.003	1.80	14.10	7.2	2.3	0.5	40.2	<0.01	0.20
I030650		0.13	0.50	1.9	320	6.4	48.5	<0.001	0.02	0.39	3.9	0.2	0.9	20.4	0.01	<0.01
I030651		0.02	0.13	36.7	720	7.2	13.3	0.005	1.36	28.3	5.6	1.7	0.4	45.6	<0.01	0.20
I030652		0.02	0.07	33.9	120	2.7	19.8	0.001	0.64	12.05	3.9	1.6	0.3	22.1	<0.01	0.09
I030653		0.03	0.08	35.3	120	2.0	27.7	0.002	0.65	2.02	4.5	2.0	0.4	28.9	<0.01	0.09
I030654		0.05	0.16	45.4	380	2.1	26.9	0.006	0.76	1.86	4.9	2.8	0.5	27.6	<0.01	0.13
I030655		0.03	0.12	55.6	440	2.2	19.4	0.010	0.95	3.27	3.8	3.5	0.4	19.9	<0.01	0.15
I030656		0.26	0.11	44.5	440	3.6	39.9	0.002	0.80	5.86	9.6	1.4	0.7	66.7	<0.01	0.13
I030657		0.18	0.11	32.5	310	5.6	41.1	0.002	0.64	0.76	7.1	1.5	0.8	51.7	<0.01	0.10
I030658		0.20	0.08	26.3	290	4.5	56.1	0.001	0.52	0.12	10.7	0.8	0.9	83.6	<0.01	0.05
I030659		0.21	0.06	31.2	260	4.2	46.6	<0.001	0.19	1.12	5.9	0.4	0.9	61.0	<0.01	0.05
I030660		0.20	0.07	30.0	240	3.8	44.9	0.001	0.19	1.24	5.3	0.4	0.8	61.2	<0.01	0.04
I030661		0.32	0.07	31.6	330	4.8	55.4	<0.001	0.28	0.63	5.7	0.6	1.0	80.1	<0.01	0.56
I030662		0.03	0.09	35.0	260	3.0	28.9	0.003	0.62	3.71	4.6	1.5	0.6	29.5	<0.01	0.18
I030663		0.02	0.12	35.3	230	3.2	29.0	0.002	0.46	11.15	4.7	1.2	0.6	15.0	<0.01	0.16
I030664		0.02	0.14	60.0	1210	6.8	32.5	0.006	0.32	24.2	8.1	1.4	1.0	56.8	<0.01	1.55
I030665		0.02	0.24	39.2	850	6.6	39.5	0.007	0.07	24.2	8.6	0.8	0.6	30.2	<0.01	0.67
I030666		0.07	0.22	50.6	800	5.0	39.2	0.006	0.63	5.40	7.0	1.7	0.7	123.5	<0.01	0.13
I030667		0.24	0.10	18.3	300	3.9	69.9	<0.001	0.84	0.26	12.7	0.4	0.2	46.7	<0.01	0.04
I030668		0.23	0.11	6.2	860	8.6	50.7	0.001	3.36	17.65	25.2	1.5	0.4	68.2	<0.01	0.42
I030669		0.23	<0.05	55.7	360	3.5	51.2	0.001	0.95	0.48	5.9	0.5	<0.2	33.6	<0.01	0.08
I030669D		0.24	<0.05	55.0	350	3.3	52.2	0.001	0.99	0.53	6.1	0.5	<0.2	34.3	<0.01	0.09
I030670		0.24	<0.05	56.5	280	3.1	54.6	0.001	0.93	0.29	5.8	0.4	<0.2	31.7	<0.01	0.07
I030671		0.05	0.08	35.3	690	4.9	39.7	0.002	1.14	0.23	14.1	2.0	2.6	24.9	<0.01	0.24
I030672		0.02	0.15	25.0	850	4.9	25.9	0.002	0.57	5.46	3.2	1.2	0.5	22.5	<0.01	0.76
I030673		0.01	0.06	10.7	150	1.8	3.1	<0.001	0.10	0.60	1.2	0.2	<0.2	11.3	<0.01	0.14
I030674		0.02	0.09	9.4	150	1.5	4.6	<0.001	0.10	0.23	1.3	0.2	<0.2	8.6	<0.01	0.03
I030675		0.02	0.17	13.8	500	2.5	12.5	0.001	0.41	0.21	2.3	0.6	0.2	12.1	<0.01	0.25
I030676		0.05	0.28	37.9	790	3.5	31.8	0.004	1.12	0.22	5.7	1.8	0.5	26.0	<0.01	0.16
I030677		0.02	0.21	36.3	580	2.9	41.5	0.004	0.63	0.10	7.8	1.1	0.6	19.9	<0.01	0.09
I030678		0.12	0.12	57.7	590	6.6	67.6	0.001	0.53	0.07	19.7	0.9	0.9	59.6	<0.01	0.13
I030679		0.24	0.09	56.2	930	13.8	51.7	0.002	0.15	0.06	26.6	0.6	0.8	72.8	<0.01	0.05
I030680		0.17	0.22	23.2	960	11.9	7.3	0.014	0.42	5.03	3.3	4.1	2.9	113.0	<0.01	4.81
I030681		0.11	0.07	59.3	890	9.9	64.9	0.006	0.50	0.43	22.2	1.1	0.7	62.7	<0.01	0.08

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I030643		5.1	0.041	0.21	1.47	63	0.12	12.05	66	3.8
I030644		3.5	0.099	0.33	1.11	141	0.13	19.85	102	2.2
I030645		3.5	<0.005	0.20	1.07	26	0.42	8.82	74	3.2
I030646		2.5	<0.005	0.14	0.69	10	0.16	5.48	254	1.2
I030647		3.2	<0.005	0.16	0.99	13	0.18	11.25	532	1.1
I030648		3.3	<0.005	0.13	1.32	9	0.15	9.44	148	1.5
I030649		5.5	0.028	0.27	1.36	59	0.12	12.90	82	2.0
I030650		10.9	0.150	0.39	2.82	45	0.11	7.00	39	3.3
I030651		6.6	0.011	0.17	1.69	48	0.12	12.50	86	2.4
I030652		3.8	0.017	0.10	1.19	42	0.06	7.88	38	1.5
I030653		3.6	0.027	0.11	0.93	54	0.07	9.21	37	1.6
I030654		4.1	0.044	0.13	1.71	93	0.09	12.00	39	1.8
I030655		3.6	0.025	0.08	2.29	84	0.13	14.85	57	4.3
I030656		1.6	0.153	0.19	0.57	118	0.15	7.19	80	1.0
I030657		5.1	0.102	0.21	1.61	76	0.14	10.50	57	1.5
I030658		5.2	0.139	0.33	1.38	94	0.11	9.87	75	1.4
I030659		3.9	0.160	0.25	0.81	75	0.13	5.23	60	1.1
I030660		4.2	0.147	0.25	0.72	68	0.12	4.80	54	1.0
I030661		4.0	0.173	0.27	1.43	80	0.31	6.67	71	2.2
I030662		4.1	0.032	0.13	1.57	52	0.15	8.88	42	3.0
I030663		4.3	0.041	0.15	1.23	41	0.22	6.09	47	1.8
I030664		5.5	0.046	0.15	1.59	114	0.34	23.1	265	5.6
I030665		8.7	0.088	0.19	1.05	113	0.57	13.15	86	4.0
I030666		5.3	0.103	0.19	2.22	91	0.29	10.65	74	2.6
I030667		0.4	0.164	0.36	0.07	253	0.11	2.95	104	<0.5
I030668		0.2	0.114	0.31	0.12	233	38.2	7.62	139	<0.5
I030669		0.3	0.201	0.22	0.08	180	0.13	1.49	114	<0.5
I030669D		0.3	0.200	0.23	0.08	184	0.15	1.51	115	<0.5
I030670		0.4	0.188	0.24	0.05	167	0.08	1.29	115	<0.5
I030671		4.8	0.098	0.19	0.98	140	0.23	12.05	75	3.3
I030672		6.9	0.029	0.33	1.39	38	0.18	9.39	76	6.4
I030673		0.6	<0.005	0.02	0.32	6	0.08	2.10	15	0.6
I030674		0.6	0.007	0.02	0.26	7	0.08	1.82	15	0.7
I030675		1.4	0.031	0.05	0.65	23	0.58	4.38	32	2.3
I030676		4.0	0.073	0.15	1.47	53	0.29	8.66	65	3.7
I030677		3.6	0.087	0.17	1.47	75	0.14	8.01	59	2.4
I030678		4.2	0.162	0.34	1.04	142	0.17	13.40	101	1.3
I030679		3.8	0.164	0.24	1.27	207	0.08	14.50	108	0.9
I030680		2.1	0.120	0.05	2.03	64	17.65	8.34	74	6.7
I030681		3.6	0.131	0.30	1.81	172	0.24	13.75	117	2.0

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
Sample Description LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I030682	4.69	<0.005		0.13	3.57	0.2	<0.2	<10	430	0.78	0.19	1.32	0.05	31.0	19.6
I030683	7.29	<0.005		0.12	3.23	0.2	<0.2	<10	410	0.87	0.27	1.34	0.03	33.5	14.4
I030684	6.73	<0.005		0.14	2.04	0.3	<0.2	<10	240	0.59	0.21	0.60	0.03	45.8	12.6
I030685	5.96	<0.005		0.08	2.66	0.5	<0.2	<10	610	0.79	0.20	1.00	0.02	29.7	12.6
I030686	3.23	<0.005		0.13	3.49	0.1	<0.2	<10	240	0.90	0.19	1.72	0.03	45.2	18.8
I030687	1.27	<0.005		0.12	3.04	<0.1	<0.2	<10	430	0.65	0.13	2.16	0.03	44.1	19.2
I030688	6.37	<0.005		0.14	3.66	0.1	<0.2	<10	390	0.89	0.11	1.20	0.04	26.3	17.7
I030689	6.09	<0.005		0.17	3.88	0.1	<0.2	<10	200	1.13	0.10	1.41	0.04	20.4	16.9
I030690	1.04	<0.005		0.02	1.24	0.4	<0.2	<10	210	0.14	0.04	0.29	0.03	14.55	5.5
I030691	5.81	<0.005		0.22	3.24	0.1	<0.2	<10	340	0.82	0.15	1.92	0.06	11.45	14.9
I030692	6.13	<0.005		0.17	3.78	0.3	<0.2	<10	410	0.75	0.14	2.52	0.06	14.10	13.5
I030693	5.43	<0.005		0.18	2.22	0.1	<0.2	<10	390	0.55	0.18	1.00	0.04	34.6	10.3
I030694	5.36	<0.005		0.17	1.68	1.4	<0.2	<10	400	0.52	0.14	1.49	0.08	22.6	13.5
I030695	5.62	<0.005		0.23	2.72	0.4	<0.2	<10	390	0.78	0.14	2.02	0.05	16.15	15.6
I030696	5.65	<0.005		0.07	1.22	1.3	<0.2	<10	400	0.39	0.05	1.19	0.05	7.46	8.4
I030697	4.90	0.011		0.38	4.51	0.4	<0.2	<10	110	1.55	0.98	2.56	0.09	24.0	18.2
I030698	5.49	<0.005		0.15	3.85	0.1	<0.2	<10	480	1.00	0.12	1.30	0.05	33.6	20.4
I030699	3.00	0.007		0.14	3.16	6.6	<0.2	<10	470	0.75	0.10	1.48	0.05	31.3	16.9
I030700	3.10	<0.005		0.14	3.42	2.8	<0.2	<10	330	0.85	0.10	1.40	0.05	30.6	17.5
I030701	5.12	<0.005		0.25	5.15	0.4	<0.2	<10	160	1.51	0.17	2.36	0.10	17.30	20.8
I030702	4.82	<0.005		0.13	2.23	0.9	<0.2	<10	610	0.75	0.09	1.47	0.24	14.35	10.7
I030703	4.27	0.009		0.43	2.90	<2	<0.2	<10	690	0.56	0.12	11.90	0.40	10.20	6.0
I030704	4.74	0.609		2.74	0.97	2240	0.5	<10	200	0.24	0.15	3.53	1.21	22.7	11.9
I030705	0.95	0.108		0.83	0.40	282	<0.2	<10	70	0.30	0.17	2.53	0.42	14.90	9.3
I030706	5.76	0.009		0.18	2.20	22.4	<0.2	<10	580	0.56	0.12	1.74	0.08	77.1	16.8
I030707	5.45	<0.005		0.16	3.56	1.6	<0.2	<10	770	0.99	0.16	1.53	0.04	79.9	12.7
I030708	5.28	0.005		0.18	3.67	3.4	<0.2	<10	360	0.81	0.22	2.21	0.11	43.9	12.5
I030709	5.51	0.005		0.22	5.29	1.8	<0.2	<10	360	0.80	0.25	2.21	0.11	40.9	18.5
I030709D	<0.02	<0.005		0.16	5.01	1.5	<0.2	<10	550	0.81	0.19	2.13	0.12	38.8	17.9
I030710	1.12	<0.005		0.03	1.36	0.8	<0.2	<10	260	0.12	0.04	0.37	0.04	30.2	5.9
I030711	6.00	<0.005		0.11	2.97	5.9	<0.2	<10	680	0.53	0.20	1.28	0.06	31.0	13.7
I030712	6.33	<0.005		0.12	2.43	1.3	<0.2	<10	490	0.47	0.12	1.61	0.03	55.0	16.8
I030713	5.83	0.023		0.23	3.35	50.1	<0.2	<10	550	0.53	0.10	0.81	0.04	55.9	20.2
I030714	6.97	<0.005		0.15	5.44	0.6	<0.2	<10	820	0.94	0.09	2.46	0.06	41.6	20.4
I030715	6.15	<0.005		0.13	3.07	1.2	<0.2	<10	600	0.57	0.17	6.11	0.09	53.7	13.1
I030716	6.24	0.007		0.22	4.83	11.6	<0.2	<10	620	0.63	0.19	3.16	0.09	45.0	26.2
I030717	6.23	0.007		0.23	4.07	0.9	<0.2	<10	570	0.41	0.35	2.06	0.07	65.2	24.2
I030718	6.19	0.006		0.13	3.11	6.6	<0.2	<10	520	0.56	0.15	1.27	0.03	72.1	11.5
I030719	6.50	0.019		0.20	2.28	10.0	<0.2	<10	290	0.47	0.24	0.89	0.14	83.3	14.5
I030720	0.08	4.16	4.18	1.60	1.66	8850	3.7	20	80	0.15	75.0	4.96	0.42	22.1	124.0

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
Sample Description LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I030682	73	1.62	71.9	4.28	10.05	0.11	0.11	0.01	0.025	1.22	16.5	13.9	1.58	622	3.86
I030683	36	1.35	56.1	3.29	9.13	0.09	0.03	<0.01	0.022	0.92	16.3	10.5	1.04	589	0.91
I030684	23	0.86	26.4	2.80	5.86	0.09	0.04	<0.01	0.014	0.61	22.8	8.0	0.90	524	0.45
I030685	41	1.28	29.9	2.89	7.72	0.08	0.07	<0.01	0.017	0.88	14.9	9.3	1.08	489	0.83
I030686	70	1.70	68.8	4.54	11.05	0.12	0.25	<0.01	0.028	1.25	24.4	12.5	1.62	594	2.69
I030687	51	1.37	71.9	4.57	9.82	0.13	0.11	<0.01	0.024	0.92	24.2	11.1	1.56	564	2.38
I030688	60	1.70	71.7	4.18	11.50	0.11	0.13	0.01	0.032	1.27	14.3	11.4	1.72	525	2.75
I030689	58	1.68	74.4	3.82	11.25	0.09	0.13	0.01	0.023	1.30	10.1	10.5	1.79	692	3.04
I030690	6	1.77	2.3	1.94	4.69	0.08	0.12	<0.01	0.009	0.62	6.1	22.1	0.49	459	0.15
I030691	34	1.23	65.5	2.98	9.06	0.07	0.05	<0.01	0.023	1.02	5.5	6.0	1.39	1140	2.49
I030692	48	1.12	56.3	3.33	8.99	0.07	0.04	<0.01	0.023	1.01	7.0	6.6	1.58	843	1.47
I030693	39	0.91	35.8	2.89	6.57	0.08	0.09	0.01	0.020	0.59	17.5	8.6	1.11	333	1.80
I030694	26	1.20	56.2	2.53	5.81	0.06	0.11	0.01	0.024	0.66	11.0	9.3	0.89	1100	2.17
I030695	31	1.63	74.5	3.08	8.74	0.08	0.12	0.01	0.024	0.93	8.0	10.4	1.13	1180	2.05
I030696	21	0.73	27.9	1.20	4.37	<0.05	0.03	0.01	0.015	0.43	3.1	4.4	0.56	890	1.25
I030697	57	2.30	105.0	4.25	13.70	0.12	0.33	0.08	0.032	1.42	13.1	14.8	1.77	979	8.66
I030698	36	2.52	68.2	4.55	11.95	0.13	0.11	0.01	0.039	1.48	18.4	16.6	1.91	700	2.57
I030699	28	1.86	51.9	3.84	9.40	0.10	0.05	<0.01	0.034	1.04	16.0	12.8	1.51	618	1.89
I030700	27	2.11	63.9	4.00	9.81	0.10	0.05	<0.01	0.037	1.18	15.6	13.1	1.61	632	1.53
I030701	61	2.50	104.5	4.43	14.20	0.12	0.13	<0.01	0.030	1.71	9.6	13.1	1.93	820	9.46
I030702	30	1.49	43.2	2.31	7.01	0.07	0.08	<0.01	0.018	0.80	7.4	7.2	1.05	842	4.41
I030703	39	1.54	26.9	2.43	7.63	0.08	0.11	0.01	0.027	0.86	5.8	6.0	2.87	2740	5.01
I030704	18	0.87	76.0	3.20	3.24	0.07	0.13	0.16	0.039	0.40	11.4	4.2	1.73	981	4.27
I030705	10	0.84	40.7	2.47	1.32	0.06	0.05	0.12	0.022	0.10	6.9	2.6	0.78	1090	1.36
I030706	35	2.09	50.3	3.97	7.50	0.14	0.07	0.03	0.036	0.84	37.1	12.5	1.23	1090	2.24
I030707	46	3.28	36.3	3.26	10.40	0.12	0.07	<0.01	0.026	1.18	39.0	19.0	1.43	609	0.61
I030708	33	2.91	59.1	3.44	10.65	0.11	0.04	<0.01	0.031	1.21	21.7	13.4	1.57	785	2.40
I030709	44	3.86	68.3	4.08	14.20	0.15	0.05	<0.01	0.039	1.53	19.9	18.6	2.08	968	2.20
I030709D	43	3.65	67.3	3.94	13.45	0.15	0.05	<0.01	0.036	1.48	19.1	18.2	2.00	939	2.10
I030710	6	2.19	4.4	2.18	5.35	0.11	0.15	0.01	0.014	0.68	14.8	27.8	0.58	520	0.11
I030711	33	2.68	56.7	3.21	8.81	0.11	0.06	0.01	0.029	1.13	15.5	14.9	1.46	954	2.01
I030712	34	1.91	29.7	3.33	8.18	0.10	0.02	<0.01	0.036	0.96	23.4	10.8	1.13	1380	0.20
I030713	42	2.03	33.0	4.15	11.35	0.13	0.02	<0.01	0.039	1.16	25.3	13.2	1.46	1100	0.43
I030714	47	2.78	47.3	4.18	15.20	0.15	0.02	<0.01	0.045	1.75	20.1	15.2	1.82	925	2.13
I030715	30	1.80	32.0	2.78	9.01	0.11	0.03	<0.01	0.027	1.01	25.6	9.6	1.17	740	1.11
I030716	41	1.78	59.7	4.56	13.45	0.15	0.02	<0.01	0.039	1.18	21.8	11.4	2.01	665	0.73
I030717	44	1.60	41.7	4.16	12.65	0.15	0.02	<0.01	0.037	1.29	31.1	10.9	1.90	626	0.57
I030718	28	1.20	32.1	2.81	8.81	0.11	0.02	<0.01	0.024	1.06	34.0	9.1	0.85	455	0.38
I030719	29	1.10	58.9	3.22	6.78	0.12	0.05	<0.01	0.021	0.93	41.2	9.2	0.86	513	5.09
I030720	32	1.27	273	4.54	5.56	0.19	0.20	0.09	0.468	0.18	12.2	8.5	0.52	788	24.3

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I030682	0.07	0.39	62.9	1340	4.7	48.5	0.009	0.81	0.05	8.2	1.3	0.8	34.0	0.01	0.11
I030683	0.11	0.34	27.1	540	5.5	46.6	0.001	0.59	<0.05	6.0	0.9	0.7	44.5	0.01	0.20
I030684	0.03	0.31	22.9	350	4.4	31.0	<0.001	0.25	<0.05	3.1	0.5	0.4	15.3	0.01	0.11
I030685	0.08	0.28	31.5	500	3.6	43.1	0.002	0.40	<0.05	4.9	0.6	0.7	28.1	0.01	0.17
I030686	0.05	0.43	63.0	1000	3.9	49.2	0.005	0.94	0.06	7.1	1.1	0.9	32.7	0.01	0.10
I030687	0.03	0.83	53.6	1090	3.7	43.6	0.001	1.01	0.06	5.7	1.0	0.8	28.3	0.01	0.08
I030688	0.09	0.47	52.0	1050	3.2	51.3	0.004	0.84	0.05	7.3	1.2	0.9	30.3	0.01	0.11
I030689	0.14	0.18	44.7	730	2.8	50.3	0.004	1.02	<0.05	8.5	1.3	0.8	42.6	<0.01	0.20
I030690	0.13	0.54	2.2	260	6.5	48.0	<0.001	0.05	0.11	3.2	0.2	0.8	21.1	0.01	0.01
I030691	0.16	0.18	31.7	560	2.7	48.2	0.002	0.91	0.05	6.5	0.8	0.6	59.5	<0.01	0.19
I030692	0.14	0.18	30.6	610	3.0	43.7	0.002	0.86	0.06	7.0	0.9	0.6	64.8	0.01	0.10
I030693	0.04	0.26	32.6	620	3.2	30.4	0.004	0.57	0.07	4.2	0.8	0.5	21.7	0.01	0.14
I030694	0.04	0.19	32.1	650	2.9	30.8	0.004	0.77	0.27	4.9	0.9	0.5	31.1	<0.01	0.13
I030695	0.07	0.30	29.7	910	4.3	42.0	0.004	0.91	0.17	6.9	1.1	0.7	40.5	<0.01	0.22
I030696	0.04	0.14	23.2	280	2.1	19.6	0.004	0.20	0.06	3.6	0.4	0.4	22.6	<0.01	0.06
I030697	0.13	0.26	52.9	2550	7.3	53.3	0.022	1.47	0.07	10.0	2.4	1.1	78.2	0.01	1.23
I030698	0.04	0.75	27.0	1880	4.2	53.9	0.006	0.83	0.06	8.4	1.4	1.0	38.3	0.01	0.13
I030699	0.06	0.59	22.0	1300	5.0	44.7	0.004	0.75	0.28	7.2	1.3	0.7	41.0	0.01	0.13
I030700	0.06	0.57	22.4	1370	4.9	43.2	0.002	0.83	0.17	7.3	1.4	0.8	41.9	0.01	0.12
I030701	0.18	0.40	52.9	2760	6.4	62.6	0.024	1.33	0.23	9.5	2.5	1.1	97.0	0.01	0.36
I030702	0.07	0.22	26.3	1110	3.3	36.3	0.008	0.54	0.22	5.4	1.0	0.6	43.7	<0.01	0.08
I030703	0.10	0.12	20.8	1110	5.7	37.1	0.008	0.41	2.17	5.9	0.9	0.5	325	<0.01	0.30
I030704	0.01	0.27	36.5	1470	31.3	17.6	0.008	1.97	64.0	4.4	1.4	0.2	76.6	<0.01	0.56
I030705	0.01	0.07	20.8	240	14.1	5.3	0.002	0.89	44.6	4.3	0.8	0.3	73.1	<0.01	0.43
I030706	0.02	0.41	35.5	1200	6.4	39.7	0.006	0.77	25.8	6.6	1.0	0.7	44.0	<0.01	0.20
I030707	0.06	0.34	36.7	530	7.4	48.0	0.001	0.56	8.29	6.5	0.9	0.8	64.2	0.01	0.23
I030708	0.10	0.28	25.3	840	5.9	46.4	0.006	0.82	5.96	7.1	1.2	0.9	63.1	0.01	0.31
I030709	0.20	0.28	34.8	1000	7.3	56.1	0.005	0.81	3.06	11.5	1.1	1.1	94.7	0.01	0.37
I030709D	0.19	0.31	33.9	1010	7.2	54.1	0.005	0.80	3.02	11.0	1.1	1.1	91.5	0.01	0.25
I030710	0.12	0.53	2.4	340	6.5	47.5	<0.001	0.02	0.22	4.2	0.2	1.0	23.0	<0.01	<0.01
I030711	0.04	0.43	29.2	940	5.9	42.6	0.003	0.51	2.96	6.3	0.7	0.9	37.3	0.01	0.21
I030712	0.02	0.33	32.4	350	5.6	35.8	0.001	0.34	3.18	6.1	0.4	1.0	28.0	<0.01	0.13
I030713	0.12	0.40	38.4	530	6.2	41.4	0.001	0.48	0.17	8.0	0.5	1.2	31.5	0.01	0.15
I030714	0.25	0.51	36.8	910	7.6	63.5	0.003	0.59	0.07	11.3	0.7	1.4	89.0	0.01	0.18
I030715	0.09	0.26	23.9	510	6.5	37.6	0.002	0.42	0.78	7.0	0.5	0.8	119.0	<0.01	0.22
I030716	0.27	0.38	50.2	720	7.3	42.8	0.001	0.59	0.13	11.6	0.7	0.7	105.0	0.01	0.28
I030717	0.24	0.42	47.4	780	5.2	45.5	<0.001	0.43	0.10	9.9	0.5	1.0	64.0	0.01	0.42
I030718	0.21	0.36	22.3	410	6.0	39.0	<0.001	0.40	0.08	5.9	0.6	0.8	51.2	0.01	0.21
I030719	0.06	0.45	45.9	1330	6.0	33.0	0.014	0.46	0.17	3.9	0.7	0.4	29.1	0.01	0.26
I030720	0.11	0.66	60.2	830	15.3	8.1	0.036	1.22	30.0	4.1	5.6	30.1	82.6	0.01	15.55

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I030682		6.9	0.107	0.24	2.83	111	0.22	11.80	101	3.9
I030683		9.7	0.087	0.18	1.40	46	0.26	8.99	60	0.8
I030684		13.3	0.061	0.13	1.65	28	0.34	7.75	61	1.3
I030685		7.6	0.091	0.17	1.44	45	0.42	7.04	56	2.5
I030686		8.1	0.144	0.22	1.27	82	0.13	10.85	93	10.4
I030687		7.3	0.139	0.16	0.57	59	0.14	10.10	94	4.5
I030688		6.4	0.151	0.22	1.31	88	0.19	8.70	92	5.3
I030689		5.4	0.123	0.22	1.57	90	0.12	7.26	80	5.3
I030690		13.5	0.141	0.31	2.08	41	0.12	4.78	36	2.2
I030691		2.9	0.100	0.18	0.83	61	0.18	4.71	65	1.8
I030692		5.2	0.102	0.16	1.11	75	0.82	5.62	72	1.2
I030693		8.7	0.062	0.13	2.12	55	0.20	8.84	68	3.7
I030694		4.3	0.054	0.14	1.57	51	0.17	6.75	62	4.5
I030695		3.8	0.107	0.17	1.31	83	0.35	8.95	56	5.2
I030696		1.8	0.039	0.08	0.97	44	0.20	3.38	30	1.3
I030697		7.3	0.148	0.26	5.97	235	1.71	20.5	94	14.9
I030698		6.9	0.171	0.26	1.92	113	0.67	15.60	101	5.1
I030699		9.2	0.131	0.19	1.79	84	0.26	12.10	78	1.8
I030700		9.0	0.138	0.20	1.68	84	1.08	12.60	82	1.6
I030701		8.7	0.167	0.30	5.45	214	0.58	17.95	98	5.3
I030702		3.5	0.080	0.14	2.46	106	0.16	9.24	61	3.5
I030703		3.4	0.075	0.16	2.38	93	0.33	14.85	81	4.0
I030704		4.8	0.023	0.16	2.39	47	0.26	11.75	140	5.2
I030705		2.9	<0.005	0.12	1.42	26	0.26	10.15	54	1.8
I030706		11.4	0.060	0.24	2.43	69	0.23	14.55	87	2.5
I030707		16.0	0.088	0.26	2.36	47	0.15	13.50	68	2.5
I030708		9.1	0.090	0.27	2.60	71	1.12	11.55	74	1.5
I030709		7.5	0.129	0.32	1.75	115	0.21	9.77	109	1.9
I030709D		7.7	0.125	0.32	1.80	112	0.44	9.88	105	1.9
I030710		14.4	0.166	0.40	2.46	49	0.13	6.72	42	2.9
I030711		7.4	0.094	0.25	2.00	68	0.53	10.25	81	2.4
I030712		10.1	0.083	0.23	1.00	42	0.16	8.07	75	0.7
I030713		15.3	0.111	0.27	1.65	60	1.07	8.23	97	<0.5
I030714		10.5	0.158	0.37	2.12	101	2.13	10.05	112	0.5
I030715		9.1	0.071	0.22	1.87	51	0.37	13.55	73	1.0
I030716		9.4	0.171	0.24	1.36	104	0.76	10.45	82	0.5
I030717		11.5	0.183	0.26	1.39	100	1.20	9.98	90	<0.5
I030718		14.8	0.101	0.22	1.86	38	0.62	11.25	67	<0.5
I030719		15.8	0.071	0.22	5.69	55	0.81	18.20	84	2.2
I030720		2.4	0.106	1.24	1.57	56	22.2	6.59	67	7.6

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
Sample Description LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I030721	2.81	1.170	1.40	0.69	1.67	43.7	0.9	<10	300	0.35	0.65	0.72	0.19	58.3	10.8
I030722	3.07	0.665		0.78	1.25	1450	0.5	<10	200	0.39	0.16	1.50	0.42	65.0	14.3
I030723	6.02	0.042		0.24	2.18	9.3	<0.2	<10	380	0.52	0.21	1.44	0.11	72.6	13.7
I030724	5.90	0.007		0.33	2.09	35.1	<0.2	<10	290	0.50	0.39	0.74	0.20	101.5	14.9
I030725	5.29	0.061		0.34	1.67	211	<0.2	<10	190	0.41	0.19	0.72	0.58	82.0	13.0
I030726	5.61	0.012		0.68	1.66	4.2	<0.2	<10	170	0.55	0.89	1.01	0.97	64.2	17.2
I030727	2.20	0.057		0.99	1.90	10.4	<0.2	<10	70	0.67	1.77	2.37	4.62	48.3	29.0
I030728	2.76	0.055		0.59	0.89	224	<0.2	<10	200	0.34	0.54	9.26	3.02	42.3	10.4
I030729	5.02	0.255		0.34	2.34	872	0.2	<10	240	0.73	0.17	3.57	0.49	30.9	10.6
I030730	1.05	<0.005		0.04	1.37	6.7	<0.2	<10	230	0.16	0.04	0.44	0.06	33.1	5.4
I030731	5.23	0.015		0.08	3.80	3.7	<0.2	<10	1440	0.98	0.17	2.63	0.11	25.6	7.4
I030732	5.18	0.165		0.37	2.49	130.0	0.2	<10	160	0.71	0.53	3.08	0.48	21.4	11.8
I030733	5.65	<0.005		0.25	3.33	1.5	<0.2	<10	150	1.02	0.76	3.48	0.17	10.40	11.5
I030734	5.37	0.019		0.16	2.10	128.0	<0.2	<10	740	0.52	0.43	1.83	0.10	23.4	9.6
I030735	5.44	<0.005		0.12	2.63	0.9	<0.2	<10	460	0.67	0.09	0.99	0.04	28.2	9.8
I030736	5.71	0.040		0.16	2.11	230	<0.2	<10	330	0.40	0.15	2.05	0.13	23.2	14.8
I030737	5.74	<0.005		0.16	3.07	4.2	<0.2	<10	270	0.45	0.18	1.64	0.13	31.4	16.2
I030738	6.85	<0.005		0.08	3.01	1.4	<0.2	<10	230	0.49	0.11	0.84	0.05	10.05	19.4
I030739	2.95	0.006		0.09	2.48	1.3	<0.2	<10	160	0.36	0.11	0.87	0.04	14.20	18.1
I030740	3.86	0.006		0.10	2.44	1.5	<0.2	<10	150	0.33	0.12	0.60	0.03	13.50	18.7
I030741	5.18	0.006		0.12	2.29	0.9	<0.2	<10	260	0.30	0.13	1.35	0.08	11.15	16.6
I030742	1.64	0.005		0.19	2.14	0.8	<0.2	<10	130	0.13	0.16	1.29	0.10	3.37	20.1
I030743	2.20	0.009		0.28	0.79	0.8	<0.2	<10	160	0.64	0.51	1.13	0.56	51.2	2.8
I030744	3.02	<0.005		0.60	0.81	0.5	<0.2	<10	120	0.43	1.18	1.64	2.09	43.0	3.5
I030745	2.58	0.009		0.72	3.41	10.9	<0.2	<10	340	0.50	1.63	3.62	0.33	21.5	24.3
I030746	2.31	<0.005		0.18	1.60	0.9	<0.2	<10	510	0.43	0.13	1.06	0.13	30.8	9.8
I030747	2.66	0.027		0.38	0.56	34.5	<0.2	<10	150	0.35	0.09	1.02	0.38	30.9	9.5
I030748	3.09	0.017		0.37	0.75	38.9	<0.2	<10	140	0.52	0.20	1.73	0.21	28.5	14.0
I030749	2.64	0.286		0.14	0.94	1320	0.2	<10	110	0.57	0.20	3.05	0.15	17.25	16.8
I030750	<0.02	0.240		0.15	1.01	1290	0.2	<10	120	0.61	0.20	2.98	0.16	18.10	17.2
I030751	2.78	<0.005		0.06	2.58	7.7	<0.2	<10	280	0.13	0.06	1.63	0.04	4.22	19.5
I030752	2.77	<0.005		0.09	2.51	6.1	<0.2	<10	70	0.06	0.02	2.33	0.06	1.96	12.7
I030753	3.72	0.019		0.04	2.98	56.2	<0.2	<10	100	0.09	0.04	3.43	0.05	2.52	18.0
I030754	2.49	<0.005		0.19	2.37	0.5	<0.2	<10	440	0.75	0.14	1.40	0.10	49.8	11.7
I030755	0.59	0.029		0.56	1.22	<2	<0.2	<10	70	0.79	3.28	10.75	5.19	50.8	9.3
I030756	2.57	<0.005		0.15	2.72	0.2	<0.2	<10	430	0.92	0.30	1.33	0.10	35.4	11.2
I030757	4.37	0.005		0.21	5.00	0.4	<0.2	<10	560	1.11	0.23	2.31	0.05	24.7	18.5
I030758	4.12	0.013		0.35	3.73	0.3	<0.2	<10	420	0.98	0.78	1.95	0.07	34.4	11.4
I030759	4.20	0.019		0.34	3.73	0.3	<0.2	<10	300	0.93	1.71	1.70	0.22	45.7	12.5
I030760	0.08	1.225	1.83	0.72	1.66	2020	1.6	20	90	0.17	38.7	4.01	0.40	16.85	58.8

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
Sample Description LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I030721	20	0.82	32.5	2.62	5.26	0.09	0.04	0.01	0.020	0.72	27.9	7.5	0.64	515	1.11
I030722	14	0.59	50.5	3.00	3.84	0.10	0.04	0.03	0.019	0.45	30.6	5.3	0.53	679	0.97
I030723	23	0.99	56.2	3.12	6.74	0.11	0.04	0.02	0.026	0.76	35.1	9.5	0.81	908	1.67
I030724	23	0.89	55.2	3.25	6.66	0.13	0.05	<0.01	0.019	0.75	47.8	8.0	0.76	643	1.71
I030725	17	0.83	27.3	3.18	4.87	0.10	0.05	0.02	0.021	0.62	38.9	7.3	0.72	558	0.29
I030726	16	1.16	75.7	3.53	5.38	0.11	0.05	0.12	0.020	0.63	30.2	7.3	0.75	555	1.61
I030727	35	1.44	255	4.68	6.35	0.14	0.14	0.45	0.044	0.52	23.2	9.3	0.74	614	11.80
I030728	30	1.17	46.0	2.40	3.63	0.09	0.16	0.28	0.033	0.25	22.7	5.2	0.42	1960	5.00
I030729	40	1.50	35.6	2.76	6.51	0.08	0.07	0.08	0.042	0.77	15.4	16.5	1.05	632	1.71
I030730	7	2.08	3.8	2.17	5.38	0.09	0.18	0.01	0.013	0.62	16.1	26.1	0.51	511	0.20
I030731	49	1.49	24.0	2.34	10.10	0.09	0.03	<0.01	0.026	0.99	12.8	13.2	1.14	568	1.62
I030732	55	1.33	59.7	2.86	7.43	0.09	0.03	0.01	0.039	0.68	10.3	12.2	1.30	767	2.30
I030733	73	1.60	18.0	2.92	9.89	0.11	0.02	0.01	0.056	0.78	5.1	8.1	1.71	966	4.27
I030734	37	0.82	36.2	2.47	6.12	0.07	0.03	0.01	0.024	0.49	11.1	8.9	1.02	379	1.56
I030735	48	1.10	57.8	2.84	7.73	0.09	0.03	0.01	0.019	0.78	13.7	9.4	1.11	256	1.25
I030736	74	1.47	42.5	2.91	6.37	0.08	0.04	0.01	0.026	0.73	11.3	9.4	1.46	533	0.35
I030737	46	1.39	49.9	3.43	8.48	0.10	0.02	<0.01	0.023	0.94	14.8	12.2	1.78	614	1.72
I030738	125	1.15	26.4	2.83	7.69	0.08	<0.02	<0.01	0.010	0.78	4.4	13.1	2.31	604	1.12
I030739	65	0.89	29.6	3.33	7.41	0.07	0.02	<0.01	0.010	0.78	6.9	11.3	1.81	514	0.76
I030740	59	0.89	31.9	3.38	7.11	0.08	<0.02	<0.01	0.009	0.76	6.5	11.3	1.76	437	0.49
I030741	56	1.07	37.9	2.56	6.21	0.08	0.03	<0.01	0.009	0.84	5.4	8.9	1.60	452	0.68
I030742	12	0.86	66.0	3.51	5.73	0.13	0.04	<0.01	0.008	0.54	1.6	8.0	1.55	469	0.14
I030743	9	0.67	8.1	1.04	3.81	0.08	0.15	<0.01	0.010	0.38	26.9	4.3	0.23	258	0.52
I030744	12	0.66	11.7	1.46	3.93	0.08	0.18	<0.01	0.024	0.31	22.3	5.1	0.40	372	0.25
I030745	42	14.15	20.8	5.34	12.30	0.18	0.10	<0.01	0.045	2.42	11.0	26.2	2.47	1200	0.31
I030746	47	1.65	30.2	2.57	6.27	0.11	0.04	<0.01	0.029	0.86	15.7	9.4	0.78	326	1.19
I030747	25	0.52	37.9	2.91	2.40	0.08	0.03	0.05	0.022	0.18	14.9	4.9	0.41	442	1.37
I030748	32	1.16	31.6	3.49	3.43	0.09	0.04	0.04	0.050	0.15	12.7	5.7	0.68	579	1.00
I030749	35	2.34	26.9	3.27	2.90	0.08	0.05	0.03	0.035	0.21	8.4	6.0	1.14	667	0.88
I030750	36	2.40	26.9	3.26	3.12	0.08	0.05	0.03	0.038	0.22	8.7	6.9	1.11	666	1.01
I030751	57	1.72	28.1	2.61	5.90	0.10	0.03	0.01	0.013	0.62	2.0	8.6	1.12	280	0.26
I030752	72	0.34	36.3	1.50	4.64	0.08	0.04	<0.01	0.011	0.08	0.8	6.4	0.77	225	0.20
I030753	86	0.52	21.1	1.98	5.87	0.09	0.04	<0.01	0.015	0.15	1.1	8.4	1.13	332	0.58
I030754	63	1.38	48.6	3.27	8.40	0.12	0.05	<0.01	0.032	0.98	25.0	7.2	0.89	379	1.21
I030755	24	0.35	43.6	3.34	5.07	0.12	0.07	0.03	0.044	0.18	29.5	2.2	0.26	1080	0.99
I030756	62	1.36	36.1	3.05	8.90	0.11	0.05	<0.01	0.029	1.08	17.5	8.1	0.99	342	0.96
I030757	90	2.15	61.6	4.23	14.70	0.15	0.04	<0.01	0.038	1.58	12.4	9.2	1.51	549	1.07
I030758	50	1.47	43.1	3.20	11.15	0.12	0.02	<0.01	0.036	1.05	17.5	7.0	1.04	421	1.08
I030759	53	1.36	58.2	3.31	12.00	0.13	0.03	<0.01	0.032	1.03	22.9	8.7	1.00	410	0.64
I030760	22	0.86	117.0	3.57	5.27	0.14	0.20	0.01	0.122	0.16	10.8	10.0	0.56	891	7.79

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I030721	0.05	0.28	20.0	400	6.4	31.9	0.002	0.63	0.25	3.3	0.5	0.6	22.0	0.01	0.40
I030722	0.02	0.20	25.8	560	8.6	19.3	0.001	1.40	5.00	2.6	0.7	0.3	31.1	<0.01	0.29
I030723	0.04	0.32	25.5	620	6.8	34.6	0.004	0.45	0.51	4.7	0.5	0.7	35.1	0.01	0.11
I030724	0.03	0.35	29.5	520	21.0	33.7	0.004	0.41	0.19	4.0	0.9	0.5	24.0	0.01	0.14
I030725	0.01	0.21	24.2	330	8.3	26.4	<0.001	1.01	0.68	2.5	0.5	0.3	20.0	0.01	0.13
I030726	0.01	0.16	27.6	740	5.5	28.7	0.002	1.94	1.08	4.0	1.4	0.5	23.8	<0.01	1.05
I030727	0.02	0.21	46.9	2210	6.1	25.7	0.010	2.88	9.50	7.0	3.6	1.2	35.2	0.01	2.48
I030728	0.01	0.12	42.6	470	4.0	13.0	0.005	1.58	11.50	5.3	1.4	0.5	73.2	<0.01	0.60
I030729	0.08	0.15	29.1	450	6.0	37.5	0.002	1.16	7.94	8.1	1.2	0.7	79.4	<0.01	0.15
I030730	0.16	0.56	2.4	290	6.9	45.5	<0.001	0.01	0.25	4.1	0.2	0.9	30.4	0.01	0.01
I030731	0.18	0.26	21.1	1060	4.7	48.8	0.003	0.16	0.14	8.3	0.6	0.8	89.8	0.01	0.16
I030732	0.08	0.13	44.3	910	5.1	35.7	0.005	1.04	1.29	7.8	2.0	1.0	67.8	<0.01	0.29
I030733	0.10	0.12	51.9	520	4.4	39.6	0.008	1.09	0.09	10.9	1.9	2.8	82.7	<0.01	0.13
I030734	0.08	0.14	31.1	330	3.2	26.1	0.002	0.63	1.55	7.3	1.1	0.9	52.0	<0.01	0.24
I030735	0.11	0.22	38.2	440	2.8	34.5	0.001	0.70	0.08	5.5	0.9	0.6	38.3	<0.01	0.13
I030736	0.10	0.16	46.2	450	5.0	36.7	<0.001	1.06	3.40	6.3	0.7	0.5	55.1	<0.01	0.07
I030737	0.13	0.15	34.9	600	5.9	35.7	0.003	1.26	0.14	6.4	0.8	0.4	35.9	<0.01	0.06
I030738	0.10	0.11	67.0	430	2.4	36.9	0.001	0.59	0.12	4.0	0.4	0.5	35.3	<0.01	0.03
I030739	0.09	0.15	42.2	500	3.0	33.0	0.001	0.69	0.10	3.8	0.3	0.4	21.5	<0.01	0.03
I030740	0.09	0.17	40.0	510	2.4	32.5	0.001	0.76	0.11	3.3	0.4	0.3	19.0	<0.01	0.03
I030741	0.12	0.15	37.0	460	2.4	34.9	0.001	0.56	0.11	3.0	0.3	0.3	36.7	<0.01	0.03
I030742	0.10	0.16	11.5	540	2.0	24.2	<0.001	0.79	0.14	3.5	0.5	0.2	39.6	<0.01	0.05
I030743	0.05	0.16	5.5	640	27.0	28.0	<0.001	0.13	0.15	1.4	0.5	0.8	18.4	<0.01	0.13
I030744	0.07	0.14	6.8	610	42.9	23.5	0.001	0.40	0.13	1.9	0.7	0.8	33.6	<0.01	0.28
I030745	0.15	0.14	18.2	570	13.5	196.0	0.001	1.42	0.10	20.1	1.4	2.1	91.9	<0.01	0.14
I030746	0.02	0.16	31.7	620	7.2	42.6	0.001	0.32	1.77	6.9	0.9	0.6	16.9	<0.01	0.03
I030747	0.03	0.11	31.8	680	5.7	9.1	0.002	0.91	6.58	4.1	1.2	0.3	19.0	<0.01	0.15
I030748	0.03	0.06	31.7	870	6.7	9.6	0.002	0.75	5.47	10.8	1.1	0.7	35.7	<0.01	0.21
I030749	0.03	0.05	29.3	490	5.2	13.6	0.001	0.64	5.36	11.2	0.8	0.4	85.9	<0.01	0.07
I030750	0.03	0.05	29.3	500	5.1	14.5	0.001	0.64	5.34	10.9	0.8	0.5	91.1	<0.01	0.06
I030751	0.23	0.07	29.0	480	2.0	31.5	0.001	0.19	0.28	6.7	0.3	0.2	51.6	<0.01	0.02
I030752	0.23	0.10	22.7	320	1.5	4.4	<0.001	0.09	0.20	7.1	0.3	0.2	54.3	<0.01	0.01
I030753	0.26	0.08	26.3	340	1.8	8.9	0.001	0.08	0.82	9.3	0.3	<0.2	86.4	<0.01	0.01
I030754	0.09	0.30	34.8	670	5.8	52.2	0.002	0.63	0.06	8.3	1.2	1.0	55.3	<0.01	0.09
I030755	0.03	0.10	23.2	460	15.8	12.5	0.001	1.42	0.16	5.5	1.4	0.9	84.6	<0.01	1.07
I030756	0.12	0.31	32.6	740	5.6	60.7	0.001	0.44	0.05	8.9	0.9	1.0	68.3	<0.01	0.15
I030757	0.29	0.31	40.3	800	7.2	85.6	0.001	0.83	0.05	14.9	1.6	1.3	122.0	0.01	0.12
I030758	0.23	0.24	25.3	840	6.4	59.5	0.001	0.58	0.05	8.8	1.1	1.0	99.5	0.01	0.41
I030759	0.29	0.30	34.0	560	9.0	58.0	0.001	0.78	0.05	7.4	1.4	1.3	172.5	0.01	0.69
I030760	0.15	0.30	24.3	900	11.4	7.7	0.014	0.37	4.45	3.2	3.9	2.8	107.5	<0.01	3.85

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I030721		12.1	0.054	0.18	1.85	24	0.30	10.20	56	0.9
I030722		14.1	0.018	0.14	2.08	18	0.17	11.25	79	1.4
I030723		11.5	0.059	0.19	2.25	36	0.28	14.30	72	1.0
I030724		16.4	0.051	0.21	2.68	28	0.14	16.35	82	1.2
I030725		16.4	0.032	0.18	1.76	14	0.12	12.00	73	1.8
I030726		11.8	0.033	0.19	2.08	34	0.24	13.55	69	1.7
I030727		4.4	0.050	0.17	3.04	79	0.66	15.95	146	5.8
I030728		3.7	0.014	0.13	1.63	52	0.58	16.85	104	6.9
I030729		6.8	0.038	0.25	2.63	51	0.17	13.05	92	2.5
I030730		16.5	0.145	0.38	2.97	43	0.10	6.73	38	3.3
I030731		7.7	0.068	0.24	3.14	64	0.20	11.50	80	0.8
I030732		3.7	0.046	0.17	1.67	77	0.12	10.25	91	1.3
I030733		2.8	0.067	0.18	1.74	116	0.12	9.89	59	0.9
I030734		5.3	0.037	0.11	1.50	49	0.18	8.43	50	1.4
I030735		7.1	0.074	0.18	1.46	58	0.24	8.50	66	0.8
I030736		4.3	0.073	0.22	1.20	52	0.10	8.52	73	0.9
I030737		5.6	0.090	0.23	1.40	74	0.14	9.07	100	0.6
I030738		2.5	0.084	0.16	0.27	49	0.07	3.07	62	<0.5
I030739		5.1	0.091	0.16	0.47	50	0.11	5.03	71	<0.5
I030740		4.8	0.090	0.16	0.47	48	0.11	4.57	69	<0.5
I030741		3.6	0.121	0.18	0.31	51	0.14	3.84	71	0.7
I030742		1.0	0.160	0.11	0.13	67	0.22	3.15	55	0.9
I030743		10.1	0.014	0.15	5.13	12	0.14	7.37	36	5.3
I030744		8.8	0.014	0.13	4.64	14	0.21	8.70	109	6.0
I030745		4.6	0.256	1.37	2.01	144	0.21	15.20	108	3.0
I030746		5.1	0.059	0.22	1.16	82	0.15	12.75	73	1.2
I030747		6.1	0.005	0.17	1.07	44	0.28	12.05	80	0.9
I030748		4.7	0.006	0.24	1.74	82	0.37	17.85	74	1.3
I030749		3.9	0.008	0.20	1.64	62	0.20	14.05	64	1.4
I030750		4.0	0.007	0.19	1.64	62	0.20	14.20	63	1.5
I030751		0.5	0.178	0.21	0.13	75	0.11	6.10	37	0.5
I030752		0.2	0.160	0.02	0.07	56	0.09	5.33	16	0.6
I030753		0.3	0.129	0.05	0.06	66	0.09	5.82	22	0.5
I030754		9.7	0.109	0.28	1.64	90	1.04	14.20	92	1.6
I030755		5.8	0.006	0.12	1.12	45	0.32	22.7	191	2.8
I030756		7.3	0.139	0.35	1.25	99	0.69	12.90	79	1.6
I030757		6.6	0.207	0.44	1.22	150	4.49	14.75	114	0.5
I030758		7.8	0.127	0.35	1.52	92	0.88	15.10	81	0.7
I030759		10.2	0.114	0.31	2.13	60	0.68	13.25	89	0.6
I030760		2.1	0.102	0.06	1.94	56	17.25	8.39	66	7.1

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I030761		4.22	0.015		0.37	4.56	8.2	<0.2	<10	340	1.10	1.48	2.23	0.08	50.8	13.4
I030762		3.60	0.025		0.63	2.81	0.3	<0.2	<10	330	0.99	1.11	1.35	1.12	67.7	13.1
I030763		3.95	0.006		0.31	4.20	0.5	<0.2	<10	280	1.18	0.40	2.05	0.44	69.7	15.9
I030764		4.68	0.006		0.22	2.54	0.5	<0.2	<10	410	0.67	0.30	1.12	0.33	58.4	11.1
I030765		4.13	<0.005		0.17	1.65	0.2	<0.2	<10	330	0.47	0.12	0.69	0.10	54.9	9.1
I030766		4.14	0.008		0.26	2.12	0.4	<0.2	<10	490	0.77	0.43	1.29	0.76	47.3	11.2
I030767		2.74	0.244		0.98	0.86	577	0.2	<10	160	0.35	1.49	1.83	0.81	26.5	15.1
I030768		4.51	0.099		0.30	1.57	450	<0.2	<10	310	0.64	0.21	1.64	0.22	25.0	10.7
I030769		4.51	0.009		0.37	2.59	5.0	<0.2	<10	330	0.96	0.45	1.47	0.40	21.8	12.7
I030770		Not Recvd														
I030771		4.36	0.009		0.17	2.43	12.8	<0.2	<10	610	0.95	0.19	1.38	0.16	36.1	10.6
I030772		4.90	0.006		0.32	2.02	2.3	<0.2	<10	380	0.85	0.40	1.69	0.60	29.0	11.6
I030773		4.31	0.153		0.65	0.71	346	<0.2	<10	140	0.43	0.35	1.72	0.56	29.5	11.5
I030774		3.45	0.345		1.05	0.56	1920	0.3	<10	110	0.62	0.42	3.30	2.26	29.1	8.1
I030775		4.46	0.009		0.17	2.73	14.4	<0.2	<10	600	0.74	0.35	1.98	0.13	29.2	14.4
I030776		3.36	0.006		0.15	1.82	1.5	<0.2	<10	350	0.49	0.16	1.35	0.15	31.4	10.6
I030777		2.65	0.005		0.12	3.18	1.4	<0.2	<10	610	0.23	0.10	3.57	0.11	5.16	23.1
I030778		2.51	0.011		0.12	2.48	0.6	<0.2	<10	530	0.71	0.16	1.18	0.07	24.8	9.9
I030779		1.41	0.007		0.13	1.43	2.8	<0.2	<10	380	0.40	0.09	0.98	0.07	25.9	8.3
I030780		1.77	0.011		0.15	1.60	4.4	<0.2	<10	380	0.41	0.10	1.14	0.05	29.8	9.2
I030781		2.09	0.007		0.25	2.62	0.7	<0.2	<10	600	0.82	0.08	0.94	0.12	22.6	9.5
I030782		2.96	0.009		0.05	1.84	55.4	<0.2	<10	30	0.06	0.18	2.88	0.05	7.24	36.0
I030783		1.10	<0.005		0.04	2.12	0.8	<0.2	<10	320	0.14	0.02	0.59	0.03	31.1	9.6
I030784		1.01	<0.005		0.03	1.56	0.8	<0.2	<10	270	0.13	0.03	0.43	0.05	22.5	7.3
I030785		1.14	<0.005		0.03	2.22	0.6	<0.2	<10	330	0.16	0.02	0.62	0.03	48.8	9.4
I030786		1.15	<0.005		0.03	2.14	0.7	<0.2	<10	320	0.14	0.02	0.59	0.03	38.4	8.8
I030787		1.07	<0.005		0.04	2.17	0.7	<0.2	<10	320	0.17	0.02	0.59	0.03	40.3	9.7
I030788		1.18	<0.005		0.03	2.25	0.9	<0.2	<10	320	0.16	0.02	0.64	0.04	39.6	9.5
I030789		1.30	<0.005		0.03	2.16	0.7	<0.2	<10	330	0.15	0.02	0.58	0.04	32.1	8.9
I030570		0.71	<0.005		0.03	1.36	0.9	<0.2	<10	250	0.12	0.04	0.37	0.04	31.0	5.9

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I030761		62	1.35	75.9	3.75	14.15	0.15	0.04	0.01	0.034	1.08	25.6	8.1	1.04	371	0.81
I030762		55	1.56	48.6	3.87	9.59	0.15	0.06	<0.01	0.026	1.04	33.7	8.4	1.02	331	1.33
I030763		67	1.62	71.3	4.17	13.40	0.17	0.04	0.01	0.032	1.21	34.8	8.6	1.11	376	1.26
I030764		54	1.36	40.0	3.17	8.07	0.13	0.03	<0.01	0.021	0.99	29.8	7.3	0.82	267	1.60
I030765		38	0.98	25.5	2.66	5.02	0.10	0.03	<0.01	0.013	0.81	28.3	6.3	0.70	203	0.99
I030766		52	1.16	50.9	3.15	7.18	0.12	0.04	0.01	0.026	0.94	23.9	7.7	0.88	384	1.85
I030767		25	1.18	64.2	3.15	3.30	0.09	0.14	0.15	0.024	0.33	13.6	4.3	0.78	601	2.99
I030768		44	3.08	44.1	3.04	5.39	0.08	0.13	0.06	0.022	0.57	12.5	8.2	1.16	462	2.05
I030769		68	4.15	59.4	3.01	8.13	0.11	0.10	0.09	0.022	0.79	10.7	8.5	1.10	461	2.81
I030770																
I030771		65	4.81	48.9	3.20	8.44	0.13	0.12	0.02	0.022	1.13	18.0	13.6	1.44	468	3.74
I030772		53	4.04	61.8	2.97	7.59	0.11	0.09	0.12	0.035	0.62	15.1	9.3	0.98	652	4.85
I030773		32	1.78	45.4	2.94	3.01	0.08	0.06	0.45	0.020	0.31	14.9	4.4	0.73	613	3.45
I030774		14	1.45	53.7	2.41	2.06	0.07	0.06	0.41	0.033	0.24	15.5	2.3	0.83	758	0.91
I030775		59	5.38	31.2	3.42	8.82	0.11	0.04	0.16	0.032	1.15	15.2	12.8	1.19	586	1.08
I030776		42	2.82	35.6	2.32	6.12	0.09	0.04	0.02	0.023	0.77	15.9	13.0	0.74	359	1.34
I030777		72	4.13	34.5	3.00	7.98	0.12	0.04	0.01	0.013	1.00	2.4	11.7	1.36	584	0.36
I030778		44	2.21	47.9	2.49	7.55	0.09	0.03	0.01	0.021	0.79	12.6	9.7	0.73	221	1.35
I030779		36	1.40	35.4	2.34	4.36	0.08	0.03	<0.01	0.013	0.53	13.1	10.8	0.58	220	1.26
I030780		33	1.55	39.3	2.54	4.90	0.08	0.03	<0.01	0.016	0.55	14.8	11.7	0.62	236	1.48
I030781		47	1.99	44.4	2.43	8.12	0.09	0.02	<0.01	0.021	0.91	11.4	8.3	0.80	227	1.35
I030782		1300	1.46	3.0	1.95	4.95	0.15	<0.02	<0.01	0.013	0.19	3.7	2.7	3.36	425	0.85
I030783		18	2.00	4.4	2.86	7.33	0.16	0.13	<0.01	0.013	1.08	16.3	22.1	0.90	569	0.28
I030784		16	2.24	3.1	2.32	5.78	0.12	0.20	<0.01	0.012	0.77	10.0	24.5	0.65	521	0.17
I030785		10	1.94	4.0	2.97	7.22	0.16	0.13	<0.01	0.013	1.12	25.8	21.0	0.93	589	0.20
I030786		9	1.82	3.9	2.83	6.84	0.16	0.12	<0.01	0.011	1.06	19.4	20.2	0.88	571	0.21
I030787		10	2.05	5.2	2.91	7.54	0.17	0.13	<0.01	0.014	1.10	20.8	22.7	0.91	588	0.25
I030788		10	1.98	4.3	2.91	7.51	0.16	0.13	<0.01	0.015	1.10	20.3	22.4	0.91	602	0.22
I030789		8	1.89	3.6	2.89	6.60	0.14	0.13	<0.01	0.011	1.08	16.4	19.7	0.89	601	0.23
I030570		8	2.18	2.9	2.08	5.06	0.12	0.19	<0.01	0.013	0.65	15.6	27.0	0.54	490	0.10

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I030761		0.34	0.38	36.3	760	8.1	59.4	0.001	0.98	0.07	8.6	1.8	1.3	123.5	0.01	0.75
I030762		0.08	0.32	41.2	890	14.7	55.3	0.002	1.03	0.06	6.9	1.4	0.9	44.8	<0.01	0.68
I030763		0.25	0.37	44.2	990	9.6	66.7	0.002	1.10	<0.05	8.9	2.1	1.1	81.4	0.01	0.23
I030764		0.13	0.46	39.7	990	6.4	48.1	0.003	0.60	0.05	5.3	1.4	0.6	58.9	0.01	0.17
I030765		0.06	0.41	33.0	790	6.0	39.4	0.001	0.57	<0.05	3.2	0.9	0.5	20.6	0.01	0.07
I030766		0.07	0.28	39.8	860	9.7	49.5	0.003	0.79	0.06	5.7	1.5	0.7	31.5	<0.01	0.31
I030767		0.02	0.23	45.9	870	17.8	17.4	0.007	2.00	25.0	4.0	1.7	0.3	43.7	<0.01	0.43
I030768		0.05	0.20	37.6	670	6.8	30.7	0.003	1.12	8.43	5.4	1.5	0.5	69.1	<0.01	0.12
I030769		0.08	0.16	52.6	640	5.9	38.6	0.003	0.97	0.27	5.7	1.8	0.8	67.9	<0.01	0.30
I030770																
I030771		0.05	0.17	47.2	740	4.8	49.6	0.005	0.67	0.23	7.2	1.9	0.8	58.4	<0.01	0.11
I030772		0.05	0.18	44.8	860	5.2	31.5	0.008	0.94	0.92	6.2	2.5	0.8	56.6	<0.01	0.16
I030773		0.02	0.11	38.1	770	10.5	19.0	0.004	1.57	9.71	4.7	1.7	0.5	53.0	<0.01	0.43
I030774		0.03	0.10	19.5	700	29.3	15.1	0.001	1.46	22.2	3.0	1.2	0.4	60.8	<0.01	0.35
I030775		0.13	0.16	27.5	600	6.3	63.4	0.002	0.39	0.47	9.4	0.8	1.0	44.0	<0.01	0.05
I030776		0.05	0.21	31.2	550	4.2	42.6	0.002	0.35	0.31	6.0	1.0	0.8	24.5	0.01	0.04
I030777		0.26	0.08	23.1	550	3.2	56.8	0.001	0.35	0.72	9.9	0.8	0.3	89.7	<0.01	0.03
I030778		0.12	0.34	31.6	590	4.5	41.9	0.002	0.46	0.11	5.7	1.4	0.6	41.2	0.01	0.08
I030779		0.03	0.25	30.6	540	3.5	28.5	0.001	0.39	0.19	3.7	1.0	0.4	17.0	<0.01	0.05
I030780		0.04	0.23	32.6	600	3.7	26.4	0.002	0.51	0.40	3.7	1.1	0.4	20.4	0.01	0.05
I030781		0.13	0.32	33.8	590	6.5	48.4	0.001	0.36	0.05	6.1	1.2	0.8	39.4	0.01	0.04
I030782		0.02	<0.05	438	420	0.8	14.4	0.001	0.23	0.18	4.4	0.2	<0.2	47.6	<0.01	0.09
I030783		0.20	0.31	4.2	510	4.3	62.6	<0.001	0.02	0.13	6.0	0.3	0.7	37.3	0.01	<0.01
I030784		0.17	0.49	3.8	380	5.8	54.7	<0.001	0.02	0.10	4.9	0.3	0.9	27.5	0.01	<0.01
I030785		0.21	0.32	2.5	530	4.2	61.0	<0.001	0.01	0.11	6.1	0.3	0.7	37.0	0.01	<0.01
I030786		0.20	0.30	2.4	500	4.0	58.5	<0.001	0.01	0.09	5.8	0.3	0.7	36.6	0.01	<0.01
I030787		0.20	0.33	2.6	510	4.4	65.1	<0.001	0.01	0.11	6.2	0.4	0.8	38.5	0.01	<0.01
I030788		0.22	0.31	2.7	510	4.5	63.8	<0.001	0.01	0.12	6.2	0.3	0.7	41.9	0.01	<0.01
I030789		0.20	0.31	2.5	510	3.9	58.5	<0.001	0.01	0.11	5.5	0.3	0.7	34.6	0.01	<0.01
I030570		0.16	0.51	2.0	320	6.9	50.4	<0.001	<0.01	0.14	4.5	0.3	1.0	25.0	0.01	<0.01

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I030761		9.8	0.132	0.32	2.20	66	3.70	14.90	80	0.9
I030762		12.5	0.111	0.41	2.63	76	0.99	14.65	105	2.1
I030763		11.9	0.142	0.33	2.19	80	6.99	18.90	93	1.1
I030764		12.4	0.127	0.27	2.07	72	0.86	14.50	74	1.5
I030765		11.0	0.090	0.23	2.45	41	2.82	12.10	53	0.8
I030766		8.8	0.101	0.25	1.72	81	0.25	12.65	94	0.8
I030767		6.5	0.013	0.37	1.81	38	0.39	10.45	84	6.1
I030768		7.1	0.045	0.28	1.52	62	0.28	8.25	74	5.7
I030769		6.5	0.077	0.24	1.50	81	0.27	7.14	81	4.2
I030770										
I030771		7.7	0.106	0.27	2.27	116	0.14	8.86	85	5.6
I030772		6.6	0.061	0.27	2.51	102	0.89	12.00	107	3.9
I030773		5.3	0.014	0.92	1.58	44	0.48	11.10	70	3.1
I030774		6.0	<0.005	0.56	3.05	18	0.44	9.85	142	2.4
I030775		5.1	0.137	0.58	1.69	105	0.27	12.60	74	1.1
I030776		5.9	0.070	0.27	1.82	65	0.18	10.85	65	0.9
I030777		0.7	0.211	0.40	0.28	108	0.13	7.20	51	0.7
I030778		7.0	0.071	0.23	1.75	72	2.60	9.86	60	0.6
I030779		6.3	0.046	0.13	1.47	49	0.20	7.98	56	0.6
I030780		7.1	0.044	0.15	1.65	48	0.18	9.08	61	0.8
I030781		6.6	0.085	0.26	1.90	77	0.23	9.14	69	<0.5
I030782		1.7	0.020	0.14	0.60	33	0.08	3.70	49	<0.5
I030783		9.9	0.220	0.40	2.62	68	0.15	7.34	54	1.7
I030784		12.1	0.169	0.37	3.17	52	0.11	6.78	44	3.3
I030785		15.2	0.229	0.40	3.94	71	0.14	7.69	55	1.7
I030786		11.9	0.213	0.37	2.96	67	0.12	7.11	53	1.7
I030787		12.9	0.224	0.42	4.34	69	0.13	7.79	55	1.8
I030788		12.1	0.223	0.42	2.17	69	0.13	7.87	55	1.8
I030789		10.4	0.222	0.39	3.36	68	0.13	6.75	54	1.7
I030570		14.9	0.149	0.36	2.50	45	0.13	7.02	39	3.3

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10084852

Method	CERTIFICATE COMMENTS
ME-MS41	Interference: Ca>10% on ICP-MS As,ICP-AES results shown.
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

CERTIFICATE WH10087519

Project: SQI10-01

P.O. No.: SQ110-06-6

This report is for 4 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 29-JUN-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Chemex

EXCELLENCE IN ANALYTICAL CHEMISTRY

ALS Canada Ltd.

2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10087519

Sample Description	Method	WEI-21	Au-AA23	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr
	Units	kg	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
	LOR	0.02	0.005	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1	1
130790		6.21	<0.005	0.14	3.12	0.4	<0.2	<10	470	0.66	0.13	2.96	0.16	67.6	16.8	68
130791		2.52	0.014	0.40	1.60	8.6	<0.2	<10	340	0.70	0.36	2.97	0.44	56.3	16.9	38
130792		2.80	0.007	0.17	1.84	1.7	<0.2	<10	470	0.54	0.17	2.25	0.45	53.6	12.0	34
130793		1.96	<0.005	0.22	2.85	8.1	<0.2	<10	440	0.70	0.18	1.59	0.34	61.7	16.2	71

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10087519

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo	Na
	Units	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%
	LOR	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05	0.01
130790		5.16	44.4	3.77	10.80	0.14	0.05	0.03	0.051	1.52	34.2	15.0	1.23	554	0.98	0.14
130791		1.93	52.2	3.72	6.30	0.11	0.06	0.08	0.045	0.71	28.1	10.5	0.81	757	1.49	0.03
130792		2.11	38.0	3.07	6.40	0.10	0.05	0.02	0.044	0.79	27.1	10.4	0.79	555	1.30	0.07
130793		5.00	50.0	3.78	9.82	0.14	0.07	0.04	0.045	1.38	32.0	13.4	1.14	556	2.29	0.11

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10087519

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th
	Units	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01	0.2
130790		0.23	47.8	770	11.6	85.0	0.002	0.35	0.18	9.4	0.8	1.6	91.9	0.01	0.02	10.8
130791		0.28	39.9	700	10.3	43.0	0.003	0.94	1.24	9.3	1.6	1.0	69.1	<0.01	0.29	9.8
130792		0.21	30.1	730	11.8	46.0	0.003	0.49	0.31	6.3	1.3	1.0	50.3	<0.01	0.03	8.6
130793		0.28	52.1	1190	10.7	77.8	0.005	0.67	0.26	8.7	1.9	1.4	61.9	0.01	0.07	9.5

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10087519

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.005	0.02	0.05	1	0.05	0.05	2	0.5
130790		0.170	0.58	1.99	71	0.17	21.1	92	1.2
130791		0.068	0.38	2.46	76	0.26	18.10	107	1.5
130792		0.082	0.30	3.41	48	0.12	18.90	98	1.4
130793		0.157	0.59	2.56	83	0.31	18.90	111	1.8

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 16-JUL-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10087519

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 21-JUL-2010
Account: EIASQI

CERTIFICATE WH10089645

Project: SQI10-03

P.O. No.: SQI10-03_9

This report is for 32 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 5-JUL-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
PUL-QC	Pulverizing QC Test
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature: 

Colin Ramshaw, Vancouver Laboratory Manager

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 21-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10089645

Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
Sample Description LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I030794	3.62	<0.005		0.19	3.40	0.7	<0.2	<10	310	0.54	0.07	3.52	0.11	17.80	25.9
I030795	4.82	0.008		0.19	3.77	0.5	<0.2	<10	360	0.64	0.09	2.94	0.08	14.55	23.8
I030796	5.20	<0.005		0.17	1.63	2.8	<0.2	<10	200	0.49	0.13	2.36	0.13	13.35	8.4
I030797	4.16	<0.005		0.09	1.51	2.7	<0.2	<10	210	0.43	0.08	1.18	0.06	19.95	7.2
I030798	5.28	<0.005		0.14	2.18	0.5	<0.2	<10	380	0.58	0.12	0.85	0.06	19.10	8.6
I030799	4.94	<0.005		0.20	1.54	0.6	<0.2	<10	540	0.44	0.12	0.88	0.15	14.20	6.9
I030800	0.10	4.02	4.14	1.53	1.65	8440	3.8	20	80	0.21	86.0	4.70	0.36	18.75	126.5
I030951	5.06	0.009		0.34	2.23	1.8	<0.2	<10	490	0.57	0.37	4.98	0.12	12.50	11.1
I030952	4.98	<0.005		0.44	3.15	0.8	<0.2	<10	90	0.95	0.30	2.96	0.46	8.91	17.5
I030953	5.06	<0.005		0.33	2.63	0.6	<0.2	<10	310	0.80	0.46	3.01	0.99	14.25	9.6
I030954	4.86	<0.005		0.16	2.83	1.5	<0.2	<10	700	0.59	0.19	4.43	0.07	16.80	13.3
I030955	4.72	<0.005		0.20	3.25	15.0	<0.2	<10	610	0.36	0.45	3.35	0.10	17.30	22.7
I030956	3.18	0.060		1.00	2.51	6.7	<0.2	<10	280	0.48	0.39	1.02	0.10	34.4	17.0
I030957	2.88	0.064		2.26	0.78	1.9	<0.2	<10	70	0.16	3.85	0.48	0.03	11.55	26.4
I030958	4.54	0.034		0.20	3.85	0.8	<0.2	<10	210	0.48	0.14	3.59	0.13	17.30	23.9
I030959	2.34	0.262		0.97	0.77	1955	0.2	<10	90	0.26	0.28	2.93	0.81	12.90	15.5
I030960	0.94	<0.005		0.04	1.44	2.9	<0.2	<10	260	0.16	0.05	0.42	0.05	33.6	6.5
I030961	1.32	0.069		0.50	0.74	136.0	<0.2	<10	190	0.28	0.09	3.03	0.44	15.80	18.0
I030962	2.62	>10.0	19.75	1.43	0.73	>10000	18.9	<10	90	0.35	0.19	2.99	0.45	26.4	23.2
I030963	2.08	1.105	1.09	0.33	0.28	3730	1.2	<10	100	0.19	0.09	11.95	0.19	12.80	5.4
I030964	1.78	0.424		0.79	0.72	1975	0.5	<10	150	0.37	0.19	1.43	0.33	57.0	14.3
I030965	1.92	0.581		0.94	0.63	1925	0.7	<10	110	0.32	0.14	1.70	0.19	45.8	13.7
I030966	2.30	1.445	1.47	4.04	0.46	4090	1.3	<10	120	0.20	0.17	1.37	0.80	23.0	10.4
I030967	2.28	2.15	2.16	6.87	0.43	4910	1.9	<10	130	0.20	0.14	1.53	1.07	14.80	9.3
I030968	1.72	0.582		3.70	0.47	3340	0.5	<10	130	0.20	0.08	2.37	0.59	15.80	14.5
I030969	1.80	0.227		1.62	0.62	1235	0.3	<10	100	0.28	0.12	2.19	0.33	30.3	17.2
I030970	1.78	0.230		1.14	0.60	1100	0.2	<10	160	0.26	0.14	2.10	0.24	28.1	14.3
I030971	4.54	0.015		0.17	1.16	21.1	<0.2	<10	330	0.34	0.11	1.29	0.07	29.0	12.3
I030972	3.50	0.005		0.20	1.55	11.5	<0.2	<10	530	0.46	0.18	4.54	0.08	18.15	11.2
I030973	3.56	<0.005		0.11	1.64	23.0	<0.2	<10	480	0.37	0.11	6.51	0.05	30.1	9.9
I030974	4.98	0.005		0.09	1.01	17	<0.2	<10	220	0.19	0.18	23.2	0.10	15.15	7.6
I030975	5.32	<0.005		0.17	2.26	12	<0.2	<10	370	0.41	0.18	16.30	0.14	17.25	13.7

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 21-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10089645

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I030794		148	2.19	66.2	4.31	11.45	0.12	0.05	0.01	0.018	1.07	8.9	13.0	2.39	655	0.74
I030795		134	1.82	55.8	4.85	11.85	0.14	0.04	0.04	0.021	0.78	7.4	14.6	2.84	825	0.56
I030796		28	1.07	46.4	2.21	4.98	0.05	0.03	<0.01	0.014	0.61	7.1	5.5	0.83	526	1.21
I030797		28	1.02	31.5	2.00	4.77	0.05	0.05	<0.01	0.014	0.57	9.9	5.3	0.69	224	0.35
I030798		37	1.44	39.5	2.34	6.58	0.06	0.05	0.01	0.017	0.70	9.5	6.3	0.88	186	0.56
I030799		29	1.09	43.6	2.04	5.38	0.06	0.09	0.01	0.013	0.48	7.0	5.7	0.74	206	3.84
I030800		33	1.06	261	4.57	6.06	0.17	0.26	0.10	0.480	0.17	10.6	9.9	0.51	776	24.4
I030951		25	1.07	47.6	2.12	7.37	0.06	0.03	0.01	0.020	0.62	6.1	7.2	1.16	693	2.16
I030952		100	1.68	84.4	3.29	10.75	0.10	0.09	<0.01	0.023	0.90	4.4	7.5	1.42	411	6.37
I030953		43	1.40	55.5	2.38	8.29	0.07	0.09	<0.01	0.032	0.75	7.4	7.4	1.31	533	2.32
I030954		40	1.31	48.0	2.65	8.46	0.08	0.04	<0.01	0.024	0.84	8.1	7.2	1.45	578	1.99
I030955		94	1.22	47.7	3.77	10.55	0.13	0.06	0.01	0.030	0.65	8.5	11.8	2.16	783	0.98
I030956		57	1.67	62.2	3.50	8.51	0.10	0.06	0.02	0.026	0.76	17.7	19.7	1.31	540	1.49
I030957		22	0.61	183.5	4.65	2.73	0.09	0.05	0.01	0.011	0.20	5.2	5.6	0.43	316	2.47
I030958		97	3.43	52.6	4.25	11.70	0.15	0.07	0.01	0.044	1.34	8.6	15.8	2.21	938	1.35
I030959		26	1.23	73.0	3.29	2.55	0.07	0.10	0.21	0.040	0.26	6.4	7.1	0.89	999	3.60
I030960		6	2.25	3.5	2.38	5.84	0.11	0.21	<0.01	0.015	0.69	15.7	26.0	0.58	521	0.14
I030961		26	0.53	70.8	3.11	3.04	0.06	0.07	0.44	0.032	0.17	7.4	3.9	0.82	1700	2.88
I030962		27	1.29	66.6	4.47	2.67	0.09	0.06	0.36	0.057	0.33	12.1	2.7	1.13	1600	1.92
I030963		4	0.30	9.0	1.40	0.86	<0.05	0.03	0.07	0.027	0.17	6.3	1.0	6.70	984	0.85
I030964		11	0.64	45.9	3.09	2.26	0.09	0.04	0.28	0.022	0.37	27.5	3.3	0.58	607	0.57
I030965		12	0.49	46.8	2.86	2.13	0.07	0.03	0.18	0.027	0.28	21.6	4.3	0.65	1060	1.52
I030966		4	0.53	75.7	2.69	1.36	0.06	0.03	0.19	0.025	0.31	11.0	1.2	0.54	644	0.82
I030967		4	0.39	99.2	2.85	1.15	0.06	0.04	0.21	0.025	0.31	7.3	0.7	0.56	604	0.89
I030968		11	0.40	92.6	2.83	1.45	0.05	0.05	0.21	0.023	0.30	7.6	1.2	0.93	917	3.12
I030969		13	0.51	98.7	3.35	2.21	0.07	0.04	0.12	0.020	0.34	14.5	3.7	0.75	1270	1.69
I030970		12	0.53	84.3	3.24	2.09	0.07	0.04	0.11	0.018	0.33	13.4	3.7	0.73	1250	1.79
I030971		23	0.88	56.5	2.31	4.38	0.06	0.05	0.01	0.021	0.45	13.1	9.7	0.55	979	1.40
I030972		27	1.22	38.0	2.23	5.45	0.06	0.07	0.01	0.025	0.54	8.1	11.2	0.95	889	1.67
I030973		23	1.45	24.0	1.96	5.43	0.07	0.06	<0.01	0.022	0.61	14.0	11.4	1.08	442	0.51
I030974		15	0.71	13.7	1.38	3.47	0.05	0.06	<0.01	0.017	0.31	7.6	6.6	1.19	434	0.56
I030975		41	1.39	35.4	2.58	7.27	0.09	0.05	<0.01	0.028	0.67	8.3	8.3	1.51	674	1.26

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 21-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10089645

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I030794		0.15	0.35	90.1	2440	3.1	43.2	0.002	0.57	0.21	8.7	1.0	0.5	66.2	0.01	0.04
I030795		0.10	0.49	84.7	1330	2.9	33.7	0.002	0.59	0.20	8.3	0.9	0.6	57.4	0.01	0.07
I030796		0.09	0.11	23.9	670	3.3	28.5	0.004	1.10	0.14	3.6	1.4	0.4	31.8	<0.01	0.08
I030797		0.09	0.08	28.8	400	2.4	28.5	0.002	1.01	0.11	3.3	1.1	0.4	22.1	<0.01	0.04
I030798		0.12	0.15	29.5	380	3.5	36.8	0.001	0.63	0.11	5.0	0.7	0.5	29.9	<0.01	0.06
I030799		0.07	0.14	28.7	610	3.5	29.0	0.007	0.58	0.10	3.7	1.2	0.4	30.3	<0.01	0.07
I030800		0.12	0.55	62.0	810	18.7	8.7	0.036	1.17	28.0	4.3	7.0	30.7	90.6	0.01	15.85
I030951		0.10	0.10	28.4	440	3.6	30.0	0.003	0.74	0.07	5.9	1.0	0.4	119.0	<0.01	0.41
I030952		0.11	0.13	75.1	710	4.6	44.3	0.008	1.43	0.10	9.4	3.7	0.4	105.5	<0.01	0.32
I030953		0.10	0.07	42.2	540	4.1	35.4	0.004	0.96	0.08	6.6	2.3	0.6	85.2	<0.01	0.30
I030954		0.12	0.24	32.0	630	3.5	38.0	0.003	0.69	0.06	8.3	1.0	0.6	112.5	0.01	0.11
I030955		0.12	0.17	42.5	370	3.6	30.2	0.002	0.55	0.07	15.7	0.9	0.8	59.0	0.01	0.12
I030956		0.04	0.24	53.8	550	4.2	35.0	0.002	0.80	1.58	7.9	1.1	0.7	26.0	0.01	0.62
I030957		0.02	0.11	23.2	140	4.1	10.3	0.002	3.17	0.26	3.9	4.2	0.2	11.4	<0.01	5.59
I030958		0.26	0.12	46.3	670	3.4	61.7	0.003	0.84	0.23	14.7	1.5	1.1	77.8	<0.01	0.09
I030959		0.02	0.06	53.3	930	10.6	14.3	0.008	2.21	32.7	6.2	2.6	0.3	72.4	<0.01	0.31
I030960		0.17	0.47	2.7	320	7.8	56.9	<0.001	0.02	0.23	5.0	0.3	1.0	29.4	0.01	<0.01
I030961		0.02	0.09	46.8	1260	8.6	9.7	0.018	1.87	25.6	4.9	1.2	0.3	65.1	<0.01	0.18
I030962		0.02	0.11	64.1	1630	10.8	18.2	0.005	2.96	56.6	7.6	1.3	0.3	81.3	<0.01	0.55
I030963		0.02	0.08	10.0	760	11.7	9.2	0.001	0.73	624	2.6	0.4	<0.2	203	<0.01	0.43
I030964		0.02	0.08	30.1	460	11.5	17.1	0.001	2.19	37.2	2.8	0.7	0.2	36.4	<0.01	0.29
I030965		0.02	0.07	26.5	600	8.3	13.5	0.003	1.46	47.8	3.7	0.8	0.3	36.0	<0.01	0.34
I030966		0.02	0.06	18.2	490	14.8	16.0	0.001	2.37	43.5	2.4	0.9	<0.2	29.9	<0.01	0.63
I030967		0.02	0.05	17.4	570	16.6	14.7	0.001	2.79	53.2	2.2	1.0	<0.2	30.1	<0.01	1.23
I030968		0.02	0.05	44.9	870	7.4	15.9	0.008	2.41	45.5	3.3	1.0	<0.2	52.9	<0.01	0.48
I030969		0.02	0.18	39.9	560	9.0	16.6	0.002	2.56	41.1	3.0	1.0	0.2	41.1	<0.01	0.16
I030970		0.02	0.19	36.6	530	8.8	16.3	0.002	2.39	35.8	3.1	0.9	0.2	41.0	<0.01	0.16
I030971		0.01	0.21	30.4	390	3.8	22.0	0.002	0.58	17.70	4.2	0.7	0.4	21.1	<0.01	0.10
I030972		0.02	0.16	29.5	490	4.4	24.5	0.003	0.65	77.6	5.9	0.8	0.7	94.1	<0.01	0.12
I030973		0.02	0.22	19.4	500	3.9	29.8	0.001	0.47	29.8	5.8	0.7	0.5	159.0	<0.01	0.03
I030974		0.03	0.26	13.9	600	3.5	14.9	0.001	0.77	9.59	4.5	0.8	0.3	571	<0.01	0.02
I030975		0.11	0.22	30.9	880	5.9	33.0	0.003	1.06	0.54	8.5	1.1	0.4	446	<0.01	0.04

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 21-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10089645

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I030794		3.9	0.223	0.27	0.83	127	0.23	8.55	80	1.1
I030795		2.9	0.236	0.36	0.75	97	0.27	8.41	76	0.9
I030796		4.2	0.048	0.18	1.53	54	0.24	6.34	32	1.1
I030797		5.3	0.037	0.20	0.92	40	0.12	5.16	34	2.4
I030798		5.7	0.065	0.22	0.74	46	0.13	3.80	52	1.8
I030799		3.6	0.040	0.16	0.56	42	0.15	4.50	40	4.0
I030800		2.5	0.108	1.27	1.67	54	25.4	7.96	62	10.0
I030951		4.2	0.040	0.15	1.20	39	0.36	7.51	40	1.2
I030952		2.5	0.089	0.25	1.01	110	0.20	6.96	67	4.1
I030953		4.8	0.049	0.21	1.38	75	0.18	7.90	113	4.6
I030954		4.4	0.083	0.18	1.30	60	0.65	9.96	55	1.1
I030955		3.7	0.131	0.16	0.95	118	1.30	12.45	55	1.5
I030956		5.7	0.077	0.22	1.32	57	0.18	11.80	63	2.7
I030957		1.8	0.014	0.06	0.42	22	0.85	4.79	19	2.0
I030958		2.6	0.213	0.32	0.79	137	0.19	14.20	88	1.6
I030959		2.8	<0.005	0.18	1.83	44	0.27	10.35	101	5.1
I030960		18.6	0.157	0.45	2.32	48	0.11	7.46	40	4.0
I030961		2.3	<0.005	0.18	1.96	39	0.37	10.80	71	3.4
I030962		3.0	<0.005	0.30	1.18	31	0.81	11.60	94	2.7
I030963		3.5	<0.005	0.09	0.70	5	0.28	8.91	35	0.9
I030964		18.0	<0.005	0.27	2.11	10	0.20	12.00	65	1.4
I030965		10.5	<0.005	0.25	1.95	19	0.22	11.85	65	1.0
I030966		7.2	<0.005	0.21	1.23	6	0.27	7.91	88	1.4
I030967		4.1	<0.005	0.16	0.71	5	0.28	7.03	107	2.0
I030968		4.3	<0.005	0.18	1.64	15	0.31	9.62	74	2.4
I030969		6.9	0.006	0.17	1.21	14	0.23	9.26	52	1.6
I030970		6.2	0.006	0.16	1.10	14	0.24	8.30	43	1.6
I030971		4.6	0.035	0.13	1.07	31	0.16	6.94	41	1.7
I030972		3.1	0.051	0.13	1.04	46	0.24	7.40	37	2.8
I030973		5.8	0.052	0.13	1.19	29	0.13	9.25	39	2.3
I030974		2.5	0.034	0.06	1.11	22	0.09	8.88	25	2.1
I030975		3.1	0.068	0.12	1.53	54	0.11	13.15	48	1.5

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 21-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10089645

Method	CERTIFICATE COMMENTS
ME-MS41	Interference: Ca>10% on ICP-MS As,ICP-AES results shown.
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 23-JUL-2010
Account: EIASQI

CERTIFICATE WH10091901

Project: SQI10-03

P.O. No.: SQ10-03_10

This report is for 43 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 8-JUL-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION


ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
PUL-QC	Pulverizing QC Test
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature: 

Colin Ramshaw, Vancouver Laboratory Manager

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 23-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10091901

Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
Sample Description LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I030976	4.04	0.006		0.17	2.66	0.4	<0.2	<10	470	0.64	0.19	1.48	0.03	23.8	13.1
I030977	4.00	<0.005		0.16	3.41	0.5	<0.2	<10	220	1.00	0.13	2.04	0.05	37.8	15.1
I030978	4.66	0.005		0.20	3.73	<0.1	<0.2	<10	240	0.94	0.20	1.77	0.08	33.8	15.6
I030979	2.22	0.011		0.21	4.50	0.4	<0.2	<10	190	1.00	0.28	2.13	0.05	22.4	19.8
I030980	2.60	0.006		0.21	4.66	0.1	<0.2	<10	130	1.05	0.20	2.22	0.05	22.6	20.6
I030981	4.84	0.005		0.17	4.62	0.5	<0.2	<10	300	1.05	0.14	2.59	0.04	23.5	18.3
I030982	4.30	0.005		0.21	4.64	1.8	<0.2	<10	230	0.94	0.26	3.17	0.12	21.1	26.1
I030983	3.84	0.008		0.20	2.05	0.5	<0.2	<10	410	0.65	0.31	2.04	0.11	16.80	11.5
I030984	4.96	<0.005		0.18	2.66	2.0	<0.2	<10	470	0.73	0.48	1.91	0.07	21.5	14.0
I030985	3.82	0.005		0.15	5.01	1.2	<0.2	<10	480	1.09	0.19	3.07	0.10	21.7	19.4
I030986	4.72	<0.005		0.19	4.92	1.4	<0.2	<10	210	1.13	0.17	2.28	0.04	27.8	19.0
I030987	4.18	0.006		0.18	3.79	0.7	<0.2	<10	440	0.99	0.23	1.88	0.03	14.00	13.8
I030988	4.80	0.005		0.21	3.53	0.2	<0.2	<10	240	0.91	0.25	2.15	0.06	16.70	13.5
I030989	4.16	0.005		0.21	5.33	1.4	<0.2	<10	380	0.67	0.21	4.61	0.18	10.45	28.6
I030990	0.10	1.150	1.25	0.45	1.67	2030	1.2	30	90	0.19	38.9	3.95	0.40	18.50	58.5
I030991	4.42	0.005		0.10	2.79	17.2	<0.2	<10	470	0.24	0.44	1.72	0.05	4.70	23.3
I030992	4.82	<0.005		0.14	2.32	0.6	<0.2	<10	340	0.09	0.20	1.45	0.04	5.17	24.2
I030993	3.62	0.011		0.25	1.97	0.4	<0.2	<10	270	0.05	0.51	1.59	0.05	3.61	25.5
I030994	2.80	0.006		0.17	5.46	0.7	<0.2	<10	490	1.12	0.26	3.64	0.07	25.5	19.8
I030995	4.46	0.010		0.19	4.26	0.2	<0.2	<10	660	0.94	0.29	3.08	0.21	20.7	14.9
I030996	3.76	0.007		0.19	6.34	1.0	<0.2	<10	240	1.25	0.28	3.74	0.06	19.50	25.1
I030997	3.78	<0.005		0.25	2.81	0.4	<0.2	<10	130	0.87	0.27	1.27	0.07	28.0	14.3
I030998	4.18	0.149		0.33	4.39	0.3	<0.2	<10	240	1.32	2.69	2.65	0.09	26.6	15.7
I030999	7.02	<0.005		0.36	3.31	0.3	<0.2	<10	160	1.04	0.35	1.80	0.12	29.4	14.0
I031000	1.20	<0.005		0.04	1.98	0.8	<0.2	<10	290	0.22	0.04	0.61	0.02	43.9	7.9
I031101	4.34	<0.005		0.25	1.97	0.5	<0.2	<10	410	0.67	0.11	1.52	0.26	14.50	9.0
I031102	5.02	<0.005		0.21	1.67	0.6	<0.2	<10	320	0.57	0.13	1.14	0.17	17.70	8.0
I031103	5.96	<0.005		0.14	1.89	0.5	<0.2	<10	590	0.56	0.10	0.62	0.04	25.4	7.7
I031104	5.52	<0.005		0.08	0.56	1.2	<0.2	<10	800	0.21	0.06	0.71	0.13	7.71	2.5
I031105	5.48	<0.005		0.31	2.22	0.3	<0.2	<10	110	0.88	0.23	1.16	0.62	16.90	11.0
I031106	5.72	<0.005		0.30	1.27	0.8	<0.2	<10	270	0.57	0.18	1.23	0.80	19.25	9.1
I031107	1.18	0.019		0.41	3.04	31.3	<0.2	<10	100	0.91	0.31	3.35	0.50	31.0	35.4
I031108	2.34	0.319		0.88	0.35	1330	0.3	<10	190	0.23	0.18	8.00	0.34	11.65	13.0
I031109	1.12	0.269		0.65	0.46	643	0.2	<10	220	0.20	0.23	7.31	0.29	13.80	8.7
I031110	1.18	0.233		0.66	0.33	749	0.2	<10	160	0.12	0.20	6.36	0.30	12.60	8.6
I031111	2.16	0.352		0.80	0.25	398	0.3	<10	120	0.11	0.10	5.09	0.48	6.28	6.2
I031112	1.92	0.670		3.64	0.49	4400	0.7	<10	130	0.29	0.28	6.29	2.35	8.40	15.3
I031113	2.18	0.096		0.83	0.72	514	<0.2	<10	70	0.27	0.30	3.67	1.72	17.80	23.8
I031114	2.58	0.019		0.63	1.12	18.9	<0.2	<10	310	0.36	0.25	2.28	0.23	20.8	15.2
I031115	2.70	<0.005		0.22	3.19	2.1	<0.2	<10	160	0.89	0.12	2.14	0.13	32.5	21.7

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 23-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10091901

Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
Sample Description LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I030976	32	1.72	53.1	3.00	8.03	0.09	0.07	<0.01	0.008	0.87	11.8	11.5	1.25	717	2.10
I030977	42	1.74	59.8	3.33	10.40	0.12	0.10	<0.01	0.011	1.06	19.5	12.4	1.32	788	2.80
I030978	36	1.78	55.9	3.84	11.05	0.12	0.05	<0.01	0.015	1.07	17.6	11.8	1.47	810	4.26
I030979	59	1.85	69.1	4.47	13.20	0.14	0.05	<0.01	0.022	1.31	11.1	12.8	1.82	757	2.45
I030980	62	1.85	73.9	4.61	13.65	0.15	0.04	<0.01	0.022	1.31	11.0	13.2	1.86	756	2.08
I030981	118	1.75	56.3	3.71	13.25	0.15	0.03	<0.01	0.017	1.30	11.7	10.4	1.82	689	1.98
I030982	130	1.83	60.3	4.96	13.80	0.19	0.04	<0.01	0.050	1.14	10.3	11.5	2.33	942	1.02
I030983	47	1.04	50.2	2.54	7.74	0.08	0.03	<0.01	0.005	0.66	8.2	6.8	1.06	595	1.22
I030984	68	0.92	64.1	2.92	9.00	0.10	0.03	<0.01	0.008	0.64	10.4	9.9	1.50	565	1.59
I030985	80	1.71	49.0	3.81	12.85	0.13	0.02	<0.01	0.018	1.23	10.5	12.0	2.07	765	1.69
I030986	51	1.67	62.5	4.05	14.15	0.14	0.03	<0.01	0.016	1.33	14.0	12.4	1.82	677	1.74
I030987	57	1.44	54.3	3.05	10.80	0.11	0.02	<0.01	0.012	1.09	6.8	9.8	1.43	572	1.48
I030988	68	1.13	70.1	2.93	10.75	0.09	0.02	<0.01	0.008	0.98	8.2	9.3	1.23	564	1.70
I030989	128	1.51	65.3	5.07	14.00	0.21	0.04	<0.01	0.031	1.02	5.0	17.0	3.17	1160	0.58
I030990	22	0.90	113.0	3.50	5.34	0.14	0.21	0.02	0.110	0.16	12.1	10.5	0.55	892	7.62
I030991	181	1.20	46.8	2.59	6.67	0.11	0.03	<0.01	<0.005	0.66	2.3	12.5	1.72	415	0.43
I030992	106	1.02	66.8	3.06	5.81	0.11	0.04	<0.01	<0.005	0.50	2.6	11.8	1.71	389	0.42
I030993	72	0.55	72.8	3.15	5.28	0.13	0.06	<0.01	<0.005	0.29	1.6	8.4	1.48	403	0.31
I030994	73	1.83	51.1	4.15	13.50	0.15	0.02	<0.01	0.023	1.58	12.5	16.9	2.09	867	1.46
I030995	62	1.41	59.2	3.18	11.20	0.11	0.02	<0.01	0.018	1.13	10.6	13.3	1.53	751	1.40
I030996	130	2.23	54.1	4.61	15.35	0.14	0.03	<0.01	0.022	1.81	9.3	17.7	2.51	998	1.67
I030997	42	1.13	53.3	3.08	8.63	0.08	0.02	<0.01	0.010	0.91	13.7	10.2	1.21	666	2.12
I030998	79	1.40	59.7	3.19	12.65	0.12	0.02	<0.01	0.016	1.26	12.7	12.0	1.63	735	1.40
I030999	51	1.11	50.0	3.17	10.55	0.11	0.03	<0.01	0.028	0.96	14.6	9.5	1.20	563	1.87
I031000	7	1.76	5.0	2.56	6.83	0.16	0.13	<0.01	<0.005	0.95	24.3	22.2	0.76	550	0.23
I031101	27	1.25	48.0	2.41	5.99	0.07	0.03	<0.01	<0.005	0.61	7.4	9.2	0.89	537	2.56
I031102	30	1.16	38.5	1.94	5.15	0.06	0.04	<0.01	<0.005	0.60	8.7	5.3	0.71	260	2.62
I031103	28	1.40	34.9	2.18	5.71	0.07	0.08	<0.01	<0.005	0.68	12.8	7.0	0.75	190	0.51
I031104	18	0.41	11.8	0.85	2.03	<0.05	0.05	<0.01	<0.005	0.19	3.9	3.1	0.33	125	0.21
I031105	62	1.89	66.0	3.01	7.61	0.08	0.19	<0.01	0.013	0.71	8.2	7.7	1.16	293	4.66
I031106	28	1.62	60.2	2.32	4.66	0.08	0.27	0.01	0.005	0.54	9.9	6.2	0.73	241	9.03
I031107	263	4.95	84.6	6.27	11.10	0.14	0.20	0.02	0.051	1.26	14.3	12.9	3.17	948	3.41
I031108	15	0.54	51.6	2.62	1.31	0.06	0.07	0.09	0.017	0.19	5.6	1.6	1.59	929	1.63
I031109	9	0.42	31.7	1.89	1.63	0.05	0.06	0.10	0.007	0.16	6.5	3.0	0.58	799	1.08
I031110	8	0.34	33.9	1.55	1.21	<0.05	0.05	0.11	0.006	0.12	5.8	2.1	0.40	703	1.20
I031111	7	0.35	23.0	1.68	0.76	<0.05	0.04	0.04	0.016	0.12	2.9	0.6	0.48	579	1.19
I031112	18	0.98	146.0	3.57	1.43	0.06	0.07	0.20	0.062	0.20	3.9	3.2	2.26	1140	5.07
I031113	40	0.80	86.7	3.99	2.93	0.08	0.13	0.09	0.049	0.28	7.9	4.2	1.75	1520	22.0
I031114	44	1.27	69.2	2.62	4.69	0.06	0.17	0.01	0.025	0.37	9.8	8.2	0.84	1860	4.87
I031115	98	2.83	59.0	4.17	11.15	0.12	0.17	0.01	0.040	1.07	16.0	14.7	1.70	1300	2.84

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 23-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10091901

Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I030976	0.08	0.15	29.7	970	3.9	40.1	0.006	0.72	0.20	5.9	0.8	0.6	56.4	<0.01	0.05
I030977	0.13	0.19	37.8	1110	4.3	45.0	0.008	0.84	1.31	7.4	1.2	0.9	56.7	<0.01	0.08
I030978	0.15	0.30	31.2	1510	4.7	45.1	0.006	0.88	0.10	7.3	1.2	0.9	73.1	0.01	0.10
I030979	0.19	0.28	43.5	1490	4.3	54.4	0.004	1.06	0.05	11.8	1.5	1.0	67.4	0.01	0.13
I030980	0.21	0.30	45.4	1550	4.6	53.9	0.003	1.20	0.06	11.8	1.5	0.9	70.0	0.01	0.09
I030981	0.25	0.22	70.4	960	3.5	53.9	0.003	0.83	0.06	12.4	1.3	0.9	92.9	0.01	0.10
I030982	0.25	0.24	73.2	1100	3.3	47.5	0.001	0.97	0.08	16.5	1.4	1.9	151.0	0.01	0.07
I030983	0.12	0.07	39.6	290	2.9	32.9	0.002	0.82	0.41	7.6	2.1	0.6	102.0	<0.01	0.10
I030984	0.11	0.07	46.6	360	3.0	30.8	0.004	0.67	0.10	10.2	2.1	0.6	63.7	<0.01	0.09
I030985	0.25	0.09	43.0	600	4.9	52.8	0.003	0.66	0.05	14.5	1.2	0.9	103.0	<0.01	0.08
I030986	0.25	0.29	34.2	1170	4.4	56.4	0.004	0.90	0.05	12.0	1.4	1.0	79.4	0.01	0.09
I030987	0.20	0.11	36.7	490	3.3	45.7	0.003	0.75	<0.05	9.8	1.4	0.8	61.1	<0.01	0.09
I030988	0.20	0.12	47.3	460	3.2	42.0	0.004	0.87	0.06	8.3	2.0	0.7	48.4	<0.01	0.11
I030989	0.19	0.10	42.6	510	5.1	48.3	0.001	0.73	0.07	23.3	1.2	0.7	77.9	<0.01	0.04
I030990	0.16	0.20	23.8	890	11.7	6.9	0.012	0.37	5.08	3.4	3.4	2.6	107.5	<0.01	4.20
I030991	0.24	0.07	66.3	380	2.6	33.6	0.001	0.30	0.17	6.2	0.5	0.4	42.0	<0.01	0.09
I030992	0.13	0.08	32.1	500	2.3	24.5	0.001	0.47	0.11	5.8	0.7	0.5	29.7	<0.01	0.05
I030993	0.14	0.08	31.1	480	2.2	13.6	0.001	0.63	0.16	6.7	0.7	0.5	41.4	<0.01	0.13
I030994	0.24	0.14	38.4	650	4.9	66.1	0.002	0.66	0.06	16.2	1.1	1.0	158.5	0.01	0.07
I030995	0.20	0.13	30.6	530	7.4	50.2	0.003	0.62	0.05	13.1	1.1	1.0	84.8	0.01	0.08
I030996	0.15	0.14	51.7	660	4.9	77.4	0.003	0.87	0.06	19.8	1.6	0.9	143.5	0.01	0.07
I030997	0.11	0.10	41.5	690	2.7	44.3	0.005	1.14	0.05	7.1	1.8	0.7	59.6	<0.01	0.09
I030998	0.20	0.09	44.4	380	6.0	58.9	0.003	0.88	0.05	12.9	1.5	0.9	104.0	<0.01	0.34
I030999	0.21	0.08	42.4	650	4.2	45.0	0.004	1.36	0.06	8.4	2.2	0.8	65.5	<0.01	0.10
I031000	0.24	0.21	2.9	410	5.4	54.5	<0.001	0.01	0.13	5.8	0.2	0.8	43.4	<0.01	0.01
I031101	0.11	0.11	21.1	480	2.7	27.4	0.008	0.63	0.12	4.2	1.0	0.6	39.6	<0.01	0.12
I031102	0.10	0.07	25.2	520	3.0	31.2	0.003	0.73	0.08	3.4	0.8	0.4	37.3	<0.01	0.09
I031103	0.09	0.14	25.2	360	3.2	35.7	0.001	0.47	0.07	3.5	0.5	0.5	30.2	<0.01	0.05
I031104	0.02	<0.05	11.0	210	2.0	9.4	<0.001	0.38	0.07	1.5	0.3	<0.2	34.0	<0.01	0.04
I031105	0.06	0.08	49.8	600	6.4	39.4	0.008	1.15	0.07	6.1	2.4	0.5	45.2	<0.01	0.09
I031106	0.03	0.05	45.8	640	3.6	28.7	0.016	1.08	0.15	3.8	3.1	0.3	20.5	<0.01	0.13
I031107	0.04	0.12	173.5	1220	6.6	61.4	0.007	1.99	1.36	19.4	3.3	0.7	70.8	<0.01	0.13
I031108	0.02	<0.05	45.9	540	13.2	10.0	0.004	2.27	15.60	4.2	1.4	<0.2	109.5	<0.01	0.24
I031109	0.02	0.05	17.2	590	6.5	8.5	0.002	1.57	9.29	2.9	0.7	0.2	58.2	<0.01	0.13
I031110	0.01	<0.05	17.8	440	5.6	6.4	0.002	1.35	10.40	2.6	0.6	0.2	47.6	<0.01	0.12
I031111	0.01	0.11	11.8	410	11.6	6.2	0.001	1.76	10.90	1.6	0.7	<0.2	57.6	<0.01	0.17
I031112	0.02	0.11	45.2	670	13.4	11.2	0.008	3.43	43.2	7.9	1.3	0.2	143.5	<0.01	0.62
I031113	0.01	0.14	114.0	970	7.6	13.9	0.006	2.84	15.60	6.3	3.5	0.2	153.5	<0.01	0.40
I031114	0.01	0.16	54.8	1000	4.7	17.6	0.012	1.17	4.07	4.6	1.4	0.4	62.4	<0.01	0.46
I031115	0.03	0.31	80.2	1280	3.4	44.1	0.006	1.00	0.85	8.1	1.1	0.8	57.0	<0.01	0.06

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 23-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10091901

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I030976		6.9	0.072	0.18	2.07	69	0.09	7.67	63	3.0
I030977		8.2	0.103	0.21	2.84	88	0.15	12.85	74	4.1
I030978		8.4	0.117	0.22	2.47	86	0.25	11.80	85	1.6
I030979		5.6	0.154	0.24	2.19	123	0.77	12.20	94	1.8
I030980		5.4	0.155	0.25	1.85	122	1.14	12.25	91	1.3
I030981		5.1	0.160	0.24	1.43	128	0.41	10.50	81	0.8
I030982		3.2	0.218	0.22	0.82	158	0.16	11.40	94	0.9
I030983		3.9	0.066	0.13	0.94	74	0.07	9.01	49	1.1
I030984		3.9	0.076	0.13	1.23	106	0.08	11.30	52	0.9
I030985		4.5	0.115	0.23	1.20	131	0.16	9.85	84	0.5
I030986		6.1	0.151	0.25	1.80	123	0.36	12.10	84	0.7
I030987		4.9	0.094	0.21	1.29	90	0.24	7.68	63	0.6
I030988		6.0	0.099	0.20	1.64	91	0.14	9.46	60	0.7
I030989		1.9	0.193	0.21	0.50	180	0.09	11.30	122	0.5
I030990		2.1	0.102	0.05	1.95	57	18.25	8.09	67	7.2
I030991		0.9	0.172	0.17	0.24	76	0.34	4.68	58	0.7
I030992		1.1	0.198	0.13	0.25	72	0.20	4.91	55	0.7
I030993		0.5	0.202	0.06	0.13	78	0.19	6.18	49	1.0
I030994		5.0	0.145	0.31	1.17	140	0.26	11.30	80	0.5
I030995		4.3	0.117	0.23	1.12	112	0.19	9.86	96	<0.5
I030996		3.6	0.174	0.35	1.29	165	0.41	10.70	90	0.7
I030997		4.7	0.065	0.17	1.70	69	0.10	9.97	53	0.8
I030998		4.7	0.088	0.25	1.50	99	0.23	10.85	75	0.5
I030999		6.5	0.059	0.19	2.07	78	0.18	10.75	61	0.7
I031000		14.6	0.195	0.37	2.43	60	0.09	7.76	48	2.0
I031101		4.4	0.056	0.13	1.09	50	0.16	6.08	39	1.3
I031102		4.6	0.043	0.16	0.92	48	0.44	4.83	41	1.7
I031103		5.6	0.062	0.17	0.69	39	0.35	3.66	50	3.4
I031104		1.3	0.010	0.05	0.25	16	<0.05	2.35	21	2.4
I031105		2.9	0.059	0.23	1.58	79	0.13	5.81	96	8.8
I031106		3.3	0.023	0.18	3.02	59	0.08	6.77	97	12.1
I031107		3.7	0.130	0.57	1.22	190	0.10	13.85	235	8.4
I031108		3.0	<0.005	0.14	0.86	19	0.17	8.48	58	3.2
I031109		3.2	<0.005	0.16	0.96	12	0.14	8.12	40	2.3
I031110		2.8	<0.005	0.17	0.88	11	0.09	6.91	40	2.1
I031111		1.4	<0.005	0.10	0.49	6	0.12	5.36	40	1.6
I031112		2.3	<0.005	0.19	1.65	35	0.33	13.30	135	3.3
I031113		2.9	0.009	0.17	1.24	35	0.28	11.10	150	5.4
I031114		2.6	0.028	0.13	3.08	62	0.13	9.85	60	7.3
I031115		4.4	0.158	0.28	1.89	106	0.19	14.05	100	6.8

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 23-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10091901

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I031116		3.34	<0.005		0.12	2.01	1.9	<0.2	<10	480	0.51	0.10	1.30	0.05	24.6	16.0
I031117		3.28	<0.005		0.14	3.85	1.6	<0.2	<10	230	0.97	0.10	2.03	0.06	22.1	23.0
I031118		3.98	<0.005		0.18	3.00	1.4	<0.2	<10	460	0.84	0.13	3.01	0.12	22.5	15.7

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 23-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10091901

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031116		68	1.59	46.4	2.83	7.62	0.10	0.08	<0.01	0.026	0.61	11.9	11.3	1.17	891	1.22
I031117		81	2.56	59.0	3.79	12.30	0.15	0.05	<0.01	0.049	1.12	10.7	14.6	1.65	812	2.84
I031118		64	1.92	50.3	3.06	10.35	0.11	0.06	<0.01	0.031	0.85	10.8	15.0	1.39	1060	2.38

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 23-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10091901

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031116		0.01	0.47	55.1	890	2.4	27.2	0.002	0.57	0.18	6.0	0.9	0.5	31.8	<0.01	0.07
I031117		0.10	0.55	61.0	1590	3.5	44.3	0.006	0.77	0.11	8.1	1.3	0.8	104.5	0.01	0.07
I031118		0.09	0.32	48.6	960	4.1	40.4	0.004	0.80	0.12	7.5	1.1	0.8	80.6	<0.01	0.15

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 23-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10091901

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031116		2.9	0.120	0.15	0.84	70	0.09	8.32	59	2.9
I031117		2.9	0.225	0.25	1.61	118	0.49	11.80	72	1.6
I031118		3.7	0.131	0.20	1.53	86	0.26	10.50	63	2.4

***** See Appendix Page for comments regarding this certificate *****

ALS Chemex
EXCELLENCE IN ANALYTICAL CHEMISTRY
ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alschemex.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 23-JUL-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10091901

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-AUG-2010
Account: EIASQI

CERTIFICATE WH10095045

Project: SQI10-03

P.O. No.: SQI10-03_12

This report is for 67 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 16-JUL-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
PUL-QC	Pulverizing QC Test
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
LOG-22d	Sample login - Rcd w/o BarCode dup
SPL-21d	Split sample - duplicate
PUL-31d	Pulverize Split - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095045

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I031168		2.39	0.007		0.03	0.10	6	<0.2	<10	30	0.09	0.06	18.50	0.12	10.00	2.9
I031169		3.35	0.026		0.19	0.54	75.9	<0.2	<10	90	0.29	0.27	6.43	0.18	25.7	10.1
I031170		0.07	1.230	1.50	0.44	1.64	1875	1.1	30	80	0.16	39.8	3.76	0.41	18.10	58.6
I031171		2.63	0.326		0.31	0.44	1610	0.4	<10	110	0.28	0.49	3.94	0.14	27.4	10.0
I031172		2.32	0.344		4.58	0.38	661	0.3	<10	110	0.22	0.18	2.68	2.91	13.95	9.0
I031173		3.67	1.005	1.09	4.07	0.40	5620	1.0	<10	90	0.21	0.27	1.84	2.33	22.1	15.4
I031174		2.86	1.115	1.15	3.52	0.44	4250	1.1	<10	130	0.30	0.29	2.89	0.44	15.40	11.5
I031175		4.03	0.100		0.69	0.29	962	<0.2	<10	80	0.18	0.13	1.00	0.22	15.35	7.8
I031176		4.07	0.015		0.14	0.15	100.0	<0.2	<10	30	0.09	0.07	0.61	0.06	6.75	5.4
I031177		3.99	0.009		0.22	0.16	6.2	<0.2	<10	30	0.08	0.09	0.85	0.09	5.88	4.4
I031178		4.20	0.006		0.31	0.97	2.4	<0.2	<10	140	0.24	0.18	0.79	0.16	23.0	10.7
I031179		4.21	0.194		0.41	0.81	647	0.2	<10	160	0.22	0.09	1.36	0.46	16.85	10.6
I031180		0.62	<0.005		0.03	2.16	7.2	<0.2	<10	300	0.20	0.02	0.66	0.04	40.6	9.0
I031181		4.55	0.322		0.55	2.49	934	0.2	<10	250	0.58	0.12	3.01	0.37	26.3	27.0
I031182		3.62	0.102		0.23	2.75	143.0	<0.2	<10	270	0.71	0.38	2.61	0.30	39.3	16.2
I031183		4.71	<0.005		0.15	2.70	1.5	<0.2	<10	280	0.69	0.09	1.87	0.10	65.4	17.5
I031184		4.03	0.005		0.25	2.78	2.2	<0.2	<10	330	0.61	0.18	2.15	1.68	43.9	17.1
I031185		4.74	0.017		0.25	3.42	10.5	<0.2	<10	430	0.78	0.23	2.64	0.73	51.6	16.1
I031186		4.38	0.006		0.18	1.78	1.5	<0.2	<10	270	0.48	0.23	3.29	0.44	49.5	10.0
I031187		4.07	0.008		0.14	2.14	15.0	<0.2	<10	220	0.51	0.14	1.00	0.41	70.8	15.1
I031188		5.20	0.008		0.14	1.88	8.0	<0.2	<10	330	0.49	0.09	0.79	0.19	46.3	12.4
I031189		2.00	0.014		0.18	1.91	39.5	<0.2	<10	350	0.46	0.16	1.12	0.24	30.2	12.5
I031190		1.84	0.009		0.28	1.97	10.2	<0.2	<10	230	0.50	0.17	0.99	0.63	30.4	14.0
I031191		3.45	<0.005		0.14	4.49	2.2	<0.2	<10	480	0.69	0.25	1.92	0.09	52.7	27.7
I031192		5.31	<0.005		0.09	2.53	1.1	<0.2	<10	330	0.66	0.15	0.95	0.15	68.7	13.3
I031193		4.29	0.068		0.10	1.49	114.0	<0.2	<10	190	0.40	0.10	0.65	0.22	72.4	11.5
I031194		4.22	0.121		0.16	1.20	179.5	0.2	<10	180	0.34	0.11	0.48	0.32	73.5	11.1
I031195		2.87	0.267		0.36	0.81	1430	0.3	<10	190	0.28	0.14	1.78	0.28	36.2	11.7
I031196		3.98	0.037		0.23	1.92	29.1	<0.2	<10	250	0.62	0.16	1.45	0.32	54.5	14.0
I031197		2.38	0.009		0.24	4.21	3.7	<0.2	<10	180	0.96	0.15	2.34	0.10	58.0	19.7
I031198		1.19	0.259		0.60	1.89	618	0.6	<10	200	0.33	0.17	3.80	0.49	69.6	20.8
I031199		3.40	0.010		0.34	2.32	25.3	<0.2	<10	150	0.50	0.46	1.47	0.24	48.3	19.1
I031200		<0.02	0.015		0.26	2.36	18.3	<0.2	<10	120	0.47	0.32	1.45	0.25	48.1	18.4
I031201		2.60	0.014		0.16	4.01	16.7	<0.2	<10	230	1.28	0.37	2.33	0.14	39.1	17.3
I031202		2.15	0.131		0.46	1.73	1200	<0.2	<10	140	0.63	0.61	2.22	0.74	34.9	17.4
I031203		3.00	<0.005		0.11	2.08	8.7	<0.2	<10	620	0.86	0.16	1.29	0.09	42.5	8.9
I031204		1.97	0.011		0.13	1.67	74.3	<0.2	<10	200	0.57	0.19	8.38	0.15	38.3	7.7
I031205		3.94	0.069		0.31	2.65	462	<0.2	<10	160	0.76	0.15	2.59	0.12	27.6	13.9
I031206		4.34	<0.005		0.08	2.43	1.0	<0.2	<10	550	0.27	0.06	1.38	0.04	13.55	15.8
I031207		3.07	<0.005		0.05	1.55	2.0	<0.2	<10	450	0.37	0.11	2.29	0.10	21.5	7.2

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095045

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031168		4	0.07	1.7	0.85	0.36	0.05	0.04	0.01	0.009	0.02	5.5	1.3	8.53	761	1.23
I031169		15	0.30	31.3	2.08	2.00	0.05	0.08	0.14	0.020	0.13	12.3	4.2	3.13	674	1.35
I031170		21	0.88	114.5	3.34	5.07	0.13	0.24	0.02	0.122	0.16	11.8	11.7	0.53	846	7.71
I031171		14	0.44	41.4	2.35	1.54	0.05	0.06	0.14	0.024	0.21	13.1	3.3	1.66	450	1.92
I031172		8	0.68	71.1	2.21	1.14	0.05	0.08	0.15	0.038	0.17	6.8	1.6	0.92	657	1.88
I031173		7	0.35	84.2	3.27	1.24	0.06	0.03	0.22	0.041	0.28	10.4	1.0	0.70	560	1.82
I031174		7	0.40	86.3	2.63	1.26	<0.05	0.08	0.22	0.033	0.28	7.6	1.0	0.93	686	4.90
I031175		11	0.18	42.9	1.52	0.89	<0.05	0.02	0.10	0.010	0.17	6.7	1.6	0.41	903	0.89
I031176		15	0.09	15.8	0.66	0.56	<0.05	<0.02	0.01	<0.005	0.07	2.6	1.0	0.19	461	0.42
I031177		12	0.08	16.5	0.68	0.53	<0.05	<0.02	0.01	<0.005	0.08	2.5	0.7	0.18	430	0.23
I031178		17	0.50	57.1	1.95	3.19	0.05	0.06	<0.01	0.011	0.40	12.7	6.1	0.48	549	1.22
I031179		16	0.46	62.4	2.01	2.76	0.05	0.06	0.01	0.014	0.35	9.3	5.7	0.43	750	2.08
I031180		9	1.70	5.3	2.87	7.07	0.13	0.14	<0.01	0.015	1.05	21.5	20.5	0.86	576	0.24
I031181		38	1.32	105.0	3.29	7.44	0.09	0.12	0.01	0.029	0.84	15.0	9.9	1.24	1030	3.29
I031182		37	1.35	87.5	3.62	8.75	0.11	0.13	<0.01	0.025	0.79	22.4	15.2	1.12	1200	5.64
I031183		31	1.11	70.1	3.44	7.87	0.11	0.03	<0.01	0.020	0.87	32.3	9.5	1.22	689	1.13
I031184		28	1.42	94.3	3.69	8.99	0.11	0.09	<0.01	0.034	0.89	22.6	9.9	1.32	673	5.81
I031185		46	1.50	56.3	3.19	10.00	0.10	0.05	<0.01	0.026	1.17	25.5	10.3	1.30	688	6.23
I031186		21	0.80	29.8	2.13	5.40	0.07	0.03	<0.01	0.017	0.70	24.8	5.7	0.68	585	1.80
I031187		23	0.86	32.8	3.05	6.56	0.09	0.04	<0.01	0.017	0.79	35.4	9.7	0.77	592	1.48
I031188		22	0.83	41.1	2.68	5.58	0.08	0.05	<0.01	0.016	0.75	23.0	8.2	0.70	585	2.38
I031189		26	1.21	54.2	2.60	6.05	0.07	0.06	<0.01	0.021	0.80	15.5	10.0	0.90	769	2.20
I031190		28	1.18	78.7	2.82	6.25	0.08	0.08	<0.01	0.023	0.84	15.6	10.7	0.95	723	4.19
I031191		41	2.59	62.3	4.49	13.20	0.14	0.03	0.01	0.044	1.78	26.0	15.7	2.10	1020	1.14
I031192		27	1.08	41.2	2.89	7.74	0.10	0.04	<0.01	0.023	0.97	34.5	11.3	0.80	570	2.71
I031193		19	0.65	33.5	2.54	5.05	0.09	0.05	<0.01	0.015	0.60	36.7	9.6	0.56	369	2.13
I031194		14	0.52	28.8	2.44	3.88	0.09	0.04	0.01	0.013	0.50	36.7	7.8	0.47	307	1.72
I031195		13	0.53	49.4	2.93	2.66	0.07	0.04	0.03	0.016	0.36	18.3	6.1	0.69	1010	1.77
I031196		23	1.03	56.7	3.35	6.14	0.10	0.07	0.02	0.020	0.70	28.1	12.6	0.69	595	2.97
I031197		36	1.61	75.1	3.90	12.20	0.11	0.03	0.01	0.030	1.16	27.4	13.4	1.14	617	1.12
I031198		26	1.24	80.0	4.10	6.78	0.11	0.04	0.05	0.042	0.57	33.0	14.7	1.51	934	0.78
I031199		29	1.45	88.0	3.65	8.18	0.10	0.06	0.05	0.033	0.91	22.6	11.6	1.15	693	1.62
I031200		29	1.42	88.6	3.66	8.16	0.11	0.06	0.04	0.033	0.91	22.7	11.5	1.15	701	1.98
I031201		88	2.70	63.5	4.11	12.65	0.15	0.10	0.07	0.037	1.35	18.5	18.7	1.85	618	4.08
I031202		50	1.25	127.5	3.08	6.52	0.09	0.08	0.09	0.036	0.62	17.0	10.7	0.79	438	3.67
I031203		45	1.71	52.5	2.55	7.67	0.09	0.12	0.03	0.027	0.76	20.3	13.1	0.91	328	3.84
I031204		29	2.23	27.7	2.51	6.37	0.09	0.12	0.19	0.032	0.61	20.6	9.0	0.77	828	2.06
I031205		38	1.25	53.3	3.23	6.54	0.07	0.07	0.07	0.020	0.79	13.3	8.2	1.16	516	1.57
I031206		129	1.34	33.7	2.84	6.29	0.09	0.04	0.02	0.011	0.74	6.6	7.2	1.95	472	0.34
I031207		19	1.87	12.1	1.78	5.20	0.05	0.04	0.08	0.022	0.53	10.2	5.9	0.85	550	0.07

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095045

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031168		0.01	0.07	6.3	250	6.3	1.0	<0.001	0.18	1.90	1.9	0.3	<0.2	205	<0.01	0.01
I031169		0.03	<0.05	22.2	790	6.6	6.5	0.002	0.54	16.05	4.2	0.8	0.2	86.5	<0.01	0.18
I031170		0.14	0.23	23.6	840	12.1	6.8	0.013	0.34	5.02	3.1	3.5	3.0	107.0	<0.01	4.03
I031171		0.01	0.05	30.3	460	5.1	10.5	0.002	1.25	18.45	3.9	1.2	0.2	55.5	<0.01	0.23
I031172		0.01	<0.05	27.8	500	60.4	9.0	0.004	2.10	41.6	2.3	1.0	0.2	44.1	<0.01	0.29
I031173		0.01	0.08	30.8	550	15.4	12.7	0.003	2.98	40.0	1.9	1.7	<0.2	39.8	<0.01	1.23
I031174		0.01	0.05	29.6	1000	5.0	13.3	0.008	2.16	37.6	2.3	1.5	<0.2	60.3	<0.01	1.23
I031175		0.01	<0.05	17.0	280	3.2	8.0	0.001	0.81	14.35	1.4	0.5	<0.2	23.8	<0.01	0.37
I031176		<0.01	<0.05	11.9	80	2.2	3.3	<0.001	0.13	8.01	0.9	0.2	<0.2	15.9	<0.01	0.12
I031177		<0.01	<0.05	9.0	130	3.3	3.5	<0.001	0.11	4.34	0.6	0.2	<0.2	18.1	<0.01	0.18
I031178		<0.01	0.25	18.2	640	8.1	17.6	0.004	0.46	6.43	2.3	0.8	0.3	18.2	<0.01	0.17
I031179		0.01	0.34	18.8	890	4.5	15.9	0.005	0.60	2.72	2.4	1.0	0.3	30.2	<0.01	0.20
I031180		0.22	0.24	2.8	470	4.4	60.0	<0.001	<0.01	0.17	5.7	0.2	0.7	43.4	<0.01	<0.01
I031181		0.06	0.25	45.3	1780	4.8	34.7	0.007	1.00	6.31	6.6	2.1	0.6	72.5	<0.01	0.30
I031182		0.08	0.33	45.9	2250	5.0	38.0	0.014	0.92	3.49	6.0	1.8	0.5	67.3	0.01	0.46
I031183		0.10	0.26	34.7	550	5.1	38.4	0.002	0.86	0.08	5.0	1.3	0.5	55.8	<0.01	0.15
I031184		0.06	0.33	34.5	1480	5.8	37.7	0.022	0.96	0.13	6.9	2.2	0.6	64.0	<0.01	0.15
I031185		0.13	0.18	34.7	730	6.7	50.9	0.013	0.64	0.13	8.3	1.1	0.6	84.2	<0.01	0.36
I031186		0.08	0.19	20.0	590	11.0	35.3	0.004	0.53	0.07	3.4	0.8	0.4	85.1	<0.01	0.18
I031187		0.06	0.22	29.7	530	6.7	33.7	0.002	0.50	0.13	3.5	0.7	0.4	30.4	0.01	0.09
I031188		0.05	0.22	27.5	650	4.3	31.0	0.005	0.49	0.12	3.5	0.9	0.4	28.0	<0.01	0.07
I031189		0.03	0.18	29.8	800	4.5	34.6	0.004	0.65	0.29	4.5	1.1	0.6	34.1	<0.01	0.14
I031190		0.03	0.20	39.2	1270	4.9	36.8	0.010	0.95	0.24	4.2	1.7	0.6	30.0	<0.01	0.17
I031191		0.15	0.28	52.5	840	6.9	73.9	0.002	0.65	0.11	11.2	0.8	0.9	78.5	0.01	0.17
I031192		0.09	0.24	26.0	670	5.9	41.5	0.009	0.37	0.17	4.5	1.0	0.7	46.4	<0.01	0.09
I031193		0.02	0.19	22.5	470	7.0	28.3	0.005	0.36	1.04	3.0	0.8	0.4	21.9	<0.01	0.06
I031194		0.02	0.16	21.5	440	7.3	23.1	0.005	0.50	0.41	2.1	0.6	0.3	20.3	<0.01	0.06
I031195		0.01	0.15	26.7	800	6.2	16.6	0.005	1.13	6.07	2.5	1.0	0.3	56.7	<0.01	0.20
I031196		0.04	0.26	29.2	950	4.7	32.8	0.006	1.09	0.27	4.4	1.5	0.5	46.8	<0.01	0.22
I031197		0.24	0.27	30.6	700	6.7	52.9	0.002	0.98	0.10	8.3	1.2	0.9	85.2	<0.01	0.30
I031198		0.04	0.17	29.9	750	6.9	29.0	0.002	1.21	8.82	7.8	0.7	0.4	76.1	<0.01	0.34
I031199		0.08	0.27	35.5	970	4.4	36.9	0.002	1.15	0.56	7.0	1.0	0.6	55.7	<0.01	0.47
I031200		0.08	0.28	34.4	1010	4.4	36.8	0.002	1.15	0.53	6.8	1.0	0.6	51.1	<0.01	0.34
I031201		0.13	0.20	51.3	720	4.6	57.0	0.005	0.59	2.99	13.2	1.2	1.3	63.1	<0.01	0.38
I031202		0.01	0.19	55.4	710	3.9	32.3	0.006	1.08	12.10	7.6	2.2	0.7	34.1	<0.01	0.81
I031203		0.01	0.16	32.9	580	4.2	42.1	0.004	0.44	0.70	7.6	1.2	0.7	32.0	<0.01	0.19
I031204		0.01	0.14	24.6	460	4.7	38.6	0.004	1.26	8.94	6.1	1.4	0.7	55.0	<0.01	0.09
I031205		0.15	0.09	29.2	420	4.8	39.7	0.003	1.11	6.54	5.6	1.1	0.5	48.1	<0.01	0.19
I031206		0.11	0.08	63.5	380	2.9	34.7	0.001	0.43	0.31	5.2	0.5	0.3	35.9	<0.01	0.04
I031207		0.03	0.06	11.6	330	7.2	29.1	<0.001	0.49	0.22	4.9	0.4	0.5	49.7	<0.01	0.01

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095045

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031168		1.0	<0.005	<0.02	0.69	7	0.08	7.41	25	1.5
I031169		4.6	<0.005	0.12	1.37	21	0.11	10.20	42	2.8
I031170		1.9	0.104	0.05	1.90	55	19.15	8.03	62	7.6
I031171		6.8	<0.005	0.17	1.17	16	0.28	8.02	54	2.7
I031172		4.1	<0.005	0.14	1.12	12	0.22	8.56	214	3.0
I031173		8.6	<0.005	0.20	1.41	10	0.27	6.18	197	1.4
I031174		6.6	<0.005	0.18	2.62	13	0.36	7.74	50	3.8
I031175		2.5	<0.005	0.14	0.94	7	0.17	3.65	36	0.9
I031176		0.7	<0.005	0.02	0.29	3	0.11	1.69	10	<0.5
I031177		0.6	<0.005	0.03	0.33	3	0.10	2.45	10	<0.5
I031178		3.4	0.033	0.10	1.62	29	0.16	7.81	43	2.2
I031179		2.3	0.028	0.09	1.62	31	0.22	9.71	64	2.5
I031180		11.5	0.215	0.38	3.16	64	0.11	7.97	51	1.9
I031181		5.4	0.058	0.18	2.73	72	0.27	15.70	100	4.8
I031182		7.7	0.066	0.18	4.92	105	0.24	20.4	97	5.0
I031183		12.6	0.084	0.20	2.49	41	0.31	13.60	73	1.0
I031184		8.4	0.101	0.22	5.26	106	0.51	15.85	172	3.3
I031185		10.3	0.089	0.26	3.68	80	0.31	13.90	111	1.4
I031186		10.4	0.050	0.15	2.46	33	0.36	12.10	53	1.0
I031187		14.7	0.056	0.19	2.46	31	0.24	13.45	72	1.2
I031188		9.6	0.058	0.18	2.19	35	0.24	10.50	64	2.1
I031189		7.3	0.063	0.19	2.32	55	0.27	10.75	76	2.1
I031190		7.9	0.066	0.21	3.83	73	0.47	12.65	95	3.2
I031191		9.3	0.196	0.37	1.49	101	0.93	12.10	127	0.7
I031192		14.1	0.086	0.23	3.06	48	0.24	14.00	77	1.2
I031193		14.4	0.036	0.16	2.84	28	0.09	11.95	62	1.8
I031194		15.5	0.021	0.13	2.57	14	0.10	11.85	60	1.2
I031195		8.0	0.010	0.11	2.44	20	0.13	8.66	65	1.5
I031196		11.2	0.056	0.18	2.97	51	0.21	15.45	70	2.5
I031197		13.4	0.119	0.29	2.20	66	0.46	15.80	88	0.5
I031198		12.9	0.046	0.17	1.94	49	0.13	16.15	125	0.9
I031199		7.8	0.094	0.23	1.72	61	0.24	13.60	83	1.9
I031200		7.7	0.096	0.23	1.71	61	0.23	13.65	83	2.0
I031201		5.9	0.131	0.32	1.88	120	0.24	14.95	86	4.0
I031202		4.9	0.046	0.19	1.93	69	0.15	12.45	89	3.2
I031203		7.3	0.055	0.22	2.32	75	0.17	13.65	61	5.0
I031204		6.0	0.035	0.34	3.31	51	0.18	15.30	53	4.9
I031205		5.1	0.075	0.24	1.26	67	0.12	8.60	73	2.6
I031206		2.8	0.120	0.19	0.54	68	0.06	6.85	64	0.9
I031207		4.9	0.030	0.13	1.83	23	<0.05	10.50	51	1.0

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095045

Sample Description	Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
	Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I031208		2.24	0.006		0.16	2.77	2.4	<0.2	<10	310	0.49	0.10	4.82	2.61	21.4	14.4
I031209		0.17	0.008		0.19	3.65	0.9	<0.2	<10	310	0.82	0.25	1.59	0.13	23.1	21.4
I031210		0.07	1.280	1.48	0.54	1.71	1950	1.6	30	90	0.20	42.6	4.18	0.43	19.50	59.3
I031211		2.64	0.005		0.10	2.59	13.2	<0.2	<10	180	0.44	0.41	1.40	0.07	22.5	18.6
I031212		2.11	<0.005		0.11	2.22	0.7	<0.2	<10	150	0.64	0.15	1.35	0.04	35.2	15.3
I031213		5.20	0.005		0.27	2.08	4.1	<0.2	<10	170	0.36	0.12	1.85	0.21	8.89	17.4
I031214		5.06	0.015		0.28	2.39	19.0	<0.2	<10	210	0.27	0.13	1.74	0.17	15.60	21.4
I031215		3.98	0.011		0.40	2.74	1.6	<0.2	<10	200	0.21	0.13	1.01	0.25	8.56	21.3
I031216		2.18	0.008		0.12	2.47	1.8	<0.2	<10	230	0.25	0.10	1.12	0.06	8.01	17.3
I031217		3.29	0.130		0.19	2.13	433	<0.2	<10	170	0.18	0.12	3.53	0.18	6.83	22.4
I031218		4.74	0.008		0.25	2.66	4.8	<0.2	<10	140	0.25	0.15	1.28	0.16	8.49	22.0
I031219		4.13	0.008		0.22	3.45	1.7	<0.2	<10	240	0.39	0.10	1.77	0.19	7.85	16.8
I031220		0.65	<0.005		0.04	2.11	0.7	<0.2	<10	300	0.20	0.02	0.63	0.04	40.6	8.9
I031221		5.27	0.011		0.24	3.44	2.0	<0.2	<10	160	0.45	0.15	3.27	0.19	9.93	19.5
I031222		4.31	0.015		0.52	3.49	4.9	<0.2	<10	70	0.34	0.27	2.37	0.41	10.30	20.7
I031223		5.12	0.087		0.37	1.11	129.5	<0.2	<10	260	0.24	0.12	1.78	0.12	40.9	9.7
I031224		4.25	0.009		0.21	4.59	3.3	<0.2	<10	320	0.37	0.09	2.30	0.13	8.95	22.5
I031225		4.86	0.006		0.17	4.95	3.6	<0.2	<10	130	0.58	0.09	3.99	0.14	15.60	22.6
I031226		3.39	0.009		0.07	1.83	0.3	<0.2	<10	150	0.22	0.09	0.73	0.03	29.1	14.6
I031227		5.98	0.005		0.15	3.70	2.4	<0.2	<10	240	0.44	0.09	1.87	0.20	11.60	17.4
I031228		4.24	0.005		0.21	2.13	0.6	<0.2	<10	260	0.28	0.10	1.39	0.14	11.75	17.2
I031229		4.78	0.022		1.21	2.59	1.7	<0.2	<10	200	0.32	0.14	1.81	0.48	13.80	16.7
I031230		2.44	0.006		0.24	2.52	2.4	<0.2	<10	110	0.28	0.18	1.31	0.12	9.95	19.2
I031231		2.82	0.007		0.20	2.65	2.7	<0.2	<10	160	0.30	0.16	1.37	0.10	9.74	18.8
I031232		4.98	<0.005		0.23	2.68	2.7	<0.2	<10	120	0.34	0.16	1.21	0.13	13.10	15.0
I031233		4.43	<0.005		0.06	2.40	1.8	<0.2	<10	130	0.24	0.16	1.34	0.07	21.2	20.9
I031234		4.41	<0.005		0.11	2.05	2.0	<0.2	<10	250	0.11	0.11	1.84	0.11	7.30	18.8

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095045

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031208		60	2.26	45.5	2.91	7.33	0.08	0.03	0.20	0.018	0.99	10.5	10.9	2.10	1180	0.32
I031209		41	2.40	62.4	4.38	11.00	0.13	0.03	0.07	0.025	1.29	10.7	14.0	2.80	683	0.10
I031210		22	0.99	121.5	3.62	5.44	0.15	0.25	0.02	0.132	0.16	12.1	9.7	0.56	882	7.98
I031211		52	1.62	36.8	3.39	7.94	0.09	0.03	0.09	0.020	0.87	10.3	9.6	2.03	565	0.41
I031212		31	1.27	31.8	2.98	7.84	0.09	0.03	0.15	0.026	0.53	15.7	8.4	1.52	454	0.13
I031213		51	1.40	72.9	3.06	6.15	0.09	0.04	0.04	0.012	0.78	4.0	6.7	1.41	533	3.36
I031214		29	1.80	90.7	3.59	7.29	0.10	0.03	0.01	0.014	0.72	7.1	11.1	1.95	521	0.15
I031215		62	1.80	154.0	3.87	8.13	0.14	0.03	0.01	0.014	0.92	4.0	10.2	2.38	539	0.32
I031216		90	1.87	39.5	3.31	6.98	0.10	0.03	0.01	0.012	0.83	3.9	11.8	2.03	477	0.31
I031217		35	2.29	35.9	4.27	6.62	0.08	0.05	0.03	0.022	0.56	2.9	13.1	2.54	935	0.18
I031218		34	1.87	76.7	3.91	8.46	0.13	0.03	0.01	0.015	1.07	3.8	11.6	1.80	477	0.63
I031219		32	2.37	66.3	3.40	9.80	0.11	0.02	0.01	0.012	1.39	3.3	11.6	1.91	639	0.98
I031220		7	1.85	6.6	2.87	7.43	0.16	0.12	<0.01	0.014	1.07	20.5	17.6	0.89	564	0.27
I031221		28	2.24	60.6	3.79	9.86	0.11	0.02	0.01	0.017	1.27	4.3	11.2	2.11	914	0.76
I031222		55	3.27	133.0	4.08	10.15	0.13	0.02	0.01	0.014	1.47	4.3	16.0	2.02	715	3.23
I031223		10	2.15	43.2	2.29	4.22	0.06	0.04	0.06	0.014	0.43	19.5	5.1	0.92	428	0.16
I031224		44	2.53	50.9	4.20	11.55	0.13	<0.02	0.05	0.012	1.55	4.0	15.7	2.65	745	0.07
I031225		37	3.31	47.1	4.26	11.40	0.12	<0.02	0.05	0.012	1.75	7.0	16.1	2.80	968	0.39
I031226		16	1.09	22.2	3.25	6.43	0.08	<0.02	0.01	0.018	0.61	13.4	8.5	1.22	321	0.12
I031227		22	1.64	39.1	3.43	9.51	0.10	0.02	0.01	0.010	1.22	5.2	11.1	1.97	537	0.40
I031228		40	1.35	68.8	2.91	6.56	0.10	0.04	0.01	0.011	0.66	5.4	7.4	1.72	433	0.71
I031229		36	1.55	396	3.19	7.64	0.09	0.03	0.01	0.014	0.99	5.9	9.1	1.60	564	3.92
I031230		39	1.64	77.2	3.43	7.43	0.10	0.06	<0.01	0.013	1.09	4.4	7.9	1.67	437	7.20
I031231		41	1.71	62.0	3.50	7.80	0.11	0.06	<0.01	0.012	1.12	4.4	8.4	1.73	465	7.39
I031232		44	1.89	54.9	3.47	6.67	0.10	0.04	0.01	0.012	1.10	6.0	8.6	1.70	450	5.07
I031233		45	3.03	14.4	3.75	7.59	0.09	0.04	<0.01	0.006	0.97	10.0	11.1	1.70	525	0.14
I031234		52	2.58	33.1	3.09	6.25	0.10	0.04	<0.01	<0.005	0.64	3.5	12.4	1.71	595	0.09

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095045

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031208		0.02	0.07	33.0	280	7.3	41.4	0.001	0.88	0.27	4.1	0.5	0.3	84.2	<0.01	0.02
I031209		0.01	0.08	23.1	830	6.6	51.0	<0.001	0.70	0.39	8.8	0.4	0.5	69.5	<0.01	0.02
I031210		0.15	0.30	23.4	860	11.9	7.4	0.012	0.35	5.09	3.4	3.6	2.9	109.5	<0.01	4.32
I031211		0.02	0.08	34.7	520	4.4	33.8	0.001	0.85	0.38	6.3	0.3	0.5	47.9	<0.01	0.04
I031212		0.02	0.07	24.0	590	5.6	24.3	<0.001	0.61	0.43	6.6	0.4	0.6	54.7	<0.01	0.01
I031213		0.11	0.10	31.8	500	2.6	34.1	0.006	1.54	0.19	5.1	1.2	0.3	39.0	<0.01	0.06
I031214		0.08	0.15	20.6	650	2.8	31.1	<0.001	0.84	0.26	5.6	0.6	0.4	48.6	<0.01	0.04
I031215		0.08	0.14	30.7	620	2.2	34.4	0.001	0.96	0.11	5.5	0.6	0.3	28.1	<0.01	0.04
I031216		0.08	0.11	42.4	690	2.6	32.5	0.001	0.69	0.14	5.7	0.3	0.3	30.5	<0.01	0.04
I031217		0.05	0.10	19.7	580	3.4	28.1	0.001	1.34	1.70	9.1	0.5	0.2	72.5	<0.01	0.06
I031218		0.17	0.15	20.4	860	2.5	40.1	0.001	1.31	0.17	5.7	0.8	0.3	35.1	<0.01	0.05
I031219		0.24	0.09	16.1	550	3.7	53.0	0.002	0.99	0.07	5.4	0.5	0.3	49.1	<0.01	0.03
I031220		0.20	0.24	2.6	460	4.3	61.1	<0.001	<0.01	0.11	5.7	0.2	0.7	40.7	<0.01	<0.01
I031221		0.21	0.11	22.1	820	4.6	47.1	0.001	1.47	0.09	6.5	0.7	0.4	61.7	<0.01	0.04
I031222		0.22	0.08	34.0	690	6.3	54.6	0.005	1.62	0.12	8.4	0.8	0.5	58.3	<0.01	0.06
I031223		0.05	0.06	7.6	200	6.5	20.8	<0.001	0.78	5.37	5.8	0.7	<0.2	43.5	<0.01	0.04
I031224		0.24	0.09	24.1	290	9.7	56.6	<0.001	0.87	0.12	9.1	0.3	0.3	60.8	<0.01	0.02
I031225		0.26	0.08	22.5	300	12.3	61.8	0.001	1.72	0.10	10.3	0.5	0.3	98.1	<0.01	0.04
I031226		0.05	0.12	17.8	410	2.4	24.3	<0.001	0.53	0.08	6.4	0.2	0.3	25.9	<0.01	0.01
I031227		0.23	0.10	16.5	390	5.6	45.1	0.001	0.92	0.12	6.0	0.4	0.3	61.1	<0.01	0.03
I031228		0.11	0.18	22.8	440	2.2	27.6	0.002	0.58	0.20	4.7	0.5	0.4	38.6	<0.01	0.03
I031229		0.15	0.10	26.6	470	2.6	37.3	0.007	0.99	0.10	6.4	0.8	0.3	36.8	<0.01	0.04
I031230		0.16	0.16	27.6	690	2.1	38.8	0.009	1.46	0.09	5.4	1.1	0.3	34.7	<0.01	0.05
I031231		0.18	0.14	30.0	660	2.1	40.4	0.010	1.35	0.09	5.6	1.1	0.3	39.1	<0.01	0.05
I031232		0.18	0.14	25.1	700	2.3	40.7	0.008	1.60	0.10	4.0	1.0	0.3	30.7	<0.01	0.05
I031233		0.11	0.12	27.7	530	2.8	38.2	0.001	1.69	0.31	5.9	0.8	0.5	40.3	<0.01	0.04
I031234		0.08	0.11	24.2	470	2.0	28.7	<0.001	0.59	1.23	4.6	0.5	0.3	42.5	<0.01	0.03

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095045

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031208		3.7	0.056	0.22	0.79	46	0.06	8.85	476	1.0
I031209		3.0	0.122	0.33	0.50	89	0.08	11.55	88	0.6
I031210		2.1	0.113	0.06	2.03	57	19.70	8.62	64	8.2
I031211		4.7	0.075	0.22	0.85	57	0.22	10.75	74	0.8
I031212		5.1	0.045	0.31	1.21	50	0.14	14.65	58	0.5
I031213		1.3	0.093	0.19	1.13	89	0.16	5.84	56	1.6
I031214		2.5	0.149	0.17	0.35	72	0.07	6.71	70	0.6
I031215		1.5	0.136	0.19	0.54	85	5.70	5.84	91	0.9
I031216		1.4	0.106	0.18	0.38	83	0.13	5.77	78	0.7
I031217		0.7	0.121	0.24	0.28	87	0.11	8.26	91	1.1
I031218		1.3	0.157	0.22	0.37	81	0.16	6.51	80	0.8
I031219		1.2	0.128	0.27	0.41	89	0.07	5.54	105	0.5
I031220		11.7	0.215	0.41	2.40	65	0.11	7.48	52	1.7
I031221		1.6	0.118	0.26	0.44	90	0.28	6.84	88	0.5
I031222		1.2	0.128	0.31	0.55	115	0.10	6.16	110	0.7
I031223		6.9	0.027	0.14	0.92	37	0.06	13.25	39	0.9
I031224		2.1	0.124	0.33	0.24	127	0.05	3.87	116	<0.5
I031225		2.9	0.112	0.36	0.41	126	0.05	5.24	72	<0.5
I031226		6.2	0.068	0.13	0.45	57	0.05	7.38	48	<0.5
I031227		2.9	0.126	0.25	0.29	84	0.12	4.18	91	<0.5
I031228		2.1	0.157	0.13	0.33	72	0.11	5.53	47	0.9
I031229		3.2	0.096	0.20	1.66	101	0.10	6.21	59	1.0
I031230		1.5	0.138	0.22	1.12	94	0.71	6.03	60	2.1
I031231		1.7	0.135	0.21	1.29	97	0.14	5.87	67	2.3
I031232		2.2	0.139	0.21	1.26	100	0.53	6.59	66	1.1
I031233		4.4	0.122	0.20	0.73	72	0.08	9.18	63	1.0
I031234		1.4	0.148	0.15	0.31	71	0.05	6.13	61	0.8

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095045

Method	CERTIFICATE COMMENTS
ME-MS41	Interference: Ca>10% on ICP-MS As,ICP-AES results shown.
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-AUG-2010
Account: EIASQI

CERTIFICATE WH10095046

Project: SQI10-03

P.O. No.: SQI10-03_11

This report is for 49 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 16-JUL-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
PUL-QC	Pulverizing QC Test
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
LOG-22d	Sample login - Rcd w/o BarCode dup
SPL-21d	Split sample - duplicate
PUL-31d	Pulverize Split - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095046

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I031119		4.21	<0.005		0.21	1.90	30.0	<0.2	<10	810	0.13	0.11	1.28	0.17	15.85	22.1
I031120		<0.02	<0.005		0.25	1.88	30.1	<0.2	<10	800	0.14	0.11	1.28	0.23	15.85	22.1
I031121		8.88	<0.005		0.16	1.44	2.4	<0.2	<10	710	0.41	0.13	1.73	0.20	54.6	7.9
I031122		5.69	<0.005		0.13	0.40	5.2	<0.2	<10	320	0.35	0.09	1.89	0.21	58.6	1.4
I031123		2.64	<0.005		0.12	1.31	4.5	<0.2	<10	450	0.46	0.07	2.86	0.13	19.55	9.8
I031124		4.23	0.006		0.25	0.53	34.3	<0.2	<10	340	0.33	0.10	1.63	0.21	45.5	6.4
I031125		5.02	<0.005		0.09	0.39	0.6	<0.2	<10	200	0.55	0.12	1.26	0.17	44.0	0.4
I031126		5.52	0.011		0.18	0.33	63.1	<0.2	<10	130	0.29	0.26	1.37	0.10	24.7	0.3
I031127		5.70	<0.005		0.08	0.32	13.0	<0.2	<10	110	0.27	0.09	1.48	0.16	23.9	0.2
I031128		5.65	0.005		0.23	0.33	2.6	<0.2	<10	130	0.25	0.23	1.65	0.37	23.0	0.3
I031129		7.65	<0.005		0.20	2.41	14.9	<0.2	<10	430	0.37	0.28	2.76	0.35	29.9	20.2
I031130		0.09	3.96	4.35	1.63	1.64	8550	3.7	20	80	0.17	76.2	4.52	0.41	20.5	126.0
I031131		1.02	0.671		1.17	0.39	2690	0.7	<10	180	0.17	0.73	3.60	0.73	16.15	17.7
I031132		2.63	0.429		0.93	0.45	3380	0.4	<10	160	0.31	0.26	2.98	0.39	19.65	13.8
I031133		2.95	1.040	0.95	2.39	0.43	3750	0.9	<10	130	0.22	0.17	2.61	0.46	16.35	15.4
I031134		3.81	0.014		0.36	1.28	77.0	<0.2	<10	500	0.48	0.21	2.32	0.28	35.2	14.2
I031135		4.62	<0.005		0.39	1.66	9.6	<0.2	<10	240	0.71	0.35	2.20	0.51	34.7	12.8
I031136		6.32	0.099		0.55	0.96	101.0	<0.2	<10	180	0.47	3.57	2.75	0.63	33.3	13.4
I031137		6.90	<0.005		0.26	2.94	9.9	<0.2	<10	170	0.70	0.19	3.62	0.25	34.7	19.6
I031138		6.02	<0.005		0.26	3.53	1.8	<0.2	<10	170	0.93	0.19	1.76	0.20	11.55	16.8
I031139		3.71	<0.005		0.19	2.24	5.8	<0.2	<10	410	0.20	0.05	1.70	0.13	20.8	17.8
I031140		0.95	<0.005		0.03	1.75	1.1	<0.2	<10	280	0.12	0.02	0.44	0.04	28.3	7.7
I031141		1.73	0.104		0.31	2.18	1505	<0.2	<10	390	0.27	0.20	2.64	0.29	22.5	26.8
I031142		3.80	0.009		0.14	2.16	17.2	<0.2	<10	570	0.16	0.62	1.33	0.09	28.7	18.9
I031143		4.06	<0.005		0.15	2.96	2.7	<0.2	<10	540	0.64	0.20	1.32	0.11	26.5	10.9
I031144		7.88	<0.005		0.15	2.55	1.8	<0.2	<10	480	0.59	0.07	1.10	0.16	28.4	11.7
I031145		4.83	<0.005		0.15	4.57	2.1	<0.2	<10	660	0.83	0.10	2.03	0.13	19.05	16.0
I031146		5.39	<0.005		0.22	3.92	3.5	<0.2	<10	780	0.58	0.11	1.61	0.14	27.4	14.1
I031147		3.77	<0.005		0.14	3.07	8.7	<0.2	<10	650	0.27	0.09	1.34	0.13	11.85	19.8
I031148		1.45	<0.005		0.13	2.64	36.3	<0.2	<10	520	0.27	0.12	4.71	0.23	18.70	21.6
I031149		1.80	<0.005		0.23	3.79	5.0	<0.2	<10	730	0.40	0.16	2.00	0.18	19.00	22.3
I031150		1.52	0.006		0.19	3.99	6.8	<0.2	<10	820	0.45	0.15	2.01	0.21	19.75	21.8
I031151		3.22	0.005		0.38	2.81	1.5	<0.2	<10	660	0.62	0.16	1.31	0.52	40.7	10.9
I031152		3.82	<0.005		0.18	2.34	1.7	<0.2	<10	570	0.79	0.12	1.44	0.21	39.9	11.5
I031153		1.17	0.107		0.22	2.19	466	<0.2	<10	280	0.36	0.12	2.84	0.21	24.2	18.3
I031154		2.50	<0.005		0.15	2.00	14.1	<0.2	<10	320	0.58	0.05	1.51	0.15	47.0	10.5
I031155		4.56	<0.005		0.15	0.89	1.7	<0.2	<10	360	0.28	0.10	0.59	0.22	21.9	5.6
I031156		2.31	<0.005		0.13	0.80	3.8	<0.2	<10	350	0.29	0.08	1.00	0.36	19.80	4.5
I031157		4.43	<0.005		0.15	3.14	2.0	<0.2	<10	850	0.76	0.10	1.18	0.06	31.0	16.2
I031158		3.94	0.005		0.28	2.21	8.0	<0.2	<10	600	0.64	0.13	2.88	0.19	35.5	14.4

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095046

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031119		92	1.63	36.4	1.94	3.99	0.10	0.06	<0.01	<0.005	0.95	8.3	10.2	1.23	284	0.22
I031120		88	1.62	40.3	1.93	3.91	0.08	0.06	<0.01	<0.005	0.93	8.4	10.1	1.21	284	0.20
I031121		34	2.56	22.3	1.93	4.40	0.07	0.06	<0.01	0.007	0.74	29.1	7.3	0.67	351	1.07
I031122		4	0.46	5.3	0.49	1.39	0.05	0.07	0.01	<0.005	0.24	30.5	1.5	0.08	234	0.14
I031123		35	2.99	20.2	2.06	3.56	0.05	0.05	0.01	0.007	0.69	9.9	8.5	0.91	490	0.26
I031124		11	0.92	47.4	1.41	1.99	0.06	0.05	0.06	<0.005	0.30	23.8	2.8	0.25	300	1.61
I031125		5	0.52	4.7	0.44	1.53	<0.05	0.08	0.01	<0.005	0.23	22.9	1.5	0.03	179	0.13
I031126		4	0.33	8.7	0.45	0.99	<0.05	0.12	0.02	<0.005	0.22	12.7	1.2	0.03	198	0.08
I031127		4	0.33	2.9	0.31	0.97	<0.05	0.12	0.06	<0.005	0.23	12.1	1.2	0.02	223	0.06
I031128		4	0.30	3.8	0.39	1.03	<0.05	0.12	0.05	<0.005	0.23	11.4	1.1	0.04	255	0.09
I031129		122	2.86	63.4	3.60	7.23	0.11	0.06	0.03	0.026	0.88	15.5	11.9	1.74	674	2.70
I031130		32	1.18	277	4.65	5.88	0.18	0.23	0.07	0.441	0.18	11.5	9.5	0.52	789	25.7
I031131		16	0.51	45.7	3.17	1.07	0.06	0.04	0.15	0.022	0.22	7.6	0.9	1.69	1080	1.96
I031132		20	0.60	57.1	2.91	1.53	0.06	0.04	0.19	0.020	0.20	9.4	2.0	1.29	570	2.77
I031133		14	0.49	66.9	3.22	1.28	0.06	0.04	0.20	0.019	0.21	7.6	1.6	1.20	819	1.59
I031134		26	1.54	62.8	2.97	4.71	0.08	0.09	0.19	0.018	0.43	15.3	6.7	1.02	1040	2.98
I031135		46	2.52	68.9	2.76	6.68	0.09	0.23	0.07	0.022	0.65	17.2	9.3	1.01	733	2.40
I031136		47	1.13	81.6	3.14	4.43	0.10	0.20	0.02	0.073	0.34	18.0	4.8	0.94	630	6.76
I031137		88	2.69	69.3	3.80	10.55	0.13	0.11	<0.01	0.028	0.88	17.0	11.4	1.95	837	2.09
I031138		70	2.28	65.7	3.46	11.40	0.12	0.08	<0.01	0.024	1.05	5.3	12.4	1.84	589	3.19
I031139		76	1.73	44.9	3.42	8.32	0.13	0.03	0.02	0.018	0.53	10.0	8.6	1.26	523	1.14
I031140		6	1.93	4.2	2.48	6.47	0.13	0.13	<0.01	<0.005	0.93	13.8	23.9	0.74	525	0.16
I031141		82	3.64	42.6	4.82	9.23	0.15	0.06	0.01	0.051	0.78	9.4	13.3	1.91	767	1.23
I031142		70	2.07	34.3	3.27	8.76	0.18	0.07	<0.01	0.014	0.84	14.8	12.0	1.29	426	0.92
I031143		60	2.07	31.6	2.86	10.15	0.11	0.02	<0.01	0.018	0.92	13.5	12.9	1.18	381	1.28
I031144		57	1.60	36.0	2.93	8.85	0.10	0.02	<0.01	0.021	0.81	14.4	10.6	1.19	408	1.26
I031145		83	2.48	29.9	4.06	15.20	0.17	0.03	<0.01	0.044	1.36	8.9	14.4	1.71	643	1.05
I031146		58	2.16	35.5	3.94	12.70	0.19	0.03	0.01	0.026	1.09	14.1	12.7	1.34	530	1.09
I031147		104	2.61	26.1	3.92	11.80	0.17	0.03	<0.01	0.023	0.98	5.3	12.0	1.72	518	0.93
I031148		98	2.98	19.4	3.79	10.25	0.16	0.04	0.01	0.029	0.74	8.5	10.0	1.70	964	0.93
I031149		91	3.46	40.1	4.70	14.35	0.25	0.04	0.02	0.046	1.23	8.4	12.8	1.75	656	1.37
I031150		106	3.52	34.8	4.61	14.80	0.22	0.03	0.02	0.047	1.26	8.8	13.6	1.77	646	1.13
I031151		47	2.50	35.5	3.12	10.10	0.12	0.04	0.10	0.031	1.01	20.2	11.4	0.96	402	1.42
I031152		53	1.81	43.0	2.88	8.30	0.11	0.02	0.01	0.021	0.66	20.2	10.5	0.97	455	2.05
I031153		62	1.55	46.7	3.72	8.80	0.11	0.02	0.01	0.055	0.51	11.6	11.5	1.29	722	1.24
I031154		50	1.53	32.7	2.66	7.83	0.10	0.02	0.01	0.022	0.57	24.2	8.7	0.98	422	1.48
I031155		24	0.52	26.9	1.48	3.39	0.06	0.02	<0.01	0.010	0.33	10.5	5.4	0.39	290	1.04
I031156		21	0.58	27.1	1.26	3.26	0.05	0.02	<0.01	0.012	0.34	10.0	4.2	0.37	310	0.94
I031157		90	2.27	41.2	3.57	12.60	0.14	0.03	<0.01	0.052	1.08	14.8	11.4	1.62	626	1.19
I031158		58	1.57	58.3	2.93	9.31	0.11	0.03	0.01	0.039	0.93	18.4	9.3	1.03	658	1.16

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095046

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031119		0.10	0.06	33.9	330	2.0	36.8	<0.001	0.10	0.15	4.2	0.2	0.4	29.8	<0.01	0.01
I031120		0.10	0.06	33.5	320	1.9	36.3	0.001	0.10	0.14	4.2	0.3	0.4	29.5	<0.01	0.01
I031121		0.07	0.09	20.2	300	5.4	39.4	0.001	0.35	0.15	4.4	0.7	0.5	42.8	<0.01	0.03
I031122		0.04	0.06	1.8	80	16.4	10.7	<0.001	0.18	0.76	1.4	0.2	0.3	51.3	<0.01	0.01
I031123		0.04	0.05	18.2	200	6.1	37.5	0.001	0.40	3.70	5.7	0.5	0.4	73.4	<0.01	0.02
I031124		0.01	0.07	23.8	250	6.0	16.7	0.003	0.44	10.60	2.4	1.1	0.3	48.6	<0.01	0.04
I031125		0.03	0.07	0.3	60	10.4	11.5	<0.001	0.10	2.78	1.2	0.2	0.4	32.8	<0.01	0.02
I031126		0.02	0.07	0.3	40	8.4	9.5	<0.001	0.18	3.53	0.5	0.2	0.2	26.8	<0.01	0.01
I031127		0.02	0.05	0.2	30	11.4	10.4	<0.001	0.10	2.40	0.5	<0.2	0.2	25.7	<0.01	0.02
I031128		0.03	0.06	0.5	40	21.0	10.1	<0.001	0.15	3.01	0.6	0.2	0.2	33.0	<0.01	0.09
I031129		0.08	0.07	60.3	880	4.1	41.8	0.006	0.74	4.63	9.9	1.9	0.7	52.4	<0.01	0.06
I031130		0.11	0.51	59.1	820	17.8	8.3	0.032	1.15	29.8	3.5	6.5	30.7	85.8	0.01	14.50
I031131		0.02	0.05	44.4	370	16.3	11.2	0.001	2.08	26.5	5.6	1.2	0.4	89.6	<0.01	0.49
I031132		0.02	0.05	47.8	790	4.6	10.2	0.005	2.00	33.1	4.7	2.0	0.2	70.0	<0.01	0.26
I031133		0.02	0.05	45.5	600	10.4	11.2	0.003	2.48	40.1	3.9	1.3	<0.2	73.6	<0.01	0.50
I031134		0.04	0.10	42.0	600	6.3	21.0	0.004	0.78	26.6	5.4	1.7	0.5	74.4	<0.01	0.12
I031135		0.02	0.13	48.9	660	7.3	33.6	0.005	0.81	10.50	6.5	2.1	0.8	52.7	<0.01	0.14
I031136		0.02	0.14	75.4	1390	5.5	17.6	0.011	1.29	12.30	4.8	5.0	0.7	57.2	<0.01	0.19
I031137		0.06	0.22	64.8	1330	4.8	36.0	0.003	0.96	3.16	9.8	1.7	1.2	108.0	<0.01	0.07
I031138		0.13	0.18	58.8	990	3.1	43.0	0.006	0.92	0.31	8.5	2.1	1.0	89.5	<0.01	0.08
I031139		0.11	0.21	39.5	920	2.5	27.1	0.002	0.39	0.56	7.6	0.8	0.5	34.0	<0.01	0.02
I031140		0.15	0.27	2.8	410	4.8	56.4	<0.001	0.02	0.14	4.6	0.2	0.8	29.4	<0.01	<0.01
I031141		0.08	0.14	53.5	1400	4.8	35.1	0.001	0.82	3.92	15.4	0.8	0.9	83.4	<0.01	0.14
I031142		0.11	0.22	36.6	1150	2.6	38.3	0.001	0.21	0.20	7.3	0.6	0.8	35.7	<0.01	0.07
I031143		0.14	0.15	30.3	640	7.0	44.2	0.002	0.25	0.12	8.7	0.8	0.7	42.0	<0.01	0.05
I031144		0.12	0.23	37.5	640	7.5	39.8	0.002	0.27	0.08	7.9	0.8	0.9	29.6	<0.01	0.02
I031145		0.31	0.18	35.8	930	9.6	64.5	0.001	0.26	0.09	16.3	0.8	1.0	61.1	<0.01	0.02
I031146		0.30	0.21	26.3	820	7.6	51.7	0.001	0.36	0.11	12.4	0.9	0.8	71.7	<0.01	0.02
I031147		0.15	0.21	49.7	1000	3.9	51.9	0.001	0.20	0.10	9.6	0.6	0.9	42.0	<0.01	0.01
I031148		0.10	0.17	61.1	930	4.2	41.6	0.001	0.20	0.22	9.8	0.7	0.9	75.5	<0.01	0.02
I031149		0.22	0.22	43.4	1580	6.4	62.4	0.001	0.42	0.17	15.3	0.9	1.1	73.2	<0.01	0.04
I031150		0.24	0.19	48.6	1590	7.1	63.8	0.001	0.30	0.09	15.1	0.9	1.1	77.7	<0.01	0.02
I031151		0.14	0.19	30.9	730	21.6	47.0	0.001	0.31	0.12	10.9	0.7	0.9	64.8	<0.01	0.17
I031152		0.06	0.20	37.3	780	8.0	31.7	0.002	0.29	0.08	7.3	1.2	0.6	44.6	<0.01	0.05
I031153		0.07	0.11	35.7	1010	13.2	28.9	0.001	0.60	0.83	13.9	1.1	0.5	62.1	<0.01	0.06
I031154		0.06	0.12	37.9	380	6.1	30.7	0.002	0.30	0.20	6.7	0.9	0.4	43.1	<0.01	0.03
I031155		<0.01	0.18	23.8	400	4.8	17.6	0.001	0.20	0.11	2.8	0.9	0.3	11.0	<0.01	0.06
I031156		<0.01	0.12	19.9	360	7.5	18.8	0.002	0.17	0.21	2.7	0.9	0.4	13.9	<0.01	0.06
I031157		0.02	0.13	43.3	670	6.7	53.1	0.002	0.06	0.29	15.6	0.6	1.0	32.6	<0.01	0.04
I031158		0.04	0.14	39.5	610	7.8	45.0	0.002	0.42	0.84	11.5	1.6	1.2	32.1	<0.01	0.06

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095046

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031119		2.4	0.166	0.22	0.30	52	0.15	3.69	35	1.0
I031120		2.4	0.164	0.21	0.28	51	0.15	3.71	34	1.0
I031121		9.5	0.070	0.25	1.87	37	0.22	8.78	46	1.9
I031122		11.9	0.005	0.08	2.14	3	0.08	5.23	17	2.3
I031123		3.5	0.058	0.38	1.14	41	0.06	6.61	37	1.3
I031124		6.8	0.011	0.45	2.07	15	0.05	8.59	41	2.0
I031125		11.0	<0.005	0.17	3.19	<1	<0.05	5.84	19	2.5
I031126		7.5	<0.005	0.09	3.68	<1	<0.05	5.32	6	4.0
I031127		7.3	<0.005	0.10	2.44	<1	<0.05	4.45	12	4.1
I031128		6.9	<0.005	0.11	3.59	1	<0.05	4.86	18	3.7
I031129		3.9	0.085	0.30	1.37	102	0.11	15.55	97	1.9
I031130		2.6	0.101	1.22	1.67	55	24.9	7.26	65	9.0
I031131		3.8	<0.005	0.18	0.69	12	0.42	9.52	71	1.2
I031132		4.3	<0.005	0.21	1.35	25	0.20	9.62	71	1.9
I031133		4.6	<0.005	0.22	1.36	15	0.17	8.75	65	1.6
I031134		7.1	0.026	0.60	1.28	40	0.09	9.49	82	4.0
I031135		4.6	0.050	0.45	1.40	73	0.11	10.05	88	10.4
I031136		3.8	0.026	0.13	2.78	102	0.13	12.10	119	8.8
I031137		4.0	0.098	0.19	0.96	93	0.15	12.05	93	4.8
I031138		2.1	0.116	0.22	1.17	110	0.35	6.54	94	3.6
I031139		2.9	0.192	0.30	0.47	106	0.14	10.45	72	0.5
I031140		10.4	0.190	0.42	2.35	57	0.10	6.69	46	2.2
I031141		1.5	0.196	0.41	0.50	133	0.21	19.10	89	0.9
I031142		3.3	0.295	0.23	0.77	94	4.67	10.70	54	0.9
I031143		5.1	0.134	0.25	1.15	94	0.16	12.05	84	<0.5
I031144		6.3	0.115	0.21	1.84	81	0.19	10.95	77	<0.5
I031145		3.2	0.223	0.34	1.71	140	0.19	13.60	95	<0.5
I031146		5.1	0.207	0.40	0.83	117	0.19	11.05	81	<0.5
I031147		1.2	0.236	0.30	0.75	128	0.24	10.40	87	<0.5
I031148		1.0	0.184	0.28	1.47	111	0.14	21.9	73	0.5
I031149		1.6	0.262	0.43	1.26	157	0.25	17.55	97	0.5
I031150		2.0	0.231	0.41	1.06	155	0.19	16.85	101	<0.5
I031151		6.0	0.104	0.37	1.23	105	0.09	14.45	96	0.9
I031152		6.8	0.084	0.26	1.11	97	0.23	14.90	79	0.5
I031153		2.7	0.060	0.31	2.59	105	0.10	14.00	85	0.5
I031154		8.8	0.052	0.23	1.19	95	0.06	15.00	69	<0.5
I031155		3.7	0.031	0.10	1.07	32	0.09	6.43	44	0.6
I031156		3.2	0.024	0.14	1.00	35	0.07	6.89	38	0.6
I031157		5.7	0.126	0.30	0.74	133	0.12	11.15	92	0.8
I031158		5.3	0.087	0.25	1.54	103	0.27	14.15	74	0.7

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095046

Sample Description	Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
	Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I031159		3.99	0.005		0.15	3.62	0.5	<0.2	<10	810	0.82	0.09	1.44	0.07	34.2	17.9
I031160		<0.02	0.005		0.13	3.57	0.4	<0.2	<10	830	0.75	0.09	1.41	0.06	33.4	17.2
I031161		3.72	0.005		0.15	3.20	0.4	<0.2	<10	770	0.79	0.10	1.37	0.08	33.8	13.2
I031162		4.84	<0.005		0.15	3.71	0.6	<0.2	<10	810	0.70	0.10	1.85	0.12	24.8	20.6
I031163		5.50	<0.005		0.15	3.14	0.4	<0.2	<10	790	0.54	0.09	1.38	0.08	26.9	16.2
I031164		4.09	<0.005		0.13	3.51	0.4	<0.2	<10	710	0.75	0.11	1.26	0.08	32.6	21.1
I031165		4.79	0.005		0.13	2.89	0.8	<0.2	<10	820	0.74	0.09	1.47	0.06	41.6	17.1
I031166		4.73	<0.005		0.10	4.02	0.9	<0.2	<10	1140	0.98	0.11	1.42	0.12	23.2	17.8
I031167		5.54	0.006		0.11	3.72	2.2	<0.2	<10	940	0.78	0.11	1.47	0.07	19.20	17.8

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095046

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031159		86	2.94	38.5	3.62	13.10	0.20	0.04	<0.01	0.055	1.49	16.2	12.6	1.52	528	1.06
I031160		85	2.79	36.4	3.57	12.55	0.19	0.04	<0.01	0.053	1.47	15.6	11.9	1.49	519	1.32
I031161		64	2.33	43.3	3.01	10.95	0.13	0.04	<0.01	0.037	1.25	16.5	10.8	1.18	488	1.23
I031162		86	2.47	45.1	3.77	13.60	0.17	0.03	<0.01	0.045	1.32	11.6	12.1	1.52	517	1.46
I031163		81	2.39	45.0	3.30	11.80	0.16	0.03	<0.01	0.037	1.20	13.2	10.7	1.34	437	1.20
I031164		97	2.49	50.8	4.12	12.80	0.19	0.03	<0.01	0.045	1.09	15.6	9.0	1.62	588	1.26
I031165		77	2.17	45.1	3.35	11.55	0.14	0.03	<0.01	0.046	1.30	19.9	9.9	1.42	486	1.26
I031166		85	2.37	37.4	3.71	14.30	0.18	0.03	<0.01	0.041	1.35	10.9	9.8	1.46	498	1.11
I031167		79	2.19	50.2	3.44	12.60	0.18	0.02	<0.01	0.035	1.21	9.1	8.9	1.29	441	0.99

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095046

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031159		0.19	0.16	45.1	800	7.5	71.1	0.001	0.29	0.09	16.6	1.0	1.5	50.8	<0.01	0.03
I031160		0.19	0.17	45.5	750	7.6	68.5	0.002	0.28	0.09	15.8	1.0	1.4	48.8	<0.01	0.04
I031161		0.18	0.16	35.9	680	6.8	61.5	0.001	0.31	0.09	11.8	1.1	1.4	46.2	<0.01	0.04
I031162		0.21	0.18	44.0	970	5.8	64.1	0.002	0.28	0.09	15.0	0.9	0.9	57.5	<0.01	0.04
I031163		0.17	0.18	47.0	780	5.1	60.1	0.001	0.23	0.08	11.5	0.9	1.1	39.3	<0.01	0.03
I031164		0.17	0.15	56.4	770	5.1	55.7	0.002	0.26	0.08	15.1	1.0	1.1	38.2	<0.01	0.05
I031165		0.05	0.16	47.5	690	5.5	62.1	0.002	0.22	0.11	13.8	1.0	1.2	27.9	<0.01	0.05
I031166		0.27	0.15	50.6	770	7.9	66.7	0.002	0.18	0.08	13.8	0.8	1.0	49.6	<0.01	0.04
I031167		0.29	0.22	46.5	840	5.4	59.5	0.001	0.30	0.09	10.7	1.0	0.8	47.1	<0.01	0.05

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095046

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031159		5.5	0.175	0.37	1.98	144	0.17	15.85	76	0.7
I031160		5.5	0.178	0.37	2.06	143	0.15	15.20	75	0.7
I031161		5.5	0.147	0.30	2.38	109	0.21	13.80	68	0.7
I031162		4.0	0.226	0.32	1.03	145	0.23	12.40	75	0.5
I031163		4.6	0.184	0.32	0.70	125	0.22	9.80	70	<0.5
I031164		5.1	0.169	0.30	1.32	162	0.08	13.90	86	<0.5
I031165		6.4	0.126	0.33	0.99	133	0.17	13.40	78	0.6
I031166		3.8	0.199	0.37	1.04	148	0.21	11.25	86	0.6
I031167		3.3	0.215	0.31	1.66	136	0.19	10.15	75	<0.5

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10095046

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 11-AUG-2010
Account: EIASQI

CERTIFICATE WH10102122

Project: Boulevard

P.O. No.: SQI10-03

This report is for 49 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 26-JUL-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
PUL-QC	Pulverizing QC Test
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
LOG-22d	Sample login - Rcd w/o BarCode dup
SPL-21d	Split sample - duplicate
PUL-31d	Pulverize Split - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 11-AUG-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10102122

Sample Description	Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
	Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I031235		0.76	0.143		0.27	1.92	562	<0.2	<10	170	0.15	0.14	2.47	0.20	6.76	18.2
I031236		5.45	0.018		0.29	2.41	10.1	<0.2	<10	250	0.18	0.11	1.15	0.12	8.61	19.6
I031237		4.11	0.013		0.12	2.42	2.7	<0.2	<10	290	0.29	0.30	1.46	0.07	8.50	19.4
I031238		4.38	0.006		0.24	2.98	1.3	<0.2	<10	330	0.31	0.11	1.36	0.10	7.81	20.0
I031239		4.34	<0.005		0.09	2.74	1.2	<0.2	<10	300	0.32	0.12	1.49	0.06	7.84	17.1
I031240		<0.02	<0.005		0.11	2.89	1.4	<0.2	<10	300	0.34	0.13	1.53	0.07	8.38	17.8
I031241		1.24	0.250		0.32	1.09	1305	0.3	<10	110	0.42	0.29	4.25	0.20	26.8	17.5
I031242		4.50	<0.005		0.13	2.80	9.1	<0.2	<10	290	0.30	0.12	1.32	0.07	10.15	20.3
I031243		4.99	0.032		0.26	1.86	148.0	<0.2	<10	210	0.34	0.17	2.69	0.13	12.75	15.3
I031244		5.00	0.005		0.20	2.60	2.0	<0.2	<10	300	0.25	0.08	1.46	0.11	10.55	18.4
I031245		4.87	<0.005		0.18	2.34	2.7	<0.2	<10	260	0.20	0.08	1.23	0.09	12.25	20.3
I031246		5.14	0.011		0.12	2.19	47.6	<0.2	<10	240	0.26	0.11	1.64	0.08	13.30	15.7
I031247		5.32	0.005		1.03	2.07	1.4	<0.2	<10	210	0.20	0.09	1.33	0.15	9.13	16.3
I031248		4.44	0.022		0.24	2.14	7.9	<0.2	<10	280	0.18	0.10	1.36	0.12	8.96	20.1
I031249		1.33	<0.005		0.12	1.10	0.5	<0.2	<10	110	0.09	0.05	0.67	0.07	15.55	8.8
I031250		0.07	4.32	4.00	1.44	1.61	8120	4.2	20	80	0.23	79.4	4.97	0.43	19.90	118.5
I031251		4.52	0.062		0.25	2.40	14.0	<0.2	<10	280	0.19	0.11	1.29	0.10	12.30	17.7
I031252		4.26	<0.005		0.24	3.34	3.1	<0.2	<10	270	0.38	0.12	1.79	0.20	6.90	19.0
I031253		4.38	<0.005		0.15	3.37	1.2	<0.2	<10	430	0.51	0.10	1.88	0.17	17.05	16.6
I031254		5.07	0.005		0.18	3.15	0.8	<0.2	<10	430	0.32	0.10	1.00	0.09	16.90	20.0
I031255		4.29	<0.005		0.13	2.59	2.0	<0.2	<10	380	0.35	0.11	1.02	0.07	21.4	17.8
I031256		4.61	0.011		0.31	3.82	1.4	<0.2	<10	130	0.62	0.14	1.30	0.27	13.75	22.5
I031257		4.87	0.018		0.48	2.30	2.4	<0.2	<10	130	0.28	0.18	0.94	0.50	18.40	18.4
I031258		5.70	0.006		0.19	3.78	1.7	<0.2	<10	130	0.47	0.16	1.50	0.15	12.40	23.3
I031301		5.57	<0.005		0.12	2.38	0.4	<0.2	<10	370	0.17	0.20	1.25	0.91	14.40	17.9
I031302		4.92	<0.005		0.07	2.08	0.2	<0.2	<10	350	0.19	0.14	0.92	0.07	12.60	12.1
I031303		4.15	<0.005		0.07	1.92	0.6	<0.2	<10	350	0.19	0.11	0.83	0.14	15.20	12.1
I031304		3.65	<0.005		0.07	1.93	2.3	<0.2	<10	230	0.17	0.13	1.24	0.06	13.95	14.2
I031305		3.69	<0.005		0.11	1.98	2.8	<0.2	<10	310	0.16	0.15	1.02	0.10	15.25	14.7
I031306		5.02	<0.005		0.10	2.39	0.4	<0.2	<10	520	0.21	0.13	0.95	0.04	15.00	13.4
I031307		4.88	<0.005		0.22	2.39	1.0	<0.2	<10	170	0.07	0.43	0.98	0.09	9.98	21.8
I031308		4.46	<0.005		0.16	4.34	0.3	<0.2	<10	440	0.43	0.45	2.45	0.21	2.88	20.5
I031309		2.86	<0.005		0.17	3.16	12.3	<0.2	<10	300	0.23	0.38	1.90	0.14	5.59	21.9
I031310		2.89	<0.005		0.15	3.44	4.7	<0.2	<10	300	0.23	0.43	2.44	0.14	5.07	22.2
I031311		4.67	<0.005		0.18	3.27	0.5	<0.2	<10	420	0.14	0.40	0.87	0.06	5.01	21.8
I031312		3.17	<0.005		0.24	3.33	0.5	<0.2	<10	150	0.22	0.47	0.97	0.08	7.65	22.2
I031313		6.59	0.006		0.71	3.51	0.5	<0.2	<10	320	0.08	0.47	1.16	0.42	4.99	28.1
I031314		4.67	0.007		0.56	3.03	1.0	<0.2	<10	350	0.16	0.24	0.62	0.32	8.37	14.1
I031315		4.87	<0.005		0.13	2.57	3.5	<0.2	<10	320	0.15	0.26	0.84	0.07	13.10	14.7
I031316		5.25	<0.005		0.17	3.14	0.8	<0.2	<10	520	0.17	0.28	0.81	0.08	9.47	16.6

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 11-AUG-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10102122

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031235		53	2.11	55.2	3.45	6.41	0.10	0.05	0.03	0.018	0.47	3.0	10.4	2.21	621	0.24
I031236		44	1.90	93.6	3.36	7.70	0.11	0.04	0.01	0.012	0.77	3.9	13.8	1.91	422	0.17
I031237		51	1.76	27.3	3.13	7.03	0.10	0.03	<0.01	0.023	0.79	4.0	12.6	1.74	470	0.32
I031238		44	2.10	61.6	3.22	8.23	0.12	0.02	<0.01	0.009	1.10	3.6	13.1	1.93	495	0.18
I031239		23	2.29	22.6	3.24	7.79	0.11	0.04	0.01	0.013	0.90	3.5	19.1	1.65	472	0.27
I031240		22	2.41	23.2	3.38	8.32	0.11	0.04	<0.01	0.015	0.93	3.8	20.0	1.71	491	0.17
I031241		11	1.64	35.4	3.80	3.81	0.10	0.03	0.06	0.052	0.38	11.9	7.5	2.03	951	0.14
I031242		29	2.45	41.4	3.80	8.65	0.13	0.03	0.01	0.014	0.94	4.8	19.9	2.05	514	0.15
I031243		21	2.00	60.0	3.26	5.97	0.10	0.04	0.02	0.024	0.61	5.8	11.9	1.87	644	0.30
I031244		54	2.26	70.0	3.18	7.37	0.12	0.03	<0.01	0.013	0.85	5.0	14.8	1.78	514	0.14
I031245		49	1.76	51.6	3.12	7.11	0.10	0.03	<0.01	0.010	0.69	5.6	15.6	1.82	452	0.22
I031246		32	1.41	24.9	2.60	6.53	0.09	0.03	<0.01	0.015	0.59	6.2	12.1	1.35	459	0.12
I031247		42	1.21	99.2	2.74	6.28	0.11	0.04	<0.01	0.014	0.60	4.2	9.4	1.32	401	0.11
I031248		74	1.95	72.3	3.38	6.74	0.10	0.03	<0.01	0.014	0.68	3.9	14.6	1.75	463	0.17
I031249		14	1.04	38.6	1.87	3.55	0.06	<0.02	<0.01	0.011	0.34	6.6	9.0	0.76	237	0.11
I031250		32	1.10	250	4.63	5.85	0.21	0.25	0.09	0.480	0.17	10.9	9.1	0.50	762	24.4
I031251		37	2.09	57.2	3.61	8.17	0.08	0.02	<0.01	0.015	0.89	5.7	18.4	1.80	487	0.11
I031252		57	2.09	51.9	3.32	9.55	0.11	0.03	<0.01	0.011	1.27	3.0	12.3	1.85	603	3.28
I031253		42	2.28	35.3	3.37	10.40	0.10	0.02	<0.01	0.015	1.34	7.5	15.4	2.01	699	0.45
I031254		64	1.33	53.4	4.00	10.65	0.13	0.02	<0.01	0.012	1.00	7.5	13.9	2.44	456	0.19
I031255		83	1.50	47.1	3.20	8.19	0.09	0.02	<0.01	0.012	0.98	9.8	10.0	1.79	377	0.23
I031256		32	2.24	128.5	4.71	11.55	0.17	0.04	<0.01	0.023	1.53	6.4	15.3	2.57	508	1.79
I031257		23	1.47	233	4.16	9.43	0.14	0.06	<0.01	0.025	1.09	8.6	8.6	1.50	382	1.90
I031258		17	2.20	100.5	4.81	13.10	0.16	0.04	<0.01	0.020	1.40	5.6	12.9	2.38	534	2.19
I031301		43	1.27	17.1	3.08	8.06	0.15	0.08	<0.01	0.017	0.93	6.7	13.4	1.97	358	0.50
I031302		33	0.93	14.7	2.49	7.37	0.11	0.06	<0.01	0.014	0.90	5.8	11.0	1.68	320	0.44
I031303		34	1.07	10.2	2.39	6.99	0.09	0.07	<0.01	0.015	0.86	7.1	12.4	1.56	296	0.58
I031304		25	1.23	6.1	2.64	6.76	0.11	0.08	<0.01	0.020	0.65	6.3	11.7	1.63	310	0.45
I031305		45	1.46	25.4	2.81	6.80	0.13	0.08	<0.01	0.017	0.80	7.0	11.9	1.65	308	0.78
I031306		44	1.32	33.0	3.05	8.60	0.11	0.08	<0.01	0.012	1.14	6.9	14.2	2.01	291	0.61
I031307		32	1.36	72.7	4.01	8.38	0.14	0.06	<0.01	0.014	0.55	4.4	13.1	2.29	350	0.42
I031308		113	2.29	42.7	3.75	10.95	0.12	0.03	0.01	0.015	1.12	1.2	19.5	2.49	570	0.59
I031309		55	1.77	34.1	3.41	7.55	0.09	0.04	<0.01	0.016	0.71	2.5	14.5	1.93	501	0.78
I031310		44	1.65	38.9	3.38	7.85	0.09	0.05	<0.01	0.015	0.68	2.3	13.0	1.92	541	0.59
I031311		63	1.34	62.1	4.36	8.65	0.10	0.03	<0.01	0.018	0.98	2.1	14.0	2.59	591	0.50
I031312		40	1.15	78.0	4.58	10.20	0.11	0.03	<0.01	0.018	1.06	3.3	12.9	2.53	582	0.32
I031313		73	0.99	295	4.90	9.55	0.12	0.03	<0.01	0.024	0.77	2.1	11.4	3.28	765	0.48
I031314		44	1.03	232	4.31	10.60	0.10	0.02	<0.01	0.025	1.02	3.5	14.0	2.36	604	0.54
I031315		12	0.95	42.9	4.00	9.47	0.10	0.03	<0.01	0.020	0.72	5.7	12.6	2.11	620	0.17
I031316		30	1.35	64.6	4.28	10.75	0.11	0.02	<0.01	0.023	0.97	4.2	15.7	2.43	643	0.36

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 11-AUG-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10102122

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031235		0.05	0.14	18.1	510	8.5	23.3	0.001	0.58	1720	9.2	0.3	0.3	57.7	<0.01	0.14
I031236		0.11	0.10	21.4	400	2.1	32.8	<0.001	0.51	14.20	6.0	0.3	0.4	34.3	<0.01	0.03
I031237		0.13	0.13	30.7	590	2.2	33.1	<0.001	0.74	4.76	4.7	0.6	0.4	36.9	<0.01	0.11
I031238		0.18	0.09	26.4	410	2.3	46.3	0.001	0.45	0.54	4.8	0.4	0.4	35.8	<0.01	0.03
I031239		0.18	0.12	15.7	550	2.6	43.7	<0.001	0.66	1.79	5.0	0.5	0.5	49.7	<0.01	0.04
I031240		0.19	0.11	16.6	590	2.8	40.6	<0.001	0.69	1.57	5.2	0.6	0.5	51.5	<0.01	0.03
I031241		0.03	0.07	14.9	490	8.7	19.2	<0.001	1.77	24.1	11.6	1.0	0.5	135.0	<0.01	0.09
I031242		0.15	0.13	21.5	710	2.0	39.3	0.001	0.80	1.57	5.7	0.7	0.4	41.5	<0.01	0.04
I031243		0.08	0.17	17.0	580	3.8	29.3	0.001	1.02	9.28	6.6	0.7	0.4	86.7	<0.01	0.04
I031244		0.15	0.10	27.8	490	2.2	34.9	0.001	0.36	0.45	5.3	0.4	0.3	43.1	<0.01	0.02
I031245		0.11	0.11	24.6	420	2.1	31.3	0.001	0.39	0.36	5.6	0.4	0.3	38.8	<0.01	0.02
I031246		0.13	0.19	22.7	480	3.3	27.3	<0.001	0.49	0.72	4.4	0.4	0.4	41.9	<0.01	0.02
I031247		0.15	0.16	20.8	430	2.0	26.6	<0.001	0.49	0.29	5.0	0.4	0.5	40.4	<0.01	0.02
I031248		0.09	0.09	31.4	430	2.1	32.3	0.001	0.59	1.32	7.1	0.4	0.4	41.6	<0.01	0.04
I031249		0.04	0.08	6.9	390	1.5	15.4	<0.001	0.23	2.90	4.2	0.2	0.4	18.7	<0.01	<0.01
I031250		0.11	0.68	55.8	770	15.9	8.3	0.031	1.07	29.8	4.0	6.6	32.2	87.9	0.01	14.65
I031251		0.09	0.07	21.3	480	3.4	38.4	<0.001	0.57	6.10	7.4	0.4	0.3	40.6	<0.01	0.02
I031252		0.24	0.08	25.9	480	5.4	50.0	0.006	0.94	0.41	6.7	0.9	0.4	55.0	<0.01	0.04
I031253		0.14	0.08	21.9	390	7.4	52.2	0.001	0.49	0.63	7.4	0.4	0.5	67.5	<0.01	0.02
I031254		0.12	0.24	32.4	990	3.1	38.0	0.001	0.44	0.26	7.6	0.7	0.7	39.6	<0.01	0.03
I031255		0.13	0.13	34.4	680	2.7	38.6	<0.001	0.55	0.18	6.6	0.5	0.7	38.3	<0.01	0.02
I031256		0.22	0.15	21.6	830	2.5	58.2	0.005	1.64	0.22	16.1	2.0	0.6	53.4	<0.01	0.07
I031257		0.16	0.29	18.2	960	2.0	40.6	0.003	1.57	0.16	7.9	1.9	0.8	29.2	<0.01	0.08
I031258		0.27	0.17	15.5	910	3.4	52.8	0.004	1.39	0.19	14.8	1.3	0.7	54.9	<0.01	0.07
I031301		0.12	0.17	20.8	490	3.5	36.1	0.001	0.17	0.78	6.8	0.4	0.6	41.8	<0.01	0.02
I031302		0.11	0.18	15.4	410	2.7	34.7	<0.001	0.15	0.25	4.0	0.3	0.9	24.7	<0.01	0.01
I031303		0.10	0.18	15.9	400	2.3	34.5	0.001	0.12	0.35	4.4	0.3	0.8	19.8	<0.01	0.01
I031304		0.11	0.21	15.0	490	2.4	29.4	0.001	0.18	0.39	6.0	0.3	0.7	31.8	<0.01	0.02
I031305		0.11	0.15	17.5	490	2.4	33.3	0.001	0.19	0.83	6.6	0.5	0.7	26.6	<0.01	0.03
I031306		0.13	0.16	24.6	600	1.9	46.0	0.001	0.20	0.22	5.3	0.5	0.9	19.7	<0.01	0.04
I031307		0.07	0.16	17.3	600	3.5	24.2	0.001	0.65	0.55	7.2	0.8	0.5	24.1	<0.01	0.07
I031308		0.29	0.07	51.1	450	9.0	44.4	0.001	0.50	0.50	8.5	0.8	0.5	35.8	<0.01	0.06
I031309		0.20	0.08	29.2	510	6.0	24.3	0.002	0.60	0.49	8.0	0.5	0.3	27.1	<0.01	0.07
I031310		0.23	0.10	25.1	500	6.8	23.5	0.001	0.60	0.47	7.8	0.5	0.3	32.9	<0.01	0.06
I031311		0.17	0.14	20.5	600	2.5	31.0	0.001	0.71	0.25	7.9	0.6	0.4	23.3	<0.01	0.07
I031312		0.18	0.18	12.5	800	2.8	33.1	<0.001	1.05	0.20	7.8	0.8	0.5	26.7	<0.01	0.09
I031313		0.12	0.13	20.7	640	2.4	23.7	0.001	0.88	0.32	8.3	0.9	0.3	34.6	<0.01	0.11
I031314		0.11	0.26	14.7	940	1.7	29.9	0.001	0.73	0.24	6.7	0.7	0.7	17.2	<0.01	0.08
I031315		0.08	0.25	5.7	840	2.2	20.5	<0.001	0.84	0.32	6.5	0.5	0.7	18.1	<0.01	0.04
I031316		0.10	0.19	11.1	870	2.4	27.9	0.001	0.57	0.74	8.1	0.4	0.7	21.6	<0.01	0.04

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 11-AUG-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10102122

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031235		0.7	0.145	0.20	0.17	74	0.10	6.57	66	1.3
I031236		2.1	0.149	0.18	0.22	80	0.06	5.27	59	0.8
I031237		1.7	0.151	0.17	0.46	72	0.09	5.79	55	0.8
I031238		2.5	0.161	0.25	0.23	84	0.10	4.36	67	0.5
I031239		1.5	0.168	0.21	0.31	79	0.07	5.40	57	0.9
I031240		1.7	0.170	0.22	0.32	82	0.07	5.67	60	0.9
I031241		3.9	0.017	0.25	1.12	55	0.25	14.25	64	0.7
I031242		2.0	0.148	0.21	0.50	92	0.05	6.46	67	0.9
I031243		1.8	0.100	0.21	0.71	67	0.15	9.15	56	1.1
I031244		2.2	0.167	0.18	0.29	78	0.11	6.26	65	0.8
I031245		3.1	0.151	0.15	0.32	78	0.15	5.57	56	0.8
I031246		3.2	0.131	0.15	0.41	61	0.26	5.71	46	0.7
I031247		2.3	0.158	0.13	0.28	70	0.12	5.60	43	0.8
I031248		2.1	0.126	0.17	0.37	83	0.11	6.97	58	0.7
I031249		3.9	0.030	0.07	0.38	27	<0.05	5.16	27	<0.5
I031250		2.7	0.113	1.25	1.79	55	25.2	7.96	61	10.2
I031251		2.5	0.119	0.21	0.32	74	<0.05	7.14	72	0.5
I031252		1.3	0.141	0.27	1.04	100	0.11	5.44	93	1.0
I031253		3.7	0.122	0.29	0.45	84	0.09	6.95	98	<0.5
I031254		4.5	0.234	0.21	0.46	90	0.07	7.59	79	0.5
I031255		5.3	0.156	0.20	0.54	73	<0.05	6.97	53	<0.5
I031256		2.2	0.201	0.32	1.99	179	0.11	10.40	109	1.1
I031257		2.7	0.203	0.24	1.30	111	0.10	12.05	130	1.8
I031258		1.5	0.244	0.30	1.07	170	0.28	10.60	99	1.2
I031301		2.4	0.260	0.24	0.36	74	0.32	9.16	117	1.8
I031302		2.5	0.176	0.20	0.41	45	1.03	6.89	66	1.6
I031303		3.0	0.163	0.23	0.54	45	0.18	7.29	67	2.2
I031304		2.4	0.227	0.19	0.38	62	1.17	9.16	38	1.9
I031305		3.0	0.213	0.23	0.44	68	1.95	8.67	40	2.1
I031306		3.3	0.226	0.29	0.46	69	0.40	8.15	30	2.1
I031307		1.7	0.219	0.16	0.31	98	0.20	8.28	47	1.4
I031308		0.4	0.184	0.30	0.08	105	0.59	6.45	122	0.6
I031309		0.9	0.170	0.19	0.21	88	0.28	5.19	84	0.9
I031310		0.9	0.184	0.18	0.19	92	0.30	5.40	71	1.1
I031311		0.7	0.193	0.21	0.13	91	0.26	5.57	109	0.5
I031312		1.0	0.188	0.22	0.17	71	0.16	7.19	82	0.5
I031313		0.6	0.219	0.17	0.13	118	0.17	6.12	126	0.6
I031314		1.1	0.173	0.19	0.21	56	0.24	7.43	73	<0.5
I031315		1.9	0.124	0.15	0.29	44	0.11	10.00	64	<0.5
I031316		1.3	0.151	0.19	0.26	70	0.11	8.87	82	<0.5

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 11-AUG-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10102122

Sample Description	Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
	Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I031317		2.72	<0.005		0.20	2.62	1.2	<0.2	<10	310	0.16	0.37	1.48	0.07	15.55	12.6
I031318		4.53	<0.005		0.26	2.79	0.9	<0.2	<10	250	0.15	0.53	0.96	0.07	14.60	13.5
I031319		4.84	<0.005		0.36	2.94	1.0	<0.2	<10	280	0.14	1.23	1.80	0.15	9.61	20.3
I031320		<0.02	0.005		0.36	3.01	1.0	<0.2	<10	260	0.12	1.05	1.81	0.14	10.20	20.4
I031321		5.08	<0.005		0.23	3.75	5.7	<0.2	<10	410	0.21	0.38	1.54	0.11	5.50	22.1
I031322		4.36	<0.005		0.27	2.59	16.4	<0.2	<10	250	0.17	0.40	1.54	0.12	9.68	15.8
I031323		5.01	<0.005		0.26	2.33	1.2	<0.2	<10	350	<0.05	0.41	1.50	0.13	3.56	28.8
I031324		5.00	<0.005		0.21	2.40	0.5	<0.2	<10	170	<0.05	0.39	0.82	0.09	2.71	25.9
I031325		3.01	<0.005		0.12	2.54	1.7	<0.2	<10	180	0.05	0.14	0.80	0.07	5.54	22.3

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 11-AUG-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10102122

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031317		49	0.88	32.8	3.59	9.13	0.10	0.03	<0.01	0.026	0.86	6.9	11.0	1.93	564	0.41
I031318		13	1.18	62.5	4.10	9.69	0.09	0.03	<0.01	0.032	0.92	6.6	11.4	1.96	512	0.52
I031319		13	1.00	250	4.91	9.09	0.11	0.04	<0.01	0.039	0.59	4.4	12.1	2.30	740	0.37
I031320		13	1.04	249	5.01	9.52	0.12	0.03	<0.01	0.042	0.60	4.6	12.3	2.35	760	0.43
I031321		18	2.54	99.4	4.78	9.99	0.10	0.02	<0.01	0.037	1.01	2.4	16.7	2.64	713	1.18
I031322		31	1.33	84.5	3.95	8.24	0.07	0.03	<0.01	0.031	0.79	4.3	12.0	1.86	580	0.82
I031323		26	1.11	121.0	4.05	7.11	0.12	0.04	<0.01	0.019	0.64	1.4	9.7	1.90	542	0.14
I031324		29	0.73	95.3	4.16	6.72	0.13	0.03	<0.01	0.015	0.42	1.1	8.4	2.09	484	0.08
I031325		32	1.00	41.9	3.60	7.69	0.13	0.03	<0.01	0.015	0.28	2.4	11.6	2.50	514	0.13

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 11-AUG-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10102122

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031317		0.11	0.12	23.3	570	2.8	22.4	0.001	0.71	0.74	9.9	0.5	0.6	31.9	<0.01	0.08
I031318		0.12	0.13	7.0	570	3.0	25.0	0.001	1.00	0.22	10.3	0.7	0.6	18.8	<0.01	0.11
I031319		0.12	0.15	9.8	600	3.2	21.9	0.001	1.29	0.21	10.2	1.1	0.6	30.3	<0.01	0.38
I031320		0.13	0.16	9.9	610	3.2	22.3	0.001	1.28	0.23	10.5	1.1	0.6	30.5	<0.01	0.31
I031321		0.17	0.09	13.2	570	5.1	32.8	0.002	0.82	0.50	8.7	0.5	0.3	28.0	<0.01	0.06
I031322		0.12	0.13	17.1	650	4.9	22.2	0.002	0.97	0.79	7.1	0.8	0.4	26.0	<0.01	0.07
I031323		0.12	0.09	15.9	480	2.4	22.9	<0.001	0.84	0.47	6.7	0.7	0.3	31.7	<0.01	0.07
I031324		0.10	0.08	17.4	460	1.8	15.9	<0.001	0.73	0.47	7.2	0.6	0.2	20.3	<0.01	0.05
I031325		0.04	0.07	16.9	540	1.7	13.3	<0.001	0.21	0.84	8.5	0.2	<0.2	21.9	<0.01	0.02

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 11-AUG-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10102122

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031317		2.3	0.126	0.17	0.34	68	0.09	8.57	64	0.7
I031318		2.3	0.145	0.18	0.47	80	0.11	8.34	64	0.8
I031319		1.5	0.143	0.13	0.24	91	0.29	7.90	86	0.8
I031320		1.5	0.150	0.14	0.25	94	0.43	8.33	87	0.8
I031321		0.7	0.164	0.32	0.17	113	0.11	6.07	116	0.5
I031322		1.5	0.133	0.20	0.40	69	0.11	8.04	62	0.6
I031323		0.5	0.191	0.15	0.13	107	0.16	5.78	63	0.8
I031324		0.2	0.188	0.09	0.08	114	0.13	4.68	60	0.7
I031325		0.5	0.134	0.11	0.15	112	0.10	5.15	61	0.5

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 11-AUG-2010
Account: EIASQI

Project: Boulevard

CERTIFICATE OF ANALYSIS WH10102122

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

CERTIFICATE WH10110711

Project: SQI10-03

P.O. No.:

This report is for 2 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 12-AUG-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110711

Sample Description	Method	WEI-21	Au-AA23	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr
	Units	kg	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
	LOR	0.02	0.005	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1	1
I319601		1.16	0.013	0.17	2.62	7.8	<0.2	<10	220	0.67	0.13	2.03	0.07	28.7	16.5	39
I319602		2.27	<0.005	0.15	1.67	2.6	<0.2	<10	380	0.46	0.13	1.09	0.04	15.80	10.6	36

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110711

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo	Na
	Units	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%
	LOR	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05	0.01
I319601		3.48	59.6	3.58	9.64	0.09	0.06	0.01	0.039	0.90	13.9	14.7	1.49	648	0.76	0.04
I319602		1.44	63.1	2.26	6.73	0.06	0.05	<0.01	0.016	0.59	7.3	8.7	0.85	402	1.22	0.05

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110711

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th
	Units	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01	0.2
I319601		0.10	34.8	460	3.1	45.7	0.002	0.76	10.70	13.2	0.7	1.1	42.2	<0.01	0.06	5.0
I319602		0.09	40.9	500	1.9	29.6	0.003	0.66	4.30	7.0	1.3	0.6	33.1	<0.01	0.08	3.4

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110711

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I319601		0.089	0.22	0.97	93	<0.05	11.60	64	1.8
I319602		0.053	0.14	0.79	52	0.05	5.92	35	2.1

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110711

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

CERTIFICATE WH10110979

Project: SQI10-03

P.O. No.: SQ|10-03_18

This report is for 101 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 11-AUG-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
PUL-QC	Pulverizing QC Test
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
LOG-22d	Sample login - Rcd w/o BarCode dup
SPL-21d	Split sample - duplicate
PUL-31d	Pulverize Split - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110979

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I031799		3.90	0.014		0.12	2.15	14.6	<0.2	<10	300	0.15	0.12	1.49	0.04	6.25	17.7
I031800		<0.02	0.018		0.11	2.08	15.5	<0.2	<10	290	0.13	0.12	1.45	0.04	6.20	17.7
I031801		5.56	<0.005		0.08	2.47	5.6	<0.2	<10	390	0.11	0.22	0.94	0.05	6.56	24.8
I031802		4.13	<0.005		0.14	2.52	8.8	<0.2	<10	470	0.09	0.24	0.78	0.06	6.11	29.6
I031803		4.22	<0.005		0.15	4.68	2.6	<0.2	<10	410	0.22	0.25	1.64	0.07	6.65	27.2
I031804		3.17	0.055		0.48	4.99	337	<0.2	<10	210	0.30	0.31	2.81	0.12	5.59	28.1
I031805		3.71	0.120		0.33	2.48	596	<0.2	<10	110	0.51	0.32	2.99	0.74	21.4	19.2
I031806		3.10	<0.005		0.07	4.02	5.5	<0.2	<10	670	0.18	0.10	1.93	0.06	10.65	19.9
I031807		3.23	0.005		0.10	4.16	0.9	<0.2	<10	720	0.24	0.28	2.14	0.06	8.10	22.5
I031808		3.34	0.014		0.15	4.81	7.2	<0.2	<10	350	0.31	0.33	2.04	0.12	6.55	24.2
I031809		2.04	<0.005		0.16	5.61	1.6	<0.2	<10	190	0.64	0.22	2.69	0.18	7.61	23.3
I031810		0.08	1.165	1.37	7.70	3.26	1520	1.2	<10	70	0.12	49.0	0.02	0.09	93.4	3.1
I031811		3.66	<0.005		0.33	4.08	20.3	<0.2	<10	220	1.29	0.92	3.04	0.88	14.30	15.6
I031812		4.81	<0.005		0.15	3.93	2.1	<0.2	<10	290	1.16	0.62	1.67	0.25	15.05	14.2
I031813		1.13	0.015		0.20	2.69	2.8	<0.2	<10	150	0.80	0.90	1.28	0.17	17.45	14.0
I031814		4.35	0.012		0.15	2.90	6.7	<0.2	<10	330	0.83	0.61	1.20	0.21	14.45	12.6
I031815		1.03	0.007		0.10	3.33	7.7	<0.2	<10	270	0.82	0.54	1.28	0.11	16.00	11.2
I031816		3.00	0.020		0.45	2.38	12.6	<0.2	<10	330	0.67	1.20	1.19	0.36	22.9	12.4
I031817		3.94	0.014		0.15	2.55	2.2	<0.2	<10	180	0.78	0.76	1.45	0.13	26.9	12.5
I031818		2.22	0.066		0.47	2.07	139.5	<0.2	<10	410	0.45	0.42	3.24	0.66	25.6	11.8
I031819		2.57	0.005		0.15	2.07	8.2	<0.2	<10	330	0.49	0.58	0.74	0.24	27.3	10.1
I031820		0.53	<0.005		0.03	1.39	0.7	<0.2	<10	240	0.18	0.05	0.39	0.04	16.15	6.1
I031821		3.11	0.011		0.21	2.75	4.8	<0.2	<10	300	0.87	1.02	1.16	0.24	18.70	12.7
I031822		3.97	0.006		0.17	2.69	3.5	<0.2	<10	210	0.89	0.75	1.63	0.36	16.35	12.8
I031823		4.34	0.010		0.26	3.79	15.6	<0.2	<10	130	0.72	0.43	2.61	0.35	13.75	17.6
I031824		2.42	0.008		0.22	4.11	8.2	<0.2	<10	100	0.66	0.53	2.50	0.20	12.15	20.2
I031825		2.26	0.107		0.60	3.95	53.1	<0.2	<10	180	0.56	4.41	2.79	0.86	12.15	15.5
I031826		2.07	0.028		0.26	4.50	0.6	<0.2	<10	220	0.74	1.47	3.06	0.17	13.60	17.4
I031827		1.76	0.018		0.21	4.09	0.8	<0.2	<10	160	1.14	0.94	2.27	0.18	24.2	14.1
I031828		2.04	0.327		5.20	3.56	60.0	0.3	<10	160	0.93	1.15	3.36	1.61	23.9	18.1
I031829		2.07	0.078		0.62	1.72	560	<0.2	<10	300	0.49	0.94	2.35	0.49	19.30	14.1
I031830		1.34	0.223		2.64	1.49	567	0.2	<10	270	0.37	1.52	2.60	0.65	17.90	12.7
I031831		1.68	0.156		0.24	3.23	18.5	<0.2	<10	300	0.99	4.49	2.06	0.18	28.7	13.4
I031832		3.45	0.006		0.23	4.15	3.7	<0.2	<10	160	0.91	0.73	2.87	0.27	20.1	17.1
I031833		1.52	0.025		0.33	1.50	77.6	<0.2	<10	350	0.61	0.68	6.01	0.22	26.2	12.9
I031834		3.94	0.010		0.22	2.22	35.5	<0.2	<10	190	0.59	0.68	2.75	0.27	28.7	14.4
I031835		2.51	0.125		1.68	1.75	729	<0.2	<10	110	0.55	0.56	2.32	1.06	24.1	10.7
I031836		2.57	0.118		0.68	1.67	807	<0.2	<10	200	0.62	0.48	1.95	0.40	21.2	12.6
I031837		2.16	<0.005		0.26	2.63	11.6	<0.2	<10	140	0.75	0.60	1.40	0.39	21.8	13.2
I031838		2.29	0.010		0.36	2.48	36.0	<0.2	<10	130	0.56	0.79	2.75	1.38	25.6	14.9

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110979

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031799		51	1.88	11.0	2.93	6.69	0.11	0.05	<0.01	0.016	0.92	3.1	15.2	1.91	372	0.47
I031800		49	1.87	10.3	2.89	6.73	0.11	0.04	<0.01	0.013	0.88	3.1	15.6	1.86	362	0.45
I031801		56	2.84	41.4	3.90	8.07	0.15	0.04	<0.01	0.014	1.31	3.2	14.7	2.26	384	0.48
I031802		52	2.31	69.8	4.02	8.42	0.15	0.03	<0.01	0.014	1.05	2.9	14.7	2.27	388	0.34
I031803		73	3.75	54.7	4.70	12.45	0.16	0.03	<0.01	0.022	2.01	3.2	18.5	2.81	635	0.43
I031804		130	3.94	82.7	4.62	12.25	0.12	0.03	0.04	0.032	1.91	2.6	16.6	2.94	730	0.85
I031805		88	1.75	53.3	3.83	8.91	0.11	0.33	0.01	0.043	1.00	11.7	11.1	1.83	605	8.06
I031806		57	3.15	23.1	4.27	12.15	0.14	0.04	<0.01	0.031	1.84	5.5	13.4	2.35	552	0.17
I031807		52	3.77	33.1	4.76	12.30	0.15	0.04	<0.01	0.026	1.97	4.1	14.1	2.36	547	0.15
I031808		69	3.90	39.3	4.99	13.60	0.14	0.04	<0.01	0.035	2.10	3.2	15.4	2.88	618	0.46
I031809		85	3.13	37.1	4.58	14.45	0.16	0.05	<0.01	0.038	1.98	4.0	14.1	2.65	593	2.66
I031810		33	0.20	74.5	3.32	140.5	0.73	0.20	28.7	0.546	1.24	25.4	0.5	0.03	12	15.75
I031811		131	2.02	56.2	3.44	15.35	0.13	0.13	0.30	0.049	1.33	7.7	9.3	1.87	636	10.15
I031812		118	2.68	54.6	3.32	12.55	0.14	0.11	0.02	0.023	1.41	8.5	11.8	1.87	418	7.29
I031813		79	2.00	69.5	3.21	9.44	0.09	0.27	0.01	0.019	0.95	9.7	12.9	1.35	362	6.60
I031814		89	1.72	49.2	2.96	9.07	0.09	0.15	0.01	0.016	1.03	8.2	11.5	1.30	329	4.39
I031815		74	2.10	48.0	3.14	10.15	0.11	0.09	<0.01	0.014	1.21	9.1	13.1	1.38	315	3.09
I031816		66	2.02	58.5	3.01	8.26	0.10	0.35	<0.01	0.013	0.81	12.8	11.9	1.16	307	5.07
I031817		81	2.09	49.5	3.06	8.64	0.11	0.31	<0.01	0.018	0.95	15.5	12.6	1.31	335	2.87
I031818		58	1.77	43.5	2.81	7.58	0.10	0.37	0.01	0.032	0.80	14.6	12.6	1.16	636	4.02
I031819		52	1.82	44.1	2.96	7.79	0.09	0.40	<0.01	0.023	0.88	16.2	15.5	1.21	338	2.33
I031820		6	2.12	3.2	2.19	5.48	0.11	0.19	<0.01	0.011	0.65	6.9	23.9	0.56	517	0.19
I031821		66	1.90	63.9	2.97	9.22	0.10	0.34	<0.01	0.020	0.91	10.3	12.2	1.29	353	5.03
I031822		79	2.17	54.5	2.90	9.17	0.10	0.34	<0.01	0.023	1.01	9.0	10.0	1.44	420	6.18
I031823		179	2.60	58.9	3.79	11.85	0.13	0.25	<0.01	0.029	1.38	7.1	13.7	2.09	610	8.33
I031824		254	3.76	58.7	4.13	12.20	0.14	0.22	0.01	0.022	1.46	6.2	18.2	2.45	576	5.38
I031825		248	4.38	67.2	3.84	12.40	0.11	0.14	0.01	0.024	1.65	6.3	20.0	2.54	721	8.27
I031826		232	4.75	69.6	4.16	14.45	0.15	0.19	0.01	0.022	1.69	7.2	20.9	2.68	703	9.08
I031827		109	2.97	72.4	3.66	12.75	0.14	0.16	<0.01	0.021	1.31	12.5	19.4	1.74	458	4.45
I031828		132	3.67	51.1	4.20	10.85	0.11	0.23	0.02	0.048	1.36	11.3	23.2	2.45	780	6.58
I031829		90	1.60	65.1	3.19	5.40	0.05	0.27	<0.01	0.017	0.56	8.9	13.4	1.54	509	8.88
I031830		98	1.58	55.2	3.04	4.85	0.06	0.23	<0.01	0.022	0.51	8.2	12.6	1.55	583	5.26
I031831		77	2.41	62.6	3.59	9.77	0.10	0.27	<0.01	0.023	1.03	13.6	20.0	1.55	432	19.05
I031832		137	3.38	60.7	4.19	13.35	0.15	0.24	<0.01	0.030	1.56	10.4	17.1	2.33	736	8.80
I031833		81	1.41	55.8	2.90	6.02	0.09	0.25	0.01	0.023	0.42	13.8	7.1	1.50	1000	53.0
I031834		124	2.22	65.6	3.51	8.60	0.11	0.26	<0.01	0.028	0.94	15.1	12.5	1.74	608	10.75
I031835		63	1.21	57.6	3.31	6.71	0.09	0.22	0.01	0.031	0.72	12.6	10.3	1.37	584	6.60
I031836		71	1.11	52.9	2.92	5.76	0.09	0.19	<0.01	0.025	0.64	11.1	10.9	1.16	527	6.26
I031837		92	1.87	62.2	3.25	9.51	0.11	0.11	<0.01	0.024	0.98	11.5	15.2	1.52	510	13.85
I031838		138	2.12	59.0	3.54	9.77	0.13	0.22	<0.01	0.035	1.03	13.6	13.6	1.71	614	13.85

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110979

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031799		0.12	0.11	24.2	520	2.5	40.1	0.001	0.42	0.35	7.3	0.2	0.4	28.5	<0.01	0.05
I031800		0.11	0.11	24.0	500	2.5	39.5	0.001	0.43	0.82	7.3	0.3	0.4	28.3	<0.01	0.05
I031801		0.14	0.12	20.4	500	1.5	51.8	0.001	0.51	0.75	10.4	0.4	0.4	20.3	<0.01	0.03
I031802		0.10	0.12	21.1	560	1.8	44.3	0.001	0.64	0.78	9.9	0.5	0.3	19.5	<0.01	0.04
I031803		0.32	0.09	26.0	510	4.6	72.9	0.001	0.66	3.09	17.0	0.6	0.4	43.7	<0.01	0.04
I031804		0.33	0.08	47.6	450	5.9	71.7	0.002	1.00	27.4	22.0	0.7	0.4	71.2	<0.01	0.07
I031805		0.14	0.11	54.3	1080	13.0	39.0	0.011	1.50	8.70	13.0	3.5	0.6	57.3	<0.01	0.07
I031806		0.27	0.11	16.6	540	3.2	67.5	<0.001	0.32	0.29	18.7	0.5	0.6	48.1	<0.01	0.01
I031807		0.29	0.12	16.4	580	3.2	72.4	0.001	0.53	0.13	21.0	0.5	0.6	53.7	<0.01	0.03
I031808		0.33	0.12	23.4	580	3.9	76.6	0.001	0.86	0.14	22.0	1.0	0.6	55.5	<0.01	0.05
I031809		0.45	0.12	33.3	670	6.6	74.5	0.004	0.87	0.12	20.3	1.5	0.7	83.8	<0.01	0.05
I031810		0.03	0.37	2.5	1110	56.5	2.2	0.001	2.67	354	9.0	18.3	2.5	2040	0.02	1.63
I031811		0.33	0.15	73.1	1050	8.9	55.2	0.012	1.28	4.50	13.1	4.1	1.0	164.5	<0.01	0.10
I031812		0.27	0.14	63.0	1050	4.3	54.2	0.011	0.88	0.29	12.9	3.2	0.9	72.4	<0.01	0.05
I031813		0.17	0.09	55.0	710	3.9	38.8	0.008	1.12	0.23	9.2	3.3	0.6	46.8	<0.01	0.12
I031814		0.13	0.12	57.5	740	4.4	40.9	0.008	0.80	0.15	9.1	2.9	0.6	44.6	<0.01	0.10
I031815		0.12	0.12	43.3	660	2.7	47.1	0.007	0.77	0.09	10.9	3.0	0.6	37.3	<0.01	0.07
I031816		0.12	0.09	49.6	650	14.6	37.5	0.007	0.81	2.01	9.3	2.6	0.5	34.3	<0.01	0.24
I031817		0.12	0.08	51.8	690	5.5	37.2	0.003	0.94	0.44	10.1	2.5	0.5	49.6	<0.01	0.08
I031818		0.08	0.07	43.8	710	11.4	40.3	0.007	0.87	7.77	10.6	2.2	0.6	149.0	<0.01	0.19
I031819		0.08	0.07	34.7	600	4.7	37.5	0.003	0.70	3.76	8.1	2.2	0.5	29.6	<0.01	0.08
I031820		0.16	0.42	2.7	320	6.6	48.6	<0.001	0.01	0.22	4.5	<0.2	0.9	28.8	<0.01	<0.01
I031821		0.16	0.08	47.2	800	5.5	37.3	0.007	0.76	1.42	9.3	3.2	0.6	48.6	<0.01	0.12
I031822		0.15	0.08	52.3	930	5.7	43.0	0.010	0.84	0.63	9.4	2.9	0.6	61.5	<0.01	0.08
I031823		0.30	0.10	99.1	930	7.7	56.4	0.009	1.17	0.50	12.0	2.7	0.8	96.9	<0.01	0.08
I031824		0.28	0.11	145.0	850	6.6	57.7	0.009	1.16	0.53	11.8	2.7	0.7	77.7	<0.01	0.07
I031825		0.25	0.09	138.5	700	11.9	67.5	0.008	0.91	0.68	12.3	2.4	0.6	69.0	<0.01	0.69
I031826		0.29	0.11	129.0	850	7.0	74.8	0.010	1.02	0.19	13.4	3.1	0.8	71.5	<0.01	0.21
I031827		0.29	0.09	52.8	990	6.7	59.3	0.006	1.18	0.14	12.8	3.9	0.8	92.9	<0.01	0.11
I031828		0.12	0.08	76.3	1030	480	62.1	0.009	1.52	25.5	14.0	3.5	0.7	71.5	<0.01	1.34
I031829		0.04	0.07	91.5	740	19.0	28.5	0.007	1.23	20.6	7.1	2.5	0.2	59.7	<0.01	0.22
I031830		0.03	0.09	92.2	580	261	26.3	0.006	1.29	21.3	5.9	2.4	0.2	56.1	<0.01	0.76
I031831		0.23	0.10	50.6	900	9.8	49.8	0.008	1.29	1.52	9.9	3.7	0.6	79.8	<0.01	0.64
I031832		0.31	0.09	62.1	1000	5.8	64.3	0.008	1.28	0.24	15.6	3.4	0.9	104.5	<0.01	0.08
I031833		0.03	0.07	54.6	840	8.4	19.3	0.008	0.99	2.79	8.4	2.9	0.4	90.7	<0.01	0.09
I031834		0.12	0.09	67.0	790	5.1	41.2	0.010	1.31	0.68	9.9	3.2	0.6	115.5	<0.01	0.09
I031835		0.09	0.09	42.4	710	33.6	35.0	0.005	1.79	15.40	6.8	2.9	0.5	66.4	<0.01	0.24
I031836		0.09	0.10	60.7	700	10.5	31.0	0.007	1.44	5.64	5.9	2.7	0.4	61.5	<0.01	0.18
I031837		0.19	0.08	65.4	650	5.1	46.6	0.005	1.21	0.27	7.8	2.7	0.6	53.7	<0.01	0.08
I031838		0.17	0.09	72.5	1040	9.8	47.3	0.011	1.53	0.99	10.5	3.9	0.8	85.2	<0.01	0.11

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110979

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031799		1.0	0.233	0.25	0.18	81	0.29	7.18	45	1.0
I031800		0.9	0.228	0.25	0.17	78	0.28	7.31	52	0.9
I031801		0.9	0.265	0.38	0.16	113	0.23	6.58	56	1.0
I031802		0.8	0.211	0.32	0.16	110	0.14	5.95	58	0.7
I031803		0.9	0.241	0.60	0.14	159	0.22	6.56	101	0.8
I031804		1.3	0.167	0.67	0.20	152	0.31	6.75	100	0.9
I031805		5.8	0.083	0.42	1.33	131	0.22	13.75	105	14.2
I031806		3.1	0.217	0.52	0.37	131	0.21	9.24	84	1.1
I031807		2.5	0.240	0.54	0.29	156	0.43	8.44	82	1.0
I031808		2.0	0.225	0.63	0.25	158	0.24	8.51	108	1.0
I031809		2.5	0.195	0.62	0.55	174	0.33	8.48	104	1.7
I031810		2.3	0.110	0.44	15.00	46	9.92	1.81	11	15.9
I031811		5.8	0.135	0.48	1.72	166	0.69	10.05	121	5.9
I031812		5.3	0.138	0.45	1.42	165	0.34	10.75	79	5.1
I031813		5.2	0.082	0.38	1.33	112	0.48	9.62	60	11.9
I031814		4.9	0.106	0.37	1.39	112	0.23	6.89	63	6.3
I031815		4.9	0.132	0.39	1.21	116	0.13	6.00	58	3.5
I031816		4.9	0.078	0.31	1.56	102	0.24	10.55	65	15.8
I031817		5.1	0.093	0.34	1.63	109	0.09	10.20	64	13.8
I031818		4.4	0.073	0.35	0.90	92	0.16	12.80	106	16.3
I031819		5.4	0.081	0.35	1.33	87	0.09	8.78	78	16.5
I031820		11.9	0.152	0.38	2.68	45	0.13	7.23	39	3.9
I031821		4.9	0.074	0.36	1.61	114	0.21	9.80	63	15.9
I031822		4.9	0.078	0.38	1.76	117	0.16	10.55	73	15.7
I031823		5.2	0.145	0.50	1.46	163	0.27	10.80	112	10.1
I031824		4.7	0.160	0.57	1.44	156	0.19	11.25	119	9.4
I031825		4.3	0.142	0.63	1.16	148	2.24	9.70	136	5.7
I031826		4.4	0.145	0.69	1.34	171	1.28	11.30	102	8.1
I031827		5.7	0.117	0.57	1.58	161	0.14	12.55	69	6.5
I031828		4.8	0.112	0.60	1.48	153	0.19	14.95	179	9.9
I031829		4.9	0.038	0.33	1.24	76	0.23	8.87	82	12.3
I031830		3.7	0.032	0.30	0.97	63	0.26	8.78	83	9.9
I031831		6.1	0.091	0.43	1.87	119	0.27	12.90	66	11.3
I031832		5.3	0.147	0.61	1.65	178	0.29	13.70	110	9.2
I031833		4.5	0.021	0.28	1.24	95	0.57	22.3	81	11.6
I031834		5.6	0.066	0.39	1.59	127	0.19	13.15	91	10.9
I031835		5.0	0.049	0.34	1.37	91	0.25	10.55	133	9.3
I031836		4.8	0.042	0.29	1.16	72	0.33	7.99	76	8.0
I031837		5.3	0.071	0.42	1.25	115	0.65	9.17	93	4.6
I031838		5.5	0.082	0.41	1.67	149	0.32	11.40	131	9.1

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110979

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I031839		1.79	0.008		0.19	2.45	12.5	<0.2	<10	400	0.66	0.78	4.39	0.64	16.20	12.1
I031840		<0.02	0.010		0.20	2.33	13.5	<0.2	<10	320	0.61	0.74	4.28	0.82	15.40	12.0
I031841		4.37	<0.005		0.34	3.25	2.0	<0.2	<10	90	0.77	0.73	2.58	1.13	18.70	18.1
I031842		3.90	0.011		0.24	4.28	2.7	<0.2	<10	160	1.04	0.79	2.43	0.24	19.00	17.1
I031843		2.01	0.009		0.42	2.73	20.2	<0.2	<10	130	0.61	0.44	2.17	0.62	27.9	13.7
I031844		1.91	<0.005		0.23	4.37	4.7	<0.2	<10	160	0.76	0.40	2.37	0.30	13.15	18.9
I031845		2.52	0.018		0.61	3.59	16.1	<0.2	<10	110	0.82	0.41	2.92	0.88	25.4	17.0
I031846		1.68	<0.005		0.30	3.57	2.3	<0.2	<10	210	0.90	0.27	2.17	0.95	25.5	13.2
I031847		2.06	0.017		0.57	3.14	21.9	<0.2	<10	90	0.79	0.30	3.52	1.13	29.2	15.3
I031848		1.91	0.249		3.05	3.06	31.9	0.2	<10	100	0.91	0.81	2.45	1.52	32.8	13.5
I031849		2.21	<0.005		0.22	3.08	6.3	<0.2	<10	230	0.86	0.67	2.44	0.25	32.2	11.5
I031850		0.08	1.160	1.30	8.90	4.00	1690	1.3	<10	70	0.12	53.7	0.05	0.09	103.5	2.8
I031851		2.56	<0.005		0.22	4.01	4.0	<0.2	<10	200	1.06	0.73	2.31	0.23	27.0	13.6
I031852		4.49	0.006		0.25	3.16	42.7	<0.2	<10	190	0.38	0.50	2.80	0.15	17.75	17.1
I031853		2.10	0.329		0.35	1.27	1560	0.4	<10	290	0.28	0.52	2.50	0.18	25.1	8.2
I031854		3.25	<0.005		0.21	1.77	6.1	<0.2	<10	330	0.19	0.73	2.09	0.13	23.5	11.8
I031855		3.67	<0.005		0.18	2.94	15.5	<0.2	<10	550	0.27	0.56	2.17	0.13	23.0	19.0
I031856		4.18	<0.005		0.14	2.78	3.1	<0.2	<10	400	0.30	1.11	1.64	0.10	10.15	28.0
I031857		1.33	0.005		0.22	3.25	1.6	<0.2	<10	500	0.46	5.34	2.54	0.07	10.55	34.7
I031858		4.05	0.135		0.93	1.29	632	0.2	<10	200	0.47	1.07	4.42	0.38	21.4	11.8
I031859		2.32	0.075		0.31	2.79	82.8	<0.2	<10	190	0.68	1.27	1.96	0.27	30.0	12.1
I031860		1.03	<0.005		0.03	1.34	3.6	<0.2	<10	220	0.15	0.06	0.36	0.05	30.2	6.0
I031861		2.73	0.093		0.28	2.90	11.9	<0.2	<10	180	0.72	1.76	2.63	0.20	28.6	12.2
I031862		4.61	0.055		0.17	3.03	3.8	<0.2	<10	280	0.67	0.91	1.22	0.17	20.5	11.9
I031863		4.93	0.105		0.14	3.70	0.9	<0.2	<10	180	0.91	1.43	1.48	0.12	17.45	11.2
I031864		3.14	0.505		0.15	4.05	0.9	0.4	<10	310	1.00	5.42	1.79	0.10	17.35	11.2
I031865		3.72	0.327		0.22	2.93	3.9	0.4	<10	180	0.60	5.36	2.29	0.18	12.75	11.3
I031866		0.66	0.087		3.04	2.09	648	<0.2	<10	180	0.17	0.20	5.19	4.21	8.32	18.5
I031867		2.15	<0.005		0.15	5.12	6.8	<0.2	<10	480	0.17	0.31	1.63	0.09	5.91	27.6
I031868		2.21	0.006		0.25	5.43	1.1	<0.2	<10	270	0.39	0.57	2.81	0.11	7.10	25.0
I031869		2.29	<0.005		0.15	4.78	0.1	<0.2	<10	420	0.31	0.40	2.15	0.09	9.25	22.6
I031870		0.02	<0.005		0.19	4.76	0.4	<0.2	<10	430	0.28	0.37	2.19	0.08	9.26	21.9
I031871		2.09	<0.005		0.25	5.08	<0.1	<0.2	<10	430	0.31	0.50	2.77	0.11	6.86	23.0
I031872		2.09	<0.005		0.20	5.41	0.2	<0.2	<10	450	0.36	0.40	2.76	0.10	8.12	21.6
I031873		2.25	<0.005		0.16	5.06	<0.1	<0.2	<10	410	0.34	0.26	3.10	0.10	11.00	18.3
I031874		1.93	0.009		0.22	4.93	10.9	<0.2	<10	400	0.28	0.37	3.80	0.18	8.64	23.9
I031875		1.92	<0.005		0.23	5.55	2.2	<0.2	<10	320	0.33	0.36	2.42	0.11	8.06	25.8
I031876		1.55	<0.005		0.22	5.12	2.9	<0.2	<10	400	0.34	0.30	2.48	0.12	8.69	20.8
I031877		2.00	<0.005		0.16	5.05	<0.1	<0.2	<10	420	0.34	0.32	1.98	0.07	7.97	25.6
I031878		2.04	<0.005		0.24	3.44	0.3	<0.2	<10	280	0.23	0.39	2.84	0.16	12.45	22.0

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110979

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031839		89	1.53	56.7	2.99	8.07	0.08	0.13	<0.01	0.023	0.82	8.5	13.2	1.40	636	5.41
I031840		86	1.43	58.1	2.95	7.80	0.09	0.11	<0.01	0.024	0.77	8.1	12.8	1.34	620	5.19
I031841		170	2.73	62.7	4.02	11.40	0.15	0.13	<0.01	0.036	1.29	9.7	15.2	2.22	616	13.75
I031842		211	2.82	57.0	3.57	13.65	0.17	0.12	<0.01	0.028	1.54	10.1	13.9	2.47	594	8.71
I031843		100	2.09	60.9	3.45	9.90	0.12	0.20	<0.01	0.033	1.11	14.7	14.4	1.79	668	5.61
I031844		256	2.82	47.5	3.93	13.30	0.18	0.08	<0.01	0.038	1.61	6.8	18.0	2.79	637	4.81
I031845		173	2.15	56.2	3.84	11.70	0.14	0.26	<0.01	0.041	1.34	13.7	14.3	2.14	636	9.53
I031846		122	2.13	49.5	3.38	11.80	0.15	0.13	<0.01	0.042	1.36	13.7	14.2	1.89	549	5.38
I031847		106	1.70	72.3	3.55	10.80	0.12	0.16	0.01	0.046	1.07	15.6	15.4	2.04	757	11.45
I031848		110	2.03	71.5	3.36	10.85	0.13	0.16	0.02	0.043	1.18	16.8	13.8	1.83	655	5.61
I031849		82	1.77	55.4	3.12	10.40	0.13	0.18	0.01	0.027	1.08	17.3	14.5	1.48	567	8.16
I031850		40	0.17	80.2	3.46	160.5	1.12	0.21	34.1	0.588	1.50	25.4	0.3	0.03	14	16.00
I031851		109	2.02	56.4	3.58	12.65	0.16	0.14	0.02	0.029	1.31	14.3	13.7	1.80	547	6.72
I031852		68	1.84	52.1	3.66	9.60	0.14	0.05	<0.01	0.028	0.97	8.6	8.7	1.47	561	9.51
I031853		29	0.88	41.3	2.74	4.90	0.09	0.04	0.01	0.024	0.49	12.2	7.0	0.85	510	0.67
I031854		49	1.10	39.9	3.04	6.68	0.11	0.05	0.01	0.024	0.62	11.4	7.9	1.11	491	0.47
I031855		136	2.07	33.7	3.83	9.96	0.15	0.06	<0.01	0.033	1.09	11.4	12.7	1.90	599	0.96
I031856		331	1.37	42.1	3.26	8.46	0.11	0.03	0.01	0.018	0.64	4.9	17.0	2.19	444	3.00
I031857		184	1.72	36.1	2.82	8.81	0.12	0.05	<0.01	0.016	0.72	5.4	14.1	1.77	433	4.77
I031858		85	1.17	46.6	3.28	4.74	0.09	0.11	0.08	0.019	0.52	10.8	7.5	2.15	691	3.14
I031859		73	2.29	60.5	3.35	8.47	0.12	0.09	0.01	0.019	0.92	16.2	13.8	1.51	403	3.81
I031860		8	2.15	4.1	2.30	5.21	0.10	0.19	<0.01	0.011	0.66	13.8	24.6	0.55	501	0.21
I031861		92	2.26	60.7	3.29	9.04	0.11	0.13	0.01	0.018	0.87	15.7	12.4	1.34	394	4.01
I031862		77	2.46	53.4	3.17	9.39	0.11	0.09	<0.01	0.023	1.07	10.9	8.5	1.40	355	3.36
I031863		95	2.27	54.5	3.31	11.20	0.13	0.07	<0.01	0.022	1.21	9.2	9.3	1.55	366	3.55
I031864		105	2.25	53.6	3.27	11.95	0.13	0.07	<0.01	0.017	1.28	9.3	8.7	1.65	382	5.11
I031865		91	1.02	71.4	3.14	8.53	0.10	0.09	0.01	0.019	0.59	6.8	6.1	1.24	422	24.5
I031866		38	2.13	144.5	3.57	5.19	0.07	0.04	0.07	0.068	0.81	3.7	11.8	3.32	1660	0.55
I031867		43	4.74	40.1	5.18	13.10	0.16	0.03	<0.01	0.027	2.33	2.6	26.6	3.09	588	0.42
I031868		73	2.92	77.2	4.88	12.90	0.14	0.04	<0.01	0.028	1.59	3.4	17.5	2.18	631	0.99
I031869		93	2.99	39.4	4.21	12.45	0.13	0.04	<0.01	0.029	1.68	4.2	17.2	2.16	540	1.10
I031870		92	2.92	38.4	4.26	12.15	0.12	0.05	<0.01	0.027	1.65	4.3	16.7	2.19	551	1.12
I031871		65	2.73	40.0	4.95	13.25	0.12	0.03	<0.01	0.031	1.79	3.0	18.3	2.23	666	1.63
I031872		57	2.55	33.4	4.83	14.75	0.14	0.04	<0.01	0.040	1.91	3.6	20.3	2.13	639	0.91
I031873		35	2.31	28.7	4.71	14.20	0.14	0.04	<0.01	0.047	1.84	5.1	19.0	1.97	808	0.60
I031874		78	3.39	40.8	5.24	12.85	0.14	0.04	<0.01	0.041	1.85	3.9	22.5	2.72	1060	0.60
I031875		70	3.07	57.8	5.20	13.50	0.13	0.04	<0.01	0.036	2.06	3.7	20.6	2.53	726	1.54
I031876		39	3.44	41.8	5.05	13.35	0.13	0.04	<0.01	0.043	2.02	4.0	23.8	2.46	850	1.06
I031877		139	2.70	38.3	4.54	12.65	0.14	0.05	<0.01	0.052	1.94	3.6	17.0	2.45	606	0.49
I031878		72	1.74	41.2	4.20	9.09	0.14	0.06	<0.01	0.030	1.15	5.6	11.1	1.65	654	0.33

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110979

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031839		0.15	0.10	60.3	900	5.6	36.1	0.008	1.12	0.25	7.0	3.3	0.5	223	<0.01	0.08
I031840		0.14	0.10	59.6	860	5.7	34.2	0.007	1.13	0.29	6.8	3.3	0.4	219	<0.01	0.08
I031841		0.22	0.13	82.3	1200	7.3	54.7	0.011	1.62	0.10	12.7	4.0	0.9	62.2	<0.01	0.09
I031842		0.34	0.11	85.4	990	5.7	65.4	0.011	1.06	0.06	13.2	3.7	1.0	83.2	<0.01	0.11
I031843		0.16	0.09	58.0	900	13.1	49.2	0.009	1.26	0.18	10.7	3.2	0.8	52.2	<0.01	0.12
I031844		0.31	0.10	153.0	790	8.1	68.0	0.007	1.00	0.15	13.2	2.9	0.9	83.2	<0.01	0.07
I031845		0.22	0.10	101.5	1190	14.6	62.4	0.013	1.46	0.62	11.2	4.5	0.9	79.3	<0.01	0.22
I031846		0.24	0.08	57.2	810	7.6	61.5	0.008	1.10	0.08	12.2	3.3	0.9	72.5	<0.01	0.07
I031847		0.20	0.09	60.7	990	15.1	50.3	0.011	1.47	0.27	11.9	3.7	0.8	84.1	<0.01	0.17
I031848		0.20	0.08	57.5	860	146.5	54.4	0.008	1.32	3.10	11.0	3.5	0.9	69.2	<0.01	1.33
I031849		0.22	0.10	47.6	860	8.6	49.4	0.008	0.93	0.94	10.0	3.6	0.9	70.8	<0.01	0.11
I031850		0.05	0.34	2.3	1290	66.8	1.8	0.001	3.21	380	9.0	20.1	2.7	2280	0.02	1.81
I031851		0.31	0.11	55.0	960	6.1	58.5	0.009	1.08	0.27	12.2	3.7	0.9	93.0	<0.01	0.10
I031852		0.27	0.12	32.2	770	3.6	40.9	0.002	1.06	0.29	13.9	2.0	0.7	80.7	<0.01	0.13
I031853		0.10	0.13	11.6	320	3.5	22.4	<0.001	1.01	4.72	6.6	1.7	0.4	40.9	<0.01	0.33
I031854		0.19	0.17	20.4	370	2.4	26.6	<0.001	0.90	0.12	9.2	1.5	0.7	41.4	<0.01	0.33
I031855		0.23	0.16	88.8	460	3.0	46.7	0.001	0.73	0.29	13.2	1.3	0.9	64.4	<0.01	0.34
I031856		0.17	0.10	367	320	2.4	25.9	0.001	0.73	0.19	5.8	1.8	0.5	91.7	<0.01	0.86
I031857		0.33	0.11	183.5	490	2.8	31.4	0.004	0.59	0.64	8.4	1.5	0.5	149.5	<0.01	3.96
I031858		0.05	0.10	77.9	540	12.7	24.8	0.004	1.52	760	7.9	1.9	0.4	118.5	<0.01	0.28
I031859		0.16	0.08	45.9	830	5.0	40.9	0.006	1.13	28.3	11.1	2.6	0.6	73.3	<0.01	0.14
I031860		0.14	0.47	3.1	310	6.6	50.0	<0.001	0.01	2.21	4.4	<0.2	0.9	25.7	<0.01	<0.01
I031861		0.16	0.11	51.4	800	7.5	40.0	0.006	1.12	1.18	10.8	2.7	0.6	67.7	<0.01	0.20
I031862		0.23	0.10	43.2	660	4.9	48.8	0.004	0.96	0.33	10.5	2.6	0.8	54.6	<0.01	0.11
I031863		0.30	0.11	43.2	660	3.4	52.4	0.004	0.98	0.20	13.7	2.5	0.8	65.7	<0.01	0.15
I031864		0.34	0.12	52.3	900	3.0	53.5	0.007	0.82	0.30	13.4	2.2	0.9	66.1	<0.01	0.68
I031865		0.24	0.13	47.0	660	3.2	28.0	0.007	1.10	2.00	9.5	2.3	0.7	68.9	<0.01	1.12
I031866		0.09	0.09	13.4	300	18.0	40.0	<0.001	1.36	61.0	12.9	0.4	0.2	89.6	<0.01	0.12
I031867		0.26	0.10	16.6	540	5.2	84.7	0.001	0.60	0.87	20.4	0.3	0.5	32.3	<0.01	0.03
I031868		0.37	0.11	33.0	590	6.9	58.7	0.002	1.20	3.21	17.2	0.5	0.6	47.8	<0.01	0.06
I031869		0.37	0.10	38.2	530	7.9	64.0	0.001	0.66	0.63	18.9	0.4	0.7	38.0	<0.01	0.04
I031870		0.37	0.08	37.1	530	8.2	63.3	0.001	0.65	0.59	18.5	0.4	0.7	37.4	<0.01	0.04
I031871		0.36	0.11	25.3	570	8.7	67.3	0.001	0.97	0.23	20.1	0.4	0.7	38.3	<0.01	0.05
I031872		0.33	0.15	21.9	550	8.5	70.5	0.001	0.81	0.15	18.8	0.4	1.0	37.0	<0.01	0.04
I031873		0.37	0.13	14.1	480	9.3	69.4	0.001	0.63	0.15	17.2	0.3	1.1	40.2	<0.01	0.02
I031874		0.31	0.09	32.3	540	13.2	72.4	0.001	0.98	0.31	19.5	0.4	0.7	50.6	<0.01	0.03
I031875		0.41	0.11	25.1	570	10.8	77.0	0.001	1.07	0.16	22.4	0.5	0.8	43.5	<0.01	0.03
I031876		0.35	0.11	15.7	520	17.0	81.7	0.001	0.93	0.18	19.4	0.3	0.8	38.3	<0.01	0.02
I031877		0.39	0.09	51.4	500	6.7	71.3	0.001	0.80	0.15	19.0	0.4	0.8	38.7	<0.01	0.03
I031878		0.29	0.12	35.5	480	6.7	44.0	0.001	1.18	0.23	14.3	0.7	1.0	42.4	<0.01	0.02

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110979

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031839		5.0	0.061	0.32	1.59	114	0.21	15.90	80	4.8
I031840		4.9	0.057	0.30	1.48	108	0.23	15.50	84	4.6
I031841		5.9	0.136	0.49	1.76	186	0.21	12.05	130	5.0
I031842		6.3	0.136	0.55	1.68	175	0.18	13.20	117	4.5
I031843		5.7	0.078	0.49	1.83	136	0.13	12.45	116	8.3
I031844		5.0	0.147	0.62	1.40	158	0.21	11.00	146	2.9
I031845		6.0	0.110	0.56	2.00	164	0.21	12.75	133	11.4
I031846		5.9	0.098	0.53	1.57	155	0.12	11.05	140	5.2
I031847		6.2	0.069	0.47	1.84	156	0.12	14.10	144	7.0
I031848		5.5	0.082	0.48	1.65	143	0.14	11.35	165	6.8
I031849		5.4	0.079	0.42	1.74	147	0.12	13.60	88	7.3
I031850		2.3	0.125	0.49	17.60	54	8.88	1.59	13	14.4
I031851		5.9	0.103	0.48	1.80	167	0.14	12.50	98	5.5
I031852		3.2	0.131	0.34	0.86	125	0.28	10.60	68	1.1
I031853		3.9	0.041	0.20	0.89	38	0.16	13.95	40	0.7
I031854		3.7	0.124	0.21	0.87	55	0.24	15.10	48	1.0
I031855		4.3	0.163	0.36	1.03	99	0.31	13.25	71	1.3
I031856		2.7	0.063	0.23	0.70	50	2.70	6.89	68	1.0
I031857		2.7	0.124	0.28	0.86	86	0.39	9.57	53	1.6
I031858		4.5	0.026	0.31	1.42	68	0.33	11.45	68	5.0
I031859		5.7	0.071	0.34	1.70	111	0.14	12.90	63	3.5
I031860		15.7	0.151	0.38	3.22	46	0.12	6.79	39	3.8
I031861		5.8	0.074	0.33	1.73	122	0.14	15.35	59	4.6
I031862		6.2	0.089	0.37	1.40	109	0.13	7.75	62	3.2
I031863		5.5	0.116	0.39	1.37	139	0.26	8.99	63	2.3
I031864		5.8	0.135	0.39	1.71	155	0.76	12.20	58	2.5
I031865		4.4	0.069	0.26	1.50	114	0.89	8.91	56	3.5
I031866		1.1	0.069	0.29	0.18	74	0.30	10.90	335	0.9
I031867		0.8	0.238	0.53	0.10	175	0.20	6.46	126	0.6
I031868		1.1	0.225	0.36	0.14	139	0.27	9.39	110	1.1
I031869		2.3	0.207	0.39	0.28	128	0.38	10.00	116	1.2
I031870		2.2	0.208	0.40	0.28	127	0.38	9.94	117	1.2
I031871		1.6	0.217	0.39	0.19	147	0.46	9.49	107	0.8
I031872		2.4	0.224	0.37	0.31	127	0.40	10.50	106	0.8
I031873		2.8	0.194	0.38	0.37	113	0.19	12.10	105	0.9
I031874		1.9	0.189	0.44	0.25	139	0.19	11.55	135	1.0
I031875		2.2	0.217	0.48	0.29	157	0.24	8.71	112	1.1
I031876		3.5	0.203	0.53	0.42	150	0.22	8.00	105	1.0
I031877		2.6	0.223	0.41	0.37	141	0.35	9.35	95	1.1
I031878		2.2	0.203	0.28	0.32	105	0.30	12.45	75	1.4

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110979

Sample Description	Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
	Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I031879		1.82	<0.005		0.19	4.27	0.9	<0.2	<10	350	0.26	0.30	1.79	0.12	12.20	24.2
I031880		0.08	1.160	1.31	7.96	3.61	1620	1.3	<10	70	0.10	52.8	0.02	0.09	108.5	3.1
I031881		2.16	<0.005		0.20	3.78	1.6	<0.2	<10	310	0.24	0.38	2.15	0.10	8.48	23.5
I031882		1.77	<0.005		0.10	4.93	2.9	<0.2	<10	420	0.20	0.23	3.25	0.08	7.36	22.6
I031883		1.47	<0.005		0.10	7.42	2.0	<0.2	<10	520	0.25	0.19	5.09	0.06	4.87	21.0
I031884		1.66	<0.005		0.30	2.89	3.2	<0.2	10	240	0.88	0.22	1.85	1.09	28.7	13.1
I031885		1.99	<0.005		0.32	2.50	1.2	<0.2	10	250	0.86	0.17	1.56	1.76	31.8	12.7
I031886		1.76	<0.005		0.40	3.98	1.2	<0.2	<10	140	1.05	0.15	2.17	1.16	25.5	15.8
I031887		1.63	<0.005		0.56	4.00	1.6	<0.2	<10	180	1.17	0.25	3.30	2.80	35.9	15.2
I031888		1.44	0.016		0.60	3.04	30.4	<0.2	<10	200	0.91	0.23	3.27	2.70	40.8	13.9
I031889		1.50	<0.005		0.49	0.95	10.5	<0.2	<10	310	0.39	0.20	0.88	1.41	25.2	9.8
I031890		0.89	<0.005		0.03	1.60	0.7	<0.2	<10	240	0.20	0.05	0.48	0.06	28.0	5.8
I031891		2.15	<0.005		0.41	1.08	1.8	<0.2	<10	170	0.44	0.21	0.43	0.70	25.1	7.6
I031892		1.70	<0.005		0.38	1.26	1.1	<0.2	<10	330	0.42	0.29	0.51	0.53	27.7	8.7
I031893		1.65	0.007		0.34	0.92	0.9	<0.2	<10	300	0.33	0.19	0.37	0.71	24.6	7.4
I031894		1.56	0.007		0.33	1.15	1.8	<0.2	<10	190	0.47	0.22	0.78	0.78	26.6	8.7
I031895		1.84	0.006		0.30	2.30	9.0	<0.2	<10	290	0.63	0.26	1.11	0.58	23.8	10.3
I031896		1.68	0.008		0.50	2.65	0.8	<0.2	<10	230	0.79	0.58	1.60	0.64	20.1	11.2
I031897		1.43	0.014		0.32	3.25	58.8	<0.2	<10	190	0.84	0.25	3.38	1.05	24.0	14.5
I031898		1.95	0.006		0.29	3.71	31.7	<0.2	<10	330	0.63	0.16	1.69	0.41	25.5	17.6
I031899		1.30	0.009		0.34	2.26	37.3	<0.2	<10	200	0.67	0.22	1.43	0.54	26.4	12.0

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110979

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031879		68	3.33	41.1	5.13	12.10	0.14	0.06	<0.01	0.037	1.97	5.6	16.7	2.57	708	0.47
I031880		35	0.21	77.3	3.39	144.5	0.85	0.20	30.9	0.587	1.38	27.0	0.6	0.03	13	16.60
I031881		99	2.70	40.3	4.38	10.50	0.13	0.06	<0.01	0.029	1.36	3.3	13.5	1.92	588	0.37
I031882		51	3.55	25.3	3.70	10.15	0.12	0.04	0.02	0.021	1.15	3.4	14.1	1.90	537	0.58
I031883		50	1.84	52.1	2.47	9.99	0.11	0.02	0.01	0.009	0.65	2.5	8.8	1.32	322	0.45
I031884		67	2.52	54.2	2.97	9.16	0.11	0.21	<0.01	0.038	0.88	15.3	14.6	1.35	628	7.24
I031885		64	2.81	69.8	2.92	8.82	0.14	0.24	<0.01	0.037	0.98	17.4	14.8	1.35	620	6.30
I031886		125	3.93	53.3	3.44	11.90	0.16	0.23	<0.01	0.046	1.37	13.3	13.5	2.10	578	9.15
I031887		159	4.84	51.2	3.43	12.65	0.18	0.36	<0.01	0.058	1.46	19.6	13.8	2.28	603	13.95
I031888		126	4.32	53.2	3.25	10.65	0.14	0.40	0.03	0.050	1.26	22.7	11.3	2.15	682	13.90
I031889		76	0.91	68.5	2.40	3.68	0.09	0.11	0.01	0.022	0.35	13.1	5.3	0.55	391	4.53
I031890		12	2.11	4.9	2.43	5.58	0.10	0.20	<0.01	0.014	0.68	12.4	25.4	0.55	538	0.34
I031891		35	1.03	58.0	2.50	3.87	0.09	0.11	0.02	0.016	0.48	13.2	5.9	0.54	291	3.16
I031892		83	1.55	56.1	2.60	4.59	0.09	0.09	<0.01	0.017	0.59	14.5	7.6	0.71	336	2.66
I031893		33	0.85	59.2	2.19	3.49	0.07	0.09	0.03	0.014	0.39	12.8	6.0	0.43	320	3.02
I031894		38	1.22	59.1	2.47	4.21	0.08	0.11	0.03	0.018	0.47	13.9	7.7	0.61	361	3.35
I031895		75	2.77	47.2	2.66	7.75	0.11	0.11	0.01	0.036	0.88	13.6	7.6	1.07	521	2.48
I031896		86	2.91	51.4	2.83	8.88	0.16	0.10	0.01	0.037	0.92	11.2	8.2	1.14	533	2.96
I031897		104	3.08	51.4	3.22	10.95	0.24	0.16	0.01	0.048	1.00	13.8	9.6	1.44	711	4.92
I031898		131	2.89	55.0	3.30	11.20	0.18	0.08	<0.01	0.038	1.05	13.9	9.3	1.71	464	2.65
I031899		48	2.47	60.3	3.05	10.65	0.52	0.24	0.01	0.035	0.82	14.2	11.6	1.07	480	2.71

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110979

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031879		0.31	0.12	26.4	590	6.9	75.1	0.001	1.06	0.30	20.3	0.5	1.0	38.7	<0.01	0.01
I031880		0.04	0.39	2.6	1210	60.8	2.3	0.001	2.96	373	9.7	19.5	2.7	2180	0.02	1.82
I031881		0.28	0.10	49.7	570	6.0	61.2	<0.001	0.89	0.37	12.8	0.5	0.7	41.1	<0.01	0.02
I031882		0.47	0.09	23.7	390	5.7	50.2	0.001	0.47	0.69	15.2	0.4	0.4	62.1	<0.01	0.02
I031883		0.58	0.14	21.1	250	5.6	30.3	0.001	0.50	0.41	9.8	0.5	0.2	194.5	0.01	0.02
I031884		0.16	0.10	47.1	940	14.4	41.8	0.010	1.03	0.45	8.7	3.4	0.8	65.9	<0.01	0.06
I031885		0.08	0.10	56.0	980	8.1	43.5	0.008	1.03	0.27	8.6	4.3	0.8	48.9	<0.01	0.08
I031886		0.34	0.09	63.5	1080	12.1	58.2	0.012	1.15	0.37	14.0	4.5	1.1	99.8	<0.01	0.06
I031887		0.30	0.09	75.7	1310	28.6	68.5	0.018	1.29	0.48	13.2	6.3	1.1	181.5	<0.01	0.07
I031888		0.15	0.08	69.9	1270	45.6	59.6	0.016	1.32	3.02	12.1	6.2	1.1	130.0	<0.01	0.09
I031889		0.01	0.15	78.5	760	7.6	19.4	0.006	0.86	46.2	3.4	4.0	0.5	27.8	<0.01	0.09
I031890		0.23	0.47	3.5	310	7.9	49.2	<0.001	0.01	0.73	4.9	<0.2	1.1	37.3	<0.01	<0.01
I031891		0.02	0.14	41.8	700	7.2	25.3	0.005	0.94	4.30	3.1	2.9	0.5	20.4	<0.01	0.08
I031892		0.02	0.13	57.4	670	6.5	32.5	0.004	0.78	0.82	3.8	2.1	0.6	25.4	<0.01	0.10
I031893		0.01	0.18	42.7	800	5.3	20.3	0.006	0.66	4.03	3.2	2.8	0.4	18.6	<0.01	0.08
I031894		0.01	0.11	45.4	730	4.2	25.9	0.005	0.95	3.31	4.1	3.3	0.4	29.8	<0.01	0.09
I031895		0.11	0.52	43.7	580	5.1	47.6	0.004	0.74	0.63	11.2	1.8	0.7	52.0	0.02	0.07
I031896		0.15	0.88	50.3	600	20.9	52.0	0.004	0.85	0.20	15.4	2.4	0.8	83.8	0.03	0.11
I031897		0.23	1.90	53.0	760	8.7	53.1	0.008	1.06	0.51	22.9	3.2	0.8	192.0	0.06	0.09
I031898		0.28	0.61	73.9	580	7.0	51.5	0.004	0.70	0.32	17.1	1.9	0.8	90.1	0.02	0.05
I031899		0.11	2.54	46.4	520	7.1	51.8	0.004	0.90	1.39	29.8	2.9	0.9	53.1	0.11	0.11

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110979

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031879		2.9	0.268	0.44	0.36	161	0.26	11.75	100	1.7
I031880		2.5	0.116	0.47	16.40	49	10.40	1.85	12	16.1
I031881		1.7	0.263	0.35	0.26	120	0.30	10.25	80	1.5
I031882		1.2	0.186	0.35	0.21	130	0.27	7.18	59	0.9
I031883		0.9	0.132	0.21	0.25	100	0.28	2.57	27	0.6
I031884		5.7	0.095	0.34	1.70	119	0.17	11.70	114	9.1
I031885		5.3	0.095	0.34	1.82	148	0.12	12.45	173	10.8
I031886		5.2	0.121	0.58	1.87	176	0.15	13.05	143	9.8
I031887		6.8	0.102	0.72	2.66	191	0.17	16.65	213	15.4
I031888		6.3	0.085	0.63	3.23	176	0.18	17.20	195	18.0
I031889		4.0	0.020	0.18	2.05	59	0.14	7.18	159	5.3
I031890		15.7	0.151	0.36	2.27	45	0.17	7.50	39	4.2
I031891		4.2	0.030	0.19	1.56	53	0.14	5.73	97	4.9
I031892		4.8	0.048	0.24	1.46	68	0.13	6.17	91	3.7
I031893		3.9	0.026	0.24	1.60	53	0.13	6.02	106	4.2
I031894		4.4	0.032	0.27	1.80	65	0.14	6.58	101	5.1
I031895		5.4	0.078	0.38	1.33	91	0.20	8.79	92	4.5
I031896		5.3	0.090	0.39	1.28	107	0.29	8.49	98	4.4
I031897		5.7	0.094	0.46	1.93	131	0.47	14.05	134	6.2
I031898		5.5	0.123	0.40	1.38	113	0.23	10.85	97	2.8
I031899		5.3	0.080	0.39	1.84	86	1.09	8.66	105	11.2

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 31-AUG-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10110979

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

CERTIFICATE WH10111280

Project: SQI10-03

P.O. No.: SQ/10-03_17

This report is for 148 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 11-AUG-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
PUL-QC	Pulverizing QC Test
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
SPL-21d	Split sample - duplicate
PUL-31d	Pulverize Split - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I031651		5.91	<0.005		0.06	2.64	1.6	<0.2	<10	390	0.25	0.06	1.25	0.09	12.20	11.0
I031652		7.06	<0.005		0.08	3.52	0.9	<0.2	<10	600	0.21	0.18	1.20	0.07	10.60	18.1
I031653		5.40	<0.005		0.07	3.39	0.7	<0.2	<10	550	0.29	0.18	1.02	0.11	13.55	17.7
I031654		6.51	<0.005		0.06	1.81	0.7	<0.2	<10	320	0.22	0.05	1.46	0.09	12.80	8.1
I031655		6.39	<0.005		0.05	1.67	0.6	<0.2	<10	220	0.16	0.11	1.85	0.11	12.25	7.4
I031656		6.10	<0.005		0.10	2.12	0.5	<0.2	<10	310	0.24	0.33	1.63	0.13	10.50	8.3
I031657		5.69	<0.005		0.10	1.52	0.9	<0.2	<10	180	0.22	0.17	1.84	0.40	14.50	7.1
I031658		5.49	<0.005		0.11	1.54	0.5	<0.2	<10	170	0.23	0.12	2.38	0.27	9.75	6.9
I031659		5.99	<0.005		0.36	1.94	0.9	<0.2	<10	230	0.29	0.07	1.42	0.39	12.95	8.8
I031660		1.58	<0.005		0.03	1.27	0.6	<0.2	<10	220	0.14	0.04	0.32	0.05	30.2	5.5
I031661		5.58	<0.005		0.07	2.35	0.3	<0.2	<10	340	0.23	0.13	2.10	0.18	13.95	9.9
I031662		5.81	<0.005		0.09	2.14	0.8	<0.2	<10	290	0.23	0.23	1.57	0.11	11.20	11.2
I031663		5.28	<0.005		0.07	2.04	0.4	<0.2	<10	250	0.23	0.18	1.34	0.05	9.89	11.2
I031664		6.41	<0.005		0.17	2.09	2.3	<0.2	<10	230	0.15	0.24	1.09	0.20	12.80	15.4
I031665		4.51	<0.005		0.07	1.19	1.7	<0.2	<10	140	0.19	0.25	1.86	0.41	13.45	6.0
I031666		4.70	0.007		0.09	1.05	1.1	<0.2	<10	140	0.17	0.11	1.53	0.80	13.00	5.7
I031667		5.20	0.035		0.11	1.48	7.7	<0.2	<10	230	0.22	0.11	1.73	0.38	14.55	7.0
I031668		4.29	<0.005		0.06	1.50	0.5	<0.2	<10	230	0.22	0.09	1.44	0.13	11.85	7.1
I031669		2.68	0.008		0.10	1.12	153.0	<0.2	<10	160	0.21	0.19	3.09	0.64	22.2	6.4
I031670		1.94	0.006		0.07	1.19	164.5	<0.2	<10	200	0.21	0.14	2.36	0.43	23.5	6.7
I031671		4.62	0.005		0.07	1.19	4.8	<0.2	<10	180	0.19	0.10	1.56	0.67	15.20	6.0
I031672		3.30	0.056		1.05	1.02	207	<0.2	<10	190	0.21	0.14	1.60	2.24	22.1	5.8
I031673		3.61	0.905		23.7	0.80	1835	0.8	<10	140	0.26	24.9	2.16	29.1	18.55	5.1
I031674		2.34	0.023		0.32	1.83	34.2	<0.2	<10	370	0.22	0.39	1.65	0.75	14.55	9.1
I031675		3.31	0.173		2.35	0.85	2310	0.2	<10	160	0.32	0.66	1.88	1.13	24.7	6.3
I031676		2.54	0.031		0.17	0.91	38.3	<0.2	<10	140	0.22	0.21	1.89	0.42	23.6	5.6
I031677		4.67	0.015		0.07	0.93	50.4	<0.2	<10	190	0.17	0.14	1.39	0.40	17.55	5.7
I031678		1.71	0.005		0.08	1.67	1.6	<0.2	<10	340	0.23	0.23	0.92	0.13	13.95	7.9
I031679		1.89	0.006		0.06	2.20	9.5	<0.2	<10	250	0.09	0.17	1.10	0.06	8.98	18.3
I031680		1.57	<0.005		0.05	2.26	1.9	<0.2	<10	240	0.06	0.16	1.13	0.06	9.36	21.0
I031681		2.05	0.036		0.28	2.09	96.5	<0.2	<10	260	0.09	0.19	1.60	0.19	12.20	21.6
I031682		4.61	<0.005		0.06	1.88	2.8	<0.2	<10	370	0.22	0.19	1.61	0.22	14.65	11.8
I031683		2.62	<0.005		0.11	2.63	3.7	<0.2	<10	440	0.21	0.22	1.27	0.10	8.14	16.3
I031684		3.95	0.051		0.51	1.66	63.6	<0.2	<10	180	0.24	0.15	2.77	0.47	20.1	9.5
I031685		1.76	0.026		0.43	2.94	29.5	<0.2	<10	250	0.31	0.16	1.59	0.75	15.95	12.6
I031686		3.43	0.005		0.25	3.85	3.1	<0.2	<10	160	0.37	0.33	2.05	1.62	9.62	23.8
I031687		4.11	0.024		0.44	2.24	1675	0.4	<10	110	0.34	0.17	2.92	0.41	13.20	23.4
I031688		4.49	0.037		0.09	1.97	166.0	<0.2	<10	290	0.26	0.10	1.76	0.11	18.85	10.3
I031689		5.25	0.056		0.08	1.31	569	<0.2	<10	210	0.26	0.13	1.80	0.08	21.5	6.5
I031690		0.07	1.140	1.33	8.46	3.66	1645	1.3	<10	50	0.13	51.7	0.04	0.11	104.0	2.9

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031651		23	0.58	16.6	3.21	8.92	0.07	0.04	<0.01	0.028	1.07	5.6	8.8	1.24	573	0.58
I031652		41	0.86	25.6	4.10	11.05	0.10	0.04	<0.01	0.027	1.19	4.7	11.1	2.06	565	0.48
I031653		42	0.86	27.1	4.08	11.30	0.10	0.04	<0.01	0.031	1.22	6.1	11.5	1.94	567	0.73
I031654		9	0.49	16.4	2.89	6.61	0.06	0.04	<0.01	0.018	0.85	5.9	7.7	0.79	528	0.86
I031655		7	0.49	9.3	2.91	6.51	0.07	0.04	<0.01	0.019	0.76	5.7	6.8	0.68	628	0.62
I031656		10	0.56	26.3	3.17	7.56	0.07	0.04	<0.01	0.018	0.74	4.8	7.7	0.82	624	0.56
I031657		6	0.47	17.8	2.74	5.47	0.05	0.05	<0.01	0.020	0.72	6.7	6.2	0.57	656	0.89
I031658		5	0.49	32.5	2.80	5.65	0.05	0.03	<0.01	0.014	0.70	4.6	6.6	0.64	778	0.71
I031659		7	0.57	271	3.13	6.55	0.06	0.03	<0.01	0.024	0.91	6.0	8.7	0.83	575	1.01
I031660		7	2.07	4.4	1.97	5.01	0.09	0.17	<0.01	0.012	0.62	13.7	24.0	0.49	473	0.13
I031661		9	0.90	14.6	3.52	8.53	0.08	0.05	<0.01	0.023	1.07	6.4	9.9	1.15	793	0.52
I031662		9	0.74	33.6	3.30	7.58	0.07	0.04	<0.01	0.019	0.92	5.1	8.4	0.98	655	0.99
I031663		10	0.77	20.7	3.19	7.32	0.07	0.03	<0.01	0.013	0.85	4.6	9.5	0.98	528	0.48
I031664		16	1.02	80.1	3.66	7.97	0.08	0.04	<0.01	0.021	0.85	6.0	9.0	1.35	535	1.11
I031665		5	0.38	14.7	2.78	4.53	0.05	0.03	<0.01	0.016	0.50	6.3	5.7	0.45	588	1.09
I031666		5	0.38	14.3	2.84	4.43	0.05	0.03	0.01	0.016	0.43	6.1	5.8	0.45	526	1.07
I031667		8	0.50	15.9	3.12	5.91	0.06	0.03	0.01	0.020	0.61	6.7	9.4	0.63	601	1.26
I031668		6	0.50	9.8	3.09	5.85	0.06	0.02	<0.01	0.017	0.69	5.5	7.7	0.64	550	1.09
I031669		4	0.68	42.8	3.05	4.73	0.06	0.03	0.04	0.026	0.49	10.9	7.5	0.65	1120	1.08
I031670		4	0.75	17.0	3.06	5.09	0.07	0.03	0.06	0.030	0.50	11.4	8.1	0.53	843	0.80
I031671		8	0.49	12.8	2.86	4.71	0.05	0.03	<0.01	0.019	0.49	7.2	9.0	0.50	634	0.96
I031672		4	0.65	19.7	3.18	4.41	0.06	0.03	0.13	0.049	0.45	10.5	9.1	0.49	719	1.18
I031673		4	0.89	253	2.95	2.83	0.05	0.03	0.32	0.275	0.42	9.0	5.9	0.50	661	1.23
I031674		13	1.26	50.2	2.84	5.96	0.05	0.02	0.01	0.027	0.76	6.7	15.0	0.79	653	0.74
I031675		4	1.79	91.7	2.92	2.97	0.06	0.04	0.40	0.043	0.39	11.8	5.7	0.39	704	0.87
I031676		4	1.21	13.7	2.69	3.73	0.05	0.03	<0.01	0.029	0.42	11.5	6.9	0.33	721	0.80
I031677		7	0.57	9.3	2.83	4.42	0.06	0.03	0.01	0.024	0.41	8.3	5.8	0.37	551	0.94
I031678		4	0.66	27.2	2.73	6.46	0.06	0.04	<0.01	0.020	0.63	6.4	7.7	0.58	400	0.98
I031679		84	1.70	22.0	3.12	6.79	0.11	0.04	<0.01	0.012	0.93	4.1	11.7	1.61	483	0.78
I031680		104	1.70	21.8	3.02	6.88	0.11	0.04	<0.01	0.012	0.97	4.2	10.8	1.80	491	1.96
I031681		26	2.19	28.7	3.98	7.23	0.10	0.05	0.02	0.016	0.96	5.5	13.0	1.88	785	1.15
I031682		17	1.10	17.0	3.00	6.70	0.07	0.04	<0.01	0.020	0.79	6.7	11.9	1.01	654	0.77
I031683		30	1.35	56.1	3.65	8.76	0.10	0.03	<0.01	0.016	1.06	3.7	10.8	1.52	574	0.38
I031684		11	1.37	31.7	3.03	5.43	0.06	0.03	0.09	0.024	0.74	9.7	10.2	0.90	977	1.07
I031685		27	1.41	37.9	3.44	7.84	0.08	0.04	0.05	0.026	1.18	7.3	21.2	1.50	844	0.99
I031686		13	1.21	57.9	4.64	11.35	0.11	0.03	0.01	0.024	1.33	4.3	15.0	2.04	741	1.22
I031687		4	1.64	38.3	5.11	7.31	0.09	0.03	0.08	0.035	0.68	5.8	12.5	2.45	1170	0.45
I031688		4	1.23	13.3	3.67	7.59	0.07	0.03	0.01	0.027	0.78	8.8	12.5	0.97	677	0.68
I031689		4	1.25	15.4	3.31	5.30	0.06	0.03	0.05	0.022	0.57	10.1	9.5	0.54	653	0.89
I031690		34	0.17	79.5	3.39	154.5	0.91	0.19	30.9	0.603	1.43	25.6	0.3	0.03	12	16.70

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031651		0.16	0.11	7.2	560	3.5	42.7	0.001	0.29	0.33	8.9	0.2	0.6	18.3	<0.01	0.01
I031652		0.20	0.09	14.4	570	4.5	45.3	<0.001	0.29	0.22	12.7	0.3	0.5	28.3	<0.01	0.01
I031653		0.20	0.11	13.3	580	3.5	46.0	0.001	0.51	0.57	13.8	0.3	0.5	29.5	<0.01	0.01
I031654		0.10	0.18	2.2	490	2.8	36.3	<0.001	0.28	0.13	6.3	0.2	0.5	17.5	<0.01	<0.01
I031655		0.11	0.17	1.6	530	3.6	35.1	<0.001	0.30	0.15	6.0	0.2	0.5	19.5	<0.01	<0.01
I031656		0.15	0.20	2.8	520	4.7	33.8	<0.001	0.48	0.11	6.4	0.3	0.6	23.3	<0.01	0.06
I031657		0.08	0.15	1.4	520	6.8	34.2	<0.001	0.32	0.12	5.0	0.3	0.4	20.1	<0.01	0.01
I031658		0.08	0.18	1.3	520	3.9	32.5	<0.001	0.26	0.07	4.5	0.3	0.3	25.7	<0.01	0.01
I031659		0.08	0.18	2.4	550	2.5	40.0	<0.001	0.35	0.10	5.9	0.3	0.4	16.5	<0.01	<0.01
I031660		0.14	0.48	2.1	300	8.0	51.3	<0.001	<0.01	0.14	3.8	<0.2	0.9	23.3	<0.01	<0.01
I031661		0.12	0.14	3.0	600	3.0	41.5	<0.001	0.33	0.09	7.8	0.2	0.5	22.7	<0.01	0.01
I031662		0.13	0.12	3.7	570	4.4	39.0	0.001	0.47	0.10	7.1	0.3	0.5	19.0	<0.01	0.02
I031663		0.14	0.13	2.7	540	3.1	37.7	<0.001	0.31	0.09	7.2	0.2	0.3	18.2	<0.01	0.01
I031664		0.14	0.12	4.2	530	4.4	31.6	0.001	0.35	0.54	7.8	0.3	0.4	16.9	<0.01	0.03
I031665		0.06	0.19	1.3	520	7.0	23.0	0.001	0.37	0.25	4.1	0.2	0.3	21.1	<0.01	0.02
I031666		0.05	0.20	1.1	470	25.5	18.6	<0.001	0.22	0.37	3.9	0.2	0.3	15.8	<0.01	<0.01
I031667		0.08	0.17	2.9	520	11.7	25.2	<0.001	0.37	0.19	6.0	0.2	0.5	22.1	<0.01	0.02
I031668		0.08	0.21	1.3	520	5.1	28.7	0.001	0.22	0.30	5.4	0.2	0.4	17.2	<0.01	<0.01
I031669		0.05	0.15	1.4	500	9.9	21.1	0.001	0.42	2.11	6.3	0.3	0.4	32.9	<0.01	0.01
I031670		0.06	0.12	1.3	490	9.7	21.0	<0.001	0.32	1.11	6.5	0.3	0.4	28.1	<0.01	0.01
I031671		0.07	0.21	1.2	500	5.4	20.1	<0.001	0.25	0.45	4.6	0.2	0.3	17.7	<0.01	<0.01
I031672		0.06	0.16	1.3	530	15.5	18.1	0.001	0.71	12.00	5.6	0.4	0.3	25.2	<0.01	0.04
I031673		0.04	0.10	1.1	490	3410	19.4	<0.001	2.05	2720	4.3	2.0	0.3	32.7	<0.01	1.62
I031674		0.11	0.08	3.2	460	28.4	29.1	0.001	0.47	18.50	6.3	0.3	0.4	28.5	<0.01	0.02
I031675		0.02	0.10	1.2	480	32.3	20.5	0.001	1.86	34.2	5.5	0.4	0.3	28.0	<0.01	0.12
I031676		0.05	0.15	1.2	500	8.8	20.5	<0.001	0.55	2.10	5.9	0.2	0.3	30.4	<0.01	0.02
I031677		0.06	0.24	1.2	510	6.6	18.9	<0.001	0.27	2.19	5.1	0.2	0.4	23.8	<0.01	0.01
I031678		0.12	0.29	1.1	510	5.2	31.1	<0.001	0.35	0.30	6.0	0.2	0.5	20.6	<0.01	0.02
I031679		0.17	0.11	28.6	550	3.1	33.1	0.001	0.19	0.56	9.0	0.2	0.3	24.3	<0.01	0.02
I031680		0.19	0.09	43.2	560	2.4	34.2	0.003	0.18	0.38	9.3	0.2	0.3	20.9	<0.01	0.02
I031681		0.14	0.14	8.3	610	4.7	38.6	0.001	0.90	2.42	9.8	0.3	0.3	33.1	<0.01	0.05
I031682		0.12	0.14	4.5	530	4.2	30.7	0.001	0.33	0.21	7.7	0.2	0.4	28.3	<0.01	0.01
I031683		0.18	0.11	9.2	510	4.3	39.1	0.001	0.43	0.39	10.0	0.3	0.3	31.5	<0.01	0.03
I031684		0.08	0.12	4.0	490	8.5	31.2	<0.001	1.31	2.11	6.3	0.4	0.4	44.0	<0.01	0.05
I031685		0.14	0.11	10.5	370	7.1	45.2	0.001	0.97	2.05	8.2	0.4	0.5	35.7	<0.01	0.04
I031686		0.25	0.09	5.5	690	8.9	54.0	0.001	1.02	0.16	12.8	0.6	0.5	52.7	<0.01	0.04
I031687		0.10	0.07	4.0	600	7.0	31.5	<0.001	1.88	6.25	13.2	0.4	0.3	95.7	<0.01	0.10
I031688		0.13	0.13	1.8	530	4.0	40.1	<0.001	0.46	0.81	9.3	0.3	0.4	35.9	<0.01	0.02
I031689		0.08	0.21	0.8	520	4.1	30.9	<0.001	0.55	1.40	6.0	0.4	0.4	31.5	<0.01	0.03
I031690		0.04	0.34	2.2	1190	60.3	1.7	<0.001	3.07	363	9.5	19.4	2.6	2110	0.02	1.96

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031651		3.0	0.149	0.22	0.45	64	0.38	8.47	70	1.0
I031652		2.5	0.172	0.24	0.35	110	0.38	7.09	101	0.9
I031653		3.0	0.177	0.25	0.41	120	0.24	8.41	101	1.1
I031654		3.4	0.119	0.21	0.55	29	0.17	8.17	64	1.5
I031655		3.1	0.120	0.19	0.53	27	0.26	8.48	66	1.1
I031656		2.6	0.137	0.18	0.47	35	0.31	7.51	91	1.1
I031657		3.6	0.099	0.20	0.55	20	0.15	9.98	113	1.3
I031658		2.5	0.115	0.18	0.40	19	0.18	7.42	89	0.8
I031659		3.1	0.128	0.22	0.56	27	0.22	8.68	138	1.0
I031660		18.1	0.151	0.37	2.27	44	0.14	6.51	38	3.2
I031661		3.3	0.151	0.23	0.52	48	0.23	8.72	113	1.4
I031662		2.7	0.152	0.22	0.52	67	0.29	7.18	90	1.0
I031663		2.5	0.150	0.20	0.51	69	0.24	6.50	72	0.9
I031664		2.9	0.149	0.21	0.47	87	0.29	8.02	101	1.1
I031665		3.1	0.085	0.14	0.61	19	0.15	9.46	100	0.8
I031666		2.9	0.074	0.10	0.55	16	0.13	8.65	149	0.8
I031667		3.3	0.101	0.14	0.66	31	0.15	9.35	120	0.8
I031668		2.8	0.116	0.17	0.49	23	0.12	7.47	102	0.6
I031669		3.9	0.051	0.14	0.93	18	0.20	14.80	107	0.6
I031670		4.3	0.049	0.13	1.04	18	0.23	16.70	106	0.6
I031671		2.9	0.081	0.13	0.64	17	0.11	10.75	135	0.6
I031672		4.3	0.041	0.13	1.06	16	0.21	14.10	226	0.7
I031673		3.8	0.024	0.29	1.17	10	0.64	12.70	1860	0.8
I031674		2.5	0.077	0.16	0.65	42	0.30	11.20	124	0.5
I031675		4.7	0.019	0.23	1.16	10	0.50	14.00	125	0.8
I031676		4.3	0.038	0.14	0.93	15	0.14	16.20	79	0.6
I031677		3.3	0.067	0.11	0.67	18	0.12	12.60	96	0.5
I031678		3.1	0.118	0.16	0.63	33	0.45	9.26	73	0.9
I031679		1.6	0.189	0.22	0.23	102	0.15	6.56	81	0.9
I031680		1.6	0.200	0.23	0.20	97	0.12	6.52	80	1.0
I031681		2.3	0.186	0.35	0.31	109	0.18	7.94	101	1.0
I031682		3.0	0.125	0.17	0.60	59	0.17	10.40	89	0.9
I031683		1.7	0.183	0.22	0.31	122	0.22	6.67	97	0.8
I031684		3.9	0.068	0.20	0.76	34	0.23	12.85	114	0.7
I031685		4.1	0.100	0.26	0.68	47	0.58	7.94	263	0.8
I031686		2.0	0.178	0.25	0.26	142	0.49	5.93	326	1.0
I031687		2.0	0.045	0.30	0.27	104	0.45	9.88	120	0.7
I031688		3.5	0.090	0.26	0.62	51	0.25	12.35	77	0.7
I031689		4.2	0.062	0.21	0.69	18	0.15	14.30	63	0.8
I031690		2.2	0.111	0.49	16.30	50	10.40	1.81	10	18.1

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I031691		3.84	0.029		0.11	1.86	13.2	<0.2	<10	280	0.16	0.08	1.58	0.12	13.40	10.3
I031692		4.65	0.007		0.08	1.96	6.2	<0.2	<10	340	0.26	0.17	1.85	0.12	18.90	10.0
I031693		2.72	<0.005		0.04	1.27	1.0	<0.2	<10	320	0.24	0.31	2.09	0.09	21.6	6.4
I031694		4.03	0.041		0.23	1.54	3.6	<0.2	<10	180	0.24	1.36	1.59	0.19	15.90	7.3
I031695		3.54	0.009		0.06	2.22	1.0	<0.2	<10	210	0.34	0.16	1.77	0.08	17.80	7.7
I031696		4.02	<0.005		0.16	1.96	1.3	<0.2	<10	180	0.35	0.15	1.77	0.12	12.35	10.0
I031697		5.10	0.007		0.57	1.93	0.9	<0.2	<10	220	0.33	0.16	1.64	0.24	14.15	8.8
I031698		2.18	0.010		0.18	3.10	63.4	<0.2	<10	500	0.31	0.40	1.76	0.11	12.45	25.4
I031699		4.51	0.433		0.07	2.22	114.5	<0.2	<10	370	0.24	0.26	1.34	0.10	12.45	12.6
I031700		0.90	<0.005		0.03	1.22	2.4	<0.2	<10	190	0.16	0.03	0.31	0.03	15.90	5.4
I031701		4.87	<0.005		0.08	2.24	1.3	<0.2	<10	350	0.18	0.31	1.01	0.05	12.80	16.6
I031702		4.09	0.011		0.06	1.34	28.2	<0.2	<10	220	0.28	0.14	1.47	0.09	20.8	6.5
I031703		3.92	<0.005		0.05	1.16	2.0	<0.2	<10	170	0.19	0.12	1.23	0.06	11.25	5.7
I031704		4.73	<0.005		0.06	1.74	1.4	<0.2	<10	300	0.19	0.15	1.47	0.06	12.90	8.7
I031705		2.44	<0.005		0.04	2.17	1.2	<0.2	<10	330	0.23	0.12	0.90	0.06	19.10	7.7
I031706		2.43	0.138		0.38	1.48	345	<0.2	<10	290	0.31	0.13	2.49	0.29	19.95	12.0
I031707		2.43	0.033		0.09	2.51	38.1	<0.2	<10	430	0.37	0.26	2.42	0.40	23.2	13.9
I031708		2.14	0.151		0.10	1.75	110.5	0.2	<10	470	0.37	0.29	3.52	0.29	25.8	12.3
I031709		3.64	0.018		0.07	1.93	14.9	<0.2	<10	290	0.28	0.35	1.86	0.16	19.30	11.8
I031710		2.51	0.028		0.08	1.79	26.5	<0.2	<10	280	0.29	0.43	1.84	0.16	21.5	12.1
I031711		3.18	<0.005		0.08	1.93	2.0	<0.2	<10	260	0.26	0.16	1.27	0.24	17.05	11.1
I031712		3.71	0.005		0.06	1.38	1.2	<0.2	<10	220	0.28	0.11	1.16	0.18	18.70	6.5
I031713		3.35	0.006		0.06	1.70	3.9	<0.2	<10	230	0.29	0.10	1.91	0.15	22.2	8.9
I031714		3.57	<0.005		0.06	1.55	0.9	<0.2	<10	250	0.26	0.13	1.91	0.20	18.25	8.8
I031715		5.67	<0.005		0.05	2.28	1.4	<0.2	<10	380	0.15	0.15	2.49	0.07	13.05	22.5
I031716		5.02	<0.005		0.06	2.24	1.0	<0.2	<10	410	0.16	0.22	1.68	0.08	13.95	28.5
I031717		3.64	<0.005		0.07	2.91	1.2	<0.2	<10	560	0.22	0.23	1.04	0.06	13.20	22.8
I031718		4.90	<0.005		0.09	2.55	0.7	<0.2	<10	350	0.33	0.20	1.71	0.10	12.70	13.1
I031719		5.74	<0.005		0.07	2.43	0.6	<0.2	<10	270	0.40	0.36	1.40	0.06	14.85	9.7
I031720		<0.02	0.006		0.07	2.42	0.4	<0.2	<10	270	0.47	0.59	1.38	0.05	15.15	9.9
I031721		4.90	<0.005		0.07	2.46	0.5	<0.2	<10	470	0.29	0.14	1.40	0.09	15.60	11.3
I031722		3.97	<0.005		0.06	3.27	1.0	<0.2	<10	610	0.26	0.19	1.29	0.15	10.30	15.5
I031723		3.50	1.120	1.17	1.47	0.87	7220	1.1	<10	130	0.28	0.37	2.62	0.50	23.0	9.9
I031724		2.51	0.077		0.10	1.22	156.0	<0.2	<10	200	0.23	0.20	2.74	0.16	20.9	9.0
I031725		2.40	0.008		0.07	1.90	190.0	<0.2	<10	300	0.20	0.11	2.08	0.10	13.85	12.8
I031726		4.10	<0.005		0.08	2.61	5.6	<0.2	<10	470	0.21	0.11	1.42	0.10	11.95	12.5
I031727		3.51	<0.005		0.09	2.86	4.8	<0.2	<10	530	0.22	0.18	1.21	0.07	15.90	14.5
I031728		1.79	0.049		7.65	1.08	235	<0.2	<10	190	0.28	14.80	2.20	4.84	18.80	12.1
I031729		4.55	0.015		0.42	2.71	153.0	<0.2	<10	520	0.24	0.66	1.70	0.31	16.25	15.2
I031730		0.08	1.180	1.35	8.70	3.44	1560	1.2	<10	60	0.10	47.0	0.04	0.11	98.3	3.0

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031691		11	1.21	16.1	4.02	6.64	0.07	0.03	0.01	0.021	0.87	6.8	14.3	1.02	702	0.59
I031692		5	1.31	27.3	3.86	7.99	0.07	0.04	0.04	0.024	0.89	9.0	10.9	1.05	798	0.95
I031693		6	1.03	7.3	3.37	5.71	0.06	0.03	0.01	0.022	0.59	10.3	7.3	0.60	670	0.81
I031694		9	1.08	152.5	3.45	5.94	0.07	0.04	0.01	0.020	0.44	7.6	6.5	0.57	599	1.02
I031695		6	1.13	19.6	3.39	8.19	0.07	0.03	<0.01	0.023	0.76	8.5	8.8	0.69	717	0.91
I031696		8	1.31	99.7	3.26	6.52	0.06	0.03	<0.01	0.017	0.84	5.8	8.2	0.88	765	0.84
I031697		8	1.01	192.0	3.10	6.89	0.06	0.03	<0.01	0.018	0.87	6.8	9.0	0.76	638	0.82
I031698		27	3.53	93.6	4.71	10.45	0.16	0.05	<0.01	0.021	1.28	5.7	11.8	2.30	805	0.40
I031699		26	1.46	26.9	3.46	7.93	0.09	0.05	<0.01	0.020	1.12	6.0	10.6	1.45	693	0.37
I031700		10	1.82	3.3	1.91	4.97	0.08	0.13	<0.01	0.009	0.60	6.6	23.5	0.49	432	0.13
I031701		22	1.36	33.9	4.03	8.91	0.09	0.04	<0.01	0.019	1.01	5.9	10.2	1.64	580	0.50
I031702		6	1.84	22.1	3.19	6.04	0.07	0.03	<0.01	0.056	0.57	9.9	8.9	0.60	659	0.85
I031703		6	0.45	14.0	2.98	5.27	0.06	0.03	<0.01	0.015	0.50	5.3	7.1	0.49	520	1.10
I031704		22	0.74	18.3	3.05	6.32	0.06	0.04	<0.01	0.017	0.79	6.2	9.0	0.96	610	0.90
I031705		9	0.87	8.7	3.40	8.33	0.07	0.03	<0.01	0.026	1.12	9.0	14.7	1.04	570	1.39
I031706		25	1.24	19.1	3.70	5.25	0.07	0.03	0.16	0.025	0.86	9.4	10.2	1.20	922	1.06
I031707		14	1.58	23.1	4.08	8.34	0.08	0.04	0.04	0.025	1.17	10.8	13.4	1.53	960	1.11
I031708		4	1.96	21.5	3.94	6.31	0.08	0.03	0.07	0.028	0.89	12.1	9.7	1.40	1120	0.60
I031709		15	1.01	15.4	3.71	7.32	0.08	0.03	0.01	0.023	0.96	9.0	13.8	1.23	711	1.09
I031710		13	1.04	20.0	3.57	6.82	0.07	0.04	0.03	0.023	0.87	10.0	12.5	1.12	716	1.04
I031711		13	0.83	20.5	3.51	7.71	0.08	0.04	<0.01	0.022	0.96	8.1	8.9	1.04	562	1.18
I031712		4	0.50	8.9	3.25	6.61	0.07	0.03	<0.01	0.026	0.62	9.0	6.7	0.55	471	1.02
I031713		7	0.78	15.7	3.23	6.57	0.09	0.04	0.01	0.026	0.82	10.5	8.0	0.82	712	0.99
I031714		5	0.63	21.2	3.23	6.48	0.07	0.03	<0.01	0.020	0.69	8.6	8.0	0.81	683	0.79
I031715		45	1.87	13.4	4.39	9.28	0.10	0.03	<0.01	0.018	0.87	6.1	9.8	2.32	980	0.19
I031716		68	1.74	14.9	4.54	9.30	0.11	0.04	0.01	0.017	0.83	6.6	11.6	2.45	655	0.49
I031717		47	1.96	24.6	4.64	10.55	0.11	0.03	<0.01	0.017	1.52	6.2	13.5	2.49	586	0.42
I031718		9	0.80	26.2	3.53	8.45	0.08	0.03	<0.01	0.020	1.06	6.1	9.4	1.17	607	0.77
I031719		8	0.71	18.1	3.39	8.36	0.08	0.04	<0.01	0.018	1.01	7.1	9.8	1.06	563	0.77
I031720		9	0.71	18.4	3.38	8.50	0.07	0.04	0.01	0.021	1.00	7.3	9.8	1.04	556	0.76
I031721		10	0.97	19.9	3.69	8.78	0.09	0.03	<0.01	0.024	1.14	7.4	11.5	1.21	577	0.66
I031722		26	1.94	22.5	3.62	8.86	0.10	0.04	<0.01	0.014	1.45	5.1	16.6	1.68	614	0.62
I031723		4	1.05	25.3	3.41	2.86	0.07	0.03	0.33	0.032	0.50	11.0	5.2	0.71	946	0.97
I031724		8	1.02	16.3	3.08	4.08	0.07	0.04	0.02	0.019	0.55	10.1	9.0	0.67	962	0.73
I031725		15	1.46	14.8	3.69	6.39	0.08	0.04	0.01	0.018	0.79	6.7	18.0	1.19	904	0.88
I031726		19	1.70	22.7	3.91	8.28	0.09	0.04	<0.01	0.018	1.18	5.9	17.1	1.38	779	0.59
I031727		24	3.44	16.2	4.08	9.17	0.10	0.04	<0.01	0.024	1.39	7.7	20.6	1.65	702	0.50
I031728		8	1.91	43.2	2.84	3.78	0.07	0.04	0.20	0.076	0.52	8.8	7.4	0.91	783	0.73
I031729		32	4.46	27.7	4.05	8.35	0.10	0.05	0.02	0.029	1.35	7.8	18.4	1.65	830	0.71
I031730		35	0.18	79.5	3.24	141.0	0.94	0.25	31.8	0.567	1.28	25.4	0.3	0.03	10	16.05

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031691		0.10	0.10	2.0	540	3.4	34.7	0.001	0.35	1.84	6.4	0.3	0.4	25.3	<0.01	0.01
I031692		0.13	0.13	1.6	530	3.8	42.8	<0.001	0.27	0.59	8.6	0.4	0.5	38.9	<0.01	0.01
I031693		0.08	0.11	1.0	470	2.5	29.8	<0.001	0.17	0.17	7.1	0.3	0.4	38.7	<0.01	0.01
I031694		0.13	0.15	1.9	370	5.0	21.7	<0.001	0.84	0.13	6.5	0.5	0.5	34.5	<0.01	0.34
I031695		0.19	0.13	1.5	480	3.6	42.0	<0.001	0.29	0.08	7.6	0.2	0.6	34.6	<0.01	0.01
I031696		0.13	0.11	3.9	450	3.9	43.0	<0.001	0.25	0.10	6.0	0.2	0.4	32.7	<0.01	0.02
I031697		0.13	0.17	2.2	490	3.0	46.3	<0.001	0.35	0.08	6.1	0.3	0.5	27.3	<0.01	0.01
I031698		0.22	0.09	8.1	560	3.4	51.7	<0.001	0.47	0.29	15.4	0.4	0.4	46.3	<0.01	0.04
I031699		0.16	0.13	5.4	470	3.3	46.2	<0.001	0.26	0.33	8.7	0.3	0.5	28.1	<0.01	0.02
I031700		0.15	0.43	1.9	230	7.3	48.6	<0.001	<0.01	0.14	3.7	<0.2	0.8	26.5	<0.01	0.01
I031701		0.16	0.13	6.3	560	2.9	39.0	<0.001	0.40	0.10	10.4	0.3	0.6	21.3	<0.01	0.04
I031702		0.09	0.19	1.5	490	2.9	29.2	<0.001	0.30	0.15	7.3	0.3	0.5	27.6	<0.01	0.01
I031703		0.08	0.31	1.1	480	2.5	26.5	<0.001	0.30	0.07	4.3	0.2	0.4	18.0	<0.01	0.01
I031704		0.11	0.17	8.0	430	2.4	37.0	<0.001	0.26	0.08	5.9	0.3	0.5	21.9	<0.01	0.01
I031705		0.14	0.14	3.0	500	2.3	50.3	<0.001	0.28	0.09	8.2	0.3	0.6	20.1	<0.01	0.01
I031706		0.05	0.13	9.9	460	4.6	38.8	<0.001	1.25	3.03	8.0	0.4	0.3	50.8	<0.01	0.05
I031707		0.14	0.11	4.6	630	4.3	50.9	<0.001	0.60	0.72	9.4	0.4	0.4	52.7	<0.01	0.02
I031708		0.09	0.09	2.4	570	5.4	40.5	<0.001	0.70	0.99	10.4	0.5	0.4	72.8	<0.01	0.02
I031709		0.11	0.11	5.1	520	5.0	40.7	<0.001	0.40	0.33	9.2	0.4	0.4	37.3	<0.01	0.03
I031710		0.10	0.11	4.0	550	4.7	39.4	<0.001	0.44	0.34	8.8	0.4	0.5	35.3	<0.01	0.02
I031711		0.15	0.18	3.2	490	3.3	44.2	<0.001	0.29	0.10	9.1	0.3	0.5	26.1	<0.01	0.01
I031712		0.09	0.17	1.1	490	3.8	31.0	<0.001	0.26	0.12	7.2	0.3	0.5	24.0	<0.01	0.01
I031713		0.08	0.10	2.0	490	3.4	38.2	<0.001	0.27	0.21	7.5	0.4	0.5	26.1	<0.01	0.01
I031714		0.08	0.10	1.6	450	3.7	31.9	<0.001	0.26	0.10	6.5	0.3	0.4	30.8	<0.01	0.01
I031715		0.09	0.08	10.9	570	1.8	35.7	<0.001	0.28	0.11	13.5	0.3	0.3	34.2	<0.01	0.01
I031716		0.11	0.09	15.3	630	1.7	34.1	<0.001	0.46	0.08	13.1	0.3	0.4	28.6	<0.01	0.01
I031717		0.19	0.10	11.2	570	2.9	62.2	<0.001	0.38	0.09	13.1	0.3	0.4	29.4	<0.01	0.02
I031718		0.17	0.15	2.9	520	4.0	49.0	<0.001	0.37	0.09	9.3	0.3	0.5	36.0	<0.01	0.03
I031719		0.16	0.17	2.4	530	3.4	50.5	<0.001	0.34	0.40	8.3	0.3	0.5	35.4	<0.01	0.02
I031720		0.16	0.17	2.4	530	3.4	51.4	<0.001	0.34	0.41	8.4	0.3	0.5	35.5	<0.01	0.02
I031721		0.15	0.12	3.6	520	3.4	50.4	<0.001	0.27	0.65	9.1	0.3	0.6	28.6	<0.01	0.01
I031722		0.22	0.11	5.0	560	4.3	54.4	<0.001	0.31	2.05	9.2	0.4	0.4	30.3	<0.01	0.01
I031723		0.04	0.12	3.0	520	9.9	21.4	<0.001	1.82	30.2	5.9	0.6	0.2	47.7	<0.01	0.22
I031724		0.08	0.12	2.0	500	4.6	23.8	<0.001	0.64	2.87	5.8	0.5	0.3	36.4	<0.01	0.01
I031725		0.10	0.09	4.6	550	3.2	33.0	<0.001	0.44	1.06	7.6	0.4	0.4	27.4	<0.01	<0.01
I031726		0.16	0.09	4.2	580	3.3	45.9	<0.001	0.25	1.09	8.5	0.4	0.5	28.8	<0.01	<0.01
I031727		0.19	0.10	4.1	590	5.0	54.1	<0.001	0.48	2.19	10.5	0.5	0.5	26.5	<0.01	0.01
I031728		0.04	0.08	3.8	430	143.0	22.4	<0.001	1.33	16.00	8.4	1.0	0.8	42.2	<0.01	1.04
I031729		0.17	0.08	6.8	580	11.2	54.3	<0.001	0.63	3.55	11.5	0.6	0.6	32.7	<0.01	0.04
I031730		0.05	0.40	1.9	1150	58.6	1.8	<0.001	2.87	357	8.3	19.9	2.7	2130	0.01	1.98

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031691		2.8	0.097	0.20	0.46	51	0.22	10.40	108	0.7
I031692		4.0	0.125	0.21	0.78	61	0.24	13.85	102	0.9
I031693		4.7	0.062	0.15	0.86	26	0.11	16.45	59	0.8
I031694		4.5	0.062	0.15	0.70	24	0.21	11.70	57	1.1
I031695		3.9	0.109	0.17	0.65	38	0.13	11.95	72	0.8
I031696		2.7	0.115	0.21	0.45	55	0.15	9.31	88	0.9
I031697		2.9	0.115	0.22	0.52	29	0.18	10.10	77	1.0
I031698		2.0	0.190	0.34	0.29	147	0.15	9.11	116	1.2
I031699		2.5	0.166	0.24	0.39	69	0.15	9.77	108	1.3
I031700		14.9	0.135	0.37	3.38	39	0.12	5.40	35	2.8
I031701		2.6	0.184	0.21	0.39	107	0.15	9.73	85	1.1
I031702		3.7	0.074	0.15	0.63	25	0.10	14.75	71	0.7
I031703		2.2	0.101	0.13	0.41	19	0.13	8.73	68	0.6
I031704		3.0	0.126	0.19	0.41	38	0.30	9.06	72	1.0
I031705		4.5	0.120	0.27	0.63	32	0.21	11.85	89	0.8
I031706		3.7	0.072	0.26	0.88	37	0.29	13.90	102	0.9
I031707		4.2	0.121	0.28	0.62	61	0.34	14.05	155	0.9
I031708		3.9	0.082	0.24	0.66	56	0.25	16.10	119	0.8
I031709		3.5	0.126	0.21	0.66	55	0.20	12.65	102	0.9
I031710		3.9	0.110	0.19	0.69	52	0.22	13.20	101	1.0
I031711		3.8	0.170	0.23	0.70	62	0.25	12.25	91	1.0
I031712		3.5	0.087	0.16	0.84	24	0.22	13.75	80	0.6
I031713		3.8	0.086	0.19	0.66	33	0.24	16.40	78	0.7
I031714		3.4	0.092	0.15	0.56	42	0.19	12.70	78	0.8
I031715		1.7	0.136	0.19	0.22	146	0.17	10.60	79	0.8
I031716		1.7	0.162	0.21	0.17	151	0.16	8.22	76	0.9
I031717		2.0	0.232	0.34	0.28	148	0.12	7.96	102	0.9
I031718		2.9	0.168	0.25	0.51	71	0.34	8.67	84	1.0
I031719		3.8	0.160	0.27	0.63	43	0.23	9.21	76	1.2
I031720		3.7	0.162	0.27	0.62	43	0.23	9.48	76	1.2
I031721		3.6	0.145	0.26	0.59	57	0.24	9.79	112	0.9
I031722		2.6	0.189	0.30	0.35	86	0.34	6.32	150	0.9
I031723		3.8	0.021	0.33	1.02	18	0.57	14.50	127	0.7
I031724		3.6	0.052	0.15	0.81	23	0.19	14.55	84	0.9
I031725		2.5	0.095	0.21	0.47	52	0.24	9.99	98	0.7
I031726		2.6	0.160	0.22	0.43	69	0.23	8.94	118	0.9
I031727		3.0	0.166	0.31	0.37	90	0.23	9.53	103	0.9
I031728		3.2	0.031	0.19	0.70	34	0.88	13.75	224	0.9
I031729		2.9	0.148	0.37	0.50	84	0.28	11.05	108	1.1
I031730		2.4	0.116	0.45	14.35	49	10.80	1.73	11	18.5

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I031731		2.64	0.006		0.12	2.83	16.9	<0.2	<10	450	0.19	0.35	1.71	0.09	10.05	21.2
I031732		3.78	<0.005		0.08	2.40	2.0	<0.2	<10	320	0.08	0.20	0.83	0.04	7.52	27.6
I031733		4.07	0.006		0.13	3.91	4.8	<0.2	<10	390	0.23	0.36	1.36	0.05	7.73	28.2
I031734		3.80	<0.005		0.12	1.59	19.4	<0.2	<10	220	0.18	0.30	1.57	0.07	18.35	7.4
I031735		4.93	0.008		0.08	1.61	18.5	<0.2	<10	240	0.18	0.36	1.43	0.06	14.80	7.5
I031736		3.74	<0.005		0.06	2.50	1.2	<0.2	<10	350	0.22	0.10	1.24	0.04	10.50	10.3
I031737		4.32	<0.005		0.04	1.92	1.5	<0.2	<10	210	0.18	0.06	1.58	0.07	10.25	9.1
I031738		4.56	<0.005		0.05	1.87	1.0	<0.2	<10	160	0.25	0.07	1.17	0.09	10.45	7.1
I031739		3.79	0.005		0.11	1.80	3.3	<0.2	<10	170	0.25	0.76	1.50	0.36	9.43	7.1
I031740		0.42	<0.005		0.03	1.31	0.5	<0.2	<10	200	0.14	0.04	0.36	0.03	29.7	5.2
I031741		3.78	<0.005		0.11	2.57	2.1	<0.2	<10	270	0.32	0.33	1.42	1.47	10.10	10.9
I031742		4.95	0.006		0.49	2.62	2.9	<0.2	<10	240	0.30	0.86	1.40	10.15	8.18	13.6
I031743		3.77	<0.005		0.24	2.63	0.7	<0.2	<10	230	0.27	0.34	2.97	4.07	7.84	10.6
I031744		4.78	0.007		0.36	3.09	0.7	<0.2	<10	430	0.21	0.30	1.50	0.74	6.98	16.5
I031745		3.63	0.005		0.17	3.53	1.0	<0.2	<10	350	0.28	0.26	3.04	0.44	7.03	17.2
I031746		5.77	0.005		0.15	2.69	3.4	<0.2	<10	360	0.29	0.30	1.66	0.17	13.15	12.9
I031747		4.43	0.128		0.68	3.46	427	<0.2	<10	260	0.30	0.31	2.18	0.28	16.15	17.2
I031748		4.16	<0.005		0.12	2.93	6.6	<0.2	<10	580	0.16	0.28	1.48	0.08	14.00	21.3
I031749		2.52	0.050		0.42	1.67	94.0	<0.2	<10	100	0.21	0.29	1.84	0.25	22.4	17.3
I031750		1.30	0.032		0.29	1.72	45.2	<0.2	<10	240	0.22	0.35	2.23	0.12	19.15	16.9
I031751		3.27	0.027		0.16	2.15	97.2	<0.2	<10	190	0.22	0.15	1.34	0.09	28.5	16.2
I031752		4.14	0.304		10.75	1.61	1530	0.2	<10	130	0.44	6.49	3.13	23.2	34.9	16.9
I031753		1.42	0.017		0.39	3.45	31.9	<0.2	<10	650	0.35	0.17	1.95	0.34	17.80	13.4
I031754		4.76	0.011		0.15	3.29	17.1	<0.2	<10	290	0.51	0.16	2.31	0.30	27.6	16.5
I031755		4.01	0.007		0.15	3.78	6.1	<0.2	<10	310	0.60	0.22	2.63	0.09	21.6	20.9
I031756		4.53	0.128		2.44	2.16	341	<0.2	<10	180	0.36	0.29	2.97	0.62	20.7	17.5
I031757		3.82	0.006		0.14	2.74	9.8	<0.2	<10	250	0.27	0.25	2.19	0.25	13.90	19.3
I031758		2.97	<0.005		0.07	2.13	2.6	<0.2	<10	200	0.21	0.17	1.41	0.06	8.73	13.2
I031759		2.97	0.032		0.10	1.67	53.4	<0.2	<10	130	0.27	0.20	1.36	0.08	13.20	7.5
I031760		<0.02	0.041		0.09	1.61	67.7	<0.2	<10	130	0.25	0.20	1.39	0.08	14.30	7.7
I031761		2.68	0.064		0.48	0.72	436	<0.2	<10	150	0.35	0.41	3.24	0.18	22.9	8.9
I031762		4.95	<0.005		0.10	3.05	4.1	<0.2	<10	240	0.35	0.29	1.41	0.05	12.30	16.4
I031763		6.17	0.005		0.18	2.33	4.1	<0.2	<10	220	0.20	0.63	1.46	0.09	6.81	22.2
I031764		5.32	<0.005		0.23	2.15	2.2	<0.2	<10	210	0.16	0.68	1.28	0.08	7.82	22.3
I031765		6.26	<0.005		0.18	2.62	0.6	<0.2	<10	300	0.19	0.62	1.05	0.05	5.49	23.1
I031766		5.36	<0.005		0.14	2.59	0.4	<0.2	<10	280	0.27	0.39	1.09	0.05	8.80	17.6
I031767		5.15	<0.005		0.13	3.86	0.4	<0.2	<10	360	0.43	1.02	1.46	0.05	14.25	22.4
I031768		5.26	<0.005		0.14	4.02	0.3	<0.2	<10	400	0.44	0.38	1.57	0.05	16.70	20.5
I031769		4.06	<0.005		0.07	2.12	18.6	<0.2	<10	220	0.27	0.16	1.64	0.06	14.95	10.6
I031770		0.08	1.160	1.35	8.28	3.48	1600	1.2	<10	80	0.11	49.6	0.04	0.11	95.3	2.8

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031731		28	3.18	19.4	4.33	8.64	0.10	0.04	0.02	0.019	1.26	4.9	18.9	2.26	741	0.39
I031732		44	3.48	16.5	4.72	8.35	0.11	0.02	0.01	0.012	1.07	3.6	16.8	2.37	441	0.32
I031733		49	6.69	48.3	5.12	12.30	0.12	0.03	0.01	0.029	1.97	3.5	30.6	2.86	623	0.39
I031734		8	2.71	19.8	3.30	6.07	0.08	0.04	<0.01	0.024	0.75	9.0	15.8	0.77	592	0.73
I031735		11	1.47	15.8	3.28	5.85	0.07	0.04	<0.01	0.016	0.80	7.2	12.1	0.82	587	0.55
I031736		25	1.56	15.6	3.31	7.71	0.08	0.03	<0.01	0.017	1.07	5.2	12.8	1.37	582	0.69
I031737		37	0.75	7.6	3.12	6.06	0.07	0.04	<0.01	0.011	0.81	5.1	8.7	0.91	649	0.83
I031738		8	0.58	7.4	2.98	5.75	0.07	0.04	<0.01	0.012	0.68	5.3	8.4	0.69	524	0.72
I031739		8	0.94	20.0	2.86	5.53	0.07	0.03	<0.01	0.015	0.64	4.5	10.7	0.73	585	0.63
I031740		8	1.84	2.3	2.03	4.90	0.10	0.17	<0.01	0.009	0.61	13.9	21.1	0.50	463	0.20
I031741		23	0.94	24.1	3.07	7.16	0.07	0.03	<0.01	0.017	0.91	4.9	9.7	0.95	636	0.66
I031742		19	0.77	112.5	3.32	7.26	0.09	0.04	0.11	0.028	0.87	4.0	8.8	1.03	621	0.91
I031743		12	1.12	53.1	3.14	8.00	0.09	0.04	0.03	0.019	0.93	3.9	9.9	1.46	875	1.18
I031744		29	1.50	108.5	3.75	8.96	0.11	0.04	<0.01	0.018	1.35	3.4	11.8	1.76	733	0.48
I031745		32	1.65	45.7	3.84	8.07	0.09	0.04	<0.01	0.015	1.43	3.4	12.3	1.92	953	1.21
I031746		14	2.11	41.3	3.43	7.48	0.09	0.05	<0.01	0.016	1.11	6.6	12.4	1.17	680	1.09
I031747		30	2.51	41.2	3.94	8.47	0.10	0.07	0.05	0.018	1.74	8.3	13.8	2.16	891	0.35
I031748		40	5.83	25.2	3.99	8.33	0.15	0.06	0.01	0.015	1.71	6.9	19.3	2.21	733	0.28
I031749		20	5.73	30.7	3.87	5.49	0.10	0.05	0.06	0.029	1.05	10.9	13.3	1.72	768	0.18
I031750		22	6.83	33.6	3.71	5.60	0.09	0.05	0.04	0.033	0.99	9.3	12.3	1.92	926	0.17
I031751		18	6.11	18.4	4.57	7.49	0.12	0.04	0.05	0.034	1.41	13.8	11.3	2.03	798	0.34
I031752		29	3.68	48.0	3.84	5.65	0.11	0.09	0.38	0.253	0.77	17.1	9.2	1.96	1080	0.90
I031753		23	6.27	25.0	4.12	10.55	0.12	0.11	0.02	0.018	1.41	8.6	15.9	1.35	762	0.62
I031754		63	2.54	32.9	3.31	8.86	0.11	0.05	0.01	0.015	1.61	14.0	14.7	1.87	673	0.80
I031755		56	2.44	42.2	3.61	9.94	0.12	0.06	<0.01	0.014	1.77	10.9	21.7	2.23	764	0.98
I031756		36	2.73	57.4	3.24	7.22	0.09	0.06	0.06	0.026	1.26	10.1	12.3	2.05	949	1.05
I031757		40	3.33	34.0	3.57	8.62	0.12	0.06	<0.01	0.026	1.59	6.8	17.9	2.03	658	0.27
I031758		29	2.59	21.4	2.64	6.85	0.11	0.06	<0.01	0.010	1.16	4.1	21.1	1.45	443	0.47
I031759		7	1.58	22.0	2.44	6.01	0.06	0.03	0.01	0.016	0.71	6.4	19.0	0.58	411	0.59
I031760		7	1.64	22.4	2.44	5.94	0.06	0.04	<0.01	0.017	0.69	6.8	18.7	0.57	417	0.58
I031761		6	1.57	23.9	2.68	2.56	0.05	0.04	0.04	0.023	0.37	11.8	6.2	1.19	772	0.53
I031762		22	2.08	33.3	3.37	8.89	0.13	0.04	0.01	0.020	1.42	5.9	16.7	1.53	597	0.46
I031763		44	1.72	37.1	3.15	6.60	0.11	0.05	<0.01	0.011	1.08	3.1	13.9	1.58	556	0.34
I031764		26	1.22	47.2	3.26	6.41	0.10	0.05	<0.01	0.011	0.81	3.5	9.5	1.24	450	0.26
I031765		62	1.79	27.5	3.31	7.56	0.10	0.04	<0.01	0.011	1.27	2.5	11.3	1.74	487	0.28
I031766		24	1.82	25.2	3.25	8.32	0.11	0.04	<0.01	0.013	1.33	4.1	13.4	1.53	498	0.31
I031767		56	2.24	26.0	3.49	10.35	0.14	0.04	<0.01	0.014	1.82	6.7	16.5	2.26	589	0.38
I031768		72	1.97	25.1	3.55	10.75	0.14	0.05	<0.01	0.015	1.70	7.8	16.1	2.10	593	0.45
I031769		20	1.32	16.6	2.30	6.49	0.08	0.04	<0.01	0.013	0.95	7.9	16.9	1.09	482	0.14
I031770		34	0.18	79.0	3.21	138.0	0.89	0.20	31.6	0.639	1.25	25.5	0.4	0.02	11	16.00

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031731		0.16	0.08	9.0	630	4.5	46.9	<0.001	0.43	1.48	12.1	0.4	0.4	29.8	<0.01	0.01
I031732		0.15	0.12	10.2	750	2.3	38.9	<0.001	0.51	0.47	11.3	0.4	0.3	15.8	<0.01	0.01
I031733		0.24	0.08	21.9	580	3.6	70.6	0.001	0.66	0.28	19.4	0.5	0.5	27.3	<0.01	0.02
I031734		0.10	0.15	2.0	560	3.4	35.0	<0.001	0.65	0.53	6.8	0.5	0.5	15.8	<0.01	0.01
I031735		0.08	0.14	2.8	550	2.7	34.3	<0.001	0.40	0.29	5.6	0.5	0.5	16.2	<0.01	0.01
I031736		0.15	0.12	6.6	500	2.9	40.5	<0.001	0.25	0.60	8.3	0.4	0.5	20.7	<0.01	0.01
I031737		0.14	0.21	11.3	560	3.3	36.1	<0.001	0.23	0.30	5.5	0.4	0.4	20.9	<0.01	<0.01
I031738		0.13	0.21	1.3	560	5.7	35.3	<0.001	0.30	0.23	4.8	0.4	0.4	21.9	<0.01	<0.01
I031739		0.10	0.24	1.7	510	9.4	31.0	<0.001	0.49	0.20	4.6	0.4	0.3	22.8	<0.01	0.02
I031740		0.16	0.45	1.8	280	6.6	49.1	<0.001	<0.01	0.14	3.5	0.2	0.8	25.6	<0.01	<0.01
I031741		0.15	0.20	7.8	540	12.0	44.2	<0.001	0.63	0.16	5.2	0.5	0.4	31.7	<0.01	0.02
I031742		0.16	0.15	9.0	520	17.8	40.9	<0.001	0.80	0.16	6.8	1.0	0.4	44.8	<0.01	0.04
I031743		0.13	0.14	4.1	490	20.3	42.0	<0.001	0.61	0.26	6.9	0.7	0.4	46.8	<0.01	0.03
I031744		0.14	0.12	9.0	530	9.5	53.5	<0.001	0.43	0.51	10.3	0.5	0.5	32.2	<0.01	0.03
I031745		0.20	0.10	8.4	570	9.7	55.5	<0.001	0.58	0.43	10.2	0.5	0.4	49.2	<0.01	0.03
I031746		0.18	0.12	3.8	570	7.5	48.0	<0.001	0.62	1.43	8.3	0.5	0.5	35.0	<0.01	0.02
I031747		0.20	0.08	6.8	480	13.3	64.1	<0.001	0.79	9.48	11.1	0.6	0.4	54.0	<0.01	0.05
I031748		0.16	0.10	10.3	820	4.0	77.5	<0.001	0.40	2.74	10.7	0.5	0.4	26.2	<0.01	0.02
I031749		0.06	0.13	6.3	500	14.0	56.8	<0.001	1.55	8.78	10.8	0.7	0.5	50.0	<0.01	0.09
I031750		0.06	0.11	6.5	500	6.0	56.8	<0.001	1.14	4.28	10.6	0.6	0.4	51.2	<0.01	0.07
I031751		0.07	0.13	4.8	530	6.4	68.2	<0.001	1.07	6.00	12.8	0.7	0.8	47.4	<0.01	0.04
I031752		0.04	0.13	19.0	650	801	44.1	<0.001	2.05	1240	9.0	1.2	0.6	76.7	<0.01	0.35
I031753		0.39	0.17	9.9	1430	14.4	66.8	<0.001	0.36	18.35	6.1	0.5	0.6	148.5	<0.01	0.02
I031754		0.23	0.11	29.0	540	8.3	69.1	<0.001	0.50	7.61	5.7	0.7	0.6	44.5	<0.01	0.03
I031755		0.23	0.15	27.5	620	5.9	80.8	<0.001	0.96	0.93	6.6	0.8	0.8	50.0	<0.01	0.04
I031756		0.12	0.16	23.2	520	15.0	64.8	<0.001	1.37	40.8	6.6	0.9	0.7	60.2	<0.01	0.09
I031757		0.17	0.16	20.7	590	5.4	71.3	<0.001	1.10	0.39	5.8	0.8	0.7	31.8	<0.01	0.04
I031758		0.12	0.12	17.0	560	3.5	50.4	0.001	0.30	0.24	4.3	0.3	0.4	24.4	<0.01	0.02
I031759		0.12	0.21	2.6	430	5.4	38.4	<0.001	0.39	1.04	5.1	0.2	0.4	34.5	<0.01	0.01
I031760		0.11	0.22	2.6	420	5.3	38.2	<0.001	0.40	1.12	5.2	0.2	0.4	36.0	<0.01	0.01
I031761		0.03	0.12	2.5	310	11.3	20.1	<0.001	1.22	6.83	5.7	0.4	0.2	43.9	<0.01	0.08
I031762		0.21	0.10	12.9	530	4.0	65.6	<0.001	0.42	0.66	6.7	0.3	0.4	28.0	<0.01	0.02
I031763		0.17	0.10	19.9	460	3.6	46.8	0.001	0.89	0.30	6.4	0.4	0.3	24.7	<0.01	0.05
I031764		0.23	0.13	13.2	550	3.3	34.5	<0.001	1.13	0.20	7.0	0.4	0.4	26.3	<0.01	0.07
I031765		0.21	0.10	28.1	590	2.6	52.6	<0.001	0.86	0.12	7.4	0.3	0.3	20.8	<0.01	0.04
I031766		0.19	0.16	16.6	510	2.9	57.4	0.001	0.69	0.11	6.6	0.3	0.5	21.3	<0.01	0.03
I031767		0.26	0.09	27.4	520	3.7	78.1	0.001	0.58	0.09	9.0	0.3	0.4	34.4	<0.01	0.03
I031768		0.30	0.12	31.9	490	4.2	71.9	0.001	0.61	0.11	8.5	0.3	0.5	36.5	<0.01	0.04
I031769		0.15	0.11	9.6	280	4.1	43.7	<0.001	0.37	0.28	5.0	0.2	0.5	27.8	<0.01	0.02
I031770		0.04	0.37	2.2	1150	60.6	1.6	0.001	2.87	356	8.4	18.7	2.6	2020	0.02	1.77

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031731		1.6	0.166	0.24	0.23	120	0.19	8.50	95	0.9
I031732		0.9	0.202	0.19	0.09	182	0.11	5.02	74	0.6
I031733		1.2	0.253	0.57	0.14	191	0.13	5.80	88	0.7
I031734		3.5	0.109	0.21	0.62	36	0.12	11.95	64	0.7
I031735		3.2	0.113	0.19	0.55	32	0.12	10.30	68	0.8
I031736		2.5	0.153	0.20	0.37	58	0.17	7.03	81	0.8
I031737		2.5	0.154	0.19	0.46	40	0.20	7.66	81	0.9
I031738		2.7	0.135	0.18	0.44	27	0.17	7.28	84	1.1
I031739		2.7	0.105	0.18	0.42	24	0.16	5.84	148	0.8
I031740		16.9	0.141	0.34	1.90	42	0.11	5.56	37	3.0
I031741		3.0	0.139	0.25	0.45	40	0.22	5.99	317	0.7
I031742		2.5	0.143	0.26	0.40	48	0.22	5.42	1560	0.9
I031743		2.5	0.135	0.24	0.39	48	0.22	5.31	584	0.9
I031744		1.9	0.190	0.29	0.31	90	0.26	5.05	253	1.0
I031745		2.0	0.193	0.30	0.36	91	0.23	5.48	213	1.1
I031746		3.1	0.149	0.27	0.59	60	0.19	8.65	148	1.2
I031747		3.3	0.154	0.34	0.66	106	0.22	9.90	166	2.0
I031748		2.1	0.297	0.53	0.31	143	0.22	8.90	118	1.4
I031749		3.9	0.113	0.51	0.71	66	0.21	11.15	73	1.1
I031750		3.1	0.109	0.54	0.57	71	0.24	10.25	67	1.2
I031751		4.7	0.177	0.63	0.67	97	0.14	11.20	73	1.0
I031752		5.5	0.066	0.54	0.98	62	0.35	16.20	1500	2.2
I031753		2.5	0.274	0.50	0.51	86	0.18	11.95	134	3.1
I031754		5.4	0.191	0.35	0.68	82	0.19	9.52	95	1.4
I031755		4.1	0.217	0.43	0.58	98	0.28	8.68	94	1.3
I031756		3.9	0.145	0.45	0.65	70	0.28	10.50	97	1.3
I031757		2.8	0.238	0.44	0.41	96	0.31	8.02	87	1.5
I031758		2.1	0.199	0.31	0.32	72	0.27	5.88	63	1.7
I031759		3.0	0.117	0.22	0.77	39	0.13	9.10	43	0.9
I031760		3.1	0.113	0.22	0.80	38	0.16	9.51	43	0.9
I031761		4.2	0.019	0.15	1.36	18	0.19	17.60	39	1.0
I031762		2.9	0.191	0.42	0.48	88	0.15	7.37	88	1.1
I031763		1.6	0.181	0.34	0.23	90	0.18	4.91	83	1.1
I031764		1.6	0.191	0.23	0.26	77	0.33	7.52	64	1.3
I031765		1.2	0.240	0.37	0.19	98	0.19	5.98	88	1.1
I031766		2.1	0.227	0.36	0.32	85	0.25	7.18	70	1.1
I031767		3.1	0.236	0.52	0.38	117	0.20	5.66	97	1.0
I031768		3.7	0.228	0.46	0.45	104	0.56	7.62	92	1.2
I031769		5.4	0.132	0.26	1.34	53	0.16	8.02	48	1.2
I031770		3.0	0.118	0.47	16.50	48	9.80	1.87	12	17.0

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Sample Description	Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
	Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I031771		4.42	0.007		0.29	2.22	9.2	<0.2	<10	450	0.10	0.37	0.44	0.25	19.60	15.2
I031772		3.66	0.007		0.60	3.83	1.7	<0.2	<10	860	0.33	1.02	1.10	3.64	9.85	26.9
I031773		1.66	0.008		0.16	1.65	5.3	<0.2	<10	310	0.17	0.15	0.48	0.29	14.10	14.5
I031774		3.59	0.005		0.10	2.23	1.0	<0.2	<10	270	0.21	0.09	0.67	0.04	19.90	17.6
I031775		4.93	0.005		0.14	2.71	0.7	<0.2	<10	380	0.34	0.10	0.44	0.05	30.3	20.8
I031776		5.11	0.005		0.12	2.89	0.6	<0.2	<10	490	0.26	0.12	1.15	0.04	10.95	18.9
I031777		5.44	<0.005		0.07	2.34	0.5	<0.2	<10	250	0.10	0.12	1.54	0.03	4.66	19.5
I031778		5.23	<0.005		0.04	3.51	0.7	<0.2	<10	330	0.29	0.08	4.02	0.06	6.35	16.5
I031779		4.64	0.006		0.11	1.84	1.0	<0.2	<10	260	0.11	0.25	3.92	0.07	7.77	16.2
I031780		0.91	<0.005		0.02	1.35	0.4	<0.2	<10	230	0.16	0.04	0.37	0.04	21.3	5.7
I031781		5.62	<0.005		0.09	2.28	1.0	<0.2	<10	420	0.18	0.22	3.58	0.08	9.33	28.2
I031782		5.00	0.005		0.27	2.06	2.2	<0.2	<10	150	0.11	0.15	3.01	0.04	5.65	21.3
I031783		5.24	0.007		0.04	2.46	2.5	<0.2	<10	300	0.13	0.11	1.17	0.02	6.28	22.3
I031784		6.87	<0.005		0.08	2.32	1.0	<0.2	<10	360	0.12	0.16	0.87	0.03	7.59	20.7
I031785		2.42	0.006		0.11	4.09	5.0	<0.2	<10	240	0.25	0.27	1.29	0.03	6.84	22.4
I031786		2.57	0.006		0.13	3.55	3.5	<0.2	<10	610	0.42	0.17	2.43	0.09	8.94	18.7
I031787		1.94	<0.005		0.03	3.10	5.3	<0.2	<10	590	0.32	0.11	4.08	0.06	7.01	16.8
I031788		4.60	<0.005		0.02	1.88	0.5	<0.2	<10	310	0.25	0.04	2.00	0.04	11.95	13.1
I031789		1.92	0.157		0.16	1.70	1170	0.2	<10	240	0.27	0.12	2.26	0.06	20.3	18.3
I031790		1.53	0.118		0.28	1.76	508	<0.2	<10	260	0.24	0.09	2.32	0.08	24.4	15.9
I031791		4.58	0.132		0.07	2.00	640	<0.2	<10	280	0.16	0.11	1.28	0.04	10.80	18.4
I031792		4.11	0.024		0.21	2.05	382	<0.2	<10	170	0.16	0.11	1.17	0.03	9.06	18.2
I031793		4.88	0.018		0.05	2.54	4.4	<0.2	<10	230	0.10	0.06	0.70	0.02	5.74	19.9
I031794		4.33	0.006		0.14	1.80	2.1	<0.2	<10	90	0.10	0.10	1.01	0.04	6.60	17.9
I031795		3.77	<0.005		0.04	1.94	0.9	<0.2	<10	210	0.11	0.09	1.01	0.04	7.01	16.2
I031796		4.70	<0.005		0.07	2.05	1.1	<0.2	<10	310	0.14	0.16	0.92	0.04	7.21	18.8
I031797		3.69	<0.005		0.09	2.22	1.0	<0.2	<10	340	0.11	0.17	0.88	0.04	9.12	21.8
I031798		3.92	<0.005		0.07	2.11	0.7	<0.2	<10	310	0.13	0.12	0.83	0.03	9.55	18.2

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I031771		13	0.97	19.8	3.42	8.79	0.14	0.06	0.09	0.030	0.71	9.0	9.8	1.75	407	0.98
I031772		166	2.20	69.8	3.51	10.20	0.16	0.04	0.03	0.029	1.80	4.5	26.7	2.77	474	0.47
I031773		34	0.87	34.6	2.62	5.76	0.07	0.03	0.02	0.014	0.71	6.4	10.3	0.94	210	0.68
I031774		31	1.68	41.9	3.30	7.96	0.09	0.05	<0.01	0.014	1.00	9.5	12.1	1.46	332	0.43
I031775		44	1.48	53.1	4.13	9.24	0.09	0.04	<0.01	0.019	1.21	15.3	15.5	1.71	357	0.75
I031776		59	1.69	42.1	3.31	9.04	0.13	0.05	<0.01	0.011	1.19	5.0	16.2	2.02	385	1.12
I031777		50	1.03	10.0	2.60	6.04	0.12	0.04	<0.01	0.010	0.69	2.0	11.8	1.76	357	0.38
I031778		97	1.40	5.7	2.38	8.04	0.12	0.04	<0.01	0.010	1.07	2.8	14.3	2.12	541	0.53
I031779		29	0.87	19.1	2.40	5.64	0.10	0.03	<0.01	0.013	0.66	3.6	9.7	1.31	564	0.53
I031780		7	2.21	3.0	2.04	5.13	0.10	0.19	<0.01	0.014	0.64	9.3	27.8	0.53	486	0.09
I031781		39	1.56	31.9	2.80	6.51	0.11	0.04	0.01	0.014	0.89	4.4	15.9	1.76	533	0.18
I031782		36	1.56	15.9	2.97	6.79	0.09	0.04	<0.01	0.012	1.15	2.4	14.7	1.71	495	0.49
I031783		41	1.76	6.0	3.10	7.89	0.10	0.04	<0.01	0.013	1.48	2.7	15.2	1.94	349	0.71
I031784		34	1.32	25.8	3.18	7.18	0.12	0.05	<0.01	0.011	0.94	3.4	13.6	2.02	330	0.28
I031785		65	2.50	26.7	4.09	11.20	0.13	0.03	<0.01	0.013	2.03	3.0	20.0	2.98	538	0.68
I031786		63	2.40	32.6	3.38	9.84	0.11	0.04	<0.01	0.015	1.66	4.0	20.0	2.59	697	0.91
I031787		61	1.90	7.1	2.56	8.87	0.10	0.04	<0.01	0.013	1.41	3.1	18.1	2.23	708	1.02
I031788		55	1.16	2.3	1.73	6.39	0.10	0.07	<0.01	0.011	0.88	5.5	16.7	1.57	285	0.47
I031789		38	1.53	27.1	2.81	5.86	0.08	0.03	0.05	0.016	0.79	9.5	11.9	1.85	406	0.25
I031790		47	1.47	34.7	2.50	6.18	0.08	0.04	0.06	0.017	0.80	11.8	15.8	1.78	412	0.29
I031791		61	1.42	14.4	2.53	6.09	0.07	0.05	0.01	0.013	0.96	4.9	13.0	1.78	288	0.68
I031792		51	1.55	15.2	3.10	6.69	0.07	0.05	0.02	0.014	0.75	4.0	14.1	1.77	267	0.72
I031793		75	1.40	21.6	3.12	8.15	0.11	0.03	<0.01	0.015	1.02	2.5	17.1	2.24	249	0.49
I031794		37	0.91	73.3	2.82	7.02	0.11	0.04	<0.01	0.010	0.48	3.0	9.8	1.66	257	0.62
I031795		44	1.39	11.3	2.60	7.63	0.12	0.06	<0.01	0.012	0.87	3.2	12.5	1.79	255	0.69
I031796		60	1.59	25.7	2.87	7.06	0.14	0.05	<0.01	0.015	0.97	3.4	12.5	1.86	243	0.67
I031797		74	2.04	36.3	3.16	8.07	0.14	0.06	<0.01	0.016	1.10	4.4	13.8	2.20	286	0.74
I031798		59	2.11	20.8	2.91	8.25	0.13	0.07	<0.01	0.014	1.13	4.5	14.5	1.97	267	0.34

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I031771		0.09	0.20	8.8	590	19.0	31.8	0.001	0.46	2.60	10.8	0.7	0.5	27.3	<0.01	0.10
I031772		0.24	0.10	67.4	610	54.6	75.8	0.001	0.39	0.47	7.5	1.0	0.9	30.8	<0.01	0.08
I031773		0.10	0.16	20.3	510	8.8	33.8	0.001	0.77	0.77	4.9	0.6	0.5	18.0	<0.01	0.04
I031774		0.11	0.15	23.4	840	2.0	42.5	0.001	0.59	0.14	5.6	0.4	0.4	16.2	<0.01	0.02
I031775		0.06	0.19	38.3	560	2.1	50.3	0.001	0.62	0.12	6.7	0.3	0.5	14.0	<0.01	0.02
I031776		0.18	0.19	34.4	670	1.7	51.7	0.002	0.50	0.18	5.3	0.4	0.6	17.0	<0.01	0.04
I031777		0.15	0.13	26.0	580	1.6	29.2	0.001	0.28	0.21	5.4	0.3	0.3	28.0	<0.01	0.04
I031778		0.24	0.09	39.8	490	2.8	45.2	0.002	0.16	0.20	8.0	0.2	0.4	33.1	<0.01	0.01
I031779		0.15	0.13	19.9	490	2.6	27.6	0.002	0.83	0.71	5.2	0.4	0.3	31.0	<0.01	0.05
I031780		0.15	0.42	2.3	320	7.2	53.2	<0.001	<0.01	0.12	3.9	<0.2	0.9	26.3	<0.01	<0.01
I031781		0.12	0.12	29.6	360	2.5	37.7	<0.001	0.68	0.58	6.8	0.4	0.3	33.6	<0.01	0.04
I031782		0.10	0.09	17.0	640	1.9	44.3	0.001	1.18	0.22	5.9	0.5	0.3	28.4	<0.01	0.04
I031783		0.12	0.11	19.2	680	1.6	54.9	0.001	0.81	0.18	6.1	0.4	0.4	22.4	<0.01	0.04
I031784		0.11	0.13	16.4	630	1.7	35.4	0.001	0.56	0.37	5.9	0.3	0.3	24.4	<0.01	0.03
I031785		0.25	0.09	28.1	640	2.0	74.5	0.001	1.06	1.62	8.8	0.7	0.5	18.3	<0.01	0.06
I031786		0.19	0.09	32.4	540	2.3	62.3	0.003	0.62	1.18	8.2	0.4	0.5	33.6	<0.01	0.03
I031787		0.22	0.09	31.2	490	2.1	53.7	0.003	0.30	0.31	5.8	0.3	0.4	34.1	<0.01	0.02
I031788		0.11	0.18	28.2	550	1.6	38.2	0.001	0.03	0.19	4.3	0.2	0.6	29.0	<0.01	0.01
I031789		0.08	0.13	24.7	450	2.6	33.9	0.001	0.72	4.29	7.3	0.3	0.3	47.9	<0.01	0.03
I031790		0.07	0.13	27.0	480	2.2	33.8	<0.001	0.34	7.82	7.4	0.3	0.4	39.6	<0.01	0.02
I031791		0.12	0.11	32.0	540	1.8	38.4	0.001	0.42	1.08	6.1	0.3	0.3	31.3	<0.01	0.03
I031792		0.08	0.11	28.5	670	1.7	30.9	0.001	0.72	3.63	7.3	0.3	0.3	25.4	<0.01	0.03
I031793		0.11	0.06	29.9	540	1.0	39.7	0.001	0.12	1.47	6.9	0.2	0.3	19.3	<0.01	0.01
I031794		0.10	0.10	15.9	540	1.2	20.8	0.002	0.34	0.22	6.7	0.3	0.4	21.8	<0.01	0.02
I031795		0.12	0.09	16.4	560	1.4	36.8	0.001	0.17	0.18	7.0	0.3	0.4	21.1	<0.01	0.01
I031796		0.13	0.09	22.8	460	1.4	39.6	0.001	0.34	0.25	7.0	0.3	0.5	23.9	<0.01	0.02
I031797		0.12	0.10	35.1	520	1.3	46.5	0.001	0.46	0.23	8.1	0.4	0.5	17.6	<0.01	0.02
I031798		0.14	0.12	28.8	570	1.3	50.1	0.001	0.33	0.28	7.9	0.4	0.7	20.0	<0.01	0.03

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I031771		3.2	0.183	0.21	0.83	104	0.23	10.00	51	1.6
I031772		3.4	0.271	0.42	0.36	98	0.32	6.18	283	1.1
I031773		5.5	0.141	0.19	0.56	38	0.13	8.88	52	0.8
I031774		5.1	0.156	0.23	0.57	65	0.15	9.91	29	1.1
I031775		10.1	0.139	0.30	0.87	72	0.25	9.54	41	0.9
I031776		3.2	0.217	0.29	0.34	86	0.18	6.04	43	1.3
I031777		0.8	0.228	0.18	0.20	78	0.25	5.14	34	0.9
I031778		1.4	0.221	0.24	0.24	95	0.25	5.85	41	0.8
I031779		1.9	0.179	0.15	0.27	66	0.23	6.50	32	0.9
I031780		13.5	0.156	0.38	2.98	45	0.10	6.96	39	3.7
I031781		2.9	0.190	0.23	0.30	86	0.27	5.36	30	1.0
I031782		0.9	0.214	0.25	0.14	72	0.18	7.67	28	0.7
I031783		1.2	0.257	0.30	0.18	85	0.24	7.20	22	0.7
I031784		1.6	0.233	0.21	0.24	90	0.18	5.78	29	1.0
I031785		1.7	0.253	0.44	0.21	135	0.20	6.54	59	0.6
I031786		1.7	0.210	0.35	0.24	104	0.13	7.63	61	1.0
I031787		1.4	0.210	0.30	0.22	89	0.16	6.77	47	0.9
I031788		2.9	0.233	0.19	0.42	62	0.28	7.17	24	1.9
I031789		4.6	0.114	0.23	0.46	68	0.20	8.60	30	0.6
I031790		5.4	0.119	0.22	0.59	66	0.17	9.22	31	0.8
I031791		2.1	0.207	0.25	0.33	66	0.25	7.75	26	1.0
I031792		1.7	0.168	0.23	0.26	76	0.25	9.35	28	0.8
I031793		1.0	0.217	0.23	0.21	111	0.12	6.76	26	0.5
I031794		1.1	0.201	0.12	0.20	84	0.17	6.92	21	0.8
I031795		1.2	0.264	0.22	0.24	95	0.21	7.96	30	1.0
I031796		1.2	0.271	0.24	0.20	90	0.20	6.41	29	1.1
I031797		1.5	0.249	0.27	0.24	104	0.53	6.79	38	1.3
I031798		1.6	0.280	0.30	0.25	98	0.27	7.31	45	1.4

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 1-SEP-2010
Account: EIASQI

Project: SQI10-03

CERTIFICATE OF ANALYSIS WH10111280

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-OCT-2010
Account: EIASQI

CERTIFICATE WH10127714

Project: SQI10-01

P.O. No.: SQI10-01_9

This report is for 74 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 17-SEP-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
PUL-QC	Pulverizing QC Test
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
LOG-22d	Sample login - Rcd w/o BarCode dup
SPL-21d	Split sample - duplicate
PUL-31d	Pulverize Split - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127714

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I102001		2.09	<0.005		0.38	1.00	4.5	<0.2	<10	60	0.75	0.90	0.63	0.32	41.7	6.0
I102002		4.42	<0.005		0.16	1.01	4.2	<0.2	<10	70	0.77	0.19	0.57	0.38	42.9	5.4
I102003		4.12	<0.005		0.57	1.33	13.2	<0.2	<10	40	1.85	0.94	1.46	1.58	62.6	12.9
I102004		4.48	<0.005		0.24	0.93	7.3	<0.2	10	40	1.19	0.34	1.84	1.23	54.1	9.0
I102005		3.09	<0.005		1.24	0.91	13.4	<0.2	10	40	1.13	1.97	1.23	6.53	54.9	6.8
I102006		0.71	<0.005		4.24	0.46	6.2	<0.2	10	30	0.83	7.19	1.69	11.15	63.8	1.2
I102007		3.79	<0.005		1.01	0.47	7.5	<0.2	10	40	0.92	1.58	2.12	2.44	54.9	4.7
I102008		4.55	<0.005		0.44	0.86	5.4	<0.2	<10	40	1.53	0.64	1.77	0.79	44.9	9.7
I102009		1.75	<0.005		3.70	0.87	14.3	<0.2	<10	40	1.17	6.65	1.29	2.21	47.7	6.2
I102010		0.03	2.76	2.58	2.24	1.68	533	2.7	30	130	0.42	244	9.27	0.61	27.6	29.8
I102011		2.29	<0.005		0.12	0.85	3.0	<0.2	<10	80	0.59	0.58	0.51	0.22	39.2	4.8
I102012		4.71	<0.005		0.24	0.91	3.7	<0.2	<10	90	0.60	0.57	0.54	0.53	40.1	4.7
I102013		4.51	<0.005		0.18	0.79	4.3	<0.2	<10	80	0.53	0.29	0.58	0.29	36.7	6.9
I102014		4.47	<0.005		0.14	0.69	3.1	<0.2	<10	80	0.44	0.19	0.45	0.35	40.9	4.8
I102015		1.96	<0.005		0.19	0.83	2.5	<0.2	<10	90	0.54	0.27	0.43	0.43	39.8	4.6
I102016		2.15	<0.005		0.29	0.83	2.7	<0.2	<10	70	0.66	1.73	0.57	0.30	39.7	4.8
I102017		3.88	<0.005		0.59	1.10	6.2	<0.2	<10	60	1.26	1.33	0.87	1.23	50.5	5.6
I102018		4.02	<0.005		0.26	1.02	3.2	<0.2	<10	80	0.95	0.46	0.63	0.48	44.0	5.7
I102019		4.22	<0.005		0.20	0.90	2.4	<0.2	<10	90	0.82	0.29	0.49	0.26	45.2	5.5
I102020		0.94	<0.005		0.05	0.71	4.5	<0.2	<10	100	0.56	0.30	0.27	0.17	29.8	3.4
I102021		3.63	<0.005		0.08	1.01	2.4	<0.2	<10	90	1.09	0.21	0.76	0.14	46.5	5.2
I102022		2.92	<0.005		0.11	1.30	1.9	<0.2	<10	130	1.69	0.22	0.72	0.14	41.8	5.3
I102023		2.06	<0.005		0.16	1.22	4.9	<0.2	<10	70	2.01	0.22	2.23	0.27	53.0	5.4
I102024		3.05	<0.005		0.35	1.28	8.8	<0.2	<10	90	1.98	0.54	1.16	1.09	49.8	5.8
I102025		1.83	0.005		0.54	0.89	26.4	<0.2	<10	70	1.60	0.36	1.04	0.66	45.0	5.5
I102026		4.07	<0.005		0.17	0.91	2.1	<0.2	<10	90	0.72	0.24	0.60	0.30	44.2	5.7
I102027		4.30	<0.005		0.20	0.87	1.8	<0.2	<10	90	0.64	0.33	0.48	0.35	41.8	5.2
I102028		3.21	<0.005		0.23	1.19	2.9	<0.2	<10	100	1.50	0.50	1.12	1.50	41.9	5.9
I102029		2.18	<0.005		0.12	0.93	1.9	<0.2	<10	100	0.74	0.18	0.49	0.18	42.5	5.6
I102030		1.88	<0.005		0.12	0.93	2.0	<0.2	<10	100	0.74	0.17	0.47	0.16	42.0	5.7
I102031		3.15	<0.005		0.16	0.88	1.9	<0.2	<10	90	0.68	0.23	0.79	0.40	39.8	5.2
I102032		3.55	<0.005		0.11	1.13	1.9	<0.2	<10	90	1.40	0.24	0.96	0.16	42.3	5.1
I102033		3.25	<0.005		0.14	0.77	1.9	<0.2	<10	80	0.83	0.27	0.50	0.16	43.9	4.6
I102034		2.54	<0.005		0.22	1.76	3.1	<0.2	<10	50	3.01	0.61	2.05	0.24	51.1	4.8
I102035		2.04	<0.005		0.58	1.41	1.8	<0.2	<10	60	2.07	3.71	0.54	0.18	47.6	4.8
I102036		1.53	0.085		0.94	0.79	87.0	<0.2	<10	30	1.87	11.15	0.34	0.41	49.2	33.7
I102037		3.27	0.016		1.62	1.51	5.5	<0.2	<10	50	2.19	24.5	0.56	0.37	55.8	9.8
I102038		3.24	<0.005		0.43	2.24	2.4	<0.2	<10	130	2.82	3.34	0.79	0.31	46.3	5.9
I102039		3.66	0.016		1.34	1.18	18.6	<0.2	10	60	1.57	10.05	0.40	0.23	56.7	15.6
I102040C		<0.02	0.022		1.25	1.15	20.9	<0.2	<10	50	1.53	10.30	0.41	0.24	57.1	15.1

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127714

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I102001		17	2.91	13.3	2.27	4.90	0.09	0.19	<0.01	0.024	0.19	20.9	16.0	0.61	941	4.14
I102002		17	3.44	16.0	2.28	4.92	0.08	0.18	<0.01	0.015	0.22	21.7	15.4	0.63	552	3.51
I102003		5	7.38	11.6	2.09	3.00	0.05	0.21	<0.01	0.090	0.33	34.8	16.8	0.37	1570	2.44
I102004		4	7.33	1.7	1.81	2.16	<0.05	0.29	<0.01	0.075	0.34	30.5	8.4	0.52	2180	3.46
I102005		3	9.16	5.3	2.44	2.71	0.05	0.29	0.01	0.094	0.38	31.5	6.6	0.45	2830	3.86
I102006		3	7.88	32.5	1.68	1.31	<0.05	0.35	0.01	0.202	0.31	36.2	1.9	0.11	3240	3.12
I102007		4	7.40	15.4	1.76	1.24	<0.05	0.32	<0.01	0.094	0.34	30.9	2.3	0.46	2580	2.71
I102008		5	7.25	7.3	2.08	1.70	<0.05	0.33	<0.01	0.094	0.31	25.6	6.6	0.55	1920	2.32
I102009		9	8.73	95.4	2.39	3.35	0.05	0.17	0.01	0.088	0.24	25.4	11.8	0.34	1420	3.24
I102010		51	1.50	292	5.08	6.62	0.22	0.41	4.86	1.415	0.16	14.2	7.6	0.26	863	74.4
I102011		15	3.31	11.3	2.06	4.49	0.08	0.16	0.01	0.011	0.27	20.0	12.2	0.55	404	3.28
I102012		16	3.78	11.4	2.13	4.60	0.09	0.16	<0.01	0.025	0.26	20.4	12.9	0.56	474	4.11
I102013		15	7.73	8.2	2.09	4.15	0.09	0.15	0.01	0.011	0.24	18.7	12.0	0.50	391	4.21
I102014		16	7.92	11.9	2.04	3.92	0.09	0.15	0.01	0.012	0.30	20.7	11.8	0.46	435	5.91
I102015		17	6.06	18.5	2.26	4.31	0.09	0.14	0.01	0.014	0.39	20.3	14.5	0.53	482	7.84
I102016		16	5.14	12.5	2.26	4.59	0.08	0.14	0.01	0.019	0.30	20.2	15.5	0.57	660	7.80
I102017		13	10.20	26.3	2.53	5.08	0.06	0.12	0.02	0.059	0.31	26.1	14.2	0.43	1370	5.53
I102018		18	6.47	29.4	2.44	5.18	0.09	0.15	<0.01	0.025	0.39	22.6	17.4	0.59	624	6.12
I102019		17	7.78	14.4	2.27	4.96	0.08	0.15	0.01	0.010	0.43	22.9	21.8	0.58	443	8.50
I102020		12	6.56	2.7	1.98	3.74	0.07	0.22	0.01	0.022	0.36	15.1	33.5	0.43	281	1.02
I102021		15	6.89	10.9	2.20	5.16	0.07	0.21	<0.01	0.013	0.46	24.0	30.9	0.53	651	3.15
I102022		14	9.33	13.3	2.14	5.55	0.06	0.16	0.01	0.013	0.45	21.6	29.5	0.56	648	7.43
I102023		13	9.09	12.2	2.37	5.05	0.06	0.14	<0.01	0.043	0.35	28.5	18.8	0.42	2380	6.36
I102024		13	12.50	32.2	2.44	5.50	0.06	0.14	0.01	0.051	0.40	25.8	16.0	0.43	1450	5.71
I102025		13	9.38	249	2.28	4.73	0.07	0.15	0.01	0.050	0.37	23.5	15.8	0.44	4010	8.37
I102026		17	7.68	19.0	2.35	5.12	0.09	0.17	<0.01	0.014	0.46	22.6	21.3	0.58	678	11.35
I102027		18	7.70	16.0	2.14	4.75	0.09	0.16	0.01	0.013	0.42	20.9	20.6	0.57	436	8.42
I102028		15	9.78	18.3	2.29	5.49	0.07	0.13	0.01	0.030	0.39	21.8	23.3	0.59	1420	8.66
I102029		17	8.51	17.7	2.28	5.16	0.09	0.15	<0.01	0.012	0.46	21.3	27.8	0.58	371	10.80
I102030		18	8.50	17.1	2.38	5.07	0.09	0.15	0.01	0.010	0.46	21.1	27.3	0.58	374	12.05
I102031		17	7.78	14.4	2.12	4.83	0.09	0.15	0.01	0.012	0.43	20.3	23.7	0.56	463	8.90
I102032		15	7.79	13.3	2.09	5.09	0.07	0.14	0.01	0.012	0.40	22.1	26.5	0.53	832	6.70
I102033		15	4.48	10.6	2.06	4.46	0.08	0.25	<0.01	0.012	0.37	22.3	24.2	0.47	401	4.13
I102034		12	6.30	13.4	1.99	5.79	0.05	0.13	0.01	0.031	0.24	27.1	12.0	0.46	2090	0.61
I102035		12	8.03	14.7	2.35	5.15	0.05	0.18	0.02	0.052	0.28	24.0	11.9	0.48	1000	0.64
I102036		7	12.65	50.1	6.11	4.73	0.07	0.09	0.03	0.078	0.27	27.4	3.1	0.15	726	5.09
I102037		11	11.50	264	3.67	6.39	0.06	0.09	0.01	0.116	0.22	28.7	12.7	0.53	2670	1.68
I102038		14	7.13	21.7	2.52	7.28	0.06	0.16	0.01	0.060	0.32	23.7	16.3	0.66	1500	0.96
I102039		9	12.30	48.0	4.11	5.52	0.07	0.11	0.01	0.071	0.31	31.5	11.9	0.30	2090	2.46
I102040C		9	12.55	55.5	4.13	5.49	0.07	0.12	0.01	0.066	0.27	31.3	11.5	0.31	2050	2.42

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127714

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I102001		0.03	1.18	4.5	850	39.3	21.2	<0.001	0.04	0.98	2.5	0.2	1.2	28.8	0.01	0.02
I102002		0.04	0.97	4.5	870	30.3	26.0	<0.001	0.02	1.21	2.4	0.2	1.3	28.5	0.01	0.01
I102003		<0.01	<0.05	3.7	760	174.5	33.4	<0.001	0.15	1.80	2.0	0.3	0.3	33.2	<0.01	0.01
I102004		<0.01	<0.05	3.5	670	131.5	38.8	<0.001	0.43	0.49	1.6	0.3	0.2	27.8	<0.01	0.01
I102005		<0.01	<0.05	3.5	660	714	41.7	0.001	0.43	1.03	1.4	0.4	0.2	24.9	<0.01	0.02
I102006		<0.01	<0.05	2.2	700	888	39.0	<0.001	0.03	3.99	1.8	0.3	<0.2	24.5	<0.01	0.06
I102007		<0.01	<0.05	2.7	660	199.0	40.1	<0.001	0.24	3.94	1.9	0.3	<0.2	41.5	<0.01	0.01
I102008		<0.01	<0.05	3.9	650	66.6	35.1	<0.001	0.49	1.41	2.1	0.3	0.2	51.5	<0.01	0.01
I102009		0.02	0.32	3.5	800	366	27.4	<0.001	0.28	21.1	2.8	0.3	0.5	25.4	<0.01	0.03
I102010		0.04	1.02	61.2	760	40.6	10.8	0.002	1.07	8.47	6.0	1.4	106.0	80.8	0.02	43.9
I102011		0.04	1.10	3.7	870	20.1	31.3	<0.001	<0.01	0.81	2.0	0.2	1.1	18.5	<0.01	0.06
I102012		0.05	1.26	4.0	850	29.1	29.4	<0.001	0.03	0.89	2.4	0.2	1.2	31.1	0.01	0.04
I102013		0.05	1.71	3.8	860	31.3	28.3	<0.001	0.34	0.62	2.1	0.2	1.1	48.8	<0.01	0.02
I102014		0.05	1.94	3.7	840	27.2	38.1	<0.001	0.03	0.43	2.0	0.2	1.2	29.2	<0.01	0.01
I102015		0.07	1.87	4.3	830	28.9	43.1	<0.001	<0.01	1.02	2.1	0.2	1.2	20.9	<0.01	0.01
I102016		0.05	1.40	4.2	830	37.3	38.2	<0.001	<0.01	1.35	2.7	0.2	1.2	23.6	<0.01	0.64
I102017		0.03	0.44	4.0	870	113.5	35.9	<0.001	<0.01	3.56	4.1	0.3	0.7	59.6	<0.01	0.06
I102018		0.06	1.40	4.5	870	36.2	45.2	<0.001	<0.01	1.38	2.7	0.3	1.2	31.7	<0.01	0.06
I102019		0.05	1.83	4.8	890	46.2	53.1	<0.001	<0.01	0.56	2.3	0.2	1.2	29.9	<0.01	0.01
I102020		0.06	2.13	4.0	660	19.9	49.2	<0.001	<0.01	0.39	3.7	0.2	1.5	14.1	0.01	<0.01
I102021		0.05	1.46	4.1	860	15.6	56.7	<0.001	<0.01	1.12	2.5	0.2	1.2	26.2	0.01	0.01
I102022		0.03	0.83	3.9	870	18.4	57.3	<0.001	<0.01	0.94	2.9	0.2	1.2	192.5	<0.01	0.01
I102023		0.03	0.56	3.7	820	98.5	43.1	<0.001	<0.01	0.99	4.8	0.3	0.9	100.5	<0.01	0.01
I102024		0.03	0.54	4.0	850	81.7	47.8	<0.001	0.06	2.52	4.2	0.3	0.9	112.0	<0.01	0.03
I102025		0.03	0.90	4.0	850	121.5	45.5	<0.001	0.03	11.35	3.4	0.3	0.9	53.1	<0.01	0.02
I102026		0.06	1.91	4.4	860	41.1	55.5	<0.001	<0.01	0.37	2.9	0.2	1.2	29.5	<0.01	0.02
I102027		0.05	1.77	4.1	840	33.0	52.8	<0.001	<0.01	0.52	2.3	0.2	1.2	27.5	<0.01	0.04
I102028		0.03	0.93	4.2	860	47.9	50.8	<0.001	<0.01	1.00	2.7	0.2	1.2	97.4	<0.01	0.08
I102029		0.06	2.00	4.3	870	41.8	57.7	<0.001	<0.01	0.36	2.3	0.3	1.3	42.3	<0.01	0.01
I102030		0.07	2.18	4.5	870	41.4	58.1	<0.001	<0.01	0.39	2.3	0.3	1.4	46.2	<0.01	0.01
I102031		0.06	1.95	4.0	830	74.9	55.0	<0.001	<0.01	0.32	2.2	0.2	1.2	34.1	<0.01	0.01
I102032		0.04	1.04	3.8	840	33.6	53.0	<0.001	<0.01	0.88	2.7	0.2	1.2	48.7	<0.01	<0.01
I102033		0.08	1.70	3.8	820	28.8	43.0	<0.001	<0.01	0.57	2.5	0.2	1.1	22.4	<0.01	<0.01
I102034		0.01	0.19	3.5	790	47.5	32.7	<0.001	<0.01	1.40	4.1	0.2	0.9	91.2	<0.01	0.02
I102035		0.01	0.31	3.6	830	44.7	39.2	<0.001	<0.01	0.84	3.2	0.2	0.9	66.7	<0.01	0.15
I102036		<0.01	0.07	3.6	790	26.1	37.8	<0.001	<0.01	3.02	1.4	0.7	0.9	22.3	<0.01	1.05
I102037		<0.01	0.08	3.9	830	80.7	36.3	<0.001	<0.01	1.00	2.6	0.3	0.6	102.5	<0.01	0.41
I102038		0.02	0.28	4.0	830	70.6	39.5	<0.001	<0.01	0.91	3.7	0.2	1.3	421	<0.01	0.03
I102039		0.01	0.11	4.1	750	38.1	44.3	<0.001	<0.01	1.50	2.1	0.3	1.0	74.4	<0.01	0.39
I102040C		0.01	0.12	4.0	760	37.9	42.0	<0.001	<0.01	1.53	2.1	0.4	0.9	71.7	<0.01	0.37

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127714

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I102001		31.9	0.143	0.12	11.85	50	1.33	12.60	113	2.6
I102002		34.1	0.145	0.14	11.45	51	1.73	12.40	99	2.5
I102003		28.2	<0.005	0.42	8.61	12	0.20	14.00	295	7.1
I102004		22.0	<0.005	0.45	9.12	4	0.17	10.40	124	11.5
I102005		22.4	<0.005	0.59	10.10	4	0.18	9.69	637	12.1
I102006		22.7	<0.005	0.50	5.54	4	0.17	13.20	809	14.6
I102007		21.3	<0.005	0.49	8.42	4	0.14	11.00	234	11.7
I102008		20.9	<0.005	0.44	8.33	7	0.13	10.95	155	12.4
I102009		32.6	0.042	0.28	12.20	31	0.44	14.00	398	4.3
I102010		4.0	0.149	0.12	1.97	30	56.3	8.76	82	16.8
I102011		31.6	0.148	0.17	13.25	54	1.04	11.35	56	2.5
I102012		29.3	0.150	0.16	10.40	52	1.11	11.85	112	2.7
I102013		28.6	0.151	0.15	10.05	47	1.21	11.70	69	2.3
I102014		29.4	0.156	0.20	10.85	53	2.00	11.80	90	2.2
I102015		27.8	0.178	0.26	10.75	59	2.02	12.00	102	2.3
I102016		28.5	0.154	0.20	10.45	56	1.65	12.75	79	2.2
I102017		29.4	0.077	0.26	8.96	49	0.97	14.05	168	2.2
I102018		29.2	0.170	0.27	11.60	62	2.74	13.55	128	2.4
I102019		30.3	0.180	0.30	12.65	65	3.44	13.60	63	2.4
I102020		30.2	0.149	0.33	7.79	49	0.64	12.95	34	3.5
I102021		31.9	0.163	0.34	12.95	61	1.55	12.10	44	3.5
I102022		29.7	0.148	0.33	10.70	60	0.67	11.30	46	2.6
I102023		30.0	0.089	0.30	13.65	53	0.60	15.50	60	2.5
I102024		29.6	0.097	0.35	15.35	51	0.81	14.65	124	2.7
I102025		28.8	0.117	0.32	13.15	50	1.90	15.10	91	2.6
I102026		30.0	0.181	0.34	12.30	62	2.53	14.05	80	2.7
I102027		28.4	0.175	0.31	11.75	60	2.63	13.00	66	2.6
I102028		29.9	0.148	0.31	10.55	59	2.20	13.85	141	2.1
I102029		31.0	0.189	0.33	13.60	65	3.54	13.70	54	2.5
I102030		30.7	0.193	0.34	13.70	66	4.12	13.55	54	2.5
I102031		28.3	0.182	0.31	11.40	62	4.07	12.95	77	2.4
I102032		33.1	0.152	0.35	12.90	59	2.39	12.20	52	2.3
I102033		32.2	0.145	0.27	16.30	58	2.16	12.80	42	3.9
I102034		31.8	0.037	0.23	4.99	50	0.52	13.95	64	2.9
I102035		35.0	0.066	0.28	6.72	51	0.44	11.95	99	3.6
I102036		27.8	<0.005	0.48	27.2	34	1.67	10.75	49	2.2
I102037		31.6	0.013	0.35	9.34	42	0.55	14.90	98	2.3
I102038		29.7	0.081	0.30	6.46	55	0.57	13.20	100	3.2
I102039		27.6	0.016	0.52	16.50	33	1.12	12.00	82	2.7
I102040C		27.5	0.017	0.48	17.45	35	1.14	12.05	82	2.6

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127714

Sample Description	Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
	Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I102041		1.81	<0.005		0.23	1.55	2.0	<0.2	<10	80	1.87	6.25	0.50	0.25	50.2	5.4
I102042		2.13	0.053		0.51	0.92	10.9	<0.2	<10	50	1.02	6.26	0.28	0.17	66.3	10.1
I102043		1.74	1.510	1.79	2.62	0.51	147.5	4.6	<10	40	0.78	50.0	0.09	0.04	23.8	15.2
I102044		1.74	>10.0	14.15	14.95	0.28	381	16.4	<10	20	0.33	547	0.08	0.04	5.85	36.2
I102045		2.70	1.040	0.92	0.79	1.19	19.3	1.3	<10	80	1.84	8.00	0.36	0.28	48.9	34.5
I102046		2.10	0.217		0.53	1.22	7.1	2.2	<10	50	1.94	2.19	0.48	0.22	44.3	7.0
I102047		2.71	<0.005		0.13	1.13	4.0	<0.2	<10	60	1.32	2.80	0.49	0.11	47.1	4.2
I102048		2.12	<0.005		0.10	2.07	3.0	<0.2	<10	70	2.38	6.66	0.85	0.24	47.9	5.6
I102049		2.59	0.021		0.11	1.99	2.7	<0.2	<10	30	2.03	26.6	0.69	0.16	52.2	6.7
I102050		0.03	2.88	2.57	2.11	1.72	527	2.8	30	120	0.29	253	9.27	0.70	29.8	25.6
I102051		0.87	0.007		0.18	2.14	6.6	<0.2	<10	70	2.59	16.50	0.95	0.26	55.3	12.5
I102052		3.45	<0.005		0.12	1.24	3.5	<0.2	<10	60	1.14	2.82	0.46	0.23	44.0	4.9
I102053		3.89	<0.005		0.08	1.09	4.3	<0.2	<10	50	0.97	1.98	0.48	0.25	40.3	5.6
I102054		4.17	<0.005		0.12	1.00	4.7	<0.2	<10	60	0.77	1.74	0.48	0.26	43.6	5.4
I102055		3.67	<0.005		0.10	1.21	5.0	<0.2	<10	30	1.14	3.40	0.52	0.25	44.9	6.9
I102056		4.63	<0.005		0.13	1.04	3.2	<0.2	<10	50	0.98	2.15	0.53	0.20	52.6	6.8
I102057		3.13	<0.005		0.09	1.43	3.3	<0.2	<10	50	1.44	1.25	0.51	0.33	53.9	6.6
I102058		4.53	<0.005		0.12	1.28	5.4	<0.2	<10	70	0.82	2.08	0.64	0.35	50.9	5.8
I102059		2.05	<0.005		0.12	1.07	5.8	<0.2	<10	70	0.63	1.07	0.70	0.39	49.3	5.0
I102060		0.97	<0.005		0.08	0.71	5.3	<0.2	<10	100	0.57	0.30	0.30	0.23	33.0	3.8
I102061		4.20	<0.005		0.28	1.09	3.2	<0.2	<10	70	0.86	7.79	0.71	0.21	46.4	7.4
I102062		4.24	<0.005		0.58	0.93	3.5	<0.2	<10	80	0.61	10.55	0.56	0.21	46.7	5.5
I102063		3.86	<0.005		0.08	0.93	4.2	<0.2	<10	90	0.61	0.83	0.51	0.18	45.8	5.6
I102064		2.12	<0.005		0.11	0.93	3.8	<0.2	<10	90	0.70	0.44	0.44	0.16	44.6	5.4
I102065		2.37	<0.005		0.41	1.80	3.5	<0.2	<10	70	2.47	5.39	0.68	0.29	51.3	6.7
I102066		4.04	<0.005		0.14	1.26	3.7	<0.2	<10	90	1.30	2.11	0.61	0.19	45.6	5.3
I102067		3.33	<0.005		0.21	1.14	3.7	<0.2	<10	80	1.27	1.62	0.52	0.18	46.9	5.9
I102068		1.72	<0.005		0.30	1.53	3.6	<0.2	<10	70	1.47	1.79	0.73	0.26	48.5	5.6
I102069		1.59	0.024		0.49	1.79	16.9	<0.2	<10	70	3.49	3.16	1.05	0.23	59.6	27.6
I102070		1.55	0.028		0.45	1.50	24.7	<0.2	<10	70	3.32	2.94	0.88	0.27	51.4	28.2
I102071		2.45	<0.005		0.35	2.05	4.8	<0.2	<10	60	3.09	6.14	0.82	0.27	48.9	6.4
I102072		4.02	<0.005		0.21	1.44	3.2	<0.2	<10	70	1.44	3.85	0.61	0.22	47.2	5.6
I102073		3.01	<0.005		0.16	1.36	2.8	<0.2	<10	70	1.40	2.67	0.55	0.26	49.1	6.4
I102074		3.48	<0.005		0.38	1.18	2.5	<0.2	<10	60	1.09	11.20	0.71	0.20	53.1	8.6

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127714

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I102041		15	6.64	31.4	2.85	6.59	0.07	0.19	<0.01	0.062	0.32	23.8	21.2	0.73	1030	0.86
I102042		10	13.65	8.2	2.57	4.71	0.06	0.15	<0.01	0.060	0.33	35.6	10.8	0.20	846	1.36
I102043		6	5.71	25.6	12.20	5.74	0.11	0.11	0.02	0.139	0.27	14.5	2.2	0.03	169	16.00
I102044		6	3.19	36.1	14.70	3.84	0.12	0.05	0.39	0.126	0.15	3.6	0.6	0.02	62	22.3
I102045		16	11.35	21.3	3.98	5.53	0.07	0.18	0.04	0.075	0.28	26.0	14.3	0.39	1340	3.12
I102046		15	6.21	5.9	2.91	5.25	0.06	0.19	0.02	0.048	0.23	23.0	14.2	0.46	703	0.74
I102047		15	4.09	5.8	2.38	5.35	0.06	0.22	0.01	0.050	0.26	23.9	13.8	0.54	433	0.59
I102048		15	3.52	14.2	2.72	7.22	0.05	0.12	0.01	0.037	0.17	24.6	18.1	0.76	1050	0.36
I102049		16	2.92	3.5	2.82	7.57	0.05	0.08	0.01	0.034	0.14	27.5	21.1	0.89	1260	0.40
I102050		51	1.54	291	5.13	6.22	0.20	0.40	4.96	1.540	0.16	15.2	6.9	0.26	870	77.6
I102051		10	19.30	27.5	4.55	7.73	0.06	0.10	0.06	0.084	0.35	30.2	8.3	0.54	1200	0.78
I102052		16	4.85	12.4	2.50	5.51	0.07	0.15	0.01	0.051	0.31	21.9	20.2	0.68	557	0.91
I102053		15	4.15	6.4	2.33	5.07	0.07	0.13	<0.01	0.061	0.23	20.5	19.1	0.67	512	0.81
I102054		17	6.85	9.0	2.55	5.16	0.08	0.17	<0.01	0.058	0.26	22.2	15.2	0.59	492	1.63
I102055		17	4.08	8.7	2.85	6.03	0.07	0.21	<0.01	0.127	0.16	23.2	20.6	0.79	769	0.65
I102056		17	3.44	7.5	3.78	5.46	0.06	0.19	<0.01	0.046	0.25	27.5	15.7	0.64	874	1.96
I102057		17	5.16	7.1	3.31	6.70	0.06	0.21	0.01	0.058	0.26	29.1	19.9	0.84	1080	0.58
I102058		18	10.30	12.9	2.79	6.27	0.10	0.26	<0.01	0.094	0.30	26.1	22.2	0.80	696	0.97
I102059		19	11.75	9.2	2.41	5.46	0.10	0.25	<0.01	0.082	0.29	25.1	21.8	0.68	488	0.86
I102060		13	6.08	3.1	2.04	3.94	0.07	0.21	0.01	0.018	0.36	15.4	29.8	0.38	291	2.21
I102061		16	6.50	22.8	3.09	5.59	0.07	0.24	<0.01	0.058	0.36	23.4	20.0	0.72	801	1.57
I102062		16	5.90	13.3	2.68	4.86	0.07	0.28	<0.01	0.044	0.39	23.7	20.5	0.64	556	2.86
I102063		17	5.51	9.9	2.44	4.64	0.09	0.26	<0.01	0.040	0.40	23.1	22.9	0.62	467	2.08
I102064		16	6.11	9.4	2.28	4.43	0.09	0.24	<0.01	0.035	0.39	22.4	22.7	0.60	479	2.00
I102065		12	17.75	25.7	2.78	6.64	0.06	0.12	0.02	0.113	0.31	25.9	18.2	0.62	2430	0.70
I102066		16	6.42	10.3	2.57	5.36	0.07	0.18	<0.01	0.046	0.38	22.9	20.2	0.65	730	1.53
I102067		16	7.33	8.4	2.54	5.31	0.07	0.18	0.01	0.049	0.37	23.5	20.0	0.62	675	1.86
I102068		17	16.95	17.4	2.75	5.69	0.05	0.15	0.01	0.045	0.37	24.6	21.2	0.60	1170	1.78
I102069		10	35.8	20.3	3.00	6.77	<0.05	0.11	0.04	0.137	0.36	32.0	14.5	0.50	1210	1.20
I102070		9	32.7	16.4	3.24	6.03	0.05	0.10	0.03	0.125	0.34	27.1	11.9	0.45	1160	1.72
I102071		13	9.07	8.2	2.81	7.24	0.05	0.14	0.03	0.092	0.28	24.3	21.8	0.81	1020	0.42
I102072		16	5.78	10.0	3.19	6.93	0.06	0.18	0.01	0.070	0.34	23.8	22.6	0.83	799	1.18
I102073		15	6.41	7.1	2.88	6.13	0.06	0.18	0.01	0.059	0.31	22.9	22.2	0.83	644	0.77
I102074		17	7.32	26.6	3.40	6.38	0.06	0.14	<0.01	0.062	0.30	26.2	20.6	0.76	683	0.75

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127714

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I102041		0.03	0.35	4.4	840	36.4	39.7	<0.001	<0.01	0.57	4.1	0.2	1.0	173.0	<0.01	0.08
I102042		0.01	0.11	3.2	760	37.7	45.1	<0.001	<0.01	0.77	2.9	0.3	0.9	26.2	<0.01	0.08
I102043		<0.01	0.08	2.4	1280	20.2	39.3	<0.001	0.06	1.60	1.1	2.1	0.5	43.2	<0.01	0.74
I102044		<0.01	0.23	3.6	1210	66.8	18.5	0.001	0.03	7.61	0.4	1.6	3.3	20.9	<0.01	2.92
I102045		0.02	0.39	4.8	680	50.3	33.4	<0.001	0.01	1.56	3.3	0.2	1.4	69.4	0.01	0.23
I102046		0.02	0.47	3.8	770	31.9	26.9	<0.001	<0.01	0.70	3.0	0.2	2.6	33.9	0.01	0.10
I102047		0.04	0.79	3.8	770	25.6	26.4	<0.001	<0.01	0.51	2.9	<0.2	2.0	33.0	0.01	0.23
I102048		0.01	0.23	4.1	770	29.9	16.5	<0.001	<0.01	0.78	3.8	<0.2	1.8	72.4	0.01	0.44
I102049		0.01	0.10	4.8	900	26.3	14.0	<0.001	<0.01	0.47	3.1	<0.2	0.6	40.6	<0.01	0.12
I102050		0.03	1.02	53.5	740	39.8	9.5	0.003	1.05	8.73	5.3	1.3	113.0	79.1	0.03	41.0
I102051		<0.01	0.08	3.4	2020	34.4	45.7	<0.001	<0.01	2.17	2.3	0.2	3.5	52.5	<0.01	2.51
I102052		0.04	0.61	3.9	780	30.0	34.3	<0.001	<0.01	0.61	2.7	0.2	2.2	38.6	0.01	0.08
I102053		0.04	0.70	3.8	750	32.1	24.1	<0.001	<0.01	0.51	2.3	<0.2	1.9	50.5	0.01	0.03
I102054		0.06	1.01	3.8	780	44.4	24.7	<0.001	<0.01	0.61	2.4	0.2	2.4	67.3	0.01	0.04
I102055		0.03	0.51	4.7	810	38.2	14.9	<0.001	<0.01	0.62	2.8	0.2	2.1	57.3	0.01	0.04
I102056		0.02	0.32	4.0	770	56.6	26.0	<0.001	<0.01	0.52	2.7	<0.2	2.1	25.9	0.01	0.03
I102057		0.03	0.36	4.6	800	40.5	25.8	<0.001	<0.01	0.49	3.2	0.2	1.5	33.7	0.01	0.01
I102058		0.05	0.79	4.7	860	39.4	26.1	<0.001	<0.01	0.76	3.3	<0.2	1.9	69.3	0.01	0.01
I102059		0.06	1.08	4.4	800	42.9	25.0	<0.001	<0.01	0.74	3.3	<0.2	1.6	89.4	0.01	<0.01
I102060		0.08	3.25	4.4	660	20.4	47.3	<0.001	<0.01	0.41	3.1	0.2	1.6	17.4	0.01	0.01
I102061		0.04	0.91	4.3	790	82.3	41.5	<0.001	<0.01	0.64	3.4	0.2	1.4	31.4	0.01	0.15
I102062		0.05	1.33	4.2	810	62.6	45.0	<0.001	<0.01	0.60	3.0	0.2	1.3	43.8	0.01	0.11
I102063		0.06	1.45	4.2	830	29.6	40.8	<0.001	<0.01	0.60	2.4	<0.2	1.5	33.6	0.01	0.01
I102064		0.05	1.29	4.0	820	27.6	43.4	<0.001	<0.01	0.68	2.2	0.2	1.5	29.3	0.01	0.01
I102065		0.01	0.17	3.9	770	210	41.1	<0.001	<0.01	0.79	4.0	<0.2	1.2	250	<0.01	0.01
I102066		0.05	0.79	4.3	830	38.0	39.5	<0.001	<0.01	0.75	3.1	<0.2	1.5	105.0	0.01	0.02
I102067		0.04	0.84	4.1	820	40.3	41.4	<0.001	<0.01	0.79	3.0	<0.2	1.4	47.8	0.01	0.02
I102068		0.04	0.51	4.2	820	52.1	45.2	<0.001	<0.01	0.83	3.3	<0.2	1.3	111.5	0.01	0.01
I102069		0.02	0.16	4.1	890	24.2	54.8	<0.001	<0.01	4.77	3.3	0.2	2.0	105.0	<0.01	0.09
I102070		0.01	0.16	3.7	810	24.3	51.7	<0.001	<0.01	5.90	3.0	<0.2	1.7	86.4	<0.01	0.16
I102071		0.01	0.17	3.9	830	34.5	31.2	<0.001	<0.01	4.11	4.1	0.2	1.3	80.6	<0.01	0.04
I102072		0.03	0.40	4.4	780	34.5	35.8	<0.001	<0.01	0.83	3.6	<0.2	1.6	47.8	0.01	0.06
I102073		0.03	0.43	4.2	780	30.2	34.2	<0.001	<0.01	0.73	3.4	<0.2	1.3	67.4	<0.01	0.03
I102074		0.03	0.33	4.2	790	30.2	36.9	<0.001	<0.01	0.77	3.4	0.2	1.4	31.4	<0.01	0.09

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127714

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I102041		33.5	0.082	0.32	7.41	58	0.45	14.15	92	3.5
I102042		31.4	0.013	0.48	25.1	36	0.95	12.20	91	3.3
I102043		23.3	<0.005	0.38	18.15	25	14.25	3.72	33	3.0
I102044		6.8	<0.005	0.24	31.5	55	330	1.73	21	1.4
I102045		29.9	0.069	0.31	10.90	49	3.71	13.85	76	3.7
I102046		29.7	0.083	0.17	7.35	54	1.62	13.95	70	3.3
I102047		32.8	0.125	0.15	7.92	53	1.23	14.55	60	3.8
I102048		34.0	0.051	0.13	5.44	52	0.57	12.95	78	2.7
I102049		31.2	0.018	0.13	4.76	49	1.24	14.65	153	2.2
I102050		4.0	0.154	0.11	1.98	31	62.1	8.41	80	17.0
I102051		30.5	0.009	0.53	13.40	46	4.33	15.00	143	3.0
I102052		29.9	0.128	0.23	10.50	54	1.58	12.20	96	2.5
I102053		30.9	0.124	0.14	9.22	48	1.20	11.45	89	2.2
I102054		31.8	0.144	0.15	11.40	52	1.51	12.25	97	2.6
I102055		28.6	0.108	0.12	7.01	52	0.83	13.30	130	4.2
I102056		31.1	0.058	0.23	8.93	47	1.50	13.25	107	4.2
I102057		32.4	0.082	0.22	8.06	55	0.68	15.75	152	4.6
I102058		29.6	0.157	0.17	8.27	57	0.95	14.35	133	5.2
I102059		30.6	0.170	0.15	7.60	53	1.07	14.55	126	5.0
I102060		33.2	0.155	0.28	8.60	47	0.92	12.50	34	3.6
I102061		30.8	0.130	0.27	11.65	58	0.99	14.55	91	4.8
I102062		29.9	0.152	0.27	11.35	59	0.82	14.10	82	5.4
I102063		28.4	0.177	0.22	11.20	60	1.05	13.85	68	4.9
I102064		28.1	0.169	0.23	10.40	60	1.83	13.75	65	4.7
I102065		27.4	0.053	0.29	7.16	48	0.52	13.35	113	2.8
I102066		28.3	0.158	0.22	9.86	62	0.93	13.95	81	3.4
I102067		28.4	0.148	0.24	9.31	62	1.04	13.40	72	3.3
I102068		28.5	0.123	0.25	9.14	59	1.09	14.30	83	3.0
I102069		25.7	0.041	0.41	7.86	42	1.17	13.60	72	2.9
I102070		25.5	0.038	0.39	8.54	41	1.30	12.45	65	2.9
I102071		27.6	0.054	0.24	5.38	52	0.44	12.90	82	3.5
I102072		28.4	0.098	0.26	8.33	60	0.79	13.35	83	4.0
I102073		29.3	0.103	0.21	8.95	58	0.61	13.70	75	3.7
I102074		28.9	0.072	0.32	9.70	56	0.67	14.30	87	2.9

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 3-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127714

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

CERTIFICATE WH10127718

Project: SQI10-01

P.O. No.: SQI10-01_11

This report is for 88 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 17-SEP-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
PUL-QC	Pulverizing QC Test
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
LOG-22d	Sample login - Rcd w/o BarCode dup
SPL-21d	Split sample - duplicate
PUL-31d	Pulverize Split - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127718

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-AA23 Au Check ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02
I102121		1.84	<0.005			0.10	1.03	3.1	<0.2	<10	90	1.11	2.20	0.52	0.20	48.5
I102122		1.70	<0.005			0.23	1.02	3.7	<0.2	<10	80	1.08	2.09	0.51	0.76	48.0
I102123		2.59	0.020			1.38	1.61	3.5	<0.2	<10	70	1.32	5.47	0.45	0.61	56.6
I102124		1.56	<0.005			3.85	0.91	12.4	<0.2	<10	60	0.98	11.70	0.35	0.54	62.2
I102125		2.47	0.016			1.02	2.47	3.8	<0.2	<10	80	2.31	2.63	0.61	0.32	63.4
I102126		2.86	0.037			2.06	1.29	5.8	<0.2	<10	90	1.74	20.1	0.47	0.37	53.6
I102127		2.60	<0.005			3.21	0.98	19.0	<0.2	10	60	1.05	4.02	0.26	0.19	46.0
I102128		5.38	<0.005			0.16	0.81	3.1	<0.2	<10	50	1.02	0.80	0.35	0.13	42.8
I102129		4.87	<0.005			0.19	1.18	4.4	<0.2	<10	90	1.15	1.28	0.54	0.18	52.2
I102130		0.04	3.05		3.15	0.09	0.89	3.9	<0.2	<10	70	0.74	0.80	0.42	0.20	43.4
I102131		3.12	<0.005			2.04	1.78	517	2.6	20	120	0.26	235	9.20	0.68	27.9
I102132		4.98	<0.005			0.16	1.35	5.2	<0.2	<10	80	1.19	3.94	0.51	0.25	61.4
I102133		4.68	<0.005			0.09	2.20	3.9	<0.2	<10	20	1.08	7.80	0.65	0.10	42.5
I102134		2.12	<0.005			0.09	1.27	2.9	<0.2	<10	40	1.41	3.72	0.43	0.41	53.5
I102135		1.10	<0.005			0.12	1.75	6.0	<0.2	<10	60	1.70	5.95	0.56	0.28	53.8
I102136		4.86	0.006			0.21	1.76	6.9	<0.2	<10	40	0.97	4.89	0.90	0.26	33.9
I102137		2.41	<0.005			0.02	1.83	6.5	<0.2	<10	20	0.82	2.19	1.01	0.11	34.3
I102138		3.06	<0.005			0.05	1.21	4.6	<0.2	<10	40	1.00	1.15	0.96	0.13	37.4
I102139		2.09	<0.005			0.16	1.90	5.0	<0.2	<10	70	1.38	3.06	0.72	0.29	33.7
I102140		1.34	<0.005			0.08	0.68	5.5	<0.2	<10	90	0.63	0.35	0.28	0.25	32.3
I102141		2.70	<0.005			0.12	1.70	3.7	<0.2	<10	80	1.26	1.13	0.81	0.34	47.7
I102142		6.34	<0.005			0.08	1.08	4.9	<0.2	<10	80	0.70	1.12	0.82	0.16	44.1
I102143		3.36	<0.005			0.07	2.02	5.6	<0.2	<10	80	1.15	6.98	1.19	0.19	48.7
I102144		5.49	<0.005			0.07	1.20	7.1	<0.2	<10	130	0.48	0.27	0.90	0.20	49.8
I102145		5.46	<0.005			0.11	1.17	8.2	<0.2	<10	140	0.39	0.23	0.79	0.18	48.7
I102146		5.81	<0.005			0.07	1.08	7.6	<0.2	<10	110	0.55	0.77	0.87	0.19	52.0
I102147		4.12	<0.005			0.09	1.54	7.5	<0.2	<10	140	0.87	1.42	1.05	0.19	49.7
I102148		4.91	<0.005			0.07	1.32	7.1	<0.2	<10	140	0.68	0.27	1.24	0.15	44.5
I102149		0.81	<0.005			0.18	2.87	5.7	<0.2	<10	150	2.05	0.15	3.08	0.18	42.0
I102150		1.03	<0.005			0.23	2.90	6.1	<0.2	<10	170	2.21	0.13	2.75	0.18	43.3
I102151		3.25	<0.005			0.08	2.30	6.7	<0.2	<10	170	1.86	0.28	1.63	0.20	44.3
I102152		2.66	<0.005			0.07	1.31	6.5	<0.2	<10	130	0.91	0.41	0.98	0.17	37.9
I102153		4.26	<0.005			0.07	1.46	7.5	<0.2	<10	150	1.08	0.36	0.95	0.15	50.9
I102154		2.09	<0.005			0.05	1.52	7.1	<0.2	<10	110	1.27	0.31	0.87	0.17	64.2
I102155		3.69	<0.005			0.06	1.61	6.4	<0.2	<10	190	1.04	0.14	1.36	0.13	43.0
I102156		4.00	<0.005			0.06	1.66	6.4	<0.2	<10	90	1.59	0.18	1.40	0.13	40.6
I102157		6.48	<0.005			0.06	1.73	6.7	<0.2	<10	90	1.48	0.39	0.91	0.15	47.7
I102158		1.22	<0.005			0.05	1.89	6.2	<0.2	<10	80	2.89	0.80	0.98	0.26	43.4
I102159		3.18	<0.005			0.07	2.12	4.9	<0.2	<10	130	2.92	1.44	1.92	0.26	43.1
I102160		<0.02	<0.005			0.05	1.78	4.5	<0.2	<10	120	2.79	1.23	1.87	0.25	41.3

Comments: Additional Au-AA23 check results for sample I102172 report 3.79ppm and 2.11ppm.

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127718

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Co	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn
	Units	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm
	LOR	0.1	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5
I102121		5.5	18	4.60	16.5	2.38	5.01	0.08	0.13	<0.01	0.036	0.33	26.7	17.7	0.63	860
I102122		4.9	15	4.98	17.2	2.34	4.72	0.08	0.14	<0.01	0.055	0.31	25.3	17.6	0.61	814
I102123		5.4	17	4.91	18.1	3.38	7.03	0.08	0.11	0.01	0.058	0.27	28.5	23.3	0.78	914
I102124		7.2	11	10.55	191.5	3.66	4.32	0.08	0.09	0.02	0.052	0.31	30.4	8.9	0.28	834
I102125		6.4	16	5.46	17.1	3.09	9.53	0.09	0.09	0.03	0.068	0.33	37.6	21.5	0.96	745
I102126		3.2	7	5.55	136.5	1.88	4.63	0.06	0.08	0.01	0.064	0.17	27.5	9.4	0.45	791
I102127		5.8	9	4.84	156.5	4.28	4.94	0.09	0.12	0.03	0.040	0.25	23.3	7.8	0.23	1140
I102128		3.6	13	3.96	11.7	1.96	3.94	0.07	0.22	<0.01	0.030	0.23	21.6	12.9	0.44	563
I102129		4.8	18	4.76	13.6	2.52	5.41	0.10	0.30	<0.01	0.040	0.40	25.6	18.4	0.58	670
I102130		4.4	15	4.09	9.3	2.11	4.37	0.10	0.23	<0.01	0.037	0.32	21.1	19.6	0.53	455
I102131		25.8	48	1.51	292	5.11	6.04	0.20	0.41	5.00	1.495	0.16	13.4	7.0	0.25	864
I102132		5.9	19	5.11	9.7	3.00	6.38	0.09	0.24	0.03	0.065	0.40	29.2	18.8	0.70	686
I102133		4.3	36	3.73	21.4	3.69	9.73	0.08	0.09	0.01	0.081	0.09	20.2	37.7	1.35	898
I102134		3.3	9	3.47	10.7	2.12	5.38	0.07	0.07	0.01	0.094	0.15	21.9	17.9	0.65	755
I102135		4.5	14	5.44	29.1	2.76	7.96	0.09	0.10	0.01	0.137	0.20	26.1	23.7	0.86	512
I102136		8.7	35	7.53	43.3	3.29	9.17	0.12	0.21	<0.01	0.063	0.10	17.0	43.4	1.23	667
I102137		5.1	34	1.50	2.9	3.31	9.40	0.12	0.22	<0.01	0.034	0.06	16.9	37.5	1.25	581
I102138		3.8	10	3.35	2.2	2.74	6.65	0.11	0.11	<0.01	0.037	0.12	18.3	26.1	0.80	474
I102139		7.0	12	5.89	63.1	2.81	8.44	0.10	0.11	<0.01	0.036	0.22	18.3	29.3	0.96	467
I102140		3.5	14	6.42	4.4	1.96	3.73	0.10	0.22	0.01	0.022	0.33	15.3	36.6	0.41	281
I102141		4.5	12	5.08	28.8	2.46	6.85	0.08	0.13	<0.01	0.047	0.25	23.6	16.7	0.69	429
I102142		4.6	11	5.96	9.4	2.59	5.42	0.10	0.11	<0.01	0.059	0.24	20.9	24.7	0.73	477
I102143		5.7	9	4.85	28.8	2.66	6.87	0.09	0.08	<0.01	0.133	0.19	22.7	25.5	0.90	468
I102144		5.8	9	7.58	6.7	2.52	5.59	0.12	0.13	<0.01	0.057	0.26	23.3	32.4	0.75	459
I102145		5.3	9	6.76	6.8	2.62	5.29	0.12	0.17	<0.01	0.048	0.27	23.6	25.7	0.65	431
I102146		5.2	10	9.35	9.4	2.60	5.08	0.11	0.12	<0.01	0.056	0.23	24.6	25.7	0.62	405
I102147		5.4	9	7.19	7.1	2.90	6.56	0.11	0.11	<0.01	0.073	0.30	24.6	26.6	0.83	453
I102148		5.0	9	7.00	5.4	2.67	5.42	0.09	0.10	<0.01	0.046	0.31	21.3	26.5	0.77	432
I102149		4.7	7	6.61	3.9	2.27	7.14	0.07	0.07	<0.01	0.043	0.27	21.2	23.5	0.88	489
I102150		4.7	7	7.30	3.6	2.24	6.67	0.07	0.07	0.01	0.042	0.27	21.6	22.9	0.84	444
I102151		5.1	9	6.06	3.9	2.43	7.15	0.08	0.11	<0.01	0.064	0.30	20.6	22.2	0.81	405
I102152		4.7	9	6.11	3.9	2.40	5.27	0.10	0.11	<0.01	0.057	0.31	18.3	21.0	0.73	389
I102153		5.0	9	7.31	9.0	2.56	6.14	0.10	0.16	<0.01	0.056	0.33	23.4	19.9	0.62	364
I102154		4.2	8	9.17	4.6	2.54	5.83	0.08	0.08	<0.01	0.061	0.22	35.9	14.5	0.57	277
I102155		4.3	9	5.95	4.4	2.23	5.50	0.08	0.16	<0.01	0.054	0.30	20.9	19.3	0.64	481
I102156		4.1	9	5.94	3.5	2.10	5.71	0.07	0.12	<0.01	0.048	0.24	20.8	21.0	0.71	514
I102157		4.1	10	6.00	3.4	2.24	6.22	0.08	0.16	<0.01	0.062	0.26	24.6	18.9	0.74	496
I102158		4.3	9	5.03	5.0	1.86	6.20	0.07	0.07	0.01	0.045	0.22	24.1	17.7	0.77	424
I102159		3.5	9	4.13	4.9	1.95	6.48	0.07	0.10	0.01	0.042	0.23	22.4	15.0	0.63	607
I102160		3.2	9	3.70	4.0	1.89	5.30	0.06	0.08	0.01	0.039	0.22	21.3	13.7	0.59	576

Comments: Additional Au-AA23 check results for sample I102172 report 3.79ppm and 2.11ppm.

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127718

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Mo	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.05	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01
I102121		1.57	0.03	0.90	4.3	830	28.1	39.9	<0.001	0.06	0.74	2.7	0.2	1.7	41.9	<0.01
I102122		1.43	0.04	0.93	4.0	770	70.8	38.3	0.001	0.03	0.72	2.6	0.2	1.7	42.6	<0.01
I102123		0.81	0.04	0.20	4.8	850	96.6	30.0	<0.001	0.01	0.47	3.6	0.2	1.3	65.6	<0.01
I102124		1.10	0.01	0.18	3.3	960	181.5	40.3	<0.001	0.01	1.44	2.0	0.2	2.7	24.7	<0.01
I102125		0.48	0.02	0.14	5.2	950	34.6	41.1	<0.001	0.01	0.45	4.3	0.2	1.7	71.4	<0.01
I102126		0.55	0.01	0.10	2.7	650	129.5	22.0	<0.001	0.01	0.70	1.7	0.2	1.2	162.0	<0.01
I102127		2.71	0.01	0.24	2.6	810	19.8	31.0	<0.001	0.01	1.31	1.3	0.2	16.3	27.3	<0.01
I102128		2.45	0.03	1.23	3.1	630	26.8	26.2	<0.001	0.01	0.65	2.1	0.2	1.4	37.6	0.01
I102129		1.75	0.09	1.60	4.2	800	37.8	40.3	<0.001	0.01	0.76	3.4	0.3	2.2	53.9	0.02
I102130		2.07	0.05	1.59	3.8	730	30.4	36.5	<0.001	0.01	0.49	2.4	0.2	1.8	32.2	0.01
I102131		72.6	0.04	1.14	55.0	720	38.3	10.3	0.002	1.03	7.61	4.8	1.2	112.0	78.3	0.02
I102132		1.78	0.06	0.92	5.1	920	41.4	44.3	<0.001	0.01	0.74	4.1	0.3	2.8	46.4	0.01
I102133		0.20	0.03	0.09	9.7	1200	24.9	10.1	<0.001	0.01	0.33	3.3	<0.2	1.2	29.3	<0.01
I102134		0.31	0.03	0.13	3.6	550	34.6	16.2	<0.001	0.01	0.49	2.8	0.2	1.3	31.6	<0.01
I102135		0.39	0.03	0.17	4.5	850	35.2	19.7	<0.001	<0.01	0.75	4.0	0.2	2.4	71.6	<0.01
I102136		2.36	0.05	0.26	9.0	1090	50.8	15.6	<0.001	<0.01	0.76	3.2	0.2	2.7	42.4	<0.01
I102137		0.15	0.05	0.20	8.7	1090	9.7	5.7	<0.001	<0.01	0.88	2.7	0.2	1.7	36.7	<0.01
I102138		0.41	0.04	0.61	3.7	930	17.5	13.0	<0.001	<0.01	0.77	2.6	0.2	1.9	33.7	<0.01
I102139		0.59	0.04	0.33	4.3	970	39.7	22.2	<0.001	<0.01	0.67	3.6	0.2	2.5	38.7	<0.01
I102140		1.07	0.05	2.51	4.0	670	22.4	48.9	<0.001	<0.01	0.51	3.2	0.2	1.8	13.1	0.01
I102141		0.94	0.03	0.25	3.7	780	29.2	27.7	<0.001	0.01	0.50	3.3	0.2	1.9	55.0	<0.01
I102142		1.70	0.04	0.72	3.5	970	21.3	26.1	<0.001	<0.01	0.62	2.4	0.2	2.1	30.1	0.01
I102143		0.44	0.04	0.17	3.3	1100	21.0	19.5	<0.001	<0.01	0.58	2.3	<0.2	2.0	48.4	<0.01
I102144		1.33	0.05	0.82	3.6	1130	22.6	29.7	<0.001	0.01	0.60	2.2	0.2	2.5	42.5	<0.01
I102145		1.48	0.09	1.05	3.4	1180	22.9	27.2	<0.001	<0.01	0.75	2.1	0.3	2.9	64.3	0.01
I102146		1.16	0.05	0.77	3.3	1180	21.9	25.6	<0.001	0.01	0.70	2.4	0.2	2.7	48.8	<0.01
I102147		0.85	0.07	0.48	3.5	1160	21.4	34.5	<0.001	<0.01	0.75	2.6	0.2	3.0	66.5	<0.01
I102148		0.36	0.05	0.61	3.3	1160	22.3	35.0	<0.001	<0.01	0.59	2.1	0.2	2.2	58.8	<0.01
I102149		0.20	0.06	0.17	2.9	1040	21.8	26.8	<0.001	0.01	0.43	2.2	0.2	1.9	173.0	<0.01
I102150		0.18	0.08	0.18	3.0	1070	21.4	27.3	<0.001	0.01	0.45	2.0	0.2	1.8	214	<0.01
I102151		0.33	0.05	0.25	3.5	990	25.0	32.7	<0.001	0.01	0.54	2.9	0.2	2.2	187.0	<0.01
I102152		0.41	0.04	0.55	3.3	980	24.8	34.7	<0.001	0.01	0.57	2.5	0.2	2.1	62.8	<0.01
I102153		0.73	0.07	0.64	3.5	980	23.6	37.8	<0.001	<0.01	0.78	2.9	0.2	2.5	87.0	<0.01
I102154		0.36	0.03	0.17	2.8	950	22.8	25.4	<0.001	<0.01	0.92	3.0	0.2	2.5	130.0	<0.01
I102155		0.54	0.05	0.48	3.0	880	25.5	30.5	<0.001	<0.01	0.60	2.7	0.2	2.3	278	<0.01
I102156		0.57	0.03	0.29	2.9	800	24.3	25.2	<0.001	<0.01	0.48	2.2	0.2	1.9	50.2	<0.01
I102157		0.48	0.04	0.36	3.1	760	26.0	29.1	<0.001	<0.01	0.60	2.9	0.2	2.2	58.6	<0.01
I102158		0.35	0.02	0.21	3.1	690	33.3	27.7	<0.001	0.01	0.54	2.6	0.2	1.8	82.2	<0.01
I102159		0.39	0.02	0.30	3.1	630	32.7	26.3	<0.001	<0.01	0.45	2.8	0.2	2.0	228	<0.01
I102160		0.34	0.02	0.24	2.9	620	30.1	23.9	<0.001	<0.01	0.38	2.3	<0.2	1.7	217	0.01

Comments: Additional Au-AA23 check results for sample I102172 report 3.79ppm and 2.11ppm.

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127718

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Te	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I102121		0.44	34.6	0.117	0.29	9.97	54	0.60	12.80	78	2.2
I102122		0.43	31.8	0.115	0.29	9.84	52	0.60	11.95	261	2.1
I102123		0.65	26.9	0.034	0.37	9.04	52	0.85	15.90	135	2.1
I102124		2.93	34.2	0.021	0.48	12.20	33	3.68	12.35	98	1.8
I102125		0.25	30.8	0.034	0.45	7.24	58	0.49	18.95	96	1.9
I102126		8.71	34.5	0.011	0.25	8.10	27	1.80	11.75	73	1.8
I102127		0.43	31.7	0.017	0.41	14.35	28	13.60	10.30	66	2.4
I102128		0.04	35.3	0.097	0.17	15.15	44	0.95	11.70	50	3.4
I102129		0.28	40.4	0.157	0.27	15.05	56	1.08	15.55	66	5.0
I102130		0.02	34.3	0.140	0.23	12.00	48	0.86	13.05	57	3.5
I102131		40.6	3.7	0.152	0.12	1.88	30	56.2	8.13	80	16.8
I102132		0.16	43.0	0.126	0.34	13.90	64	1.28	17.60	87	4.0
I102133		0.23	7.7	0.014	0.12	1.25	56	0.18	7.06	148	3.8
I102134		0.08	36.4	0.018	0.14	5.55	31	0.56	12.20	83	1.7
I102135		0.13	28.9	0.034	0.18	5.23	48	0.44	13.55	79	2.6
I102136		0.22	6.4	0.098	0.18	1.44	58	0.37	6.46	115	6.6
I102137		0.02	6.6	0.088	0.06	1.29	54	0.58	5.87	89	7.1
I102138		0.04	17.9	0.093	0.11	5.47	46	0.56	8.61	64	2.2
I102139		0.24	19.9	0.088	0.22	6.89	51	0.46	10.60	75	2.0
I102140		<0.01	32.1	0.139	0.30	10.45	49	0.63	13.85	35	3.4
I102141		0.05	26.3	0.051	0.24	7.80	46	0.62	12.95	58	2.8
I102142		0.04	18.4	0.097	0.24	6.70	47	0.56	9.84	62	2.0
I102143		0.18	14.0	0.050	0.20	3.36	44	0.54	9.50	71	1.7
I102144		0.01	15.5	0.143	0.25	4.54	48	0.96	9.41	56	2.2
I102145		<0.01	13.8	0.167	0.24	4.11	50	3.03	9.02	52	2.9
I102146		0.01	15.0	0.123	0.22	4.82	50	1.61	8.92	52	2.1
I102147		0.01	14.1	0.123	0.36	3.99	52	0.56	9.76	65	2.1
I102148		<0.01	13.7	0.130	0.33	3.43	51	0.41	8.13	55	1.9
I102149		<0.01	12.9	0.063	0.26	3.35	43	0.75	8.19	48	1.7
I102150		<0.01	13.5	0.054	0.25	3.23	44	0.90	8.22	47	1.6
I102151		<0.01	17.0	0.079	0.32	4.26	46	0.34	9.93	50	2.4
I102152		<0.01	17.5	0.109	0.32	5.70	47	0.31	9.21	53	2.2
I102153		<0.01	20.2	0.120	0.32	6.88	49	0.45	11.40	45	2.9
I102154		<0.01	20.5	0.031	0.24	6.48	40	0.96	13.30	47	1.7
I102155		<0.01	18.8	0.119	0.24	5.80	47	0.38	9.92	44	2.7
I102156		<0.01	19.5	0.075	0.20	5.17	43	0.32	9.45	44	2.4
I102157		<0.01	23.3	0.095	0.24	6.90	44	0.38	11.45	48	3.2
I102158		0.01	26.8	0.038	0.23	7.04	36	0.33	11.00	48	1.5
I102159		0.01	27.6	0.048	0.22	6.17	39	0.27	11.05	48	2.0
I102160		<0.01	27.0	0.040	0.21	6.03	37	0.21	9.93	45	1.5

Comments: Additional Au-AA23 check results for sample I102172 report 3.79ppm and 2.11ppm.

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127718

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-AA23 Au Check ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02
I102161		0.84	<0.005			0.10	2.05	4.8	<0.2	<10	110	2.55	6.68	1.37	0.22	44.1
I102162		1.80	<0.005			0.20	1.52	8.9	<0.2	<10	220	1.54	1.91	0.68	0.19	47.9
I102163		3.64	<0.005			0.11	1.21	8.4	<0.2	<10	110	0.90	1.23	0.60	0.26	47.3
I102164		2.05	<0.005			0.06	1.16	7.0	<0.2	<10	100	1.00	1.36	0.58	0.23	52.1
I102165		4.71	<0.005			0.08	1.07	9.6	<0.2	<10	110	0.62	0.69	0.53	0.27	52.0
I102166		3.33	<0.005			0.07	1.04	7.8	<0.2	<10	90	0.67	0.35	0.46	0.22	52.8
I102167		4.54	<0.005			0.10	1.00	6.8	<0.2	<10	100	0.68	0.46	0.45	0.18	53.6
I102168		3.45	<0.005			0.07	1.19	6.9	<0.2	<10	90	1.07	0.53	0.48	0.28	53.1
I102169		3.63	0.005			0.12	0.99	6.0	<0.2	<10	90	0.90	6.11	0.43	0.33	65.8
I102170		0.04	0.285			9.32	0.52	8.1	0.3	<10	180	0.21	1.64	2.48	0.14	12.05
I102171		4.32	0.005			0.11	0.90	5.7	<0.2	<10	70	0.81	7.40	0.75	0.33	42.6
I102172		3.90	1.225	0.150	0.25	0.20	1.10	5.9	<0.2	<10	100	0.84	8.10	0.50	0.35	51.5
I102173		3.20	<0.005			0.09	0.85	4.0	<0.2	<10	80	0.78	0.42	0.45	0.14	51.7
I102174		4.45	<0.005			0.12	1.00	4.7	<0.2	<10	100	0.66	0.38	0.49	0.17	50.2
I102175		3.81	<0.005			0.09	1.69	4.0	<0.2	<10	200	1.56	0.96	1.10	0.20	53.3
I102176		3.89	<0.005			0.17	1.59	4.6	<0.2	<10	200	1.36	0.84	1.02	0.29	55.2
I102177		4.15	<0.005			0.12	1.29	4.2	<0.2	<10	130	1.23	0.36	1.17	0.21	52.5
I102178		4.42	<0.005			0.17	1.38	4.5	<0.2	<10	120	1.28	0.71	1.19	0.22	49.3
I102179		4.39	0.007			0.15	1.16	4.3	<0.2	<10	90	0.93	0.52	0.62	0.20	52.1
I102180		1.09	<0.005			0.08	0.80	4.9	<0.2	<10	110	0.67	0.32	0.34	0.13	36.9
I102181		1.00	<0.005			0.16	1.45	4.2	<0.2	<10	100	1.31	0.46	0.89	0.27	50.5
I102182		4.65	<0.005			0.27	2.11	3.9	<0.2	<10	90	2.07	3.88	1.04	0.77	53.8
I102183		1.72	0.009			0.25	0.89	3.7	<0.2	10	30	1.03	5.01	0.57	0.74	83.3
I102184		2.25	0.021			0.82	1.18	7.9	<0.2	10	90	1.06	13.95	0.43	0.68	53.3
I102185		1.44	0.010			0.34	1.66	85.6	<0.2	<10	90	3.20	24.5	0.67	1.43	59.6
I102186		1.70	<0.005			0.39	2.10	26.7	<0.2	<10	120	2.16	4.22	0.62	0.54	52.7
I102187		2.15	0.022			0.91	1.33	19.1	<0.2	<10	80	1.81	131.0	0.53	0.56	52.6
I102188		2.10	0.005			0.47	1.54	5.3	<0.2	<10	60	1.64	2.34	0.53	0.45	61.9
I102189		1.26	0.005			0.29	1.20	5.6	<0.2	<10	50	1.75	2.41	0.43	1.01	65.6
I102190		1.19	0.007			0.35	1.32	5.7	<0.2	10	50	1.81	3.46	0.40	1.17	69.7
I102191		2.98	<0.005			0.21	1.19	3.9	<0.2	<10	100	0.97	1.72	0.40	1.97	56.9
I102192		4.67	<0.005			0.21	2.14	4.5	<0.2	<10	60	2.27	2.22	0.77	1.04	54.6
I102193		4.61	<0.005			0.24	1.87	4.7	<0.2	<10	70	2.09	2.75	0.71	0.47	53.7
I102194		5.25	<0.005			0.25	2.02	7.2	<0.2	<10	80	1.94	2.28	0.67	0.65	53.2
I102195		4.87	<0.005			0.14	1.28	4.4	<0.2	<10	90	0.98	0.89	0.52	0.41	47.7
I102196		1.72	0.018			0.22	1.14	12.0	<0.2	<10	60	1.08	1.01	0.35	0.48	58.9
I102197		1.79	0.006			0.24	1.98	8.9	<0.2	<10	180	2.29	2.26	0.65	0.50	77.2
I102198		2.55	0.005			0.55	1.80	21.4	<0.2	<10	250	2.81	1.39	0.45	0.70	77.6
I102199		1.88	0.006			0.11	0.89	11.3	<0.2	20	30	1.11	1.03	0.38	0.14	56.8
I102200		<0.02	0.006			0.11	0.74	11.9	<0.2	10	20	1.22	1.03	0.39	0.15	55.6

Comments: Additional Au-AA23 check results for sample I102172 report 3.79ppm and 2.11ppm.

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127718

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Co	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn
	Units	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm
	LOR	0.1	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5
I102161		3.9	8	5.36	11.1	3.34	6.44	0.07	0.07	0.01	0.037	0.23	22.4	12.9	0.64	567
I102162		6.2	8	9.78	36.3	2.03	4.96	0.07	0.09	0.01	0.043	0.26	25.1	14.7	0.52	372
I102163		5.3	12	5.89	4.4	2.27	5.55	0.11	0.16	<0.01	0.048	0.33	23.9	20.2	0.63	368
I102164		3.8	13	4.50	3.1	2.11	4.97	0.09	0.13	<0.01	0.043	0.30	26.2	16.9	0.55	310
I102165		6.0	15	4.54	4.8	2.28	5.36	0.13	0.15	<0.01	0.053	0.34	26.4	21.2	0.60	350
I102166		3.6	14	5.09	2.2	2.32	4.84	0.11	0.14	<0.01	0.043	0.34	26.4	21.9	0.58	421
I102167		3.7	15	5.53	3.2	2.29	4.89	0.11	0.15	<0.01	0.042	0.37	26.7	20.9	0.55	446
I102168		4.2	14	5.19	2.8	2.37	5.41	0.10	0.15	<0.01	0.039	0.34	27.3	21.3	0.65	470
I102169		4.4	13	4.10	45.1	2.36	4.65	0.10	0.32	<0.01	0.053	0.35	33.7	17.2	0.49	551
I102170		3.9	7	0.90	6270	1.51	1.69	<0.05	0.04	0.79	0.022	0.26	5.8	1.9	0.11	425
I102171		7.3	14	4.98	29.4	2.72	4.97	0.10	0.20	<0.01	0.037	0.31	21.2	19.2	0.55	540
I102172		5.1	14	5.39	16.5	2.55	5.54	0.10	0.14	<0.01	0.067	0.38	25.5	19.0	0.57	525
I102173		3.8	15	4.28	4.2	2.07	4.43	0.09	0.18	<0.01	0.018	0.33	25.1	15.7	0.45	448
I102174		3.8	16	4.51	3.1	2.10	4.79	0.10	0.17	<0.01	0.016	0.36	24.6	18.2	0.48	533
I102175		4.2	13	6.79	3.0	2.03	5.80	0.08	0.13	0.01	0.023	0.33	25.9	18.4	0.57	515
I102176		4.6	13	6.25	8.5	2.13	6.07	0.08	0.18	<0.01	0.025	0.37	27.6	19.6	0.56	521
I102177		4.3	13	5.36	3.3	1.98	5.30	0.08	0.14	<0.01	0.024	0.30	26.2	19.4	0.52	576
I102178		5.0	14	5.07	4.7	2.19	5.92	0.10	0.15	<0.01	0.043	0.35	24.0	22.5	0.57	522
I102179		3.9	14	6.38	3.1	2.13	5.07	0.10	0.16	<0.01	0.022	0.34	25.6	20.5	0.52	396
I102180		3.7	15	6.04	3.3	2.15	4.35	0.10	0.21	<0.01	0.019	0.40	16.3	34.2	0.42	275
I102181		3.8	14	6.78	3.1	2.18	5.73	0.08	0.14	<0.01	0.025	0.36	24.5	20.6	0.60	454
I102182		4.7	14	5.82	33.0	2.57	7.36	0.07	0.12	<0.01	0.122	0.33	26.5	18.7	0.73	626
I102183		1.9	4	3.42	17.1	1.64	2.12	0.09	0.06	<0.01	0.038	0.14	44.5	3.4	0.17	326
I102184		5.3	12	7.89	91.1	2.76	5.50	0.10	0.15	<0.01	0.408	0.46	25.3	18.3	0.58	454
I102185		8.0	6	8.64	153.0	3.87	5.18	0.09	0.10	<0.01	0.137	0.25	33.5	9.5	0.45	443
I102186		4.9	8	6.87	30.2	2.31	6.07	0.06	0.10	<0.01	0.064	0.35	23.4	13.8	0.57	362
I102187		4.2	5	7.05	56.7	2.74	3.98	0.08	0.08	<0.01	0.036	0.24	24.5	7.4	0.39	463
I102188		3.4	7	10.00	24.7	2.57	4.53	0.09	0.12	<0.01	0.063	0.32	35.0	8.7	0.37	408
I102189		4.8	8	5.92	20.4	2.45	4.21	0.08	0.10	<0.01	0.062	0.22	31.6	9.3	0.45	676
I102190		4.5	10	5.23	26.5	2.60	4.95	0.09	0.12	<0.01	0.083	0.28	32.1	11.1	0.47	785
I102191		4.2	16	8.48	15.0	2.86	6.29	0.11	0.15	<0.01	0.467	0.47	28.0	20.9	0.75	602
I102192		4.5	12	6.31	15.2	2.70	6.98	0.08	0.10	<0.01	0.108	0.27	28.7	15.5	0.76	962
I102193		5.9	11	5.39	37.1	2.65	6.48	0.07	0.08	<0.01	0.063	0.27	26.2	16.5	0.70	711
I102194		4.6	13	4.84	29.0	2.49	6.70	0.08	0.14	<0.01	0.057	0.31	27.8	15.6	0.67	837
I102195		4.0	14	5.60	8.9	2.13	5.60	0.09	0.13	<0.01	0.033	0.32	23.1	15.2	0.57	931
I102196		9.7	7	9.85	6.4	3.27	4.60	0.07	0.07	0.01	0.076	0.33	31.4	7.6	0.17	2920
I102197		5.4	11	10.65	11.5	2.39	7.00	0.10	0.11	<0.01	0.056	0.23	47.3	14.5	0.49	4380
I102198		9.1	9	18.25	20.5	4.60	6.93	0.10	0.15	<0.01	0.045	0.24	32.5	23.6	0.25	9700
I102199		4.9	3	13.60	13.0	2.33	2.83	0.06	0.07	<0.01	0.026	0.18	26.2	2.4	0.14	577
I102200		5.2	2	12.10	16.4	2.33	2.46	0.06	0.06	<0.01	0.026	0.14	25.3	2.1	0.13	584

Comments: Additional Au-AA23 check results for sample I102172 report 3.79ppm and 2.11ppm.

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127718

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Mo	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.05	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01
I102161		0.32	0.02	0.19	2.9	690	26.5	27.2	<0.001	<0.01	0.45	2.2	0.2	2.3	244	<0.01
I102162		1.68	0.02	0.41	3.5	740	32.9	33.6	<0.001	0.11	0.77	2.5	0.2	3.2	46.0	<0.01
I102163		1.99	0.07	0.93	3.4	710	32.8	39.7	<0.001	0.06	0.76	2.4	0.2	2.6	51.0	0.01
I102164		0.90	0.04	0.90	3.2	710	28.2	35.5	<0.001	0.01	0.57	2.3	0.2	2.2	75.2	0.01
I102165		0.49	0.08	1.20	3.7	730	35.0	38.5	<0.001	<0.01	0.74	2.7	0.2	2.8	58.8	0.01
I102166		0.44	0.06	1.20	3.6	740	31.2	41.3	<0.001	<0.01	0.63	2.4	0.2	2.5	43.2	0.01
I102167		0.66	0.07	1.43	3.5	720	35.6	43.3	<0.001	<0.01	0.72	2.5	0.2	2.4	32.1	0.01
I102168		1.54	0.05	0.88	3.7	740	33.5	42.9	<0.001	<0.01	0.56	2.6	0.2	2.3	36.5	0.01
I102169		2.48	0.06	0.82	4.0	710	38.0	36.8	<0.001	<0.01	0.80	2.8	0.2	1.6	29.2	0.01
I102170		150.5	0.03	<0.05	4.3	400	18.2	6.6	0.035	1.50	14.00	0.7	0.5	0.3	361	<0.01
I102171		1.14	0.05	1.01	4.3	760	49.8	38.8	<0.001	0.01	0.74	2.5	0.2	1.6	25.5	0.01
I102172		1.28	0.07	0.98	3.9	760	58.8	43.7	<0.001	0.01	0.71	2.9	0.2	2.8	44.9	0.01
I102173		1.41	0.05	1.41	3.5	780	40.3	38.3	<0.001	0.01	0.63	2.2	0.3	1.6	26.6	<0.01
I102174		1.20	0.08	1.16	3.5	840	44.6	37.0	<0.001	0.01	0.53	1.9	0.3	1.6	48.5	<0.01
I102175		0.93	0.06	0.57	3.5	780	49.1	38.2	<0.001	0.01	0.47	2.6	0.2	1.6	403	<0.01
I102176		1.05	0.08	0.76	3.7	760	65.8	42.3	<0.001	0.01	0.63	2.8	0.3	1.7	377	0.01
I102177		0.73	0.05	0.74	3.3	750	51.8	37.3	<0.001	0.01	0.59	2.3	0.3	1.7	260	0.01
I102178		0.99	0.07	0.78	3.7	780	62.8	42.1	<0.001	0.01	0.64	2.7	0.3	1.9	177.5	0.01
I102179		1.35	0.05	1.03	3.6	800	54.5	42.7	<0.001	<0.01	0.49	2.0	0.3	1.8	73.0	<0.01
I102180		2.18	0.10	2.90	4.5	770	21.2	50.7	<0.001	0.01	0.39	2.7	0.3	2.4	19.5	0.01
I102181		1.18	0.05	0.74	3.7	810	59.6	41.6	<0.001	0.01	0.55	2.3	0.3	1.7	139.5	0.01
I102182		0.67	0.04	0.35	4.1	790	70.3	39.4	<0.001	0.01	0.50	4.1	0.2	1.8	124.5	<0.01
I102183		0.59	0.03	0.07	1.8	830	40.9	18.0	<0.001	0.01	0.51	0.7	0.2	0.5	41.0	<0.01
I102184		1.64	0.07	0.84	3.8	750	98.5	62.2	<0.001	0.01	1.07	4.0	0.4	1.8	42.2	<0.01
I102185		1.67	0.02	0.17	3.2	780	52.8	34.8	<0.001	0.01	2.09	1.9	0.6	1.3	185.5	<0.01
I102186		1.93	0.02	0.14	2.9	810	38.0	43.4	<0.001	0.01	0.57	2.5	0.4	1.1	218	<0.01
I102187		1.73	0.02	0.10	2.9	780	175.5	30.4	<0.001	0.01	0.77	1.4	0.5	1.4	111.0	<0.01
I102188		0.65	0.02	0.13	2.6	840	74.6	41.2	<0.001	0.01	1.11	1.9	0.3	3.1	59.3	<0.01
I102189		1.10	0.02	0.11	3.1	780	69.5	29.1	<0.001	0.01	0.56	1.9	0.4	2.0	43.4	<0.01
I102190		1.45	0.04	0.11	3.2	810	93.3	36.2	<0.001	0.01	0.63	2.1	0.3	1.8	37.1	<0.01
I102191		1.77	0.05	0.86	4.3	830	50.7	59.3	<0.001	0.01	0.71	4.8	0.3	2.3	68.6	<0.01
I102192		0.47	0.03	0.19	3.4	870	69.9	34.6	<0.001	0.01	0.60	3.4	0.3	1.7	71.0	<0.01
I102193		0.63	0.02	0.19	3.5	1220	48.6	35.7	<0.001	0.01	0.51	3.1	0.2	1.6	83.9	<0.01
I102194		0.66	0.04	0.27	3.7	820	49.3	35.4	<0.001	0.01	0.64	3.2	0.3	1.5	102.5	0.01
I102195		1.20	0.05	0.77	3.5	780	49.3	40.3	<0.001	0.01	0.61	2.2	0.3	1.8	89.8	0.01
I102196		3.83	0.01	0.11	2.7	800	21.7	46.2	<0.001	<0.01	2.20	2.2	0.3	7.2	89.3	<0.01
I102197		1.24	0.01	0.13	3.5	880	49.7	30.4	<0.001	0.01	2.36	5.4	0.4	2.0	223	0.01
I102198		3.31	0.01	0.12	4.5	910	86.9	35.9	<0.001	0.01	1.55	4.2	0.3	1.8	246	<0.01
I102199		1.53	0.01	<0.05	1.8	830	16.4	26.0	<0.001	<0.01	1.35	0.6	0.2	1.4	26.3	<0.01
I102200		1.54	0.01	<0.05	4.2	850	18.0	21.3	<0.001	0.01	1.22	0.5	0.2	1.1	24.5	<0.01

Comments: Additional Au-AA23 check results for sample I102172 report 3.79ppm and 2.11ppm.

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127718

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Te	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I102161		0.01	24.2	0.026	0.31	5.35	34	0.23	11.00	46	1.4
I102162		0.03	27.2	0.063	0.31	8.50	30	0.34	10.35	47	1.9
I102163		<0.01	26.2	0.134	0.33	9.94	46	0.68	11.60	54	2.7
I102164		<0.01	27.8	0.119	0.26	9.77	47	0.45	11.30	46	2.3
I102165		0.01	25.8	0.153	0.29	10.95	50	0.59	11.95	55	2.6
I102166		<0.01	27.4	0.147	0.32	11.00	52	0.59	11.95	59	2.3
I102167		<0.01	27.4	0.149	0.34	10.65	51	0.61	12.40	64	2.4
I102168		<0.01	30.5	0.123	0.34	10.45	51	0.47	12.70	65	2.5
I102169		0.01	32.1	0.096	0.33	10.85	38	0.51	12.85	78	8.0
I102170		1.94	1.1	<0.005	0.04	0.88	12	4.49	4.35	40	1.5
I102171		0.02	29.8	0.114	0.32	11.85	45	1.03	12.50	82	4.0
I102172		0.06	28.4	0.134	0.42	10.85	49	1.39	12.75	119	2.3
I102173		0.01	32.5	0.133	0.28	14.00	52	0.60	13.30	57	3.1
I102174		0.01	30.2	0.151	0.27	13.30	54	0.51	13.15	64	2.9
I102175		0.02	28.3	0.111	0.26	8.30	52	0.34	12.45	62	2.3
I102176		0.01	32.7	0.131	0.31	11.55	51	0.48	14.25	62	3.0
I102177		<0.01	29.0	0.120	0.27	10.55	52	0.41	12.85	65	2.4
I102178		0.01	26.8	0.140	0.31	10.40	54	0.52	12.85	69	2.5
I102179		<0.01	28.7	0.144	0.31	11.55	53	0.53	12.70	67	2.8
I102180		<0.01	28.1	0.170	0.33	10.15	54	0.79	15.35	36	3.4
I102181		0.01	28.4	0.134	0.30	12.55	57	0.41	12.90	68	2.5
I102182		0.05	26.8	0.096	0.36	7.70	53	0.34	13.15	104	2.4
I102183		0.08	27.7	0.006	0.17	5.07	7	0.65	10.60	43	1.5
I102184		0.12	29.9	0.107	0.58	10.45	44	0.90	13.05	381	2.8
I102185		0.22	28.2	0.028	0.32	11.00	24	0.87	14.10	233	2.2
I102186		0.08	29.7	0.044	0.45	11.15	28	0.17	9.81	59	2.4
I102187		0.38	27.6	0.022	0.28	9.16	16	0.49	10.35	93	1.7
I102188		0.08	27.3	0.027	0.40	6.06	23	2.51	12.00	62	3.4
I102189		0.13	31.2	0.025	0.28	7.63	26	1.85	13.70	79	2.4
I102190		0.13	31.8	0.025	0.37	7.63	30	1.49	14.50	101	2.7
I102191		0.03	31.0	0.131	0.59	9.75	58	0.60	15.75	644	2.6
I102192		0.06	27.6	0.044	0.32	5.98	43	1.19	14.85	221	2.5
I102193		0.04	28.5	0.037	0.31	10.05	40	0.60	13.00	97	2.0
I102194		0.04	30.3	0.073	0.32	7.94	46	0.40	14.15	122	2.9
I102195		0.01	29.6	0.129	0.30	9.77	51	0.58	12.45	89	2.3
I102196		0.04	23.0	0.012	0.57	14.95	28	2.94	11.45	86	2.0
I102197		0.04	29.8	0.039	0.32	9.25	44	1.05	17.60	91	2.7
I102198		0.04	30.4	0.030	0.65	16.20	40	0.52	14.70	101	3.4
I102199		0.04	26.3	<0.005	0.27	12.55	7	0.64	10.05	24	1.9
I102200		0.04	25.9	<0.005	0.21	12.30	6	0.70	10.15	31	1.6

Comments: Additional Au-AA23 check results for sample I102172 report 3.79ppm and 2.11ppm.

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127718

Sample Description	Method	WEI-21	Au-AA23	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Au Check	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce
	Units	kg	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm
	LOR	0.02	0.005	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02
I102201		2.25	<0.005			0.10	0.93	5.5	<0.2	10	30	1.34	0.53	0.50	0.22	77.1
I102202		2.20	0.006			0.41	1.17	8.3	<0.2	10	80	1.04	2.98	0.34	0.39	59.7
I102203		1.60	0.010			0.28	1.30	10.1	<0.2	<10	60	1.10	3.34	0.43	0.34	41.8
I102204		4.07	0.005			0.36	1.23	8.8	<0.2	<10	90	0.78	2.84	0.63	0.56	48.8
I102205		2.07	<0.005			0.47	0.90	11.4	<0.2	<10	80	0.72	2.74	0.55	0.41	48.1
I102206		4.72	<0.005			0.21	0.85	4.5	<0.2	<10	100	0.63	1.04	0.44	0.42	50.2
I102207		2.35	0.005			0.32	0.60	13.4	<0.2	<10	80	0.73	3.43	0.33	2.55	38.7
I102208		2.52	<0.005			0.18	0.85	7.7	<0.2	<10	110	0.50	1.22	0.41	0.43	46.5

Comments: Additional Au-AA23 check results for sample I102172 report 3.79ppm and 2.11ppm.

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127718

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Co	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn
	Units	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm
	LOR	0.1	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5
I102201		2.1	4	2.90	10.8	1.62	2.79	0.07	0.10	<0.01	0.017	0.14	36.3	6.0	0.28	690
I102202		8.3	11	8.04	109.5	2.85	5.31	0.09	0.13	<0.01	0.068	0.43	28.6	17.1	0.55	681
I102203		7.4	14	7.28	199.0	3.18	6.58	0.08	0.11	<0.01	0.065	0.34	20.8	22.0	0.74	592
I102204		10.1	15	9.98	117.0	2.82	5.98	0.11	0.14	<0.01	0.058	0.52	24.6	26.6	0.77	517
I102205		12.8	12	8.96	79.8	2.83	4.51	0.11	0.17	0.01	0.049	0.36	23.7	16.6	0.50	485
I102206		5.3	15	6.47	18.5	2.14	4.61	0.11	0.21	<0.01	0.027	0.42	25.1	15.0	0.46	369
I102207		8.3	12	5.50	162.5	2.05	4.16	0.11	0.17	<0.01	0.054	0.25	20.0	14.7	0.39	288
I102208		4.8	14	6.35	20.1	2.00	4.99	0.13	0.19	<0.01	0.030	0.37	23.7	20.4	0.49	347

Comments: Additional Au-AA23 check results for sample I102172 report 3.79ppm and 2.11ppm.

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127718

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Mo	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.05	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01
I102201		2.63	0.02	0.07	1.8	850	25.2	16.9	<0.001	0.01	0.45	0.8	0.2	0.8	31.1	<0.01
I102202		2.37	0.06	0.54	4.0	790	45.2	54.9	<0.001	0.04	0.94	3.2	0.4	1.7	43.6	<0.01
I102203		1.12	0.04	0.57	4.4	820	49.7	42.1	<0.001	0.01	0.61	4.0	0.3	2.1	35.3	<0.01
I102204		3.68	0.08	1.48	4.2	780	63.1	69.2	<0.001	0.05	0.93	4.9	0.8	3.3	32.8	0.01
I102205		8.78	0.05	1.23	3.7	770	55.4	48.2	<0.001	0.03	0.87	2.6	0.4	11.9	25.5	0.01
I102206		3.45	0.12	1.91	3.4	770	55.5	49.5	<0.001	0.01	0.54	2.3	0.3	2.2	25.2	0.01
I102207		1.78	0.05	1.82	3.1	750	95.3	37.7	<0.001	0.01	0.72	1.7	0.3	1.9	17.8	0.01
I102208		1.63	0.09	1.60	3.3	750	47.6	48.2	<0.001	<0.01	0.65	2.2	0.4	2.3	36.8	0.01

Comments: Additional Au-AA23 check results for sample I102172 report 3.79ppm and 2.11ppm.

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127718

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Te	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I102201		0.01	30.0	0.009	0.18	5.59	10	0.27	12.45	26	2.5
I102202		0.05	30.0	0.079	0.57	10.80	39	1.61	13.35	95	2.7
I102203		0.06	28.5	0.099	0.48	8.99	49	0.67	11.70	88	2.1
I102204		0.07	28.4	0.171	0.67	11.90	53	0.83	13.60	99	2.4
I102205		0.07	27.5	0.131	0.43	10.70	44	5.43	12.55	78	3.0
I102206		0.01	31.6	0.154	0.38	16.65	53	0.98	13.95	70	3.4
I102207		0.06	27.0	0.113	0.24	13.05	39	0.89	11.20	186	3.1
I102208		0.02	30.7	0.146	0.29	12.40	50	1.00	13.60	63	3.1

Comments: Additional Au-AA23 check results for sample I102172 report 3.79ppm and 2.11ppm.

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127718

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-OCT-2010
Account: EIASQI

CERTIFICATE WH10127719

Project: SQI10-01

P.O. No.: SQI10-01_10

This report is for 46 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 17-SEP-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
PUL-QC	Pulverizing QC Test
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
LOG-22d	Sample login - Rcd w/o BarCode dup
SPL-21d	Split sample - duplicate
PUL-31d	Pulverize Split - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature: 

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127719

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1	ME-MS41 Cr ppm 1
I102075		1.59	0.005	0.61	1.28	5.0	<0.2	<10	40	1.01	13.35	0.79	0.40	52.7	6.4	9
I102076		0.58	0.005	0.19	1.16	6.3	<0.2	<10	40	0.99	1.90	0.40	0.21	58.2	4.1	6
I102077		1.74	<0.005	0.19	1.11	4.7	<0.2	<10	40	1.05	2.27	0.41	0.19	57.8	4.6	7
I102078		2.23	0.006	0.40	1.28	8.2	<0.2	<10	90	0.92	11.20	0.80	0.29	50.1	8.9	16
I102079		2.74	0.008	0.49	1.25	43.6	<0.2	<10	60	1.10	5.79	1.10	0.39	59.4	9.2	15
I102080C		<0.02	0.007	0.56	1.24	43.7	<0.2	<10	60	1.05	5.56	1.10	0.37	59.6	9.1	15
I102081		2.65	0.010	1.30	1.13	46.8	<0.2	10	50	1.15	17.80	1.31	0.24	60.3	9.1	12
I102082		3.53	<0.005	0.49	1.39	15.4	<0.2	<10	40	1.14	3.79	1.01	0.41	63.6	7.2	18
I102083		1.79	<0.005	0.64	1.29	5.0	<0.2	<10	30	1.42	10.65	0.72	0.38	68.6	8.8	9
I102084		1.84	<0.005	0.28	2.22	7.5	<0.2	<10	100	2.32	2.42	1.53	0.39	67.5	4.5	14
I102085		1.85	<0.005	0.39	1.32	6.5	<0.2	<10	70	1.28	2.67	0.76	0.34	58.6	5.4	14
I102086		2.03	<0.005	0.36	1.23	4.5	<0.2	<10	70	1.26	2.78	0.73	0.33	57.5	5.6	15
I102087		2.27	<0.005	0.30	0.93	4.8	<0.2	<10	90	0.60	2.64	0.65	0.40	55.8	5.3	18
I102088		1.48	<0.005	0.28	1.47	9.3	<0.2	<10	60	1.31	2.66	1.48	0.24	62.1	12.7	13
I102089		1.64	0.006	0.42	1.39	3.9	<0.2	<10	60	1.10	15.45	1.29	0.30	61.0	6.5	15
I102090		0.05	0.304	9.98	0.48	7.2	0.3	<10	190	0.18	1.80	2.34	0.14	12.90	4.1	6
I102091		2.32	<0.005	0.23	0.98	4.5	<0.2	<10	90	0.69	2.31	0.69	0.35	51.3	6.0	17
I102092		1.82	0.007	0.30	1.04	7.1	<0.2	<10	80	0.91	1.76	0.72	0.50	45.0	7.2	13
I102093		0.68	0.009	1.69	1.04	33.8	<0.2	<10	60	1.54	13.20	0.54	0.19	66.4	5.6	11
I102094		2.10	<0.005	0.19	1.43	3.9	<0.2	<10	70	1.63	1.77	1.38	0.68	50.6	6.8	14
I102095		1.25	<0.005	0.16	0.98	4.8	<0.2	<10	90	1.06	1.22	0.40	2.49	54.3	7.8	15
I102096		1.34	0.008	0.56	1.15	9.0	<0.2	<10	60	0.79	1.48	0.36	0.31	57.2	5.0	12
I102097		1.61	0.021	1.93	0.83	31.9	<0.2	<10	150	2.74	8.72	0.07	9.53	39.5	47.2	7
I102098		1.34	0.019	1.70	1.05	83.4	<0.2	<10	490	5.39	22.3	0.09	21.7	81.3	95.0	5
I102099		2.15	0.028	0.43	1.04	30.3	<0.2	<10	70	1.59	5.38	0.28	0.53	43.9	4.9	12
I102100		1.03	0.006	0.50	1.15	31.9	<0.2	<10	80	1.72	5.77	0.33	0.66	47.0	5.4	13
I102101		2.83	0.006	0.68	1.38	22.8	<0.2	<10	70	1.81	18.90	0.28	1.04	56.4	11.9	25
I102102		2.79	0.006	0.51	1.33	5.5	<0.2	<10	30	1.50	2.96	0.29	0.49	56.0	9.7	22
I102103		0.93	0.134	2.13	0.96	24.6	<0.2	<10	80	1.94	19.90	0.26	0.25	46.4	21.4	16
I102104		4.14	<0.005	0.77	1.20	3.2	<0.2	<10	30	1.05	13.15	0.67	0.36	59.5	5.5	25
I102105		3.39	0.205	0.71	1.21	4.3	<0.2	<10	40	1.47	28.1	0.31	0.26	58.6	6.4	24
I102106		3.55	0.058	1.36	1.37	7.6	<0.2	<10	50	1.11	9.34	0.41	0.49	51.6	9.0	22
I102107		2.80	0.005	0.25	1.58	3.3	<0.2	<10	20	1.55	5.41	0.36	0.50	63.4	5.8	30
I102108		1.62	0.010	0.28	1.73	34.3	<0.2	<10	30	2.68	5.67	0.58	0.57	33.5	13.0	18
I102109		0.62	0.009	0.30	1.69	49.9	<0.2	<10	60	2.32	7.85	0.46	0.69	35.5	12.6	13
I102110		0.85	0.008	0.35	1.68	57.7	<0.2	<10	50	2.24	8.15	0.46	0.77	33.4	15.0	15
I102111		3.28	<0.005	0.36	1.30	17.2	<0.2	<10	90	0.87	6.30	0.55	0.35	48.0	6.8	19
I102112		4.37	<0.005	0.19	0.89	6.8	<0.2	<10	100	0.56	4.80	0.48	0.40	47.4	5.0	20
I102113		4.01	<0.005	0.18	0.88	4.9	<0.2	<10	90	0.65	4.31	0.44	0.34	47.1	4.5	18
I102114		1.82	0.013	2.17	2.16	30.9	<0.2	<10	100	2.11	50.9	0.62	3.03	44.8	13.7	15

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127719

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo	Na
	Units	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%
	LOR	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05	0.01
I102075		4.20	3.8	3.17	6.13	0.05	0.45	0.04	0.075	0.22	28.1	14.3	0.38	716	6.11	0.01
I102076		6.34	1.2	4.77	6.23	0.06	0.40	0.03	0.079	0.23	31.1	11.5	0.15	1020	6.84	<0.01
I102077		6.34	1.6	2.91	5.20	0.05	0.28	0.02	0.084	0.24	30.2	10.5	0.13	729	6.16	<0.01
I102078		7.12	31.7	2.98	6.96	0.12	0.21	<0.01	0.073	0.36	25.3	31.7	0.86	602	5.43	0.04
I102079		5.47	13.9	3.39	7.26	0.08	0.20	<0.01	0.060	0.29	29.9	27.4	0.76	707	65.4	0.03
I102080C		5.39	14.6	3.35	7.19	0.09	0.20	0.01	0.059	0.28	30.0	26.3	0.75	689	62.6	0.02
I102081		6.10	23.4	3.44	5.46	0.07	0.16	<0.01	0.057	0.27	30.7	17.0	0.50	882	20.5	0.02
I102082		5.45	56.0	2.99	8.01	0.10	0.16	<0.01	0.090	0.19	31.2	30.5	0.83	859	4.96	0.03
I102083		7.43	33.4	2.74	5.23	0.05	0.11	0.37	0.071	0.20	35.5	12.7	0.27	560	5.23	<0.01
I102084		11.20	12.2	2.90	6.75	0.06	0.19	0.02	0.095	0.30	33.5	20.7	0.51	872	2.18	0.03
I102085		7.18	25.8	2.76	6.09	0.05	0.22	<0.01	0.093	0.32	29.0	20.6	0.54	602	2.77	0.02
I102086		7.22	19.4	2.65	5.47	0.06	0.20	0.01	0.084	0.33	28.2	19.7	0.52	591	2.83	0.02
I102087		7.21	24.3	2.60	5.40	0.09	0.28	<0.01	0.050	0.39	27.3	23.0	0.63	459	3.08	0.06
I102088		25.6	10.5	3.01	6.83	0.06	0.30	<0.01	0.047	0.32	31.5	27.2	0.68	481	4.25	0.03
I102089		23.4	42.1	2.59	6.87	0.06	0.36	<0.01	0.093	0.31	30.1	26.1	0.73	502	3.63	0.02
I102090		0.94	5930	1.42	1.65	<0.05	0.04	0.81	0.021	0.26	6.1	2.0	0.10	405	140.5	0.02
I102091		7.82	20.8	2.57	5.53	0.10	0.28	<0.01	0.036	0.38	24.8	21.0	0.62	422	3.09	0.06
I102092		5.60	28.8	2.37	5.21	0.06	0.29	<0.01	0.030	0.30	21.1	22.0	0.57	375	3.39	0.04
I102093		9.05	91.9	3.08	5.10	0.06	0.21	<0.01	0.094	0.23	30.6	12.9	0.37	184	8.83	0.01
I102094		7.89	30.0	2.77	6.22	0.06	0.30	0.01	0.069	0.30	24.4	26.5	0.72	664	3.22	0.04
I102095		7.07	395	2.52	5.13	0.10	0.22	<0.01	0.063	0.40	25.1	31.0	0.60	731	6.45	0.05
I102096		7.90	112.5	2.04	5.12	0.05	0.21	0.01	0.127	0.35	27.8	19.9	0.32	286	3.62	0.01
I102097		14.70	586	5.68	6.30	0.07	0.17	0.02	0.114	0.24	18.8	9.4	0.13	18800	15.00	<0.01
I102098		47.2	876	7.73	10.35	0.13	0.21	0.03	0.088	0.40	32.7	60.8	0.12	43000	21.9	0.01
I102099		8.99	124.0	3.00	6.58	0.05	0.21	<0.01	0.048	0.34	22.6	21.3	0.31	688	3.91	0.02
I102100		10.40	132.5	3.25	6.60	0.05	0.20	0.01	0.054	0.38	24.2	23.2	0.32	953	4.24	0.02
I102101		8.38	201	3.43	9.16	0.05	0.40	<0.01	0.056	0.28	27.4	26.1	0.52	2440	4.90	0.02
I102102		5.14	31.4	2.65	8.47	<0.05	0.30	0.01	0.053	0.18	28.9	24.1	0.59	1520	1.49	0.02
I102103		22.5	159.5	4.87	7.27	0.05	0.29	0.01	0.087	0.24	20.7	8.3	0.17	1500	4.27	<0.01
I102104		1.51	23.4	2.56	9.04	<0.05	0.54	<0.01	0.050	0.16	31.5	24.2	0.65	1220	3.34	0.01
I102105		4.80	8.8	2.68	9.32	<0.05	0.44	<0.01	0.041	0.16	18.7	25.4	0.59	1440	1.87	<0.01
I102106		7.43	109.5	2.83	9.42	0.05	0.40	0.01	0.081	0.22	31.9	20.5	0.48	1550	1.08	<0.01
I102107		1.51	6.0	2.58	10.10	<0.05	0.51	<0.01	0.050	0.14	39.8	32.6	0.87	1080	0.50	0.01
I102108		4.18	123.0	4.01	9.01	0.09	0.19	0.01	0.073	0.17	18.3	21.5	0.81	703	0.68	0.04
I102109		6.45	149.5	3.93	8.06	0.09	0.19	0.01	0.100	0.38	18.6	21.0	0.72	618	1.47	0.02
I102110		6.22	154.5	4.30	8.62	0.10	0.19	<0.01	0.104	0.34	16.2	23.5	0.83	570	1.52	0.05
I102111		11.30	32.4	3.20	7.44	0.15	0.22	0.01	0.121	0.50	23.6	29.3	0.88	525	3.59	0.09
I102112		8.63	14.6	2.64	5.35	0.14	0.26	<0.01	0.116	0.45	23.2	22.3	0.62	477	3.99	0.11
I102113		5.05	9.7	2.61	5.72	0.13	0.23	<0.01	0.074	0.44	22.6	26.1	0.65	642	2.98	0.09
I102114		16.60	127.0	4.37	10.90	0.12	0.17	0.02	0.142	0.45	20.7	24.5	0.86	2330	1.94	0.05

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127719

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th
	Units	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01	0.2
I102075		<0.05	3.3	830	43.1	26.9	<0.001	1.48	0.34	4.2	0.9	3.0	40.2	<0.01	0.42	20.2
I102076		0.07	3.1	770	9.8	28.5	<0.001	0.41	0.71	3.1	0.6	6.7	33.9	0.01	0.03	19.3
I102077		<0.05	2.8	890	12.9	31.8	<0.001	0.36	0.57	3.1	0.5	1.4	32.8	<0.01	0.06	20.2
I102078		1.39	5.2	890	35.1	44.9	<0.001	1.27	0.79	4.6	0.9	3.9	63.8	0.01	0.62	30.3
I102079		0.83	4.9	850	36.5	37.5	<0.001	1.38	0.63	4.4	0.8	2.9	36.2	0.01	0.49	32.5
I102080C		0.73	4.9	860	36.1	36.3	<0.001	1.42	0.62	4.3	0.8	2.7	35.7	0.01	0.53	31.2
I102081		0.20	4.1	810	44.0	31.9	<0.001	0.87	0.51	2.7	0.8	1.5	56.8	0.01	0.24	30.6
I102082		0.73	6.1	890	47.5	19.9	<0.001	0.33	0.77	5.1	0.6	3.1	52.5	0.01	0.34	29.9
I102083		0.06	4.0	880	29.3	25.8	<0.001	0.31	0.55	3.3	0.8	1.4	48.4	<0.01	0.49	26.5
I102084		0.18	4.5	890	33.5	34.6	<0.001	0.05	0.79	4.8	0.5	1.8	583	0.01	0.03	31.7
I102085		0.65	4.3	890	33.2	38.4	<0.001	0.21	1.08	3.9	0.5	1.7	49.2	0.01	0.06	31.2
I102086		0.61	4.1	880	30.6	38.2	<0.001	0.19	0.91	3.6	0.4	1.6	46.4	0.01	0.07	29.5
I102087		1.90	4.8	900	43.4	45.7	<0.001	0.10	0.77	3.8	0.5	1.8	43.5	0.01	0.06	30.4
I102088		0.37	5.5	870	34.1	45.5	<0.001	2.09	0.41	4.8	1.0	1.8	84.9	0.01	0.32	31.1
I102089		0.52	4.8	890	39.0	43.5	<0.001	0.57	0.42	4.5	0.6	1.9	66.3	0.01	0.67	30.8
I102090		<0.05	4.4	380	17.4	6.8	0.033	1.35	14.90	0.9	0.4	0.3	344	<0.01	2.01	0.9
I102091		1.67	4.8	870	36.5	36.3	<0.001	0.16	0.77	3.2	0.4	1.8	59.2	0.01	0.11	29.3
I102092		1.29	4.8	920	29.4	32.7	<0.001	0.38	0.88	3.1	0.5	1.5	50.3	0.01	0.07	30.3
I102093		0.29	3.5	940	154.5	29.7	<0.001	0.14	0.82	4.5	0.6	1.0	119.0	<0.01	0.08	29.9
I102094		0.54	5.5	880	30.2	36.1	<0.001	<0.01	0.64	4.9	0.4	1.4	169.5	0.01	0.02	28.2
I102095		1.44	5.4	900	47.0	44.5	<0.001	<0.01	1.13	2.6	0.5	1.9	19.8	0.01	0.01	29.4
I102096		0.53	3.2	750	33.0	48.4	<0.001	0.13	5.18	4.7	0.4	1.6	30.7	<0.01	0.02	28.9
I102097		0.14	2.9	770	86.1	34.9	<0.001	0.05	32.1	3.2	0.4	0.8	330	<0.01	0.05	29.3
I102098		0.24	6.9	800	46.8	59.4	<0.001	0.05	78.0	3.1	1.1	0.9	820	0.01	0.33	32.7
I102099		0.50	2.9	700	56.4	44.8	<0.001	0.24	3.93	3.2	0.7	1.9	49.3	<0.01	0.24	29.6
I102100		0.45	3.1	700	53.6	49.6	<0.001	0.29	5.71	3.3	0.8	2.3	62.3	<0.01	0.21	30.1
I102101		0.07	5.5	700	52.7	44.8	<0.001	0.35	3.25	2.8	0.9	0.9	56.6	<0.01	0.48	18.8
I102102		<0.05	5.7	660	54.1	23.3	<0.001	0.01	0.67	2.4	0.3	1.1	19.0	<0.01	0.55	21.5
I102103		0.05	4.0	700	156.0	36.4	<0.001	0.12	2.92	2.2	0.8	1.2	46.3	<0.01	2.08	20.1
I102104		<0.05	5.5	660	61.9	19.6	<0.001	0.18	0.47	2.8	0.5	0.9	23.9	<0.01	6.26	23.4
I102105		0.05	5.1	670	97.9	19.4	<0.001	<0.01	0.68	2.7	0.3	1.0	26.4	<0.01	14.95	21.6
I102106		<0.05	4.5	650	148.5	29.1	<0.001	<0.01	0.93	2.8	0.2	0.8	29.1	<0.01	3.30	21.0
I102107		<0.05	5.8	740	41.0	17.5	<0.001	<0.01	0.35	2.8	0.3	0.6	24.8	<0.01	1.17	22.0
I102108		0.16	5.4	850	39.7	25.0	<0.001	0.03	0.66	3.0	0.3	1.9	35.3	<0.01	0.32	26.2
I102109		0.30	4.1	780	60.9	55.1	<0.001	<0.01	1.03	3.8	0.4	3.0	29.0	<0.01	0.20	26.5
I102110		0.28	5.1	840	39.6	46.1	<0.001	0.02	0.94	4.2	0.5	3.0	26.3	0.01	0.43	28.3
I102111		1.21	5.5	900	37.8	66.2	<0.001	0.05	0.51	5.4	0.4	3.2	66.0	0.01	0.09	32.7
I102112		1.60	4.6	920	41.3	49.4	0.001	0.03	0.57	2.9	0.3	2.5	54.9	0.01	0.02	31.9
I102113		1.92	4.3	880	37.0	51.8	<0.001	0.03	0.59	2.9	0.3	3.4	27.3	0.01	0.02	33.3
I102114		0.23	5.9	890	256	63.4	<0.001	0.03	0.75	5.1	0.3	5.3	98.2	0.01	0.40	30.5

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127719

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I102075		<0.005	0.30	7.97	30	0.85	13.60	89	18.0
I102076		0.008	0.34	8.70	37	14.90	15.75	111	15.0
I102077		<0.005	0.36	7.21	27	2.85	15.60	86	12.0
I102078		0.152	0.29	12.00	55	1.71	13.90	88	4.3
I102079		0.094	0.28	12.85	51	1.56	14.85	113	4.4
I102080C		0.090	0.27	13.00	51	1.35	14.85	112	4.3
I102081		0.023	0.29	12.50	34	4.53	15.05	95	3.5
I102082		0.105	0.14	12.30	57	0.86	14.95	130	3.2
I102083		0.009	0.21	12.60	34	2.58	16.95	105	3.5
I102084		0.048	0.24	13.75	53	0.97	19.45	97	5.1
I102085		0.099	0.24	15.15	54	1.52	15.45	94	4.9
I102086		0.096	0.24	13.75	53	1.37	14.65	92	4.4
I102087		0.178	0.26	11.40	61	0.80	16.30	97	5.1
I102088		0.056	0.33	13.20	46	0.35	18.10	81	7.7
I102089		0.080	0.26	10.00	55	0.41	17.05	93	8.7
I102090		<0.005	0.03	1.22	11	4.42	4.15	37	1.4
I102091		0.179	0.22	10.70	60	0.82	15.00	86	5.4
I102092		0.153	0.16	10.35	49	0.97	14.20	70	5.5
I102093		0.048	0.20	18.20	40	0.97	13.05	123	5.4
I102094		0.101	0.22	6.87	51	1.00	16.10	101	6.4
I102095		0.186	0.27	11.90	58	0.74	19.80	158	3.7
I102096		0.093	0.30	28.3	46	0.98	15.65	102	4.6
I102097		0.023	0.83	25.5	33	4.37	8.44	140	4.5
I102098		0.025	1.81	29.5	37	6.50	14.75	207	4.9
I102099		0.066	0.44	15.00	41	0.58	9.96	73	5.1
I102100		0.069	0.51	15.25	44	0.63	10.35	75	5.0
I102101		0.020	0.38	6.85	33	0.67	11.10	180	14.5
I102102		0.007	0.18	5.58	30	1.45	8.95	170	11.3
I102103		0.006	0.31	12.25	28	2.01	6.54	114	10.5
I102104		0.006	0.17	6.29	31	1.55	9.62	153	20.2
I102105		0.008	0.16	6.90	33	1.22	8.05	149	17.0
I102106		0.007	0.23	6.73	31	1.03	7.52	144	15.2
I102107		0.005	0.16	4.97	37	0.66	10.20	165	19.2
I102108		0.038	0.34	4.13	49	0.68	10.95	127	5.9
I102109		0.074	0.79	6.90	48	0.94	11.45	121	4.5
I102110		0.083	0.63	6.81	54	0.92	12.00	113	4.5
I102111		0.180	0.60	10.20	66	1.77	13.85	87	4.3
I102112		0.178	0.37	11.15	61	1.54	13.80	87	4.6
I102113		0.171	0.38	14.35	60	1.15	14.55	85	3.7
I102114		0.083	0.89	7.67	59	0.59	13.00	284	4.0

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127719

Sample Description	Method	WEI-21	Au-AA23	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr
	Units	kg	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
	LOR	0.02	0.005	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1	1
I102115		1.53	0.107	4.47	1.70	63.4	<0.2	<10	80	2.20	38.7	0.80	1.27	36.2	19.8	8
I102116		3.80	0.005	0.71	1.36	6.6	<0.2	<10	80	1.13	62.8	0.62	1.65	39.5	7.1	18
I102117		4.40	0.009	0.42	1.40	7.6	<0.2	<10	80	1.08	32.7	0.65	0.63	37.3	11.2	19
I102118		5.15	0.005	0.33	1.18	6.6	<0.2	<10	80	0.68	16.60	0.53	0.37	44.8	10.3	20
I102119		1.90	0.007	0.25	1.41	9.5	<0.2	<10	90	0.86	6.67	0.53	0.37	34.2	11.6	19
I102120C		<0.02	0.007	0.26	1.43	9.2	<0.2	<10	90	0.82	6.77	0.53	0.34	33.0	11.4	19

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127719

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo	Na
	Units	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%
	LOR	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05	0.01
I102115		20.0	57.1	5.17	10.00	0.10	0.15	0.01	0.175	0.43	19.7	10.0	0.40	3170	1.72	0.05
I102116		8.01	81.3	3.37	7.81	0.12	0.15	0.01	1.020	0.45	19.3	28.0	0.89	808	2.10	0.08
I102117		6.95	96.9	3.23	7.75	0.14	0.16	0.02	0.171	0.41	18.5	25.4	0.85	716	2.91	0.08
I102118		6.96	69.4	3.65	7.42	0.14	0.21	<0.01	0.085	0.48	22.0	28.9	0.89	547	3.77	0.10
I102119		10.65	100.5	3.85	7.90	0.13	0.16	0.01	0.104	0.53	16.4	30.6	0.92	583	2.88	0.09
I102120C		10.05	99.8	3.82	7.95	0.13	0.15	<0.01	0.094	0.53	15.7	28.9	0.91	572	2.98	0.09

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127719

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th
	Units	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01	0.2
I102115		0.11	4.5	1520	103.0	57.3	<0.001	0.03	3.52	2.7	0.3	2.8	75.6	<0.01	0.31	24.1
I102116		0.71	5.3	860	48.7	56.8	<0.001	0.06	1.17	5.2	0.4	4.1	48.2	0.01	4.02	30.0
I102117		0.83	7.3	870	39.2	51.8	<0.001	0.04	0.63	4.5	0.4	4.1	42.1	0.01	4.62	27.3
I102118		1.19	6.3	880	43.6	58.5	<0.001	0.03	0.61	5.4	0.4	3.3	40.7	0.01	0.24	30.3
I102119		0.94	5.5	890	41.3	69.0	<0.001	0.06	0.51	5.9	0.4	2.7	37.1	0.01	0.23	29.2
I102120C		0.80	5.4	890	41.1	68.0	<0.001	0.05	0.48	5.7	0.3	2.7	36.4	0.01	0.20	29.3

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127719

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I102115		0.014	1.03	12.25	39	1.62	11.30	127	3.9
I102116		0.134	0.56	8.44	61	0.92	12.90	518	2.7
I102117		0.143	0.47	8.44	59	0.95	12.25	125	3.1
I102118		0.172	0.53	10.95	67	1.05	13.45	107	3.7
I102119		0.162	0.69	9.91	67	1.89	12.70	98	2.6
I102120C		0.158	0.70	9.85	67	1.77	12.30	97	2.5

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 5-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10127719

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

CERTIFICATE WH10137378

Project: SQI10-01

P.O. No.: SQI10-01_15

This report is for 32 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 24-SEP-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
CRU-31	Fine crushing - 70% <2mm
PUL-QC	Pulverizing QC Test
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
LOG-22d	Sample login - Rcd w/o BarCode dup
SPL-21d	Split sample - duplicate
PUL-31d	Pulverize Split - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137378

Sample Description	Method	WEI-21	Au-AA23	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr
	Units	kg	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
	LOR	0.02	0.005	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1	1
I102387		2.41	<0.005	0.14	0.84	5.9	<0.2	<10	90	0.70	0.56	0.48	0.25	41.9	4.4	14
I102388		1.26	0.005	0.29	1.81	5.2	<0.2	<10	60	2.10	0.89	3.12	0.15	46.5	4.4	12
I102389		1.03	0.013	0.92	1.45	7.6	<0.2	<10	50	1.88	4.03	1.33	0.46	73.5	5.0	8
I102390		1.07	0.010	1.01	1.83	7.0	<0.2	<10	60	2.19	3.93	1.52	0.53	72.3	5.0	11
I102391		2.11	0.023	1.36	1.18	38.3	<0.2	10	20	1.33	8.01	0.43	0.76	68.8	8.3	6
I102392		2.10	0.164	3.72	0.84	74.0	0.2	<10	40	1.22	56.2	0.29	1.51	63.7	11.8	5
I102393		1.10	0.122	4.09	1.81	52.5	<0.2	<10	60	1.43	6.26	0.53	26.5	53.6	34.0	8
I102394		0.81	0.007	0.44	1.37	5.5	<0.2	<10	50	1.20	8.37	0.44	0.85	53.6	7.3	15
I102395		3.83	<0.005	0.28	1.11	5.3	<0.2	<10	60	0.92	2.66	0.54	0.67	49.5	7.6	16
I102396		2.24	<0.005	0.16	0.86	4.1	<0.2	<10	80	0.76	0.64	0.48	0.61	46.4	4.8	16
I102397		1.87	0.008	0.57	1.27	5.2	<0.2	<10	50	1.20	6.74	0.57	0.41	48.8	12.2	15
I102398		2.24	0.009	0.32	0.56	2.8	<0.2	20	30	1.06	7.93	0.26	0.38	60.9	7.1	9
I102399		1.73	<0.005	0.26	1.04	4.1	<0.2	10	50	1.29	9.76	0.35	0.36	63.3	7.2	13
I102400		<0.02	0.005	0.25	0.99	4.4	<0.2	10	40	1.23	9.96	0.35	0.35	62.5	7.2	13
I102401		2.22	0.009	0.24	1.09	4.2	<0.2	<10	80	0.80	1.69	0.63	0.30	44.0	6.1	17
I102402		2.15	0.005	0.22	1.06	3.0	<0.2	<10	90	0.79	1.80	0.57	0.25	48.0	5.3	17
I102403		0.33	0.005	0.09	0.99	1.2	<0.2	10	30	0.78	1.71	0.32	0.26	61.3	4.1	17
I102404		4.32	0.006	0.35	1.13	3.8	<0.2	<10	80	1.02	4.56	0.47	0.64	45.2	5.9	16
I102405		2.02	0.035	0.66	1.31	10.7	<0.2	<10	70	1.12	5.76	0.36	0.53	64.9	8.0	15
I102406		2.05	0.017	0.90	0.79	24.1	<0.2	10	40	0.99	1.05	0.14	0.33	68.2	13.1	6
I102407		1.84	0.060	0.61	1.27	10.8	<0.2	<10	90	1.32	2.56	0.34	0.68	59.6	10.8	13
I102408		1.83	0.098	1.68	0.76	42.5	<0.2	<10	60	0.82	6.49	0.15	0.41	51.9	13.7	8
I102409		1.67	0.017	0.37	0.70	20.6	<0.2	10	10	0.73	3.07	0.22	0.27	78.5	6.9	8
I102410		0.04	0.310	9.41	0.50	8.4	0.3	<10	180	0.18	1.77	2.40	<0.01	13.25	4.3	6
I102411		1.82	0.023	3.18	0.82	22.6	<0.2	<10	210	1.90	2.27	0.19	0.83	60.9	6.0	6
I102412		3.47	0.283	1.66	1.14	29.1	0.3	<10	280	1.74	2.25	0.23	0.56	61.1	8.8	8
I102413		2.12	<0.005	0.32	0.89	2.8	<0.2	<10	90	0.61	0.90	0.37	0.28	43.6	4.9	16
I102414		2.29	<0.005	0.32	0.85	4.4	<0.2	<10	80	0.45	0.38	0.44	0.53	42.2	4.4	17
I102415		2.39	<0.005	0.19	0.98	4.3	<0.2	<10	90	0.65	1.99	0.48	0.34	41.2	4.7	16
I102416		0.95	0.178	0.35	2.12	12.8	<0.2	<10	90	2.25	7.10	7.26	1.88	43.6	10.7	10
I102417		1.90	<0.005	0.21	0.95	4.4	<0.2	<10	80	0.65	1.07	0.45	0.23	43.7	4.4	17
I102418		2.30	<0.005	0.24	0.91	4.2	<0.2	<10	100	0.48	0.44	0.43	0.47	46.7	4.4	17

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137378

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo	Na
	Units	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%
	LOR	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05	0.01
I102387		4.23	7.6	1.98	4.33	0.09	0.22	<0.01	0.016	0.37	21.6	17.1	0.43	358	1.87	0.08
I102388		3.45	9.6	1.91	5.97	0.08	0.15	0.01	0.021	0.25	24.5	12.7	0.57	2690	1.01	0.04
I102389		7.02	52.1	2.07	4.45	0.09	0.12	<0.01	0.114	0.28	40.1	9.4	0.34	2220	1.49	0.01
I102390		7.39	55.4	2.29	5.53	0.10	0.11	0.01	0.152	0.33	39.2	11.0	0.38	2550	1.51	0.02
I102391		7.13	162.5	3.68	4.96	0.11	0.13	0.01	0.055	0.25	37.5	9.7	0.21	1720	8.72	0.02
I102392		14.15	147.5	5.06	6.81	0.12	0.10	0.03	0.203	0.28	35.6	8.4	0.12	7550	27.4	0.02
I102393		33.7	188.0	5.67	13.40	0.12	0.10	0.31	0.555	0.27	26.2	20.4	0.33	13900	28.1	0.03
I102394		4.90	50.7	2.85	6.95	0.10	0.21	0.01	0.139	0.24	27.3	21.6	0.68	963	1.65	0.04
I102395		4.57	32.6	2.63	5.93	0.11	0.21	<0.01	0.083	0.28	24.8	21.2	0.60	725	3.08	0.05
I102396		4.64	12.6	2.12	4.80	0.11	0.21	<0.01	0.024	0.35	24.5	15.6	0.44	639	2.81	0.09
I102397		4.51	30.6	3.06	6.68	0.11	0.14	<0.01	0.051	0.26	25.0	20.9	0.71	1020	3.63	0.04
I102398		2.69	27.8	3.62	3.13	0.10	0.11	<0.01	0.022	0.23	32.2	5.4	0.16	517	2.25	0.01
I102399		3.05	32.9	3.44	5.31	0.10	0.10	<0.01	0.035	0.25	34.0	12.8	0.44	687	1.59	0.02
I102400		2.94	31.2	3.36	5.18	0.10	0.09	<0.01	0.034	0.21	33.6	12.8	0.45	678	1.53	0.02
I102401		4.82	24.3	2.48	5.84	0.13	0.17	<0.01	0.053	0.32	22.6	21.4	0.67	626	4.45	0.06
I102402		5.36	20.7	2.49	5.47	0.12	0.16	<0.01	0.023	0.42	24.9	19.3	0.57	638	5.03	0.09
I102403		4.19	28.5	3.66	5.72	0.11	0.07	<0.01	0.021	0.25	36.0	21.3	0.53	651	0.73	0.02
I102404		5.77	23.9	2.82	6.11	0.13	0.16	<0.01	0.038	0.34	23.7	20.8	0.63	1280	2.37	0.05
I102405		8.37	19.6	3.52	7.86	0.12	0.15	<0.01	0.046	0.36	35.3	19.3	0.49	1450	3.58	0.03
I102406		11.55	223	3.63	3.75	0.10	0.05	0.02	0.123	0.39	36.0	3.3	0.05	2130	9.13	0.01
I102407		10.20	302	3.62	5.59	0.11	0.13	<0.01	0.044	0.34	31.6	15.8	0.30	2520	5.38	0.02
I102408		9.73	573	3.36	3.74	0.09	0.06	0.03	0.121	0.32	27.2	6.0	0.11	2680	9.56	0.01
I102409		6.97	17.7	2.06	3.16	0.09	0.05	0.01	0.071	0.34	43.5	4.9	0.04	1760	6.51	0.01
I102410		0.92	6270	1.42	1.79	<0.05	0.04	0.83	0.020	0.27	6.6	1.8	0.10	414	147.5	0.03
I102411		19.15	44.8	4.89	5.01	0.12	0.05	0.03	0.057	0.33	34.5	20.2	0.07	11550	11.35	0.01
I102412		19.85	21.8	4.78	7.61	0.06	0.07	0.02	0.105	0.41	31.9	28.2	0.14	16000	15.55	0.01
I102413		7.84	13.0	2.24	4.77	0.07	0.14	<0.01	0.018	0.45	22.4	16.4	0.52	610	7.50	0.06
I102414		4.62	21.7	2.23	4.51	0.05	0.18	<0.01	0.011	0.36	22.2	17.1	0.53	551	3.80	0.06
I102415		4.89	9.8	2.40	4.94	0.06	0.17	<0.01	0.022	0.40	21.5	16.3	0.55	664	5.74	0.08
I102416		22.2	4.7	3.34	6.84	0.05	0.12	0.02	0.080	0.32	25.5	9.3	0.43	3520	1.36	0.02
I102417		5.65	18.4	2.35	5.04	0.05	0.18	<0.01	0.025	0.35	21.8	16.5	0.57	601	5.53	0.06
I102418		6.90	22.0	2.35	4.95	0.06	0.18	<0.01	0.015	0.45	24.4	18.2	0.54	503	8.94	0.10

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137378

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th
	Units	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01	0.2
I102387		1.72	3.5	800	23.8	41.2	<0.001	<0.01	0.93	2.1	0.3	1.2	23.6	<0.01	0.01	31.5
I102388		0.45	3.0	760	46.2	25.9	<0.001	<0.01	1.24	2.7	0.3	1.2	52.4	<0.01	0.01	32.6
I102389		0.22	3.2	830	41.8	33.7	<0.001	<0.01	6.12	2.9	0.3	0.7	70.4	<0.01	0.04	36.5
I102390		0.19	3.5	850	42.3	37.7	<0.001	<0.01	5.44	3.6	0.4	0.9	79.9	<0.01	0.03	36.3
I102391		0.17	3.3	810	29.4	35.9	<0.001	<0.01	12.15	1.7	0.5	0.8	24.9	<0.01	0.34	35.6
I102392		0.17	4.3	710	53.9	37.9	<0.001	0.03	25.8	1.7	0.4	1.5	129.5	<0.01	0.58	32.8
I102393		0.14	9.9	780	120.5	38.6	<0.001	0.01	15.35	2.8	0.4	1.4	203	<0.01	0.22	28.6
I102394		0.40	4.4	820	35.4	29.3	<0.001	<0.01	1.52	4.0	0.4	1.3	35.6	<0.01	0.02	34.7
I102395		0.93	7.9	830	43.3	31.6	<0.001	<0.01	1.16	3.1	0.3	1.6	29.4	<0.01	0.03	33.0
I102396		1.84	5.2	810	26.4	37.5	<0.001	<0.01	0.82	2.2	0.3	1.3	26.8	<0.01	0.01	32.1
I102397		0.66	5.1	850	45.5	28.8	<0.001	<0.01	0.71	2.9	0.3	1.8	26.8	<0.01	0.29	31.1
I102398		0.23	2.9	880	64.7	26.6	<0.001	<0.01	0.65	0.8	0.3	1.3	10.4	<0.01	2.22	31.1
I102399		0.25	3.8	860	58.4	26.3	<0.001	<0.01	0.60	1.5	0.3	1.6	17.9	<0.01	1.20	33.2
I102400		0.23	3.6	890	56.3	22.5	<0.001	<0.01	0.56	1.5	0.3	1.6	16.7	<0.01	1.18	34.2
I102401		1.37	4.5	880	51.9	33.6	<0.001	<0.01	0.78	2.9	0.3	2.1	70.5	<0.01	0.08	30.0
I102402		1.53	4.3	860	45.7	44.2	<0.001	<0.01	0.86	3.0	0.3	1.3	42.0	<0.01	0.06	27.2
I102403		0.17	4.1	900	14.6	30.4	<0.001	<0.01	0.20	1.9	0.3	0.3	11.4	<0.01	0.03	24.9
I102404		1.01	4.3	880	63.3	38.1	<0.001	<0.01	1.06	3.3	0.3	1.3	49.9	<0.01	0.08	28.1
I102405		0.42	4.7	910	78.6	45.1	<0.001	0.01	0.78	4.4	0.4	1.4	32.8	<0.01	0.25	30.8
I102406		0.12	2.4	750	17.5	53.5	<0.001	<0.01	0.97	1.8	0.4	1.7	25.3	<0.01	0.02	28.8
I102407		0.46	5.0	1020	42.1	44.5	<0.001	<0.01	1.33	4.4	0.7	5.6	42.2	<0.01	0.13	35.3
I102408		0.25	2.9	670	19.7	41.6	<0.001	<0.01	1.24	2.2	0.6	2.0	29.0	<0.01	0.09	27.5
I102409		0.10	1.6	830	18.1	47.9	<0.001	<0.01	1.01	1.5	0.4	0.6	19.5	<0.01	0.11	29.2
I102410		0.10	4.4	390	16.2	7.1	0.034	1.46	12.30	0.8	0.5	0.3	364	<0.01	1.99	1.4
I102411		0.12	5.3	820	34.3	51.9	<0.001	<0.01	1.08	2.5	0.4	0.4	100.0	<0.01	0.04	28.2
I102412		0.09	3.8	620	51.7	58.7	0.001	<0.01	1.81	2.7	0.3	1.1	168.0	<0.01	0.06	31.4
I102413		1.88	4.0	850	75.4	61.7	<0.001	<0.01	0.75	2.3	0.4	1.4	19.3	0.01	0.02	31.2
I102414		1.77	3.7	900	45.9	41.6	<0.001	<0.01	0.37	1.8	0.4	1.3	21.4	0.01	<0.01	29.1
I102415		1.42	3.9	820	43.5	43.6	<0.001	<0.01	0.51	2.4	0.3	1.3	28.0	0.01	<0.01	29.6
I102416		0.66	2.7	>10000	22.6	46.6	<0.001	<0.01	4.68	3.3	0.3	6.6	204	<0.01	0.18	23.2
I102417		1.57	4.4	950	45.6	42.0	<0.001	<0.01	0.62	2.3	0.3	1.4	27.1	0.01	0.01	29.7
I102418		2.11	3.9	840	47.4	54.9	0.001	<0.01	0.47	1.9	0.3	1.4	27.1	0.01	<0.01	32.1

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137378

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I102387		0.141	0.25	14.70	54	0.71	11.20	54	3.7
I102388		0.076	0.17	9.39	48	0.83	12.75	63	2.6
I102389		0.015	0.35	9.68	30	0.19	16.25	55	2.5
I102390		0.015	0.38	9.28	36	0.17	16.50	60	2.6
I102391		0.011	0.42	23.5	20	0.93	13.05	85	3.2
I102392		0.006	0.40	29.4	21	6.49	11.75	149	2.7
I102393		0.007	0.45	29.1	36	6.92	11.75	322	2.5
I102394		0.053	0.26	9.94	57	0.64	15.15	201	3.8
I102395		0.109	0.23	12.05	57	0.92	13.15	174	3.5
I102396		0.153	0.24	13.70	56	1.41	11.60	105	3.5
I102397		0.091	0.27	9.49	54	0.64	13.95	174	2.2
I102398		0.008	0.28	7.49	21	1.08	11.10	76	2.0
I102399		0.016	0.27	7.02	35	1.45	14.50	117	1.9
I102400		0.016	0.23	7.14	35	1.23	14.50	117	1.7
I102401		0.150	0.23	9.30	57	0.96	12.50	197	2.3
I102402		0.170	0.30	9.97	58	0.95	12.65	99	2.5
I102403		0.008	0.27	8.15	54	0.09	15.60	98	1.4
I102404		0.138	0.26	9.54	59	1.12	13.20	137	2.4
I102405		0.063	0.36	12.80	58	1.20	15.65	142	2.5
I102406		<0.005	0.80	18.25	22	2.28	14.35	99	0.9
I102407		0.072	0.42	15.90	53	3.17	16.30	138	2.4
I102408		0.015	0.59	15.85	25	1.92	11.05	83	1.3
I102409		<0.005	0.64	11.15	27	1.14	20.2	52	1.0
I102410		<0.005	0.05	1.04	11	4.86	4.46	38	1.4
I102411		<0.005	1.16	14.80	32	2.75	14.05	128	1.2
I102412		0.009	1.20	18.10	42	5.34	11.25	154	1.5
I102413		0.174	0.38	13.00	60	2.64	12.50	115	2.6
I102414		0.174	0.24	11.40	59	2.96	11.85	115	3.5
I102415		0.163	0.27	12.25	57	2.86	11.80	90	3.4
I102416		0.014	0.63	116.5	33	8.90	14.20	66	2.6
I102417		0.162	0.26	12.15	59	2.42	12.35	87	3.1
I102418		0.176	0.33	14.75	60	3.47	12.95	84	3.4

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137378

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

CERTIFICATE WH10137460

Project: SQI10-01

P.O. No.: SQI10-01_14

This report is for 64 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 24-SEP-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
CRU-31	Fine crushing - 70% <2mm
PUL-QC	Pulverizing QC Test
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
LOG-22d	Sample login - Rcd w/o BarCode dup
SPL-21d	Split sample - duplicate
PUL-31d	Pulverize Split - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	
Ag-GRA21	Ag 30g FA-GRAV finish	WST-SIM

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137460

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I102323		2.86	<0.005		0.14	1.60	5.2	<0.2	<10	120	1.72	0.59	0.71	0.10	42.5	5.3
I102324		2.28	<0.005		0.25	1.39	13.8	<0.2	<10	60	1.58	1.61	0.68	0.99	47.4	6.5
I102325		2.27	<0.005		0.37	2.14	7.0	<0.2	<10	170	2.38	0.68	0.73	14.15	49.3	4.4
I102326		2.71	0.039		10.60	1.35	67.2	<0.2	<10	90	2.11	15.00	0.46	29.8	55.8	3.9
I102327		4.21	<0.005		0.25	0.92	6.1	<0.2	<10	70	0.97	1.59	0.56	2.53	46.1	4.1
I102328		4.78	<0.005		0.25	0.78	5.5	<0.2	<10	70	0.74	1.28	0.54	0.55	43.7	3.3
I102329		4.35	<0.005		0.24	0.85	5.6	<0.2	<10	80	0.89	1.26	0.55	0.43	52.6	4.0
I102330		0.04	0.307		9.87	0.48	9.1	0.3	<10	140	0.27	1.84	2.37	0.18	13.55	4.2
I102331		2.63	<0.005		0.08	0.87	3.5	<0.2	<10	110	0.95	0.39	0.64	0.17	51.7	4.4
I102332		3.20	<0.005		0.47	1.29	2.6	<0.2	<10	70	1.96	0.20	1.27	0.09	54.8	4.6
I102333		2.93	0.014		0.84	1.15	61.1	<0.2	<10	90	1.54	6.38	0.38	0.38	61.9	11.9
I102334		1.60	0.314		0.75	0.90	78.5	<0.2	<10	40	1.69	5.27	0.37	0.50	70.4	14.8
I102335		3.04	<0.005		0.44	1.12	7.4	<0.2	<10	50	1.32	4.13	0.56	0.31	55.1	6.3
I102336		3.49	0.005		1.10	1.25	25.3	<0.2	<10	60	1.54	6.07	0.74	0.27	49.7	6.9
I102337		2.24	<0.005		0.31	1.08	22.7	<0.2	<10	40	1.40	2.28	1.02	0.27	63.2	5.7
I102338		2.33	0.012		0.85	0.98	8.1	<0.2	<10	30	1.29	3.69	1.02	0.19	75.2	8.4
I102339		1.50	0.005		0.32	1.32	22.7	<0.2	<10	40	1.35	8.83	0.98	0.70	62.0	9.0
I102340		1.06	<0.005		0.07	0.70	6.6	<0.2	<10	100	0.78	0.40	0.30	0.20	35.5	3.9
I102341		3.64	<0.005		0.37	1.23	26.5	<0.2	<10	30	1.65	3.71	0.64	0.24	73.9	8.0
I102342		2.32	<0.005		0.16	0.77	6.9	<0.2	<10	60	0.86	0.80	0.50	0.41	51.8	3.4
I102343		2.02	<0.005		0.17	0.76	3.1	<0.2	<10	70	0.72	1.95	0.38	0.26	45.6	4.6
I102344		1.64	0.016		0.37	0.68	7.3	<0.2	10	40	1.19	3.59	0.29	0.23	47.4	7.1
I102345		2.92	<0.005		0.16	1.00	3.7	<0.2	<10	80	1.18	0.50	0.44	0.29	49.7	5.0
I102346		3.22	<0.005		0.16	1.12	2.6	<0.2	<10	100	1.15	0.46	0.46	0.24	57.4	5.1
I102347		1.64	<0.005		0.27	2.58	3.5	<0.2	<10	300	3.68	0.72	1.52	2.13	59.8	5.4
I102348		1.50	<0.005		0.22	1.70	2.4	<0.2	<10	130	2.18	1.13	0.60	0.51	52.4	5.3
I102349		1.05	0.350		0.30	1.39	12.8	<0.2	10	150	2.37	2.75	0.52	0.25	59.4	14.1
I102350		1.06	0.024		0.31	1.33	10.2	<0.2	<10	130	2.24	2.43	0.49	0.22	64.7	10.1
I102351		1.32	0.552		3.85	0.51	56.8	18.6	<10	10	0.70	29.2	0.11	0.13	17.10	36.8
I102352		2.25	0.008		0.34	0.86	10.6	<0.2	10	50	1.17	3.31	0.23	0.21	54.2	9.6
I102353		3.49	<0.005		0.15	1.12	3.3	<0.2	<10	70	1.46	2.20	0.43	0.29	49.9	5.2
I102354		1.31	<0.005		0.11	1.83	4.5	<0.2	<10	100	2.35	1.75	0.71	0.46	49.9	6.2
I102355		3.64	0.006		0.15	1.21	5.0	<0.2	<10	100	1.18	1.85	0.68	0.31	47.4	6.5
I102356		3.74	<0.005		0.09	1.56	3.9	<0.2	<10	90	1.58	6.33	0.60	0.28	51.2	5.9
I102357		8.85	<0.005		0.10	1.08	4.9	<0.2	<10	100	0.83	3.23	0.53	0.25	44.9	5.8
I102358		1.96	<0.005		0.10	0.89	4.8	<0.2	<10	90	0.74	5.34	0.49	0.24	46.9	5.4
I102359		1.12	0.009		0.56	0.79	10.1	<0.2	<10	30	1.15	11.15	0.35	0.18	81.9	5.3
I102360		<0.02	0.011		0.58	0.84	9.8	<0.2	<10	40	1.26	11.50	0.35	0.15	75.1	5.2
I102361		1.30	0.006		0.54	0.94	15.5	<0.2	<10	50	1.38	6.09	0.38	0.19	77.6	12.6
I102362		4.30	<0.005		0.35	1.03	5.1	<0.2	<10	80	0.81	6.14	0.77	0.30	50.9	5.5

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137460

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I102323		16	7.67	18.6	2.36	6.07	0.09	0.18	<0.01	0.038	0.35	22.6	19.7	0.63	533	2.95
I102324		11	3.78	13.9	2.06	6.05	0.09	0.18	0.01	0.055	0.21	27.3	20.0	0.62	614	1.39
I102325		15	7.56	9.7	2.53	6.72	0.09	0.13	0.03	0.040	0.36	26.0	18.2	0.64	1480	1.65
I102326		9	8.54	259	3.50	5.15	0.08	0.11	0.14	0.093	0.35	29.1	11.0	0.31	2030	4.69
I102327		17	6.44	23.8	2.36	4.98	0.12	0.16	<0.01	0.043	0.33	22.5	19.2	0.55	451	4.15
I102328		17	4.82	16.4	2.30	4.28	0.10	0.14	<0.01	0.044	0.29	20.7	15.2	0.44	308	4.16
I102329		18	6.52	22.4	2.37	4.66	0.13	0.17	0.01	0.038	0.37	25.6	21.1	0.46	326	4.68
I102330		6	0.96	6110	1.40	1.67	<0.05	0.04	0.83	0.020	0.24	6.3	1.7	0.10	406	148.5
I102331		16	6.74	13.0	2.03	4.69	0.11	0.18	0.01	0.021	0.37	25.4	23.7	0.46	376	3.30
I102332		15	4.36	6.8	2.00	5.17	0.07	0.16	<0.01	0.010	0.29	28.1	20.7	0.47	779	0.82
I102333		8	14.05	230	4.26	4.60	0.09	0.11	0.01	0.077	0.40	31.6	10.4	0.19	5920	10.20
I102334		5	18.00	88.3	6.91	4.68	0.13	0.07	0.02	0.168	0.28	35.1	10.6	0.12	19950	39.5
I102335		15	5.04	23.7	2.52	5.75	0.08	0.17	<0.01	0.049	0.24	28.2	17.5	0.61	1100	2.36
I102336		16	4.49	28.9	2.98	6.28	0.09	0.18	<0.01	0.055	0.27	24.6	18.5	0.63	883	3.10
I102337		13	4.12	69.1	2.68	5.52	0.09	0.14	<0.01	0.054	0.20	32.0	18.2	0.57	763	5.72
I102338		12	4.12	53.7	2.70	5.08	0.09	0.12	0.01	0.042	0.19	38.6	13.1	0.41	726	27.3
I102339		28	3.76	60.6	3.46	7.99	0.11	0.15	<0.01	0.072	0.22	31.4	25.4	0.82	697	25.9
I102340		14	6.30	5.7	2.14	4.22	0.10	0.20	0.01	0.020	0.33	16.6	34.7	0.39	308	2.06
I102341		13	2.90	81.8	2.75	6.70	0.08	0.10	<0.01	0.052	0.16	35.9	20.8	0.66	831	4.18
I102342		17	4.59	13.7	2.28	4.74	0.11	0.23	<0.01	0.031	0.30	26.1	14.5	0.46	409	5.47
I102343		16	6.34	9.6	1.99	4.67	0.10	0.18	<0.01	0.018	0.35	22.1	17.3	0.48	425	4.67
I102344		8	4.27	4.6	2.00	3.00	0.06	0.11	<0.01	0.021	0.24	24.1	8.9	0.22	906	1.50
I102345		16	5.79	7.3	2.17	5.18	0.09	0.19	<0.01	0.021	0.35	24.4	17.6	0.52	554	2.90
I102346		17	6.89	12.2	2.33	5.01	0.10	0.21	<0.01	0.016	0.42	28.9	24.2	0.56	527	3.44
I102347		13	8.48	10.3	2.46	6.74	0.08	0.12	0.02	0.022	0.24	31.4	18.9	0.68	6980	3.19
I102348		15	7.52	12.4	2.48	5.89	0.09	0.16	0.01	0.028	0.33	25.1	20.0	0.61	1430	1.44
I102349		10	11.15	9.0	4.51	5.28	0.12	0.14	0.02	0.056	0.26	28.6	12.6	0.42	3160	1.61
I102350		9	11.65	8.9	4.41	5.17	0.13	0.14	0.02	0.052	0.25	30.3	12.8	0.42	2770	1.22
I102351		4	11.65	46.4	4.21	2.43	0.07	0.06	0.02	0.150	0.18	9.4	3.1	0.04	517	4.24
I102352		9	10.00	175.5	3.99	3.75	0.08	0.14	0.01	0.058	0.31	22.4	6.0	0.15	490	1.81
I102353		13	6.59	57.0	2.28	5.44	0.10	0.23	<0.01	0.054	0.26	26.0	18.3	0.55	624	0.77
I102354		15	3.82	7.8	2.48	6.41	0.10	0.23	0.01	0.065	0.25	25.5	23.6	0.80	1060	0.63
I102355		17	4.58	9.7	2.37	5.33	0.11	0.25	0.01	0.071	0.30	23.6	21.4	0.62	780	1.40
I102356		16	5.84	14.0	3.02	7.12	0.11	0.21	<0.01	0.066	0.34	25.4	28.5	0.87	650	0.72
I102357		16	5.08	7.7	2.44	5.19	0.11	0.30	<0.01	0.044	0.36	22.7	23.2	0.64	529	1.62
I102358		17	4.73	6.9	2.28	4.57	0.12	0.32	<0.01	0.044	0.36	23.3	19.2	0.53	592	1.59
I102359		14	23.7	20.6	3.20	4.16	0.11	0.15	0.01	0.109	0.24	42.8	8.6	0.12	930	0.58
I102360		14	22.3	18.2	3.23	4.31	0.08	0.15	0.01	0.097	0.26	38.5	8.2	0.12	903	0.59
I102361		12	29.4	15.1	3.41	4.92	0.09	0.15	0.02	0.093	0.22	38.4	9.5	0.17	2230	1.30
I102362		19	5.49	7.5	2.86	5.85	0.12	0.27	<0.01	0.060	0.36	25.8	21.1	0.67	781	2.24

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137460

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I102323		0.04	0.62	4.2	760	30.1	40.5	<0.001	<0.01	1.46	2.8	0.3	1.7	114.0	<0.01	0.04
I102324		0.03	0.61	3.7	610	28.0	22.7	<0.001	0.04	1.70	2.7	0.3	1.8	43.5	<0.01	0.20
I102325		0.03	0.37	4.3	910	50.6	43.0	<0.001	<0.01	4.18	3.7	0.4	1.5	215	<0.01	0.04
I102326		0.01	0.16	4.6	910	69.9	44.5	<0.001	0.17	15.65	2.9	0.6	1.5	83.0	<0.01	0.15
I102327		0.05	1.34	4.2	860	33.9	43.6	<0.001	0.01	1.48	2.4	0.3	1.8	34.0	0.01	0.07
I102328		0.05	1.27	3.7	850	34.6	37.1	<0.001	<0.01	1.15	1.7	0.3	1.7	26.8	0.01	0.03
I102329		0.08	1.79	3.9	840	35.1	49.1	<0.001	<0.01	1.19	2.1	0.3	1.6	29.4	0.01	0.01
I102330		0.03	<0.05	4.4	390	15.5	6.1	0.037	1.43	15.50	0.8	0.6	0.3	355	<0.01	1.98
I102331		0.06	1.56	3.7	820	30.2	50.5	<0.001	0.01	1.09	2.5	0.2	1.2	77.5	0.01	<0.01
I102332		0.03	0.55	3.5	850	18.4	38.5	<0.001	<0.01	0.50	2.5	0.2	1.1	34.2	<0.01	<0.01
I102333		0.01	0.16	3.9	840	66.4	56.0	<0.001	0.01	5.64	2.0	0.5	4.4	134.0	<0.01	0.65
I102334		0.01	0.07	9.2	800	23.3	37.5	<0.001	0.01	4.04	1.9	0.5	1.2	232	<0.01	0.85
I102335		0.03	0.52	4.5	810	99.6	31.0	<0.001	<0.01	0.94	3.1	0.3	1.7	36.6	0.01	0.21
I102336		0.04	0.63	4.3	830	55.0	32.0	<0.001	0.12	1.29	3.0	0.3	2.6	47.9	0.01	0.88
I102337		0.03	0.38	4.3	800	39.4	24.6	0.001	0.28	1.20	2.9	0.4	1.5	31.0	0.01	0.23
I102338		0.02	0.08	3.7	770	25.1	23.5	<0.001	0.07	0.95	2.3	0.4	1.3	27.2	<0.01	1.19
I102339		0.04	0.28	5.5	860	34.8	27.1	0.001	0.37	0.70	4.1	0.6	1.8	26.9	0.01	0.47
I102340		0.06	2.70	4.2	760	21.6	47.1	<0.001	0.01	0.47	2.9	0.3	2.1	14.9	0.01	0.01
I102341		0.02	0.06	4.2	750	30.4	20.8	<0.001	0.12	0.49	2.6	0.3	0.6	23.1	<0.01	0.34
I102342		0.07	1.81	3.7	820	46.6	35.1	<0.001	0.03	0.77	2.5	0.3	2.3	22.6	0.01	0.03
I102343		0.04	1.80	3.7	790	50.2	47.1	<0.001	<0.01	0.82	2.1	0.2	1.2	22.1	0.01	0.01
I102344		0.01	0.33	2.4	820	24.5	34.5	<0.001	<0.01	0.89	1.4	0.2	5.5	28.0	<0.01	1.27
I102345		0.05	1.34	3.9	810	51.4	45.8	<0.001	<0.01	0.88	2.5	0.2	1.4	28.6	0.01	0.02
I102346		0.06	1.29	4.0	850	60.6	55.2	<0.001	<0.01	1.05	2.7	0.4	1.4	51.9	0.01	<0.01
I102347		0.03	0.26	3.5	2970	62.9	29.7	<0.001	<0.01	1.43	3.7	0.4	1.1	440	<0.01	0.02
I102348		0.03	0.57	3.9	890	70.8	46.0	<0.001	<0.01	0.82	3.5	0.3	1.3	104.5	<0.01	0.01
I102349		0.02	0.46	3.8	830	28.5	33.5	<0.001	<0.01	1.96	2.1	0.3	3.0	131.0	<0.01	0.06
I102350		0.02	0.43	3.8	870	25.7	34.9	<0.001	<0.01	1.73	2.2	0.3	2.6	110.5	<0.01	0.06
I102351		<0.01	0.10	1.7	350	22.8	29.8	<0.001	0.04	1.94	0.6	0.3	2.9	10.9	<0.01	0.32
I102352		0.01	0.16	2.1	580	40.8	42.0	<0.001	<0.01	1.88	1.1	0.4	1.3	14.4	<0.01	0.10
I102353		0.04	0.74	3.8	680	35.4	31.0	<0.001	<0.01	0.61	3.2	0.5	1.4	59.3	0.01	0.08
I102354		0.03	0.30	4.1	860	50.1	24.8	<0.001	<0.01	0.61	4.0	0.4	1.6	80.9	<0.01	0.05
I102355		0.05	0.79	4.0	830	52.5	29.7	<0.001	<0.01	0.87	3.5	0.4	1.7	74.7	0.01	0.07
I102356		0.03	0.50	4.4	850	38.9	38.8	<0.001	<0.01	0.51	4.2	0.4	1.6	57.3	<0.01	0.21
I102357		0.06	1.17	4.2	820	40.7	37.2	<0.001	<0.01	0.62	2.9	0.4	1.7	42.7	0.01	0.23
I102358		0.06	1.36	3.8	830	39.6	38.5	<0.001	<0.01	0.69	2.5	0.5	1.5	29.0	0.01	0.10
I102359		0.01	0.10	3.6	950	118.5	34.6	<0.001	<0.01	1.17	4.0	0.4	0.8	20.7	<0.01	0.15
I102360		0.01	0.07	3.6	920	96.5	35.9	<0.001	<0.01	1.28	4.3	0.3	0.8	21.4	<0.01	0.15
I102361		0.01	0.08	4.0	950	72.0	33.3	<0.001	<0.01	1.24	4.1	0.3	0.9	49.7	<0.01	0.28
I102362		0.05	1.28	4.8	810	42.1	40.2	<0.001	0.01	0.81	4.1	0.3	1.5	29.7	0.01	1.02

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137460

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	Ag-GRA21
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr	Ag
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5	5
I102323		31.9	0.097	0.26	9.89	49	2.29	13.55	58	4.0	
I102324		35.5	0.070	0.17	8.53	33	0.73	13.50	119	4.7	
I102325		32.8	0.083	0.33	8.83	54	0.52	15.60	608	2.6	
I102326		27.8	0.022	0.51	16.35	31	0.85	13.10	1630	2.3	
I102327		27.4	0.149	0.26	11.15	52	1.02	13.50	188	2.2	
I102328		26.2	0.136	0.21	9.98	51	1.19	12.85	52	1.9	
I102329		27.7	0.159	0.27	12.10	55	1.35	14.60	54	2.4	
I102330		1.1	<0.005	0.05	0.86	11	4.83	4.37	35	1.5	
I102331		30.9	0.148	0.27	10.65	54	0.65	12.45	39	2.6	
I102332		29.0	0.097	0.22	8.50	55	1.30	11.15	34	2.4	
I102333		29.5	0.017	0.69	17.90	30	2.46	11.75	79	2.3	
I102334		28.0	<0.005	0.61	38.6	19	0.94	15.10	140	1.4	
I102335		33.1	0.083	0.24	10.50	47	0.99	15.65	94	2.4	
I102336		30.6	0.096	0.25	7.66	46	1.03	14.50	80	2.9	
I102337		32.9	0.045	0.22	10.95	39	0.79	16.25	87	2.4	
I102338		32.2	0.008	0.24	8.90	34	1.59	17.20	69	2.4	
I102339		29.5	0.038	0.23	10.10	55	1.85	17.15	109	2.5	
I102340		29.1	0.150	0.30	8.39	52	0.76	14.80	35	3.1	
I102341		36.4	0.006	0.22	6.52	36	0.64	17.40	103	1.8	
I102342		37.7	0.148	0.23	17.60	53	1.65	12.25	81	3.2	
I102343		31.5	0.155	0.27	13.35	52	1.10	12.25	66	2.7	
I102344		35.3	0.025	0.34	9.95	19	2.59	9.77	39	2.2	
I102345		31.4	0.159	0.27	10.50	52	1.02	13.05	72	3.1	
I102346		32.8	0.177	0.33	12.10	58	1.19	13.60	62	3.1	
I102347		30.8	0.059	0.34	17.10	49	1.23	17.95	78	2.1	
I102348		32.9	0.125	0.32	9.17	57	0.85	12.50	80	2.7	
I102349		38.0	0.077	0.39	11.15	39	5.45	11.85	81	2.8	
I102350		39.2	0.073	0.36	10.50	37	4.48	11.85	78	2.8	
I102351		21.7	<0.005	0.34	22.5	23	5.89	4.28	42	1.2	
I102352		36.5	0.010	0.51	15.25	25	1.87	10.20	80	2.6	
I102353		38.1	0.101	0.21	10.85	44	0.74	15.40	87	3.7	
I102354		33.0	0.119	0.17	7.92	50	0.50	13.75	113	4.3	
I102355		30.7	0.159	0.19	9.88	52	0.72	13.30	105	4.4	
I102356		32.0	0.123	0.28	7.97	57	0.48	14.15	100	4.0	
I102357		32.7	0.166	0.22	11.15	53	0.82	13.85	83	5.4	
I102358		35.0	0.166	0.25	11.90	54	1.08	14.45	77	5.4	
I102359		37.7	0.009	0.35	13.05	45	1.52	14.25	104	3.5	
I102360		30.9	0.009	0.35	11.00	46	1.48	14.00	102	3.6	
I102361		30.4	0.012	0.36	12.00	46	1.50	16.25	100	3.8	
I102362		33.8	0.140	0.31	13.25	57	1.62	15.40	109	5.1	

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137460

Sample Description	Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
	Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I102363		2.16	<0.005		0.13	0.97	6.0	<0.2	<10	110	0.66	1.04	0.59	0.34	43.5	5.8
I102364		4.71	0.005		0.22	1.25	4.3	<0.2	<10	90	0.98	4.19	0.75	0.28	45.4	8.8
I102365		0.41	0.010		0.87	0.84	10.3	<0.2	<10	40	0.90	1.60	0.34	0.30	45.9	12.1
I102366		1.79	<0.005		0.18	1.28	4.1	<0.2	<10	100	1.00	4.49	0.57	0.20	46.9	6.9
I102367		2.27	<0.005		0.22	1.26	4.7	<0.2	<10	90	1.04	1.35	0.96	0.22	47.2	6.9
I102368		0.59	0.031		>100	1.72	9.9	<0.2	<10	110	2.02	8.65	0.63	0.30	49.0	13.5
I102369		3.89	<0.005		0.57	1.27	4.4	<0.2	<10	140	0.88	2.63	0.55	0.23	42.1	5.7
I102370		0.03	3.05	3.35	2.11	1.78	567	2.8	20	140	0.34	261	9.73	0.73	33.7	33.3
I102371		1.18	<0.005		0.20	1.03	5.2	<0.2	<10	100	0.88	2.18	0.47	0.17	48.0	5.0
I102372		1.35	<0.005		13.50	1.38	4.0	<0.2	<10	80	1.71	2.14	0.48	0.32	64.7	6.4
I102373		2.27	<0.005		0.42	0.76	8.8	<0.2	10	70	1.42	1.60	0.30	0.21	68.2	11.3
I102374		2.25	<0.005		0.33	1.13	4.8	<0.2	<10	40	1.49	0.80	0.34	0.38	67.2	7.1
I102375		3.73	<0.005		0.17	1.26	3.7	<0.2	<10	30	1.14	2.14	0.50	0.12	48.7	4.3
I102376		4.62	<0.005		0.15	1.30	4.0	<0.2	<10	40	1.13	1.76	0.50	0.10	55.0	5.2
I102377		1.99	<0.005		0.31	0.93	5.4	<0.2	<10	30	1.28	1.74	0.32	0.12	55.7	11.0
I102378		2.02	<0.005		0.28	0.97	12.7	<0.2	<10	50	1.29	1.63	0.32	0.17	67.0	8.1
I102379		2.98	0.068		0.18	1.19	3.5	<0.2	<10	80	1.16	2.78	0.52	0.25	51.3	6.4
I102380		0.93	<0.005		0.06	0.72	5.0	<0.2	<10	100	0.61	0.28	0.28	0.20	32.4	3.4
I102381		1.70	<0.005		1.14	1.21	6.2	<0.2	<10	80	1.60	2.90	0.45	0.72	62.6	9.5
I102382		2.07	1.525	1.44	18.30	1.35	253	2.0	<10	170	3.30	132.5	1.12	2.63	41.9	102.0
I102383		2.59	0.060		1.29	3.04	12.5	<0.2	<10	110	2.80	6.62	2.56	0.33	45.3	9.5
I102384		3.50	0.028		36.8	1.64	11.6	<0.2	<10	60	1.97	11.05	0.92	0.42	54.6	10.6
I102385		2.25	0.010		0.76	0.99	12.0	<0.2	<10	90	1.04	4.71	0.38	0.24	53.7	18.0
I102386		2.24	<0.005		0.17	1.03	4.2	<0.2	<10	100	0.85	0.99	0.48	0.28	56.0	6.1

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137460

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I102363		22	4.89	6.1	2.50	5.21	0.12	0.31	<0.01	0.034	0.43	21.6	18.3	0.60	467	2.13
I102364		19	6.14	13.4	3.10	6.38	0.10	0.24	<0.01	0.075	0.39	22.5	23.0	0.81	838	1.59
I102365		11	30.0	79.3	3.05	3.54	0.06	0.10	0.01	0.075	0.31	24.3	6.1	0.21	830	0.58
I102366		20	9.06	15.0	3.22	6.59	0.13	0.26	<0.01	0.075	0.43	23.6	22.4	0.82	734	1.06
I102367		19	5.64	4.4	3.09	6.50	0.10	0.18	<0.01	0.084	0.33	23.2	22.9	0.86	692	0.84
I102368		15	9.19	181.5	3.27	6.55	0.07	0.14	0.27	0.073	0.28	27.5	17.6	0.79	1120	1.08
I102369		20	6.77	7.5	3.03	6.37	0.11	0.22	0.01	0.072	0.44	20.2	26.8	0.91	788	1.50
I102370		52	1.66	302	5.48	7.53	0.30	0.47	5.17	1.370	0.17	16.5	8.1	0.27	917	85.5
I102371		17	6.52	9.3	2.70	5.83	0.11	0.24	0.01	0.061	0.40	23.2	24.9	0.74	588	1.22
I102372		16	8.69	74.9	3.36	5.92	0.08	0.16	0.16	0.061	0.24	32.9	15.3	0.62	1340	0.94
I102373		15	10.85	5.4	3.78	3.38	0.09	0.13	0.01	0.063	0.27	33.4	4.9	0.12	1140	1.31
I102374		18	11.10	5.6	3.55	5.78	0.08	0.11	0.01	0.053	0.21	32.1	11.7	0.49	1280	1.02
I102375		17	5.05	10.3	2.86	7.77	0.10	0.63	<0.01	0.079	0.13	25.8	23.4	0.75	638	1.30
I102376		15	3.41	7.3	2.90	7.89	0.10	0.64	<0.01	0.089	0.14	28.8	23.6	0.75	648	0.96
I102377		16	9.14	9.1	3.53	4.91	0.08	0.08	0.01	0.039	0.16	26.2	8.7	0.42	799	0.56
I102378		13	5.39	12.0	4.35	5.01	0.10	0.14	0.01	0.058	0.28	34.0	10.5	0.40	503	0.70
I102379		19	5.86	9.7	3.02	6.04	0.10	0.24	0.01	0.078	0.38	24.2	19.7	0.74	661	1.03
I102380		19	6.85	3.0	2.03	3.78	0.09	0.21	<0.01	0.021	0.36	15.4	33.8	0.42	291	0.90
I102381		20	7.15	137.0	3.27	5.82	0.09	0.20	0.01	0.100	0.33	31.6	17.9	0.63	1120	0.94
I102382		10	32.0	3610	10.20	11.25	0.17	0.10	0.25	0.563	0.24	21.7	7.4	0.20	4530	6.50
I102383		13	20.1	95.4	2.60	9.08	0.07	0.14	0.03	0.081	0.27	21.0	17.3	0.67	1540	0.59
I102384		26	19.75	101.5	3.44	7.03	0.08	0.18	0.13	0.081	0.26	28.7	15.9	0.56	1280	7.63
I102385		17	10.35	39.7	4.44	4.84	0.09	0.19	0.02	0.045	0.32	27.1	10.5	0.34	1040	2.19
I102386		19	7.33	9.5	2.55	4.94	0.10	0.26	<0.01	0.021	0.41	27.9	20.1	0.61	580	3.14

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137460

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I102363		0.09	2.02	4.7	840	30.9	43.2	<0.001	0.01	0.89	3.1	0.3	1.7	47.5	0.01	0.10
I102364		0.05	1.12	5.2	890	33.8	45.5	<0.001	0.01	1.02	3.8	0.3	2.0	38.2	0.01	0.06
I102365		0.01	0.11	2.9	720	38.0	45.5	<0.001	0.01	1.81	2.0	0.2	1.2	21.0	<0.01	0.05
I102366		0.07	1.18	5.1	900	32.8	51.1	<0.001	0.01	1.28	4.3	0.3	2.1	51.3	0.01	0.03
I102367		0.05	0.89	5.3	940	29.9	37.1	<0.001	0.01	1.08	3.8	0.2	2.0	43.9	0.01	0.02
I102368		0.09	0.39	4.4	900	128.5	36.5	0.002	0.01	1.12	3.6	0.3	3.3	62.7	<0.01	0.21
I102369		0.06	1.11	5.3	910	42.9	54.0	<0.001	0.01	0.90	4.3	0.2	2.2	38.8	0.01	0.14
I102370		0.04	1.48	67.0	790	45.1	10.9	0.003	1.15	9.35	7.6	1.5	107.0	87.6	0.03	41.8
I102371		0.06	1.24	5.1	900	41.3	48.0	<0.001	0.01	0.92	3.5	0.2	2.1	28.8	0.01	0.11
I102372		0.03	0.22	20.0	960	31.7	32.1	0.001	0.01	0.68	3.7	0.3	1.0	44.1	<0.01	0.10
I102373		0.01	0.09	3.6	940	91.7	37.3	<0.001	0.01	1.09	1.4	0.3	1.6	19.7	<0.01	0.07
I102374		0.03	0.08	4.0	860	42.4	27.6	<0.001	0.01	0.78	2.4	0.2	1.0	25.6	<0.01	0.04
I102375		0.04	0.56	3.9	660	25.3	16.2	<0.001	0.01	1.06	3.3	0.2	2.9	35.9	0.01	0.02
I102376		0.05	0.60	3.9	680	15.7	15.2	<0.001	0.01	1.10	3.4	0.2	1.9	39.8	0.01	0.04
I102377		0.02	0.08	3.3	870	45.1	22.4	<0.001	0.01	0.59	1.5	0.2	0.7	19.1	<0.01	0.06
I102378		0.02	0.29	3.3	770	22.5	38.9	<0.001	0.01	1.84	2.2	0.2	1.9	21.0	<0.01	0.03
I102379		0.06	0.97	4.9	1260	29.7	46.9	<0.001	0.01	1.15	3.8	0.3	1.8	35.6	0.01	0.04
I102380		0.06	2.48	3.9	690	19.5	53.2	<0.001	0.03	0.42	3.7	0.2	1.5	14.9	0.01	0.01
I102381		0.03	0.55	4.5	990	28.7	42.8	<0.001	0.02	3.91	4.1	0.3	1.5	41.2	<0.01	0.03
I102382		0.02	0.16	6.6	3990	172.0	42.4	0.001	0.03	148.0	2.4	0.7	6.6	241	<0.01	0.80
I102383		0.04	0.29	4.2	5270	43.3	37.4	<0.001	0.03	8.34	4.8	0.2	1.4	185.0	<0.01	0.04
I102384		0.03	0.28	6.1	1940	47.7	36.9	0.001	0.03	3.18	3.6	0.2	2.2	88.3	<0.01	0.10
I102385		0.03	0.55	4.2	960	23.3	38.5	<0.001	0.02	2.66	3.1	0.3	22.5	33.1	0.01	0.21
I102386		0.05	1.47	4.2	980	41.7	49.8	<0.001	0.01	0.76	3.0	0.3	1.6	32.4	0.01	0.01

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137460

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	Ag-GRA21
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr	Ag
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5	5
I102363		30.6	0.191	0.29	12.85	57	2.43	14.35	85	6.0	
I102364		28.8	0.154	0.37	9.52	62	0.83	13.75	102	5.0	
I102365		24.6	0.011	0.43	6.58	26	2.16	11.30	63	2.5	
I102366		31.0	0.173	0.41	9.11	67	2.12	14.35	84	5.2	
I102367		28.8	0.135	0.27	8.51	65	0.74	13.80	86	3.5	
I102368		27.1	0.052	0.42	7.38	53	340	13.00	101	3.7	167
I102369		29.5	0.172	0.47	9.14	66	3.54	12.75	91	4.3	
I102370		4.7	0.164	0.14	2.42	32	70.4	9.39	85	20.7	
I102371		31.5	0.166	0.35	8.38	63	1.87	13.60	73	4.9	
I102372		32.5	0.036	0.37	8.51	56	199.5	16.90	99	3.9	
I102373		29.5	0.008	0.39	11.45	34	1.76	13.45	104	3.7	
I102374		30.4	0.010	0.34	8.10	49	1.35	14.70	107	2.6	
I102375		21.3	0.083	0.21	6.57	43	0.97	9.48	82	21.4	
I102376		25.1	0.089	0.18	6.80	43	0.56	10.60	81	19.8	
I102377		30.5	0.007	0.24	6.67	36	0.31	12.55	100	2.0	
I102378		32.3	0.037	0.43	7.65	43	2.40	11.75	67	3.6	
I102379		32.7	0.133	0.38	12.35	62	0.78	14.65	80	4.8	
I102380		31.4	0.146	0.33	8.37	50	0.71	13.10	35	3.6	
I102381		33.7	0.097	0.41	10.25	57	1.35	15.60	94	4.4	
I102382		24.7	0.006	0.99	64.9	63	85.0	11.70	166	3.0	
I102383		27.8	0.054	0.34	30.0	51	4.07	11.55	84	3.3	
I102384		27.1	0.042	0.37	12.90	45	136.0	11.90	90	5.5	
I102385		33.2	0.071	0.36	11.45	53	18.45	12.90	76	4.5	
I102386		33.5	0.168	0.29	14.05	62	2.86	15.45	82	5.1	

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 12-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137460

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 13-OCT-2010
Account: EIASQI

CERTIFICATE WH10137461

Project: SQI10-01

P.O. No.: SQI10-01_13

This report is for 37 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 24-SEP-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
CRU-31	Fine crushing - 70% <2mm
PUL-QC	Pulverizing QC Test
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
LOG-22d	Sample login - Rcd w/o BarCode dup
SPL-21d	Split sample - duplicate
PUL-31d	Pulverize Split - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 13-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137461

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	Au-GRA21 Au Check ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02
I102286		2.10	<0.005			0.18	0.81	5.9	<0.2	<10	60	0.79	0.84	0.58	0.93	59.3
I102287		1.19	<0.005			3.19	1.46	9.9	<0.2	<10	60	1.63	10.15	0.40	3.19	70.9
I102288		1.70	<0.005			0.57	1.71	8.4	<0.2	<10	80	2.35	1.91	0.65	3.67	56.1
I102289		1.40	<0.005			0.19	2.08	2.5	<0.2	<10	80	3.34	0.64	0.78	2.50	42.4
I102290		0.06	2.97	2.89		2.08	1.91	569	2.5	20	130	0.30	257	9.94	1.13	30.6
I102291		2.87	0.043			2.59	1.17	47.7	<0.2	<10	70	1.87	4.90	0.47	1.98	54.2
I102292		1.26	0.131			7.08	1.32	50.2	<0.2	<10	60	1.21	7.43	0.46	34.6	78.7
I102293		1.75	<0.005			0.35	1.09	5.6	<0.2	<10	80	0.80	1.06	0.58	6.71	40.9
I102294		2.20	<0.005			0.27	0.91	5.2	<0.2	<10	80	0.90	1.02	0.56	0.63	50.2
I102295		3.31	0.152			2.12	1.50	8.6	0.2	<10	350	3.10	8.05	0.55	0.92	75.2
I102296		2.85	1.070	0.81		1.93	0.92	24.6	1.0	<10	70	1.10	110.5	0.18	1.17	75.2
I102297		1.42	6.49	4.98	5.09	69.7	0.55	229	2.8	<10	30	1.37	500	0.11	1.05	25.3
I102298		1.43	0.095			8.83	1.19	14.7	<0.2	<10	70	1.48	12.00	0.26	0.68	58.7
I102299		3.74	0.006			0.75	0.77	3.9	<0.2	<10	60	0.93	3.12	0.41	0.38	44.0
I102300		0.99	<0.005			0.19	0.85	5.9	<0.2	<10	110	0.67	0.72	0.32	0.16	34.6
I102301		0.03	<0.005			0.12	0.67	4.9	<0.2	<10	90	0.53	0.64	0.26	0.14	28.2
I102302		4.13	0.121			0.51	0.89	3.4	<0.2	<10	80	1.10	3.04	0.35	0.16	48.0
I102303		1.48	1.495	1.28	2.13	1.50	1.31	15.1	0.3	<10	150	2.04	75.2	0.44	0.25	48.8
I102304		1.95	0.014			1.21	2.17	3.6	<0.2	<10	450	3.24	21.5	0.79	0.41	57.1
I102305		1.91	0.050			0.69	1.28	3.7	<0.2	<10	110	1.68	5.07	0.61	0.15	43.8
I102306		3.72	<0.005			0.34	1.59	3.1	<0.2	<10	190	1.88	3.90	1.02	0.22	53.6
I102307		2.54	<0.005			0.11	2.02	2.6	<0.2	<10	220	2.74	0.45	1.91	0.16	42.7
I102308		2.39	<0.005			0.21	1.97	3.4	<0.2	<10	120	2.55	0.53	1.27	0.23	44.6
I102309		1.80	<0.005			0.13	1.16	3.4	<0.2	<10	90	1.41	0.42	0.66	0.14	39.5
I102310		1.90	<0.005			0.13	1.13	3.8	<0.2	<10	90	1.14	0.25	0.46	0.13	39.8
I102311		2.16	<0.005			0.09	0.89	4.3	<0.2	<10	80	0.78	0.20	0.41	0.17	37.7
I102312		2.14	<0.005			0.10	0.98	4.8	<0.2	<10	80	0.90	2.61	0.55	0.16	46.4
I102313		1.74	<0.005			0.95	1.81	4.0	<0.2	<10	100	2.12	2.04	0.70	0.39	47.8
I102314		2.63	0.010			0.67	1.85	9.4	<0.2	<10	60	2.29	3.15	0.70	0.63	49.7
I102315		3.48	<0.005			0.07	1.15	1.6	<0.2	<10	20	1.21	4.16	0.65	0.11	58.4
I102316		2.03	<0.005			0.26	1.13	1.2	<0.2	<10	20	1.26	4.25	0.50	0.12	55.5
I102317		2.25	<0.005			0.17	1.25	1.6	<0.2	<10	20	1.44	7.30	0.32	0.10	51.8
I102318		1.34	<0.005			0.55	1.93	15.2	<0.2	<10	20	2.92	1.90	0.75	0.16	53.7
I102319		3.30	<0.005			0.32	1.93	4.1	<0.2	<10	110	2.09	1.17	0.75	0.22	34.2
I102320		0.02	<0.005			0.38	1.94	4.6	<0.2	<10	110	2.57	1.52	0.76	0.26	42.6
I102321		4.09	<0.005			0.32	1.16	4.3	<0.2	<10	90	1.12	3.10	0.59	0.20	46.4
I102322		2.22	<0.005			0.12	1.16	4.9	<0.2	<10	80	0.90	4.68	0.66	0.24	40.0

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 13-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137461

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Co	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn
	Units	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm
	LOR	0.1	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5
I102286		3.7	15	5.53	55.3	2.06	4.33	0.11	0.24	0.01	0.026	0.30	33.3	13.4	0.48	506
I102287		7.1	11	27.3	234	3.16	6.57	0.10	0.12	0.02	0.139	0.31	40.5	16.6	0.41	3750
I102288		5.9	13	14.30	45.8	2.72	5.68	0.10	0.14	0.01	0.055	0.27	29.8	16.1	0.45	3580
I102289		5.3	14	6.27	11.0	2.41	6.43	0.08	0.15	0.01	0.066	0.28	28.7	14.5	0.57	3160
I102290		26.5	53	1.61	312	5.51	6.46	0.20	0.42	4.64	1.655	0.18	15.2	6.9	0.27	953
I102291		13.2	10	14.60	122.5	3.59	4.67	0.10	0.15	0.05	0.084	0.25	30.8	7.8	0.30	4560
I102292		10.5	7	25.8	1180	2.31	4.99	0.10	0.12	0.09	0.119	0.35	41.6	8.2	0.22	3350
I102293		6.5	17	6.73	15.1	2.65	4.84	0.08	0.15	0.01	0.035	0.33	20.6	12.6	0.57	1600
I102294		5.9	24	5.72	17.7	2.88	5.76	0.14	0.26	<0.01	0.025	0.41	25.8	14.6	0.58	721
I102295		5.6	13	19.20	39.3	3.31	7.28	0.11	0.16	0.01	0.042	0.24	36.3	12.2	0.52	8090
I102296		19.8	10	18.75	338	4.39	4.82	0.13	0.12	0.01	0.046	0.35	38.5	10.7	0.14	1770
I102297		11.9	5	8.42	1240	8.48	5.93	0.17	0.07	0.19	0.308	0.17	16.4	2.1	0.06	417
I102298		9.7	10	12.55	936	3.43	5.90	0.10	0.14	0.01	0.048	0.32	34.2	11.8	0.25	2350
I102299		4.0	14	5.45	44.9	1.93	4.46	0.10	0.23	<0.01	0.014	0.27	23.7	15.1	0.39	490
I102300		3.7	14	7.15	14.5	2.29	4.53	0.11	0.24	<0.01	0.019	0.43	17.7	36.9	0.43	346
I102301		3.2	15	6.29	5.3	1.90	3.74	0.10	0.22	<0.01	0.017	0.34	14.2	33.6	0.39	273
I102302		3.9	16	5.63	174.0	2.39	5.45	0.10	0.23	<0.01	0.024	0.34	25.2	18.4	0.40	597
I102303		9.8	13	10.85	134.5	3.54	6.27	0.11	0.13	0.01	0.040	0.26	26.2	16.6	0.41	1400
I102304		5.1	12	14.30	85.2	2.64	7.55	0.09	0.12	0.01	0.034	0.26	31.8	14.5	0.60	2030
I102305		4.9	14	7.26	21.2	2.27	5.40	0.08	0.16	<0.01	0.015	0.30	22.6	18.3	0.53	498
I102306		4.8	15	7.76	185.5	2.77	6.48	0.09	0.20	<0.01	0.036	0.35	28.3	21.1	0.55	1020
I102307		4.9	12	10.75	10.3	1.95	6.34	0.08	0.14	<0.01	0.010	0.30	23.0	16.5	0.64	861
I102308		5.2	14	6.26	7.3	2.32	6.60	0.09	0.21	<0.01	0.016	0.33	23.6	17.5	0.69	687
I102309		4.3	11	5.30	9.4	1.89	4.98	0.09	0.28	<0.01	0.011	0.31	20.9	19.2	0.55	442
I102310		4.1	12	4.64	6.9	2.04	4.96	0.11	0.37	<0.01	0.012	0.35	21.0	18.9	0.52	398
I102311		5.0	11	4.68	8.8	1.82	4.54	0.11	0.34	<0.01	0.009	0.34	19.5	20.1	0.53	372
I102312		7.1	16	4.93	10.0	2.51	5.66	0.15	0.22	<0.01	0.047	0.34	23.9	21.9	0.64	443
I102313		5.7	16	6.30	10.7	2.71	7.06	0.13	0.18	<0.01	0.063	0.37	23.9	20.7	0.85	1130
I102314		6.1	16	5.50	11.4	3.23	8.37	0.11	0.17	0.01	0.067	0.24	31.5	21.3	0.91	1280
I102315		4.2	14	2.67	5.9	2.66	6.91	0.09	0.39	<0.01	0.054	0.18	28.4	18.2	0.67	766
I102316		3.5	9	2.82	9.7	2.49	6.40	0.09	0.39	<0.01	0.066	0.16	25.9	16.5	0.66	705
I102317		4.4	12	2.52	19.8	2.59	6.57	0.07	0.37	<0.01	0.114	0.17	17.3	18.7	0.70	677
I102318		6.5	14	2.23	10.2	3.04	8.55	0.08	0.10	0.01	0.068	0.12	27.3	22.5	1.11	817
I102319		5.8	18	4.38	5.8	3.03	6.25	0.12	0.12	0.02	0.072	0.36	20.2	23.5	1.03	811
I102320		7.0	17	5.48	6.7	3.07	7.68	0.14	0.15	0.02	0.088	0.36	24.5	28.9	1.07	818
I102321		6.8	17	5.55	10.1	2.79	6.13	0.17	0.25	<0.01	0.051	0.37	24.7	21.4	0.68	770
I102322		6.7	17	4.62	14.9	2.82	6.34	0.18	0.25	0.01	0.052	0.34	21.5	24.3	0.73	543

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 13-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137461

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Mo	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.05	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01
I102286		4.16	0.03	1.56	3.9	740	84.8	34.6	<0.001	<0.01	1.96	2.7	0.3	1.3	28.3	<0.01
I102287		7.79	0.01	0.19	4.2	760	982	42.3	<0.001	0.01	19.55	3.6	0.4	1.1	62.3	<0.01
I102288		2.32	0.01	0.26	5.0	900	49.0	35.4	<0.001	<0.01	33.6	4.7	0.4	1.1	99.0	<0.01
I102289		0.70	0.01	0.29	4.7	840	24.1	37.2	<0.001	<0.01	7.69	3.1	0.4	1.2	79.0	<0.01
I102290		79.1	0.05	1.06	53.9	860	39.6	11.2	0.003	1.17	7.56	4.6	1.5	115.5	90.7	0.03
I102291		5.36	0.01	0.27	4.0	810	619	33.5	<0.001	0.08	31.6	2.6	0.5	1.2	81.0	<0.01
I102292		8.91	<0.01	0.14	7.2	1010	787	51.2	<0.001	0.59	57.1	2.3	0.6	0.9	76.0	<0.01
I102293		3.67	0.04	0.81	4.8	830	59.4	41.5	<0.001	0.01	1.34	2.8	0.2	1.4	64.3	0.01
I102294		3.71	0.08	2.00	4.8	990	38.8	48.8	<0.001	0.01	1.78	3.1	0.4	1.8	40.5	0.01
I102295		2.80	0.02	0.30	4.7	770	60.7	33.0	<0.001	<0.01	1.49	3.5	0.4	1.6	378	<0.01
I102296		6.63	0.01	0.23	3.3	530	51.8	48.4	<0.001	0.01	4.40	2.0	0.4	4.0	39.1	<0.01
I102297		30.3	0.01	0.26	2.2	1040	654	23.4	<0.001	0.12	215	0.7	1.5	8.5	104.0	<0.01
I102298		3.20	0.01	0.30	3.5	550	217	41.5	<0.001	<0.01	12.60	2.6	0.3	11.6	62.5	<0.01
I102299		3.07	0.04	1.63	3.1	690	59.3	35.7	<0.001	<0.01	2.20	1.9	0.2	1.4	34.0	0.01
I102300		2.11	0.09	2.77	4.2	680	25.3	54.5	<0.001	<0.01	0.68	3.2	0.3	1.8	21.6	0.01
I102301		1.91	0.05	2.96	3.7	630	20.6	47.2	<0.001	0.01	0.57	2.8	0.3	1.5	13.1	0.01
I102302		3.27	0.07	1.32	3.3	680	44.1	39.6	<0.001	<0.01	0.82	2.4	0.3	1.6	35.5	<0.01
I102303		0.80	0.01	0.42	3.5	710	125.0	35.0	<0.001	0.01	1.30	3.3	0.3	1.4	109.5	<0.01
I102304		0.61	0.01	0.19	3.7	880	101.5	31.2	<0.001	0.01	1.05	3.6	0.3	1.4	517	<0.01
I102305		0.62	0.02	0.64	3.5	760	41.0	37.4	<0.001	<0.01	0.57	2.8	0.2	1.4	112.5	<0.01
I102306		0.78	0.03	0.58	3.8	770	60.1	42.2	<0.001	<0.01	0.90	2.8	0.3	1.7	175.0	<0.01
I102307		0.37	0.02	0.36	3.3	730	28.2	36.3	<0.001	<0.01	0.56	2.6	0.3	1.2	452	<0.01
I102308		0.71	0.02	0.45	4.3	790	25.2	36.9	<0.001	<0.01	0.76	2.8	0.3	1.5	162.5	<0.01
I102309		1.05	0.03	0.93	3.4	640	26.0	34.7	<0.001	<0.01	0.64	2.2	0.3	1.2	67.1	0.01
I102310		1.31	0.06	1.40	3.5	600	26.4	37.2	<0.001	0.01	0.74	2.2	0.3	1.4	41.6	0.01
I102311		3.85	0.04	1.67	3.3	600	32.1	36.8	<0.001	0.01	0.69	2.0	0.3	1.2	22.1	0.01
I102312		2.11	0.04	1.51	4.4	860	44.1	36.9	<0.001	0.01	0.91	2.6	0.4	2.2	29.1	0.01
I102313		1.94	0.03	0.58	4.6	900	33.8	42.0	<0.001	0.01	0.68	3.0	0.3	2.0	63.9	<0.01
I102314		1.22	0.01	0.22	5.2	1260	112.0	29.2	<0.001	<0.01	0.61	3.0	0.3	1.4	49.2	<0.01
I102315		0.63	0.02	0.07	3.7	680	18.8	18.8	<0.001	<0.01	0.48	2.3	0.3	0.3	29.1	<0.01
I102316		0.43	0.02	0.06	3.0	750	24.9	15.3	<0.001	<0.01	0.43	2.0	0.3	0.2	26.8	<0.01
I102317		2.70	0.02	0.06	3.3	660	30.8	16.6	<0.001	<0.01	0.51	1.7	0.3	0.2	21.2	<0.01
I102318		0.58	0.01	0.06	5.4	1010	15.4	13.3	<0.001	<0.01	0.32	1.9	0.3	0.5	37.6	<0.01
I102319		0.93	0.03	0.29	4.0	1200	35.8	38.8	<0.001	0.02	0.80	3.0	0.2	1.5	36.8	<0.01
I102320		1.05	0.02	0.32	4.9	1210	44.5	47.0	0.001	0.02	0.83	3.7	0.4	1.9	43.6	0.01
I102321		1.00	0.05	1.03	4.7	910	73.9	49.0	<0.001	0.02	0.74	3.6	0.5	1.8	36.7	0.01
I102322		1.12	0.04	1.14	4.4	950	42.2	43.0	0.001	0.02	0.67	2.8	0.5	1.9	96.3	0.01

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 13-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137461

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Te	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I102286		0.03	59.1	0.131	0.22	14.85	47	1.04	12.65	78	3.4
I102287		0.30	54.1	0.025	0.47	12.35	36	0.38	15.70	182	2.4
I102288		0.09	39.7	0.056	0.29	5.33	47	0.37	15.95	168	2.8
I102289		0.02	31.7	0.060	0.25	6.27	57	0.30	15.65	174	2.6
I102290		42.3	4.4	0.165	0.13	2.07	35	60.9	10.35	88	18.8
I102291		0.50	34.5	0.034	0.37	14.80	38	0.54	12.65	158	3.1
I102292		1.72	27.3	0.017	0.53	14.15	29	0.38	17.75	511	3.4
I102293		0.05	27.5	0.128	0.28	14.80	56	0.78	14.05	281	2.8
I102294		0.03	37.2	0.189	0.28	13.60	76	0.90	14.75	89	4.2
I102295		0.05	37.3	0.043	0.37	12.20	52	1.03	16.60	99	2.8
I102296		0.40	35.8	0.021	0.52	22.2	37	8.01	10.45	83	2.6
I102297		1.06	27.8	0.006	0.21	47.0	40	166.5	5.28	110	1.6
I102298		0.06	38.7	0.035	0.41	17.80	38	15.80	11.20	129	2.7
I102299		0.01	39.3	0.110	0.21	13.35	47	2.18	10.60	68	3.9
I102300		<0.01	35.2	0.163	0.34	11.25	51	1.08	13.90	40	3.9
I102301		<0.01	30.8	0.143	0.29	9.64	46	0.86	12.05	33	3.4
I102302		0.02	38.3	0.102	0.26	14.90	49	1.32	11.95	56	4.0
I102303		0.19	33.5	0.052	0.28	9.39	50	2.33	11.55	73	2.7
I102304		0.02	34.8	0.034	0.35	8.13	47	1.12	13.85	93	2.4
I102305		0.01	35.4	0.101	0.24	9.25	52	1.01	11.45	58	2.9
I102306		0.01	36.2	0.091	0.32	10.40	53	0.68	12.35	70	3.3
I102307		0.01	33.4	0.076	0.23	9.61	49	0.28	12.50	62	2.5
I102308		0.01	35.2	0.113	0.24	8.40	51	0.39	12.95	58	4.2
I102309		<0.01	33.9	0.113	0.19	9.47	42	0.56	12.85	56	5.5
I102310		<0.01	34.6	0.142	0.22	9.73	41	0.70	13.40	55	6.6
I102311		<0.01	35.1	0.150	0.21	12.55	40	1.20	12.85	60	6.2
I102312		0.01	30.0	0.166	0.25	9.95	56	1.73	13.75	79	3.8
I102313		0.01	31.2	0.136	0.32	7.49	60	1.17	13.95	67	3.6
I102314		0.03	27.2	0.049	0.26	6.94	51	0.77	15.15	143	5.6
I102315		0.02	26.4	0.006	0.19	6.80	35	0.12	12.70	90	14.6
I102316		0.01	24.7	0.006	0.15	6.66	33	0.40	12.65	89	14.6
I102317		0.08	26.0	0.006	0.16	5.54	34	0.34	11.10	91	13.2
I102318		0.14	25.3	0.007	0.14	4.32	44	0.77	12.50	117	3.8
I102319		0.02	22.3	0.100	0.30	5.78	61	1.18	10.70	96	2.4
I102320		0.02	28.1	0.095	0.37	7.68	63	1.38	13.05	100	2.8
I102321		<0.01	29.7	0.152	0.29	9.98	61	0.79	14.70	86	4.0
I102322		<0.01	28.9	0.160	0.25	10.50	62	1.64	13.40	81	4.1

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 13-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137461

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 10-OCT-2010
Account: EIASQI

CERTIFICATE WH10137462

Project: SQI10-01

P.O. No.: SQI10-01_12

This report is for 77 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 24-SEP-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
CRU-31	Fine crushing - 70% <2mm
PUL-QC	Pulverizing QC Test
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
LOG-22d	Sample login - Rcd w/o BarCode dup
SPL-21d	Split sample - duplicate
PUL-31d	Pulverize Split - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 10-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137462

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I102209		1.68	0.005		0.22	0.93	5.4	<0.2	<10	100	0.60	0.26	0.47	0.16	49.0	5.2
I102210		0.02	3.02	2.82	2.20	1.75	546	2.8	20	130	0.41	263	9.51	0.69	34.2	33.0
I102211		1.21	0.093		1.11	1.32	6.1	<0.2	<10	80	1.25	4.82	0.45	0.26	57.1	5.3
I102212		4.04	<0.005		0.11	0.99	4.3	<0.2	<10	90	0.96	0.73	0.45	0.13	49.3	5.4
I102213		5.61	<0.005		0.20	0.95	4.1	<0.2	<10	80	0.96	0.59	0.50	0.13	44.1	4.8
I102214		3.68	<0.005		0.16	1.09	4.1	<0.2	<10	80	1.24	0.60	0.55	0.26	50.6	5.1
I102215		4.56	<0.005		0.10	1.38	3.7	<0.2	<10	90	1.61	0.78	0.67	0.23	51.5	5.5
I102216		4.56	<0.005		0.13	1.84	3.1	<0.2	<10	130	2.41	0.54	1.18	0.25	52.4	6.0
I102217		5.70	<0.005		0.09	1.17	4.0	<0.2	<10	90	1.56	0.63	1.11	0.30	47.8	4.6
I102218		5.61	<0.005		0.09	0.94	4.9	<0.2	<10	80	1.03	0.78	0.82	0.18	43.7	4.5
I102219		0.90	<0.005		0.15	2.07	12.7	<0.2	<10	40	2.59	1.75	1.11	0.28	56.9	6.6
I102220		0.44	<0.005		0.07	0.74	6.7	<0.2	<10	100	0.86	0.37	0.33	0.18	36.3	4.4
I102221		2.66	0.005		0.12	1.06	4.0	<0.2	<10	80	1.38	1.04	0.41	0.16	42.6	4.8
I102222		4.75	0.017		0.08	1.01	3.8	<0.2	<10	60	1.53	1.02	0.40	0.16	40.7	4.5
I102223		4.52	<0.005		0.16	1.68	3.6	<0.2	<10	130	3.22	0.53	0.72	0.26	38.4	5.0
I102224		5.09	<0.005		0.10	1.05	5.2	<0.2	<10	80	1.23	0.54	0.59	0.14	40.1	5.4
I102225		4.09	0.005		0.08	1.16	5.6	<0.2	<10	90	1.36	0.46	0.63	0.23	44.4	5.6
I102226		4.17	0.005		0.07	0.81	2.9	<0.2	<10	60	1.46	0.29	0.41	0.11	39.4	4.3
I102227		4.17	<0.005		0.07	1.53	4.0	<0.2	<10	100	2.72	0.43	1.46	0.24	45.3	5.6
I102228		5.20	<0.005		0.06	1.13	6.4	<0.2	<10	70	1.56	1.09	0.70	0.18	44.9	5.2
I102229		2.23	<0.005		0.06	1.14	7.9	<0.2	<10	80	1.63	1.48	0.53	0.11	49.4	4.1
I102230		2.11	<0.005		0.07	1.20	6.7	<0.2	<10	90	1.70	0.90	0.60	0.10	47.4	4.0
I102231		3.88	<0.005		0.07	1.45	8.5	<0.2	<10	70	2.35	0.24	0.78	0.14	49.8	4.7
I102232		0.50	<0.005		0.05	2.04	6.6	<0.2	<10	60	3.70	0.15	0.95	0.18	44.0	4.3
I102233		3.83	<0.005		0.04	1.47	6.5	<0.2	<10	70	2.45	0.19	0.69	0.13	47.1	4.6
I102234		4.48	<0.005		0.06	2.07	8.1	<0.2	<10	70	2.85	0.66	1.13	0.16	44.2	7.7
I102235		4.59	<0.005		0.07	2.11	8.9	<0.2	<10	110	2.78	0.20	1.27	0.16	45.3	2.9
I102236		4.24	<0.005		0.06	1.72	8.2	<0.2	<10	130	2.23	0.27	0.83	0.13	43.9	2.9
I102237		3.72	<0.005		0.33	1.83	8.3	<0.2	<10	130	2.15	0.48	0.90	0.18	44.7	4.7
I102238		3.63	<0.005		0.07	2.01	8.2	<0.2	<10	190	2.04	0.50	0.86	0.19	48.6	6.4
I102239		3.74	<0.005		0.08	2.29	4.7	<0.2	<10	170	2.81	0.42	1.06	0.18	44.5	5.0
I102240		<0.02	<0.005		0.11	2.28	4.6	<0.2	<10	170	2.77	0.40	1.01	0.18	47.1	5.2
I102241		4.93	<0.005		0.16	2.53	5.0	<0.2	<10	120	2.67	0.95	1.21	0.16	51.7	5.0
I102242		5.00	<0.005		0.10	1.35	6.6	<0.2	<10	100	1.75	0.95	0.54	0.17	51.4	5.0
I102243		1.62	<0.005		0.11	1.26	6.7	<0.2	<10	110	1.41	0.50	0.49	0.11	51.4	5.2
I102244		2.65	0.012		0.41	2.70	9.2	<0.2	<10	100	5.38	3.70	0.91	0.37	59.2	11.5
I102245		4.70	<0.005		0.12	1.11	10.2	<0.2	<10	150	0.91	0.89	0.47	0.29	52.1	6.4
I102246		1.86	<0.005		0.04	0.90	9.1	<0.2	<10	90	0.66	0.52	0.42	0.18	46.5	3.4
I102247		1.30	<0.005		0.07	0.94	8.7	<0.2	<10	100	0.94	2.72	0.41	0.21	52.5	3.5
I102248		2.04	<0.005		0.10	1.17	7.7	<0.2	10	20	1.34	0.56	0.56	0.18	59.0	3.1

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 10-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137462

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I102209		20	7.03	9.6	2.56	4.69	0.10	0.17	<0.01	0.031	0.44	25.1	16.1	0.59	508	3.94
I102210		55	1.74	307	5.26	7.44	0.26	0.44	4.99	1.400	0.17	16.5	8.6	0.27	895	85.1
I102211		16	11.45	9.1	3.03	5.83	0.08	0.12	0.01	0.055	0.33	27.9	16.3	0.56	959	0.97
I102212		19	5.51	8.8	2.54	5.24	0.09	0.16	<0.01	0.031	0.38	24.3	17.5	0.61	462	2.84
I102213		19	5.27	8.2	2.47	4.92	0.08	0.15	<0.01	0.036	0.34	22.2	14.7	0.56	413	2.75
I102214		19	5.83	7.8	2.36	4.99	0.07	0.13	0.02	0.042	0.28	23.5	12.0	0.53	405	1.77
I102215		18	5.63	10.9	2.32	5.44	0.07	0.12	0.02	0.042	0.33	26.8	14.8	0.67	441	1.80
I102216		17	6.48	12.0	2.28	6.20	0.07	0.13	0.01	0.041	0.29	27.5	16.2	0.66	509	0.87
I102217		17	10.60	6.8	2.12	5.11	0.07	0.15	0.01	0.023	0.29	24.6	15.5	0.53	474	1.48
I102218		16	5.05	10.7	2.10	4.68	0.08	0.15	<0.01	0.019	0.29	22.1	15.6	0.46	420	1.33
I102219		13	14.45	13.0	2.22	6.57	0.06	0.08	0.01	0.054	0.24	36.1	7.4	0.46	346	0.61
I102220		16	6.09	3.5	2.25	4.14	0.09	0.22	0.01	0.023	0.35	17.1	36.6	0.40	319	3.06
I102221		10	6.93	8.6	2.00	4.75	0.06	0.19	<0.01	0.035	0.33	21.8	13.8	0.52	365	3.02
I102222		11	5.49	6.5	1.93	4.60	0.05	0.17	0.01	0.025	0.30	20.9	13.8	0.47	356	1.22
I102223		12	5.33	5.9	1.85	5.84	<0.05	0.13	0.01	0.024	0.27	21.5	14.9	0.58	536	0.64
I102224		14	5.43	4.8	2.15	4.62	0.06	0.18	<0.01	0.028	0.38	20.2	17.7	0.55	408	1.73
I102225		15	6.45	7.0	2.19	4.78	0.07	0.17	<0.01	0.034	0.35	21.9	16.1	0.51	404	1.64
I102226		14	4.62	11.1	1.78	3.99	0.05	0.17	<0.01	0.018	0.28	20.8	12.6	0.40	299	2.77
I102227		13	7.60	7.2	2.18	5.85	0.06	0.14	0.01	0.037	0.31	23.7	16.3	0.54	547	2.91
I102228		14	4.47	6.1	2.41	5.60	0.07	0.16	0.01	0.038	0.27	23.2	18.3	0.56	428	1.43
I102229		18	6.00	5.6	2.32	5.29	0.08	0.19	<0.01	0.030	0.30	26.2	17.3	0.55	340	1.18
I102230		19	5.69	5.3	2.25	5.19	0.07	0.18	0.01	0.028	0.29	26.3	16.5	0.55	322	1.10
I102231		16	5.14	11.3	2.29	5.79	0.08	0.19	<0.01	0.030	0.34	25.5	15.6	0.56	349	0.74
I102232		15	5.87	8.7	2.16	6.45	<0.05	0.13	<0.01	0.021	0.31	22.0	15.6	0.65	328	0.66
I102233		17	5.13	6.0	2.17	5.50	0.07	0.17	0.01	0.019	0.33	24.9	15.8	0.55	330	0.82
I102234		12	3.86	41.6	2.33	7.04	0.07	0.10	0.01	0.025	0.26	23.3	23.0	0.78	367	0.49
I102235		11	3.61	7.0	2.23	7.02	0.06	0.09	0.01	0.027	0.23	22.4	23.0	0.76	330	0.32
I102236		8	4.14	8.2	2.33	6.51	0.06	0.11	0.01	0.027	0.21	22.1	20.6	0.72	329	0.48
I102237		8	5.25	12.3	2.42	6.86	0.07	0.11	0.01	0.029	0.28	23.6	24.4	0.95	384	0.43
I102238		8	7.62	9.3	2.51	7.43	0.07	0.12	0.01	0.042	0.34	23.0	23.2	0.81	421	0.42
I102239		8	5.14	4.8	2.31	6.93	0.06	0.11	0.01	0.039	0.32	23.0	21.6	0.77	408	0.31
I102240		9	5.37	5.3	2.33	7.35	0.07	0.14	0.01	0.042	0.32	24.1	22.1	0.76	414	0.36
I102241		7	4.90	5.9	2.16	7.60	0.07	0.11	0.01	0.039	0.31	27.1	18.7	0.70	364	0.66
I102242		10	4.71	6.0	2.10	5.84	0.08	0.16	<0.01	0.034	0.34	27.2	24.4	0.65	316	0.91
I102243		11	5.73	7.3	2.29	5.83	0.11	0.19	<0.01	0.033	0.39	27.3	24.8	0.65	335	1.22
I102244		7	6.72	37.7	2.31	8.80	0.07	0.09	0.01	0.039	0.28	29.8	22.0	0.94	469	0.64
I102245		10	7.13	12.7	2.12	5.35	0.12	0.16	<0.01	0.040	0.36	26.9	25.0	0.60	369	1.76
I102246		12	4.70	2.7	2.16	4.09	0.11	0.16	<0.01	0.029	0.37	24.3	19.5	0.52	267	0.78
I102247		13	5.17	31.8	2.27	4.35	0.12	0.18	<0.01	0.039	0.34	27.4	18.9	0.45	354	2.31
I102248		4	4.89	59.7	2.01	2.45	0.05	0.11	<0.01	0.026	0.12	22.7	6.0	0.27	507	1.54

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 10-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137462

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I102209		0.08	1.57	4.4	900	28.3	58.9	<0.001	0.01	1.22	2.5	0.2	2.2	29.8	0.01	0.02
I102210		0.04	1.33	66.5	810	45.4	11.0	0.003	1.14	9.50	7.1	1.6	109.5	88.8	0.03	43.4
I102211		0.02	0.39	5.2	950	139.5	48.0	<0.001	<0.01	1.00	4.0	0.2	2.5	44.1	<0.01	0.06
I102212		0.06	1.25	4.6	930	26.3	50.7	<0.001	<0.01	0.98	2.5	0.2	1.9	26.9	0.01	0.03
I102213		0.06	1.06	4.2	870	28.1	43.7	<0.001	<0.01	0.96	2.5	0.2	2.1	35.2	0.01	0.02
I102214		0.04	0.53	4.1	880	41.4	35.7	<0.001	<0.01	0.61	3.5	0.2	1.8	58.3	<0.01	0.04
I102215		0.04	0.44	4.3	880	31.3	45.1	<0.001	<0.01	0.64	3.3	0.2	2.0	51.6	<0.01	0.04
I102216		0.04	0.38	4.1	800	29.5	37.5	<0.001	<0.01	0.53	3.4	0.2	1.9	165.0	<0.01	0.02
I102217		0.05	0.62	3.7	800	28.3	39.2	<0.001	0.01	0.62	2.6	0.2	1.6	81.7	0.01	0.02
I102218		0.06	1.05	3.7	800	30.4	38.5	<0.001	0.02	0.77	2.1	0.2	1.5	35.9	<0.01	0.02
I102219		0.02	0.08	2.8	1730	40.7	32.3	<0.001	0.01	0.85	3.9	0.3	3.1	46.9	0.01	0.06
I102220		0.06	3.27	4.7	850	23.1	43.2	<0.001	0.01	0.51	3.0	0.5	2.9	13.9	0.01	0.01
I102221		0.05	1.12	3.1	610	29.0	36.5	0.001	0.01	0.65	3.2	0.3	2.1	61.8	0.01	0.02
I102222		0.06	0.94	2.9	590	25.1	36.2	<0.001	0.01	0.50	2.9	0.2	1.9	39.8	0.01	0.02
I102223		0.03	0.41	3.1	790	29.8	31.1	<0.001	0.01	0.40	3.2	0.3	1.9	199.5	0.01	0.02
I102224		0.06	1.23	3.8	810	28.0	40.2	<0.001	<0.01	0.67	3.1	0.3	2.0	41.3	0.01	0.01
I102225		0.05	0.84	3.8	790	31.5	38.3	<0.001	<0.01	0.71	3.9	0.3	2.1	87.9	0.01	0.01
I102226		0.04	1.45	2.9	650	23.6	33.0	<0.001	<0.01	0.56	2.4	0.2	1.5	37.5	0.01	0.01
I102227		0.04	0.61	3.5	750	28.9	37.4	<0.001	<0.01	0.47	4.1	0.3	2.0	161.5	0.01	0.01
I102228		0.06	0.84	3.7	820	33.0	32.0	<0.001	<0.01	0.82	3.0	0.2	2.4	102.0	0.01	0.01
I102229		0.05	0.85	4.2	860	26.6	34.8	<0.001	<0.01	0.73	2.7	0.3	1.9	119.5	0.01	0.02
I102230		0.04	0.80	4.0	890	25.4	32.3	<0.001	0.01	0.67	2.8	0.3	1.8	163.5	0.01	0.01
I102231		0.05	0.76	3.9	850	24.7	37.7	<0.001	0.01	0.68	3.5	0.3	2.3	71.4	0.01	0.01
I102232		0.05	0.35	3.6	840	26.8	37.5	<0.001	0.01	0.63	3.1	0.3	1.6	86.3	0.01	0.01
I102233		0.05	0.64	3.8	870	25.1	35.5	<0.001	<0.01	0.61	3.1	0.3	1.5	60.9	0.01	0.01
I102234		0.03	0.27	3.5	1180	19.1	29.2	<0.001	<0.01	0.54	3.0	0.3	1.9	65.9	0.01	0.03
I102235		0.03	0.20	2.9	1190	23.7	24.1	<0.001	<0.01	0.49	2.5	0.2	1.6	79.2	<0.01	0.01
I102236		0.04	0.28	3.0	1200	21.0	21.4	<0.001	<0.01	0.60	2.3	0.2	1.6	177.0	0.01	0.01
I102237		0.04	0.30	3.3	1240	23.0	30.6	<0.001	<0.01	0.68	2.6	0.2	1.8	131.0	0.01	0.01
I102238		0.05	0.27	3.6	1140	22.8	37.5	<0.001	<0.01	0.71	3.7	0.2	1.8	265	0.01	0.01
I102239		0.05	0.23	3.3	1000	23.8	32.7	<0.001	<0.01	0.45	3.6	0.3	1.6	285	0.01	0.01
I102240		0.05	0.30	3.6	970	23.9	34.9	<0.001	<0.01	0.52	4.0	0.3	1.8	262	0.01	0.01
I102241		0.05	0.24	3.0	870	24.8	34.8	<0.001	<0.01	0.46	3.2	0.2	1.8	167.0	0.01	0.01
I102242		0.04	0.82	3.6	740	30.6	39.2	<0.001	<0.01	0.55	3.2	0.3	2.3	49.2	0.01	0.01
I102243		0.06	1.16	4.0	770	34.3	45.8	<0.001	<0.01	0.72	3.7	0.4	2.7	28.4	0.01	0.01
I102244		0.02	0.16	3.9	820	41.7	39.0	<0.001	<0.01	0.71	4.5	0.3	2.5	97.2	0.03	0.04
I102245		0.05	1.13	3.9	780	39.2	39.7	<0.001	0.10	0.81	3.3	0.4	3.2	42.3	0.01	0.02
I102246		0.07	1.37	3.2	740	28.3	34.3	<0.001	<0.01	0.78	2.4	0.3	2.1	22.7	0.01	0.01
I102247		0.07	1.31	3.8	760	32.9	34.2	<0.001	<0.01	1.20	2.3	0.4	2.2	32.4	0.01	0.02
I102248		0.03	0.05	3.0	1140	21.0	14.4	<0.001	<0.01	0.63	1.2	0.3	0.4	26.8	0.01	0.02

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 10-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137462

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I102209		31.4	0.178	0.35	9.31	62	2.45	12.35	51	3.0
I102210		4.6	0.156	0.14	2.32	31	67.8	9.25	85	20.0
I102211		28.4	0.077	0.42	7.59	51	1.57	12.30	87	1.9
I102212		29.2	0.154	0.34	11.50	63	0.95	12.40	53	2.6
I102213		32.8	0.133	0.29	14.00	58	1.14	12.10	56	2.5
I102214		33.7	0.085	0.26	12.25	56	0.72	12.90	57	2.0
I102215		33.4	0.095	0.33	9.47	57	0.64	13.45	58	1.9
I102216		34.1	0.076	0.26	9.44	55	0.58	14.30	51	2.3
I102217		35.9	0.091	0.25	14.80	53	0.54	13.65	47	2.3
I102218		34.4	0.117	0.26	12.55	54	0.57	10.35	44	2.4
I102219		32.1	0.012	0.32	10.00	38	0.96	14.95	42	1.3
I102220		31.9	0.156	0.28	11.20	60	1.04	16.40	40	3.4
I102221		38.4	0.100	0.29	16.55	44	1.02	11.80	48	3.0
I102222		34.1	0.085	0.25	14.30	42	0.64	11.45	43	3.0
I102223		33.8	0.070	0.22	9.51	47	0.59	12.45	40	2.3
I102224		30.8	0.136	0.27	11.00	55	0.87	11.80	49	3.0
I102225		29.8	0.112	0.26	10.70	54	0.84	13.10	52	2.9
I102226		35.3	0.104	0.21	15.60	46	0.85	10.65	44	2.9
I102227		34.2	0.087	0.27	11.10	52	0.68	13.25	50	2.4
I102228		31.2	0.110	0.21	11.35	54	0.64	12.75	56	2.6
I102229		33.0	0.111	0.24	11.40	55	0.60	12.35	55	3.3
I102230		31.9	0.107	0.23	11.15	55	0.51	12.30	54	3.1
I102231		36.5	0.121	0.23	10.75	58	0.67	14.00	41	2.8
I102232		30.4	0.090	0.22	7.43	58	0.31	12.65	41	1.7
I102233		32.7	0.112	0.22	10.75	60	0.36	13.20	41	2.6
I102234		21.2	0.083	0.20	5.53	56	0.42	10.95	42	1.9
I102235		16.3	0.068	0.20	4.10	51	0.30	8.54	41	1.7
I102236		14.7	0.088	0.18	3.86	52	0.40	8.41	43	2.0
I102237		16.7	0.105	0.25	4.97	53	1.06	9.78	44	2.2
I102238		18.6	0.097	0.32	5.76	52	0.44	10.50	45	2.5
I102239		19.3	0.085	0.28	4.83	55	0.33	10.40	50	2.2
I102240		19.9	0.096	0.28	5.11	54	0.40	11.10	51	2.7
I102241		23.2	0.063	0.30	5.87	48	0.69	11.25	45	2.4
I102242		28.9	0.124	0.32	9.21	49	0.57	11.80	43	2.9
I102243		28.8	0.149	0.36	9.70	48	0.81	12.80	47	3.2
I102244		27.3	0.045	0.34	7.25	36	0.62	13.15	46	1.8
I102245		27.3	0.150	0.33	10.05	47	1.18	11.90	52	2.7
I102246		24.3	0.148	0.28	8.69	51	0.61	10.90	42	2.9
I102247		26.8	0.138	0.30	8.90	50	0.58	12.15	41	3.1
I102248		24.7	0.007	0.14	6.45	18	0.19	13.15	39	3.8

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 10-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137462

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I102249		1.22	<0.005		0.10	1.30	9.0	<0.2	<10	70	1.69	1.14	0.51	0.20	50.7	8.8
I102250		0.04	0.302		9.42	0.53	8.1	0.3	<10	240	0.23	1.70	2.41	0.15	12.35	4.4
I102251		3.81	<0.005		0.10	1.29	8.1	<0.2	<10	100	1.09	0.62	0.64	0.19	49.9	4.9
I102252		3.90	<0.005		0.07	1.07	6.3	<0.2	<10	100	0.92	1.60	0.48	0.16	48.7	3.9
I102253		3.01	<0.005		0.17	1.05	20.4	<0.2	<10	100	0.74	1.35	0.48	0.35	47.2	9.3
I102254		4.10	<0.005		0.10	1.65	8.3	<0.2	<10	90	2.40	1.17	0.61	0.20	54.1	5.7
I102255		4.21	<0.005		0.18	0.88	28.2	<0.2	<10	90	0.74	1.44	0.42	0.22	45.3	5.9
I102256		3.70	<0.005		0.22	0.80	21.7	<0.2	<10	100	0.47	1.51	0.36	0.38	48.8	7.9
I102257		3.88	<0.005		0.24	1.00	48.4	<0.2	<10	100	0.80	1.69	0.41	0.33	50.4	8.3
I102258		4.18	<0.005		0.21	0.68	8.7	<0.2	<10	90	0.41	0.82	0.37	0.23	50.2	4.4
I102259		4.17	<0.005		0.19	0.65	7.3	<0.2	<10	100	0.41	0.79	0.38	0.25	49.5	4.1
I102260		0.69	<0.005		0.08	0.70	5.0	<0.2	<10	100	0.70	0.30	0.29	0.20	31.2	3.4
I102261		4.58	<0.005		0.16	0.61	7.5	<0.2	<10	90	0.37	2.80	0.35	0.21	46.8	3.6
I102262		4.17	<0.005		0.35	0.79	17.5	<0.2	<10	100	0.53	5.61	0.42	0.38	43.2	6.6
I102263		3.36	0.007		0.26	0.98	9.2	<0.2	<10	100	0.84	12.05	0.52	0.24	44.0	7.2
I102264		4.31	<0.005		0.23	0.85	8.8	<0.2	<10	90	0.54	2.22	0.47	0.23	44.7	6.0
I102265		2.64	<0.005		0.23	1.03	12.8	<0.2	<10	100	0.89	0.96	0.44	0.25	47.0	8.0
I102266		3.16	<0.005		0.25	1.44	20.5	<0.2	<10	100	1.44	4.23	0.53	0.46	46.4	8.4
I102267		2.37	<0.005		0.14	1.42	15.3	<0.2	<10	90	1.44	4.96	0.51	0.25	47.0	7.5
I102268		1.99	<0.005		0.16	1.36	7.4	<0.2	<10	90	2.04	3.21	0.48	0.30	47.3	3.8
I102269		1.15	<0.005		0.23	2.25	9.6	<0.2	<10	110	1.99	1.96	0.75	0.16	53.1	6.0
I102270		1.37	NSS		0.20	2.05	10.0	<0.2	<10	110	1.98	2.01	0.77	0.18	49.8	6.1
I102271		3.75	<0.005		0.18	1.37	13.6	<0.2	<10	130	1.05	1.52	0.54	0.09	40.7	4.7
I102272		4.35	<0.005		0.22	1.02	25.6	<0.2	<10	90	0.81	8.33	0.48	0.33	44.1	4.9
I102273		3.98	<0.005		0.23	0.92	16.1	<0.2	<10	90	0.80	2.52	0.47	0.34	42.1	5.5
I102274		5.10	<0.005		0.13	1.42	9.8	<0.2	<10	120	1.61	1.25	0.51	0.21	45.6	4.7
I102275		4.11	<0.005		0.13	1.30	5.9	<0.2	10	90	1.56	1.02	0.44	0.17	51.5	4.2
I102276		3.20	0.016		0.35	1.14	10.1	<0.2	10	50	1.39	4.57	0.54	0.15	51.3	4.3
I102277		2.79	0.006		0.25	0.68	11.4	<0.2	20	100	1.39	0.99	0.25	0.15	59.2	6.0
I102278		2.82	<0.005		0.15	0.62	7.3	<0.2	30	40	0.73	1.21	0.26	0.11	41.2	3.1
I102279		4.27	<0.005		0.08	1.15	6.9	<0.2	<10	110	0.87	1.06	0.43	0.22	49.5	4.5
I102280		<0.02	<0.005		0.09	1.18	7.8	<0.2	<10	110	0.94	1.05	0.44	0.26	50.4	4.9
I102281		1.64	<0.005		0.13	1.51	5.5	<0.2	<10	90	1.36	1.06	0.55	0.20	60.2	3.9
I102282		4.90	<0.005		0.18	1.79	8.9	<0.2	<10	90	2.11	1.76	0.69	0.23	55.5	7.9
I102283		4.92	<0.005		0.10	2.03	7.9	<0.2	<10	110	2.22	1.06	0.75	0.24	53.0	6.7
I102284		3.19	0.018		0.13	1.98	6.0	<0.2	<10	130	1.94	1.08	0.77	0.25	49.8	5.3
I102285		2.17	0.032		0.14	0.98	20.7	<0.2	<10	80	1.91	0.79	0.54	0.17	57.3	16.8

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 10-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137462

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I102249		8	4.86	53.5	2.28	4.57	0.07	0.15	0.01	0.047	0.30	27.2	13.3	0.50	379	0.81
I102250		3	0.88	6460	1.39	1.71	<0.05	0.04	0.89	0.021	0.28	6.0	1.9	0.11	414	148.5
I102251		12	4.50	29.9	2.11	5.04	0.09	0.18	<0.01	0.033	0.37	26.3	20.8	0.53	297	2.70
I102252		13	4.62	15.7	2.20	4.89	0.11	0.19	<0.01	0.025	0.37	25.0	20.4	0.53	246	1.76
I102253		13	5.31	43.8	2.42	4.98	0.12	0.19	<0.01	0.044	0.38	24.1	20.4	0.54	300	3.14
I102254		11	5.12	18.7	2.12	6.24	0.09	0.18	<0.01	0.038	0.34	29.5	21.2	0.66	340	0.94
I102255		12	4.97	23.6	2.05	4.65	<0.05	0.14	<0.01	0.037	0.35	23.8	21.2	0.49	274	2.59
I102256		12	5.64	11.8	2.47	4.51	0.05	0.17	<0.01	0.033	0.39	26.1	23.1	0.50	296	2.95
I102257		11	7.48	38.9	2.34	4.88	0.05	0.16	<0.01	0.048	0.38	26.5	21.5	0.48	358	3.09
I102258		15	5.73	7.8	2.06	4.26	0.05	0.20	<0.01	0.028	0.35	26.3	17.3	0.40	308	1.74
I102259		16	6.93	4.5	2.13	4.15	<0.05	0.24	<0.01	0.024	0.37	25.8	16.3	0.39	334	3.18
I102260		13	5.76	3.7	2.07	3.88	<0.05	0.20	<0.01	0.016	0.36	16.0	34.5	0.38	260	3.23
I102261		15	5.55	9.0	1.96	3.86	<0.05	0.21	<0.01	0.024	0.34	24.7	17.1	0.38	322	1.63
I102262		12	4.37	55.6	2.17	4.45	0.06	0.15	<0.01	0.044	0.37	23.2	20.5	0.48	289	3.59
I102263		13	5.65	58.9	2.18	5.07	<0.05	0.15	<0.01	0.072	0.35	23.7	22.8	0.52	343	3.71
I102264		15	4.87	11.7	1.99	4.44	<0.05	0.16	0.01	0.038	0.35	23.6	23.8	0.49	306	3.29
I102265		14	7.29	46.5	2.26	5.27	<0.05	0.15	<0.01	0.049	0.37	25.6	22.9	0.53	422	4.01
I102266		11	7.84	61.6	2.38	5.78	<0.05	0.14	<0.01	0.067	0.32	26.5	19.9	0.59	612	4.36
I102267		12	7.69	79.4	2.05	5.83	<0.05	0.18	<0.01	0.047	0.33	25.6	22.9	0.64	385	1.49
I102268		13	9.37	52.1	2.27	6.16	<0.05	0.15	<0.01	0.036	0.36	26.0	23.5	0.65	437	1.59
I102269		12	7.29	22.3	2.20	7.91	<0.05	0.12	<0.01	0.039	0.33	27.9	24.6	0.78	516	0.75
I102270		11	7.62	23.3	2.06	7.27	<0.05	0.11	<0.01	0.037	0.33	27.1	25.4	0.75	506	0.67
I102271		13	6.63	20.1	2.29	5.71	<0.05	0.14	<0.01	0.038	0.36	20.3	22.2	0.60	379	2.26
I102272		12	6.51	37.8	2.29	4.90	0.05	0.14	0.01	0.049	0.39	23.2	21.8	0.53	201	4.14
I102273		12	5.81	42.6	1.99	4.62	<0.05	0.13	<0.01	0.057	0.36	22.5	19.8	0.49	278	3.83
I102274		13	8.65	13.9	2.41	5.98	<0.05	0.13	<0.01	0.038	0.40	24.9	23.7	0.68	666	1.75
I102275		11	7.30	11.4	2.25	4.96	<0.05	0.11	<0.01	0.033	0.37	27.0	17.6	0.52	642	2.27
I102276		8	10.95	56.5	3.00	4.36	<0.05	0.13	0.01	0.061	0.30	27.2	8.7	0.30	821	2.76
I102277		7	32.2	25.5	4.80	3.23	<0.05	0.12	0.01	0.043	0.24	30.8	5.1	0.07	1240	3.35
I102278		8	7.57	26.3	2.52	2.37	<0.05	0.08	<0.01	0.035	0.20	19.5	3.9	0.10	265	3.63
I102279		15	10.05	3.5	2.50	5.73	<0.05	0.13	<0.01	0.036	0.44	25.5	22.9	0.66	498	4.27
I102280		15	10.05	6.8	2.58	5.89	<0.05	0.13	<0.01	0.039	0.45	25.5	24.1	0.65	507	4.32
I102281		12	11.70	4.6	2.07	5.82	<0.05	0.14	0.01	0.054	0.28	33.1	16.9	0.47	647	1.49
I102282		12	8.74	14.2	2.38	6.02	<0.05	0.15	<0.01	0.047	0.34	29.0	18.3	0.65	692	1.51
I102283		13	8.89	18.5	2.47	6.80	<0.05	0.14	<0.01	0.052	0.34	29.4	19.7	0.69	816	0.88
I102284		14	9.55	5.8	2.56	6.87	<0.05	0.13	<0.01	0.048	0.34	26.6	17.7	0.63	880	1.40
I102285		7	33.7	2.0	2.81	4.30	<0.05	0.11	0.01	0.075	0.30	32.0	6.4	0.15	2200	0.68

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 10-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137462

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I102249		0.05	0.53	3.8	830	36.7	31.2	<0.001	<0.01	0.72	3.1	0.3	2.2	37.4	0.01	0.03
I102250		0.03	0.05	4.1	400	15.4	6.3	0.042	1.46	14.05	0.9	0.3	0.3	370	<0.01	2.06
I102251		0.08	1.13	3.6	940	33.1	35.4	<0.001	<0.01	0.84	2.5	0.3	2.0	36.3	0.01	0.02
I102252		0.07	1.28	3.6	830	31.7	36.9	<0.001	<0.01	0.61	2.3	0.3	1.8	37.6	0.01	0.04
I102253		0.08	1.61	3.7	810	35.9	36.0	<0.001	0.39	0.86	3.0	0.6	2.3	40.7	0.01	0.05
I102254		0.04	0.59	3.7	860	37.1	36.9	<0.001	<0.01	0.67	3.7	0.3	2.3	59.9	0.01	0.04
I102255		0.06	1.58	4.1	770	43.2	39.1	<0.001	0.59	0.71	2.5	0.6	1.6	29.2	0.01	0.05
I102256		0.06	2.78	4.6	740	53.4	49.7	<0.001	1.67	0.82	3.7	1.0	2.3	64.9	0.01	0.07
I102257		0.07	1.79	4.0	790	56.8	44.3	0.001	0.94	0.87	3.6	0.7	2.7	41.6	0.01	0.10
I102258		0.07	2.03	3.1	780	62.7	39.1	<0.001	0.03	0.68	1.9	0.3	2.1	64.4	0.01	0.02
I102259		0.09	2.19	3.3	760	57.6	40.6	<0.001	0.07	0.61	2.0	0.3	2.0	69.8	0.01	0.01
I102260		0.08	2.64	3.7	690	20.6	44.2	<0.001	<0.01	0.39	2.7	0.3	1.6	17.2	0.01	<0.01
I102261		0.07	2.27	3.2	750	55.6	37.5	<0.001	0.06	0.57	2.0	0.3	1.8	45.9	0.01	0.02
I102262		0.06	2.06	3.5	730	52.7	43.1	<0.001	1.01	0.71	3.3	1.0	6.7	46.6	0.01	0.14
I102263		0.07	1.28	3.4	740	46.4	41.5	<0.001	0.17	0.73	3.1	0.8	7.4	35.8	0.01	0.13
I102264		0.06	1.56	3.0	770	46.4	39.7	<0.001	0.20	0.71	2.1	0.5	2.4	47.5	0.01	0.10
I102265		0.06	1.30	3.6	800	49.2	45.4	<0.001	0.06	1.10	3.1	0.4	3.5	39.0	0.01	0.04
I102266		0.04	0.73	3.7	760	46.9	40.1	<0.001	0.08	0.94	3.5	0.4	3.6	48.6	0.01	0.07
I102267		0.04	0.57	3.6	770	48.6	42.1	<0.001	0.01	0.75	3.1	0.3	3.4	45.0	<0.01	0.08
I102268		0.04	0.66	4.2	790	42.1	45.4	<0.001	<0.01	0.53	3.5	0.4	3.9	44.3	0.01	0.11
I102269		0.03	0.30	3.1	820	44.8	42.6	<0.001	<0.01	0.74	4.9	0.4	3.9	71.6	<0.01	0.12
I102270		0.02	0.33	3.2	830	43.2	43.3	<0.001	<0.01	0.81	4.9	0.4	4.0	94.2	<0.01	0.15
I102271		0.04	0.90	2.9	850	51.7	46.1	<0.001	0.56	0.90	4.5	1.1	4.1	119.5	0.01	0.10
I102272		0.06	1.80	3.4	790	47.5	50.3	<0.001	0.90	0.85	3.7	1.1	3.8	45.2	0.01	0.11
I102273		0.05	1.71	3.3	780	48.9	44.7	0.001	0.45	0.77	3.2	0.6	3.5	32.7	0.01	0.07
I102274		0.04	0.84	3.8	850	41.5	53.7	<0.001	0.13	0.63	4.0	0.5	3.3	69.0	<0.01	0.03
I102275		0.03	0.46	3.0	850	33.4	49.0	<0.001	0.01	0.88	2.8	0.3	2.7	53.1	<0.01	0.01
I102276		0.01	0.22	2.2	1600	29.2	43.7	0.001	<0.01	2.37	2.0	0.3	2.6	50.3	<0.01	0.10
I102277		0.01	0.17	2.4	940	21.5	39.3	<0.001	<0.01	2.78	1.0	0.2	2.8	48.7	<0.01	0.01
I102278		0.01	0.12	1.5	770	18.1	25.5	0.001	<0.01	1.59	0.9	0.2	1.1	18.8	<0.01	0.01
I102279		0.05	1.15	3.7	820	39.6	60.3	<0.001	<0.01	0.72	3.6	0.3	2.9	73.0	<0.01	<0.01
I102280		0.06	1.19	6.4	800	41.2	60.7	<0.001	<0.01	0.77	3.7	0.3	3.0	72.0	0.01	0.01
I102281		0.02	0.27	4.5	840	33.0	35.0	<0.001	<0.01	0.66	3.6	0.3	1.6	71.9	<0.01	<0.01
I102282		0.04	0.37	4.3	810	41.0	42.7	<0.001	<0.01	0.78	3.5	0.3	2.1	135.0	0.01	0.01
I102283		0.03	0.30	4.1	840	43.3	42.8	<0.001	<0.01	0.60	4.0	0.3	2.4	96.4	<0.01	0.01
I102284		0.05	0.39	3.7	850	35.3	41.4	<0.001	<0.01	0.84	3.5	0.3	2.2	297	<0.01	<0.01
I102285		0.01	0.08	2.5	1220	11.5	44.9	<0.001	<0.01	2.69	3.2	0.2	1.2	169.0	<0.01	0.03

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 10-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137462

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I102249		27.8	0.097	0.24	7.24	39	0.53	12.05	42	3.1
I102250		0.9	<0.005	0.04	0.79	12	4.67	3.93	41	1.4
I102251		27.3	0.147	0.27	9.29	52	0.60	12.10	48	3.2
I102252		28.3	0.145	0.27	10.05	56	0.83	12.80	45	3.4
I102253		27.5	0.165	0.28	10.80	50	0.90	12.30	48	3.7
I102254		29.9	0.111	0.31	7.93	50	0.53	13.65	50	3.8
I102255		26.7	0.147	0.31	10.65	42	0.66	12.45	59	2.8
I102256		27.6	0.158	0.42	13.65	35	0.76	12.75	63	3.4
I102257		27.6	0.161	0.37	12.55	37	1.01	12.55	65	3.3
I102258		28.5	0.158	0.29	11.20	51	0.89	13.00	62	4.2
I102259		30.2	0.156	0.29	15.05	50	1.16	14.35	60	4.7
I102260		29.0	0.151	0.29	9.89	49	0.82	14.25	31	3.3
I102261		28.1	0.153	0.28	12.25	49	0.68	13.35	57	4.0
I102262		26.2	0.150	0.34	10.95	38	0.67	12.00	59	2.9
I102263		27.2	0.141	0.33	10.60	46	0.68	12.30	54	3.2
I102264		26.5	0.153	0.33	11.00	50	0.61	12.35	63	3.0
I102265		26.5	0.153	0.38	9.03	51	0.69	14.05	62	3.1
I102266		28.1	0.125	0.37	10.45	44	0.66	13.25	66	3.0
I102267		27.1	0.122	0.36	7.27	46	0.59	13.10	58	4.2
I102268		27.3	0.127	0.43	8.03	51	0.66	14.45	57	3.4
I102269		31.3	0.090	0.41	10.55	49	0.69	13.40	60	2.6
I102270		29.7	0.083	0.42	10.50	48	0.55	13.15	69	2.3
I102271		31.6	0.142	0.43	14.25	44	0.54	11.20	43	2.9
I102272		29.0	0.161	0.43	11.10	43	0.71	13.15	48	2.5
I102273		27.7	0.158	0.36	10.05	46	0.67	12.30	51	2.3
I102274		30.2	0.127	0.49	9.34	51	0.51	14.35	58	2.8
I102275		28.1	0.076	0.46	7.15	39	1.56	13.55	49	2.7
I102276		33.5	0.023	0.48	18.75	26	1.84	11.35	59	3.2
I102277		27.1	0.009	0.50	12.80	18	2.42	11.60	73	3.1
I102278		24.5	0.010	0.28	6.39	15	0.78	10.10	29	2.4
I102279		27.7	0.154	0.50	8.44	55	0.69	14.20	62	2.5
I102280		26.3	0.155	0.51	7.81	54	0.70	14.30	64	2.6
I102281		28.1	0.049	0.32	5.10	45	0.82	15.70	54	3.9
I102282		33.7	0.089	0.38	7.84	44	0.36	15.20	55	3.6
I102283		29.9	0.082	0.38	6.11	49	0.35	14.65	58	3.5
I102284		25.3	0.108	0.30	5.16	56	0.62	14.75	61	2.9
I102285		27.4	0.007	0.56	9.72	23	1.29	13.90	54	3.8

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 10-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10137462

Method	CERTIFICATE COMMENTS
ALL METHODS	NSS is non-sufficient sample.
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 19-OCT-2010
Account: EIASQI

CERTIFICATE WH10140655

Project: SQI10-01

P.O. No.: SQI10-01-17

This report is for 56 Drill Core samples submitted to our lab in Whitehorse, YT, Canada on 1-OCT-2010.

The following have access to data associated with this certificate:

EQUITY ENG E-MAIL	DARCY BAKER	

SAMPLE PREPARATION

ALS CODE	DESCRIPTION
WEI-21	Received Sample Weight
LOG-22	Sample login - Rcd w/o BarCode
CRU-QC	Crushing QC Test
PUL-QC	Pulverizing QC Test
CRU-31	Fine crushing - 70% <2mm
SPL-21	Split sample - riffle splitter
PUL-31	Pulverize split to 85% <75 um
LOG-22d	Sample login - Rcd w/o BarCode dup
SPL-21d	Split sample - duplicate
PUL-31d	Pulverize Split - duplicate
LOG-24	Pulp Login - Rcd w/o Barcode

ANALYTICAL PROCEDURES

ALS CODE	DESCRIPTION	INSTRUMENT
Au-AA23	Au 30g FA-AA finish	AAS
Au-GRA21	Au 30g FA-GRAV finish	WST-SIM
ME-MS41	51 anal. aqua regia ICPMS	

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
ATTN: DARCY BAKER
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

This is the Final Report and supersedes any preliminary report with this certificate number. Results apply to samples as submitted. All pages of this report have been checked and approved for release.

Signature:

Colin Ramshaw, Vancouver Laboratory Manager

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 19-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10140655

Sample Description	Method Analyte Units LOR	WEI-21 Recvd Wt. kg 0.02	Au-AA23 Au ppm 0.005	Au-GRA21 Au ppm 0.05	ME-MS41 Ag ppm 0.01	ME-MS41 Al % 0.01	ME-MS41 As ppm 0.1	ME-MS41 Au ppm 0.2	ME-MS41 B ppm 10	ME-MS41 Ba ppm 10	ME-MS41 Be ppm 0.05	ME-MS41 Bi ppm 0.01	ME-MS41 Ca % 0.01	ME-MS41 Cd ppm 0.01	ME-MS41 Ce ppm 0.02	ME-MS41 Co ppm 0.1
I102419		5.33	<0.005		0.87	0.88	6.7	<0.2	<10	70	0.52	0.14	1.03	0.19	49.7	8.8
I102420		1.15	<0.005		0.10	0.72	5.9	<0.2	<10	100	0.66	0.30	0.44	0.14	36.1	3.3
I102421		4.97	<0.005		1.40	0.81	6.4	<0.2	<10	80	0.42	0.13	0.73	0.17	54.0	9.3
I102422		5.26	0.022		1.42	1.44	6.0	<0.2	<10	70	1.21	7.27	0.68	1.71	56.1	9.5
I102423		4.18	0.005		0.24	0.99	2.8	<0.2	<10	50	0.54	1.81	0.34	0.92	35.3	4.9
I102424		4.39	<0.005		0.12	1.15	3.0	<0.2	<10	70	0.56	1.71	0.42	0.16	38.4	5.0
I102425		5.53	<0.005		0.14	0.90	2.9	<0.2	<10	40	0.85	2.35	0.33	0.22	48.9	4.2
I102426		5.60	<0.005		0.11	0.88	3.1	<0.2	<10	40	1.01	0.50	0.32	0.19	41.8	3.5
I102427		0.47	<0.005		0.09	1.02	3.9	<0.2	<10	50	0.62	0.41	0.48	0.13	40.6	4.8
I102428		5.34	<0.005		0.10	1.09	4.2	<0.2	<10	50	0.71	1.44	0.45	0.20	43.8	4.3
I102429		2.21	<0.005		0.09	0.90	2.7	<0.2	<10	40	1.06	2.90	0.36	0.15	46.1	3.8
I102430		2.48	<0.005		0.08	0.85	2.5	<0.2	<10	40	1.04	2.69	0.34	0.16	44.7	3.7
I102431		2.01	0.021		0.73	0.94	16.3	<0.2	<10	50	1.42	6.19	0.27	0.19	55.6	6.7
I102432		2.19	<0.005		0.14	0.91	3.4	<0.2	<10	50	0.95	1.37	0.37	0.21	52.9	4.4
I102433		3.34	0.009		0.67	0.78	9.9	<0.2	<10	40	1.35	6.98	0.27	0.20	67.1	7.4
I102434		3.13	<0.005		0.20	0.96	4.5	<0.2	<10	50	0.83	0.96	0.35	0.14	48.5	4.0
I102435		2.18	<0.005		0.22	1.13	3.7	<0.2	<10	40	1.43	1.70	0.36	0.19	55.7	3.9
I102436		1.61	0.005		0.72	1.28	9.2	<0.2	<10	60	1.66	1.93	0.42	0.34	54.3	3.5
I102437		1.75	0.011		0.68	1.98	4.9	<0.2	<10	60	2.21	8.43	1.78	0.91	58.2	7.8
I102438		1.05	2.07	2.58	2.03	1.07	35.3	3.1	<10	40	1.85	226	0.42	0.41	49.0	34.6
I102439		3.89	0.009		0.26	0.95	3.8	<0.2	<10	50	0.82	5.55	0.35	0.36	55.7	5.2
I102440		<0.02	0.005		0.34	1.08	3.8	<0.2	<10	60	0.91	5.24	0.40	0.38	55.0	5.1
I102441		4.16	<0.005		0.25	0.95	4.3	<0.2	<10	60	0.62	9.06	0.44	0.58	51.6	6.4
I102442		2.84	<0.005		0.26	1.14	3.5	<0.2	<10	50	1.10	6.12	0.33	0.37	50.6	6.2
I102443		3.81	<0.005		0.22	0.77	3.6	<0.2	<10	70	0.72	1.33	0.37	0.21	56.8	3.9
I102444		3.89	<0.005		0.14	0.64	3.6	<0.2	<10	60	0.55	0.45	0.41	0.49	55.2	3.7
I102445		4.77	<0.005		0.29	0.81	3.2	<0.2	<10	60	0.71	1.14	0.39	0.26	51.6	4.0
I102446		4.05	<0.005		0.16	0.82	3.0	<0.2	<10	60	0.65	1.28	0.36	0.17	51.9	4.1
I102447		0.69	<0.005		0.58	1.10	21.3	<0.2	<10	50	1.85	3.41	0.34	0.62	61.6	11.3
I102448		2.21	0.005		0.25	1.27	6.5	<0.2	<10	60	0.99	2.87	0.39	0.20	49.5	8.0
I102449		4.73	<0.005		0.14	0.88	2.6	<0.2	<10	50	0.73	0.67	0.33	0.20	50.1	4.1
I102450		0.03	2.91	2.76	2.13	1.70	576	2.9	20	130	0.26	254	8.81	0.68	26.1	27.4
I102451		5.33	0.007		0.37	1.14	2.7	<0.2	<10	50	0.86	3.31	0.35	0.42	50.3	5.2
I102452		1.34	0.005		0.11	1.14	2.8	<0.2	<10	50	1.00	2.42	0.40	0.28	46.2	4.7
I102453		3.58	<0.005		0.08	1.27	1.9	<0.2	<10	40	0.97	8.35	0.31	0.12	56.8	4.4
I102454		4.09	0.012		0.07	0.93	1.6	<0.2	<10	20	0.78	3.85	0.22	0.08	58.9	3.5
I102455		3.85	0.005		0.14	1.14	2.1	<0.2	<10	40	1.35	13.10	0.27	0.18	62.9	4.9
I102456		3.52	0.006		0.08	1.09	1.9	<0.2	<10	30	1.46	9.19	0.26	0.09	60.8	4.9
I102457		1.76	0.010		0.09	1.60	2.7	<0.2	<10	40	2.07	7.54	0.37	0.12	54.1	8.3
I102458		3.70	<0.005		0.12	1.09	3.3	<0.2	<10	80	1.04	1.64	0.39	0.26	50.8	8.3

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 19-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10140655

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I102419		74	8.25	26.0	2.72	4.60	0.10	0.08	0.01	0.014	0.52	24.7	17.4	0.89	330	2.08
I102420		16	5.86	3.9	2.07	3.84	0.10	0.17	0.01	0.019	0.39	17.1	32.4	0.37	282	1.81
I102421		78	8.15	57.4	2.76	4.61	0.11	0.08	<0.01	0.014	0.53	26.9	16.2	0.88	372	1.00
I102422		64	11.45	81.6	3.86	7.45	0.13	0.15	0.01	0.046	0.55	28.5	22.4	0.94	1860	1.35
I102423		23	5.36	14.8	2.05	4.49	0.08	0.16	<0.01	0.019	0.36	16.8	14.8	0.57	343	0.61
I102424		22	6.54	14.4	2.30	5.10	0.10	0.18	<0.01	0.036	0.39	19.9	20.7	0.64	425	0.77
I102425		17	4.88	18.7	2.73	5.29	0.10	0.11	<0.01	0.040	0.24	25.1	18.2	0.58	456	0.84
I102426		12	3.90	7.9	1.97	4.59	0.08	0.16	<0.01	0.041	0.22	20.8	15.7	0.43	361	0.68
I102427		20	4.28	4.0	2.86	5.81	0.12	0.12	<0.01	0.039	0.28	21.9	26.2	0.79	397	0.68
I102428		18	4.77	5.8	2.66	6.17	0.11	0.15	<0.01	0.045	0.35	23.3	26.2	0.73	420	0.86
I102429		14	5.56	12.0	2.39	5.19	0.10	0.12	<0.01	0.028	0.25	23.0	15.0	0.49	374	0.69
I102430		14	5.53	11.4	2.27	5.02	0.09	0.12	<0.01	0.026	0.22	22.3	14.6	0.47	360	0.69
I102431		10	11.80	36.1	3.71	4.49	0.09	0.13	0.01	0.058	0.23	29.8	8.4	0.24	3500	2.08
I102432		14	6.26	10.3	2.23	4.55	0.10	0.17	<0.01	0.035	0.30	27.4	12.9	0.43	536	0.69
I102433		11	10.70	35.5	2.75	3.85	0.09	0.11	0.01	0.050	0.23	35.0	7.5	0.25	1050	0.81
I102434		14	5.42	10.3	2.15	4.41	0.10	0.17	<0.01	0.027	0.31	26.0	13.3	0.43	368	0.78
I102435		13	6.29	10.3	2.24	4.98	0.09	0.13	<0.01	0.038	0.27	28.3	15.0	0.46	799	0.59
I102436		12	5.86	116.5	2.52	4.63	0.08	0.09	<0.01	0.043	0.31	29.3	11.1	0.38	1660	0.75
I102437		12	5.77	754	2.39	5.58	0.09	0.13	0.01	0.042	0.18	46.0	12.4	0.65	1710	0.72
I102438		8	11.70	1370	3.78	4.81	0.10	0.09	0.02	0.292	0.31	26.2	9.3	0.30	2150	1.83
I102439		17	6.65	153.0	2.47	5.06	0.11	0.14	<0.01	0.064	0.33	28.7	15.9	0.53	623	1.48
I102440		16	6.56	174.0	2.50	5.23	0.10	0.13	<0.01	0.063	0.33	29.0	16.2	0.54	682	1.50
I102441		18	6.16	57.0	2.59	5.18	0.12	0.15	<0.01	0.067	0.34	27.3	20.0	0.64	548	7.62
I102442		15	9.39	88.3	2.66	5.43	0.10	0.10	<0.01	0.035	0.32	25.5	17.6	0.52	614	1.41
I102443		17	5.67	22.2	2.06	4.28	0.11	0.15	<0.01	0.043	0.33	30.0	11.0	0.40	452	1.74
I102444		18	5.55	12.2	1.89	3.96	0.10	0.16	<0.01	0.021	0.31	29.8	10.9	0.41	397	3.55
I102445		18	5.36	15.5	2.15	4.54	0.11	0.16	0.01	0.021	0.35	27.2	16.5	0.50	514	4.88
I102446		15	4.75	18.1	1.93	4.29	0.11	0.17	<0.01	0.025	0.31	26.6	15.7	0.44	542	1.52
I102447		11	10.55	90.4	3.70	6.00	0.11	0.08	0.01	0.086	0.28	35.1	12.7	0.39	1450	7.41
I102448		19	5.35	205	3.20	6.79	0.10	0.15	<0.01	0.049	0.37	24.3	21.7	0.69	814	3.04
I102449		14	4.26	14.4	1.89	4.12	0.09	0.15	0.01	0.019	0.25	26.2	13.1	0.40	537	0.92
I102450		49	1.41	316	5.03	5.61	0.21	0.34	5.41	1.305	0.14	13.7	6.6	0.26	851	72.6
I102451		15	4.44	51.3	2.71	5.75	0.10	0.15	0.01	0.042	0.34	26.0	16.8	0.55	758	1.15
I102452		16	5.49	20.6	2.81	6.16	0.12	0.15	<0.01	0.048	0.30	23.9	22.9	0.61	759	0.77
I102453		28	2.19	35.6	3.38	8.56	0.12	0.46	<0.01	0.055	0.20	29.1	21.8	0.76	1040	0.63
I102454		13	1.55	16.1	2.45	5.96	0.09	0.45	<0.01	0.069	0.14	31.8	15.9	0.55	795	0.55
I102455		12	1.68	37.1	2.65	8.44	0.10	0.47	<0.01	0.056	0.20	32.8	20.9	0.58	727	0.60
I102456		17	2.20	19.6	2.76	8.26	0.10	0.69	<0.01	0.072	0.15	29.8	22.0	0.60	746	0.53
I102457		46	2.34	20.4	4.06	10.70	0.10	0.51	<0.01	0.114	0.21	22.8	26.7	0.85	1280	0.80
I102458		21	2.89	20.2	2.74	6.53	0.10	0.23	0.01	0.040	0.22	25.1	20.4	0.63	920	6.97

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 19-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10140655

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I102419		0.07	0.65	24.8	2270	28.7	59.7	<0.001	0.03	0.94	2.8	0.3	0.8	35.7	<0.01	<0.01
I102420		0.11	2.89	4.4	740	20.7	42.0	<0.001	0.02	0.39	2.4	0.3	2.0	20.3	0.01	<0.01
I102421		0.08	0.60	26.4	2420	20.9	65.9	<0.001	0.02	0.76	3.2	0.3	0.8	35.7	<0.01	0.01
I102422		0.07	0.52	24.4	2230	78.1	69.4	<0.001	0.02	0.98	5.6	0.4	2.0	56.3	<0.01	0.02
I102423		0.06	0.54	4.6	810	20.4	46.4	<0.001	0.02	0.48	3.3	0.2	0.8	33.6	<0.01	0.01
I102424		0.11	0.50	4.2	830	16.1	45.0	<0.001	0.02	0.55	3.4	0.3	0.7	52.5	<0.01	0.03
I102425		0.04	0.51	4.5	840	34.9	26.2	<0.001	0.02	0.54	2.9	0.3	1.3	24.3	<0.01	0.04
I102426		0.06	0.69	3.7	590	23.2	23.0	<0.001	0.02	0.52	2.2	0.3	1.3	30.5	<0.01	0.04
I102427		0.04	1.20	5.7	880	26.1	27.4	<0.001	0.02	0.55	2.6	0.2	1.7	28.4	<0.01	0.07
I102428		0.06	1.12	4.9	820	28.2	33.6	<0.001	0.02	0.56	3.2	0.3	2.2	33.2	0.01	0.15
I102429		0.04	0.82	3.9	770	29.3	29.4	<0.001	0.02	0.49	2.6	0.3	1.5	28.9	<0.01	0.04
I102430		0.04	0.79	3.8	760	28.2	28.5	<0.001	0.02	0.48	2.5	0.3	1.4	27.1	<0.01	0.03
I102431		0.02	0.39	3.3	690	32.5	28.4	<0.001	0.02	2.34	2.1	0.3	8.2	73.4	<0.01	0.15
I102432		0.07	1.31	3.8	770	28.8	33.2	<0.001	0.02	0.63	2.9	0.3	1.5	29.4	0.01	0.02
I102433		0.02	0.44	3.2	750	73.6	30.6	<0.001	0.02	1.72	2.0	0.3	2.2	30.6	<0.01	1.42
I102434		0.07	1.23	3.5	750	32.6	33.8	<0.001	0.02	0.57	2.3	0.3	1.4	25.1	0.01	0.09
I102435		0.04	0.53	3.7	820	26.7	32.4	<0.001	0.02	0.85	2.6	0.3	0.9	31.1	<0.01	0.04
I102436		0.02	0.27	3.7	850	37.1	31.4	<0.001	0.02	1.41	2.2	0.3	0.9	47.4	<0.01	0.06
I102437		0.02	0.35	3.3	6530	41.0	24.3	<0.001	0.03	1.27	3.2	0.4	1.3	72.8	0.01	0.20
I102438		0.02	0.26	4.0	1380	208	35.9	<0.001	0.03	4.79	2.0	0.4	5.7	46.0	<0.01	0.99
I102439		0.04	0.93	4.2	820	37.6	37.0	<0.001	0.02	0.64	2.4	0.3	1.2	25.5	<0.01	0.08
I102440		0.06	0.78	4.1	950	37.7	38.1	<0.001	0.02	0.71	2.6	0.3	1.3	30.1	<0.01	0.08
I102441		0.06	1.42	4.5	800	42.1	40.8	<0.001	0.03	0.80	2.6	0.3	1.5	25.2	<0.01	0.09
I102442		0.04	0.76	4.6	800	44.8	41.2	<0.001	0.02	0.66	2.4	0.3	1.2	25.8	<0.01	0.16
I102443		0.08	1.68	3.7	790	30.8	36.5	<0.001	0.02	0.57	2.0	0.3	1.3	31.6	0.01	0.01
I102444		0.06	1.95	3.7	990	32.5	37.8	<0.001	0.02	0.47	1.8	0.3	1.1	35.5	<0.01	0.01
I102445		0.08	1.62	4.0	770	31.7	39.3	<0.001	0.02	0.59	2.4	0.3	1.3	25.4	0.01	0.01
I102446		0.08	1.64	3.5	700	30.4	33.5	<0.001	0.03	0.51	2.3	0.3	1.3	26.1	0.01	0.02
I102447		0.02	0.18	3.5	950	74.7	35.7	<0.001	0.02	1.71	2.2	0.4	0.6	39.6	<0.01	0.16
I102448		0.05	0.49	5.4	860	42.5	39.5	<0.001	0.02	0.59	2.9	0.3	1.1	24.4	0.01	0.08
I102449		0.05	1.12	3.4	710	30.3	27.9	<0.001	0.02	0.46	1.8	0.3	1.0	25.8	<0.01	0.02
I102450		0.04	1.43	60.8	810	41.9	9.2	0.004	1.18	7.34	4.8	1.1	86.9	76.0	0.02	36.0
I102451		0.05	0.67	4.2	790	61.4	33.4	<0.001	0.02	0.53	2.6	0.3	1.2	25.6	<0.01	0.09
I102452		0.04	0.74	4.7	820	28.2	34.9	<0.001	0.02	0.59	2.7	0.3	1.7	30.8	<0.01	0.09
I102453		0.05	0.13	7.8	970	10.0	19.6	<0.001	0.02	0.69	2.3	0.3	0.4	26.6	<0.01	0.15
I102454		0.04	0.11	3.6	670	9.6	12.6	<0.001	0.02	0.58	1.6	0.3	0.2	20.3	<0.01	0.11
I102455		0.06	0.13	3.8	680	10.7	20.1	<0.001	<0.01	1.21	2.5	0.4	0.3	24.8	<0.01	0.07
I102456		0.04	0.13	4.4	710	10.4	15.3	<0.001	<0.01	0.74	2.5	0.4	0.3	25.3	<0.01	0.17
I102457		0.06	0.12	6.5	850	16.3	21.1	<0.001	<0.01	0.88	4.1	0.3	0.4	30.9	<0.01	0.21
I102458		0.05	0.60	4.5	830	26.8	25.5	<0.001	<0.01	0.57	2.8	0.3	1.2	27.2	<0.01	0.05

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 19-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10140655

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I102419		16.7	0.147	0.54	4.50	117	4.25	11.10	117	2.5
I102420		33.1	0.154	0.30	12.85	52	0.92	15.25	34	2.5
I102421		17.3	0.147	0.58	4.85	124	0.65	11.80	130	2.5
I102422		19.6	0.153	0.79	6.26	115	1.64	13.35	261	4.3
I102423		13.3	0.109	0.47	4.72	57	0.59	9.65	88	4.6
I102424		14.0	0.102	0.51	4.50	58	0.52	10.75	83	5.4
I102425		29.0	0.062	0.24	8.30	51	0.64	12.50	76	1.5
I102426		35.0	0.067	0.22	8.07	37	0.58	11.55	55	3.1
I102427		30.0	0.120	0.23	6.44	59	0.90	10.15	71	1.7
I102428		30.6	0.123	0.29	8.11	55	1.28	12.65	67	1.8
I102429		31.9	0.087	0.22	8.93	50	1.08	11.85	57	1.6
I102430		35.6	0.080	0.22	9.27	48	1.11	11.70	55	1.7
I102431		35.4	0.031	0.36	18.45	40	6.05	12.35	67	2.6
I102432		31.0	0.117	0.26	11.60	49	1.05	13.55	54	2.4
I102433		35.3	0.036	0.32	16.40	42	3.67	13.80	71	2.1
I102434		33.5	0.122	0.26	10.80	48	1.73	12.95	49	2.3
I102435		34.8	0.073	0.33	12.35	45	0.76	13.70	54	2.0
I102436		31.6	0.047	0.37	14.10	44	1.11	12.10	61	1.5
I102437		32.7	0.042	0.31	52.8	43	1.38	26.7	64	1.9
I102438		28.4	0.027	0.47	30.5	37	6.79	13.70	66	1.6
I102439		37.0	0.103	0.32	11.75	52	2.31	12.80	126	1.9
I102440		35.8	0.105	0.35	12.55	51	2.13	13.45	127	1.9
I102441		34.5	0.132	0.36	12.15	53	3.88	12.60	177	2.1
I102442		33.3	0.098	0.41	12.35	50	1.98	12.20	89	1.5
I102443		34.4	0.138	0.26	12.25	52	2.49	11.65	83	2.2
I102444		37.8	0.130	0.26	18.65	50	2.53	11.15	94	2.3
I102445		33.6	0.138	0.29	14.50	52	3.21	11.80	73	2.3
I102446		34.8	0.132	0.25	12.05	47	2.35	12.40	59	2.4
I102447		31.3	0.020	0.46	17.90	45	1.61	15.35	78	2.0
I102448		25.9	0.085	0.43	9.36	52	1.72	12.20	105	4.0
I102449		36.9	0.105	0.21	11.50	47	1.43	10.70	52	2.4
I102450		3.9	0.153	0.14	1.92	29	59.1	8.06	87	13.8
I102451		33.2	0.085	0.35	10.60	49	1.00	12.60	111	2.5
I102452		48.4	0.107	0.46	13.20	55	0.75	11.30	85	2.2
I102453		23.4	0.019	0.21	6.32	50	0.16	13.60	137	18.0
I102454		23.9	0.010	0.15	6.75	31	0.26	13.45	103	17.1
I102455		25.8	0.009	0.23	7.17	35	0.19	16.00	100	22.0
I102456		25.0	0.009	0.17	7.71	37	0.24	14.85	103	26.1
I102457		22.7	0.009	0.23	8.64	51	0.18	13.50	190	21.7
I102458		29.6	0.086	0.20	11.25	57	1.39	11.60	118	5.9

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 19-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10140655

Sample Description	Method	WEI-21	Au-AA23	Au-GRA21	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Recvd Wt.	Au	Au	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co
	Units	kg	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	LOR	0.02	0.005	0.05	0.01	0.01	0.1	0.2	10	10	0.05	0.01	0.01	0.01	0.02	0.1
I102459		3.73	0.020		0.29	0.96	3.6	<0.2	<10	70	0.91	3.89	0.46	0.19	51.7	5.8
I102460		0.97	<0.005		0.08	0.68	6.2	<0.2	<10	100	0.79	0.37	0.30	0.18	35.2	4.2
I102461		1.74	<0.005		0.14	1.21	3.0	<0.2	<10	70	1.62	0.27	2.12	0.16	47.5	4.6
I102462		0.93	0.009		7.46	1.61	4.7	<0.2	<10	100	2.33	3.23	0.52	1.23	56.1	13.0
I102463		1.66	0.403		3.11	1.34	19.3	0.6	<10	260	2.18	55.5	0.36	0.68	60.7	14.7
I102464		2.25	0.005		0.46	2.32	5.9	<0.2	<10	320	3.91	13.30	0.89	0.61	47.8	7.4
I102465		3.48	<0.005		0.20	1.04	3.6	<0.2	<10	80	0.94	0.57	0.46	0.18	50.7	5.0
I102466		2.46	<0.005		0.10	0.93	3.1	<0.2	<10	130	0.98	2.42	0.41	0.17	53.0	4.6
I102467		3.12	<0.005		0.17	2.22	7.9	<0.2	<10	130	3.04	6.77	0.66	0.60	69.1	13.2
I102468		1.58	<0.005		0.12	0.97	3.0	<0.2	<10	60	1.06	0.44	0.42	0.17	45.4	4.9
I102469		1.09	<0.005		0.09	0.81	3.7	<0.2	<10	70	0.81	0.28	0.41	0.10	41.8	4.5
I102470		1.17	<0.005		0.07	0.71	3.4	<0.2	<10	60	0.71	0.27	0.35	0.10	38.6	4.2
I102471		1.80	<0.005		0.09	1.07	5.3	<0.2	<10	70	1.14	1.02	0.49	0.20	38.7	4.3
I102472		1.86	0.005		0.10	1.24	11.3	<0.2	<10	30	1.92	0.92	0.57	0.18	51.1	32.3
I102473		1.14	<0.005		0.20	2.07	7.0	<0.2	<10	80	2.79	2.41	0.75	0.35	54.8	12.4
I102474		2.08	<0.005		0.11	0.80	4.3	<0.2	<10	70	0.68	0.58	0.44	0.22	44.9	5.6

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 19-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10140655

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Cr	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
	Units	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
	LOR	1	0.05	0.2	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.2	0.1	0.01	5	0.05
I102459		20	4.09	30.4	2.48	5.95	0.11	0.18	0.01	0.041	0.32	26.4	20.4	0.55	550	6.90
I102460		17	5.93	3.8	2.22	4.37	0.12	0.22	<0.01	0.020	0.34	16.0	38.4	0.38	298	1.52
I102461		14	3.25	7.2	1.93	5.28	0.09	0.23	0.01	0.021	0.29	24.9	15.4	0.51	1610	1.41
I102462		19	6.37	1220	2.70	6.58	0.09	0.16	0.04	0.072	0.24	28.1	14.3	0.55	2500	1.20
I102463		9	23.4	1230	3.52	8.00	0.11	0.08	0.02	0.592	0.31	31.0	20.0	0.23	3270	4.12
I102464		14	6.60	54.2	2.31	8.02	0.08	0.11	0.01	0.038	0.19	26.8	16.8	0.94	3000	0.58
I102465		19	3.43	18.5	2.14	5.38	0.11	0.24	<0.01	0.024	0.31	25.7	17.0	0.52	398	2.66
I102466		17	4.24	14.7	2.00	5.00	0.10	0.26	<0.01	0.018	0.28	27.4	13.9	0.45	604	1.39
I102467		16	4.57	13.0	2.73	7.63	0.10	0.12	0.01	0.027	0.23	36.0	17.6	0.75	980	0.76
I102468		16	3.61	8.4	2.06	5.15	0.09	0.20	0.01	0.014	0.25	22.4	17.0	0.52	310	1.10
I102469		17	2.75	6.0	2.07	4.54	0.10	0.21	0.01	0.012	0.27	20.6	12.5	0.40	289	0.93
I102470		16	2.75	5.1	1.88	4.28	0.09	0.18	<0.01	0.010	0.23	19.1	12.7	0.38	248	0.72
I102471		14	2.95	5.8	1.71	5.55	0.11	0.25	0.01	0.035	0.28	19.4	25.6	0.61	397	1.48
I102472		22	2.80	13.2	4.00	6.26	0.13	0.11	<0.01	0.042	0.17	28.6	15.2	0.71	1060	0.67
I102473		25	5.22	7.4	3.59	7.74	0.11	0.08	0.01	0.047	0.14	26.0	18.7	0.98	1140	0.64
I102474		17	3.93	9.1	2.13	4.07	0.12	0.17	<0.01	0.019	0.32	23.9	18.2	0.51	361	1.97

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 19-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10140655

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta	Te
	Units	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.01	0.05	0.2	10	0.2	0.1	0.001	0.01	0.05	0.1	0.2	0.2	0.2	0.01	0.01
I102459		0.07	1.19	4.4	860	33.0	33.0	0.001	<0.01	0.83	2.8	0.4	1.7	31.1	<0.01	0.04
I102460		0.06	2.93	4.4	800	21.9	42.6	<0.001	<0.01	0.44	3.0	0.4	2.5	14.8	0.01	<0.01
I102461		0.07	0.87	3.0	740	24.5	31.6	<0.001	<0.01	0.80	2.4	0.3	1.4	37.7	0.01	<0.01
I102462		0.05	0.34	7.0	1020	71.5	32.5	0.001	<0.01	3.54	4.2	0.4	1.3	103.5	<0.01	0.02
I102463		0.02	0.15	4.6	870	93.9	45.2	<0.001	<0.01	29.9	3.1	0.8	4.4	98.2	<0.01	0.52
I102464		0.03	0.20	4.3	1520	68.9	24.1	<0.001	<0.01	2.79	3.8	0.4	1.6	172.5	<0.01	0.13
I102465		0.08	1.12	3.8	830	33.8	29.5	0.001	<0.01	0.61	2.5	0.3	1.8	35.4	0.01	0.01
I102466		0.05	1.15	3.4	910	35.5	30.2	<0.001	<0.01	0.85	2.0	0.4	1.3	35.9	0.01	0.15
I102467		0.03	0.23	4.4	910	73.6	29.2	<0.001	<0.01	1.12	3.3	0.4	1.5	67.4	<0.01	0.19
I102468		0.05	0.87	3.6	870	38.9	31.0	<0.001	<0.01	0.48	2.0	0.3	1.3	31.8	<0.01	0.01
I102469		0.08	1.34	3.4	830	33.8	29.0	<0.001	<0.01	0.34	2.0	0.3	1.2	66.0	<0.01	<0.01
I102470		0.05	1.06	3.2	800	32.4	26.7	<0.001	<0.01	0.30	1.6	0.3	1.0	44.3	<0.01	0.01
I102471		0.07	1.31	3.6	610	44.2	28.3	<0.001	<0.01	0.79	3.2	0.3	1.6	32.9	0.01	0.11
I102472		0.01	0.08	15.8	2010	20.1	16.6	<0.001	<0.01	0.59	1.8	0.4	0.4	20.1	<0.01	0.04
I102473		0.01	0.10	15.6	1760	23.1	16.7	<0.001	<0.01	0.72	2.4	0.3	0.5	50.9	<0.01	0.03
I102474		0.04	1.33	4.4	940	37.6	37.3	<0.001	<0.01	0.45	1.9	0.3	0.9	21.8	0.01	0.01

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 19-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10140655

Sample Description	Method	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41	ME-MS41
	Analyte	Th	Ti	Tl	U	V	W	Y	Zn	Zr
	Units	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
	LOR	0.2	0.005	0.02	0.05	1	0.05	0.05	2	0.5
I102459		29.6	0.133	0.27	11.90	61	4.36	11.75	66	2.9
I102460		30.8	0.154	0.29	11.70	57	0.91	16.20	37	3.4
I102461		31.4	0.123	0.22	11.25	49	0.97	11.45	48	4.2
I102462		30.2	0.060	0.30	11.00	61	38.4	14.85	141	2.6
I102463		30.0	0.007	0.56	12.35	32	3.91	13.55	109	2.1
I102464		29.7	0.027	0.21	6.97	48	0.62	14.40	91	2.2
I102465		31.2	0.137	0.22	11.90	55	1.23	11.85	46	4.4
I102466		34.7	0.117	0.22	14.40	54	0.89	11.90	37	4.6
I102467		36.2	0.032	0.23	9.14	50	1.41	15.00	57	2.2
I102468		32.4	0.112	0.20	12.60	56	1.17	10.05	45	3.5
I102469		33.0	0.127	0.18	13.05	56	1.36	10.05	42	3.5
I102470		29.8	0.110	0.16	12.00	52	1.25	9.00	39	3.1
I102471		24.6	0.142	0.20	6.68	36	0.77	12.10	81	5.6
I102472		18.6	0.010	0.17	4.85	52	0.71	13.00	79	5.0
I102473		21.8	0.015	0.16	5.18	53	0.62	10.95	89	3.0
I102474		27.8	0.131	0.23	10.15	53	0.62	10.25	68	3.8

***** See Appendix Page for comments regarding this certificate *****

ALS Canada Ltd.
2103 Dollarton Hwy
North Vancouver BC V7H 0A7
Phone: 604 984 0221 Fax: 604 984 0218 www.alsglobal.com

To: **EQUITY EXPLORATION CONSULTANTS LTD.**
SUITE 200, 900 WEST HASTINGS STREET
VANCOUVER BC V6C 1E5

Finalized Date: 19-OCT-2010
Account: EIASQI

Project: SQI10-01

CERTIFICATE OF ANALYSIS WH10140655

Method	CERTIFICATE COMMENTS
ME-MS41	Gold determinations by this method are semi-quantitative due to the small sample weight used (0.5g).

Appendix E: Rock Sample Descriptions

MINERALS AND ALTERATION ABBREVIATIONS

AC	actinolite	FP	feldspar	PF	plagioclase
AL	alunite	GA	garnet	PH	phlogopite
AM	amphibole	GE	goethite	PL	pyrolusite
AS	arsenopyrite	GL	galena	PO	pyrrhotite
AU	augite	GR	graphite	PY	pyrite
AZ	azurite	HB	hornblende	QZ	quartz veining
BA	barite	HE	haematite	RE	realgar
BI	biotite	HS	specularite	RN	rhodonite
BO	bornite	HZ	hydrozincite	SB	stibnite
BT	pyrobitumen	IL	illite	SD	siderite
CA	calcite	JA	jarosite	SI	silicification
CB	Fe-carbonate	KF	potassium feldspar	SK	skarn
CC	chalcocite	MC	malachite	SM	smithsonite
CD	chalcedony	MG	magnetite	SP	sphalerite
CL	chlorite	MI	mica	SR	scorodite
CP	chalcopyrite	MN	Mn-oxides	SS	sulphosalts
CU	native copper	MO	molybdenite	ST	smectite
CV	covellite	MR	mariposite/fuchsite	TP	topaz
CY	clay	MS	sericite	TT	tetrahedrite
DC	dickite	MT	marcasite	VG	gold
DS	diaspore	MU	muscovite	ZE	Zeolite
DU	dumortierite	NA	natroalunite	ZN	zunyite
EN	enargite	NE	neotocite		
EP	epidote	PA	pyrargyrite		

ALTERATION INTENSITY

w	weak	s	strong
m	moderate	i	intense

Appendix F: Drill Logs

Drill Log Legend



Casing



SANDSTONE



Limestone



Chert



Chlorite Biotite Schist



Quartzphyric Schist



Ultramfic Talc Schist



Biotite Chlorite Schist

Quartz-Muscovite Schist

Seriticized Chl schist and fault gouge



Fault Zone/Gouge
Hydrothermal Breccia
Fractured Schist



Quartz vein



Vein



S1 Foliation

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1346.0
Hole BV08-1	**Azimuth (º):** 30.0
Location: 6966459 m North, 575853 m East	**Dip (º):** -45.0
Logged by: Lehtinen	**Length (m):** 245.40
Drilled by: Coretech	**Horizontal Projection:**
Assayed by: ALS Chemex	**Vertical Projection:**
Core Size: BTW	
Date Started: 2008/09/12 **Date Completed:** 2008/09/16	
Dip Tests By: none	
Objective Test mineralisation beneath Trench BLVD08-1	

Summary Log:

0.00-4.60	Casing
4.60-17.20	Mafic Schist
17.20-19.90	Diorite
19.90-44.10	Mafic Schist
44.10-46.10	Quartzite
46.10-52.00	Mafic Schist
52.00-57.40	Quartzite
57.40-64.70	Mafic Schist
64.70-66.90	Chert
66.90-88.10	Mafic Schist
88.10-93.80	Quartzite
93.80-120.40	Mafic Schist. EOH

Mineralisation is dominantly disseminated and foliation parallel pyrite and disseminated and fracture fill pyrrhotite.
QA/QC SAMPLES
G080919 - BLANK
G080939 - STANDARD 1


Downhole surveys:

Depth	Dip	Azimuth
0.00	-45.00	30.00

Project: Boulevard

Hole Number: BV08-1

From	To	Rocktype	& Description
0.00	4.60	Casing	Casing
4.60	17.20	Mafic Schist	Strongly foliated, medium green to brown-green with lighter areas of silicification. Weak quartz stringers, commonly augen shaped and irregular, parallel to foliation. Minor rusty fracturing sub-parallel TCA. Weak bedding in very fine grained chloritic units< 1cm beds parallel to foliation. Structure:< @ 5.00 foliation 45° >< @ 6.10 47° >< @ 7.30 foliation 57° >< @ 10.10 foliation 45° >< @ 12.30 foliation 4° >< @ 4.60 bedding 30° > « 7.70- 9.90 rusty fracturing 10-40°» « 8.20- 10.00 cross-cutting foliation stringers 10-50° 5mm»< @ 15.10 foliation 68° > « 14.50- 17.00 parallel to foliation quartz stringers- augen and irregular »< @ 8.20 xcut foliation quartz 27 2mm > Alteration: « 6.20- 11.70 silica 2» « 14.50- 17.00 silica 1» Mineralization: « 4.60- 17.20 disseminated and along foliation pyrite 2-4%»« disseminated irregular distribution,minor fracture fill pyrrhotite 1-2%» « 10.90- 10.91 clotty pyrite and pyrrhotite quartz vein 10%»
17.20	19.90	Diorite	Medium to dark green. Fine grained. Non to weakly foliated. Weakly magnetic throughout. Contacts appear to parallel foliation. Alteration:« chlorite 3»« epidote 1*» Mineralization:« trace fracture fill pyrite 0-1%»
19.90	44.10	Mafic Schist	Variable dark grey to medium grey to green grey. Strongly foliated with numerous quartz stringers and cm width veins. Irregular vein orientation and foliation parallel veins. Strongly contorted zones with crenulated foliation. Becoming more muscovite rich towards bottom of interval. Very strongly bedded/foliated at bottom of interval. Variable pyrite content. Primarily trace and trace, trace pyrrhotite.

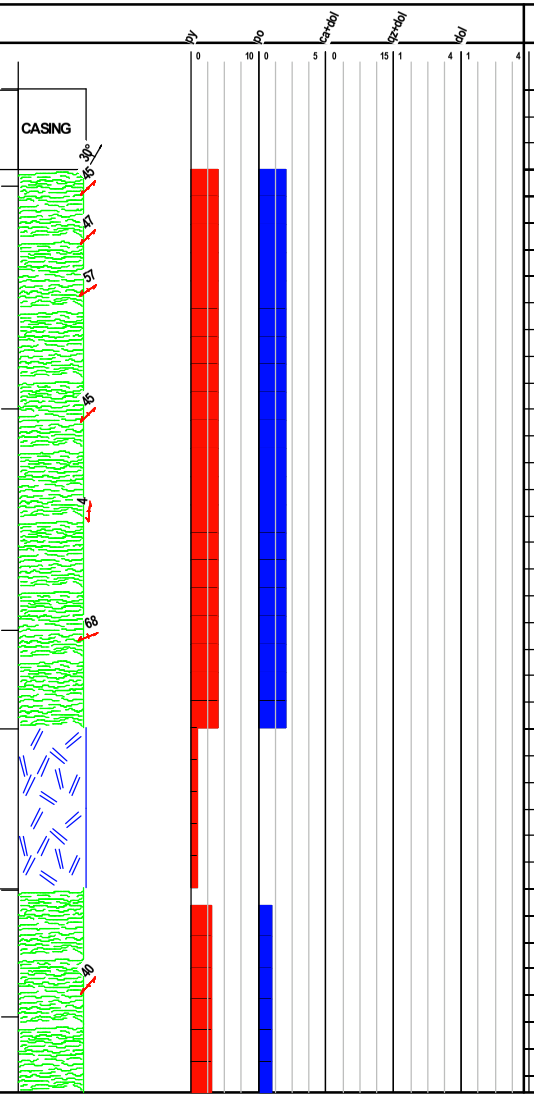


From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
4.60	5.80	1.20	G0809001	-0.01	4.20	0.30	0.16	1.41
5.80	8.50	2.70	G0809002	0.02	0.90	1.21	0.08	2.11
8.50	11.60	3.10	G0809003	-0.01	1.80	0.69	0.08	0.99
11.60	14.60	3.00	G0809004	-0.01	1.00	0.21	0.11	0.82
14.60	17.20	2.60	G0809005	-0.01	1.10	0.23	0.11	1.14
17.20	19.90	2.70	G0809006	-0.01	0.30	0.05	0.11	0.21
19.90	20.70	0.80	G0809007	-0.01	0.50	0.09	0.07	0.29
20.70	23.80	3.10	G0809008	-0.01	0.30	0.14	0.07	0.72
23.80	26.80	3.00	G0809009	0.01	0.30	0.13	0.05	1.28
26.80	28.70	1.90	G0809010	0.01	5.40	0.16	0.15	1.32
28.70	31.70	3.00	G0809011	0.01	0.30	0.40	0.07	1.80
31.70	33.70	2.00	G0809012	0.01	0.30	0.49	0.05	1.77
33.70	35.70	2.00	G0809013	-0.01	2.00	0.22	0.06	1.66
35.70	38.40	2.70	G0809014	-0.01	0.30	0.21	0.09	1.24

* depth component not to scale

Project: Boulevard

Hole Number: BV08-1

From	To	Rocktype & Description
		Structure:< @ 23.70 foliation 40° >< @ 29.00 foliation 45° >
		« 31.30- 31.70 xcut foliation quartz 1° 2mm»< @ 33.50 foliation 50° ><
		@ 37.70 foliation 65° > « 36.70- 37.30 crenulated foliation »
		« 38.40- 39.30 crenulated foliation »< @ 40.40 foliation 45° >< @
		43.40 strong foliation/bedding foliation 60° >< @ 26.70 xcuts foliation,tr PO
		quartz 20° 2mm >
		Alteration:
		« 21.30- 34.00 stringered and pervasive silica 1*»
		Mineralization:
		« 20.60- 30.00 disseminated and cubic crystalline pyrite 3%»«
		pyrrhotite 0-1%»< @ 28.70 quartz vein 45° 3mm >< @ 28.70 x-cuts quartz
		calcite vein 45° 2mm >
44.10	46.10	Quartzite
		Dominantly light grey-white with chlorite and brown biotite bands. Protolith =
		interbedded quartzite with mudstone and siltstone beds. Minor fault slips, <
		0.1mm, weakly displacing beds.
		Structure:< @ 45.50 bedding foliation 65° >
		Mineralization:« pyrrhotite 0-1%»« pyrite 0-1%»
46.10	52.00	Mafic Schist
		Variably coloured from medium green to green brown, owing to chlorite and
		biotite content. Very finely laminated/foliated. Some discrete beds parallel to
		foliation. Very finely laminated at base of interval.
		Structure:< @ 46.90 foliation 60° >< @ 50.10 foliation 68° >< @ 52.00
		foliation 55° >
		« 48.70- 49.00 irregular shape, foliation parallel quartz 65° 30cm»
		Mineralization:« pyrrhotite 0-1%»
		« 49.80- 50.50 disseminated pyrite 5%»« disseminated pyrrhotite 3%»
52.00	57.40	Quartzite
		Variable white-grey to brown-grey due to biotite content in
		quartzite/greywacke. Moderately foliated. Basal contact is faulted with
		carbonaceous to graphitic fault slips with gouge. Irregular quartz sweats less

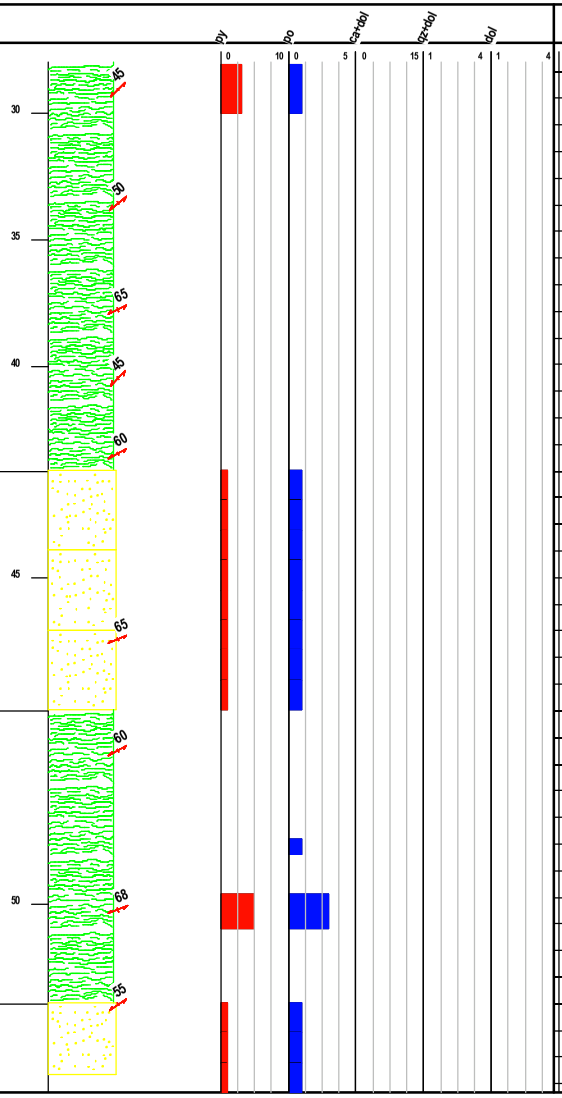


From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
38.40	41.50	3.10	G0809015	-0.01	0.50	0.13	0.13	0.60
41.50	45.10	3.60	G0809016	-0.01	0.40	0.08	0.17	0.28
45.10	47.20	2.10	G0809017	-0.01	0.90	0.08	0.16	0.35
47.20	48.10	0.90	G0809018	0.01	7.40	0.17	0.26	0.30
48.10	48.10	0.00	G0809019	-0.01	0.10	-0.01	-0.05	-0.05
48.10	51.20	3.10	G0809020	0.01	2.90	0.17	0.19	0.26
51.20	54.30	3.10	G0809021	-0.01	1.10	0.12	0.17	1.67
54.30	57.40	3.10	G0809022	0.07	205.00	0.28	1.93	1.33

Project: Boulevard

Hole Number: BV08-1

From	To	Rocktype & Description
		than 2 cm as augen. Structure:< @ 55.60 foliation 57° > Mineralization:« pyrite 0-1%»« pyrrhotite 0-1%»
57.40	59.20	Mafic Schist Medium grey to green grey. Strongly foliated and faulted zone. Numerous carbonaceous to graphitic slips and fault gouge zones. Moderately altered within zone. Structure:< @ 57.70 fault 45° > « 57.40- 57.43 fault gouge 90°» « 59.00- 59.05 fault gouge 90°»< @ 59.15 strong polishing fault 30° > Alteration: « 57.40- 59.20 clay 1*» Mineralization:« disseminated Pyrite 3%»
59.20	64.70	Mafic Schist Medium to dark brown. Very thinly laminated and foliated with chloritic zones and lighter silica-rich cherty zones at the base of the interval. Structure:< @ 59.90 bedding foliation 60° >< @ 64.20 bedding foliation 52° >
64.70	66.90	Chert Light grey to grey-white with bands of biotite and biotite-rich minor intervals. Structure:< @ 65.70 bedding 55° >< @ 64.70 quartz vein 70° 3cm > Mineralization: « 64.70- 64.73 pyrrhotite 1%»
66.90	88.10	Mafic Schist Medium to dark brown-grey with more chloritic green-grey intervals and some lighter silicic wacke to quartzite beds. Very thinly foliated to laminated. Discrete planar quartz veinlets as well as planar one surface and irregular contact on the adjacent vein wall. Boudinage veinlets. Structure:< @ 67.10 antiform axis >< @ 69.90 foliation 70° >< @ 66.90 minor pyrrhotite quartz 60° 1cm >< @ 73.30 foliation 65° >< @ 66.90 quartz 65° 2cm >< @ 74.80 erratic veining and smaller stringer quartz 45° 5mm >< @ 76.00 2 stringers quartz 45° 5mm >< @ 76.40 quartz 60° 3mm >< @ 76.40 quartz 1mm >< @ 76.80 2 veins quartz 50° 5mm >< @ 76.80 2nd vein quartz 32° 3mm >< @ 76.85

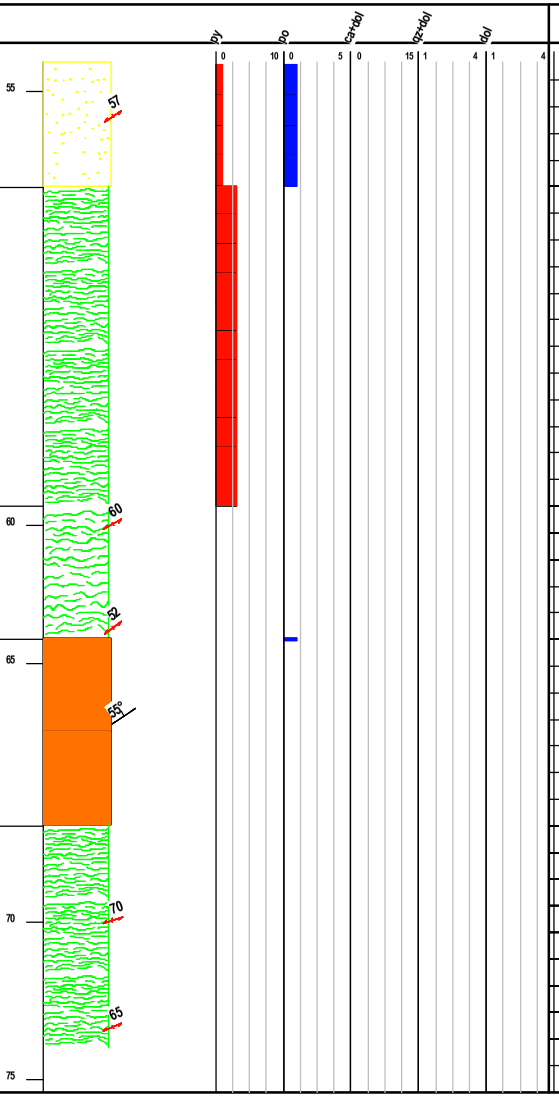


From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
57.40	59.20	1.80	G0809023	1.00	5120.00	0.13	35.30	11.50
59.20	60.40	1.20	G0809024	-0.01	19.30	0.07	3.08	0.55
60.40	62.80	2.40	G0809025	-0.01	9.30	0.19	2.87	4.28
62.80	64.70	1.90	G0809026	0.01	4.40	0.64	0.56	4.00
64.70	66.90	2.20	G0809027	-0.01	3.70	0.05	18.65	1.02
66.90	69.50	2.60	G0809028	-0.01	4.50	0.14	2.30	1.49
69.50	72.50	3.00	G0809029	-0.01	1.60	0.21	0.24	2.14
72.50	75.60	3.10	G0809030	-0.01	1.00	0.21	0.29	1.76
75.60	78.60	3.00	G0809031	-0.01	0.50	0.21	0.22	1.88
78.60	81.70	3.10	G0809032	0.01	1.50	0.17	8.89	3.84
81.70	82.50	0.80	G0809033	0.02	1.50	0.22	24.80	0.59
82.50	84.70	2.20	G0809034	-0.01	0.60	0.19	1.50	0.98
84.70	87.70	3.00	G0809035	-0.01	2.10	0.13	0.22	4.04
87.70	88.10	0.40	G0809036	-0.01	1.40	0.06	0.07	1.78

Project: Boulevard

Hole Number: BV08-1

From	To	Rocktype	& Description
			quartz 37° 2mm >< @ 76.90 quartz 55° 10mm >< @ 77.50 foliation 50° >< @ 77.60 quartz 50° 15mm >< @ 77.80 blowout,irregular quartz 70° 5mm >< @ 78.00 synform fold axis >< @ 79.20 trace Pyrrhotite chlorite 45° 3mm >< @ 79.30 foliation 45° >< @ 79.50 quartz breccia 65° 15mm >< @ 81.30 erratic orientation quartz 10mm >< @ 81.70 narrow gouge zone fault 70° 10mm > « 81.70- 82.50 chaotic orientation quartz »< @ 84.10 foliation 60° >< @ 85.70 minor PO in quartz 45° 8mm >< @ 86.30 quartz 65° 4cm >
			Mineralization:< @ 81.70 clotty, with quartz pyrrhotite 3% >< @ 84.90 along quartz vein selvege pyrrhotite 3% 10 >< @ 85.00 vein selvege pyrrhotite 3% 2 >< @ 85.60 7 % pyrrhotite quartz 27° 3 >< @ 85.70 foliation 45° >< @ 85.70 quartz 45° 5mm >< @ 87.30 quartz 68° 2cm >< @ 87.30 chalcopyrite -1% > « 84.60- 87.70 in and along quartz stringers Pyrrhotite 0-1%»« trace along and in quartz stringers chalcopyrite 0-1%»
88.10	93.80	Quartzite	
			Dominantly light to medium grey. Increased biotite towards bottom of interval, into gradational contact. Well developed banding/bedding. Minor small scale fold axes.
			Structure: < @ 89.10 foliation 5° >< @ 88.10 boudined quartz 60° 10mm >< @ 88.10 M fold fold >< @ 90.70 S fold >< @ 91.00 S fold >< @ 91.20 foliation 55° >< @ 91.30 synform axis >< @ 91.40 synform axis >< @ 91.80 foliation 65° > « 92.90- 93.00 narrow veining quartz 55° 1-3cm»
93.80	95.70	Mafic Schist	
			Similar to previous 1ab. Medium to dark brown-grey, minor quartz stringers with variable Pyrrhotite and pyrite.
			Structure:< @ 94.20 foliation 72° >< @ 95.20 quartz 75° 4cm > Mineralization: « 93.90- 94.05 in quartz and vein selvege pyrrhotite 1%» « 95.20- 95.24 in quartz pyrite 1%»
95.70	97.80	Mafic Schist	
			Differs from unit above as it is dominantly chloritic with minor biotite. Medium green, biotite foliations
			Structure:< @ 96.80 foliation 67° >
97.80	120.40	Mafic Schist	

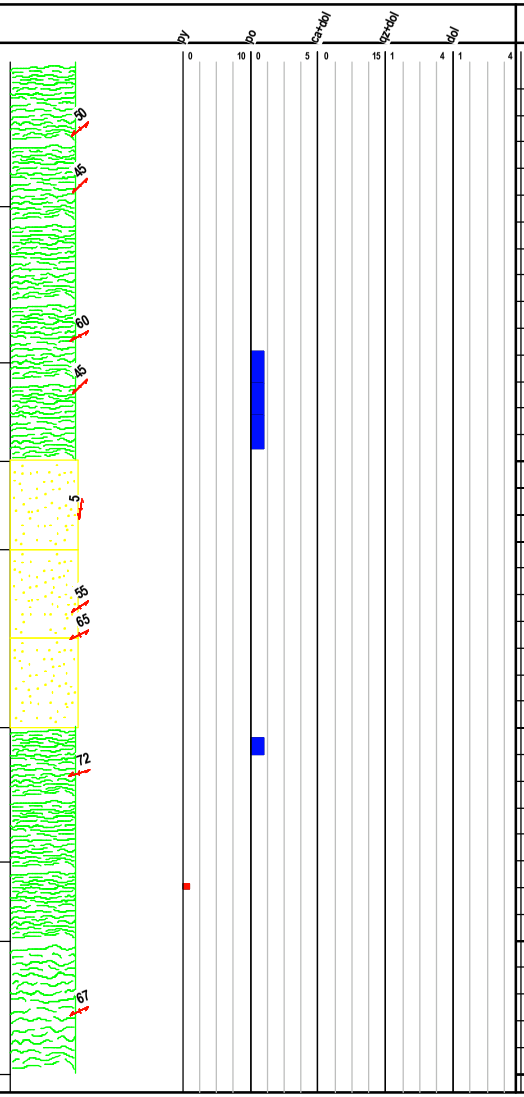


From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
88.10	90.00	1.90	G0809037	-0.01	1.10	0.10	0.07	2.63
90.00	92.40	2.40	G0809038	-0.01	1.30	0.14	0.23	1.47
92.40	92.40	0.00	G0809039	1.25	1925.00	42.50	4.70	8.13
92.40	93.80	1.40	G0809040	0.01	10.30	0.37	0.28	2.45
93.80	95.70	1.90	G0809041	-0.01	1.00	0.16	0.13	4.10
95.70	97.80	2.10	G0809042	-0.01	2.10	0.19	0.11	1.06
97.80	100.30	2.50	G0809043	0.01	1.60	0.37	0.41	3.71

Project: Boulevard

Hole Number: BV08-1

From	To	Rocktype & Description
		Dominantly a dark brown-grey with lighter, minor, silicic intervals of wacke/quartzite. Minor limestone beds and laminae.
		< @ 107.30 foliation 55° >
		Structure:< @ 98.50 foliation 87° >< @ 99.90 foliation - bedding 50° >< @ 103.00 foliation 65° >
		« 102.20- 102.30 quartz 55°»< @ 103.00 foliation 65° >
		Mineralization:< @ 98.40 trace with PO chalcopyrite 0-1% >< @ 98.40 trace pyrrhotite 0-1% >< @ 99.40 irregular sub-parallel to foliation quartz 2cm >< @ 99.40 trace pyrite pyrrhotite 1% >< @ 97.80 minor on fracture surfaces hematite >« on fractures pyrrhotite 3%»
		« 99.90- 100.10 Limestone »
		« 100.30- 101.20 Pale grey, weak banding Quartzite »
		« 104.20- 106.10 Stronger silica content, light grey,gradational bottom contact Quartzite »
		« 104.30- 104.40 fracture fill pyrrhotite 0-1%»« contorted and faulted beds »
		« 109.30- 109.90 numerous cm scale quartz 50°»< @ 112.40 quartz 15° 4mm >
		« 114.00- 114.06 quartz 45° 6cm»« fracture fill pyrrhotite 1%»« trace chalcopyrite 0-1%»
		« 114.60- 114.64 quartz 50°»« pyrrhotite 1%»< @ 114.60 vein 50° >
		« 115.10- 115.20 foliation sub-parallel quartz stringers 55°»« pyrrhotite 3%»< @ 116.40 foliation 55° >
		« 117.60- 117.65 fault breccia »< @ 117.45 fault 45° >
		« 118.40- 118.50 fine white porphyroblasts »< @ 119.60 foliation 55° >
		« 120.30- 120.40 fine,ragged, white porphyroblasts »
120.40	120.40	EOH

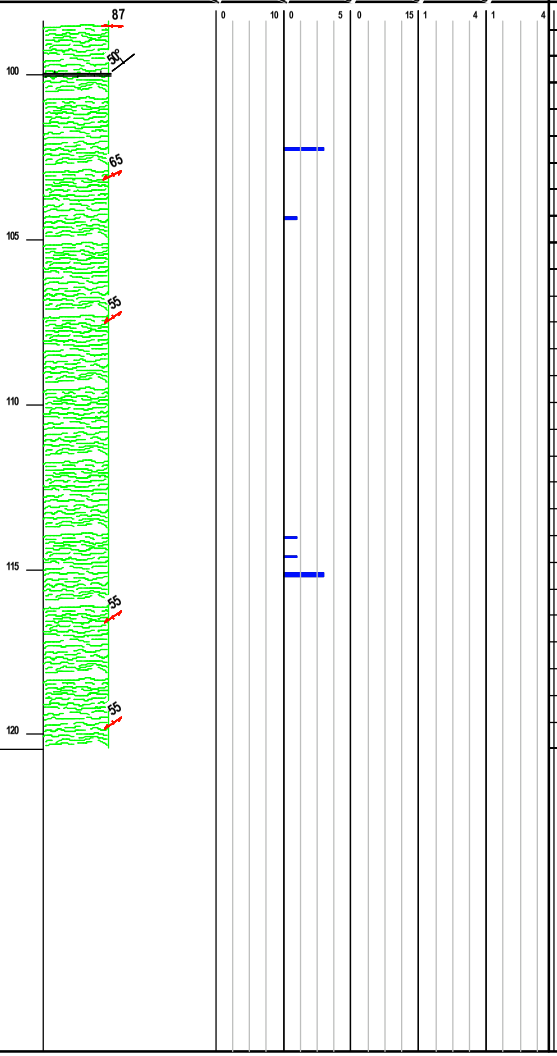

From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
100.30	101.20	0.90	G0809044	-0.01	0.50	0.20	0.06	0.77
101.20	103.00	1.80	G0809045	-0.01	1.90	0.27	0.23	3.44
103.00	104.90	1.90	G0809046	-0.01	2.30	0.33	0.06	2.99
104.90	107.00	2.10	G0809047	0.01	1.80	0.29	0.05	2.36
107.00	109.10	2.10	G0809048	-0.01	0.90	0.23	0.11	1.52
109.10	111.90	2.80	G0809049	0.03	2.00	0.30	0.06	1.25
111.90	114.90	3.00	G0809050	0.02	1.10	0.25	0.05	1.94
114.90	117.60	2.70	G0809051	0.01	0.30	0.34	0.05	2.76
117.60	118.60	1.00	G0809052	0.01	1.50	0.27	0.07	2.99
118.60	120.40	1.80	G0809053	-0.01	7.30	0.17	0.07	1.30

* depth component not to scale

Drill Log Legend


Bedding



Casing


Chert


Diorite


Dolomite


Limestone


Mafic Schist

Quartzite

Quartzite


S2 Foliation

qz+dol

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1343.0
Hole BV08-2	**Azimuth (º):** 210
Location: 6966561 m North, 575905 m East	**Dip (º):** -45.0
Logged by: Lehtinen	**Length (m):** 84.70
Drilled by: Coretech	**Horizontal Projection:**
Assayed by: ALS Chemex	**Vertical Projection:**
Core Size: BTW	
Date Started: 2008/09/17 **Date Completed:** 2008/09/20	
Dip Tests By: none	
Objective Scissor hole to undercut mineralisation beneath Trench BLVD08-1.	

Summary Log:

0.00-3.40	Casing
3.40-5.20	Mafic Schist
5.20-18.90	Feldspar-Quartz Crystal Tuff
18.90-59.30	Mafic Schist
59.30-62.50	Limestone
62.50-72.20	Mafic Schist
72.20-73.40	Fault Breccia
73.40-77.70	Quartzite
77.70-84.70	Mafic Schist. EOH

Very weakly mineralised with trace pyrite, pyrrhotite and very minor chalcopyrite.
QA/QC SAMPLES
G0809063 - STANDARD 2


Downhole surveys:

Depth	Dip	Azimuth
0.00	-45.00	210.00

Project: Boulevard

Hole Number: BV08-2

From	To	Rocktype & Description
0.00	4.60	Casing
		Casing
3.40	5.20	Mafic Schist
		Variably coloured from light green grey to med. to dark green-grey. Darker sections of strongly foliated biotite-chlorite schist, lighter zones of increased felsic crystal tuff. White porphyroblasts in darker unit.
		Structure: < @ 4.90 foliation 45° >
		« 4.95- 5.00 quartz 60° 4cm»
		Mineralization:« pyrite 1%»« trace chalcopyrite 0-1%»
5.20	18.90	Feldspar-Quartz Crystal Tuff
		Pale green-white. Minor interbeds of 1ab, mafic schist. All moderately to well foliated. Dominantly white plagioclase crystals in pale green muscovite matrix
		« 6.30- 6.50 Mafic Schist »
		« 14.00- 14.80 contorted beds, dominantly vfg biotite rich =pelitic Mafic Schist »
		« 15.50- 16.60 Mafic Schist »
		Structure:< @ 9.20 foliation 30° >< @ 14.90 foliation 35° >
		Mineralization:Very weakly mineralized throughout the entire crystal tuff with <1% finely disseminated pyrite.
18.90	22.60	Mafic Schist
		Dominantly chlorite-biotite schist with minor interbedded crystal tuff. Zone is more chlorite rich than Mafic Schist below. Medium to dark green grey to brown grey. Moderately foliated. Minor augen shaped or discontinuous quartz veins, less than 2 cm. Erratic dispersion of white, fine grained porphyroblasts. Very little sulphides.
		« 24.00- 24.90 Feldspar-Quartz Crystal Tuff »
		« 25.50- 25.60 Feldspar-Quartz Crystal Tuff »
		« 26.60- 27.60 Feldspar-Quartz Crystal Tuff »
		Structure:< @ 20.30 foliation 45° >< @ 23.40 foliation 70° >< @ 27.30 foliation 50° >
		« 26.00- 26.60 brecciated »« stringer calcite »< @ 26.20 calcite 35-45° >
22.60	59.30	Mafic Schist

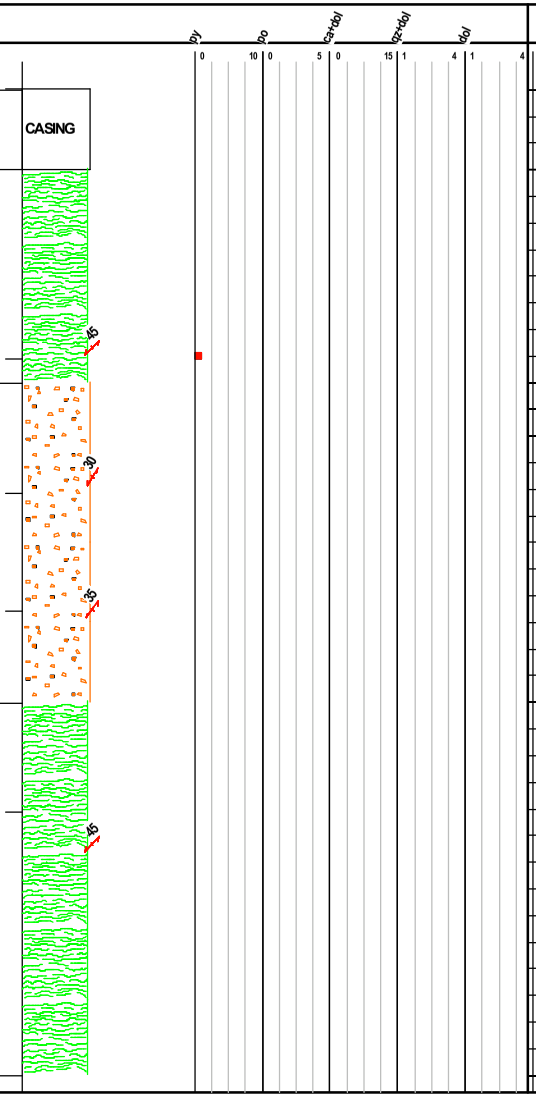


From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
6.50	9.50	3.00	G0809054	-0.01	0.60	0.26	0.39	0.40
9.50	11.60	2.10	G0809055	-0.01	0.20	0.32	0.55	0.23
16.60	18.90	2.30	G0809056	0.01	0.40	0.54	0.28	1.15
35.80	36.40	0.60	G0809057	0.03	1.00	1.62	8.36	2.31

Project: Boulevard

Hole Number: BV08-2

From	To	Rocktype & Description
		Dominantly medium to dark brown-grey. Minor intervals of medium green chlorite richer units. Zones of stronger quartz stringering. Individual veins commonly less than 5cm. Zones of very strong calcite stringers parallel to laminae and cross-cutting foliation in chloritie/biotitie schist. Erratic distribution of white porphyroblsts. Very minor sulphides generally pyrrhotite and pyrite with trace chalcopyrite commonly with quartz stringers/veins.
		« 29.00- 33.30 stringers parallel to sub-parallel to foliation. Commonly discontinuous calcite 1-2mm»
		« 35.80- 36.40 quartz 40% over the interval quartz »
		« 38.20- 39.70 calcite stringer zone 40°»
		« 42.10- 42.50 calcite stringer zone »
		« 39.90- 41.00 60% quartz vein content quartz 57°»
		« 48.70- 49.10 numerous veins to 60% quartz 60°»
		« 50.30- 51.00 Pale grey, weakly banded siliceous Quartzite »
		« 57.70- 59.30 zone of chaotic veining 40%quartz quartz »
		« 55.00- 55.50 40% vein quartz quartz 50°»< @ 56.30 35° 3cm >< @ 56.30 late fault breccia 35° 3cm >
		« 45.30- 46.60 minor biotite in dominantly chlorite schist chlorite »
		Structure:< @ 34.70 foliation 4° >< @ 34.70 cross cutting foliation with pyrrhotite quartz 42° 2-3mm >< @ 35.70 foliation 50° >
		« 35.90- 35.93 quartz 75% 3cm»< @ 44.60 foliation 60° >< @ 52.00 foliation 37° >< @ 52.20 quartz 30° 1cm >
		Mineralization:« fracture fill, late pyrite 0-1%»
		« 39.90- 41.00 pyrite 0-1%»« with quartz and selvege pyrrhotite 0-1%»« trace trace chalcopyrite 0-1%»
		« 48.70- 49.20 inquartz pyrrhotite 0-1%»
		« 57.70- 59.30 trace pyrrhotite 0-1%»« trace, trace chalcopyrite 0-1%»
59.30	62.50	Limestone
		Light grey-white to light blue-grey. Moderately foliated with brown biotite bands. Minor calcite stringers.
		Structure:< @ 61.10 foliation 40° >

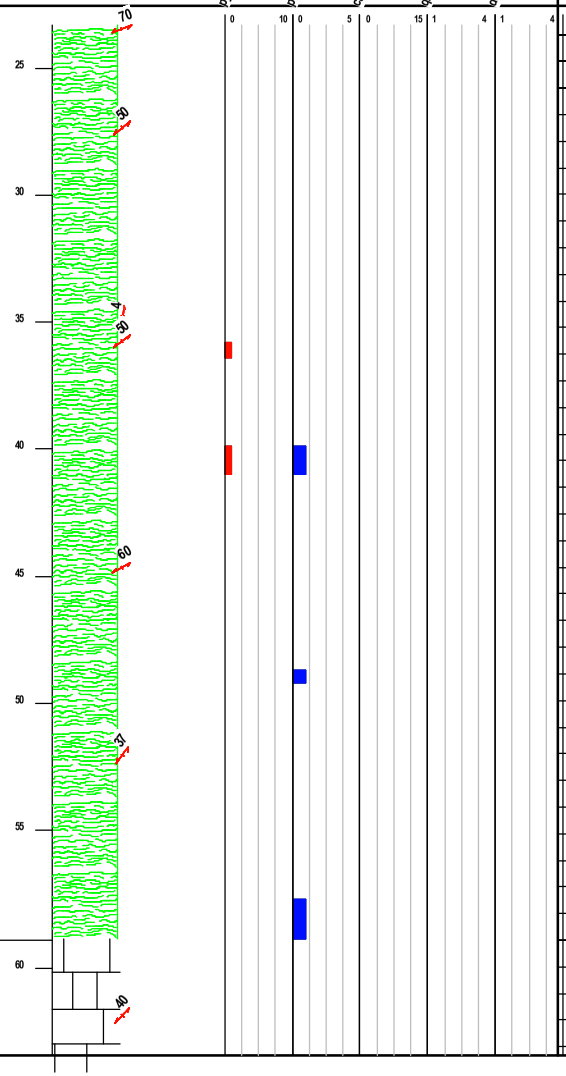


From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
39.90	41.00	1.10	G0809058	0.01	1.40	0.56	0.10	1.57
48.70	49.20	0.50	G0809059	0.01	0.80	0.32	0.18	1.19
57.70	59.30	1.60	G0809060	0.01	1.20	0.14	0.09	2.45

* depth component not to scale

Project: Boulevard

Hole Number: BV08-2

From	To	Rocktype & Description
62.50	72.20	Mafic Schist
		Medium grey to green -brown. More chloritic than overlying 1ab. Minor siliceous bands of quartz rich metaseds. Strongly foliated. Minor quartz veining as discontinuous and weak planar veins , all less than 5 cm.
		« 69.20- 69.70 banded, siliceous , light grey Quartzite »
		Structure:< @ 66.40 trace pyrrhotite quartz 40° 1cm >< @ 68.80 sub-parallel to foliation quartz 45° 5mm >< @ 69.20 trace PO,PY,CP quartz 85° 3cm >< @ 70.00 quartz 30° 3cm >
		« 70.00- 70.30 erratic veining quartz 15-30°»« pyrrhotite 0-1%»< @ 72.20 fault contact 30° >
72.20	73.40	Breccia - Tectonic(?)
		Fault brecciated zone with erratic quartz stringrering in dominantly biotite rich schist. Minor weakly graphitic zone near the base of the interval. Fault polished and slickensides.
73.40	77.70	Quartzite
		Medium to light grey, moderate to strongly foliated. Minor dark brown intervals of biotite-rich,strongly contorted beds. Quartz veining all less than 3cm, commonly foliation parallel. Fine mm scale calcite stringers cross-cutting foliation and quartz.
		« 78.70- 78.90 Quartzite »
		Structure: < @ 74.30 quartz 50° 3cm >< @ 73.80 foliation 43° >
		« 73.80- 74.00 Mafic Schist »
		« 75.00- 75.40 Mafic Schist »« pyrrhotite 1%»< @ 76.20 quartz 25° 1cm >< @ 77.10 foliation 32° >
77.70	84.70	Mafic Schist
		Medium to dark brown, strongly foliated. Minor quartz veins , less than 3cm, commonly foliation parallel. Weak < 3mm quartz stringers crosscutting foliation near bottom of interval.
		Structure:< @ 80.30 foliation 47° >< @ 81.60 foliation 42° >< @ 83.40 late, crosscutting foliation and qv's quartz 20° 3mm >
		« 83.40- 83.45 schist inclusions, quartz 45° 5cm»« pyrrhotite 1%»« pyrite 0-1%»
		« 83.80- 84.30 40% quartz over interval quartz 58°»« pyrrhotite 1%»
		84.7 EOH
84.70	84.70	EOH

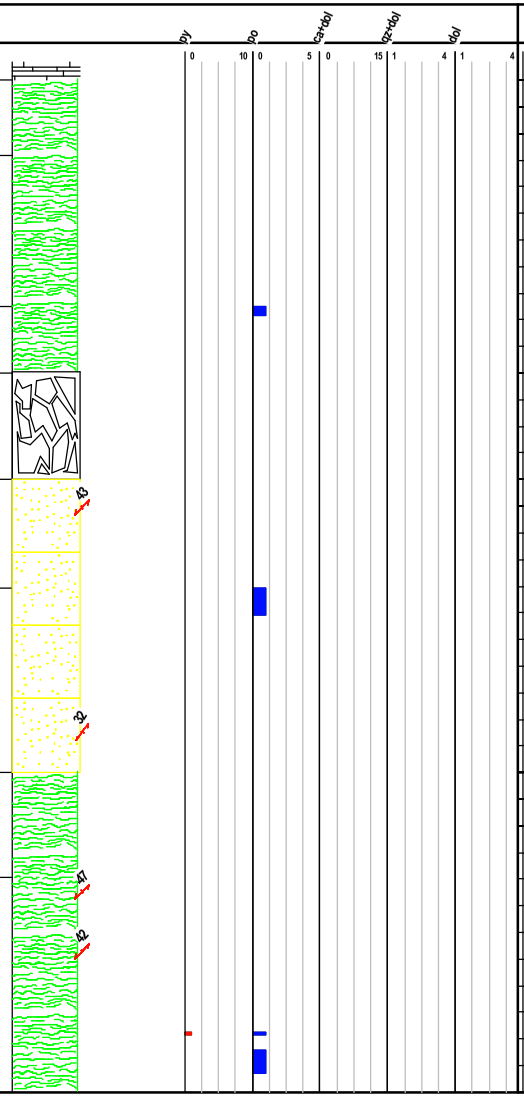

From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
62.50	63.80	1.30	G0809061	0.01	2.00	0.15	0.06	2.68
69.20	70.30	1.10	G0809062	-0.01	1.60	0.05	0.41	0.72
70.30	70.30	0.00	G0809063	4.53	7930.00	82.70	28.30	25.30
72.20	73.40	1.20	G0809064	0.05	44.10	1.11	70.30	3.17
73.40	75.00	1.60	G0809065	0.07	2.80	0.33	23.50	2.44
75.00	75.40	0.40	G0809066	0.06	2.50	2.22	17.05	17.40
77.70	78.90	1.20	G0809067	-0.01	0.30	0.19	1.27	2.18
82.50	83.50	1.00	G0809068	0.01	0.40	0.16	0.31	0.90
83.50	84.70	1.20	G0809069	0.01	0.70	0.18	0.15	1.07

* depth component not to scale

Drill Log Legend


Bedding


Breccia - Tectonic(?)



Casing

Dolomite


Feldspar-Quartz Crystal Tuff


Limestone

Mafic Schist


Mafic Schist

Quartzite

Quartzite


S2 Foliation

qz+dol

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1344.0
Hole BV08-3	**Azimuth (º):** 30.0
Location: 6966515 m North, 575883 m East	**Dip (º):** -70.0
Logged by: Lehtinen	**Length (m):** 26.20
Drilled by: Coretech	**Horizontal Projection:**
Assayed by: ALS Chemex	**Vertical Projection:**
Core Size: BTW	
Date Started: 2008/09/22 **Date Completed:** 2008/09/22	
Dip Tests By: none	
Objective Step-up hole close to the trench mineralisation to undercut the down-dip mineralisation at a shallow depth.	

Summary Log:

0.00-1.50	Casing
1.50-4.90	Mafic Schist
4.90-5.90	Graphitic Phyllite
5.90-11.00	Quartzite
11.00-18.20	Mafic Schist
18.20-25.00	Phyllite
25.00-26.20	Mafic Schist. EOH

Mineralised zone intersected from 5.9-24.1 metres with strongest mineralisation from 5.9-11.4 metres. Strongly faulted within mineralised zone.


Downhole surveys:

Depth	Dip	Azimuth
0.00	-60.00	30.00

Project: Boulevard

Hole Number: BV08-3

From	To	Rocktype & Description
0.00	1.50	Casing
		Casing
1.50	4.90	Mafic Schist
		Strongly broken, iron stained, strongly foliated. Weakly calcareous with late stringers of calcite. Fracture surfaces with manganese or possibly oxides of other sulphides (looks like neoticite). No visible sulphides.
		Structure:< @ 2.60 foliation 3° >< @ 4.00 foliation parallel quartz 22° 5mm >
4.90	5.90	Graphitic Phyllite
		Dark grey, extremely broken core. Minor green-orange colour due to iron oxide +/- scorodite? Top contact parallel to foliation.
5.90	11.00	Quartzite
		Possibly quartzite/wacke or silicified 1ab. Light green-grey, moderately foliated. Extremely broken core with strong iron and weak arsenic oxides on fracture surfaces. Vein remnants show both foliation parallel and crosscutting relationships. Early quartz veining crosscut by later dolomite and very fine grained calcite. Clay altered in part and clay gouge. Fault brecciated fragments.
		Structure:< @ 6.80 pyrite in selvege calcite 45° 1cm >< @ 6.80 quartz breccia 5° 5mm >
		« 6.80- 7.90 fault? extreme iron oxides and clay breccia »< @ 7.90 discontinuous quartz 3° 1-5cm >« sub-parallel TCA foliation 3°»< @ 10.00 quartz 40° 4mm >< @ 10.70 vein/fault breccia 25° >
		Mineralization: « 7.90- 11.00 in rubble fragments vfg needle-like crystals arsenopyrite 1%»
11.00	18.20	Mafic Schist
		Dark brown-grey to medium to light green dependent on local vein intensity and alteration. Alteration dominantly weak to moderate silica and sericite. Strongly broken core. Minor vfg calcite stringers. Numerous late fault slip/fracture planes. Pyrite rich dolomite veins at 20 to 25 TCA appear to strike northerly and dip steeply east and west. (Reconstructed using local foliation attitude). All quartz veins appear discontinuous or truncated. Arsenopyrite in quartz veining and as disseminations.
		Structure:< @ 13.50 foliation 17° >< @ 13.90 pyrite 5 % dolomite 22° 3mm >< @ 14.40 dolomite 25° 5mm >< @ 14.60 pyrite 3% dolomite 20° 7mm >< @ 14.90

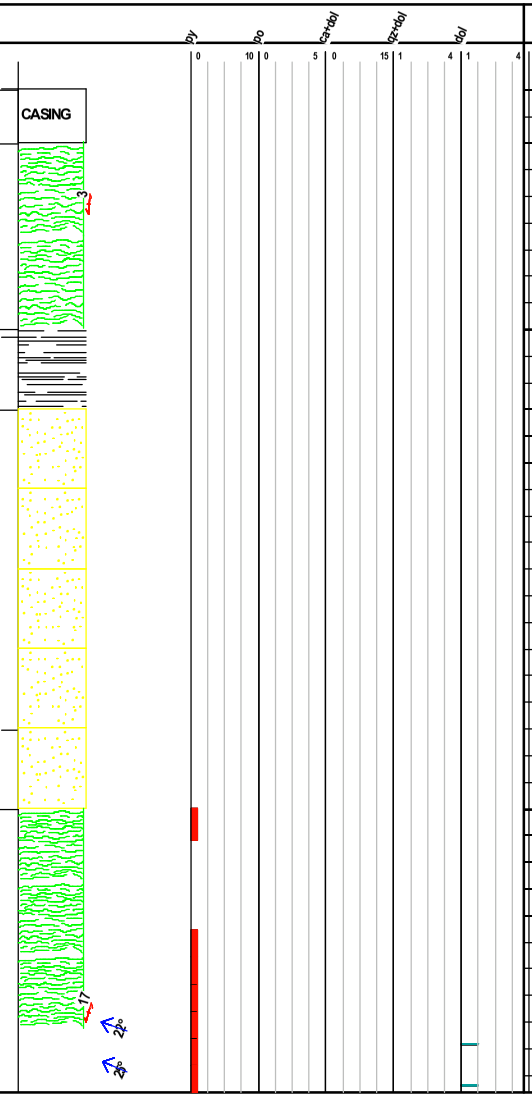


From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
0.00	1.50	1.50	G0809070	-0.01	21.40	0.50	0.11	5.47
1.50	4.90	3.40	G0809071	0.01	56.10	0.17	8.71	2.44
4.90	5.90	1.00	G0809072	0.11	255.00	0.19	23.50	6.48
5.90	7.90	2.00	G0809073	0.98	5380.00	0.08	124.50	1.63
7.90	10.00	2.10	G0809074	1.57	10001.00	0.25	41.40	1.03
10.00	11.00	1.00	G0809075	2.31	10001.00	0.14	106.00	0.84
11.00	11.40	0.40	G0809076	2.97	10001.00	0.54	1225.00	0.66
11.40	13.40	2.00	G0809077	0.10	745.00	0.11	28.60	0.55
13.40	14.90	1.50	G0809078	0.21	1345.00	0.12	40.00	0.42
14.90	17.10	2.20	G0809079	0.63	1955.00	0.34	37.30	0.73
17.10	18.20	1.10	G0809080	0.17	1540.00	0.42	31.00	2.29

Project: Boulevard

Hole Number: BV08-3

From	To	Rocktype	& Description
			foliation 14° >< @ 15.20 pyrite quartz-dolomite 40° 1cm >< @ 15.50 foliation 13° >
			Mineralization:
			« 11.00- 11.40 fine grained and euhedral crystals with quartz veining stibnite 1%»« disseminated and fine grained massive in quartz veining arsenopyrite 1%»« dominantly along vein selvege pyrite 1»« 10-25 % quartz, , discontinuous quartz veining »< @ 11.00 stibnite and arseno quartz 65° 2cm >
			« 12.50- 14.90 in minor quartz and dolomite veins pyrite 1%»
			« 14.90- 17.10 very fine grained disseminated needles arsenopyrite 0-1%»« sericite 2*»
			« 17.10- 18.20 biotite rich unaltered wacke Mafic Schist »
18.20	25.00	Phyllite	
			Pale green to grey, with numerous quartz vein segments/veins. also quartz dolomite veining. Late <1mm calcite stringers and fracture fill. Strongly broken core throughout. Light colour due to med-strong sericite and weaker siica alteration. Pyrite common throughout associated with veining. Arsenopyrite more erratic distribution as fine disseminations in wallrock, as fine dissemination in veining and as rinds surrounding pyrite in quartz veining.
			« 20.10- 24.00 vein zone quartz-dolomite »
			Structure:< @ 19.70 foliation 30° >< @ 20.30 foliation 40° >< @ 21.20 discontinuous quartz 15° 4cm >< @ 21.20 quartz-dolomite 50° 1cm >< @ 21.30 quartz-dolomite 65° 5mm >< @ 21.90 foliation parallel quartz 20° >< @ 21.90 stringers quartz-dolomite 45° 3mm >
			Alteration: « 18.20- 19.80 sericite 1*»
			« 19.80- 22.00 sericite 2»« silica 1*»
			« 22.00- 24.10 silica 2-3*»« sericite 2-3*»
			« 24.10- 25.00 sericite 0-1*»
			Mineralization:
			« 20.10- 24.10 finely disseminated, low concentration arsenopyrite 0-1%»« trace disseminated pyrite 0-1%»
25.00	26.20	Mafic Schist	
			Medium to dark brown, biotite rich,strongly foliated. First appearance of pyrrhotite.
			Structure:< @ 25.20 minor pyrrhotite quartz 40 3cm >< @ 25.60 foliation 20° >
26.20	26.20	EOH	

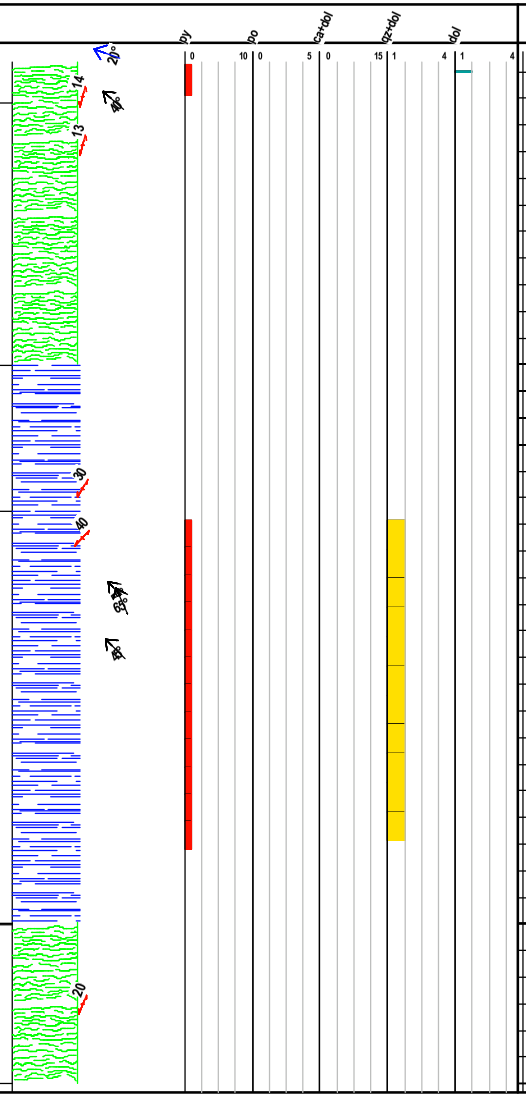

From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
18.20	20.10	1.90	G0809081	0.31	1630.00	0.52	43.60	1.95
20.10	22.00	1.90	G0809082	0.72	2750.00	0.18	68.80	6.10
22.00	24.10	2.10	G0809083	1.44	4730.00	0.13	41.80	2.65
24.10	25.00	0.90	G0809084	-0.01	26.10	0.21	37.70	1.60
25.00	26.20	1.20	G0809085	-0.01	11.60	0.17	14.65	1.55

* depth component not to scale

Drill Log Legend



Bedding



Casing

Dolomite



Graphitic Phyllite

Mafic Schist



Mafic Schist



Phyllite

Quartzite



S2 Foliation

qz+dol

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1344.0
Hole BV08-4	**Azimuth (º):** 30.0
Location: 6966440 m North, 575960 m East	**Dip (º):** -50.0
Logged by: Lehtinen	**Length (m):** 43.40
Drilled by: Coretech	**Horizontal Projection:**
Assayed by: ALS Chemex	**Vertical Projection:**
Core Size: BTW	
Date Started: 2008/09/25 **Date Completed:** 2008/09/25	
Dip Tests By: none	
Objective Test mineralisation beneath trench BLVD08-2.	

Summary Log:

0.00-4.40	Casing
4.40-17.10	Mafic Schist
17.10-17.70	Fault Gouge
17.70-21.40	Mafic Schist
21.40-22.10	Fault Gouge
22.10-23.00	Mafic Schist
23.00-23.30	Fault Breccia
23.30-34.20	Mafic Schist
34.20-34.50	Fault Gouge
34.50-36.90	Mafic Schist
36.90-37.80	Limestone
37.80-43.30	Mafic Schist. EOH

Mineralised zone is extremely faulted and the true width is similar to the width of theTrench BLVD08-2 mineralisation.
QA/QC SAMPLES
G0809086 - BLANK, not included in the log
G0809101 - Duplicate
G0809102 - Duplicate


Downhole surveys:

Depth	Dip	Azimuth
0.00	-50.00	30.00

Project: Boulevard

Hole Number: BV08-4

From	To	Rocktype & Description
0.00	4.40	Casing
		Casing
4.40	17.10	Mafic Schist
		Variably coloured medium to dark green to green-brown. Lighter fragments of broken core associated with quartz veining and commonly weak sericite alteration. Strongly broken core throughout. Weak discontinuous quartz veining generally sub-parallel to foliation and commonly only vein fragments left after weak fault slips. Also augen shaped quartz.
		Structure:< @ 8.40 foliation 30° >< @ 12.40 3 cm gouge zone, high angle TCA Fault >< @ 13.80 foliation 50° >
		« 8.10- 17.10 Fine stringering parallel to foliation late calcite 13mm»
		Mineralization:
		« 13.70- 13.80 weak disseminated pyrite 1%»< @ 17.10 quartz dolomite stringer with trace arsenopyrite 1% 1cm >
17.10	17.70	Fault Gouge
		Fault gouge. Orange-brown clay.
17.70	21.40	Mafic Schist
		Similar to unit above, but with highly variable alteration and quartz and dolomite veining. Very strongly broken. Unaltered zones are generally dark green-grey and exhibit fine calcite stringers parallel to foliation. Lighter zones are generally associated with quartz veining and sericite to clay alteration.
		Structure:< @ 19.80 foliation 40° >
		Mineralization:
		« 18.50- 18.60 trace in dolomite stringers along CA arsenopyrite 1%»« in 2mm dolomite stringers pyrite 1%»« trace, trace chalcopyrite 1%»
		« 18.90- 18.90 disseminated arsenopyrite 1%»
		« 20.20- 20.70 quartz 45° 23cm»« trace arsenopyrite 1%»
		« 21.30- 21.40 trace arsenopyrite quartz 25° 4cm»
		Alteration:« 20.70- 21.30 strongly fractured, weakly clay altered clay 1-2*»
21.40	22.10	Fault Gouge
		Clay and rubble. Orange-brown.
22.10	23.00	Mafic Schist

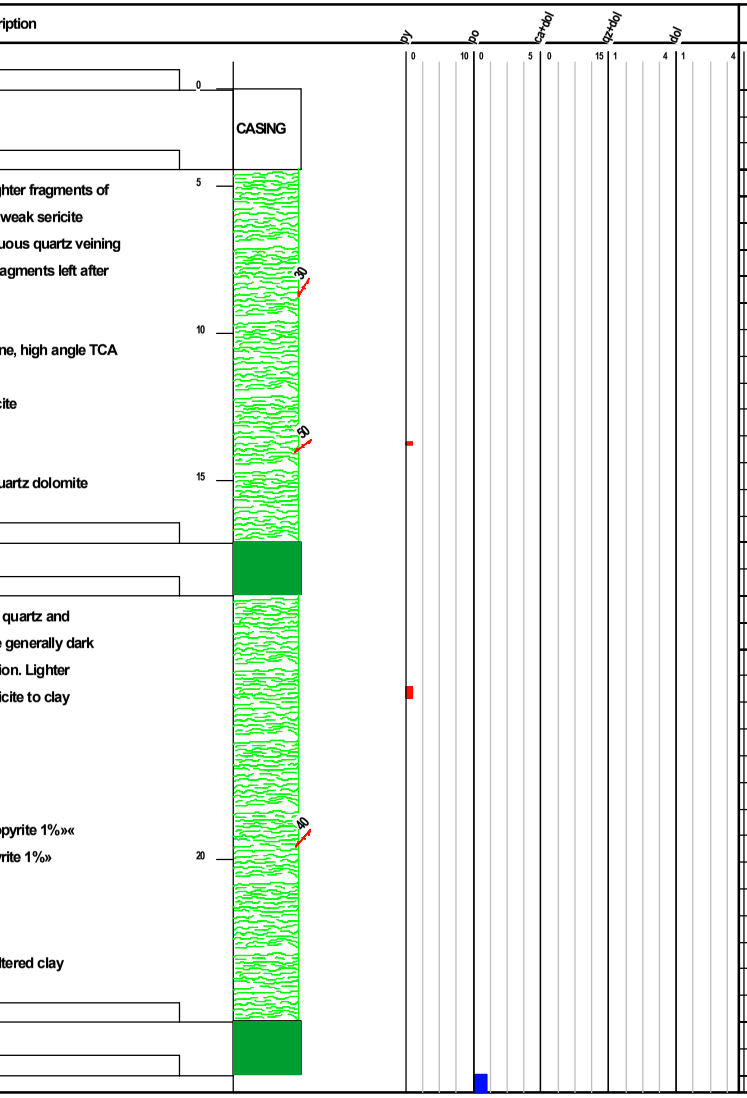


From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
4.40	5.50	1.10	G0809087	-0.01	3.00	0.58	0.60	1.19
5.50	8.50	3.00	G0809088	-0.01	3.40	1.58	0.30	1.32
8.50	11.60	3.10	G0809089	-0.01	1.60	0.13	0.33	0.57
11.60	14.30	2.70	G0809090	0.01	1.40	2.45	0.16	0.95
14.30	16.50	2.20	G0809091	0.01	3.30	0.22	0.32	1.31
16.50	17.10	0.60	G0809092	0.15	1055.00	0.09	2.97	1.46
17.10	17.70	0.60	G0809093	0.91	5050.00	0.32	11.00	1.47
17.70	20.20	2.50	G0809094	0.75	2230.00	0.30	7.19	0.52
20.20	20.70	0.50	G0809095	1.65	2990.00	1.71	10.15	0.39
20.70	21.40	0.70	G0809096	0.01	25.40	0.21	1.83	0.29
21.40	22.10	0.70	G0809097	0.01	74.60	0.56	0.95	0.40

* depth component not to scale

Project: Boulevard

Hole Number: BV08-4

From	To	Rocktype & Description
		Light to medium grey. Weak quartz stringering parallel to foliation.
		Structure:< @ 22.40 foliation 50° >« silica 1-2*»« pyrrhotite 1%»
23.00	23.30	Fault Breccia
		Fault . Brecciated, clay altered and calcite stringered.
23.30	30.20	Mafic Schist
		Medium to dark green, chloritic, foliated with brown biotite bands. Becoming less chloritic and more biotite rich. Minor magnetite bands = detrital magnetite? Minor quartz veins parallel to foliation.
		Structure:< @ 26.10 foliation 50° > « 27.50- 27.70 quartz 50° 15cm»< @ 28.30 quartz 40° 2cm >< @ 30.00 foliation 35° >
		Mineralization: « 23.30- 30.20 Pyrite 1%»« pyrrhotite 1%»
		Alteration: « 28.90- 30.20 silica 1*»
30.20	34.20	Mafic Schist
		Medium to light brown-grey. Zone of increased quartz veining. Quartz and dolomite veining comprise 30% of rock volume. Variable angles TCA, commonly foliation parallel. Variable arsenopyrite mineralization with dolomite-quartz veining. Late calcite on fractures.
		Structure: « 31.90- 32.40 dolomite stringers in quartz arsenopyrite 1%»
		Mineralization: « 32.60- 34.20 discontinuous to disjointed quartz and dolomite veining »« trace arsenopyrite 1°0°»< @ 34.20 within 1 cm of bottom contact of quartz vein trace molybdenum 30° >
34.20	34.50	Fault Gouge
		Medium orange-green fragments and gouge.
34.50	36.90	Mafic Schist
		Medium to dark grey, strongly foliated with numerous rusty fractures. Minor silicified zones around quartz veining. Weak interbeds with limestone at base.
		Structure:< @ 35.20 foliation 45° >

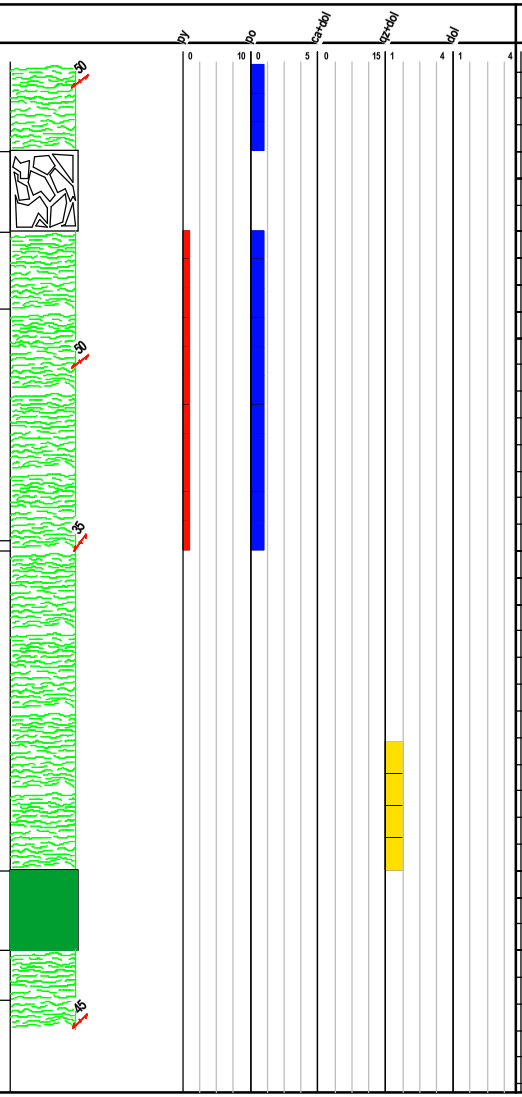


From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
22.10	23.80	1.70	G0809098	-0.01	4.50	0.51	0.52	0.35
23.80	25.90	2.10	G0809099	-0.01	3.10	0.11	0.26	0.22
25.90	27.70	1.80	G0809100	-0.01	2.20	0.09	0.13	0.39
27.70	28.70	1.00	G0809101	-0.01	1.20	0.11	0.07	0.30
27.70	28.70	1.00	G0809102	-0.01	0.50	0.09	0.07	0.36
28.70	30.20	1.50	G0809103	-0.01	1.80	0.19	0.11	0.50
30.20	31.90	1.70	G0809104	0.01	33.10	0.17	0.24	0.54
31.90	32.40	0.50	G0809105	0.04	143.00	0.18	0.82	1.47
32.40	33.20	0.80	G0809106	0.03	5.00	0.66	0.18	8.80
33.20	36.00	2.80	G0809107	0.02	2.60	0.43	0.26	3.92
36.00	36.90	0.90	G0809108	-0.01	1.20	0.10	0.09	0.86

Project: Boulevard

Hole Number: BV08-4

From	To	Rocktype	& Description
			« 36.60- 36.70 broken quartz »
			Alteration:
			« 36.00- 36.60 silica 1-2* »
36.90	37.80	Limestone	
			Light grey to blue-grey. Interbedded with pelitic units near the base of the interval.
			< @ 37.10 foliation 60° >
37.80	43.30	Mafic Schist	
			Medium brown grey. Thinly foliated/laminated throughout. Minor quartz stringers < 3cm, QV's all foliation parallel to sub-parallel. Minor interbeds of silicic seds-(quartzite).
			« 42.90- 43.30 black and light grey banded Quartzite »
			Structure:< @ 38.40 quartz 55° 2cm >< @ 41.50 foliation 52° >
43.30	43.30	EOH	

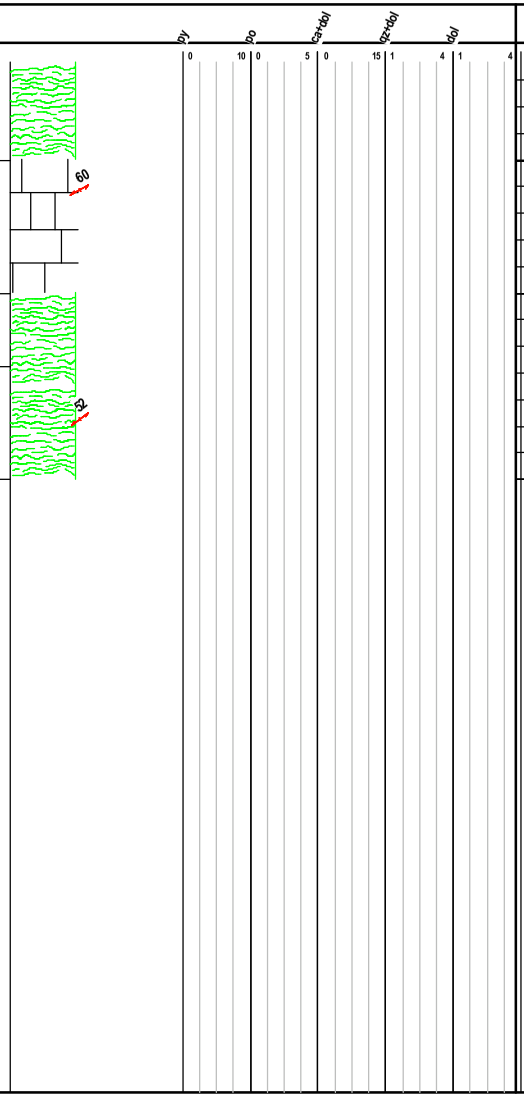

From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
36.90	37.80	0.90	G0809109	-0.01	7.00	0.21	0.20	1.95

* depth component not to scale

Drill Log Legend


Bedding



Casing

Dolomite


Fault Breccia


Fault Gouge


Limestone


Mafic Schist

Quartzite


S2 Foliation

qz+dol

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1344.0
Hole BV08-5	**Azimuth (º):** 30.0
Location: 6966440 m North, 575960 m East	**Dip (º):** -70.0
Logged by: Lehtinen	**Length (m):** 73.50
Drilled by: Coretech	**Horizontal Projection:**
Assayed by: ALS Chemex	**Vertical Projection:**
Core Size: BTW	
Date Started: 2008/09/26 **Date Completed:** 2008/09/26	
Dip Tests By: none	
Objective Test the mineralisation encountered in hole BV08-4 at a greater depth.	

Summary Log:

0.00-4.20	Casing
4.20-15.50	Mafic Schist
15.50-17.90	Fault Zone
17.90-47.10	Mafic Schist
47.10-47.30	Limestone
47.30-50.00	Quartzite
50.00-54.00	Mafic Schist
54.00-55.40	Quartzite
55.40-63.20	Mafic Schist
63.20-63.40	Limestone
63.40-73.50	Mafic Schist. EOH

Weak mineralisation associated with a late fault structure.
QA/QC SAMPLES
G0809131 STANDARD 1


Downhole surveys:

Depth	Dip	Azimuth
0.00	-70.00	30.00

Project: Boulevard

Hole Number: BV08-5

From	To	Rocktype	& Description
0.00	4.20	Casing	Casing
4.20	7.00	Mafic Schist	Medium brown and green. Well foliated, weakly altered. Minor weak quartz parallel to foliation. Structure:< @ 5.40 foliation 22° > Alteration: « 4.20- 7.00 sericite 1» Mineralization: « 6.40- 7.00 foliation parallel veining 20% quartz quartz 45°»« pyrite »« trace pyrrhotite 1%»« trace trace chalcopyrite »
7.00	15.50	Mafic Schist	Very dark green-grey due to chlorite alteration. Strongly foliated and numerous calcite stringers along foliation. Finely disseminated, euhedral pyrite over the interval. Structure:< @ 10.90 foliation 25° > « 11.50- 11.60 minor gouge with calcite fault 35°» « 12.80- 12.90 calcite stringers cross-cutting quartz 45° 6cm» Mineralization: « 7.00- 15.50 pyrite 1-3%» Alteration:« chlorite 1-3»
15.50	17.90	Fault Zone	Very strongly fractured with fragments, clay gouge and calcite stringers. Minor sericite-clay altered Mafic Schist with pyrite and finely disseminated arseno (rare)
17.90	21.00	Mafic Schist	Vein fracture zone in 1ab. Light green altered, with pyrite and trace arsenopyrite. Minor vein breccia. Mineralization:« disseminated euhedral pyrite 1%»« trace trace arsenopyrite » Alteration:« sericite 1»« silica 1»
21.00	36.10	Mafic Schist	Medium to dark green to brown, decreasing chlorite and increasing biotite down hole. Minor quartz veins. Calcite stringers parallel to foliation over entire interval.

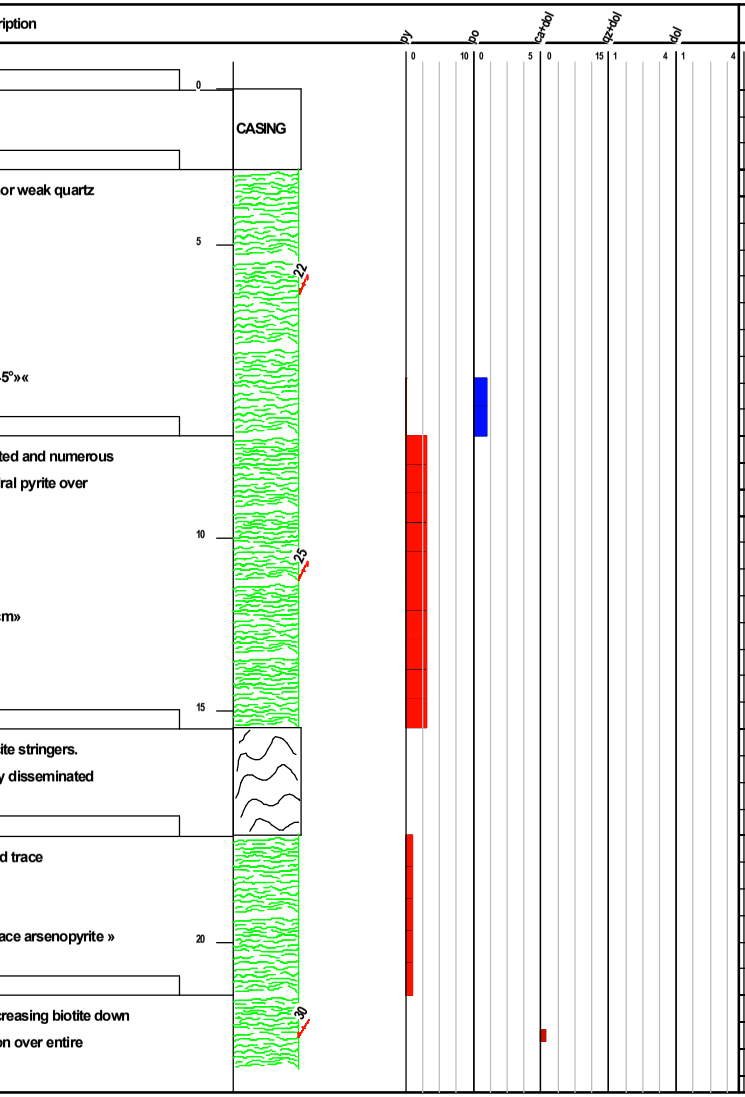


From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
4.20	6.40	2.20	G0809110	-0.01	6.40	0.90	0.46	1.36
6.40	7.00	0.60	G0809111	-0.01	12.60	1.46	0.25	1.39
7.00	8.50	1.50	G0809112	-0.01	1.40	0.34	0.16	1.12
8.50	11.60	3.10	G0809113	-0.01	2.40	0.10	0.44	0.59
11.60	14.60	3.00	G0809114	-0.01	3.40	0.30	0.26	0.53
14.60	15.50	0.90	G0809115	0.04	14.50	0.58	0.66	0.76
15.50	17.90	2.40	G0809116	0.68	668.00	0.69	4.78	0.85
17.90	21.00	3.10	G0809117	0.30	487.00	2.04	14.45	0.77
21.00	23.80	2.80	G0809118	-0.01	2.10	0.16	0.50	1.64
23.80	26.60	2.80	G0809119	-0.01	1.30	0.11	0.22	1.80
26.60	28.70	2.10	G0809120	-0.01	4.60	0.13	0.10	1.12
28.70	30.90	2.20	G0809121	-0.01	4.40	0.14	0.18	0.68

Project: Boulevard

Hole Number: BV08-5

From	To	Rocktype & Description
		Structure:calcite-dolomite veining cross-cuts foliation at shallow angle « 28.00- 28.07 quartz 45° 6cm»« trace pyrrhotite 1%»« trace trace chalcopyrite »< @ 27.00 foliation 30° > « 29.80- 30.90 25% quartz quartz 30°» « 31.80- 32.40 25% quartz quartz 30°» Alteration: « 21.00- 26.60 decreasing downhole chlorite 1-2» « 34.20- 36.10 weak sericite 1»
36.10	42.20	Mafic Schist Extremely broken core with numerous veins of quartz + calcite . Minor pyrrhotite and pyrite « chlorite 1-2»« pyrite 1%»
42.20	47.10	Mafic Schist Medium green-grey. Becoming more silica rich and finely banded. « 43.80- 45.90 chlorite rich Mafic Schist » « 45.90- 47.10 silica rich, thin biotite banded Quartzite »
47.10	47.30	Limestone Light, mottled grey with sharp contacts.
47.30	50.00	Quartzite Light to medium grey to green grey. Fine bands of darker biotite rich bands. Minor limestone and siliceous interbeds. Structure:< @ 49.70 foliation bedding 55° >
50.00	54.00	Mafic Schist Dark green-brown, biotite rich. Moderately foliated, foliation parallel calcite throughout. « 51.20- 51.60 light grey biotite bands Quartzite » « 52.50- 53.50 erratic veining across foliation and along CA quartz »« in quartz veining pyrrhotite 1%»« trace, trace in pyrrhotite chalcopyrite »< @ 53.80 foliation 35° >
54.00	55.40	Quartzite Light grey weakly banded quartzite. Structure:< @ 55.20 foliation bedding 45° >< @ 55.40 at base of quartzite

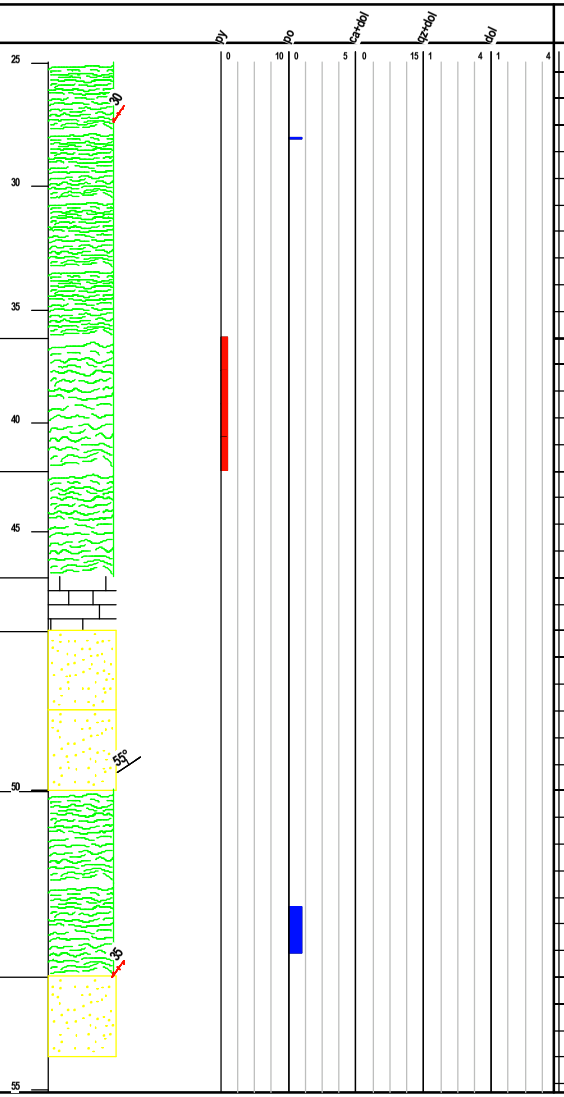


From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
30.90	32.40	1.50	G0809122	-0.01	2.30	0.18	0.14	0.48
32.40	34.20	1.80	G0809123	-0.01	1.00	0.34	0.13	0.24
34.20	36.10	1.90	G0809124	-0.01	0.80	0.23	0.07	0.85
36.10	39.00	2.90	G0809125	-0.01	0.50	0.59	0.08	0.23
39.00	42.10	3.10	G0809126	0.01	0.50	0.46	0.12	0.47
42.10	43.80	1.70	G0809127	-0.01	3.60	0.27	0.10	1.52
52.50	53.50	1.00	G0809128	-0.01	1.50	0.94	0.09	2.10
53.50	55.40	1.90	G0809129	0.01	1.40	0.23	0.24	1.92


* depth component not to scale

Project: Boulevard

Hole Number: BV08-5

From	To	Rocktype	& Description
			quartz 30° 2cm >
55.40	63.20	Mafic Schist	Medium to dark brown-grey, thinly laminated/foliated with minor zones of lighter sericite altered schist. « 56.30- 58.80 sericite 1»< @ 58.40 foliation 38° >< @ 62.00 foliation 35° > « 61.50- 62.80 biotite rich Quartzite »
63.20	63.40	Limestone	Mottled grey-white. Brecciated top contact.
63.40	73.50	Mafic Schist	Variable medium to dark green-grey to dark brown-grey. Foliated throughout, strongly stringered at bottom of the interval. Structure:< @ 66.40 foliation 35° >< @ 70.10 Foliation 40° > Alteration: « 67.90- 70.50 medium green-grey carbonate 1-2» « 72.10- 73.50 erratic stockwork quartz and calcite »
73.50	73.50	EOH	



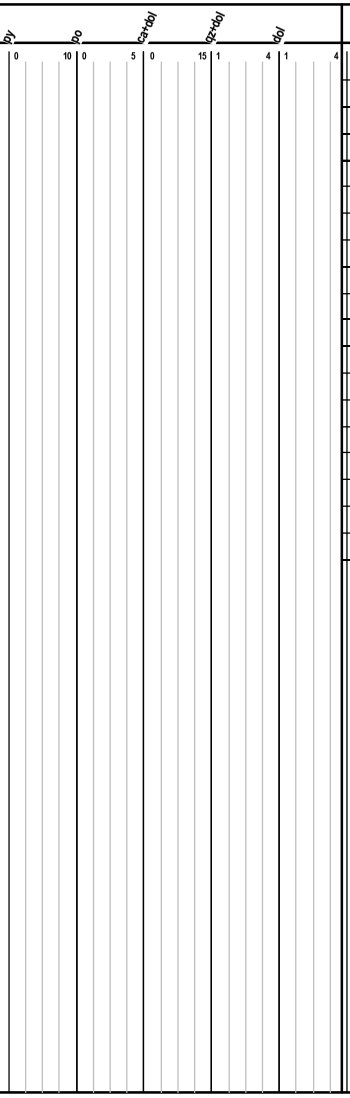

From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
55.40	56.30	0.90	G0809130	0.02	47.70	0.36	1.21	1.39
56.30	56.30	0.00	G0809131	1.17	1970.00	40.10	4.92	8.06
56.30	58.80	2.50	G0809132	0.02	116.00	0.23	0.41	1.19
63.80	65.30	1.50	G0809133	-0.01	0.70	0.09	0.06	0.83
72.10	73.50	1.40	G0809134	0.10	496.00	0.47	2.40	4.02

Drill Log Legend


Bedding



Casing

Dolomite


Fault Zone


Limestone

Mafic Schist


Mafic Schist

Quartzite

Quartzite


S2 Foliation

qz+dol

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1340.0
Hole BV08-6	**Azimuth (º):** 210
Location: 6966384 m North, 576170 m East	**Dip (º):** -50.0
Logged by: Lehtinen	**Length (m):** 86.60
Drilled by: Coretech	**Horizontal Projection:**
Assayed by: ALS Chemex	**Vertical Projection:**
Core Size: BTW	
Date Started: 2008/09/27 **Date Completed:** 2008/09/27	
Dip Tests By: none	
Objective Testing an area of strongest Au soil geochemistry as well as along the magnetic trend related to mineralisation in trenches BVLD08-1, & 2.	

Summary Log:

0.00-2.50 Casing
2.50-86.60 Mafic Schist. EOH
Minor pyrite and pyrrhotite. Uniform lithology throughout drill hole. Minor faulting
QA/QC SAMPLES
NONE


Downhole surveys:

Depth	Dip	Azimuth
0.00	-50.00	210.00

Project: Boulevard

Hole Number: BV08-6

From	To	Rocktype & Description
0.00	2.50	Casing
		Casing
2.50	21.70	Mafic Schist
		Dark brown-green. Very strongly broken core with limonite iron stain on numerous fracture surfaces. Fractures commonly parallel to foliation, but also along CA and oblique to foliation. core fragments are dominantly biotite-chlorite schist with minor vein quartz fragments. Pyrite and pyrrhotite generally associated with veins and selveges.
		Structure:< @ 7.60 foliation 40° >< @ 9.60 foliation 40° >< @ 15.20 minor quartz augen foliation 50° >< @ 17.20 foliation 40° >
		« 20.80- 21.70 fault gouge »
		Mineralization:« disseminated, trace pyrrhotite pyrite 1%»
21.70	77.40	Mafic Schist
		Dark green to green-brown over entire interval. Dominanty chloritc with browner biotite rich areas. Variably pyritic with large intervals of 3-5% disseminated, euhedral pyrite.
		Structure:
		« 26.20- 30.60 quartz vein zone 15% quartz »« in veining and as selveges pyrite 1%»< @ 29.80 foliation 40° >< @ 33.00 foliation 47° >< @ 36.60 foliation 4° >< @ 45.00 foliation 45° >< @ 49.20 foliation 40° >< @ 54.30 foliation 45° >< @ 56.50 foliation 43° >< @ 62.70 foliation 40° >< @ 69.10 foliation 53° >< @ 75.10 foliation 60° >
		« 33.50- 35.20 strongly broken and veined calcite and dolomite »
		« 35.60- 39.20 15% quartz in veins parallel to foliation quartz »< @ 38.80 quartz 50° 4cm >
		« 42.00- 43.30 fracture zone calcite dolomite »
		Mineralization:< @ 40.10 foliation parallel trace pyrite pyrrhotite quartz 35° 4cm >
		« 40.10- 42.00 disseminated pyrite 1%»

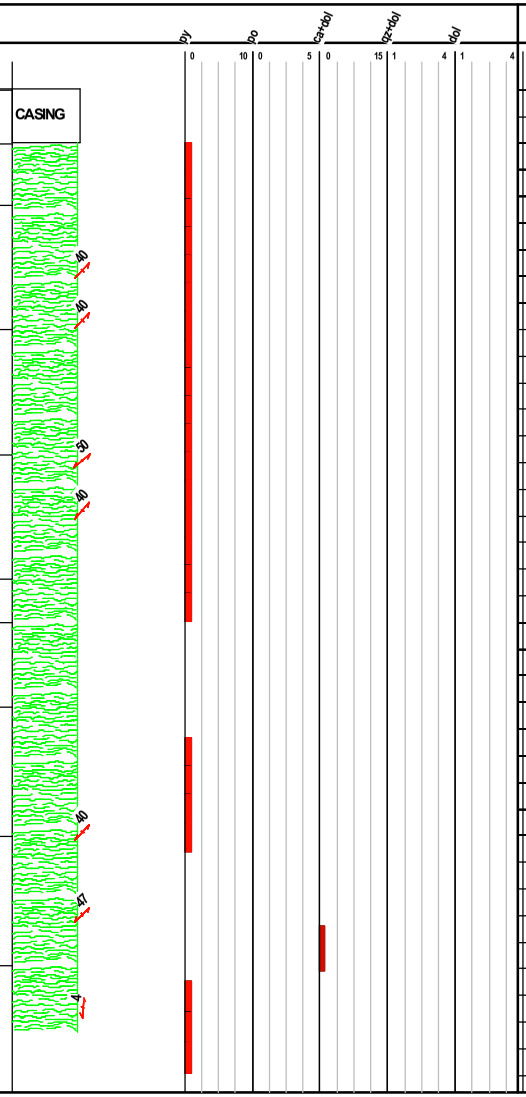


From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
2.50	4.90	2.40	G0809135	-0.01	10.70	0.21	0.39	0.36
4.90	7.90	3.00	G0809136	0.01	50.20	0.22	0.87	0.58
7.90	11.00	3.10	G0809137	-0.01	1.50	0.19	0.23	1.12
11.00	14.00	3.00	G0809138	-0.01	1.20	0.18	0.17	1.30
14.00	17.10	3.10	G0809139	-0.01	10.80	0.25	0.35	1.41
17.10	17.70	0.60	G0809140	-0.01	3.10	0.28	0.11	0.97
17.70	21.70	4.00	G0809141	-0.01	4.20	0.54	0.73	1.72
21.70	23.80	2.10	G0809142	-0.01	0.50	0.24	0.76	0.59
23.80	26.20	2.40	G0809143	-0.01	0.60	0.25	0.75	0.96
26.20	28.30	2.10	G0809144	0.02	48.80	0.16	1.04	0.66
28.30	30.60	2.30	G0809145	-0.01	2.80	0.09	0.31	0.40
35.60	37.40	1.80	G0809146	-0.01	0.50	0.85	0.29	1.98
37.40	39.20	1.80	G0809147	-0.01	0.30	1.06	0.20	1.57
48.20	49.20	1.00	G0809148	0.01	5.40	0.58	0.17	1.01
54.30	55.30	1.00	G0809149	0.01	5.50	0.40	0.20	2.53
66.60	67.60	1.00	G0809150	-0.01	2.50	0.48	0.20	1.54

* depth component not to scale

Project: Boulevard

Hole Number: BV08-6

From	To	Rocktype	& Description
« 43.30- 48.10 disseminated, euhedral to subhedral pyrite 3%»			
« 43.30- 59.00 disseminated, euheral to subhedral pyrite 5%»			
« 59.00- 63.60 pyrite 1%»			
« 66.60- 70.10 disseminated some euhedral pyrite 5%»			
« 63.60- 65.50 gouge zone fault »« pyrite 1%»			
Alteration:			
« 21.70- 63.60 chlorite 2-3*»			
« 63.60- 66.60 light green carbonate 1*»			
« 66.60- 70.10 chlorite 2*»			
« 70.10- 77.40 chlorite 3*»			
« 70.10- 71.40 chlorite 2*»« carbonate 1*»			
« 71.40- 77.40 chlorite 3*»			
77.40	78.60	Mafic Schist	
Medium yellow green, extremely broken and clay altered. Minor fault gouge.			
Remnants of late calcite stringering. Pyritic mud.« clay 2-3*»			

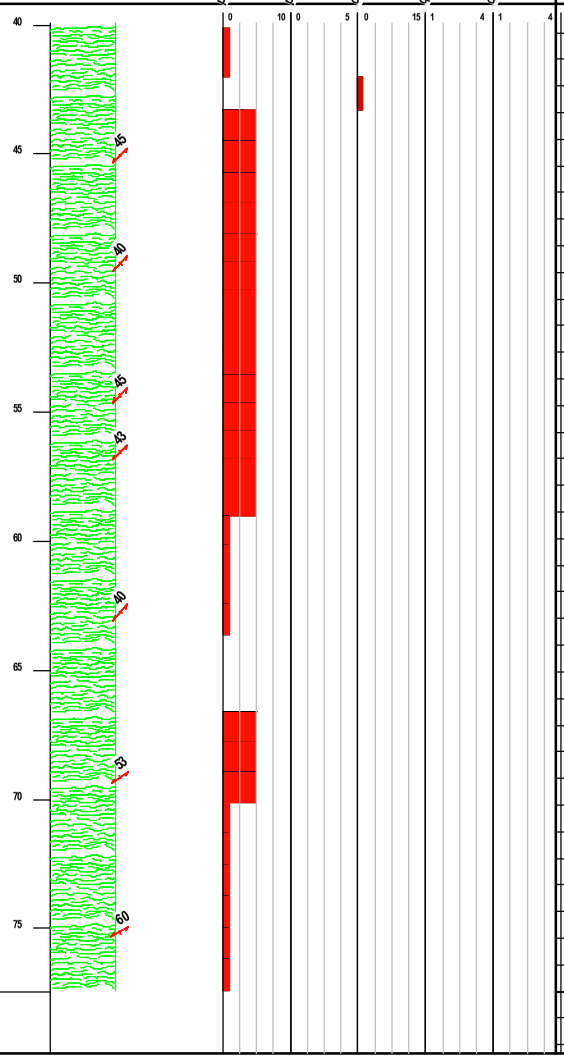


From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
77.40	78.60	1.20	G0809151	-0.01	1.40	0.30	4.98	0.82


* depth component not to scale

Project: Boulevard

Hole Number: BV08-6

From	To	Rocktype & Description
78.60	86.60	Mafic Schist
		Variably coloured zone from medium to dark green to green-brown with lighter carbonate altered zones, darker biotite rich zones and minor silicified zones with quartz stringering. Minor foliation parallel, late calcite stringers.
		Structure:< @ 81.20 foliation 50° >< @ 85.30 foliation 45° >
		« 83.10- 83.70 foliation parallel, 15% quartz veins quartz »
		Alteration:
		« 78.60- 80.20 chlorite 2-3*»
		« 80.20- 82.00 biotite 1-2*»« chlorite 1-2*»
		« 82.00- 83.70 fracture zone and calcite veining carbonate 1-2*»
		« 83.70- 86.60 chlorite 1-2*»« biotite 2*»
86.60	86.60	EOH



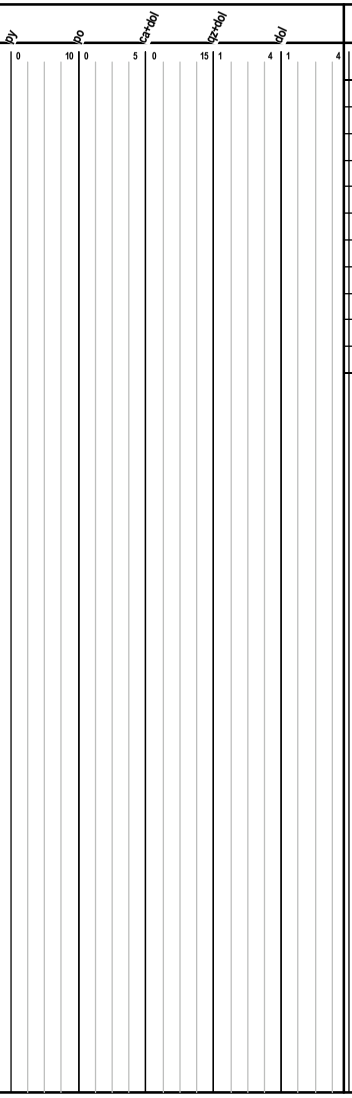

From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
82.00	83.70	1.70	G0809152	-0.01	18.80	0.11	0.46	1.24

Drill Log Legend


Bedding



Casing


Dolomite


Mafic Schist


S2 Foliation

qz+dol

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1225.0
Hole BV08-7	**Azimuth (º):** 210
Location: 6965739 m North, 576823 m East	**Dip (º):** -50.0
Logged by: Lehtinen	**Length (m):** 90.20
Drilled by: Coretech	**Horizontal Projection:**
Assayed by: ALS Chemex	**Vertical Projection:**
Core Size: BTW	
Date Started: 2008/09/30 **Date Completed:** 2008/09/30	
Dip Tests By: none	
Objective Test high Au, As, Sb soil geochemistry at the northern margin of the mgnetic high.	

Summary Log:

0.00-5.50	Casing
5.50-18.50	Quartzite
18.50-78.40	Mafic Schist
78.40-90.20	Quartzite. EOH

QA/QC SAMPLES
G0809160 - STANDARD 1


Downhole surveys:

Depth	Dip	Azimuth
0.00	-50.00	210.00

Project: Boulevard

Hole Number: BV08-7

From	To	Rocktype	& Description
0.00	5.50	Casing	Casing
5.50	18.50	Quartzite	Dark green-grey. Strongly broken core. Minor rusty stained fractures. Fractures sub-parallel TCA producing rubbly core. Zones of thin foliation/bedding of strong siliceous wacke. Throughout interval are minor quartz vein fragments and faulted veins with no continuity. Late veining with chorite, calcite and epidote. Structure:< @ 8.00 foliation 37° > « 13.50- 15.50 late fracture with minor open space fracture 5°» Mineralization: « 5.50- 18.50 disseminated subhedral and grainy pyrite 1-3%» Alteration:« weak paralleling minor stringers epidote 1*»
18.50	54.10	Mafic Schist	Dark green-grey, dominantly chlorite alteration overprinting biotite. Numerous epidote stringers and alteration envelopes around veining. Patchy pyrite in vein selvage commonly in epidote. Strongly fractured core up to approximately 26m. Weak disseminated pyrite throughout as disseminated euhedral to subhedral grains. Erratic foliation, commonly along or sub-parallel TCA Structure:< @ 24.00 foliation 55° >< @ 24.00 epidote along fracturing 55° >< @ 26.30 foliation 55° >< @ 29.30 foliation 33° >< @ 24.50 calcite in brecciated quartz calcite 38° 1cm >< @ 30.20 epidote, chlorite,calcite foliation 18° >< @ 30.40 epidote, chlorite, calcite foliation 35° >< @ 30.40 pyrite in quartz veining quartz 41° >< @ 24.50 spot location in chloritic and chlorite stringer magnetite 1% > « 33.40- 33.60 erratic,sub-parallel to foliation quartz »< @ 36.50 foliation 50° > « 39.60- 40.00 wacke Quartzite »< @ 41.50 weak Quartz bx, late calcite quartz-calcite 35° 3cm >< @ 43.30 metamorphic, erratic vein margins quartz 5cm >< @ 46.90 foliation 55° >< @ 49.90 pink-grey following foliation quartz 35-40° >< @ 52.00 foliation 30° >< @ 52.70 sub-parallel foliation, erratic Quartz 45° 10cm > Alteration:« chlorite 1-2*»« epidote 1*» alteration variable with stringer epidote increasing towards bottom of interval. Commonly sub-parallel to quartz

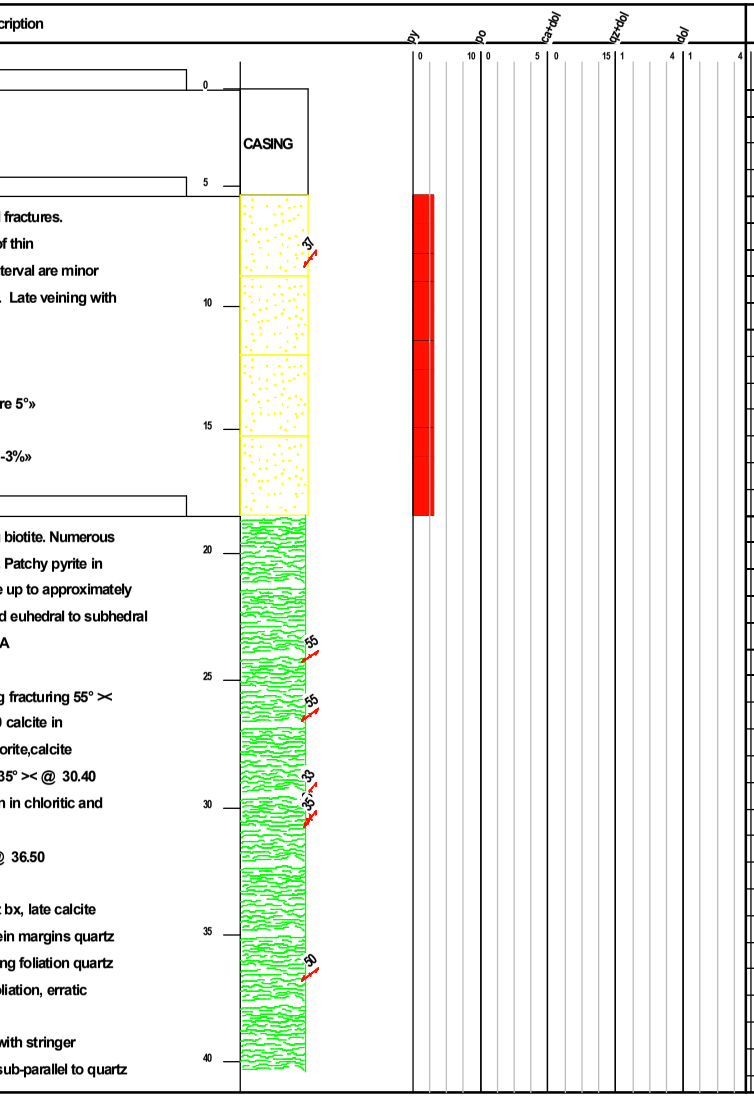


From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
0.50	-5.10	-5.60	G0809155					
6.10	8.50	2.40	G0809154					
8.50	11.60	3.10	G0809155					
11.60	13.70	2.10	G0809156					
11.70	8.80	-2.90	G0809159					
13.70	14.60	0.90	G0809157					
14.60	17.70	3.10	G0809158					
23.80	23.80	0.00	G0809160					
23.80	26.80	3.00	G0809161					
26.80	28.70	1.90	G0809162					
28.70	29.90	1.20	G0809163					
29.90	32.90	3.00	G0809164					
47.00	48.70	1.70	G0809165					
52.10	54.10	2.00	G0809166					

* depth component not to scale

Project: Boulevard

Hole Number: BV08-7

From	To	Rocktype & Description
		veining.
54.10	78.40	Mafic Schist Chlorite-biotite schist. Possibly intermediate flow unit or intermediate epiclastic??. Dark green to brown-green, with erratic discontinuous biotite and chlorite. Mottled appearance. Tremolite common throughout. Weak to moderately magnetic. Minor intervals of thinly banded siliceous sediments = wacke, with biotite banding. Weak epidote alteration paralleling minor quartz stringers. Structure:< @ 64.10 foliation 55° >< @ 74.50 foliation 30° > « 65.50- 66.60 wacke, medium to dark grey to light grey. Erratic foliation Quartzite » « 61.70- 62.30 silicified and thinly banded, erratic orientation Quartzite »« with quartz epidote 1-2*» « 76.70- 77.40 late calcite and pink-grey quartz 45-30°» Alteration: « 54.10- 78.40 chlorite 1-2*» Mineralization:« weakly disseminated or with minor quartz veins pyrite 1-2%»
78.40	90.20	Quartzite Medium to dark grey. Dominantly silica rich seds with chloritic interbeds. Zones of Mafic Schist chlorite-biotite schist within wacke. Moderately magnetic.

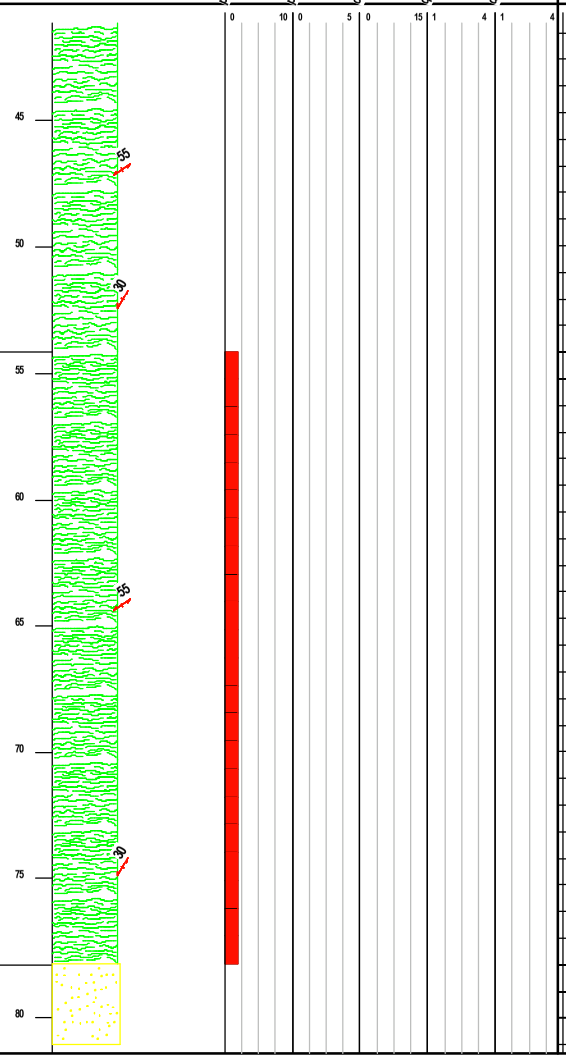


From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm
54.10	55.30	1.20	G0809167					
76.70	78.40	1.70	G0809168					
84.80	85.90	1.10	G0809169					
85.90	86.30	0.40	G0809170					
86.30	88.10	1.80	G0809171					

Project: Boulevard

Hole Number: BV08-7

From	To	Rocktype & Description
		« 81.70- 82.20 Mafic Schist »
		« 83.10- 83.30 Mafic Schist »
		Structure:< @ 85.20 quartz dolomite 47° 5mm >< @ 85.50 quartz dolomite 50°
		1cm >< @ 86.40 breccia fault 10 cm>
		« 85.90- 86.30 minor dolomite. basal contact brecciated quartz »
		Alteration:
		« 84.80- 88.10 white quartz light grey-beige dolomite 1-2*»« silica
		1*»
		Mineralization: Euhedral pyrite dominantly in alteration in vein selvage.
		« 84.80- 88.10 disseminated and fracture fill pyrite 1-3%»
90.20	90.20	EOH

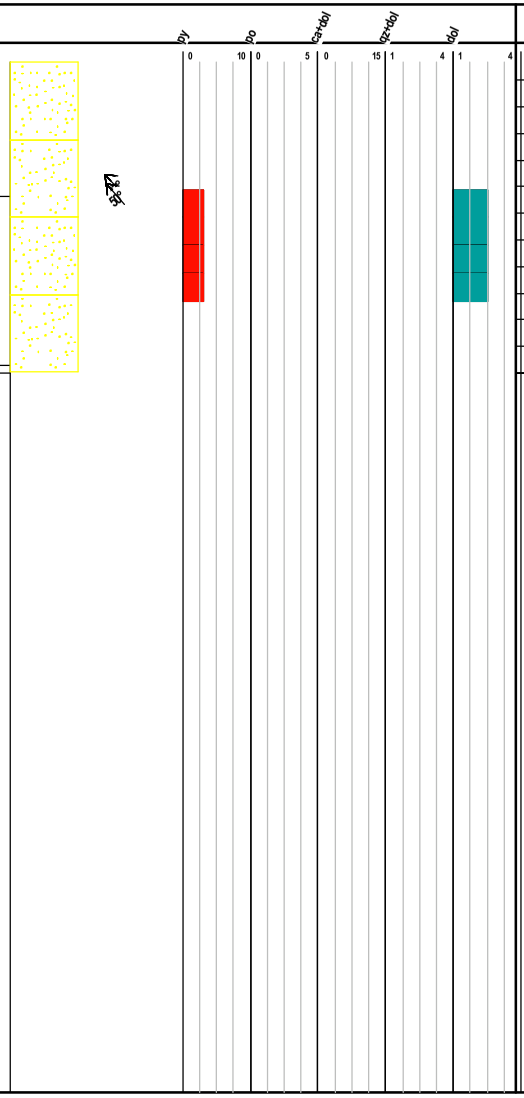

From	To	Width	Sample	Au ppm	As ppm	Bi ppm	Sb ppm	Mo ppm

* depth component not to scale

Drill Log Legend



Bedding



Casing

Dolomite

Mafic Schist



Mafic Schist

Quartzite

Quartzite



S2 Foliation

qz+dol

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1337.0
Hole BV10-08	**Azimuth (º):** 70.0
Location: 6966527 m North, 575830 m East	**Dip (º):** -50.0
Logged by: Ryan Toole	**Length (m):** 102.70
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Sunset trend; step out NW from BV08-3 intercept
Date Started: 2010/06/11 **Date Completed:** 2010/06/12	
Dip Tests By:	

Summary Log:

0.0-2.9m Casing

2.9-27.3m Biotite Chlorite Schist with 2 stages of quartz veining, pyrite associated with the later stage. Locally trace pyrrhotite. Lower 1m shows more intense shearing. Sharp lower contact

27.3-29.5m Hydrothermal Breccia with brecciated clasts of the previous unit in upper 1m. Local fractures are moderately to strongly oxidized. 1-2% pyrite and trace arsenopyrite present. Sharp lower contact. Beginning of Arsenopyrite bearing zone.

29.5-43.6m Biotite Chlorite Schist however contains locally intense early and late stage quartz veining. Carbonate is often present with late stage veining. Brecciated fault zone from 32.1 to 32.6m. 1 % pyrite disseminations throughout both schist and quartz veining and locally rare pyrrhotite. Trace arsenopyrite. Locally moderate sericite and silica alteration. Sharp lower contact with fault gouge. Main Arsenopyrite bearing zone ends at approximately 34.0 meters with very rare occurances to 43.6m.

43.6-43.8 Fault Gouge consisting of a pebbly sand with a 2 cm quartz vein at the basal contact. Portable XRF ran 8 ppm gold on this FG. Sharp lower c ontact.


43.8-102.7m Biotite Chlorite Schist that is the same as 2.9-27.3. Locally chlorite increases proportional to biotite. Local occurance of chalcopyrite in an early quartz vein however very minor. Late stage veins become more rare downhole.

Downhole surveys:

Depth	Dip	Azimuth
50.90	-50.20	70.70
96.60	-50.00	70.90

Project: Boulevard2010 **Hole Number:** BV10-08


From	To	Rocktype & Description
0.00	2.90	Casing
		CASING - Overburden
2.90	27.30	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium to dark grey, fine grained, strongly foliated, biotite chlorite schist. 1st generation quartz veins are transposed with schistosity, while 2nd generation veining has been emplaced along foliation planes. 2nd generation quartz veining contains pyrite and pyrrhotite blebs.Trace pyrite and pyrrhotite disseminations throughout interval. Local fractures contain iron oxide staining.
		ALTERATION
		« Silicification 1.00*»
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 15.00 S1 Foliation 60.00° >
27.30	29.50	Hydrothermal Breccia
		HYDROTHERMAL BRECCIA - with brecciated clasts of the previous unit in upper 1m. This is the beginning of the mineralized horizon. Local fractures are moderately to strongly oxidized. Late stage quartz carbonate veins cross cut this perpendicular to core axis and are associate with pyrite.1% pyrite and trace arsenopyrite present. Sharp lower contact.
		ALTERATION
		« sil 4.00*»
		MINERALIZATION

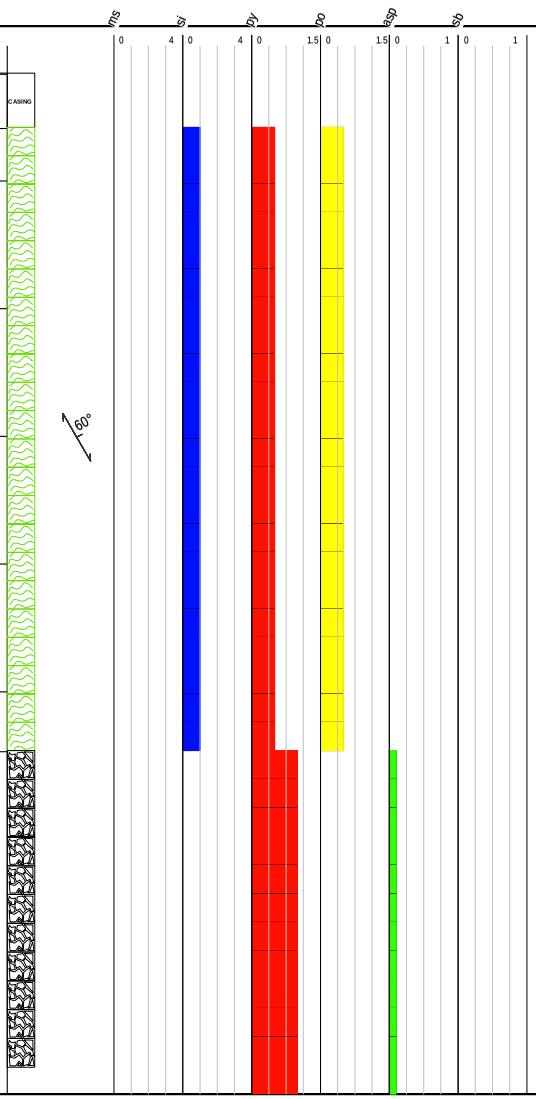

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
3.00	5.00	2.00	I030550	0.01	0.23	0.50	0.06	1.82
5.00	7.00	2.00	I030551	0.01	0.27	0.30	0.06	1.64
7.00	9.00	2.00	I030552	0.01	0.36	0.70	0.08	1.60
9.00	11.00	2.00	I030553	0.01	0.33	5.00	0.11	5.77
11.00	13.00	2.00	I030554	0.05	0.88	3.40	0.15	1.62
13.00	15.00	2.00	I030555	0.01	0.23	0.60	0.17	2.13
15.00	17.00	2.00	I030556	0.01	0.26	1.30	1.39	0.72
17.00	19.00	2.00	I030557	0.01	0.14	0.70	0.10	2.21
19.00	21.00	2.00	I030558	0.01	0.24	1.40	0.13	1.77
21.00	23.00	2.00	I030559	0.01	0.12	2.80	0.10	0.45
23.00	25.00	2.00	I030561	0.01	0.13	6.10	0.11	0.20
25.00	26.00	1.00	I030562	0.01	0.15	1.40	0.19	0.25
26.00	27.30	1.30	I030563	0.01	0.35	63.50	10.40	4.53
27.30	28.30	1.00	I030564	0.19	1.05	315.00	17.20	3.70
28.30	29.30	1.00	I030565	0.36	2.11	822.00	29.50	2.30

Project: Boulevard2010 **Hole Number:** BV10-08


From	To	Rocktype & Description
		« TRACE Arsenopyrite 0.10%»
		« Pyrite 1.00%»
29.50	43.60	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST however contains locally intense early and late stage quartz veining. Carbonate is often present with late stage veining. Brecciated fault zone from 32.1 to 32.6m. 2% pyrite disseminations throughout both schist and quartz veining and locally rare pyrrhotite. Trace arsenopyrite. Locally moderate sericite and silica alteration. Sharp lower contact with fault gouge.
		VEINING
		« 29.50- 34.00 Early and late stage Veining sil 3.00*»
		ALTERATION
		« 29.50- 43.60 ser 2.00*»
		MINERALIZATION
		« Pyrite 2.00%»
		« TRACE Arsenopyrite 0.10%»
43.60	43.80	Fault Gouge
		FAULT GOUGE - consisting of a pebbly sand with a 2 cm quartz vein at the basal contact. Portable XRF ran 8 ppm gold on this FG. Sharp lower contact.
43.80	102.70	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - same as 2.9-27.3m. Locally chlorite increases proportional to biotite. Local occurance of chalcopyrite in 2nd generation quartz vein however very minor. Late stage veins dimminish downhole. Pyrite and pyrrhotite increase downhole up to 2% each. Chlorite increases in proportion to biotite from 64.6-66.1 and 74.7 to 78.6m.
		ROCK UNIT INTERVALS

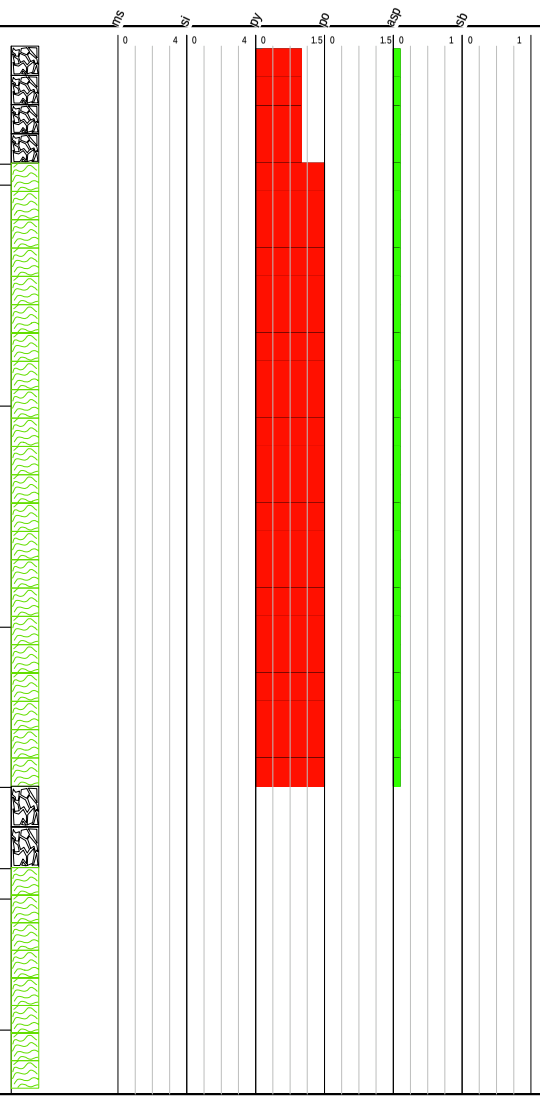

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
29.30	29.60	0.30	I030566	1.13	0.36	3610.00	44.30	0.81
29.60	30.60	1.00	I030567	0.01	0.21	36.30	37.50	1.62
30.60	32.60	2.00	I030568	0.02	0.27	46.60	24.00	0.94
32.60	34.60	2.00	I030569	0.05	0.45	86.20	12.85	2.82
34.60	36.60	2.00	I030571	0.01	0.22	18.10	27.90	1.81
36.60	38.60	2.00	I030572	0.25	0.50	1140.00	25.90	0.61
38.60	40.60	2.00	I030573	0.17	0.19	942.00	115.00	1.55
40.60	42.60	2.00	I030574	0.29	0.24	582.00	34.40	2.97
42.60	43.60	1.00	I030575	0.36	0.61	1780.00	35.30	2.53
43.60	43.80	0.20	I030576	0.87	5.24	5070.00	105.50	1.08
43.80	44.80	1.00	I030577	0.50	2.43	1805.00	231.00	0.64
44.80	45.40	0.60	I319601	0.01	0.17	7.80	10.70	0.76
45.40	46.40	1.00	I319602	0.01	0.15	2.60	4.30	1.22

Project: Boulevard2010 **Hole Number:** BV10-08


From	To	Rocktype & Description
		« 64.60- 66.10 Chl Bt Schist»
		« 74.70- 78.60 Chl Bt Schist »
		MINERALIZATION
		« TRACE Chalcopyrite 0.10%»

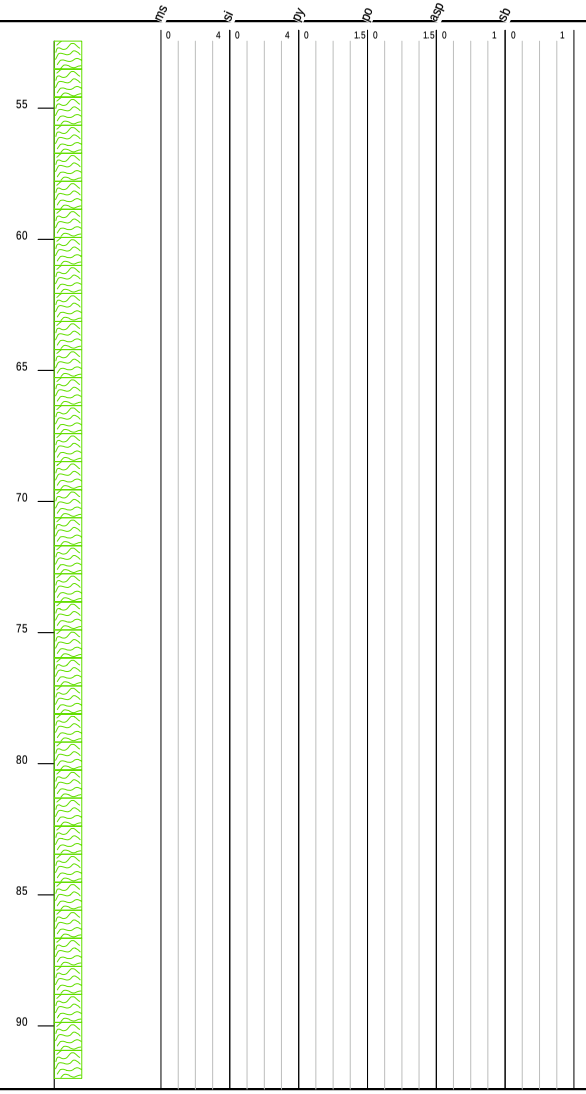

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-08

From	To	Rocktype & Description
	95	
	100	
102.70	102.70	EOH

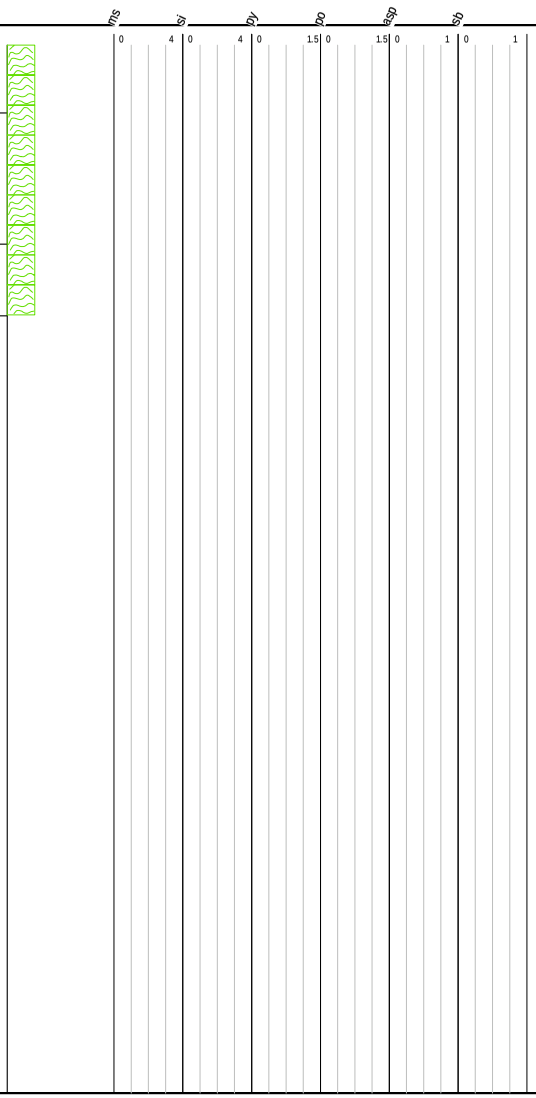

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1337.0
Hole BV10-09	**Azimuth (º):** 70.0
Location: 6966528 m North, 575830 m East	**Dip (º):** -85.0
Logged by: Ronald Voordouw	**Length (m):** 99.00
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Sunset trend; step out NW from BV08-3 intercept
Date Started: 2010/06/13 **Date Completed:** 2010/06/14	
Dip Tests By:	

Summary Log:


0.0 - 2.4 m CASING
2.4 - 13.6 m CHLORITE BIOTITE SCHIST - ~1% disseminated pyrrhotite and two generations of quartz veins, together comprising ~1 of the logged interval. Both generations contain ~1% pyrite.
13.6 - 14.5 m FAULT ZONE - Fractured and Fe-stained chlorite schist with a thick quartz vein and fault gouge
14.5 - 21.0 m CHLORITE BIOTITE AND QUARTZ CHLORITE SCHIST- ~1% disseminated pyrrhotite restricted to the quartz-poor intervals.
21.0 - 22.4 m QUARTZ VEIN - Steeply dipping chlorite- and biotite-bearing quartz vein with trace abundances of pyrite
22.4 - 39.3 m CHLORITE BIOTITE AND QUARTZ CHLORITE SCHIST - ~1% disseminated pyrrhotite occurs in the chlorite biotite schist.
39.3 - 40.4 m FAULT ZONE- Fractured, Fe-stained and silicified chlorite schist
40.4 - 41.6 m CHLORITE BIOTITE AND QUARTZ CHLORITE SCHIST - Chlorite biotite and quartz chlorite schist as previously described (e.g. interval from 22.4 - 39.3 m)
41.6 - 43.9 m FAULT ZONE - Fractured, Fe-stained and quartz chlorite schist with quartz veins and fault gouge
43.9 - 45.1 m QUARTZ CHLORITE SCHIST - Medium-grey, fine-grained and strongly foliated quartz chlorite schist
54.1 - 45.7 m FAULT ZONE - Fractured and Fe-stained chlorite biotite schist with fault gouge
45.7 - 55.5 m QUARTZ CHLORITE SCHIST - some thin intervals of chlorite biotite schist
55.5 - 57.8 m FAULT ZONE - Fault gouge and highly strained chlorite biotite schist, possibly including cataclastite. Abundant sericitic alteration.
57.8 - 59.7 m QUARTZ CHLORITE SCHIST - thin layers of pyrrhotite-bearing chlorite biotite schist.
59.7 - 60.4 m FAULT ZONE - Highly-strained and sericitized fault zone that is similar to previously described fault zones
60.4 - 73.6 m CHLORITE BIOTITE AND QUARTZ CHLORITE SCHIST - two generations of quartz veins. The older generation strikes parallel to schistosity and may contain pyrrhotite. Second generation veins are scarce, crosscut the foliation and lack mineralization.
73.6 - 73.9 m BRECCIA - Breccia comprising poorly sorted and angular clasts of quartz chlorite schist within a pale grey, fine-grained, massive sericitic groundmass.
73.7 - 99.0 m CHLORITE BIOTITE AND QUARTZ CHLORITE SCHIST - Chlorite biotite schist contains ~1% pyrrhotite. EOH

Downhole surveys:

Depth	Dip	Azimuth
93.60	-85.60	82.60

Project: Boulevard2010 **Hole Number:** BV10-09


From	To	Rocktype & Description
0.00	2.40	CASING
		CASING
2.40	13.60	Chl schist
		CHLORITE SCHIST: dark greenish-grey, fine-grained,strongly foliated, biotite feldspar chlorite schist with ~1% quartz +/- carb veins of two generations. First generation strikes parallel to foliation in the schist and is typically boudinaged, although shapeless sweats also occur. Second generation is slightly less steeply dipping (~20 degrees to core axis). Both generations may contain trace abundances of pyrite.
		MINERALIZATION
		cubes and stringers of pyrite replaced by « Pyrrhotite 1.00%»
		STRUCTURE
		pervasive < @ 6.40 S1 Foliation 10.00° > py-coated < @ 8.80 Fracture 20.00° 1.00mm > pervasive < @ 10.50 S1 Foliation 15.00° > py-coated < @ 11.90 Fracture 15.00° 1.00mm >
13.60	14.50	Fractured schist
		FRACTURED SCHIST: heavily fractured, Fe-stained and silicified chlorite schist with quartz vein, pyrite-coated fractures and minor amounts of fault gouge
		« 13.60- 13.90 »
		« 13.90- 14.30 »
		« 14.30- 14.50 »
		MINERALIZATION
		« 14.20- 14.21 1%»
		STRUCTURE
		first generation qtz-bt < @ 14.10 ven 15.00° 400.00mm > unconsolidated clays in < @ 14.30 Fault Gouge 20.00° 5.00cm >
		ALTERATION
		« 13.60- 14.50 2»« 1»
14.50	21.00	Chl Schist

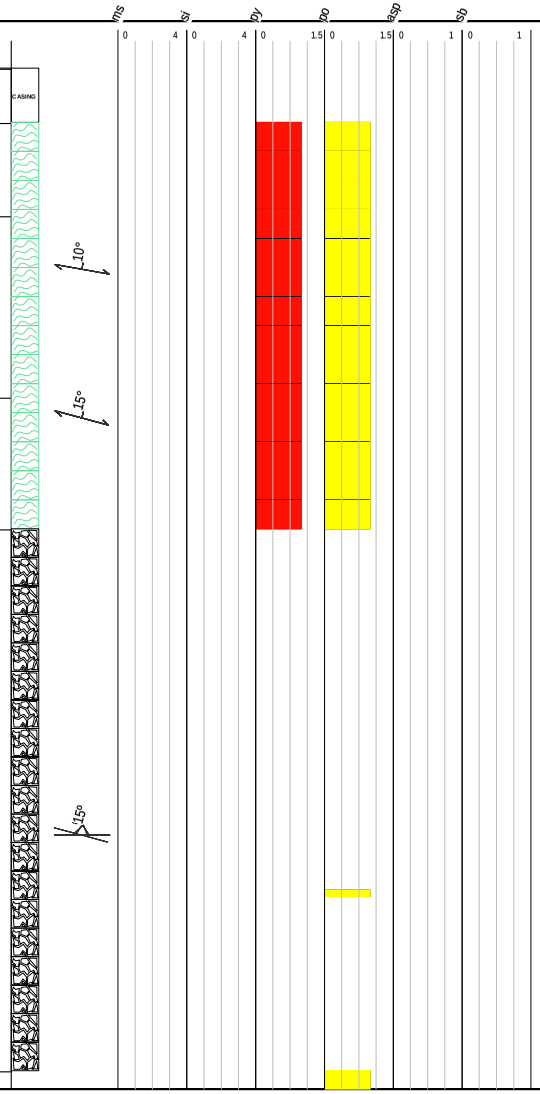

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
2.40	4.40	2.00	I030578	0.01	0.43	19.60	2.00	1.24
4.40	6.40	2.00	I030579	0.01	0.32	1.80	0.80	0.31
6.40	8.40	2.00	I030581	0.01	0.71	0.60	0.34	0.17
8.40	10.40	2.00	I030582	0.11	0.57	0.40	0.17	0.12
10.40	12.40	2.00	I030583	0.01	0.86	0.30	0.16	0.26
12.40	13.60	1.20	I030584	0.01	0.23	0.70	0.10	2.01
13.60	14.50	0.90	I030585	0.05	0.86	0.40	0.50	5.45
14.50	16.50	2.00	I030586	0.01	0.24	0.80	0.24	4.48

Project: Boulevard2010 **Hole Number:** BV10-09


From	To	Rocktype & Description
		CHL SCHIST: dark greenish-grey to medium-grey, fine-grained, pervasively foliated, locally silicified, chorite schist with ~1% pyrrhotite, as well as two generations of quartz veins. Pyrrhotite is absent from silicified segments. First generation veins strike parallel to foliation and are typically stretched into boudins. Second generation is inclined at ~20-80 degrees to core axis. Both generations consist predominantly of quartz with variable abundances of carbonate, chlorite and biotite, and with trace abundances of pyrite. MINERALIZATION pyrrhotite « 1%» STRUCTURE pyrite-coated < @ 17.10 Fracture 20.00° 1.00mm > Pyrite- and chlorite-coated < @ 18.80 Fracture 25.00° > Pervasive and silicified < @ 19.50 S1 Foliation 10.00° > ALTERATION Silicification « 18.60- 21.00 2»
21.00	22.40	Quartz vein
		QUARTZ VEIN: steeply dipping quartz « vein » with ~5% combined cholorite and biotite, no visible sulfides STRUCTURE vein < @ 21.00 Upper Contact 30.00° > « vein » < @ 22.40 Lower Contact 15.00° >
22.40	39.30	Chl Schist
		CHL SCHIST: dark greenish-grey to medium-grey, fine-grained, pervasively foliated, locally silicified, chlorite schist with ~1% pyrrhotite, quartz veins and sweats (particularly abundant in two intervals), sub-horizontal quartz veins and pyrite-coated fractures. Veins comprise only ~1% of the rock. First generation quartz-carbonate veins typically strike parallel to foliation and are boudinaged, although large pod-like aggregates also occur. Second generation quartz veins are typically sub-horizontal relative to core axis. Both generations may contain ~1% pyrite and/or pyrrhotite, although many are also barren. « 30.10- 30.90 »

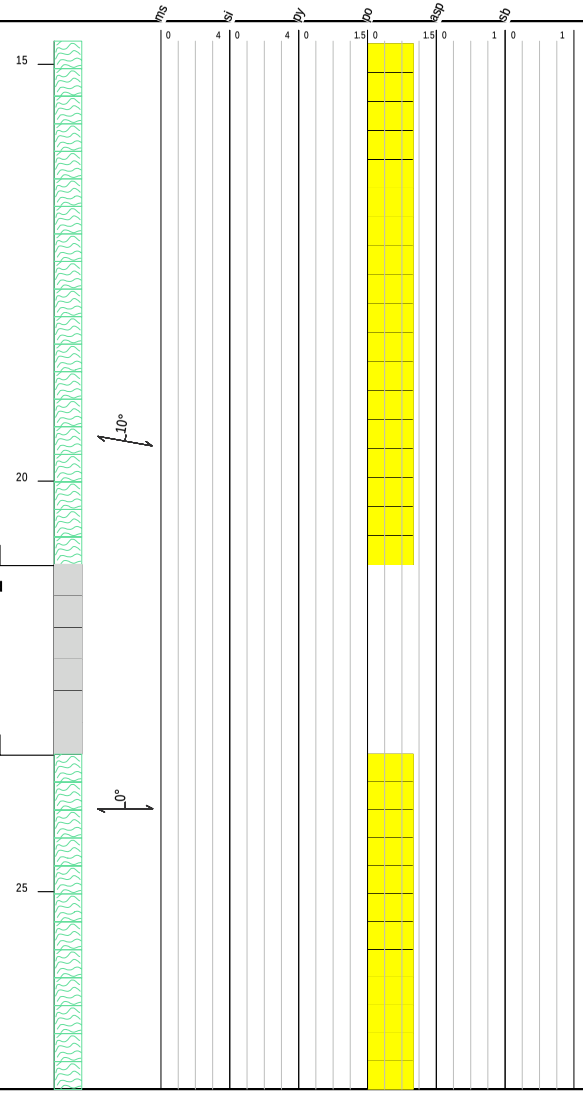

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
16.50	18.60	2.10	I030587	0.01	0.25	0.30	0.15	2.29
18.60	20.60	2.00	I030588	0.01	0.22	0.10	0.07	1.70
20.60	21.00	0.40	I030589	0.01	0.13	0.10	0.08	0.83
21.00	22.40	1.40	I030591	0.01	0.03	3.00	0.11	0.49
22.40	24.40	2.00	I030592	0.01	0.34	0.40	0.15	5.81
24.40	26.40	2.00	I030593	0.03	0.63	0.10	0.13	2.73
26.40	28.40	2.00	I030594	0.05	1.32	0.10	0.11	0.75
28.40	30.40	2.00	I030595	0.02	0.70	0.40	0.13	4.20
30.40	32.40	2.00	I030596	0.01	0.34	0.30	0.15	2.17
32.40	33.20	0.80	I030597	0.01	0.35	1.70	0.16	2.64
33.20	34.00	0.80	I030598	0.01	0.24	1.00	0.17	1.24
34.00	36.00	2.00	I030599	0.01	0.29	0.20	0.14	2.39
36.00	36.90	0.90	I030600	0.01	0.22	0.80	0.24	2.33
36.90	38.70	1.80	I030602	0.01	0.24	18.90	0.34	0.76

Project: Boulevard2010 **Hole Number:** BV10-09


From	To	Rocktype & Description
		MINERALIZATION
		pyrrhotite
		« 22.40- 33.20 1%»
		pyrrhotite
		« 34.00- 36.90 1%»
		pyrrhotite « 1%»
		STRUCTURE
		< @ 23.40 S1 Foliation 0° > pyrite-coated < @ 23.60 Fracture 10.00° 1.00mm >
		pyrite-coated < @ 28.50 Fracture 80.00° 1.00mm > pod-like quartz < @ 29.70
		ven 10.00° 200.00mm > < @ 31.40 S1 Foliation 75.00° > < @ 33.60 S1 Foliation
		10.00° > pyrite-coated < @ 36.10 Fracture 50.00° 1.00mm > pyrite-coated < @
		36.20 Fracture 10.00° 1.00mm > Fe stained < @ 37.10 Fracture 20.00° 1.00mm >
		quartz < @ 37.50 ven 45.00° 1.00mm > < @ 37.80 S1 Foliation 5.00° > First
		generation quartz < @ 38.70 ven 10.00° 20.00mm > < @ 39.10 S1 Foliation
		10.00° > oxidized pyrite-coated < @ 39.20 Fracture 20.00° 1.00mm >
		ALTERATION
		silicification « 2» Fe hydroxide
		« 36.90- 39.3 1»
39.30	40.40	Fractured Schist
		FRACTURED SCHIST: Pervasively foliated, fractured and veined chlorite schist.
		Fractures are Fe-stained and resulted in poor core recovery. Veins consist of
		first generation (?) quartz, although low quality of core makes identification
		difficult. Pyirte occurs in trace amounts although highly oxidized nature of
		the core suggests alteration was likely.
		MINERALIZATION
		disseminated pyrite in veins and host rocks « 1%»
		STRUCTURE
		quartz < @ 39.50 ven 80.00° 30.00mm >
		ALTERATION
		Fe hydroxide alteration « 1»
40.40	41.60	Chl Schist
		CHL SCHIST: Dark greeish-grey, fine-grained, strongly foliated and partially

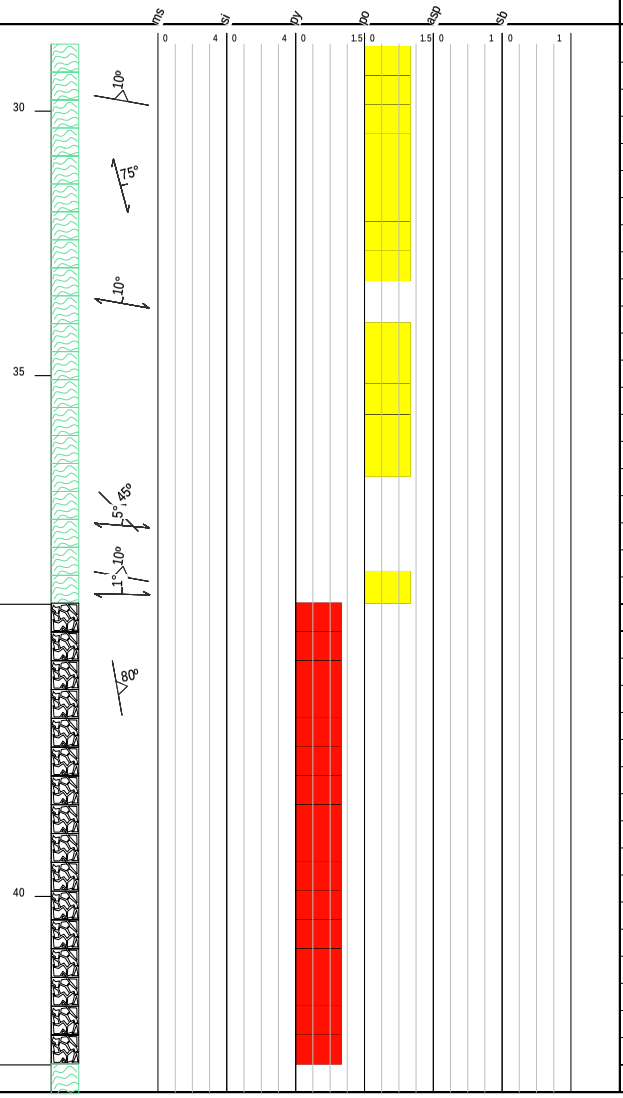

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
38.70	40.40	1.70	I030603	0.01	0.18	1.00	0.72	1.76
40.40	41.60	1.20	I030604	0.01	0.13	5.00	5.26	1.97

Project: Boulevard2010 **Hole Number:** BV10-09


From	To	Rocktype & Description
		silicified chlorite schist, with silicification particularly strong in the lower half of the interval STRUCTURE < @ 40.70 S1 Foliation 25.00° > ALTERATION Silicification « 41.00- 41.60 2»
41.60	43.90	Fractured schist
		FRACTURED SCHIST: pervasively foliated, fractured and altered chlorite schist. Alteration consists of silicification, which includes first generation quartz veins and sweats, as well as Fe hydroxide staining along brittle fractures. There are two thin second generation quartz veins inclined at 45 degrees to the core axis. MINERALIZATION disseminated blebs and fracture-fills of pyrite « 1%» STRUCTURE qtz-chl-bt < @ 41.80 ven 35.00° 2.00mm > < @ 42.30 Fault Gouge > < @ 42.90 S1 Foliation 25.00° > < @ 43.70 Fault Gouge > ALTERATION silicification « 41.60- 42.00 2» Fe hydroxide « 41.60- 43.30 2» silicification « 43.40- 43.90 2»
43.90	45.10	Chl schist
		CHL SCHIST: dark greenish-grey to medium-grey, fine-grained, pervasively foliated and partially silicified schist, with ~1% pyrrhotite within the unsilicified schist. A few thin first generation quartz sweats lie parallel to foliation MINERALIZATION chlorite-rich layer with pyrite « 5.00%» STRUCTURE < @ 44.70 S1 Foliation 15.00° >

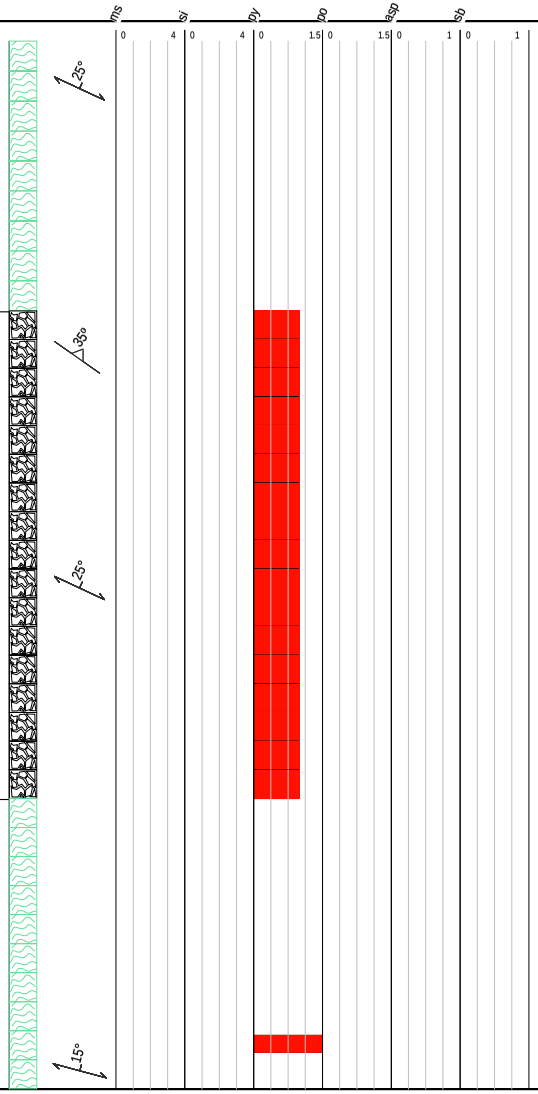

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
41.60	43.90	2.30	I030605	0.11	0.32	411.00	15.35	2.80
43.90	45.10	1.20	I030606	0.02	0.34	21.30	14.05	1.58

Project: Boulevard2010 **Hole Number:** BV10-09

From	To	Rocktype & Description
		ALTERATION Silicification « 44.20- 44.60 2»
45.10	45.70	Fractured schist
		FRACTURED SCHIST: Strongly silicified schist cut by Fe-stained fractures, fractures filled with pyrite and second generation quartz veins. Foliation mostly obscured. MINERALIZATION pyrite as fracture fills « 1%» ALTERATION silicification « 4» Fe hydroxide « 2»
45.70	55.50	Chl Schist
		CHL SCHIST: dark greenish-grey to medium-grey, fine-grained, strongly foliated, mostly silicified, chlorite schist with quartz veins. First generation veins are folded and boudinaged, and are relatively thick. Second generation veins are scarce (only ~10 in th entire nterval, all of which are ~1 mm thick) and subhorizontal to inclined at ~45 degrees to the core axis. STRUCTURE First generation qtz-bt < @ 47.00 ven 35.00° 25.00mm > pervasive < @ 49.40 S1 Foliation 25.00° > second generation quarts < @ 49.20 ven 70.00° 10.00mm > pyrite-coated < @ 52.40 Fracture 25.00° 10.00mm > ALTERATION Silicification « 45.70- 47.80 2» SIlicification « 47.80- 53.00 3» Silicification « 53.00- 55.50 2» Fe hydroxide « 47.00- 50.20 1»
55.50	57.80	Seriticized Chl schist and fault g
		SERITICIZED CHL SCHIST and FAULT GOUGE: Medium- to dark-grey, fine-grained, massively altered to strongly (relict) foliated, sericitically altered chlorite

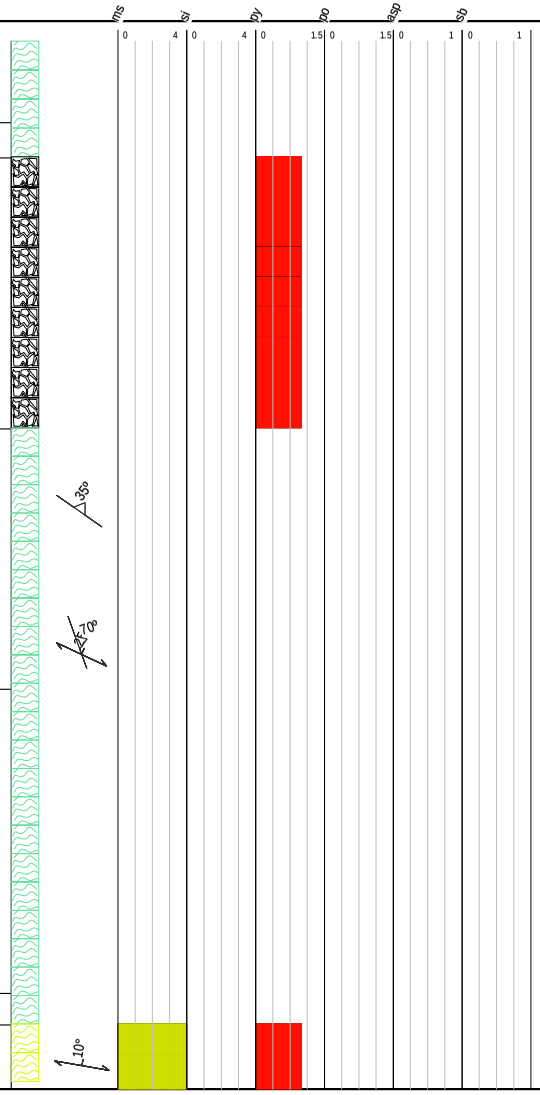

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
45.10	45.70	0.60	I030607	0.55	1.23	1965.00	24.50	0.90
45.70	47.60	1.90	I030608	0.04	0.51	177.50	20.50	2.46
47.60	49.60	2.00	I030609	0.10	1.82	256.00	13.20	1.23
49.60	51.60	2.00	I030610	0.04	1.08	5.30	17.45	0.49
51.60	53.60	2.00	I030611	0.01	0.36	4.30	23.70	1.46
53.60	55.50	1.90	I030613	0.01	0.27	7.60	24.70	2.98
55.50	57.70	2.20	I030614	0.59	1.59	1290.00	16.40	1.53

Project: Boulevard2010 **Hole Number:** BV10-09

From	To	Rocktype & Description

schist and fault gouge with relict first and second generation quartz veins. A subhorizontal second generation vein is cut a steeply dipping (third?) generation vein that appears related to the alteration. The most strongly altered schists are malleable to touch.

MINERALIZATION
disseminated pyrite « 1»

STRUCTURE
< @ 55.70 S1 Foliation 10.00° > < @ 56.30 Fault Gouge > to < @ 57.80 Fault Gouge >

ALTERATION
Sericitization « 4»

57.80 59.70 Chl Schist

CHL SCHIST: dark greenish-grey to medium-grey, fine-grained, silicified chorite schist with several thick (2-3 cm) first generation quartz veins

STRUCTURE
< @ 58.20 S1 Foliation 10.00° > first generation quartz < @ 59.30 ven 30.00mm >

ALTERATION
Silicification « 3»


59.70 60.40 Seriticized schist

SERITICIZED SCHIST: medium-grey, fine-grained, strongly sericitically and silicified chlorite schist with relict foliation and ~2% disseminated pyrite

MINERALIZATION
Disseminated pyrite « 2%»

STRUCTURE
Relict < @ 59.70 S1 Foliation 20.00° >

ALTERATION
Sericitization « 3» Silicification « 3»

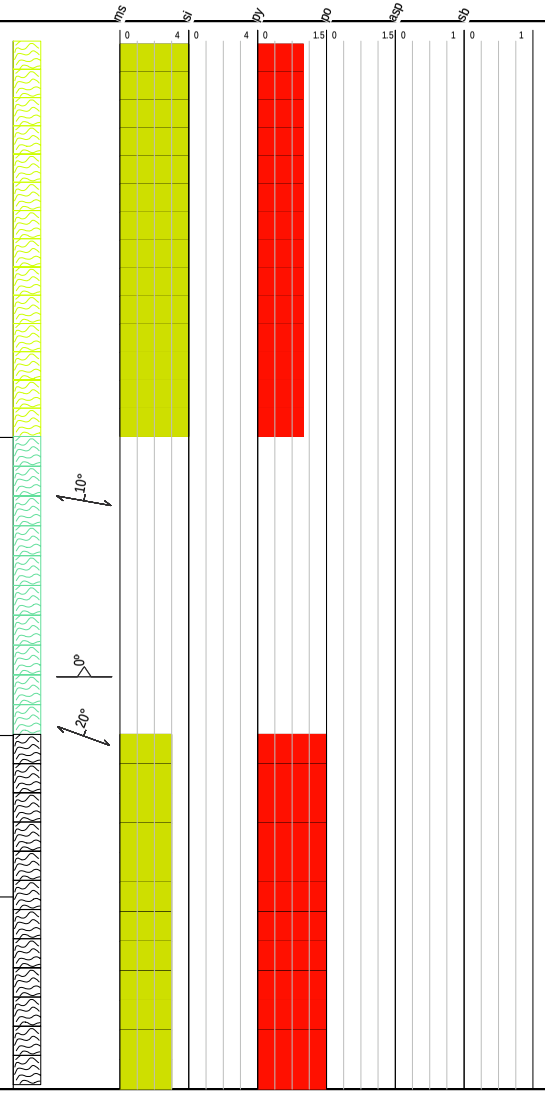

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
57.70	59.70	2.00	I030615	0.76	1.57	996.00	21.50	0.99
59.70	60.40	0.70	I030616	2.43	2.68	1150.00	29.80	0.49

Project: Boulevard2010 **Hole Number:** BV10-09

From	To	Rocktype & Description
60.40	73.60	Chl Schist

CHL SCHIST: dark greenish-grey to medium-grey, fine-grained, strongly foliated, weakly to intensely silicified chlorite schist with two generations of quartz veins, which together comprise ~1% of the interval. SIlicified units are typically complexly folded whereas foliation in unsilicified schist tends to be straight. Second generation veins occur in both silicified and unsilicified intervals, and are subhorizontal to ~45 degrees to the core axis.

MINERALIZATION

Disseminated pyrrhotite in unsilicified Chl schist

« 61.70- 64.40 1.00%»

Disseminated pyrrhotite with trace chalcopyrite in unsilicified CHl schist « 1%»

Disseminated pyrrhotite « 1%»

STRUCTURE

5 closely spaced second generation quartz < @ 62.00 ven 80.00° 50.00mm > < @ 63.30 S1 Foliation 10.00° > pyrite-coated < @ 64.90 Fracture 25.00° > < @ 69.10 S1 Foliation 20.00° > quartz-chlorite-pyrite < @ 71.20 ven 70.00° 50.00mm >

ALTERATION

Silicification

« 60.40- 61.70 3.00»

Silicification

« 61.70- 64.40 1»

SIlicification

« 64.40- 67.40 2»

Silicification

« 67.40- 71.00 3»

Silicification


« 71.00- 72.60 1»

Silicification

« 72.60- 73.60 4»

From	To	Rocktype & Description
73.60	73.90	Fault breccia


FAULT BRECCIA: Fault breccia developed in intensely silicified chlorite schist. Clasts are angular and consists of silicified schist. Groundmass comprises chalky white clays that likely consist predominantly of sericite. No sulfides

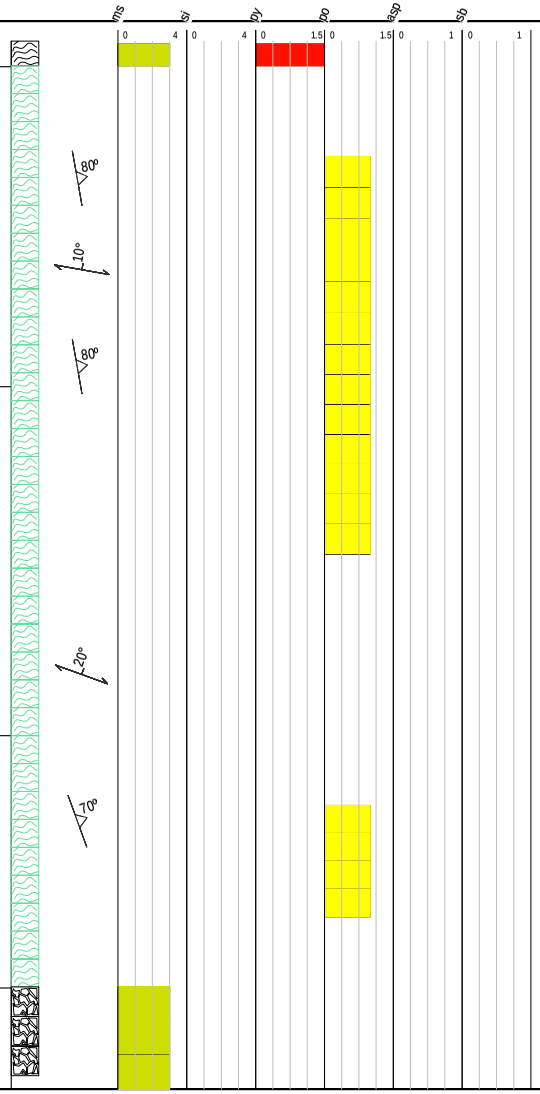

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
60.40	62.40	2.00	I030617	0.05	0.17	28.70	4.09	1.23
62.40	64.40	2.00	I030618	0.01	0.09	3.60	1.45	1.43
64.40	66.40	2.00	I030619	0.01	0.09	7.60	1.01	1.49
66.40	67.40	1.00	I030621	0.01	0.10	1.20	0.78	1.27
67.40	69.40	2.00	I030622	0.01	0.11	4.30	0.63	1.08
69.40	71.00	1.60	I030623	0.01	0.12	2.60	3.55	0.93
71.00	72.60	1.60	I030624	0.01	0.20	7.00	2.47	2.03
72.60	73.60	1.00	I030625	0.01	0.10	3.70	1.19	0.42
73.60	73.90	0.30	I030626	0.01	0.07	4.70	2.13	0.25

Project: Boulevard2010 **Hole Number:** BV10-09


From	To	Rocktype & Description
		were observed.
		STRUCTURE
		< @ 73.60 Upper Contact 3.00° > < @ 73.90 Lower Contact 30.00° >
		ALTERATION
		Sericitic « 3»
73.90	99.00	Chl schist
		CHL SCHIST: dark greenish-grey to medium-grey, fine-grained, strong foliated, weakly to intensely silicified chlorite schist with two generations of quartz veins. Silicified rocks show straight to complexly deformed foliations. Unsilicified schist shows straight foliation and typically contains ~1% pyrrhotite, with increased concentrations when surrounded by more silcified schist. Second generation quartz veins are subhorizontal to inclided at 45 degrees to the core axis.
		MINERALIZATION
		Disseminated pyrrhotite and pyrite in unsilicified schist
		« 74.30- 75.60 1%»
		Disseminated and stringers of pyrrhotite in unsilicified selvage
		« 78.30- 78.60 2%»
		Disseminatd and stringers of pyrrhotite with lesser pyrite and chalcopyrite « 1%»
		Pyrrhotite in strongly silicified chlorite schist
		« 88.70- 89.00 2%»
		Pyrite in unsilicified schist
		« 89.00- 90.10 1%»
		Pyrrhotite in weakly silicified schist « 1%»
		STRUCTURE
		pervasive < @ 75.20 S1 Foliation 5.00° > pervasive < @ 86.70 S1 Foliation 10.00° > second generation qtz-chl-po < @ 92.00 ven 45.00° 300.00mm > pervasive < @ 94.50 S1 Foliation 0° >
		ALTERATION:
		Silicification
		« 73.90- 74.30 4»
		SIlcification

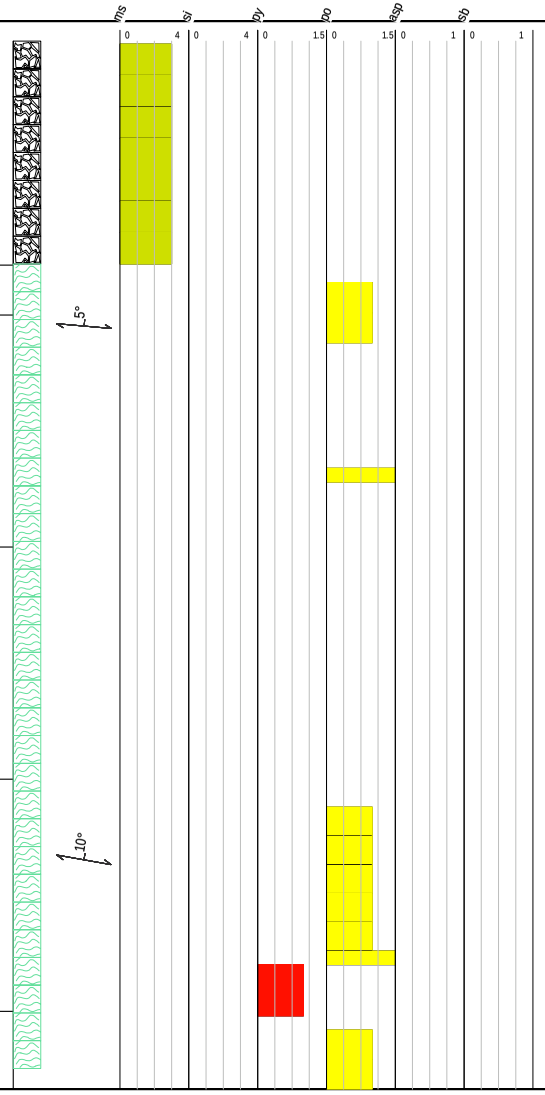

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
73.90	75.90	2.00	I030627	0.01	0.11	8.30	1.80	1.43
75.90	77.90	2.00	I030628	0.01	0.06	7.40	0.96	0.27
77.90	80.20	2.30	I030629	0.01	0.05	5.90	1.25	0.38
80.20	82.20	2.00	I030631	0.01	0.14	1.80	6.49	2.27
82.20	83.60	1.40	I030632	0.01	0.12	1.30	29.20	0.27
83.60	85.60	2.00	I030633	0.01	0.10	3.20	6.71	0.59
85.60	87.60	2.00	I030634	0.01	0.13	8.80	4.13	1.65
87.60	89.60	2.00	I030635	0.01	0.25	3.50	16.40	3.70
89.60	91.60	2.00	I030636	0.01	0.29	3.20	5.51	3.13
91.60	93.60	2.00	I030637	0.01	0.31	1.50	11.50	2.07
93.60	95.60	2.00	I030638	0.05	0.97	1.50	10.30	4.32
95.60	97.60	2.00	I030639	0.02	0.57	1.10	10.05	2.64
97.60	99.00	1.40	I030641	0.01	0.28	28.20	2.83	4.64

Project: Boulevard2010 **Hole Number:** BV10-09

From	To	Rocktype & Description
« 75.60- 80.20 4»		
Silicification		
« 80.20- 83.60 1»		
Silicifcation « 3»		
Silicification		
« 85.60- 88.70 1»		
Silicification « 4»		
SIliciifcation		
« 90.10- 90.40 3»		
SIliciifcation		
« 90.40- 99.00 1.00»		
99.00	99.00	EOH

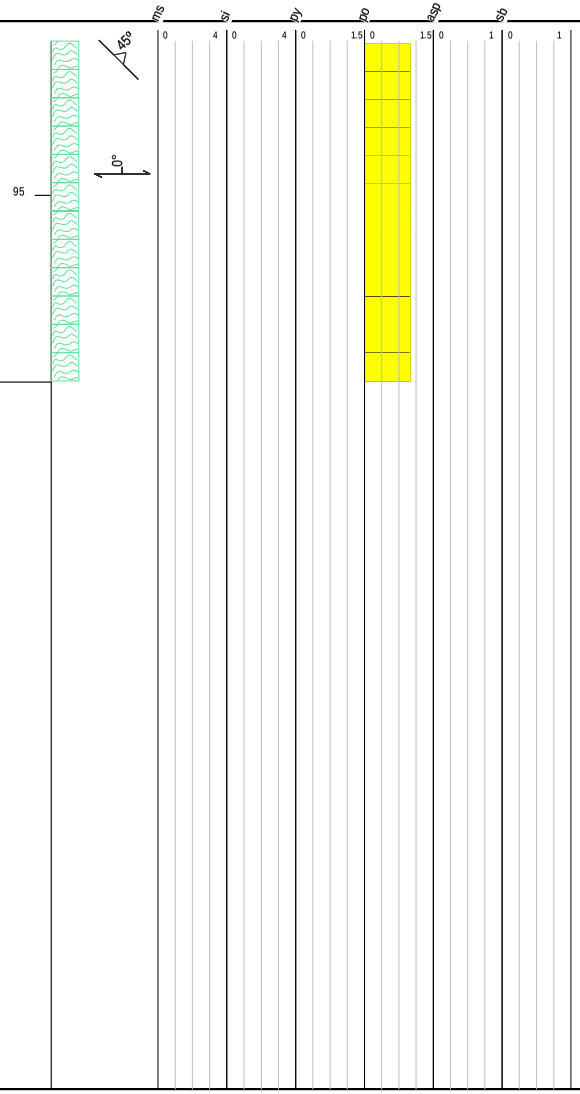

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1333.0
Hole BV10-10	**Azimuth (º):** 70.0
Location: 6966549 m North, 575757 m East	**Dip (º):** -50.0
Logged by: Ryan Toole	**Length (m):** 121.30
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Sunset trend; step-out NW from BV10-08
Date Started: 2010/06/14 **Date Completed:** 2010/06/15	
Dip Tests By:	

Summary Log:

0.0-4.9m CASING

4.9-57.0m BIOTITE CHLORITE SCHIST - Med grey, fine grained, finely laminated biotite chlorite schist. Early stage quartz veining has been transposed by schistosity, where as late, 2nd generation quartz carbonate veins cross cut all fabric chaotically. Upper 10 meters is highly oxidized from weathering; mostly along fractures. Unit is weakly silicified from top to bottom, with local zones increasing in intensity to strong. Faulted lower contact with fault gouge.

57.00-57.50m FAULT GOUGE - Light brown pebbly rubble fault gouge with clasts of quartz veins and schist. Gouge is oxidized and contains rare microfractures with associated pyrite in local brittle zones. Sharp lower contact with brecciated quartz carb v @ 90 degrees.

57.5-60.7m CHLORITE BIOTITE QUARTZ SCHIST - Greenish grey, fine grained, chlorite biotite schist. Upper 15 cm is brecciated from overlying fault zone. 3rd generation mineralized veins occur for the first time in this hole in this unit. Veins are typically <1cm and have mineralized margins comprising of dominantly pyrite, with trace to locally 1% arsenopyrite. Unit is moderately silicified and weakly sericitized. The density of the veins is approximately 7 veins over 20 cm for the entire unit however is approximately 10 veins over 20 cm, or 1:2 in the more intense zones.43.6-43.8 fault gouge consisting of a pebbly sand with a 2 cm quartz vein at the basal contact. Portable XRF ran 8 ppm gold on this FG. Sharp lower contact.

60.7-84.00m BIOTITE CHLORITE SCHIST -Greyish green, fine grained, biotite chlorite schist. 3rd generation veins disappear in upper 1 meter, where 3 are present, still at approximately 70 degrees to the core axis, however are unmineralized. 1st and 2nd generation veins are rare. 2nd generation veins contain both pyrite and pyrrhotite blebs at about 1-2%. Disseminated pyrrhotite appears in this unit and was not present in the previous. Local silicification is moderate. Lower contact is broken and sharp with fault zone.

84.00-85.60m FAULT ZONE/GOUGE - Upper 40 cm is muddy gouge, where as lower 1.2 meters is block and broken biotite chlorite schist with local intervals of rubbly sandy core. Entire zone is moderately to locally strongly oxidized. Unable to get an orientation of the fault from this core. Muddy seams contain rounded 1-2mm quartz clasts. Lower contact is sharp and broken.

85.60-97.20m BIOTITE CHLORITE SCHIST - Med grey, fine grained, biotite chlorite schist that is moderately foliated with no 3rd generation veins present. Very rare first and second generation veins with very rare pyrite mineralization. Trace pyrite and pyrrhotite disseminations throughout. Unit is relatively featureless. Schistosity is at 45 degrees throughout unit. Sharp lower contact with 1st generation quartz v that separates lower unit.

97.20-121.3CHLORITE BIOTITE SCHIST - Green, fine grained weakly foliated, chlorite biotite schist with 5% foliation parallel early carb veins. Fine disseminated pyrite and pyrrhotite occurs throughout unit with larger 1-2mm blebs occurring on carb v margins. Deformation and microfolding occurs at 108.9 with increased carb veining.

Downhole surveys:

Depth	Dip	Azimuth
60.35	-49.70	60.50

Project: Boulevard2010 **Hole Number:** BV10-10

From	To	Rocktype & Description
0.00	4.90	Casing

CASING - Overburden

From	To	Rocktype & Description
4.90	57.00	Biotite Chlorite Schist

BIOTITE CHLORITE SCHIST - Med grey, fine grained, strongly foliated biotite chlorite schist. Rare 1st generation quartz veining; 2nd generation veining comprises approximately 3% of core composition. Pyrrhotite is disseminated locally in schist and also occurs as belbs and stringers within 2nd generation quartz veins and along boundaries. Upper 10 meters is highly oxidized from weathering; mostly along fractures. Unit is weakly silicified from top to bottom, with local zones increasing in intensity to strong. Faulted lower contact with fault gouge.

STRUCTURE

< @ 15.00 S1 Foliation 30.00° >

< @ 37.00 S1 Foliation 31.00° >

MAJOR EARLY VEINS

< @ 24.40 ven 25.00° 450.00mm >

< @ 27.20 ven 30.00° 200.00mm >

< @ 29.75 ven 30.00° 650.00mm >

< @ 33.40 ven 30.00° 800.00mm >


< @ 38.60 ven 30.00° 700.00mm >

< @ 39.60 ven 30.00° 550.00mm >

2nd generation veins are chaotic and typically 5 cm or less.

ALTERATION


« 4.90- 57.00 Silicification 1.00*»

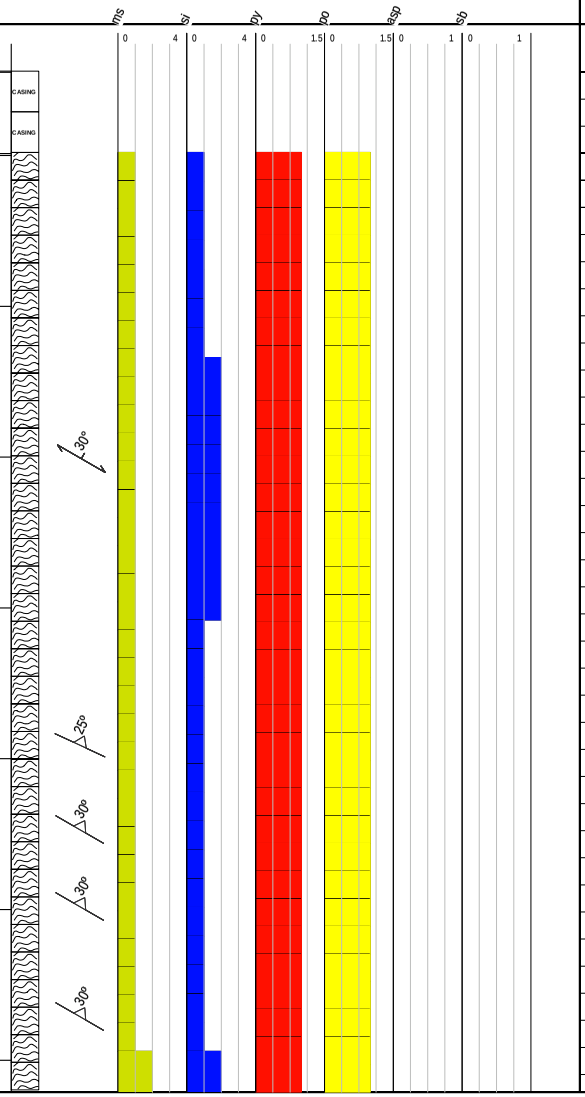

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
51.00	53.00	2.00	I030642	0.04	0.34	231.00	18.85	2.75
53.00	55.00	2.00	I030643	0.05	0.32	90.90	8.18	2.39
55.00	57.00	2.00	I030644	0.01	0.21	2.80	8.39	1.11

Project: Boulevard2010 **Hole Number:** BV10-10

From	To	Rocktype & Description
		« 11.70- 20.40 Silicification 2.00*»
		« 34.70- 38.40 Silicification 2.00*»
		« 4.90- 57.00 Sericite 1.00*»
		« 34.70- 38.40 Sericite 2.00*»
		MINERALIZATION
		« 4.90- 57.00 Pyrite 1.00%»
		« 4.90- 57.00 Pyrrhotite 1.00%»
		Pyrite and Pyrrhotite are tyipcally finely disseminated in the Biotite Chlorite schist and occur as belbs or stringers along fractures or late quartz carb veins boundaries.
		FAULT
		< @ 24.05 Fault 23.00° 10.00cm >
57.00	57.50	Fault Gouge
		FAULT GOUGE - Light brown pebbly ruble fault gouge with clasts of quartz veins and schist. Gouge is oxidized and contains rare microfractures with associated pyrite in local brittle zones. Sharp lower contact with brecciated quartz carb v @ 90 degrees.
57.50	60.70	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Greenish grey, fine grained, strongly foliated, biotite chlorite schist. Upper 15 cm is brecciated from overlying fault zone. 3rd generation mineralized veins occur for the first time in this hole in this unit. Veins are typically <1cm and have mineralized margins comprising of dominantly pyrite, with trace to locally 1% arsenopyrite. Unit is moderately silicified and weakly sericitized. The density of the veins is approximately 7 veins over 20 cms for the entire unit however is approximately 10 veins over 20 cms, or 1:2 in the more intense zones.

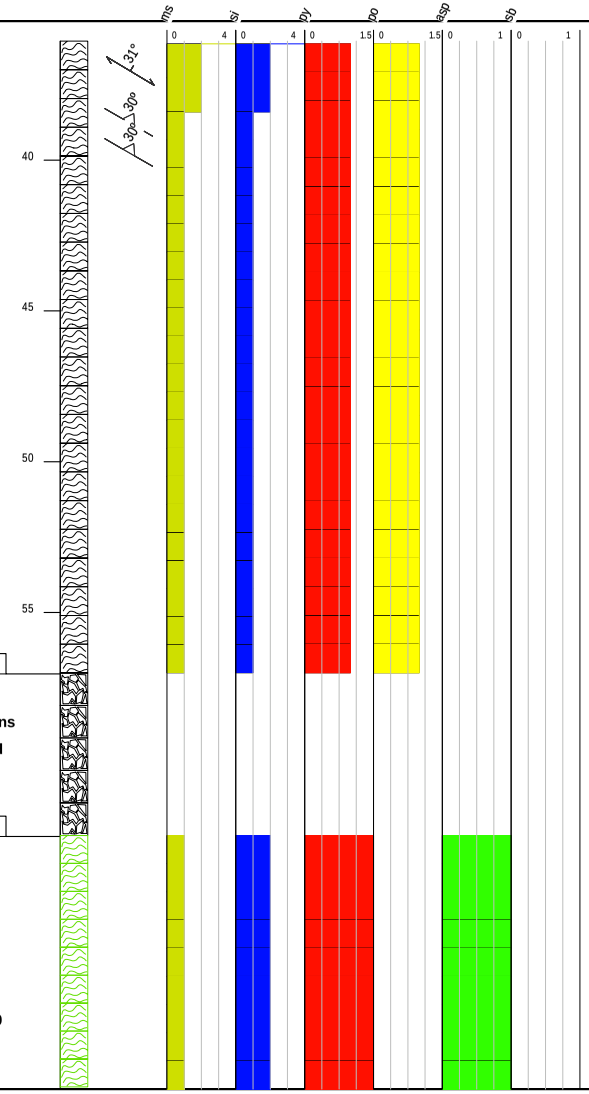

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
57.00	57.40	0.40	I030645	0.22	1.13	554.00	35.10	1.43
57.40	58.40	1.00	I030646	1.26	4.77	461.00	58.20	0.95
58.40	59.40	1.00	I030647	0.24	7.36	1255.00	154.00	1.34
59.40	60.00	0.60	I030648	0.39	4.30	968.00	61.10	1.41

Project: Boulevard2010 **Hole Number:** BV10-10

From	To	Rocktype & Description

ALTERATION

« Silicification 2.00*»

« Sericite 1.00*»

MINERALIZATION

« Pyrite 3.00%»

« 57.50- 60.10 Arsenopyrite 1.00%» TRACE

« 60.65- 60.70 Arsenopyrite 3.00%» Occurs on the margins of a 1 cm quartz carb v at the bottom of the unit.

VEINS

3rd generation veins are generally parallel at approximately 70 degrees to the core axis.

60.70 84.00 Biotite Chlorite Schist


BIOTITE CHLORITE SCHIST -Greyish green, fine grained, strongly foliated, biotite chlorite schist. 3rd generation veins disappear in upper 1 meter, where 3 are present, still at approximately 70 degrees to the core axis, however are unmineralized. 1st and 2nd generation veins are rare. 2nd generation veins contain both pyrite and pyrrhotite belbs at about 1-2%. Disseminated pyrrhotite appears in this unit and was not present in the previous. Local silicification is moderate. Lower contact is broken and sharp with fault zone.

ALTERATION

« Silicification 1.00*»

« 73.20- 81.00 Silicification 2.00*»


MINERALIZATION

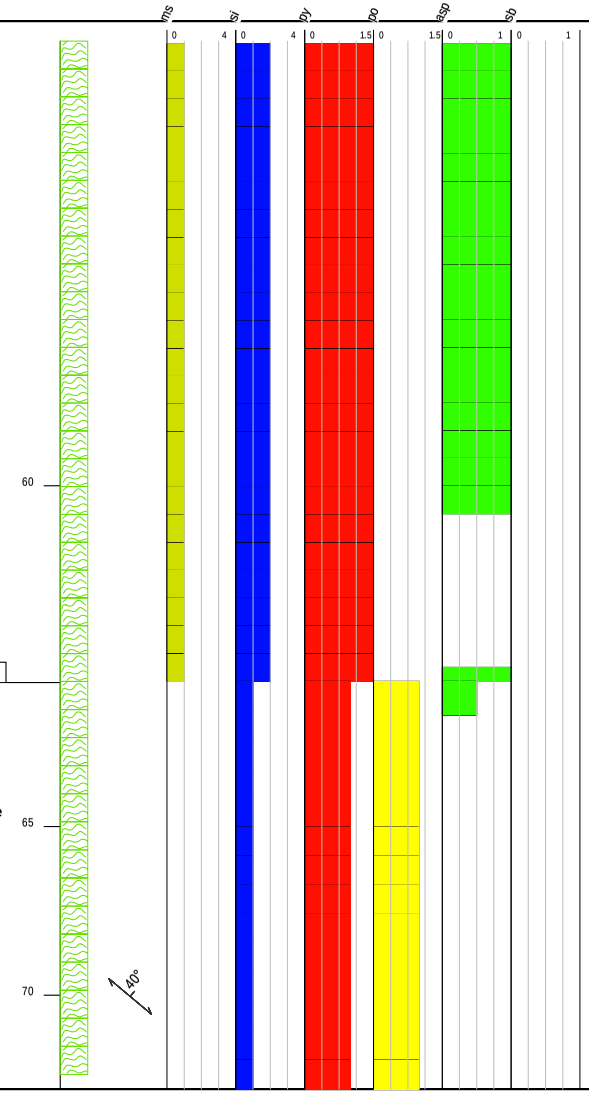

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
60.00	60.80	0.80	I030649	0.06	0.43	119.00	14.10	1.66
60.80	62.80	2.00	I030651	0.17	1.56	559.00	28.30	2.07
62.80	64.80	2.00	I030652	0.02	0.19	34.90	12.05	0.58
64.80	66.80	2.00	I030653	0.01	0.16	4.40	2.02	0.93
66.80	68.80	2.00	I030654	0.01	0.21	0.90	1.86	3.42
68.80	70.80	2.00	I030655	0.02	0.26	132.50	3.27	8.04
70.80	72.80	2.00	I030656	0.01	0.18	7.50	5.86	0.93
72.80	74.80	2.00	I030657	0.01	0.23	15.40	0.76	1.17
74.80	76.80	2.00	I030658	0.01	0.11	2.10	0.12	0.53
76.80	78.80	2.00	I030659	0.01	0.07	6.80	1.12	0.27
78.80	80.80	2.00	I030661	0.03	0.09	6.50	0.63	0.16
80.80	82.80	2.00	I030662	0.01	0.22	1.20	3.71	2.42
82.80	84.00	1.20	I030663	0.01	0.21	1.10	11.15	1.01

Project: Boulevard2010 **Hole Number:** BV10-10


From	To	Rocktype & Description
		« Pyrite 1.00%»
		« Pyrrhotite 1.00%»
		« 60.70- 61.70 Arsenopyrite 0.50%»
		STRUCTURE
		Schistosity remains consistent at approximately 40 degrees
		< @ 70.00 S1 Foliation 40.00° >
84.00	85.60	Fault Zone/Gouge
		FAULT ZONE/GOUGE - Upper 40 cm is muddy gouge, where as lower 1.2 meters is block and broken biotite chlorite schist with local intervals of rubbly sandy core. Entire zone is moderately to locally strongly oxidized. Unable to get an orientation of the fault from this core. Muddy seams contain rounded 1-2mm quartz clasts. Lower contact is sharp and broken.
85.60	97.20	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Med grey, fine grained, strongly foliated, biotite chlorite schist that is moderately foliated with no 3rd generation veins present. Very rare first and second generation veins with very rare pyrite mineralization. Trace pyrite and pyrrhotite disseminations throught unit.Unit is relatively featureless. Schistosity is at 45 degrees throughout unit. Sharp lower contact with 1st generation quartz v that separates lower unit.
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		VEINS
		2nd generation « vein » < @ 89.40 ven 45.00° 50.00mm >
		STRUCTURE

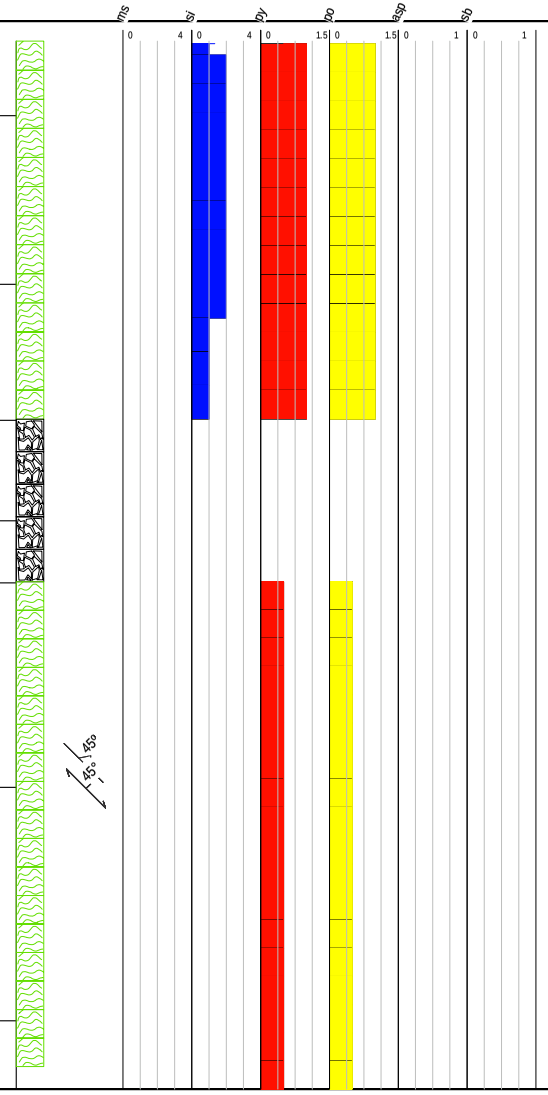

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
84.00	84.40	0.40	I030664	0.02	0.33	3.30	24.20	6.99
84.40	85.60	1.20	I030665	0.01	0.32	3.00	24.20	3.58
85.60	87.60	2.00	I030666	0.01	0.18	1.00	5.40	3.56

Project: Boulevard2010 **Hole Number:** BV10-10

From	To	Rocktype & Description
		< @ 90.00 S1 Foliation 45.00° >
97.20	121.30	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Green, fine grained, moderately foliated, chlorite biotite schist with 5% foliation parallel early carb veins. Fine disseminated pyrite and pyrrhotite occurs throughout unit with larger 1-2mm blebs occuring on carbonate vein margins. Deformation and microfolding occurs at 108.9 with increased carbonate veining.
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 1.00%»
		« 106.50- 106.52 Arsenopyrite 1.00%» Associated with 1.5 cm wide carb v
		< @ 106.50 ven 45.00° 15.00mm >
		EOH @ 121.3m
121.30	121.30	EOH

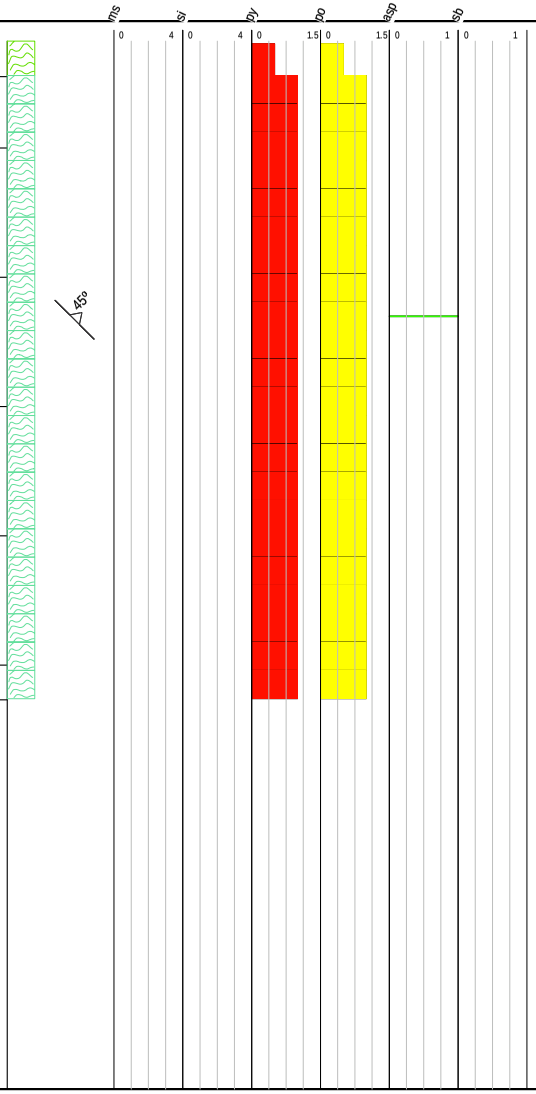

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
105.35	106.35	1.00	I030667	0.01	0.24	0.10	0.26	0.11
106.35	106.55	0.20	I030668	0.10	0.88	1245.00	17.65	0.10
106.55	108.55	2.00	I030669	0.01	0.29	0.70	0.48	0.19

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1333.0
Hole BV10-11	**Azimuth (º):** 70.0
Location: 6966550 m North, 575757 m East	**Dip (º):** -82.0
Logged by: Ryan Toole	**Length (m):** 154.83
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Sunset trend; step-out NW from BV10-08
Date Started: 2010/06/16 **Date Completed:** 2010/06/17	
Dip Tests By:	

Summary Log:

0.0-3.0m CASING

4.9-76.50 BIOTITE CHLORITE SCHIST - Med grey, fine grained, biotite chlorite schist, that is heavily fractured and weathered with iron oxide staining in the upper 5 meters. Unit is interbedded with chert from 8.0m to 17.1 meters. Contacts between these units are sharp, and bedding is preserved in the chert. Previously believed to be silicification however sharp contacts and preserved bedding suggest otherwise. Pyrite and pyrrhotite occur on 1st and 2nd generation veins boundaries. One straggler mineralized 3rd generation V occurs at 39.6m and is 1 cm thick with arsenopyrite occurring along the contacts. Locally unit becomes mottled and folded. Lower contact is sharp with fault zone @ 45 degrees to core axis.

76.50-77.80m FAULT ZONE/GOUGE - Upper 15cm is rubbly sandy gouge similar to gouges in previous holes, whereas lower 1.15m is a brecciated quartz carb rich zone and is very blocky. Rare preserved fabric is at 50 degrees to core axis. Trace pyrite disseminations. Intense folding. Lower contact is broken without orientation preserved.

77.80-124.00m BIOTITE CHLORITE SCHIST - Med grey, fine grained, biotite chlorite schist. Early generation veins show strong boudinaging however only make up approximately 2-3% of rock composition. 2nd generation, quartz carb unmineralized veins occur rarely throughout unit (1 v per 20 cm of core). Locally from 111.0 to 113.0m, 3rd generation quartz dolomite mineralized veins occur with an intensity of approximately 7 veins per 10 cm of core. These 3rd generation veins contain dominantly pyrite, pyrrhotite, arsenopyrite and chalcopyrite. Schistosity is at very shallow angles to the core axis; 20 degrees. Lower contact is faulted and broken with fault zone/gouge.

124.00-125.10m FAULT ZONE/GOUGE - Continuation of the previous schist unit however unit becomes heavily faulted and gouged with increased sericite alteration. Clasts in gouged intervals contain quartz and schist chloritic schist. Contacts are sharp at 20 degrees to the core axis. Trace pyrite and pyrrhotite. 84.00-85.60m FAULT ZONE/GOUGE - Upper 40 cm is muddy gouge, whereas lower 1.2 meters is block and broken biotite chlorite schist with local intervals of rubbly sandy core. Entire zone is moderately to locally strongly oxidized. Unable to get an orientation of the fault from this core. Muddy seams contain rounded 1-2mm quartz clasts. Lower contact is sharp and broken.


125.10-154.83m BIOTITE CHLORITE SCHIST - Continuation of 77.8-124.0m. Medium greyish green, fine grained, biotite chlorite schist. 3rd generation mineralized veins diminish downhole, however are locally more intense in upper 2 meters of unit . Early generation veins are rare and unmineralized. Schistosity remains constant at approximately 20 degrees to the core axis with local minor tight folding present in upper 10 meters.

Downhole surveys:

Depth	Dip	Azimuth
78.64	-82.90	63.00
148.74	-82.40	60.90

Project: Boulevard2010 **Hole Number:** BV10-11

From	To	Rocktype & Description
0.00	3.00	Casing
		CASING - Overburden
3.00	76.50	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Med grey, fine grained, strongly foliated, biotite chlorite schist, that is heavily fractured and weathered with iron oxide staining in the upper 5 meters. Unit is interbedded with chert from 8.0m to 17.1 meters. Contacts between these unts are sharp, and bedding is preserved in the chert. Previously believed to be silicification however sharp contacts and preserved bedding suggest otherwise. Pyrite and Pyrrhotite occur on 1st and 2nd generation veins boundaries. One straggler mineralized 3rd generation V occurs at 39.6m and is 1 cm thick with arsenopyrite occuring along the contacts. Locally unit becomed mottled and folded. Lower contact is sharp with fault zone @ 45 degrees to core axis.
		ALTERATION
		« 54.20- 59.90 Silicification 2.00*»
		« 69.40- 72.10 Silicification 2.00*»
		« 3.00- 76.50 Silicification 1.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 1.00%»
		« 39.60- 39.61 One Straggler Vein Arsenopyrite 0.50%»
		« 74.40- 74.41 One Straggler Vein Arsenopyrite 0.10%»
		« 75.65- 75.85 Sp is localized to one early Qtz Carb Vein Sphalerite 1.00%»
		STRUCTURE

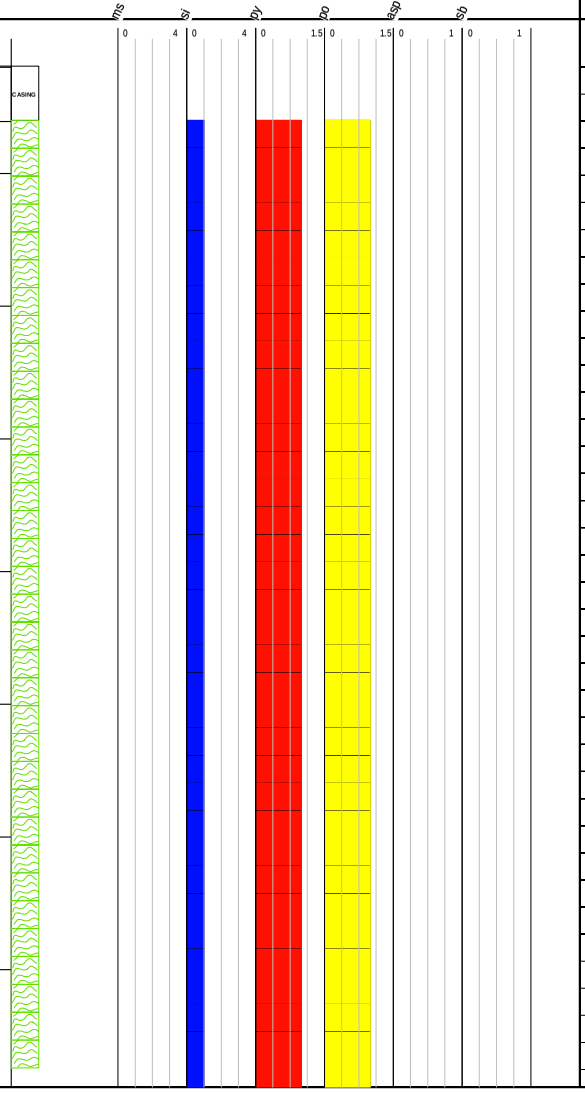

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
3.04	5.54	2.50	I030671	0.01	0.51	0.50	0.23	1.70
5.54	8.04	2.50	I030672	0.02	0.71	0.40	5.46	2.31
8.04	10.54	2.50	I030673	0.01	0.13	0.60	0.60	0.23
10.54	13.04	2.50	I030674	0.01	0.09	1.00	0.23	0.18
13.04	15.54	2.50	I030675	0.01	0.29	0.50	0.21	0.55
15.54	18.04	2.50	I030676	0.01	0.24	0.40	0.22	2.05
18.04	20.54	2.50	I030677	0.01	0.14	0.70	0.10	1.51
20.54	23.04	2.50	I030678	0.01	0.16	1.70	0.07	1.02
23.04	25.54	2.50	I030679	0.01	0.19	5.30	0.06	1.12
25.54	28.04	2.50	I030681	0.01	0.17	5.40	0.43	2.33
28.04	30.54	2.50	I030682	0.01	0.13	0.20	0.05	3.86
30.54	33.04	2.50	I030683	0.01	0.12	0.20	0.05	0.91
33.04	35.54	2.50	I030684	0.01	0.14	0.30	0.05	0.45
35.54	38.04	2.50	I030685	0.01	0.08	0.50	0.05	0.83
38.04	39.40	1.36	I030686	0.01	0.13	0.10	0.06	2.69
39.40	39.90	0.50	I030687	0.01	0.12	0.10	0.06	2.38
39.94	42.40	2.46	I030688	0.01	0.14	0.10	0.05	2.75
42.40	44.90	2.50	I030689	0.01	0.17	0.10	0.05	3.04
44.90	47.40	2.50	I030691	0.01	0.22	0.10	0.05	2.49
47.40	49.90	2.50	I030692	0.01	0.17	0.30	0.06	1.47
49.90	52.40	2.50	I030693	0.01	0.18	0.10	0.07	1.80
52.40	54.90	2.50	I030694	0.01	0.17	1.40	0.27	2.17
54.90	57.40	2.50	I030695	0.01	0.23	0.40	0.17	2.05
57.40	59.90	2.50	I030696	0.01	0.07	1.30	0.06	1.25
59.90	62.40	2.50	I030697	0.01	0.38	0.40	0.07	8.66
62.40	64.90	2.50	I030698	0.01	0.15	0.10	0.06	2.57
64.90	67.40	2.50	I030699	0.01	0.14	6.60	0.28	1.89
67.40	69.90	2.50	I030701	0.01	0.25	0.40	0.23	9.46
69.90	72.40	2.50	I030702	0.01	0.13	0.90	0.22	4.41
72.40	74.90	2.50	I030703	0.01	0.43	2.00	2.17	5.01
74.90	76.50	1.60	I030704	0.61	2.74	2240.00	64.00	4.27

Project: Boulevard2010 **Hole Number:** BV10-11

From	To	Rocktype & Description

< @ 50.00 S1 Foliation 20.00° >

Late Mineralized Veins


< @ 39.60 ven 90.00° 20.00mm >
< @ 74.40 ven 85.00° 10.00mm >

First generation veins are transposed along schistosity at approximately 20 degrees and are typically larger than 5 cm.

Second generation veins are chaotic and typicaly less than 5 mm.

76.50 77.80 Fault Zone/Gouge


FAULT ZONE/GOUGE - Upper 15cm is rubbly sandy gouge similar to gouges in previous holes, whereas lower 1.15m is a brecciated quartz carb rich zone and

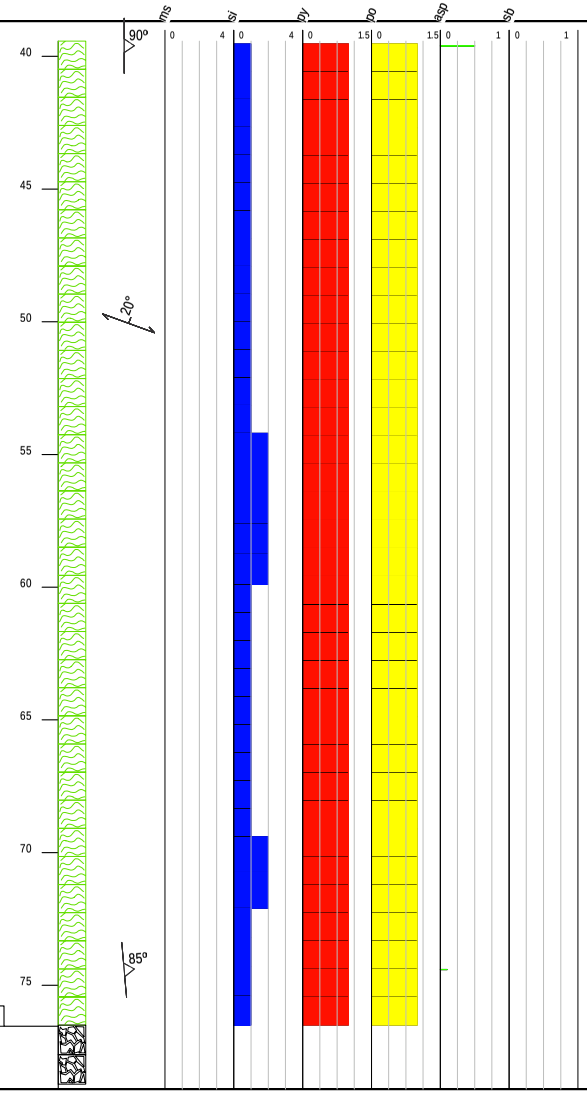

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
76.50	77.80	1.30	I030705	0.11	0.83	282.00	44.60	1.36

Project: Boulevard2010 **Hole Number:** BV10-11

From	To	Rocktype & Description
		is very blocky. Rare preserved fabric is at 50 degrees to core axis. Trace pyrite disseminations. Intense folding. Lower contact is broken without orientation preserved. STRUCTURE < @ 77.00 S1 Foliation 50.00° >
77.80	124.00	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Med grey, fine grained, biotite chlorite schist. Early generation veins show strong boudinaging however only make up approximatey 2-3% of rock composition. 2nd generation, quartz carb unmineralized veins occur rarely throughout unit (1 v per 20 cm of core). Locally from 111.0 to 113.0m, 3rd generation quartz dolomite mineralized veins occur with an intensity of approximately 7 veins per 10 cm of core. These 3rd generation veins contain dominantly pyrite, pyrrhotite, arsenopyrite and chalcopyrite. Schistosity is at very shallow angles to the core axis; 20 degrees. Lower contact is faulted and broken with fault zone/gouge. ALTERATION « 77.80- 111.00 Sericite 1.00*» « 111.00- 113.00 Chlorite 3.00*» « 111.00- 113.00 Sericite 2.00*» « 113.00- 124.00 Sericite 1.00*» MINERALIZATION « 77.80- 111.00 Pyrite 1.00%» « 77.80- 111.00 Pyrrhotite 2.00%» « 77.80- 111.0 Arsenopyrite 0.10%»

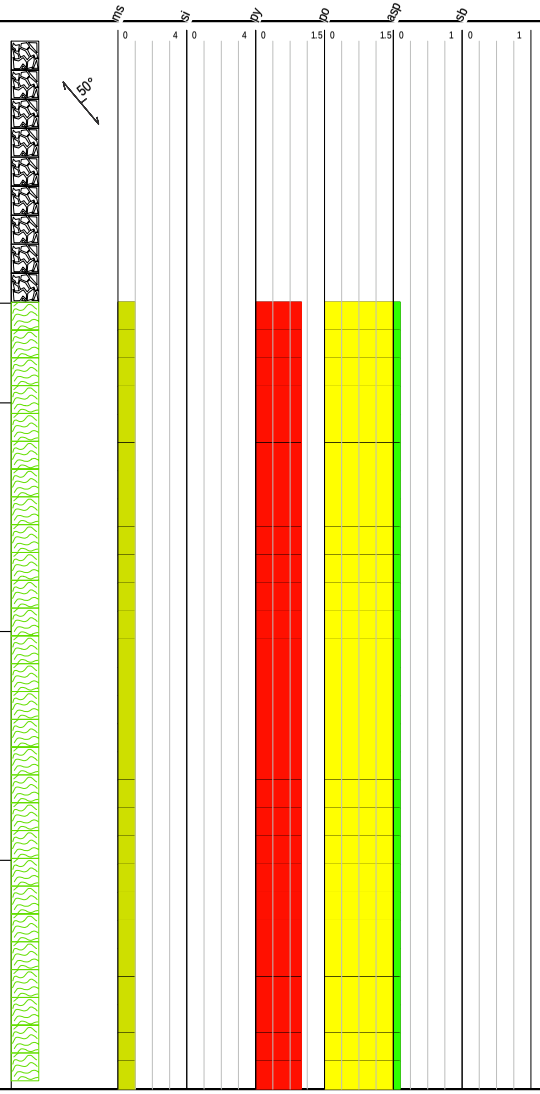

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
77.80	80.30	2.50	I030706	0.01	0.18	22.40	25.80	2.24
80.30	82.80	2.50	I030707	0.01	0.16	1.60	8.29	0.61
82.80	85.30	2.50	I030708	0.01	0.18	3.40	5.96	2.40
85.30	87.80	2.50	I030709	0.01	0.22	1.80	3.06	2.20
87.80	90.30	2.50	I030711	0.01	0.11	5.90	2.96	2.01
90.30	92.80	2.50	I030712	0.01	0.12	1.30	3.18	0.20
92.80	95.30	2.50	I030713	0.02	0.23	50.10	0.17	0.43
95.30	98.30	3.00	I030714	0.01	0.15	0.60	0.07	2.13
98.30	100.90	2.60	I030715	0.01	0.13	1.20	0.78	1.11
100.90	103.40	2.50	I030716	0.01	0.22	11.60	0.13	0.73
103.40	105.90	2.50	I030717	0.01	0.23	0.90	0.10	0.57
105.90	108.40	2.50	I030718	0.01	0.13	6.60	0.08	0.38
108.40	110.90	2.50	I030719	0.02	0.20	10.00	0.17	5.09
110.90	112.00	1.10	I030721	1.40	0.69	43.70	0.25	1.11
112.00	113.10	1.10	I030722	0.67	0.78	1450.00	5.00	0.97
113.10	115.60	2.50	I030723	0.04	0.24	9.30	0.51	1.67
115.60	118.10	2.50	I030724	0.01	0.33	35.10	0.19	1.71
118.10	120.60	2.50	I030725	0.06	0.34	211.00	0.68	0.29
120.60	123.10	2.50	I030726	0.01	0.68	4.20	1.08	1.61
123.10	124.00	0.90	I030727	0.06	0.99	10.40	9.50	11.80

Project: Boulevard2010 **Hole Number:** BV10-11

From	To	Rocktype & Description

« 77.8- 111.0 Chalcopyrite 0.10%»

« 111.00- 113.00 Pyrite 2.00%»

« 111.00- 113.00 Pyrrhotite 1.00%»

« 111.00- 113.00 Arsenopyrite 2.00%»

« 111.00- 113.00 Chalcopyrite 0.50%»

« 113.00- 124.00 Pyrite 1.00%»

« 113.00- 124.00 Pyrrhotite 1.00%»

« 113.00- 124.00 Arsenopyrite 0.10%»

VEINING


3rd Generation Mineralized Veining

The mineralized veining sequence is between 111.0 and 113.0m and consists of veins generally less than 1 cm running parallel to each other at approximately 80 degrees to the core axis. These veins consist of dominantly quartz with dolomite margins. Rare later generation veins that look very similar to the mineralized occur throughout this unit however do not contain arsenopyrite or dolomite and generally occur between 70 and 90 degrees to the core axis.

< @ 112.00 ven 80.00° 10.00mm >

4th (?) Generation Carbonate Veins

In the lower 1m of the unit, Late stage veins consisting of carbonate cut the

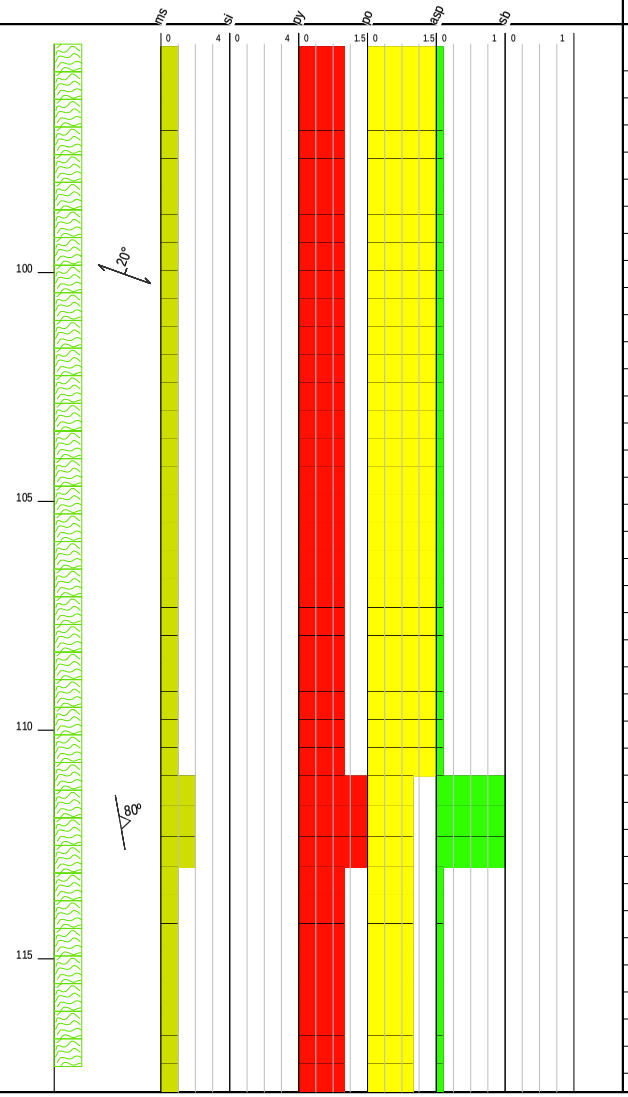

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-11

From	To	Rocktype & Description

core axis at approximately 90 degrees however contain no visible arsenopyrite. In 2008 similar veins were observed cutting the mineralized quartz dolomite veins. They are typically 5 mm or less in width.

< @ 123.50 ven 90.00° 5.00mm >

STRUCTURE

< @ 100.00 S1 Foliation 20.00° >

From	To	Rocktype & Description
124.00	125.10	Fault Zone/Gouge

FAULT ZONE/GOUGE - Continuation of the previous schist unit however unit becomes heavily faulted and gouged with increased sericite alteration. Clasts in gouged intervals contain quartz and schist chloritic schist. Contacts are sharp at 20 degrees to the core axis.Trace pyrite and pyrrhotite.

ALTERATION

« Sericite 2.00*»

MINERALIZATION

« Pyrite 0.50%»

« Pyrrhotite 0.50%»


From	To	Rocktype & Description
125.10	154.83	Biotite Chlorite Schist

BIOTITE CHLORITE SCHIST - Continuation of 77.8-124.0m. Medium greyish green, fine grained, strongly foliated, biotite chlorite schist. 3rd generation mineralized veins deminish downhole, however are locally more intense in upper 2 meters of unit . Early generation veins are rare and unmineralized. Schistosity remains constant at approximately 20 degrees to the core axis with local minor tight folding present in upper 10 meters.

ALTERATION

« Sericite 2.00*»


« 127.60- 127.85 Silicification 2.00*»

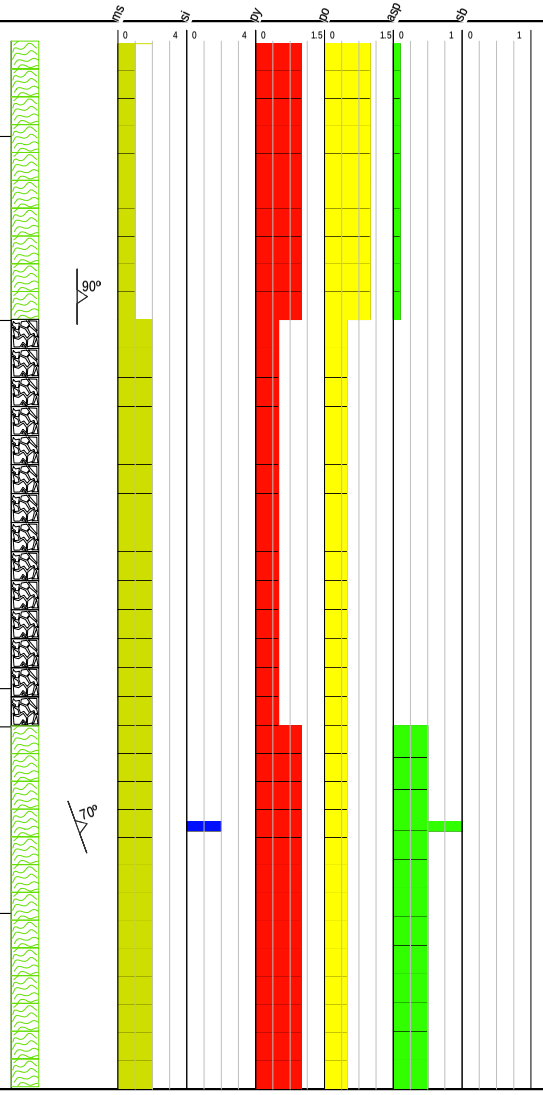

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
124.00	125.90	1.90	I030728	0.06	0.59	224.00	11.50	5.00
125.90	128.30	2.40	I030729	0.26	0.34	872.00	7.94	1.71
128.30	130.40	2.10	I030731	0.02	0.08	3.70	0.14	1.62
130.40	132.90	2.50	I030732	0.17	0.37	130.00	1.29	2.30
132.90	135.40	2.50	I030733	0.01	0.25	1.50	0.09	4.27
135.40	137.90	2.50	I030734	0.02	0.16	128.00	1.55	1.56
137.90	140.40	2.50	I030735	0.01	0.12	0.90	0.08	1.25
140.40	142.90	2.50	I030736	0.04	0.16	230.00	3.40	0.35
142.90	145.40	2.50	I030737	0.01	0.16	4.20	0.14	1.72
145.40	148.40	3.00	I030738	0.01	0.08	1.40	0.12	1.12
148.40	150.90	2.50	I030739	0.01	0.09	1.30	0.10	0.76
150.90	153.40	2.50	I030741	0.01	0.12	0.90	0.11	0.68
153.40	154.22	0.82	I030742	0.01	0.19	0.80	0.14	0.14

Project: Boulevard2010 **Hole Number:** BV10-11

From	To	Rocktype & Description
		« 152.90- 153.30 Epidote 3.00*»
		MINERALIZATION
		« 125.10- 154.83 Pyrite 1.00%»
		« 125.10- 154.83 Pyrrhotite 0.50%»
		« 127.60- 127.85 Arsenopyrite 2.00%»
		« 125.10- 141.0 Arsenopyrite 0.50%»
		VEINING
		3rd generation mineralized quartz Carbonate veining occurs most intensly (3 veins per 10 cm) in the upper 2 meters of the unit at approximately 70 degrees to core axis. Below the upper 2 meters, veining decreases downhole to approximately 1 Vein per 50 cm down to 141.0 m where the last Vein occurs, all at approximately 70 degrees to core axis. Veins are typically <5mm.
		< @ 127.70 ven 70.00° 3.00mm >
		< @ 141.00 ven 75.00° 20.00mm >
		STRUCTURE
		< @ 135.00 S1 Foliation 20.00° >
154.83	154.83	EOH

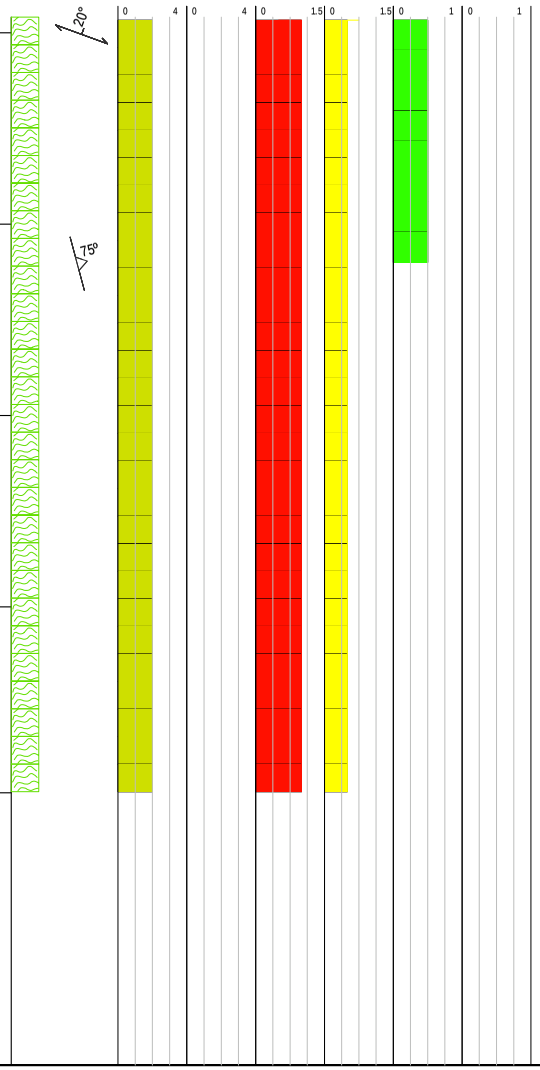

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1314.0
Hole BV10-12	**Azimuth (º):** 45.0
Location: 6966540 m North, 576278 m East	**Dip (º):** -50.0
Logged by: Darcy Baker	**Length (m):** 203.30
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Hollywood trend
Date Started: 2010/06/15 **Date Completed:** 2010/06/17	
Dip Tests By:	

Summary Log:


0-2.44 m CASING
2.44-11.70 m SANDSTONE, c.g., strongly foliated
11.70-31.90 m BIOTITE-CHLORITE SCHIST, strong tectonic foliation, contains minor strongly deformed quartz veins transposed into foliation
31.90-35.50 m SERICITE SCHIST, sericite-carbonate altered, strongly sheared at base, light sandy brown. Alteration is later than schistosity.
35.50-47.80 m CHLORITE-BIOTITE SCHIST, strong tectonic fabric, green-brown, more chlorite dominated
47.80-69.10 m BIOTITE-CHLORITE SCHIST, equivalent to unit starting at 11.7 m
69.10-111.20 m CHLORITE-BIOTITE SCHIST, equivalent to unit starting at 35.5 m
111.20-203.30 m BIOTITE-CHLORITE SCHIST, equivalent to unit starting at 11.7 m, monotonous, strong fabric, locally abundant early (folded, boudinaged) quartz veins with minor pyrrhotite-pyrite and trace chalcopyrite
203.30 m EOH

Downhole surveys:

Depth	Dip	Azimuth
50.90	-48.10	45.00
130.15	-46.00	44.70
173.76	-43.70	40.50
197.21	-43.10	41.80

Project: Boulevard2010 **Hole Number:** BV10-12


From	To	Rocktype & Description
0.00	2.44	CASING
		CASING: overburden, gravel.
2.44	11.70	SANDSTONE
		SANDSTONE: light grey, strongly foliated. Distinct owing to 5 mm white grainsof quartz. Looks to be a c.g. sandstone. White-mica rich but less so than the underlying schist. Minor disseminated blebs of « Pyrrhotite 0.50%» also associated with rare deformed quartz veins.
		Bottom of interval characterized by strong silicification « 11.30- 11.70 Silicification 3.00*» which could just be a vein.
		Two planar calscite veins < @ 10.60 ven 42.00° 3.00mm > and < @ 10.80 ven 34.00° 4.00mm >
		Foliation is pervasive and generaly consisten and strong: < @ 13.40 S1 Foliation 55.00° >
11.70	31.90	BIOTITE-CHLORITE SCHIST
		BIOTITE-CHLORITE SCHIST:grey-green-brown, strongly deformed rock with schistosity defined by abundant biotite and chlorite and probably by some white mica. Distinct from unit below mostly by colour and therefore by chlorite content (i.e unit below is more chloritic). This mineralogy appears to be pretty obviously the regional metamorphic assemblage and is consistent with deformation and metamorphism of a pelitic sedimentary package. Minor disseminated « Pyrrhotite 0.50%» adn « Pyrite 0.50%» < @ 28.40 S1 Foliation 60.00° >
31.90	35.50	SCHIST
		ALTERED SCHIST: looks to be the same bioite-chlorite schist but it is altered

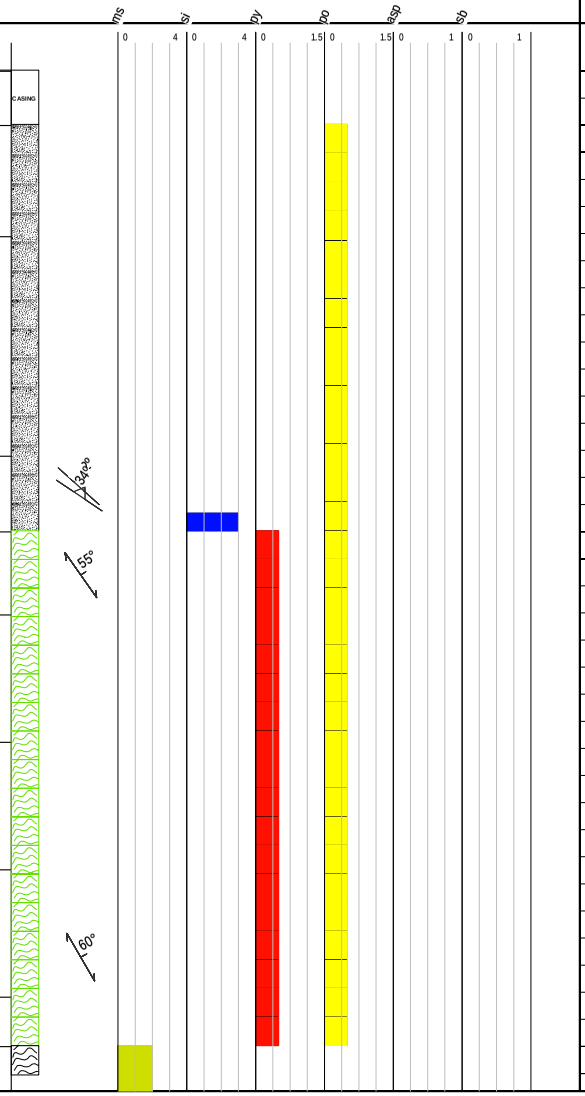

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
9.50	10.50	1.00	I030743	0.01	0.28	0.80	0.15	0.52
10.50	11.70	1.20	I030744	0.01	0.60	0.50	0.13	0.25
11.70	12.70	1.00	I030745	0.01	0.72	10.90	0.10	0.31
30.90	31.90	1.00	I030746	0.01	0.18	0.90	1.77	1.19
31.90	33.00	1.10	I030747	0.03	0.38	34.50	6.58	1.37
33.00	34.10	1.10	I030748	0.02	0.37	38.90	5.47	1.00

Project: Boulevard2010 **Hole Number:** BV10-12

From	To	Rocktype & Description
		locally in patches and also strongly sheared. This deformation appears to cut (rework?) the S1 Foliation schistosity. « Sericite 2.00*» appears as pale brown to light greenish soft rock. Not consistent across whole interval. Lower part of interval is fault breccia « 34.10- 35.50 fault breccia 1.40m». Breccia orientation is not totally clear but most slip planes are at high angle to core axis -- clearly higher than surrounding schistoisty. « Sericite 3.00*» « Pyrite 3.00%» « Arsenopyrite 0.10%» locally associated with quartz calcit veins. < @ 36.00 S1 Foliation 60.00° >
35.50	47.80	CHLORITE-BIOTITE SCHIST
		CHLORITE-BIOTITE SCHIST: green, strongly foliation rock. Distinct from above unit by containing less biotite. This is a an arbitrary break since this unit also contains lots of bioite but the colour contrast is fairly distinct although the contact is gradational and this interval contains short (10 cm) intervals of stronger bioite like the upper unit. Cut by rare boudinaged (early) quartz veins with pyrrhotite. Several portions of the core exhibit tight to isoclinal folding of S1. Minor white patches of « Calcite 1.00%» are locally present. « Pyrrhotite 0.20%»
47.80	69.10	BIOTITE-CHLORITE SCHIST
		BIOTITE-CHLORITE SCHIST: equivalent to unit starting at 11.70 m. brown-reddish colour typical of biotite-bearing rock. Strong fabric. Locally more silica-rich but this is likely due to some sandy beds (i.e. a primary effect). Cut by several boudinaged or folded glassy quartz veins (i.e. early veins) which contain minor blebs of pyrrhotite-pyrite+/- chalcopyrite (very trace). « Pyrite 0.50%» « Pyrrhotite 0.50%» < @ 48.50 S1 Foliation 50.00° > < @ 63.50 S1 Foliation 65.00° >

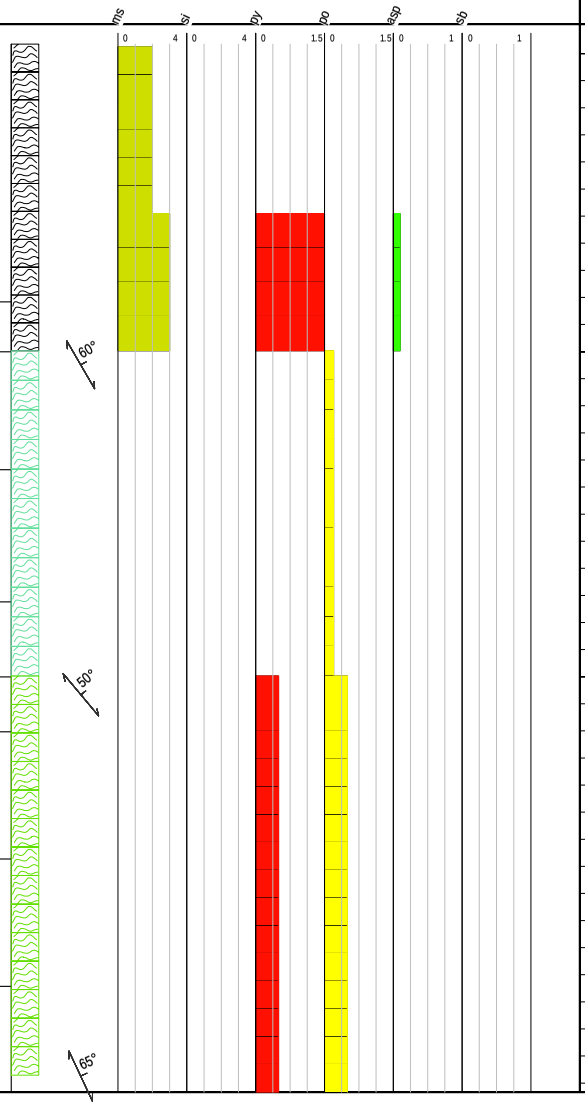

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
34.10	35.50	1.40	I030749	0.29	0.14	1320.00	5.36	0.88
35.50	36.50	1.00	I030751	0.01	0.06	7.70	0.28	0.26


Project: Boulevard2010 **Hole Number:** BV10-12

From	To	Rocktype & Description
69.10	111.20	CHLORITE-BIOTITE SCHIST

CHLORITE-BIOTITE SCHIST: green rock, equivalent to unit beginning at 35.5 m. Contains minor disseminated « Pyrrhotite 0.50%» and « Pyrite 0.50%» within wallrock and as blebs associated with early (boudinaged) quartz +/- calcite veins. « Calcite 1.00%»

One narrow interval is cut by late (planar, discordant) veins with minor bleaching (sericite, carbonate) of wallrock proximal to veins. < @ 94.15 ven 40.00° 5.00mm > calcite-quartz; < @ 94.20 ven 65.00° 8.00mm > calcite-quartz; < @ 94.35 ven 47.00° 5.00mm > calcite -quartz.These veins contain minor pyrite and very trace stibnite? as v.f. disseminated stubby grains.

Foliations (early, S1):
< @ 77.40 S1 Foliation 60.00° >
< @ 85.80 S1 Foliation 55.00° >
< @ 101.80 S1 Foliation 70.00° >

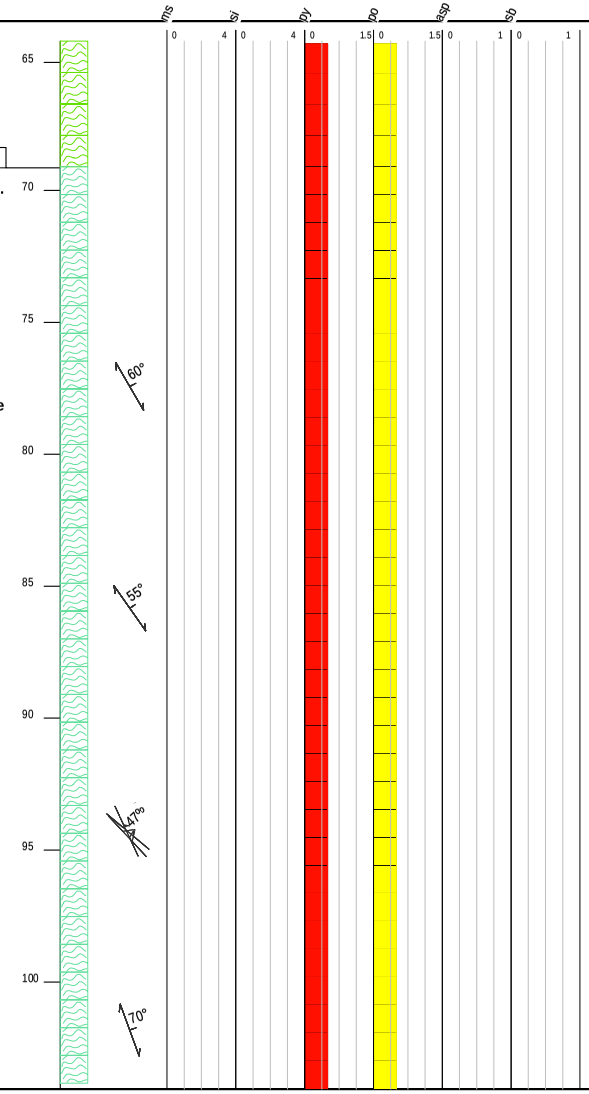

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
93.00	94.00	1.00	I030752	0.01	0.09	6.10	0.20	0.20
94.00	95.40	1.40	I030753	0.02	0.04	56.20	0.82	0.58

Project: Boulevard2010 **Hole Number:** BV10-12

From	To	Rocktype & Description
111.20	203.30	BIOTITE-CHLORITE SCHIST

BIOTITE-CHLORITE SCHIST: Equivalent to unit starting at 47.8 m. Generally brown-reddish. Locally cut by several boudinaged quartz-calcite veins with blebs (locally c.g.) of pyrrhotite+/-pyrite with trace chalcopyrite which is always in grain to grain contact with pyrrhotite. « Pyrrhotite 0.80%» « Pyrite 0.50%» « Chalcopyrite 0.10%» probably less and very rare.

Foliation is locally convoluted.


Unit is cut by two faults: DIfficult to tell the orienation, seems to truncate the main fabirc. contains « Pyrite 1.00%» .

Second fault is at 160.6 m < @ 149.40 Fault 13.00cm > fault gouge. Grey, minor pyrite. Cuts foliation.

Early quartz +/- calcite veins common from about 157.0 to 168.0 (about 3 per metre) and some have assosicated c.g. blebs of pyrrhotite « 157.00- 168.00 Pyrrhotite 2.00%» with minor chalcopyrite. These veins are strongly deformed.

203.30 = EOH


Foliations, pervasive, S1:
< @ 113.80 S1 Foliation 75.00° >
< @ 128.50 S1 Foliation 55.00° >
< @ 136.40 S1 Foliation 60.00° >
< @ 149.00 S1 Foliation 55.00° >
< @ 162.70 S1 Foliation 45.00° >
< @ 170.50 S1 Foliation 60.00° >
< @ 179.60 S1 Foliation 55.00° >

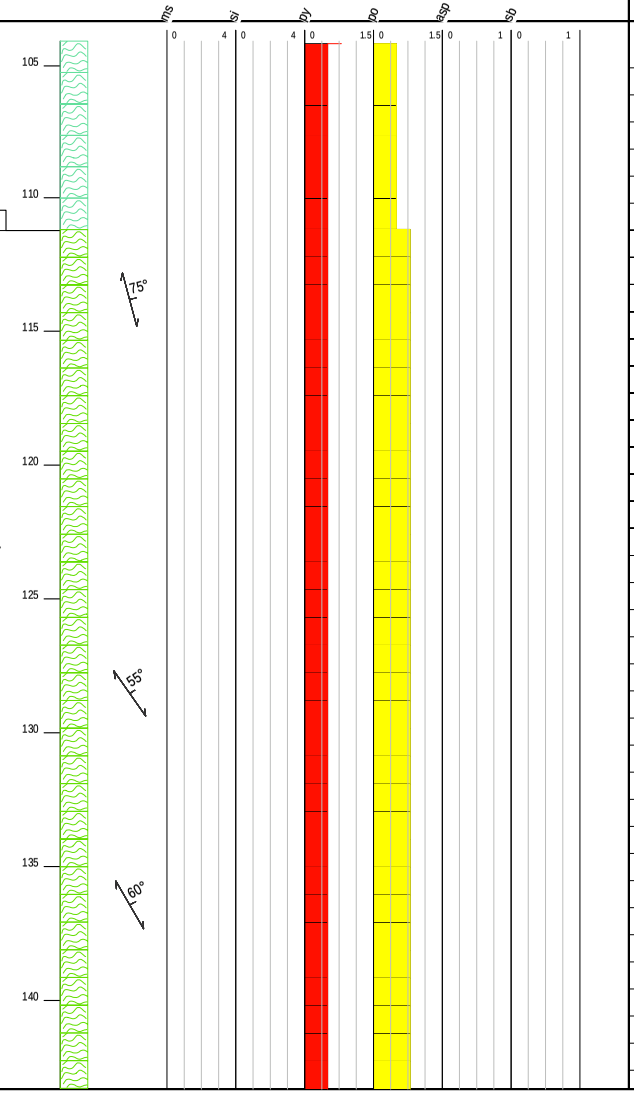

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
148.40	149.40	1.00	I030754	0.01	0.19	0.50	0.06	1.21
149.40	149.90	0.50	I030755	0.03	0.56	2.00	0.16	0.99
149.90	150.90	1.00	I030756	0.01	0.15	0.20	0.05	0.96
150.90	153.00	2.10	I030757	0.01	0.21	0.40	0.05	1.07
153.00	155.00	2.00	I030758	0.01	0.35	0.30	0.05	1.08
155.00	157.00	2.00	I030759	0.02	0.34	0.30	0.05	0.64
157.00	159.00	2.00	I030761	0.02	0.37	8.20	0.07	0.81
159.00	161.00	2.00	I030762	0.03	0.63	0.30	0.06	1.33
161.00	163.00	2.00	I030763	0.01	0.31	0.50	0.05	1.26
163.00	165.00	2.00	I030764	0.01	0.22	0.50	0.05	1.60
165.00	167.00	2.00	I030765	0.01	0.17	0.20	0.05	0.99
167.00	168.70	1.70	I030766	0.01	0.26	0.40	0.06	1.85

Project: Boulevard2010 **Hole Number:** BV10-12


From	To	Rocktype & Description

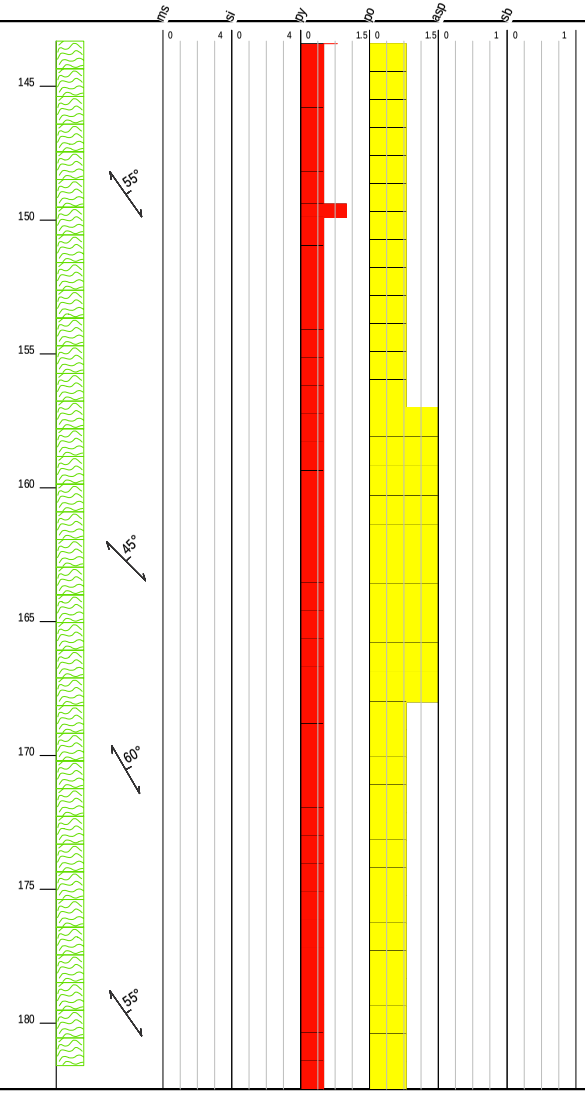

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-12

From	To	Rocktype & Description
203.30	203.30	EOH

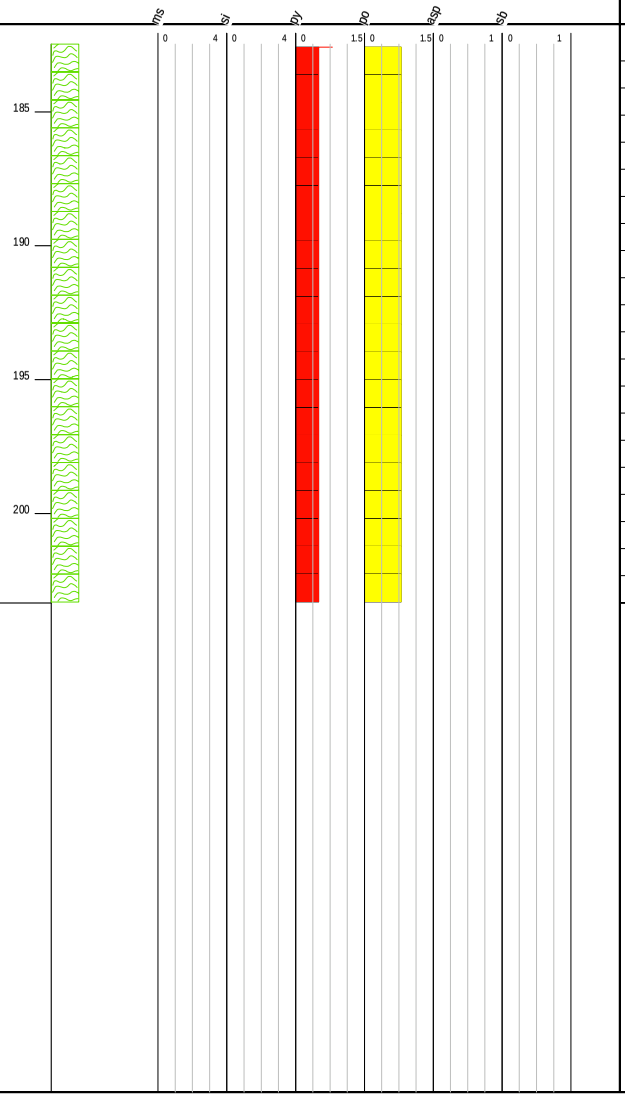

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1311.0
Hole BV10-13	**Azimuth (º):** 45.0
Location: 6966478 m North, 576360 m East	**Dip (º):** -50.0
Logged by: Ryan Toole	**Length (m):** 203.33
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Hollywood trend
Date Started: 2010/06/18 **Date Completed:** 2010/06/19	
Dip Tests By:	

Summary Log:

3.66-20.10m QUARTZ-PHYRIC SCHIST; light grey, fine grained, quartz-phyric schist. Unit is moderately silicified and sericitized. Sharp lower contact with biotite chlorite schist at 40 degrees to core axis.

20.10-38.49m BIOTITE CHLORITE SCHIST - Dark grey, fine grained, moderately foliated, biotite chlorite schist.Trace disseminated pyrite and pyrrhotite with minor 1mm blebs associated with veining. 1st generation veining is locally tightly folded. Local interval of chlorite biotite schist.

38.49-54.64m BIOTITE CHLORITE SCHIST - Dark grey, fine grained, moderately foliated, biotite chlorite schist with intense 2nd and 3rd generation veining. Lower contact is sharp with chlorite biotite schist where veining also terminates.

54.64-72.84CHLORITE BIOTITE SCHIST - Medium to dark green, fine grained, moderately foliated, chlorite biotite schist, Massive and featureless. 90% chlorite, 10% Biotite. Sharp lower contact parallel to foliation.

72.84-86.17m BIOTITE CHLORITE SCHIST - Medium to dark grey, fine grained, moderately foliated, biotite chlorite schist. Sharp lower contact with chlorite biotite schist.

86.17-110.70m CHORITE BIOTITE SCHIST - Continuation of 54.64-72.84m. Medium to dark green, fine grained, moderately foliated, chlorite biotite schist, Massive and featureless. 90% chlorite, 10% Biotite. No visible arsenopyrite throughout unit. Trace pyrrhotite disseminate throughout unit.

110.70-129.36m BIOTITE CHLORITE SCHIST - Medium to dark grey, fine grained, moderately foliated, biotite chlorite schist. Trace pyrrhotite and pyrite occurs as disseminations in schist, and as cubes/blebs along 2nd generation Vein boundaries. Sharp lower contact at 60 degrees to core axis.

129.36-130.38m ULTRAMAFIC TALC SCHIST - Med green, fine grained, moderately foliated, talc schist.Unit has weak local gouging parallel to foliation. Sharp lower contact at 70 degrees to core axis.

130.38-134.18m BIOTITE CHLORITE SCHIST - Medium grey, fine grained, moderately foliated, biotite chlorite schist. 1st generation veining is locally folded. Unit becomes blocky and gouged from 131.06-131.70m. Sharp lower contact at 70 degrees.

134.18-138.00 ULTRAMAFIC TALC SCHIST - Medium to light green, fine grained, moderately foliated, talc schist. Local dark green chloritic bands. 5% calcareous porphyroblasts (?) have been stretched along foliation. Rare local boudinaged calcite veins. Unit has weak local gouging parallel to foliation. Sharp lower contact at 40 degrees to core axis.

138.00-153.50 BIOTITE CHLORITE SCHIST - Medium to dark grey, fine grained, moderately foliated, biotite chlorite schist. Sharp lower contact at 35 degrees to core axis.

153.50-155.00m ULTRAMAFIC TALC SCHIST - Medium to light green, fine grained, moderately foliated, talc schist. Local dark green chloritic bands. Sharp lower contact at 30 degrees to the core axis.

155.00-203.33m BIOTITE CHLORITE SCHIST - Medium to dark grey, fine grained, moderately foliated, biotite chlorite schist. No visible arsenopyrite in hole. EOH

Downhole surveys:

Depth	Dip	Azimuth
50.90	-49.40	43.50
121.00	-48.10	44.30
197.21	-47.80	45.70

Project: Boulevard2010 **Hole Number:** BV10-13

From	To	Rocktype & Description
0.00	3.66	Casing
		CASING - Overburden
3.66	20.10	Quartzphyric Schist

Quartzphyric Schist - Light grey, fine grained, quartzphyric schist. This unit strongly resembles a quartzphyric sandy ash tuff. It was also collared into in BV10-12. Unit is moderately silicified and sericitized. 1-2 mm milky quartz crystals make up 5% of unit. Unit has a weak foliation and quartz crystals have been rotated shown by grain tail complexes. Rare faint bands of Fe rich chlorite alteration typically 1-2 cm wide, parallel to foliation. Foliation remains consitent at 40 degrees to the core axis. Local interbedded units of biotite chlorite schist. Sharp lower contact with biotite chlorite schist at 40 degrees to core axis.

ALTERATION

« Silicification 2.00*»
« Sericite 2.00*»

MINERALIZATION

No visible mineralization of any kind


STRUCTURE

< @ 5.00 S1 Foliation 40.00° >

INTERBEDDED INTERVALS

Biotite Chlorite Schist interbedded intervals occur from 8.20-8.75, 9.00-11.48, and 18.40-19.62.

« 8.20- 8.75 Bt Chl Schist »
« 9.00- 11.48 Bt Chl Schist »
« 18.40- 19.62 Bt Chl Schist »

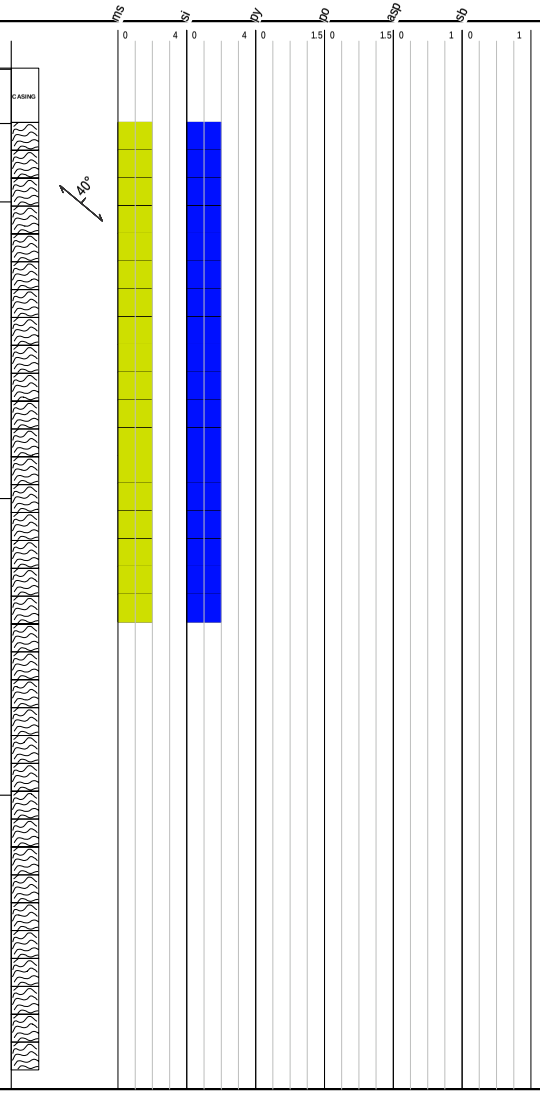

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-13

From	To	Rocktype & Description
20.10	38.49	Biotite Chlorite Schist

BIOTITE CHLORITE SCHIST - Dark grey, fine grained, strongly foliated, biotite chlorite schist. Rare 1st and 2nd generation veins transposed along foliation and boudinaged. Trace disseminated pyrite and pyrrhotite with minor 1mm blebs associated with veining. 1st generation veining is locally tightly folded. Local interval of chlorite biotite schist. Lower contact is marked by presence of 3rd generation veining.

ALTERATION

« 20.10- 28.00 Silicification 1.00*»

« 37.60- 38.30 Sericite 4.00*»

MINERALIZATION

« Pyrite 0.50%»

« Pyrrhotite 0.50%»

STRUCTURE

< @ 23.00 S1 Foliation 40.00° >
< @ 28.00 S1 Foliation 40.00° >
< @ 33.00 S1 Foliation 50.00° >


Fault/Gouge Zone 37.60 - 38.30 that is intensly sericitized and blocky.

INTERBEDDED UNITS

« 26.80- 27.77 Chl Bt Schist »

From	To	Rocktype & Description
38.49	54.64	Biotite Chlorite Schist

BIOTITE CHLORITE SCHIST - Dark grey, fine grained, strongly foliated, biotite chorite schist with intense 2nd and 3rd generation veining. 3rd generation

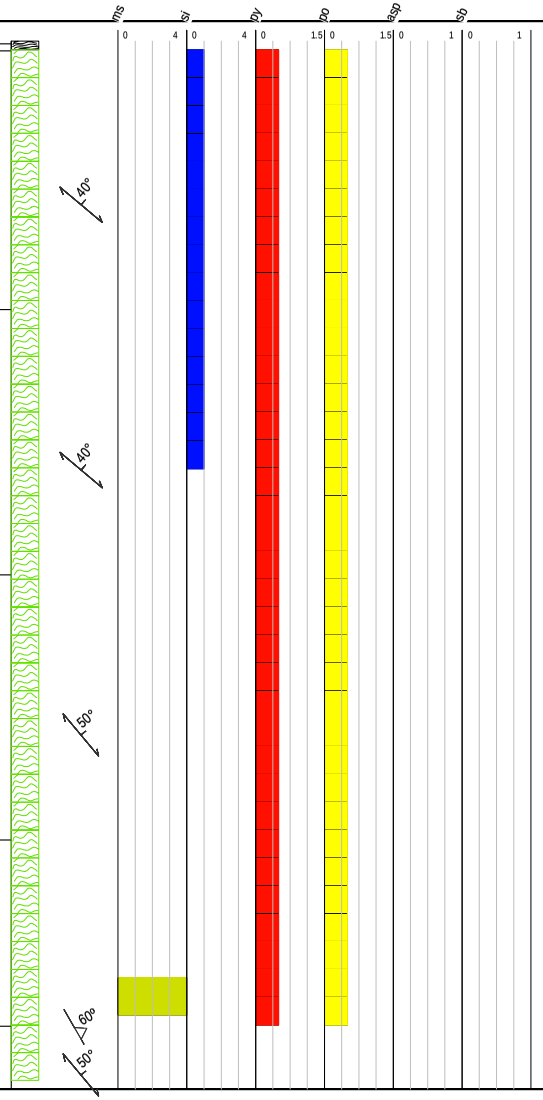

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
36.50	38.50	2.00	I030767	0.24	0.98	577.00	25.00	2.99
38.50	40.50	2.00	I030768	0.10	0.30	450.00	8.43	2.05
40.50	42.50	2.00	I030769	0.01	0.37	5.00	0.27	2.81
42.50	44.50	2.00	I030771	0.01	0.17	12.80	0.23	3.74

Project: Boulevard2010 **Hole Number:** BV10-13

From	To	Rocktype & Description

veining, which is typically mineralized with arsenopyrite, has only very rare trace amounts of asp, with minor pyrite and trace pyrrhotite. 2nd generation veining is transposed along foliation, is locally folded, and generally <5cm. 3rd generation veins are generally at 65 degrees to the core axis and generally 2-3mm in width. Lower contact is sharp with chlorite biotite schist where veining also terminates.

ALTERATION

« 48.00- 57.60 Silicification 1.00*»

« 49.90- 50.90 Sericite 3.00*»

MINERALIZATION

« Pyrite 1.00%»
« Pyrrhotite 0.50%»
« Arsenopyrite 0.10%»

STRUCTURE

2nd generation veins average approximately 4 Veins/m.

< @ 41.00 ven 40.00° 50.00mm > 2nd Generation

< @ 45.40 ven 65.00° 70.00mm> 2nd Generation


3rd generation veins average approximately 1 Vein/m, with local intense zones up to 5 Veins/m.

< @ 38.55 ven 60.00° 3.00mm > 3rd Generation

< @ 47.90 ven 70.00° 4.00mm > 3rd Generation

Shear Zone


46.55-46.90 @ 70°

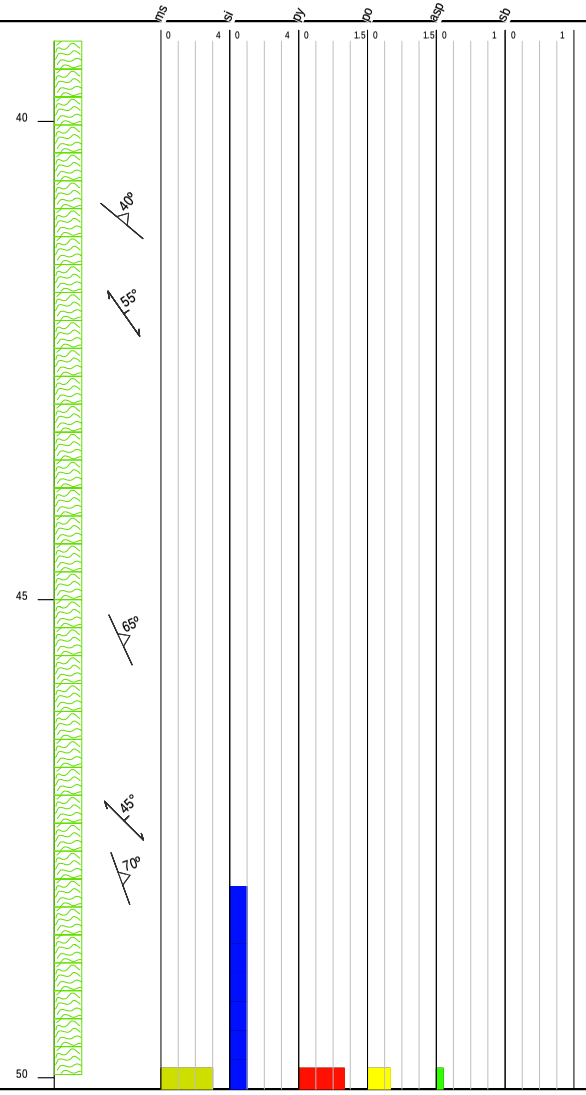

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
44.50	46.50	2.00	I030772	0.01	0.32	2.30	0.92	4.85
46.50	48.50	2.00	I030773	0.15	0.65	346.00	9.71	3.45
48.50	50.90	2.40	I030774	0.35	1.05	1920.00	22.20	0.91
50.90	52.90	2.00	I030775	0.01	0.17	14.40	0.47	1.08
52.90	54.60	1.70	I030776	0.01	0.15	1.50	0.31	1.34

Project: Boulevard2010 **Hole Number:** BV10-13


From	To	Rocktype & Description
		Shistosity
		< @ 39.00 S1 Foliation 50.00° >
		< @ 42.00 S1 Foliation 55.00° >
		< @ 47.30 S1 Foliation 45.00° >
		< @ 51.00 S1 Foliation 50.00° >
		< @ 53.90 S1 Foliation 45.00° >
54.64	72.84	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Medium to dark green, fine grained, strongly foliated, chlorite biotite schist, Massive and featureless. 90% chlorite, 10% Biotite. Rare 1st generation quartz veins present with trace pyrite and pyrrhotite associated with contacts. No visible arsenopyrite throughout unit. Rare 2nd-3rd (?) generation quartz calcite veins present cross cutting foliation with no associated mineralization of any kind. Sharp lower contact parallel to foliation.
		ALTERATION
		None
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 61.65 ven 55.00° 3.00mm > 1st Generation

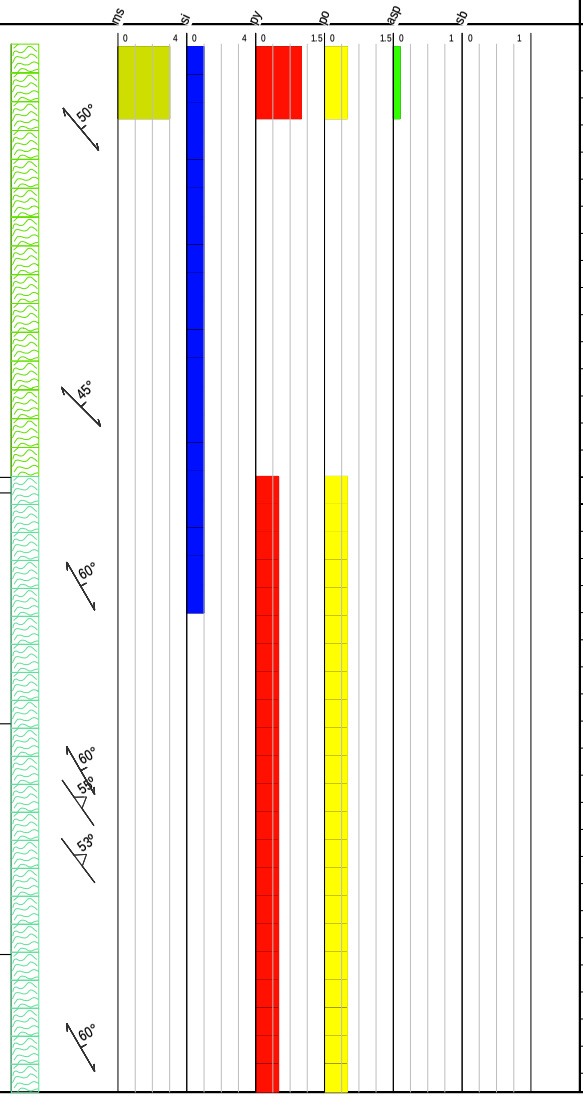

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
54.60	55.60	1.00	I030777	0.01	0.12	1.40	0.72	0.36

Project: Boulevard2010 **Hole Number:** BV10-13


From	To	Rocktype & Description
		< @ 62.90 ven 53.00° 15.00mm > 1st Generation
		< @ 69.90 ven 80.00° 2.00mm > 2nd -3rd (?) Generation
		< @ 57.00 S1 Foliation 60.00° >
		< @ 61.00 S1 Foliation 60.00° >
		< @ 67.00 S1 Foliation 60.00° >
		< @ 70.50 S1 Foliation 50.00° >
72.84	86.17	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium to dark grey, fine grained, strongly foliated, biotite chlorite schist. Rare 2nd generation quartz veining transposed along foliation with 2 late carb stringers at 77.5m cross cutting foliation; no mineralization associated with late carb stringers. 2nd generation veining has trace occurances of chalcopyrite associated with pyrrhotite. Sharp lower contact with chlorite biotite schist.
		ALTERATION
		« Sericite 1.00*»
		MINERALIZATION
		« Pyrite 0.50%» Associated with 2nd generation veining
		« Pyrrhotite 0.50%» Associated with 2nd generation veining
		« Chalcopyrite 0.10%» Associated with pyrrhotite in 2nd generation veining
		STRUCTURE
		< @ 77.75 ven 65.00° 50.00mm > 2nd generation
		< @ 77.50 ven 50.00° 3.00mm > Carb stringers cross cutting foliation
		SCHISTOSITY
		< @ 75.00 S1 Foliation 55.00° >
		< @ 78.00 S1 Foliation 55.00° >

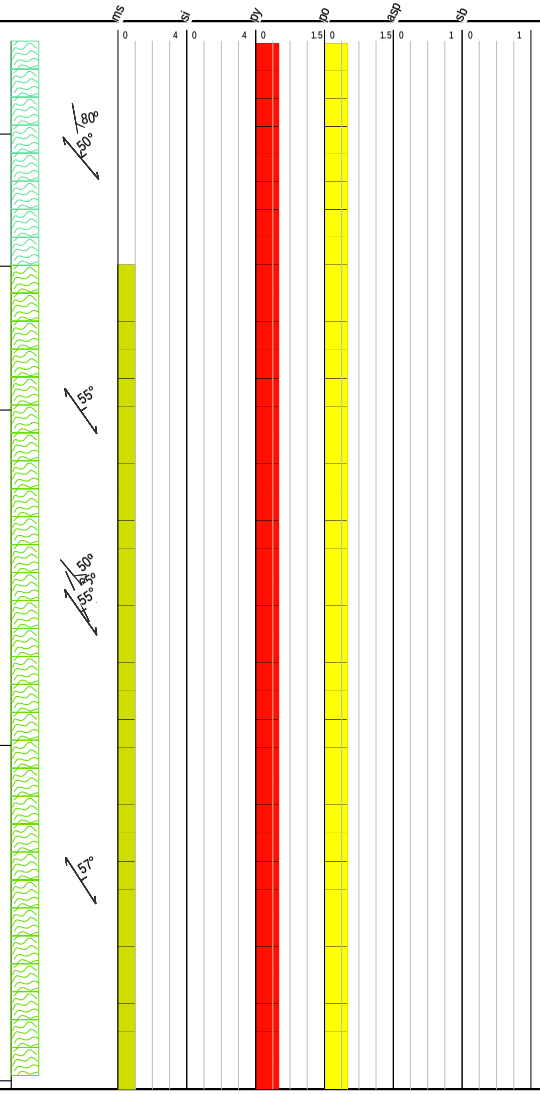

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
76.00	77.00	1.00	I030778	0.01	0.12	0.60	0.11	1.35
77.00	78.20	1.20	I030779	0.01	0.13	2.80	0.19	1.26
78.20	79.20	1.00	I030781	0.01	0.25	0.70	0.05	1.35

Project: Boulevard2010 **Hole Number:** BV10-13

From	To	Rocktype & Description
		< @ 82.00 S1 Foliation 57.00° >
86.17	110.70	Chlorite Biotite Schist
		CHORITE BIOTITE SCHIST - Continuation of 54.64-72.84m. Medium to dark green, fine grained, strongly foliated, chlorite biotite schist, Massive and featureless. 90% chlorite, 10% Biotite. No visible arsenopyrite throughout unit. Rare 2nd-3rd (?) generation quartz calcite veins present dominantly parallel to foliation with rare sporatic veins cross cutting foliation with no associated mineralization of any kind. Trace pyrrhotite disseminate throughout unit.
		ALTERATION
		None
		MINERALIZATION
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 88.05 ven 55.00° 10.00mm > 2nd-3rd (?) generation quartz calcite Vein. Generally one of these veins per 1m of core.
		SCHISTOSITY
		< @ 90.00 S1 Foliation 50.00° >
		< @ 94.00 S1 Foliation 50.00° >
		< @ 99.00 S1 Foliation 55.00° >
		INTERBEDDED UNIT
		« 91.90- 93.47 Bt Chl Schist » Interval of Biotite Chlorite Schist with sharp contacts parallel to foliation.

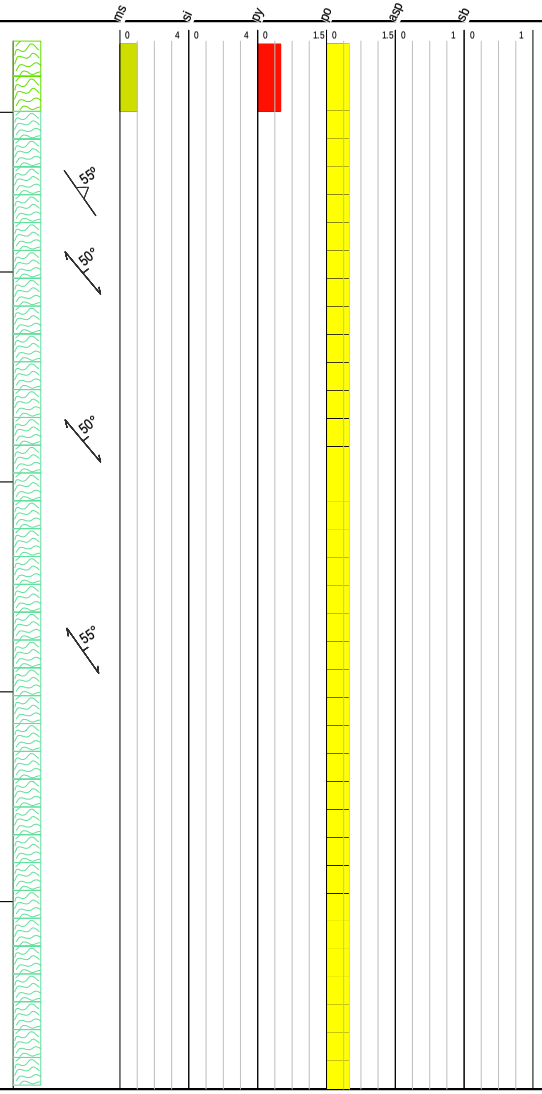

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-13

From	To	Rocktype & Description
110.70	129.36	Biotite Chlorite Schist

BIOTITE CHLORITE SCHIST - Medium to dark grey, fine grained, strongly foliated, biotite chorite schist. 1st generation veining is locally tightly folded, transposed along schistosity, and <10mm in width. 2nd generation veining is transposed along schistosity, and <50mm in width. Trace pyrrhotite and pyrite occurs as disseminations in schist, and as cubes/belbs along 2nd generation Vein boundaries. Sharp lower contact at 60 degrees to core axis.

ALTERATION

None

MINERALIZATION

« Pyrite 0.50%»
« Pyrrhotite 0.50%»

STRUCTURE

< @ 120.00 S1 Foliation 50.00° >
< @ 125.00 S1 Foliation 49.00° >
< @ 128.00 S1 Foliation 45.00° >

< @ 114.70 ven 50.00° > 1st generation Vein

< @ 119.50 ven 60.00° > 2nd generation Vein

From	To	Rocktype & Description
129.36	130.38	Ultramafic Talc Schist

ULTRAMAFIC TALC SCHIST - Med green, fine grained, moderately foliated, talc schist. Local dark green chloritic bands. 5% calcareous porphyroblasts (?) have been stretched along foliation. Unit has weak local gouging parallel to foliation. Sharp lower contact at 70 degrees to core axis.


ALTERATION

None

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-13

From	To	Rocktype & Description
		MINERALIZATION
		None
		STRUCTURE
		< @ 130.00 S1 Foliation 50.00° >
130.38	134.18	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium grey, fine grained, strongly foliated, biotite chlorite schist. 1st generation veining is locally folded. local occurancesof 4th (?) generation calcite veining from 130.80-131.06m. No associated mineralization. Unit becomes blocky and gouged from 131.06-131.70m. Sharp lower contact at 70 degrees.
		ALTERATION
		« 131.06- 131.70 Sericite 1.00*»
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 131.02 ven 20.00° > 4th generation veins
		< @ 133.00 S1 Foliation 50.00° >
		FAULT GOUGE
		< @ 131.50 Fault Gouge 85.00º 5.00cm >
134.18	138.00	Ultramfic Talc Schist
		ULTRAMAFIC TALC SCHIST - Medium to light green, fine grained, strongly foliated, talc schist. Local dark green chloritic bands. 5% calcareous

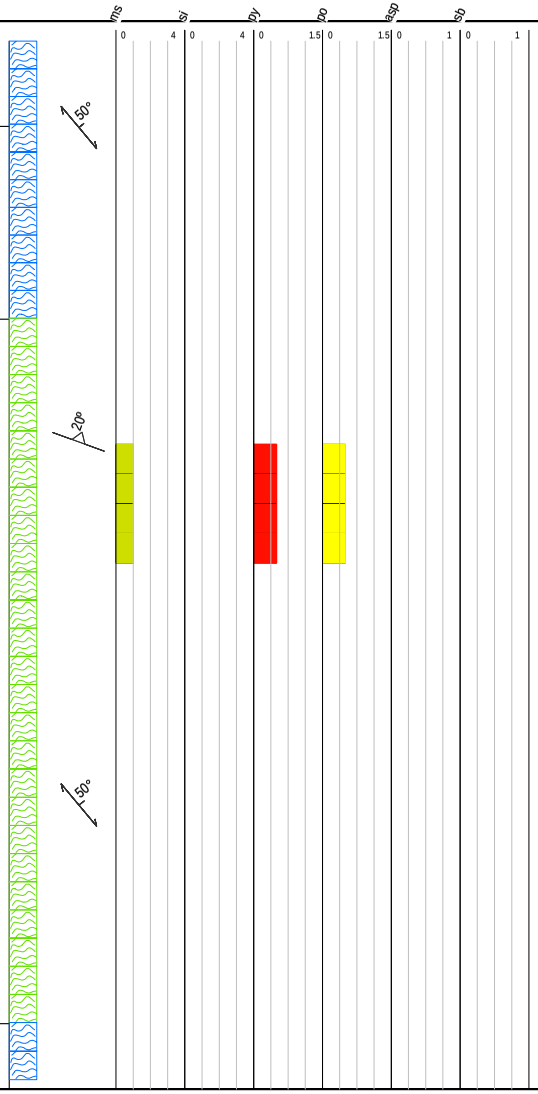

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-13

From	To	Rocktype & Description

porphyroblasts (?) have been stretched along foliation. Rare local boudinaged calcite veins. Unit has weak local gouging parallel to foliation. Sharp lower contact at 40 degrees to core axis.

ALTERATION

None

MINERALIZATION

None

STRUCTURE

< @ 136.00 S1 Foliation 27.00° >

< @ 137.00 S1 Foliation 30.00° >

138.00	153.50	Biotite Chlorite Schist

BIOTITE CHLORITE SCHIST - Medium to dark grey, fine grained, strongly foliated, biotite chorite schist. 1st generation veining is locally tightly folded, boudinaged, transposed along schistosity, and <10mm in width. 2nd generation veining is transposed along schistosity, and locally 15 cm in width. @ 147.20m, a 2nd generation Vein looks to have a splay that cross cuts foliation, suggesting that these 2nd generation sweats may have been implaced along foliation planes, and postdate foliation. Trace pyrrhotite and pyrite occurs as disseminations in schist, and as cubes/belbs along 2nd generation Vein boundaries. Sharp lower contact at 35 degrees to core axis.


ALTERATION

« 138.50- 144.40 Sericite 1.00*»

MINERALIZATION

« Pyrite 1.00%»
« Pyrrhotite 1.00%»


STRUCTURE

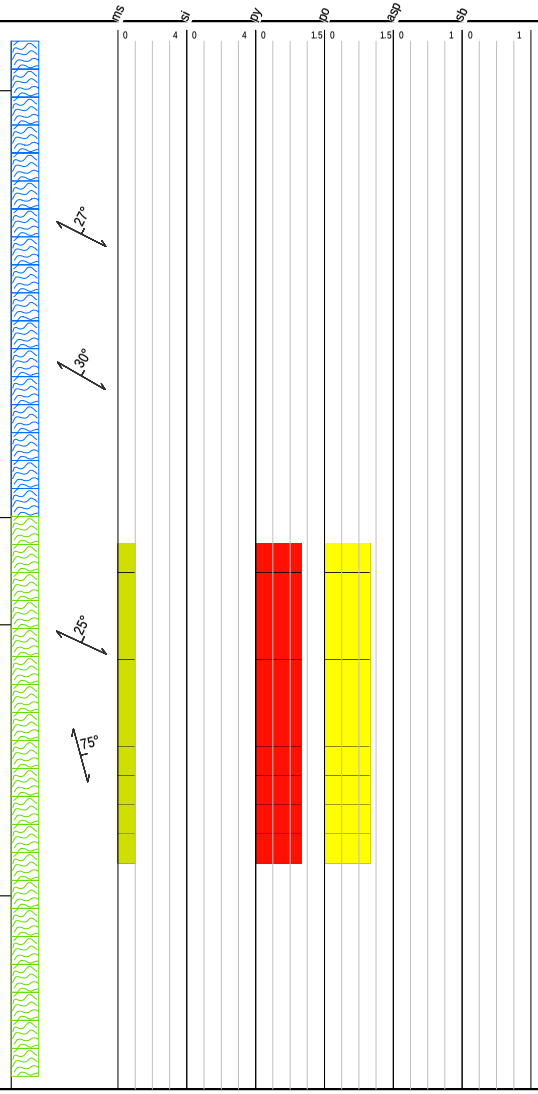

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-13


From	To	Rocktype & Description
		< @ 140.30 S1 Foliation 25.00° >
		< @ 142.40 S1 Foliation 75.00° >
		< @ 150.00 S1 Foliation 75.00° >
		FAULT
		< @ 140.36 Fault 20.00° 154.00cm >
153.50	155.00	Ultramafic Talc Schist
		ULTRAMAFIC TALC SCHIST - Medium to light green, fine grained, moderately foliated, talc schist. Local dark green chloritic bands. Sporatic 4th generation calcite veins <3mm in width occur from 153.9 to 155.2m. Lower 15cm is gouged. Sharp lower contact at 30 degrees to the core axis.
		ALTERATION
		None
		MINERALIZATION
		None
		STRUCTURE
		< @ 154.20 S1 Foliation 35.00° >
		< @ 154.20 ven 15.00° 3.00mm > 4th generation unmineralized calcite veining.
		Fault Gouge
		< @ 154.85 Fault Gouge 30.00° 15.00cm >
155.00	203.33	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium to dark grey, fine grained, strongly foliated, biotite chorite schist. 1st generation veining is locally tightly folded, transposed along schistosity, and <10mm in width. 2nd generation veining is transposed along schistosity, and <15cm in width. Trace pyrrhotite and pyrite

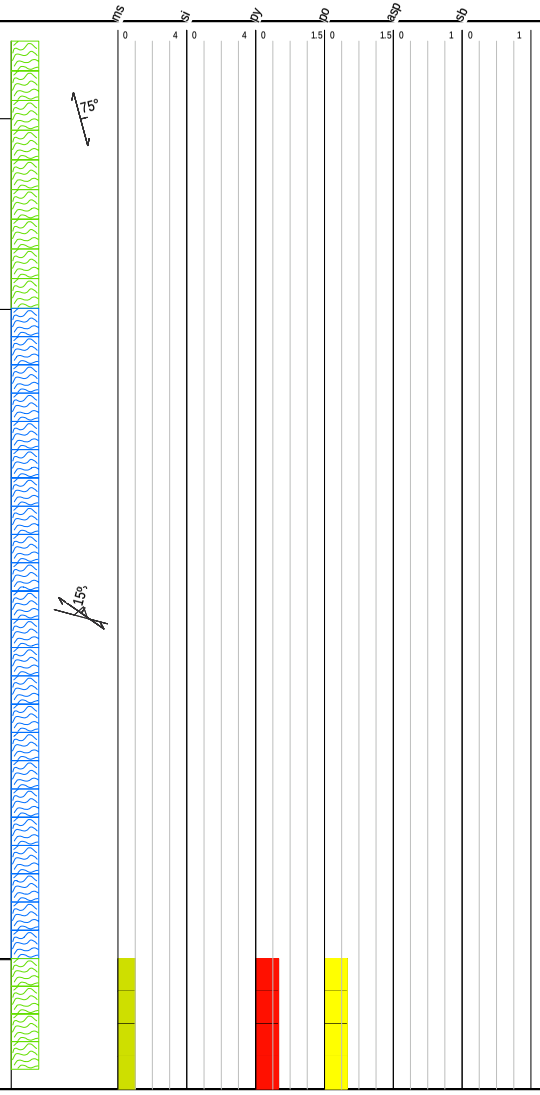

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
153.50	155.00	1.50	I030782	0.01	0.05	55.40	0.18	0.85

Project: Boulevard2010 **Hole Number:** BV10-13


From	To	Rocktype & Description
		occurs as disseminations in schist, and as cubes/belbs along 2nd generation Vein boundaries. Unit is locally gouged. No visible arsenopyrite in hole. EOH
		ALTERATION
		« 155.00- 179.00 Sericite 1.00*»
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 165.00 S1 Foliation 50.00° >
		< @ 175.00 S1 Foliation 52.00° >
		< @ 185.00 S1 Foliation 50.00° >
		< @ 195.00 S1 Foliation 51.00° >
		FAULT GOUGES
		< @ 183.70 Fault Gouge 50.00º 5.00cm >
		< @ 184.30 Fault Gouge 50.00º 10.00cm >
		SHEAR PLANES
		< @ 163.90 Shear Plane 50.00º >
		< @ 171.10 Shear Plane 50.00º >

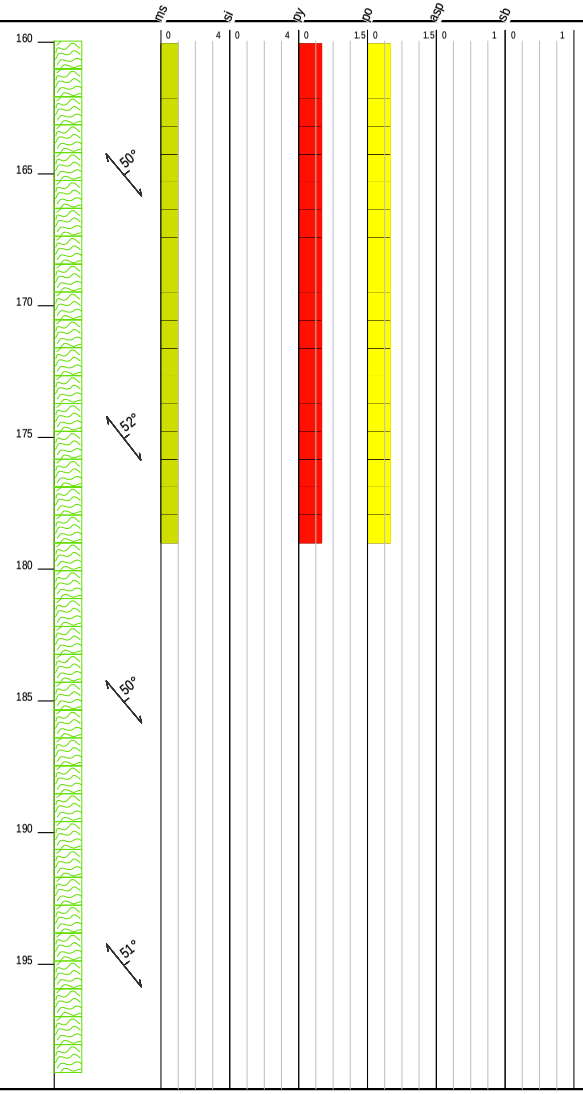

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-13

From	To	Rocktype & Description
	200	
203.33	203.33	EOH

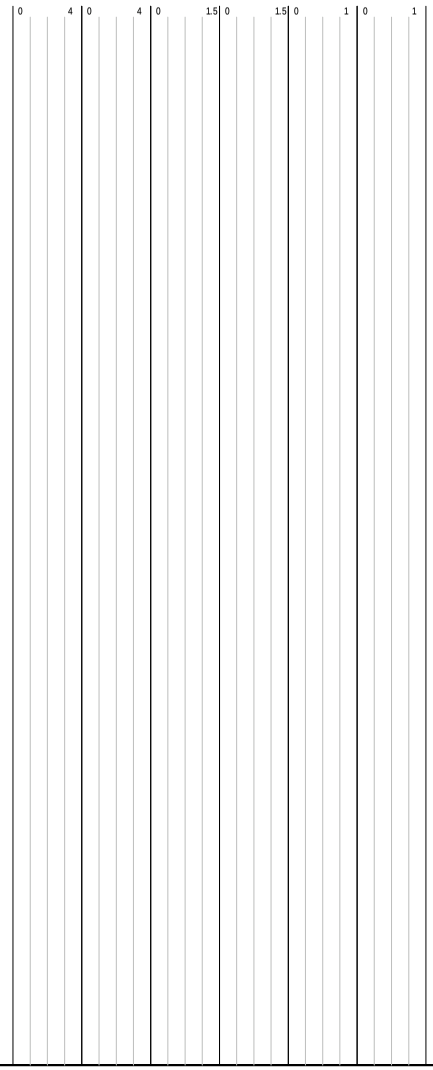

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1311.0
Hole BV10-14	**Azimuth (º):** 45.0
Location: 6966758 m North, 575902 m East	**Dip (º):** -50.0
Logged by: Ryan Toole	**Length (m):** 208.88
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Hollywood trend
Date Started: 2010/06/20 **Date Completed:** 2010/06/21	
Dip Tests By:	

Summary Log:

0.0-2.43m Casing

2.43-144.96m BIOTITE CHLORITE SCHIST - Medium to dark grey, fine grained, moderately foliated, biotite chlorite schist. Upper 10 m is locally blocky with iron oxide staining along fractures. 1st generation veining is locally tightly folded, transposed along schistosity, and <10mm in width. 2nd generation is typically oriented along foliation with rare "sweats" cross cutting foliation, suggesting these were emplaced along foliation planes. Trace pyrrhotite and pyrite occurs as disseminations in schist, and as cubes/blebs along 2nd generation Vein boundaries.

144.96-149.85m FLT GOUGE - blocky, fractured and strongly altered biotite chlorite schist

149.85-208.88m BIOTITE CHLORITE SCHIST - Same as before

208.88m EOH

Downhole surveys:

Depth	Dip	Azimuth
56.08	-50.30	48.00
129.24	-47.80	46.60
202.39	-46.50	45.60

Project: Boulevard2010 **Hole Number:** BV10-14

From	To	Rocktype & Description
0.00	2.43	Casing
		CASING - Overburden
2.43	144.96	Biotite Chlorite Schist

BIOTITE CHLORITE SCHIST - Medium to dark grey, fine grained, strongly foliated, biotite chorite schist. Upper 10 m is locally blocky with iron oxide staining along fractures. 1st generation veining is locally tightly folded, transposed along schistosity, and <10mm in width. 2nd generation is typically oriented along foliation with rare sweats cross cutting foliation, suggesting these were implaced along foliation planes. Trace pyrrhotite and pyrite occurs as disseminations in schist, and as cubes/belbs along 2nd generation vein boundaries.Core becomes locally blocky from 126.30 to bottom of unit. Broken blocky lower contact with fault zone.

ALTERATION

« Sericite 1.00*»

MINERALIZATION


« Pyrite 0.50%»
« Pyrrhotite 0.50%»

STRUCTURE

< @ 10.00 S1 Foliation 45.00° >
< @ 20.00 S1 Foliation 65.00° >
< @ 30.00 S1 Foliation 65.00° >
< @ 45.00 S1 Foliation 60.00° >
< @ 60.00 S1 Foliation 56.00° >
< @ 75.00 S1 Foliation 55.00° >
< @ 90.00 S1 Foliation 65.00° >
< @ 105.00 S1 Foliation 65.00° >
< @ 120.00 S1 Foliation 56.00° >
< @ 130.00 S1 Foliation 57.00° >

FAULT GOUGES


< @ 29.05 Fault Gouge 48.00° 5.00cm >

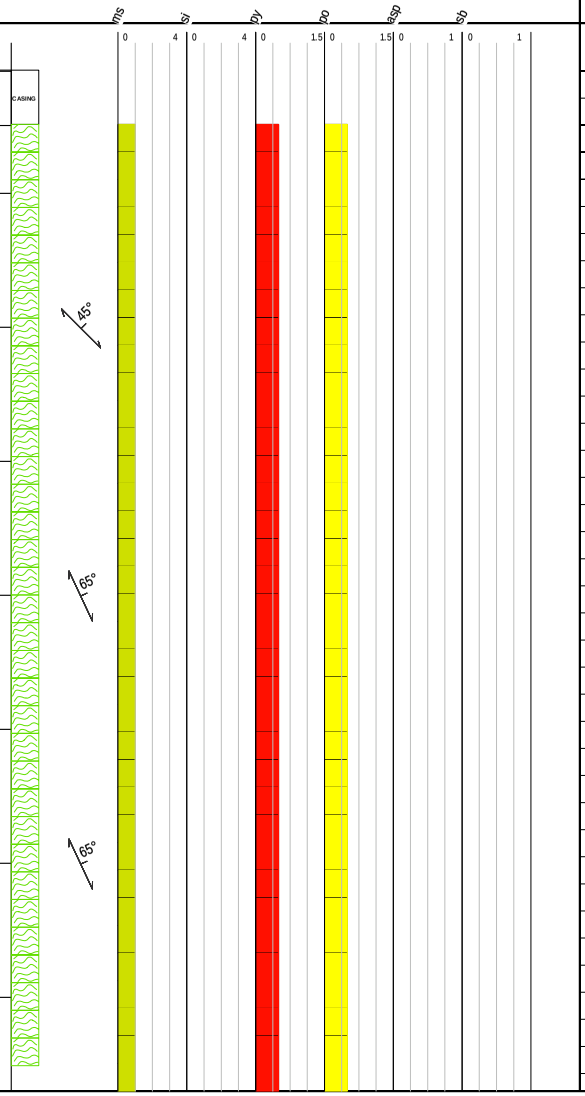

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
35.40	36.40	1.00	I030790	0.01	0.14	0.40	0.18	0.98
36.40	37.60	1.20	I030792	0.01	0.17	1.70	0.31	1.30
37.60	38.60	1.00	I030793	0.01	0.22	8.10	0.26	2.29

Project: Boulevard2010 **Hole Number:** BV10-14


From	To	Rocktype & Description
		< @ 40.60 Fault Gouge 80.00° 10.00cm >
		< @ 69.80 Fault Gouge 70.00° 3.00cm >

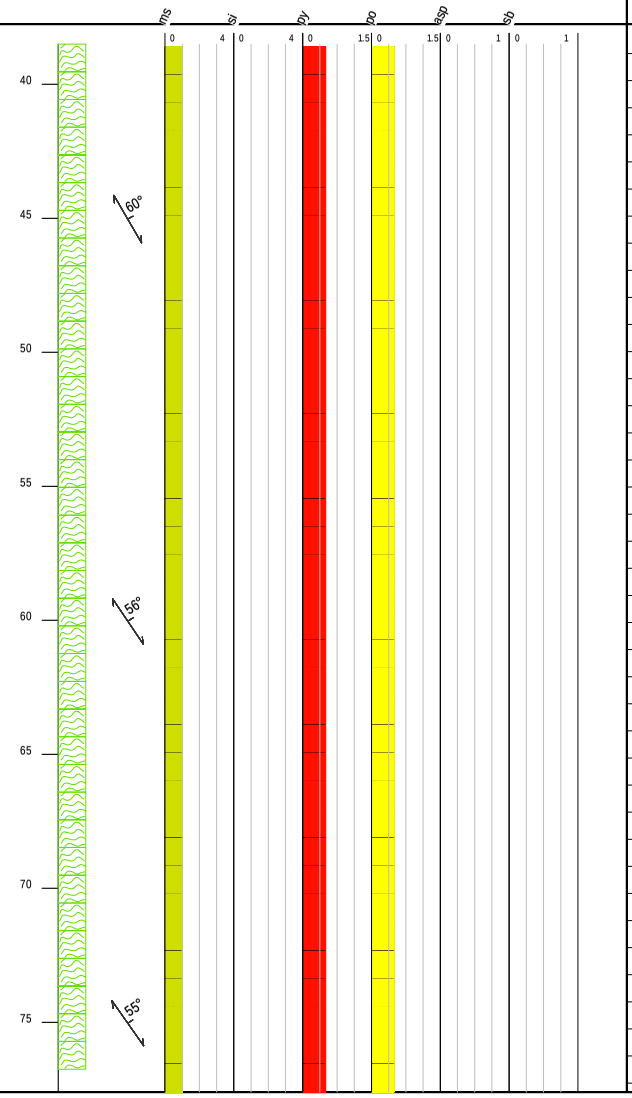

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-14

From	To	Rocktype & Description

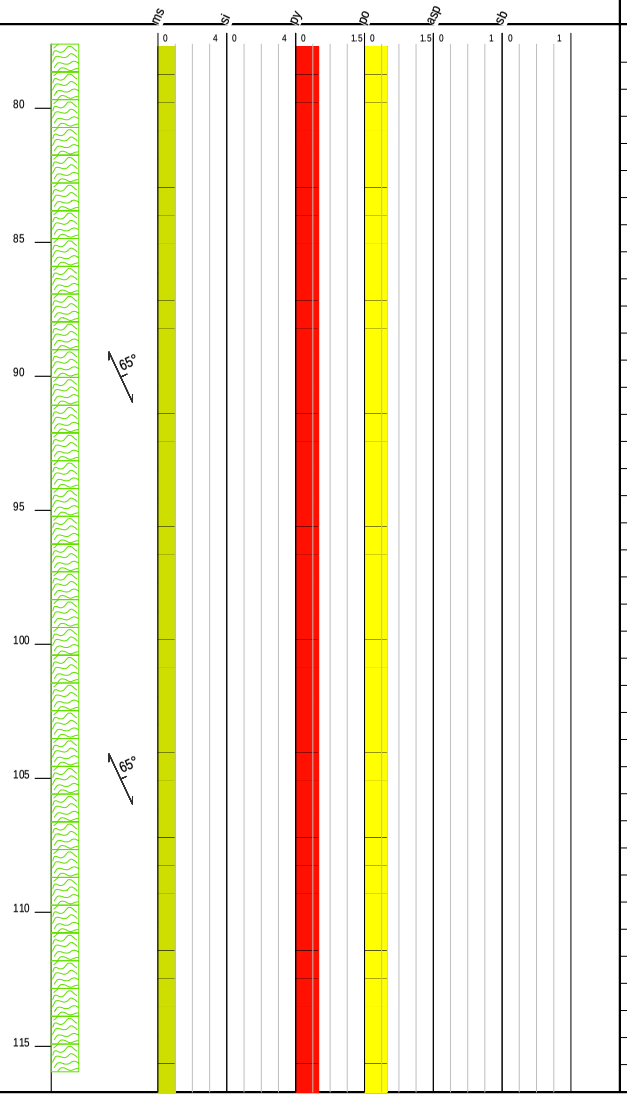

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-14


From	To	Rocktype & Description
144.96	149.85	Fault Zone

FAULT ZONE - Continuation of the biotite chlorite schist that has been heavily faulted. Never more than 10cm of unbroken core. Only visible mineralization is pyrite associated with smashed 2 generation quartz veins. Fractured surfaces exhibit iron oxide staining.

ALTERATION

« Sericite 1.00*»


MINERALIZATION

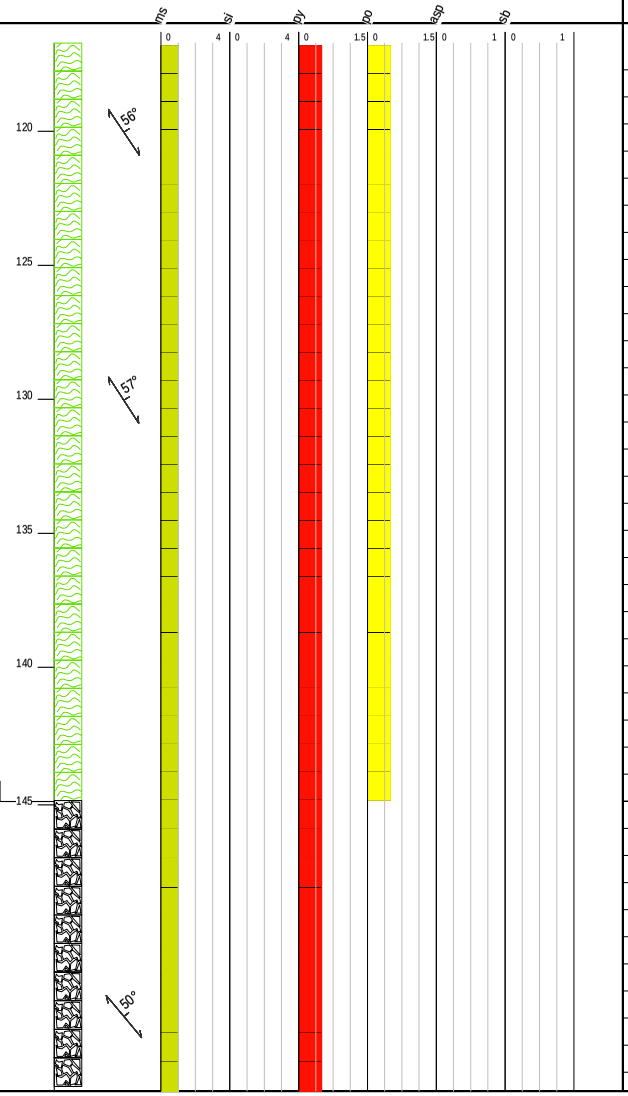

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-14


From	To	Rocktype & Description
		« Pyrite 0.50%»
		STRUCTURE
		< @ 147.00 S1 Foliation 50.00° >
		< @ 144.96 Fault 50.00° 489.00cm >
149.85	208.88	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium grey, fine grained, strongly foliated, biotite chlorite schist. Hole collared and ended all within the same lithology. 1st generation veining is locally tightly folded, transposed along schistosity, and <10mm in width. 2nd generation is typically oriented along foliation with rare sweats cross cutting foliation, suggesting these were implaced along foliation planes. Trace pyrrhotite and pyrite occurs as disseminations in schist, and as cubes/belbs along 2nd generation vein boundaries.
		ALTERATION
		« Sericite 1.00*»
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		« Chalcopyrite 0.05%»
		STRUCTURE
		< @ 155.00 S1 Foliation 50.00° >
		< @ 160.00 S1 Foliation 60.00° >
		< @ 162.00 S1 Foliation 45.00° >
		< @ 168.85 S1 Foliation 60.00° >
		< @ 171.90 S1 Foliation 68.00° >
		< @ 182.00 S1 Foliation 54.00° >
		< @ 191.50 S1 Foliation 79.00° >
		< @ 200.00 S1 Foliation 45.00° >
		FAULT GOUGE

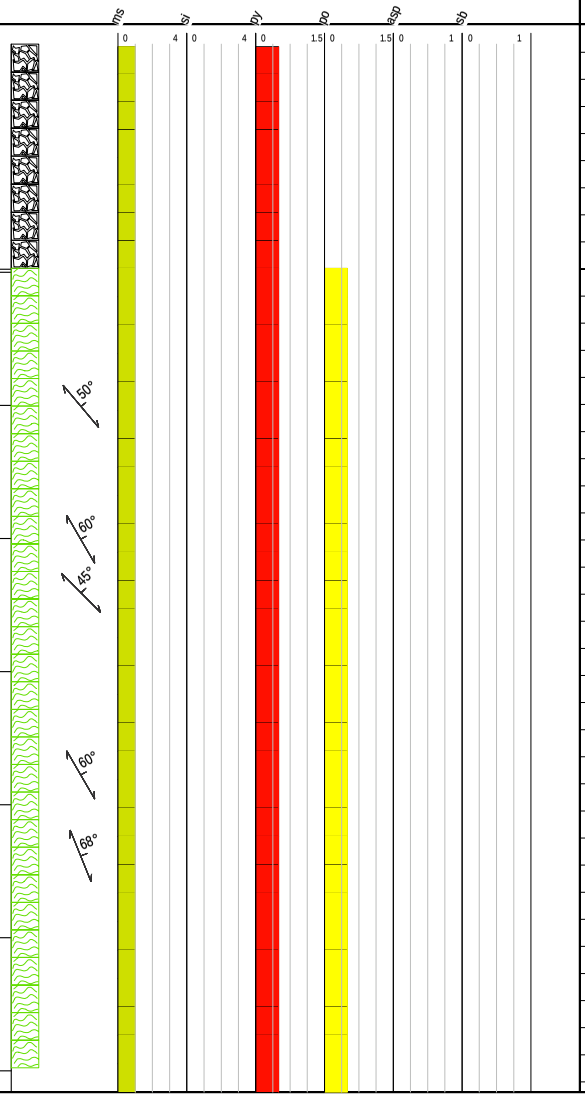

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-14

From	To	Rocktype & Description
		< @ 198.06 Fault Gouge 30.00° 6.00cm >
208.88	208.88	EOH

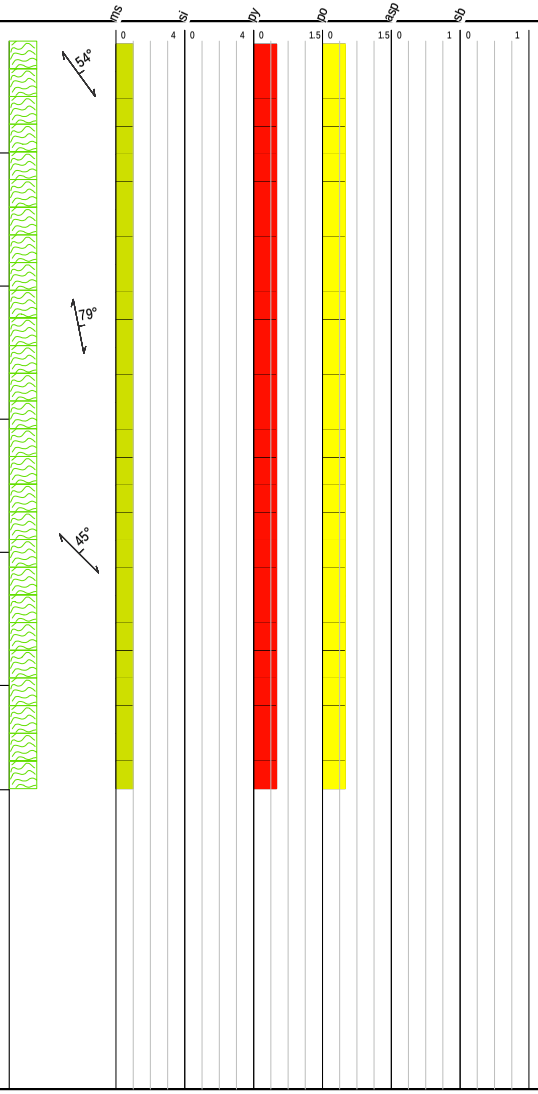

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1341.0
Hole BV10-15	**Azimuth (º):** 30.0
Location: 6966492 m North, 575869 m East	**Dip (º):** -50.0
Logged by: Ryan Toole	**Length (m):** 93.57
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Sunset trend; downdip test below BV08-3
Date Started: 2010/06/22 **Date Completed:** 2010/06/22	
Dip Tests By:	

Summary Log:


0.0-2.44m Casing
2.44-25.98 BIOTITE CHLORITE SCHIST - Med grey, fine grained, biotite chlorite schist. No mineralization
25.98-27.31 QUARTZ VEIN - Milky quartz, mottled quartz vein with pyrite and chalcopyrite.
27.31-28.04 BIOTITE CHLORITE SCHIST - Med grey, fine grained, biotite chlorite schist.
28.04-29.20 CHLORITE BIOTITE SCHIST - Med green, fine grained, moderately foliated, chlorite biotite schist. Lower contact signified by appearance of 3rd generation veining and faulting.
29.20-39.76 BIOTITE CHLORITE SCHIST/FZ - 3rd generation mineralized veins make up 5% of interval, with trace to locally 1% arsenopyrite. Unit is locally gouged and blocky. Lower contact signified by loss of 3rd generation veins.
39.76-76.72m BIOTITE CHLORITE SCHIST - Medium grey, fine grained, moderately foliated, no mineralization. Local intervals of chlorite biotite schist.
76.72-82.32m CHLORITE BIOTITE SCHIST - Med green, fine grained, moderately foliated, chlorite biotite schist. No mineralization
82.32-93.57m BIOTITE CHLORITE SCHIST - Med grey, fine grained, moderately foliated, biotite chlorite schist. No mineralization.
93.57m EOH

Downhole surveys:

Depth	Dip	Azimuth
57.00	-48.70	28.50

Project: Boulevard2010 **Hole Number:** BV10-15


From	To	Rocktype & Description
0.00	2.44	Casing
		CASING - Overburden
2.44	5.18	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Medium green, fine grained, strongly foliated, chorite biotite schist. Early quartz carbonate veins have been transposed along schistosity. No visible mineralization. Sharp lower contact at 60 degrees to core axis.
		ALTERATION
		None
		MINERALIZATION
		None
		STRUCTURE
		< @ 3.50 S1 Foliation 60.00° >
5.18	25.98	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium grey, fine grained, strongly foliated, biotite chlorite schist. Moderate silica and weak sericite alteration. 1st and 2nd generation veins present. 1st generation veins are locally boudinaged. 2nd generation veins contain trace chalcopyrite. Locally, core is blocky with oxidized fractures. 1% disseminated pyrite and pyrrhotite. Sharp lower contact at 43 degrees to core axis.
		ALTERATION
		« Silicification 2.00*»
		« Sericite 1.00*»
		MINERALIZATION
		« Pyrite 1.0%»
		« Pyrrhotite 1.0%»
		« Chalcopyrite 0.10%»

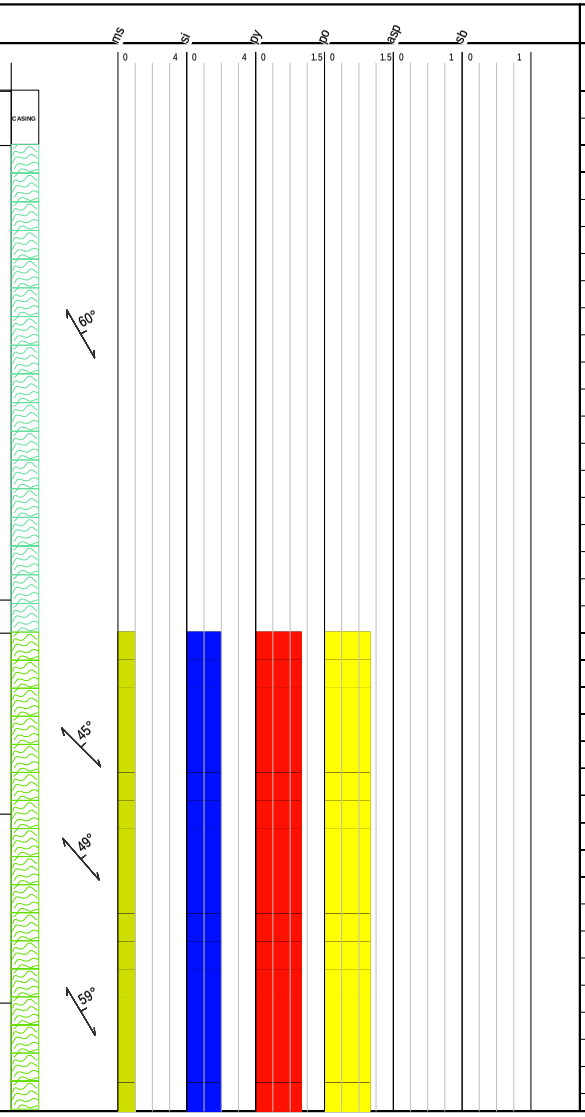

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
2.44	4.44	2.00	I030794	0.01	0.19	0.70	0.21	0.74
4.44	6.44	2.00	I030795	0.01	0.19	0.50	0.20	0.56
6.44	8.44	2.00	I030796	0.01	0.17	2.80	0.14	1.21
8.44	10.44	2.00	I030797	0.01	0.09	2.70	0.11	0.35
10.44	12.44	2.00	I030798	0.01	0.14	0.50	0.11	0.56
12.44	14.44	2.00	I030799	0.01	0.20	0.60	0.10	3.84
14.44	16.44	2.00	I030951	0.01	0.34	1.80	0.07	2.16
16.44	18.44	2.00	I030952	0.01	0.44	0.80	0.10	6.37
18.44	20.44	2.00	I030953	0.01	0.33	0.60	0.08	2.32
20.44	22.44	2.00	I030954	0.01	0.16	1.50	0.06	1.99
22.44	24.44	2.00	I030955	0.01	0.20	15.00	0.07	0.98
24.44	25.98	1.54	I030956	0.06	1.00	6.70	1.58	1.49

Project: Boulevard2010 **Hole Number:** BV10-15


From	To	Rocktype & Description
		STRUCTURE
		< @ 8.20 S1 Foliation 45.00° >
		< @ 11.16 S1 Foliation 49.00° >
		< @ 15.20 S1 Foliation 59.00° >
		< @ 20.00 S1 Foliation 30.00° >
		< @ 25.00 S1 Foliation 45.00° >
25.98	27.31	Quartz Vein
		QUARTZ VEIN - Milky quartz vein with a mottled appearance from infilling of fractures with biotite, chlorite, pyrite, and pyrrhotite. Chalcopyrite is often associated with pyrrhotite blotches. Sharp lower contact at 35 degrees to core axis.
		ALTERATION
		None
		MINERALIZATION
		« Pyrite 2.00%»
		« Pyrrhotite 1.00%»
		« Chalcopyrite 0.30%»
27.31	28.05	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Med grey, fine grained, strongly foliated, biotite chlorite schist. Rare 1st generation veins are folded and boudinaged. Trace disseminated pyrite and pyrrhotite. Sharp lower contact at 30 degrees to core axis.
		ALTERATION
		None
		MINERALIZATION
		« Pyrite 0.50%»

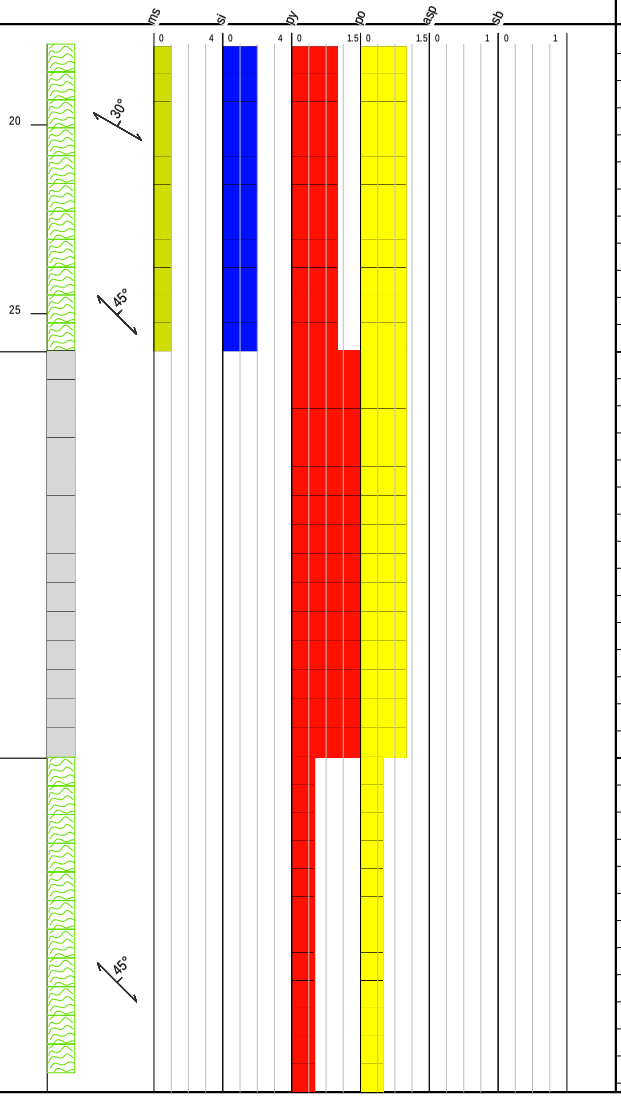

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
25.98	27.31	1.33	I030957	0.06	2.26	1.90	0.26	2.47

Project: Boulevard2010 **Hole Number:** BV10-15


From	To	Rocktype & Description
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 27.65 S1 Foliation 45.00° >
28.05	29.21	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Medium green, fine grained, strongly foliated, chlorite biotite schist. Early quartz carbonate veins have been transposed along schistosity with trace disseminated pyrrhotite and pyrite throughout unit. Small sinistral fracture/fault occurse at 28.66m with 2cm offset. Ambiguous lower contact is signified by presence of 3rd generation veining and a fault zone.
		ALTERATION
		None
		MINERALIZATION
		« Pyrite 0.10%»
		« Pyrrhotite 0.10%»
		STRUCTURE
		< @ 29.00 S1 Foliation 35.00° >
29.21	39.76	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Med grey, fine grained, strongly to locally strongly foliated biotite chlorite schist. Rare first generation veining with approximately 4% 3rd generation mineralized veins. 3rd generation veins chaotically cross cut foliation. Veins contain trace to locally 2% arsenopyrite. Veins are less than 1cm wide. Trace disseminated pyrite throughout unit, locally 2% associated with veins. Unit is faulted from top to bottom, locally gouged and blocky. Lower contact is signified by loss of 3rd generation veins.
		ALTERATION
		« Silicification 1.00*»

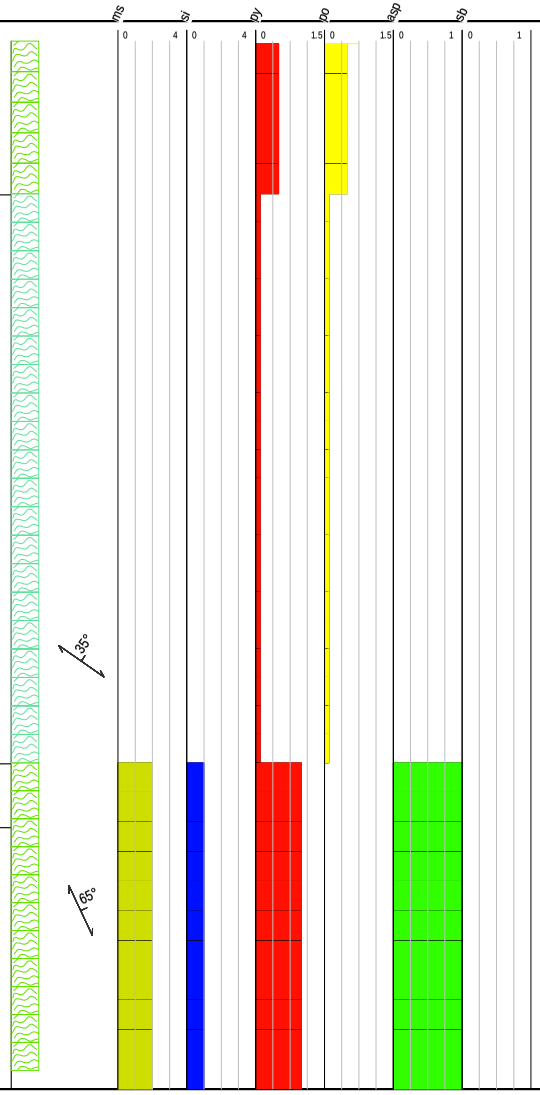

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
27.31	29.21	1.90	I030958	0.03	0.20	0.80	0.23	1.35
29.21	30.50	1.29	I030959	0.26	0.97	1955.00	32.70	3.60
30.50	31.40	0.90	I030961	0.07	0.50	136.00	25.60	2.88
31.40	32.40	1.00	I030962	19.75	1.43	10000.10	56.60	1.92
32.40	33.40	1.00	I030963	1.09	0.33	3730.00	624.00	0.85
33.40	34.40	1.00	I030964	0.42	0.79	1975.00	37.20	0.57
34.40	35.40	1.00	I030965	0.58	0.94	1925.00	47.80	1.52
35.40	36.40	1.00	I030966	1.47	4.04	4090.00	43.50	0.82
36.40	37.40	1.00	I030967	2.16	6.87	4910.00	53.20	0.89
37.40	38.40	1.00	I030968	0.58	3.70	3340.00	45.50	3.12
38.40	39.76	1.36	I030969	0.23	1.62	1235.00	41.10	1.69

Project: Boulevard2010 **Hole Number:** BV10-15


From	To	Rocktype & Description
		« Sericite 2.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Arsenopyrite 1.00%»
		STRUCTURE
		< @ 31.00 S1 Foliation 65.00° >
		< @ 33.50 S1 Foliation 58.00° >
		< @ 36.00 S1 Foliation 55.00° >
		< @ 38.00 S1 Foliation 38.00° >
		FAULT GOUGES
		< @ 29.36 Fault Gouge 70.00° 205.00cm >
		< @ 34.40 Fault Gouge 60.00° 18.00cm >
		< @ 35.28 Fault Gouge 90.00° 10.00cm >
39.76	76.70	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium grey, fine grained, strongly foliated, biotite chlorite schist. Contains only 1st and 2nd generation veining, of which 2nd generation contains blebs of pyrrhotite and trace chalcopyrite. Trace disseminated pyrite and pyrrhotite occur throughout unit. Upper 10m is blocky. Sharp lower contact at 60 degrees TCA.
		ALTERATION
		« 75.00- 76.70 Chlorite 2.00*»
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		« Chalcopyrite 0.10%»
		STRUCTURE

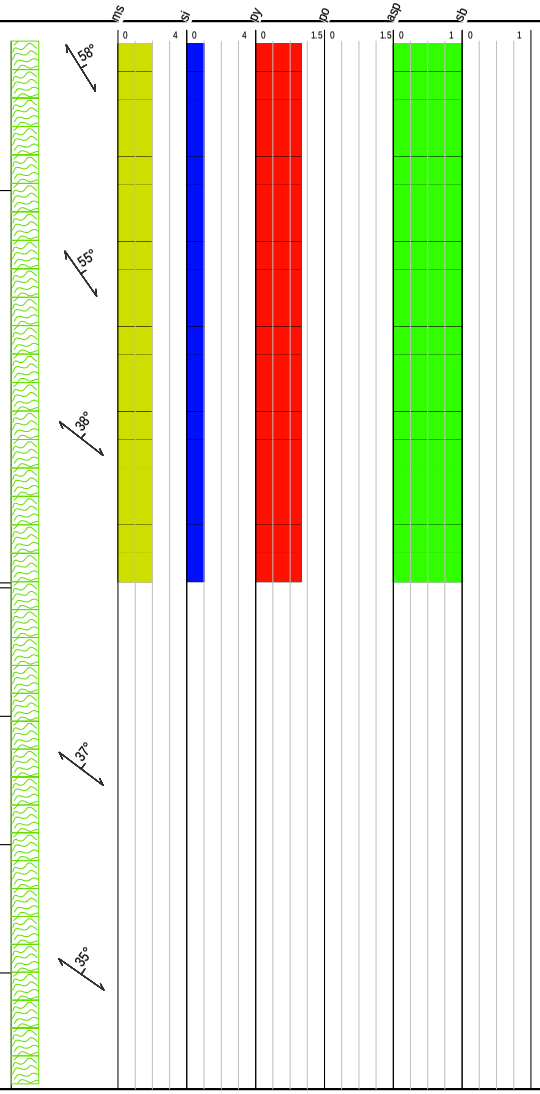

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
39.76	41.76	2.00	I030971	0.02	0.17	21.10	17.70	1.40
41.76	43.76	2.00	I030972	0.01	0.20	11.50	77.60	1.67
43.76	45.76	2.00	I030973	0.01	0.11	23.00	29.80	0.51
45.76	47.76	2.00	I030974	0.01	0.09	17.00	9.59	0.56
47.76	49.76	2.00	I030975	0.01	0.17	12.00	0.54	1.26
49.76	51.76	2.00	I030976	0.01	0.17	0.40	0.20	2.10
51.76	53.76	2.00	I030977	0.01	0.16	0.50	1.31	2.80
53.76	55.76	2.00	I030978	0.01	0.20	0.10	0.10	4.26
55.76	57.76	2.00	I030979	0.01	0.21	0.40	0.05	2.45
57.76	59.76	2.00	I030981	0.01	0.17	0.50	0.06	1.98
59.76	61.76	2.00	I030982	0.01	0.21	1.80	0.08	1.02
61.76	63.76	2.00	I030983	0.01	0.20	0.50	0.41	1.22
63.76	65.76	2.00	I030984	0.01	0.18	2.00	0.10	1.59
65.76	67.76	2.00	I030985	0.01	0.15	1.20	0.05	1.69
67.76	69.76	2.00	I030986	0.01	0.19	1.40	0.05	1.74
69.76	71.76	2.00	I030987	0.01	0.18	0.70	0.05	1.48
71.76	73.76	2.00	I030988	0.01	0.21	0.20	0.06	1.70
73.76	75.76	2.00	I030989	0.01	0.21	1.40	0.07	0.58

Project: Boulevard2010 **Hole Number:** BV10-15


From	To	Rocktype & Description
		< @ 47.00 S1 Foliation 37.00° >
		< @ 55.00 S1 Foliation 35.00° >
		< @ 63.00 S1 Foliation 42.00° >
		< @ 74.00 S1 Foliation 51.00° >
76.70	82.32	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Medium green, fine grained, strongly foliated, chlorite biotite schist. Early quartz carbonate veins have been transposed along schistosity with trace disseminated pyrite and 1% blebby pyrrhotite associated with early carbonate veining. Sharp lower contact at 60 degrees TCA.
		ALTERATION
		None
		MINERALIZATION
		« Pyrite 0.10%»
		« Pyrrhotite 1.00%»
		STRUCTURE
		< @ 79.00 S1 Foliation 40.00° >
		< @ 82.00 S1 Foliation 60.00° >
82.32	93.57	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium grey, fine grained, strongly foliated, biotite chlorite schist. 1st and 2nd generation veins present. 1st generation veins are

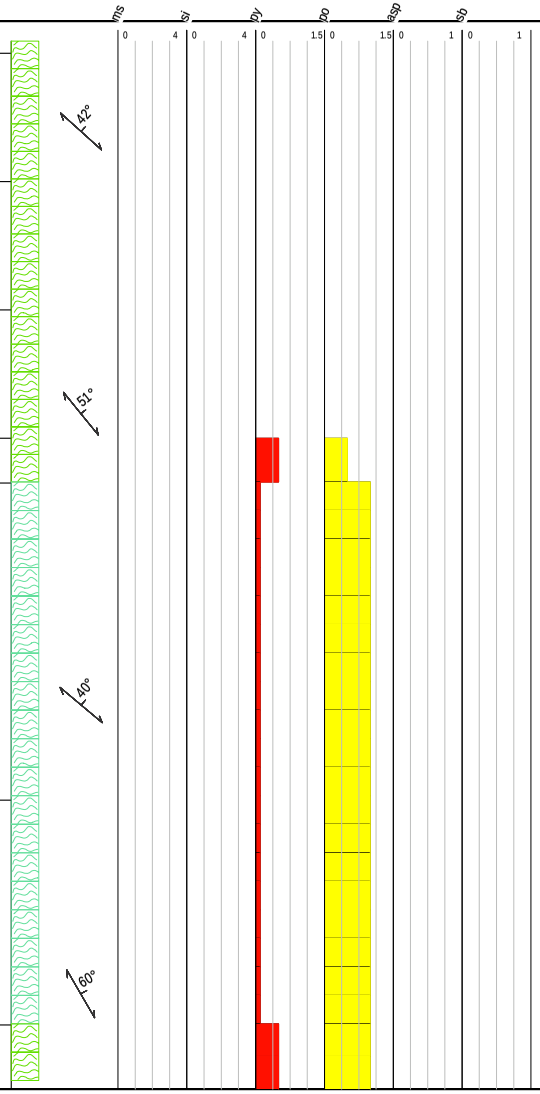

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
75.76	76.72	0.96	I030991	0.01	0.10	17.20	0.17	0.43
76.72	78.72	2.00	I030992	0.01	0.14	0.60	0.11	0.42
78.72	80.72	2.00	I030993	0.01	0.25	0.40	0.16	0.31
80.72	82.32	1.60	I030994	0.01	0.17	0.70	0.06	1.46
82.32	84.32	2.00	I030995	0.01	0.19	0.20	0.05	1.40
84.32	86.32	2.00	I030996	0.01	0.19	1.00	0.06	1.67
86.32	88.32	2.00	I030997	0.01	0.25	0.40	0.05	2.12

Project: Boulevard2010 **Hole Number:** BV10-15

From	To	Rocktype & Description
		locally boudinaged, 2nd generation veins contain trace chalcopyrite associated with blebs of pyrrhotite and lesser pyrite. EOH
		ALTERATION
		None
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 1.00%»
		« Chalcopyrite 0.05%»
		STRUCTURE
		< @ 84.00 S1 Foliation 50.00° >
		< @ 88.00 S1 Foliation 30.00° >
		< @ 92.00 S1 Foliation 50.00° >
		EOH
93.57	93.57	EOH

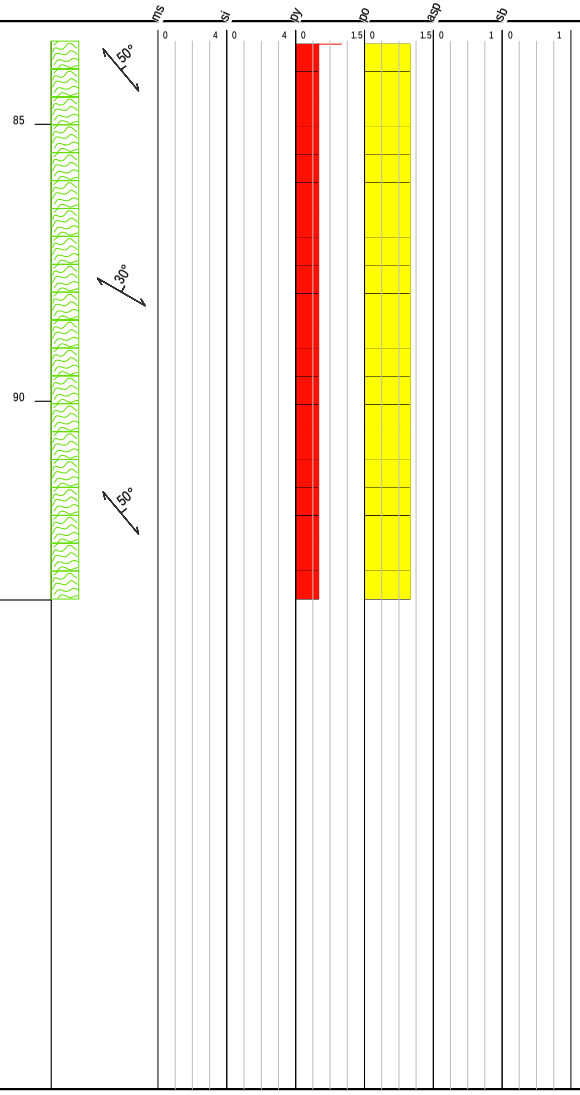

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
88.32	90.32	2.00	I030998	0.15	0.33	0.30	0.05	1.40
90.32	93.57	3.25	I030999	0.01	0.36	0.30	0.06	1.87

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1340.0
Hole BV10-16	**Azimuth (º):** 30.0
Location: 6966479 m North, 575899 m East	**Dip (º):** -50.0
Logged by: Darcy Baker	**Length (m):** 87.78
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Sunset trend, step out SE from BV10-15
Date Started: 2010/07/04 **Date Completed:** 2010/07/05	
Dip Tests By:	

Summary Log:


This hole collared 30 m off section to the SE from hole BV08-03 and the mineralized 2008 trench. It encountered 0.2% arsenopyrite associated with quartz-carbonate veins from 17.5 - 27.3 m including a core of 0.5% from 18.1 - 21.2 m. This is similar to the intercept in BV10-15 and is consistent with a SW dipping orientation.

Downhole surveys:

Depth	Dip	Azimuth
79.24	-49.00	35.70

Project: Boulevard2010 **Hole Number:** BV10-16


From	To	Rocktype & Description
0.00	2.44	Casing
		CASING: overburden, soil
2.44	17.50	biotite-chlorite schist
		BIOTITE-CHLORITE SCHIST: strongly foliated and locally crenulated schist with segregations of muscovite, red-brown biotite, quartz and chlorite. Locally strongly siliceous which could be a primary control (i.e. deformation of a more quartz-ich sedimentary rock).
		Glassy quartz veins are common and are consistently boudinaged or folded -- the early, metamorphic sweats. Thse locally have c.g. blebs of pyrrhotite « Pyrrhotite 1.00%» . Locally pyrrhotite is intergrown with minor pyite « Pyrite 0.50%» and rare chalcopyrite « Chalcopyrite 0.10%» .
		« 9.10- 12.10 Silicification 3.00*» strong silica but early, not alteation related to gold event.
		Fracture zones within this inteval are commonly oxidised.
		< @ 5.60 schistosity 40° >
		< @ 14.00 schistosity 52° >
17.50	27.30	BI-CL schist
		BIOTITE-CHLORITE SCHIST WITH CB-QZ VEINS: similar to units above and below but this interval is cut by late CB-QZ veins and locally brecciated zones with carbonate and fine euhedral quartz crystals.
		Veins are typically planar and cut the fabric at high angles. The following range features are vein counts per sample interval (not per metre but this can be calculated):
		« 18.10- 19.10 late(carb-quartz) veins 13.00»
		« 19.10- 20.10 late (carb-quartz) veins 15.00»
		« 20.10- 21.20 late (carb-quartz) count veins 12.00»
		« 21.20- 22.60 late (carb-quartz) count veins 4.00», deformed veins
		Interval is overprinted by a highly strained foliated zone which clearly overprints the carbonate-quartz veins and this is interprete as a late fault breccia. It probably has reactivated the early schistosity.
		Mineralization comprises v.f.g arsenopyrite « Arsenopyrite 0.20%» which is

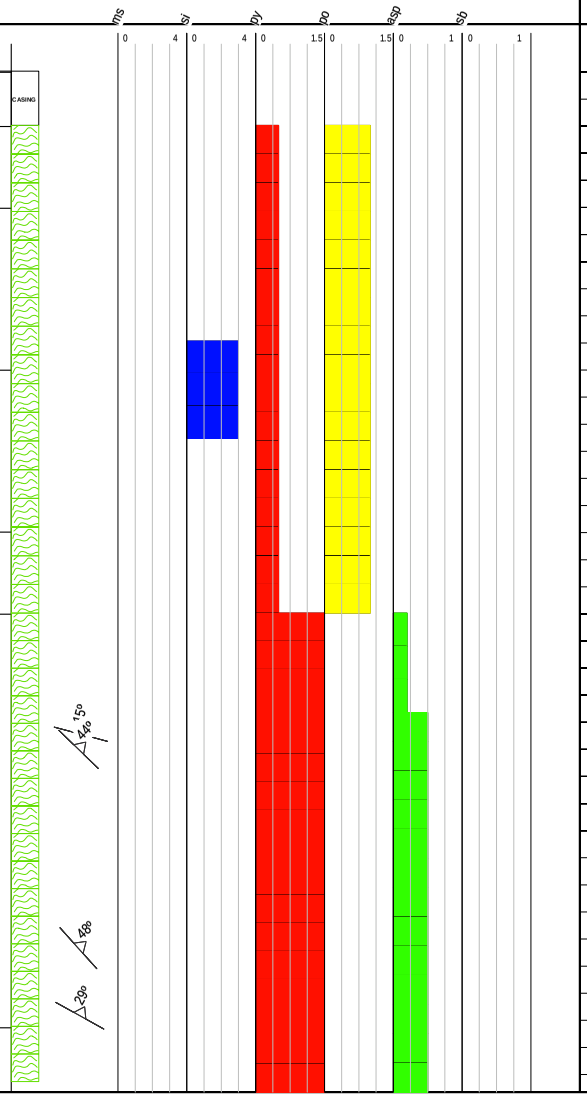

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
2.44	4.78	2.34	I031101	0.01	0.25	0.50	0.12	2.56
4.78	6.90	2.12	I031102	0.01	0.21	0.60	0.08	2.62
6.90	9.10	2.20	I031103	0.01	0.14	0.50	0.07	0.51
9.10	12.10	3.00	I031104	0.01	0.08	1.20	0.07	0.21
12.10	14.80	2.70	I031105	0.01	0.31	0.30	0.07	4.66
14.80	17.50	2.70	I031106	0.01	0.30	0.80	0.15	9.03
17.50	18.10	0.60	I031107	0.02	0.41	31.30	1.36	3.41
18.10	19.10	1.00	I031108	0.32	0.88	1330.00	15.60	1.63
19.10	20.10	1.00	I031109	0.27	0.65	643.00	9.29	1.08
20.10	21.20	1.10	I031111	0.35	0.80	398.00	10.90	1.19
21.20	22.60	1.40	I031112	0.67	3.64	4400.00	43.20	5.07
22.60	23.60	1.00	I031113	0.10	0.83	514.00	15.60	22.00
23.60	24.60	1.00	I031114	0.02	0.63	18.90	4.07	4.87
24.60	26.00	1.40	I031115	0.01	0.22	2.10	0.85	2.84
26.00	27.30	1.30	I031116	0.01	0.12	1.90	0.18	1.22

Project: Boulevard2010 **Hole Number:** BV10-16

From	To	Rocktype & Description
		disseminated within schistose wallrocks and rarely within carboate veins. Locally it is slightly more common: « 18.10- 21.20 Arsenopyrite 0.50%»
		Oyrite is common in interval « 17.50- 27.30 Pyrite 1.50%» a fine blebs and medium grained euhedral grains.
		Estimate of arsenpyrite-related carb-quartz vein orientation (Using Geocalculator software): < @ 18.20 ven 15.00° 3.00mm > = alpha anlge reference plane (schistosity): < @ 18.25 schistosity 36° > = alpha angle 'beta' between ref plane and vein = 290 degrees Assuming a foliation of 115/78 for regional schistosity, vein orientation = 050/87
		< @ 18.30 ven 44.00° 2.00mm > = alpha angle ref. plane: alpha = 39 'beta' = 162 degrees vein orientation = 310/18
		< @ 19.90 ven 29.00° 1.00mm > = alpha angle, with arsenopyrite ref. plane :alpha = 56 degrees 'beta' = 100 degrees vein orientation = 191/67
		< @ 19.50 ven 48.00° 3.00mm > = alpha angle ref. plane alpha = 45 degrees 'beta' = 165 degrees vein orientation = 209/15
		1 cm thick fault that offsets arseopyrite-related veins < @ 24.30 Fault 15.00° 1.00cm > ref plan alpha = 46 degress 'beta' = 17 degrees fault orientation = 310/66

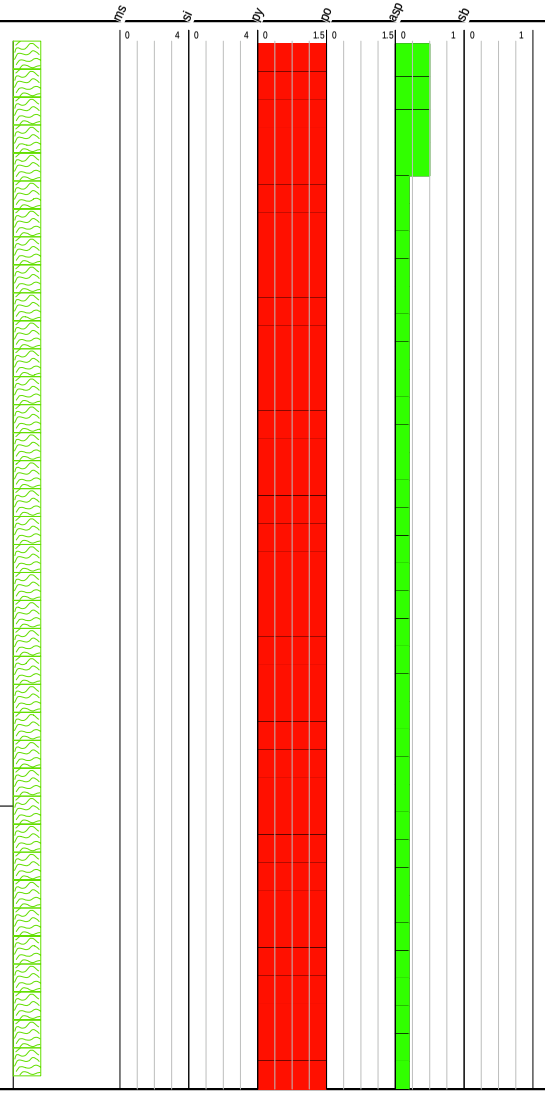

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-16

From	To	Rocktype & Description
27.30	87.78	BI-CL schist

BIOTITE-CHLORITE SCHIST: equivalent to interval at top of hole. Strongly foliated, fairly homogeous apart from a narrow interval of chlorite-biotite schist

« 80.30- 81.70 chlorite-biotite schist »

Pyrrhotite is common throughout although not ubquitose. It occurs within early (deformed) quartz veins and as disseminated blebs within schist. Generally it is more abundant proximal to veins. Overall


« 27.30- 87.78 Pyrrhotite 1.50%» .

Pyrite is less common but occurs similar to pyrrhotite, « Pyrite 0.50%»

Intrval is cut by a few isolated, later quartz-carbonate veins but none have associated sulfides..

Schistosity is generally at 45 degrees or greater to core axis:


87.78: EOH

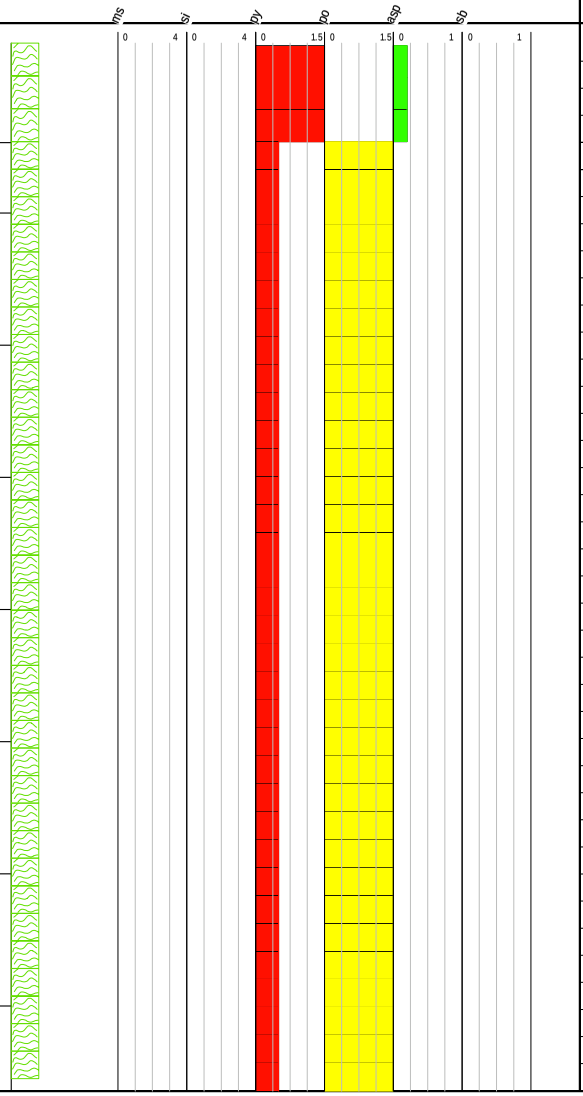

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
27.30	28.80	1.50	I031117	0.01	0.14	1.60	0.11	2.84
28.80	30.30	1.50	I031118	0.01	0.18	1.40	0.12	2.38

Project: Boulevard2010 **Hole Number:** BV10-16

From	To	Rocktype & Description
87.78	87.78	EOH

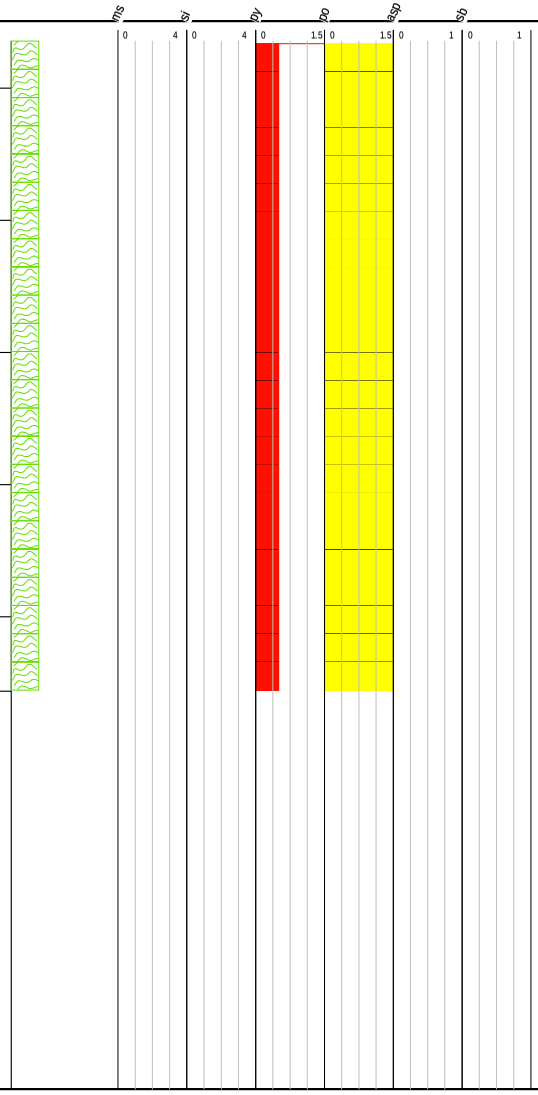

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

2011/01/13 **Equity Exploration Consultants Ltd.** * depth component not to scale Page 4 of 4

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1329.0
Hole BV10-17	**Azimuth (º):** 30.0
Location: 6966589 m North, 575762 m East	**Dip (º):** -50.0
Logged by: Darcy Baker	**Length (m):** 127.10
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Sunset trend, complete fence across broad anomaly with BV10-18
Date Started: 2010/07/05 **Date Completed:** 2010/07/06	
Dip Tests By:	

Summary Log:


Together with BV10-18 this hole completed a fence across 75 m wide As-Sb soil anomaly west of the main trench zone within the NW Sunset soil trend. BV10-17 collared just SW of the edge of the soil anomaly and encountered a carbonate-quartz veined zone with trace arsenopyrite (0.3%) from 28.6 - 32.6 m.

Downhole surveys:

Depth	Dip	Azimuth
50.90	-47.40	30.50
96.62	-44.60	30.10

Project: Boulevard2010 **Hole Number:** BV10-17


From	To	Rocktype & Description
0.00	3.05	CASING
		CASING: overburden
3.05	9.40	biotite-chlorite schist
		BIOTITE-CHLORITE SCHIST: distinct in that this interval contains six short intervals (12 to 70 cm) of muscovite-quartz schist (desribed more fully in next interval).
		Strong fabric thourhgout. Cut by few late calcite veins and some early (deformed) quartz veins.
		Rock is non-magnetic and has rare disseminated pyrite « Pyrite 0.10%»
		Schistosity (core axis angles):
		< @ 5.20 schsitosity 41 >
9.40	12.10	Quartz-Muscovite Schist
		QUARTZ-MUSCOVITE SCHIST: light grey to pale green with distinct pale white phenocrysts of feldspar. Groundmass is interlayered quatz and white mica with minor biotite.
		This is probably an igneous rock but due to the high degree of strain it is equivolcal whether it is extrusive or intrusive. Locally the contacts with the Bi-CL schist are gradational which is more conistent with this being an extrusive rock (e.g. a tuff) formed within the sedimentary pile. Additionally the short intervals of QZ-MS schist in the upper unit are not diagnostic -- this could be a small dyke swarm or a series of inter-bedded tuffs.
		The bottom contact is folded.
		Trace disseminated pyrite throughout « Pyrite 0.20%»
		Schistosity:
12.10	15.30	Biotite-Chlorite Schist
		BIOTITE-CHLORITE SCHIST: strong foliation and locally tight folding. Cut by four early, glassy quartz veins up to 25 cm. Larger ones contain several foliation concordnt layers of wallrock.

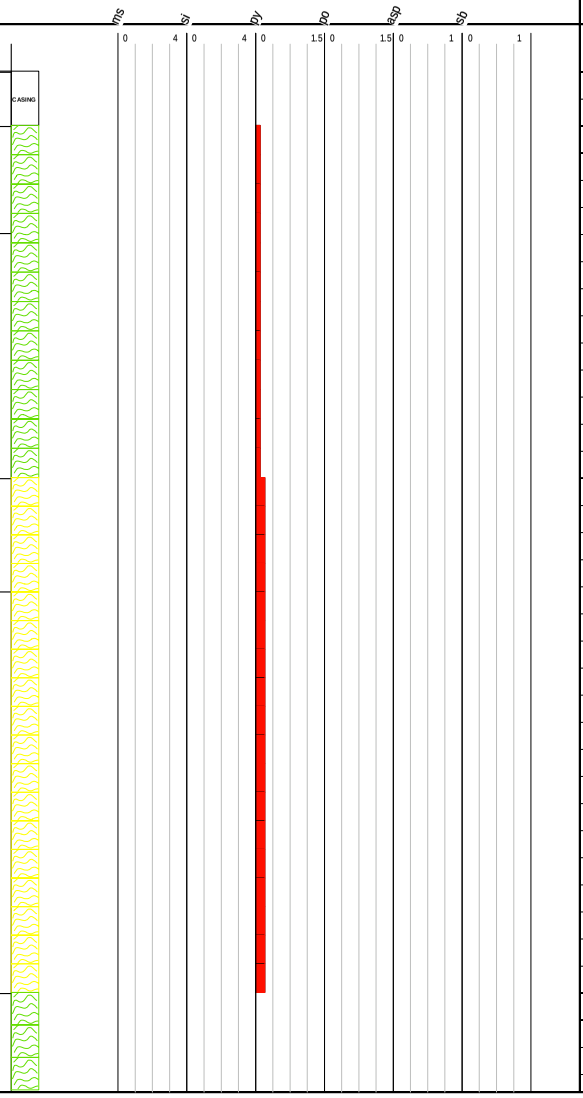

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
3.05	4.60	1.55	I031119	0.01	0.21	30.00	0.15	0.22
4.60	9.40	4.80	I031121	0.01	0.16	2.40	0.15	1.07
9.40	12.10	2.70	I031122	0.01	0.13	5.20	0.76	0.14
12.10	13.30	1.20	I031123	0.01	0.12	4.50	3.70	0.26
13.30	15.30	2.00	I031124	0.01	0.25	34.30	10.60	1.61

Project: Boulevard2010 **Hole Number:** BV10-17


From	To	Rocktype & Description
		Weak prvasive calcite alteration.
15.30	25.40	Quartz-Muscovite Schist
		QUARTZ-MUSCOVITE SCHIST: equivalent to unit starting at 9.40 m. Locally crenulated. Minor disseminate pyrite « Pyrite 0.20%».
		Cut by several glassy deformed quartz veins.
25.40	28.60	Biotite-Chlorite Schist
		BIOTITE-CHLORITE SCHIST: dark green-brown, fine-grained with abundant tight to pytigmatic folding (cm-scale).
		Weak pervasive calcite alteration.
28.60	39.40	Biotite-Chlorite Schist
		BIOTITE-CHLORITE SCHIST WITH CB-QZ VEINS: hostrock is similar to above unit but this interval is separted owing to the prescence of thin (<1 cm) off-white carbonate (dolomite)-quartz veins with associated v.f.g arsenopyrite generally proximal to veins within wallrock. Also commonly associated with minor bleb and euhedral pyrite. Rock is non-magnetic and has little reaction to acid (apart from fine calcite stringers).
		« Pyrite 1.00%» « 28.60- 32.60 Arsenopyrite 0.30%» , no arsenopyrite below 32.60 m but a few carbonate veins (mostly calcite) are present so this portion of the hole is still included in the veined interval.
		Top of interval is marked by a 2 cm wide dolomite-quartz vein with colloform banded texture which is concordant to the regional schistosity (i.e. ~115/78). Several veins are simply planar whereas other veins irregularly infill small brecciated zones.
		Consistent with observations in 2008, the hairline calcite veins clearly cut across the dolomite-quartz veins at 33.4 m.

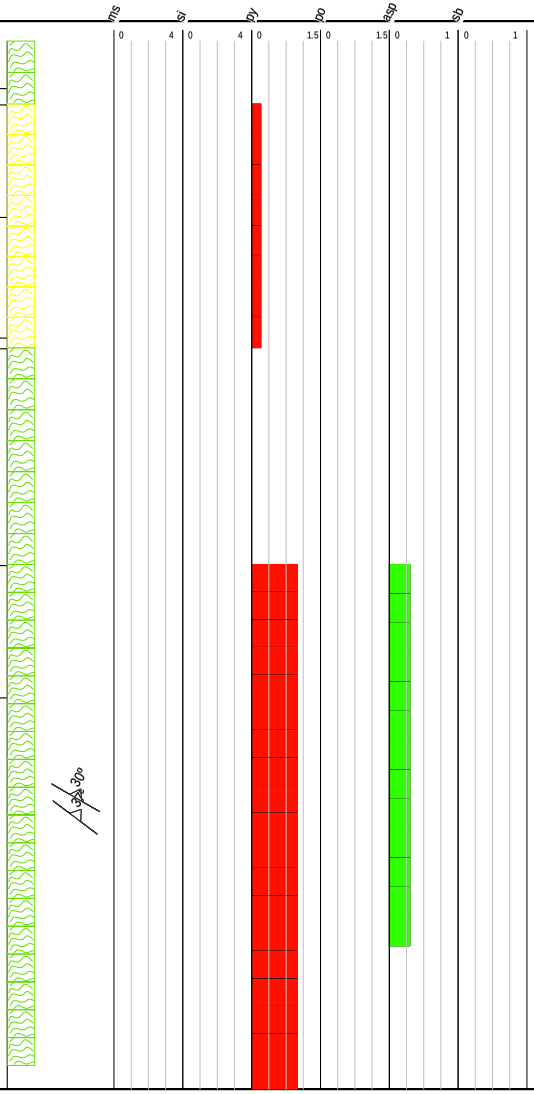

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
15.30	17.80	2.50	I031125	0.01	0.09	0.60	2.78	0.13
17.80	20.30	2.50	I031126	0.01	0.18	63.10	3.53	0.08
20.30	22.80	2.50	I031127	0.01	0.08	13.00	2.40	0.06
22.80	25.30	2.50	I031128	0.01	0.23	2.60	3.01	0.09
25.30	28.60	3.30	I031129	0.01	0.20	14.90	4.63	2.70
28.60	29.60	1.00	I031131	0.67	1.17	2690.00	26.50	1.96
29.60	31.10	1.50	I031132	0.43	0.93	3380.00	33.10	2.77
31.10	32.60	1.50	I031133	0.95	2.39	3750.00	40.10	1.59
32.60	34.80	2.20	I031134	0.01	0.36	77.00	26.60	2.98
34.80	37.00	2.20	I031135	0.01	0.39	9.60	10.50	2.40
37.00	39.40	2.40	I031136	0.10	0.55	101.00	12.30	6.76

Project: Boulevard2010 **Hole Number:** BV10-17


From	To	Rocktype & Description
		Poor recovery exists fom 29.56--32.61 m within a part of the interval with some of the most abundant arsenopyrite.
		Minor yellowish sercite alteration is strong over about 15 cm from 28.7 m.
		Orientation of QZ-DO veins: Banded colliform QZ-DO vein, concordant to schist.
		QZ-DO planar vein < @ 31.21 ven 37.00° 4.00mm > = alpha angle ref plane alpha = 35 'beta' = 163 calc orientation =
		Planar QZ-DO vein < @ 31.00 ven 30.00° 9.00mm > = alpha ref plane alpha = 67 'beta' = 230 calculated orientation =
39.40	127.10	Biotite-Chlorite Schist
		BIOTITE-CHLORITE SCHIST: typical, strongly foliated rock, red-grey, cut by several deformed (early) quartz veins, locally with blebs of pyrrhotite within or adjacent to veins. These veins also commonly contain aggregates of radiating chlorite.
		Zone near bottom of hole with two DO-QZ veins with trace arseonpyite in adjacent wallrock « 102.50- 104.40 Arsenopyrite 0.10%» . First vein < @ 102.80 ven 10.00° 25.00mm > ith bnded texture and trace v.f.g arsenopyrite. ref plan alpha = 53; 'beta' = 105 calc orientation =
		Second vein, < @ 104.20 ven 35.00° 2.00mm > with trace arsenopyrite and pyrite ref plane alpha = 72, 'beta' = 45 calc rientation =
		Mineralized and sericitized interval « 90.20- 90.90 Sericite 2.00*» with minor DO-Qz veining and disseminate arsenopyrite « Arsenopyrite 0.10%» « 90.40- 90.60 Arsenopyrite 1.00%»

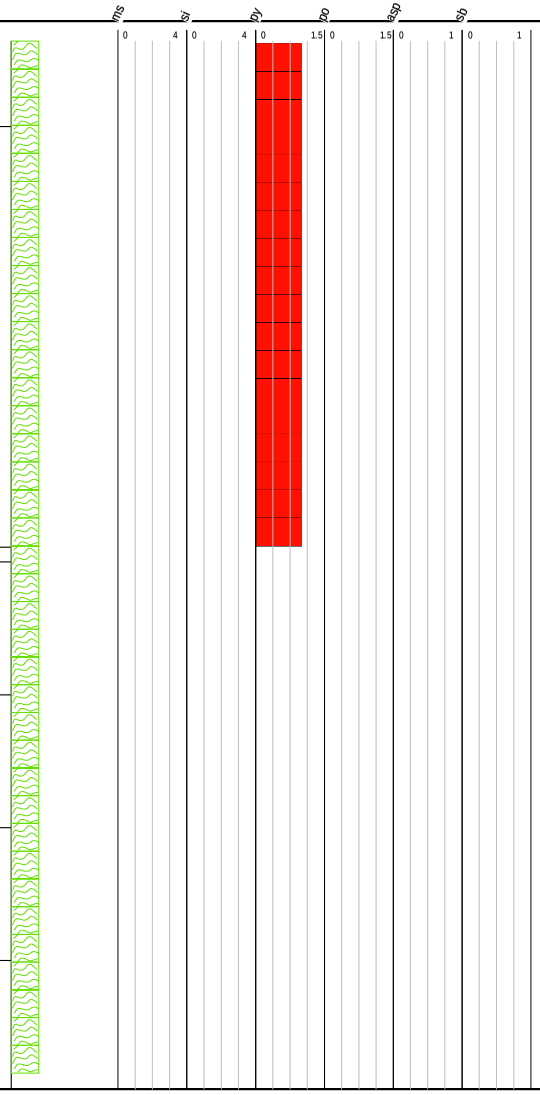

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
39.40	42.00	2.60	I031137	0.01	0.26	9.90	3.16	2.09
42.00	44.50	2.50	I031138	0.01	0.26	1.80	0.31	3.19
88.70	90.20	1.50	I031139	0.01	0.19	5.80	0.56	1.14
90.20	90.90	0.70	I031141	0.10	0.31	1505.00	3.92	1.23
90.90	92.40	1.50	I031142	0.01	0.14	17.20	0.20	0.92
92.40	94.00	1.60	I031143	0.01	0.15	2.70	0.12	1.28
94.00	97.00	3.00	I031144	0.01	0.15	1.80	0.08	1.26
97.00	99.00	2.00	I031145	0.01	0.15	2.10	0.09	1.05
99.00	101.00	2.00	I031146	0.01	0.22	3.50	0.11	1.09
101.00	102.50	1.50	I031147	0.01	0.14	8.70	0.10	0.93
102.50	103.10	0.60	I031148	0.01	0.13	36.30	0.22	0.93
103.10	104.40	1.30	I031149	0.01	0.23	5.00	0.17	1.37
104.40	105.70	1.30	I031151	0.01	0.38	1.50	0.12	1.42
105.70	107.20	1.50	I031152	0.01	0.18	1.70	0.08	2.05
107.20	107.70	0.50	I031153	0.11	0.22	466.00	0.83	1.24
107.70	108.70	1.00	I031154	0.01	0.15	14.10	0.20	1.48

Project: Boulevard2010 **Hole Number:** BV10-17


From	To	Rocktype & Description
		schistosity:
		127.10 = EOH

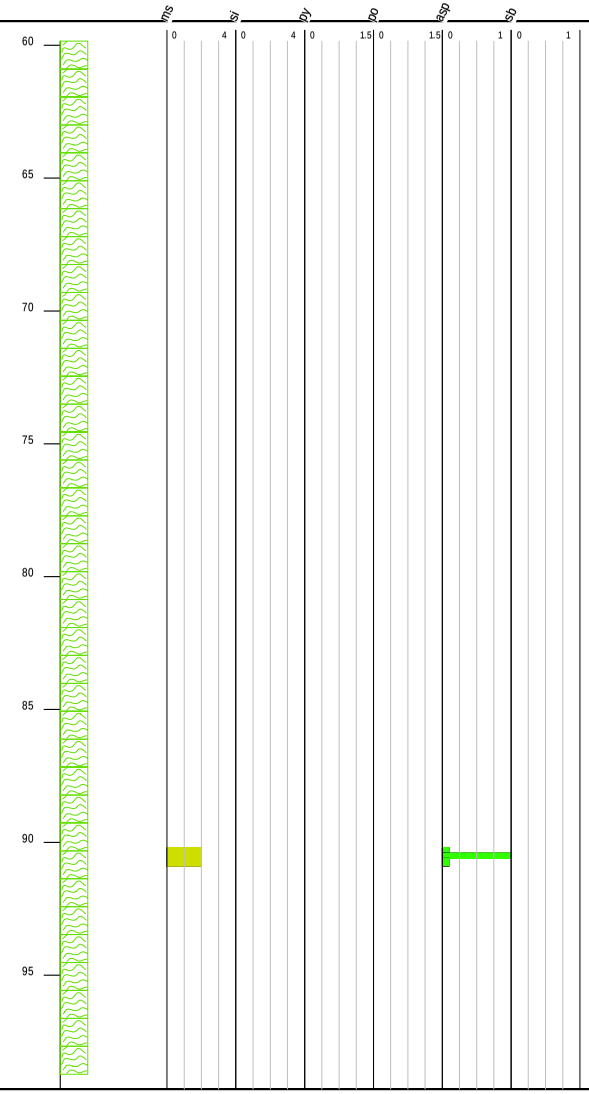

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-17

From	To	Rocktype & Description
127.10	127.10	EOH

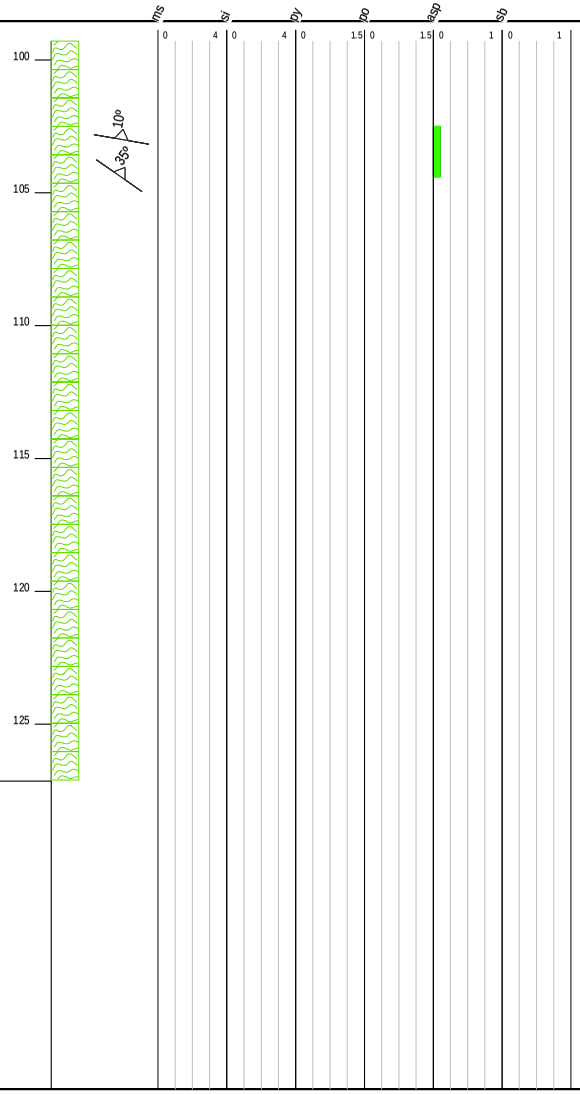

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1324.0
Hole BV10-18	**Azimuth (º):** 30.0
Location: 6966650 m North, 575801 m East	**Dip (º):** -50.0
Logged by: Ryan Toole	**Length (m):** 108.81
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Sunset trend, complete fence across broad anomaly with BV10-17
Date Started: 2010/07/06 **Date Completed:** 2010/07/07	
Dip Tests By:	

Summary Log:


Together with BV10-17 this hole completed a fence across 75 m wide As-Sb soil anomaly west of the main trench zone within the NW Sunset soil trend. BV10-17 collared just SW of the edge of the soil anomaly and encountered a carbonate-quartz veined zone with trace arsenopyrite (0.3%) from 28.6 - 32.6 m. BV10-18 collared within the soil anomaly and encountered no mineralization.

Downhole surveys:

Depth	Dip	Azimuth
47.85	-48.00	33.20
102.72	-44.50	32.70

Project: Boulevard2010 **Hole Number:** BV10-18


From	To	Rocktype & Description
0.00	3.04	Casing
		CASING - Overburden
3.04	30.94	Biotite Chlorite Schist
		BIOTITE CHORITE SCHIST - Medium grey, strongly foliated, fine grained biotite chlorite schist. Rare 1st generation veins are folded and boudinaged. Trace disseminated pyrite and pyrrhotite. Faulted lower contact @ 50 degrees TCA.
		ALTERATION
		« Sericite 1.00*»
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 11.00 S1 Foliation 48.00° >
		< @ 22.00 S1 Foliation 40.00° >
30.94	40.52	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Medium green, fine grained, strongly foliated, chlorite biotite schist. Upper 1m contains two fault zones < @ 31.01 Fault 50.00º 16.00cm > and < @ 31.85 Fault 55.00º 8.00cm >. Rare early foliation parallel quartz carb veins and < 5% late chaotic, unmineralized, carbonate veins. All veins are less than 1 cm in width. Trace disseminated pyrrhotite throughout unit. Sharp lower contact @ 54 degrees to core axis.
		MINERALIZATION

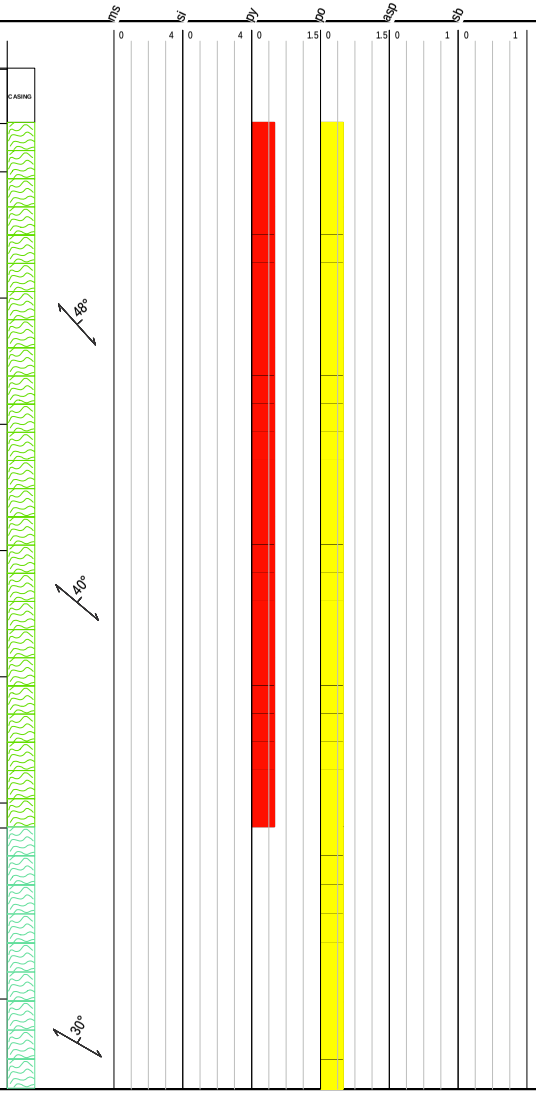

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-18


From	To	Rocktype & Description
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 36.00 S1 Foliation 30.00° >
40.52	45.04	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium grey, strongly foliated, fine grained biotite chlorite schist. Rare 1st generation, foliation parallel, veins are folded and boudinaged. Trace disseminated pyrite and pyrrhotite. Sharp lower contact at 32 degrees TCA.
		ALTERATION
		« Sericite 1.00*»
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 43.00 S1 Foliation 38.00° >
45.04	45.81	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Medium green, fine grained, strongly foliated, chlorite biotite schist. Rare early foliation parallel quartz carb veins and < 5% late chaotic, unmineralized, carbonate veins. All veins are less than 1 cm in width. Trace disseminated pyrrhotite throughout unit. Sharp lower contact at 50 degrees TCA.
		MINERALIZATION
		« Pyrrhotite 0.50%»
45.81	94.53	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium grey, fine grained, strongly foliated biotite chlorite schist. 3% early 1st generation quartz/carbonate veins with rare late stage unmineralized carbonate veins. Trace disseminate pyrite and pyrrhotite locally associated with vein margins. Faulted lower contact at 55 degrees TCA.

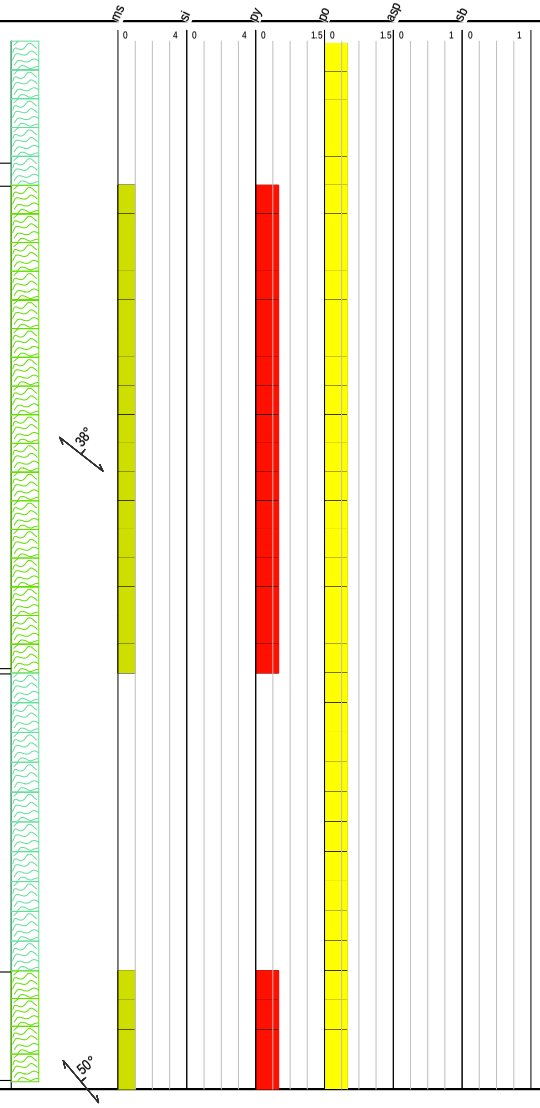

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-18


From	To	Rocktype & Description
		ALTERATION
		« 45.81- 59.91 Chlorite 1.00*»
		« 45.81- 95.53 Sericite 1.00*»
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 50.00 S1 Foliation 50.00° >
		< @ 66.00 S1 Foliation 65.00° >
		< @ 75.00 S1 Foliation 55.00° >
		< @ 86.00 S1 Foliation 55.00° >
		< @ 94.20 Fault 55.00° 33.00cm >
		ROCKTYPE SUB UNIT
		« 59.91- 60.81 Chlorite Biotite Schist »

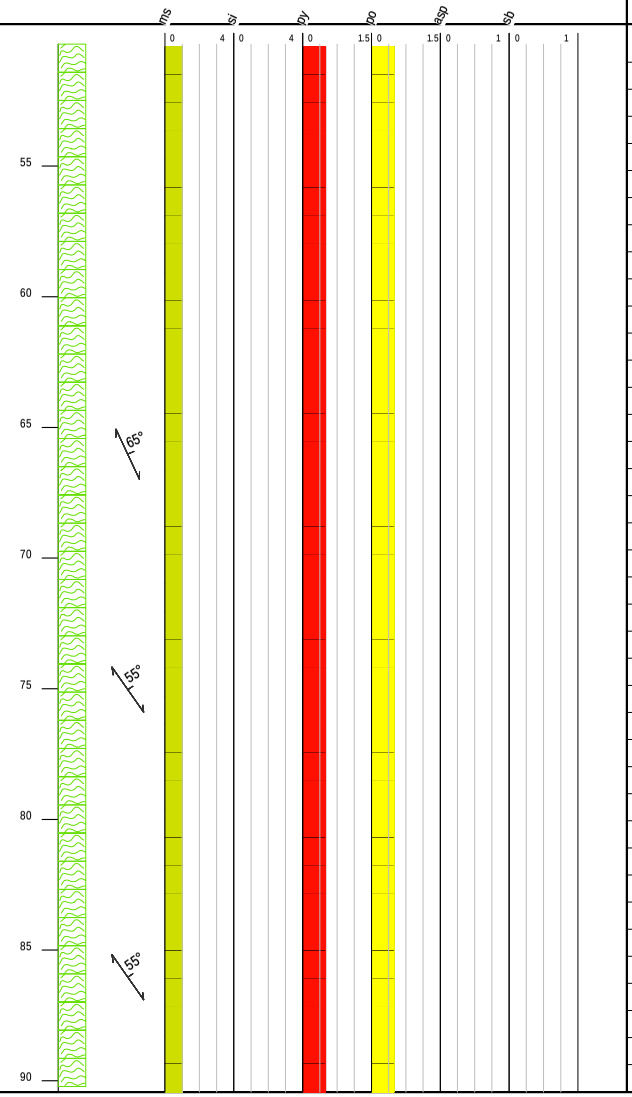

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-18

From	To	Rocktype & Description
94.53	105.09	Chlorite Biotite Schist
		CHORITE BIOTITE SCHIST - Medium green, fine grained, moderately foliated, chlorite biotite schist. 2% late chaotic carboate unmineralized veining all less than 5mm wide. Unit is featureless. Trace disseminated pyrrhotite. Sharp lower contact at 60 degrees TCA.
		MINERALIZATION
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 100.00 S1 Foliation 73.00° >
105.09	108.81	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium grey, fine grained, strongly foliated biotite chlorite schist. 3% early 1st generation quartz/carbonate veins with rare late stage unmineralized carbonate veins. Trace disseminate pyrite and pyrrhotite locally associated with vein margins.
		ALTERATION
		« Sericite 1.00*»
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 107.00 S1 Foliation 80.00° >
		< @ 105.36 Fault 80.00° 94.00cm >
108.81	108.81	EOH

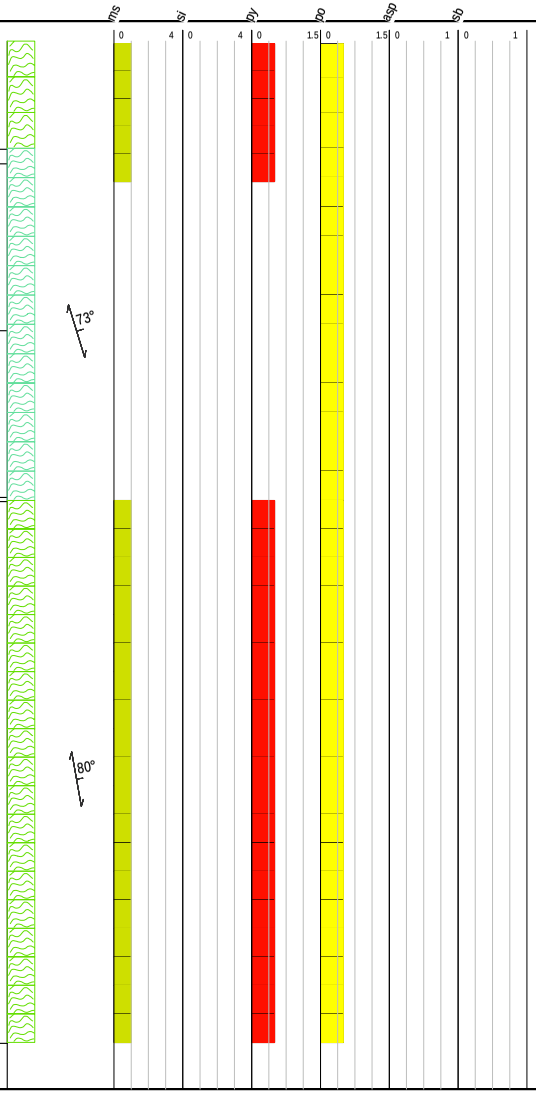

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1295.0
Hole BV10-19	**Azimuth (º):** 225
Location: 6966836 m North, 576038 m East	**Dip (º):** -50.0
Logged by: Ryan Toole	**Length (m):** 136.55
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Hollywood trend, test for NE dip to zone
Date Started: 2010/07/07 **Date Completed:** 2010/07/08	
Dip Tests By:	

Summary Log:


This hole collared 150 m to the NE from hole BV10-14 to test the soil anomaly and encountered late stage quartz carbonate veining with no visible mineralization associated with a fault zone at 106.45-107.80 m.

Downhole surveys:

Depth	Dip	Azimuth
72.54	-49.20	218.80
133.50	-48.30	216.60

Project: Boulevard2010 **Hole Number:** BV10-19

From	To	Rocktype & Description
0.00	3.04	Casing
		CASING - Overburden
3.04	91.03	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Light to medium grey, fine grained, strongly foliated, biotite chlorite schist. Veining consists of 2% 1st generation, 2% 2nd generation, and very rare local late stage unmineralized carbonate veining. Trace to locally 1% pyrite and pyrrhotite is associated with vein boundaries and also occurs as disseminations throughout unit. Weak sericite alteration. weak iron oxidation occurs throughout unit, generally localized to fractures. Faulted lower contact.
		ALTERATION
		« Sericite 1.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 1.00%»
		STRUCTURE
		< @ 10.00 S1 Foliation 33.00° >
		< @ 20.00 S1 Foliation 32.00° >
		< @ 30.00 S1 Foliation 33.00° >
		< @ 40.00 S1 Foliation 38.00° >
		< @ 50.00 S1 Foliation 45.00° >
		< @ 60.00 S1 Foliation 35.00° >
		< @ 70.00 S1 Foliation 36.00° >
		< @ 80.00 S1 Foliation 40.00° >
		< @ 90.00 S1 Foliation 25.00° >

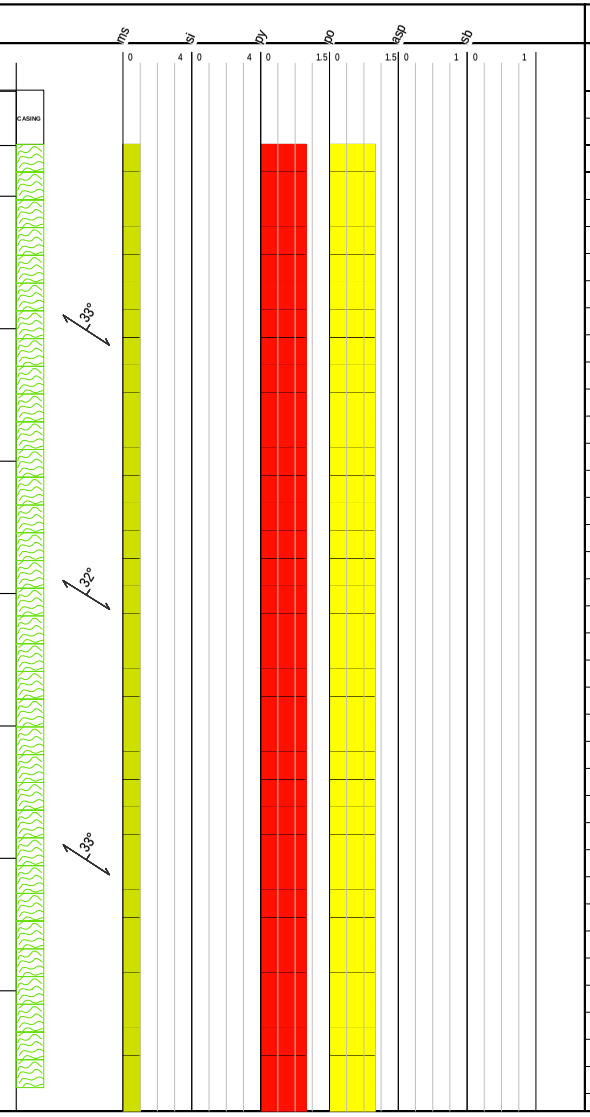


From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
88.00	90.00	2.00	I031155	0.01	0.15	1.70	0.11	1.04
90.00	91.00	1.00	I031156	0.01	0.13	3.80	0.21	0.94

Project: Boulevard2010

Hole Number: BV10-19


From	To	Rocktype & Description

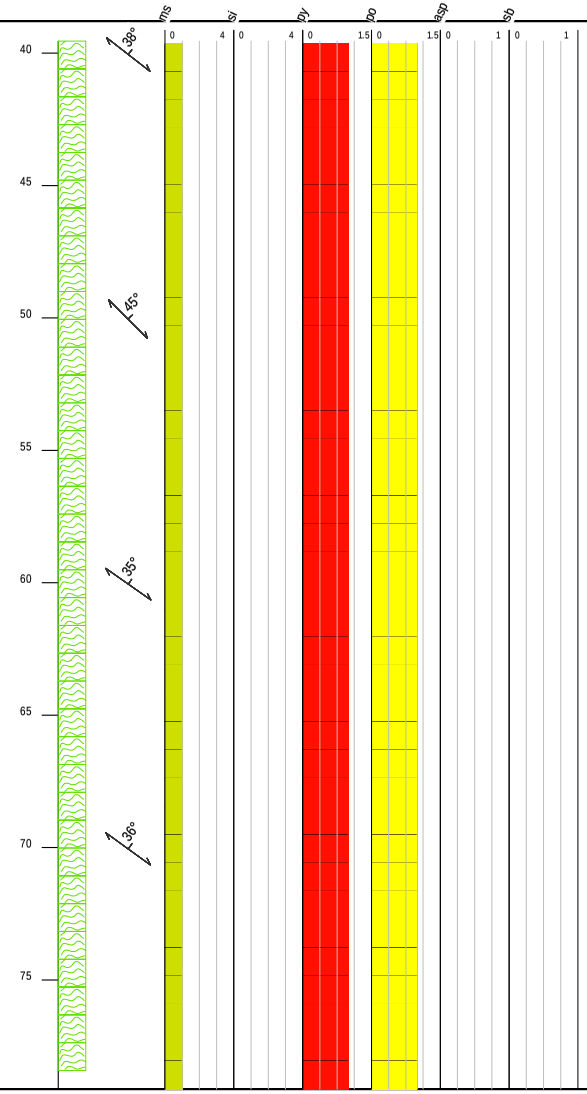

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-19


From	To	Rocktype & Description
91.03	94.74	Fault Zone
		FAULT ZONE - BIOTITE CHLORITE SCHIST - Fault zone within previous unit. Locally strong to intense sericite alteration associated with gouging. Trace pyrite and pyrrhotite disseminations.
		ALTERATION
		« 91.64- 92.29 Sericite 3.00*»
		« 93.47- 93.88 Sericite 3.00*»
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 91.03 Fault 45.00° 371.00cm >
		< @ 91.64 Fault Gouge 45.00° 65.00cm >
		< @ 93.47 Fault Gouge 45.00° 41.00cm >
94.74	136.55	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium to light grey, fine grained, strongly folitated, biotite chlorite schist. Veining consists of rare 1st and 2nd generation veining, with local late unmineralized carbonate veining associated with fault zone at 106.45-107.80. Weak sericite alteration. Local intervals of

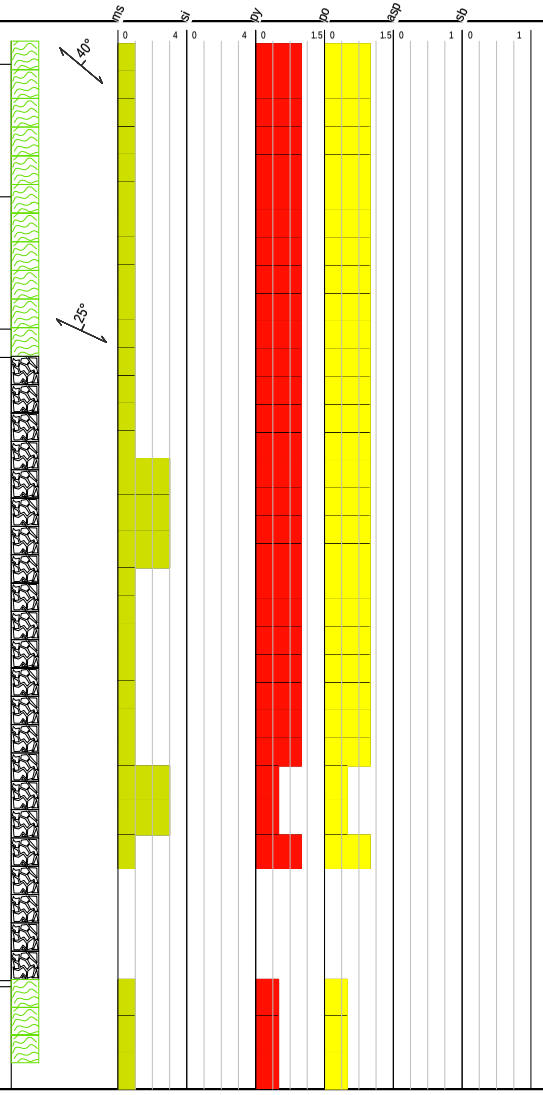

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
91.00	93.00	2.00	I031157	0.01	0.15	2.00	0.29	1.19
93.00	95.00	2.00	I031158	0.01	0.28	8.00	0.84	1.16
95.00	97.00	2.00	I031159	0.01	0.15	0.50	0.09	1.06
97.00	99.00	2.00	I031161	0.01	0.15	0.40	0.09	1.23
99.00	101.00	2.00	I031162	0.01	0.15	0.60	0.09	1.46
101.00	103.00	2.00	I031163	0.01	0.15	0.40	0.08	1.20
103.00	105.00	2.00	I031164	0.01	0.13	0.40	0.08	1.26

Project: Boulevard2010 **Hole Number:** BV10-19


From	To	Rocktype & Description
		chlorite biotite schist. Trace pyrite and pyrrhotite associated with vein boundaries and as disseminations throughout unit.
		ALTERATION
		« 99.68- 99.83 Sericite 3.00*»
		« 102.64- 102.81 Sericite 3.00*»
		« 106.50- 107.00 Sericite 3.00*»
		« 94.74- 136.55 Sericite 1.00*»
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		ROCKTYPE SUB UNITS
		« 99.98- 100.71 Chlorite Biotite Schist »
		« 101.41- 101.73 Chlorite Biotite Schist »
		« 112.64- 113.15 Chlorite Biotite Schist »
		STRUCTURE
		< @ 99.68 Fault Gouge 30.00º 15.00cm >
		< @ 102.64 Fault Gouge 45.00º 17.00cm >
		< @ 106.45 Fault 28.00º 135.00cm >
		< @ 106.50 Fault Gouge 28.00º 50.00cm >
		< @ 100.00 S1 Foliation 35.00° >
		< @ 110.00 S1 Foliation 40.00° >
		< @ 120.00 S1 Foliation 28.00° >
		< @ 130.00 S1 Foliation 20.00° >
		< @ 136.00 S1 Foliation 22.00° >

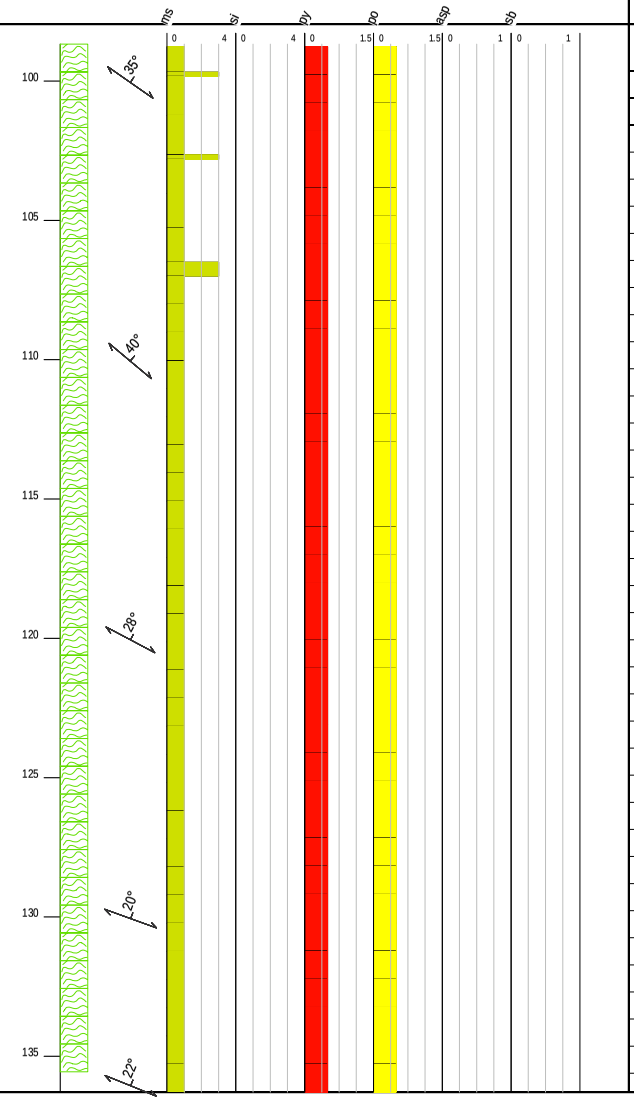

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
105.00	107.00	2.00	I031165	0.01	0.13	0.80	0.11	1.26
107.00	109.00	2.00	I031166	0.01	0.10	0.90	0.08	1.11
109.00	111.00	2.00	I031167	0.01	0.11	2.20	0.09	0.99

Project: Boulevard2010 **Hole Number:** BV10-19

From	To	Rocktype & Description
136.55	136.55	EOH

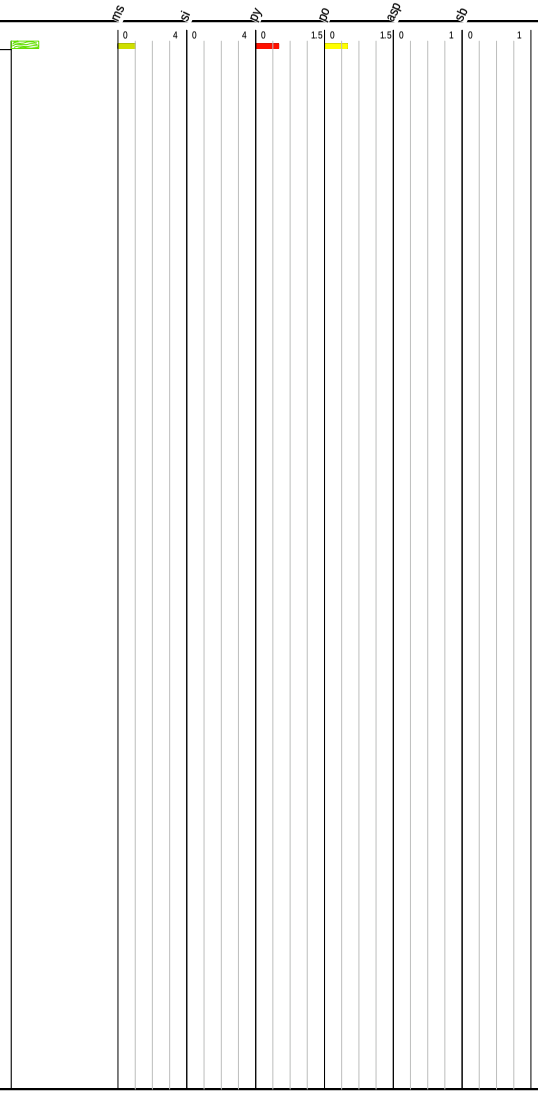

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1332.0
Hole BV10-20	**Azimuth (º):** 70.0
Location: 6966537 m North, 575719 m East	**Dip (º):** -65.0
Logged by: Ryan Toole	**Length (m):** 241.71
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Sunset trend; completes fence with BV10-10 and tests 50 m deeper than BV10-01
Date Started: 2010/07/08 **Date Completed:** 2010/07/10	
Dip Tests By:	

Summary Log:

This hole encountered 0.2% arsenopyrite associated with quartz carbonate veins from 97.23 – 100.05 m. Late veins occur locally throughout hole with no visible mineralization.

Downhole surveys:

Depth	Dip	Azimuth
79.25	-65.40	73.30
213.36	-65.30	75.70

Project: Boulevard2010 **Hole Number:** BV10-20

From	To	Rocktype & Description
0.00	3.40	Casing
		CASING - Overburden
3.40	87.05	Biotite Chlorite Schist

BIOTITE CHLORITE SCHIST - Medium grey, fine grained, strongly foliated, biotite chlorite schist. Upper 25 m is blocky and has oxidized fractures. Rare 1st and 2nd generation, foliation parallel quartz veining. Locally rare, late stage chaotic carbonate unmineralized veining cross cuts schistosity. Local strong sericite alteration associatd with fault zones; local strong silica alteration. Trace pyrite and pyrrhotite associated with 2nd generation veining,and as disseminations throughout unit. Trace chalcopyrite occurs associated with pyrrhotite. Sharp lower contact at 25 degrees TCA.

ALTERATION

« Sericite 1.00*»

« 28.63- 29.45 Sericite 3.00*»

« 68.03- 68.70 Sericite 3.00*»

« 70.91- 71.16 Sericite 2.00*»

« 73.35- 73.58 Sericite 3.00*»

« 81.28- 82.17 Sericite 2.00*»


« 28.63- 29.45 Chlorite 3.00*»

« 81.08- 84.40 Chlorite 4.00*»

MINERALIZATION

« Pyrite 0.50%»
« Pyrrhotite 0.50%»
« Chalcopyrite 0.05%»


STRUCTURE

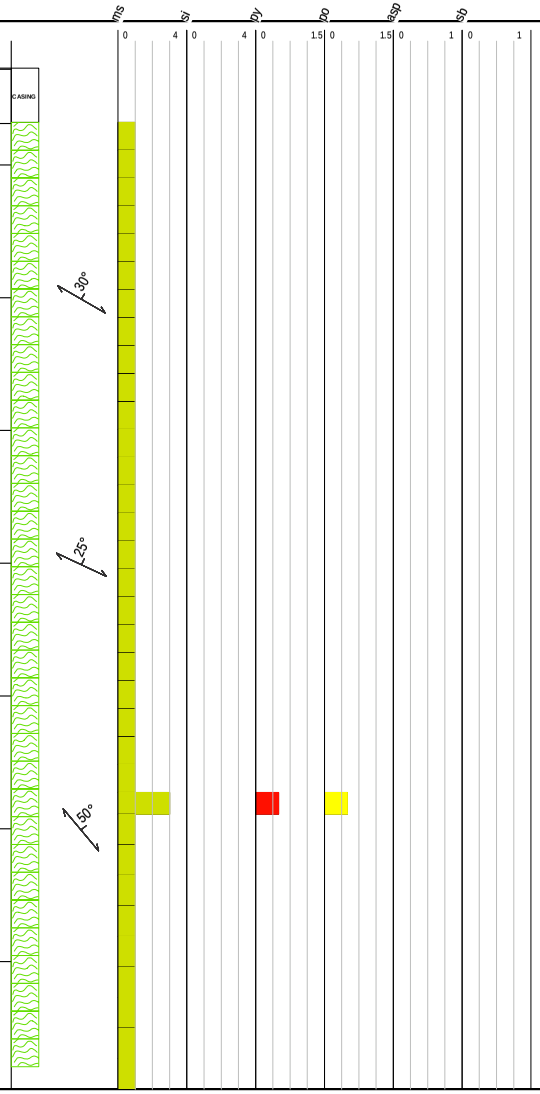

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-20


From	To	Rocktype & Description
		< @ 10.00 S1 Foliation 30.00° >
		< @ 20.00 S1 Foliation 25.00° >
		< @ 30.00 S1 Foliation 50.00° >
		< @ 40.00 S1 Foliation 35.00° >
		< @ 50.00 S1 Foliation 35.00° >
		< @ 60.00 S1 Foliation 35.00° >
		< @ 70.00 S1 Foliation 30.00° >
		< @ 80.00 S1 Foliation 25.00° >
		FAULTS
		< @ 28.63 Fault 30.00° 82.00cm >
		< @ 68.03 Fault 35.00° 67.00cm >
		< @ 70.91 Fault 30.00° 25.00cm >
		< @ 73.35 Fault Gouge 23.00° 23.00cm >
		< @ 81.28 Fault 5.00° 89.00cm >

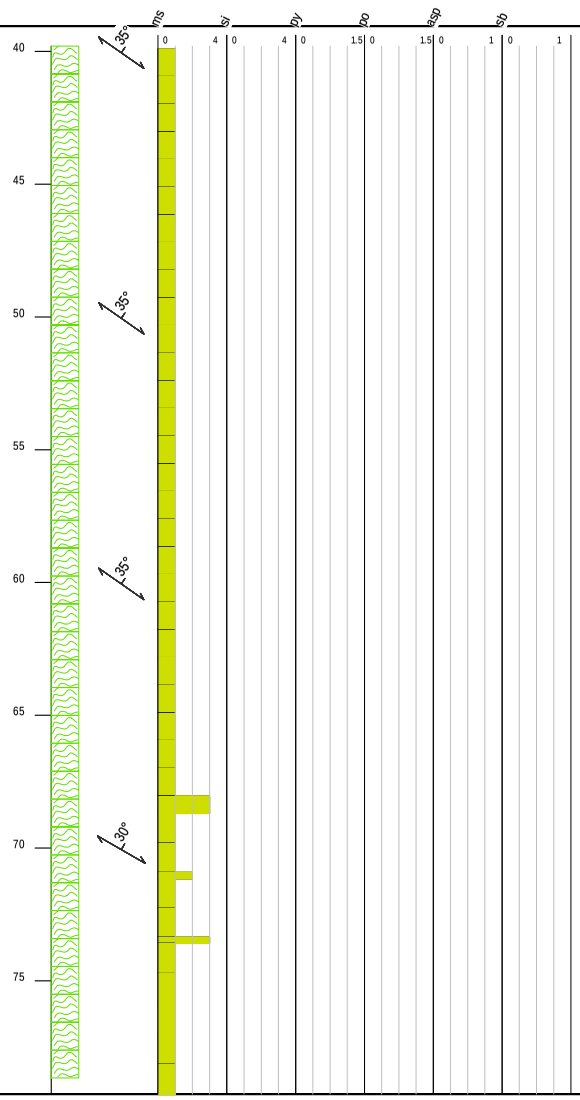

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-20

From	To	Rocktype & Description
87.05	93.43	Limestone
93.43	96.12	Biotite Chlorite Schist

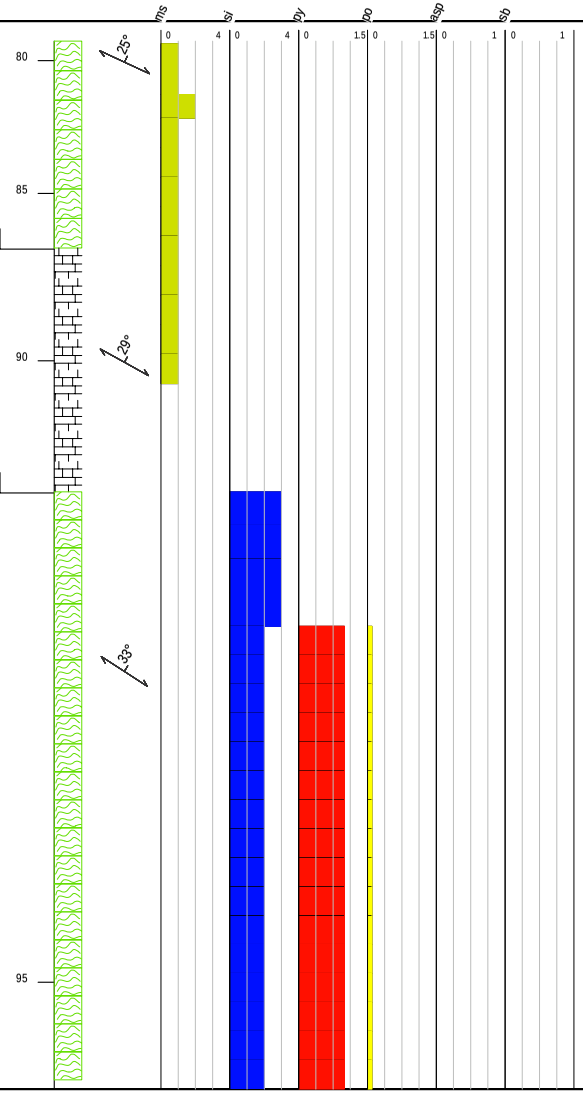

LIMESTONE - Light blueish grey, fine grained, non to weakly foliated, limestone. Rare carbonate stringers. Moderately fractured with weak fracture bleaching. Interbedded with biotite chlorite schist. Sharp lower contact at 48 degrees TCA.

STRUCTURE

< @ 90.00 S1 Foliation 29.00° >

BIOTITE CHLORITE SCHIST - Greenish grey, fine grained, strongly foliated, biotite chlorite schist. Interval of limestone from 94.64-95.19. Lower 25 cm is heavily fractured/brecciated. 1% disseminated pyrite, trace pyrrhotite. Sharp lower contact with fault zone at 45 degrees TCA.

ALTERATION

« 93.43- 93.86 Silicification 3.00*»

« 93.86- 96.13 Silicification 2.00*»

« 93.86- 93.86 Chlorite 1.00*»

« 93.86- 96.12 Chlorite 3.00*»

MINERALIZATION


« Pyrite 1.00%»

« Pyrrhotite 0.10%»

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
92.43	93.43	1.00	I031168	0.01	0.03	6.00	1.90	1.23
93.43	95.05	1.62	I031169	0.03	0.19	75.90	16.05	1.35
95.05	96.13	1.08	I031171	0.33	0.31	1610.00	18.45	1.92

Project: Boulevard2010 **Hole Number:** BV10-20


From	To	Rocktype & Description
		STRUCTURE
		< @ 94.00 S1 Foliation 33.00° >
		ROCKTYPE SUB UNIT
		« 94.64- 95.19 Limestone »
96.12	97.23	Fault Zone
		FAULT ZONE - Dark grey to black, strongly sheared, fault zone. Rare late stage unmineralized carbonate veining. Upper 3 cm and lower 4 cm is gouged. 2 % disseminated pyrite. Sharp gouged lower contact at 60 degrees TCA.
		ALTERATION
		« Chlorite 4.00*»
		« Sericite 1.00*»
		MINERALIZATION
		« Pyrite 2.00%»
		STRUCTURE
		< @ 96.30 S1 Foliation 55.00° >
		< @ 96.73 S1 Foliation 20.00° >
		< @ 96.83 S1 Foliation 60.00° >
		< @ 96.12 Fault 45.00° >
		< @ 97.23 Fault 60.00° >
97.23	100.05	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Med grey green, fine grained, strongly foliated, biotite chlorite schist. Strong sericite and silica alteration. 1st appearance of late stage, arsenopyrite bearing, carbonate quartz veins. Veins are at 85-90 degrees TCA. Locally moderate epidote alteration. 1% pyrite associated with vein margins and as disseminations, and trace pyrrhotite and arsenopyrite associated with veining. Lower contact signified by loss of silica alteration and late stage veining.

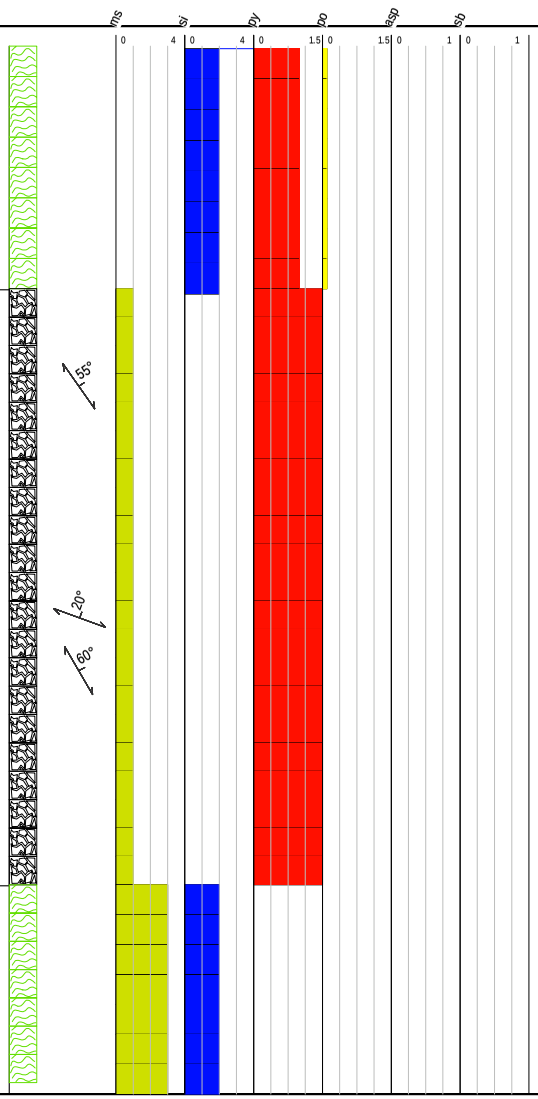

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
96.13	97.23	1.10	I031172	0.34	4.58	661.00	41.60	1.88
97.23	98.87	1.64	I031173	1.09	4.07	5620.00	40.00	1.82
98.87	100.05	1.18	I031174	1.15	3.52	4250.00	37.60	4.90

Project: Boulevard2010 **Hole Number:** BV10-20


From	To	Rocktype & Description
		ALTERATION
		« Sericite 3.00*»
		« Silicification 2.00*»
		« 98.85- 99.03 Epidote 1.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Arsenopyrite 0.20%»
		« Pyrrhotite 0.20%»
		STRUCTURE
		< @ 99.00 S1 Foliation 35.00° >
100.05	109.75	Chert
		CHERT - Light grey, weakly foliated, chert. Carbonate filled fractures. Locally interbedded with biotite chlorite schist in lower 2.5 m. Trace pyrite and pyrrhotite associated with fractures. Interbedding shows sharp contacts. Faulted lower contact.
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 105.00 Bedding (S0) 10.00° >
109.75	133.60	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium grey, fine grained, strongly foliated, biotite chlorite schist. 1st and 2nd generation foliation parallel veining, locally boudinaged and folded. 1% pyrrhotite associated with veining and rare disseminations. Trace chalcopyrite associated with pyrrhotite blebs. Trace pyrite disseminations and rare blebs associated with veining. Lower contact associated with presence of arsenopyrite bearing late stage quartz carb veins.

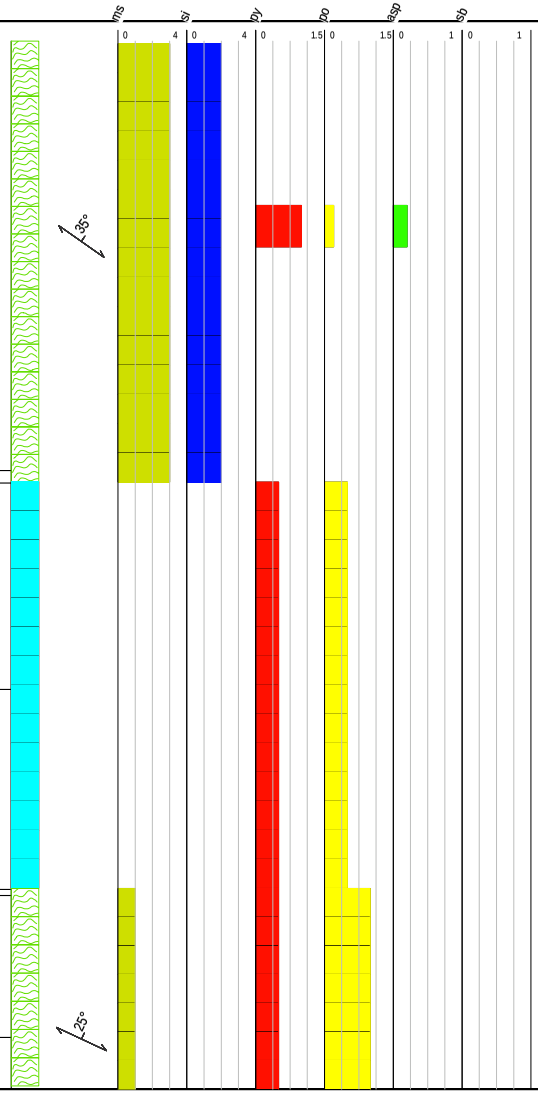

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
100.05	102.05	2.00	I031175	0.10	0.69	962.00	14.35	0.89
102.05	104.05	2.00	I031176	0.02	0.14	100.00	8.01	0.42
104.05	106.05	2.00	I031177	0.01	0.22	6.20	4.34	0.23
106.05	108.05	2.00	I031178	0.01	0.31	2.40	6.43	1.22
108.05	110.05	2.00	I031179	0.19	0.41	647.00	2.72	2.08
110.05	112.05	2.00	I031181	0.32	0.55	934.00	6.31	3.29
112.05	114.05	2.00	I031182	0.10	0.23	143.00	3.49	5.64
114.05	116.05	2.00	I031183	0.01	0.15	1.50	0.08	1.13
116.05	118.05	2.00	I031184	0.01	0.25	2.20	0.13	5.81
118.05	120.05	2.00	I031185	0.02	0.25	10.50	0.13	6.23
120.05	122.05	2.00	I031186	0.01	0.18	1.50	0.07	1.80
122.05	124.05	2.00	I031187	0.01	0.14	15.00	0.13	1.48
124.05	126.05	2.00	I031188	0.01	0.14	8.00	0.12	2.38

Project: Boulevard2010 **Hole Number:** BV10-20


From	To	Rocktype & Description
		ALTERATION
		« Sericite 1.00*»
		MINERALIZATION
		« Pyrrhotite 1.00%»
		« Pyrite 0.50%»
		« Chalcopyrite 0.05%»
		STRUCTURE
		< @ 115.00 S1 Foliation 25.00° >
		< @ 125.00 S1 Foliation 32.00° >
		< @ 132.00 S1 Foliation 40.00° >
133.60	143.03	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Med grey, fine grained, strongly foliated biotite chlorite schist. Local swarms of arsenopyrite bearing late quartz carbonate veins. Veins contain trace to locally 1% arsenopyrite. 25 total veins, generally <1cm. 1% pyrite and 1% pyrrhotite occurs as disseminations and blebs associated with veins. Very rare 1st and 2nd generation foliation parallel veins. Faulted lower contact.
		ALTERATION
		« 133.60- 136.80 Sericite 1.00*»
		« 136.80- 138.60 Sericite 2.00*»
		« 138.60- 141.00 Sericite 1.00*»
		« 141.00- 141.43 Sericite 2.00*»
		« 141.43- 143.03 Sericite 1.00*»
		MINERALIZATION

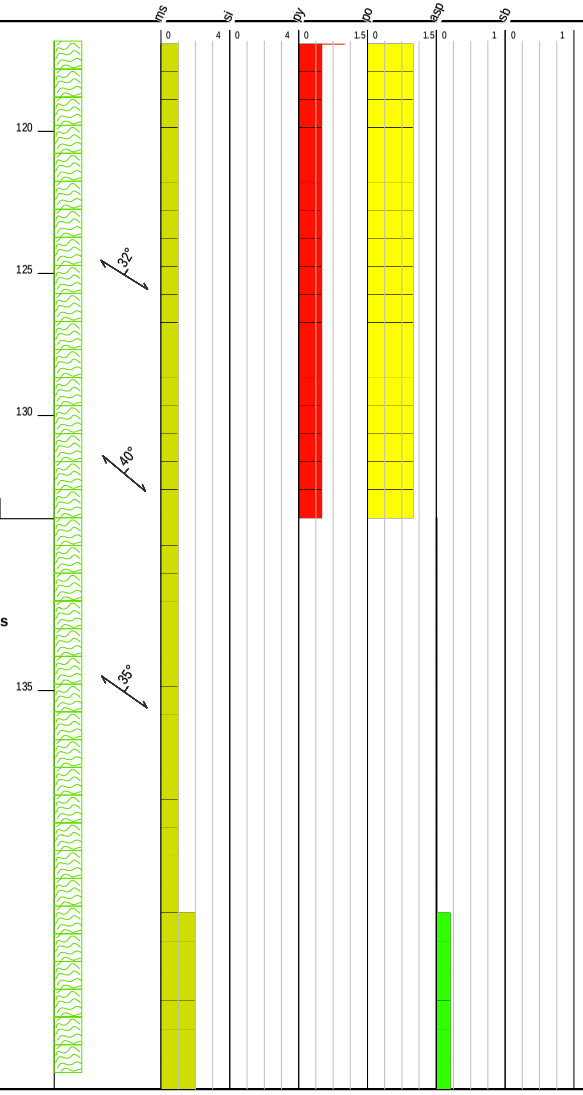

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
126.05	128.05	2.00	I031189	0.01	0.18	39.50	0.29	2.20
128.05	130.05	2.00	I031191	0.01	0.14	2.20	0.11	1.14
130.05	132.50	2.45	I031192	0.01	0.09	1.10	0.17	2.71
132.50	134.50	2.00	I031193	0.07	0.10	114.00	1.04	2.13
134.50	136.50	2.00	I031194	0.12	0.16	179.50	0.41	1.72
136.50	138.00	1.50	I031195	0.27	0.36	1430.00	6.07	1.77
138.00	140.00	2.00	I031196	0.04	0.23	29.10	0.27	2.97
140.00	141.10	1.10	I031197	0.01	0.24	3.70	0.10	1.12
141.10	141.70	0.60	I031198	0.26	0.60	618.00	8.82	0.78
141.70	143.03	1.33	I031199	0.01	0.34	25.30	0.56	1.62

Project: Boulevard2010 **Hole Number:** BV10-20


From	To	Rocktype & Description
		« Pyrite 1.00%»
		« Pyrrhotite 0.50%»
		« 133.60- 136.80 Arsenopyrite 0.01%»
		« 136.80- 138.60 Arsenopyrite 0.20%»
		« 138.60- 141.00 Arsenopyrite 0.01%»
		« 141.00- 141.43 Arsenopyrite 0.20%»
		« 141.43- 143.03 Arsenopyrite 0.01%»
		STRUCTURE
		< @ 135.00 S1 Foliation 35.00° >
		< @ 139.00 S1 Foliation 35.00° >
		< @ 141.00 S1 Foliation 40.00° >
		All mineralized veining occurs from 70-90 degrees TCA.
143.03	151.03	Fault Zone
		FAULT ZONE - BIOTITE CHLORITE SCHIST - Continuation of previous unit however heavily faulted and gouged. Rare (2) late mineralize quartz carbonate veins with trace arsenopyrite.
		ALTERATION
		« Sericite 3.00*»
		« Chlorite 2.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 0.20%»
		« Arsenopyrite 0.01%»
		STRUCTURE

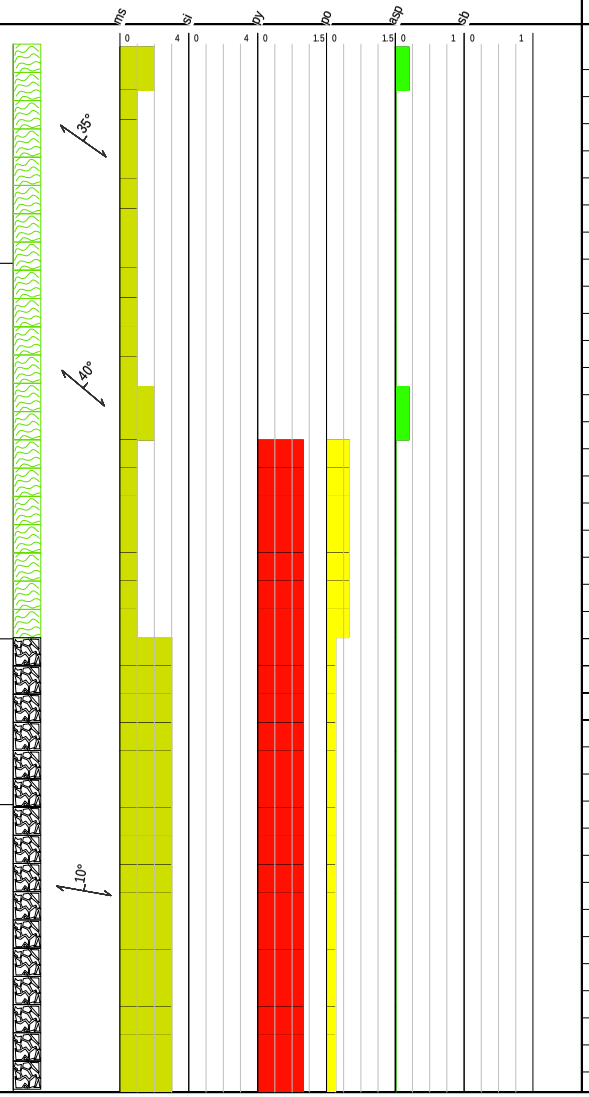

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
143.03	145.03	2.00	I031201	0.01	0.16	16.70	2.99	4.08
145.03	147.03	2.00	I031202	0.13	0.46	1200.00	12.10	3.67
147.03	149.03	2.00	I031203	0.01	0.11	8.70	0.70	3.84
149.03	151.03	2.00	I031204	0.01	0.13	74.30	8.94	2.06

Project: Boulevard2010 **Hole Number:** BV10-20


From	To	Rocktype & Description
		< @ 146.00 S1 Foliation 10.00° >
		< @ 143.03 Fault 30.00° 824.00cm >
		< @ 143.71 Fault Gouge 30.00° 19.00cm >
		< @ 145.80 Fault Gouge 30.00° 50.00cm >
		< @ 148.30 Fault Gouge 30.00° 20.00cm >
151.03	155.89	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Med grey, fine grained, strongly foliated biotite chlorite schist. Continuation of 133.60. 2 late mineralized quartz carbonate veins with trace arsenopyrite. Trace disseminated pyrite and pyrrhotite. Faulted lower contact.
		ALTERATION
		« Sericite 1.00*»
		« 152.00- 154.84 Chlorite 2.00*»
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		« Arsenopyrite 0.01%»
		STRUCTURE
		< @ 154.00 S1 Foliation 20.00° >
155.89	164.00	Fault Zone
		FAULT ZONE - Fault zone within previous unit. No visible mineralized veining. Heavily broken and locally gouged. 1% disseminated pyrite and .5% disseminated pyrrhotite.
		ALTERATION
		« Sericite 3.00*»
		« Chlorite 2.00*»

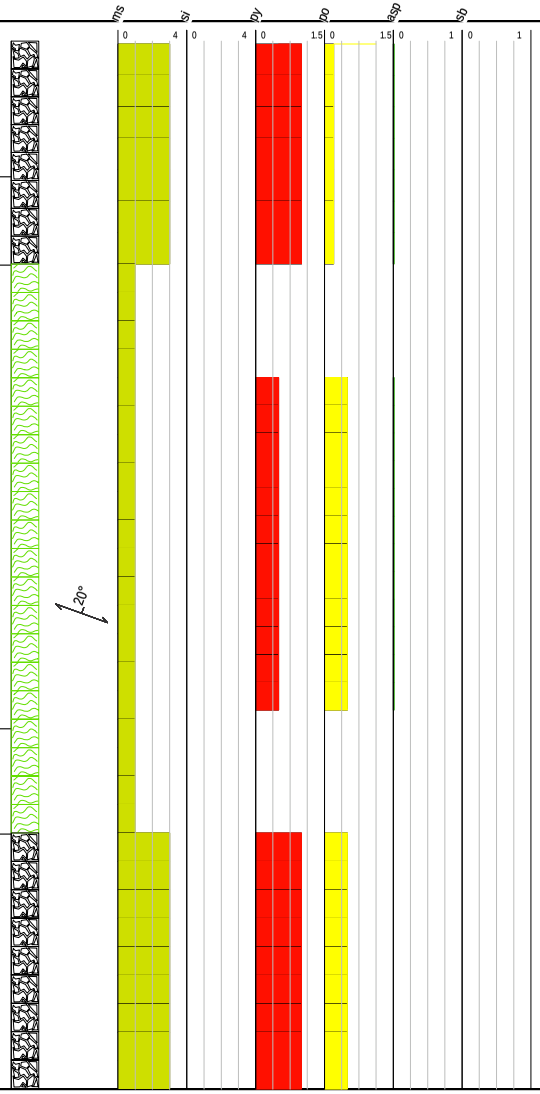

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
151.03	153.03	2.00	I031205	0.07	0.31	462.00	6.54	1.57
153.03	155.03	2.00	I031206	0.01	0.08	1.00	0.31	0.34
155.03	155.89	0.86	I031207	0.01	0.05	2.00	0.22	0.07
155.89	157.89	2.00	I031208	0.01	0.16	2.40	0.27	0.32
157.89	159.89	2.00	I031209	0.01	0.19	0.90	0.39	0.10
159.89	161.89	2.00	I031211	0.01	0.10	13.20	0.38	0.41
161.89	164.00	2.11	I031212	0.01	0.11	0.70	0.43	0.13

Project: Boulevard2010 **Hole Number:** BV10-20


From	To	Rocktype & Description
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 160.00 S1 Foliation 28.00° >
		< @ 156.22 Fault Gouge -25.00° 48.00cm >
		< @ 159.72 Fault Gouge 25.00° 60.00cm >
		< @ 160.07 Fault Gouge 25.00° 30.00cm >
164.00	241.71	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Med grey, fine grained, strongly foliated biotite chlorite schist. Continuation of 151.03-155.89. Late mineralized quartz carbonate veins diminish down unit. Rare late veins contain trace to local 1mm bands of stibnite. Veins typically decrease away from fault zones. Epidote and silica alteration increases down unit. 1% disseminated pyrite, trace disseminated pyrrhotite.
		ALTERATION
		« 164.00- 200.00 Sericite 1.00*»
		« 164.00- 200.00 Silicification 1.00*»
		« 200.00- 241.71 Silicification 2.00*»
		« 164.00- 200.00 Epidote 1.00*»
		« 200.00- 224.00 Epidote 2.00*»
		« 224.00- 241.71 Epidote 1.00*»
		« 164.00- 200.00 Chlorite 1.00*»
		« 200.00- 224.00 Chlorite 2.00*»
		MINERALIZATION
		« Pyrite 2.00%»
		« Pyrrhotite 0.20%»
		« 164.00- 212.75 Arsenopyrite 0.05%» Last sign of arseonpyrite in a late

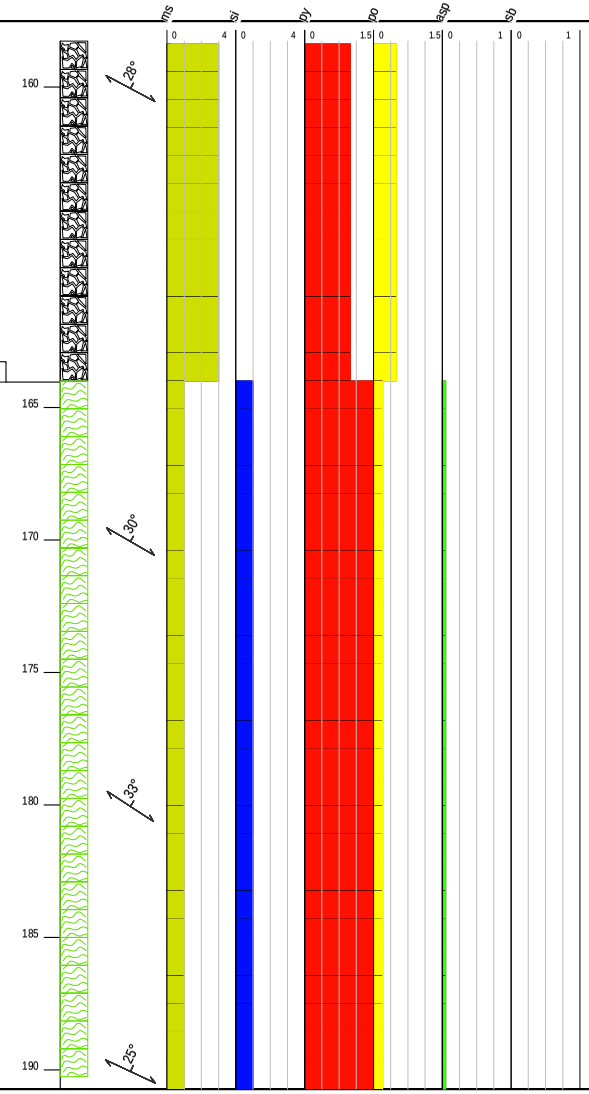

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
164.00	166.00	2.00	I031213	0.01	0.27	4.10	0.19	3.36
166.00	168.00	2.00	I031214	0.02	0.28	19.00	0.26	0.15
168.00	170.00	2.00	I031215	0.01	0.40	1.60	0.11	0.32
170.00	171.30	1.30	I031216	0.01	0.12	1.80	0.14	0.31
171.30	172.60	1.30	I031217	0.13	0.19	433.00	1.70	0.18
172.60	174.60	2.00	I031218	0.01	0.25	4.80	0.17	0.63
174.60	176.60	2.00	I031219	0.01	0.22	1.70	0.07	0.98
176.60	178.60	2.00	I031221	0.01	0.24	2.00	0.09	0.76
178.60	180.60	2.00	I031222	0.02	0.52	4.90	0.12	3.23
180.60	182.60	2.00	I031223	0.09	0.37	129.50	5.37	0.16
182.60	184.60	2.00	I031224	0.01	0.21	3.30	0.12	0.07
184.60	186.60	2.00	I031225	0.01	0.17	3.60	0.10	0.39
186.60	188.60	2.00	I031226	0.01	0.07	0.30	0.08	0.12
188.60	190.60	2.00	I031227	0.01	0.15	2.40	0.12	0.40
190.60	192.60	2.00	I031228	0.01	0.21	0.60	0.20	0.71
192.60	194.60	2.00	I031229	0.02	1.21	1.70	0.10	3.92
194.60	196.60	2.00	I031231	0.01	0.20	2.70	0.09	7.39
196.60	198.60	2.00	I031232	0.01	0.23	2.70	0.10	5.07
198.60	200.60	2.00	I031233	0.01	0.06	1.80	0.31	0.14
200.60	202.50	1.90	I031234	0.01	0.11	2.00	1.23	0.09
202.50	202.80	0.30	I031235	0.14	0.27	562.00	1720.00	0.24
202.80	204.80	2.00	I031236	0.02	0.29	10.10	14.20	0.17
204.80	206.80	2.00	I031237	0.01	0.12	2.70	4.76	0.32
206.80	208.80	2.00	I031238	0.01	0.24	1.30	0.54	0.18
208.80	210.40	1.60	I031239	0.01	0.09	1.20	1.79	0.27
210.40	211.10	0.70	I031241	0.25	0.32	1305.00	24.10	0.14
211.10	213.10	2.00	I031242	0.01	0.13	9.10	1.57	0.15

Project: Boulevard2010 **Hole Number:** BV10-20


From	To	Rocktype & Description
vein	is at 212.75.	
STRUCTURE		
< @ 170.00 S1 Foliation 30.00° >		
< @ 180.00 S1 Foliation 33.00° >		
< @ 190.00 S1 Foliation 25.00° >		
< @ 200.00 S1 Foliation 28.00° >		
< @ 210.00 S1 Foliation 35.00° >		

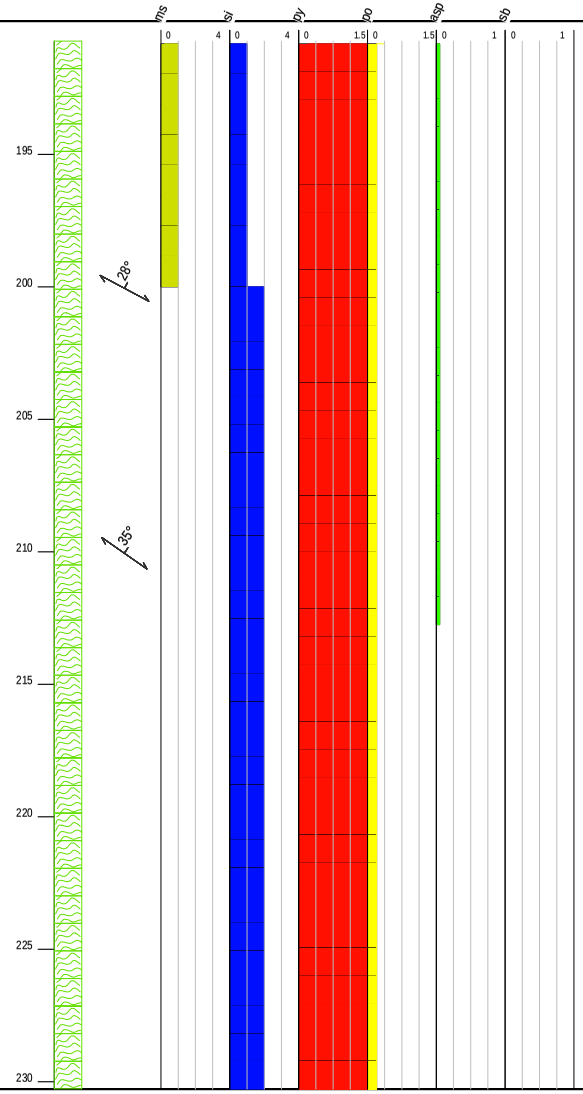

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
213.10	215.10	2.00	I031243	0.03	0.26	148.00	9.28	0.30
215.10	217.10	2.00	I031244	0.01	0.20	2.00	0.45	0.14
217.10	219.10	2.00	I031245	0.01	0.18	2.70	0.36	0.22
219.10	221.10	2.00	I031246	0.01	0.12	47.60	0.72	0.12
221.10	223.10	2.00	I031247	0.01	1.03	1.40	0.29	0.11
223.10	224.94	1.84	I031248	0.02	0.24	7.90	1.32	0.17
224.94	225.47	0.53	I031249	0.01	0.12	0.50	2.90	0.11
225.47	227.47	2.00	I031251	0.06	0.25	14.00	6.10	0.11
227.47	229.47	2.00	I031252	0.01	0.24	3.10	0.41	3.28
229.47	231.47	2.00	I031253	0.01	0.15	1.20	0.63	0.45
231.47	233.47	2.00	I031254	0.01	0.18	0.80	0.26	0.19
233.47	235.47	2.00	I031255	0.01	0.13	2.00	0.18	0.23
235.47	237.47	2.00	I031256	0.01	0.31	1.40	0.22	1.79
237.47	239.47	2.00	I031257	0.02	0.48	2.40	0.16	1.90
239.47	241.71	2.24	I031258	0.01	0.19	1.70	0.19	2.19

Project: Boulevard2010 **Hole Number:** BV10-20

From	To	Rocktype & Description
	241.71	241.71 EOH

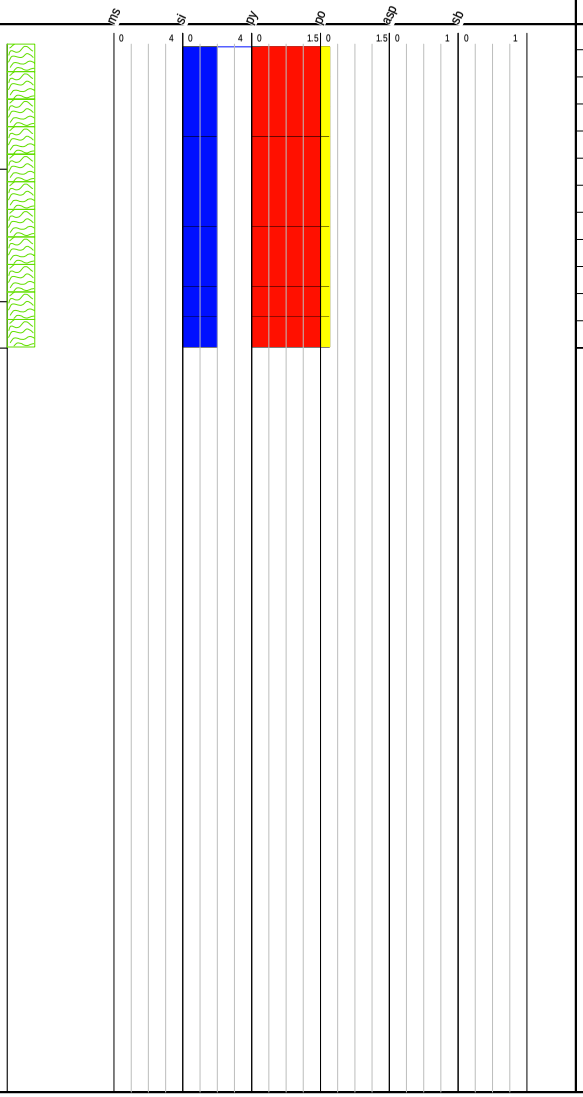

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1308.0
Hole BV10-21	**Azimuth (º):** 45.0
Location: 6966236 m North, 576283 m East	**Dip (º):** -50.0
Logged by: Ryan Toole	**Length (m):** 118.69
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Test Vegas trend near Sunset trend
Date Started: 2010/07/10 **Date Completed:** 2010/07/11	
Dip Tests By:	

Summary Log:


This hole was the first to test the Vegas trend. It encountered 0.3% arsenopyrite and 1% stibnite from 19.96 – 21.17m, 0.5% arsenopyrite from 41.75 – 42.40m, 0.1% arsenopyrite from 44.50 – 44.80m, and 0.1% arsenopyrite from 45.70 – 46.28 associated with quartz carbonate veins. The presence of arsenopyrite and stibnite explains the SSE-trending Vegas Trend soil anomaly and is significant in that we encountered mineralization within a new area, however the veining density and sulfide content is not abundant.

Downhole surveys:

Depth	Dip	Azimuth
98.45	-51.50	49.80

Project: Boulevard2010 **Hole Number:** BV10-21


From	To	Rocktype & Description
0.00	3.66	Casing
		Casing - Overburden
3.66	30.92	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium grey, fine grained, strongly foliated, biotite chlorite schist. Upper 14m is blocky with oxidized fractures. Approximately 15 late stage stibnite and arsenopyrite bearing quartz carbonate veining from 19.96-21.17m. Trace to locally 1% arsenopyrite in veins and disseminated throughout wall rock surrounding veins. 1cm band of stibnite @ 20.77 within a quartz vein. 1% disseminated pyrite, 1% diseeminated pyrrhotite. Sharp lower contact at 55 degrees TCA.
		ALTERATION
		« 19.96- 21.17 Sericite 1.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 1.00%»
		« 22.00- 26.00 Pyrite 2.00%»
		« 22.00- 26.00 Pyrrhotite 3.00%»
		« 19.96- 21.17 Arsenopyrite 0.30%»
		« 19.96- 21.17 Stibnite 1.00%»
		STRUCTURE
		< @ 10.00 S1 Foliation 35.00° >
		< @ 20.00 S1 Foliation 25.00° >
		< @ 30.00 S1 Foliation 40.00° >
30.92	46.50	Chlorite Schist
		CHLORITE SCHIST - Green, fine grained, strongly foliated chlorite schist. Rare 1st generation veining, local 3rd generation mineralized veining. Mineralized veining has anastomosing habit, with very fine grained arsenopyrite up to 2% of

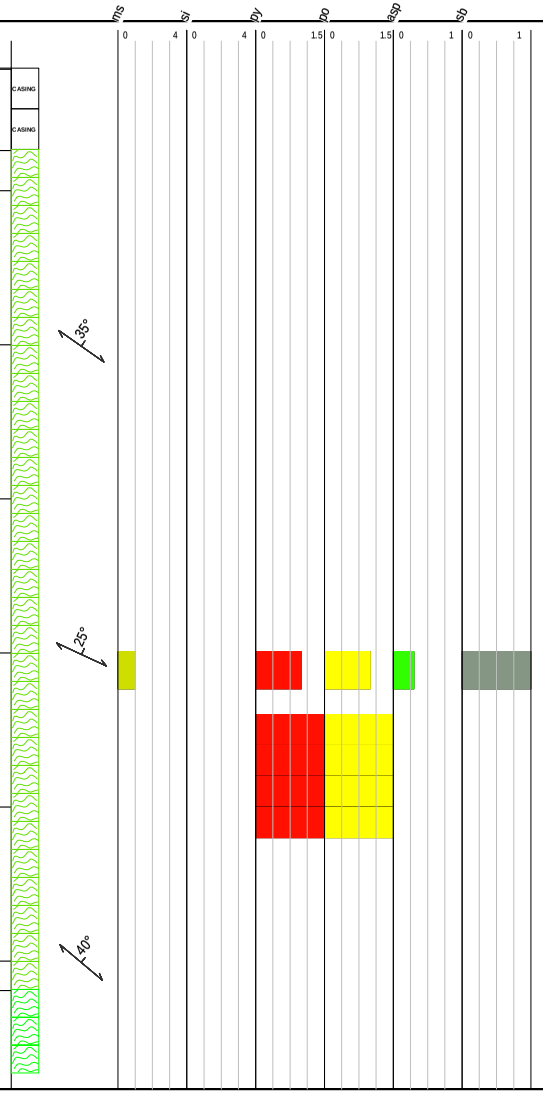

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
3.65	4.88	1.23	I031259	0.01	0.41	5.90	0.79	2.00
4.88	7.92	3.04	I031261	0.01	0.48	1.30	0.90	0.80
7.92	10.97	3.05	I031262	0.02	0.64	9.00	3.42	6.00
10.97	14.02	3.05	I031263	0.01	0.39	6.40	1.28	5.43
14.02	17.07	3.05	I031264	0.02	0.29	7.90	5.94	0.45
17.07	19.07	2.00	I031265	0.22	0.35	8.20	2.06	1.01
19.07	20.60	1.53	I031266	0.15	1.02	1325.00	3650.00	0.42
20.60	22.60	2.00	I031267	0.01	0.10	0.90	4.12	0.18
22.60	24.60	2.00	I031268	0.01	0.57	3.10	7.69	0.95
24.60	26.60	2.00	I031269	0.01	0.45	2.50	4.19	1.68
26.60	28.60	2.00	I031271	0.01	0.35	1.50	3.03	0.74
28.60	30.60	2.00	I031272	0.04	0.30	0.70	0.64	0.42
30.60	32.60	2.00	I031273	0.02	0.21	2.00	1.21	0.51
32.60	34.60	2.00	I031274	0.01	0.15	1.60	1.24	0.40
34.60	36.60	2.00	I031275	0.01	0.13	1.00	0.72	0.48
36.60	38.60	2.00	I031276	0.01	0.13	0.90	0.86	0.45
38.60	40.60	2.00	I031277	0.01	0.10	0.80	0.58	0.58

Project: Boulevard2010 **Hole Number:** BV10-21


From	To	Rocktype & Description
		veins. Mineralized veining occurs from 41.75-42.40, 44.50-44.80 (trace arsenopyrite), and 45.70-46.28 (trace arsenopyrite). Lower 2.10 m is a fault zone. Core is blocky throughout unit. Irregular lower contact.
		ALTERATION
		« 45.70- 46.28 Sericite 3.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 1.00%»
		« 41.75- 42.40 Arsenopyrite 0.50%»
		« 44.50- 44.80 Arsenopyrite 0.10%»
		« 45.70- 46.28 Arsenopyrite 0.10%»
		STRUCTURE
		< @ 40.00 S1 Foliation 45.00° >
		< @ 45.00 S1 Foliation 60.00° >
		FAULTS
		< @ 32.85 Fault 50.00° 10.00cm >
		< @ 39.53 Fault 55.00° 47.00cm >
		< @ 44.40 Fault 80.00° 210.00cm >
		< @ 46.00 Fault Gouge 65.00° 28.00cm >
		< @ 46.28 ven 35.00° 22.00mm > 2nd generation quartz vein
46.50	113.69	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Green, fine grained, strongly foliated chlorite biotite schist. This unit is not the same as previous chlorite biotite schists logged as it has much more biotite, 35-40% as opposed to 15%. It appears to be the same unit as all biotite chlorite schists logged, however has more chlorite than biotite. Locally, biotite increases to 50% of composition. 1st and 2nd

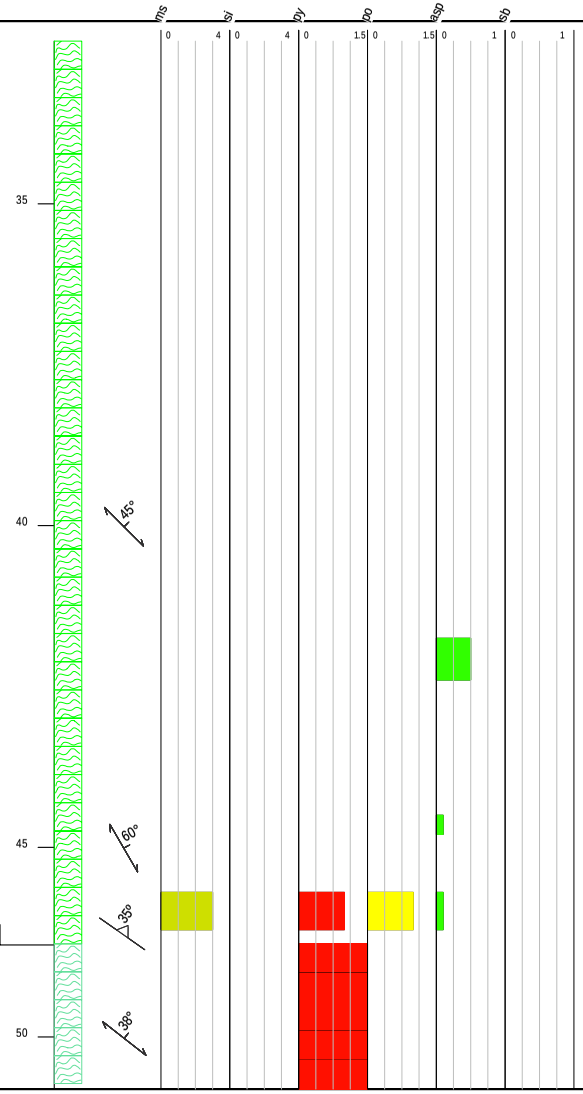

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
40.60	41.60	1.00	I031278	0.01	0.08	0.70	0.54	0.56
41.60	42.40	0.80	I031279	0.01	0.07	0.80	0.45	0.79
42.40	44.40	2.00	I031281	0.01	0.08	1.00	1.85	0.53
44.40	45.68	1.28	I031282	0.01	0.14	3.50	0.65	0.27
45.68	46.28	0.60	I031283	0.65	0.73	2380.00	2.98	1.40
46.28	48.28	2.00	I031284	0.02	0.66	18.10	0.57	6.87
48.28	50.28	2.00	I031285	0.01	0.25	18.40	0.40	1.92
50.28	51.28	1.00	I031286	0.01	0.32	7.30	0.32	2.28
91.00	93.00	2.00	I031287	0.01	0.24	1.70	0.32	1.67
93.00	95.00	2.00	I031288	0.01	0.21	0.80	0.33	1.16
95.00	97.00	2.00	I031289	0.01	0.15	1.70	0.45	1.06
97.00	99.00	2.00	I031291	0.01	0.22	1.60	0.39	0.65

Project: Boulevard2010 **Hole Number:** BV10-21


From	To	Rocktype & Description
		generation veins are locally folded, boudinaged, and transposed along foliation. Local epidote alteration typically associated with faulting, and rarely with 2nd generation veining. 4% dissemineted pyrite dimminished downhole. Rare, late, unmineralized carbonate veins in lower 18.69m. EOH
		ALTERATION
		« 54.47- 54.97 Sericite 2.00*»
		« 94.60- 95.00 Sericite 2.00*»
		« 54.34- 54.47 Sericite 4.00*»
		« 54.00- 56.30 Epidote 1.00*»
		« 76.00- 79.00 Epidote 1.00*»
		MINERALIZATION
		« 46.50- 67.00 Pyrite 4.00%»
		« 67.00- 85.00 Pyrite 2.00%»
		« 85.00- 113.69 Pyrite 1.00%»
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 50.00 S1 Foliation 38.00° >
		< @ 60.00 S1 Foliation 39.00° >
		< @ 70.00 S1 Foliation 30.00° >
		< @ 80.00 S1 Foliation 41.00° >
		< @ 90.00 S1 Foliation 38.00° >
		< @ 100.00 S1 Foliation 30.00° >
		< @ 110.00 S1 Foliation 30.00° >
		FAULTS

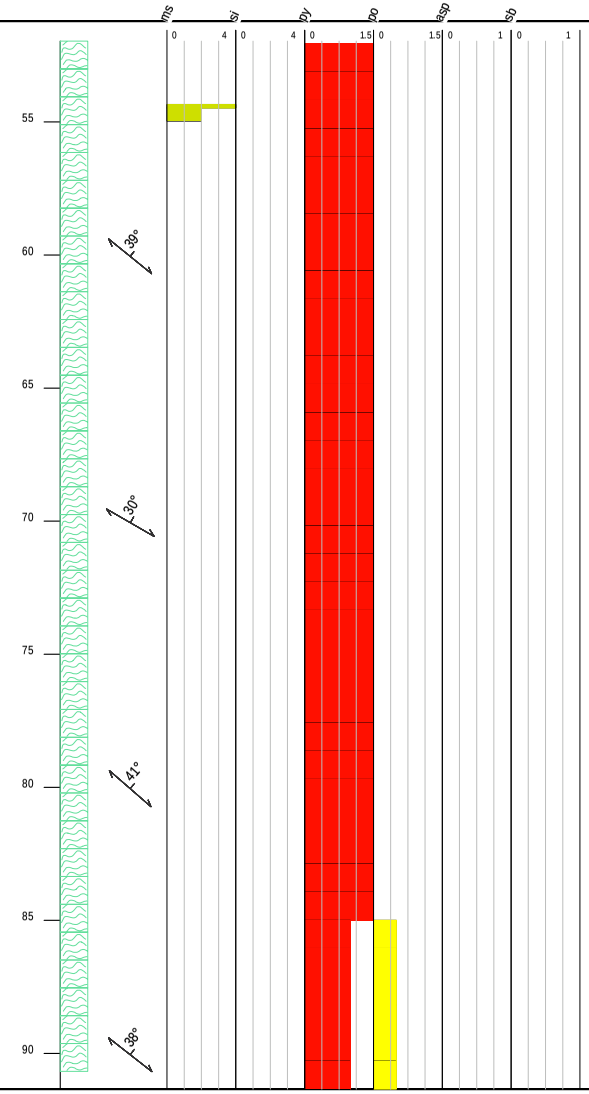

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
99.00	101.00	2.00	I031292	0.01	0.25	0.90	0.24	0.57
101.00	103.00	2.00	I031293	0.01	0.23	1.60	0.43	2.63
103.00	105.00	2.00	I031294	0.01	0.15	1.00	0.32	2.12
105.00	107.00	2.00	I031295	0.01	0.07	1.10	0.47	1.82
107.00	109.00	2.00	I031296	0.01	0.36	0.70	0.28	0.50
109.00	111.00	2.00	I031297	0.01	0.19	0.30	0.25	0.73
111.00	112.00	1.00	I031298	0.01	0.20	3.50	0.24	0.45
112.00	113.69	1.69	I031299	0.01	0.17	0.10	0.27	0.41

Project: Boulevard2010 **Hole Number:** BV10-21

From	To	Rocktype & Description
		< @ 54.34 Fault Gouge 50.00° 13.00cm >
		< @ 54.34 Fault 50.00° 65.00cm >
		< @ 57.57 Fault 70.00° 58.00cm >
		< @ 83.32 Fault 55.00° 20.00cm >
		< @ 84.00 Fault 10.00° 12.00cm >
		< @ 85.62 Fault 10.00° 148.00cm >
		< @ 94.00 Fault 50.00° 175.00cm >
		< @ 94.85 Fault Gouge 50.00° 15.00cm >
113.69	113.69	EOH

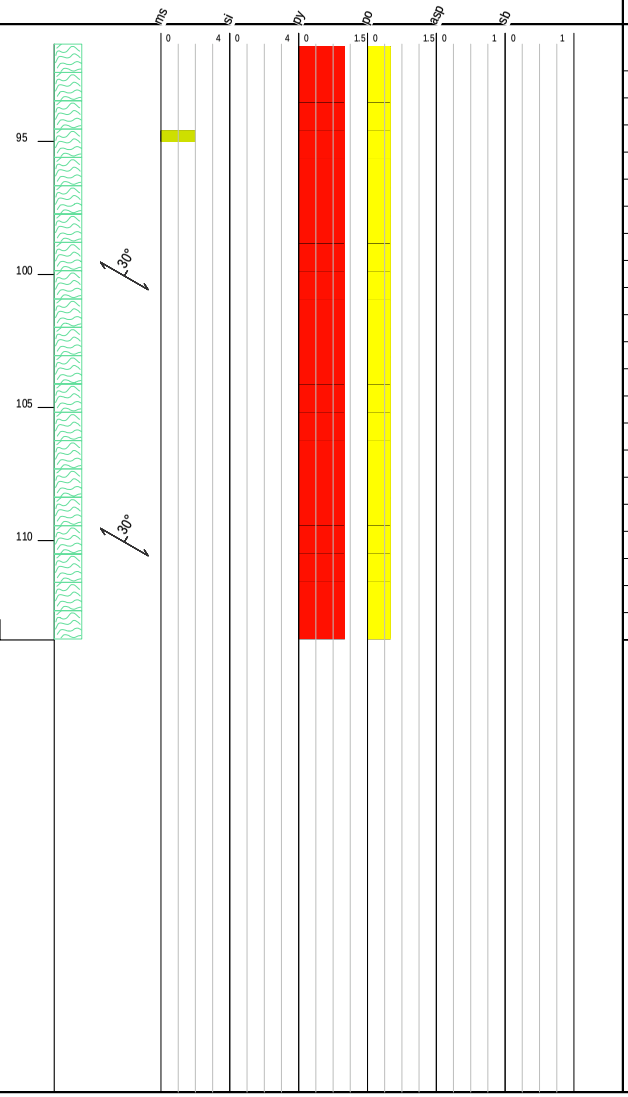

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1288.0
Hole BV10-22	**Azimuth (º):** 45.0
Location: 6966111 m North, 576326 m East	**Dip (º):** -50.0
Logged by: Ryan Toole	**Length (m):** 124.11
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Vegas trend
Date Started: 2010/07/11 **Date Completed:** 2010/07/12	
Dip Tests By:	

Summary Log:


It encountered 0.5% sphalerite and 0.5% stibnite from 56.05-66.8m and 0.1% sphalerite and 0.1% stibnite from 66.80-75.19m associated with quartz-carbonate veins. A single minute occurrence of visible gold exists at 72.80m, infilling a fracture on an early quartz vein, in close proximity to a late quartz-carbonate vein.

Downhole surveys:

Depth	Dip	Azimuth
57.00	-51.20	45.50
99.97	-50.90	44.80
117.96	-50.70	46.90

Project: Boulevard2010 **Hole Number:** BV10-22

From	To	Rocktype & Description
0.00	6.10	Casing
		CASING - Overburden
6.10	56.03	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Mottled green and grey, fine grained, strongly foliated, chlorite biotite schist. 65% chlorite. Locally biotite increases to 50% from 24.0-32.0m. Moderate silica and epidote alteration. Rare 1st and 2nd generation veining. 4 late quartz carbonate veins in lower 15 m with no visible mineralization. 1% pyrite and 1% pyrrhotite disseminations. Fault zone starts at 51.68-57.65 through into next unit. Gouged lower contact at 85 degrees TCA.
		ALTERATION
		« Silicification 2.00*»
		« 6.10- 50.60 Epidote 2.00*»
		« 50.60- 56.03 Epidote 1.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 1.00%»
		STRUCTURE
		< @ 10.00 S1 Foliation 50.00° >
		< @ 20.00 S1 Foliation 33.00° >
		< @ 30.00 S1 Foliation 40.00° >
		< @ 40.00 S1 Foliation 45.00° >
		< @ 50.00 S1 Foliation 50.00° >
		FAULTS
		< @ 11.20 Fault 55.00° 20.00cm >

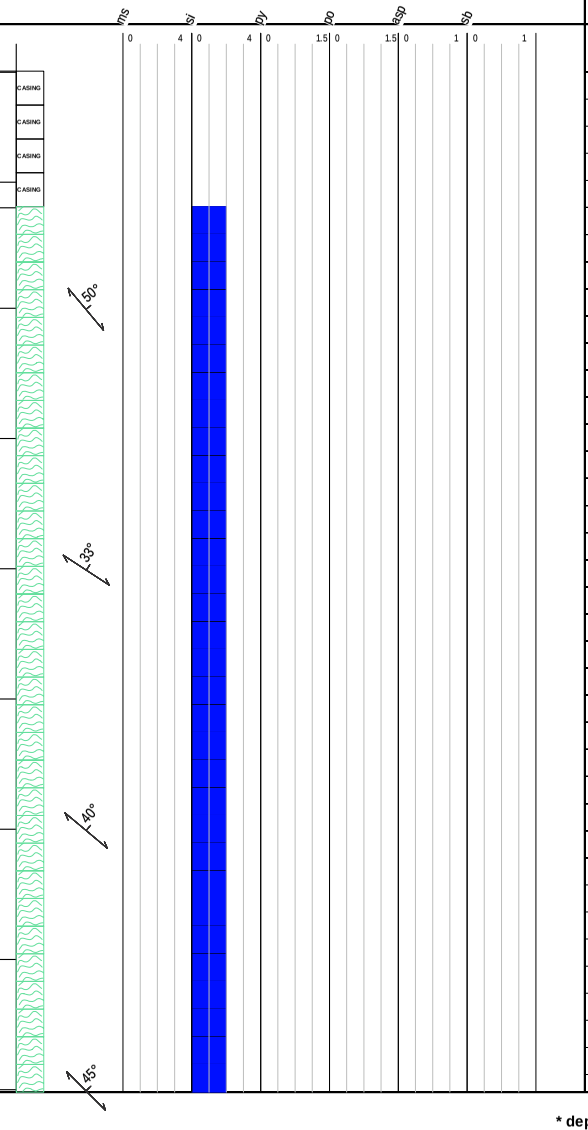

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
6.10	8.10	2.00	I031301	0.01	0.12	0.40	0.78	0.50
8.10	10.10	2.00	I031302	0.01	0.07	0.20	0.25	0.44
10.10	12.10	2.00	I031303	0.01	0.07	0.60	0.35	0.58
12.10	14.10	2.00	I031304	0.01	0.07	2.30	0.39	0.45
14.10	16.10	2.00	I031305	0.01	0.11	2.80	0.83	0.78
16.10	18.10	2.00	I031306	0.01	0.10	0.40	0.22	0.61
18.10	20.10	2.00	I031307	0.01	0.22	1.00	0.55	0.42
20.10	22.10	2.00	I031308	0.01	0.16	0.30	0.50	0.59
22.10	24.10	2.00	I031309	0.01	0.17	12.30	0.49	0.78
24.10	26.10	2.00	I031311	0.01	0.18	0.50	0.25	0.50
26.10	28.10	2.00	I031312	0.01	0.24	0.50	0.20	0.32
28.10	30.10	2.00	I031313	0.01	0.71	0.50	0.32	0.48
30.10	32.10	2.00	I031314	0.01	0.56	1.00	0.24	0.54
32.10	34.10	2.00	I031315	0.01	0.13	3.50	0.32	0.17
34.10	36.10	2.00	I031316	0.01	0.17	0.80	0.74	0.36
36.10	38.10	2.00	I031317	0.01	0.20	1.20	0.74	0.41
38.10	40.10	2.00	I031318	0.01	0.26	0.90	0.22	0.52
40.10	42.10	2.00	I031319	0.01	0.36	1.00	0.21	0.37
42.10	44.10	2.00	I031321	0.01	0.23	5.70	0.50	1.18
44.10	46.10	2.00	I031322	0.01	0.27	16.40	0.79	0.82
46.10	48.10	2.00	I031323	0.01	0.26	1.20	0.47	0.14
48.10	50.10	2.00	I031324	0.01	0.21	0.50	0.47	0.08
50.10	52.10	2.00	I031325	0.01	0.12	1.70	0.84	0.13
52.10	54.10	2.00	I031326	0.01	0.10	1.80	1.54	0.54
54.10	56.00	1.90	I031327	0.01	0.18	11.60	1.96	0.67

Project: Boulevard2010 **Hole Number:** BV10-22

From	To	Rocktype & Description
< @ 15.10 Fault 10.00° 37.00cm >		
< @ 36.12 Fault Gouge 45.00° 8.00cm >		
< @ 45.45 Fault Gouge 25.00° 3.00cm >		
< @ 51.68 Fault 49.00° 597.00cm >		
< @ 10.20 Fault Gouge 10.00° 60.00cm >		
56.03	75.19	Biotite Chlorite Schist

BIOTITE CHLORITE SCHIST - Medium to dark grey, fine grained, strongly foliated biotite chlorite schist. Late mineralized quartz carbonate veining occurs with an average density of 1 vein per 10 cm (1/10). No visible arsenopyrite, however; 1/4 of veins host approximately 2% sphalerite, 2% stibnite, and on one occurance at 72.80, very minor (<.5mm) visible gold. Pyrite forms euhedral crystals up to 3mm, and as fine disseminations in wall rock. Veining generally occurs between 50-65 degrees TCA. Mineralization within veining decreases down unit away from fault zone. Locally unit is faulted and gouged. Lower contact signified by loss of mineralized veins and silica alteration.

ALTERATION

« Silicification 1.00*»


« 56.05- 56.22 Sericite 4.00*»

« 56.22- 57.56 Sericite 2.00*»

« 60.73- 63.27 Sericite 3.00*»

« 63.27- 66.80 Sericite 2.00*»


« 66.80- 75.19 Sericite 1.00*»

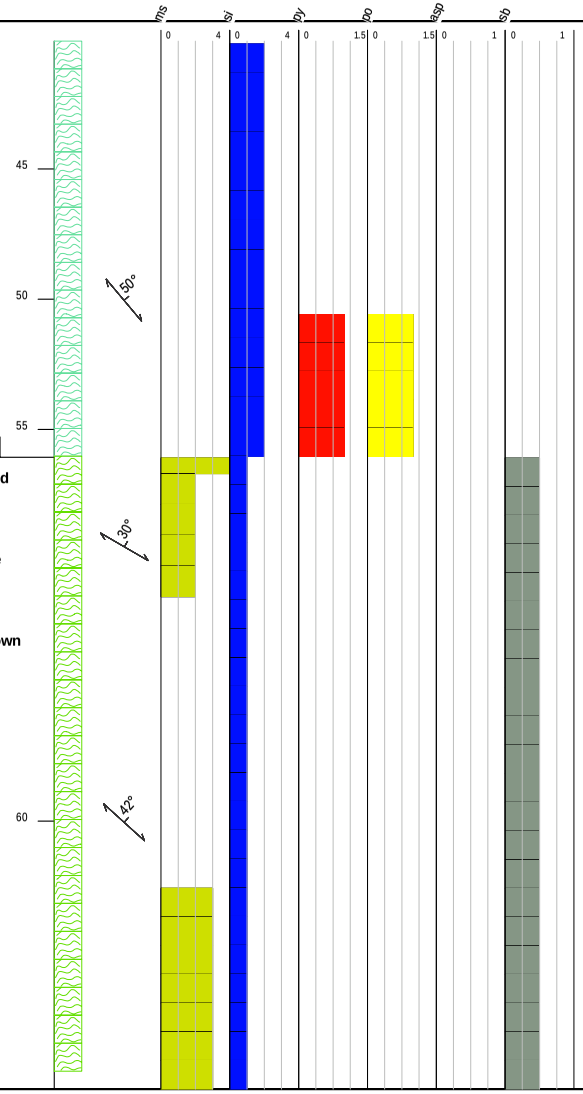

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
56.00	57.00	1.00	I031328	0.21	2.42	446.00	11.70	0.36
57.00	58.00	1.00	I031329	1.18	12.80	141.00	21.40	0.51
58.00	59.00	1.00	I031331	0.07	1.21	171.00	4.22	1.34
59.00	60.46	1.46	I031332	0.02	0.21	86.10	1.74	0.69
60.46	62.10	1.64	I031333	0.39	2.83	971.00	35.00	0.36
62.10	63.10	1.00	I031334	0.17	1.52	71.00	3.61	0.59
63.10	65.10	2.00	I031335	0.17	0.98	855.00	8.34	0.48
65.10	66.85	1.75	I031337	0.74	6.84	1940.00	45.50	1.13
66.85	68.85	2.00	I031338	0.02	0.27	41.70	6.00	1.51
68.85	70.85	2.00	I031339	0.04	0.68	335.00	4.76	0.91
70.85	72.60	1.75	I031341	0.10	0.52	129.50	7.00	0.59
72.60	73.00	0.40	I031342	4.03	1.18	1495.00	40.30	0.79
73.00	74.00	1.00	I031343	0.34	0.82	1555.00	19.85	0.58

Project: Boulevard2010 **Hole Number:** BV10-22

From	To	Rocktype & Description
		« 66.80- 75.19 carbonate (ankerite?) 1.00*»
		MiINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 0.50%»
		« 56.05- 66.80 Sphalerite 0.50%»
		« 66.80- 75.19 Sphalerite 0.10%»
		« 56.05- 66.80 Stibnite 0.50%»
		« 66.80- 75.19 Stibnite 0.10%»
		« 72.80- 72.81 Augite 0.01%»
		STRUCTURE
		< @ 57.00 S1 Foliation 30.00° >
		< @ 60.00 S1 Foliation 42.00° >
		< @ 63.00 S1 Foliation 46.00° >
		< @ 66.00 S1 Foliation 49.00° >
		< @ 69.00 S1 Foliation 53.00° >
		< @ 72.00 S1 Foliation 55.00° >
		< @ 75.00 S1 Foliation 40.00° >
		FAULTS
		< @ 56.05 Fault Gouge 90.00° 10.00cm >
		< @ 56.59 Fault Gouge 70.00° 14.00cm >
		< @ 60.46 Fault 90.00° 245.00cm >
		< @ 60.46 Fault Gouge 90.00° 34.00cm >
		< @ 61.10 Fault Gouge 90.00° 40.00cm >
		< @ 62.59 Fault Gouge 60.00° 50.00cm >
		< @ 65.35 Fault 65.00° 145.00cm >

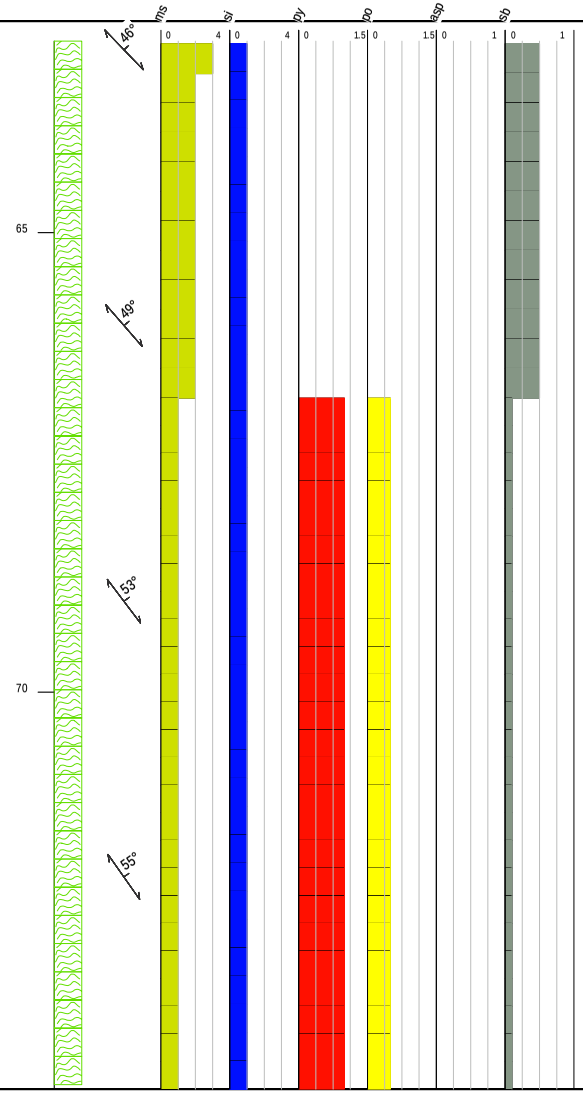

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Project: Boulevard2010 **Hole Number:** BV10-22

From	To	Rocktype & Description
75.19	108.81	Biotite Chlorite Schist

BIOTITE CHLORITE SCHIST - Medium grey, fine grained, strongly foliated biotite chlorite schist. Continuation of previous unit with chlorite increasing downhole locally up to 50%. Rare unmineralized late quartz carbonate veining with a density of approximately 1vein/100cm. 1 arsenopyrite bearing vein at 87.89 with 2% arsenopyrite. 1% pyrite and 1% pyrrhotite disseminations. Late veining increases to 1vein/10cm from 88.33-90.50m associated with a fault zone. Rare 1st and 2nd generation veining. Lower contact signified by increased chlorite.

ALTERATION

« carbonate (ankerite?) 1.00*»

« 88.33- 89.34 Sericite 4.00*»

« 89.34- 90.50 Sericite 1.00*»

MINERALIZATION


« Pyrite 1.00%»
« Pyrrhotite 1.00%»

STRUCTURE

< @ 78.00 S1 Foliation 41.00° >
< @ 81.00 S1 Foliation 45.00° >
< @ 84.00 S1 Foliation 30.00° >
< @ 87.50 S1 Foliation 36.00° >
< @ 95.00 S1 Foliation 50.00° >
< @ 105.00 S1 Foliation 25.00° >

FAULTS


< @ 82.06 Fault Gouge 42.00° 2.00cm >
< @ 88.33 Fault Gouge 90.00° 95.00cm >

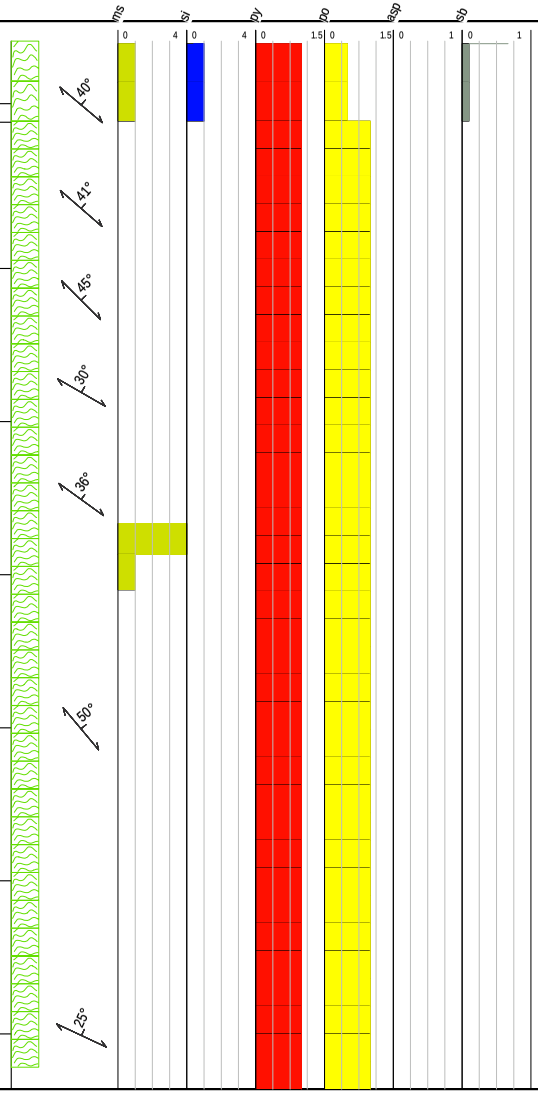

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
74.00	75.20	1.20	I031344	0.59	2.32	356.00	38.70	0.49
75.20	77.20	2.00	I031345	0.01	0.30	4.40	3.15	0.49
77.20	79.20	2.00	I031346	0.01	0.26	11.10	0.86	0.37
79.20	81.20	2.00	I031347	0.01	0.31	0.90	0.36	0.34
81.20	83.20	2.00	I031348	0.02	0.38	16.40	1.66	0.45
83.20	85.20	2.00	I031349	0.01	0.29	18.70	0.71	0.32
85.20	87.20	2.00	I031351	0.01	0.25	1.00	0.12	0.36
87.20	87.80	0.60	I031352	0.01	0.20	8.70	0.19	0.37
87.80	88.33	0.53	I031353	0.12	0.21	1165.00	2.04	0.39
88.33	89.28	0.95	I031354	0.01	0.20	26.50	0.87	0.41
89.28	90.28	1.00	I031355	0.53	0.22	1270.00	2.61	0.49
90.28	92.28	2.00	I031356	0.01	0.17	14.90	0.20	0.40
92.28	94.28	2.00	I031357	0.08	0.87	325.00	7.68	0.40
94.28	96.28	2.00	I031358	0.01	0.28	54.30	1.57	0.40
96.28	98.28	2.00	I031359	0.15	1.15	314.00	12.90	0.42
98.28	100.28	2.00	I031361	0.02	0.19	5.90	0.27	0.26
100.28	102.28	2.00	I031362	0.01	0.14	0.50	0.16	0.36
102.28	104.28	2.00	I031363	0.01	0.11	0.60	2.62	0.46
104.28	106.28	2.00	I031364	0.01	0.14	0.50	2.48	0.53
106.28	108.28	2.00	I031365	0.01	0.10	0.50	0.23	0.62

Project: Boulevard2010 **Hole Number:** BV10-22


From	To	Rocktype & Description
108.81	119.18	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Green, fine grained, strongly foliated, chlorite schist. Biotite ranges from 25% at the upper contact to <2% at the lower contact. Rare 1st and 2nd generation veining. Rare late (4th generation) unmineralized carbonate veining;<5mm wide. Trace pyrite and pyrrhotite disseminations. Lower contact signified by increased biotite and fault zone.
		MINERALIZATION
		« Pyrite 0.30%»
		« Pyrrhotite 0.30%»
		STRUCTURE
		< @ 110.00 S1 Foliation 41.00° >
		< @ 115.00 S1 Foliation 25.00° >
119.18	124.05	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium grey, fine grained, strongly foliated, biotite chlorite schist. Rare 1st and 2nd generation veining. Trace pyrite and pyrrhotite disseminations. Less than 5% chlorite. EOH
		ALTERATION
		« carbonate (ankerite?) 1.00*»
		« 119.18- 119.68 Sericite 2.00*»
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 121.00 S1 Foliation 33.00° >

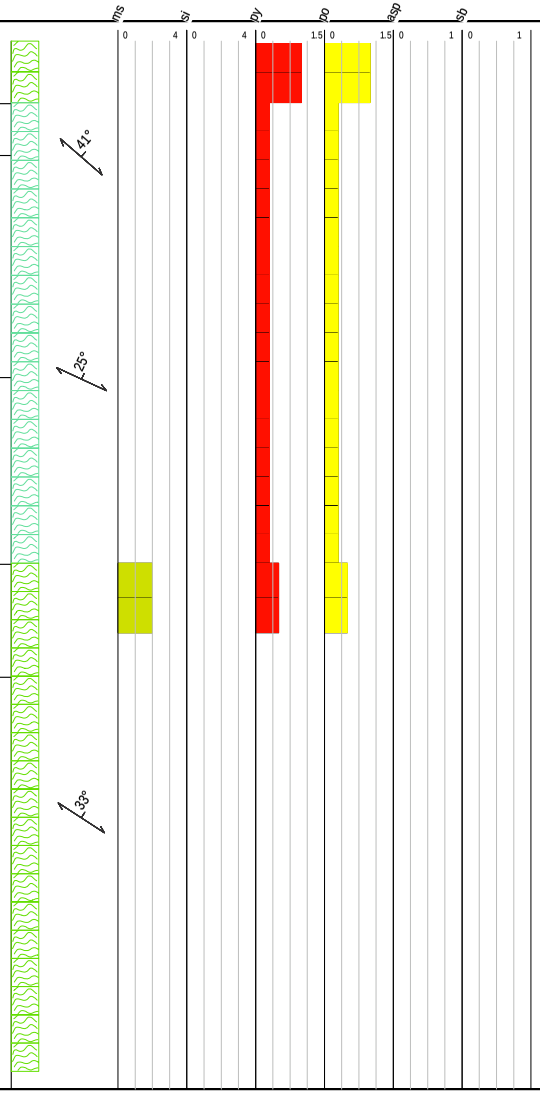

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
108.28	110.28	2.00	I031366	0.01	0.08	0.50	0.18	0.71
110.28	112.28	2.00	I031367	0.01	0.13	0.60	0.20	0.09
112.28	114.28	2.00	I031368	0.01	0.08	2.20	0.20	2.17
114.28	116.28	2.00	I031369	0.01	0.05	2.20	0.21	0.18
116.28	118.28	2.00	I031371	0.01	0.11	8.20	0.20	0.32
118.28	119.18	0.90	I031372	0.01	0.20	1.20	0.32	0.11
119.18	121.18	2.00	I031373	0.01	0.27	6.70	1.61	4.54
121.18	123.18	2.00	I031374	0.01	0.32	2.30	0.48	12.45
123.18	124.05	0.87	I031375	0.01	0.24	1.70	0.32	5.08

Project: Boulevard2010 **Hole Number:** BV10-22

From	To	Rocktype & Description
		FAULTS
		< @ 119.18 Fault 40.00° 50.00cm >
124.05	124.05	EOH

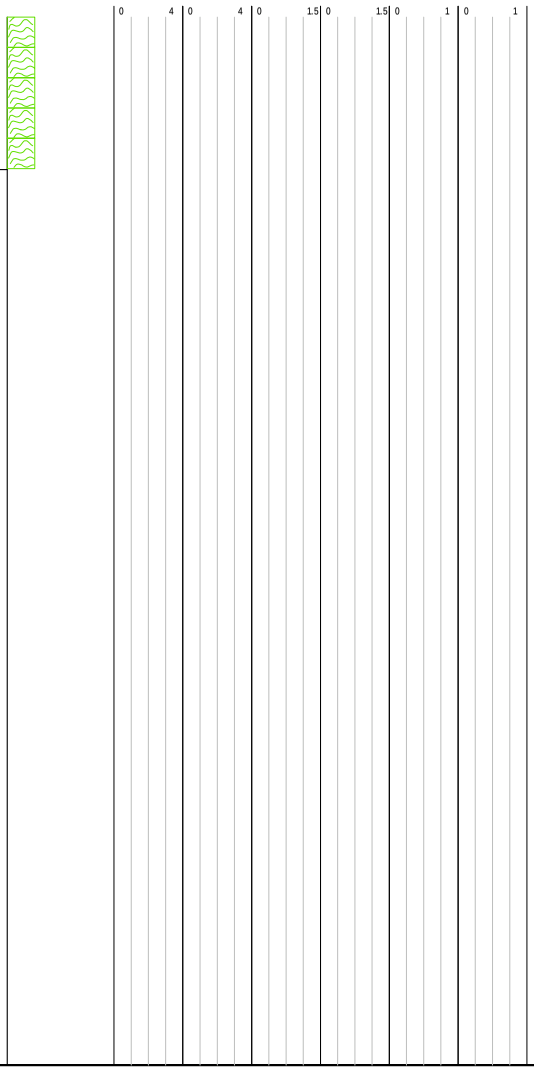

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1288.0
Hole BV10-23	**Azimuth (º):** 45.0
Location: 6966111 m North, 576326 m East	**Dip (º):** -70.0
Logged by: Ryan Toole	**Length (m):** 200.50
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Vegas trend; steeper test from same set-up as BV10-22
Date Started: 2010/07/15 **Date Completed:** 2010/07/16	
Dip Tests By:	

Summary Log:


Hole BV10-23 was drilled from the same set up at BV10-22 and steepened to -70°encountered numerous zones of quartz-carbonate mineralized veining with trace sphalerite and stibnite from 12.15m to 183.57m. The most intense veining and mineralization occurs between 62.00-99.62m with approximately 0.2% sphalerite and stibnite. Arsenopyrite occurs between 119.47-120.78, 157.00-165.65, 173.5-176.67, and 182.02-183.57m at 0.2%, very minor stibnite and sphalerite.

Downhole surveys:

Depth	Dip	Azimuth
106.07	-70.50	42.50
157.89	-70.10	42.60

Project: Boulevard2010 **Hole Number:** BV10-23


From	To	Rocktype & Description
0.00	6.10	Casing
		CASING - Overburden
6.10	55.03	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Greenish grey, fine grained, strongly foliated, chlorite biotite schist. Rare 1st and 2nd generation, foliation parallel veining. 2nd generatoin quartz veins have 1-2% pyrrhotite blebs with trace chalcopyrite. Rare local 3rd generation quartz carbonate veins with trace sphalerite and stibnite with 1-2 % euhederal pyrite cubes. Veins occur from 12.15-12.17m, 37.10-37.23m, and 43.59-44.49m. No visible sphalerite from 43.59-44.49. 1% pyrite and pyrrhotite disseminations throughout unit. Faulted lower contact at 80 degrees TCA.
		ALTERATION
		« 43.59- 44.49 Sericite 1.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 1.00%»
		« 12.15- 12.17 Sphalerite 0.10%»
		« 12.15- 12.17 Stibnite 0.10%»
		« 37.10- 37.23 Sphalerite 0.10%»
		« 37.10- 37.23 Stibnite 0.10%»
		« 43.59- 44.49 Stibnite 0.10%»
		STRUCTURE
		< @ 10.00 S1 Foliation 35.00° >
		< @ 20.00 S1 Foliation 30.00° >
		< @ 30.00 S1 Foliation 20.00° >
		< @ 40.00 S1 Foliation 45.00° >
		< @ 50.00 S1 Foliation 40.00° >

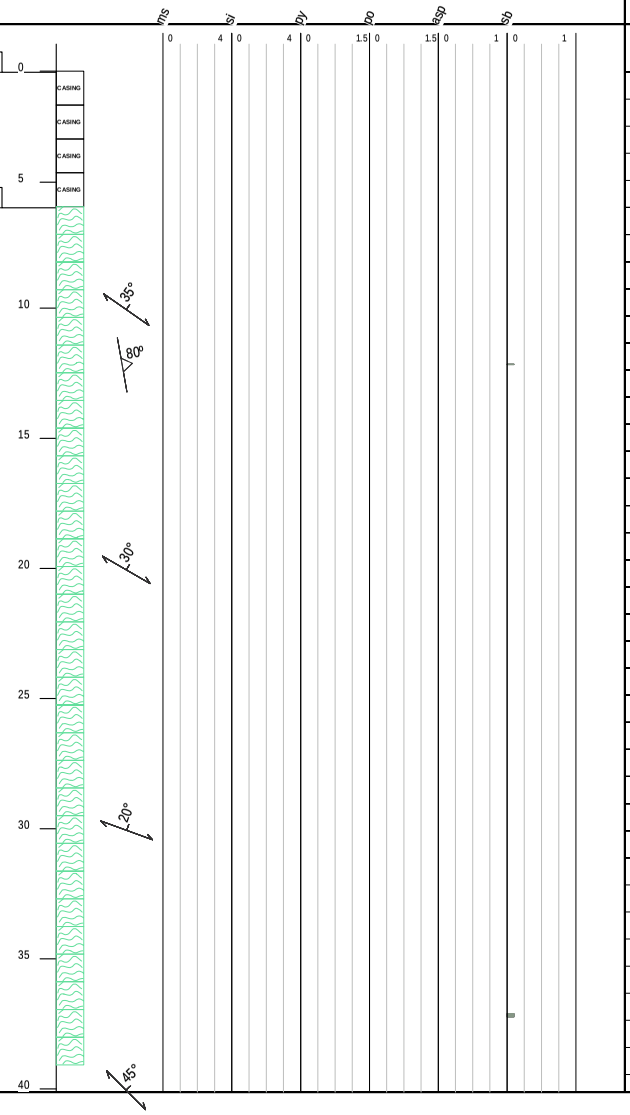

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
6.10	8.10	2.00	I031376	0.01	0.09	0.50	0.41	0.64
8.10	10.10	2.00	I031377	0.01	0.12	0.60	0.30	0.67
10.10	12.10	2.00	I031378	0.01	0.10	3.60	0.33	0.60
12.10	14.10	2.00	I031379	0.01	0.07	3.00	0.28	0.36
14.10	16.10	2.00	I031381	0.01	0.08	0.50	0.25	0.36
16.10	18.10	2.00	I031382	0.01	0.08	0.70	0.29	0.62
18.10	20.10	2.00	I031383	0.01	0.15	3.30	0.32	0.81
20.10	22.10	2.00	I031384	0.01	0.24	8.40	0.70	1.17
22.10	24.10	2.00	I031385	0.01	0.18	0.80	0.55	0.80
24.10	26.10	2.00	I031386	0.01	0.06	0.60	0.53	0.57
26.10	28.10	2.00	I031387	0.01	0.27	0.50	0.41	1.40
28.10	30.10	2.00	I031388	0.01	0.19	0.60	0.31	1.04
30.10	32.10	2.00	I031389	0.01	0.19	1.50	0.49	0.73
32.10	34.10	2.00	I031391	0.01	0.09	0.50	0.39	0.95
34.10	36.10	2.00	I031392	0.01	0.07	0.70	0.36	0.44
36.10	37.10	1.00	I031393	0.04	0.33	148.50	2.98	0.42
37.10	39.10	2.00	I031394	0.01	0.11	1.20	0.71	0.28
39.10	41.10	2.00	I031395	0.01	0.14	0.90	0.38	0.22
41.10	43.60	2.50	I031396	0.01	0.10	1.90	0.46	0.78
43.60	44.55	0.95	I031397	0.04	0.16	277.00	3.17	0.67
44.55	47.55	3.00	I031398	0.01	0.13	4.30	0.41	0.91
47.55	49.55	2.00	I031399	0.01	0.03	0.70	0.21	0.42
49.55	51.55	2.00	I031401	0.01	0.08	0.50	0.25	0.46
51.55	53.55	2.00	I031402	0.01	0.07	0.70	0.37	0.40
53.55	55.03	1.48	I031403	0.01	0.11	1.20	0.49	0.91

Project: Boulevard2010 **Hole Number:** BV10-23

From	To	Rocktype & Description
		FAULTS
		< @ 16.59 Fault 80.00° 67.00cm >
		< @ 42.06 Fault 80.00° 158.00cm >
55.03	99.62	Chlorite Biotite Schist
		FAULT ZONE-CHLORITE BIOTITE SCHIST - Fault zone within previous unit. Core is blocky with local oxidized fractures and gouging. 3rd generation mineralized veining occurs at a denisty of approximately 1 vein/100cm except between 62.0-72.62, 78.63-79.10, and 82.59-85.92m where it increases to 1 vein/10cm. Veins have 2% euhedral pyrite grains with trace stibnite and sphalerite, all occuring at approximately between 65-80 degrees TCA. Rare 1st and 2nd foliation parallel veining.
		ALTERATION
		« 55.03- 55.43 Sericite 2.00*»
		« 82.59- 85.92 Sericite 2.00*»
		« 94.00- 99.62 Sericite 1.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 0.50%»
		« 62.00- 72.62 Sphalerite 0.20%»
		« 62.20- 72.62 Stibnite 0.20%»
		« 78.63- 79.10 Sphalerite 0.20%»
		« 78.63- 79.10 Stibnite 0.20%»
		« 82.59- 85.92 Sphalerite 0.20%»

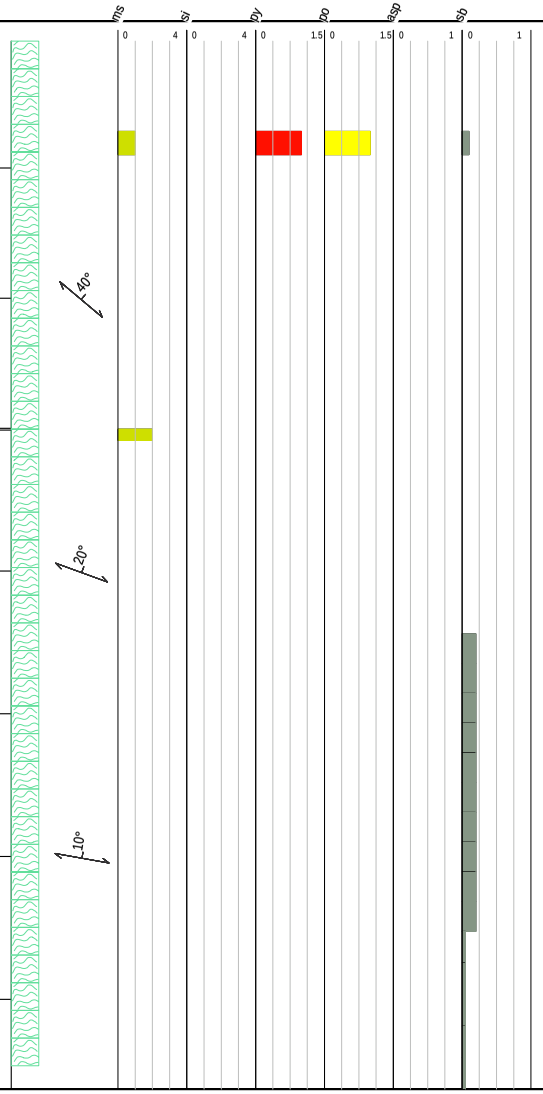

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
55.03	57.03	2.00	I031404	0.01	0.08	2.40	1.22	0.78
57.03	59.03	2.00	I031405	0.01	0.18	3.00	3.14	0.64
59.03	61.03	2.00	I031406	0.01	0.07	2.60	1.05	0.47
61.03	62.00	0.97	I031407	0.01	0.11	1.60	1.06	0.46
62.00	63.10	1.10	I031408	2.71	12.45	373.00	22.80	0.29
63.10	65.10	2.00	I031409	0.39	0.96	1940.00	13.90	0.71
65.10	66.10	1.00	I031411	0.37	1.13	647.00	22.30	1.10
66.10	66.75	0.65	I031412	0.18	1.11	745.00	22.60	1.04
66.75	68.26	1.51	I031413	5.93	4.88	748.00	693.00	1.42
68.26	70.71	2.45	I031414	0.04	0.48	319.00	21.70	0.56
70.71	72.62	1.91	I031415	0.01	0.10	13.10	3.75	0.13
72.62	73.00	0.38	I031416	0.11	0.75	149.50	7.36	0.32
73.00	75.00	2.00	I031417	0.08	0.21	104.00	11.20	0.60
75.00	77.00	2.00	I031418	0.05	0.34	79.60	6.87	0.84
77.00	78.00	1.00	I031419	0.15	0.23	224.00	3.69	0.30
78.00	79.10	1.10	I031421	2.39	17.80	3230.00	197.00	0.55
79.10	81.10	2.00	I031422	0.36	0.94	481.00	11.35	0.30
81.10	82.60	1.50	I031423	0.15	0.24	2450.00	4.63	0.12
82.60	84.60	2.00	I031424	0.59	1.88	1860.00	20.20	0.70
84.60	85.90	1.30	I031425	0.30	2.60	221.00	17.10	0.53
85.90	87.90	2.00	I031426	0.01	0.22	4.80	2.51	0.16
87.90	89.90	2.00	I031427	0.01	0.13	4.60	0.60	0.79
89.90	91.90	2.00	I031428	0.10	0.43	245.00	5.15	0.75
91.90	93.09	1.19	I031429	0.01	0.06	3.50	1.21	0.15
93.09	95.09	2.00	I031431	0.08	0.11	506.00	4.50	0.55

Project: Boulevard2010 **Hole Number:** BV10-23


From	To	Rocktype & Description
« 82.59-	85.92	Stibnite 0.20%»
« 72.62-	78.63	Sphalerite 0.05%»
« 72.62-	78.63	Stibnite 0.05%»
« 79.10-	82.59	Sphalerite 0.05%»
« 79.10-	82.59	Stibnite 0.05%»
« 85.92-	99.62	Sphalerite 0.05%»
« 85.92-	99.62	Stibnite 0.05%»
STRUCTURE		
< @ 60.00		S1 Foliation 20.00° >
< @ 70.00		S1 Foliation 10.00° >
< @ 80.00		S1 Foliation 10.00° >
< @ 90.00		S1 Foliation 60.00° >
FAULT GOUGES		
< @ 55.03		Fault Gouge 84.00° 40.00cm >
< @ 66.75		Fault Gouge 65.00° 15.00cm >
< @ 67.45		Fault Gouge 85.00° 11.00cm >
< @ 67.92		Fault Gouge 65.00° 10.00cm >
< @ 95.15		Fault Gouge 80.00° 17.00cm >
99.62	183.57	Chlorite Biotite Schist

CHLORITE BIOTITE SCHIST - Greenish grey, fine grained, strongly foliated, chlorite biotite schist. Rare 1st and 2nd generation veining. Rare late quartz carbonate veining with trace sphalerite and stibnite and trace arsenopyrite in the wall rock within 2cm of quartz carbonate veins. 2nd generation veins contain trace chalcopyrite associated with pyrrhotite blebs. Veining is generally 1vein/5m except from 157.00-165.65, 173.50-176.62, 182.02-183.57, and 119.47-120.78 where the intensity increases to 1vein/20cm. 1% pyrite and trace pyrrhotite disseminations. Lower contact signified by loss of veins.

MINERALIZATION

« Pyrite 1.00%»
« Pyrrhotite 0.50%»
« Chalcopyrite 0.01%»


« 157.00- 165.65 Arsenopyrite 0.20%»

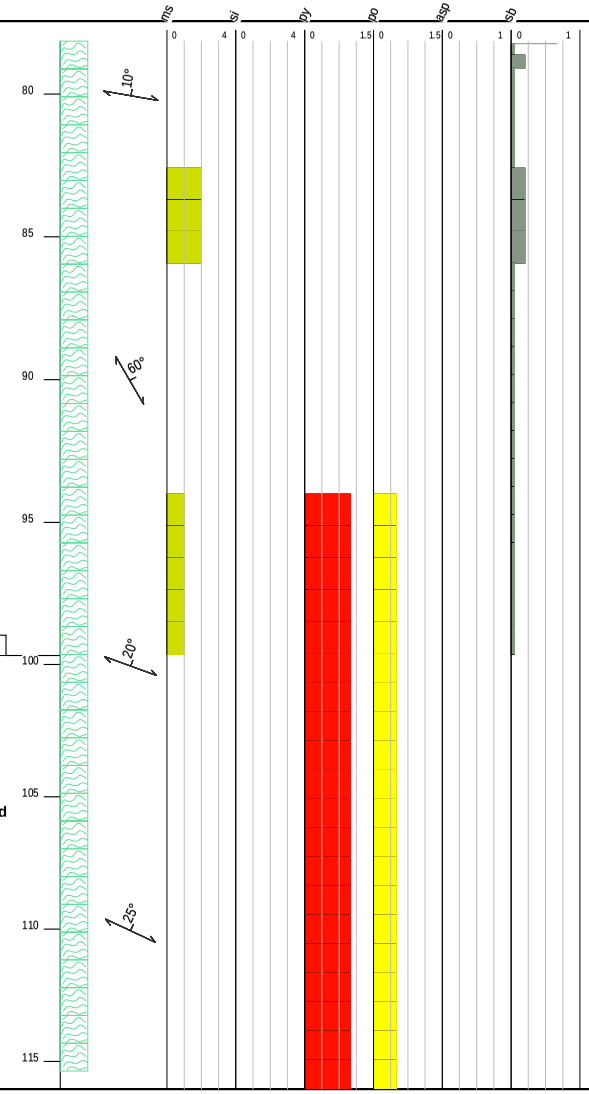

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
95.09	97.09	2.00	I031432	0.25	0.70	693.00	10.20	1.59
97.09	99.62	2.53	I031433	0.68	0.76	1260.00	12.35	0.75
99.62	101.62	2.00	I031434	0.01	0.06	14.60	4.55	0.27
101.62	103.62	2.00	I031435	0.01	0.09	3.70	2.96	0.32
103.62	105.62	2.00	I031436	0.04	0.06	90.00	0.61	0.26
105.62	107.62	2.00	I031437	0.01	0.11	2.50	3.14	0.15
107.62	109.62	2.00	I031438	0.01	0.23	1.30	5.59	0.14
109.62	111.62	2.00	I031439	0.01	0.16	0.40	2.65	0.17
111.62	113.62	2.00	I031441	0.01	0.14	1.10	1.44	0.44
113.62	115.62	2.00	I031442	0.06	0.30	227.00	3.30	0.21
115.62	117.62	2.00	I031443	0.01	0.18	6.50	0.83	0.23
117.62	119.40	1.78	I031444	0.01	0.18	2.00	0.40	0.35
119.40	121.00	1.60	I031445	0.04	0.32	219.00	3.38	0.07
121.00	123.00	2.00	I031446	0.01	0.17	3.20	0.40	0.38
123.00	125.00	2.00	I031447	0.01	0.12	1.20	0.79	0.49
125.00	127.00	2.00	I031448	0.01	0.12	0.40	0.75	0.69
127.00	129.00	2.00	I031449	0.01	0.10	0.70	0.29	0.54
129.00	131.00	2.00	I031451	0.01	0.24	44.00	0.85	0.40
131.00	133.00	2.00	I031452	0.01	0.11	0.80	0.19	0.67

Project: Boulevard2010 **Hole Number:** BV10-23

From	To	Rocktype & Description
« 157.00-	165.65	Stibnite 0.01%»
« 157.00-	165.65	Sphalerite 0.01%»
« 173.50-	176.67	Arsenopyrite 0.20%»
« 173.50-	176.67	Stibnite 0.01%»
« 173.50-	176.67	Sphalerite 0.01%»
« 182.02-	183.57	Arsenopyrite 0.20%»
« 182.02-	183.57	Stibnite 0.01%»
« 182.02-	183.57	Sphalerite 0.01%»
« 119.47-	120.78	Arsenopyrite 0.20%»
« 119.47-	120.78	Stibnite 0.01%»
« 119.47-	120.78	Sphalerite 0.01%»
STRUCTURE		
< @ 100.00		S1 Foliation 20.00° >
< @ 110.00		S1 Foliation 25.00° >
< @ 120.00		S1 Foliation 20.00° >
< @ 130.00		S1 Foliation 25.00° >
< @ 140.00		S1 Foliation 20.00° >
< @ 150.00		S1 Foliation 20.00° >
< @ 160.00		S1 Foliation 30.00° >
< @ 170.00		S1 Foliation 35.00° >
< @ 180.00		S1 Foliation 30.00° >
FAULTS		
< @ 103.00		Fault 15.00° 20.00cm >
< @ 134.95		Fault 15.00° 30.00cm >
< @ 167.75		Fault 30.00° 20.00cm >
< @ 182.59		Fault 35.00° 63.00cm >

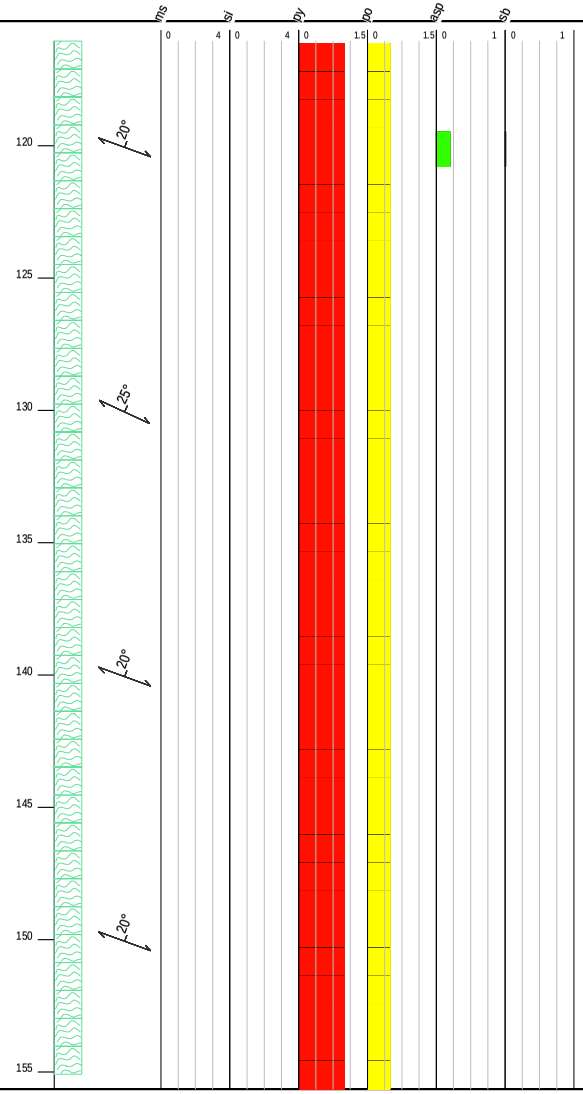

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
133.00	134.70	1.70	I031453	0.01	0.13	1.80	4.84	0.72
134.70	136.70	2.00	I031454	0.02	0.21	100.50	2.50	0.49
136.70	138.70	2.00	I031455	0.01	0.11	1.10	0.23	0.61
138.70	140.70	2.00	I031456	0.01	0.08	0.70	0.15	0.52
140.70	142.70	2.00	I031457	0.01	0.09	0.10	0.27	0.49
142.70	144.70	2.00	I031458	0.02	0.12	0.70	0.22	0.62
144.70	146.70	2.00	I031459	0.10	0.13	0.20	0.16	0.60
146.70	148.70	2.00	I031461	0.02	0.09	0.20	0.38	0.77
148.70	150.70	2.00	I031462	0.02	0.11	0.30	0.20	0.31
150.70	152.70	2.00	I031463	0.02	0.21	0.50	0.55	0.15
152.70	154.70	2.00	I031464	0.02	0.22	0.30	0.19	0.14
154.70	156.70	2.00	I031465	0.01	0.13	0.40	0.22	0.32
156.70	158.70	2.00	I031466	0.04	0.23	1.20	0.19	0.09
158.70	160.70	2.00	I031467	0.01	0.17	0.60	0.34	0.19
160.70	162.00	1.30	I031468	0.01	0.13	1.20	0.52	0.71
162.00	164.00	2.00	I031469	0.01	0.15	0.50	0.16	1.03
164.00	165.20	1.20	I031471	0.01	0.12	0.40	0.13	0.30
165.20	165.70	0.50	I031472	0.37	0.70	2220.00	16.05	0.51
165.70	167.70	2.00	I031473	0.01	0.17	14.70	0.49	0.70
167.70	169.70	2.00	I031474	0.14	0.19	2.20	0.17	0.59
169.70	171.70	2.00	I031475	0.01	0.14	0.40	0.13	0.81
171.70	173.50	1.80	I031476	0.01	0.15	0.50	0.23	0.61
173.50	175.00	1.50	I031477	0.14	0.34	711.00	2.79	0.39
175.00	177.00	2.00	I031478	0.07	0.27	317.00	2.22	0.69
177.00	179.00	2.00	I031479	0.01	0.19	2.40	0.12	1.19
179.00	181.00	2.00	I031481	0.01	0.22	1.90	0.27	0.94
181.00	182.70	1.70	I031482	0.01	0.36	13.40	0.60	0.77
182.70	183.60	0.90	I031483	0.10	0.52	534.00	10.25	0.68

Project: Boulevard2010 **Hole Number:** BV10-23


From	To	Rocktype & Description
183.57	200.50	Chlorite Biotite Schist

CHLORITE BIOTITE SCHIST - Continuation of previous unit with no 3rd generation mineralized veining. 1% pyrite and pyrrhotite disseminations. First occurance of a dyke at 191.45-192.49. Dyke is a mafic, dark green, chloritic and homogeneous and cross cuts foliation. EOH

MINERALIZATION

« Pyrrhotite 1.00%»
« Pyrite 0.50%»


STRUCTURE

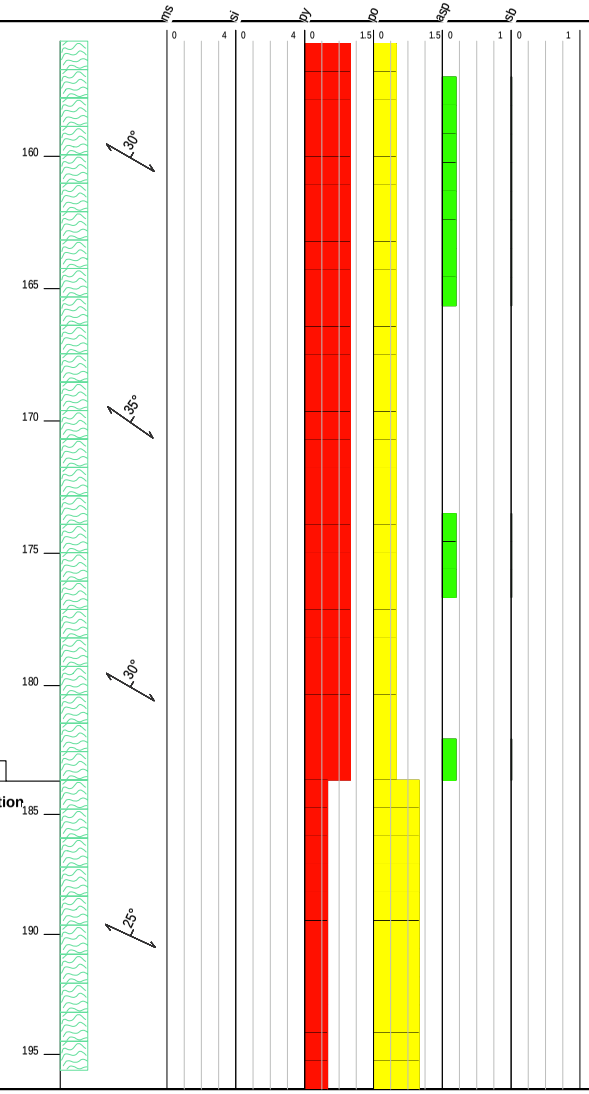

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
183.60	185.60	2.00	I031484	0.01	0.24	7.40	0.20	1.18
185.60	187.60	2.00	I031485	0.03	0.18	2.00	0.22	0.87
187.60	189.60	2.00	I031486	0.01	0.14	0.50	0.17	0.70
189.60	191.60	2.00	I031487	0.01	0.22	1.40	0.36	1.06
191.60	193.60	2.00	I031488	0.02	0.14	4.50	0.61	0.81
193.60	195.60	2.00	I031489	0.02	0.23	0.30	0.16	0.29
195.60	197.60	2.00	I031491	0.01	0.18	6.80	1.56	0.87
197.60	199.60	2.00	I031492	0.01	0.25	1.10	0.19	1.55
199.60	200.50	0.90	I031493	0.01	0.16	0.70	0.13	1.41

Project: Boulevard2010 **Hole Number:** BV10-23

From	To	Rocktype & Description
		< @ 190.00 S1 Foliation 25.00° >
		< @ 200.00 S1 Foliation 40.00° >
200.50	200.50	EOH

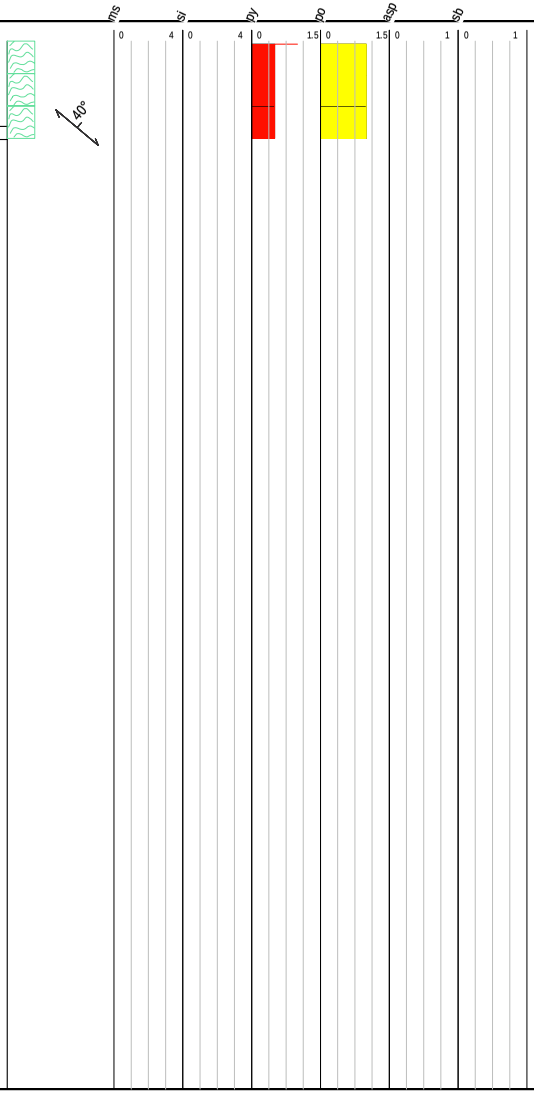

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1282.0
Hole BV10-24	**Azimuth (º):** 45.0
Location: 6966071 m North, 576358 m East	**Dip (º):** -50.0
Logged by: Ryan Toole	**Length (m):** 185.03
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Vegas trend, step-out SE from BV10-22, -23
Date Started: 2010/07/16 **Date Completed:** 2010/07/17	
Dip Tests By:	

Summary Log:


Hole BV10-24 encountered local intervals of late quartz carbonate mineralized veining associated with fault zones. Arsenopyrite occurs from 39.45-64.39 in trace amounts. The addition of trace stibnite to the arsenopyrite bearing quartz carbonate veins occurs from 69.84-71.67m and 81.14-82.27m. Minor sphalerite and stibnite mineralization occurs from 93.30-96.07 and 110.03-110.33m within late quartz carbonate veins.

Downhole surveys:

Depth	Dip	Azimuth
179.22	-47.20	37.20

Project: Boulevard2010 **Hole Number:** BV10-24

From	To	Rocktype & Description
0.00	6.10	Casing
		CASING - Overburden
6.10	39.45	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Medium green, fine grained, strongly foliated, chlorite biotite schist. Upper 20m is highly oxidized and blocky. Rare 1st and 2nd generation quartz veining. Trace pyrite and pyrrhotite disseminations. Trace chalcopyrite associated with pyrrhotite blebs in 2nd generation veining. Sharp lower contact at 55 degrees TCA.
		ALTERATION
		« 32.00- 39.45 Sericite 1.00*»
		MINERALIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		« Chalcopyrite 0.01%»
		STRUCTURE
		< @ 10.00 S1 Foliation 31.00° >
		< @ 20.00 S1 Foliation 50.00° >
		< @ 30.00 S1 Foliation 37.00° >
		FAULTS
		< @ 30.38 Fault Gouge 55.00° 10.00cm >
		< @ 31.14 Fault Gouge 52.00° 2.00cm >
39.45	65.39	Chlorite Biotite Schist

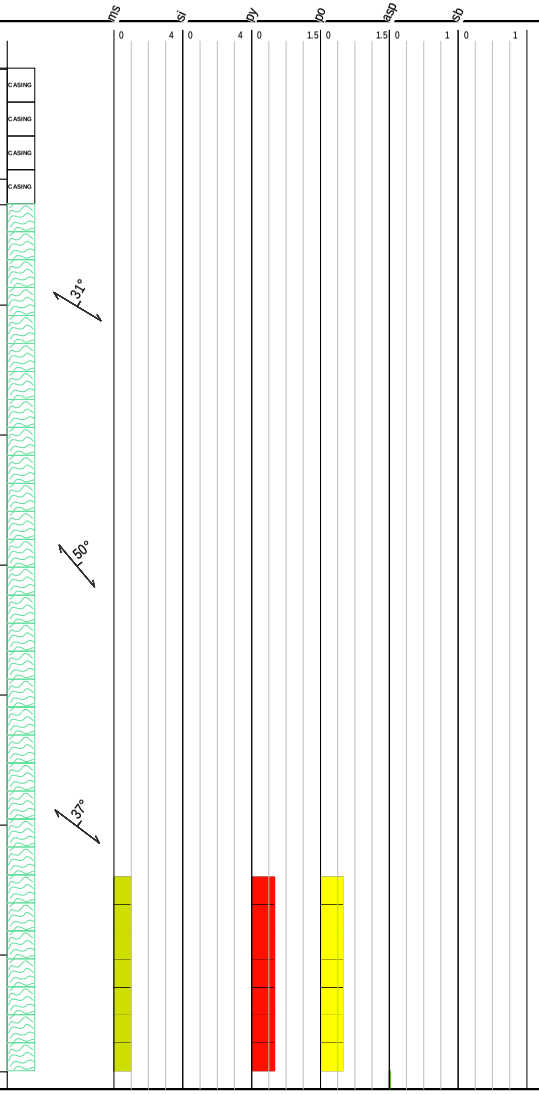

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
6.10	8.23	2.13	I031494	0.01	0.24	11.00	2.56	0.82
8.23	11.28	3.05	I031495	0.01	0.11	2.60	2.00	0.64
11.28	14.38	3.10	I031496	0.01	0.20	3.80	2.61	0.81
14.38	17.37	2.99	I031497	0.03	0.12	1.60	1.85	0.64
17.37	19.37	2.00	I031498	0.01	0.08	1.20	1.20	0.51
19.37	21.37	2.00	I031499	0.01	0.09	0.40	1.06	0.32
21.37	23.37	2.00	I031501	0.01	0.06	0.20	0.36	0.34
23.37	25.37	2.00	I031502	0.01	0.08	0.90	0.61	0.18
25.37	27.37	2.00	I031503	0.01	0.10	0.50	0.43	0.16
27.37	29.37	2.00	I031504	0.01	0.11	0.50	0.40	0.29
29.37	31.37	2.00	I031505	0.01	0.15	0.70	0.53	0.28
31.37	33.37	2.00	I031506	0.01	0.11	2.00	0.53	0.69
33.37	35.37	2.00	I031507	0.01	0.10	0.80	0.37	0.39
35.37	37.37	2.00	I031508	0.01	0.05	1.00	0.38	0.91
37.37	39.45	2.08	I031509	0.01	0.14	2.10	1.15	0.41
39.45	41.45	2.00	I031511	0.24	4.68	823.00	35.80	0.36

Project: Boulevard2010 **Hole Number:** BV10-24

From	To	Rocktype & Description

CHLORITE BIOTITE SCHIST/FZ - Continuation of previous unit with the addition of 3rd generation mineralized veining at a density of approximately 1vein/50cm from 39.45-58.0m and 1vein/5cm from 58.0-64.39m. Late veining contains only associated trace arsenopyrite in the surrounding wall rock. Interval is faulted from top to bottom. Lower contact signified by end of faulting.

ALTERATION

« 58.00- 64.39 Sericite 1.00*»

MINERALIZATION

« Pyrite 1.00%»
« Pyrrhotite 0.50%»

« 39.45- 58.00 Arsenopyrite 0.01%»

« 58.00- 64.39 Arsenopyrite 0.10%»

STRUCTURE

< @ 40.00 S1 Foliation 55.00° >
< @ 50.00 S1 Foliation 45.00° >
< @ 60.00 S1 Foliation 55.00° >

FAULTS

Interval is faulted and blocky from top to bottom

< @ 56.25 Fault Gouge 40.00° 10.00cm >
< @ 56.75 Fault Gouge 40.00° 25.00cm >
< @ 58.75 Fault Gouge 65.00° 65.00cm >
< @ 63.84 Fault Gouge 46.00° 22.00cm >

65.39	81.14	Chlorite Biotite Schist

CHLORITE BIOTITE SCHIST - Medium green, fine grained, strongly foliated,



From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
41.45	43.55	2.10	I031512	0.34	2.31	1460.00	23.30	0.29
43.55	45.55	2.00	I031513	0.01	0.20	12.80	1.32	0.59
45.55	47.55	2.00	I031514	0.01	0.18	17.20	1.25	0.43
47.55	49.55	2.00	I031515	0.04	0.34	181.00	3.45	0.39
49.55	51.55	2.00	I031516	0.01	0.30	3.20	6.59	0.33
51.55	53.95	2.40	I031517	0.02	0.25	9.20	2.60	0.59
53.95	57.00	3.05	I031518	0.01	0.17	28.10	5.73	0.36
57.00	60.05	3.05	I031519	0.00	0.00	0.00	0.00	0.00
60.05	63.05	3.00	I031521	0.03	0.26	71.60	4.15	0.21
63.05	64.06	1.01	I031522	0.93	2.60	1495.00	14.40	0.18
64.06	66.06	2.00	I031523	0.02	0.23	204.00	5.77	0.38
66.06	68.06	2.00	I031524	0.01	0.12	3.30	2.37	0.22
68.06	69.84	1.78	I031525	0.01	0.09	54.90	1.12	0.06

Project: Boulevard2010 **Hole Number:** BV10-24

From	To	Rocktype & Description

chorite biotite schist. Continuation of previous unit however not faulted. Rare 3rd generation mineralized veining (1vein/2m). Trace stibnite within veins with trace arsenopyrite in surrounding wall rock. Trace pyrite and pyrrhotite disseminations throughout interval. Sharp lower contact with fault zone at 55 degrees TCA.

ALTERATION

« 69.84- 71.67 Sericite 2.00*»

MINERALIZATION

« Pyrite 0.50%»
« Pyrrhotite 0.50%»
« 69.84- 71.67 Arsenopyrite 0.01%»
« 69.84- 71.67 Stibnite 0.01%»

STRUCTURE

< @ 70.00 S1 Foliation 45.00° >

81.14 87.27 Chlorite Biotite Schist

CHLORITE BIOTITE SCHIST/FZ - Medium green, fine grained, strongly foliated, chorite biotite schist. Continuation of previous unit however heavily faulted and locally gouged. 3rd generation mineralized veining increases to a density of approximately 1vein/10cm. Veins contain trace stibnite with trace arsenopyrite in wall rock. Lower contact signified by end of faulting.

ALTERATION


« 81.14- 82.40 Sericite 4.00*»

« 82.40- 86.79 Sericite 2.00*»

« 86.79- 87.27 Sericite 4.00*»

MINERALIZATION


« Pyrite 1.00%»
« Pyrrhotite 0.50%»

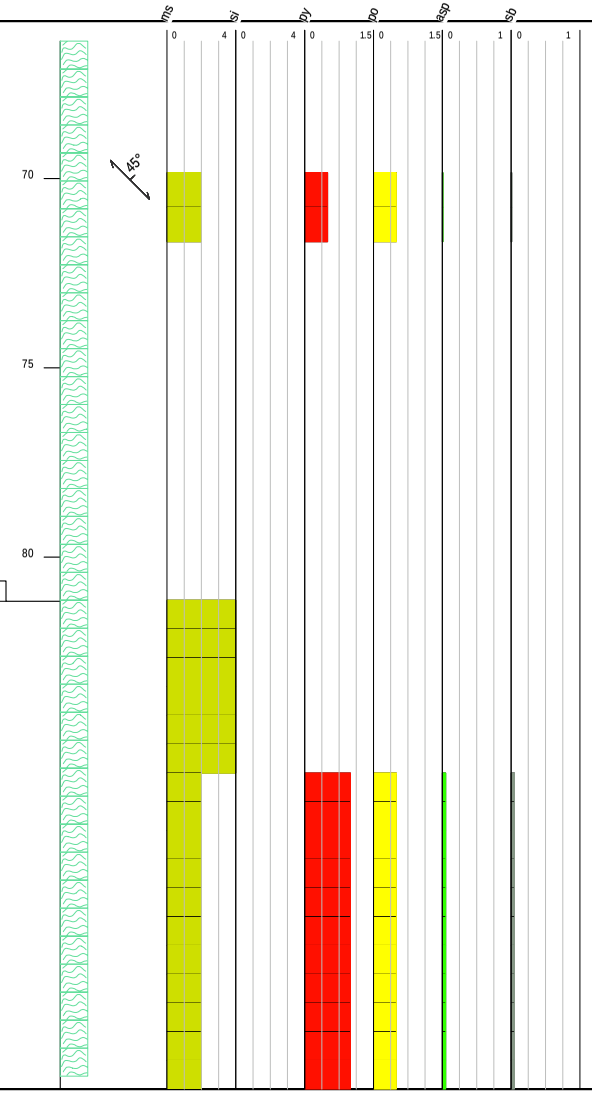

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
69.84	71.84	2.00	I031526	0.08	0.42	316.00	4.46	0.07
71.84	73.84	2.00	I031527	0.01	0.31	4.10	2.03	0.11
73.84	75.84	2.00	I031528	0.01	0.11	4.50	0.74	0.20
75.84	77.84	2.00	I031529	0.01	0.18	1.20	1.43	0.28
77.84	79.84	2.00	I031531	0.01	0.15	1.70	2.74	0.42
79.84	81.14	1.30	I031532	0.01	0.13	1.90	1.79	0.35
81.14	83.14	2.00	I031533	0.26	0.52	1345.00	5.51	0.34
83.14	85.14	2.00	I031534	0.70	1.87	2010.00	7.37	0.33
85.14	87.27	2.13	I031535	0.08	0.74	139.00	5.89	0.40

Project: Boulevard2010 **Hole Number:** BV10-24


From	To	Rocktype & Description
		« Arsenopyrite 0.05%»
		« Stibnite 0.05%»
		STRUCTURE
		< @ 85.00 S1 Foliation 50.00° >
		FAULTS
		< @ 81.14 Fault Gouge 55.00° 126.00cm >
		< @ 86.79 Fault Gouge 55.00° 48.00cm >
87.27	139.70	Chlorite Biotite Schist
		CHLORITE BIOTOTE SCHIST - Medium green, fine grained, strongly foliated, chorite biotite schist. Continuation of 65.39 - 81.14m. 3rd generation mineralized veining occurs at a density of approximately 1vein/2m however arsenopyrite has become absent with the addition of trace sphalerite within the veining along with the stibnite. Biotite increases downhole. Sharp lower contact at 38 degrees TCA.
		ALTERATION
		« 93.30- 96.07 Sericite 2.00*»
		« 110.03- 110.33 Sericite 2.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 0.50%»
		« 93.30- 96.07 Stibnite 0.10%»
		« 93.30- 96.07 Sphalerite 0.10%»
		« 110.03- 110.33 Stibnite 0.10%»
		« 110.03- 110.33 Sphalerite 0.10%»
		STRUCTURE

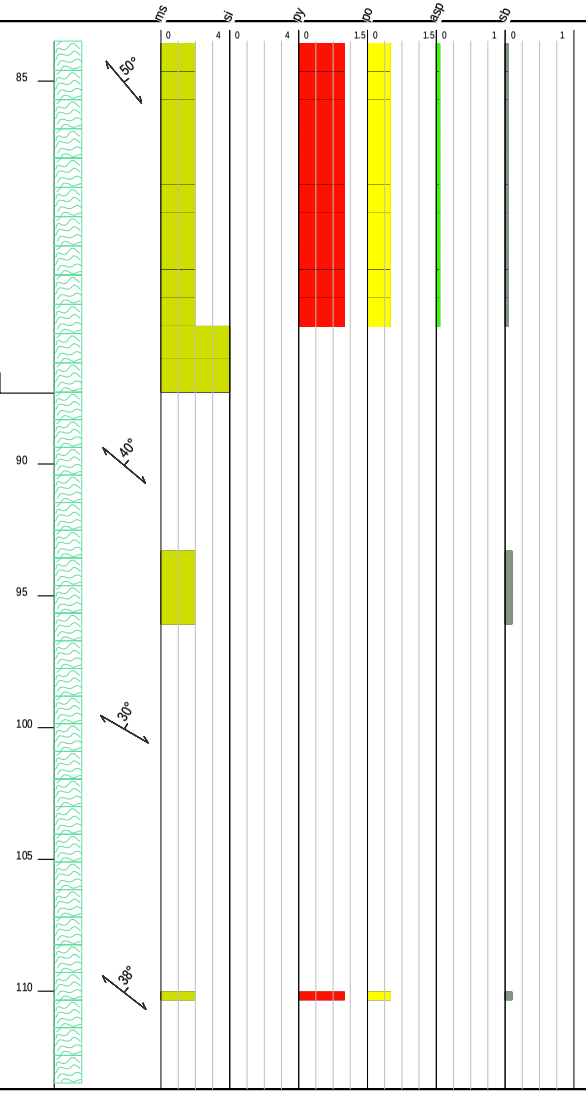

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
87.27	89.27	2.00	I031536	0.02	0.30	41.10	4.43	0.37
89.27	91.27	2.00	I031537	0.01	0.18	2.20	7.41	0.57
91.27	93.27	2.00	I031538	0.01	0.27	7.90	2.50	0.34
93.27	95.00	1.73	I031539	0.17	0.68	923.00	9.74	1.23
95.00	96.40	1.40	I031541	3.52	1.72	1115.00	20.10	0.14
96.40	98.40	2.00	I031542	0.02	0.23	11.70	3.01	0.27
98.40	100.40	2.00	I031543	0.01	0.14	1.60	0.37	0.36
100.40	102.40	2.00	I031544	0.01	0.18	0.60	0.26	0.39
102.40	104.40	2.00	I031545	0.01	0.18	12.10	0.48	0.14
104.40	106.40	2.00	I031546	0.01	0.26	29.30	0.87	0.19
106.40	108.40	2.00	I031547	0.01	0.11	4.40	0.31	0.48
108.40	110.00	1.60	I031548	0.01	0.07	2.00	0.22	0.96
110.00	110.40	0.40	I031866	0.09	3.04	648.00	61.00	0.55
110.40	112.40	2.00	I031867	0.01	0.15	6.80	0.87	0.42
112.40	114.40	2.00	I031868	0.01	0.25	1.10	3.21	0.99
114.40	116.40	2.00	I031869	0.01	0.15	0.10	0.63	1.10
116.40	118.40	2.00	I031871	0.01	0.25	0.10	0.23	1.63
118.40	120.40	2.00	I031872	0.01	0.20	0.20	0.15	0.91
120.40	122.40	2.00	I031873	0.01	0.16	0.10	0.15	0.60
122.40	124.40	2.00	I031874	0.01	0.22	10.90	0.31	0.60
124.40	126.40	2.00	I031875	0.01	0.23	2.20	0.16	1.54
126.40	128.40	2.00	I031876	0.01	0.22	2.90	0.18	1.06
128.40	130.40	2.00	I031877	0.01	0.16	0.10	0.15	0.49
130.40	132.40	2.00	I031878	0.01	0.24	0.30	0.23	0.33
132.40	134.40	2.00	I031879	0.01	0.19	0.90	0.30	0.47
134.40	136.40	2.00	I031881	0.01	0.20	1.60	0.37	0.37

Project: Boulevard2010 **Hole Number:** BV10-24


From	To	Rocktype & Description
		< @ 90.00 S1 Foliation 40.00° >
		< @ 100.00 S1 Foliation 30.00° >
		< @ 110.00 S1 Foliation 38.00° >
		< @ 120.00 S1 Foliation 46.00° >
		< @ 130.00 S1 Foliation 50.00° >
		FAULTS
		< @ 90.36 Fault Gouge 80.00° 2.00cm >
		< @ 90.83 Fault 58.00° 4.00cm >
		< @ 95.60 Fault 33.00° 15.00cm >
		< @ 96.04 Fault 90.00° 1.00cm >
139.70	169.57	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Dark grey, fine grained, strongly foliated, biotite chlorite schist with only minor chlorite. Rare early 1st and 2nd genration veining, and rare 4th generation, unmineralized chaotic carbonate veins typically less than 2mm wide. Trace pyrite and pyrrhotite disseminations throughout interval. Local intervals of chlorite biotite schist with sharp contact in lower 2m of interval. Sharp lower contact at 45 degrees TCA.
		ALTERATION
		« carbonate (ankerite?) 1.00*»
		« 149.35- 149.47 Chlorite 4.00*» (Black Fe rich Chlorite Alteration)

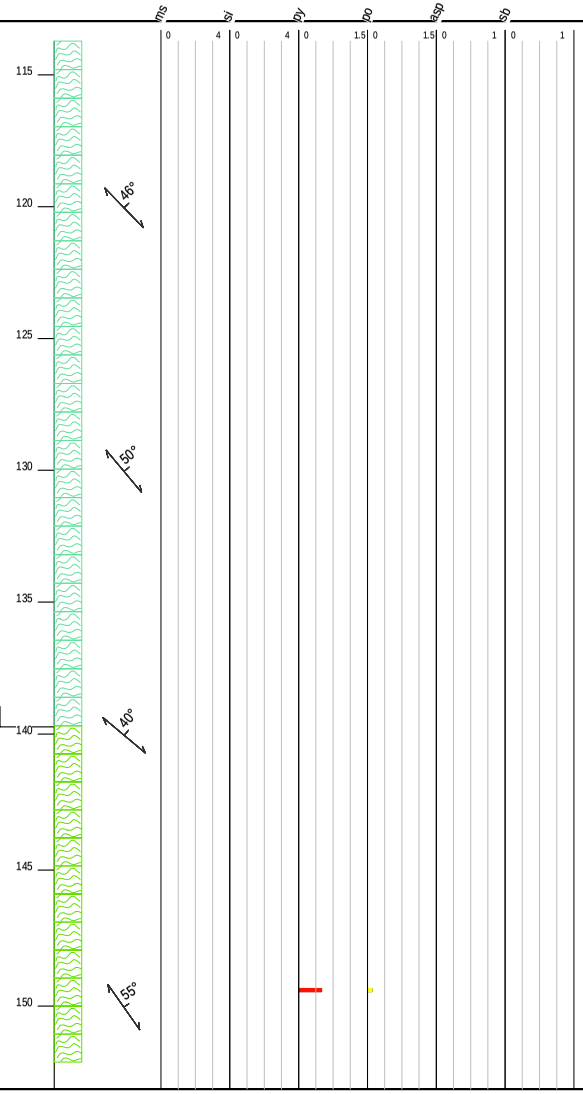

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
136.40	138.40	2.00	I031882	0.01	0.10	2.90	0.69	0.58
138.40	139.70	1.30	I031883	0.01	0.10	2.00	0.41	0.45
139.70	141.70	2.00	I031884	0.01	0.30	3.20	0.45	7.24
141.70	143.70	2.00	I031885	0.01	0.32	1.20	0.27	6.30
143.70	145.70	2.00	I031886	0.01	0.40	1.20	0.37	9.15
145.70	147.70	2.00	I031887	0.01	0.56	1.60	0.48	13.95
147.70	149.70	2.00	I031888	0.02	0.60	30.40	3.02	13.90
149.70	151.70	2.00	I031889	0.01	0.49	10.50	46.20	4.53
151.70	153.70	2.00	I031891	0.01	0.41	1.80	4.30	3.16
153.70	155.70	2.00	I031892	0.01	0.38	1.10	0.82	2.66
155.70	157.70	2.00	I031893	0.01	0.34	0.90	4.03	3.02
157.70	159.70	2.00	I031894	0.01	0.33	1.80	3.31	3.35
159.70	161.70	2.00	I031895	0.01	0.30	9.00	0.63	2.48
161.70	163.70	2.00	I031896	0.01	0.50	0.80	0.20	2.96
163.70	165.70	2.00	I031897	0.01	0.32	58.80	0.51	4.92
165.70	167.70	2.00	I031898	0.01	0.29	31.70	0.32	2.65

Project: Boulevard2010 **Hole Number:** BV10-24

From	To	Rocktype & Description
		MINERALIZATION
		« Pyrite 0.5%»
		« Pyrrhotite 0.10%»
		STRUCTURE
		< @ 140.00 S1 Foliation 40.00° >
		< @ 150.00 S1 Foliation 55.00° >
		< @ 160.00 S1 Foliation 45.00° >
		FAULTS
		< @ 149.35 Fault Gouge 45.00° 12.00cm >
169.57	185.03	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Med green, fine grained, strongly foliated, chlorite biotite schist. Rare 1st and 2nd generation veining. Trace pyrite and pyrrhotite disseminations throughout interval.
		ALTERTION
		None
		MINERLIZATION
		« Pyrite 0.50%»
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 170.00 S1 Foliation 40.00° >
		< @ 180.00 S1 Foliation 45.00° >
185.03	185.03	EOH

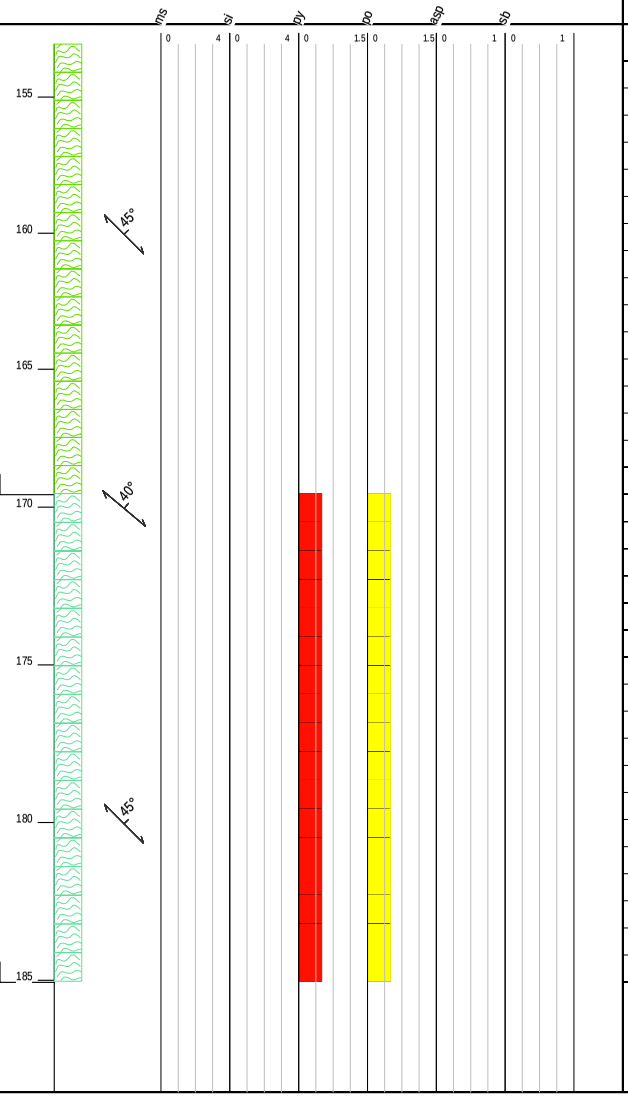

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
167.70	169.56	1.86	I031899	0.01	0.34	37.30	1.39	2.71
169.56	171.56	2.00	I031586	0.01	0.19	1.30	0.55	1.20
171.56	173.56	2.00	I031587	0.02	0.15	1.10	0.54	1.23
173.56	175.56	2.00	I031588	0.01	0.17	1.00	0.60	0.62
175.56	177.56	2.00	I031589	0.01	0.30	1.70	0.51	0.71
177.56	179.56	2.00	I031591	0.01	0.13	0.60	0.74	0.22
179.56	181.56	2.00	I031592	0.01	0.09	0.20	0.60	0.19
181.56	183.56	2.00	I031593	0.01	0.16	0.70	0.66	0.78
183.56	185.03	1.47	I031594	0.01	0.16	0.90	0.62	0.78

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1296.0
Hole BV10-25	**Azimuth (º):** 45.0
Location: 6966158 m North, 576300 m East	**Dip (º):** -50.0
Logged by: Ryan Toole	**Length (m):** 120.70
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Vegas trend, step-out NW from BV10-22, -23
Date Started: 2010/07/17 **Date Completed:** 2010/07/18	
Dip Tests By:	

Summary Log:


This hole encountered trace stibnite associated with late quartz carbonate veins from 14.20-95.17 m.

Downhole surveys:

Depth	Dip	Azimuth
59.74	-51.50	40.60
114.61	-50.10	41.20

Project: Boulevard2010 **Hole Number:** BV10-25


From	To	Rocktype & Description
0.00	6.10	Casing
		CASING- Overburden
6.10	20.12	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Medium to dark grey, fine grained, strongly foliated, chlorite biotite schist. Rare 1st, 2nd, and 3rd generation veining. 3rd generation veining contains trace stibnite. Over burden to 11.28m. Interval is blocky with local gouging. 3rd generation veining increases to 1vein/10cm down interval. Broken lower contact with biotite chlorite schist.
		ALTERATION
		« 18.00- 20.12 Sericite 1.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 1.00%»
		« 14.20- 20.12 Stibnite 0.05%»
		STRUCTURE
		< @ 14.00 S1 Foliation 59.00° >
		< @ 35.00 S1 Foliation 19.00° >
		FAULTS
		< @ 18.60 Fault 90.00° 60.00cm >
		< @ 16.75 Fault 20.00° 10.00cm >
		< @ 17.10 Fault Gouge 80.00° 60.00cm >
20.12	95.17	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST/FZ - Medium grey, fine grained, stronly foliated biotite chlorite schist. Chlorite is very minor; 2%. Unit is blocky and locally gouged. Rare 1st and 2nd generation veining. 3rd generation mineralized veining

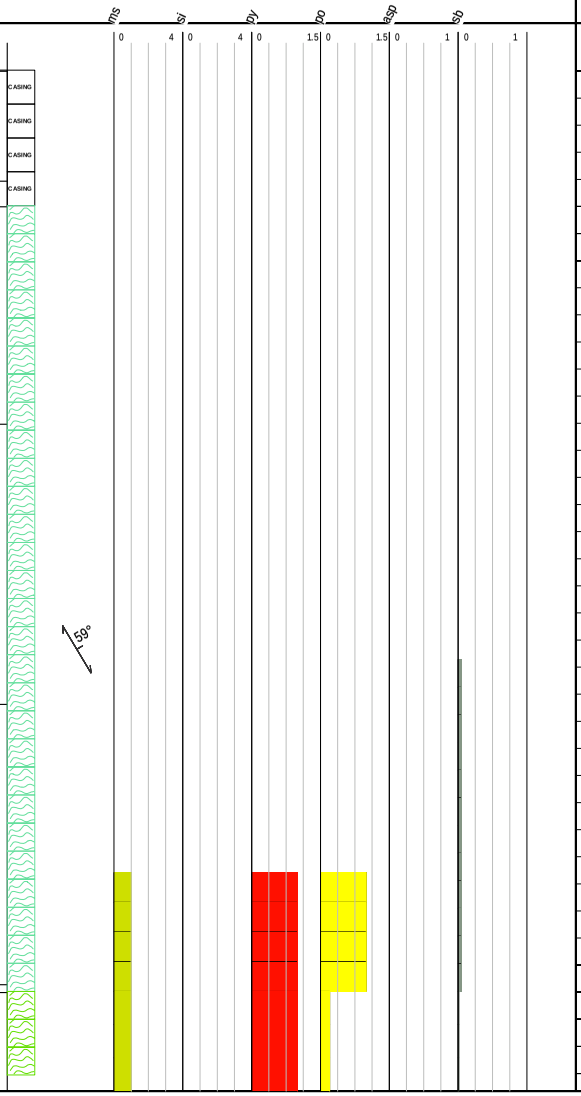

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
13.40	15.40	2.00	I031595	0.01	0.18	7.80	0.49	0.98
15.40	17.70	2.30	I031596	0.04	0.37	76.20	4.86	1.01
17.70	19.70	2.00	I031597	0.03	0.35	78.10	1.05	0.97
19.70	23.16	3.46	I031598	0.01	0.16	4.80	1.61	4.55
23.16	25.16	2.00	I031599	0.01	0.25	5.60	2.96	5.02
25.16	27.21	2.05	I031601	0.01	0.29	7.10	1.90	1.28
27.21	32.31	5.10	I031602	0.01	0.36	21.30	4.82	5.57
32.31	34.31	2.00	I031603	0.01	0.31	19.70	3.52	5.52

Project: Boulevard2010 **Hole Number:** BV10-25

From	To	Rocktype & Description
		occurs throughout interval, at a density of approximately 1vein/2m, and contains trace stibnite. Locally, mineralized veins are off set and exhibit 'pull apart' structures. 1% pyrite with trace pyrrhotite disseminations throughout interval. Lower contact signified by end of faulting.
		ALTERATION
		« carbonate (ankerite?) 1.00*»
		« Sericite 1.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 0.20%»
		« Stibnite 0.01%»
		STRUCTURE
		< @ 30.00 S1 Foliation 30.00° >
		< @ 40.00 S1 Foliation 40.00° >
		< @ 50.00 S1 Foliation 50.00° >
		< @ 60.00 S1 Foliation 45.00° >
		< @ 70.00 S1 Foliation 5.00° >
		< @ 80.00 S1 Foliation 15.00° >
		< @ 90.00 S1 Foliation 38.00° >
		FAULTS
		< @ 26.70 Fault Gouge 25.00° 50.00cm >
		< @ 69.25 Fault Gouge 45.00° 593.00cm >

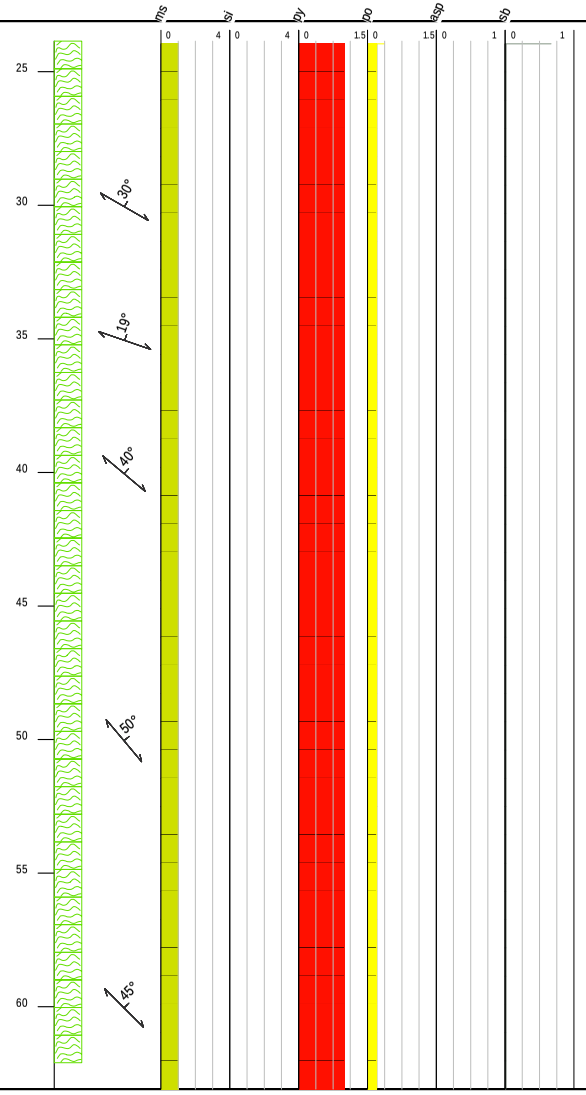


From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
34.31	36.31	2.00	I031604	0.01	0.42	19.50	2.40	6.56
36.31	38.31	2.00	I031605	0.01	0.26	2.10	2.04	6.03
38.31	41.00	2.69	I031606	0.01	0.21	6.40	4.20	2.11
41.00	43.00	2.00	I031607	0.03	0.26	103.50	5.14	1.93
43.00	45.00	2.00	I031608	0.26	0.40	1420.00	9.62	4.95
45.00	47.00	2.00	I031609	0.02	0.40	95.20	5.62	7.45
47.00	48.20	1.20	I031611	0.18	0.87	717.00	18.20	5.81
48.20	50.20	2.00	I031612	0.02	0.50	96.60	7.51	9.59
50.20	52.20	2.00	I031613	0.01	0.45	29.30	4.18	7.56
52.20	54.20	2.00	I031614	0.01	0.36	25.20	5.11	6.03
54.20	56.20	2.00	I031615	0.05	0.51	187.50	13.05	10.55
56.20	58.20	2.00	I031616	0.01	0.31	18.20	7.49	5.63
58.20	60.20	2.00	I031617	0.07	1.55	248.00	18.10	4.35
60.20	62.20	2.00	I031618	0.03	0.48	169.50	5.29	6.93
62.20	64.20	2.00	I031619	0.01	0.38	12.80	3.74	10.15
64.20	66.20	2.00	I031621	0.01	0.32	6.80	6.08	7.73
66.20	68.20	2.00	I031622	0.20	0.93	631.00	51.70	2.41
68.20	68.89	0.69	I031623	0.01	0.47	46.90	18.25	6.03
68.89	71.93	3.04	I031624	0.01	0.44	29.40	13.20	4.42
71.93	74.98	3.05	I031625	0.14	1.21	509.00	12.05	2.23
74.98	78.03	3.05	I031626	0.01	0.44	11.10	3.48	2.68
78.03	81.08	3.05	I031627	0.01	0.33	9.70	7.99	4.28
81.08	84.12	3.04	I031628	0.06	0.32	4.50	8.40	2.82
84.12	86.12	2.00	I031629	0.06	0.36	6.40	14.15	4.18
86.12	88.12	2.00	I031631	0.01	0.21	2.50	1.91	1.69
88.12	89.92	1.80	I031632	0.01	0.24	1.40	2.40	0.84
89.92	91.44	1.52	I031633	0.12	0.86	376.00	6.46	4.76
91.44	93.88	2.44	I031634	0.05	0.35	12.60	4.35	3.64
93.88	95.17	1.29	I031635	0.01	0.44	3.20	5.22	4.53

Project: Boulevard2010 **Hole Number:** BV10-25

From	To	Rocktype & Description
95.17	120.70	Biotite Chlorite Schist

BIOTITE CHLORITE SCHIST - Medium grey, fine grained, stronly foliated biotite chlorite schist. Chlorite is very minor; 2%. Continuation of previous unit however no faulting or 3rd generation mineralized veining. 1% pyrite and trace pyrrhotite disseminations throughout interval. EOH


ALTERATION

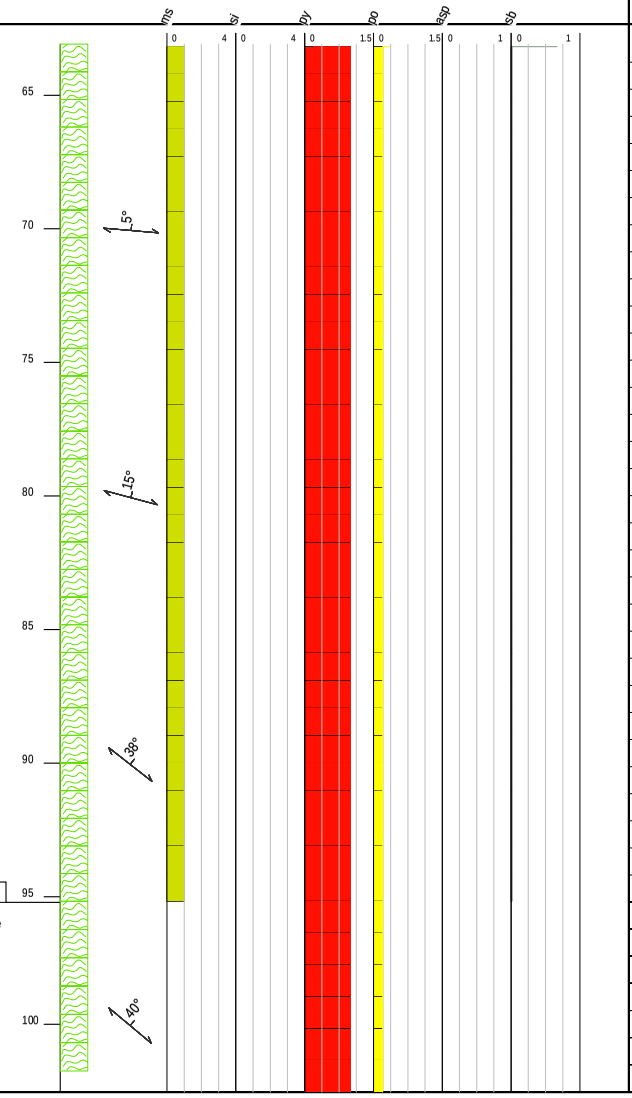

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
95.17	97.17	2.00	I031636	0.01	0.46	0.90	0.66	1.86
97.17	99.17	2.00	I031637	0.01	0.29	0.60	0.48	0.70
99.17	101.17	2.00	I031638	0.01	0.26	5.50	0.37	0.70
101.17	103.17	2.00	I031639	0.01	0.21	2.10	0.14	2.91
103.17	105.17	2.00	I031641	0.01	0.21	1.50	0.32	2.17
105.17	107.17	2.00	I031642	0.01	0.38	1.40	0.13	1.59
107.17	109.17	2.00	I031643	0.01	0.22	0.70	0.13	1.47
109.17	111.17	2.00	I031644	0.01	0.22	0.50	0.09	1.49

Project: Boulevard2010 **Hole Number:** BV10-25

From	To	Rocktype & Description
		« carbonate (ankerite?) 1.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 0.20%»
		STRUCTURE
		< @ 100.00 S1 Foliation 40.00° >
		< @ 110.00 S1 Foliation 40.00° >
		< @ 120.00 S1 Foliation 35.00° >
120.70	120.70	EOH

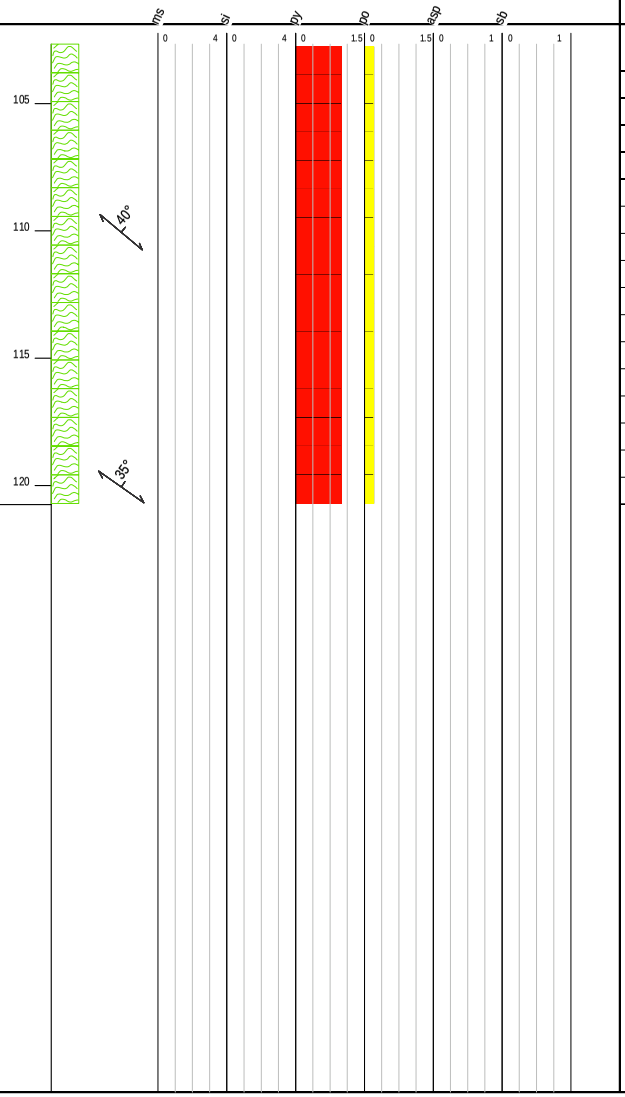

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
111.17	113.17	2.00	I031645	0.01	0.19	0.80	0.08	1.64
113.17	115.17	2.00	I031646	0.01	0.49	0.80	0.14	6.81
115.17	117.17	2.00	I031647	0.01	0.24	5.40	0.65	2.11
117.17	119.17	2.00	I031648	0.01	0.14	4.20	0.30	0.28
119.17	120.70	1.53	I031649	0.01	0.14	3.60	0.28	0.41

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1207.0
Hole BV10-26	**Azimuth (º):** 30.0
Location: 6965621 m North, 576809 m East	**Dip (º):** -50.0
Logged by: Ryan Toole	**Length (m):** 216.41
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by: ALS	**Vertical Projection:**
Core Size: NQ	**Objective** Test Sunset trend at far SE part of trend in area with high Au in soils
Date Started: 2010/07/18 **Date Completed:** 2010/07/19	
Dip Tests By:	

Summary Log:

Hole BV10-26 encountered late stage quartz carbonate mineralized veining locally from 40.90-196.26m. Mineralization was composed of trace sphalerite and stibnite within the veins, with lesser amounts of arsenopyrite disseminated in the wall rock with close proximity to the veins. At 52.50m is a 7cm thick vein composed of 10% stibnite and 7% sphalerite.

Downhole surveys:

Depth	Dip	Azimuth
63.40	-49.50	29.30
148.74	-48.40	33.10
209.70	-47.70	32.20

Project: Boulevard2010 **Hole Number:** BV10-26

From	To	Rocktype & Description
0.00	3.05	Casing
		CASING - Overburden
3.05	40.90	Biotite Chlorite Schist

BIOTITE CHLORITE SCHIST - Medium grained, fine grained, strongly foliated, biotite chlorite schist, with increased quartz. Rare 1st and 2nd generation veining. Local 4th generation, unmineralized chaotic carbonate veining, generally less than 2mm wide. Weak local epidote alteration. 1% pyrite with trace pyrrhotite disseminations. Interval is blocky. Lower contact signified by presence of 3rd generation mineralized veining.

ALTERATION


« Epidote 1.00*»
« Sericite 1.00*»

MINERALIZATION

« Pyrite 1.00%»
« Pyrrhotite 0.10%»

STRUCTURE

< @ 5.00 S1 Foliation 40.00° >
< @ 10.00 S1 Foliation 40.00° >
< @ 20.00 S1 Foliation 45.00° >
< @ 30.00 S1 Foliation 40.00° >
< @ 40.00 S1 Foliation 50.00° >

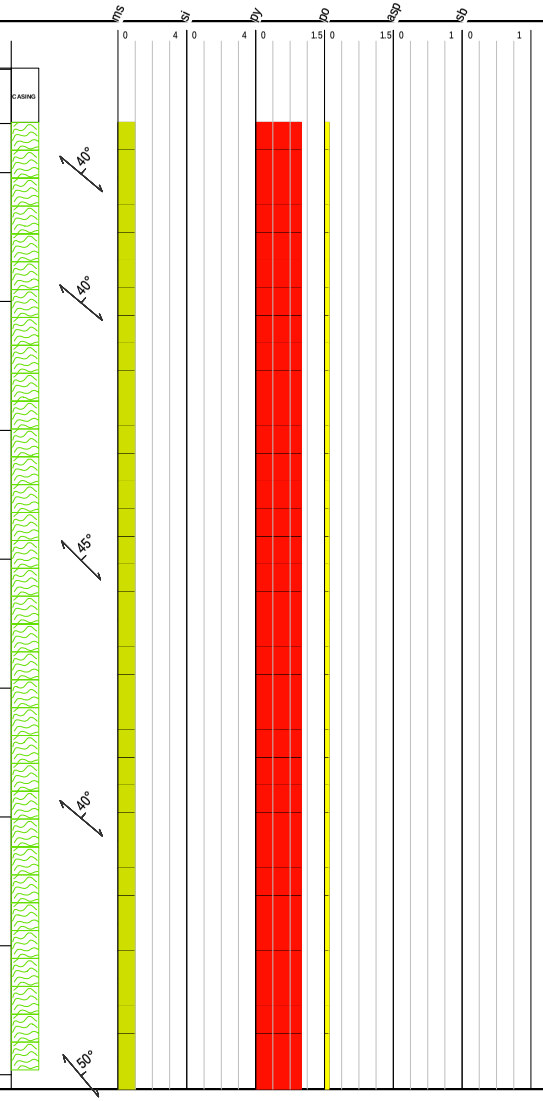

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
3.05	5.55	2.50	I031651	0.01	0.06	1.60	0.33	0.58
5.55	8.05	2.50	I031652	0.01	0.08	0.90	0.22	0.48
8.05	10.55	2.50	I031653	0.01	0.07	0.70	0.57	0.73
10.55	13.05	2.50	I031654	0.01	0.06	0.70	0.13	0.86
13.05	15.55	2.50	I031655	0.01	0.05	0.60	0.15	0.62
15.55	18.05	2.50	I031656	0.01	0.10	0.50	0.11	0.56
18.05	20.55	2.50	I031657	0.01	0.10	0.90	0.12	0.89
20.55	23.05	2.50	I031658	0.01	0.11	0.50	0.07	0.71
23.05	25.55	2.50	I031659	0.01	0.36	0.90	0.10	1.01
25.55	28.05	2.50	I031661	0.01	0.07	0.30	0.09	0.52
28.05	30.55	2.50	I031662	0.01	0.09	0.80	0.10	0.99
30.55	33.05	2.50	I031663	0.01	0.07	0.40	0.09	0.48
33.05	35.55	2.50	I031664	0.01	0.17	2.30	0.54	1.11
35.55	38.05	2.50	I031665	0.01	0.07	1.70	0.25	1.09
38.05	40.55	2.50	I031666	0.01	0.09	1.10	0.37	1.07
40.55	43.05	2.50	I031667	0.04	0.11	7.70	0.19	1.26

Project: Boulevard2010 **Hole Number:** BV10-26

From	To	Rocktype & Description
40.90	61.43	Biotite Chlorite Schist

BIOTITE CHLORITE SCHIST - Continuation of previous unit with the addition of 3rd generation, sphalerite and stibnite bearing veins. Veins are concentrated within 1m of fault zone and dissipate away from faulting. Epidote alteration increases with depth. 7cm vein of 7% sphalerite and 10% stibnite at 52.50. Sharp lower contact with chlorite biotite schist at 45 degrees TCA.

ALTERATION

« Sericite 1.00*»
« Epidote 1.00*»

MINERALIZATION

« Pyrite 1.00%»
« Pyrrhotite 0.50%»
« Sphalerite 0.10%»
« Stibnite 0.10%»

« 52.50- 52.57 Sphalerite 7.00%»
« 52.50- 52.57 Stibnite 10.00%»

STRUCTURE


< @ 50.00 S1 Foliation 40.00° >
< @ 60.00 S1 Foliation 40.00° >

FAULTS

< @ 54.75 Fault 10.00° 95.00cm >

From	To	Rocktype & Description
61.43	129.85	Biotite Chlorite Schist


BIOTITE CHLORITE SCHIST - Medium grey, fine grained, strongly foliated, biotite chlorite schist. Unit is locally interlayered with medium green, fine grained, strongly foliated, chlorite biotite schist. Intervals have sharp, foliation parallel contacts suggesting they are early dykes. Rare 3rd generation veins throughout interval at a density of approximately 1vein/3m. Veins contain trace stibnite and arsenopyrite. 1% pyrite with trace pyrrhotite disseminations throughout interval. Sharp lower contact at 65 degrees TCA.

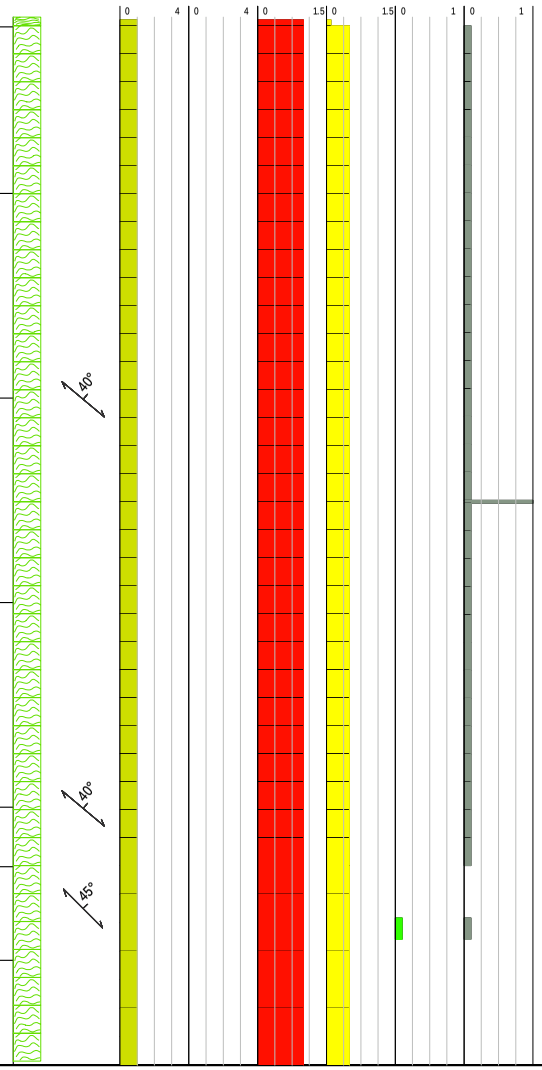

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
43.05	45.55	2.50	I031668	0.01	0.06	0.50	0.30	1.09
45.55	48.05	2.50	I031669	0.01	0.10	153.00	2.11	1.08
48.05	50.05	2.00	I031671	0.01	0.07	4.80	0.45	0.96
50.05	52.05	2.00	I031672	0.06	1.05	207.00	12.00	1.18
52.05	53.92	1.87	I031673	0.91	23.70	1835.00	2720.00	1.23
53.92	54.73	0.81	I031674	0.02	0.32	34.20	18.50	0.74
54.73	56.73	2.00	I031675	0.17	2.35	2310.00	34.20	0.87
56.73	58.50	1.77	I031676	0.03	0.17	38.30	2.10	0.80
58.50	60.50	2.00	I031677	0.02	0.07	50.40	2.19	0.94
60.50	61.43	0.93	I031678	0.01	0.08	1.60	0.30	0.98
61.43	63.40	1.97	I031679	0.01	0.06	9.50	0.56	0.78
63.40	64.40	1.00	I031681	0.04	0.28	96.50	2.42	1.15
64.40	66.60	2.20	I031682	0.01	0.06	2.80	0.21	0.77
66.60	68.00	1.40	I031683	0.01	0.11	3.70	0.39	0.38
68.00	70.00	2.00	I031684	0.05	0.51	63.60	2.11	1.07
70.00	70.80	0.80	I031685	0.03	0.43	29.50	2.05	0.99
70.80	72.80	2.00	I031686	0.01	0.25	3.10	0.16	1.22
72.80	74.56	1.76	I031687	0.02	0.44	1675.00	6.25	0.45

Project: Boulevard2010 **Hole Number:** BV10-26


From	To	Rocktype & Description
		ALTERATION
		« Sericite 1.00*»
		« Epidote 2.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 0.50%»
		« 63.40- 64.20 Arsenopyrite 0.10%»
		« 63.40- 64.20 Stibnite 0.10%»
		« 69.20- 69.95 Arsenopyrite 0.10%»
		« 69.20- 69.95 Stibnite 0.10%»
		« 72.85- 74.56 Arsenopyrite 0.10%»
		« 72.85- 74.56 Stibnite 0.10%»
		« 102.50- 105.80 Arsenopyrite 0.10%»
		« 102.50- 105.80 Stibnite 0.10%»
		« 134.60- 138.60 Arsenopyrite 0.10%»
		« 134.60- 138.60 Stibnite 0.10%»
		STRUCTURE
		< @ 63.00 S1 Foliation 45.00° >
		< @ 70.00 S1 Foliation 40.00° >
		< @ 80.00 S1 Foliation 40.00° >
		< @ 90.00 S1 Foliation 53.00° >
		< @ 100.00 S1 Foliation 50.00° >
		< @ 110.00 S1 Foliation 50.00° >
		< @ 120.00 S1 Foliation 54.00° >
		< @ 130.00 S1 Foliation 68.00° >
		< @ 140.00 S1 Foliation 50.00° >
		< @ 150.00 S1 Foliation 50.00° >
		< @ 160.00 S1 Foliation 60.00° >
		< @ 170.00 S1 Foliation 50.00° >
		FAULTS

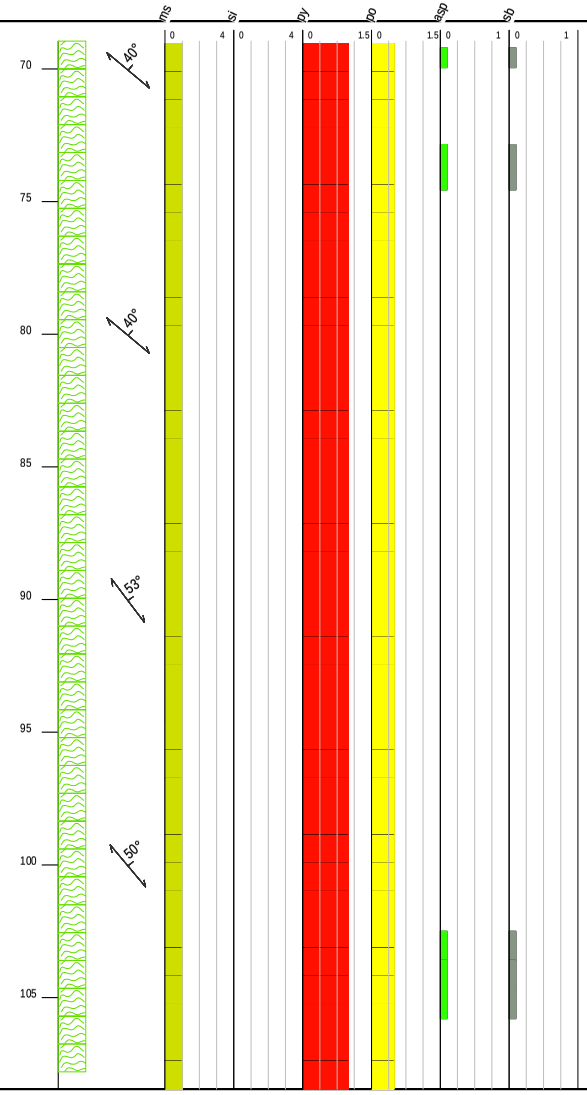

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
74.56	76.56	2.00	I031688	0.04	0.09	166.00	0.81	0.68
76.56	78.80	2.24	I031689	0.06	0.08	569.00	1.40	0.89
78.80	80.80	2.00	I031691	0.03	0.11	13.20	1.84	0.59
80.80	82.80	2.00	I031692	0.01	0.08	6.20	0.59	0.95
82.80	84.40	1.60	I031693	0.01	0.04	1.00	0.17	0.81
84.40	86.40	2.00	I031694	0.04	0.23	3.60	0.13	1.02
86.40	88.40	2.00	I031695	0.01	0.06	1.00	0.08	0.91
88.40	90.40	2.00	I031696	0.01	0.16	1.30	0.10	0.84
90.40	92.50	2.10	I031697	0.01	0.57	0.90	0.08	0.82
92.50	93.88	1.38	I031698	0.01	0.18	63.40	0.29	0.40
93.88	95.82	1.94	I031699	0.43	0.07	114.50	0.33	0.37
95.82	97.82	2.00	I031701	0.01	0.08	1.30	0.10	0.50
97.82	99.82	2.00	I031702	0.01	0.06	28.20	0.15	0.85
99.82	101.82	2.00	I031703	0.01	0.05	2.00	0.07	1.10
101.82	103.82	2.00	I031704	0.01	0.06	1.40	0.08	0.90
103.82	105.57	1.75	I031705	0.01	0.04	1.20	0.09	1.39
105.57	106.60	1.03	I031706	0.14	0.38	345.00	3.03	1.06
106.60	107.60	1.00	I031707	0.03	0.09	38.10	0.72	1.11
107.60	108.82	1.22	I031708	0.15	0.10	110.50	0.99	0.60
108.82	110.82	2.00	I031709	0.02	0.07	14.90	0.33	1.09
110.82	112.82	2.00	I031711	0.01	0.08	2.00	0.10	1.18
112.82	114.65	1.83	I031712	0.01	0.06	1.20	0.12	1.02
114.65	116.65	2.00	I031713	0.01	0.06	3.90	0.21	0.99
116.65	118.50	1.85	I031714	0.01	0.06	0.90	0.10	0.79
118.50	121.00	2.50	I031715	0.01	0.05	1.40	0.11	0.19
121.00	123.50	2.50	I031716	0.01	0.06	1.00	0.08	0.49
123.50	125.00	1.50	I031717	0.01	0.07	1.20	0.09	0.42
125.00	127.50	2.50	I031718	0.01	0.09	0.70	0.09	0.77

Project: Boulevard2010 **Hole Number:** BV10-26


From	To	Rocktype & Description
		< @ 77.80 Fault Gouge 25.00° 1.00cm >
		< @ 77.80 Fault 70.00° 1.00cm >
		ROCKCODE
		« 61.43- 64.60 Chlorite Biotite Schist »
		« 66.35- 67.17 Chlorite Biotite Schist »
		« 70.80- 74.56 Chlorite Biotite Schist »
		« 88.42- 88.72 Chlorite Biotite Schist »
		« 91.60- 93.88 Chlorite Biotite Schist »
		« 95.83- 97.64 Chlorite Biotite Schist »
		« 102.44- 102.83 Chlorite Biotite Schist »
		« 111.04- 111.80 Chlorite Biotite Schist »
		« 118.50- 125.00 Chlorite Biotite Schist »
129.85	151.18	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Medium green, fine grained, strongly foliated, chlorite biotite schist. Same as the intervals within the previous unit. 3rd generation veining occurs from 134.3-138.6m with trace stibnite within the veins and trace arsenopyrite hosted in the immediate wall rock. Sharp lower contact at 70 degrees TCA.
		ALTERATION
		« Epidote 1.00*»
		« 134.30- 138.60 Sericite 2.00*»
		« 142.40- 143.95 Sericite 3.00*»
		MINERALIZATION
		« Pyrite 1.00%»

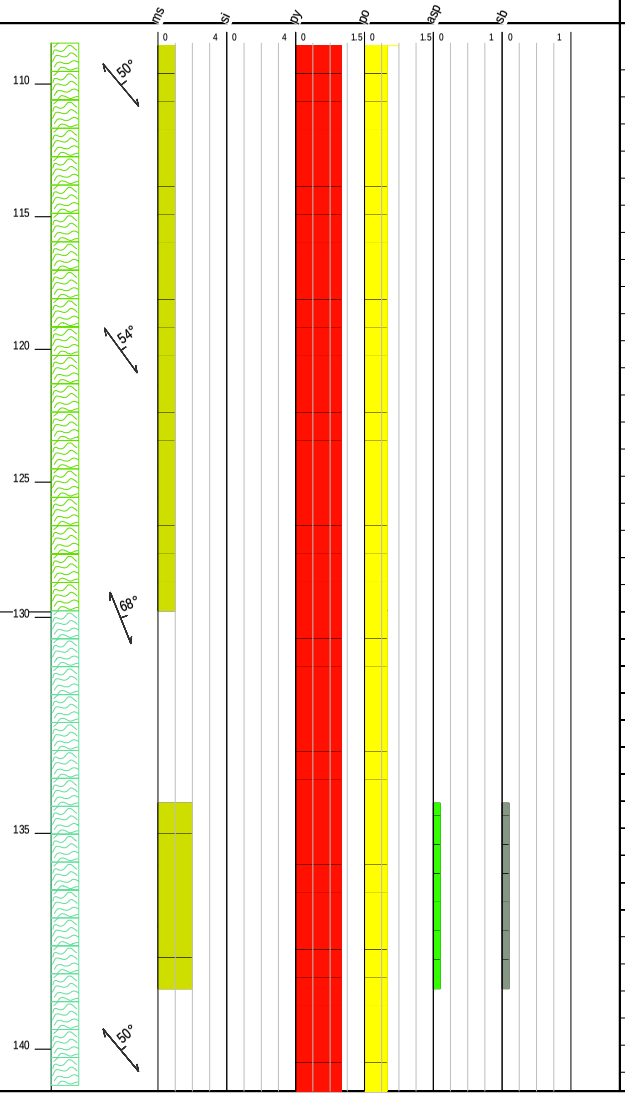

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
127.50	130.00	2.50	I031719	0.01	0.07	0.60	0.40	0.77
130.00	132.50	2.50	I031721	0.01	0.07	0.50	0.65	0.66
132.50	134.50	2.00	I031722	0.01	0.06	1.00	2.05	0.62
134.50	136.50	2.00	I031723	1.17	1.47	7220.00	30.20	0.97
136.50	137.50	1.00	I031724	0.08	0.10	156.00	2.87	0.73
137.50	138.60	1.10	I031725	0.01	0.07	190.00	1.06	0.88
138.60	140.60	2.00	I031726	0.01	0.08	5.60	1.09	0.59
140.60	142.40	1.80	I031727	0.01	0.09	4.80	2.19	0.50
142.40	143.60	1.20	I031728	0.05	7.65	235.00	16.00	0.73
143.60	145.60	2.00	I031729	0.02	0.42	153.00	3.55	0.71
145.60	147.60	2.00	I031731	0.01	0.12	16.90	1.48	0.39
147.60	149.60	2.00	I031732	0.01	0.08	2.00	0.47	0.32
149.60	151.18	1.58	I031733	0.01	0.13	4.80	0.28	0.39

Project: Boulevard2010 **Hole Number:** BV10-26


From	To	Rocktype & Description
		« Pyrrhotite 0.50%»
		« 134.30- 138.60 Stibnite 0.10%»
		« 134.30- 138.60 Arsenopyrite 0.10%»
		STRUCTURE
		< @ 130.00 S1 Foliation 68.00° >
		< @ 140.00 S1 Foliation 50.00° >
		< @ 150.00 S1 Foliation 50.00° >
		FAULTS
		< @ 142.42 Fault 40.00° 90.00cm >
151.18	175.60	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium grey, fine grained, strongly foliated, biotite chlorite schist. Epidote alteration and chlorite increase with depth. Rare 1st and 2nd generation veining. Two 3rd generation mineralized veins occur in upper 1m of interval with trace stibnite and arsenopyrite. 1% pyrite and trace pyrrhotite disseminations throughout interval. Sharp lower contact at 65 degrees TCA.
		ALTERATION
		« 152.00- 153.00 Sericite 1.00*»
		« 154.80- 175.60 Epidote 2.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 0.50%»
		« 152.00- 153.00 Stibnite 0.10%»
		« 152.00- 153.00 Arsenopyrite 0.10%»
		STRUCTURE

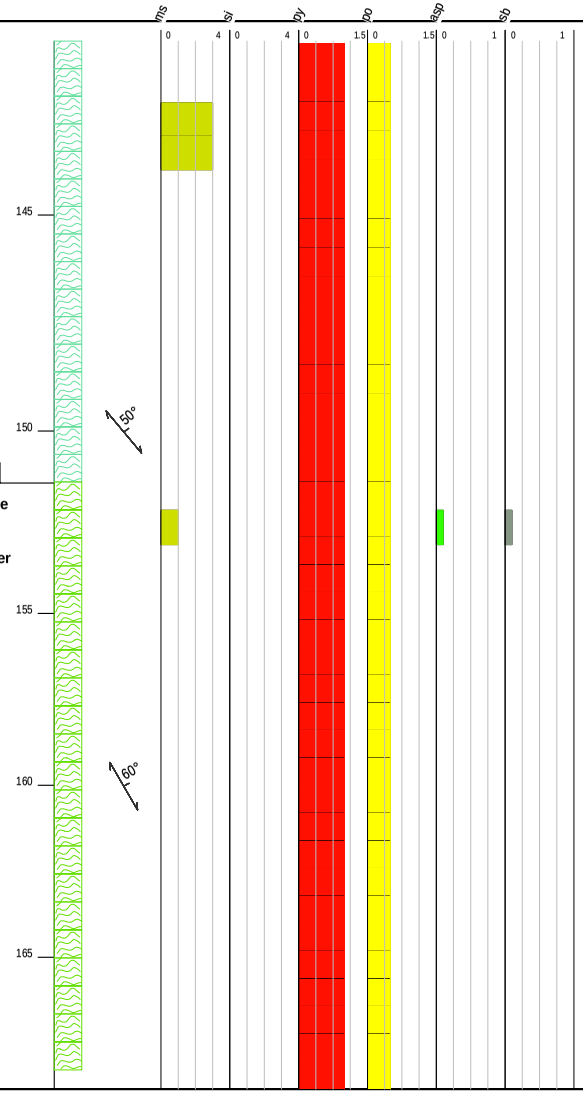

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
151.18	153.18	2.00	I031734	0.01	0.12	19.40	0.53	0.73
153.18	155.18	2.00	I031735	0.01	0.08	18.50	0.29	0.55
155.18	157.18	2.00	I031736	0.01	0.06	1.20	0.60	0.69
157.18	159.18	2.00	I031737	0.01	0.04	1.50	0.30	0.83
159.18	161.18	2.00	I031738	0.01	0.05	1.00	0.23	0.72
161.18	163.18	2.00	I031739	0.01	0.11	3.30	0.20	0.63
163.18	165.18	2.00	I031741	0.01	0.11	2.10	0.16	0.66
165.18	167.18	2.00	I031742	0.01	0.49	2.90	0.16	0.91
167.18	169.18	2.00	I031743	0.01	0.24	0.70	0.26	1.18
169.18	171.18	2.00	I031744	0.01	0.36	0.70	0.51	0.48
171.18	173.18	2.00	I031745	0.01	0.17	1.00	0.43	1.21

Project: Boulevard2010 **Hole Number:** BV10-26


From	To	Rocktype & Description
		< @ 160.00 S1 Foliation 60.00° >
		< @ 170.00 S1 Foliation 50.00° >
		FAULTS
		< @ 170.90 Fault 60.00° 5.00cm >
175.60	197.04	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Medium green, fine grained, strongly foliated, chlorite biotite schist. Intense 3rd generation mineralized veining with trace to locally 1% sphalerite and 1% stibnite. 2 cm vein of 40% stibnite and 15% sphalerite at 184.50m. Veining is chaotic and occurs at a density of 1vein/3cm from 182.00-184.52m and dimminshes away from this zone to 1vein/20cm. Rare 1st and 2nd generation veining. Mafic dyke occurs from 184.52-185.80m with sharp contact cross cutting foliation at 40 and 55 degrees, and late, unmineralized, carbonate filled fractures. Lower contact signified by loss of veining.
		ALTERATION
		« Sericite 2.00*»
		« Epidote 1.00*»
		« 182.91- 183.11 Sericite 3.00*»
		« 195.90- 196.26 Sericite 3.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 0.50%»
		« Stibnite 0.30%»
		« Sphalerite 0.10%»
		« 182.00- 184.52 Stibnite 1.00%»
		« 182.00- 184.52 Sphalerite 0.50%»
		STRUCTURE

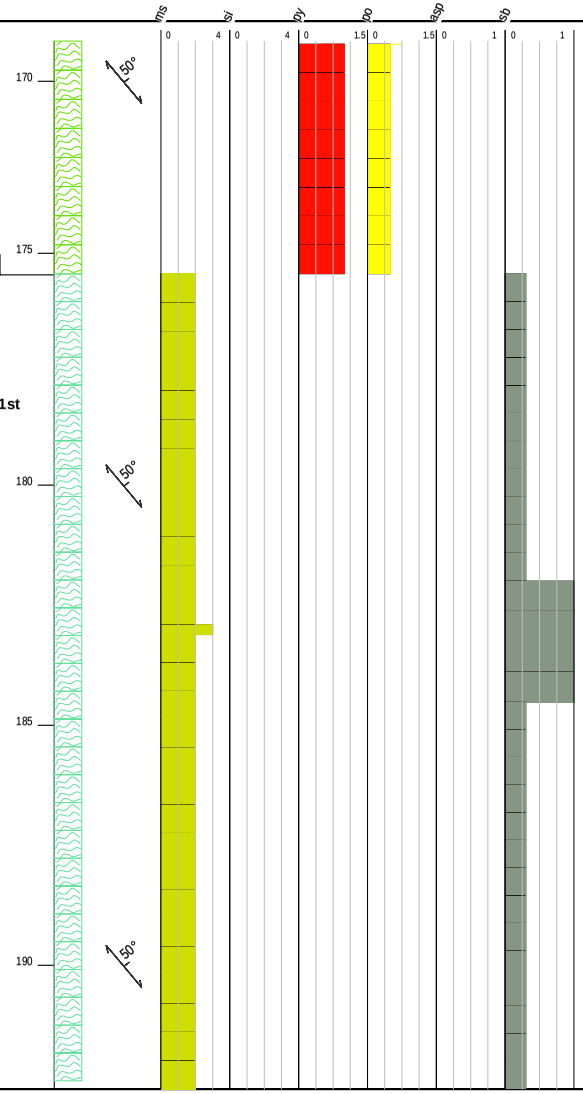

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
173.18	175.80	2.62	I031746	0.01	0.15	3.40	1.43	1.09
175.80	178.00	2.20	I031747	0.13	0.68	427.00	9.48	0.35
178.00	180.00	2.00	I031748	0.01	0.12	6.60	2.74	0.28
180.00	181.40	1.40	I031749	0.05	0.42	94.00	8.78	0.18
181.40	182.90	1.50	I031751	0.03	0.16	97.20	6.00	0.34
182.90	184.80	1.90	I031752	0.30	10.75	1530.00	1240.00	0.90
184.80	185.80	1.00	I031753	0.02	0.39	31.90	18.35	0.62
185.80	187.80	2.00	I031754	0.01	0.15	17.10	7.61	0.80
187.80	189.80	2.00	I031755	0.01	0.15	6.10	0.93	0.98
189.80	191.80	2.00	I031756	0.13	2.44	341.00	40.80	1.05
191.80	193.80	2.00	I031757	0.01	0.14	9.80	0.39	0.27
193.80	194.70	0.90	I031758	0.01	0.07	2.60	0.24	0.47
194.70	195.90	1.20	I031759	0.03	0.10	53.40	1.04	0.59
195.90	197.04	1.14	I031761	0.06	0.48	436.00	6.83	0.53

Project: Boulevard2010 **Hole Number:** BV10-26

From	To	Rocktype & Description
		< @ 180.00 S1 Foliation 50.00° >
		< @ 190.00 S1 Foliation 50.00° >
		FAULTS
		< @ 182.91 Fault -80.00° 20.00cm >
		< @ 195.90 Fault 50.00° 36.00cm >
197.04	216.40	Chlorite Biotite Schist
		CHLORITE BIOTITE SCHIST - Medium green, fine grained, strongly foliated, chlorite biotite schist. Rare 1st generation veining. 1% pyrite and 1% pyrrhotite disseminations. Featureless. EOH
		ALTERATION
		None
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 1.00%»
		STRUCTURE
		< @ 200.00 S1 Foliation 50.00° >
		< @ 210.00 S1 Foliation 55.00° >
		< @ 215.00 S1 Foliation 50.00° >
216.40	216.40	EOH

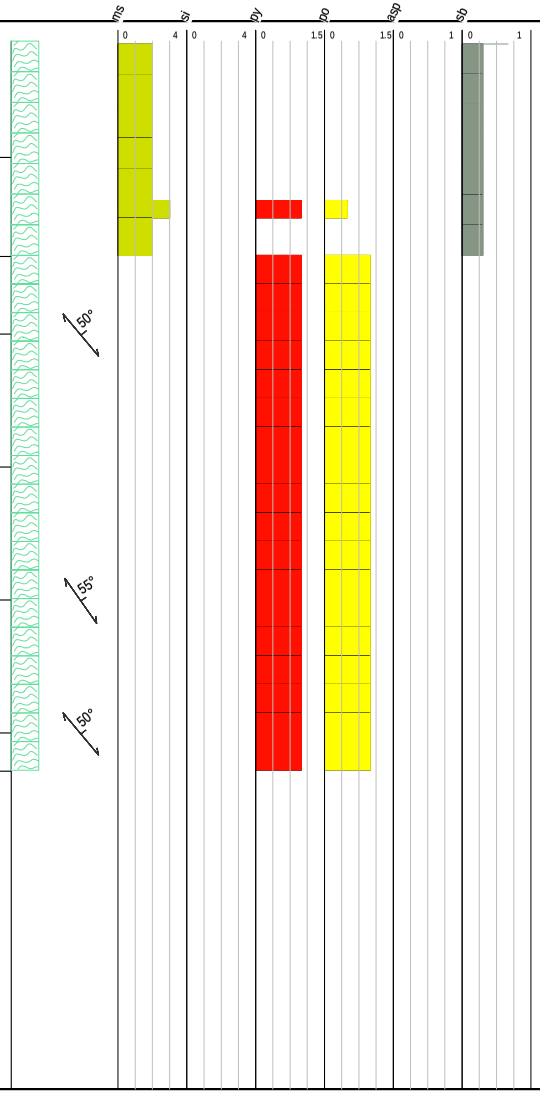

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
197.04	199.54	2.50	I031762	0.01	0.10	4.10	0.66	0.46
199.54	202.04	2.50	I031763	0.01	0.18	4.10	0.30	0.34
202.04	204.54	2.50	I031764	0.01	0.23	2.20	0.20	0.26
204.54	207.04	2.50	I031765	0.01	0.18	0.60	0.12	0.28
207.04	209.54	2.50	I031766	0.01	0.14	0.40	0.11	0.31
209.54	212.04	2.50	I031767	0.01	0.13	0.40	0.09	0.38
212.04	214.54	2.50	I031768	0.01	0.14	0.30	0.11	0.45
214.54	216.40	1.86	I031769	0.01	0.07	18.60	0.28	0.14

EQUITY

DRILL LOG

Project: Boulevard	**Collar Elevation (m):** 1254.0
Hole BV10-27	**Azimuth (º):** 45.0
Location: 6965932 m North, 576421 m East	**Dip (º):** -50.0
Logged by: Ryan Toole	**Length (m):** 151.49
Drilled by: Ridgeline	**Horizontal Projection:**
Assayed by:	**Vertical Projection:**
Core Size: NQ	**Objective** Vegas trend; step-out SE from BV10-24
Date Started: 2010/07/19 **Date Completed:** 2010/07/20	
Dip Tests By:	

Summary Log:


Hole BV10-27 encountered late stage quartz carbonate mineralized veining locally from 71.90-140.67m. Arsenopyrite is the only mineral phase occurring in the veins from 71.90-74.27m and 134.20-140.67m. Veins occurring between 91.50-130.06m contained only stibnite.

Downhole surveys:

Depth	Dip	Azimuth
75.29	-50.90	48.60
145.40	-50.60	47.80

Project: Boulevard2010 **Hole Number:** BV10-27

From	To	Rocktype & Description
0.00	3.05	Casing
		CASING - Overburden
3.05	43.24	Biotite Chlorite Schist
		BIOTITE CHLORITE SCHIST - Medium grey-green, fine grained, moderate to strongly foliated, biotite chlorite schist. Core is blocky down to 18.0m and highly oxidized. Rare 1st and 2nd generation veining with local carbonate filled fractures. One 3rd generation veing with no visible mineralization at 42.87m. Localy epidote alteration. 1% pyrite and trace pyrrhotite disseminations. Local intervals of chlorite biotite schist in lower 4m. Sharp lower contact at 48 degrees TCA.
		ALTERATION
		« Sericite 1.00*»
		« 20.00- 43.24 Epidote 1.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 0.50%»
		STRUCTURE
		< @ 10.00 S1 Foliation 35.00° >
		< @ 20.00 S1 Foliation 43.00° >
		< @ 30.00 S1 Foliation 47.00° >
		< @ 40.00 S1 Foliation 50.00° >
		FAULTS
		< @ 39.34 Fault Gouge 50.00° 20.00cm >
		< @ 41.40 Fault 10.00° 75.00cm >

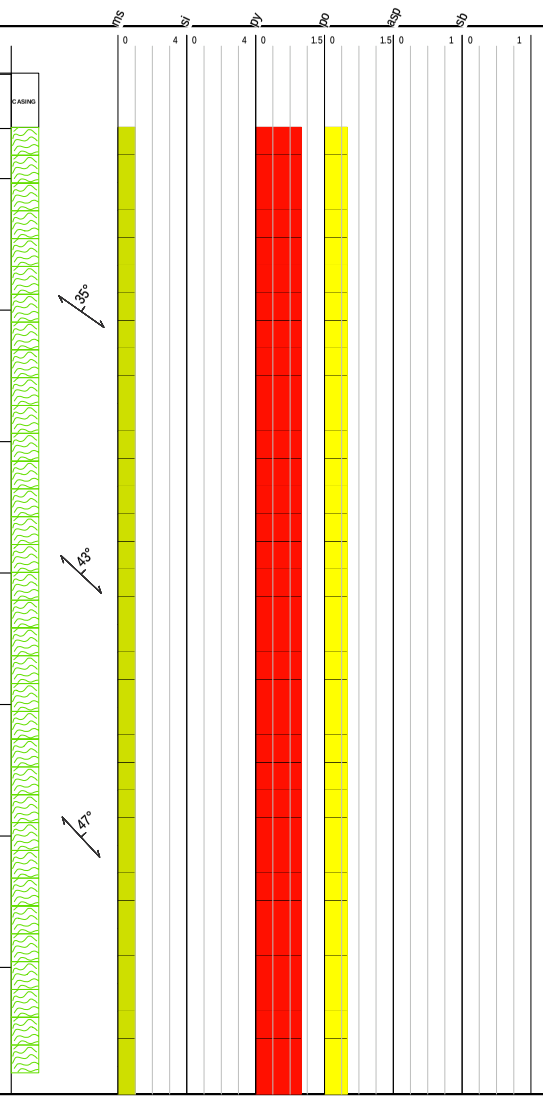

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
3.05	7.92	4.87	I031771	0.01	0.29	9.20	2.60	0.98
7.92	10.97	3.05	I031772	0.01	0.60	1.70	0.47	0.47
10.97	13.71	2.74	I031773	0.01	0.16	5.30	0.77	0.68
13.71	17.07	3.36	I031774	0.01	0.10	1.00	0.14	0.43
17.07	19.57	2.50	I031775	0.01	0.14	0.70	0.12	0.75
19.57	22.07	2.50	I031776	0.01	0.12	0.60	0.18	1.12
22.07	24.57	2.50	I031777	0.01	0.07	0.50	0.21	0.38
24.57	27.07	2.50	I031778	0.01	0.04	0.70	0.20	0.53
27.07	29.57	2.50	I031779	0.01	0.11	1.00	0.71	0.53
29.57	32.07	2.50	I031781	0.01	0.09	1.00	0.58	0.18
32.07	34.57	2.50	I031782	0.01	0.27	2.20	0.22	0.49
34.57	37.07	2.50	I031783	0.01	0.04	2.50	0.18	0.71
37.07	39.57	2.50	I031784	0.01	0.08	1.00	0.37	0.28
39.57	40.57	1.00	I031785	0.01	0.11	5.00	1.62	0.68
40.57	42.16	1.59	I031786	0.01	0.13	3.50	1.18	0.91
42.16	43.24	1.08	I031787	0.01	0.03	5.30	0.31	1.02

Project: Boulevard2010 **Hole Number:** BV10-27

From	To	Rocktype & Description
43.24	80.10	Chlorite Biotite Schist

CHLORITE BIOTITE SCHIST - Medium green, fine grained, strongly foliated, chlorite biotite schist. Local late 3rd generation veining with trace arsenopyrite hosted in the immediate wall rock from 71.90-74.27m. Rare 1st generation veining. Trace pyrite and pyrrhotite disseminations. Local weak epidote alteration. Sharp lower contact at 58 degrees TCA

ALTERATION

« 62.40- 65.00 Epidote 1.00*»

MINERALIZATION

« Pyrite 0.50%»
« Pyrrhotite 0.50%»

« 71.90- 74.27 Arsenopyrite 0.10%»


STRUCTURE

< @ 50.00 S1 Foliation 40.00° >
< @ 60.00 S1 Foliation 45.00° >
< @ 70.00 S1 Foliation 55.00° >
< @ 80.00 S1 Foliation 38.00° >

FAULTS

< @ 49.90 Fault 70.00° 30.00cm >


From	To	Rocktype & Description
80.10	130.06	Biotite Chlorite Schist

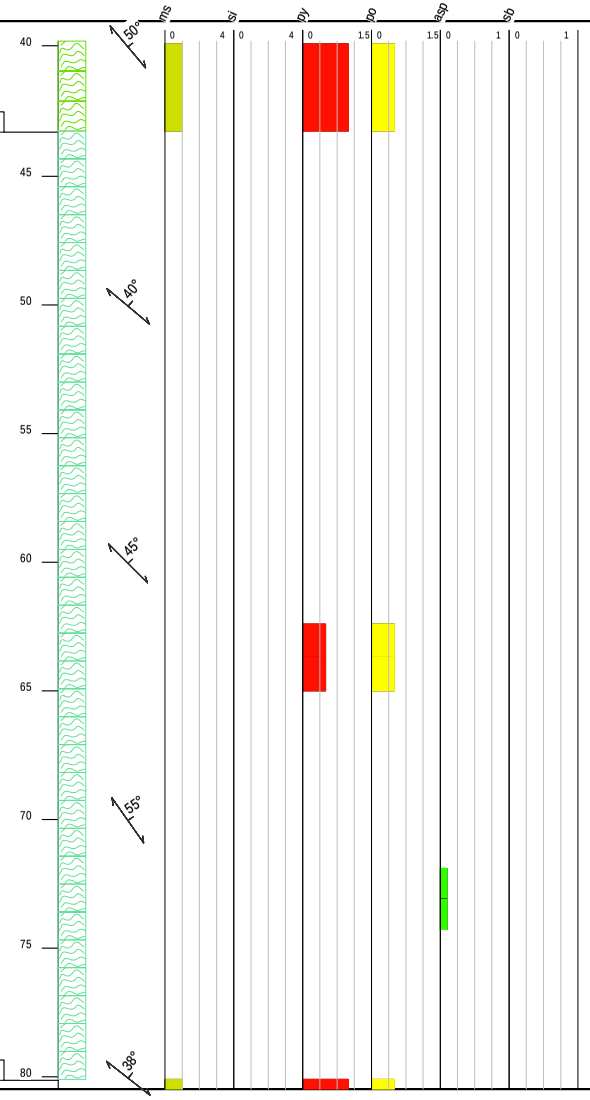

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
43.24	45.40	2.16	I031788	0.01	0.02	0.50	0.19	0.47
45.40	46.55	1.15	I031789	0.16	0.16	1170.00	4.29	0.25
46.55	48.55	2.00	I031791	0.13	0.07	640.00	1.08	0.68
48.55	50.55	2.00	I031792	0.02	0.21	382.00	3.63	0.72
50.55	52.55	2.00	I031793	0.02	0.05	4.40	1.47	0.49
52.55	54.55	2.00	I031794	0.01	0.14	2.10	0.22	0.62
54.55	56.55	2.00	I031795	0.01	0.04	0.90	0.18	0.69
56.55	58.55	2.00	I031796	0.01	0.07	1.10	0.25	0.67
58.55	60.55	2.00	I031797	0.01	0.09	1.00	0.23	0.74
60.55	62.55	2.00	I031798	0.01	0.07	0.70	0.28	0.34
62.55	64.55	2.00	I031799	0.01	0.12	14.60	0.35	0.47
64.55	67.40	2.85	I031801	0.01	0.08	5.60	0.75	0.48
67.40	69.40	2.00	I031802	0.01	0.14	8.80	0.78	0.34
69.40	71.40	2.00	I031803	0.01	0.15	2.60	3.09	0.43
71.40	73.00	1.60	I031804	0.06	0.48	337.00	27.40	0.85
73.00	74.80	1.80	I031805	0.12	0.33	596.00	8.70	8.06
74.80	76.00	1.20	I031806	0.01	0.07	5.50	0.29	0.17
76.00	78.00	2.00	I031807	0.01	0.10	0.90	0.13	0.15
78.00	79.40	1.40	I031808	0.01	0.15	7.20	0.14	0.46
79.40	80.10	0.70	I031809	0.01	0.16	1.60	0.12	2.66
80.10	82.10	2.00	I031811	0.01	0.33	20.30	4.50	10.15

Project: Boulevard2010 **Hole Number:** BV10-27

From	To	Rocktype & Description
		BIOTITE CHLORITE SCHIST - Medium grey, fine grained, strongly foliated, biotite chlorite schist. Rare 1st and 2nd generation veining. 3rd generation mineralized veining occurs throughout interval with intensity increasing towards fault zones. Fault zones cross cut veins however, suggesting fault zones are later than mineralization event, and followed the path of least resistance where alteration was highest. Trace stibnite occurs within veins. Veining density is approximately 1vein/10cm from 106.0-117.65, decreasing away from this zone to 1vein/1m. 1% pyrite and trace pyrrhotite disseminations. Sharp lower contact at 70 degrees TCA.
		ALTERATION
		« Sericite 1.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 0.50%»
		« 91.50- 106.00 Stibnite 0.01%»
		« 106.00- 117.65 Stibnite 0.10%»
		« 117.65- 130.06 Stibnite 0.01%»
		STRUCTURE
		< @ 90.00 S1 Foliation 49.00° >
		< @ 100.00 S1 Foliation 50.00° >
		< @ 110.00 S1 Foliation 68.00° >
		< @ 120.00 S1 Foliation 50.00° >
		< @ 130.00 S1 Foliation 51.00° >
		FAULTS
		< @ 87.66 Fault 50.00° 40.00cm >
		< @ 91.50 Fault 50.00° 395.00cm >
		< @ 109.39 Fault Gouge 80.00° 62.00cm >

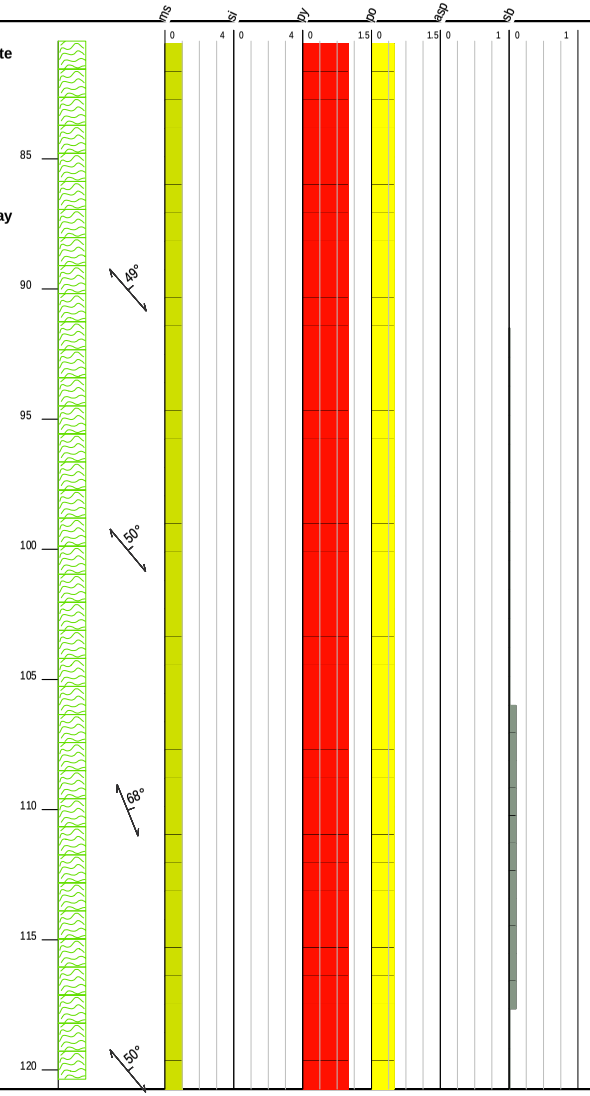

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
82.10	84.10	2.00	I031812	0.01	0.15	2.10	0.29	7.29
84.10	84.70	0.60	I031813	0.02	0.20	2.80	0.23	6.60
84.70	86.70	2.00	I031814	0.01	0.15	6.70	0.15	4.39
86.70	87.64	0.94	I031815	0.01	0.10	7.70	0.09	3.09
87.64	89.64	2.00	I031816	0.02	0.45	12.60	2.01	5.07
89.64	91.50	1.86	I031817	0.01	0.15	2.20	0.44	2.87
91.50	93.27	1.77	I031818	0.07	0.47	139.50	7.77	4.02
93.27	94.27	1.00	I031819	0.01	0.15	8.20	3.76	2.33
94.27	96.27	2.00	I031821	0.01	0.21	4.80	1.42	5.03
96.27	98.27	2.00	I031822	0.01	0.17	3.50	0.63	6.18
98.27	100.27	2.00	I031823	0.01	0.26	15.60	0.50	8.33
100.27	101.27	1.00	I031824	0.01	0.22	8.20	0.53	5.38
101.27	102.41	1.14	I031825	0.11	0.60	53.10	0.68	8.27
102.41	103.41	1.00	I031826	0.03	0.26	0.60	0.19	9.08
103.41	104.20	0.79	I031827	0.02	0.21	0.80	0.14	4.45
104.20	105.40	1.20	I031828	0.33	5.20	60.00	25.50	6.58
105.40	106.40	1.00	I031829	0.08	0.62	560.00	20.60	8.88
106.40	107.40	1.00	I031831	0.16	0.24	18.50	1.52	19.05
107.40	109.40	2.00	I031832	0.01	0.23	3.70	0.24	8.80
109.40	110.10	0.70	I031833	0.03	0.33	77.60	2.79	53.00
110.10	112.10	2.00	I031834	0.01	0.22	35.50	0.68	10.75
112.10	113.35	1.25	I031835	0.13	1.68	729.00	15.40	6.60
113.35	114.60	1.25	I031836	0.12	0.68	807.00	5.64	6.26
114.60	115.60	1.00	I031837	0.01	0.26	11.60	0.27	13.85
115.60	116.60	1.00	I031838	0.01	0.36	36.00	0.99	13.85
116.60	117.60	1.00	I031839	0.01	0.19	12.50	0.25	5.41
117.60	119.60	2.00	I031841	0.01	0.34	2.00	0.10	13.75
119.60	121.60	2.00	I031842	0.01	0.24	2.70	0.06	8.71
121.60	122.60	1.00	I031843	0.01	0.42	20.20	0.18	5.61
122.60	123.60	1.00	I031844	0.01	0.23	4.70	0.15	4.81
123.60	124.60	1.00	I031845	0.02	0.61	16.10	0.62	9.53
124.60	125.60	1.00	I031846	0.01	0.30	2.30	0.08	5.38
125.60	126.60	1.00	I031847	0.02	0.57	21.90	0.27	11.45
126.60	127.60	1.00	I031848	0.25	3.05	31.90	3.10	5.61
127.60	128.60	1.00	I031849	0.01	0.22	6.30	0.94	8.16
128.60	130.07	1.47	I031851	0.01	0.22	4.00	0.27	6.72

Project: Boulevard2010 **Hole Number:** BV10-27

From	To	Rocktype & Description
130.06	140.67	Chlorite Biotite Schist

CHLORITE BIOTITE SCHIST - Medium green, fine grained, strongly foliated, chlorite biotite schist. Locally blocky. Rare 1st and 2nd generation veining. 3rd generation veining occurs at a density of 1vein/1.25m and contains trace arsenopyrite in immediate wall rock. Trace pyrite and pyrrhotite disseminations throughout interval. Sharp lower contact at 48 degrees TCA.

ALTERATION

None

MINERALIZATION

« Pyrite 0.50%»
« Pyrrhotite 0.50%»

« 134.20- 140.67 Arsenopyrite 0.01%»

STRUCTURE

< @ 140.00 S1 Foliation 25.00° >

From	To	Rocktype & Description
140.67	151.29	Biotite Chlorite Schist

BIOTITE CHLORITE SCHIST - Medium grey, fine grained, strongly foliated, biotite chlorite schist. Rare 1st and 2nd generation veining. 3rd generation veining occurs in upper 3m at a density of 1vein/25cm however no visible mineralization. EOH


ALTERATION



From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm
130.07	132.07	2.00	I031852	0.01	0.25	42.70	0.29	9.51
132.07	133.07	1.00	I031853	0.33	0.35	1560.00	4.72	0.67
133.07	135.07	2.00	I031854	0.01	0.21	6.10	0.12	0.47
135.07	137.07	2.00	I031855	0.01	0.18	15.50	0.29	0.96
137.07	139.07	2.00	I031856	0.01	0.14	3.10	0.19	3.00
139.07	139.70	0.63	I031857	0.01	0.22	1.60	0.64	4.77
139.70	141.43	1.73	I031858	0.14	0.93	632.00	760.00	3.14
141.43	142.43	1.00	I031859	0.08	0.31	82.80	28.30	3.81
142.43	143.65	1.22	I031861	0.09	0.28	11.90	1.18	4.01
143.65	145.65	2.00	I031862	0.06	0.17	3.80	0.33	3.36
145.65	148.65	3.00	I031863	0.11	0.14	0.90	0.20	3.55
148.65	150.41	1.76	I031864	0.51	0.15	0.90	0.30	5.11
150.41	151.29	0.88	I031865	0.33	0.22	3.90	2.00	24.50

Project: Boulevard2010 **Hole Number:** BV10-27

From	To	Rocktype & Description
		« Sericite 1.00*»
		MINERALIZATION
		« Pyrite 1.00%»
		« Pyrrhotite 1.00%»
		STRUCTURE
		< @ 150.00 S1 Foliation 45.00° >
		FAULTS
		< @ 149.66 Fault 10.00° 215.00cm >
151.29	151.29	EOH

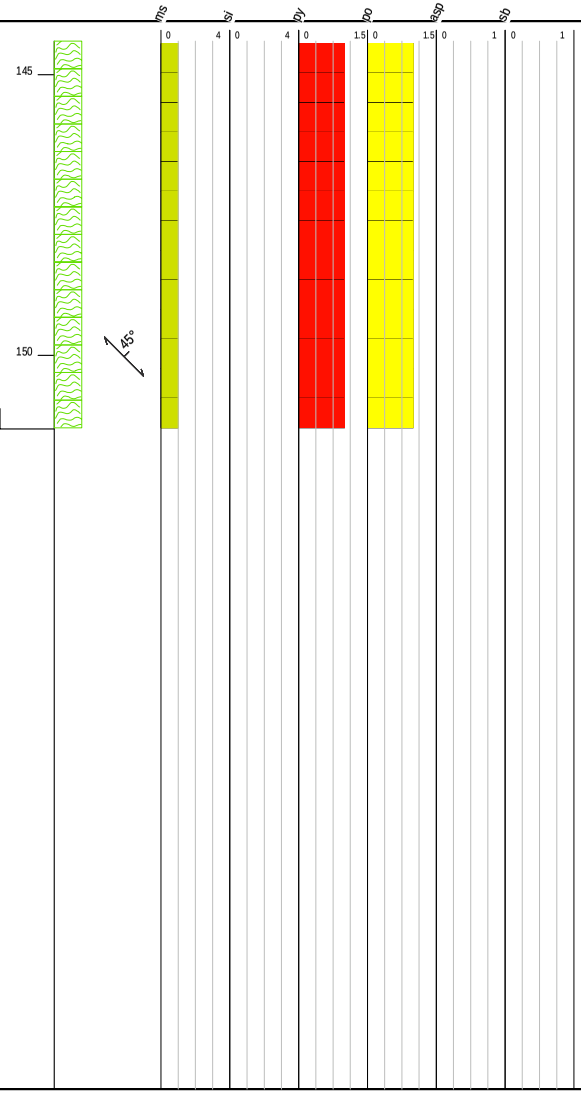

From	To	Width	Sample	Au ppm	Ag ppm	As ppm	Sb ppm	Mo ppm

Appendix G: Geophysical Logistical Report

FIELD LOGISTICS REPORT

(SQI INTERNAL DOCUMENT)

Covering the Silver Quest Resources Ltd. Geophysics Field Program
June 23, 2010 to June 27, 2010

Boulevard Property
Dawson Range, Yukon Territory

Prepared by: Canterra Minerals Corp.
Author: Francis Moul

Date: February 8, 2011

Table of Contents

1.0 Introduction 4

2.0 Background 5

3.0 Ground Magnetic Survey 6

3.1 Personnel 6

3. 2 Survey Area 6

3.3 Survey Time and Line Kilometers 7

3.4 Description of Survey Method 8

3.5 Planning 9

3.6 Logistics 9

3.7 Instrumentation 10

3.8 Acquisition Parameters 11

3.9 Data processing 11

4.0 Results 13

4.1 Interpretation 13

5.0 Recommendations 15

6.0 References 16

List of Appendices

Appendix A: Property and Survey Location Maps
Appendix B: Plots of Ground Magnetic Data with Claim Boundaries
Appendix C: Interpretation
Appendix D: Survey Information File
Appendix E: Digital Data

1.0 Introduction

This report summarizes the Silver Quest Resources Ltd. ("Silver Quest") ground geophysics program undertaken on the Boulevard Property ("Boulevard") between June 23rd and June 27th, 2010.

The objective of the program was to create a geophysical base layer using the ground magnetic method. The ground magnetic program occurred concurrently with a soil and rock geochemical sampling, geological mapping, trenching, and drilling program. The ground magnetic data was used to identify lineaments in the area of interest, areas of alternation and to assist in the selection of trench and drill collar locations.

At the conclusion of the survey a single grid totaling 62.5 line kilometers ("lkm") had been completed.

2.0 Background

The Boulevard Property is located approximately 135 km south of Dawson City, YT. The camp was serviced by MD500 helicopter from the Independence or Thistle airstrips. A location map showing the property boundaries, claims and camp locations is included (Appendix A – Figure 1).

The ground magnetic survey area (Appendix B – Figure 2) was selected based on the area of interest for trenching and drilling during the summer 2010 field season. The survey covers a broad gold-arsenic anomaly in soils and high-grade gold discoveries in surface trenches.

The survey area represents a small portion of the total property area. The survey was located in the central region in an area generally mapped as a quartzite schist. The quartzite schist is bounded on the northeast and southwest by granitic intrusions (Coffee Creek Granite to the north).

Only a small portion of the property consists of exposed bedrock. Most of the ground is covered by overburden and bedrock geology is known only through frost heaved or excavated/exposed material and drilling. In the survey area the bedrock is described as moderately to strongly foliated, muscovite to biotite schist and quartzite. Drill holes in this area intercepted dominantly interbedded mafic schists, quartzite and limestone.

The survey area is covered by the 2009 Northern Stevenson Ridge airborne magnetic total field survey (Goldak, 2009). The airborne traverse lines were separated by 400 m; the data are of insufficient resolution to resolve most features on the ground survey scale (Appendix B – Figure 1).

Most of the 2010 survey area was previously covered by a station based ground magnetic survey in 2008 conducted by Scott Geophysics Ltd. (Scott, 2008). A small (three line) IP/Resitivity survey was carried out concurrently. The 2008 ground magnetic survey data were relatively low resolution given the small area of known mineralization (100 m spaced traverse lines) and variability of response within the schist (12.5 m sample stations). The 2008 ground magnetic survey data in the area of the 2010 ground magnetic survey are presented in Appendix B – Figures 2 to 4.

3.0 Ground Magnetic Survey

3.1 Personnel

The 2010 ground magnetic survey data were acquired by employees of Equity Exploration Consultants Ltd. ("Equity") and Canterra Minerals Corp. The program was planned by Francis Moul of Canterra Minerals Corp. ("Canterra") in the Canterra office in Vancouver and managed by Darcy Baker of Equity at the Boulevard camp. The ground magnetic data were quality reviewed, processed and preliminary interpreted by Francis Moul at the Canterra office in Vancouver, BC.

The survey data and interpretation are presented in the appendices. A list of personnel is located in Table 1.

Table 1 - Personnel List

Crew	Company	Location	Title
Francis Moul	Canterra Minerals Corp.	Field / Vancouver	Geophysicist
Darcy Baker	Equity Exploration Consultants Ltd.	Field	Field Program Manager, President
Sean Suttie	Equity Exploration Consultants Ltd.	Field	Equipment Operator, Sr. Sampler
Ryan Toole	Equity Exploration Consultants Ltd.	Field	Equipment Operator, Sampler
Tashina Scurvey	YMAT Intern./Equity Exploration Consultants Ltd.	Field	Equipment Operator

Equity Exploration Consultants Ltd. is located at 200-900 West Hastings St., Vancouver, BC (www.equityexploration.com).

3. 2 Survey Area

One survey grid was completed during the period between June 23, 2010 and June 27, 2010. The coordinates of a polygon defining the survey area in NAD83 UTM Zone 7N are presented in Table 2.

Table 2 - Block Coordinates

Easting (m)	Northing (m)
575197	6967138
576337	6967138
576337	6966886
576737	6966888
576737	6966578
576747	6966578
576747	6966477
576936	6966478
576938	6965408
576397	6965407
576398	6965598
576067	6965598
576068	6965607
575196	6965607

3.3 Survey Time and Line Kilometers

Assuming an 8 hour survey day a total of 76 person-hours were required to complete the grid. A summary log is presented in Table 3.

Table 3 Summary Survey Log

Date	Survey Day	Personnel	Task
June 23, 2010	1	Francis Moul, Sean Suttie	Mob.(Francis) / Survey (0.5 day)
June 24, 2010	2	Francis Moul, Sean Suttie	Survey
July 25, 2010	3	Francis Moul, Sean Suttie, Tashina Scurvey	Survey / Demob. (Francis)
July 26, 2010	4	Sean Suttie, Tashina Scurvey	Survey
July 27, 2010	5	Sean Suttie, Ryan Toole	Survey

The total number of line kilometers completed on each claim are presented in Table 4 below. The claim boundaries are accurate as of January 31, 2011.

Table 4 Line Length Surveyed in each Claim Area

Grant Number	Line Length (km)	Fraction of Total Line Length (%)
YC64840	3.3	5.3
YC64841	3.2	5.1
YC64854	2.4	3.8
YC64855	0.5	0.8
YC64838	4.3	6.9
YC54839	6.8	10.9
YC64852	4.9	7.8
YC64853	3.2	5.1
YC64836	4.8	7.7
YC64837	4.8	7.7
YC64850	4.6	7.4
YC64851	4.5	7.2
YC81288	2.7	4.3
YC81290	2.9	4.6
YC81292	4.0	6.4
YC81294	5.0	8.0
YC81293	0.1	0.2
YC81295	0.5	0.8
Totals	62.5	100.0

3.4 Description of Survey Method

The ground magnetic survey method allows definition of near surface variations in the magnetic field due to the presence of materials with contrasting magnetic susceptibility and remnant magnetization. In magnetically complicated environments the ground magnetic method offers improved near surface resolution relative to airborne magnetic methods.

A ground magnetic survey is typically conducted along a series of parallel traverse lines of a constant orientation. The line separation is smaller than employed in airborne surveys; typical line separations are 25 m to 100 m. Station spacing varies from less than a metre in “walking mode” surveys to typically 12.5 m or 25 m spacing in “station mode” surveys. The station spacing establishes the minimum width of an anomaly which may be resolved along the survey line; as the station spacing becomes smaller, the width of the smallest resolvable feature becomes narrower.

The survey method requires a minimum of two magnetometers; one of which is employed as a static monitor of the total magnetic field intensity while the other is moved across the survey area in a regular manner. The difference between the value of the total magnetic field intensity at the rover (moving magnetometer) and the base (static magnetometer) is a record of the spatial variations of the magnetic field over the survey area. Typically the resulting data are gridded to provide a continuous surface representing the variation in the magnetic field.

Generally, areas of relatively high total magnetic field intensity correlate with rocks of relatively high magnetic susceptibility and areas of relatively low total magnetic field intensity correlate with rocks or overburden of relatively low magnetic susceptibility. Magnetic susceptibility is directly related to the approximate proportion of magnetite and pyrrhotite and to a limited extent other minerals present in the sample.

3.5 Planning

The ground survey grids were initially planned using the orientation and extent of the previous ground magnetic survey conducted in 2008 to define the grid parameters. The 2008 survey was conducted in station mode with survey lines separated by 100 m and stations separated by 12.5 m. The 2008 survey lines were oriented at a 30 deg. azimuth, which is approximately perpendicular to the estimated strike of the magnetic lineaments.

The 2010 ground magnetic survey lines were oriented north-south at 50 m line separation, with continuous sampling (walking mode). The survey line orientation was intentionally different from that of the 2008 survey in order to resolve any structures parallel to the 2008 survey lines. The continuous sampling mode was selected in order to optimally resolve narrow features within the schist and any change in character which may be related to alternation of the host rock.

Plan maps showing the topographic contours and survey lines were created and distributed to the survey crew prior to commencing operations. The survey lines as completed are presented in Appendix B – Figure 5.

3.6 Logistics

Trenching, soil and rock sampling were undertaken at the same time as the magnetic survey in the same area of interest. There was no drilling at the time of survey but a drill was located on the survey grid. The drill was located between survey lines, and the equipment did not have a significant influence on the line data.

The survey crew was lifted from the camp to the survey area each day by helicopter (MD500). The partial first day was used to establish the base station and complete a 450 m x 500 m block over the area of known mineralization. Subsequent survey lines were offset by 25 m in order to achieve 25 m line spacing over the area of known mineralization. The survey line path is presented in Appendix B – Figure 5.

The base station was placed on the survey grid for simplified access. Once established the base station remained in place until the conclusion of the survey.

The crew conducted the survey along sets of adjacent lines. The crew met at the end of each line before proceeding to the next set. This procedure was undertaken to increase safety given the absence of radios suitable for use while acquiring magnetic data.

The basic survey information metadata (the "survey information file") are presented in Appendix D.

3.7 Instrumentation

Three magnetometers were operated simultaneously at times throughout the survey period. All three of the magnetometers were property of Canterra. The details of the instruments used are presented in Table 5.

Table 5 Instrumentation

Magnetometer Type	Serial Number	Owner
GSM-19W v7.0 Overhauser	7052314	Canterra
GSM-19W v7.0 Overhauser	7052316	Canterra
GSM-19TG v5.0 Proton Precession	705699	Canterra

Throughout the survey, one or two GSM-19W magnetometers were used as rovers and the GSM-19TG magnetometer was employed as a static base station. Typically, the base station is deployed as close as possible to the active survey grid. In this case the base station was located approximately at the centre of the grid. The base station data were used as the source for magnetic differential correction.

The GSM-19W magnetometers were equipped with a GPS and real-time DGPS receiver allowing both accurate positioning and instrument clock synchronization. The Canada-wide DGPS service (CDGPS) broadcast was used for differential positioning; it is transmitted on L-band frequencies from the MSAT-1 communications satellite. The manufacturer quoted accuracy of the GPS receiver is less than 1 m. DGPS corrections were intermittent due to latitude and topography.

The sensor on each GSM-19W instrument is a scalar magnetometer capable of measuring the earth's total magnetic field intensity. The Overhauser version allows sample rates down to 0.2 seconds with an absolute accuracy of +/- 0.1 nT. The manufacturer stated range of operating temperature is between -40ºC and +55ºC. The entire assembly weighs approximately 3 kg.

The GSM-19TG magnetometer was not equipped with a GPS receiver. Instrument internal clock synchronization was accomplished by establishing link to one of the GPS enabled GSM-19W magnetometers at the beginning of each the survey day using a data cable.

3.8 Acquisition Parameters

The traverse lines were separated by nominal 50 m spacing and oriented north-south. In the area of known mineralization data were acquired over a small 450 m x 500 m infill block reducing the nominal line separation in this area to 25 m.

The survey position data were collected in WGS-84 UTM 7N coordinates. Sample locations were recovered using real-time differentially corrected GPS sampling at two Hertz.

The magnetic data on the rovers were collected at a continuous two Hertz sample rate while the magnetic data on the base were collected at a continuous 0.33 Hertz sample rate (one sample each three seconds). The rover data were collected in "walking mode" where time, magnetic field and position values are continuously recorded while the base station data were recorded in "base mode" where only the time and magnetic field data are continuously recorded. The raw and processed data are included on DVD in Appendix E along with documentation of the digital file formats.

3.9 Data processing

The data were recorded to the GSM-19 data loggers in real-time and downloaded to a laptop computer at the end of each day. Data was sent to the Canterra office in Vancouver where final data processing and plotting was conducted. The data processing flow included the following steps:

1. Downloading of data from rover and base GSM-19W to laptop using Hyperterminal
2. Import of ASCII data files to Geosoft
3. Set coordinate datum to WGS-84 UTM 7N
4. Split rover data into lines named by nearest easting or northing
5. Review rover data for magnetic and position noise
6. Edit or apply non-linear filter to remove magnetic noise
7. Edit to remove bad position data
8. Review base data for diurnal variation and magnetic noise
9. Edit or apply non-linear filter to remove magnetic noise
10. Merge base and rover data
11. Calculate diurnal corrected channel (datum 0 nT, mean value at local base station during survey period was 57110 nT)
12. Trim survey lines to remove overlap

13. Deselect duplicate lines and copy essential channels to final database
14. Grid diurnally corrected magnetic data
15. Trim grids to survey block polygon
16. Determine total line kilometers from trimmed line path.

4.0 Results

A single survey grid consisting of 62.5 lkm was completed in five survey days. Plan view maps of the resulting grids (total magnetic intensity, first vertical derivative of the total magnetic intensity, running mean filtered total magnetic intensity profiles, digital terrain model and line path with satellite image) are presented in Appendix B – Figures 5 to 10.

4.1 Interpretation

The survey area may be separated into regions of distinct character as follows: a quiescent, relative low magnetic intensity zone in the south west corner ("A"), an unsettled central zone dominated by narrow relative high magnetic intensity linear anomalies ("B") and a broad northern quiescent zone interrupted by a few weak linear anomalies ("C") (Appendix C – Figure 1).

Areas of apparent outcrop and areas of apparent down slope soil or debris flow were estimated by analysis of the public 10 m resolution SPOT panchromatic satellite image (presented as the base layer in Appendix C – Figure 1). Linear magnetic features were picked from the stacked profile data (Appendix B – Figure 6). Relative high magnetic intensity areas were estimated by removing a first order planar trend from the total magnetic intensity grid and contouring at approximately two standard deviations above the mean.

In the south-east of the survey area there are indications of debris following the down slope gradient based on analysis of the satellite image. The debris flow combines into a single lineament trending 150 deg. (perhaps a creek) at the southern edge of the survey area. The area covered encompassed by this apparent soil or debris flow is coincident with a broad weak magnetic high through which most magnetic lineaments are disrupted.

In region "B", the magnetic lineaments are dominantly magnetic intensity highs but may be either highs or lows and have a fairly consistent orientation of between 105 deg. and 120 deg. In the south-west corner of region "B" the lineaments form a relative high magnetic intensity zone. Outcrop is apparent in this area from the satellite image; banding or bedding in the outcrop has an apparent strike of between 110 deg. to 120 deg.

The outcrop in this area is known from descriptions entered into the property geology database. Three descriptions were entered for outcrop in this region: 1. a moderately banded biotite – muscovite schist with interlayered quartzite (575267 mE, 6965940 mN); 2. weakly magnetic biotite rich schist with lesser muscovite, fine grained disseminated magnetite with one percent pyrite (575363mE, 6965993 mN) and 3. weakly magnetic biotite schist with less disseminated magnetite and pyrite relative to the previous location (575328mE, 6965976mN). Where relatively high proportions of magnetite or biotite are noted the total magnetic intensity is also relatively high. The high magnetic intensity

linear features trending through these outcrops are interpreted to be relatively mafic units within the schist.

The typical anomalous response across the magnetic high lineaments is approximately + 600 nT. The gridded lineaments are typically an aggregate of multiple short wavelength anomalies. The typical anomaly character may be reproduced in a near surface, depth extensive thin (< 1 m) sheet model striking 105 deg. to 110 deg. with vertical to sub-vertical (< 10 deg.) dip and magnetic susceptibility of approximately 0.3×10^{-3} in SI units.

In region “C” (the northern third of the survey area), the character of the magnetic field is relatively quiet. Materials in frost heaves in this area are identified as moderately to strongly foliated biotite – muscovite schists. There is some indication of relatively weak lineations in the total magnetic field with orientations between 90 deg. and 110 deg. The schistosity appears to remain consistent in regions “B” and “C” but there is evidently a change in the nature of the underlying bedrock.

In the area of known mineralization the high intensity magnetic lineaments become difficult to follow. The contact between the quiet region in the north of the grid and the higher intensity region in the central portion is still traceable but the intense lineaments are missing. This may be due to termination of the relatively susceptible schist, alteration of the rock in this area or tight folding of the higher intensity beds. There is no clear evidence of either a cross cutting fault structure, a fold nose or alteration halo in the area of the known mineralization.

5.0 Recommendations

Orthorectified air photos and/or high resolution (0.5 m) satellite imagery of the property are recommended. Outcrop and soil flow could be accurately mapped using either of these products. High resolution panchromatic satellite images now reasonably priced relative to the cost of creating orthorectified air photo mosaics.

Physical property measurements (primarily magnetic susceptibility and conductivity) should be made on outcrop and drill core as a matter of standard procedure in order to facilitate constrain inversion of the data.

Small, low-power non-interfering radios should be carried mounted to the strapping at the front of the magnetometers to allow crew to remain in contact while working at different rates. Typical handheld VHF radios produce significant interference (even due to subtle changes in orientation) due to a strong internal magnet.

A property scale heliborne magnetic total field intensity and radiometric survey would provide an excellent base layer to assist exploration. A magnetic survey using a stinger mounted instrument would allow good sensor position control and draping. The magnetic total field data may allow definition of property scale structures. The relatively low aircraft terrain clearance would permit advantageous use of a radiometric survey system. In the absence of pervasive glaciation radiometric data may allow identification of an alteration zone, classification of bedrock in the absence of outcrop and definition of zones of transported soils.

6.0 References

Scott, 2008. Logistical Report: Induced Polarization and Magnetometer Surveys, Boulevard Property, Dawson Area, Yukon. Report prepared for Rimfire Minerals Corp.


Goldak, 2009. Technical Report on a fixed wing aeromagnetic survey: Northern Stevenson Ridge Block, Yukon for Geological Survey of Canada and Yukon Geological Survey. Goldak Airborne Surveys.

Appendix A:


Property and Survey Location Maps

List of Figures:

Figure 1 – Property Location
Figure 2 – Survey Location

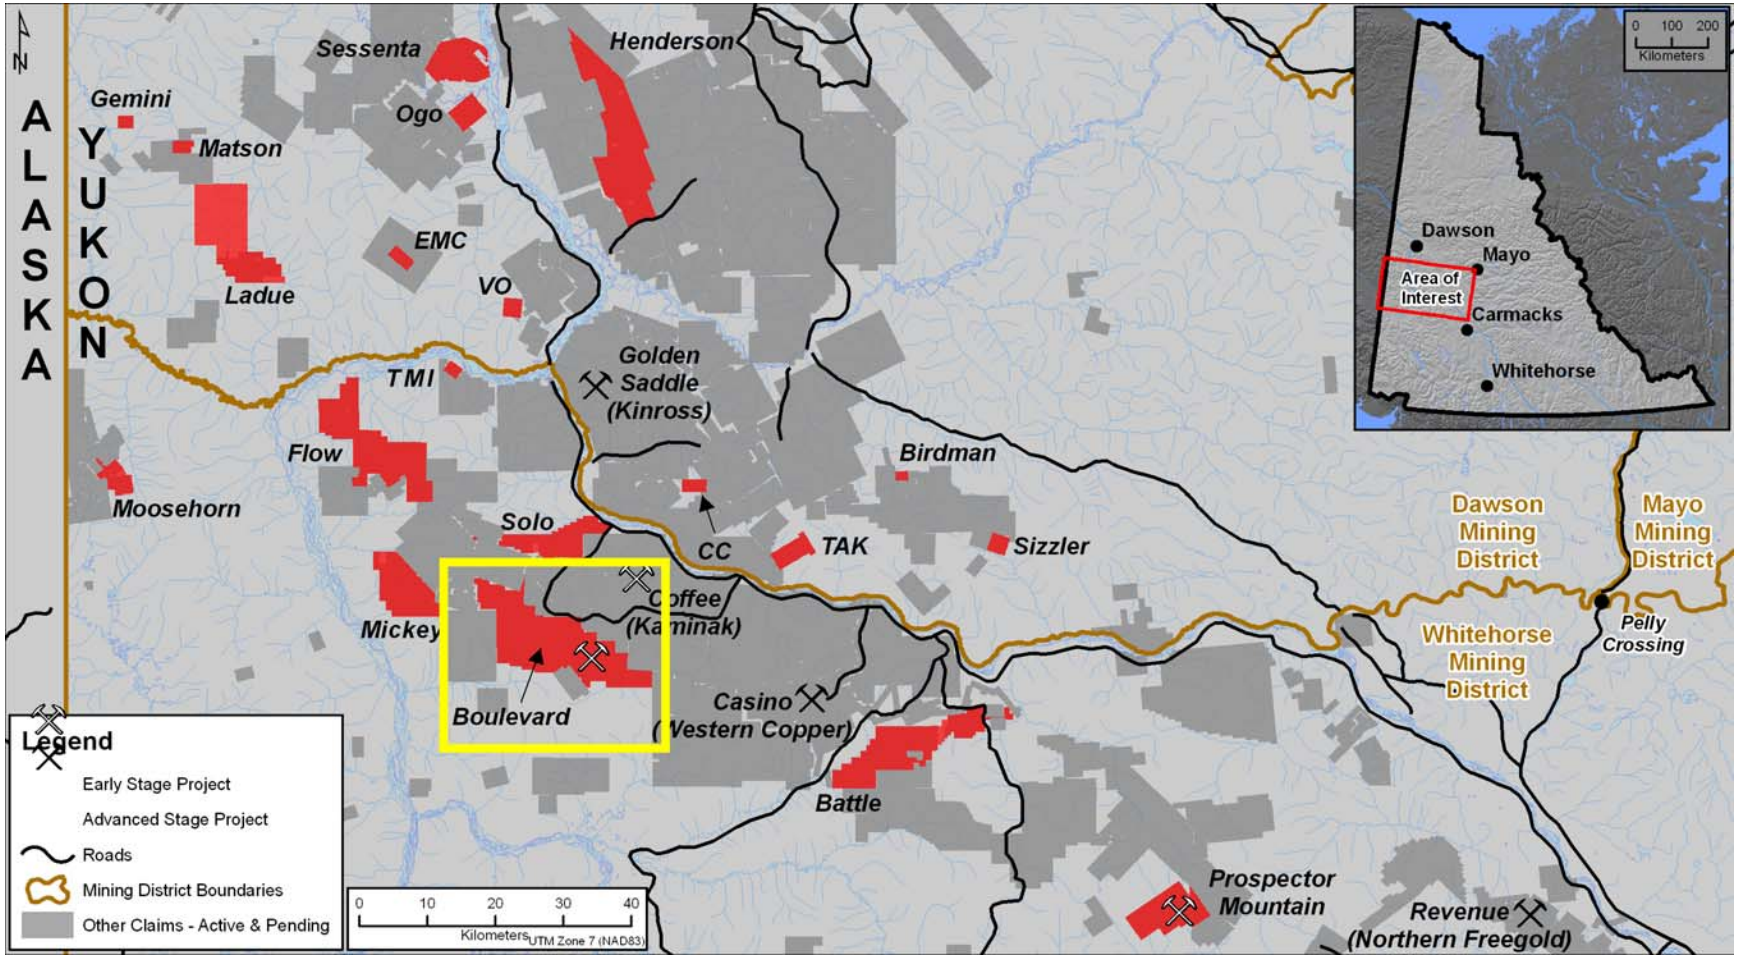

Appendix A - Figure 1

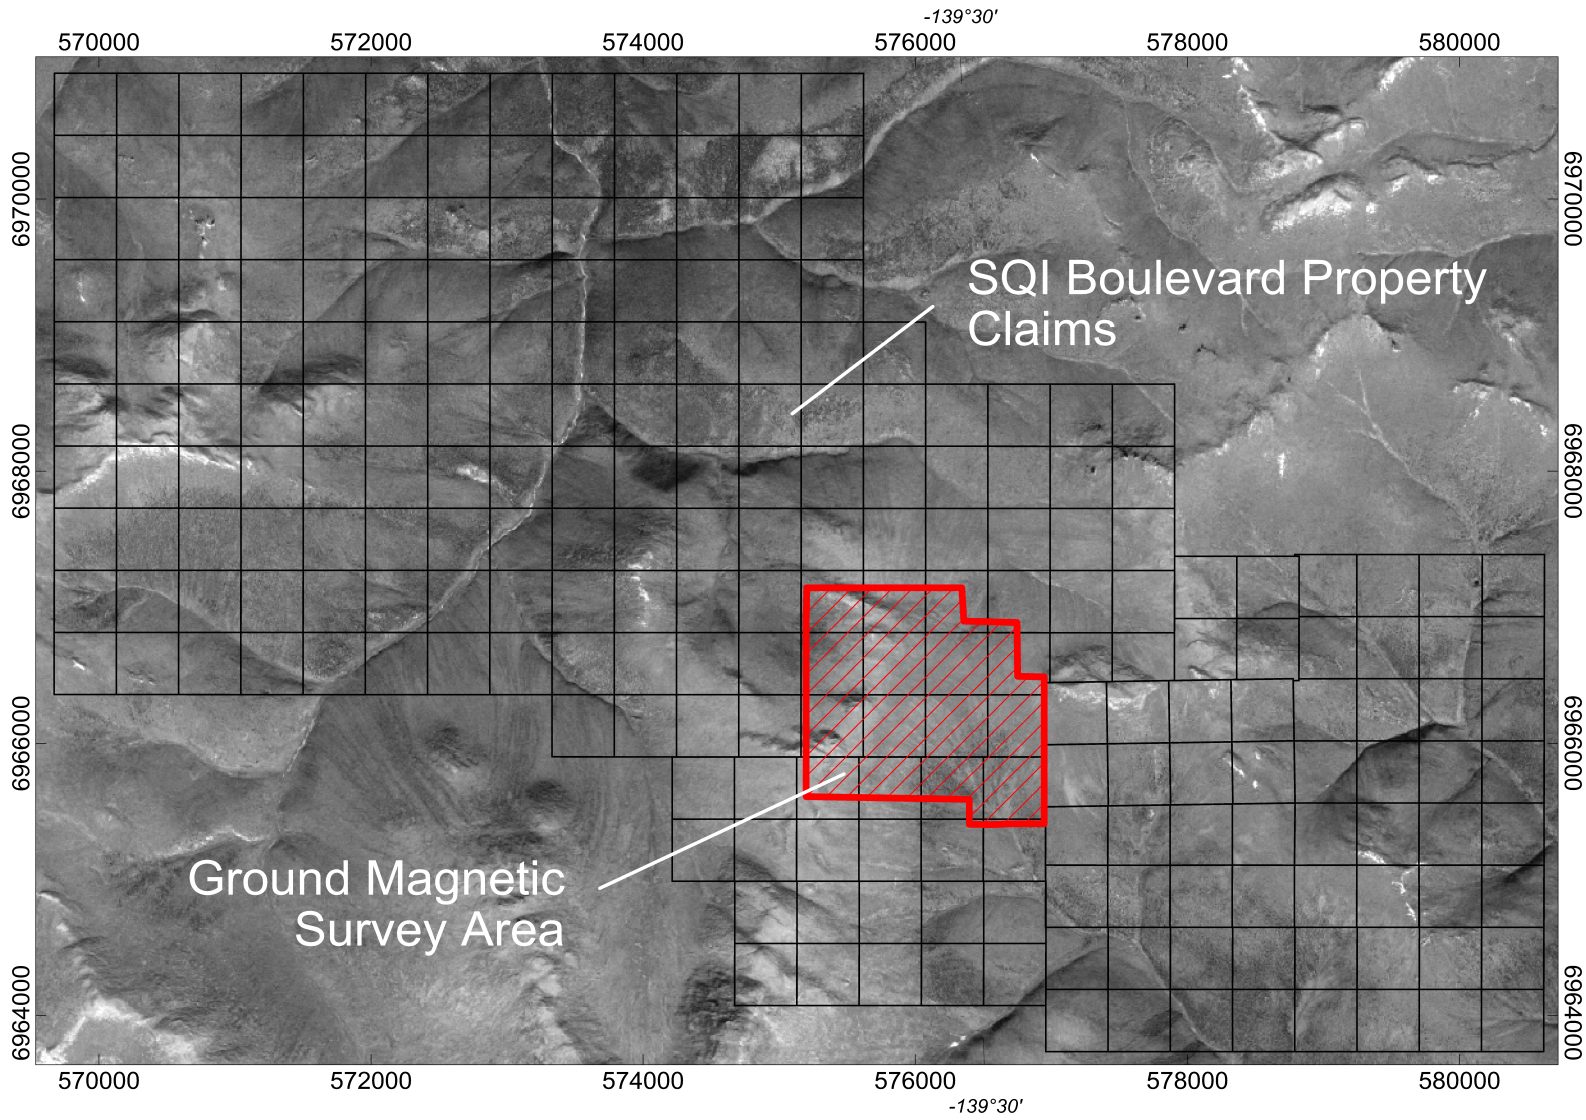

500 0 500 1000 1500

(meters)

NAD83 / UTM zone 7N

Appendix A - Figure 2


Silver Quest Resources Ld.
Boulevard Project, YT **2010 Exploration Program** **Ground Total Magnetic Intensity Survey**
Survey Location
F. Moul, February 7, 2011


Appendix B:

Plots of Ground Magnetic Data with Claim Boundaries

List of Figures:

Figure 1 – 2009 Airborne Total Magnetic Intensity and Line Path
Figure 2 – 2008 Survey Line Path
Figure 3 – 2008 Total Magnetic Intensity Grid
Figure 4 – 2008 First Vertical Derivative of Total Magnetic Intensity Grid
Figure 5 – 2010 Survey Line Path
Figure 6 – 2010 Total Magnetic Intensity Profiles
Figure 7 – 2010 Total Magnetic Intensity Grid
Figure 8 – 2010 First Vertical Derivative of Total Magnetic Intensity with Infill
Figure 9 – 2010 First Vertical Derivative of Total Magnetic Intensity without Infill
Figure 10 – 2010 Digital Elevation Model Grid and Contours

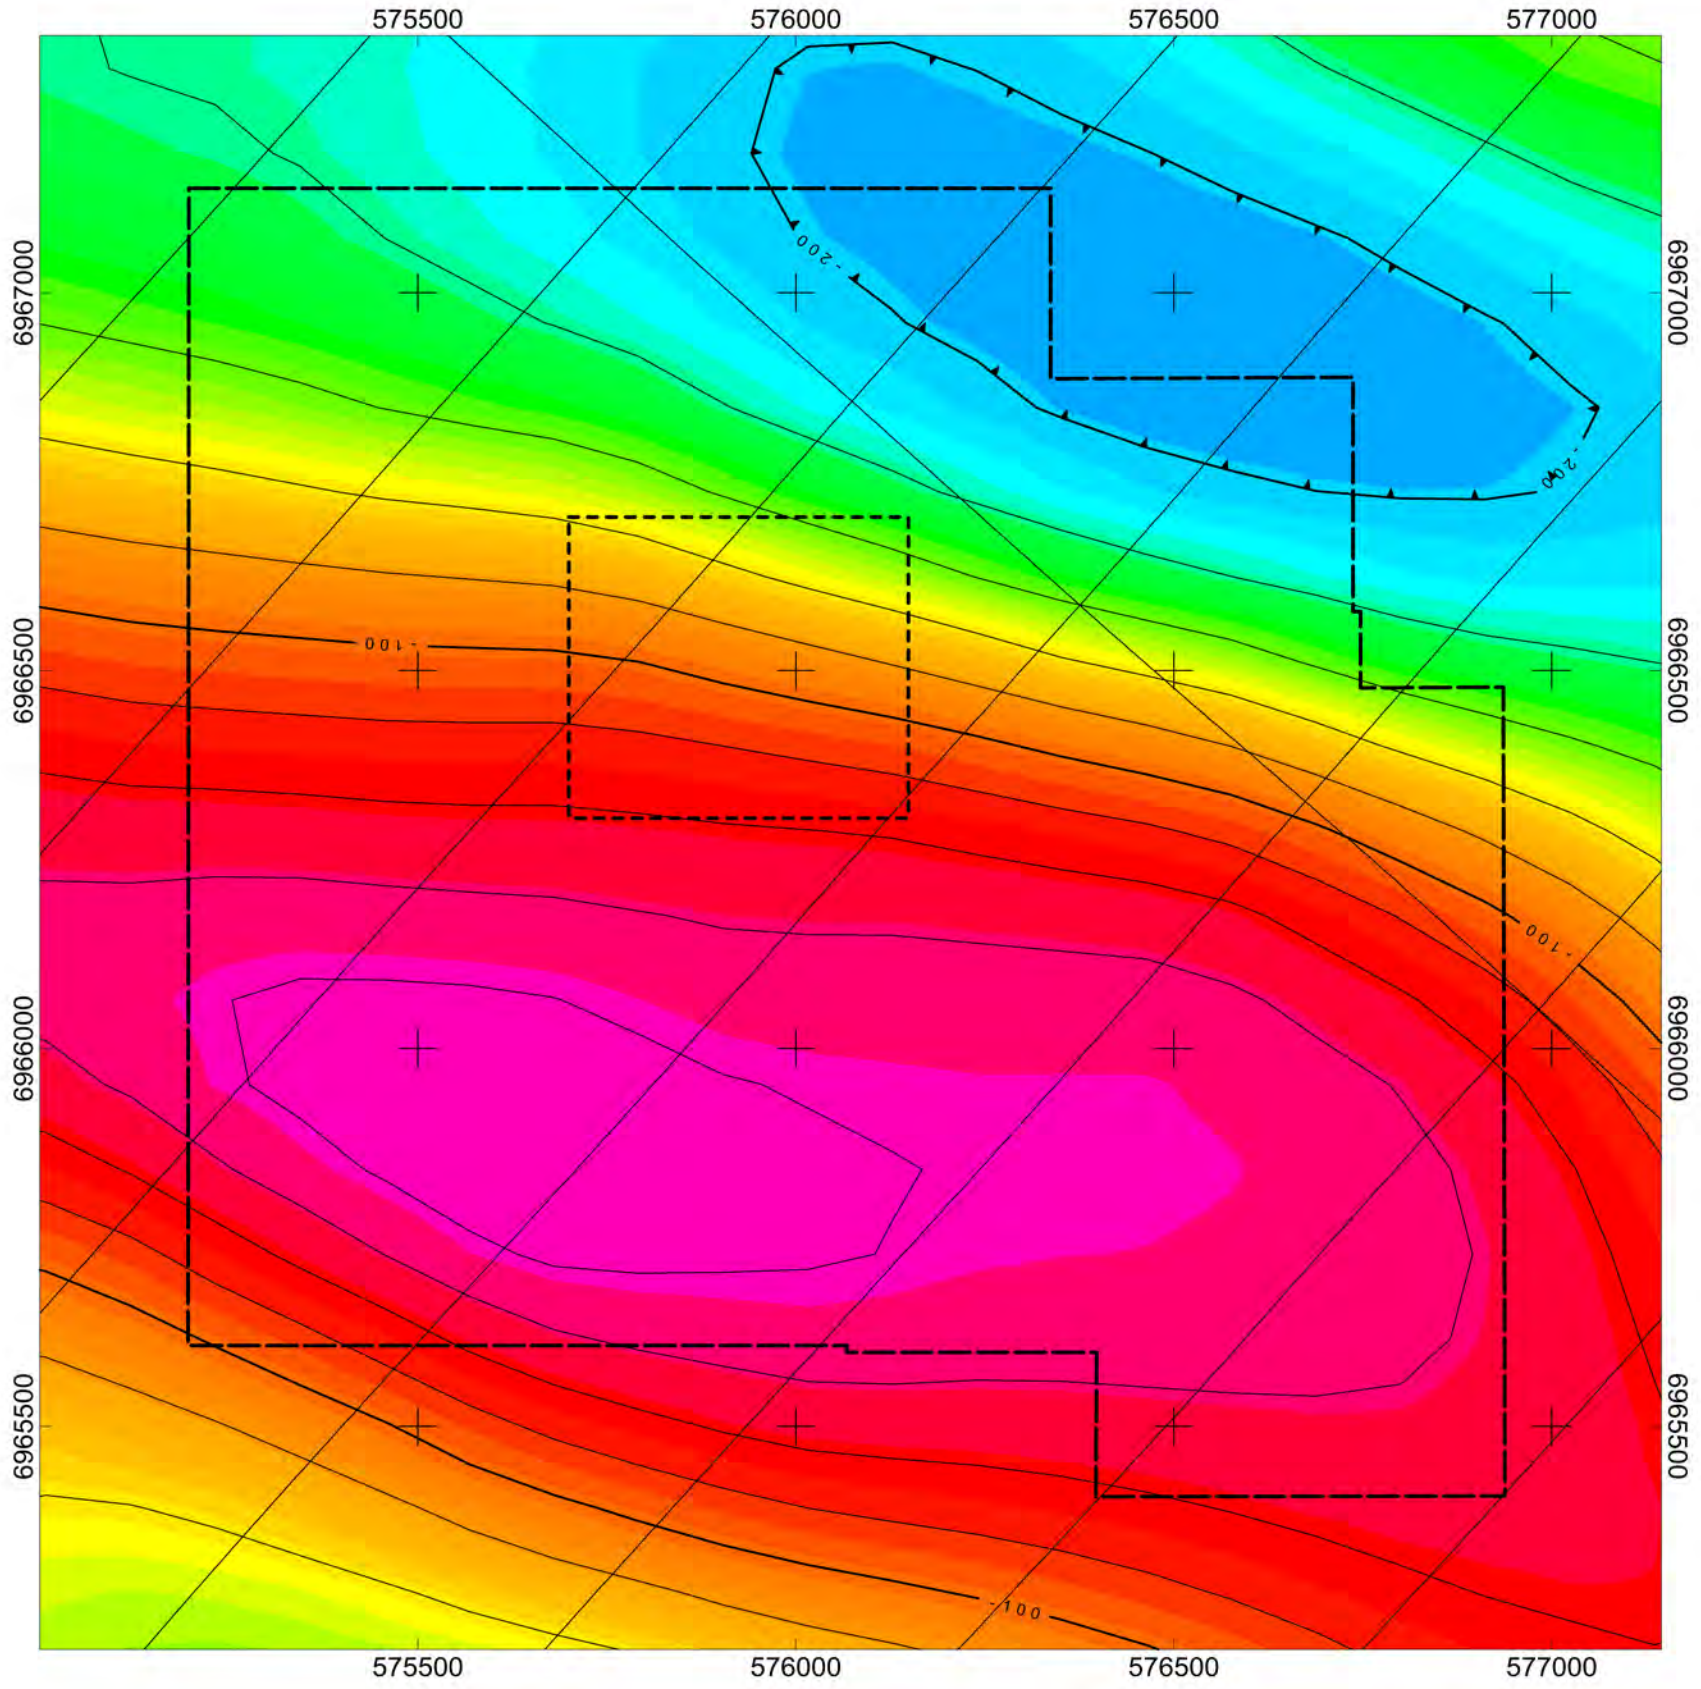

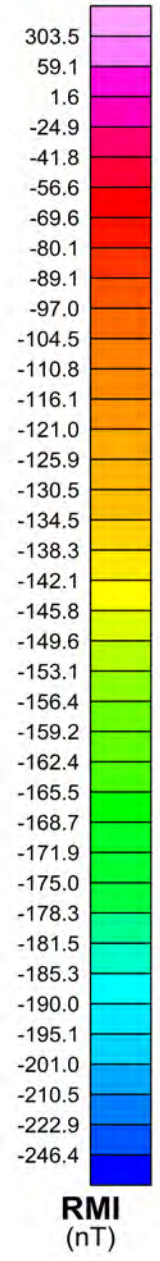

Company: Silver Quest Resources Ltd.
Project: Boulevard Project
Location: Approx. 135 km south of Dawson City, YT

Map
Contour Intervals: 20, 100, 500 nT/m

50 m Line Spacing Area

25 m Line Spacing Detail Area

Airborne Survey Line Path

Scale 1:10000


100 0 100 200 300 400 500 600

(meters)

NAD83 / UTM zone 7N

Appendix B - Figure 1

Silver Quest Resources Ld.
Boulevard Project, YT **2010 Exploration Program** **Ground Total Magnetic Intensity Survey**
Northern Stevenson Ridge 400 m - Airborne - Residual Magnetic Intensity
F. Moul, January 31, 2010

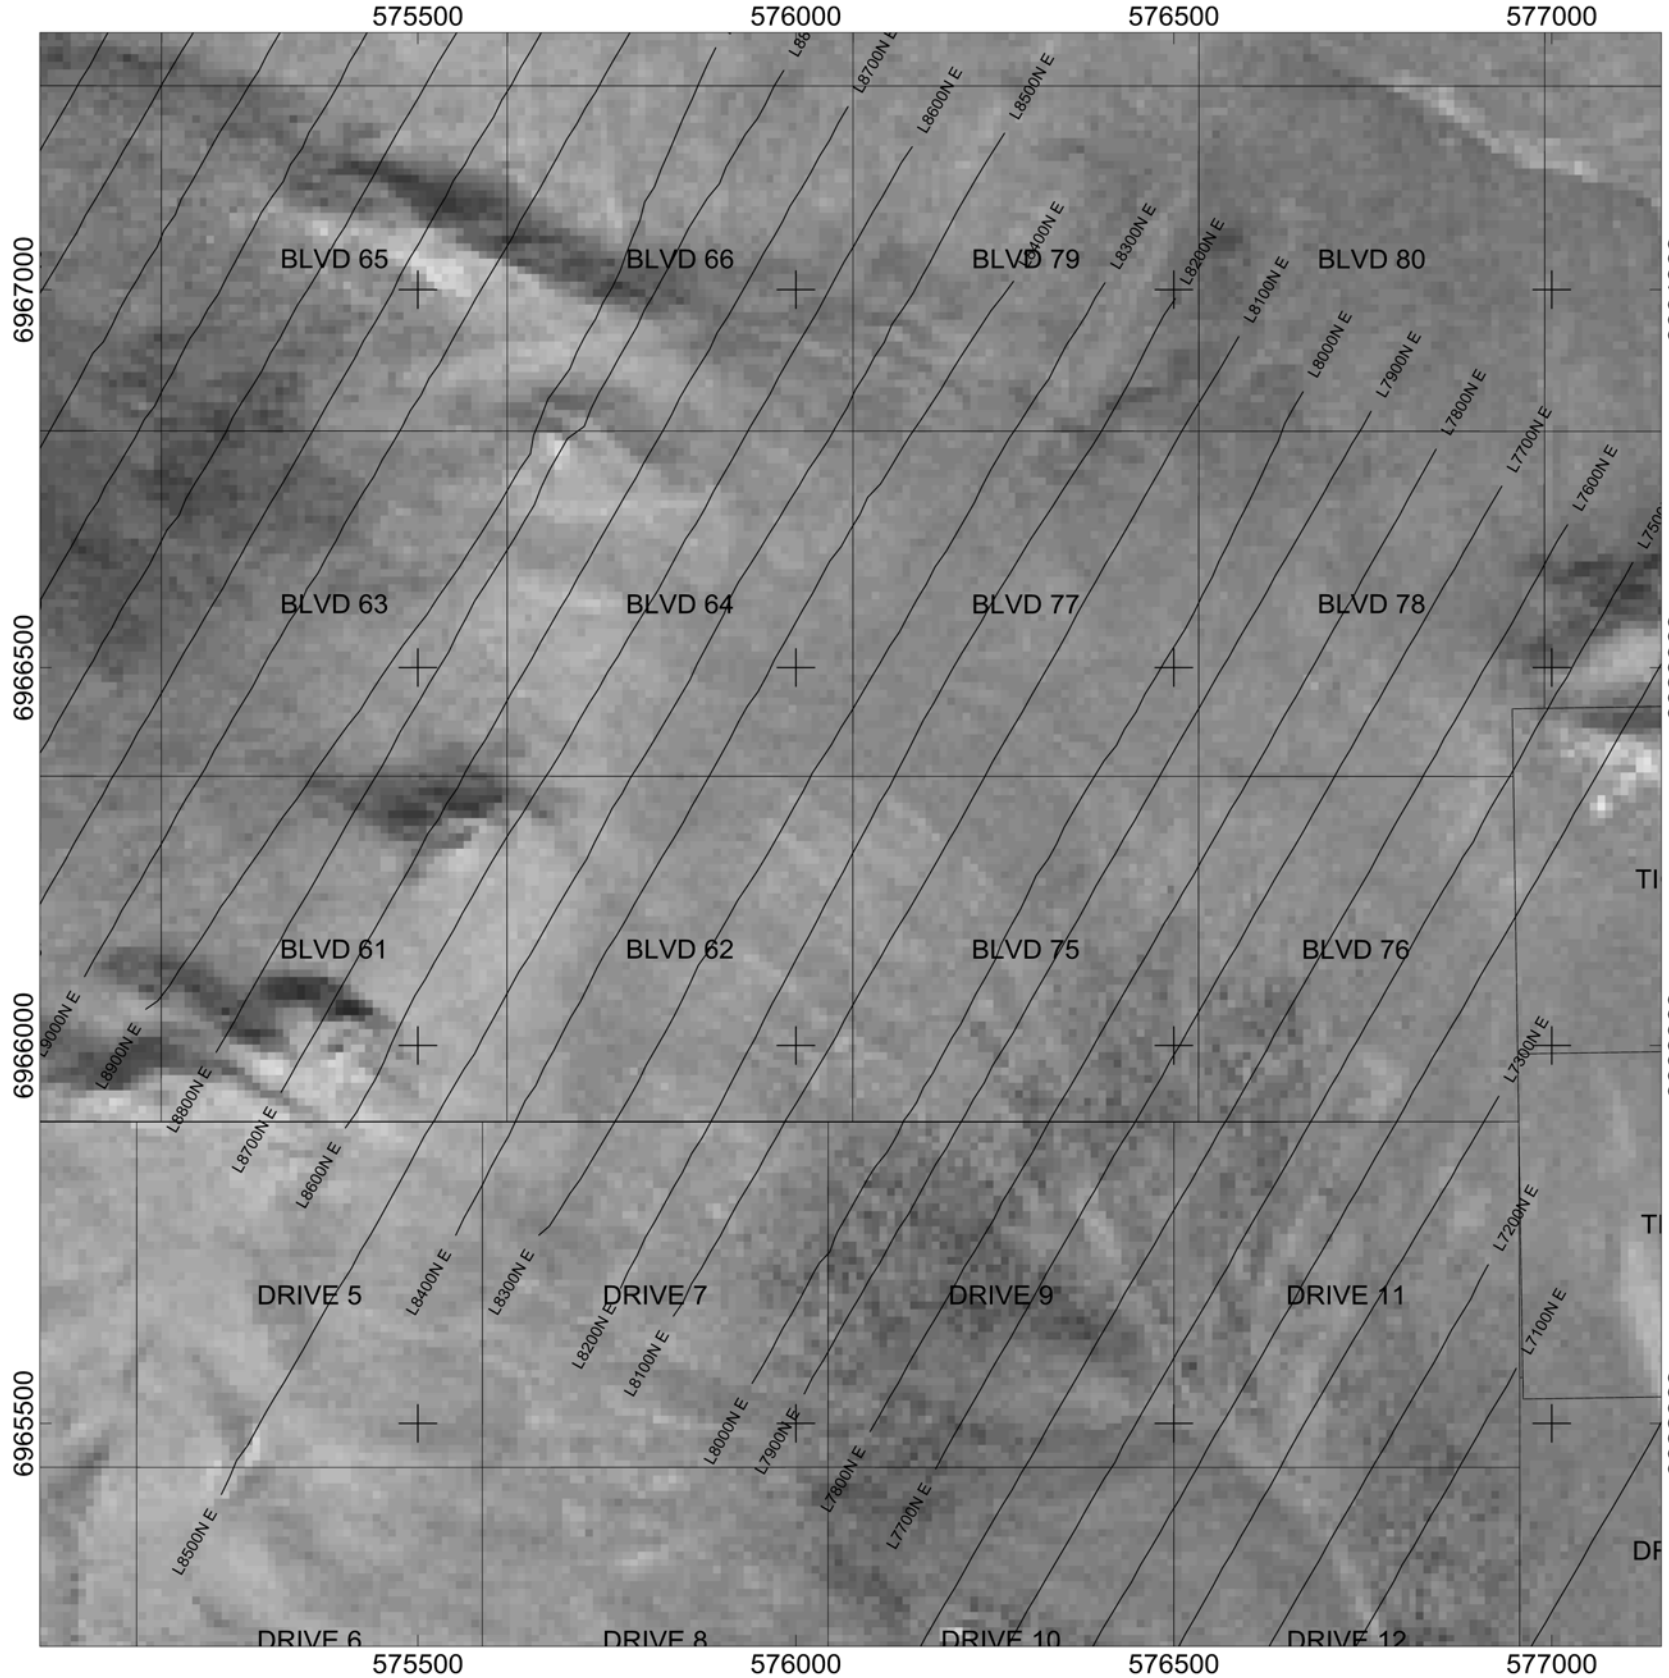

Company: Silver Quest Resources Ltd.
Project: Boulevard Project
Location: Approx. 135 km south of Dawson City, YT

Survey:

Method: Total Magnetic Field
Instrument Type: Scintrex ENVI Proton
Survey Date: September 2008
Traverse Line Orientation: 30 deg.
Traverse Line Separation: 100 m
Station Separation: 12.5 m
Trimmed Line Length: 44.6 lkm

Data Acquired by Scott Geophysics for Rimfire Minerals

Grid:

Cell Size: 20 m
Filters: None

Map:

Background is SPOT 10 m Panchromatic Image

Scale 1:10000


100 0 100 200 300 400 500 600


(meters)

NAD83 / UTM zone 7N

Appendix B - Figure 2

Silver Quest Resources Ld.
Boulevard Project, YT **2010 Exploration Program** **Ground Total Magnetic Intensity Survey**
2008 (Historic) Survey Line Path
F. Moul, January 31, 2010

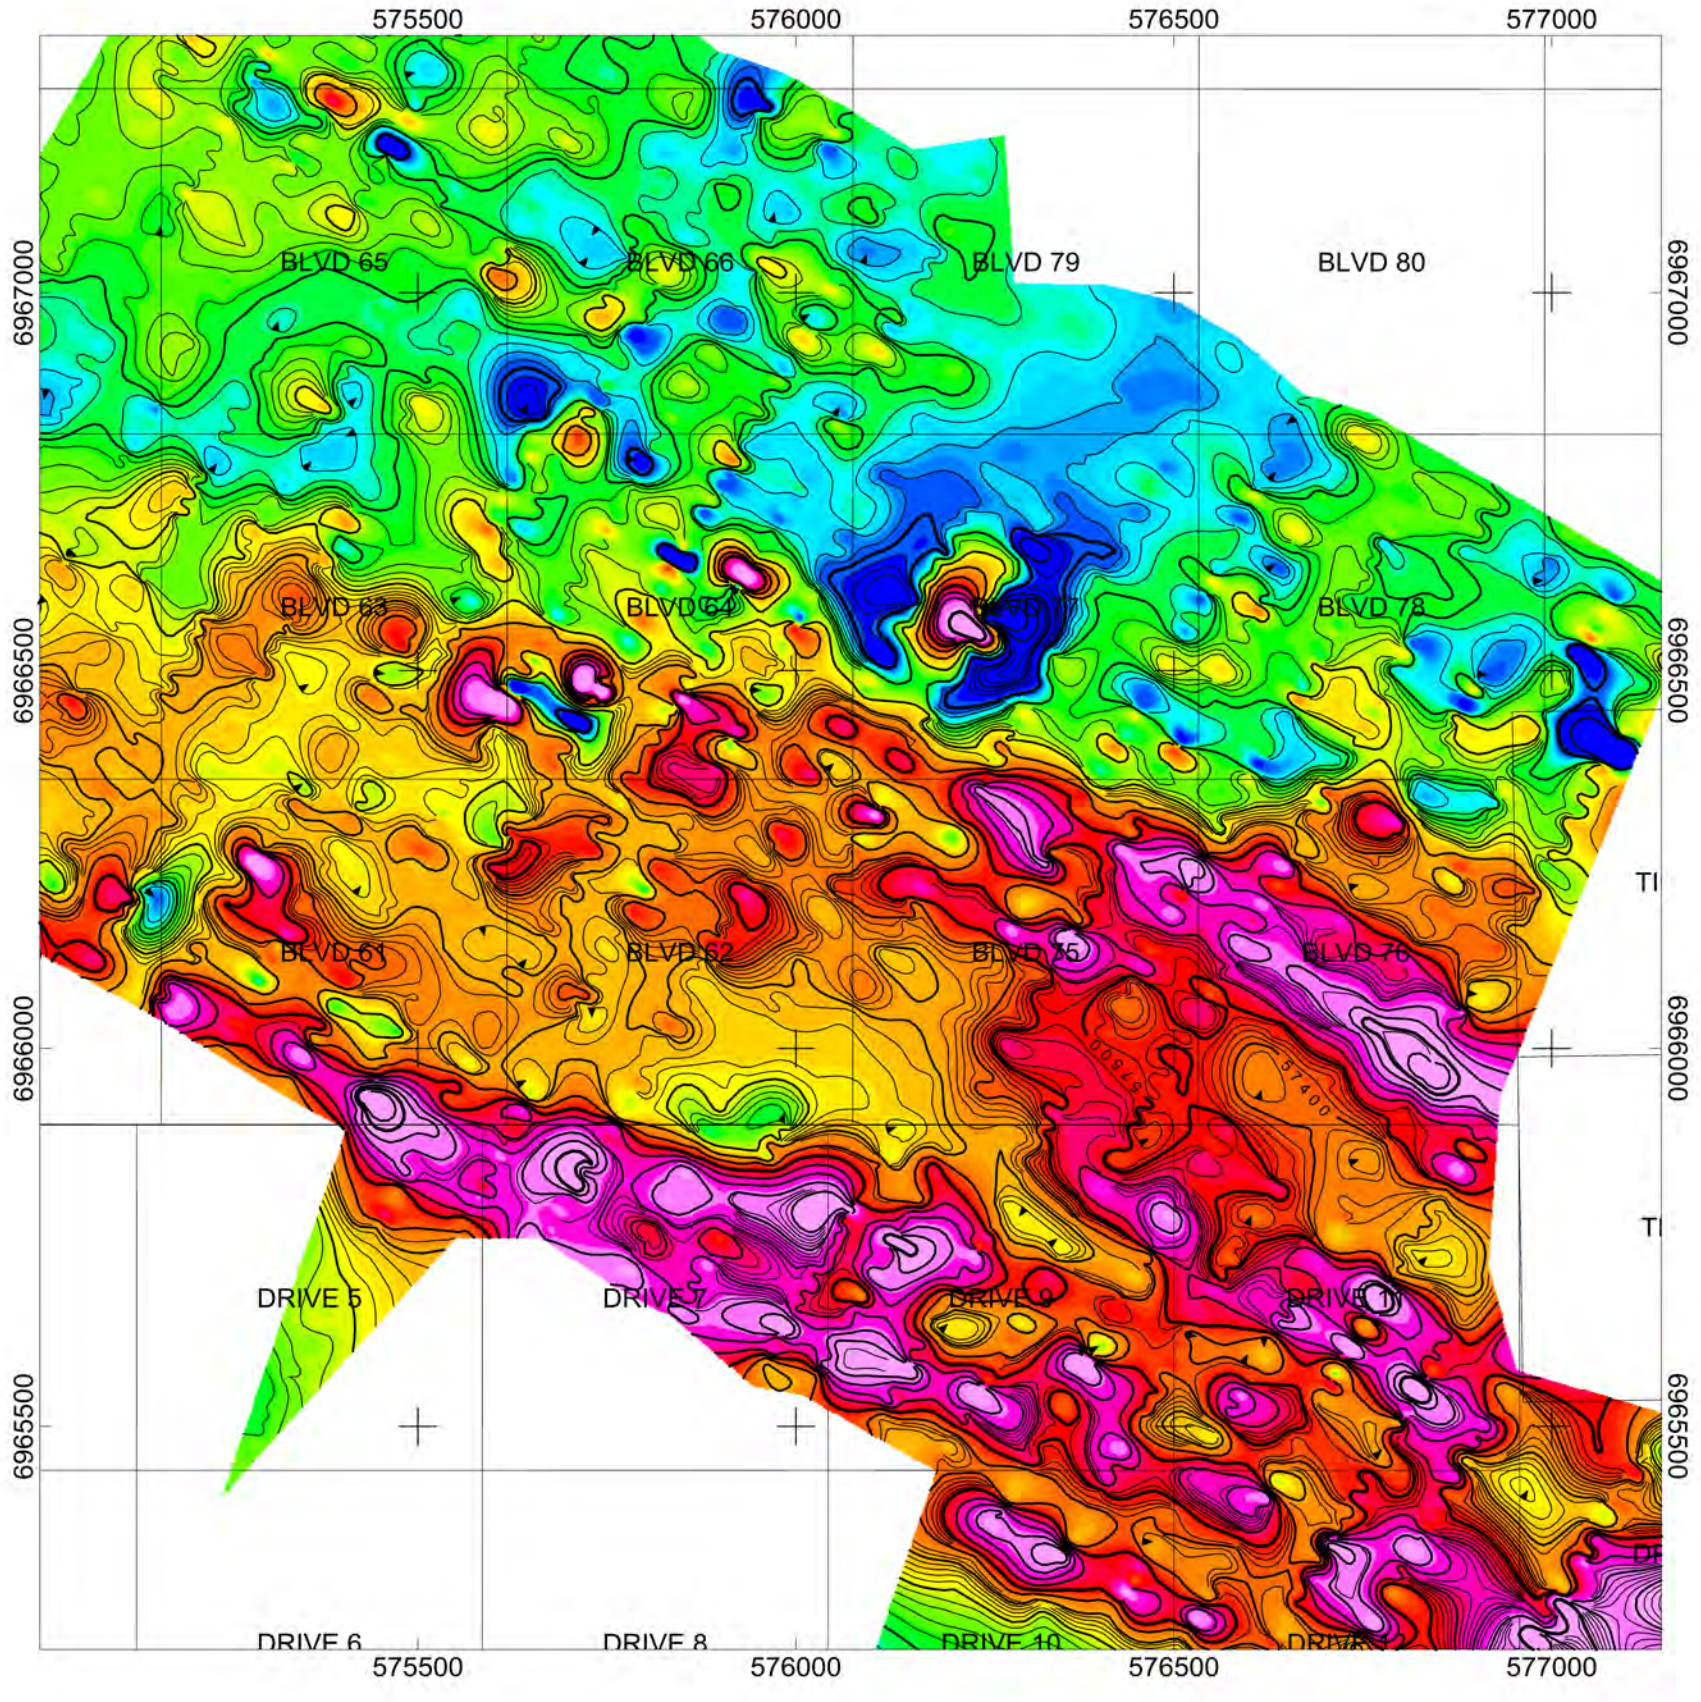

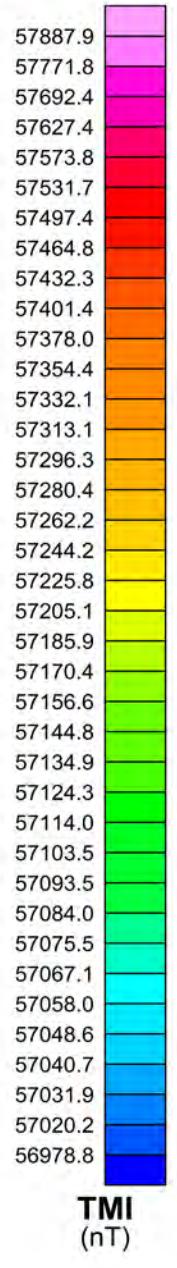

Company: Silver Quest Resources Ltd.
Project: Boulevard Project
Location: Approx. 135 km south of Dawson City, YT

Survey:

Method: Total Magnetic Field
Instrument Type: Scintrex ENVI Proton
Survey Date: September 2008
Traverse Line Orientation: 30 deg.
Traverse Line Separation: 100 m
Station Separation: 12.5 m
Trimmed Line Length: 44.6 lkm

Data Acquired by Scott Geophysics for Rimfire Minerals

Grid:

Cell Size: Unknown - Converted from Surfer
Filters: None

Map:

Contour Intervals: 20, 100, 500 nT

Scale 1:10000


100 0 100 200 300 400 500 600


(meters)

NAD83 / UTM zone 7N

Appendix B - Figure 3

Silver Quest Resources Ld.
Boulevard Project, YT **2010 Exploration Program** **Ground Total Magnetic Intensity Survey**
2008 (Historic) Total Magnetic Intensity
F. Moul, January 31, 2010

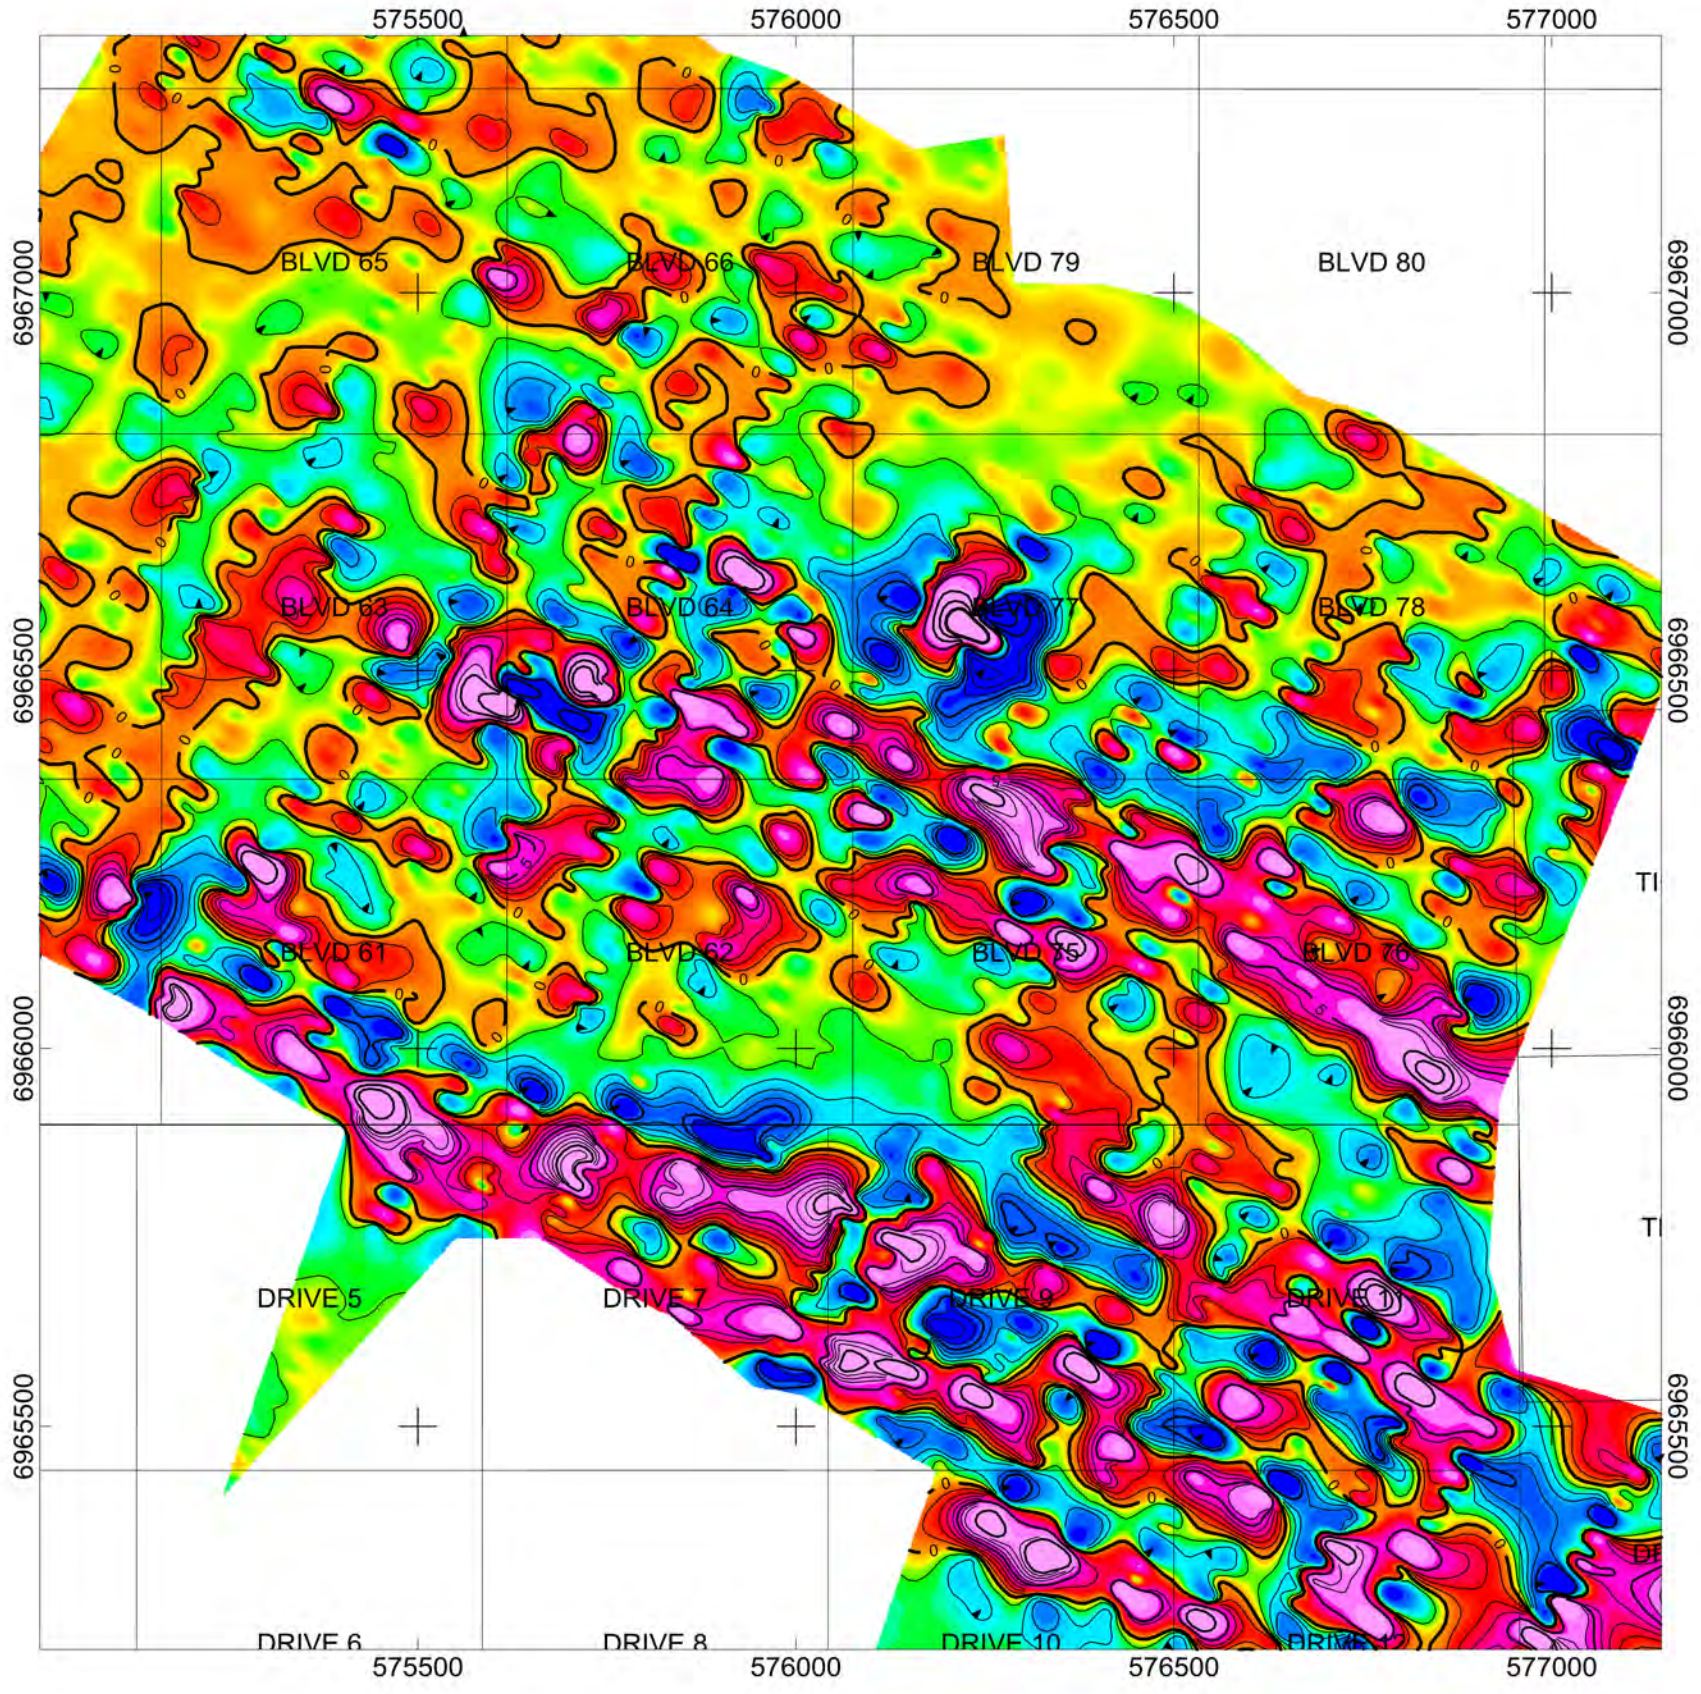

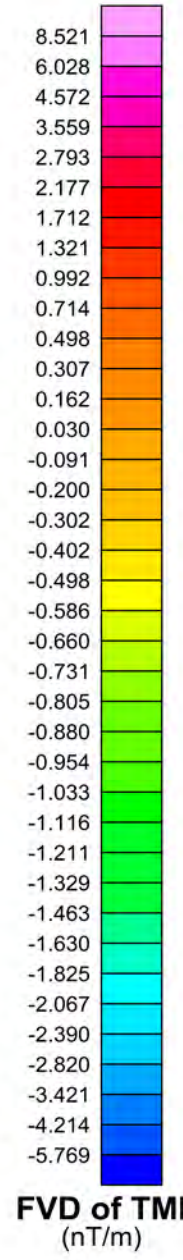

Company: Silver Quest Resources Ltd.
Project: Boulevard Project
Location: Approx. 135 km south of Dawson City, YT

Survey:

Method: Total Magnetic Field
Instrument Type: Scintrex ENVI Proton
Survey Date: September 2008
Traverse Line Orientation: 30 deg.
Traverse Line Separation: 100 m
Station Separation: 12.5 m
Trimmed Line Length: 44.6 lkm

Data Acquired by Scott Geophysics for Rimfire Minerals

Grid:

Cell Size: 20 m
Filters: Upward Continuation 10 m, First Vertical Derivative

Map:

Contour Intervals: 1, 5, 20 nT/m

Scale 1:10000


100 0 100 200 300 400 500 600

(meters)

NAD83 / UTM zone 7N

Appendix B - Figure 4

Silver Quest Resources Ld.
Boulevard Project, YT **2010 Exploration Program** **Ground Total Magnetic Intensity Survey**
2008 (Historic) First Vertical Derivative of Total Magnetic Intensity
F. Moul, January 31, 2010

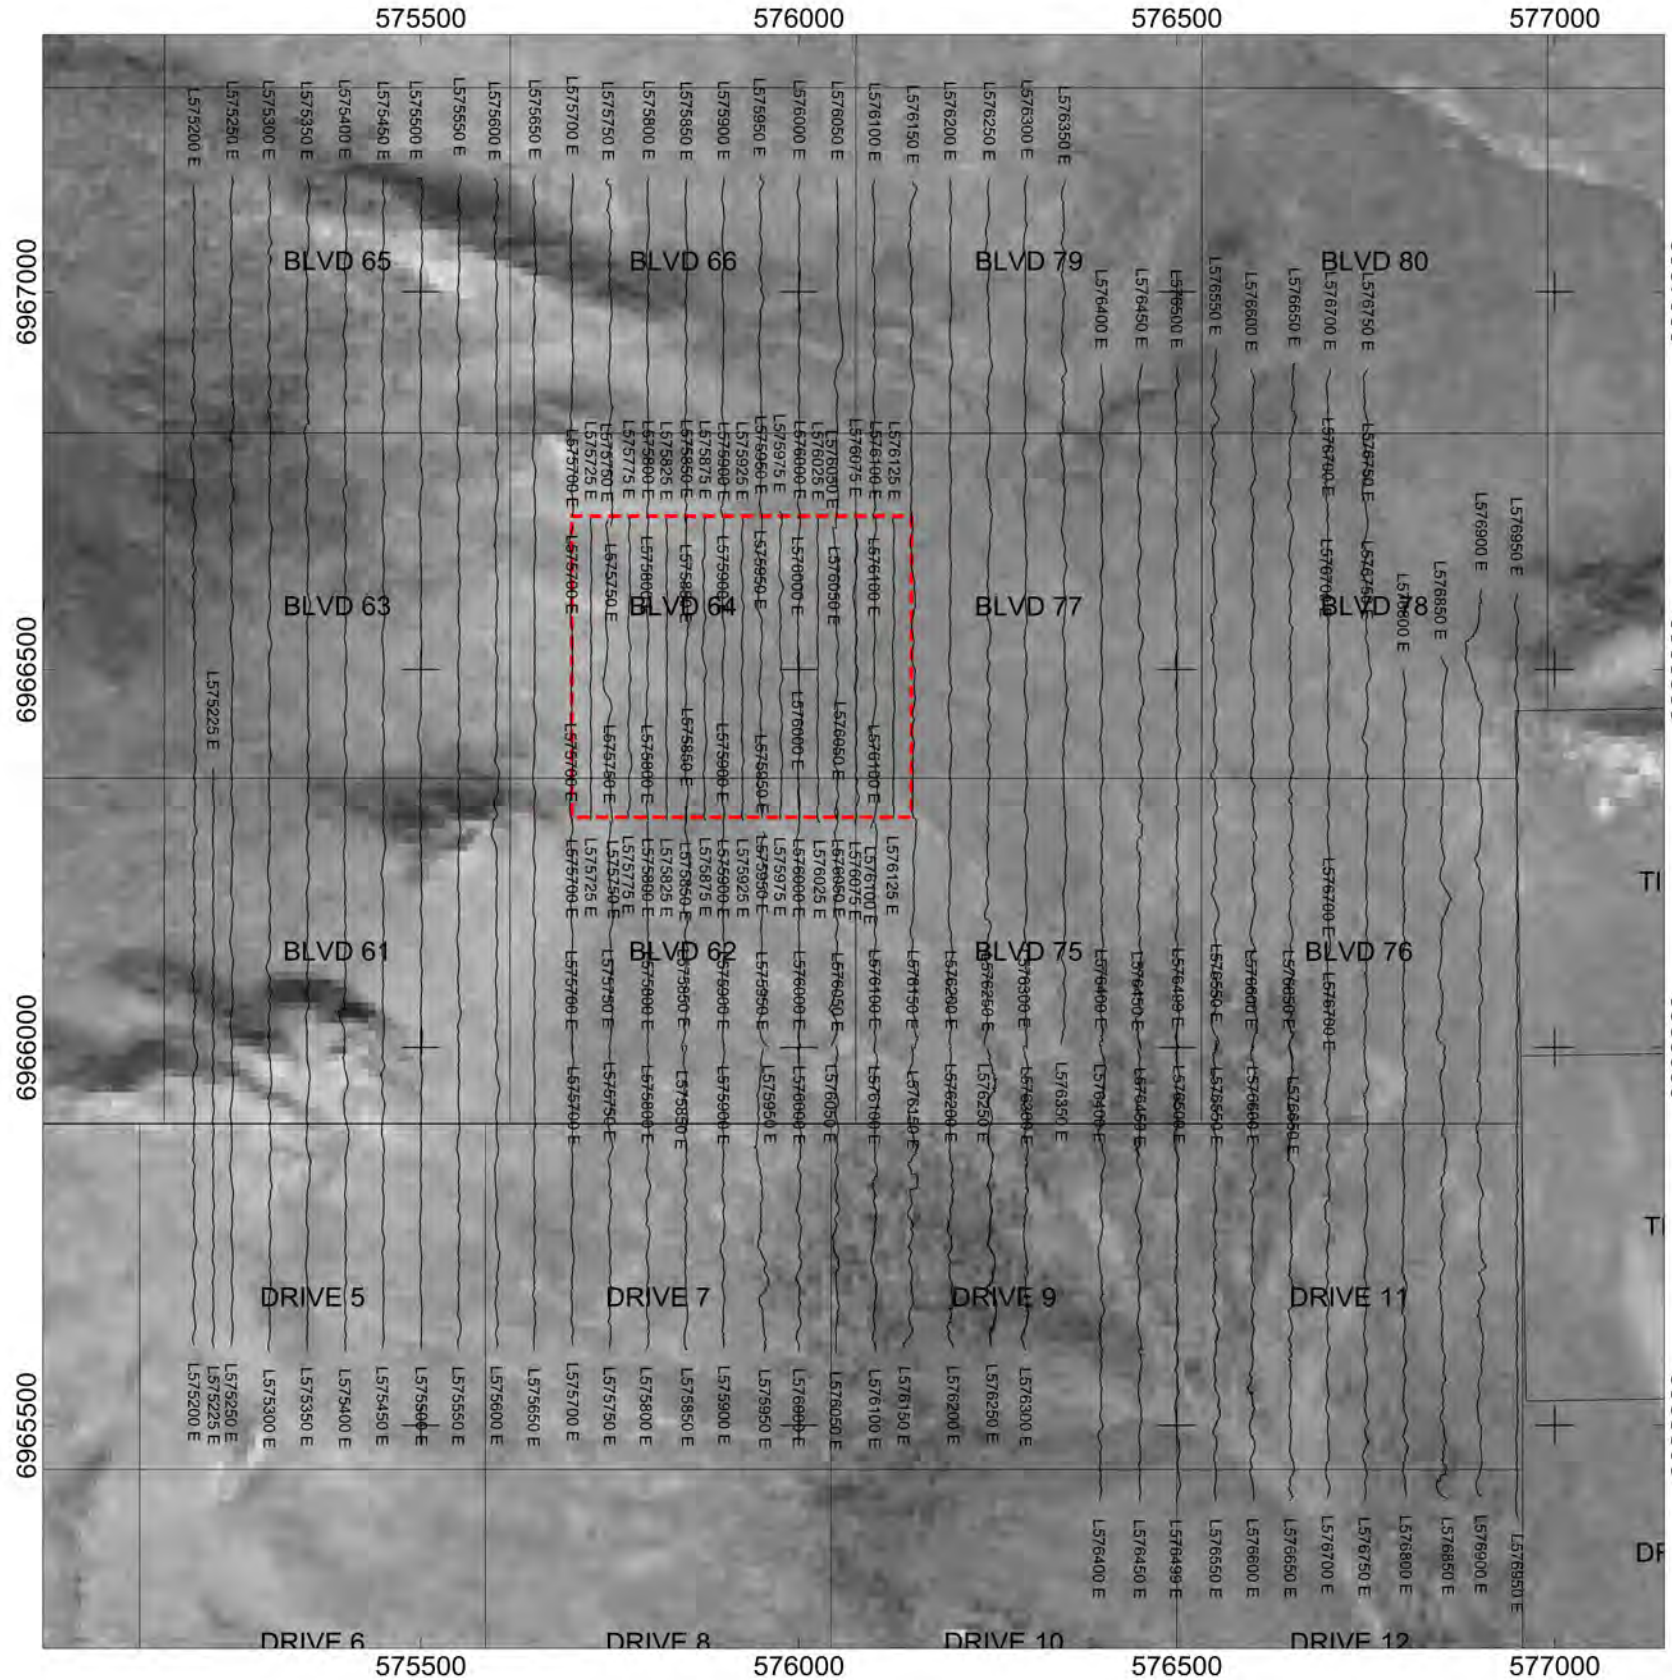

Company: Silver Quest Resources Ltd.
Project: Boulevard Project
Location: Approx. 135 km south of Dawson City, YT

Survey:

Method: Total Magnetic Field
Rover 1: GSM-19W v7 SN. 7052314 (1), 2 Hz
Rover 2: GSM-19W v7 SN. 7052316 (3), 2 Hz
Base 1: GSM-19TG v5 SN. 705699 (4), 0.33 Hz
Survey Dates: June 23, 2010 - June 27, 2010
Traverse Line Orientation: 0 deg.
Traverse Line Separation: 25 m - 50 m
Trimmed Line Length: 62.5 lkm

Processing

Magnetic Data: Manual Despiking, Diurnal Correction
Position Data: Non-linear filter despiking, Running Mean

Grid

Cell Size: 10 m
Filters: None

Map

Background is SPOT 10 m Panchromatic Satellite Image

25 m Line Spacing Detail Area

Scale 1:10000


100 0 100 200 300 400 500 600

(meters)

NAD83 / UTM zone 7N

Appendix B - Figure 5

Silver Quest Resources Ld.
Boulevard Project, YT **2010 Exploration Program** **Ground Total Magnetic Intensity Survey**
Survey Line Path
F. Moul, January 31, 2010

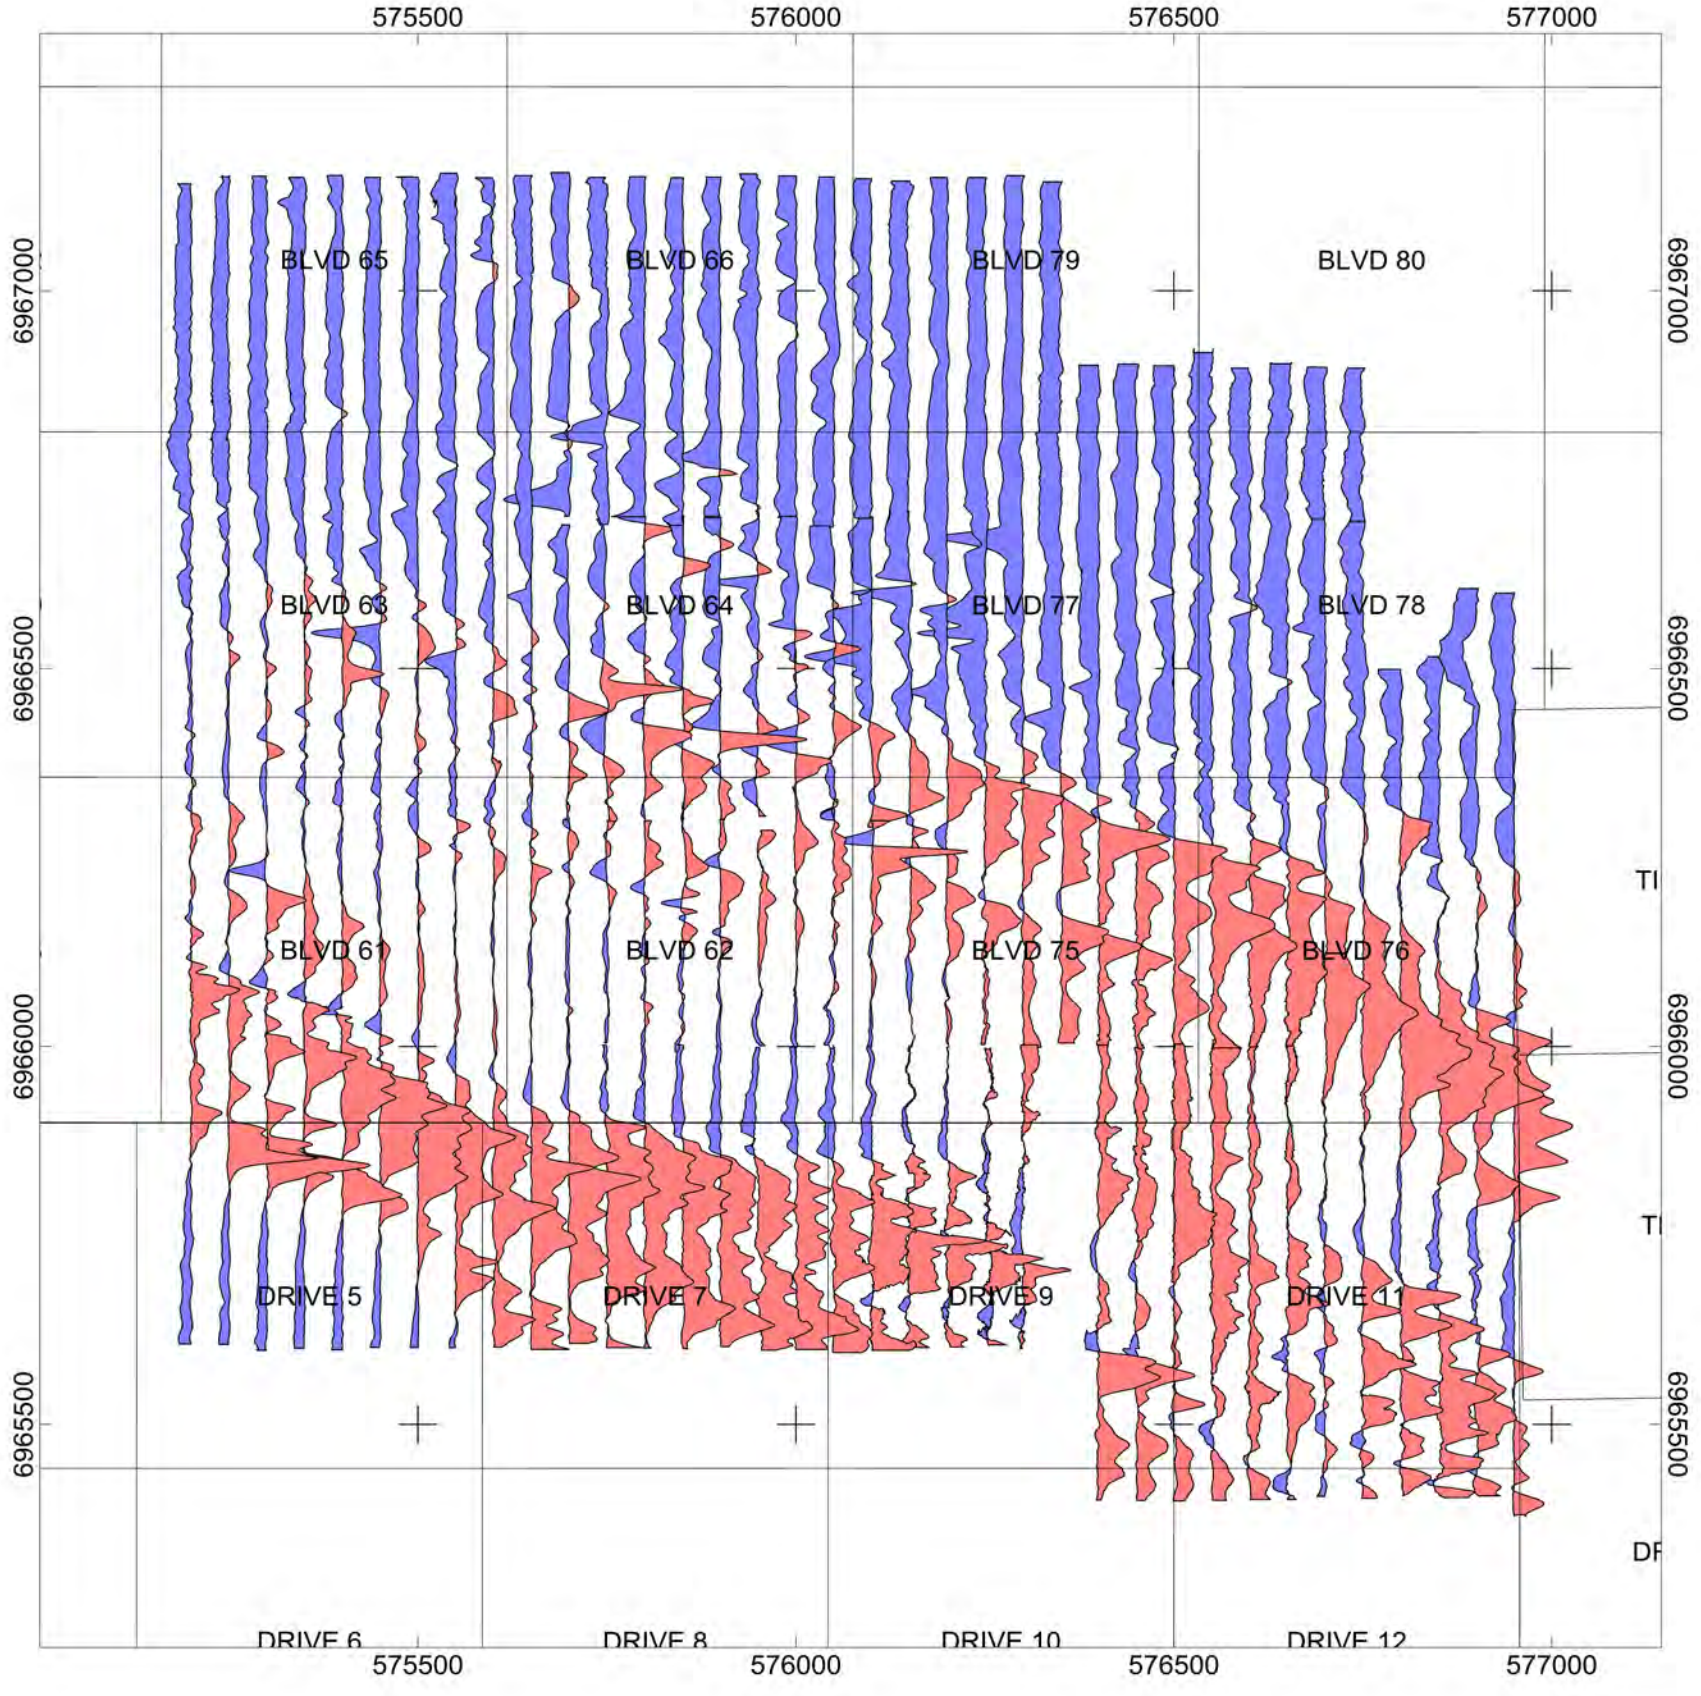

Company: Silver Quest Resources Ltd.
Project: Boulevard Project
Location: Approx. 135 km south of Dawson City, YT

Survey:

Method: Total Magnetic Field
Rover 1: GSM-19W v7 SN. 7052314 (1), 2 Hz
Rover 2: GSM-19W v7 SN. 7052316 (3), 2 Hz
Base 1: GSM-19TG v5 SN. 705699 (4), 0.33 Hz
Survey Dates: June 23, 2010 - June 27, 2010
Traverse Line Orientation: 0 deg.
Traverse Line Separation: 25 m - 50 m
Trimmed Line Length: 62.5 lkm

Processing

Magnetic Data: Manual Despiking, Diurnal Correction, 10 pt running mean
Position Data: Non-linear filter despiking, Running Mean

Map

Filters: Residual resulting from removal of
first order trend from grid.

Profile Scale is: 100 nT/mm with a base level of 57251.92 removed

Scale 1:10000


100 0 100 200 300 400 500 600


(meters)

NAD83 / UTM zone 7N

Appendix B - Figure 6

Silver Quest Resources Ld.
Boulevard Project, YT **2010 Exploration Program** **Ground Total Magnetic Intensity Survey**
Total Magnetic Intensity Profiles
F. Moul, February 8, 2011

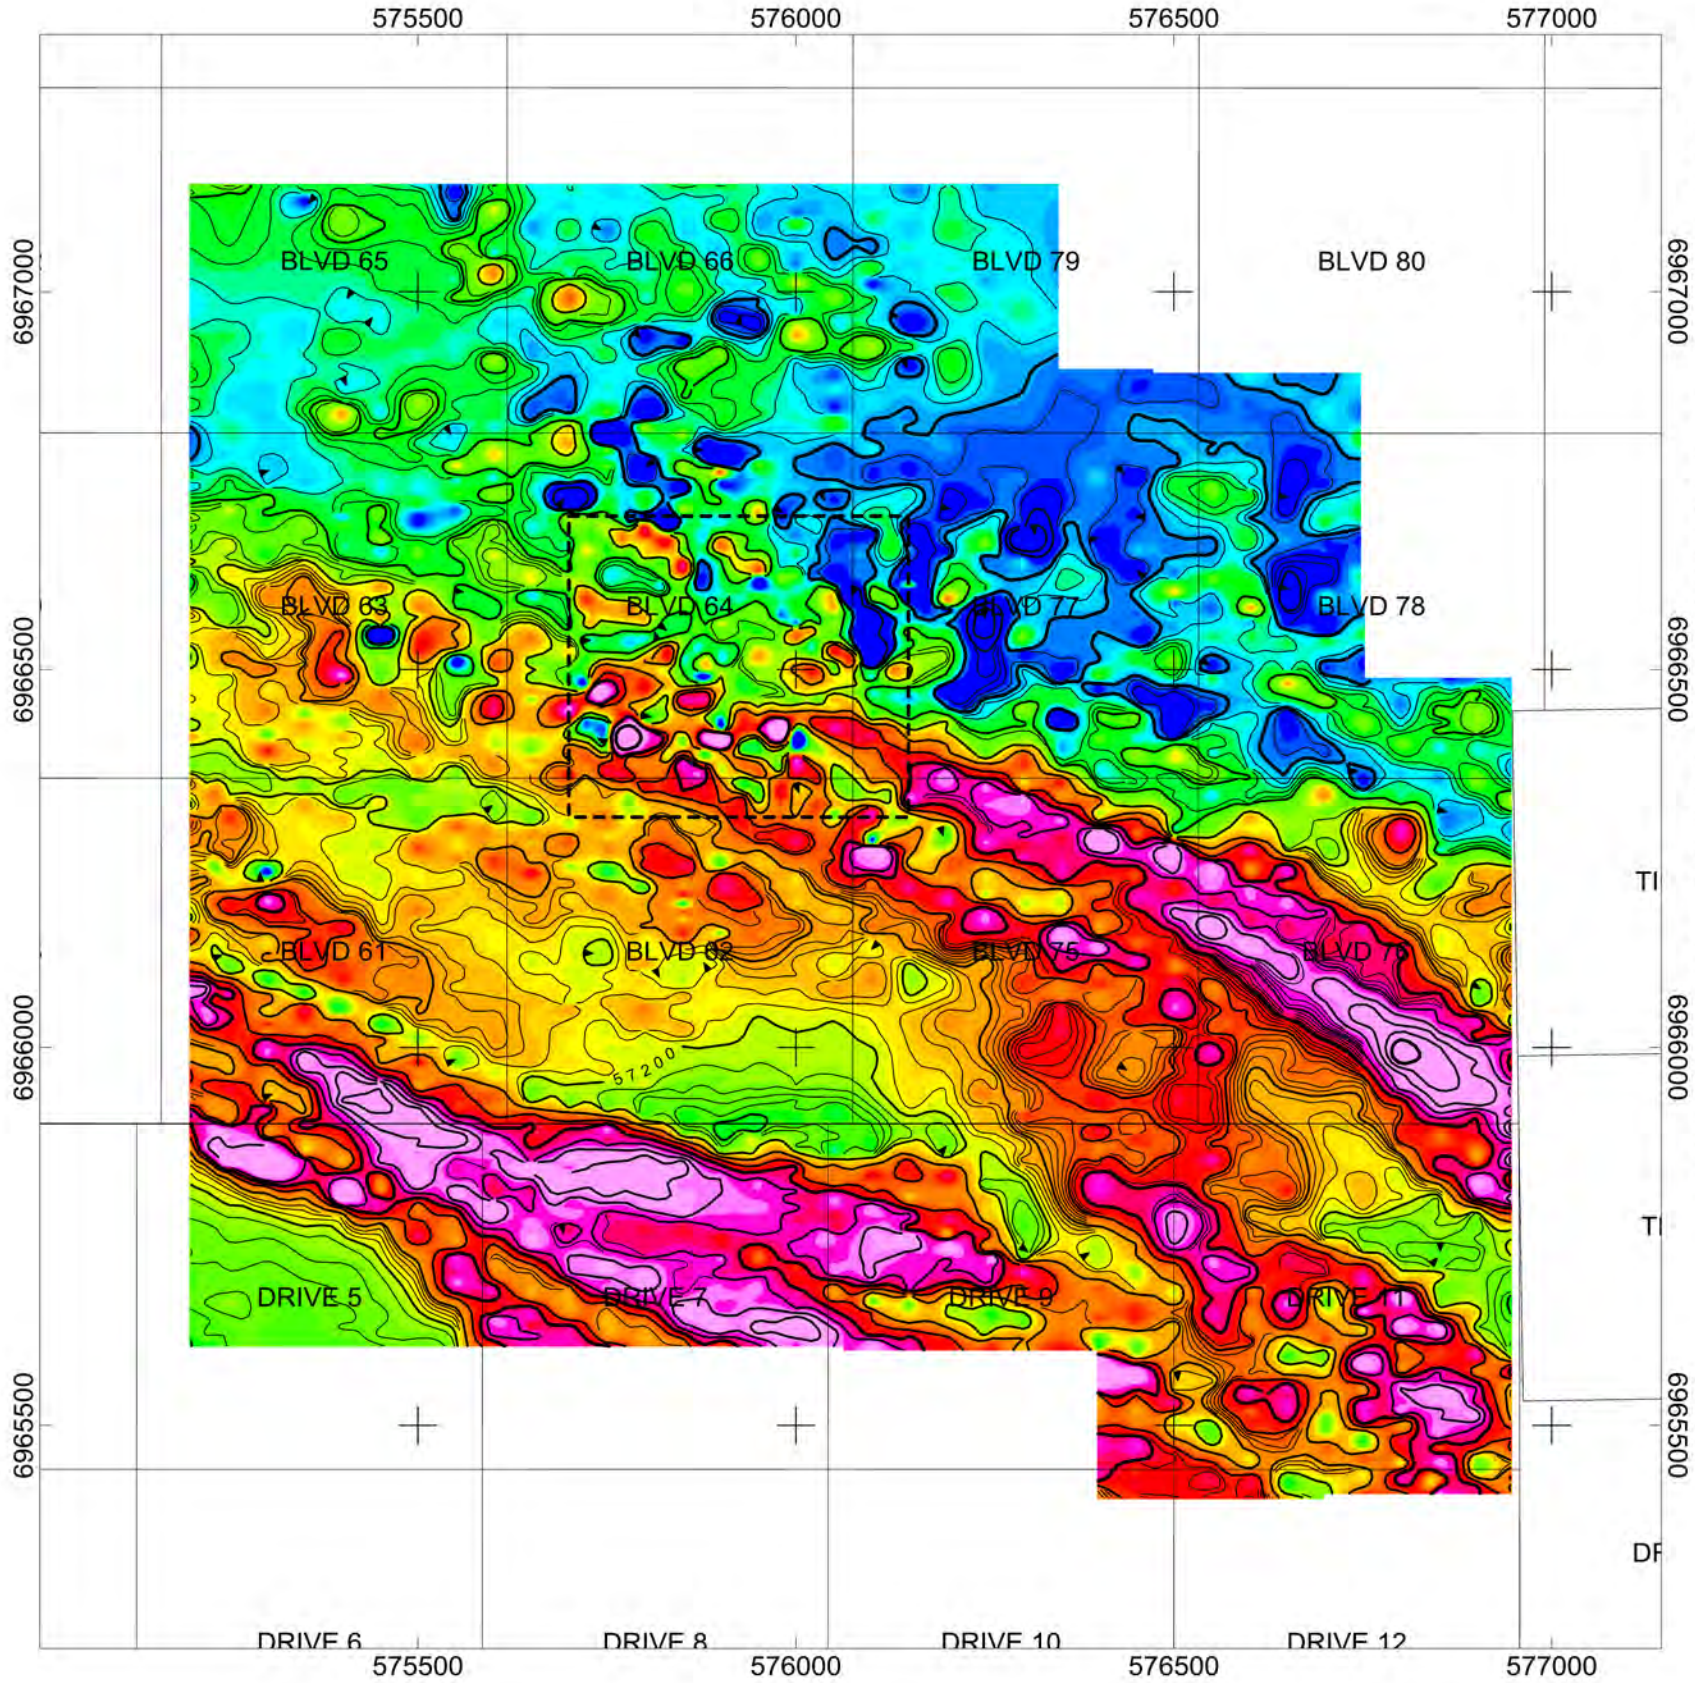

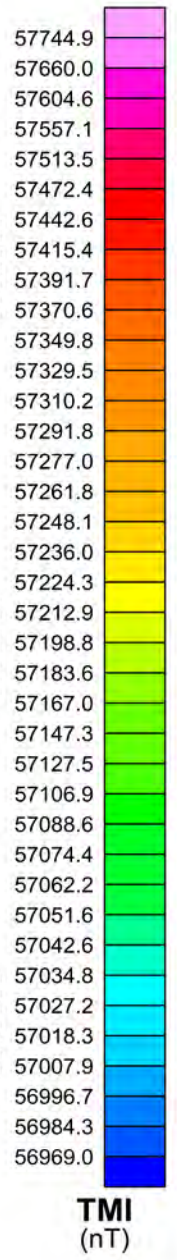

Company: Silver Quest Resources Ltd.
Project: Boulevard Project
Location: Approx. 135 km south of Dawson City, YT

Survey:

Method: Total Magnetic Field
Rover 1: GSM-19W v7 SN. 7052314 (1), 2 Hz
Rover 2: GSM-19W v7 SN. 7052316 (3), 2 Hz
Base 1: GSM-19TG v5 SN. 705699 (4), 0.33 Hz
Survey Dates: June 23, 2010 - June 27, 2010
Traverse Line Orientation: 0 deg.
Traverse Line Separation: 25 m - 50 m
Trimmed Line Length: 62.5 lkm

Processing

Magnetic Data: Manual Despiking, Diurnal Correction
Position Data: Non-linear filter despiking, Running Mean

Grid

Cell Size: 10 m
Filters: None

Map

Contour Intervals: 20, 100, 500 nT

25 m Line Spacing Detail Area

Scale 1:10000


100 0 100 200 300 400 500 600


(meters)

NAD83 / UTM zone 7N

Appendix B - Figure 7

Silver Quest Resources Ld.
Boulevard Project, YT **2010 Exploration Program** **Ground Total Magnetic Intensity Survey**
Total Magnetic Intensity
F. Moul, January 31, 2010

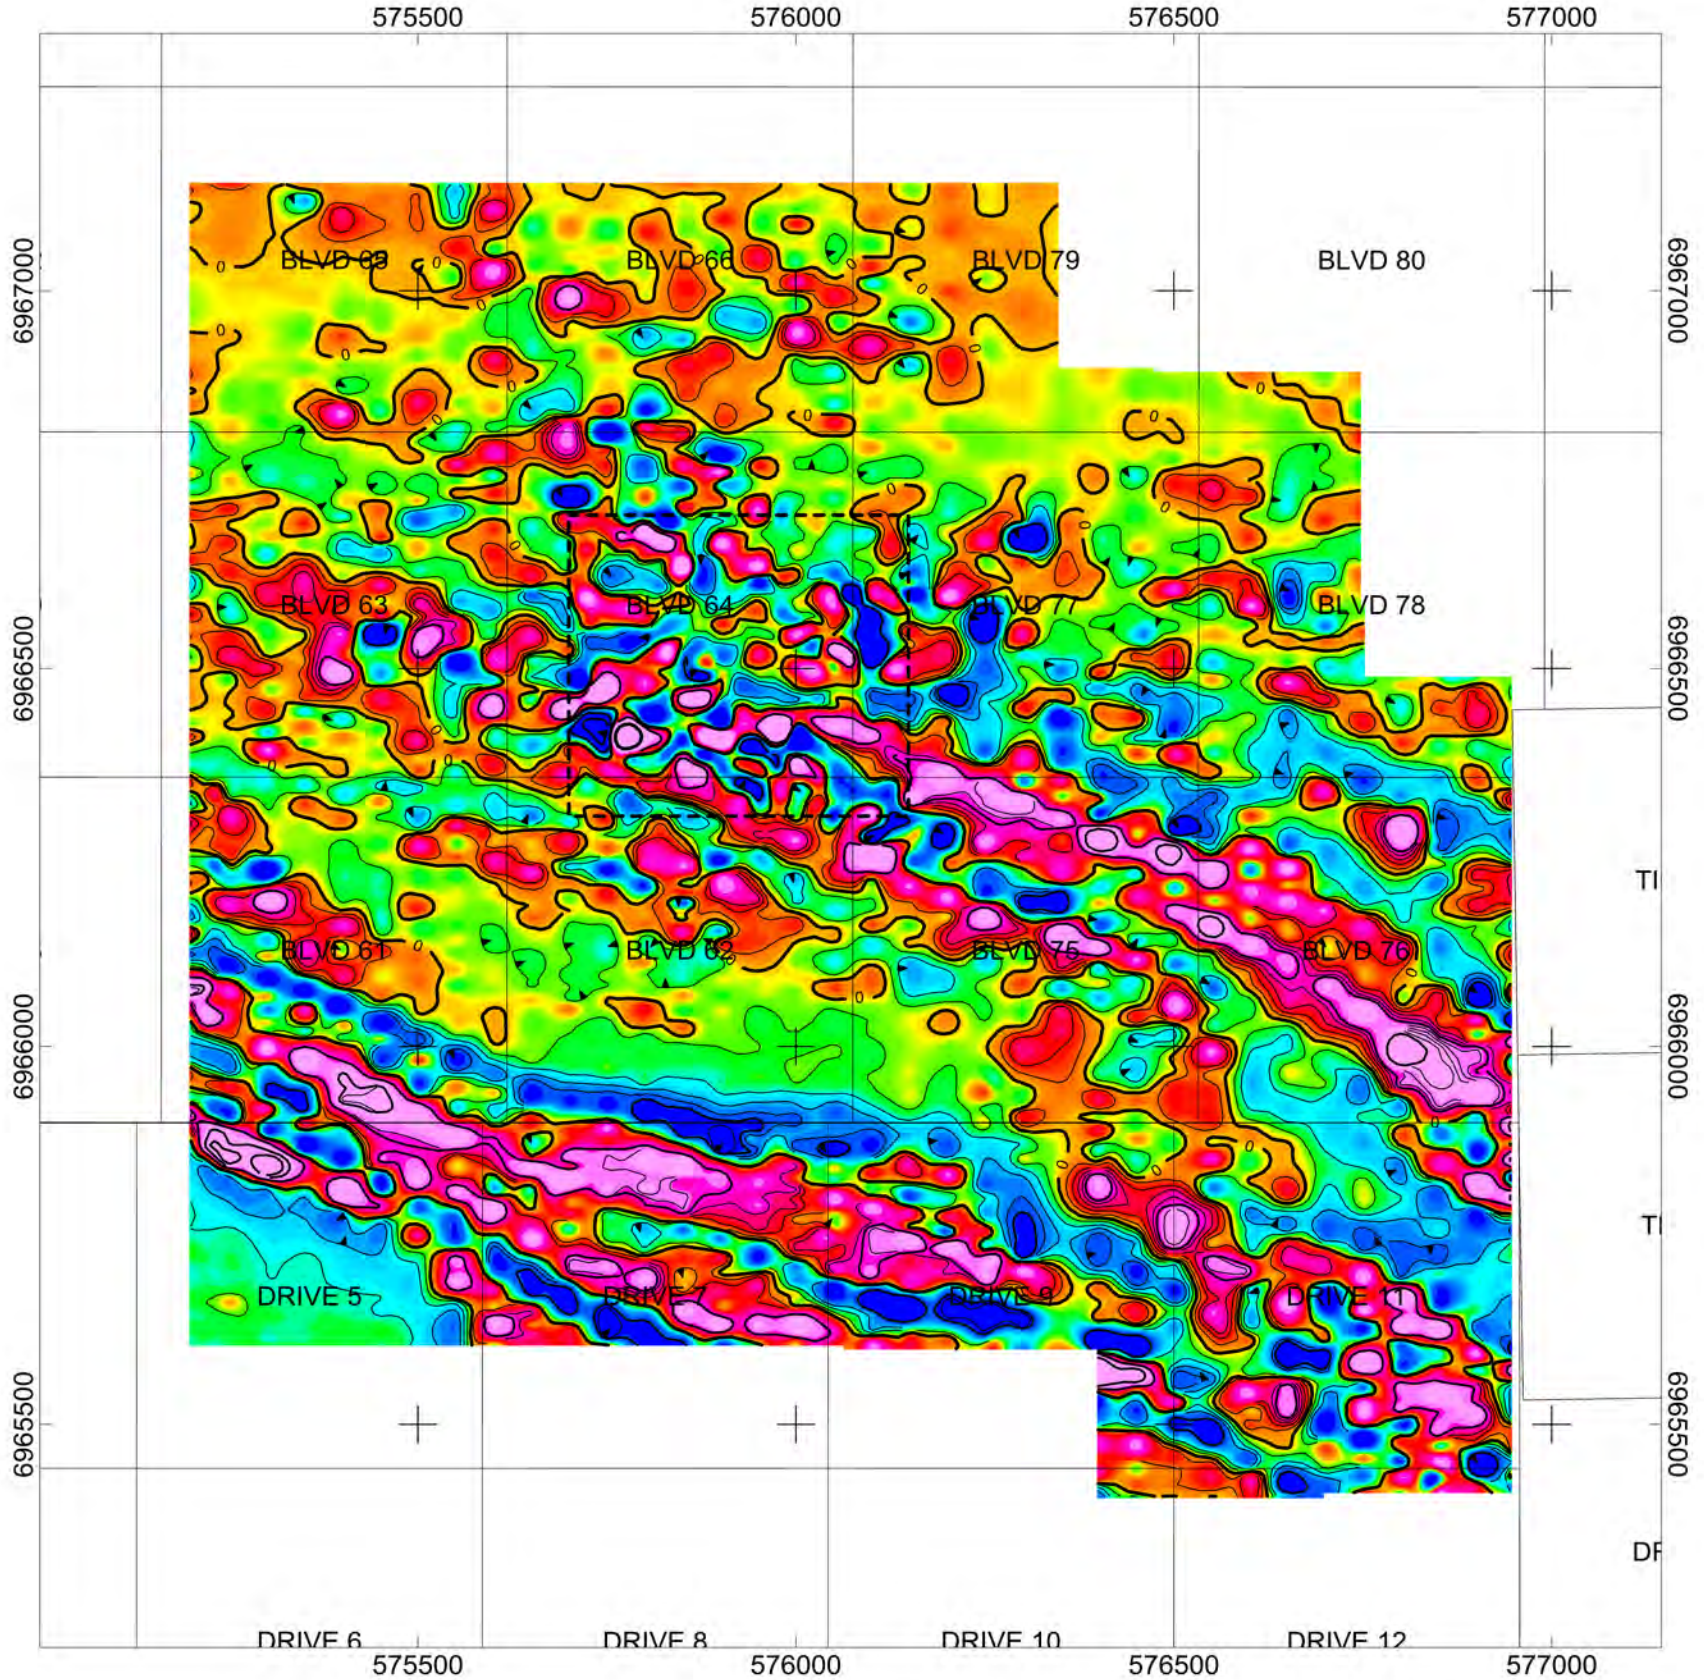

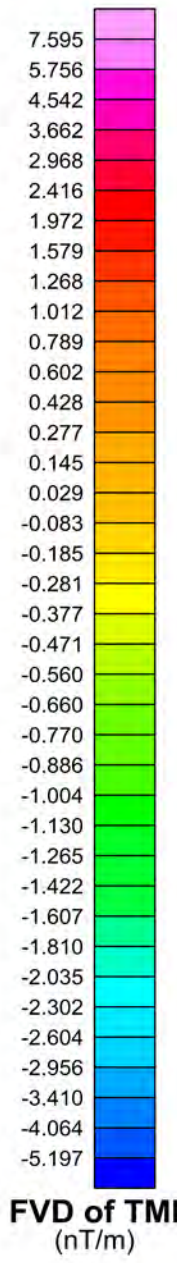

Company: Silver Quest Resources Ltd.
Project: Boulevard Project
Location: Approx. 135 km south of Dawson City, YT

Survey:

Method: Total Magnetic Field
Rover 1: GSM-19W v7 SN. 7052314 (1), 2 Hz
Rover 2: GSM-19W v7 SN. 7052316 (3), 2 Hz
Base 1: GSM-19TG v5 SN. 705699 (4), 0.33 Hz
Survey Dates: June 23, 2010 - June 27, 2010
Traverse Line Orientation: 0 deg.
Traverse Line Separation: 25 m - 50 m
Trimmed Line Length: 62.5 lkm

Processing

Magnetic Data: Manual Despiking, Diurnal Correction
Position Data: Non-linear filter despiking, Running Mean


Grid


Cell Size: 10 m
Filters: Upcon. 10 m, 1 Vert. Derivative

Map

Contour Intervals: 1, 5, 20 nT/m


25 m Line Spacing Detail Area






Appendix B - Figure 9

Silver Quest Resources Ld.
Boulevard Project, YT **2010 Exploration Program** **Ground Total Magnetic Intensity Survey**
First Vertical Derivative of Total Magnetic Intensity
F. Moul, January 31, 2010

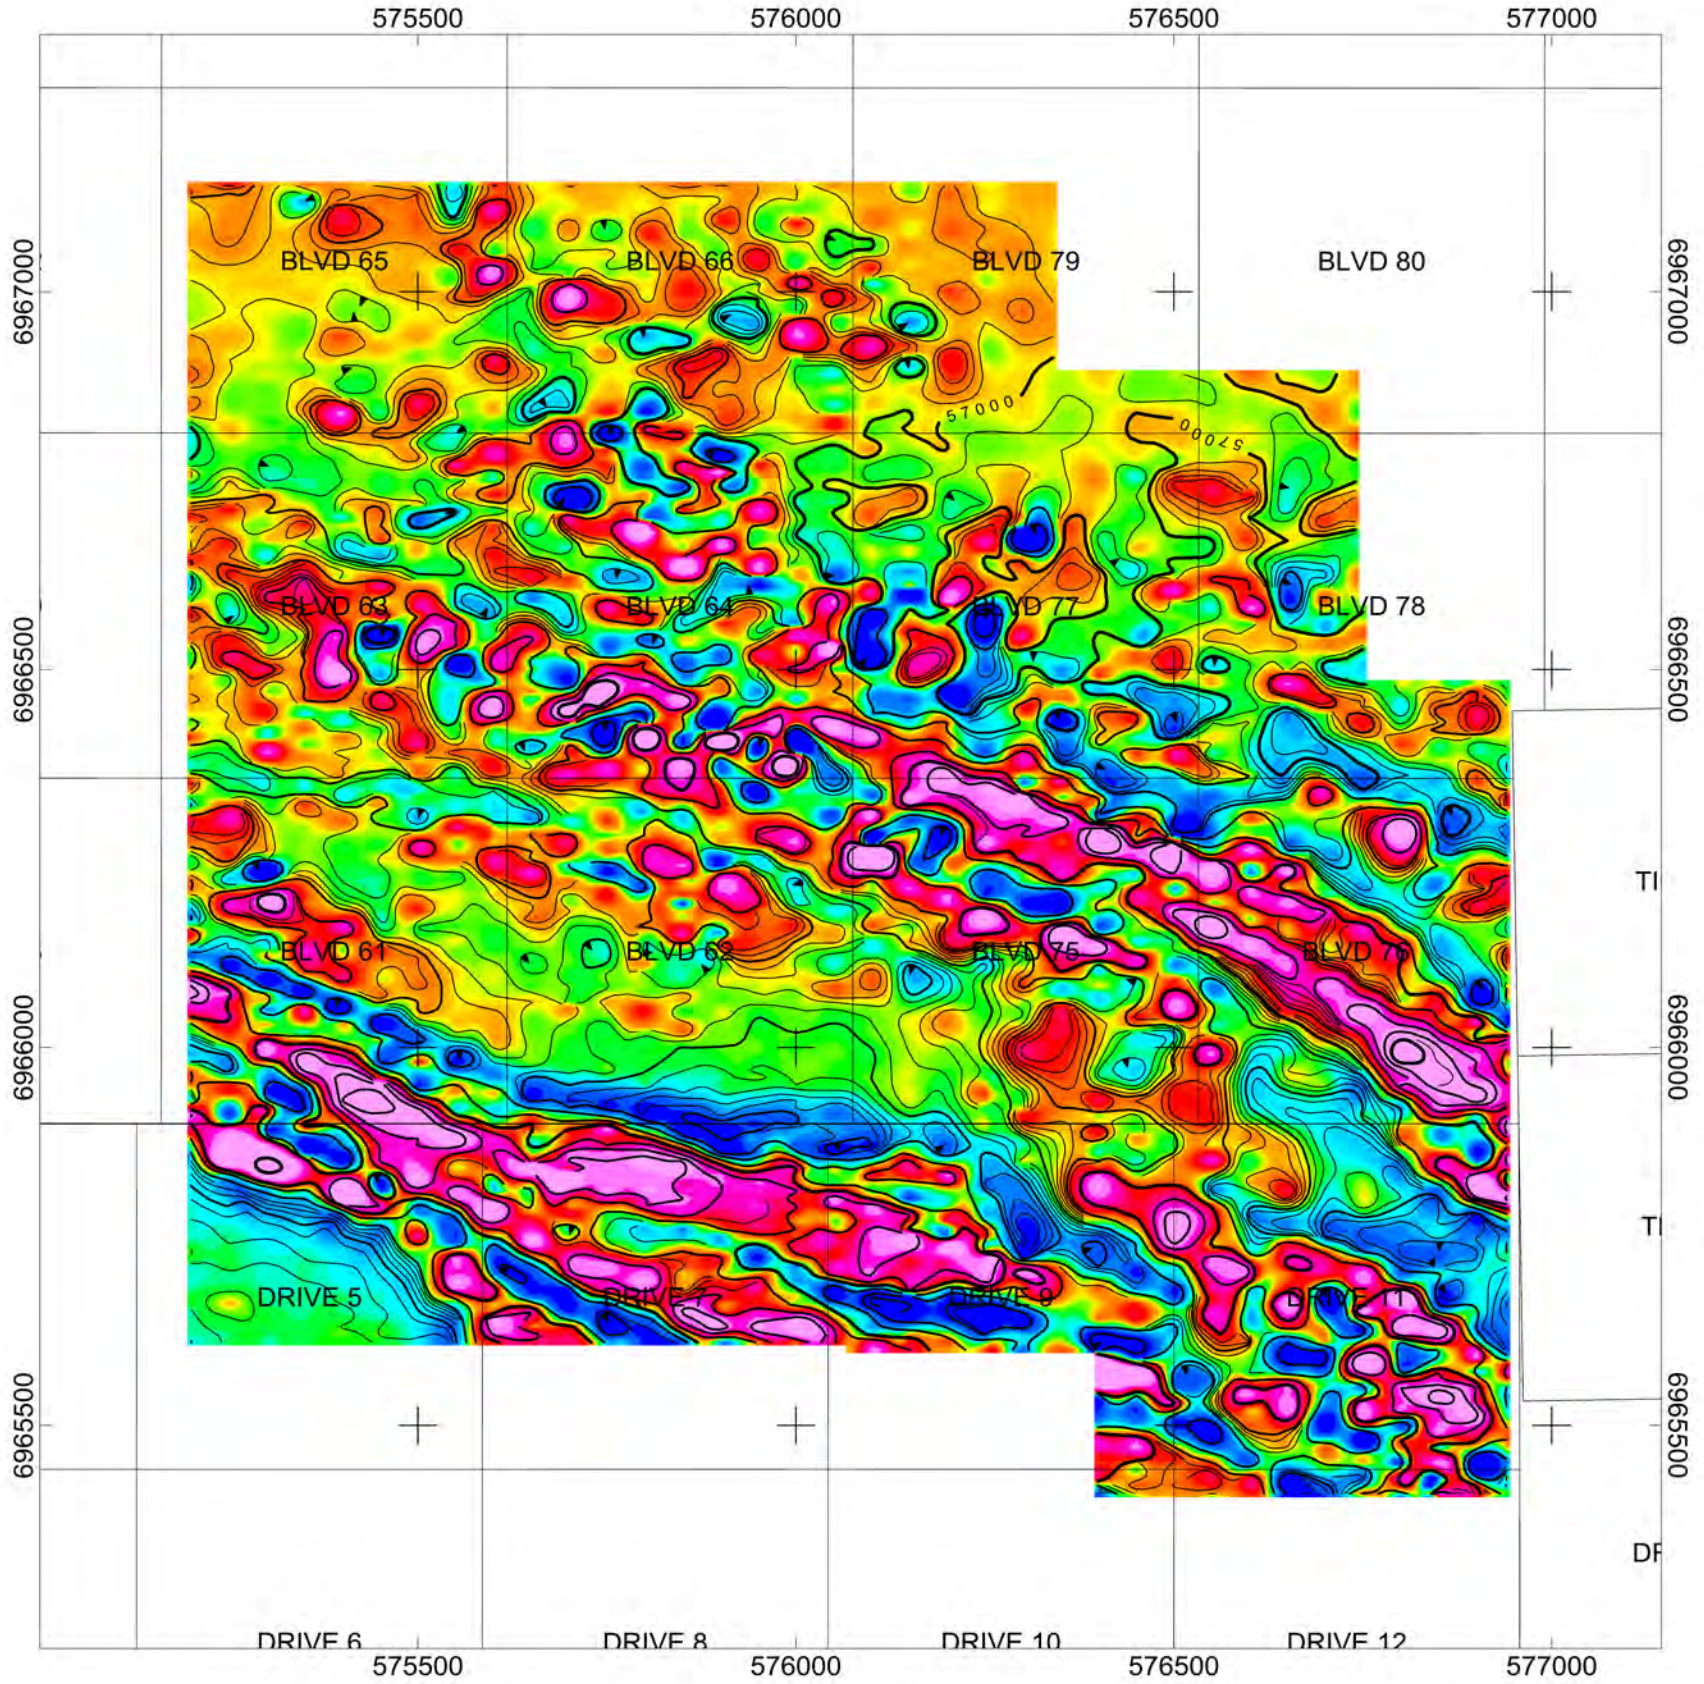

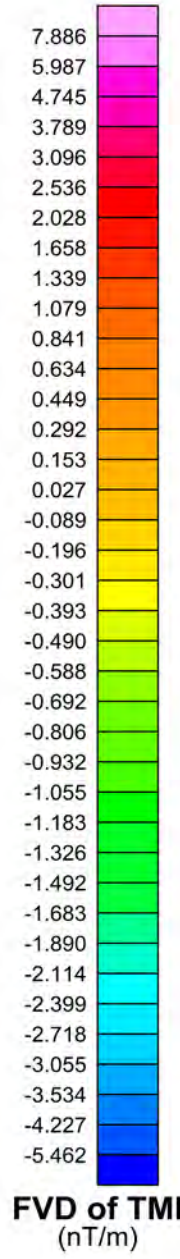

Company: Silver Quest Resources Ltd.
Project: Boulevard Project
Location: Approx. 135 km south of Dawson City, YT

Survey:

Method: Total Magnetic Field
Rover 1: GSM-19W v7 SN. 7052314 (1), 2 Hz
Rover 2: GSM-19W v7 SN. 7052316 (3), 2 Hz
Base 1: GSM-19TG v5 SN. 705699 (4), 0.33 Hz
Survey Dates: June 23, 2010 - June 27, 2010
Traverse Line Orientation: 0 deg.
Traverse Line Separation: 25 m - 50 m
Trimmed Line Length: 62.5 lkm

Processing


Magnetic Data: Manual Despiking, Diurnal Correction
Position Data: Non-linear filter despiking, Running Mean

Grid

Cell Size: 10 m
Filters: Upcon. 10 m, First Vertical Derivative

Map

Contour Intervals: 1, 5, 20 nT/m



Scale 1:10000


100 0 100 200 300 400 500 600


(meters)

NAD83 / UTM zone 7N

Appendix B - Figure 8

Silver Quest Resources Ld.
Boulevard Project, YT **2010 Exploration Program** **Ground Total Magnetic Intensity Survey**
Total Magnetic Intensity (No Infill Area)
F. Moul, January 31, 2010

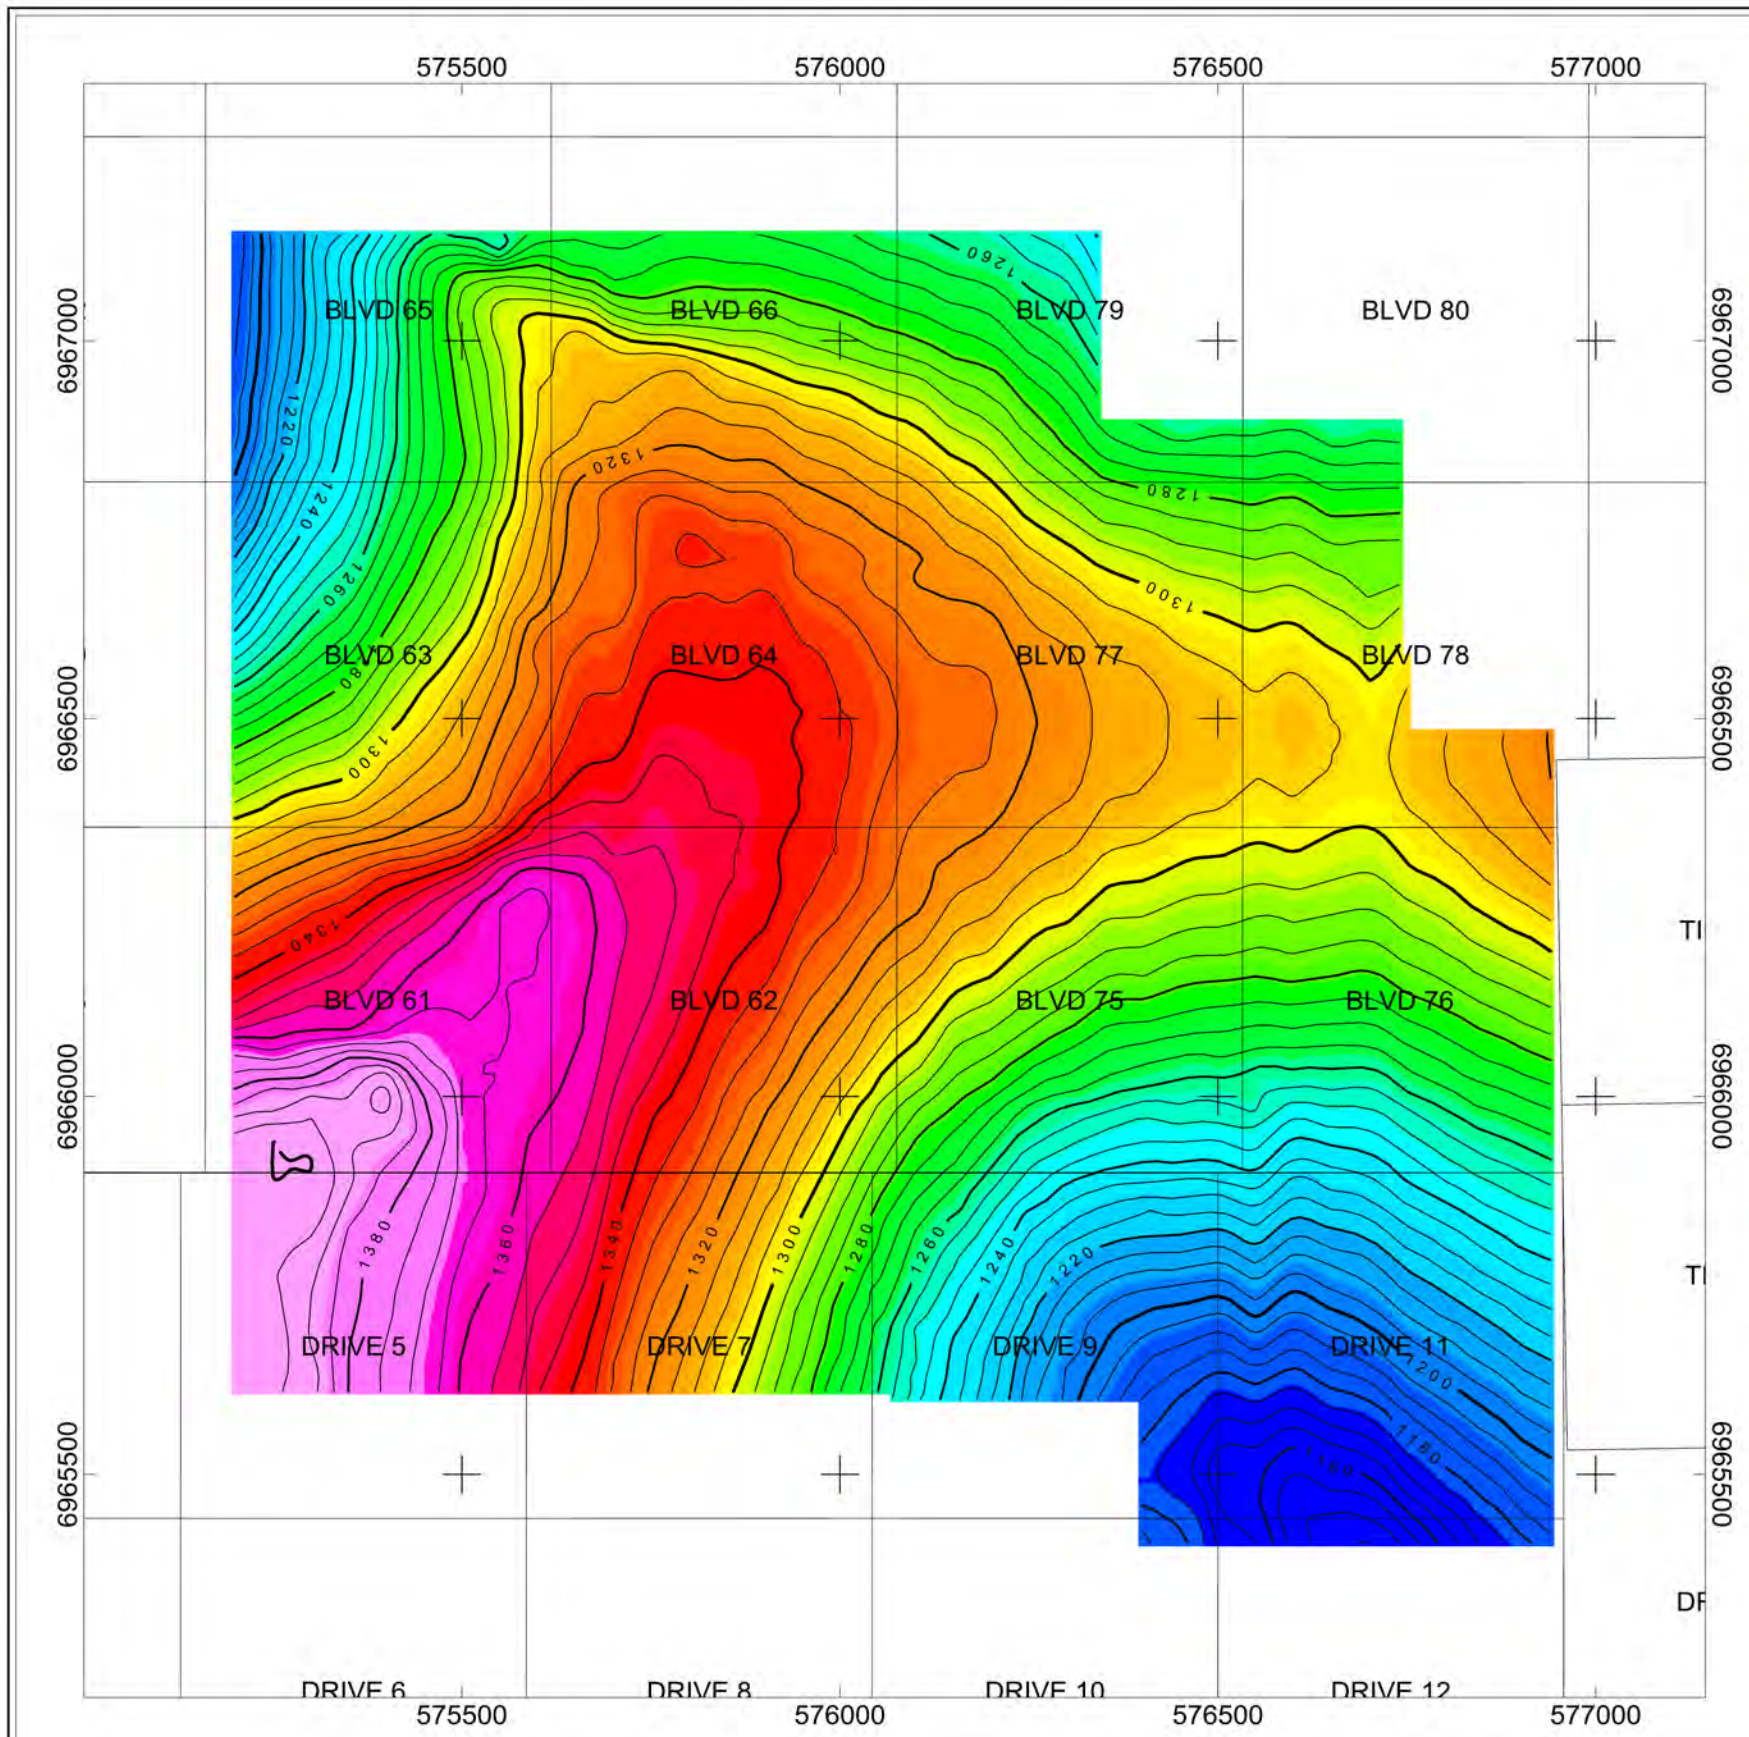

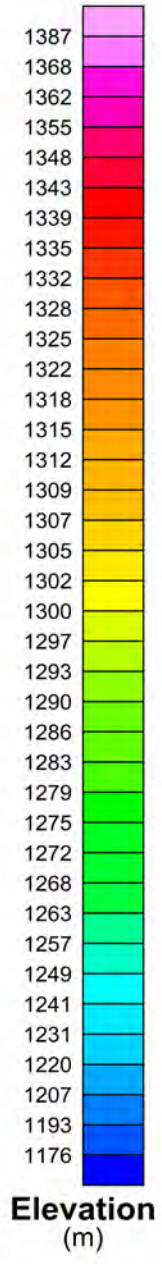

Company: Silver Quest Resources Ltd.
Project: Boulevard Project
Location: Approx. 135 km south of Dawson City, YT

Survey:

Method: Total Magnetic Field
Rover 1: GSM-19W v7 SN. 7052314 (1), 2 Hz
Rover 2: GSM-19W v7 SN. 7052316 (3), 2 Hz
Base 1: GSM-19TG v5 SN. 705699 (4), 0.33 Hz
Survey Dates: June 23, 2010 - June 27, 2010
Traverse Line Orientation: 0 deg.
Traverse Line Separation: 25 m - 50 m
Trimmed Line Length: 62.5 lkm

Processing

Magnetic Data: Manual Despiking, Diurnal Correction
Position Data: Non-linear filter despiking, Running Mean

Grid

Cell Size: 10 m
Filters: None

Map

Contour Intervals: 5, 20, 100 m ASL (CVGD28)

Scale 1:10000

100 0 100 200 300 400 500 600

(meters)

NAD83 / UTM zone 7N

Appendix B - Figure 10


Silver Quest Resources Ld.
Boulevard Project, YT **2010 Exploration Program** **Ground Total Magnetic Intensity Survey**
Digital Elevation Model
F. Moul, January 31, 2010

Appendix C:

Interpretation

List of Figures:

Figure 1 – Interpretation of Ground Total Magnetic Intensity Data

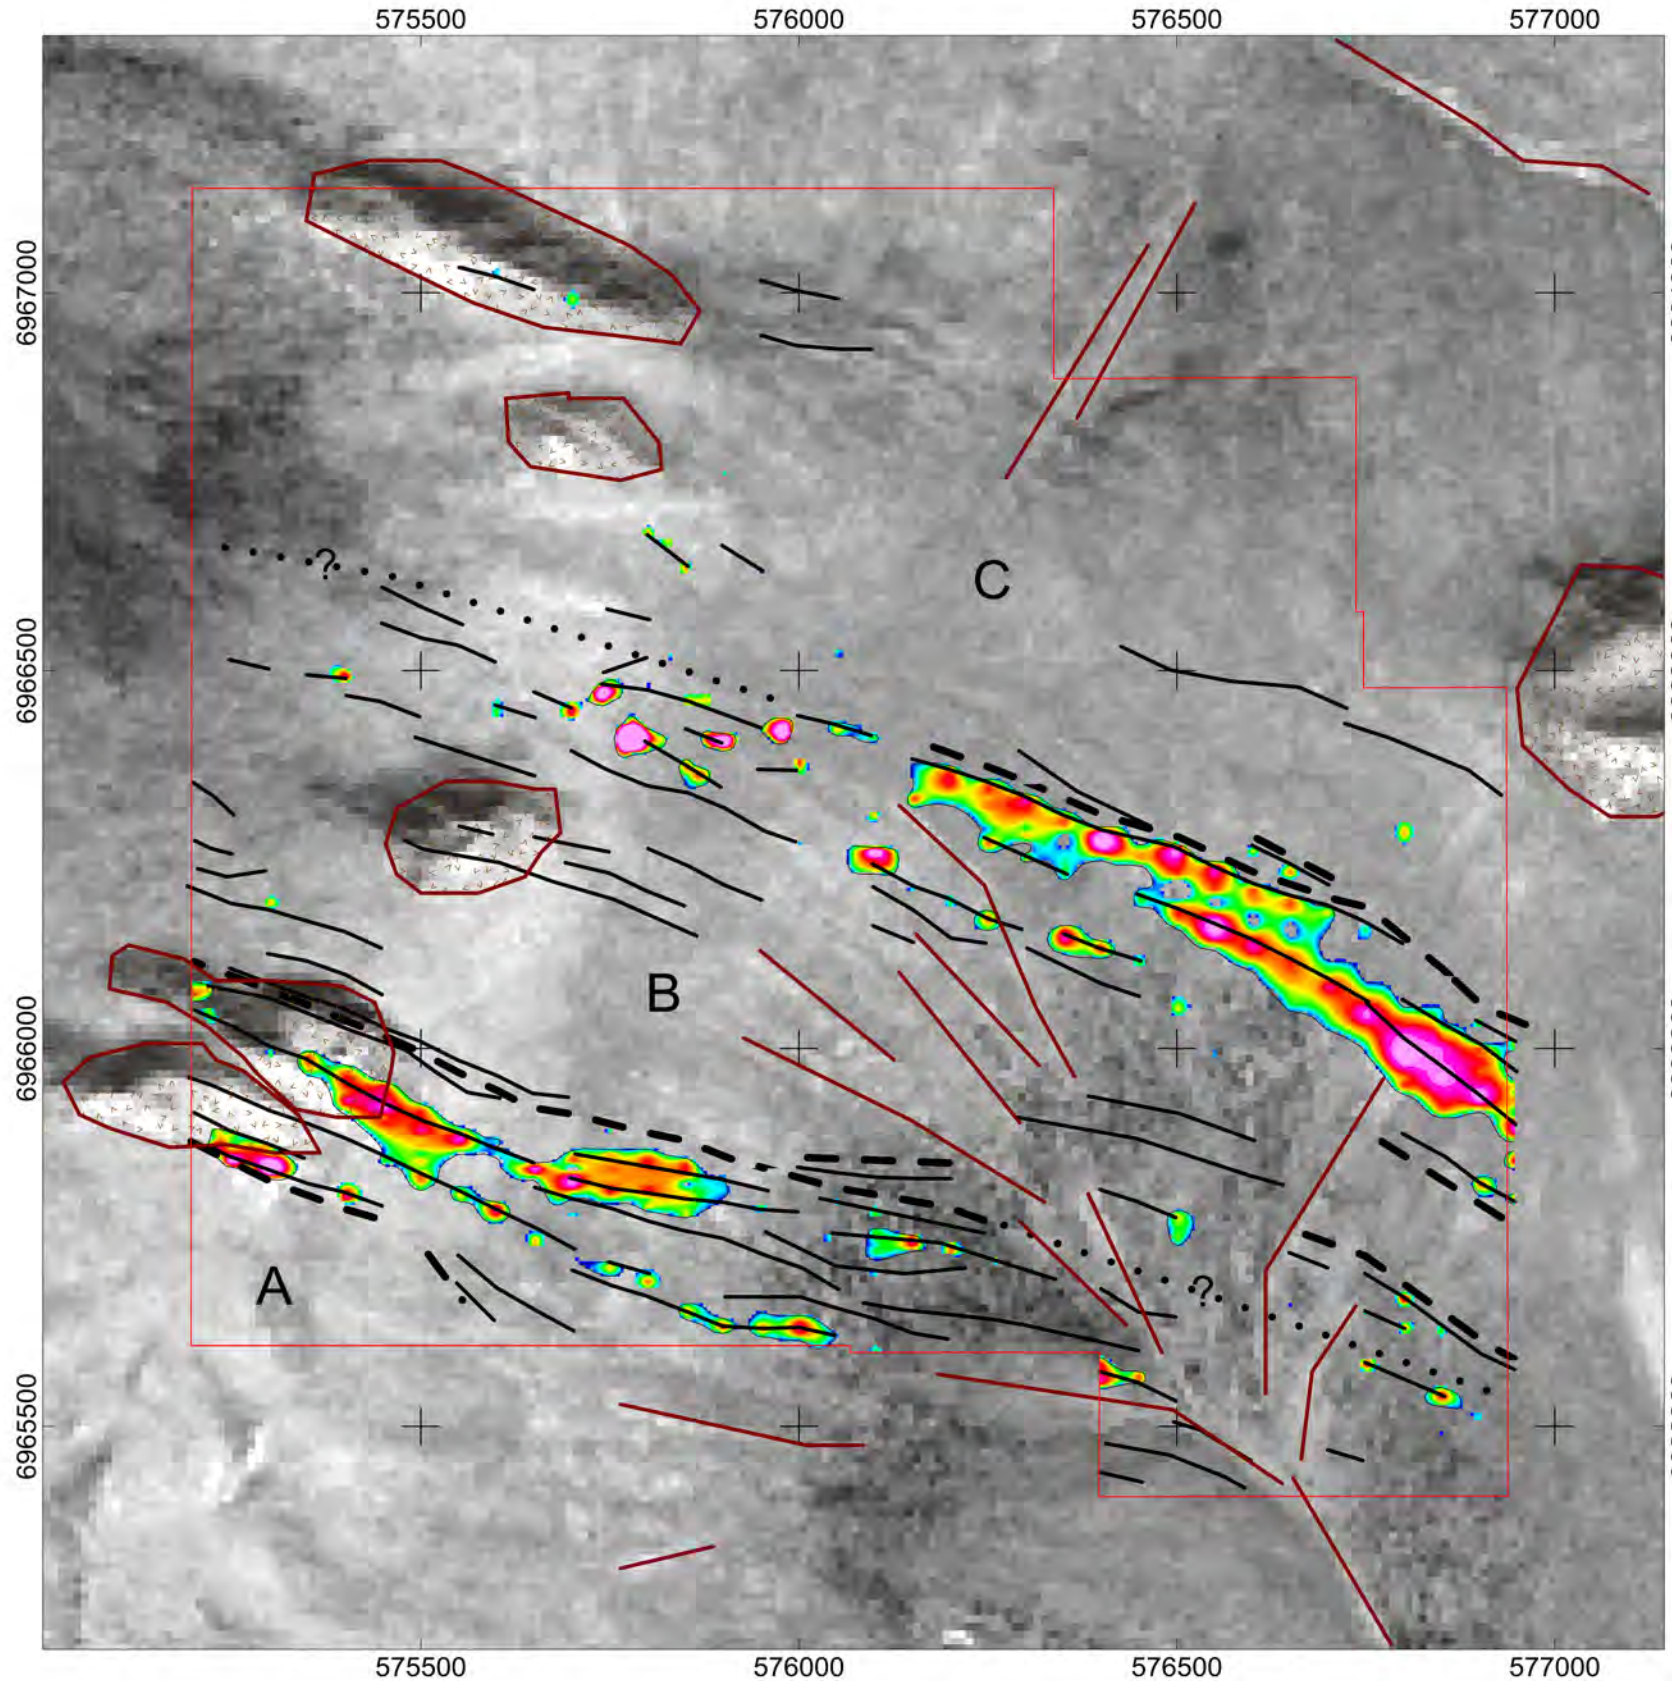

588.1
418.5
353.3
305.6
267.4
236.5
209.3
185.5
164.7
146.1
128.8
115.2
102.5
91.5
82.4
73.9
66.1
59.4
53.5
48.0
42.2
36.5
31.0
25.8
20.2
14.8
9.6
4.1
-1.1
-6.1
-10.9
-15.7
-20.7
-25.7
-30.5
-35.3
-40.3
-45.5
-50.1
-54.6
-58.9
-63.1
-67.4
-72.2
-77.0
-82.0
-87.0
-92.5
-97.7
-103.1
-108.7
-115.3
-122.5
-130.4
-138.6
-147.2
-157.1
-168.9
-183.8
-200.5
-222.1
-250.8
-286.7
-349.2

RMI
(nT)

Company: Silver Quest Resources Ltd.
Project: Boulevard Project
Location: Approx. 135 km south of Dawson City, YT

Survey:

Method: Total Magnetic Field
Rover 1: GSM-19W v7 SN. 7052314 (1), 2 Hz
Rover 2: GSM-19W v7 SN. 7052316 (3), 2 Hz
Base 1: GSM-19TG v5 SN. 705699 (4), 0.33 Hz
Survey Dates: June 23, 2010 - June 27, 2010
Traverse Line Orientation: 0 deg.
Traverse Line Separation: 25 m - 50 m
Trimmed Line Length: 62.5 lkm

Processing

Magnetic Data: Manual Despiking, Diurnal Correction
Position Data: Non-linear filter despiking, Running Mean

Grid

Cell Size: 10 m
Filters: Residual resulting from removal of first order trend from grid.

Map

Contour Interval: 280 nT
Colour levels below 280 nT are white

Base image is SPOT 10 m Panchromatic Image

- Satellite Image Lineament
- Magnetic Lineament (High or Low)
- Magnetic Contact
- Inferred Contact (Weak support)
- Satellite Image Apparent Outcrop
- Ground Survey Boundary
- Grid Contour
- A Region Label

Scale 1:10000

100 0 100 200 300 400 500 600
(meters)
NAD83 / UTM zone 7N

Appendix C - Figure 1

Silver Quest Resources Ld.
Boulevard Project, YT **2010 Exploration Program** **Ground Total Magnetic Intensity Survey**
Residual Magnetic Intensity with Interpretation
F. Moul, February 8, 2011

Appendix D:

Survey Information File

Company: Silver Quest Resources Ltd.
Project: Boulevard Property
Location: 135 km South of Dawson City, YT

Survey Type: Total Field Magnetics using GEM Magnetometers

Instruments:

7052314 GSM-19W v7 CDGPS Walking Magnetometer - rover, unit #1
7052316 GSM-19W v7 CDGPS Walking Magnetometer - rover, unit #3
705699 GSM-19TG v5 Magnetic Gradiometer - base, unit #4

Data rate set at 2 Hz on rover magnetometers and 0.33 Hz (1 sample/3 sec) on the base station.

Survey Dates: June 23rd - June 27th

Personnel:

Francis Moul June 22 - June 25 (Canterra Minerals, Vancouver - Whitehorse June 22, Whitehorse - Camp June 23, Camp - Vancouver 27th)
Sean Suttie June 23 - June 27 (Equity Exploration)
Tashina Scurvey June 25 - June 26 (Student Internship)
Ryan Toole June 27 (Equity Exploration)

Daily Log:

June 22 FM Mob. Depart Vancouver - Arrive Whitehorse
June 23 1 FM, SS Mob. / Survey Depart Whitehorse - Arrive Equity Boulevard Camp (schedule flight Whitehorse - Dawson, Beaver Dawson to Thistle Strip, MD500 Thistle Strip to camp)
June 24 2 FM, SS Survey Full survey day. Expanded survey area to cover anomalous soil geochem samples and structurally complex area to the southwest. Offset survey lines in area of previous 400m by 400m grid to reduce line spacing to 25 m. Lightning and hail cut short day by about an hour. Lightning visable on base station data. Unit #1 froze during survey mode requiring restart.
June 25 3 FM, SS, TS Survey / Demob. FM and SS survey until approx. 10:30. TS replaced FM for remainder of day. Dropped lunch and external batteries at end of survey line but these were not found by crew. TS battery appears to have run out before finding external battery. SS did excellent job preserving battery to get a full day in. FM completed planning for upcoming Prospector Mtn. survey and demobed. MD400

camp - Thistle, Cessna 206 Thistle - Whitehorse, Schedule flight on Air North Whitehorse - Vancouver. Unit #1 froze during survey mode requiring restart. The problem seems to occur once early in the day and not reoccur.

June 26 4 TS, SS Survey TS and SS survey full day. TS became lost walking approximately 1 km beyond the south end of the grid.
June 27 5 RT, SS Survey RT and SS survey full day. Grid completed.

The instruments and support equipment were left in the camp with a full inventory recorded.

Terrain was mostly alpine. On the highest points terrain is mostly broken talus covered in this layer of moss and/or soil. On the slopes scrubby vegetation becomes shoulder high and trees become common. Each day weather followed a similar pattern. Clear and warm in morning with cumulous clouds forming through the morning developing into isolated showers, hail and thunder storms in the late afternoon.

CDGPS correction was intermittent.

Access to the site was by short helicopter flight from camp.

Total trimmed distance is 62.8 lkm.

Appendix E:

Digital Data

DVD archive including .pdf maps, packed Geosoft maps, Geosoft data files

Appendix H: Quality Control / Quality Assurance

1.0 QUALITY ASSURANCE / QUALITY CONTROL

1.1 Chain of Custody

Drill core samples were packed into rice sacks and sealed with uniquely-numbered straps to deter and identify evidence of tampering. Rice sacks were shipped via Small's Expediting (Dawson City) to the ALS Laboratory Group (ALS) preparation lab in Whitehorse, YT which has been certified compliant with ISO9001:2008 requirements.

1.2 Blanks

Blanks are samples which are known to be barren of mineralization or are from locally derived material lacking obvious alteration of mineralization. Blanks are inserted into the sample stream in the field to determine whether contamination has occurred after sample collection. A total of 27 blanks were inserted into the sample sequence (approximately every 40th sample) and submitted for analysis. For the Boulevard drilling program the blank material comprised post-tectonic, unaltered and unmineralized boulders of Cretaceous granodiorite.

Review of the analytical results from the blanks samples indicates that all blank samples in the drill core sample stream returned uniformly low values in all elements of interest.

1.3 Analytical Accuracy: Standard Performance

Standard reference materials are inserted into the sample stream to gauge the accuracy of the lab's analyses. Three standards were used in the course of this program; SRM 1.2 which was obtained from Minerals Exploration and Environmental Geochemistry in Reno, Nevada and PM422 and PM423 from WCM Minerals in Burnaby BC. The means and standard deviations established during round robin standard certification are used for calculating warning and control limits. Warning limits are set at the mean ±2 standard deviations (σ) and control limits are set at ±3σ. Any single SRM beyond the upper and lower control limits is deemed a failure and consecutive standards on the same certificate exceeding the warning limits are also deemed failures.

Shewhart charts which plot concentration versus sample sequence with warning and control limits are attached below. By plotting the z-score multiple standards can be displayed for each element; the z-score levels the mean and standard deviation for each standard so that warning limits are indicated by a z-score of ±2 and control limits are indicated by a z-score of ±3. All standards plotted within control limits and no standards were deemed failures.

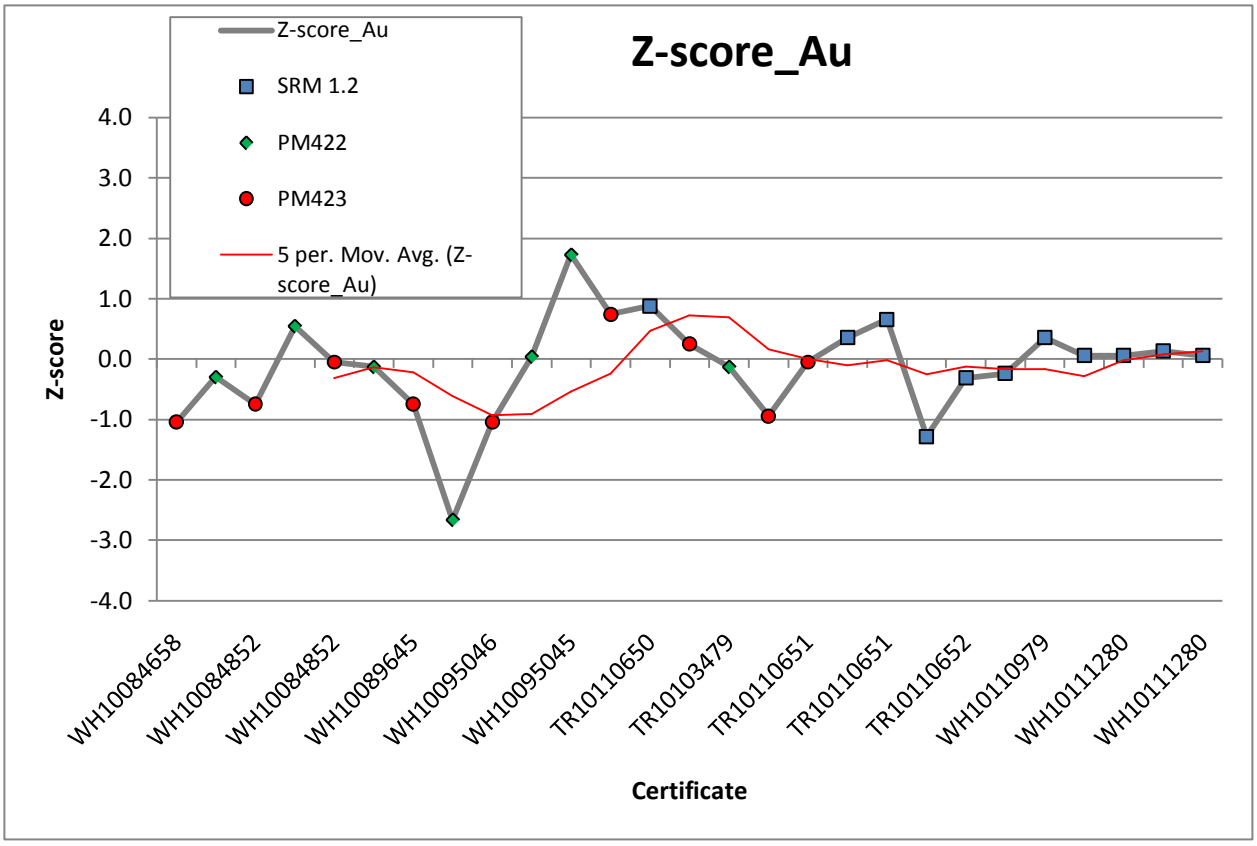


Figure 1: Shewhart Chart for Au indicating all standard reference materials in the core sample stream.

1.4 Analytical Precision: Duplicate Analysis

Field duplicates analysis is collection and analysis of two separate samples from the same field location. In the case of core samples, the mechanically split half of the core was quartered and both quarter samples were submitted as field duplicates. These field duplicates are used to measure the reproducibility of sampling, which includes both laboratory variation and sample variation. The duplicate-pairs will contain all the cumulative error associated with the sampling and analytical process and may also allow the determination of true, or effective, detection limits (where the cumulative uncertainty of sampling and analytical techniques, or precision, equals 100%). A total of 25 field duplicate-pairs (approximately every 40th sample was a field duplicate) were inserted into the sample sequence and submitted for analysis. In addition, a total of 26 preparation duplicate-pairs were submitted for analysis by requesting that the prep lab prepare a second pulp from the same reject.

Generally speaking acceptable levels of precision for base metals in field duplicates of drill core would be 90% of samples having a precision better than 30%. One could expect poorer precision for precious metals, particularly Au, with 90% of samples achieving better than 40% precision. In respect of prep duplicates acceptable levels of precision for base metals and precious would be 90% of samples with better than 20% and 30% precision, respectively. The main element of interest at the Boulevard Project is Au which exhibits poor reproducibility or precision in field and prep duplicates, as illustrated in Figure 2 below.

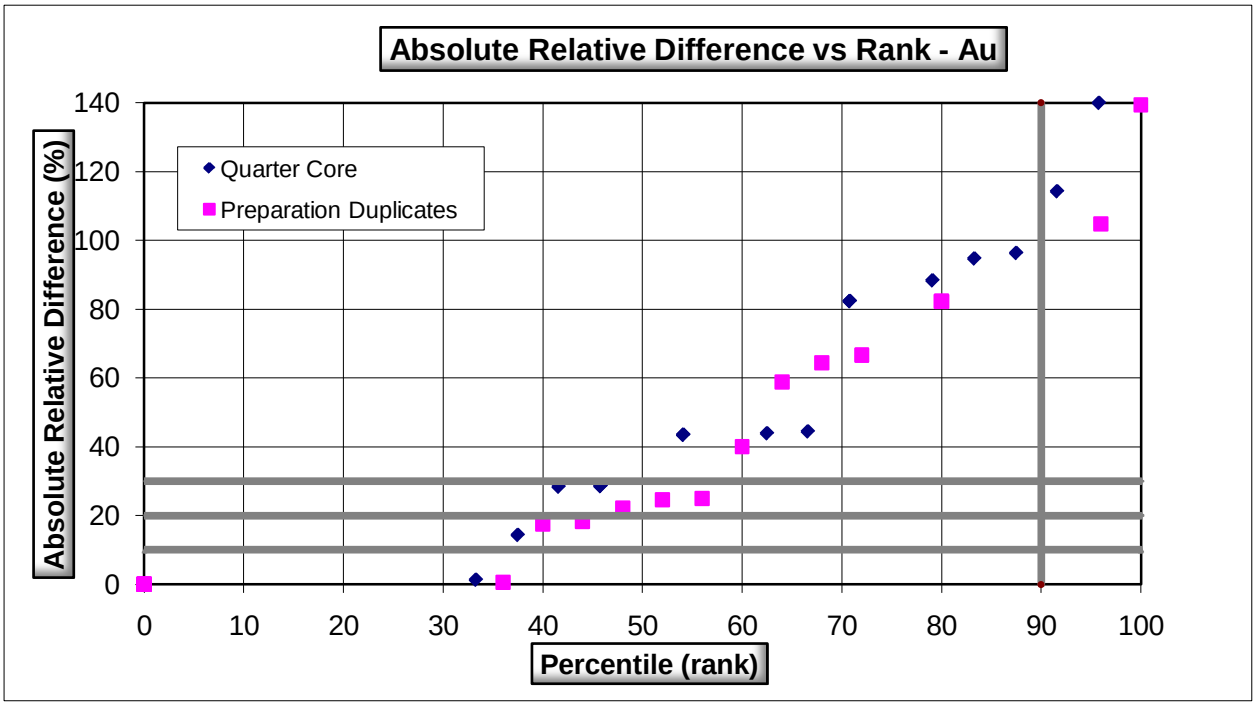


Figure 2: Chart illustrating the absolute relative difference (ARD%, a proxy for precision) versus duplicate-pair mean concentration. It can be read that 90% of field duplicates have a precision of ~110% or better and that 90% of prep duplicates have a precision of 90% or better.

The precision of the dataset can be further be illustrated by plotting ARD% vs mean concentration for field duplicates (Figure 3). The pink line represents a moving average of ARD% or precision with concentration and the precision from the detection limit to 0.04 ppm Au is ~100% and improves with increasing concentration to approximately 50% at 0.25 ppm Au. Poor precision is common as concentration approach the detection limit due to equipment limits.

The same poor precision near the detection limit of 80%-100% at concentrations <0.015 ppm Au can be seen in the chart below for prep duplicates (Figure 4). The precision improves to 30-40% at concentrations >0.015 ppm Au.

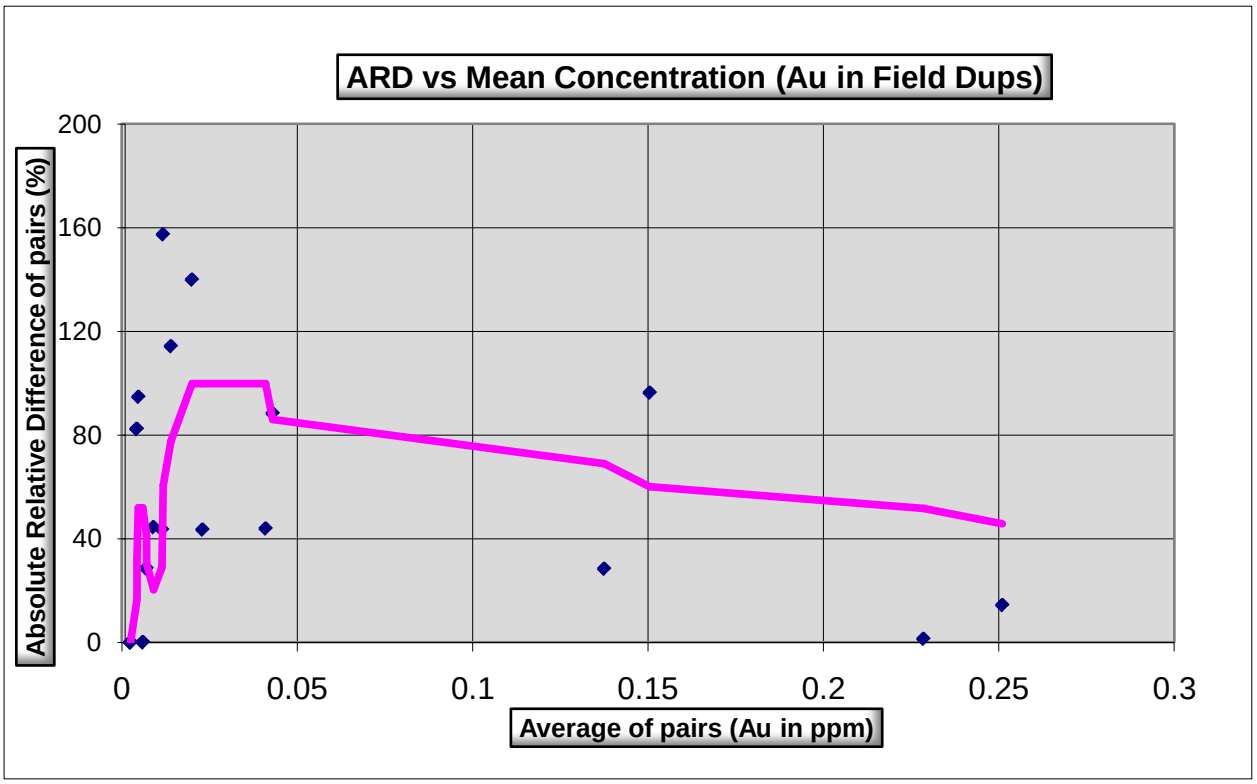


Figure 3: Chart illustrating the variance of precision with concentration, plotting absolute relative difference (ARD%) versus field duplicate-pair mean concentration for Au.

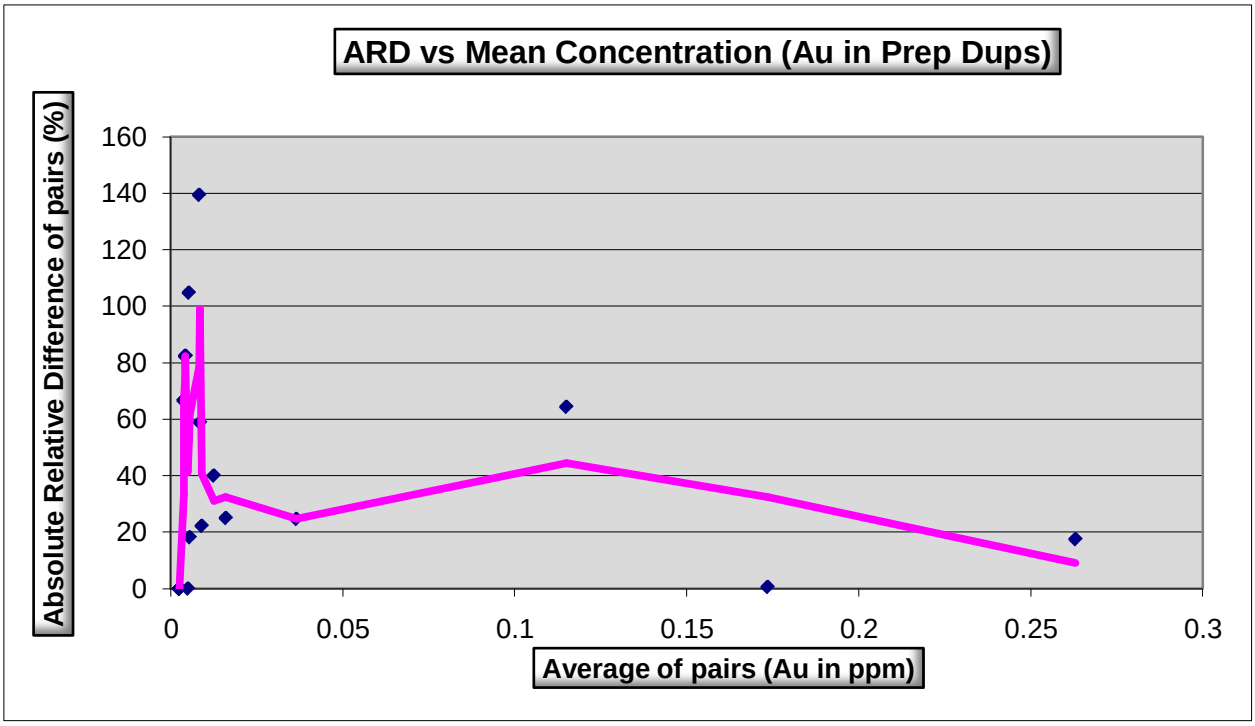


Figure 4: Chart illustrating the variance of precision with concentration, plotting absolute relative difference (ARD%) versus prep duplicate-pair mean concentration for Au.

Poor levels of precision are also noted for As and Sb, which are important pathfinders at the Boulevard Project. Gold commonly exhibits poor reproducibility in several types of deposits, particularly heterogeneous structurally-controlled deposits or in deposits with overprinting styles of mineralization. In contrast, Ag exhibits markedly better precision with both field and prep duplicates having 90% of samples better than ~60% precision as shown below in Figure 5. Similarly, Bi and Pb also exhibit acceptable levels of precision at the Boulevard Project.

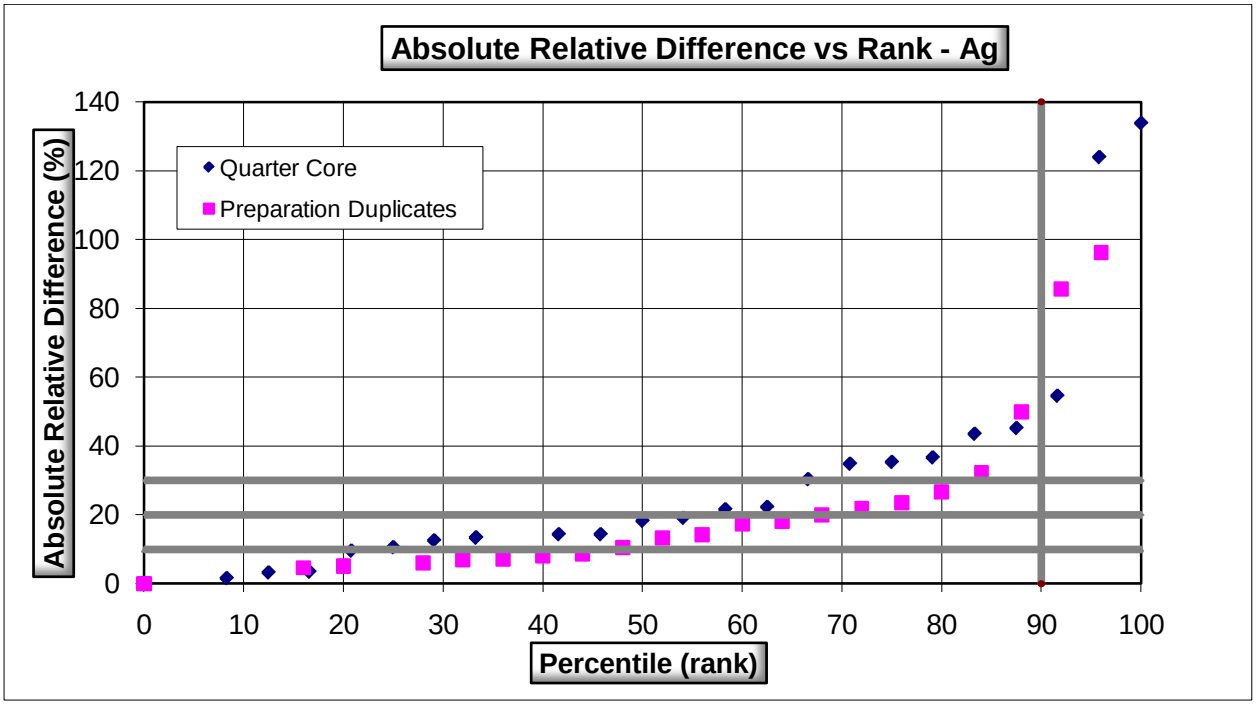


Figure 5: Chart illustrating the absolute relative difference (ARD%, a proxy for precision) versus duplicate-pair mean concentration for Ag.

1.5 Conclusions

- There is no evidence of tampering with the samples between collection and the laboratory.
- All blank samples returned values at or below detection limits for all elements of interest.
- All standards reported assays within control limits and no standards met the two failure criteria.

Field and prep duplicate analysis of core samples indicates that the dataset shows poor levels of precision and reproducibility for Au in both field and prep duplicates. Similar poor reproducibility was noted for important pathfinder elements As and Sb. Acceptable levels of precision were noted for Ag, Bi and Pb. Gold mineralization commonly exhibits poor reproducibility and the mineralization at the Boulevard Project, which is structurally-controlled is inherently difficult to reproduce owing to its heterogeneous nature and distribution. Overprinting styles or mineralized structures would also negatively impact reproducibility.

Appendix I: Compact Disc

Report text, geochemical and drill databases, geophysical files, photographs, soil certificates

Appendix J: Geologist’s Certificate

GEOLOGIST'S CERTIFICATE

Darcy E.L. Baker
Suite 114 – 2635 Prince Edward Street,
Vancouver, BC, Canada

I, Darcy Baker, P.Geo. do hereby certify that:

- I am a Geologist and President of Equity Exploration Consultants Ltd., with offices at Suite 200–900 West Hastings Street in the City of Vancouver, B.C., in the Province of British Columbia.
- I am a member in good standing (#33,448) of the Association of Professional Engineers and Geoscientists of British Columbia.
- I am a graduate of Dalhousie University (1997) with an Honours Bachelor of Science degree in Geology, and am a graduate of the University of Newcastle, Australia (2003) with a Doctor of Philosophy degree in Geology, and I have practiced my profession continuously since 1997.
- Since 1997 I have been involved in mineral exploration for gold, silver, copper, uranium, molybdenum, lead and zinc across Canada and in Alaska, Nevada and Australia.
- I am a Consulting Geologist and principal of Equity Exploration Consultants Ltd. (a geological consulting and contracting firm) and have been so since May 2003.
- I managed the Yukon field exploration campaigns for Silver Quest during 2010 including managing the soil sampling, mapping and drilling programs at the Boulevard property.
- I am independent of Silver Quest.

Dated at Vancouver, British Columbia, this 11th day of February, 2011.

_____

Darcy Baker, Ph.D., P.Geo.

EQUITY EXPLORATION CONSULTANTS LTD.

Vancouver, British Columbia

Silver Quest Resources Ltd.

2010 GEOLOGICAL, GEOCHEMICAL, GEOPHYSICAL AND DIAMOND DRILLING REPORT ON THE BOULEVARD PROPERTY, YUKON

Volume II – Maps and Drill Sections

Located in the North Dawson Range
Whitehorse Mining District
NTS 115J/13, 115J/14
62˚ 49' N Latitude; 139˚ 31' W Longitude
UTM 6,966,030N, 575,600E (NAD 83 Zone 7)
Work conducted May 21 to Sept. 29, 2010 on the following claims:

AVE 1-4	SOL 1-84	XT 361-378
BDW 1-104	TIGER 1-8	XY 1-21
BLVD 1-202	XT 235-244	XY 23-54
DRIVE 1-32	XT 269-286	XY 311-315
GRT 1-36	XT 301-328	XY 56-300
HAN 1-8	XT 331-358	XZ 1-32

-prepared for-

SILVER QUEST RESOURCES LTD.
Suite 1410, 650 West Georgia Street
Vancouver, British Columbia, Canada V6B 4N8

-prepared by-

Darcy Baker, Ph.D., P.Geo.
EQUITY EXPLORATION CONSULTANTS LTD.
Suite 200, 900 West Hastings Street
Vancouver, British Columbia, Canada, V6C 1E5

February 11, 2011

EQUITY

565,000 mE

575,000 mE

585,000 mE

6,975,000 mN

6,965,000 mN

2000 m

Silver Quest Resources Ltd.

Boulevard Project

TENURE MAP

EQUITY	Date: JAN 2011	Scale: 1:100,000	Figure 2
	U.T.M. Zone: UTM7 - NAD83	Mining Division: WHITEHORSE	
	N.T.S. 115J/13	State/Province: YUKON	

Americano

Americano West

Espresso

Coffee Creek Granite

Drill Camp

PROPERTY BOUNDARY

Independence Airstrip

Wilshire

Hollywood

Sunset

Vegas

Toni Tiger

AREA of INSET

1 km

1:5,000

Surface Trace of Mineralization

200 m

Outcrop Lithology

- Rhyolite
- Dacite
- Amphibolite
- Quartzite
- Phyllite
- Gneiss
- Feldspar Quartz Porphyry
- Granodiorite
- Granite
- Schist - chlorite
- Schist - biotite - chlorite
- Ultramafic

Regional Lithology

Cretaceous

Dawson Range Batholith granite/granodiorite

Mid(?) to late Paleozoic

Ultramafic and gabbro

Permian

Klondike Schist mica schist, chlorite schist

geology after Roberts (2008), Lehtinen & Lui (2009), and this report

SYMBOLS

- Outcrop, subcrop
- Bedding (inclined, vertical)
- Foliation (inclined, vertical)
- Jointing (inclined, vertical)
- Faulting (inclined, vertical)
- Veining (inclined, vertical)
- Magmatic Foliation (inclined, vertical)
- Fold Axis, Intersection Lineation, Slickensides
- Lithological contact (inferred)
- Fault
- Drill hole

2008 Trench

Prospects

Silver Quest Resources Ltd.

Boulevard Project

Property Geology

Date	January 2013	Scale	1:20,000
CAD File	Fig 1 - NAD83	Projection	Mineshow
NTS	115J/14	Author	Yukon

Figure 4

Drill Camp

Americano

Americano West

Espresso

Independence

Wilshire

Hollywood

Sunset

Flagstaff

Prospect
Airstrip
Camp 2010
Soil Sample 2010
Silt Sample 2010
Rock Sample 2010

1 km

Silver Quest Resources Ltd.

Boulevard Project

Sample Location Map

EQUITY

Date	January 2011	Scale	1:25,000
UTM Zone	UTM 7 - NAD83	Prepared by	MKirkhorne
NTS	103 I/14	Reviewed	Tulsan

FIGURE 6

Drill Hole

Anomalous Soils
Au > 10 ppb

Rock Geochemistry
Gold (ppm)
- > 6.4 ppm
- 1.3 to 6.4
- 0.1 to 1.3
- 0.05 to 0.1
- < 0.05 ppm

Silt Geochemistry
Gold (ppm)
- > 0.057 ppm
- 0.031 to 0.057
- 0.021 to 0.031
- 0.013 to 0.021
- < 0.013 ppm

Soil Geochemistry
Gold (ppm)
- > 0.026 ppm
- 0.015 to 0.026
- 0.010 to 0.015
- 0.008 to 0.010
- 0.005 to 0.008
- Below Detection

Americano

Americano West

Espresso

323 ppb Au

Drill Camp

Independence

Wilshire

Hollywood

Sunset

Vulcan

Tom Tiger

N

1 km

Silver Quest Resources Ltd.

Boulevard Project

Geochemistry
Gold (ppm)

EQUITY	Date: January 2021	Scale: 1:25,000	Figure: 7a
	Drawn: CTM, JM	Projection: UTM Zone 7 - NAD83	Mining Claims: 909 claims
	Author: MSE	Location: 133/134	Province: Yukon

Drill Hole

Soil Geochemistry
Arsenic (ppm)
- >96 ppm
- 58 to 96
- 11 to 58
- 6 to 11
- -10 to 6

Silt Geochemistry
Arsenic (ppm)
- > 13 ppm
- 9 to 13
- 7.3 to 9
- 6.7 to 7.3
- < 6.7 ppm

Rock Geochemistry
Arsenic (ppm)
- > 5,730 ppm
- 1,000 to 5,370
- 300 to 1,000
- 50 to 300
- < 50 ppm

Anomalous Soils
- Arsenic > 11 ppm

Americano

Americano West

Espresso

Drill Camp

Independence

Wildfire

Hollywood

Sunset

Las Vegas

Front Tiger

N

1 km

Silver Quest Resources Ltd.

Boulevard Project

Geochemistry
Arsenic (ppm)

EQUITY

DWN	January 2021	SCALE	1:25,000	FIGURE
CAD/Job	2567 - 140621	Mining Corner	MX Infrastructure	7b
DATE	13/01/21	Private	Yukon	

2010 Drill Hole

Silt Geochemistry
Antimony (ppm)
- > 3 ppm
- 2.25 to 3
- 2 to 2.25
- 0.44 to 2
- < 0.44 ppm

Rock Geochemistry
Antimony (ppm)
- > 2,000 ppm
- 200 to 2,000
- 50 to 200
- 10 to 50
- < 10 ppm

Anomalous Soils
- Antimony > 0.8 ppm

Soil Geochemistry
Antimony (ppm)
- > 4 ppm (283)
- 1.9 to 4 (254)
- 0.8 to 1.9 (838)
- 0.4 to 0.8 (3495)
- -5 to 0.4 (8062)

Americano
Americano West
Espresso
Drill Camp
Independence
Willshire
Hollywood
Sunset
Vegas
Tomi Tiger
1 km
N

Silver Quest Resources Ltd.
Boulevard Project
Geochemistry
Antimony (ppm)
EQUITY
7c

Drill Hole

Rock Geochemistry
Molybdenum (ppm)
- > 98.44 ppm
- 23.2 to 98.44
- 3 to 23.2
- 2 to 3
- < 2 ppm

Silt Geochemistry
Molybdenum (ppm)
- > 3.594 ppm
- 2.07 to 3.594
- 1.52 to 2.07
- 1.26 to 1.52
- < 0.91 ppm

Soil Geochemistry
Molybdenum (ppm)
- > 17 ppm
- 4 to 17
- 2 to 4
- 1 to 2
- < 1 ppm

Anomalous Soils
- Molybdenum > 1.5 ppm

Americano
Americano West
Espresso
Drill Camp
Independence
Wilshire
Hollywood
Sunset
Vegas
Strip Ridge

N

1 km

Silver Quest Resources Ltd.

Boulevard Project

Geochemistry
Molybdenum (ppm)

EQUITY	Date: January 2021	Scale: 1:25,000	Figure: 7d
	Drawn: CTM, JW	Projection: NAD83	Reviewed: MP	
	Job #: 1201154	Reviewer: Yukon	

Drill Hole

Anomalous soils

Bismuth 0.5> ppm

Soil Geochemistry
Bismuth (ppm)

- > 2 ppm
- 0.75 to 2
- 0.5 to 0.75
- 0.25 to 0.5
- < 0.25 ppm

Silt Geochemistry
Bismuth (ppm)

- > 1.18 ppm
- 0.818 to 1.18
- 0.584 to 0.818
- 0.432 to 0.584
- < 0.432 ppm

Rock Geochemistry
Bismuth (ppm)

- > 73.8 ppm
- 3.5 to 73.8
- 2.1 to 3.5
- 2 to 2.1
- < 2 ppm

Drill Camp

Americano

Americano West

Espresso

Independence

Wilshire

Hollywood

Sunset

Vegas

Tom Thiger

N

1 km

Silver Quest Resources Ltd.

Boulevard Project

Geochemistry
Bismuth (ppm)

EQUITY

FIGURE 7e