GEOLOGICAL & GEOCHEMICAL ASSESSMENT REPORT ON THE VM CLAIMS (NTS 105I/02 & 03), YUKON

VM CLAIMS 001-048 (YD25651-YD25698); 049-072 (YD25859-YD25882); 073-074 (YD25699-YD25700); 075-078 (YD25883-YD25886); 079-084 (YD25845-YD25850); & 085-104 (YD26481-YD26500)

Work completed: August 13 - 18th 2011

1:250 000-scale Little Nahanni River Map Sheet (105I)

1:50 000-scale NTS Map Sheet 105I/02 & 03

Latitude 62° 5' 40" N Longitude 128° 58' 36" W

E 501215 N 6884662 UTM (NAD83, Zone 9N)

Watson Lake Mining District

Prepared for:

BEARING RESOURCES LTD.

Suite 1280 - 625 Howe Street
Vancouver, BC
Canada V6C 2T6

Prepared by:
Lauren Blackburn, B.Sc.
Keno Hill Exploration Corp.

December 16th, 2011

SUMMARY

In October 2010, Bearing Resources (formerly Valley High Ventures) staked the VM 001-*048 (YD25651-YD25698); 049-072 (YD25859-YD25882); 073-074 (YD25699 YD25700); 075-078 (YD25883-YD25886); 079-084 (YD25845-YD25850); & 085-104 (YD26481-YD26500)* quartz claims to cover government Regional Geochemical Survey coincident gold and arsenic stream sediment sample anomalies (one As 90-95 percentile and two Au >99 percentile), favorable geology and structural lineaments highlighted by regional mapping of the area.

The claims are situated in the Little Nahanni River region, where gold occurrences form a 90-km-long belt along the Upper Hyland River that is considered to be the south-easternmost part of the Tombstone Gold Belt (*herein* TGB). The TGB follows a southeast trend of mid- to late- Cretaceous granitoid intrusions extending from eastern Alaska, across central Yukon to the Yukon-British Columbia border, roughly parallel to the accretionary ancestral North American Craton boundary. Anomalous RGS gold geochemistry and geology support potential for orogenic, distal plutonic-related gold mineralization in the Upper Hyland River area where several high grade gold-vein occurrences are known, including (from south to north); 3ACE and GREEN (Northern Tiger Resources Inc. "Northern Tiger"); FER (Precipitate Gold Ltd.); Bearing's HY-JAY and the Horn property of RyanGold Corporation.

Old 4X4 un-tagged claim posts were located during the program however the author has been unable to find evidence that these posts were recorded and carried by later explorative work programs. Neighbouring claim blocks include the Horn, Owl, ALW, Big and VBA claims. Immediately to the northwest and west are the Summit 1-86, Big 1-648 and the Owl 1-164 quartz claims, owned 100% by GoldSpike Exploration Inc., the latter covering four gold RGS anomalies and coincident gold and arsenic geochemical anomalies, respectively. The Horn 1-146 claims to the SW were staked over a five-year period and are owned 70% by Ryan Gold Corp. and 30% by 45127 Yukon Inc. The Horn claims have been explored via ground magnetics and grid soil sampling, which has defined anomalous (Au) zones associated with the outer contact of relative magnetic highs. Fifteen-kilometers to the northwest is Bearing Resources VBA 1-80 quartz claims, which were staked in July 2011 to cover anomalous arsenic RGS samples.

According the Gordey, the area is underlain by Yusezyu Formation stratasiliciclastic and bioclastic, platformal or continental-margin sedimentary rocks of the Neoproterozoic to Lower Cambrian Hyland Group within the pericratonic Selwyn Basin on the cratonic margin with ancestral North America (Gordey, 1992; Blackburn, 2010). The Hyland Group (PCH1) Yusezyu Formation metasediments are defined by thin- to thick-bedded, brown to pale green shale, fine to coarse grained quartz-rich sandstone, grit and quartz-pebble conglomerate with minor argillaceous limestone, phyllite, quartzofeldspathic and micaceous psammite, gritty psammite and minor marble (Gordey & Makepeace, 2003).

The 2011 exploration program was completed from August 13th to 18th and was grassroots in nature. The project involved reconnaissance soil sampling, stream

sediment (silt) sampling and prospecting/mapping; a total of 161 soil samples, 8 silt and 4 rock samples were collected and sent in for geochemical analysis with AGAT Laboratories. Soil and silt samples were dried and sieved to -80 mesh and analyzed using ICP-OES (aqua regia digest) for 45 elements with trace gold fire assay finish. Rock samples were analyzed using the same process but were prepared differently; samples were crushed to -10 mesh and sub-sampled and split. Of the 161 soil samples collected, 43 samples reported ≥10 ppb Au, 10 samples reported ≥20 ppb Au with the most anomalous sample reporting 51 ppb Au. Of the eight-stream sediment samples collected, two reported ≥10 ppb Au, with the most anomalous sample reporting 61 ppb Au, placing it in the ≥99% for Au with respect to the regional geochemistry. One rock sample reported 12 ppb Au.

A total of 25-man days work was completed during the exploration program on the VM claims. The crew operated from a fly camp next to a small creek. Upon completion of the program the camp and all garbage and equipment was demobilized back to the Nahanni Range Road via helicopter and then via vehicles to Whitehorse. A total of $45,036.16 was spent during the program.

Although Bearing Resources was unable to find appreciable gold mineralization in rock samples, some encouraging gold-in-soil and anomalous silt geochemistry suggest potential and therefore the author recommends some additional work to the be completed on the claim block. An east-west trending zone was highlighted by soil sampled in the south-central portion of the claim-block; the south-end of the claim block is yet to be geochemically tested.

It is proposed that the crew operate from a fly camp with helicopter support (if necessary) in the southern end of the claim area (at E501250, N6883325) to access the southern region of the claims which were not examined during the program. Upon completion of the program the camp and all garbage and equipment will be demobilized back to the Nahanni Highway via helicopter and then driven back to Whitehorse. It is expected that the program will cost approximately $33,782.50.

TABLE OF CONTENTS

1. INTRODUCTION
1.1 Underlying Agreements & Land Tenure
Table 1. VM Claim Status
1.2 Definitions & Units
1.3 Sources of Information

2. PROPERTY LOCATION & DESCRIPTION
2.1 Location & Access
Figure 1. VM Claims- Yukon Location Map
Figure 2. VM Claim Map
2.2 Physiography & Climate

3. VM CLAIM AREA WORK HISTORY & ADJACENT CLAIMS

4. REGIONAL GEOLOGY
Table 2. Regional Geological Units
Figure 3. Regional Geology

5. VM CLAIM AREA GEOLOGY
Figure 4. VM Property Geology

6. 2011 EXPLORATION PROGRAM
6.1 Reconnaissance Soil Sampling
6.2 Stream Sediment Sampling
Figure 5. Soil & Stream Sediment Sample As-Proportional Bubble Plot
Figure 6. Soil & Stream Sediment Sample Au-Proportional Bubble Plot
6.3 Ground Truthing
Table 4. Rock Sample Descriptions
Figure 7. Rock Sample Geochemistry

7. TARGET RATIONALE
Table 5. RGS Samples
Figure 8. Plutonic Au & Carlin-type Yukon-wide Mineral Potential (from Bradshaw & vanRanden, 2004).

8. CONCLUSIONS

9. BUDGET SUMMARY
Table 6. 2011 Exploration Program Expenditures

10. RECOMMENDATIONS FOR FUTURE WORK
Table 7. Work Schedule
Table 8. Proposed Exploration Program Budget

11. STATEMENT OF QUALIFICATIONS

12. BIBLIOGRAPHY

13. APPENDICIES

Appendix I*- VM Claims Information*
Appendix II*- Geochemical Sample Data – Soil*
Geochemical Sample Data – Silt
Appendix III*- Detailed Mapping Station Data*
Appendix IV*- Assay Certificates*

1. INTRODUCTION

1.1 Underlying Agreements & Land Tenure

Bearing Resources Ltd. holds 100% interest in the VM claims, subject to no agreement(s) or encumbrances currently known by the author (refer to *Table 1. VM Claim Summary*, below). The VM 1-104 claims are within the Watson Lake Mining District and comprise the 2106 hectare property.

Table 1. *VM Claim Summary**

Claim Group Name	Claim No. (from)	Claim No. (to)	Grant No. (from)	Grant No. (to)	Expiry Date	Total No.
VM	1	48	YD25651	YD25698	Oct. 25/11	48
VM	49	72	YD25859	YD25882	Oct. 25/11	24
VM	73	74	YD25699	YD25700	Oct. 25/11	2
VM	75	78	YD25883	YD25886	Oct. 25/11	4
VM	79	84	YD25845	YD25850	Oct. 25/11	6
VM	85	104	YD26481	YD26500	Oct. 25/11	20
					TOTAL CLAIMS=	**104**
					APPROXIMATE TOTAL AREA (ha)=	**2,106**

**For a complete list of claims refer to Appendix I.*

The VM claims and are in good standing following the 2011 work program, and based upon acceptance of this Assessment Report, a new expiry date is anticipated.

1.2 Definitions & Units

The following are abbreviations used within this report:

- Distances are reported in meters (m), kilometres (km) and feet (ft).
- Geochemical data is reported in parts per million (ppm) the equivalent to grams per tonne (g/t) and ounces per tonne (oz/t), as well as parts per billion (ppb).
- Geological ages include: Ka (thousand) and Ma (million) years ago.
- Elemental abbreviations include: gold (Au), arsenic (As).
- Directional units include: north (N), east (E), south (S), west (W) and may be used in combination (*i.e.*, NNE for north-northeast).

1.3 Sources of Information

Sources of information include but are not limited to:

- Assessment Reports;
- Internal data (geological, structural, geochemical and geophysical);
- Yukon MINFILE; and
- Geological reports and maps from the Geological Survey of Canada (GSC) and Yukon Geological Survey (YGS).

140 ° W
135 ° W
130 ° W
125 ° W
68 ° N
66 ° N
64 ° N
62 ° N
60 ° N
Old Crow
Dawson City
Keno City
Mayo
Stewart Crossing
Pelly Crossing
Beaver Creek
Destruction Bay
Haines Junction
Whitehorse
Carmacks
Faro
Ross River
Tungsten
Johnsons Crossing
Tagish
Carcross
Teslin
Swift River
Watson Lake
VM Property

BEARING RESOURCES LTD.

Date: 12/12/2011	VM Project Yukon, Canada Figure 1. VM Claims Yukon Location Map
Author: L. R. B.	
Mining District: Watson Lake	
Drawing: G. B.	
Scale: 1:2500000	Projection: Yukon Albers

0 25 50 100
kilometres

2. PROPERTY LOCATION & DESCRIPTION

2.1 Location & Access

The VM project is located just northwest of the Nahanni Range road near the Northwest Territories border in southeastern Yukon at a latitude of 62°5'40"N and a longitude of 128°58'36"W (UTM Zone 9N, NAD83 Easting 0501215, Northing 6884662) on NTS map sheet 105I/02 & 03 (refer to *Figure 1- VM Claims Location Map* on previous page). The VM 1-104 contiguous quartz claims are located 225 km north of the Village of Watson Lake.

The property is accessible via the Nahanni Range Road (Highway 10), which passes approximately 20 km SE of the project (see *Figure 2-VM Claims Map* on following page). The remaining 20 km are accessible via a short helicopter ride. An old, partially overgrown skid trail to Howard's Pass passes within 4 km to the east and is ATV accessible.

During the program (August 13-18th, 2011), the crew operated from a fly camp (at E500974/N6884831) next to a small stream. A helicopter completed occasional pick ups and moves as the crew worked towards the less accessible region on the claims.

2.2 Physiography & Climate

The VM 1-104 claims are located on the north of the Hyland River (northwest of the Upper Hyland Lake), east of the Little Owls Mountains, situated within the rugged of the Logan Mountain Range with elevations ranging from 1340 to 1960 m (4396 to 6430', respectively). Higher elevations are un-vegetated and lower slopes represent tree line that is sparse to densely covered in foliage (primarily dwarf birch, willow, small coniferous trees and a diverse range of mosses and lichens). The climate in this area range from -40 to +30°C with moderate precipitation.

3. VM CLAIM AREA WORK HISTORY & ADJACENT CLAIMS

Old, un-tagged, 4X4 claim posts were located during the program however the author has been unable to find evidence that these staked claims were recorded and carried by later explorative work programs. Neighbouring projects include the Horn, Owl, ALW and Big claims.

Fifteen-kilometers to the northwest is Bearing Resources VBA 1-80 claims which were staked in 2010 to cover highly anomalous arsenic RGS samples. To the SSE are the Horn 1-146 claims owned 70% by Ryan Gold Corp. and 30% by 45127 Yukon Inc. The claim block was staked over a five-year period, the Horn 1-16 in August 2005, Horn 17-30 in September 2006 and finally Horn 31-146 were staked in December 2010. The Horn claims have been explored via ground magnetics and grid soil sampling, which has defined anomalous (Au) zones associated with the outer contact of relative magnetic highs. GoldSpike Exploration Inc. has a 100% interest in three claim blocks in the area that were staked in November 2010. Immediately to the west are the Big 1-

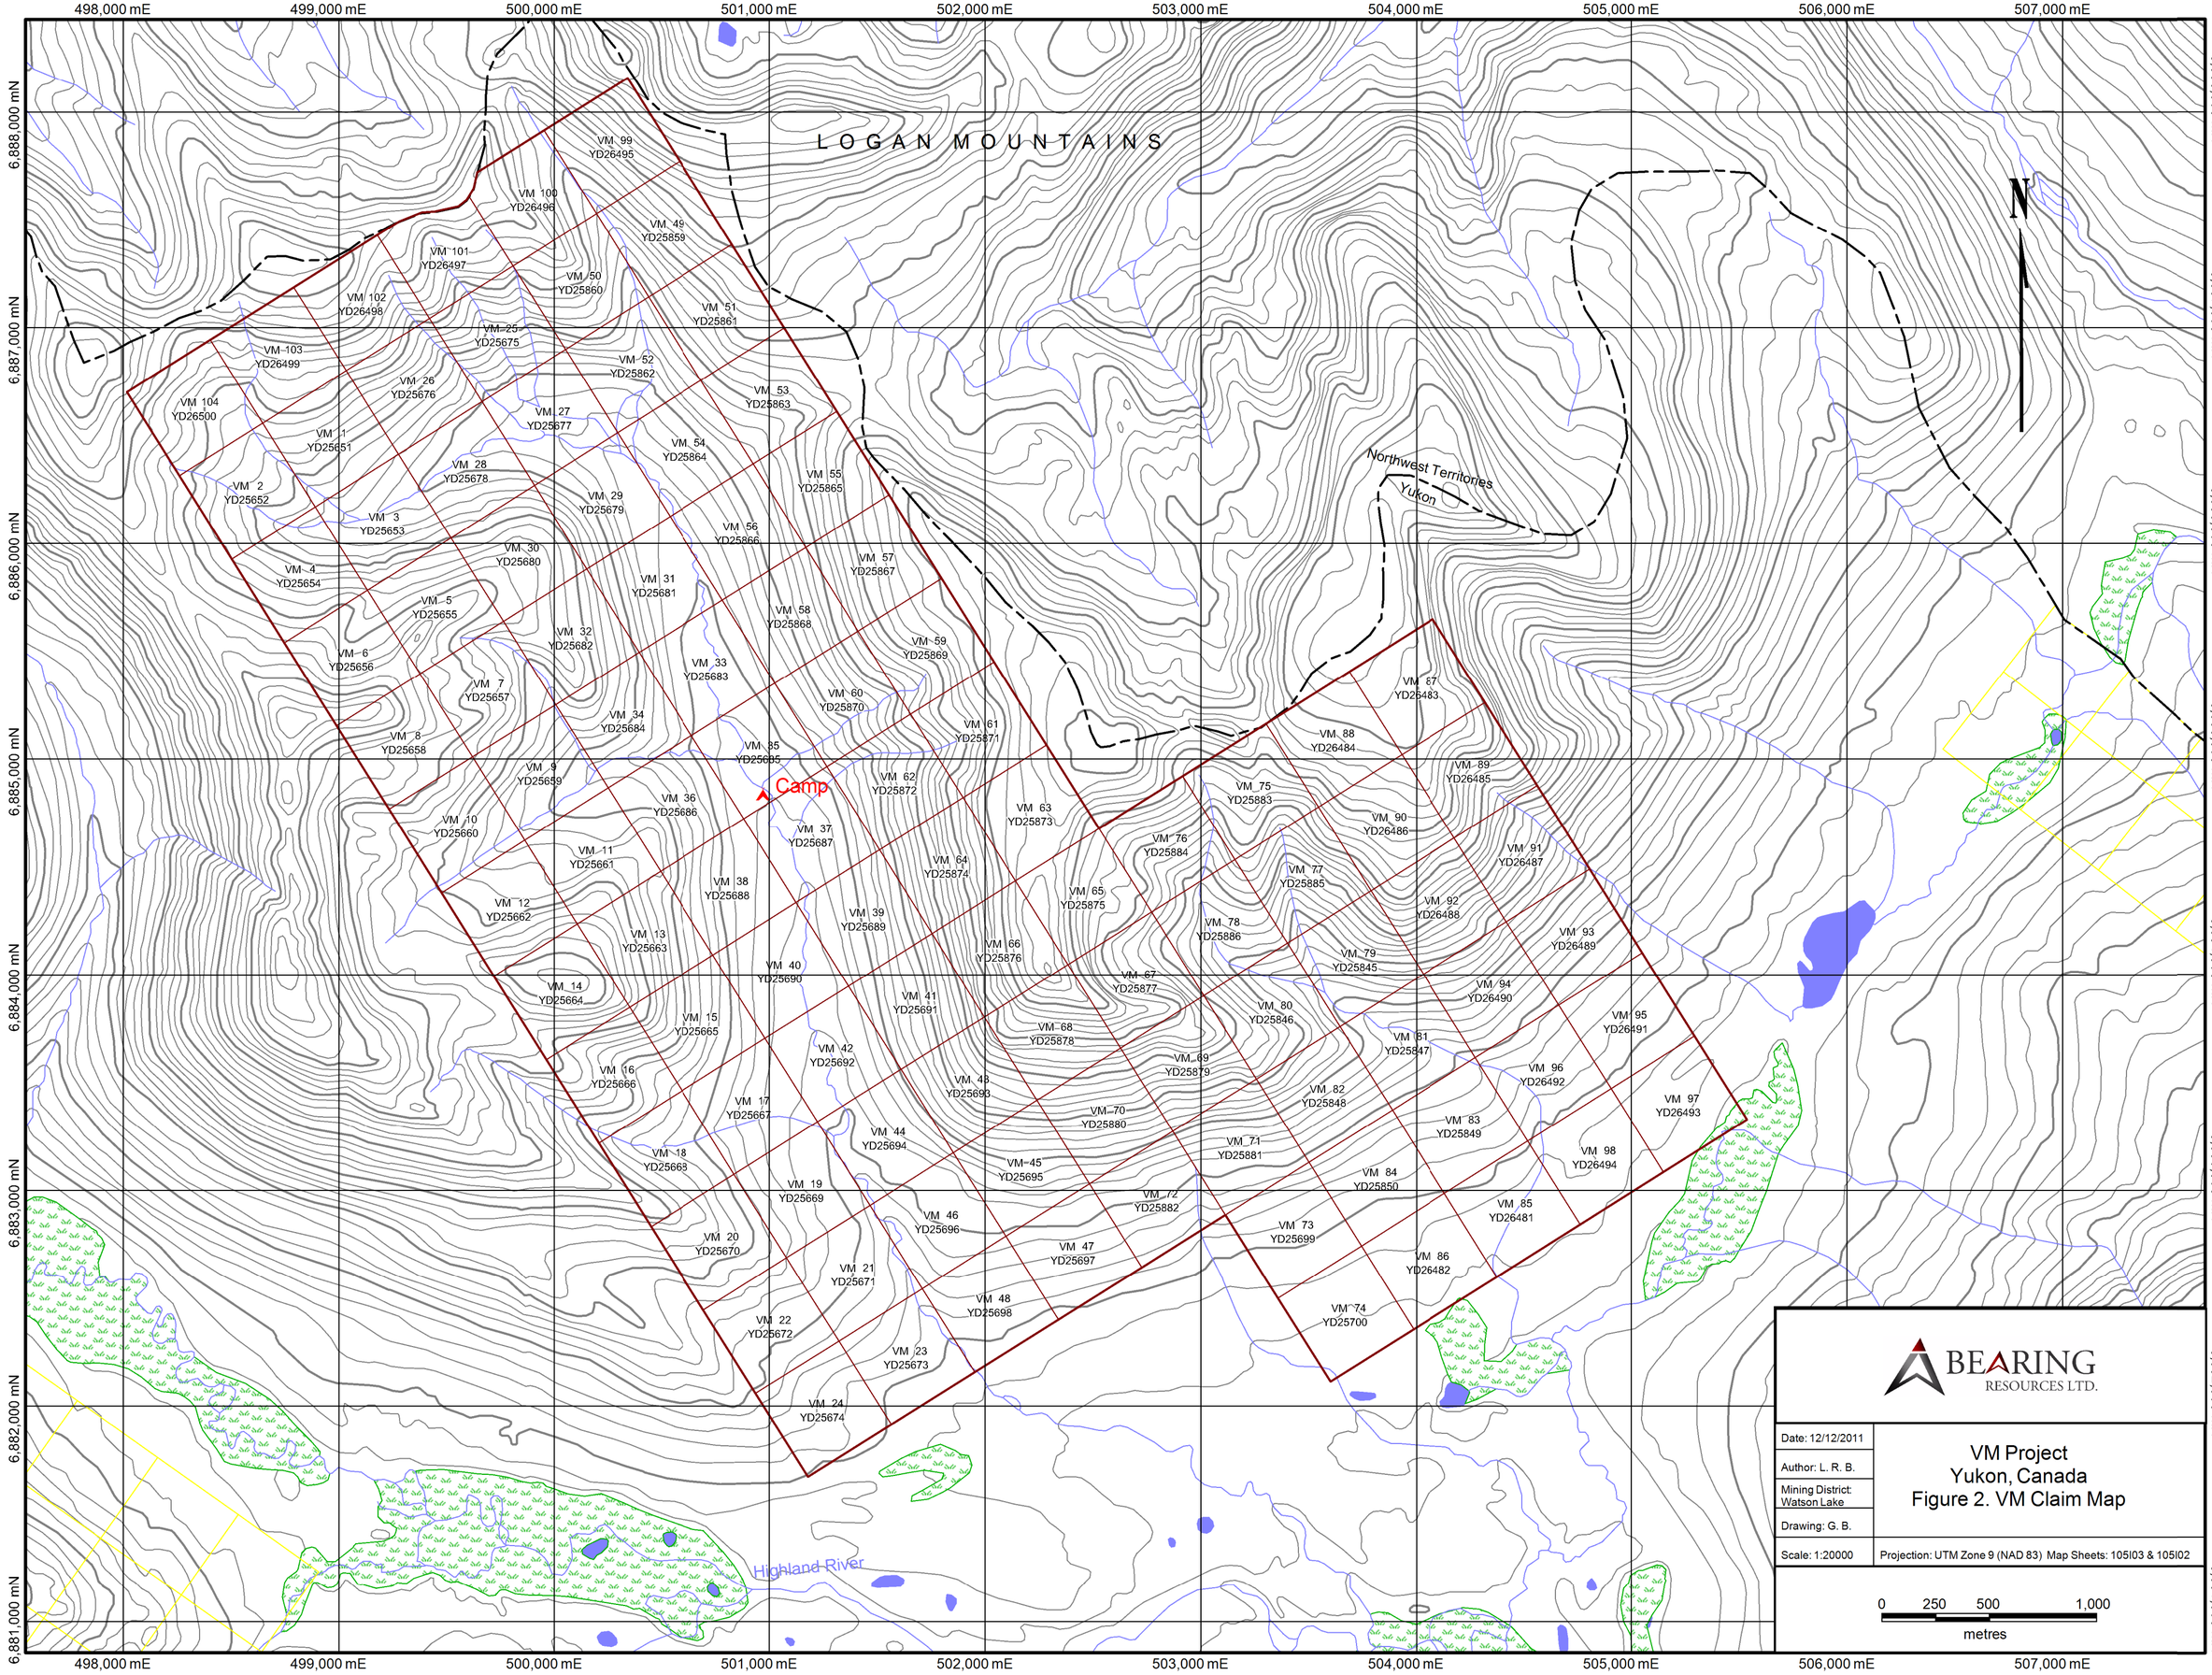

BEARING RESOURCES LTD.

Date: 12/12/2011	VM Project Yukon, Canada Figure 2. VM Claim Map
Author: L. R. B.	
Mining District: Watson Lake	
Drawing: G. B.	
Scale: 1:20000	Projection: UTM Zone 9 (NAD 83) Map Sheets: 105I03 & 105I02

648 claims, covering four gold RGS anomalies. Further to the west the Owl 1-164 claims cover gold and arsenic geochemical anomalies. Early explorative work in the claim region supports potential for gold mineralization associated with distal, often buried intrusions.

4. REGIONAL GEOLOGY

The VM prospect is located on the 1:125 000-scale Little Nahanni River map-sheet (105I) covering 1:50 00 105I/02 (Upper Hyland Lake) and 105I/03 (Little Owls Mountains) map sheets.

The 1:250,000-scale *Geology, Little Nahanni River* map-sheet, was completed by the Geological Survey of Canada (*herein* GSC) in 1992 by S.P. Gordey (Geology, Little Nahanni River, Map 1762A). No mapping has been completed at the 1:50,000-scale to the author's knowledge. The entire region of the claims was glaciated during the late Pleistocene McConnell glaciation (*ca*. 22 Ka).

According the Gordey, the area is underlain by Yusezyu Formation stratasiliciclastic and bioclastic, platformal or continental-margin sedimentary rocks of the Neoproterozoic to Lower Cambrian Hyland Group within the pericratonic Selwyn Basin on the cratonic margin with ancestral North America (Gordey, 1992; Blackburn, 2010; see below for *Table 3. Regional Geological Units*, below & following page for *Figure 3. Regional Geology*). The Selwyn Basin comprises an offshelf continental margin, deep-water shales and clastic wedges forming a basin bounded by platform carbonates to the northeast, the Tintina fault truncates the basin to the southwest (Pigage, 2006).

The Hyland Group Yusezyu Formation (PCH1) metasediments are defined by thin- to thick-bedded, brown to pale green shale, fine to coarse grained quartz-rich sandstone, grit and quartz-pebble conglomerate with minor argillaceous limestone, phyllite, quartzofeldspathic and micaceous psammite, gritty psammite and minor marble (Gordey & Makepeace, 2003).

Table 3. *Regional Geological Units* (Gordey, S.P. and Makepeace, A.J. (*compilers*), 2003).

Unit	*Age*	*Rock Type*
Hyland (PCH) Group-Yusezyu (PCH_1) and Narchilla (PCH_3) Formations	Upper Proterozoic to Lower Cambrian	Thin to thick bedded, brown to pale green shale, fine- to coarse-grained quartz rich sandstone, grit and quartz-pebble conglomerate, minor argillaceous limestone, phyllite, quartzofeldspathic and micaceous psammite, gritty psammite and minor marble.

498,000 mE 499,000 mE 500,000 mE 501,000 mE 502,000 mE 503,000 mE 504,000 mE 505,000 mE 506,000 mE 507,000 mE

6,888,000 mN 6,887,000 mN 6,886,000 mN 6,885,000 mN 6,884,000 mN 6,883,000 mN 6,882,000 mN 6,881,000 mN

LOGAN MOUNTAINS

N

Northwest Territories
Yukon

Camp

Highland River

Bedrock Geology

Hyland Group
Upper Proterozoic and Lower Cambrian

	PCn	Narchilla Formation: maroon, dark blue-grey, and green weathering shale; minor sandstone
	Py	Yusezyu Formation: grey to brown weathering, coarse quartz sandstone and quartz-pebble conglomerate; brown to pale green shale; local limestone member at top of formation

Sources

Gordey, S.P. and Makepeace, A.J. (comp.)
1999: Yukon bedrock geology in Yukon digital geology, S.P. Gordey and A.J. Makepeace (comp.); Geological Survey of Canada Open File D3826 and Exploration and Geological Services Division, Yukon, Indian and Northern Affairs Canada, Open File 1999-1(D)

Gordey. S.P.
1992. Geology, Little Nahanni River, Northwest Territories-Yukon Territory, Geological Survey of Canada, Map 1762A, scale 1:250000

BEARING RESOURCES LTD.

Date: 12/12/2011	VM Project Yukon, Canada Figure 3. Regional Geology
Author: L. R. B.	
Mining District: Watson Lake	
Drawing: G. B.	
Scale: 1:20000	Projection: UTM Zone 9 (NAD 83) Map Sheets: 105I03 & 105I02

0 250 500 1,000
metres

The claims are situated in the Little Nahanni River region, where gold occurrences form a 90-km-long belt along the Upper Hyland River that is considered to be the south-easternmost part of the Tombstone Gold Belt (*herein* TGB). The TGB follows a southeast trend of mid- to late-Cretaceous granitoid intrusions extending from eastern Alaska, across central Yukon to the Yukon-British Columbia border, roughly parallel to the accretionary ancestral North American Craton boundary. Widespread anomalous RGS gold geochemistry and geology highlight the area as an emerging new gold camp in the Yukon. Gold in the region occurs in high grade quartz veins and intensely silicified zones within metasediments and are represented by numerous known occurrences, including (from south to north) 3ACE and GREEN (Northern Tiger Resources Inc. "Northern Tiger"); FER (Precipitate Gold Ltd.); Bearing's HY-JAY. Hart & Lewis (2006) suggest the vein mineralization have characteristics similar to orogenic gold veins, and thus potentially relate to regional metamorphism and large structural features. No intrusive rocks have been mapped in the region immediate to the VBA claims. Investigation of occurrences in the area showed that the intrusion-related gold model is lacking. Plutons and dykes do not occur in the vicinity of the gold occurrences; there are no obvious zones of hornfels; contact metamorphic minerals and skarns are mostly absent; there is no known mineral or metal zonation typical of intrusion-related systems; and aeromagnetic lows result from massive, variably altered quartz grit and conglomerate and not from unroofed 'low-mag' intrusions (Hart & Lewis, 2006).

The Justin property of Aben Resources Ltd. (*herein* Aben) located 15 kilometres to the southeast of the 3Ace prospect is described as a skarn developed in limestone and associated with monzonite intrusions. Drill results from the POW zone reported 60 m of 1.19 g/t gold as well as historic chip sampling averaging 4.24 g/t Au over 4.5 metres[1].

Bearing Resources completed work on multiple properties in the Hyland region over the 2011 field season. Structural geologist, Simon Craggs wrote an in-house report compiling the structural findings over the region. Craggs (2011) summarized his findings as follows:

Rocks in the region exhibit evidence of comformable sequence of deposition into a basin, and two short cycles of sea level regression and transgression. The field area experienced a protracted history that progressed from high-level thrusting into a brittle-ductile to brittle, transtensional regime of faulting and associated folding. The structure and stratigraphic distribution indicates that the region is part of a faulted, south-east plunging homocline system. Prior to homocline growth, the region experienced a regime of E-NE directed thrusting with associated S_1 fabric development and minor isoclinal folding. S_2 fabric development and associated SE-verging, open folding occurred during the early stages of homocline growth, and was subsequently displaced by regionally widespread, N-S-striking dextral strike-slip faults and subsidiary structures. Mineralization likely occurred coevally with or shortly after the brittle deformation event.

[1] www.abenresources.com/s/JustinGold.asp

5. VM CLAIM AREA GEOLOGY

The VM Property covers a region that has been mapped at the 1:250,000-scale but no detailed mapping of the claims has been completed to the author's knowledge. David Tupper, PGeo. (VP Exploration, Bearing Resources) completed reconnaissance mapping while ground truthing the regional silt anomalies for the length of the program (see following page for *Figure 4. VM Property Geology*). The author spent two days on the property.

Tupper (2011, pers. comm.) encountered typical Yusezyu Formation stratigraphy including the local Limestone member marking the top of the Formation. The claim block borders the Yukon-Northwest Territories boundary and overlies the Yusezyu Fm. To the northeast of the claim block, Gordey (1992) mapped the contact of the older Yusezyu Fm. with the younger Narchilla Fm., which is characterized by finer basinal sediments (shale and minor sandstone). From a regional standpoint it is plausible that the argillaceous unit Gordey mapped as the Narchilla Fm. actually represents an early high sea-level phase of deposition in the Yusezyu Fm. (Craggs, 2011). In the area of the VM claims this unit is represented by platy cleaved, flaggy banded gunsteel grey and pale grey shale. Calcareous quartz-rich meta-sediments (calcarenite, psammite and quartzite) were mapped on the property and correspond to the Algae Lake member within the Yusezyu Formation. The stratigraphy observed may represent the edge of a carbonate platform and would be a suitable unit sediment-hosted mineralization. A sericitic, box-worked green slate (locally metamorphosed to phyllite) was observed and represents a good marker horizon.

Numerous, distinct, quartz ± carbonate, chlorite veins were observed on the claims (see *Photo-plate 1*, below). Very little sulphide content was noted in this vein material and it is plausible that the arsenic anomalies are reflecting the distinct sericitic-shale unit.

Photo-plate 1. Typical quartz-carbonate veining as seen at station TVM029.

Figure 4. VM Property Geology

498,000 mE | 499,000 mE | 500,000 mE | 501,000 mE | 502,000 mE | 503,000 mE | 504,000 mE | 505,000 mE | 506,000 mE | 507,000 mE

6,888,000 mN | 6,887,000 mN | 6,886,000 mN | 6,885,000 mN | 6,884,000 mN | 6,883,000 mN | 6,882,000 mN | 6,881,000 mN

LOGAN MOUNTAINS

Northwest Territories
Yukon

Camp

Highland River

TVM01 TVM02 TVM03 TVM04 TVM05 TVMG ES286216 TVMS ES286533
TVM06 TVM07 TVM08 TVM09 TVM10 SWLWR002
TVM11 TVM12 GHLWR007
TVM13 TVM14 TVM15 TVMG ES286217 TVM16 TVM17 TVM18 TVMS ES285536 TVM19 TVM20 TVM21
TVM22 TVM23 TVM24 TVM25 TVM26 TVM27 TVM28 TVMF ES286215 TVMG ES286218 TVM29 TVM30 TVM31 TVM32 TVM33
TVM34 TVM35 TVM36 TVM37 TVM38 TVM39 TVM40 TVM41 TVM42

Rock Types

Local Units

- Quartz Grit
- Phylite
- Slate
- Limestone

Regional Geological Units

Hyland Group
Upper Proterozoic and Lower Cambrian

PCn	Narchilla Formation: maroon, dark blue-grey, and green weathering shale; minor sandstone
Py	Yusezyu Formation: grey to brown weathering, coarse quartz sandstone and quartz-pebble conglomerate; brown to pale green shale; local limestone member at top of formation

Property Geology

- Bedding
- Cleavage
- Vein
- Faulting
- S1 Lineation
- S2 Lineation
- Slickensides
- Outcrop Oulines
- Geological Contact (Observed/Interpreted)

BEARING RESOURCES LTD.

Date: 12/20/2011	VM Project Yukon, Canda Figure 4. Property Geology
Author: D. W. T.	
Mining District: Watson Lake	
Drawing: G. B.	
Scale: 1:20000	Projection: UTM Zone 9 (NAD 83) Map Sheets: 105I03 & 105I02

0 250 500 1,000
metres

6. 2011 EXPLORATION PROGRAM

The 2011 exploration program on the property was threefold:

1. Reconnaissance soil sampling;
2. Stream sediment (silt) sampling; and
3. Ground truthing (prospecting/mapping).

The exploration program was completed from August 13-18th, 2011, starting out with a five-man crew and sizing down to a four-man crew for a total of 25-man days.

6.1 Reconnaissance Soil Sampling

Contour, ridgeline and line-azimuth controlled soil samples were collected during the program to cover the claim-block. At each station a 4" X 6" Kraft soil sample bag was filled, rock chips removed, and a detailed sample description (depth, colour, moisture & organic content) was noted. The soils were dried, sieved and assayed using ICP-EOS aqua-regia digestion with a trace-Au Fire Assay Finish. A total of 161 samples were collected during the program (see *Figure 5. Soil & Stream Sample As-Proportional Bubble Plot,* page 16; *Figure 6. Soil & Stream Sediment Sample Au-Proportional Bubble Plot*, page 18*; Appendix II- Geochemical Sample Data – Soil;* and *Appendix IV- Assay Certificates*).

Of the 161 samples collected, 43 samples reported ≥10 ppb Au, 10 samples reported ≥20 ppb Au with the most anomalous sample reporting 51 ppb Au. These anomalous samples did not appear correlative with anomalous arsenic geochemistry. The arsenic anomalies may be coincident with the green, sericitic shale unit (?) exposed on the claims.

498,000 mE 499,000 mE 500,000 mE 501,000 mE 502,000 mE 503,000 mE 504,000 mE 505,000 mE 506,000 mE 507,000 mE

6,888,000 mN 6,887,000 mN 6,886,000 mN 6,885,000 mN 6,884,000 mN 6,883,000 mN 6,882,000 mN 6,881,000 mN

LOGAN MOUNTAINS

N

Northwest Territories
Yukon

Camp

Highland River

VM Soil - As (ppm)

- 160 to 500 (1)
- 45 to 160 (13)
- 25 to 45 (13)
- 0 to 25 (127)

VM Silt - As (ppm)

- 25 to 45 (2)
- 0 to 25 (8)

BEARING RESOURCES LTD.

Date: 12/12/2011	VM Project Yukon, Canada Figure 5. Soil & Stream Sediment As-Proportional Bubble Plot
Author: L. R. B.	
Mining District: Watson Lake	
Drawing: G. B.	
Scale: 1:20000	Projection: UTM Zone 9 (NAD 83) Map Sheets: 105I03 & 105I02

0 250 500 1,000
metres

6.2 Stream Sediment Sampling

Stream sediment (silt) samples were collected within the streams found on the property to follow up on the anomalous geochemistry obtained during the RGS survey by the government. These samples were collected in accordance with protocol outlined by Bond (2001) in similarly glaciated (McConnell glaciation, *ca.* 22 Ka) regions. At each sample station a 2-kg bulk sediment sample was collected for geochemical analysis and a detailed sample descriptions (topographic position, slope, soil and matrix properties *etc*.) was noted. Samples were dried, split, sieved and assayed using ICP-EOS aqua-regia digestion with a trace-Au Fire Assay Finish.

A total of 8 stream sediment samples were collected (see *Figure 5. Soil & Stream Sample As-Proportional Bubble Plot,* page 16; *Figure 6. Soil & Stream Sediment Sample Au-Proportional Bubble Plot*, page 18*; Appendix II- Geochemical Sample Data – Silt;* and *Appendix IV- Assay Certificates*).

Of the eight-stream sediment samples collected, two reported ≥10 ppb Au, with the most anomalous sample reporting 61 ppb Au, placing it in the ≥99% for Au with respect to the regional geochemistry. These anomalous samples did not appear correlative with anomalous arsenic geochemistry. Two of the silt samples were collected on the claims, the remaining 6 samples were collected just outside the claim region for reconnaissance.

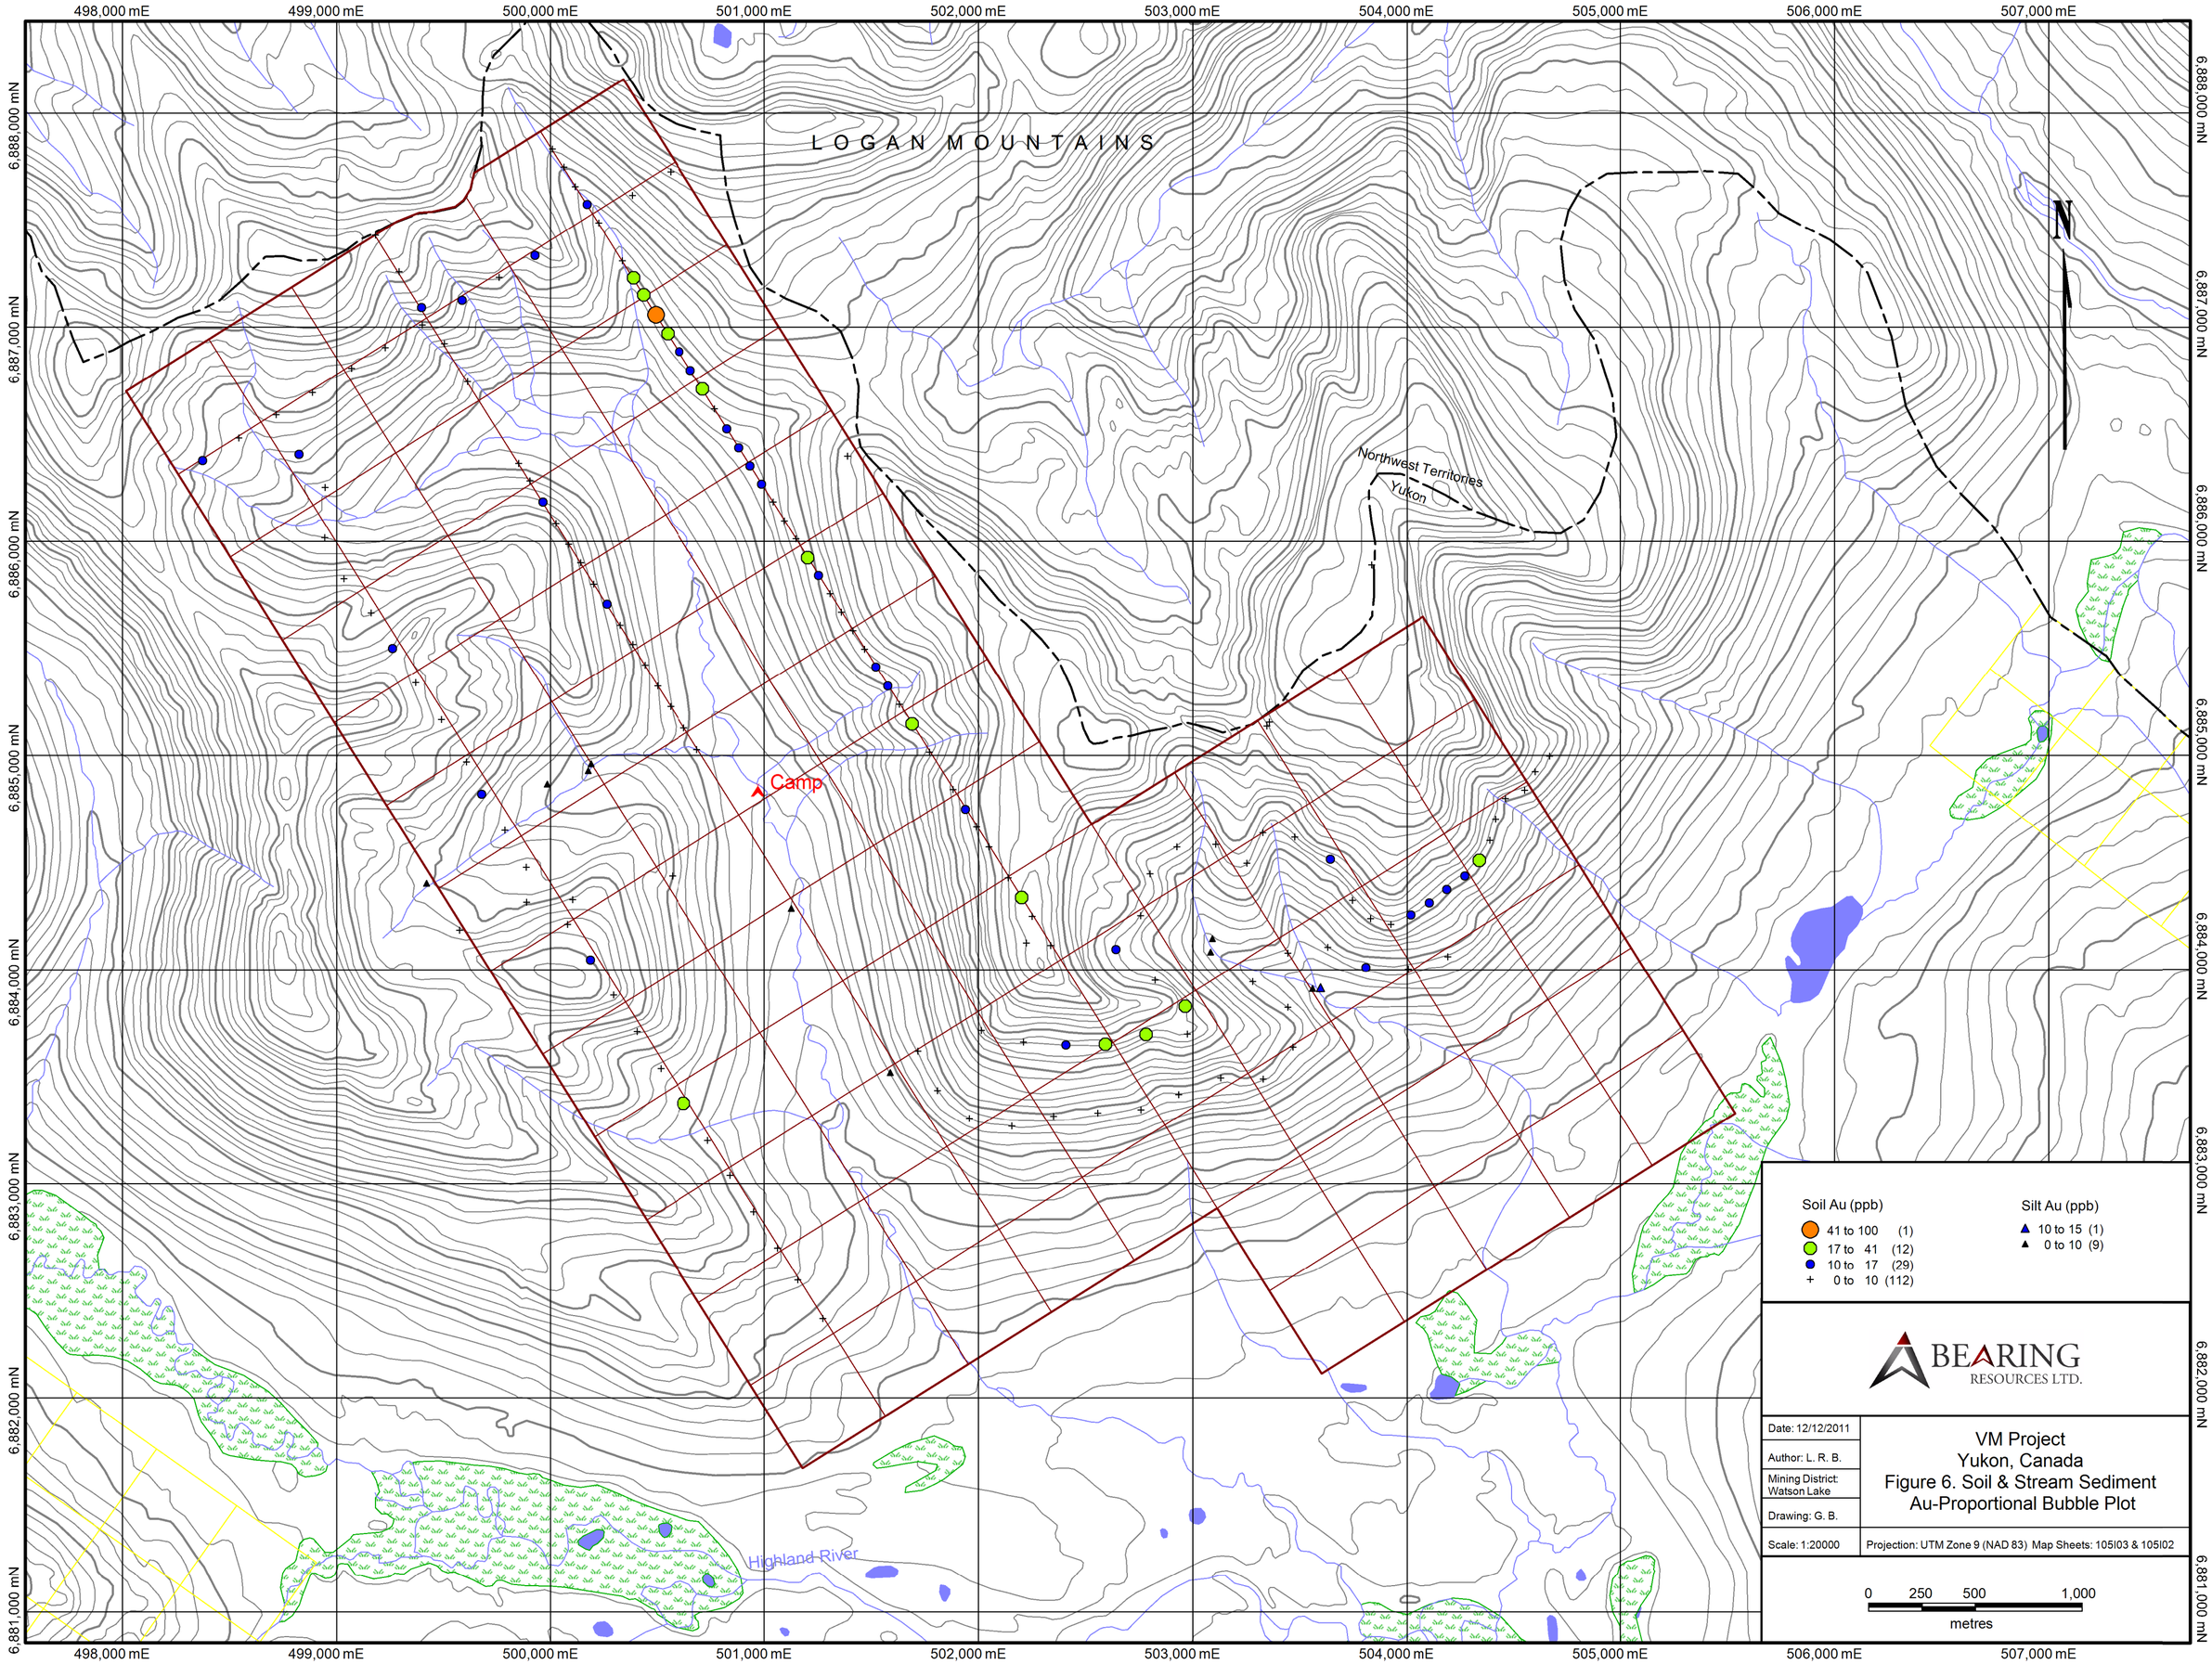
498,000 mE
499,000 mE
500,000 mE
501,000 mE
502,000 mE
503,000 mE
504,000 mE
505,000 mE
506,000 mE
507,000 mE
6,888,000 mN
6,887,000 mN
6,886,000 mN
6,885,000 mN
6,884,000 mN
6,883,000 mN
6,882,000 mN
6,881,000 mN
LOGAN MOUNTAINS
Camp
Northwest Territories
Yukon
Highland River
N
Soil Au (ppb)
41 to 100 (1)
17 to 41 (12)
10 to 17 (29)
0 to 10 (112)
Silt Au (ppb)
10 to 15 (1)
0 to 10 (9)
BEARING
RESOURCES LTD.
Date: 12/12/2011
Author: L. R. B.
Mining District: Watson Lake
Drawing: G. B.
VM Project
Yukon, Canada
Figure 6. Soil & Stream Sediment
Au-Proportional Bubble Plot
Scale: 1:20000
Projection: UTM Zone 9 (NAD 83) Map Sheets: 105I03 & 105I02
0 250 500 1,000
metres

6.3 Ground Truthing

Reconnaissance prospecting and mapping was completed over the claims examining potential for three types of mineral targets: intrusive-related gold, Carlin-type and gold-quartz vein mineralization. Zones of particular interest for ground truthing were highlighted, particularly areas that exhibit the structural hallmarks for both types of mineralization– prominent faults and regional scale antiformal traps with thrust faults, respectively. All samples were analyzed using ICP-EOS for 45 elements with a trace-gold fire assay finish. A total of 4 rock samples were collected (see *Table 4. Rock Sample Descriptions,* below*; Appendix III- Detailed Mapping Station Data;* and *Appendix IV- Assay Certificates*). One rock sample reported 12 ppb gold.

All of the rock samples collected during the program were quartz vein material ± carbonate, chlorite. Two of the samples contained visible sulphide content (see *Photo-plate 2*, below). None of the four rock samples reported appreciable gold.

Table 4. *Rock Sample Descriptions*

Name	Easting	Northing	Description	Au (ppb)	Ag (ppm)	As (ppm)	Cu (ppm)	Zn (ppm)	Pb (ppm)	Sr (ppm)
TvmGE5286216	503350	6885143	(Grab) Quartz vein hosted in psammite to very coarse grit / conglomerate. <35cm thick, rusty, trace galena.	12.0	3.1	4.0	38.5	11.3	2970.0	5.1
TvmGE5286217	500572	6884437	(Grab) White quartz veins (no visible sulphide).	<2	<0.2	2.0	25.6	28.7	5.9	7.6
TvmGE5286218	501675	6886213	(Grab) Quartz-chlorite-calcite vein, rusty, <20cm-thick, vuggy with euhedral quartz crystals.	<2	<0.2	5.0	3.2	3.7	5.7	121.0
TvmFE5286219	501662	6886217	(Float) Vuggy quartz vein (2cm-thick) with intense chlorite+SiO2 alteration to calcic-grit host. Anhedral, fresh, pyrite in salvages.	<2	<0.2	8.0	3.7	17.0	4.6	142.0

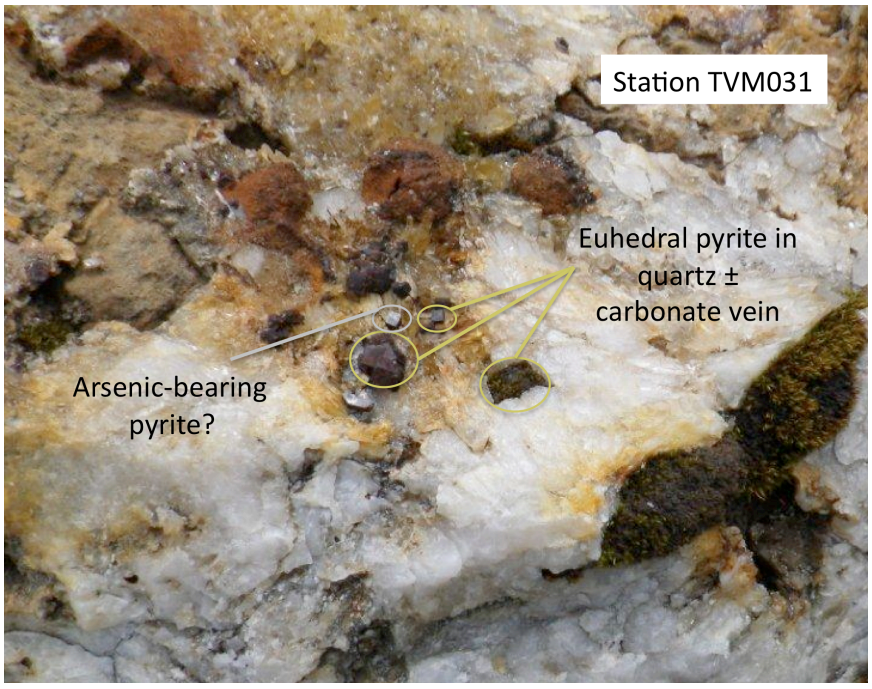

Photo-plate 2. Euhedral pyrite (and possible arsenic-bearing pyrite?) within quartz-carbonate vein.

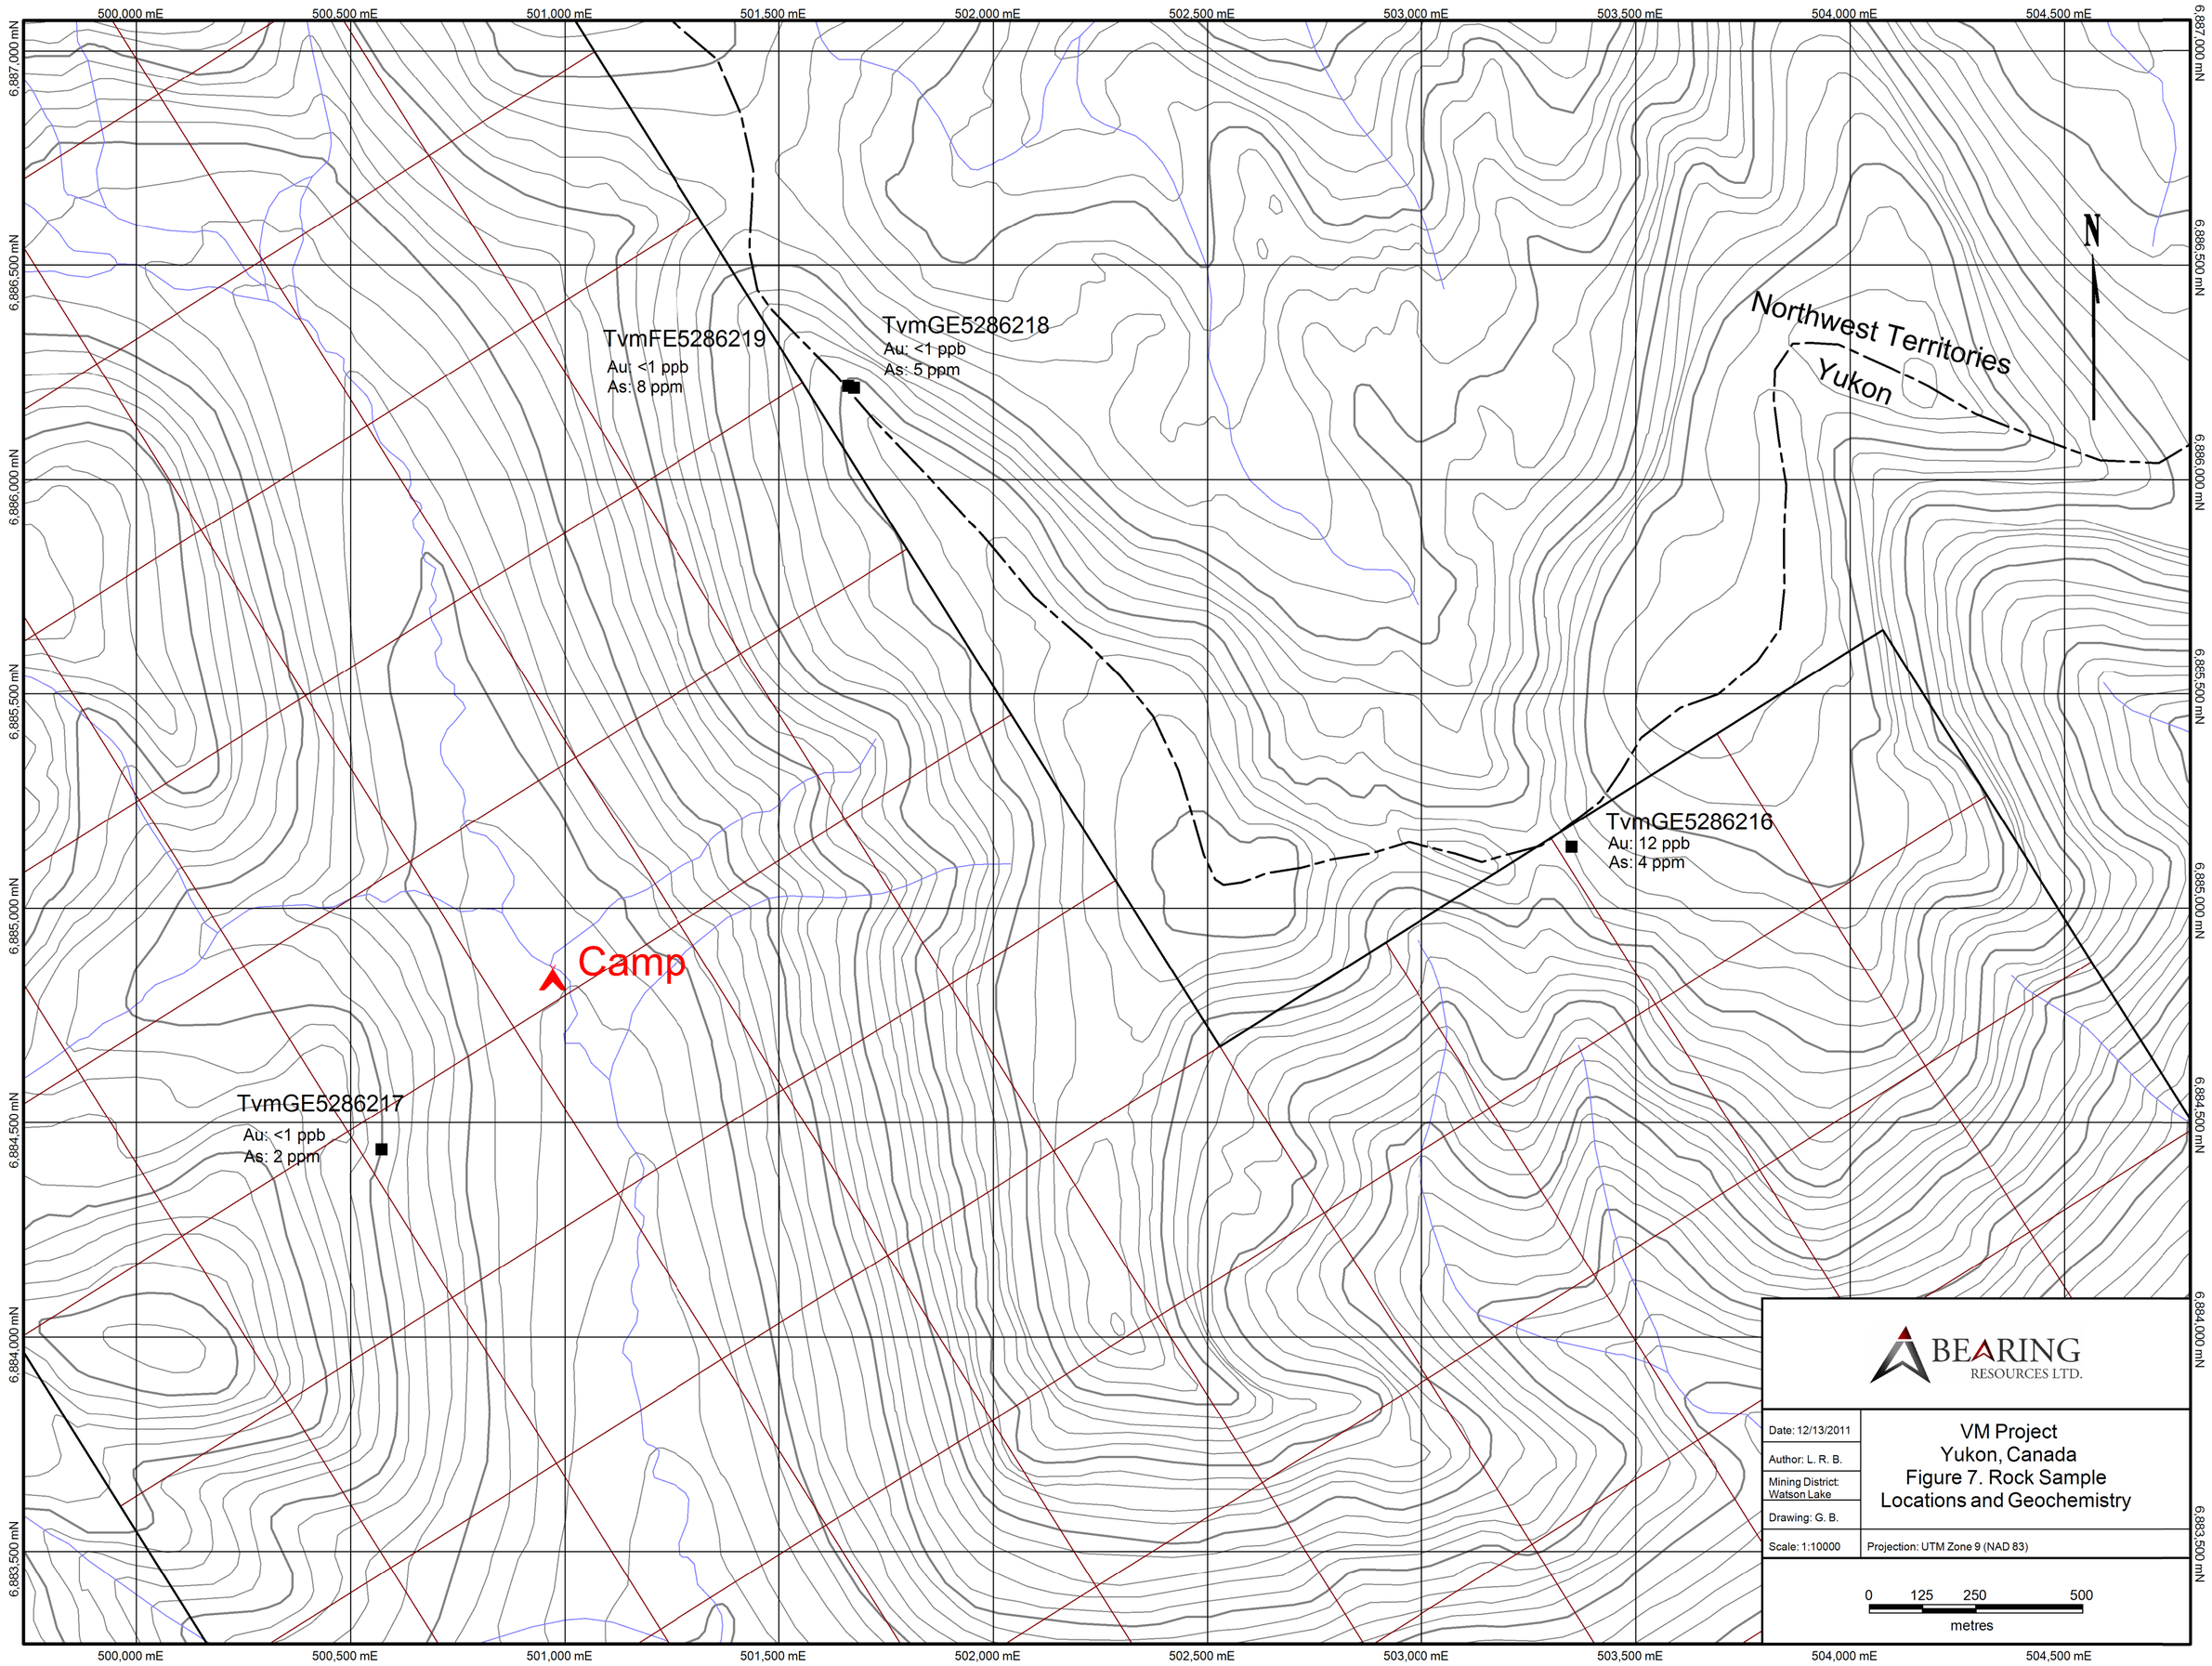
500,000 mE
500,500 mE
501,000 mE
501,500 mE
502,000 mE
502,500 mE
503,000 mE
503,500 mE
504,000 mE
504,500 mE
6,887,000 mN
6,886,500 mN
6,886,000 mN
6,885,500 mN
6,885,000 mN
6,884,500 mN
6,884,000 mN
6,883,500 mN
TvmFE5286219
Au: <1 ppb
As: 8 ppm
TvmGE5286218
Au: <1 ppb
As: 5 ppm
Northwest Territories
Yukon
N
TvmGE5286216
Au: 12 ppb
As: 4 ppm
Camp
TvmGE5286217
Au: <1 ppb
As: 2 ppm
BEARING
RESOURCES LTD.
Date: 12/13/2011
Author: L. R. B.
Mining District: Watson Lake
Drawing: G. B.
VM Project
Yukon, Canada
Figure 7. Rock Sample Locations and Geochemistry
Scale: 1:10000
Projection: UTM Zone 9 (NAD 83)
0
125
250
500
metres

6. TARGET RATIONALE

In October 2010, Bearing Resources staked the VM 1-*104* quartz claims to cover regional silt geochemistry anomalies (one As 90-95 percentile and two Au >99 percentile), favorable geology and structural lineaments highlighted by regional mapping of the area. No known previous exploration work has been completed on the claims known to the author. Regional aeromagnetics has not been completed over the region discussed in this report.

The GSC collected the three RGS samples in 1981 from the area of the recently staked VM claims (refer McCurdy *et al.,* 2009; and *Table* 5, below). Of these three samples, two were from the same location as part of quality control (*i.e.,* a duplicate). Sample 105I813102 reported As in the 90-95 percentile (50.8 ppm As) and Au as >99 percentile (53 ppb Au) with respect to samples collected in the Selwyn Basin. Sample 105I813103 and duplicate sample 105I813104 reported similar arsenic (21 and 22 ppb, respectively) in the 50-90 percentile range, however, gold ranged widely from 9 and 41 ppb, suggesting possible nugget effect (?).

Table 5. *RGS Samples*

Sample ID	Easting	Northing	As (ppm)	%	Au (ppb)	%	Colour	Depth (m)	Stream Flow	Stream Physiography	Bank Type & Drainage
105I813102	504953	6883402	50.8	90-95%	53	>99%	Black	0.1	Slow	Mountain, youthful	Alluvial, dendritic
105I813103	501927	6882571	21	50-90%	9	50-90%	Grey-blue	0.2	Moderate	Mountain, youthful	Alluvial, dendritic
105I813104*	501927	6882571	22	50-90%	41	>99%	Grey-blue	0.2	Moderate	Mountain, youthful	Alluvial, dendritic

*Repeat / Duplicate

According to Bradshaw & vanRanden (2004), the mineral tract has a high mineral potential (relative to the Territory) for plutonic Au, Carlin-type, SEDEX, W-skarn and polymetallic veins (see *Figure 8. Plutonic Au & Carlin-type Yukon-wide Mineral Potential*, page 23).

Several styles of gold mineralization are associated with three mid-Cretaceous (90-98 Ma) plutonic suites (Tungsten, Mayo & Tombstone) in the Selwyn Basin forming the Selwyn Magmatic Province, which comprises the southeastern portion of the Tombstone Gold Belt (TGB). The TGB is the type-area the intrusion-related gold system (IRGS) deposit model. Plutonic related-gold mineralization in the southeast portion of the TGB (in the region of the claims) is associated with the Selwyn Magmatic province (Hart, 2006). More specifically, the property is within the Upper Hyland Gold Belt (a portion of the TGB), which includes the Hy/Fer, 3-Ace, Sprogge and Horn properties. During the program, the crew examined potential for plutonic-Au mineralization, by prospecting for hornfelsed sediments with disseminated sulphide (arsenic-antimony bearing quartz veins). An orogenic model for gold mineralization is also considered plausible.

The mineral tract was also ranked as high for potential Carlin-type mineralization and as aforementioned, the claims were staked to cover favorable

carbonate stratigraphy and structural lineaments highlighted by regional mapping and by anomalous RGS sample geochemistry. With recent findings at ATAC Resources 'Rackla Gold Belt' (Rau & Nadaleen trends) in similarly aged stratigraphy to the NNW, Bearing Resources also prospected for Carlin-type gold potential during the program. Particularily, the crew examined favourable, folded carbonate-bearing host rock stratigraphy (see *Photo-plate 3*, below).

Photo-plate 3. Parasitic folds with axial-planar cleavage within limy sediments (calcarenite?) as viewed at station TVM040.

Recent explorative work on Northern Tiger's '3Ace' Property, located approximately 50 km to the southeast, has resulted in the finding of multiple zones of gold mineralization in quartz veins hosted in similar country rock. The first showing in the vicinity of the 3Ace claims was staked in 1963, this showing is represented by MINFILE 105H 036 ('Road') where the MINFILE capsule states that the showing is a Au-quartz vein with trace amounts of silver and arsenic. In 1998, Alex McMillan staked the 3-Ace claims, which were subsequently added to and optioned by 2010 Northern Tiger Resources in 2010. Au-quartz vein mineralization was ranked as moderate potential within the tract encompassing both the neighbouring 3-Ace' Property and Bearing Resources VM Property. Due to the proximity of the 3-Ace Property, Bearing Resources examined the quartz ± carbonate veins for visible gold.

Figure 8. *Plutonic Au & Carlin-type Yukon-wide Mineral Potential (from Bradshaw & vanRanden, 2004).*

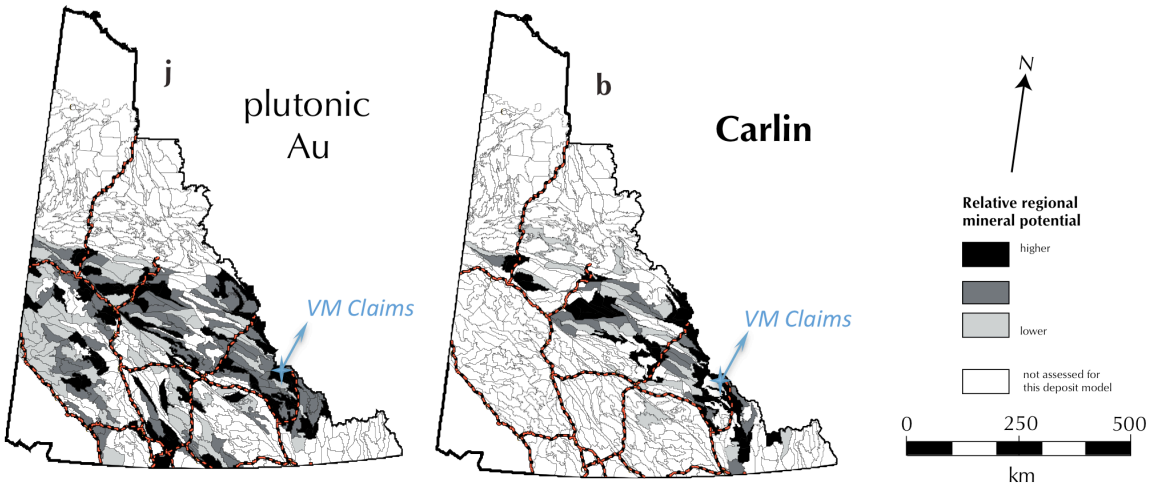

8. CONCLUSIONS

Bearing Resources completed a reconnaissance exploration program on the VM from August 13th to 10th for a total of 25 man-days at a cost of $45,036.16. During the program a total of 161 soils, 8 silts and 4 rock samples were collected and sent in for geochemical analysis. The project was successful in locating two zones with elevated gold-in-soil values, one in the northwest corner of the block trending roughly north-south and another in the south central claim block area trending east-west (just north of the two anomalous gold RGS samples). Elevated gold-in-soil values appear to be associated with veining in more competent carbonaceous strata however no rock samples have been collected to date supporting this concept.

Although Bearing Resources was unable to find appreciable gold mineralization in rock samples, some encouraging gold-in-soil and anomalous silt geochemistry suggest potential and therefore the author recommends some additional work to the be completed on the claim block. An east-west trending zone was highlighted by soil sampled in the south-central portion of the claim-block; the south-end of the claim block is yet to be geochemically tested.

9. BUDGET SUMMARY

A total of $45,036.16 was spent on the exploration program (refer to *Table 6*, below).

Table 6. *2011 Exploration Program Expenditures*

	Date	Supplier	Invoice Number	Cost	Totals
Analytical costs	08/30/2011	AGAT Lab	INV 11K31452M	173.51	
	09/28/2011	AGAT Lab		3745.39	
					$3,918.90
Helicopter costs	08/19/2011	Heli Dynamics Ltd	INV 11330	2,320.00	
	08/19/2011	Heli Dynamics Ltd	INV 11330 A	725.00	
	08/13/2011	Heli Dynamics Ltd	INV 11835 HELI	2,827.50	
	08/14/2011	Heli Dynamics Ltd	INV 11837 HELI	870.00	
	08/15/2011	Heli Dynamics Ltd	INV 11840 HELI	942.50	
	08/13/2011	Heli Dynamics Ltd	INV 11835 HELI	2,827.50	
	08/14/2011	Heli Dynamics Ltd	INV 11837 HELI	870.00	
	08/15/2011	Heli Dynamics Ltd	INV 11840 HELI	942.50	
	08/16/2011	Heli Dynamics Ltd	INV 11323 HELI	870.00	
	08/17/2011	Heli Dynamics Ltd	INV 11325 HELI	1,595.00	
	09/01/2011	Fireweed Helicopters	INV 3233 FIREWEED	1,350.00	
					$16,140.00
Fuel - Bulk	07/14/2011	North 60 Petro	EMAIL Fuel North60	1,073.91	
					$1,073.91
Expediting	08/31/2011	K. MILLER ENTERPRISES LTD	INV 27438 K MILLER	897.50	
					$897.50
Wages	08/15/2011	Graeme Buckler	110815 payroll	750.00	
	08/15/2011	Taylor Philley	110831 Payroll	600.00	
	08/31/2011	Chris Schuh	110831 Payroll	1,125.00	
	08/31/2011	Graeme Buckler	20110831 payroll	1,500.00	
	08/31/2011	Taylor Philley	20110831 payroll	1,000.00	
	08/31/2011	David Tupper - 5 days	est.	3,000.00	
	09/15/2011	Graeme Buckler	PAYROLL 20110915	250.00	
					8,225.00
Contractors	05/30/2011	William Mann	INV 11-92 YUKON PRJ	2,175.00	
	08/29/2011	Keno Hill Exploration Corp	INV 83565 KENO	2,868.54	
	08/29/2011	Lauren Blackburn	INV 83566	300.00	
					$5,343.54
Expenses	08/24/2011	Dave Tupper	ER AUG 11-D TUPPER	50.00	
(food, hardware, supplies)	08/04/2011	Deakin Industries	INV 03B-21232	51.00	
	06/13/2011	Dave Tupper	110613 ER DTupper	606.36	
	06/13/2011	Dave Tupper	110613 ER DTupper	277.88	
	06/13/2011	Dave Tupper	110613 ER DTupper	498.00	
	06/13/2011	Dave Tupper	110613 ER DTupper	182.03	
	09/12/2011	Graeme Buckler	ER SEP 11-GB	142.13	
					1,807.40
Accomadation & Airfare	08/24/2011	Dave Tupper	ER AUG 11-D TUPPER	4,220.31	
	08/26/2011	Taylor Philley	ER AUG 11- T PHILLEY	103.23	
	09/12/2011	Graeme Buckler	ER SEP 11-GB	27.75	
					$4,351.29
Map Preparation	07/04/2011	Terry Lee	INV 20110704	332.33	
					$332.33
		Field Expenses - subtotal:			**$42,089.87**
Report Preparation		Keno Hill Exploration Corp.	(7% of field costs)		$2,946.29
		TOTAL ELIGIBLE EXPLORATION EXPENDITURES:			$45,036.16

10. RECOMMENDATIONS FOR FUTURE WORK

A tentative schedule has been proposed for the 2012 exploration program on the VM Claims (see *Table 7. Work Schedule* below).

Table 7. *Work Schedule*

Task	Geologist	Geologist	Exploration Personnel 1	Exploration Personnel 2	Exploration Personnel 3	Exploration Personnel 4	Total man-days
Mob-In	X	X	X	X	X	X	6
Ground Truthing (mapping & prospecting)	XX	XX					4
Stream Sediment Sampling			X	X	X	X	4
Soil sampling			X	X	X	X	4
Mob-out	X	X	X	X	X	X	6

TOTAL = 24 man-days

It is proposed that the crew operate from a fly camp with helicopter support (if necessary) in the southern end of the claim area (at E501250, N6883325) to access the southern region of the claims which were not examined during the program. Upon completion of the program the camp and all garbage and equipment will be demobilized back to the Nahanni Highway via helicopter and then driven back to Whitehorse. It is expected that the program will cost approximately $33,782.50 (refer to *Table 8*, for estimated program budget on following page).

Table 8. *Proposed Exploration Program Budget*

Staff	**Man days @ rate**		**Cost**
4-person exploration personnel, soil sampling	4 man days @ $300/day		$1,200.00
2-person exploration personnel, Stream sediment sampling	4 man days @ $300/day		$1,200.00
4-person exploration personnel, mobe-in/out	8 man days @ $300/day	(Based on a 4-day program)- managed by two geologists	$2,400.00
2-geologists, ground truthing & recce mapping	4 man days @ $525/day		$2,100.00
2- geologists, mob in and out	4 man days @ $525/day		$2,100.00
Geochem	**Sample cost**	**Samples per man day**	**Cost**
Assays (Soil)- 120	$25/sample	~30 samples/person/day	$3,000.00
Assays (Silt)- 40	$25/sample	~10 samples/person/day	$1,000.00
Assays (Rock)- 16	$25/sample	~4 samples/person/day	$400.00
Transportation	**Rate/hr (incl. fuel)**		
Helicopter	10 hrs @ $1500/hr	(Heli mob & support)	$15,000.00
2 Trucks*	2 days @ $50/day	YTG Guideline Rate	$200.00
1 Trailor	2 days		
Daily Living Expenses	**YTG Guideline Rate**		
4-person field personnel	$100/person/4 days	YTG Guideline Rate	$1,600.00
2-geologists	$100/person/4 days	YTG Guideline Rate	$800.00
Report & Compilation	**Rate**	**Total Estimated Cost**	
1 geologist	$525/day	5% of total cost	$2,782.50

***TOTAL*= $33,782.[50]**

*Note: does not include fuel costs.

11. Statement of Qualifications

I, Lauren R. Blackburn of PO Box 28, Keno City, Yukon, am an employee of *Keno Hill Exploration Corp*.

I am a graduate of the University Alberta with a BSc. Specialization in Geology. I have worked in Yukon Territory and Mexico since 2006 and in northern Canada (NU, NWT, YT, northern BC) since 2005.

I was on the VM Property August 13 and 14, 2011 and was present for the initial portion of the exploration program as outlined in this Assessment Report. I do not own, or expect to receive any direct interest in the Property described herein for the services rendered in its preparation of this report.

I consent to the use of this report by Bearing Resources for such assessment and/or regulatory and financing purposes deemed necessary.

Dated at Keno City, Yukon Territory this 16th day of December 2011.

Lauren Blackburn B.Sc.
Keno Hill Exploration Corp.,
PO Box 15,
Keno City, Yukon
Y0B 1M0

12. BIBLIOGRAPHY

Blackburn, L.R., 2010. High-sulphidation epithermal Au-Ag-Cu mineralization at the McKay Hill property- a revised geological model. *In*: Yukon Exploration and Geology 2009, K.E. MacFarlane, L.H. Weston and L.R. Blackburn (eds.), Yukon Geological Survey.

Blusson, S.L., 1967. Sekwi Mountain (105P) and Nahanni (105I) map-areas, District of Mackenzie and Yukon Territory, Geological Survey of Canada, Paper no. 68-1A, pp. 14.

Bond, J.D., 2001. Surficial geology and till geochemistry of Weasel Lake map area (105G/13) central Yukon. *In*: Yukon Exploration and Geology 2000, D.S. Emond and L.H. Weston (eds.), Exploration and Geological Services Division, Yukon, Indian and Northern Affairs Canada, p. 73-96.

Bradshaw, G.D. and vanRanden, J.A., 2004. Yukon regional mineral potential by deposit models. *In*: Yukon Exploration and Geology 2003, D.S. Emond and L.L. Lewis (eds.), Yukon Geological Survey, p. 61-68.

Casselman, S., 2005. Report on the 2005 Line-cutting, soil sampling, HLEM and magnetic survey program on the 3-Ace Property, Little Hyland River Area, Yukon. YMIP Final Report 2005-060, North American Tungsten Corporation Ltd.

Craggs, S., 2011. A structural and stratigraphic study of the upper Hyland River Gold Belt (in-house report), 69 pp.

Justin Project, Aben Resources Ltd., <www.abenresources.com/s/JustinGold.asp>, [accessed December 8th, 2011].

McCurdy, M.W., Friske, P.W.B., McNeil, R.J., Day, S.J.A. and Goodfellow, W.D., 2009. Regional Stream Sediment and Water Geochemical Data, eastern Yukon and western Northwest Territories (NTS 105I); GSC Open File 6271 / Yukon Geological Survey Open File 2009-26. 1 CD-ROM.

Gordey, S.P. and Makepeace, A.J. (*compilers*), 2003. Yukon Digital Geology. Exploration and Geological Services Division, Yukon Regional, Indian and Northern Affairs Canada. Open File 1991-1 (D).

Gordey, S.P., 1992. Geology, South Nahanni River area, Northwest Territories-Yukon Territory. Geological Survey of Canada, Map 1762A, doi:10.4095/183922.

Hart, C.J.R., 2006. Tombstone Gold Belt- Intrusion-related gold, YGS Brochure 2006-6, Yukon Geological Survey/DIAND.

Hart, C.J.R., and Lewis, L.L, 2006. Gold mineralization in the upper Hyland River area: A non-magmatic origin. *In:* Yukon Exploration and Geology 2005, D.S. Emond, G.D. Bradshaw, L.L. Lewis and L.H. Weston (eds.), Yukon Geological Survey, p. 109-125.

Pigage, L., 2006. Selwyn Basin: Zinc-lead-silver-barium. Yukon Geological Survey, YGS Brochure: 2006-2.

Rackla Gold Project, 2011. ATAC Resources Ltd, <www.atacresources.com/s/RacklaGold.asp> [accessed November 9th, 2011].

Ryan, S., 2007. Geochemical and Geophysical YMIP Report 06-052, Cantung Area (Horn Claims). Shawn Ryan, YMIP Final Report 06-052.

YGS MapMaker Online, 2011. Yukon Geological Survey, <*http://maps.gov.yk.ca/imf.jsp?site=YGS* > [accessed October 28th, 2011].

3-Ace Project, Northern Tiger Resources Inc, <www.northern-tiger.com/s/3Ace.asp> [accessed November 9th, 2011].

13. APPENDICIES

Appendix I- *VM Claims Information*

Claim Name	Grant No.	Claim Owner	Recording Date	Expiry Date	NTS Map No.
VM 001	YD25651	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 002	YD25652	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 003	YD25653	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 004	YD25654	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 005	YD25655	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 006	YD25656	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 007	YD25657	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 008	YD25658	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 009	YD25659	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 010	YD25660	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 011	YD25661	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 012	YD25662	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 013	YD25663	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 014	YD25664	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 015	YD25665	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 016	YD25666	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 017	YD25667	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 018	YD25668	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 019	YD25669	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 020	YD25670	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 021	YD25671	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 022	YD25672	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 023	YD25673	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 024	YD25674	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 025	YD25675	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 026	YD25676	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 027	YD25677	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 028	YD25678	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 029	YD25679	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 030	YD25680	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 031	YD25681	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 032	YD25682	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 033	YD25683	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 034	YD25684	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 035	YD25685	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 036	YD25686	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 037	YD25687	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 038	YD25688	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 039	YD25689	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 040	YD25690	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 041	YD25691	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 042	YD25692	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 043	YD25693	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 044	YD25694	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 045	YD25695	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 046	YD25696	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 047	YD25697	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 048	YD25698	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 049	YD25859	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 050	YD25860	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 051	YD25861	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 052	YD25862	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 053	YD25863	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 054	YD25864	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02

Claim Name	Grant No.	Claim Owner	Recording Date	Expiry Date	NTS Map No.
VM 055	YD25865	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 056	YD25866	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 057	YD25867	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 058	YD25868	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 059	YD25869	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 060	YD25870	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 061	YD25871	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 062	YD25872	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 063	YD25873	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 064	YD25874	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 065	YD25875	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 066	YD25876	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 067	YD25877	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 068	YD25878	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 069	YD25879	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 070	YD25880	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 071	YD25881	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 072	YD25882	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 073	YD25699	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 074	YD25700	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 075	YD25883	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 076	YD25884	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 077	YD25885	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 078	YD25886	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 079	YD25845	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 080	YD25846	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 081	YD25847	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 082	YD25848	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 083	YD25849	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 084	YD25850	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 085	YD26481	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 086	YD26482	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 087	YD26483	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 088	YD26484	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 089	YD26485	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 090	YD26486	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 091	YD26487	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 092	YD26488	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 093	YD26489	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 094	YD26490	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 095	YD26491	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 096	YD26492	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 097	YD26493	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 098	YD26494	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 099	YD26495	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 100	YD26496	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I02
VM 101	YD26497	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 102	YD26498	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 103	YD26499	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03
VM 104	YD26500	BEARING RESOURCES LTD. - 100%	25/10/2010	25/10/2011	105I03

***Appendix II**- Geochemical Sample Data – Soil & Geochemical Sample Data – Silt*

VM Project - Soil Geochemical Results

Sample No.	Easting	Northing	Sampler	Date	Media	Matrix	Colour	Depth (cm)	Drainage	Organic	Slope	Topography	Bedrock
E5285889	498824	6886405	Chris	14-Aug	Residual	Clay Loam	Light Grey	30	Moderate	Minor	Gentle	Bench	No
E5285890	498946	6886252	Chris	14-Aug	Residual	Clay Loam	Light Brown	30	Moderate	Minor	Gentle	Midslope	No
E5285891	498945	6886016	Chris	14-Aug	Residual	Clay Loam	Greenish Grey	30	Moderate	Minor	Gentle	Midslope	No
E5285892	499034	6885825	Chris	14-Aug	Colluvial	Gravel Loam	Light Brown	25	Moderate	None	Steep	Midslope	No
E5285893	499162	6885666	Chris	14-Aug	Colluvial	Gravel Loam	Light Brown	20	Moderate	Minor	Gentle	Midslope	No
E5285894	499262	6885500	Chris	14-Aug	Colluvial	Loam	Olive Grey	35	Moderate	Minor	Steep	Midslope	No
E5285895	499369	6885339	Chris	14-Aug	Colluvial	Gravel Loam	Light Brown	30	Moderate	Minor	Gentle	Ridgetop	No
E5285896	499490	6885167	Chris	14-Aug	Residual	Loam	Light Brown	25	Moderate	Moderate	Gentle	Ridgetop	No
E5285897	499607	6884970	Chris	14-Aug	Residual	Loam	Light Brown	30	Moderate	Moderate	Gentle	Midslope	No
E5285898	499677	6884818	Chris	14-Aug	Colluvial	Gravel Loam	Light Brown	30	Moderate	Minor	Steep	Midslope	No
E5285899	499786	6884650	Chris	14-Aug	Residual	Loam	Light Brown	30	Poor	Minor	Gentle	Valleybottom	No
E5285900	499886	6884477	Chris	14-Aug	Residual	Clay Loam	Light Grey	40	Moderate	Minor	Gentle	Bench	No
E5285901	500078	6884211	Chris	15-Aug	Residual	Gravel Loam	Light Brown	30	Moderate	Minor	Gentle	Ridgetop	No
E5285902	500186	6884045	Chris	15-Aug	Residual	Loam	Yellow Orange	40	Moderate	Minor	Gentle	Ridgetop	No
E5285903	500293	6883881	Chris	15-Aug	Residual	Gravel Loam	Olive Grey	50	Moderate	Moderate	Gentle	Midslope	No
E5285904	500404	6883710	Chris	15-Aug	Residual	Clay Loam	Light Brown	40	Poor	Moderate	Steep	Midslope	No
E5285905	500516	6883538	Chris	15-Aug	Residual	Clay Loam	Light Brown	35	Moderate	Moderate	Gentle	Midslope	No
E5285906	500622	6883376	Chris	15-Aug	Residual	Clay Loam	Light Brown	30	Moderate	Moderate	Gentle	Midslope	No
E5285907	500735	6883201	Chris	15-Aug	Residual	Loam	Greenish Grey	35	Moderate	High	Gentle	Midslope	No
E5285908	500841	6883038	Chris	15-Aug	Residual	Clay Loam	Greenish Grey	30	Moderate	Minor	Gentle	Midslope	No
E5285909	500950	6882870	Chris	15-Aug	Residual	Loam	Light Brown	50	Moderate	Moderate	Gentle	Midslope	No
E5285910	501062	6882700	Chris	15-Aug	Residual	Clay Loam	Light Brown	30	Moderate	Minor	Gentle	Midslope	No

Sample No.	Rock Shape	Notes	Au (ppb)	Ag (ppm)	Al (%)	As (ppm)	B (ppm)	Ba (ppm)	Be (ppm)	Bi (ppm)	Ca (%)	Cd (ppm)	Ce (ppm)	Co (ppm)	Cr (ppm)	Cu (ppm)
E5285889	Angular		14	<0.2	2.06	13	<5	51	0.60	<1	0.16	<0.5	88	7.9	23.0	45.0
E5285890	Angular		2	<0.2	1.85	13	<5	48	<0.5	<1	0.16	<0.5	71	8.3	20.2	42.3
E5285891	Angular		4	<0.2	1.52	9	<5	41	<0.5	<1	0.29	<0.5	35	7.6	13.9	44.2
E5285892	Angular		2	<0.2	1.44	9	<5	24	<0.5	<1	0.14	<0.5	52	23.6	14.5	52.3
E5285893	Angular		3	<0.2	1.27	7	<5	52	0.60	<1	0.29	<0.5	51	16.1	11.6	32.0
E5285894	Angular		14	0.20	1.46	8	<5	31	<0.5	<1	0.36	<0.5	29	26.7	11.1	38.7
E5285895	Angular		4	<0.2	1.67	5	<5	27	<0.5	<1	0.13	<0.5	58	11.7	18.0	34.6
E5285896	Angular		3	<0.2	1.38	5	<5	19	<0.5	<1	0.01	<0.5	41	8.0	11.8	20.7
E5285897	Angular		4	<0.2	0.99	6	<5	32	<0.5	<1	0.11	<0.5	36	12.1	9.3	27.1
E5285898	Angular		11	<0.2	1.34	73	<5	21	<0.5	<1	<0.01	<0.5	72	12.1	12.1	78.4
E5285899	Angular		8	<0.2	1.22	12	<5	15	<0.5	<1	0.35	<0.5	48	11.5	14.9	40.1
E5285900	Angular		3	<0.2	1.51	6	<5	31	<0.5	<1	0.12	<0.5	37	4.2	19.8	14.3
E5285901	Angular		4	<0.2	2.23	16	<5	24	<0.5	<1	0.17	<0.5	114	23.2	26.7	69.7
E5285902	Angular		14	<0.2	1.76	8	<5	32	<0.5	<1	0.08	<0.5	50	12.2	21.5	63.7
E5285903	Angular		6	<0.2	2.14	14	<5	37	0.60	<1	0.26	<0.5	130	23.7	26.8	73.9
E5285904	Angular		5	<0.2	2.31	18	<5	32	0.60	<1	0.38	<0.5	85	11.9	20.7	31.5
E5285905	Angular		7	<0.2	1.78	39	<5	47	<0.5	<1	0.07	<0.5	51	10.6	18.1	34.2
E5285906	Angular		19	<0.2	1.96	43	<5	38	<0.5	<1	0.06	<0.5	41	8.5	33.8	27.3
E5285907	Angular		4	<0.2	1.19	9	<5	42	<0.5	<1	0.36	<0.5	14	3.9	7.8	21.5
E5285908	Angular		4	<0.2	2.30	21	<5	41	0.50	<1	0.13	<0.5	44	10.0	25.4	28.8
E5285909	Angular		3	<0.2	0.50	8	<5	12	<0.5	<1	0.02	<0.5	10	1.3	4.0	9.3
E5285910	Angular		5	<0.2	2.48	41	<5	23	0.60	<1	0.15	<0.5	47	10.4	28.1	53.6

VM Project - Soil Geochemical Results

Sample No.	Fe (%)	Ga (ppm)	Hg (ppm)	In (ppm)	K (%)	La (ppm)	Li (ppm)	Mg (%)	Mn (ppm)	Mo (ppm)	Na (%)	Ni (ppm)	P (ppm)	Pb (ppm)	Rb (ppm)	S (%)	Sb (ppm)	Sc (ppm)
E5285889	4.00	<5	<1	<1	0.07	45	83	0.80	225	1.00	<0.01	33.9	369	17.6	<10	0.01	<1	1.8
E5285890	3.75	<5	<1	<1	0.05	37	79	0.71	301	0.90	<0.01	32.1	420	20.3	<10	0.02	<1	1.3
E5285891	3.29	<5	<1	<1	0.04	16	47	0.63	251	0.90	<0.01	33.9	410	23.0	<10	0.03	<1	1.3
E5285892	4.41	<5	<1	<1	0.04	25	43	0.62	710	0.80	<0.01	44.9	458	35.5	<10	0.02	<1	2.0
E5285893	3.43	<5	<1	1	0.04	22	28	0.46	1730	1.00	<0.01	41.3	980	33.9	10	0.03	<1	3.5
E5285894	3.75	<5	<1	<1	0.07	13	34	0.64	557	1.30	<0.01	47.6	466	43.2	<10	0.09	<1	2.5
E5285895	3.58	<5	<1	<1	0.03	27	56	0.75	785	0.70	<0.01	31.6	402	27.5	<10	0.01	<1	1.5
E5285896	3.03	<5	<1	<1	0.03	19	26	0.40	226	<0.5	<0.01	19.0	401	15.9	<10	0.03	<1	<0.5
E5285897	4.82	<5	<1	<1	0.04	17	20	0.22	1280	1.90	<0.01	31.6	703	32.2	<10	0.04	<1	0.7
E5285898	4.25	<5	<1	<1	0.05	37	28	0.48	419	1.00	<0.01	25.9	700	33.3	<10	0.03	<1	1.2
E5285899	2.75	<5	<1	<1	0.03	23	43	0.61	411	<0.5	<0.01	29.7	403	19.1	<10	0.02	<1	1.1
E5285900	2.63	<5	<1	<1	0.04	17	45	0.67	144	0.70	<0.01	15.4	233	7.9	<10	0.01	<1	1.0
E5285901	5.09	<5	<1	<1	0.03	59	86	1.18	920	0.90	<0.01	52.3	592	28.1	<10	0.01	<1	2.8
E5285902	4.87	<5	<1	<1	0.04	24	55	0.80	538	1.00	0.01	36.8	543	20.9	<10	0.03	<1	1.4
E5285903	5.23	<5	<1	<1	0.03	81	70	0.98	1590	1.20	<0.01	60.3	537	32.6	<10	0.02	<1	4.8
E5285904	3.55	<5	<1	<1	0.05	30	50	0.67	530	0.90	<0.01	38.7	453	23.1	<10	0.03	<1	2.1
E5285905	3.17	<5	<1	1	0.07	22	43	0.55	358	1.40	<0.01	27.1	375	15.0	16	0.03	<1	1.0
E5285906	3.29	<5	<1	<1	0.08	19	43	0.77	363	<0.5	<0.01	28.8	680	15.6	12	0.04	<1	0.7
E5285907	1.21	<5	<1	1	0.05	12	13	0.19	234	1.60	0.03	10.9	973	8.3	<10	0.12	1	<0.5
E5285908	3.27	<5	<1	<1	0.06	21	63	0.83	420	<0.5	0.01	33.5	428	13.2	13	0.02	<1	1.5
E5285909	0.71	<5	<1	<1	0.02	5	6	0.09	49	<0.5	0.02	3.8	268	5.0	<10	0.02	<1	<0.5
E5285910	4.25	<5	<1	<1	0.04	28	88	1.10	495	1.40	<0.01	49.6	349	19.1	<10	0.02	<1	1.5

VM Project - Soil Geochemical Results

Sample No.	Se (ppm)	Sn (ppm)	Sr (ppm)	Ta (ppm)	Te (ppm)	Th (ppm)	Ti (%)	Tl (ppm)	U (ppm)	V (ppm)	W (ppm)	Y (ppm)	Zn (ppm)	Zr (ppm)
E5285889	<10	<5	18.9	<10	<10	<5	<0.01	<5	<5	17.1	<1	7	103.0	<5
E5285890	<10	<5	17.1	<10	<10	<5	<0.01	<5	<5	15.4	<1	5	83.7	<5
E5285891	<10	<5	28.9	<10	<10	<5	<0.01	<5	<5	13.2	<1	5	107.0	<5
E5285892	<10	<5	16.6	<10	<10	<5	<0.01	<5	<5	12.6	<1	6	113.0	<5
E5285893	<10	<5	29.5	<10	<10	<5	0.01	<5	<5	14.0	<1	27	69.2	<5
E5285894	<10	<5	29.2	<10	<10	<5	<0.01	<5	<5	9.9	<1	6	30.6	6
E5285895	<10	<5	14.9	<10	<10	<5	<0.01	<5	<5	15.8	<1	8	93.6	<5
E5285896	<10	<5	3.3	<10	<10	<5	<0.01	<5	<5	13.0	<1	2	59.7	<5
E5285897	15	<5	11.8	<10	<10	<5	<0.01	<5	<5	10.7	<1	7	96.8	<5
E5285898	12	<5	10.3	<10	<10	<5	0.01	<5	<5	13.6	<1	5	65.2	<5
E5285899	<10	<5	18.8	<10	<10	<5	<0.01	<5	<5	12.6	<1	7	73.2	<5
E5285900	<10	<5	11.0	<10	<10	<5	<0.01	<5	<5	16.6	<1	3	61.4	<5
E5285901	<10	<5	15.8	<10	<10	<5	<0.01	<5	<5	23.2	<1	17	126.0	<5
E5285902	<10	<5	9.1	<10	<10	<5	<0.01	<5	<5	21.6	<1	7	105.0	<5
E5285903	11	<5	21.5	<10	<10	<5	<0.01	<5	<5	20.8	<1	42	117.0	<5
E5285904	<10	<5	25.1	<10	<10	<5	<0.01	<5	<5	15.9	<1	11	84.0	<5
E5285905	<10	<5	11.7	<10	<10	<5	0.01	<5	<5	19.3	<1	8	67.8	<5
E5285906	<10	<5	10.3	<10	<10	<5	0.02	<5	<5	24.0	<1	4	75.4	<5
E5285907	<10	<5	24.5	<10	<10	<5	0.01	<5	<5	13.8	<1	7	34.9	<5
E5285908	<10	<5	16.4	<10	<10	<5	0.02	<5	<5	21.9	<1	6	82.2	<5
E5285909	<10	<5	5.7	<10	<10	<5	<0.01	<5	<5	9.3	<1	1	12.8	<5
E5285910	<10	<5	19.8	<10	<10	<5	<0.01	<5	<5	20.8	<1	5	93.0	<5

VM Project - Soil Geochemical Results

Sample No.	Easting	Northing	Sampler	Date	Media	Matrix	Colour	Depth (cm)	Drainage	Organic	Slope	Topography	Bedrock
E5285911	501157	6882551	Chris	15-Aug	Residual	Gravel Loam	Grey	20	Moderate	Moderate	Steep	Midslope	No
E5285912	501274	6882370	Chris	15-Aug	Residual	Loam	Light Brown	30	Moderate	Moderate	Gentle	Midslope	No
E5285913	502013	6883716	Chris	16-Aug	Colluvial	Gravel Loam	Light Brown	25	Moderate	Moderate	Steep	Midslope	No
E5285914	502210	6883661	Chris	16-Aug	Residual	Gravel Loam	Light Brown	20	Moderate	Moderate	Steep	Midslope	No
E5285915	502407	6883648	Chris	16-Aug	Colluvial	Gravel Loam	Light Brown	30	Moderate	Moderate	Steep	Midslope	No
E5285916	502593	6883651	Chris	16-Aug	Colluvial	Loam	Light Brown	30	Moderate	Moderate	Steep	Midslope	No
E5285917	502782	6883696	Chris	16-Aug	Residual	Loam	Light Brown	30	Moderate	Moderate	Steep	Midslope	No
E5285918	502974	6883699	Chris	16-Aug									
E5285919	502964	6883829	Chris	16-Aug	Colluvial	Gravel Loam	Light Grey	30	Moderate	Moderate	Steep	Midslope	No
E5285920	502824	6883951	Chris	16-Aug	Residual	Loam	Light Brown	35	Moderate	Moderate	Steep	Midslope	No
E5285921	502642	6884095	Chris	16-Aug	Colluvial	Gravel Loam	Greenish Grey	25	Moderate	Moderate	Gentle	Bench	No
E5285922	502757	6884252	Chris	16-Aug	Residual	Loam	Light Brown	30	Moderate	Moderate	Steep	Midslope	No
E5285923	502800	6884447	Chris	16-Aug	Residual	Clay Loam	Light Brown	30	Moderate	Moderate	Steep	Midslope	No
E5285924	502926	6884572	Chris	16-Aug	Residual	Loam	Olive Grey	30	Moderate	Moderate	Steep	Midslope	No
E5285925	503107	6884584	Chris	16-Aug	Residual	Loam	Greenish Grey	35	Moderate	Moderate	Steep	Midslope	No
E5285926	503253	6884496	Chris	16-Aug	Residual	Clay Loam	Grey	40	Moderate	Minor	Gentle	Ridgetop	No
E5285927	503327	6884638	Chris	16-Aug	Residual	Loam	Light Brown	30	Moderate	Moderate	Steep	Midslope	No
E5285928	503476	6884618	Chris	16-Aug	Residual	Loam	Light Brown	30	Moderate	Moderate	Steep	Midslope	No
E5285929	503642	6884514	Chris	16-Aug	Residual	Loam	Light Brown	30	Moderate	Moderate	Steep	Midslope	No
E5287158	500008	6887832	Taylor	14-Aug	Colluvial	Gravel/Loam	Dark Gray	30	Mod	Mod	Gentle	Valley Bottom	No
E5287159	500061	6887748	Taylor	14-Aug	Colluvial	Gravel/Loam	Dark Gray	25	Mod	Mod	Gentle	Valley Bottom	No
E5287160	500115	6887657	Taylor	14-Aug	Colluvial	Loam	Dark Gray	35	Mod	Mod	Gentle	Valley Bottom	No
E5287161	500170	6887574	Taylor	14-Aug	Colluvial	Gravel	Dark Gray	40	Poor	Mod	Gentle	Midslope	No

VM Project - Soil Geochemical Results

Sample No.	Rock Shape	Notes	Au (ppb)	Ag (ppm)	Al (%)	As (ppm)	B (ppm)	Ba (ppm)	Be (ppm)	Bi (ppm)	Ca (%)	Cd (ppm)	Ce (ppm)	Co (ppm)	Cr (ppm)	Cu (ppm)
E5285911	Angular		<2	<0.2	0.45	2	<5	23	<0.5	<1	0.01	<0.5	20	0.8	3.6	7.6
E5285912	Angular		3	<0.2	0.16	<1	<5	8	<0.5	<1	0.02	<0.5	2	<0.5	1.0	5.6
E5285913	Angular		4.00	<0.2	0.94	8	<5	26	<0.5	<1	0.02	<0.5	53	4.7	13.0	31.5
E5285914	Angular		4.00	<0.2	0.93	28	<5	15	<0.5	<1	0.21	<0.5	49	19.7	10.5	47.8
E5285915	Angular		14.00	<0.2	1.35	82	<5	30	<0.5	<1	0.28	<0.5	57	7.3	13.6	35.7
E5285916	Angular		31.00	<0.2	1.05	22	<5	23	<0.5	<1	0.08	<0.5	41	14.5	12.6	33.6
E5285917	Angular		28.00	<0.2	0.91	9	<5	19	<0.5	<1	0.02	<0.5	44	4.9	9.3	16.2
E5285918																NO SAM
E5285919	Angular		28.00	<0.2	2.11	19	<5	14	0.90	<1	0.14	<0.5	70	38.2	24.0	102.0
E5285920	Angular		<2	<0.2	1.05	8	<5	26	<0.5	<1	0.02	<0.5	104	16.1	5.5	26.9
E5285921	Angular		16.00	<0.2	1.12	58	<5	18	<0.5	<1	0.06	<0.5	86	21.3	10.8	44.8
E5285922	Angular		<2	<0.2	1.12	17	<5	22	<0.5	<1	0.01	<0.5	28	5.4	11.7	18.4
E5285923	Angular		3.00	<0.2	1.40	15	<5	19	<0.5	<1	0.13	<0.5	62	13.5	14.8	35.7
E5285924	Angular		9.00	<0.2	1.68	10	<5	19	<0.5	<1	0.28	<0.5	59	10.9	19.5	41.7
E5285925	Angular		2.00	<0.2	1.34	4	<5	37	<0.5	<1	0.04	<0.5	51	7.7	15.5	24.5
E5285926	Angular		4.00	<0.2	1.48	6	<5	24	0.50	<1	0.34	<0.5	51	8.1	15.9	30.3
E5285927	Angular		<2	<0.2	1.14	9	<5	38	0.60	<1	0.09	<0.5	47	35.1	11.9	40.1
E5285928	Angular		<2	<0.2	1.29	10	<5	60	0.50	<1	0.39	<0.5	43	6.5	15.2	21.1
E5285929	Angular		16.00	<0.2	1.43	28	<5	61	0.60	<1	0.17	<0.5	34	7.5	17.2	16.6
E5287158	Tons Angular		5.00	<0.2	1.42	10	<5	14	<0.5	<1	0.58	<0.5	80	12.4	16.2	42.9
E5287159	Tons Angular	Talus	3.00	<0.2	1.49	12	<5	13	<0.5	<1	0.74	<0.5	84	13.6	16.3	40.7
E5287160	Several Angular		7.00	<0.2	1.24	9	<5	19	<0.5	<1	0.25	<0.5	76	9.3	12.1	29.1
E5287161	Tons Angular		11.00	<0.2	2.13	70	<5	17	0.60	<1	0.20	<0.5	69	31.2	23.4	87.8

VM Project - Soil Geochemical Results

Sample No.	Fe (%)	Ga (ppm)	Hg (ppm)	In (ppm)	K (%)	La (ppm)	Li (ppm)	Mg (%)	Mn (ppm)	Mo (ppm)	Na (%)	Ni (ppm)	P (ppm)	Pb (ppm)	Rb (ppm)	S (%)	Sb (ppm)	Sc (ppm)
E5285911	0.37	<5	<1	<1	0.02	9	2	0.03	67	<0.5	0.01	1.8	208	3.7	<10	0.01	<1	<0.5
E5285912	0.20	<5	<1	<1	0.02	<1	1	0.02	13	<0.5	0.02	0.6	94	1.7	<10	0.01	<1	<0.5
E5285913	2.54	<5	<1	2	0.04	26	15	0.30	136	0.90	<0.01	17.9	451	11.6	<10	0.04	<1	<0.5
E5285914	3.34	<5	<1	<1	0.03	27	19	0.48	442	1.70	<0.01	46.3	420	25.1	<10	0.04	<1	0.9
E5285915	3.29	<5	<1	<1	0.04	31	25	0.56	219	1.50	<0.01	27.9	470	18.5	<10	0.03	<1	1.0
E5285916	2.45	<5	<1	<1	0.06	16	22	0.45	252	<0.5	<0.01	25.5	359	22.8	12	0.02	<1	0.7
E5285917	1.93	<5	<1	<1	0.04	18	12	0.25	295	1.00	<0.01	13.2	460	14.7	<10	0.03	<1	<0.5
E5285918	MPLE COLLECTED																	
E5285919	4.65	<5	<1	<1	0.06	29	45	1.07	530	1.60	<0.01	84.5	249	23.9	<10	0.01	<1	2.9
E5285920	2.30	<5	<1	<1	0.03	26	16	0.21	370	1.50	<0.01	47.0	524	20.6	<10	0.03	<1	<0.5
E5285921	3.06	<5	<1	<1	0.06	41	24	0.49	522	0.70	<0.01	26.4	417	26.9	<10	0.01	<1	0.6
E5285922	2.12	<5	<1	<1	0.03	12	22	0.41	330	<0.5	<0.01	12.7	418	14.2	<10	0.03	<1	<0.5
E5285923	3.52	<5	<1	<1	0.02	31	34	0.64	713	0.60	<0.01	34.6	403	25.5	<10	0.01	<1	1.1
E5285924	3.85	<5	<1	<1	0.02	30	56	0.86	390	1.20	<0.01	35.4	466	18.2	<10	0.02	<1	1.5
E5285925	2.95	<5	<1	<1	0.02	24	38	0.60	220	0.70	<0.01	20.5	443	14.4	<10	0.02	<1	0.7
E5285926	3.02	<5	<1	<1	0.02	27	42	0.69	287	0.60	<0.01	27.7	472	12.7	<10	0.01	<1	1.7
E5285927	2.70	<5	<1	<1	0.02	13	25	0.41	1190	1.50	<0.01	56.6	774	18.2	<10	0.04	<1	0.6
E5285928	2.54	<5	<1	<1	0.19	18	21	0.47	486	<0.5	0.01	20.8	518	17.1	48	0.05	<1	1.2
E5285929	2.58	<5	<1	<1	0.26	13	24	0.48	302	0.90	<0.01	19.8	347	15.3	57	0.03	<1	1.0
E5287158	3.52	<5	<1	1	0.03	39	31	0.74	515	0.80	<0.01	36.3	477	17.2	<10	0.01	<1	1.4
E5287159	3.64	<5	<1	<1	0.03	41	35	0.79	479	0.60	<0.01	38.0	514	15.4	<10	0.01	<1	1.8
E5287160	2.73	<5	<1	<1	0.03	37	23	0.60	381	<0.5	<0.01	25.9	460	14.2	<10	0.01	<1	0.9
E5287161	4.83	<5	<1	<1	0.03	33	47	0.88	1410	1.10	<0.01	52.6	725	44.1	<10	0.02	<1	1.7

VM Project - Soil Geochemical Results

Sample No.	Se (ppm)	Sn (ppm)	Sr (ppm)	Ta (ppm)	Te (ppm)	Th (ppm)	Ti (%)	Tl (ppm)	U (ppm)	V (ppm)	W (ppm)	Y (ppm)	Zn (ppm)	Zr (ppm)
E5285911	<10	<5	4.7	<10	<10	<5	<0.01	<5	<5	9.4	<1	1	8.2	<5
E5285912	<10	<5	6.1	<10	<10	<5	0.01	<5	<5	4.9	<1	<1	6.8	<5
E5285913	<10	<5	12.9	<10	<10	<5	<0.01	<5	<5	16.4	<1	4	48.0	<5
E5285914	<10	<5	30.1	<10	<10	<5	<0.01	<5	<5	10.2	<1	14	86.6	<5
E5285915	<10	<5	23.3	<10	<10	<5	<0.01	<5	<5	12.9	<1	10	73.2	<5
E5285916	<10	<5	12.5	<10	<10	<5	0.01	<5	<5	13.0	<1	4	66.1	<5
E5285917	<10	<5	5.8	<10	<10	<5	<0.01	<5	<5	12.0	<1	3	53.0	<5
E5285918														
E5285919	<10	<5	16.2	<10	<10	<5	0.01	<5	<5	17.8	<1	20	141.0	10
E5285920	<10	<5	9.0	<10	<10	<5	<0.01	<5	<5	10.1	<1	6	82.3	<5
E5285921	<10	<5	16.8	<10	<10	<5	0.02	<5	<5	11.1	<1	9	68.0	<5
E5285922	<10	<5	4.8	<10	<10	<5	<0.01	<5	<5	14.7	<1	3	55.4	<5
E5285923	<10	<5	11.1	<10	<10	<5	<0.01	<5	<5	14.2	<1	13	86.2	<5
E5285924	<10	<5	19.4	<10	<10	<5	<0.01	<5	<5	15.3	<1	15	77.0	<5
E5285925	<10	<5	78.5	<10	<10	<5	<0.01	<5	<5	14.3	<1	6	73.0	<5
E5285926	<10	<5	23.5	<10	<10	<5	<0.01	<5	<5	15.6	<1	18	78.8	<5
E5285927	<10	<5	9.3	<10	<10	<5	0.01	<5	<5	15.4	<1	8	67.3	<5
E5285928	<10	<5	29.1	<10	<10	<5	0.05	<5	<5	18.0	<1	11	75.0	<5
E5285929	<10	<5	15.8	<10	<10	<5	0.06	<5	<5	19.9	<1	4	64.5	<5
E5287158	<10	<5	20.4	<10	<10	<5	0.02	<5	<5	13.6	<1	14	77.5	<5
E5287159	<10	<5	24.3	<10	<10	<5	0.02	<5	<5	13.6	<1	14	66.4	6
E5287160	<10	<5	10.6	<10	<10	<5	0.01	<5	<5	10.9	<1	14	53.4	<5
E5287161	<10	<5	13.1	<10	<10	<5	0.01	<5	<5	17.9	<1	13	124.0	<5

VM Project - Soil Geochemical Results

Sample No.	Easting	Northing	Sampler	Date	Media	Matrix	Colour	Depth (cm)	Drainage	Organic	Slope	Topography	Bedrock
E5287162	500224	6887487	Taylor	14-Aug	Residual	Loam	Light Brown	30	Mod	High	Steep	Midslope	No
E5287163	500335	6887309	Taylor	14-Aug	Residual	Loam	Olive Gray	30	Mod	Low	Gentle	Valley Bottom	No
E5287164	500386	6887230	Taylor	14-Aug	Residual	Loam	Olive Gray	30	Mod	Low	Steep	Midslope	No
E5287165	500435	6887150	Taylor	14-Aug	Residual	Loam	Olive Gray	35	Mod	Low	Steep	Midslope	No
E5287166	500491	6887058	Taylor	14-Aug	Residual	Loam	Dark Gray	35	Mod	High	Steep	Midslope	No
E5287167	500548	6886969	Taylor	14-Aug	Residual	Loam	Olive Gray	40	Mod	High	Steep	Midslope	No
E5287168	500602	6886885	Taylor	14-Aug	Residual	Loam	Dark Gray	30	Mod	Mod	Steep	Midslope	No
E5287169	500655	6886796	Taylor	14-Aug	Residual	Loam	Dark Gray	25	Well	High	Steep	Midslope	No
E5287170	500711	6886710	Taylor	14-Aug	Residual	Loam	Dark Gray	40	Mod	Mod	Steep	Midslope	No
E5287171	500768	6886617	Taylor	14-Aug	Residual	Loam	Olive Gray	45	Mod	High	Steep	Midslope	No
E5287172	500825	6886525	Taylor	14-Aug	Residual	Loam	Olive Gray	40	Mod	Mod	Gentle	Midslope	No
E5287173	500881	6886437	Taylor	14-Aug	Residual	Loam	Olive Gray	35	Mod	High	Gentle	Midslope	No
E5287174	500934	6886351	Taylor	14-Aug	Residual	Loam	Olive Gray	40	Mod	Mod	Gentle	Midslope	No
E5287175	500988	6886267	Taylor	14-Aug	Residual	Loam	Brown Gray	30	Mod	High	Gentle	Midslope	No
E5287176	501041	6886184	Taylor	14-Aug	Residual	Loam	Dark Brown	30	Mod	Mod	Steep	Midslope	No
E5287177	501094	6886097	Taylor	14-Aug	Residual	Loam	Dark Brown	30	Mod	High	Steep	Midslope	No
E5287178	501148	6886012	Taylor	14-Aug	Residual	Loam	Dark Brown	40	Mod	High	Steep	Midslope	No
E5287179	501203	6885924	Taylor	15-Aug	Colluvial	Gravel/Loam	Olive Gray	25	Mod	Mod	Steep	Midslope	No
E5287180	501254	6885841	Taylor	15-Aug	Residual	Clay	Light Gray	40	Poor	Mod	Steep	Midslope	No
E5287181	501307	6885756	Taylor	15-Aug	Residual	Loam	Dark Gray	35	Mod	Mod	Steep	Midslope	No
E5287182	501360	6885670	Taylor	15-Aug	Residual	Loam	Dark Brown	35	Mod	Low	Steep	Midslope	No
E5287183	501415	6885583	Taylor	15-Aug	Residual	Loam	Olive Gray	35	Mod	High	Steep	Midslope	No
E5287184	501469	6885497	Taylor	15-Aug	Residual	Gravel/Loam	Dark Gray	35	Mod	High	Steep	Midslope	No
E5287185	501521	6885414	Taylor	15-Aug	Colluvial	Gravel/Loam	Dark Gray	20	Mod	High	Steep	Midslope	No
E5287186	501577	6885325	Taylor	15-Aug	Colluvial	Gravel	Dark Brown	25	Mod	High	Steep	Midslope	No

VM Project - Soil Geochemical Results

Sample No.	Rock Shape	Notes	Au (ppb)	Ag (ppm)	Al (%)	As (ppm)	B (ppm)	Ba (ppm)	Be (ppm)	Bi (ppm)	Ca (%)	Cd (ppm)	Ce (ppm)	Co (ppm)	Cr (ppm)	Cu (ppm)
E5287162	Several Angular		6.00	<0.2	1.87	65	<5	24	<0.5	<1	0.07	<0.5	34	23.2	23.1	57.9
E5287163	Several Angular	Among Large Boulders	6.00	<0.2	1.54	10	<5	32	<0.5	<1	0.20	<0.5	72	7.8	18.4	33.8
E5287164	Several Angular		21.00	<0.2	1.57	10	<5	34	<0.5	<1	0.06	<0.5	76	8.0	65.4	33.9
E5287165	Several Angular		29.00	<0.2	1.51	9	<5	28	<0.5	<1	0.39	<0.5	79	9.5	37.2	36.7
E5287166	Several Angular	Beside Old Claim Post	51.00	<0.2	1.58	8	<5	31	<0.5	<1	0.20	<0.5	67	6.0	23.4	30.4
E5287167	Several Angular		22.00	<0.2	1.67	8	<5	31	<0.5	<1	0.08	<0.5	91	9.7	17.8	32.6
E5287168	Tons Angular		15.00	<0.2	1.50	7	<5	31	<0.5	<1	0.16	<0.5	71	9.0	16.8	36.2
E5287169	Few Angular		16.00	<0.2	1.02	4	<5	26	<0.5	<1	0.05	<0.5	35	3.9	11.7	17.7
E5287170	Few Angular		22.00	<0.2	1.16	6	<5	22	<0.5	<1	0.08	<0.5	44	5.5	12.6	26.9
E5287171	Few Angular		8.00	<0.2	0.98	3	<5	26	<0.5	<1	0.04	<0.5	34	3.2	9.1	13.8
E5287172	Few Angular		12.00	<0.2	1.32	5	<5	34	<0.5	<1	0.02	<0.5	42	4.1	17.0	14.7
E5287173	Few Angular		10.00	<0.2	1.23	6	<5	31	<0.5	<1	0.08	<0.5	58	9.3	26.1	25.5
E5287174	Few Angular		10.00	<0.2	1.52	8	<5	44	<0.5	<1	0.02	<0.5	55	6.6	23.5	19.7
E5287175	Few Angular		11.00	<0.2	1.06	7	<5	31	<0.5	<1	0.05	<0.5	24	3.1	9.9	12.4
E5287176	Few Angular	Sandy	<2	<0.2	1.25	10	<5	34	<0.5	<1	0.06	<0.5	44	5.3	14.4	17.8
E5287177	Few Angular		7.00	<0.2	1.10	6	<5	27	<0.5	<1	0.12	<0.5	45	4.1	12.4	19.2
E5287178	Few Angular		<2	<0.2	0.80	8	<5	22	<0.5	<1	0.32	<0.5	44	4.5	9.2	19.3
E5287179	Tons of Angular		27.00	<0.2	1.24	7	<5	20	<0.5	<1	0.55	<0.5	48	7.4	14.9	31.6
E5287180	Several Angular		11.00	<0.2	1.17	6	<5	28	<0.5	<1	0.07	<0.5	48	3.8	12.6	15.6
E5287181	Several Angular		9.00	<0.2	0.84	5	<5	22	<0.5	<1	0.09	<0.5	41	4.9	9.5	14.7
E5287182	Few Angular		4.00	<0.2	0.72	5	<5	16	<0.5	<1	0.17	<0.5	48	6.1	6.9	20.9
E5287183	Few Angular		5.00	<0.2	0.74	5	<5	13	<0.5	<1	0.15	<0.5	44	6.2	8.2	24.7
E5287184	Tons of Angular		3.00	<0.2	1.26	7	<5	18	<0.5	<1	0.25	<0.5	80	11.5	15.1	39.3
E5287185	Tons of Angular		14.00	<0.2	1.11	9	<5	19	<0.5	<1	2.40	<0.5	61	8.6	11.8	31.8
E5287186	Tons of Angular	Talus	11.00	<0.2	1.10	9	<5	20	<0.5	<1	1.26	<0.5	69	10.7	12.6	37.5

VM Project - Soil Geochemical Results

Sample No.	Fe (%)	Ga (ppm)	Hg (ppm)	In (ppm)	K (%)	La (ppm)	Li (ppm)	Mg (%)	Mn (ppm)	Mo (ppm)	Na (%)	Ni (ppm)	P (ppm)	Pb (ppm)	Rb (ppm)	S (%)	Sb (ppm)	Sc (ppm)
E5287162	4.26	<5	<1	<1	0.03	15	43	0.76	681	1.20	<0.01	37.5	622	35.3	<10	0.04	<1	1.0
E5287163	3.27	<5	<1	<1	0.04	34	31	0.69	307	1.00	<0.01	28.8	552	17.8	<10	0.01	<1	1.3
E5287164	3.31	<5	<1	<1	0.04	34	30	0.66	362	2.70	<0.01	53.8	470	15.0	<10	0.01	<1	1.1
E5287165	3.43	<5	<1	<1	0.04	39	32	0.71	375	1.70	<0.01	43.0	595	17.2	<10	0.01	<1	1.4
E5287166	3.09	<5	<1	<1	0.04	35	36	0.68	154	1.30	<0.01	31.3	362	11.4	<10	0.02	<1	1.5
E5287167	3.44	<5	<1	1	0.04	44	35	0.71	565	0.80	<0.01	29.2	528	18.8	<10	0.01	<1	1.4
E5287168	3.19	<5	<1	<1	0.05	35	34	0.70	418	<0.5	<0.01	29.8	529	18.0	<10	0.01	<1	1.3
E5287169	1.99	<5	<1	1	0.03	17	23	0.45	141	<0.5	<0.01	15.5	378	8.1	<10	0.01	<1	0.7
E5287170	2.40	<5	<1	<1	0.03	21	28	0.53	251	<0.5	<0.01	20.5	444	10.9	<10	0.01	<1	0.7
E5287171	1.63	<5	<1	<1	0.04	14	19	0.35	125	1.00	<0.01	11.2	457	6.7	<10	0.02	<1	<0.5
E5287172	2.30	<5	<1	2	0.03	18	25	0.47	167	<0.5	<0.01	15.6	446	8.3	<10	0.02	<1	0.7
E5287173	2.42	<5	<1	2	0.05	23	28	0.54	345	0.90	<0.01	30.2	391	12.4	<10	0.01	<1	0.8
E5287174	2.83	<5	<1	<1	0.06	26	32	0.58	183	0.70	<0.01	24.7	342	10.9	11	0.01	<1	1.0
E5287175	1.67	<5	<1	<1	0.05	11	17	0.32	105	<0.5	0.01	11.8	384	6.4	<10	0.02	<1	<0.5
E5287176	2.43	<5	<1	<1	0.03	19	32	0.49	193	0.70	<0.01	17.1	432	10.8	<10	0.02	<1	0.6
E5287177	2.42	<5	<1	<1	0.02	22	32	0.48	159	<0.5	<0.01	17.3	483	11.5	<10	0.02	<1	1.0
E5287178	2.29	<5	<1	<1	0.01	23	28	0.39	99	0.80	<0.01	17.8	489	12.5	<10	0.03	<1	1.0
E5287179	3.17	<5	<1	<1	0.02	26	45	0.67	165	1.20	<0.01	27.7	549	16.6	<10	0.03	<1	1.6
E5287180	2.38	<5	<1	<1	0.02	24	33	0.51	151	1.00	<0.01	14.8	415	10.1	<10	0.01	<1	1.1
E5287181	2.45	<5	<1	<1	0.02	17	23	0.38	212	<0.5	<0.01	16.3	448	13.2	<10	0.02	<1	0.8
E5287182	2.28	<5	<1	<1	0.02	24	18	0.31	237	<0.5	<0.01	20.0	328	15.0	<10	0.01	<1	1.2
E5287183	2.39	<5	<1	<1	0.01	22	24	0.40	150	<0.5	<0.01	23.9	341	13.3	<10	0.01	<1	0.9
E5287184	3.68	<5	<1	<1	0.03	39	39	0.67	379	1.70	<0.01	35.6	483	22.2	<10	0.02	<1	1.5
E5287185	3.10	<5	<1	<1	0.03	30	33	0.59	299	1.10	<0.01	28.0	504	18.8	<10	0.05	1	1.3
E5287186	3.50	<5	<1	<1	0.03	35	31	0.60	485	1.50	<0.01	32.3	656	22.8	<10	0.04	<1	1.6

VM Project - Soil Geochemical Results

Sample No.	Se (ppm)	Sn (ppm)	Sr (ppm)	Ta (ppm)	Te (ppm)	Th (ppm)	Ti (%)	Tl (ppm)	U (ppm)	V (ppm)	W (ppm)	Y (ppm)	Zn (ppm)	Zr (ppm)
E5287162	<10	<5	5.1	<10	<10	<5	<0.01	<5	<5	18.1	<1	5	98.6	<5
E5287163	<10	<5	13.9	<10	<10	<5	0.01	<5	<5	14.7	<1	16	89.1	<5
E5287164	<10	<5	6.4	<10	<10	<5	<0.01	<5	<5	14.7	<1	12	117.0	<5
E5287165	<10	<5	19.7	<10	<10	<5	0.01	<5	<5	14.6	<1	18	95.2	<5
E5287166	<10	<5	13.9	<10	<10	<5	<0.01	<5	<5	14.0	<1	16	87.3	<5
E5287167	<10	<5	8.9	<10	<10	<5	0.01	<5	<5	14.9	<1	19	80.0	<5
E5287168	<10	<5	14.7	<10	<10	<5	0.02	<5	<5	14.4	<1	15	81.2	<5
E5287169	<10	<5	5.0	<10	<10	<5	<0.01	<5	<5	12.1	<1	5	53.7	<5
E5287170	<10	<5	6.1	<10	<10	<5	<0.01	<5	<5	12.1	<1	7	60.8	<5
E5287171	<10	<5	4.5	<10	<10	<5	<0.01	<5	<5	10.3	<1	4	42.2	<5
E5287172	<10	<5	4.5	<10	<10	<5	<0.01	<5	<5	13.7	<1	3	54.3	<5
E5287173	<10	<5	7.7	<10	<10	<5	0.01	<5	<5	11.5	<1	6	72.0	<5
E5287174	<10	<5	5.1	<10	<10	<5	<0.01	<5	<5	14.9	<1	6	69.9	<5
E5287175	<10	<5	5.7	<10	<10	<5	0.01	<5	<5	13.0	<1	3	39.8	<5
E5287176	<10	<5	9.0	<10	<10	<5	<0.01	<5	<5	14.9	<1	4	62.1	<5
E5287177	<10	<5	13.6	<10	<10	<5	<0.01	<5	<5	12.2	<1	9	70.3	<5
E5287178	<10	<5	22.9	<10	<10	<5	<0.01	<5	<5	9.4	<1	10	68.3	<5
E5287179	<10	<5	32.6	<10	<10	<5	<0.01	<5	<5	13.3	<1	14	93.2	<5
E5287180	<10	<5	8.2	<10	<10	<5	<0.01	<5	<5	12.5	<1	8	65.0	<5
E5287181	<10	<5	7.9	<10	<10	<5	<0.01	<5	<5	10.2	<1	5	64.4	<5
E5287182	<10	<5	13.4	<10	<10	<5	<0.01	<5	<5	7.8	<1	13	55.0	<5
E5287183	<10	<5	12.5	<10	<10	<5	<0.01	<5	<5	9.0	<1	11	72.1	<5
E5287184	<10	<5	23.6	<10	<10	<5	<0.01	<5	<5	12.8	<1	19	98.6	<5
E5287185	<10	<5	85.4	<10	<10	<5	<0.01	<5	<5	10.6	<1	16	79.3	<5
E5287186	<10	<5	64.6	<10	<10	<5	<0.01	<5	<5	11.7	<1	19	89.4	<5

VM Project - Soil Geochemical Results

Sample No.	Easting	Northing	Sampler	Date	Media	Matrix	Colour	Depth (cm)	Drainage	Organic	Slope	Topography	Bedrock
E5287187	501631	6885238	Taylor	15-Aug	Colluvial	Loam	Olive Gray	35	Mod	Mod	Steep	Midslope	No
E5287188	501690	6885147	Taylor	15-Aug	Colluvial	Gravel	Dark Gray	30	Mod	High	Steep	Midslope	No
E5287189	501772	6885015	Taylor	15-Aug	Residual	Loam	Olive Gray	40	Poor	Mod	Steep	Midslope	No
E5287190	501881	6884841	Taylor	15-Aug	Residual	Loam	Olive Gray	30	Mod	Mod	Steep	Midslope	No
E5287191	501939	6884747	Taylor	15-Aug	Residual	Loam	Light Brown	20	Mod	High	Steep	Midslope	No
E5287192	501991	6884665	Taylor	15-Aug	Residual	Loam	Light Brown	30	Mod	High	Steep	Midslope	No
E5287193	502049	6884572	Taylor	15-Aug	Colluvial	Gravel/Loam	Dark Gray/Black	25	Mod	High	Steep	Midslope	No
E5287194	502139	6884428	Taylor	15-Aug	Residual	Loam	Olive Gray	30	Mod	High	Steep	Midslope	No
E5287195	502202	6884336	Taylor	15-Aug	Residual	Loam	Olive Gray	20	Mod	High	Gentle	Midslope	No
E5287196	502251	6884249	Taylor	15-Aug	Residual	Loam	Olive Gray	25	Mod	Mod	Gentle (flat	Ridgetop (peak	No
E5287197	502337	6884113	Taylor	15-Aug	Residual	Sand	Gold (Bright Yellowish Orange)	25	Well	Mod	Gentle	Ridgetop	No
E5287198	502223	6884125	Taylor	15-Aug	Residual	Loam	Light Brown	20	Mod	Mod	Gentle	Bench (at peak	No
E5287199	500561	6887726	Taylor	16-Aug	Residual	Loam	Dark Gray	35	Well	Mod	Gentle	Midslope	No
E5287200	500382	6887615	Taylor	16-Aug	Residual	Loam	Olive Gray	25	Mod	Mod	Steep	Midslope	No
E5287201	499927	6887335	Taylor	16-Aug	Residual	Loam	Light Brown	25	Mod	High	Steep	Midslope	No
E5287202	499759	6887231	Taylor	16-Aug	Residual	Loam	Dark Brown	50	Mod	Mod	Steep	Midslope	No
E5287203	499586	6887125	Taylor	16-Aug	Residual	Loam	Light Brown	30	Well	High	Steep	Midslope	No
E5287204	499400	6887010	Taylor	16-Aug	Colluvial	Gravel/Loam	Dark Gray	30	Mod	Mod	Steep	Midslope	No
E5287205	499228	6886903	Taylor	16-Aug	Residual	Loam	Dark Gray	40	Mod	Mod	Steep	Midslope	No
E5287206	499070	6886806	Taylor	16-Aug	Residual	Loam	Yellowish Orange	30	Well	Mod	Steep	Midslope	No
E5287207	498887	6886693	Taylor	16-Aug	Residual	Loam	Light Brown	30	Well	Mod	Gentle	Midslope	No

VM Project - Soil Geochemical Results

Sample No.	Rock Shape	Notes	Au (ppb)	Ag (ppm)	Al (%)	As (ppm)	B (ppm)	Ba (ppm)	Be (ppm)	Bi (ppm)	Ca (%)	Cd (ppm)	Ce (ppm)	Co (ppm)	Cr (ppm)	Cu (ppm)
E5287187	Several Angular	Talus	6.00	<0.2	1.43	9	<5	32	0.60	<1	0.26	<0.5	87	11.3	16.7	48.0
E5287188	Tons of Angular	Talus & at old Claim Post	18.00	<0.2	1.48	8	<5	20	0.60	<1	0.66	<0.5	91	11.5	19.5	45.9
E5287189	Several Angular	Talus	7.00	<0.2	1.00	8	<5	25	<0.5	<1	0.12	<0.5	72	5.8	9.5	23.1
E5287190	Several Angular		5.00	<0.2	1.25	35	<5	34	<0.5	<1	0.07	<0.5	75	9.6	12.4	28.5
E5287191	Few Angular	Talus	12.00	<0.2	1.18	8	<5	26	<0.5	<1	0.02	<0.5	42	8.6	14.9	25.6
E5287192	Several Angular	Talus	7.00	<0.2	1.55	10	<5	33	<0.5	<1	0.03	<0.5	49	8.1	16.0	24.2
E5287193	Tons of Angular		9.00	<0.2	0.92	97	<5	22	<0.5	<1	0.35	<0.5	49	6.5	8.4	24.4
E5287194	Tons of Angular	Talus	5.00	<0.2	1.36	8	<5	25	<0.5	<1	0.27	<0.5	62	8.7	13.9	48.3
E5287195	Few Angular	Talus	20.00	<0.2	1.54	10	<5	22	<0.5	<1	0.07	<0.5	84	14.5	17.6	46.0
E5287196	Few Angular	Talus	2.00	<0.2	1.44	7	<5	21	<0.5	<1	0.08	<0.5	66	6.6	17.3	31.5
E5287197	Few Angular		3.00	<0.2	1.02	71	<5	11	<0.5	<1	0.10	<0.5	53	9.0	10.4	14.6
E5287198	Several Angular	In between 2 steep cliffs	<2	<0.2	1.02	4	<5	22	<0.5	<1	0.03	<0.5	19	2.0	10.0	18.5
E5287199	Several Angular		9.00	<0.2	1.06	9	<5	30	<0.5	<1	3.89	<0.5	60	9.4	12.9	27.0
E5287200	Several Angular		<2	<0.2	1.29	9	<5	40	<0.5	<1	0.32	<0.5	79	7.5	12.8	26.2
E5287201	Few Angular		16.00	<0.2	1.44	106	<5	24	<0.5	<1	0.33	<0.5	46	7.7	8.7	16.8
E5287202	Tons of Angular	Talus	3.00	<0.2	1.65	11	<5	27	0.60	<1	0.25	<0.5	81	8.6	16.5	33.4
E5287203	Several Angular		16.00	<0.2	1.38	16	<5	23	<0.5	<1	0.08	<0.5	70	14.2	16.4	43.0
E5287204	Tons of Angular		<2	<0.2	1.33	16	<5	18	<0.5	<1	1.37	<0.5	66	11.1	15.5	39.5
E5287205	Several Angular	Talus	3.00	<0.2	1.40	15	<5	26	<0.5	<1	0.44	<0.5	51	9.8	16.2	35.7
E5287206	Few Angular		7.00	<0.2	1.45	5	<5	17	<0.5	<1	0.05	<0.5	67	13.6	16.1	41.2
E5287207	Few Angular		7.00	<0.2	1.13	3	<5	37	<0.5	<1	0.04	<0.5	22	3.1	10.9	11.7

VM Project - Soil Geochemical Results

Sample No.	Fe (%)	Ga (ppm)	Hg (ppm)	In (ppm)	K (%)	La (ppm)	Li (ppm)	Mg (%)	Mn (ppm)	Mo (ppm)	Na (%)	Ni (ppm)	P (ppm)	Pb (ppm)	Rb (ppm)	S (%)	Sb (ppm)	Sc (ppm)
E5287187	3.72	<5	<1	<1	0.02	43	41	0.70	483	0.70	<0.01	36.0	556	16.8	<10	0.01	<1	1.5
E5287188	3.66	<5	<1	<1	0.02	45	46	0.74	521	<0.5	<0.01	38.9	477	21.1	<10	0.03	1	1.7
E5287189	2.99	<5	<1	<1	0.02	34	27	0.43	235	0.60	<0.01	22.5	384	14.9	<10	0.02	<1	1.0
E5287190	3.04	<5	<1	1	0.03	35	27	0.45	401	0.50	<0.01	25.7	407	22.7	<10	0.02	<1	1.3
E5287191	2.66	<5	<1	2	0.04	20	26	0.43	442	0.70	<0.01	19.0	448	19.6	<10	0.04	<1	0.7
E5287192	3.24	<5	<1	<1	0.04	24	32	0.57	475	0.50	<0.01	19.9	618	16.4	10	0.04	<1	1.0
E5287193	2.53	<5	<1	<1	0.03	26	17	0.37	294	0.50	<0.01	21.8	424	19.0	<10	0.03	<1	0.9
E5287194	3.16	<5	<1	<1	0.04	32	29	0.57	406	0.90	<0.01	30.8	494	15.3	<10	0.03	<1	1.1
E5287195	3.18	<5	<1	<1	0.04	40	39	0.70	446	1.00	<0.01	28.8	416	15.9	<10	0.02	<1	0.9
E5287196	2.93	<5	<1	<1	0.03	33	36	0.69	268	<0.5	<0.01	21.3	454	11.9	<10	0.01	<1	0.9
E5287197	2.00	<5	<1	2	0.04	23	11	0.32	245	<0.5	<0.01	21.0	114	5.2	<10	0.01	<1	0.6
E5287198	2.22	<5	<1	<1	0.04	11	13	0.30	147	<0.5	0.02	5.9	509	11.9	<10	0.04	<1	<0.5
E5287199	2.59	<5	<1	2	0.17	30	17	0.61	406	0.90	<0.01	28.5	451	24.0	55	0.07	2	1.5
E5287200	2.80	<5	<1	<1	0.07	40	18	0.59	280	<0.5	<0.01	27.2	445	22.5	14	0.02	<1	1.1
E5287201	2.26	<5	<1	<1	0.03	19	20	0.44	1940	<0.5	<0.01	18.4	561	10.4	<10	0.03	<1	1.4
E5287202	3.48	<5	<1	1	0.03	45	47	0.66	574	1.20	<0.01	37.5	736	22.3	<10	0.06	<1	2.0
E5287203	4.37	<5	<1	<1	0.02	33	55	0.57	444	1.50	<0.01	43.1	417	20.0	<10	0.02	<1	1.0
E5287204	4.01	<5	<1	<1	0.02	34	59	0.66	419	0.90	<0.01	35.4	491	20.4	<10	0.03	2	1.8
E5287205	3.78	<5	<1	<1	0.02	25	54	0.67	416	<0.5	<0.01	34.6	510	22.6	<10	0.02	<1	2.3
E5287206	4.04	<5	<1	<1	0.02	31	47	0.74	432	0.60	<0.01	40.0	392	26.2	<10	0.02	<1	0.9
E5287207	1.76	<5	<1	<1	0.03	11	27	0.33	230	0.60	0.01	8.1	538	10.5	<10	0.04	<1	0.6

VM Project - Soil Geochemical Results

Sample No.	Se (ppm)	Sn (ppm)	Sr (ppm)	Ta (ppm)	Te (ppm)	Th (ppm)	Ti (%)	Tl (ppm)	U (ppm)	V (ppm)	W (ppm)	Y (ppm)	Zn (ppm)	Zr (ppm)
E5287187	<10	<5	22.7	<10	<10	<5	0.01	<5	<5	15.8	<1	20	77.4	<5
E5287188	<10	<5	36.8	<10	<10	<5	<0.01	<5	<5	14.0	<1	19	79.0	<5
E5287189	<10	<5	10.9	<10	<10	<5	<0.01	<5	<5	10.0	<1	11	68.9	<5
E5287190	<10	<5	10.4	<10	<10	<5	<0.01	<5	<5	14.6	<1	10	78.3	<5
E5287191	<10	<5	5.9	<10	<10	<5	0.01	<5	<5	20.0	<1	4	64.1	<5
E5287192	<10	<5	6.2	<10	<10	<5	<0.01	<5	<5	19.6	<1	6	81.7	<5
E5287193	<10	<5	18.2	<10	<10	<5	<0.01	<5	<5	10.0	<1	12	61.4	<5
E5287194	<10	<5	16.6	<10	<10	<5	<0.01	<5	<5	12.7	<1	10	37.6	<5
E5287195	<10	<5	11.1	<10	<10	<5	0.01	<5	<5	17.9	<1	7	62.8	<5
E5287196	<10	<5	13.0	<10	<10	<5	0.01	<5	<5	18.5	<1	6	63.6	<5
E5287197	<10	<5	12.3	<10	<10	<5	0.01	<5	<5	8.9	<1	5	47.7	<5
E5287198	<10	<5	8.3	<10	<10	<5	0.01	<5	<5	21.0	<1	2	38.0	<5
E5287199	<10	<5	131.0	<10	<10	<5	0.05	<5	<5	14.0	<1	16	69.8	<5
E5287200	<10	<5	17.6	<10	<10	<5	0.01	<5	<5	12.7	<1	17	75.1	<5
E5287201	<10	<5	19.2	<10	<10	<5	<0.01	<5	<5	9.6	<1	20	26.8	<5
E5287202	<10	<5	19.8	<10	<10	<5	<0.01	<5	11.00	14.1	<1	20	84.7	<5
E5287203	14	<5	11.6	<10	<10	<5	<0.01	<5	<5	13.5	<1	5	102.0	<5
E5287204	<10	<5	83.0	<10	<10	<5	<0.01	<5	<5	12.3	<1	12	110.0	<5
E5287205	<10	<5	30.1	<10	<10	<5	<0.01	<5	<5	13.6	<1	17	103.0	<5
E5287206	<10	<5	6.8	<10	<10	<5	<0.01	<5	<5	14.0	<1	6	100.0	<5
E5287207	<10	<5	7.8	<10	<10	<5	<0.01	<5	<5	14.4	<1	3	42.2	<5

VM Project - Soil Geochemical Results

Sample No.	Easting	Northing	Sampler	Date	Media	Matrix	Colour	Depth (cm)	Drainage	Organic	Slope	Topography	Bedrock
E5287208	498718	6886590	Taylor	16-Aug	Residual	Loam	Dark Brown	30	Mod	High	Gentle	Midslope	No
E5287209	498544	6886482	Taylor	16-Aug	Residual	Clay	Light Gray	30	Poor	Low	Gentle	Midslope	No
E5287210	498374	6886377	Taylor	16-Aug	Residual	Loam	Olive Gray	30	Poor	Mod	Gentle	Midslope	No
E5287394	499182	6887430	Graeme	14-Aug	Residual/Colluvial	Loam	Light Brown	30	Moderate	Moderate	Gentle SE	Ridge	None
E5287395	499291	6887259	Graeme	14-Aug	Residual/Colluvial	Loam	Light Brown	40	Moderate	Moderate	Steep SE	Midslope	None
E5287396	499396	6887091	Graeme	14-Aug	Residual/Colluvial	Loam	Olive Grey	50	Moderate	Minimal	Steep SE	Midslope	None
E5287397	499503	6886922	Graeme	14-Aug	Residual/Colluvial	Loam	Light Brown	60	Moderate	Minimal	Steep SE	Midslope	None
E5287398	499612	6886745	Graeme	14-Aug	Residual/Colluvial	Loam	Light Brown	50	Moderate	Minimal	Gentle SE	Midslope	None
E5287399	499851	6886364	Graeme	14-Aug	Residual/Colluvial	Clay	Olive Grey	40	Moderate	Moderate	Gentle NW	Midslope	None
E5287400	499902	6886282	Graeme	14-Aug	Residual/Colluvial	Loam	Olive Grey	40	Moderate	Minimal	Steep N	Midslope	None
E5287401	499964	6886184	Graeme	14-Aug	Residual/Colluvial	Talus Fines	Olive Grey	30	Moderate	Minimal	Steep N	Midslope	None
E5287402	500025	6886084	Graeme	14-Aug	Residual/Colluvial	Talus Fines	Olive Grey	40	Moderate	None	Steep NE	Midslope	None
E5287403	500084	6885987	Graeme	14-Aug	Residual/Colluvial	Loam	Olive Grey	40	Moderate	Moderate	Steep NE	Midslope	None
E5287404	500140	6885900	Graeme	14-Aug	Residual/Colluvial	Loam	Light Brown	50	Moderate	Minimal	Steep NE	Midslope	None
E5287405	500200	6885800	Graeme	14-Aug	Residual/Colluvial	Loam	Light Brown	50	Moderate	Minimal	Steep E	Midslope	None
E5287406	500263	6885707	Graeme	14-Aug	Residual/Colluvial	Loam	Olive Grey	50	Moderate	Minimal	Steep E	Midslope	None
E5287407	500383	6885519	Graeme	14-Aug	Residual/Colluvial	Loam	Light Brown	40	Moderate	Moderate	Gentle E	Bench	None
E5287408	500325	6885609	Graeme	14-Aug	Residual/Colluvial	Loam	Light Grey	40	Moderate	Moderate	Steep E	Midslope	None
E5287409	500441	6885423	Graeme	15-Aug	Residual/Colluvial	Loam	Light Brown	40	Moderate	Minimal	Steep E	Midslope	None
E5287410	500500	6885324	Graeme	15-Aug	Alluvial	Clay	Greenish Grey	70	Poor	Moderate	Steep E	Midslope	None
E5287411	500561	6885228	Graeme	15-Aug	Residual/Colluvial	Loam	Very Light Brown	60	Moderate	Minimal	Gentle E	Bench	None
E5287412	500623	6885129	Graeme	15-Aug	Residual/Colluvial	Clay	Very Light Brown	60	Poor	Minimal	Gentle E	Midslope	None

VM Project - Soil Geochemical Results

Sample No.	Rock Shape	Notes	Au (ppb)	Ag (ppm)	Al (%)	As (ppm)	B (ppm)	Ba (ppm)	Be (ppm)	Bi (ppm)	Ca (%)	Cd (ppm)	Ce (ppm)	Co (ppm)	Cr (ppm)	Cu (ppm)
E5287208	Few Angular		7.00	<0.2	1.44	6	<5	36	<0.5	<1	0.24	<0.5	26	6.8	16.2	26.3
E5287209	Few Angular		4.00	<0.2	2.08	8	<5	39	<0.5	<1	0.12	<0.5	67	7.9	25.0	28.1
E5287210	Several Angular		14.00	<0.2	1.68	16	<5	35	0.50	<1	0.27	<0.5	47	12.0	16.5	52.5
E5287394	many angular		4.00	<0.2	0.97	9	<5	27	<0.5	<1	0.10	<0.5	34	7.9	11.6	27.1
E5287395	many angular		8.00	<0.2	1.26	28	<5	26	<0.5	<1	0.04	<0.5	48	8.9	12.6	29.5
E5287396	many angular		10.00	<0.2	1.37	17	<5	18	<0.5	<1	1.17	<0.5	60	12.9	14.8	47.2
E5287397	many angular		<2	<0.2	1.02	93	<5	17	<0.5	<1	0.38	<0.5	40	8.0	12.1	18.1
E5287398	sub-angular		<2	<0.2	0.93	58	<5	19	<0.5	<1	0.22	<0.5	40	5.3	9.8	24.5
E5287399	many angular		6.00	<0.2	0.85	8	<5	23	<0.5	<1	0.37	<0.5	57	9.3	6.4	30.6
E5287400	many angular		<2	<0.2	0.91	9	<5	24	<0.5	<1	0.51	<0.5	72	10.9	7.9	36.0
E5287401	many angular		15.00	<0.2	1.02	10	<5	16	<0.5	<1	0.25	<0.5	58	12.2	11.1	44.2
E5287402	many angular		3.00	<0.2	1.45	11	<5	23	<0.5	<1	0.13	<0.5	92	16.2	16.8	50.5
E5287403	many angular		4.00	<0.2	0.80	5	<5	24	<0.5	<1	0.35	<0.5	56	5.9	7.1	21.5
E5287404	many angular		7.00	<0.2	1.16	6	<5	32	<0.5	<1	0.08	<0.5	75	9.7	10.2	25.3
E5287405	many angular		8.00	<0.2	1.23	6	<5	32	0.50	<1	0.03	<0.5	95	11.6	11.6	55.5
E5287406	angular		12.00	<0.2	0.68	5	<5	29	<0.5	<1	0.33	<0.5	51	4.5	5.4	20.2
E5287407	many angular		6.00	<0.2	1.14	7	<5	29	<0.5	<1	0.30	<0.5	66	7.6	10.7	32.1
E5287408	many angular	Comes after 408	<2	<0.2	1.36	10	<5	34	<0.5	<1	0.31	<0.5	93	10.6	13.9	42.3
E5287409	many angular	Comes before 407	<2	<0.2	1.46	6	<5	34	<0.5	<1	0.03	<0.5	60	10.6	16.1	34.2
E5287410	none		<2	<0.2	1.43	8	<5	22	<0.5	<1	0.22	<0.5	51	10.2	18.0	21.1
E5287411	many angular		<2	<0.2	1.27	10	<5	37	<0.5	<1	0.11	<0.5	58	4.6	12.4	19.0
E5287412	small angular		<2	<0.2	1.38	12	<5	43	<0.5	<1	0.25	<0.5	71	9.0	14.4	33.0

VM Project - Soil Geochemical Results

Sample No.	Fe (%)	Ga (ppm)	Hg (ppm)	In (ppm)	K (%)	La (ppm)	Li (ppm)	Mg (%)	Mn (ppm)	Mo (ppm)	Na (%)	Ni (ppm)	P (ppm)	Pb (ppm)	Rb (ppm)	S (%)	Sb (ppm)	Sc (ppm)
E5287208	3.03	<5	<1	<1	0.03	14	53	0.56	281	1.10	<0.01	26.2	388	20.3	<10	0.03	<1	1.9
E5287209	3.80	<5	<1	<1	0.03	35	91	0.80	255	<0.5	<0.01	32.2	291	11.7	<10	0.01	<1	1.2
E5287210	3.49	<5	<1	<1	0.03	24	60	0.56	493	1.30	<0.01	28.9	574	22.3	<10	0.02	<1	2.0
E5287394	2.99	<5	<1	<1	0.02	14	35	0.33	361	0.60	<0.01	24.4	480	17.8	<10	0.03	<1	0.9
E5287395	3.86	<5	<1	<1	0.03	22	45	0.49	258	0.60	<0.01	30.5	475	20.8	<10	0.03	<1	1.1
E5287396	4.02	<5	<1	<1	0.02	31	60	0.68	476	1.70	<0.01	40.2	459	23.0	<10	0.03	1	1.8
E5287397	2.50	<5	<1	<1	0.02	17	39	0.39	513	1.20	<0.01	19.4	481	17.6	<10	0.05	<1	1.1
E5287398	2.34	<5	<1	2	0.02	20	35	0.44	222	1.00	<0.01	20.3	342	14.9	<10	0.02	<1	1.3
E5287399	2.95	<5	<1	1	0.04	28	22	0.36	316	1.10	<0.01	28.7	451	21.7	<10	0.02	<1	1.6
E5287400	3.17	<5	<1	<1	0.04	35	25	0.40	320	0.80	<0.01	33.2	531	22.9	<10	0.02	<1	1.6
E5287401	3.21	<5	<1	1	0.03	27	32	0.49	470	1.10	<0.01	32.1	373	23.1	<10	0.01	<1	1.7
E5287402	3.86	<5	<1	<1	0.04	43	46	0.68	612	0.70	<0.01	38.6	403	28.7	<10	0.01	<1	1.2
E5287403	2.66	<5	<1	<1	0.03	26	23	0.31	327	0.70	<0.01	20.7	367	23.0	<10	0.03	<1	1.3
E5287404	3.13	<5	<1	<1	0.04	32	32	0.46	345	1.00	<0.01	23.7	339	20.7	<10	0.01	<1	1.1
E5287405	3.38	<5	<1	<1	0.05	44	35	0.52	536	<0.5	<0.01	32.0	380	24.1	<10	0.01	<1	1.7
E5287406	2.18	<5	<1	<1	0.03	25	18	0.26	169	<0.5	<0.01	16.5	492	16.2	<10	0.03	<1	1.3
E5287407	3.05	<5	<1	2	0.04	33	31	0.45	341	0.60	<0.01	27.4	391	22.7	<10	0.03	<1	1.4
E5287408	3.26	<5	<1	<1	0.04	44	39	0.61	361	0.80	<0.01	34.6	436	20.6	<10	0.01	<1	1.5
E5287409	3.19	<5	<1	<1	0.04	30	37	0.56	651	0.70	<0.01	27.3	302	26.0	<10	0.01	<1	0.9
E5287410	2.74	<5	<1	<1	0.03	26	41	0.66	115	2.40	<0.01	22.6	380	27.2	<10	0.27	<1	1.9
E5287411	2.71	<5	<1	<1	0.04	26	33	0.45	290	0.80	<0.01	16.2	468	14.0	<10	0.02	<1	1.5
E5287412	3.41	<5	<1	<1	0.07	34	37	0.57	476	1.20	<0.01	26.8	384	21.3	<10	0.02	<1	2.0

Sample No.	Se (ppm)	Sn (ppm)	Sr (ppm)	Ta (ppm)	Te (ppm)	Th (ppm)	Ti (%)	Tl (ppm)	U (ppm)	V (ppm)	W (ppm)	Y (ppm)	Zn (ppm)	Zr (ppm)
E5287208	<10	<5	22.3	<10	<10	<5	<0.01	<5	<5	13.6	<1	10	81.5	<5
E5287209	<10	<5	11.6	<10	<10	<5	<0.01	<5	<5	18.2	<1	4	85.4	<5
E5287210	<10	<5	18.9	<10	<10	<5	<0.01	<5	<5	16.1	<1	10	70.5	<5
E5287394	<10	<5	10.0	<10	<10	<5	<0.01	<5	<5	11.7	<1	6	76.6	<5
E5287395	<10	<5	6.4	<10	<10	<5	<0.01	<5	<5	14.6	<1	5	94.8	<5
E5287396	<10	<5	74.1	<10	<10	<5	<0.01	<5	<5	12.0	<1	12	110.0	<5
E5287397	<10	<5	35.2	<10	<10	<5	<0.01	<5	<5	11.2	<1	9	64.9	<5
E5287398	<10	<5	16.9	<10	<10	<5	<0.01	<5	<5	9.7	<1	10	72.8	<5
E5287399	<10	<5	20.8	<10	<10	<5	<0.01	<5	<5	8.5	<1	12	79.5	<5
E5287400	<10	<5	30.7	<10	<10	<5	<0.01	<5	<5	9.3	<1	11	85.0	<5
E5287401	<10	<5	15.7	<10	<10	<5	<0.01	<5	<5	9.6	<1	8	87.2	<5
E5287402	<10	<5	13.6	<10	<10	<5	<0.01	<5	<5	14.3	<1	12	99.9	<5
E5287403	<10	<5	21.1	<10	<10	<5	<0.01	<5	<5	8.1	<1	15	73.5	<5
E5287404	<10	<5	8.2	<10	<10	<5	<0.01	<5	<5	10.8	<1	8	74.9	<5
E5287405	<10	<5	6.7	<10	<10	<5	<0.01	<5	<5	11.8	<1	14	59.4	<5
E5287406	<10	<5	19.9	<10	<10	<5	<0.01	<5	<5	7.6	<1	13	58.8	<5
E5287407	<10	<5	46.8	<10	<10	<5	<0.01	<5	<5	10.6	<1	12	78.0	<5
E5287408	<10	<5	16.3	<10	<10	<5	<0.01	<5	<5	12.6	<1	12	96.9	<5
E5287409	<10	<5	9.0	<10	<10	<5	<0.01	<5	<5	13.9	<1	5	84.7	<5
E5287410	<10	<5	28.4	<10	<10	<5	<0.01	<5	10.00	14.0	<1	9	95.1	<5
E5287411	<10	<5	14.7	<10	<10	<5	<0.01	<5	<5	11.4	<1	10	70.7	<5
E5287412	<10	<5	22.8	<10	<10	<5	<0.01	<5	<5	12.9	<1	12	79.9	<5

VM Project - Soil Geochemical Results

Sample No.	Easting	Northing	Sampler	Date	Media	Matrix	Colour	Depth (cm)	Drainage	Organic	Slope	Topography	Bedrock
E5287413	500685	6885027	Graeme	15-Aug	Alluvial	Loam	Light Brown	30	Moderate	High	Gentle E	Gully	None
E5287416	501718	6883619	Graeme	16-Aug	Residual/Colluvial	Loam	Light Brown	40	Moderate	Moderate	Steep W	Midslope	None
E5287417	501809	6883434	Graeme	16-Aug	Residual/Colluvial	Loam	Dark Grey	40	Moderate	Moderate	Steep SW	Midslope	None
E5287418	501958	6883304	Graeme	16-Aug	Residual/Colluvial	Loam	Light Brown	40	Moderate	Moderate	Steep SW	Midslope	None
E5287419	502156	6883268	Graeme	16-Aug	Residual/Colluvial	Loam	Dark Grey	40	Moderate	Moderate	Steep S	Midslope	at 40cm
E5287420	502351	6883314	Graeme	16-Aug	Residual/Colluvial	Loam	Light Brown	40	Moderate	Moderate	Steep S	Midslope	None
E5287421	502556	6883329	Graeme	16-Aug	Residual/Colluvial	Clay	Light Brown	40	Moderate	Minimal	Steep S	Midslope	None
E5287422	502758	6883345	Graeme	16-Aug	Residual/Colluvial	Loam	Light Brown	40	Moderate	Moderate	Steep S	Midslope	None
E5287423	502935	6883416	Graeme	16-Aug	Residual/Colluvial	Loam	Light Brown	40	Moderate	Moderate	Steep S	Midslope	None
E5287424	503131	6883493	Graeme	16-Aug	Residual/Colluvial	Loam	Yellowish Light Grey	40	Moderate	Moderate	Steep S	Midslope	None
E5287425	503329	6883488	Graeme	16-Aug	Residual/Colluvial	Loam	Light Brown	40	Good	Moderate	Steep S	Midslope	None
E5287426	503468	6883637	Graeme	16-Aug	Residual/Colluvial	Loam	Yellowish Orange	40	Good	Minimal	Steep SE	Midslope	None
E5287427	503444	6883823	Graeme	16-Aug	Residual/Colluvial	Loam	Light Brown	40	Good	Minimal	Steep NE	Midslope	None
E5287428	503279	6883944	Graeme	16-Aug	Residual/Colluvial	Loam	Light Brown	40	Good	Minimal	Gentle NE	Midslope	None
E5287429	503443	6884078	Graeme	16-Aug	Residual/Colluvial	Loam	Light Brown	40	Moderate	Moderate	Gentle SE	Midslope	None
E5287430	503630	6884105	Graeme	16-Aug	Residual/Colluvial	Loam	Light Brown	40	Moderate	Moderate	Steep SW	Midslope	None
E5287431	503808	6884010	Graeme	16-Aug	Residual/Colluvial	Loam	Light Brown	40	Good	High	Steep S	Midslope	None
E5287432	504005	6884003	Graeme	16-Aug	Residual/Colluvial	Loam	Greenish Grey	30	Moderate	Moderate	Steep S	Midslope	Float Rock
E5287433	504194	6884060	Graeme	16-Aug	Residual/Colluvial	Loam	Light Brown	30	Moderate	High	Steep S	Midslope	None
E5287434	503745	6884323	Graeme	17-Aug	Residual/Colluvial	Loam	Light Brown	30	Good	Moderate	Steep SW	Midslope	None
E5287435	503829	6884238	Graeme	17-Aug	Residual/Colluvial	Loam	Light Brown	30	Moderate	Moderate	Steep SW	Midslope	None

VM Project - Soil Geochemical Results

Sample No.	Rock Shape	Notes	Au (ppb)	Ag (ppm)	Al (%)	As (ppm)	B (ppm)	Ba (ppm)	Be (ppm)	Bi (ppm)	Ca (%)	Cd (ppm)	Ce (ppm)	Co (ppm)	Cr (ppm)	Cu (ppm)
E5287413	Angular		7.00	<0.2	1.26	24	<5	26	<0.5	<1	0.21	<0.5	44	10.9	14.4	29.9
E5287416	large angular		4.00	<0.2	1.42	14	<5	35	<0.5	<1	0.10	<0.5	48	6.2	15.2	21.1
E5287417	large angular		<2	<0.2	0.78	38	<5	18	<0.5	<1	16.80	<0.5	23	4.7	4.1	12.9
E5287418	large angular	near outcrop	8.00	<0.2	1.78	14	<5	48	0.50	<1	0.48	<0.5	46	8.9	15.4	25.5
E5287419	few angular		<2	<0.2	3.20	21	<5	56	1.10	<1	3.52	<0.5	42	12.0	29.8	36.2
E5287420	angular		6.00	<0.2	1.18	189	<5	40	0.60	<1	0.06	<0.5	85	8.4	11.4	47.9
E5287421	many angular	soil on float boulders	<2	<0.2	1.47	30	<5	32	<0.5	<1	0.10	<0.5	44	6.4	17.5	28.9
E5287422	angular	soil on float boulders	4.00	<0.2	2.02	13	<5	56	0.60	<1	0.34	<0.5	44	8.0	24.3	27.8
E5287423	angular	soil on float boulders	<2	<0.2	1.60	12	<5	48	0.60	<1	0.14	<0.5	38	9.7	19.2	27.0
E5287424	angular	below outcrop in rockfall area	<2	<0.2	1.55	21	<5	28	0.60	<1	0.08	<0.5	64	14.7	18.0	47.8
E5287425	very few angular	soil on float boulders	<2	<0.2	1.64	26	<5	43	<0.5	<1	0.03	<0.5	29	7.0	21.0	21.2
E5287426	few angular	soil on float boulders	<2	<0.2	1.62	6	<5	19	<0.5	<1	<0.01	<0.5	23	5.1	18.6	16.6
E5287427	angular		<2	<0.2	1.54	11	<5	39	0.70	<1	0.06	<0.5	31	11.6	14.6	27.5
E5287428	angular		5.00	<0.2	1.55	12	<5	39	0.60	<1	0.06	<0.5	32	5.5	15.1	33.7
E5287429	angular		<2	<0.2	1.73	16	<5	38	0.60	<1	0.27	<0.5	46	7.9	19.6	28.5
E5287430	angular		<2	<0.2	2.05	12	<5	51	0.60	<1	0.05	<0.5	32	7.1	25.9	20.1
E5287431	angular		15.00	<0.2	0.81	23	<5	33	<0.5	<1	0.11	<0.5	18	5.6	8.0	30.0
E5287432	angular		<2	<0.2	2.45	31	<5	53	0.70	<1	0.78	<0.5	25	8.9	24.0	32.2
E5287433	few rocks	soil on float boulders	2.00	<0.2	1.28	57	<5	49	<0.5	<1	0.30	<0.5	19	4.4	16.8	19.9
E5287434	angular	below float boulders	9.00	<0.2	1.13	27	<5	57	<0.5	<1	0.14	<0.5	33	5.9	13.5	16.0
E5287435	few small angular		2.00	<0.2	1.50	13	<5	57	0.60	<1	0.19	<0.5	38	8.1	19.2	27.7

VM Project - Soil Geochemical Results

Sample No.	Fe (%)	Ga (ppm)	Hg (ppm)	In (ppm)	K (%)	La (ppm)	Li (ppm)	Mg (%)	Mn (ppm)	Mo (ppm)	Na (%)	Ni (ppm)	P (ppm)	Pb (ppm)	Rb (ppm)	S (%)	Sb (ppm)	Sc (ppm)
E5287413	3.08	<5	<1	<1	0.05	21	36	0.55	517	1.10	<0.01	23.2	524	22.4	<10	0.05	<1	1.3
E5287416	2.39	<5	<1	1	0.08	21	22	0.54	265	0.50	<0.01	20.2	399	12.1	18	0.02	<1	0.7
E5287417	1.56	<5	<1	<1	0.02	9	14	0.40	347	1.80	0.02	10.0	541	8.8	19	0.25	5	1.2
E5287418	2.87	<5	<1	<1	0.06	19	30	0.58	281	<0.5	0.02	28.9	224	14.5	15	0.03	<1	1.1
E5287419	3.80	7.00	<1	<1	0.06	20	38	0.71	1040	1.60	0.08	33.1	892	27.1	42	0.16	2	2.6
E5287420	3.90	<5	<1	<1	0.09	49	23	0.35	197	<0.5	0.02	33.9	468	19.2	18	0.14	<1	1.0
E5287421	3.06	<5	<1	<1	0.05	22	30	0.67	221	1.10	<0.01	24.4	396	14.5	13	0.01	<1	0.9
E5287422	3.03	<5	<1	<1	0.19	20	49	0.70	218	1.80	0.03	32.5	252	15.7	41	0.03	<1	1.6
E5287423	2.74	<5	<1	2	0.18	16	38	0.56	304	0.70	<0.01	28.7	345	18.1	51	0.02	<1	1.0
E5287424	3.08	<5	<1	<1	0.10	23	30	0.71	278	<0.5	<0.01	35.4	362	20.1	23	0.01	<1	1.1
E5287425	2.94	<5	<1	<1	0.12	13	24	0.46	487	1.00	<0.01	16.1	456	15.3	29	0.04	<1	<0.5
E5287426	3.71	<5	<1	<1	0.03	8	26	0.61	198	0.80	<0.01	18.5	389	7.9	11	0.02	<1	0.7
E5287427	2.17	<5	<1	<1	0.08	14	22	0.45	315	0.70	0.02	24.4	454	16.2	19	0.03	<1	0.8
E5287428	2.09	<5	<1	<1	0.08	15	24	0.49	201	1.00	0.02	21.8	471	17.1	22	0.03	<1	0.6
E5287429	3.05	<5	<1	<1	0.08	24	43	0.58	390	<0.5	<0.01	28.6	391	17.0	21	0.03	<1	2.0
E5287430	3.53	<5	<1	<1	0.14	14	33	0.62	552	<0.5	<0.01	18.8	343	18.1	49	0.04	<1	1.1
E5287431	2.06	<5	<1	1	0.04	7	6	0.13	1030	1.70	0.02	8.5	734	15.8	12	0.05	<1	<0.5
E5287432	3.43	<5	<1	<1	0.26	13	65	0.87	298	0.90	0.11	32.8	685	15.8	76	0.04	<1	2.9
E5287433	2.07	<5	<1	1	0.14	9	22	0.40	259	1.20	0.02	14.3	528	11.1	38	0.06	<1	0.8
E5287434	2.14	<5	<1	<1	0.25	14	22	0.41	371	1.00	<0.01	18.0	408	18.0	49	0.02	<1	1.0
E5287435	2.64	<5	<1	<1	0.26	17	30	0.60	344	0.80	<0.01	26.0	516	14.9	54	0.02	<1	1.8

Sample No.	Se (ppm)	Sn (ppm)	Sr (ppm)	Ta (ppm)	Te (ppm)	Th (ppm)	Ti (%)	Tl (ppm)	U (ppm)	V (ppm)	W (ppm)	Y (ppm)	Zn (ppm)	Zr (ppm)
E5287413	<10	<5	15.5	<10	<10	<5	<0.01	<5	<5	13.4	<1	7	75.1	<5
E5287416	<10	<5	13.9	<10	<10	<5	0.02	<5	<5	17.3	<1	6	54.8	<5
E5287417	<10	13.00	461.0	<10	<10	<5	0.01	<5	<5	9.1	<1	7	32.6	<5
E5287418	<10	<5	35.4	<10	<10	<5	0.02	<5	<5	16.6	<1	5	62.6	<5
E5287419	<10	<5	267.0	<10	<10	<5	0.05	<5	<5	34.7	<1	15	81.9	<5
E5287420	<10	<5	66.0	<10	<10	<5	0.01	<5	<5	15.0	<1	9	56.6	<5
E5287421	<10	<5	11.9	<10	<10	<5	0.01	<5	<5	15.7	<1	6	155.0	<5
E5287422	<10	<5	37.0	<10	<10	<5	0.06	<5	<5	26.8	<1	8	83.7	<5
E5287423	<10	<5	17.7	<10	<10	<5	0.05	<5	<5	22.2	<1	6	64.3	<5
E5287424	<10	<5	12.2	<10	<10	<5	0.03	<5	<5	19.8	<1	6	79.2	<5
E5287425	<10	<5	8.8	<10	<10	<5	0.02	<5	<5	23.5	<1	4	68.8	<5
E5287426	<10	<5	<0.5	<10	<10	<5	0.01	<5	<5	19.3	<1	3	74.3	<5
E5287427	<10	<5	9.0	<10	<10	<5	0.02	<5	<5	20.0	<1	5	57.2	<5
E5287428	<10	<5	9.9	<10	<10	<5	0.02	<5	<5	18.8	<1	5	57.9	<5
E5287429	<10	<5	25.6	<10	<10	<5	0.03	<5	<5	19.0	<1	19	64.8	<5
E5287430	<10	<5	13.8	<10	<10	<5	0.05	<5	<5	28.9	<1	5	73.7	<5
E5287431	<10	<5	10.9	<10	<10	<5	0.02	<5	<5	13.0	<1	4	39.0	<5
E5287432	<10	<5	87.7	<10	<10	<5	0.09	<5	<5	31.9	<1	16	69.4	<5
E5287433	<10	<5	22.9	<10	<10	<5	0.04	<5	<5	22.2	<1	4	50.0	<5
E5287434	<10	<5	16.3	<10	<10	<5	0.06	<5	<5	16.9	<1	6	56.7	<5
E5287435	<10	<5	37.4	<10	<10	<5	0.07	<5	<5	22.1	<1	7	70.2	<5

VM Project - Soil Geochemical Results

Sample No.	Easting	Northing	Sampler	Date	Media	Matrix	Colour	Depth (cm)	Drainage	Organic	Slope	Topography	Bedrock
E5287436	503924	6884212	Graeme	17-Aug	Residual/Colluvial	Loam	Light Brown	40	Good	High	Steep S	Midslope	None
E5287437	504017	6884256	Graeme	17-Aug	Residual/Colluvial	Loam	Light Brown	30	Good	High	Steep SE	Midslope	loat boulder
E5287438	504107	6884311	Graeme	17-Aug	Residual/Colluvial	Loam	Light Brown	30	Moderate	Moderate	Steep SE	Midslope	loat boulder
E5287439	504189	6884374	Graeme	17-Aug	Residual/Colluvial	Loam	Light Brown	50	Good	Moderate	Steep SE	Midslope	None
E5287440	504273	6884436	Graeme	17-Aug	Residual/Colluvial	Loam	Light Brown	60	Good	Minimal	Steep SE	Midslope	None
E5287441	504341	6884509	Graeme	17-Aug	Residual/Colluvial	Loam	Light Brown	50	Moderate	Minimal	Steep SE	Midslope	None
E5287442	504390	6884602	Graeme	17-Aug	Residual/Colluvial	Loam	Light Brown	40	Moderate	Minimal	Steep E	Midslope	None
E5287443	504417	6884702	Graeme	17-Aug	Residual/Colluvial	Loam	Light Brown	50	Good	Moderate	Steep E	Midslope	None
E5287444	504463	6884799	Graeme	17-Aug	Residual/Colluvial	Loam	Light Brown	40	Moderate	Moderate	Steep S	Midslope	at 40cm
E5287445	504553	6884837	Graeme	17-Aug	Residual/Colluvial	Loam	Light Brown	40	Moderate	Minimal	Steep SE	Midslope	None
E5287446	504601	6884924	Graeme	17-Aug	Residual/Colluvial	Loam	Light Brown	40	Good	Minimal	Steep SE	Midslope	None
E5287447	504670	6884997	Graeme	17-Aug	Residual/Colluvial	Loam	Light Brown	40	Moderate	High	Steep SE	Midslope	None
TvmSE5286631	503835	6885890	Dave										
TvmSE5286632	503357	6885155	Dave										
TvmSE5286633	503345	6885136	Dave										
TvmSE5286634	500569	6884437	Dave										
TvmSE5286635	500103	6884327	Dave										
TvmSE5286636	499888	6884315	Dave										
TvmSE5286637	499575	6884184	Dave										
TvmLE5286638	499420	6884402	Dave										
TvmLE5286639	499984	6884866	Dave										
TvmLE5286640	500175	6884929	Dave										
TvmLE5286641	500189	6884961	Dave										
TvmSE5286642	501388	6886397	Dave										
TvmLE5286643	503092	6884146	Dave										
TvmLE5286644	503084	6884083	Dave										
TvmLE5286645	503596	6883915	Dave										
TvmLE5286646	503559	6883911	Dave										

VM Project - Soil Geochemical Results

Sample No.	Rock Shape	Notes	Au (ppb)	Ag (ppm)	Al (%)	As (ppm)	B (ppm)	Ba (ppm)	Be (ppm)	Bi (ppm)	Ca (%)	Cd (ppm)	Ce (ppm)	Co (ppm)	Cr (ppm)	Cu (ppm)
E5287436	angular		4.00	<0.2	1.67	15	<5	57	0.50	<1	0.13	<0.5	34	9.8	23.8	33.9
E5287437	few sub-angular		16.00	<0.2	1.45	104	<5	56	0.70	<1	0.19	<0.5	28	8.9	18.6	26.0
E5287438	angular		14.00	<0.2	1.85	33	<5	61	0.70	<1	0.21	<0.5	32	8.3	26.4	24.1
E5287439	angular		11.00	<0.2	2.15	8	<5	70	0.70	<1	0.15	<0.5	57	13.3	28.2	33.6
E5287440	angular		10.00	<0.2	1.57	21	<5	56	0.60	<1	0.46	<0.5	61	9.9	27.5	30.8
E5287441	angular		18.00	<0.2	1.77	7	<5	34	0.70	<1	0.15	<0.5	38	10.5	20.7	33.4
E5287442	angular		7.00	<0.2	2.14	5	<5	44	0.90	<1	0.32	<0.5	33	23.4	26.1	31.7
E5287443	angular		<2	<0.2	1.50	5	<5	40	<0.5	<1	0.45	<0.5	27	8.6	24.9	17.7
E5287444	many angular		8.00	<0.2	1.33	6	<5	29	0.70	<1	0.28	<0.5	37	11.4	16.0	32.6
E5287445	angular		5.00	<0.2	1.86	11	<5	36	1.60	<1	0.07	<0.5	112	27.1	20.8	94.7
E5287446	angular	in rockfall area	3.00	<0.2	2.84	7	<5	92	0.70	<1	0.73	<0.5	34	17.1	34.9	37.7
E5287447	angular		<2	<0.2	2.15	9	<5	62	0.60	<1	0.38	<0.5	23	14.7	27.5	32.8
TvmSE5286631			<2	0.50	1.40	6	<5	34	<0.5	<1	0.09	<0.5	32	4.8	13.0	26.2
TvmSE5286632			2.00	<0.2	1.12	8	<5	47	0.60	<1	0.13	<0.5	76	10.5	11.6	22.5
TvmSE5286633			<2	<0.2	1.37	8	<5	57	0.70	<1	0.09	<0.5	71	11.3	15.2	27.9
TvmSE5286634			<2	<0.2	0.83	4	<5	27	<0.5	<1	0.03	<0.5	19	1.5	4.8	23.1
TvmSE5286635			<2	<0.2	1.51	11	<5	29	<0.5	<1	0.06	<0.5	35	21.9	15.8	45.5
TvmSE5286636			<2	<0.2	0.96	11	<5	28	<0.5	<1	0.29	<0.5	62	33.7	6.7	85.2
TvmSE5286637			<2	<0.2	1.33	7	<5	28	<0.5	<1	0.03	<0.5	33	8.9	10.2	24.8
TvmLE5286638			<2	<0.2	1.60	13	<5	20	<0.5	<1	0.34	<0.5	65	10.4	19.6	49.5
TvmLE5286639			4.00	<0.2	1.26	37	<5	23	<0.5	<1	0.43	<0.5	58	10.4	13.5	41.8
TvmLE5286640			2.00	<0.2	1.11	24	<5	17	<0.5	<1	0.21	<0.5	53	8.0	13.9	30.5
TvmLE5286641			<2	<0.2	1.46	9	<5	27	<0.5	<1	0.39	<0.5	48	9.5	17.1	45.2
TvmSE5286642			6.00	<0.2	0.67	74	<5	45	0.90	<1	1.79	<0.5	53	11.2	4.1	21.8
TvmLE5286643			<2	<0.2	1.18	9	<5	15	<0.5	<1	0.37	<0.5	55	10.8	14.4	45.3
TvmLE5286644			<2	<0.2	1.72	31	<5	26	0.70	<1	0.21	<0.5	67	19.4	16.9	50.8
TvmLE5286645			10.00	<0.2	1.44	17	<5	32	0.50	<1	1.09	<0.5	54	9.8	19.8	40.6
TvmLE5286646			6.00	<0.2	1.46	15	<5	24	<0.5	<1	0.40	<0.5	54	10.0	16.7	40.8

VM Project - Soil Geochemical Results

Sample No.	Fe (%)	Ga (ppm)	Hg (ppm)	In (ppm)	K (%)	La (ppm)	Li (ppm)	Mg (%)	Mn (ppm)	Mo (ppm)	Na (%)	Ni (ppm)	P (ppm)	Pb (ppm)	Rb (ppm)	S (%)	Sb (ppm)	Sc (ppm)
E5287436	2.82	<5	<1	1	0.21	14	32	0.57	449	<0.5	0.01	30.2	406	19.0	61	0.05	<1	1.9
E5287437	2.48	<5	<1	<1	0.23	12	30	0.55	369	<0.5	<0.01	27.6	368	17.7	63	0.03	<1	1.5
E5287438	3.04	<5	<1	<1	0.23	13	32	0.68	499	0.60	0.02	27.2	334	19.6	66	0.03	<1	2.5
E5287439	3.61	<5	<1	<1	0.36	25	35	0.79	538	<0.5	0.01	41.7	423	17.0	87	0.03	<1	2.2
E5287440	3.29	<5	<1	<1	0.30	33	36	0.75	582	0.50	0.01	32.4	364	15.6	99	0.03	<1	3.0
E5287441	3.09	<5	<1	<1	0.08	20	38	0.72	486	<0.5	0.01	28.5	365	14.9	32	0.04	<1	1.6
E5287442	2.89	7.00	<1	1	0.19	18	55	0.66	693	1.30	0.07	39.2	307	11.7	70	0.04	<1	3.1
E5287443	2.76	<5	<1	<1	0.20	12	42	0.63	455	1.10	0.03	23.3	257	11.5	61	0.04	<1	2.8
E5287444	2.63	<5	<1	<1	0.10	17	29	0.55	322	<0.5	0.03	32.9	343	15.5	29	0.02	<1	1.7
E5287445	3.84	<5	<1	<1	0.07	31	44	0.64	370	0.90	<0.01	70.7	332	26.4	24	0.02	<1	1.8
E5287446	4.46	6.00	<1	<1	0.35	16	57	0.95	961	<0.5	0.15	40.8	418	18.5	112	0.02	<1	5.8
E5287447	3.89	<5	<1	<1	0.23	11	42	0.73	659	0.90	0.05	34.6	401	16.4	78	0.07	<1	3.1
TvmSE5286631	2.81	<5	<1	<1	0.05	16	32	0.52	321	0.50	0.01	13.5	576	7.8	11	0.03	<1	1.0
TvmSE5286632	2.27	<5	<1	<1	0.03	27	19	0.40	772	1.30	<0.01	23.3	320	13.2	<10	0.02	<1	1.7
TvmSE5286633	2.71	<5	<1	<1	0.04	30	22	0.47	772	0.50	<0.01	25.5	549	149.0	11	0.03	<1	1.8
TvmSE5286634	0.99	<5	<1	2	0.03	8	3	0.06	80	1.00	0.02	3.8	545	10.3	<10	0.05	<1	<0.5
TvmSE5286635	3.65	<5	<1	<1	0.04	14	32	0.49	1070	0.70	0.01	37.9	752	33.0	<10	0.04	<1	0.9
TvmSE5286636	6.88	<5	<1	<1	0.04	33	27	0.42	1040	0.50	<0.01	77.7	543	37.0	<10	0.05	<1	3.8
TvmSE5286637	1.99	<5	<1	1	0.04	15	21	0.37	355	0.60	0.01	17.6	369	12.8	<10	0.03	<1	0.6
TvmLE5286638	2.89	<5	<1	<1	0.05	46	43	0.74	465	1.50	<0.01	31.8	431	19.2	<10	0.04	<1	1.1
TvmLE5286639	3.30	<5	<1	<1	0.05	27	35	0.56	488	<0.5	<0.01	31.0	553	22.3	<10	0.06	<1	1.5
TvmLE5286640	2.58	<5	<1	<1	0.04	26	35	0.54	332	<0.5	<0.01	21.4	388	17.0	<10	0.07	<1	1.0
TvmLE5286641	3.17	<5	<1	<1	0.05	23	45	0.65	363	0.90	<0.01	28.6	499	21.7	<10	0.06	<1	1.4
TvmSE5286642	8.34	<5	<1	<1	0.05	25	10	0.70	3830	1.80	<0.01	25.8	2410	19.2	10	0.08	<1	3.8
TvmLE5286643	3.26	<5	<1	<1	0.02	28	40	0.64	413	1.00	<0.01	33.2	420	21.8	<10	0.02	<1	1.0
TvmLE5286644	3.46	<5	<1	<1	0.08	35	41	0.75	515	0.80	<0.01	39.2	422	23.5	19	0.02	<1	1.3
TvmLE5286645	3.51	<5	<1	<1	0.12	27	36	0.77	474	1.10	<0.01	32.3	563	15.8	28	0.04	<1	1.8
TvmLE5286646	3.25	<5	<1	<1	0.07	29	43	0.75	507	1.00	<0.01	34.6	513	19.0	12	0.04	<1	1.2

VM Project - Soil Geochemical Results

Sample No.	Se (ppm)	Sn (ppm)	Sr (ppm)	Ta (ppm)	Te (ppm)	Th (ppm)	Ti (%)	Tl (ppm)	U (ppm)	V (ppm)	W (ppm)	Y (ppm)	Zn (ppm)	Zr (ppm)
E5287436	<10	<5	20.4	<10	<10	<5	0.06	<5	<5	26.9	<1	7	80.5	<5
E5287437	<10	<5	30.1	<10	<10	<5	0.06	<5	<5	20.7	<1	6	68.7	<5
E5287438	<10	<5	22.2	<10	<10	<5	0.08	<5	<5	27.1	<1	10	91.6	<5
E5287439	<10	<5	29.3	<10	<10	<5	0.08	<5	<5	30.5	<1	12	96.7	<5
E5287440	<10	<5	51.2	<10	<10	<5	0.10	<5	<5	28.7	<1	18	129.0	<5
E5287441	<10	<5	20.0	<10	<10	<5	0.04	<5	<5	20.9	<1	18	81.7	<5
E5287442	<10	<5	29.3	<10	<10	<5	0.07	<5	<5	29.9	<1	20	71.5	<5
E5287443	<10	<5	36.7	<10	<10	<5	0.07	<5	<5	25.7	<1	12	71.0	<5
E5287444	<10	<5	69.4	<10	<10	<5	0.04	<5	<5	18.1	<1	15	74.1	<5
E5287445	<10	<5	42.6	<10	<10	<5	0.05	<5	<5	23.9	<1	14	118.0	<5
E5287446	<10	<5	61.7	<10	<10	<5	0.12	5.00	<5	40.3	<1	20	111.0	<5
E5287447	<10	<5	36.9	<10	<10	<5	0.09	<5	<5	30.9	<1	14	95.6	<5
TvmSE5286631	<10	<5	9.5	<10	<10	<5	0.01	<5	<5	18.2	<1	5	57.8	<5
TvmSE5286632	<10	<5	14.5	<10	<10	<5	0.02	<5	<5	17.3	<1	18	49.4	<5
TvmSE5286633	<10	<5	13.6	<10	<10	<5	0.02	<5	<5	21.4	<1	18	66.6	<5
TvmSE5286634	<10	<5	5.6	<10	<10	<5	<0.01	<5	<5	16.2	<1	2	18.9	<5
TvmSE5286635	<10	<5	8.2	<10	<10	<5	0.02	<5	<5	21.4	<1	5	80.0	<5
TvmSE5286636	<10	<5	18.8	<10	<10	<5	<0.01	<5	<5	12.4	<1	19	154.0	<5
TvmSE5286637	<10	<5	6.3	<10	<10	<5	<0.01	<5	<5	12.6	<1	4	45.5	<5
TvmLE5286638	<10	<5	26.6	<10	<10	<5	<0.01	<5	7.00	15.9	<1	10	84.6	<5
TvmLE5286639	<10	<5	38.6	<10	<10	<5	<0.01	<5	<5	11.8	<1	11	81.7	<5
TvmLE5286640	<10	<5	19.2	<10	<10	<5	<0.01	<5	<5	12.9	<1	6	62.7	<5
TvmLE5286641	<10	<5	41.1	<10	<10	<5	<0.01	<5	<5	13.1	<1	8	86.4	<5
TvmSE5286642	21	<5	86.4	<10	<10	<5	<0.01	<5	<5	15.0	<1	31	40.3	<5
TvmLE5286643	<10	<5	35.1	<10	<10	<5	0.01	<5	<5	12.0	<1	12	80.8	<5
TvmLE5286644	<10	<5	24.3	<10	<10	<5	0.02	<5	<5	17.3	<1	14	90.8	<5
TvmLE5286645	<10	<5	114.0	<10	<10	<5	0.04	<5	<5	18.2	<1	17	80.0	<5
TvmLE5286646	<10	<5	36.0	<10	<10	<5	0.02	<5	<5	14.6	<1	13	79.7	<5

VM Project - Silt Geochemistry

Sample No.	Easting	Northing	Sampler	Date	Color	Width (m)	Volume	Gradient	Organics (%)	Notes	Au (ppb)
E5285930	519976	6880590	Chris	17-Aug	Light Brown	0-2	Moderate	Shallow	50+	Silt - Gravel	4
E5285931	519345	6881135	Chris	17-Aug	Olive Grey	0-2	High	Shallow	35-50	Silt - Gravel	7
E5285932	518554	6882280	Chris	17-Aug	Light Grey	0-2	High	Shallow	35-50	Silt - Gravel	61
E5285933	517116	6882858	Chris	17-Aug	Olive Grey	0-2	High	Shallow	50+	Silt - Pebbles	5
E5285934	515898	6882167	Chris	17-Aug	Light Brown	>5	Low	Shallow	<10	Silt	5
E5285935	514229	6882709	Chris	17-Aug	Light Grey	0-2	High	Shallow	<10	Silt	14
E5287414	501126	6884285	Graeme	15-Aug	Dark Grey	>5	medium	shallow	moderate		<2
E5287415	501588	6883519	Graeme	15-Aug	Light brown	1	dry	moderate	low	Dry tributary	<2

VM Project - Silt Geochemistry

Sample No.	Ag (ppm)	Al (%)	As (ppm)	B (ppm)	Ba (ppm)	Be (ppm)	Bi (ppm)	Ca (%)	Cd (ppm)	Ce (ppm)	Co (ppm)	Cr (ppm)	Cu (ppm)	Fe (%)
E5285930	<0.2	2.55	10	<5	19	<0.5	<1	0.06	<0.5	85	22.2	36.2	91.5	5.10
E5285931	<0.2	2.07	7	<5	26	1	<1	0.20	<0.5	169	26.9	27.2	61.7	4.48
E5285932	<0.2	1.95	27	<5	33	1	<1	0.25	<0.5	98	23.2	26.3	85.8	4.25
E5285933	<0.2	1.88	6	<5	41	1	<1	0.17	<0.5	96	20.3	26.9	64.1	4.08
E5285934	<0.2	1.47	20	<5	14	<0.5	<1	0.34	<0.5	80	16.1	18.2	41.3	3.93
E5285935	<0.2	1.68	13	<5	43	<0.5	<1	0.17	<0.5	80	15.4	23.8	38.1	3.66
E5287414	<0.2	1.45	20	<5	19	<0.5	<1	1.02	<0.5	57	11.4	16.5	36.8	3.92
E5287415	<0.2	2.02	13	<5	51	1	<1	0.28	<0.5	44	7.8	24.1	25.4	2.97

Sample No.	Ga (ppm)	Hg (ppm)	In (ppm)	K (%)	La (ppm)	Li (ppm)	Mg (%)	Mn (ppm)	Mo (ppm)	Na (%)	Ni (ppm)	P (ppm)	Pb (ppm)	Rb (ppm)	S (%)
E5285930	<5	<1	<1	0.03	43	60	0.96	1290	1.8	<0.01	36.3	430	81.9	<10	0.02
E5285931	<5	<1	<1	0.03	68	64	0.91	1290	1.2	<0.01	47.6	515	21.4	<10	0.03
E5285932	<5	<1	<1	0.04	55	55	0.84	955	0.9	<0.01	37.6	603	28.8	<10	0.03
E5285933	<5	<1	<1	0.04	52	55	0.83	1050	0.5	<0.01	35.0	537	25.5	<10	0.03
E5285934	<5	<1	<1	0.02	41	53	0.68	516	<0.5	<0.01	33.5	514	20.8	<10	0.04
E5285935	<5	<1	<1	0.04	39	51	0.73	637	0.8	<0.01	31.1	513	16.8	<10	0.03
E5287414	<5	<1	<1	0.03	29	56	0.73	498	0.6	<0.01	34.0	482	20.4	<10	0.09
E5287415	<5	<1	<1	0.09	28	67	0.74	330	1.0	0.02	28.3	372	15.7	24	0.03

Sample No.	Sb (ppm)	Sc (ppm)	Se (ppm)	Sn (ppm)	Sr (ppm)	Ta (ppm)	Te (ppm)	Th (ppm)	Ti (%)	Tl (ppm)	U (ppm)	V (ppm)	W (ppm)	Y (ppm)	Zn (ppm)	Zr (ppm)
E5285930	<1	2.2	<10	<5	8.0	<10	<10	15	<0.01	<5	<5	25.5	<1	10	117.0	<5
E5285931	<1	1.9	<10	<5	13.7	<10	<10	15	0.01	<5	<5	26.8	<1	15	113.0	<5
E5285932	<1	1.9	<10	<5	23.9	<10	<10	12	0.02	<5	<5	24.5	<1	13	116.0	<5
E5285933	<1	1.5	<10	<5	18.2	<10	<10	14	0.01	<5	<5	25.6	<1	11	110.0	<5
E5285934	<1	1.8	<10	<5	19.6	<10	<10	14	0.01	<5	<5	16.7	<1	8	93.9	<5
E5285935	<1	1.4	<10	<5	14.3	<10	<10	9	0.03	<5	<5	23.6	<1	8	86.7	<5
E5287414	<1	1.5	<10	<5	61.1	<10	<10	<5	<0.01	<5	<5	14.7	<1	9	88.0	<5
E5287415	<1	2.0	<10	<5	27.1	<10	<10	<5	0.06	<5	<5	26.2	<1	13	79.1	<5

***Appendix III**- Detailed Mapping Station Data*

VM - Mapping Station Data

Waypoint	Easting_NAD83	Northing_NAD83	Elevation (m)	Rock Type	Sample?	Bedding	Cleavage	S?	Veining
TVM01	503623	6885456	2062	Phyllite					
TVM02	503963	6885725	2052	Limestone		147/87SW	098/41S	S2	
TVM02	503963	6885725	2052	Limestone		141/63NE	143/63SW	S3	
TVM03	503944	6886188	2042	Slate		160/25E			
TVM04	503450	6885238	2009	Phyllite					
TVM05	503360	6885159	1968	Psammite-grit	TVMS E5286632				160/80E
TVMG E5286216	503349	6885143	1959	Psammite-grit	TVMG E5286216				009/82W
TVMG E5286216	503349	6885143	1959	Psammite-grit					144/65E
TVMS E5286633	503345	6885136	1947	Quartz vein	TVMS E5286633				087/61S
TVM06	503202	6885087	1947	Psammite		141/61W			
TVM07	503205	6885050	1948	Old Post					
TVM08	503119	6885128	1988	Psammite	GLHWR008				
TVM09	503098	6885127	1981	Grit	BWLWR003				
TVM10	502970	6885172	1963	Slate-grit					
BWLWR002	502924	6885157	-	Quartz vein	BWLWR002				
GHLWR007	502648	6885045	-	Phyllite	GHLWR007				
TVM11	502338	6884927	1993	Limestone					
TVM12	502057	6885067	1896	Phyllite		114/43N	124/67N	S3?	
TVM13	500582	6884505	1593	Phyllite					
TVM14	500567	6884474	1600	Slate-grit		087/84S	104/48S	S2	
TVM15	500570	6884435	1595	Grit					122/90
TVMG E5286217	500572	6884437	1597	Quartz vein	TVMG E5286217				
TVM16	500445	6884444	1642	Quartz vein					106/74S
TVM17	500227	6884396	1711	Phyllite		105/62S	090/31	S2	
TVM18	500070	6884314	1727	Phyllite-quartzite		130/65NE	125/75SW	S3?	
TVM19	499974	6884320	1697	Conglomerate					
TVMS E5285536	499888	6884315	1695	Phyllite-limestone	TVMS E5285536				
TVM20	499595	6884179	1724	Grit-Limestone		127/65SW	126/43NE	S3?	029/52W & 054/90
TVM21	499718	6884778	1656	Grit-Phyllite					
TVM22	501486	6885044	1625	Phyllite					
TVM23	501473	6885327	1683	Grit-psammite		083/55N	145/67NE	S3	072/02E
TVM24	501479	6885530	1805	Limey slate		121/11N	091/22N	S2	
TVM25	501524	6885557	1805	Grit-psammite-slate		081/08N	111/80N	S2	111/80N
TVM26	501539	6885798	1836	Grit					
TVM27	501700	6885710	1885	Psammite					

Waypoint	Fold Axis	Faulting	Slickensides	Notes
TVM01				Phyllite with a Quartz vein.
TVM02				Limestone with intercalations of slate/phyllite, grit and sandstone. Open fold; hinge not apparent. F2 folded cleavage.
TVM02				
TVM03				Medium grey slate with pale green interbeds up to 2cm in thickness. Cleaved ~ perpindicular to bedding (thinly cleaved). Outcrop appears slightly slumped.
TVM04				Phyllite in contact with Quartz vein grit contact (grit to SW).
TVM05				Massive, cliff-forming psammite-grit with Quartz vein swarm (massive).
TVMG E5286216				Quartz vein hosted in psammite to very coarse grained grit-conglomerate. Rusty vein up to 35cm-thick, irregular, trace galena in vuggy secondary vein.
TVMG E5286216				Quartz-carbonate-chlorite veins, 2-70cm thick with pyr associated with chlorite clots.
TVMS E5286633			029/117	Quartz vein (30 m vertically) on a possible fault? Possible slickensides on Quartz vein plane.
TVM06				Psammite with Quartz veins, massive grit with no lithological bedding evident. 2 significant planes evident: 035/75E and 088/90.
TVM07				
TVM08				Quartz-carbonate-chlorite vein hosted in psammite. Old sample.
TVM09			162/72NE	Quartz vein in grit. Old sample.
TVM10				Slate-grit contact.
BWLWR002				Old sample BWLWR002 of quartz vein float.
GHLWR007				Old sample GHLWR007 of quartz vein in minor grit-phyllitic slate.
TVM11				Limestone with slate-grit.
TVM12				Pyritic phyllite with grit.
TVM13	008/294			Phyllite at base of large grit outcrop.
TVM14				Lower base of slate in massive quartz grit with abundant rip-up clasts. <3% quartz veins that are rusty with minor carbonate.
TVM15				Quarz vein in quartz grit. 50-80cm X 5-25m white quartz veins acroos ~10m width (0.5 - 1.0m spacing).
TVMG E5286217				Grab sample of white quartz veins.
TVM16				Grit with quartz veins.
TVM17				Phyllite.
TVM18				Pyritic phyllite at grit-quartzite contact (underlies quartzite). 10% boxwork. Very rusty 1.3m-thick bed.
TVM19				Quartz pebble conglomerate with irregular bull white quartz veins (0.5m thick) with minor FeOx.
TVMS E5285536				Rusty pyritic phyllite with lower basal limestone.
TVM20				Grit with quartz veins contact with Limestone-sandstone-graphitic sandstone. Veins occur as gashes 1 to 5m long X 0.1 to 15 cm at irregular intervals of 1.0 to 100 cm over area of 20 X 50 m +.
TVM21				Grit with quartz vein contact with phyllite. At base of talus slope below grit-phyllite contact.
TVM22				Phyllite outcrop with no bedding observed, two strong fabrics evident. Green-grey, greasy feel, well-cleaved, thinly-bedded, occassionally pyritic (boxworks), generally non-calcareous, rusty-orange weathering on some partings.
TVM23				Grit-psammite, bedding suspect, sandstone with graphitic parting.
TVM24				Limey slate (slumped block?).
TVM25				Grit-psammite-slate with slate as lowest bed. Slumped block? Quartz veins parallel cleavage in massive grit.
TVM26				Grit
TVM27				Psammite

VM - Mapping Station Data

Waypoint	Easting_NAD83	Northing_NAD83	Elevation (m)	Rock Type	Sample?	Bedding	Cleavage	S?	Veining
TVM28	501651	6885989	1893	Calcareous Grit					
TVM29	501676	6886203	1906	Calcareous Grit			091/37S	S2	030/40SE & 023/31W
TVMG E5286218	501675	6886213	1902	Quartz-carbonate-chlorite vein	TVMG E5286218				
TVMF E5286219	501662	6886217	1893	Quartz-carbonate-chlorite vein	TVMF E5286219				
TVM30	501388	6886793	1769	Psammite					
TVM31	501122	6886895	1805	Grit			108/58N	S2	
TVM32	500688	6887209	1791	Phyllite-grit					
TVM33	500414	6887429	1781	Psammite					033/59SE
TVM34	504154	6884202	1663	Grit-psammite					
TVM35	503980	6884135	1661	Psammite		140/60	113/78	S2	
TVM36	503936	6884115	1662	Slate					
TVM37	NO STATION - NO DATA								
TVM38	503419	6884337	1624	Psammite		026/18E	139/80SW	S3	
TVM39	503387	6884344	1644	Limey slate		125/90	153/76SW	S3	
TVM40	503366	6884311	1657	Limestone			105/58S	S2	
TVM41	503041	6884100	1623	Sericite schist					
TVM42	502934	6884110	1665	Sericite schist		145/76SW	146/58S	S3	

Waypoint	Fold Axis	Faulting	Slickensides	Notes
TVM28				Calcareous Grit, outcrops trending on an azimuth of 300 with outcrop for ~80m. Limestone scarce on slope to north.
TVM29		120/73	045/01	Calcareous Grit with quartz veins, probable slicks/fault (no gouge, very irregular), quartz-calcite-chlorite veins that are 1-30 cm thick with 10cm to 2m spacing, hosted in calcareous very coarse grit (veins extend for ~ 10m).
TVMG E5286218				Quartz-carbonate-chlorite vein grab sample. Rusty, 20cm thick, vuggy with euhedral quartz crystals.
TVMF E5286219				Quartz-carbonate-chlorite vein + pyrite float sample. Vuggy quartz vein (2cm thick) with intense chlorite + SiO_2 alteration to calcite in grit host. Anhedral, fresh pyrite in salvages.
TVM30				Psammite
TVM31				Massive Grit with quartz veins.
TVM32				Phyllite-grit
TVM33				Massive Psammite with Quartz veins (2 cm thick).
TVM34				Slumped Grit-psammite outcrop/bench.
TVM35				Massive psammite, strong cleavage (shearing?). No bedding observed, but conglomerate bed (25cm-1m thick) present. 2cm-thick sandstone beds, no quartz veins observed.
TVM36				Slate, slumped (?), no bedding apparent.
TVM37				
TVM38	45/275			Psammite, with slaty strong cleavage. Cleavage folded at 0.1 to 1.5m scale. Bedding is not obvious.
TVM39				Limey slate - Limestone that is thinly-bedded.
TVM40	34/265 & 38/312			Pyritic limestone, fold nose. Strongly cleaved, with axial planar cleavage evident. 1.5m NW plunging synform (closed with parasitic Z & S folds on limbs). Pale-grey, recessive weathering with lower base limestone that is light to medium grey, pyritic with 1% boxworks (0.1 to 0.2cm, elongate).
TVM41				Rusty pyritic sericite schist outcrop that continues up creekbed.
TVM42				Green shale - rusty pyritic sericite schist. 0.5 X 1.0mm green grains observed (often elongate). Very fine pyrite (<0.5mm). Bedding suspect.

***Appendix IV**- Assay Certificates*

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

CLIENT NAME: BEARING RESOURCES
1280 - 625 HOWE STREET
VANCOUVER, BC V6C2T6

ATTENTION TO: DAVE TUPPER

PROJECT NO: VM

AGAT WORK ORDER: 11Y521343

SOLID ANALYSIS REVIEWED BY: Ron Cardinall, Certified Assayer - Director - Technical Services (Mining)

DATE REPORTED: Sep 08, 2011

PAGES (INCLUDING COVER): 6

Should you require any information regarding this analysis please contact your client services representative at (905) 501 9998, or at 1-800-856-6261

*NOTES

All samples are stored at no charge for 90 days. Please contact the lab if you require additional sample storage time.

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521343
PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 07, 2011 | SAMPLE TYPE: Rock

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
TVMGE5286216	3.1	0.23	4	<5	7	<0.5	2	0.16	<0.5	19	2.6	216	38.5	1.51
TVMGE5286217	<0.2	0.54	2	<5	21	<0.5	<1	0.12	<0.5	10	2.9	231	25.6	1.71
TVMGE5286218	<0.2	0.10	5	<5	7	<0.5	<1	2.03	<0.5	4	1.5	198	3.2	0.49
TVMFE5286219	<0.2	0.42	8	<5	7	<0.5	<1	4.18	<0.5	13	1.5	202	3.7	1.19

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
TVMGE5286216	<5	<1	<1	0.02	9	2	0.07	127	3.1	<0.01	8.8	61	2970	<10
TVMGE5286217	<5	<1	<1	0.07	5	11	0.20	141	2.8	<0.01	10.5	140	5.9	<10
TVMGE5286218	<5	<1	<1	0.02	2	<1	0.03	188	2.5	0.02	4.5	80	5.7	<10
TVMFE5286219	<5	<1	<1	0.04	5	14	0.27	436	2.8	0.01	5.0	121	4.6	<10

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
TVMGE5286216	0.061	<1	0.7	<10	<5	5.1	<10	<10	<5	<0.01	<5	<5	11.7	<1
TVMGE5286217	0.008	<1	<0.5	<10	<5	7.6	<10	<10	<5	<0.01	<5	<5	5.8	<1
TVMGE5286218	0.051	3	0.7	<10	<5	121	<10	<10	<5	<0.01	<5	<5	1.4	<1
TVMFE5286219	0.067	4	1.1	<10	<5	142	<10	<10	<5	<0.01	<5	<5	6.2	<1

Analyte:	Y	Zn	Zr
Unit:	ppm	ppm	ppm
Sample Description RDL:	1	0.5	5
TVMGE5286216	1	11.3	<5
TVMGE5286217	<1	28.7	<5
TVMGE5286218	3	3.7	<5
TVMFE5286219	5	17.0	<5

Comments: RDL - Reported Detection Limit

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

Certificate of Analysis

AGAT WORK ORDER: 11Y521343

PROJECT NO: VM

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 03, 2011 | SAMPLE TYPE: Rock

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
TVMGE5286216	0.92	0.012
TVMGE5286217	0.84	<0.002
TVMGE5286218	0.94	<0.002
TVMFE5286219	1.25	<0.002

Comments: RDL - Reported Detection Limit

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES

AGAT WORK ORDER: 11Y521343

PROJECT NO: VM

ATTENTION TO: DAVE TUPPER

Solid Analysis

RPT Date:		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits	
										Lower	Upper
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	2638244	0.037	0.012		< 0.002	0.0795	0.0849	94%	80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2638244	3.10	3.04	2.0%	< 0.2	8	7	110%	80%	120%
Al	1	2638244	0.232	0.239	3.0%	< 0.01	0.318	0.359	88%	80%	120%
As	1	2638244	4	4	0.0%	< 1				80%	120%
B	1	2638244	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2638244	7	7	0.0%	< 1				80%	120%
Be	1	2638244	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	2638244	2	1		< 1				80%	120%
Ca	1	2638244	0.16	0.16	0.0%	< 0.01	0.617	0.635	97%	80%	120%
Cd	1	2638244	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2638244	19	19	0.0%	< 1				80%	120%
Co	1	2638244	2.6	2.6	0.0%	< 0.5	5.5	5.0	109%	80%	120%
Cr	1	2638244	216	228	5.4%	< 0.5				80%	120%
Cu	1	2638244	38.5	37.9	1.6%	0.9	4700	4700	100%	80%	120%
Fe	1	2638244	1.51	1.51	0.0%	< 0.01	1.2	1.31	92%	80%	120%
Ga	1	2638244	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2638244	< 1	< 1	0.0%	< 1	1.2	1.3	94%	80%	120%
In	1	2638244	< 1	1		< 1				80%	120%
K	1	2638244	0.02	0.02	0.0%	< 0.01	0.15	0.18	85%	80%	120%
La	1	2638244	9	9	0.0%	< 1				80%	120%
Li	1	2638244	2	2	0.0%	< 1				80%	120%
Mg	1	2638244	0.07	0.07	0.0%	< 0.01	0.097	0.098	98%	80%	120%
Mn	1	2638244	127	124	2.4%	< 1				80%	120%
Mo	1	2638244	3.1	3.1	0.0%	< 0.5	288	280	103%	80%	120%
Na	1	2638244	< 0.01	0.01		< 0.01	0.029	0.038	76%	80%	120%
Ni	1	2638244	8.80	8.25	6.5%	< 0.5	6	7	93%	80%	120%
P	1	2638244	61	62	1.6%	< 10				80%	120%
Pb	1	2638244	2970	2930	1.4%	< 0.5	39	30	128%	80%	120%
Rb	1	2638244	< 10	< 10	0.0%	< 10				80%	120%
S	1	2638244	0.0609	0.0618	1.5%	< 0.005	0.615	0.621	99%	80%	120%
Sb	1	2638244	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2638244	0.7	0.7	0.0%	< 0.5				80%	120%
Se	1	2638244	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2638244	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2638244	5.12	5.29	3.3%	< 0.5				80%	120%
Ta	1	2638244	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2638244	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2638244	< 5	< 5	0.0%	< 5				80%	120%
Ti	1	2638244	< 0.01	< 0.01	0.0%	< 0.01	0.008	0.011	74%	80%	120%
Tl	1	2638244	< 5	< 5	0.0%	< 5				80%	120%
U	1	2638244	< 5	< 5	0.0%	< 5				80%	120%
V	1	2638244	11.7	11.5	1.7%	< 0.5				80%	120%

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES

AGAT WORK ORDER: 11Y521343

PROJECT NO: VM

ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date:		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits	
										Lower	Upper
W	1	2638244	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2638244	1	1	0.0%	< 1				80%	120%
Zn	1	2638244	11.3	10.6	6.4%	0.8				80%	120%
Zr	1	2638244	< 5	< 5	0.0%	< 5				80%	120%

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Method Summary

CLIENT NAME: BEARING RESOURCES

AGAT WORK ORDER: 11Y521343

PROJECT NO: VM

ATTENTION TO: DAVE TUPPER

PARAMETER	AGAT S.O.P	LITERATURE REFERENCE	ANALYTICAL TECHNIQUE
Solid Analysis			
Ag	MIN-200-12020		ICP/OES
Al	MIN-200-12020		ICP/OES
As	MIN-200-12020		ICP/OES
B	MIN-200-12020		ICP/OES
Ba	MIN-200-12020		ICP/OES
Be	MIN-200-12020		ICP/OES
Bi	MIN-200-12020		ICP/OES
Ca	MIN-200-12020		ICP/OES
Cd	MIN-200-12020		ICP/OES
Ce	MIN-200-12020		ICP/OES
Co	MIN-200-12020		ICP/OES
Cr	MIN-200-12020		ICP/OES
Cu	MIN-200-12020		ICP/OES
Fe	MIN-200-12020		ICP/OES
Ga	MIN-200-12020		ICP/OES
Hg	MIN-200-12020		ICP/OES
In	MIN-200-12020		ICP/OES
K	MIN-200-12020		ICP/OES
La	MIN-200-12020		ICP/OES
Li	MIN-200-12020		ICP/OES
Mg	MIN-200-12020		ICP/OES
Mn	MIN-200-12020		ICP/OES
Mo	MIN-200-12020		ICP/OES
Na	MIN-200-12020		ICP/OES
Ni	MIN-200-12020		ICP/OES
P	MIN-200-12020		ICP/OES
Pb	MIN-200-12020		ICP/OES
Rb	MIN-200-12020		ICP/OES
S	MIN-200-12020		ICP/OES
Sb	MIN-200-12020		ICP/OES
Sc	MIN-200-12020		ICP/OES
Se	MIN-200-12020		ICP/OES
Sn	MIN-200-12020		ICP/OES
Sr	MIN-200-12020		ICP/OES
Ta	MIN-200-12020		ICP/OES
Te	MIN-200-12020		ICP/OES
Th	MIN-200-12020		ICP/OES
Ti	MIN-200-12020		ICP/OES
Tl	MIN-200-12020		ICP/OES
U	MIN-200-12020		ICP/OES
V	MIN-200-12020		ICP/OES
W	MIN-200-12020		ICP/OES
Y	MIN-200-12020		ICP/OES
Zn	MIN-200-12020		ICP/OES
Zr	MIN-200-12020		ICP/OES
Sample Login Weight	MIN-12009		BALANCE
Au	MIN-200-12019	BUGBEE, E: A Textbook of Fire Assaying	AAS

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

CLIENT NAME: BEARING RESOURCES
1280 - 625 HOWE STREET
VANCOUVER, BC V6C2T6

ATTENTION TO: DAVE TUPPER

PROJECT NO: VM

AGAT WORK ORDER: 11Y521344

SOLID ANALYSIS REVIEWED BY: Ron Cardinall, Certified Assayer - Director - Technical Services (Mining)

DATE REPORTED: Sep 16, 2011

PAGES (INCLUDING COVER): 42

Should you require any information regarding this analysis please contact your client services representative at (905) 501 9998, or at 1-800-856-6261

*NOTES

All samples are stored at no charge for 90 days. Please contact the lab if you require additional sample storage time.

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
TVMSE5286631 (-)	0.5	1.40	6	<5	34	<0.5	<1	0.09	<0.5	32	4.8	13.0	26.2	2.81
TVMSE5286632 (-)	<0.2	1.12	8	<5	47	0.6	<1	0.13	<0.5	76	10.5	11.6	22.5	2.27
TVMSE5286633 (-)	<0.2	1.37	8	<5	57	0.7	<1	0.09	<0.5	71	11.3	15.2	27.9	2.71
TVMSE5286634 (-)	<0.2	0.83	4	<5	27	<0.5	<1	0.03	<0.5	19	1.5	4.8	23.1	0.99
TVMSE5286635 (-)	<0.2	1.51	11	<5	29	<0.5	<1	0.06	<0.5	35	21.9	15.8	45.5	3.65
TVMSE5286636 (-)	<0.2	0.96	11	<5	28	<0.5	<1	0.29	<0.5	62	33.7	6.7	85.2	6.88
TVMSE5286637 (-)	<0.2	1.33	7	<5	28	<0.5	<1	0.03	<0.5	33	8.9	10.2	24.8	1.99
TVMLE5286638 (-)	<0.2	1.60	13	<5	20	<0.5	<1	0.34	<0.5	65	10.4	19.6	49.5	2.89
TVMLE5286639 (-)	<0.2	1.26	37	<5	23	<0.5	<1	0.43	<0.5	58	10.4	13.5	41.8	3.30
TVMLE5286640 (-)	<0.2	1.11	24	<5	17	<0.5	<1	0.21	<0.5	53	8.0	13.9	30.5	2.58
TVMLE5286641 (-)	<0.2	1.46	9	<5	27	<0.5	<1	0.39	<0.5	48	9.5	17.1	45.2	3.17
TVMSE5286642 (-)	<0.2	0.67	74	<5	45	0.9	<1	1.79	<0.5	53	11.2	4.1	21.8	8.34
TVMLE5286643 (-)	<0.2	1.18	9	<5	15	<0.5	<1	0.37	<0.5	55	10.8	14.4	45.3	3.26
TVMLE5286644 (-)	<0.2	1.72	31	<5	26	0.7	<1	0.21	<0.5	67	19.4	16.9	50.8	3.46
TVMLE5286645 (-)	<0.2	1.44	17	<5	32	0.5	<1	1.09	<0.5	54	9.8	19.8	40.6	3.51
TVMLE5286646 (-)	<0.2	1.46	15	<5	24	<0.5	<1	0.40	<0.5	54	10.0	16.7	40.8	3.25
E5285889 (-)	<0.2	2.06	13	<5	51	0.6	<1	0.16	<0.5	88	7.9	23.0	45.0	4.00
E5285890 (-)	<0.2	1.85	13	<5	48	<0.5	<1	0.16	<0.5	71	8.3	20.2	42.3	3.75
E5285891 (-)	<0.2	1.52	9	<5	41	<0.5	<1	0.29	<0.5	35	7.6	13.9	44.2	3.29
E5285892 (-)	<0.2	1.44	9	<5	24	<0.5	<1	0.14	<0.5	52	23.6	14.5	52.3	4.41
E5285893 (-)	<0.2	1.27	7	<5	52	0.6	<1	0.29	<0.5	51	16.1	11.6	32.0	3.43
E5285894 (-)	0.2	1.46	8	<5	31	<0.5	<1	0.36	<0.5	29	26.7	11.1	38.7	3.75
E5285895 (-)	<0.2	1.67	5	<5	27	<0.5	<1	0.13	<0.5	58	11.7	18.0	34.6	3.58
E5285896 (-)	<0.2	1.38	5	<5	19	<0.5	<1	0.01	<0.5	41	8.0	11.8	20.7	3.03
E5285897 (-)	<0.2	0.99	6	<5	32	<0.5	<1	0.11	<0.5	36	12.1	9.3	27.1	4.82
E5285898 (-)	<0.2	1.34	73	<5	21	<0.5	<1	<0.01	<0.5	72	12.1	12.1	78.4	4.25
E5285899 (-)	<0.2	1.22	12	<5	15	<0.5	<1	0.35	<0.5	48	11.5	14.9	40.1	2.75
E5285900 (-)	<0.2	1.51	6	<5	31	<0.5	<1	0.12	<0.5	37	4.2	19.8	14.3	2.63
E5285901 (-)	<0.2	2.23	16	<5	24	<0.5	<1	0.17	<0.5	114	23.2	26.7	69.7	5.09
E5285902 (-)	<0.2	1.76	8	<5	32	<0.5	<1	0.08	<0.5	50	12.2	21.5	63.7	4.87
E5285903 (-)	<0.2	2.14	14	<5	37	0.6	<1	0.26	<0.5	130	23.7	26.8	73.9	5.23
E5285904 (-)	<0.2	2.31	18	<5	32	0.6	<1	0.38	<0.5	85	11.9	20.7	31.5	3.55

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
E5285905 (-)	<0.2	1.78	39	<5	47	<0.5	<1	0.07	<0.5	51	10.6	18.1	34.2	3.17
E5285906 (-)	<0.2	1.96	43	<5	38	<0.5	<1	0.06	<0.5	41	8.5	33.8	27.3	3.29
E5285907 (-)	<0.2	1.19	9	<5	42	<0.5	<1	0.36	<0.5	14	3.9	7.8	21.5	1.21
E5285908 (-)	<0.2	2.30	21	<5	41	0.5	<1	0.13	<0.5	44	10.0	25.4	28.8	3.27
E5285909 (-)	<0.2	0.50	8	<5	12	<0.5	<1	0.02	<0.5	10	1.3	4.0	9.3	0.71
E5285910 (-)	<0.2	2.48	41	<5	23	0.6	<1	0.15	<0.5	47	10.4	28.1	53.6	4.25
E5285911 (-)	<0.2	0.45	2	<5	23	<0.5	<1	0.01	<0.5	20	0.8	3.6	7.6	0.37
E5285912 (-)	<0.2	0.16	<1	<5	8	<0.5	<1	0.02	<0.5	2	<0.5	1.0	5.6	0.20
E5285913 (-)	<0.2	0.94	8	<5	26	<0.5	<1	0.02	<0.5	53	4.7	13.0	31.5	2.54
E5285914 (-)	<0.2	0.93	28	<5	15	<0.5	<1	0.21	<0.5	49	19.7	10.5	47.8	3.34
E5285915 (-)	<0.2	1.35	82	<5	30	<0.5	<1	0.28	<0.5	57	7.3	13.6	35.7	3.29
E5285916 (-)	<0.2	1.05	22	<5	23	<0.5	<1	0.08	<0.5	41	14.5	12.6	33.6	2.45
E5285917 (-)	<0.2	0.91	9	<5	19	<0.5	<1	0.02	<0.5	44	4.9	9.3	16.2	1.93
E5285919 (-)	<0.2	2.11	19	<5	14	0.9	<1	0.14	<0.5	70	38.2	24.0	102	4.65
E5285920 (-)	<0.2	1.05	8	<5	26	<0.5	<1	0.02	<0.5	104	16.1	5.5	26.9	2.30
E5285921 (-)	<0.2	1.12	58	<5	18	<0.5	<1	0.06	<0.5	86	21.3	10.8	44.8	3.06
E5285922 (-)	<0.2	1.12	17	<5	22	<0.5	<1	0.01	<0.5	28	5.4	11.7	18.4	2.12
E5285923 (-)	<0.2	1.40	15	<5	19	<0.5	<1	0.13	<0.5	62	13.5	14.8	35.7	3.52
E5285924 (-)	<0.2	1.68	10	<5	19	<0.5	<1	0.28	<0.5	59	10.9	19.5	41.7	3.85
E5285925 (-)	<0.2	1.34	4	<5	37	<0.5	<1	0.04	<0.5	51	7.7	15.5	24.5	2.95
E5285926 (-)	<0.2	1.48	6	<5	24	0.5	<1	0.34	<0.5	51	8.1	15.9	30.3	3.02
E5285927 (-)	<0.2	1.14	9	<5	38	0.6	<1	0.09	<0.5	47	35.1	11.9	40.1	2.70
E5285928 (-)	<0.2	1.29	10	<5	60	0.5	<1	0.39	<0.5	43	6.5	15.2	21.1	2.54
E5285929 (-)	<0.2	1.43	28	<5	61	0.6	<1	0.17	<0.5	34	7.5	17.2	16.6	2.58
E5287158 (-)	<0.2	1.42	10	<5	14	<0.5	<1	0.58	<0.5	80	12.4	16.2	42.9	3.52
E5287159 (-)	<0.2	1.49	12	<5	13	<0.5	<1	0.74	<0.5	84	13.6	16.3	40.7	3.64
E5287160 (-)	<0.2	1.24	9	<5	19	<0.5	<1	0.25	<0.5	76	9.3	12.1	29.1	2.73
E5287161 (-)	<0.2	2.13	70	<5	17	0.6	<1	0.20	<0.5	69	31.2	23.4	87.8	4.83
E5287162 (-)	<0.2	1.87	65	<5	24	<0.5	<1	0.07	<0.5	34	23.2	23.1	57.9	4.26
E5287163 (-)	<0.2	1.54	10	<5	32	<0.5	<1	0.20	<0.5	72	7.8	18.4	33.8	3.27
E5287164 (-)	<0.2	1.57	10	<5	34	<0.5	<1	0.06	<0.5	76	8.0	65.4	33.9	3.31
E5287165 (-)	<0.2	1.51	9	<5	28	<0.5	<1	0.39	<0.5	79	9.5	37.2	36.7	3.43

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344
PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
E5287166 (-)	<0.2	1.58	8	<5	31	<0.5	<1	0.20	<0.5	67	6.0	23.4	30.4	3.09
E5287167 (-)	<0.2	1.67	8	<5	31	<0.5	<1	0.08	<0.5	91	9.7	17.8	32.6	3.44
E5287168 (-)	<0.2	1.50	7	<5	31	<0.5	<1	0.16	<0.5	71	9.0	16.8	36.2	3.19
E5287169 (-)	<0.2	1.02	4	<5	26	<0.5	<1	0.05	<0.5	35	3.9	11.7	17.7	1.99
E5287170 (-)	<0.2	1.16	6	<5	22	<0.5	<1	0.08	<0.5	44	5.5	12.6	26.9	2.40
E5287171 (-)	<0.2	0.98	3	<5	26	<0.5	<1	0.04	<0.5	34	3.2	9.1	13.8	1.63
E5287172 (-)	<0.2	1.32	5	<5	34	<0.5	<1	0.02	<0.5	42	4.1	17.0	14.7	2.30
E5287173 (-)	<0.2	1.23	6	<5	31	<0.5	<1	0.08	<0.5	58	9.3	26.1	25.5	2.42
E5287174 (-)	<0.2	1.52	8	<5	44	<0.5	<1	0.02	<0.5	55	6.6	23.5	19.7	2.83
E5287175 (-)	<0.2	1.06	7	<5	31	<0.5	<1	0.05	<0.5	24	3.1	9.9	12.4	1.67
E5287176 (-)	<0.2	1.25	10	<5	34	<0.5	<1	0.06	<0.5	44	5.3	14.4	17.8	2.43
E5287177 (-)	<0.2	1.10	6	<5	27	<0.5	<1	0.12	<0.5	45	4.1	12.4	19.2	2.42
E5287178 (-)	<0.2	0.80	8	<5	22	<0.5	<1	0.32	<0.5	44	4.5	9.2	19.3	2.29
E5287179 (-)	<0.2	1.24	7	<5	20	<0.5	<1	0.55	<0.5	48	7.4	14.9	31.6	3.17
E5287180 (-)	<0.2	1.17	6	<5	28	<0.5	<1	0.07	<0.5	48	3.8	12.6	15.6	2.38
E5287181 (-)	<0.2	0.84	5	<5	22	<0.5	<1	0.09	<0.5	41	4.9	9.5	14.7	2.45
E5287182 (-)	<0.2	0.72	5	<5	16	<0.5	<1	0.17	<0.5	48	6.1	6.9	20.9	2.28
E5287183 (-)	<0.2	0.74	5	<5	13	<0.5	<1	0.15	<0.5	44	6.2	8.2	24.7	2.39
E5287184 (-)	<0.2	1.26	7	<5	18	<0.5	<1	0.25	<0.5	80	11.5	15.1	39.3	3.68
E5287185 (-)	<0.2	1.11	9	<5	19	<0.5	<1	2.40	<0.5	61	8.6	11.8	31.8	3.10
E5287186 (-)	<0.2	1.10	9	<5	20	<0.5	<1	1.26	<0.5	69	10.7	12.6	37.5	3.50
E5287187 (-)	<0.2	1.43	9	<5	32	0.6	<1	0.26	<0.5	87	11.3	16.7	48.0	3.72
E5287188 (-)	<0.2	1.48	8	<5	20	0.6	<1	0.66	<0.5	91	11.5	19.5	45.9	3.66
E5287189 (-)	<0.2	1.00	8	<5	25	<0.5	<1	0.12	<0.5	72	5.8	9.5	23.1	2.99
E5287190 (-)	<0.2	1.25	35	<5	34	<0.5	<1	0.07	<0.5	75	9.6	12.4	28.5	3.04
E5287191 (-)	<0.2	1.18	8	<5	26	<0.5	<1	0.02	<0.5	42	8.6	14.9	25.6	2.66
E5287192 (-)	<0.2	1.55	10	<5	33	<0.5	<1	0.03	<0.5	49	8.1	16.0	24.2	3.24
E5287193 (-)	<0.2	0.92	97	<5	22	<0.5	<1	0.35	<0.5	49	6.5	8.4	24.4	2.53
E5287194 (-)	<0.2	1.36	8	<5	25	<0.5	<1	0.27	<0.5	62	8.7	13.9	48.3	3.16
E5287195 (-)	<0.2	1.54	10	<5	22	<0.5	<1	0.07	<0.5	84	14.5	17.6	46.0	3.18
E5287196 (-)	<0.2	1.44	7	<5	21	<0.5	<1	0.08	<0.5	66	6.6	17.3	31.5	2.93
E5287197 (-)	<0.2	1.02	71	<5	11	<0.5	<1	0.10	<0.5	53	9.0	10.4	14.6	2.00

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344
PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
E5287198 (-)	<0.2	1.02	4	<5	22	<0.5	<1	0.03	<0.5	19	2.0	10.0	18.5	2.22
E5287199 (-)	<0.2	1.06	9	<5	30	<0.5	<1	3.89	<0.5	60	9.4	12.9	27.0	2.59
E5287200 (-)	<0.2	1.29	9	<5	40	<0.5	<1	0.32	<0.5	79	7.5	12.8	26.2	2.80
E5287201 (-)	<0.2	1.44	106	<5	24	<0.5	<1	0.33	<0.5	46	7.7	8.7	16.8	2.26
E5287202 (-)	<0.2	1.65	11	<5	27	0.6	<1	0.25	<0.5	81	8.6	16.5	33.4	3.48
E5287203 (-)	<0.2	1.38	16	<5	23	<0.5	<1	0.08	<0.5	70	14.2	16.4	43.0	4.37
E5287204 (-)	<0.2	1.33	16	<5	18	<0.5	<1	1.37	<0.5	66	11.1	15.5	39.5	4.01
E5287205 (-)	<0.2	1.40	15	<5	26	<0.5	<1	0.44	<0.5	51	9.8	16.2	35.7	3.78
E5287206 (-)	<0.2	1.45	5	<5	17	<0.5	<1	0.05	<0.5	67	13.6	16.1	41.2	4.04
E5287207 (-)	<0.2	1.13	3	<5	37	<0.5	<1	0.04	<0.5	22	3.1	10.9	11.7	1.76
E5287208 (-)	<0.2	1.44	6	<5	36	<0.5	<1	0.24	<0.5	26	6.8	16.2	26.3	3.03
E5287209 (-)	<0.2	2.08	8	<5	39	<0.5	<1	0.12	<0.5	67	7.9	25.0	28.1	3.80
E5287210 (-)	<0.2	1.68	16	<5	35	0.5	<1	0.27	<0.5	47	12.0	16.5	52.5	3.49
E5287394 (-)	<0.2	0.97	9	<5	27	<0.5	<1	0.10	<0.5	34	7.9	11.6	27.1	2.99
E5287395 (-)	<0.2	1.26	28	<5	26	<0.5	<1	0.04	<0.5	48	8.9	12.6	29.5	3.86
E5287396 (-)	<0.2	1.37	17	<5	18	<0.5	<1	1.17	<0.5	60	12.9	14.8	47.2	4.02
E5287397 (-)	<0.2	1.02	93	<5	17	<0.5	<1	0.38	<0.5	40	8.0	12.1	18.1	2.50
E5287398 (-)	<0.2	0.93	58	<5	19	<0.5	<1	0.22	<0.5	40	5.3	9.8	24.5	2.34
E5287399 (-)	<0.2	0.85	8	<5	23	<0.5	<1	0.37	<0.5	57	9.3	6.4	30.6	2.95
E5287400 (-)	<0.2	0.91	9	<5	24	<0.5	<1	0.51	<0.5	72	10.9	7.9	36.0	3.17
E5287401 (-)	<0.2	1.02	10	<5	16	<0.5	<1	0.25	<0.5	58	12.2	11.1	44.2	3.21
E5287402 (-)	<0.2	1.45	11	<5	23	<0.5	<1	0.13	<0.5	92	16.2	16.8	50.5	3.86
E5287403 (-)	<0.2	0.80	5	<5	24	<0.5	<1	0.35	<0.5	56	5.9	7.1	21.5	2.66
E5287404 (-)	<0.2	1.16	6	<5	32	<0.5	<1	0.08	<0.5	75	9.7	10.2	25.3	3.13
E5287405 (-)	<0.2	1.23	6	<5	32	0.5	<1	0.03	<0.5	95	11.6	11.6	55.5	3.38
E5287406 (-)	<0.2	0.68	5	<5	29	<0.5	<1	0.33	<0.5	51	4.5	5.4	20.2	2.18
E5287407 (-)	<0.2	1.14	7	<5	29	<0.5	<1	0.30	<0.5	66	7.6	10.7	32.1	3.05
E5287408 (-)	<0.2	1.36	10	<5	34	<0.5	<1	0.31	<0.5	93	10.6	13.9	42.3	3.26
E5287409 (-)	<0.2	1.46	6	<5	34	<0.5	<1	0.03	<0.5	60	10.6	16.1	34.2	3.19
E5287410 (-)	<0.2	1.43	8	<5	22	<0.5	<1	0.22	<0.5	51	10.2	18.0	21.1	2.74
E5287411 (-)	<0.2	1.27	10	<5	37	<0.5	<1	0.11	<0.5	58	4.6	12.4	19.0	2.71
E5287412 (-)	<0.2	1.38	12	<5	43	<0.5	<1	0.25	<0.5	71	9.0	14.4	33.0	3.41

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344
PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
E5287413 (-)	<0.2	1.26	24	<5	26	<0.5	<1	0.21	<0.5	44	10.9	14.4	29.9	3.08
E5287414 (-)	<0.2	1.45	20	<5	19	<0.5	<1	1.02	<0.5	57	11.4	16.5	36.8	3.92
E5287415 (-)	<0.2	2.02	13	<5	51	0.5	<1	0.28	<0.5	44	7.8	24.1	25.4	2.97
E5287416 (-)	<0.2	1.42	14	<5	35	<0.5	<1	0.10	<0.5	48	6.2	15.2	21.1	2.39
E5287417 (-)	<0.2	0.78	38	<5	18	<0.5	<1	16.8	<0.5	23	4.7	4.1	12.9	1.56
E5287418 (-)	<0.2	1.78	14	<5	48	0.5	<1	0.48	<0.5	46	8.9	15.4	25.5	2.87
E5287419 (-)	<0.2	3.20	21	<5	56	1.1	<1	3.52	<0.5	42	12.0	29.8	36.2	3.80
E5287420 (-)	<0.2	1.18	189	<5	40	0.6	<1	0.06	<0.5	85	8.4	11.4	47.9	3.90
E5287421 (-)	<0.2	1.47	30	<5	32	<0.5	<1	0.10	<0.5	44	6.4	17.5	28.9	3.06
E5287422 (-)	<0.2	2.02	13	<5	56	0.6	<1	0.34	<0.5	44	8.0	24.3	27.8	3.03
E5287423 (-)	<0.2	1.60	12	<5	48	0.6	<1	0.14	<0.5	38	9.7	19.2	27.0	2.74
E5287424 (-)	<0.2	1.55	21	<5	28	0.6	<1	0.08	<0.5	64	14.7	18.0	47.8	3.08
E5287425 (-)	<0.2	1.64	26	<5	43	<0.5	<1	0.03	<0.5	29	7.0	21.0	21.2	2.94
E5287426 (-)	<0.2	1.62	6	<5	19	<0.5	<1	<0.01	<0.5	23	5.1	18.6	16.6	3.71
E5287427 (-)	<0.2	1.54	11	<5	39	0.7	<1	0.06	<0.5	31	11.6	14.6	27.5	2.17
E5287428 (-)	<0.2	1.55	12	<5	39	0.6	<1	0.06	<0.5	32	5.5	15.1	33.7	2.09
E5287429 (-)	<0.2	1.73	16	<5	38	0.6	<1	0.27	<0.5	46	7.9	19.6	28.5	3.05
E5287430 (-)	<0.2	2.05	12	<5	51	0.6	<1	0.05	<0.5	32	7.1	25.9	20.1	3.53
E5287431 (-)	<0.2	0.81	23	<5	33	<0.5	<1	0.11	<0.5	18	5.6	8.0	30.0	2.06
E5287432 (-)	<0.2	2.45	31	<5	53	0.7	<1	0.78	<0.5	25	8.9	24.0	32.2	3.43
E5287433 (-)	<0.2	1.28	57	<5	49	<0.5	<1	0.30	<0.5	19	4.4	16.8	19.9	2.07
E5287434 (-)	<0.2	1.13	27	<5	57	<0.5	<1	0.14	<0.5	33	5.9	13.5	16.0	2.14
E5287435 (-)	<0.2	1.50	13	<5	57	0.6	<1	0.19	<0.5	38	8.1	19.2	27.7	2.64
E5287436 (-)	<0.2	1.67	15	<5	57	0.5	<1	0.13	<0.5	34	9.8	23.8	33.9	2.82
E5287437 (-)	<0.2	1.45	104	<5	56	0.7	<1	0.19	<0.5	28	8.9	18.6	26.0	2.48
E5287438 (-)	<0.2	1.85	33	<5	61	0.7	<1	0.21	<0.5	32	8.3	26.4	24.1	3.04
E5287439 (-)	<0.2	2.15	8	<5	70	0.7	<1	0.15	<0.5	57	13.3	28.2	33.6	3.61
E5287440 (-)	<0.2	1.57	21	<5	56	0.6	<1	0.46	<0.5	61	9.9	27.5	30.8	3.29
E5287441 (-)	<0.2	1.77	7	<5	34	0.7	<1	0.15	<0.5	38	10.5	20.7	33.4	3.09
E5287442 (-)	<0.2	2.14	5	<5	44	0.9	<1	0.32	<0.5	33	23.4	26.1	31.7	2.89
E5287443 (-)	<0.2	1.50	5	<5	40	<0.5	<1	0.45	<0.5	27	8.6	24.9	17.7	2.76
E5287444 (-)	<0.2	1.33	6	<5	29	0.7	<1	0.28	<0.5	37	11.4	16.0	32.6	2.63

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344
PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
E5287445 (-)	<0.2	1.86	11	<5	36	1.6	<1	0.07	<0.5	112	27.1	20.8	94.7	3.84
E5287446 (-)	<0.2	2.84	7	<5	92	0.7	<1	0.73	<0.5	34	17.1	34.9	37.7	4.46
E5287447 (-)	<0.2	2.15	9	<5	62	0.6	<1	0.38	<0.5	23	14.7	27.5	32.8	3.89

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344
PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
TVMSE5286631 (-)	<5	<1	<1	0.05	16	32	0.52	321	0.5	0.01	13.5	576	7.8	11
TVMSE5286632 (-)	<5	<1	<1	0.03	27	19	0.40	772	1.3	<0.01	23.3	320	13.2	<10
TVMSE5286633 (-)	<5	<1	<1	0.04	30	22	0.47	772	0.5	<0.01	25.5	549	149	11
TVMSE5286634 (-)	<5	<1	2	0.03	8	3	0.06	80	1.0	0.02	3.8	545	10.3	<10
TVMSE5286635 (-)	<5	<1	<1	0.04	14	32	0.49	1070	0.7	0.01	37.9	752	33.0	<10
TVMSE5286636 (-)	<5	<1	<1	0.04	33	27	0.42	1040	0.5	<0.01	77.7	543	37.0	<10
TVMSE5286637 (-)	<5	<1	1	0.04	15	21	0.37	355	0.6	0.01	17.6	369	12.8	<10
TVMLE5286638 (-)	<5	<1	<1	0.05	46	43	0.74	465	1.5	<0.01	31.8	431	19.2	<10
TVMLE5286639 (-)	<5	<1	<1	0.05	27	35	0.56	488	<0.5	<0.01	31.0	553	22.3	<10
TVMLE5286640 (-)	<5	<1	<1	0.04	26	35	0.54	332	<0.5	<0.01	21.4	388	17.0	<10
TVMLE5286641 (-)	<5	<1	<1	0.05	23	45	0.65	363	0.9	<0.01	28.6	499	21.7	<10
TVMSE5286642 (-)	<5	<1	<1	0.05	25	10	0.70	3830	1.8	<0.01	25.8	2410	19.2	10
TVMLE5286643 (-)	<5	<1	<1	0.02	28	40	0.64	413	1.0	<0.01	33.2	420	21.8	<10
TVMLE5286644 (-)	<5	<1	<1	0.08	35	41	0.75	515	0.8	<0.01	39.2	422	23.5	19
TVMLE5286645 (-)	<5	<1	<1	0.12	27	36	0.77	474	1.1	<0.01	32.3	563	15.8	28
TVMLE5286646 (-)	<5	<1	<1	0.07	29	43	0.75	507	1.0	<0.01	34.6	513	19.0	12
E5285889 (-)	<5	<1	<1	0.07	45	83	0.80	225	1.0	<0.01	33.9	369	17.6	<10
E5285890 (-)	<5	<1	<1	0.05	37	79	0.71	301	0.9	<0.01	32.1	420	20.3	<10
E5285891 (-)	<5	<1	<1	0.04	16	47	0.63	251	0.9	<0.01	33.9	410	23.0	<10
E5285892 (-)	<5	<1	<1	0.04	25	43	0.62	710	0.8	<0.01	44.9	458	35.5	<10
E5285893 (-)	<5	<1	1	0.04	22	28	0.46	1730	1.0	<0.01	41.3	980	33.9	10
E5285894 (-)	<5	<1	<1	0.07	13	34	0.64	557	1.3	<0.01	47.6	466	43.2	<10
E5285895 (-)	<5	<1	<1	0.03	27	56	0.75	785	0.7	<0.01	31.6	402	27.5	<10
E5285896 (-)	<5	<1	<1	0.03	19	26	0.40	226	<0.5	<0.01	19.0	401	15.9	<10
E5285897 (-)	<5	<1	<1	0.04	17	20	0.22	1280	1.9	<0.01	31.6	703	32.2	<10
E5285898 (-)	<5	<1	<1	0.05	37	28	0.48	419	1.0	<0.01	25.9	700	33.3	<10
E5285899 (-)	<5	<1	<1	0.03	23	43	0.61	411	<0.5	<0.01	29.7	403	19.1	<10
E5285900 (-)	<5	<1	<1	0.04	17	45	0.67	144	0.7	<0.01	15.4	233	7.9	<10
E5285901 (-)	<5	<1	<1	0.03	59	86	1.18	920	0.9	<0.01	52.3	592	28.1	<10
E5285902 (-)	<5	<1	<1	0.04	24	55	0.80	538	1.0	0.01	36.8	543	20.9	<10
E5285903 (-)	<5	<1	<1	0.03	81	70	0.98	1590	1.2	<0.01	60.3	537	32.6	<10
E5285904 (-)	<5	<1	<1	0.05	30	50	0.67	530	0.9	<0.01	38.7	453	23.1	<10

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
E5285905 (-)	<5	<1	1	0.07	22	43	0.55	358	1.4	<0.01	27.1	375	15.0	16
E5285906 (-)	<5	<1	<1	0.08	19	43	0.77	363	<0.5	<0.01	28.8	680	15.6	12
E5285907 (-)	<5	<1	1	0.05	12	13	0.19	234	1.6	0.03	10.9	973	8.3	<10
E5285908 (-)	<5	<1	<1	0.06	21	63	0.83	420	<0.5	0.01	33.5	428	13.2	13
E5285909 (-)	<5	<1	<1	0.02	5	6	0.09	49	<0.5	0.02	3.8	268	5.0	<10
E5285910 (-)	<5	<1	<1	0.04	28	88	1.10	495	1.4	<0.01	49.6	349	19.1	<10
E5285911 (-)	<5	<1	<1	0.02	9	2	0.03	67	<0.5	0.01	1.8	208	3.7	<10
E5285912 (-)	<5	<1	<1	0.02	<1	1	0.02	13	<0.5	0.02	0.6	94	1.7	<10
E5285913 (-)	<5	<1	2	0.04	26	15	0.30	136	0.9	<0.01	17.9	451	11.6	<10
E5285914 (-)	<5	<1	<1	0.03	27	19	0.48	442	1.7	<0.01	46.3	420	25.1	<10
E5285915 (-)	<5	<1	<1	0.04	31	25	0.56	219	1.5	<0.01	27.9	470	18.5	<10
E5285916 (-)	<5	<1	<1	0.06	16	22	0.45	252	<0.5	<0.01	25.5	359	22.8	12
E5285917 (-)	<5	<1	<1	0.04	18	12	0.25	295	1.0	<0.01	13.2	460	14.7	<10
E5285919 (-)	<5	<1	<1	0.06	29	45	1.07	530	1.6	<0.01	84.5	249	23.9	<10
E5285920 (-)	<5	<1	<1	0.03	26	16	0.21	370	1.5	<0.01	47.0	524	20.6	<10
E5285921 (-)	<5	<1	<1	0.06	41	24	0.49	522	0.7	<0.01	26.4	417	26.9	<10
E5285922 (-)	<5	<1	<1	0.03	12	22	0.41	330	<0.5	<0.01	12.7	418	14.2	<10
E5285923 (-)	<5	<1	<1	0.02	31	34	0.64	713	0.6	<0.01	34.6	403	25.5	<10
E5285924 (-)	<5	<1	<1	0.02	30	56	0.86	390	1.2	<0.01	35.4	466	18.2	<10
E5285925 (-)	<5	<1	<1	0.02	24	38	0.60	220	0.7	<0.01	20.5	443	14.4	<10
E5285926 (-)	<5	<1	<1	0.02	27	42	0.69	287	0.6	<0.01	27.7	472	12.7	<10
E5285927 (-)	<5	<1	<1	0.02	13	25	0.41	1190	1.5	<0.01	56.6	774	18.2	<10
E5285928 (-)	<5	<1	<1	0.19	18	21	0.47	486	<0.5	0.01	20.8	518	17.1	48
E5285929 (-)	<5	<1	<1	0.26	13	24	0.48	302	0.9	<0.01	19.8	347	15.3	57
E5287158 (-)	<5	<1	1	0.03	39	31	0.74	515	0.8	<0.01	36.3	477	17.2	<10
E5287159 (-)	<5	<1	<1	0.03	41	35	0.79	479	0.6	<0.01	38.0	514	15.4	<10
E5287160 (-)	<5	<1	<1	0.03	37	23	0.60	381	<0.5	<0.01	25.9	460	14.2	<10
E5287161 (-)	<5	<1	<1	0.03	33	47	0.88	1410	1.1	<0.01	52.6	725	44.1	<10
E5287162 (-)	<5	<1	<1	0.03	15	43	0.76	681	1.2	<0.01	37.5	622	35.3	<10
E5287163 (-)	<5	<1	<1	0.04	34	31	0.69	307	1.0	<0.01	28.8	552	17.8	<10
E5287164 (-)	<5	<1	<1	0.04	34	30	0.66	362	2.7	<0.01	53.8	470	15.0	<10
E5287165 (-)	<5	<1	<1	0.04	39	32	0.71	375	1.7	<0.01	43.0	595	17.2	<10

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344
PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
E5287166 (-)	<5	<1	<1	0.04	35	36	0.68	154	1.3	<0.01	31.3	362	11.4	<10
E5287167 (-)	<5	<1	1	0.04	44	35	0.71	565	0.8	<0.01	29.2	528	18.8	<10
E5287168 (-)	<5	<1	<1	0.05	35	34	0.70	418	<0.5	<0.01	29.8	529	18.0	<10
E5287169 (-)	<5	<1	1	0.03	17	23	0.45	141	<0.5	<0.01	15.5	378	8.1	<10
E5287170 (-)	<5	<1	<1	0.03	21	28	0.53	251	<0.5	<0.01	20.5	444	10.9	<10
E5287171 (-)	<5	<1	<1	0.04	14	19	0.35	125	1.0	<0.01	11.2	457	6.7	<10
E5287172 (-)	<5	<1	2	0.03	18	25	0.47	167	<0.5	<0.01	15.6	446	8.3	<10
E5287173 (-)	<5	<1	2	0.05	23	28	0.54	345	0.9	<0.01	30.2	391	12.4	<10
E5287174 (-)	<5	<1	<1	0.06	26	32	0.58	183	0.7	<0.01	24.7	342	10.9	11
E5287175 (-)	<5	<1	<1	0.05	11	17	0.32	105	<0.5	0.01	11.8	384	6.4	<10
E5287176 (-)	<5	<1	<1	0.03	19	32	0.49	193	0.7	<0.01	17.1	432	10.8	<10
E5287177 (-)	<5	<1	<1	0.02	22	32	0.48	159	<0.5	<0.01	17.3	483	11.5	<10
E5287178 (-)	<5	<1	<1	0.01	23	28	0.39	99	0.8	<0.01	17.8	489	12.5	<10
E5287179 (-)	<5	<1	<1	0.02	26	45	0.67	165	1.2	<0.01	27.7	549	16.6	<10
E5287180 (-)	<5	<1	<1	0.02	24	33	0.51	151	1.0	<0.01	14.8	415	10.1	<10
E5287181 (-)	<5	<1	<1	0.02	17	23	0.38	212	<0.5	<0.01	16.3	448	13.2	<10
E5287182 (-)	<5	<1	<1	0.02	24	18	0.31	237	<0.5	<0.01	20.0	328	15.0	<10
E5287183 (-)	<5	<1	<1	0.01	22	24	0.40	150	<0.5	<0.01	23.9	341	13.3	<10
E5287184 (-)	<5	<1	<1	0.03	39	39	0.67	379	1.7	<0.01	35.6	483	22.2	<10
E5287185 (-)	<5	<1	<1	0.03	30	33	0.59	299	1.1	<0.01	28.0	504	18.8	<10
E5287186 (-)	<5	<1	<1	0.03	35	31	0.60	485	1.5	<0.01	32.3	656	22.8	<10
E5287187 (-)	<5	<1	<1	0.02	43	41	0.70	483	0.7	<0.01	36.0	556	16.8	<10
E5287188 (-)	<5	<1	<1	0.02	45	46	0.74	521	<0.5	<0.01	38.9	477	21.1	<10
E5287189 (-)	<5	<1	<1	0.02	34	27	0.43	235	0.6	<0.01	22.5	384	14.9	<10
E5287190 (-)	<5	<1	1	0.03	35	27	0.45	401	0.5	<0.01	25.7	407	22.7	<10
E5287191 (-)	<5	<1	2	0.04	20	26	0.43	442	0.7	<0.01	19.0	448	19.6	<10
E5287192 (-)	<5	<1	<1	0.04	24	32	0.57	475	0.5	<0.01	19.9	618	16.4	10
E5287193 (-)	<5	<1	<1	0.03	26	17	0.37	294	0.5	<0.01	21.8	424	19.0	<10
E5287194 (-)	<5	<1	<1	0.04	32	29	0.57	406	0.9	<0.01	30.8	494	15.3	<10
E5287195 (-)	<5	<1	<1	0.04	40	39	0.70	446	1.0	<0.01	28.8	416	15.9	<10
E5287196 (-)	<5	<1	<1	0.03	33	36	0.69	268	<0.5	<0.01	21.3	454	11.9	<10
E5287197 (-)	<5	<1	2	0.04	23	11	0.32	245	<0.5	<0.01	21.0	114	5.2	<10

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344
PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
E5287198 (-)	<5	<1	<1	0.04	11	13	0.30	147	<0.5	0.02	5.9	509	11.9	<10
E5287199 (-)	<5	<1	2	0.17	30	17	0.61	406	0.9	<0.01	28.5	451	24.0	55
E5287200 (-)	<5	<1	<1	0.07	40	18	0.59	280	<0.5	<0.01	27.2	445	22.5	14
E5287201 (-)	<5	<1	<1	0.03	19	20	0.44	1940	<0.5	<0.01	18.4	561	10.4	<10
E5287202 (-)	<5	<1	1	0.03	45	47	0.66	574	1.2	<0.01	37.5	736	22.3	<10
E5287203 (-)	<5	<1	<1	0.02	33	55	0.57	444	1.5	<0.01	43.1	417	20.0	<10
E5287204 (-)	<5	<1	<1	0.02	34	59	0.66	419	0.9	<0.01	35.4	491	20.4	<10
E5287205 (-)	<5	<1	<1	0.02	25	54	0.67	416	<0.5	<0.01	34.6	510	22.6	<10
E5287206 (-)	<5	<1	<1	0.02	31	47	0.74	432	0.6	<0.01	40.0	392	26.2	<10
E5287207 (-)	<5	<1	<1	0.03	11	27	0.33	230	0.6	0.01	8.1	538	10.5	<10
E5287208 (-)	<5	<1	<1	0.03	14	53	0.56	281	1.1	<0.01	26.2	388	20.3	<10
E5287209 (-)	<5	<1	<1	0.03	35	91	0.80	255	<0.5	<0.01	32.2	291	11.7	<10
E5287210 (-)	<5	<1	<1	0.03	24	60	0.56	493	1.3	<0.01	28.9	574	22.3	<10
E5287394 (-)	<5	<1	<1	0.02	14	35	0.33	361	0.6	<0.01	24.4	480	17.8	<10
E5287395 (-)	<5	<1	<1	0.03	22	45	0.49	258	0.6	<0.01	30.5	475	20.8	<10
E5287396 (-)	<5	<1	<1	0.02	31	60	0.68	476	1.7	<0.01	40.2	459	23.0	<10
E5287397 (-)	<5	<1	<1	0.02	17	39	0.39	513	1.2	<0.01	19.4	481	17.6	<10
E5287398 (-)	<5	<1	2	0.02	20	35	0.44	222	1.0	<0.01	20.3	342	14.9	<10
E5287399 (-)	<5	<1	1	0.04	28	22	0.36	316	1.1	<0.01	28.7	451	21.7	<10
E5287400 (-)	<5	<1	<1	0.04	35	25	0.40	320	0.8	<0.01	33.2	531	22.9	<10
E5287401 (-)	<5	<1	1	0.03	27	32	0.49	470	1.1	<0.01	32.1	373	23.1	<10
E5287402 (-)	<5	<1	<1	0.04	43	46	0.68	612	0.7	<0.01	38.6	403	28.7	<10
E5287403 (-)	<5	<1	<1	0.03	26	23	0.31	327	0.7	<0.01	20.7	367	23.0	<10
E5287404 (-)	<5	<1	<1	0.04	32	32	0.46	345	1.0	<0.01	23.7	339	20.7	<10
E5287405 (-)	<5	<1	<1	0.05	44	35	0.52	536	<0.5	<0.01	32.0	380	24.1	<10
E5287406 (-)	<5	<1	<1	0.03	25	18	0.26	169	<0.5	<0.01	16.5	492	16.2	<10
E5287407 (-)	<5	<1	2	0.04	33	31	0.45	341	0.6	<0.01	27.4	391	22.7	<10
E5287408 (-)	<5	<1	<1	0.04	44	39	0.61	361	0.8	<0.01	34.6	436	20.6	<10
E5287409 (-)	<5	<1	<1	0.04	30	37	0.56	651	0.7	<0.01	27.3	302	26.0	<10
E5287410 (-)	<5	<1	<1	0.03	26	41	0.66	115	2.4	<0.01	22.6	380	27.2	<10
E5287411 (-)	<5	<1	<1	0.04	26	33	0.45	290	0.8	<0.01	16.2	468	14.0	<10
E5287412 (-)	<5	<1	<1	0.07	34	37	0.57	476	1.2	<0.01	26.8	384	21.3	<10

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344
PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
E5287413 (-)	<5	<1	<1	0.05	21	36	0.55	517	1.1	<0.01	23.2	524	22.4	<10
E5287414 (-)	<5	<1	<1	0.03	29	56	0.73	498	0.6	<0.01	34.0	482	20.4	<10
E5287415 (-)	<5	<1	<1	0.09	28	67	0.74	330	1.0	0.02	28.3	372	15.7	24
E5287416 (-)	<5	<1	1	0.08	21	22	0.54	265	0.5	<0.01	20.2	399	12.1	18
E5287417 (-)	<5	<1	<1	0.02	9	14	0.40	347	1.8	0.02	10.0	541	8.8	19
E5287418 (-)	<5	<1	<1	0.06	19	30	0.58	281	<0.5	0.02	28.9	224	14.5	15
E5287419 (-)	7	<1	<1	0.06	20	38	0.71	1040	1.6	0.08	33.1	892	27.1	42
E5287420 (-)	<5	<1	<1	0.09	49	23	0.35	197	<0.5	0.02	33.9	468	19.2	18
E5287421 (-)	<5	<1	<1	0.05	22	30	0.67	221	1.1	<0.01	24.4	396	14.5	13
E5287422 (-)	<5	<1	<1	0.19	20	49	0.70	218	1.8	0.03	32.5	252	15.7	41
E5287423 (-)	<5	<1	2	0.18	16	38	0.56	304	0.7	<0.01	28.7	345	18.1	51
E5287424 (-)	<5	<1	<1	0.10	23	30	0.71	278	<0.5	<0.01	35.4	362	20.1	23
E5287425 (-)	<5	<1	<1	0.12	13	24	0.46	487	1.0	<0.01	16.1	456	15.3	29
E5287426 (-)	<5	<1	<1	0.03	8	26	0.61	198	0.8	<0.01	18.5	389	7.9	11
E5287427 (-)	<5	<1	<1	0.08	14	22	0.45	315	0.7	0.02	24.4	454	16.2	19
E5287428 (-)	<5	<1	<1	0.08	15	24	0.49	201	1.0	0.02	21.8	471	17.1	22
E5287429 (-)	<5	<1	<1	0.08	24	43	0.58	390	<0.5	<0.01	28.6	391	17.0	21
E5287430 (-)	<5	<1	<1	0.14	14	33	0.62	552	<0.5	<0.01	18.8	343	18.1	49
E5287431 (-)	<5	<1	1	0.04	7	6	0.13	1030	1.7	0.02	8.5	734	15.8	12
E5287432 (-)	<5	<1	<1	0.26	13	65	0.87	298	0.9	0.11	32.8	685	15.8	76
E5287433 (-)	<5	<1	1	0.14	9	22	0.40	259	1.2	0.02	14.3	528	11.1	38
E5287434 (-)	<5	<1	<1	0.25	14	22	0.41	371	1.0	<0.01	18.0	408	18.0	49
E5287435 (-)	<5	<1	<1	0.26	17	30	0.60	344	0.8	<0.01	26.0	516	14.9	54
E5287436 (-)	<5	<1	1	0.21	14	32	0.57	449	<0.5	0.01	30.2	406	19.0	61
E5287437 (-)	<5	<1	<1	0.23	12	30	0.55	369	<0.5	<0.01	27.6	368	17.7	63
E5287438 (-)	<5	<1	<1	0.23	13	32	0.68	499	0.6	0.02	27.2	334	19.6	66
E5287439 (-)	<5	<1	<1	0.36	25	35	0.79	538	<0.5	0.01	41.7	423	17.0	87
E5287440 (-)	<5	<1	<1	0.30	33	36	0.75	582	0.5	0.01	32.4	364	15.6	99
E5287441 (-)	<5	<1	<1	0.08	20	38	0.72	486	<0.5	0.01	28.5	365	14.9	32
E5287442 (-)	7	<1	1	0.19	18	55	0.66	693	1.3	0.07	39.2	307	11.7	70
E5287443 (-)	<5	<1	<1	0.20	12	42	0.63	455	1.1	0.03	23.3	257	11.5	61
E5287444 (-)	<5	<1	<1	0.10	17	29	0.55	322	<0.5	0.03	32.9	343	15.5	29

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
E5287445 (-)	<5	<1	<1	0.07	31	44	0.64	370	0.9	<0.01	70.7	332	26.4	24
E5287446 (-)	6	<1	<1	0.35	16	57	0.95	961	<0.5	0.15	40.8	418	18.5	112
E5287447 (-)	<5	<1	<1	0.23	11	42	0.73	659	0.9	0.05	34.6	401	16.4	78

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344
PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
TVMSE5286631 (-)	0.028	<1	1.0	<10	<5	9.5	<10	<10	<5	0.01	<5	<5	18.2	<1
TVMSE5286632 (-)	0.021	<1	1.7	<10	<5	14.5	<10	<10	<5	0.02	<5	<5	17.3	<1
TVMSE5286633 (-)	0.032	<1	1.8	<10	<5	13.6	<10	<10	<5	0.02	<5	<5	21.4	<1
TVMSE5286634 (-)	0.053	<1	<0.5	<10	<5	5.6	<10	<10	<5	<0.01	<5	<5	16.2	<1
TVMSE5286635 (-)	0.037	<1	0.9	<10	<5	8.2	<10	<10	<5	0.02	<5	<5	21.4	<1
TVMSE5286636 (-)	0.047	<1	3.8	<10	<5	18.8	<10	<10	<5	<0.01	<5	<5	12.4	<1
TVMSE5286637 (-)	0.026	<1	0.6	<10	<5	6.3	<10	<10	<5	<0.01	<5	<5	12.6	<1
TVMLE5286638 (-)	0.039	<1	1.1	<10	<5	26.6	<10	<10	<5	<0.01	<5	7	15.9	<1
TVMLE5286639 (-)	0.056	<1	1.5	<10	<5	38.6	<10	<10	<5	<0.01	<5	<5	11.8	<1
TVMLE5286640 (-)	0.073	<1	1.0	<10	<5	19.2	<10	<10	<5	<0.01	<5	<5	12.9	<1
TVMLE5286641 (-)	0.056	<1	1.4	<10	<5	41.1	<10	<10	<5	<0.01	<5	<5	13.1	<1
TVMSE5286642 (-)	0.076	<1	3.8	21	<5	86.4	<10	<10	<5	<0.01	<5	<5	15.0	<1
TVMLE5286643 (-)	0.024	<1	1.0	<10	<5	35.1	<10	<10	<5	0.01	<5	<5	12.0	<1
TVMLE5286644 (-)	0.019	<1	1.3	<10	<5	24.3	<10	<10	<5	0.02	<5	<5	17.3	<1
TVMLE5286645 (-)	0.040	<1	1.8	<10	<5	114	<10	<10	<5	0.04	<5	<5	18.2	<1
TVMLE5286646 (-)	0.038	<1	1.2	<10	<5	36.0	<10	<10	<5	0.02	<5	<5	14.6	<1
E5285889 (-)	0.009	<1	1.8	<10	<5	18.9	<10	<10	<5	<0.01	<5	<5	17.1	<1
E5285890 (-)	0.019	<1	1.3	<10	<5	17.1	<10	<10	<5	<0.01	<5	<5	15.4	<1
E5285891 (-)	0.026	<1	1.3	<10	<5	28.9	<10	<10	<5	<0.01	<5	<5	13.2	<1
E5285892 (-)	0.020	<1	2.0	<10	<5	16.6	<10	<10	<5	<0.01	<5	<5	12.6	<1
E5285893 (-)	0.031	<1	3.5	<10	<5	29.5	<10	<10	<5	0.01	<5	<5	14.0	<1
E5285894 (-)	0.094	<1	2.5	<10	<5	29.2	<10	<10	<5	<0.01	<5	<5	9.9	<1
E5285895 (-)	0.012	<1	1.5	<10	<5	14.9	<10	<10	<5	<0.01	<5	<5	15.8	<1
E5285896 (-)	0.028	<1	<0.5	<10	<5	3.3	<10	<10	<5	<0.01	<5	<5	13.0	<1
E5285897 (-)	0.040	<1	0.7	15	<5	11.8	<10	<10	<5	<0.01	<5	<5	10.7	<1
E5285898 (-)	0.026	<1	1.2	12	<5	10.3	<10	<10	<5	0.01	<5	<5	13.6	<1
E5285899 (-)	0.016	<1	1.1	<10	<5	18.8	<10	<10	<5	<0.01	<5	<5	12.6	<1
E5285900 (-)	0.009	<1	1.0	<10	<5	11.0	<10	<10	<5	<0.01	<5	<5	16.6	<1
E5285901 (-)	0.014	<1	2.8	<10	<5	15.8	<10	<10	<5	<0.01	<5	<5	23.2	<1
E5285902 (-)	0.027	<1	1.4	<10	<5	9.1	<10	<10	<5	<0.01	<5	<5	21.6	<1
E5285903 (-)	0.022	<1	4.8	11	<5	21.5	<10	<10	<5	<0.01	<5	<5	20.8	<1
E5285904 (-)	0.034	<1	2.1	<10	<5	25.1	<10	<10	<5	<0.01	<5	<5	15.9	<1

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
E5285905 (-)	0.034	<1	1.0	<10	<5	11.7	<10	<10	<5	0.01	<5	<5	19.3	<1
E5285906 (-)	0.041	<1	0.7	<10	<5	10.3	<10	<10	<5	0.02	<5	<5	24.0	<1
E5285907 (-)	0.115	1	<0.5	<10	<5	24.5	<10	<10	<5	0.01	<5	<5	13.8	<1
E5285908 (-)	0.019	<1	1.5	<10	<5	16.4	<10	<10	<5	0.02	<5	<5	21.9	<1
E5285909 (-)	0.022	<1	<0.5	<10	<5	5.7	<10	<10	<5	<0.01	<5	<5	9.3	<1
E5285910 (-)	0.022	<1	1.5	<10	<5	19.8	<10	<10	<5	<0.01	<5	<5	20.8	<1
E5285911 (-)	0.011	<1	<0.5	<10	<5	4.7	<10	<10	<5	<0.01	<5	<5	9.4	<1
E5285912 (-)	0.009	<1	<0.5	<10	<5	6.1	<10	<10	<5	0.01	<5	<5	4.9	<1
E5285913 (-)	0.038	<1	<0.5	<10	<5	12.9	<10	<10	<5	<0.01	<5	<5	16.4	<1
E5285914 (-)	0.041	<1	0.9	<10	<5	30.1	<10	<10	<5	<0.01	<5	<5	10.2	<1
E5285915 (-)	0.028	<1	1.0	<10	<5	23.3	<10	<10	<5	<0.01	<5	<5	12.9	<1
E5285916 (-)	0.024	<1	0.7	<10	<5	12.5	<10	<10	<5	0.01	<5	<5	13.0	<1
E5285917 (-)	0.031	<1	<0.5	<10	<5	5.8	<10	<10	<5	<0.01	<5	<5	12.0	<1
E5285919 (-)	0.009	<1	2.9	<10	<5	16.2	<10	<10	<5	0.01	<5	<5	17.8	<1
E5285920 (-)	0.028	<1	<0.5	<10	<5	9.0	<10	<10	<5	<0.01	<5	<5	10.1	<1
E5285921 (-)	0.012	<1	0.6	<10	<5	16.8	<10	<10	<5	0.02	<5	<5	11.1	<1
E5285922 (-)	0.027	<1	<0.5	<10	<5	4.8	<10	<10	<5	<0.01	<5	<5	14.7	<1
E5285923 (-)	0.007	<1	1.1	<10	<5	11.1	<10	<10	<5	<0.01	<5	<5	14.2	<1
E5285924 (-)	0.017	<1	1.5	<10	<5	19.4	<10	<10	<5	<0.01	<5	<5	15.3	<1
E5285925 (-)	0.019	<1	0.7	<10	<5	78.5	<10	<10	<5	<0.01	<5	<5	14.3	<1
E5285926 (-)	0.013	<1	1.7	<10	<5	23.5	<10	<10	<5	<0.01	<5	<5	15.6	<1
E5285927 (-)	0.036	<1	0.6	<10	<5	9.3	<10	<10	<5	0.01	<5	<5	15.4	<1
E5285928 (-)	0.047	<1	1.2	<10	<5	29.1	<10	<10	<5	0.05	<5	<5	18.0	<1
E5285929 (-)	0.026	<1	1.0	<10	<5	15.8	<10	<10	<5	0.06	<5	<5	19.9	<1
E5287158 (-)	0.012	<1	1.4	<10	<5	20.4	<10	<10	<5	0.02	<5	<5	13.6	<1
E5287159 (-)	0.013	<1	1.8	<10	<5	24.3	<10	<10	<5	0.02	<5	<5	13.6	<1
E5287160 (-)	0.008	<1	0.9	<10	<5	10.6	<10	<10	<5	0.01	<5	<5	10.9	<1
E5287161 (-)	0.018	<1	1.7	<10	<5	13.1	<10	<10	<5	0.01	<5	<5	17.9	<1
E5287162 (-)	0.039	<1	1.0	<10	<5	5.1	<10	<10	<5	<0.01	<5	<5	18.1	<1
E5287163 (-)	0.012	<1	1.3	<10	<5	13.9	<10	<10	<5	0.01	<5	<5	14.7	<1
E5287164 (-)	0.013	<1	1.1	<10	<5	6.4	<10	<10	<5	<0.01	<5	<5	14.7	<1
E5287165 (-)	0.012	<1	1.4	<10	<5	19.7	<10	<10	<5	0.01	<5	<5	14.6	<1

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
E5287166 (-)	0.019	<1	1.5	<10	<5	13.9	<10	<10	<5	<0.01	<5	<5	14.0	<1
E5287167 (-)	0.013	<1	1.4	<10	<5	8.9	<10	<10	<5	0.01	<5	<5	14.9	<1
E5287168 (-)	0.006	<1	1.3	<10	<5	14.7	<10	<10	<5	0.02	<5	<5	14.4	<1
E5287169 (-)	0.013	<1	0.7	<10	<5	5.0	<10	<10	<5	<0.01	<5	<5	12.1	<1
E5287170 (-)	0.008	<1	0.7	<10	<5	6.1	<10	<10	<5	<0.01	<5	<5	12.1	<1
E5287171 (-)	0.017	<1	<0.5	<10	<5	4.5	<10	<10	<5	<0.01	<5	<5	10.3	<1
E5287172 (-)	0.017	<1	0.7	<10	<5	4.5	<10	<10	<5	<0.01	<5	<5	13.7	<1
E5287173 (-)	0.007	<1	0.8	<10	<5	7.7	<10	<10	<5	0.01	<5	<5	11.5	<1
E5287174 (-)	0.011	<1	1.0	<10	<5	5.1	<10	<10	<5	<0.01	<5	<5	14.9	<1
E5287175 (-)	0.023	<1	<0.5	<10	<5	5.7	<10	<10	<5	0.01	<5	<5	13.0	<1
E5287176 (-)	0.017	<1	0.6	<10	<5	9.0	<10	<10	<5	<0.01	<5	<5	14.9	<1
E5287177 (-)	0.020	<1	1.0	<10	<5	13.6	<10	<10	<5	<0.01	<5	<5	12.2	<1
E5287178 (-)	0.025	<1	1.0	<10	<5	22.9	<10	<10	<5	<0.01	<5	<5	9.4	<1
E5287179 (-)	0.025	<1	1.6	<10	<5	32.6	<10	<10	<5	<0.01	<5	<5	13.3	<1
E5287180 (-)	0.014	<1	1.1	<10	<5	8.2	<10	<10	<5	<0.01	<5	<5	12.5	<1
E5287181 (-)	0.018	<1	0.8	<10	<5	7.9	<10	<10	<5	<0.01	<5	<5	10.2	<1
E5287182 (-)	0.014	<1	1.2	<10	<5	13.4	<10	<10	<5	<0.01	<5	<5	7.8	<1
E5287183 (-)	0.012	<1	0.9	<10	<5	12.5	<10	<10	<5	<0.01	<5	<5	9.0	<1
E5287184 (-)	0.021	<1	1.5	<10	<5	23.6	<10	<10	<5	<0.01	<5	<5	12.8	<1
E5287185 (-)	0.053	1	1.3	<10	<5	85.4	<10	<10	<5	<0.01	<5	<5	10.6	<1
E5287186 (-)	0.043	<1	1.6	<10	<5	64.6	<10	<10	<5	<0.01	<5	<5	11.7	<1
E5287187 (-)	0.012	<1	1.5	<10	<5	22.7	<10	<10	<5	0.01	<5	<5	15.8	<1
E5287188 (-)	0.025	1	1.7	<10	<5	36.8	<10	<10	<5	<0.01	<5	<5	14.0	<1
E5287189 (-)	0.017	<1	1.0	<10	<5	10.9	<10	<10	<5	<0.01	<5	<5	10.0	<1
E5287190 (-)	0.017	<1	1.3	<10	<5	10.4	<10	<10	<5	<0.01	<5	<5	14.6	<1
E5287191 (-)	0.036	<1	0.7	<10	<5	5.9	<10	<10	<5	0.01	<5	<5	20.0	<1
E5287192 (-)	0.036	<1	1.0	<10	<5	6.2	<10	<10	<5	<0.01	<5	<5	19.6	<1
E5287193 (-)	0.029	<1	0.9	<10	<5	18.2	<10	<10	<5	<0.01	<5	<5	10.0	<1
E5287194 (-)	0.033	<1	1.1	<10	<5	16.6	<10	<10	<5	<0.01	<5	<5	12.7	<1
E5287195 (-)	0.016	<1	0.9	<10	<5	11.1	<10	<10	<5	0.01	<5	<5	17.9	<1
E5287196 (-)	0.014	<1	0.9	<10	<5	13.0	<10	<10	<5	0.01	<5	<5	18.5	<1
E5287197 (-)	0.005	<1	0.6	<10	<5	12.3	<10	<10	<5	0.01	<5	<5	8.9	<1

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
E5287198 (-)	0.040	<1	<0.5	<10	<5	8.3	<10	<10	<5	0.01	<5	<5	21.0	<1
E5287199 (-)	0.068	2	1.5	<10	<5	131	<10	<10	<5	0.05	<5	<5	14.0	<1
E5287200 (-)	0.019	<1	1.1	<10	<5	17.6	<10	<10	<5	0.01	<5	<5	12.7	<1
E5287201 (-)	0.030	<1	1.4	<10	<5	19.2	<10	<10	<5	<0.01	<5	<5	9.6	<1
E5287202 (-)	0.055	<1	2.0	<10	<5	19.8	<10	<10	<5	<0.01	<5	11	14.1	<1
E5287203 (-)	0.015	<1	1.0	14	<5	11.6	<10	<10	<5	<0.01	<5	<5	13.5	<1
E5287204 (-)	0.030	2	1.8	<10	<5	83.0	<10	<10	<5	<0.01	<5	<5	12.3	<1
E5287205 (-)	0.022	<1	2.3	<10	<5	30.1	<10	<10	<5	<0.01	<5	<5	13.6	<1
E5287206 (-)	0.016	<1	0.9	<10	<5	6.8	<10	<10	<5	<0.01	<5	<5	14.0	<1
E5287207 (-)	0.037	<1	0.6	<10	<5	7.8	<10	<10	<5	<0.01	<5	<5	14.4	<1
E5287208 (-)	0.031	<1	1.9	<10	<5	22.3	<10	<10	<5	<0.01	<5	<5	13.6	<1
E5287209 (-)	0.014	<1	1.2	<10	<5	11.6	<10	<10	<5	<0.01	<5	<5	18.2	<1
E5287210 (-)	0.020	<1	2.0	<10	<5	18.9	<10	<10	<5	<0.01	<5	<5	16.1	<1
E5287394 (-)	0.025	<1	0.9	<10	<5	10.0	<10	<10	<5	<0.01	<5	<5	11.7	<1
E5287395 (-)	0.026	<1	1.1	<10	<5	6.4	<10	<10	<5	<0.01	<5	<5	14.6	<1
E5287396 (-)	0.028	1	1.8	<10	<5	74.1	<10	<10	<5	<0.01	<5	<5	12.0	<1
E5287397 (-)	0.047	<1	1.1	<10	<5	35.2	<10	<10	<5	<0.01	<5	<5	11.2	<1
E5287398 (-)	0.020	<1	1.3	<10	<5	16.9	<10	<10	<5	<0.01	<5	<5	9.7	<1
E5287399 (-)	0.015	<1	1.6	<10	<5	20.8	<10	<10	<5	<0.01	<5	<5	8.5	<1
E5287400 (-)	0.017	<1	1.6	<10	<5	30.7	<10	<10	<5	<0.01	<5	<5	9.3	<1
E5287401 (-)	0.011	<1	1.7	<10	<5	15.7	<10	<10	<5	<0.01	<5	<5	9.6	<1
E5287402 (-)	0.014	<1	1.2	<10	<5	13.6	<10	<10	<5	<0.01	<5	<5	14.3	<1
E5287403 (-)	0.031	<1	1.3	<10	<5	21.1	<10	<10	<5	<0.01	<5	<5	8.1	<1
E5287404 (-)	0.011	<1	1.1	<10	<5	8.2	<10	<10	<5	<0.01	<5	<5	10.8	<1
E5287405 (-)	0.008	<1	1.7	<10	<5	6.7	<10	<10	<5	<0.01	<5	<5	11.8	<1
E5287406 (-)	0.025	<1	1.3	<10	<5	19.9	<10	<10	<5	<0.01	<5	<5	7.6	<1
E5287407 (-)	0.034	<1	1.4	<10	<5	46.8	<10	<10	<5	<0.01	<5	<5	10.6	<1
E5287408 (-)	0.014	<1	1.5	<10	<5	16.3	<10	<10	<5	<0.01	<5	<5	12.6	<1
E5287409 (-)	0.011	<1	0.9	<10	<5	9.0	<10	<10	<5	<0.01	<5	<5	13.9	<1
E5287410 (-)	0.270	<1	1.9	<10	<5	28.4	<10	<10	<5	<0.01	<5	10	14.0	<1
E5287411 (-)	0.017	<1	1.5	<10	<5	14.7	<10	<10	<5	<0.01	<5	<5	11.4	<1
E5287412 (-)	0.021	<1	2.0	<10	<5	22.8	<10	<10	<5	<0.01	<5	<5	12.9	<1

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
E5287413 (-)	0.047	<1	1.3	<10	<5	15.5	<10	<10	<5	<0.01	<5	<5	13.4	<1
E5287414 (-)	0.094	<1	1.5	<10	<5	61.1	<10	<10	<5	<0.01	<5	<5	14.7	<1
E5287415 (-)	0.029	<1	2.0	<10	<5	27.1	<10	<10	<5	0.06	<5	<5	26.2	<1
E5287416 (-)	0.019	<1	0.7	<10	<5	13.9	<10	<10	<5	0.02	<5	<5	17.3	<1
E5287417 (-)	0.250	5	1.2	<10	13	461	<10	<10	<5	0.01	<5	<5	9.1	<1
E5287418 (-)	0.028	<1	1.1	<10	<5	35.4	<10	<10	<5	0.02	<5	<5	16.6	<1
E5287419 (-)	0.159	2	2.6	<10	<5	267	<10	<10	<5	0.05	<5	<5	34.7	<1
E5287420 (-)	0.138	<1	1.0	<10	<5	66.0	<10	<10	<5	0.01	<5	<5	15.0	<1
E5287421 (-)	0.013	<1	0.9	<10	<5	11.9	<10	<10	<5	0.01	<5	<5	15.7	<1
E5287422 (-)	0.033	<1	1.6	<10	<5	37.0	<10	<10	<5	0.06	<5	<5	26.8	<1
E5287423 (-)	0.024	<1	1.0	<10	<5	17.7	<10	<10	<5	0.05	<5	<5	22.2	<1
E5287424 (-)	0.009	<1	1.1	<10	<5	12.2	<10	<10	<5	0.03	<5	<5	19.8	<1
E5287425 (-)	0.040	<1	<0.5	<10	<5	8.8	<10	<10	<5	0.02	<5	<5	23.5	<1
E5287426 (-)	0.020	<1	0.7	<10	<5	<0.5	<10	<10	<5	0.01	<5	<5	19.3	<1
E5287427 (-)	0.026	<1	0.8	<10	<5	9.0	<10	<10	<5	0.02	<5	<5	20.0	<1
E5287428 (-)	0.025	<1	0.6	<10	<5	9.9	<10	<10	<5	0.02	<5	<5	18.8	<1
E5287429 (-)	0.034	<1	2.0	<10	<5	25.6	<10	<10	<5	0.03	<5	<5	19.0	<1
E5287430 (-)	0.036	<1	1.1	<10	<5	13.8	<10	<10	<5	0.05	<5	<5	28.9	<1
E5287431 (-)	0.054	<1	<0.5	<10	<5	10.9	<10	<10	<5	0.02	<5	<5	13.0	<1
E5287432 (-)	0.038	<1	2.9	<10	<5	87.7	<10	<10	<5	0.09	<5	<5	31.9	<1
E5287433 (-)	0.056	<1	0.8	<10	<5	22.9	<10	<10	<5	0.04	<5	<5	22.2	<1
E5287434 (-)	0.016	<1	1.0	<10	<5	16.3	<10	<10	<5	0.06	<5	<5	16.9	<1
E5287435 (-)	0.017	<1	1.8	<10	<5	37.4	<10	<10	<5	0.07	<5	<5	22.1	<1
E5287436 (-)	0.047	<1	1.9	<10	<5	20.4	<10	<10	<5	0.06	<5	<5	26.9	<1
E5287437 (-)	0.034	<1	1.5	<10	<5	30.1	<10	<10	<5	0.06	<5	<5	20.7	<1
E5287438 (-)	0.025	<1	2.5	<10	<5	22.2	<10	<10	<5	0.08	<5	<5	27.1	<1
E5287439 (-)	0.033	<1	2.2	<10	<5	29.3	<10	<10	<5	0.08	<5	<5	30.5	<1
E5287440 (-)	0.028	<1	3.0	<10	<5	51.2	<10	<10	<5	0.10	<5	<5	28.7	<1
E5287441 (-)	0.036	<1	1.6	<10	<5	20.0	<10	<10	<5	0.04	<5	<5	20.9	<1
E5287442 (-)	0.041	<1	3.1	<10	<5	29.3	<10	<10	<5	0.07	<5	<5	29.9	<1
E5287443 (-)	0.040	<1	2.8	<10	<5	36.7	<10	<10	<5	0.07	<5	<5	25.7	<1
E5287444 (-)	0.019	<1	1.7	<10	<5	69.4	<10	<10	<5	0.04	<5	<5	18.1	<1

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
E5287445 (-)	0.020	<1	1.8	<10	<5	42.6	<10	<10	<5	0.05	<5	<5	23.9	<1
E5287446 (-)	0.024	<1	5.8	<10	<5	61.7	<10	<10	<5	0.12	5	<5	40.3	<1
E5287447 (-)	0.071	<1	3.1	<10	<5	36.9	<10	<10	<5	0.09	<5	<5	30.9	<1

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344
PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Y	Zn	Zr
Unit:	ppm	ppm	ppm
Sample Description RDL:	1	0.5	5
TVMSE5286631 (-)	5	57.8	<5
TVMSE5286632 (-)	18	49.4	<5
TVMSE5286633 (-)	18	66.6	<5
TVMSE5286634 (-)	2	18.9	<5
TVMSE5286635 (-)	5	80.0	<5
TVMSE5286636 (-)	19	154	<5
TVMSE5286637 (-)	4	45.5	<5
TVMLE5286638 (-)	10	84.6	<5
TVMLE5286639 (-)	11	81.7	<5
TVMLE5286640 (-)	6	62.7	<5
TVMLE5286641 (-)	8	86.4	<5
TVMSE5286642 (-)	31	40.3	<5
TVMLE5286643 (-)	12	80.8	<5
TVMLE5286644 (-)	14	90.8	<5
TVMLE5286645 (-)	17	80.0	<5
TVMLE5286646 (-)	13	79.7	<5
E5285889 (-)	7	103	<5
E5285890 (-)	5	83.7	<5
E5285891 (-)	5	107	<5
E5285892 (-)	6	113	<5
E5285893 (-)	27	69.2	<5
E5285894 (-)	6	30.6	6
E5285895 (-)	8	93.6	<5
E5285896 (-)	2	59.7	<5
E5285897 (-)	7	96.8	<5
E5285898 (-)	5	65.2	<5
E5285899 (-)	7	73.2	<5
E5285900 (-)	3	61.4	<5
E5285901 (-)	17	126	<5
E5285902 (-)	7	105	<5
E5285903 (-)	42	117	<5
E5285904 (-)	11	84.0	<5

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Y	Zn	Zr
Unit:	ppm	ppm	ppm
Sample Description RDL:	1	0.5	5
E5285905 (-)	8	67.8	<5
E5285906 (-)	4	75.4	<5
E5285907 (-)	7	34.9	<5
E5285908 (-)	6	82.2	<5
E5285909 (-)	1	12.8	<5
E5285910 (-)	5	93.0	<5
E5285911 (-)	1	8.2	<5
E5285912 (-)	<1	6.8	<5
E5285913 (-)	4	48.0	<5
E5285914 (-)	14	86.6	<5
E5285915 (-)	10	73.2	<5
E5285916 (-)	4	66.1	<5
E5285917 (-)	3	53.0	<5
E5285919 (-)	20	141	10
E5285920 (-)	6	82.3	<5
E5285921 (-)	9	68.0	<5
E5285922 (-)	3	55.4	<5
E5285923 (-)	13	86.2	<5
E5285924 (-)	15	77.0	<5
E5285925 (-)	6	73.0	<5
E5285926 (-)	18	78.8	<5
E5285927 (-)	8	67.3	<5
E5285928 (-)	11	75.0	<5
E5285929 (-)	4	64.5	<5
E5287158 (-)	14	77.5	<5
E5287159 (-)	14	66.4	6
E5287160 (-)	14	53.4	<5
E5287161 (-)	13	124	<5
E5287162 (-)	5	98.6	<5
E5287163 (-)	16	89.1	<5
E5287164 (-)	12	117	<5
E5287165 (-)	18	95.2	<5

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344
PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Y	Zn	Zr
Unit:	ppm	ppm	ppm
Sample Description RDL:	1	0.5	5
E5287166 (-)	16	87.3	<5
E5287167 (-)	19	80.0	<5
E5287168 (-)	15	81.2	<5
E5287169 (-)	5	53.7	<5
E5287170 (-)	7	60.8	<5
E5287171 (-)	4	42.2	<5
E5287172 (-)	3	54.3	<5
E5287173 (-)	6	72.0	<5
E5287174 (-)	6	69.9	<5
E5287175 (-)	3	39.8	<5
E5287176 (-)	4	62.1	<5
E5287177 (-)	9	70.3	<5
E5287178 (-)	10	68.3	<5
E5287179 (-)	14	93.2	<5
E5287180 (-)	8	65.0	<5
E5287181 (-)	5	64.4	<5
E5287182 (-)	13	55.0	<5
E5287183 (-)	11	72.1	<5
E5287184 (-)	19	98.6	<5
E5287185 (-)	16	79.3	<5
E5287186 (-)	19	89.4	<5
E5287187 (-)	20	77.4	<5
E5287188 (-)	19	79.0	<5
E5287189 (-)	11	68.9	<5
E5287190 (-)	10	78.3	<5
E5287191 (-)	4	64.1	<5
E5287192 (-)	6	81.7	<5
E5287193 (-)	12	61.4	<5
E5287194 (-)	10	37.6	<5
E5287195 (-)	7	62.8	<5
E5287196 (-)	6	63.6	<5
E5287197 (-)	5	47.7	<5

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Y	Zn	Zr
Unit:	ppm	ppm	ppm
Sample Description RDL:	1	0.5	5
E5287198 (-)	2	38.0	<5
E5287199 (-)	16	69.8	<5
E5287200 (-)	17	75.1	<5
E5287201 (-)	20	26.8	<5
E5287202 (-)	20	84.7	<5
E5287203 (-)	5	102	<5
E5287204 (-)	12	110	<5
E5287205 (-)	17	103	<5
E5287206 (-)	6	100	<5
E5287207 (-)	3	42.2	<5
E5287208 (-)	10	81.5	<5
E5287209 (-)	4	85.4	<5
E5287210 (-)	10	70.5	<5
E5287394 (-)	6	76.6	<5
E5287395 (-)	5	94.8	<5
E5287396 (-)	12	110	<5
E5287397 (-)	9	64.9	<5
E5287398 (-)	10	72.8	<5
E5287399 (-)	12	79.5	<5
E5287400 (-)	11	85.0	<5
E5287401 (-)	8	87.2	<5
E5287402 (-)	12	99.9	<5
E5287403 (-)	15	73.5	<5
E5287404 (-)	8	74.9	<5
E5287405 (-)	14	59.4	<5
E5287406 (-)	13	58.8	<5
E5287407 (-)	12	78.0	<5
E5287408 (-)	12	96.9	<5
E5287409 (-)	5	84.7	<5
E5287410 (-)	9	95.1	<5
E5287411 (-)	10	70.7	<5
E5287412 (-)	12	79.9	<5

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Y	Zn	Zr
Unit:	ppm	ppm	ppm
Sample Description RDL:	1	0.5	5
E5287413 (-)	7	75.1	<5
E5287414 (-)	9	88.0	<5
E5287415 (-)	13	79.1	<5
E5287416 (-)	6	54.8	<5
E5287417 (-)	7	32.6	<5
E5287418 (-)	5	62.6	<5
E5287419 (-)	15	81.9	<5
E5287420 (-)	9	56.6	<5
E5287421 (-)	6	155	<5
E5287422 (-)	8	83.7	<5
E5287423 (-)	6	64.3	<5
E5287424 (-)	6	79.2	<5
E5287425 (-)	4	68.8	<5
E5287426 (-)	3	74.3	<5
E5287427 (-)	5	57.2	<5
E5287428 (-)	5	57.9	<5
E5287429 (-)	19	64.8	<5
E5287430 (-)	5	73.7	<5
E5287431 (-)	4	39.0	<5
E5287432 (-)	16	69.4	<5
E5287433 (-)	4	50.0	<5
E5287434 (-)	6	56.7	<5
E5287435 (-)	7	70.2	<5
E5287436 (-)	7	80.5	<5
E5287437 (-)	6	68.7	<5
E5287438 (-)	10	91.6	<5
E5287439 (-)	12	96.7	<5
E5287440 (-)	18	129	<5
E5287441 (-)	18	81.7	<5
E5287442 (-)	20	71.5	<5
E5287443 (-)	12	71.0	<5
E5287444 (-)	15	74.1	<5

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Y	Zn	Zr
Unit:	ppm	ppm	ppm
Sample Description RDL:	1	0.5	5
E5287445 (-)	14	118	<5
E5287446 (-)	20	111	<5
E5287447 (-)	14	95.6	<5

Comments: RDL - Reported Detection Limit

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
TVMSE5286631 (-)	0.462	<0.002
TVMSE5286632 (-)	0.492	0.002
TVMSE5286633 (-)	0.522	<0.002
TVMSE5286634 (-)	0.402	<0.002
TVMSE5286635 (-)	0.468	<0.002
TVMSE5286636 (-)	0.460	<0.002
TVMSE5286637 (-)	0.374	<0.002
TVMLE5286638 (-)	0.392	<0.002
TVMLE5286639 (-)	0.526	0.004
TVMLE5286640 (-)	0.394	0.002
TVMLE5286641 (-)	0.666	<0.002
TVMSE5286642 (-)	0.518	0.006
TVMLE5286643 (-)	0.544	<0.002
TVMLE5286644 (-)	0.416	<0.002
TVMLE5286645 (-)	0.538	0.010
TVMLE5286646 (-)	0.474	0.006
E5285889 (-)	0.568	0.014
E5285890 (-)	0.522	0.002
E5285891 (-)	0.572	0.004
E5285892 (-)	0.626	0.002
E5285893 (-)	0.590	0.003
E5285894 (-)	0.560	0.014
E5285895 (-)	0.706	0.004
E5285896 (-)	0.540	0.003
E5285897 (-)	0.478	0.004
E5285898 (-)	0.632	0.011
E5285899 (-)	0.600	0.008
E5285900 (-)	0.660	0.003
E5285901 (-)	0.620	0.004
E5285902 (-)	0.600	0.014
E5285903 (-)	0.494	0.006
E5285904 (-)	0.590	0.005

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
E5285905 (-)	0.462	0.007
E5285906 (-)	0.532	0.019
E5285907 (-)	0.460	0.004
E5285908 (-)	0.680	0.004
E5285909 (-)	0.480	0.003
E5285910 (-)	0.674	0.005
E5285911 (-)	0.508	<0.002
E5285912 (-)	0.432	0.003
E5285913 (-)	0.530	0.004
E5285914 (-)	0.532	0.004
E5285915 (-)	0.492	0.014
E5285916 (-)	0.572	0.031
E5285917 (-)	0.488	0.028
E5285919 (-)	0.716	0.028
E5285920 (-)	0.586	<0.002
E5285921 (-)	0.634	0.016
E5285922 (-)	0.568	<0.002
E5285923 (-)	0.646	0.003
E5285924 (-)	0.570	0.009
E5285925 (-)	0.636	0.002
E5285926 (-)	0.630	0.004
E5285927 (-)	0.560	<0.002
E5285928 (-)	0.486	<0.002
E5285929 (-)	0.536	0.016
E5287158 (-)	0.730	0.005
E5287159 (-)	0.770	0.003
E5287160 (-)	0.724	0.007
E5287161 (-)	0.758	0.011
E5287162 (-)	0.674	0.006
E5287163 (-)	0.752	0.006
E5287164 (-)	0.770	0.021
E5287165 (-)	0.726	0.029

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
E5287166 (-)	0.696	0.051
E5287167 (-)	0.720	0.022
E5287168 (-)	0.778	0.015
E5287169 (-)	0.556	0.016
E5287170 (-)	0.726	0.022
E5287171 (-)	0.616	0.008
E5287172 (-)	0.658	0.012
E5287173 (-)	0.650	0.010
E5287174 (-)	0.712	0.010
E5287175 (-)	0.570	0.011
E5287176 (-)	0.660	<0.002
E5287177 (-)	0.622	0.007
E5287178 (-)	0.578	<0.002
E5287179 (-)	0.628	0.027
E5287180 (-)	0.718	0.011
E5287181 (-)	0.614	0.009
E5287182 (-)	0.660	0.004
E5287183 (-)	0.682	0.005
E5287184 (-)	0.652	0.003
E5287185 (-)	0.614	0.014
E5287186 (-)	0.546	0.011
E5287187 (-)	0.698	0.006
E5287188 (-)	0.628	0.018
E5287189 (-)	0.686	0.007
E5287190 (-)	0.662	0.005
E5287191 (-)	0.662	0.012
E5287192 (-)	0.654	0.007
E5287193 (-)	0.558	0.009
E5287194 (-)	0.604	0.005
E5287195 (-)	0.666	0.020
E5287196 (-)	0.650	0.002
E5287197 (-)	0.672	0.003

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
E5287198 (-)	0.656	<0.002
E5287199 (-)	0.674	0.009
E5287200 (-)	0.662	<0.002
E5287201 (-)	0.620	0.016
E5287202 (-)	0.588	0.003
E5287203 (-)	0.636	0.016
E5287204 (-)	0.668	<0.002
E5287205 (-)	0.618	0.003
E5287206 (-)	0.666	0.007
E5287207 (-)	0.582	0.007
E5287208 (-)	0.588	0.007
E5287209 (-)	0.826	0.004
E5287210 (-)	0.708	0.014
E5287394 (-)	0.646	0.004
E5287395 (-)	0.622	0.008
E5287396 (-)	0.668	0.010
E5287397 (-)	0.660	<0.002
E5287398 (-)	0.626	<0.002
E5287399 (-)	0.828	0.006
E5287400 (-)	0.738	<0.002
E5287401 (-)	0.748	0.015
E5287402 (-)	0.734	0.003
E5287403 (-)	0.594	0.004
E5287404 (-)	0.706	0.007
E5287405 (-)	0.648	0.008
E5287406 (-)	0.642	0.012
E5287407 (-)	0.658	0.006
E5287408 (-)	0.728	<0.002
E5287409 (-)	0.746	<0.002
E5287410 (-)	0.864	<0.002
E5287411 (-)	0.744	<0.002
E5287412 (-)	0.898	<0.002

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
E5287413 (-)	0.572	0.007
E5287414 (-)	0.694	<0.002
E5287415 (-)	0.778	<0.002
E5287416 (-)	0.800	0.004
E5287417 (-)	0.612	<0.002
E5287418 (-)	0.598	0.008
E5287419 (-)	0.524	<0.002
E5287420 (-)	0.662	0.006
E5287421 (-)	0.898	<0.002
E5287422 (-)	0.674	0.004
E5287423 (-)	0.644	<0.002
E5287424 (-)	0.774	<0.002
E5287425 (-)	0.488	<0.002
E5287426 (-)	0.594	<0.002
E5287427 (-)	0.684	<0.002
E5287428 (-)	0.558	0.005
E5287429 (-)	0.602	<0.002
E5287430 (-)	0.572	<0.002
E5287431 (-)	0.532	0.015
E5287432 (-)	0.620	<0.002
E5287433 (-)	0.516	0.002
E5287434 (-)	0.660	0.009
E5287435 (-)	0.694	0.002
E5287436 (-)	0.596	0.004
E5287437 (-)	0.540	0.016
E5287438 (-)	0.624	0.014
E5287439 (-)	0.594	0.011
E5287440 (-)	0.686	0.010
E5287441 (-)	0.760	0.018
E5287442 (-)	0.644	0.007
E5287443 (-)	0.578	<0.002
E5287444 (-)	0.854	0.008

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y521344
PROJECT NO: VM

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Aug 22, 2011 | DATE RECEIVED: Aug 22, 2011 | DATE REPORTED: Sep 16, 2011 | SAMPLE TYPE: Soil

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
E5287445 (-)	0.908	0.005
E5287446 (-)	0.710	0.003
E5287447 (-)	0.614	<0.002

Comments: RDL - Reported Detection Limit

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y521344
PROJECT NO: VM
ATTENTION TO: DAVE TUPPER

Solid Analysis

RPT Date: Sep 16, 2011		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits	
										Lower	Upper
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	2638291	0.008	0.004		< 0.002	0.428	0.417	103%	80%	120%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	2638302	0.0048	0.0044	8.7%	< 0.002	0.0929	0.0849	109%	80%	120%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	2638265	< 0.002	<0.002		< 0.002	1.014	0.922	109%	80%	120%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	2638328	0.029	0.039	29.4%	< 0.002	1.23	1.28	96%	80%	120%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	2638316	0.002	<0.002		< 0.002	2.179	2.331	93%	80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2638265	0.5	< 0.2		< 0.2	8	7	119%	80%	120%
Al	1	2638265	1.40	1.45	3.5%	< 0.01	0.429	0.359	120%	80%	120%
As	1	2638265	6	6	0.0%	< 1				80%	120%
B	1	2638265	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2638265	34	35	2.9%	< 1				80%	120%
Be	1	2638265	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	2638265	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2638265	0.09	0.09	0.0%	< 0.01	0.627	0.635	99%	80%	120%
Cd	1	2638265	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2638265	32	35	9.0%	< 1				80%	120%
Co	1	2638265	4.82	5.00	3.7%	< 0.5	5.5	5.0	110%	80%	120%
Cr	1	2638265	13.0	13.4	3.0%	< 0.5				80%	120%
Cu	1	2638265	26.2	26.1	0.4%	< 0.5	4803	4700	102%	80%	120%
Fe	1	2638265	2.81	2.92	3.8%	< 0.01	1.22	1.31	93%	80%	120%
Ga	1	2638265	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2638265	< 1	< 1	0.0%	< 1	1.4	1.3	110%	80%	120%
In	1	2638265	< 1	< 1	0.0%	< 1				80%	120%
K	1	2638265	0.05	0.05	0.0%	< 0.01	0.21	0.18	115%	80%	120%
La	1	2638265	16	18	11.8%	< 1				80%	120%
Li	1	2638265	32	32	0.0%	< 1				80%	120%
Mg	1	2638265	0.522	0.532	1.9%	< 0.01	0.105	0.098	107%	80%	120%
Mn	1	2638265	321	329	2.5%	< 1				80%	120%
Mo	1	2638265	0.5	< 0.5		< 0.5	307	280	110%	80%	120%
Na	1	2638265	0.014	0.015	6.9%	< 0.01	0.034	0.038	89%	80%	120%
Ni	1	2638265	13.5	13.9	2.9%	< 0.5	7	7	99%	80%	120%
P	1	2638265	576	606	5.1%	< 10				80%	120%
Pb	1	2638265	7.81	7.62	2.5%	< 0.5				80%	120%
Rb	1	2638265	11	11	0.0%	< 10				80%	120%
S	1	2638265	0.028	0.028	0.0%	< 0.005	0.624	0.621	100%	80%	120%
Sb	1	2638265	< 1	< 1	0.0%	< 1				80%	120%

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y521344
PROJECT NO: VM
ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date: Sep 16, 2011		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Sc	1	2638265	1.0	1.0	0.0%	< 0.5				80%	120%
Se	1	2638265	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2638265	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2638265	9.52	9.62	1.0%	< 0.5				80%	120%
Ta	1	2638265	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2638265	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2638265	< 5	< 5	0.0%	< 5				80%	120%
Ti	1	2638265	0.01	0.01	0.0%	< 0.01	0.012	0.011	108%	80%	120%
Tl	1	2638265	< 5	< 5	0.0%	< 5				80%	120%
U	1	2638265	< 5	< 5	0.0%	< 5				80%	120%
V	1	2638265	18.2	18.9	3.8%	< 0.5				80%	120%
W	1	2638265	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2638265	5	5	0.0%	< 1				80%	120%
Zn	1	2638265	57.8	60.1	3.9%	1.0				80%	120%
Zr	1	2638265	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2638291	< 0.2	< 0.2	0.0%	< 0.2	36	35	104%	80%	120%
Al	1	2638291	1.22	1.35	10.1%	< 0.01				80%	120%
As	1	2638291	12	12	0.0%	< 1				80%	120%
B	1	2638291	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2638291	15	17	12.5%	< 1				80%	120%
Be	1	2638291	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	2638291	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2638291	0.353	0.378	6.8%	< 0.01				80%	120%
Cd	1	2638291	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2638291	48	52	8.0%	< 1				80%	120%
Co	1	2638291	11.5	11.9	3.4%	< 0.5				80%	120%
Cr	1	2638291	14.9	15.9	6.5%	< 0.5				80%	120%
Cu	1	2638291	40.1	41.6	3.7%	< 0.5	4775	5000	96%	80%	120%
Fe	1	2638291	2.75	3.00	8.7%	< 0.01				80%	120%
Ga	1	2638291	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2638291	< 1	< 1	0.0%	< 1				80%	120%
In	1	2638291	< 1	< 1	0.0%	< 1				80%	120%
K	1	2638291	0.03	0.03	0.0%	< 0.01				80%	120%
La	1	2638291	23	25	8.3%	< 1				80%	120%
Li	1	2638291	43	45	4.5%	< 1				80%	120%
Mg	1	2638291	0.612	0.652	6.3%	< 0.01				80%	120%
Mn	1	2638291	411	421	2.4%	< 1				80%	120%
Mo	1	2638291	< 0.5	0.5		< 0.5				80%	120%
Na	1	2638291	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Ni	1	2638291	29.7	30.9	4.0%	< 0.5				80%	120%
P	1	2638291	403	403	0.0%	< 10				80%	120%
Pb	1	2638291	19.1	19.5	2.1%	< 0.5				80%	120%
Rb	1	2638291	< 10	< 10	0.0%	< 10				80%	120%
S	1	2638291	0.016	0.016	0.0%	< 0.005				80%	120%

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y521344
PROJECT NO: VM
ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date: Sep 16, 2011		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Sb	1	2638291	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2638291	1.12	1.15	2.6%	< 0.5				80%	120%
Se	1	2638291	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2638291	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2638291	18.8	21.4	12.9%	< 0.5				80%	120%
Ta	1	2638291	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2638291	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2638291	7	8	13.3%	< 5				80%	120%
Ti	1	2638291	< 0.01	0.01		< 0.01				80%	120%
Tl	1	2638291	< 5	< 5	0.0%	< 5				80%	120%
U	1	2638291	< 5	< 5	0.0%	< 5				80%	120%
V	1	2638291	12.6	13.8	9.1%	< 0.5				80%	120%
W	1	2638291	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2638291	7	7	0.0%	< 1				80%	120%
Zn	1	2638291	73.2	76.4	4.3%	3.4				80%	120%
Zr	1	2638291	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2638316	< 0.2	< 0.2	0.0%	< 0.2	8	7	109%	80%	120%
Al	1	2638316	1.34	1.77	27.7%	< 0.01	0.367	0.359	102%	80%	120%
As	1	2638316	4	6		< 1				80%	120%
B	1	2638316	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2638316	37	46	21.7%	< 1				80%	120%
Be	1	2638316	0.4	0.5	22.2%	< 0.5				80%	120%
Bi	1	2638316	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2638316	0.04	0.05	22.2%	< 0.01	0.639	0.635	101%	80%	120%
Cd	1	2638316	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2638316	51	70		< 1				80%	120%
Co	1	2638316	7.68	7.52	2.1%	< 0.5	5.5	5.0	110%	80%	120%
Cr	1	2638316	15.5	21.1		< 0.5				80%	120%
Cu	1	2638316	24.5	32.3	27.5%	< 0.5	4627	4700	98%	80%	120%
Fe	1	2638316	2.95	3.79	24.9%	< 0.01	1.24	1.31	94%	80%	120%
Ga	1	2638316	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2638316	< 1	< 1	0.0%	< 1	1.2	1.3	92%	80%	120%
In	1	2638316	< 1	< 1	0.0%	< 1				80%	120%
K	1	2638316	0.02	0.02	0.0%	< 0.01	0.18	0.18	102%	80%	120%
La	1	2638316	24	33		< 1				80%	120%
Li	1	2638316	38	46	19.0%	< 1				80%	120%
Mg	1	2638316	0.602	0.761	23.3%	< 0.01	0.104	0.098	107%	80%	120%
Mn	1	2638316	220	296	29.5%	< 1				80%	120%
Mo	1	2638316	0.7	0.9	25.0%	< 0.5	304	280	109%	80%	120%
Na	1	2638316	< 0.01	< 0.01	0.0%	< 0.01	0.032	0.038	83%	80%	120%
Ni	1	2638316	20.5	26.7	26.3%	< 0.5	7	7	101%	80%	120%
P	1	2638316	443	562	23.7%	< 10				80%	120%
Pb	1	2638316	14.4	16.8	15.4%	< 0.5	39	30	129%	80%	120%

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y521344
PROJECT NO: VM
ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date: Sep 16, 2011		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Rb	1	2638316	< 10	< 10	0.0%	< 10				80%	120%
S	1	2638316	0.019	0.021	10.0%	< 0.005	0.639	0.621	103%	80%	120%
Sb	1	2638316	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2638316	0.7	1.0		< 0.5				80%	120%
Se	1	2638316	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2638316	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2638316	78.5	100	24.1%	2.7				80%	120%
Ta	1	2638316	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2638316	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2638316	< 5	< 5	0.0%	< 5				80%	120%
Ti	1	2638316	< 0.01	< 0.01	0.0%	< 0.01	0.011	0.011	102%	80%	120%
Tl	1	2638316	< 5	< 5	0.0%	< 5				80%	120%
U	1	2638316	< 5	< 5	0.0%	< 5				80%	120%
V	1	2638316	14.3	19.0	28.2%	< 0.5				80%	120%
W	1	2638316	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2638316	6	8	28.6%	< 1				80%	120%
Zn	1	2638316	73.0	91.9	22.9%	0.8				80%	120%
Zr	1	2638316	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2638341	< 0.2	< 0.2	0.0%	< 0.2	37	35	107%	80%	120%
Al	1	2638341	0.80	0.91	12.9%	< 0.01				80%	120%
As	1	2638341	8	9	11.8%	< 1				80%	120%
B	1	2638341	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2638341	22	25	12.8%	< 1				80%	120%
Be	1	2638341	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	2638341	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2638341	0.317	0.356	11.6%	< 0.01				80%	120%
Cd	1	2638341	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2638341	44	53	18.6%	< 1				80%	120%
Co	1	2638341	4.52	5.19	13.8%	< 0.5				80%	120%
Cr	1	2638341	9.2	10.9	16.9%	< 0.5				80%	120%
Cu	1	2638341	19.3	22.2	14.0%	< 0.5	5058	5000	101%	80%	120%
Fe	1	2638341	2.29	2.58	11.9%	< 0.01				80%	120%
Ga	1	2638341	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2638341	< 1	< 1	0.0%	< 1				80%	120%
In	1	2638341	< 1	1		< 1				80%	120%
K	1	2638341	0.014	0.015	6.9%	< 0.01				80%	120%
La	1	2638341	23	27	16.0%	< 1				80%	120%
Li	1	2638341	28	31	10.2%	< 1				80%	120%
Mg	1	2638341	0.395	0.446	12.1%	< 0.01				80%	120%
Mn	1	2638341	99	116	15.8%	< 1				80%	120%
Mo	1	2638341	0.8	1.0	22.2%	< 0.5				80%	120%
Na	1	2638341	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Ni	1	2638341	17.8	21.1	17.0%	< 0.5				80%	120%

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y521344
PROJECT NO: VM
ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date: Sep 16, 2011		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
P	1	2638341	489	552	12.1%	< 10				80%	120%
Pb	1	2638341	12.5	14.0	11.3%	< 0.5				80%	120%
Rb	1	2638341	< 10	< 10	0.0%	< 10				80%	120%
S	1	2638341	0.0250	0.0269	7.3%	< 0.005				80%	120%
Sb	1	2638341	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2638341	1.0	1.2	18.2%	< 0.5				80%	120%
Se	1	2638341	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2638341	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2638341	22.9	25.9	12.3%	< 0.5				80%	120%
Ta	1	2638341	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2638341	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2638341	< 5	< 5	0.0%	< 5				80%	120%
Ti	1	2638341	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Tl	1	2638341	< 5	< 5	0.0%	< 5				80%	120%
U	1	2638341	< 5	< 5	0.0%	< 5				80%	120%
V	1	2638341	9.42	10.7	12.7%	< 0.5				80%	120%
W	1	2638341	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2638341	10	12	18.2%	< 1				80%	120%
Zn	1	2638341	68.3	76.9	11.8%	< 0.5				80%	120%
Zr	1	2638341	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2638347	< 0.2	< 0.2	0.0%	< 0.2	8	7	113%	80%	120%
Al	1	2638347	1.26	1.17	7.4%	< 0.01	0.388	0.359	108%	80%	120%
As	1	2638347	7	7	0.0%	< 1				80%	120%
B	1	2638347	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2638347	18	17	5.7%	< 1				80%	120%
Be	1	2638347	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	2638347	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2638347	0.249	0.232	7.1%	< 0.01	0.653	0.635	103%	80%	120%
Cd	1	2638347	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2638347	80	80	0.0%	< 1				80%	120%
Co	1	2638347	11.5	11.4	0.9%	< 0.5	5.5	5.0	110%	80%	120%
Cr	1	2638347	15.1	14.8	2.0%	< 0.5				80%	120%
Cu	1	2638347	39.3	38.7	1.5%	< 0.5	4696	4700	100%	80%	120%
Fe	1	2638347	3.68	3.43	7.0%	< 0.01	1.26	1.31	96%	80%	120%
Ga	1	2638347	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2638347	< 1	< 1	0.0%	< 1	1.4	1.3	109%	80%	120%
In	1	2638347	< 1	2		< 1				80%	120%
K	1	2638347	0.03	0.03	0.0%	< 0.01	0.19	0.18	105%	80%	120%
La	1	2638347	39	38	2.6%	< 1				80%	120%
Li	1	2638347	39	36	8.0%	< 1				80%	120%
Mg	1	2638347	0.67	0.62	7.8%	< 0.01	0.106	0.098	108%	80%	120%
Mn	1	2638347	379	371	2.1%	< 1				80%	120%
Mo	1	2638347	1.7	1.1		< 0.5	310	280	111%	80%	120%
Na	1	2638347	< 0.01	< 0.01	0.0%	< 0.01	0.032	0.038	85%	80%	120%

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y521344
PROJECT NO: VM
ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date: Sep 16, 2011		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits	
										Lower	Upper
Ni	1	2638347	35.6	35.8	0.6%	< 0.5	7	7	100%	80%	120%
P	1	2638347	483	475	1.7%	< 10				80%	120%
Pb	1	2638347	22.2	21.7	2.3%	< 0.5	39	30	129%	80%	120%
Rb	1	2638347	< 10	< 10	0.0%	< 10				80%	120%
S	1	2638347	0.0205	0.0197	4.0%	< 0.005	0.653	0.621	105%	80%	120%
Sb	1	2638347	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2638347	1.5	1.5	0.0%	< 0.5				80%	120%
Se	1	2638347	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2638347	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2638347	23.6	22.5	4.8%	< 0.5				80%	120%
Ta	1	2638347	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2638347	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2638347	10	11	9.5%	< 5				80%	120%
Ti	1	2638347	< 0.01	< 0.01	0.0%	< 0.01	0.011	0.011	102%	80%	120%
Tl	1	2638347	< 5	< 5	0.0%	< 5				80%	120%
U	1	2638347	< 5	< 5	0.0%	< 5				80%	120%
V	1	2638347	12.8	12.2	4.8%	< 0.5				80%	120%
W	1	2638347	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2638347	19	18	5.4%	< 1				80%	120%
Zn	1	2638347	98.6	97.6	1.0%	< 0.5				80%	120%
Zr	1	2638347	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2638366	< 0.2	< 0.2	0.0%	< 0.2	38	35	110%	80%	120%
Al	1	2638366	1.38	1.53	10.3%	< 0.01				80%	120%
As	1	2638366	16	18	11.8%	< 1				80%	120%
B	1	2638366	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2638366	23	24	4.3%	< 1				80%	120%
Be	1	2638366	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	2638366	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2638366	0.084	0.093	10.2%	< 0.01				80%	120%
Cd	1	2638366	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2638366	70	80	13.3%	< 1				80%	120%
Co	1	2638366	14.2	16.0	11.9%	< 0.5				80%	120%
Cr	1	2638366	16.4	18.8	13.6%	< 0.5				80%	120%
Cu	1	2638366	43.0	48.1	11.2%	< 0.5	5112	5000	102%	80%	120%
Fe	1	2638366	4.37	4.89	11.2%	< 0.01				80%	120%
Ga	1	2638366	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2638366	< 1	< 1	0.0%	< 1				80%	120%
In	1	2638366	< 1	1		< 1				80%	120%
K	1	2638366	0.02	0.02	0.0%	< 0.01				80%	120%
La	1	2638366	33	37	11.4%	< 1				80%	120%
Li	1	2638366	55	60	8.7%	< 1				80%	120%
Mg	1	2638366	0.574	0.633	9.8%	< 0.01				80%	120%
Mn	1	2638366	444	501	12.1%	< 1				80%	120%

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y521344
PROJECT NO: VM
ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date: Sep 16, 2011		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Mo	1	2638366	1.5	0.5		< 0.5				80%	120%
Na	1	2638366	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Ni	1	2638366	43.1	48.1	11.0%	< 0.5				80%	120%
P	1	2638366	417	468	11.5%	< 10				80%	120%
Pb	1	2638366	20.0	21.7	8.2%	< 0.5				80%	120%
Rb	1	2638366	< 10	< 10	0.0%	< 10				80%	120%
S	1	2638366	0.0154	0.0160	3.8%	< 0.005				80%	120%
Sb	1	2638366	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2638366	1.0	1.1	9.5%	< 0.5				80%	120%
Se	1	2638366	14	20		< 10				80%	120%
Sn	1	2638366	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2638366	11.6	11.8	1.7%	< 0.5				80%	120%
Ta	1	2638366	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2638366	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2638366	4	5	22.2%	< 5				80%	120%
Ti	1	2638366	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Tl	1	2638366	< 5	< 5	0.0%	< 5				80%	120%
U	1	2638366	< 5	< 5	0.0%	< 5				80%	120%
V	1	2638366	13.5	15.6	14.4%	< 0.5				80%	120%
W	1	2638366	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2638366	5	6	18.2%	< 1				80%	120%
Zn	1	2638366	102	113	10.2%	< 0.5				80%	120%
Zr	1	2638366	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2638384	< 0.2	< 0.2	0.0%	< 0.2				80%	120%
Al	1	2638384	0.801	1.03	25.0%	< 0.01				80%	120%
As	1	2638384	5	6	18.2%	< 1				80%	120%
B	1	2638384	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2638384	24	30	22.2%	< 1				80%	120%
Be	1	2638384	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	2638384	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2638384	0.352	0.436	21.3%	< 0.01				80%	120%
Cd	1	2638384	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2638384	56	75	29.0%	< 1				80%	120%
Co	1	2638384	5.9	7.7	26.5%	< 0.5				80%	120%
Cr	1	2638384	7.1	9.3	26.8%	< 0.5				80%	120%
Cu	1	2638384	21.5	27.5	24.5%	< 0.5				80%	120%
Fe	1	2638384	2.66	3.35	23.0%	< 0.01				80%	120%
Ga	1	2638384	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2638384	< 1	< 1	0.0%	< 1				80%	120%
In	1	2638384	< 1	< 1	0.0%	< 1				80%	120%
K	1	2638384	0.032	0.040	22.2%	< 0.01				80%	120%
La	1	2638384	26	35	29.5%	< 1				80%	120%
Li	1	2638384	23	28	19.6%	< 1				80%	120%

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y521344
PROJECT NO: VM
ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date: Sep 16, 2011		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Mg	1	2638384	0.31	0.39	22.9%	< 0.01				80%	120%
Mn	1	2638384	327	419	24.7%	< 1				80%	120%
Mo	1	2638384	0.68	0.62	9.2%	< 0.5				80%	120%
Na	1	2638384	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Ni	1	2638384	20.7	26.7	25.3%	< 0.5				80%	120%
P	1	2638384	367	477	26.1%	< 10				80%	120%
Pb	1	2638384	23.0	27.8	18.9%	< 0.5				80%	120%
Rb	1	2638384	< 10	< 10	0.0%	< 10				80%	120%
S	1	2638384	0.0310	0.0348	11.6%	< 0.005				80%	120%
Sb	1	2638384	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2638384	1.3	1.8		< 0.5				80%	120%
Se	1	2638384	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2638384	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2638384	21.1	28.1	28.5%	< 0.5				80%	120%
Ta	1	2638384	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2638384	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2638384	< 5	< 5	0.0%	< 5				80%	120%
Ti	1	2638384	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Tl	1	2638384	< 5	< 5	0.0%	< 5				80%	120%
U	1	2638384	< 5	< 5	0.0%	< 5				80%	120%
V	1	2638384	8.12	10.4	24.6%	< 0.5				80%	120%
W	1	2638384	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2638384	15	20	28.6%	< 1				80%	120%
Zn	1	2638384	73.5	90.4	20.6%	< 0.5				80%	120%
Zr	1	2638384	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2638392	< 0.2	< 0.2	0.0%	< 0.2				80%	120%
Al	1	2638392	1.27	1.30	2.3%	< 0.01				80%	120%
As	1	2638392	10	11	9.5%	< 1				80%	120%
B	1	2638392	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2638392	37	38	2.7%	< 1				80%	120%
Be	1	2638392	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	2638392	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2638392	0.114	0.117	2.6%	< 0.01				80%	120%
Cd	1	2638392	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2638392	58	62	6.7%	< 1				80%	120%
Co	1	2638392	4.64	4.97	6.9%	< 0.5				80%	120%
Cr	1	2638392	12.4	13.6	9.2%	< 0.5				80%	120%
Cu	1	2638392	19.0	21.0	10.0%	< 0.5				80%	120%
Fe	1	2638392	2.71	2.80	3.3%	< 0.01				80%	120%
Ga	1	2638392	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2638392	< 1	< 1	0.0%	< 1				80%	120%
In	1	2638392	< 1	< 1	0.0%	< 1				80%	120%
K	1	2638392	0.04	0.04	0.0%	< 0.01				80%	120%
La	1	2638392	26	28	7.4%	< 1				80%	120%

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y521344
PROJECT NO: VM
ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date: Sep 16, 2011		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Li	1	2638392	33	35	5.9%	< 1				80%	120%
Mg	1	2638392	0.45	0.46	2.2%	< 0.01				80%	120%
Mn	1	2638392	290	313	7.6%	< 1				80%	120%
Mo	1	2638392	0.8	0.6	28.6%	< 0.5				80%	120%
Na	1	2638392	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Ni	1	2638392	16.2	17.6	8.3%	< 0.5				80%	120%
P	1	2638392	468	493	5.2%	< 10				80%	120%
Pb	1	2638392	14.0	14.7	4.9%	< 0.5				80%	120%
Rb	1	2638392	< 10	< 10	0.0%	< 10				80%	120%
S	1	2638392	0.017	0.017	0.0%	< 0.005				80%	120%
Sb	1	2638392	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2638392	1.55	1.65	6.3%	< 0.5				80%	120%
Se	1	2638392	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2638392	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2638392	14.7	14.5	1.4%	< 0.5				80%	120%
Ta	1	2638392	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2638392	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2638392	6	7	15.4%	< 5				80%	120%
Ti	1	2638392	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Tl	1	2638392	< 5	< 5	0.0%	< 5				80%	120%
U	1	2638392	< 5	< 5	0.0%	< 5				80%	120%
V	1	2638392	11.4	12.4	8.4%	< 0.5				80%	120%
W	1	2638392	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2638392	10	11	9.5%	< 1				80%	120%
Zn	1	2638392	70.7	75.9	7.1%	< 0.5				80%	120%
Zr	1	2638392	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2638417	< 0.2	< 0.2	0.0%	< 0.2				80%	120%
Al	1	2638417	1.67	1.69	1.2%	< 0.01				80%	120%
As	1	2638417	15	15	0.0%	< 1				80%	120%
B	1	2638417	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2638417	57	58	1.7%	< 1				80%	120%
Be	1	2638417	0.55	0.56	1.8%	< 0.5				80%	120%
Bi	1	2638417	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2638417	0.13	0.13	0.0%	< 0.01				80%	120%
Cd	1	2638417	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2638417	34	35	2.9%	< 1				80%	120%
Co	1	2638417	9.8	9.7	1.0%	< 0.5				80%	120%
Cr	1	2638417	23.8	24.2	1.7%	< 0.5				80%	120%
Cu	1	2638417	33.9	34.6	2.0%	< 0.5				80%	120%
Fe	1	2638417	2.82	2.85	1.1%	< 0.01				80%	120%
Ga	1	2638417	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2638417	< 1	< 1	0.0%	< 1				80%	120%
In	1	2638417	1	< 1		< 1				80%	120%

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date: Sep 16, 2011		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
K	1	2638417	0.214	0.223	4.1%	< 0.01				80%	120%
La	1	2638417	14	14	0.0%	< 1				80%	120%
Li	1	2638417	32	33	3.1%	< 1				80%	120%
Mg	1	2638417	0.567	0.585	3.1%	< 0.01				80%	120%
Mn	1	2638417	449	459	2.2%	< 1				80%	120%
Mo	1	2638417	0.44	0.56	24.0%	< 0.5				80%	120%
Na	1	2638417	0.01	0.01	0.0%	< 0.01				80%	120%
Ni	1	2638417	30.2	31.3	3.6%	< 0.5				80%	120%
P	1	2638417	406	402	1.0%	< 10				80%	120%
Pb	1	2638417	19.0	19.2	1.0%	< 0.5				80%	120%
Rb	1	2638417	61	64	4.8%	< 10				80%	120%
S	1	2638417	0.0471	0.0486	3.1%	< 0.005				80%	120%
Sb	1	2638417	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2638417	1.9	1.9	0.0%	< 0.5				80%	120%
Se	1	2638417	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2638417	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2638417	20.4	19.3	5.5%	< 0.5				80%	120%
Ta	1	2638417	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2638417	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2638417	< 5	< 5	0.0%	< 5				80%	120%
Ti	1	2638417	0.06	0.06	0.0%	< 0.01				80%	120%
Tl	1	2638417	< 5	< 5	0.0%	< 5				80%	120%
U	1	2638417	< 5	< 5	0.0%	< 5				80%	120%
V	1	2638417	26.9	27.2	1.1%	< 0.5				80%	120%
W	1	2638417	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2638417	7	8	13.3%	< 1				80%	120%
Zn	1	2638417	80.5	88.2	9.1%	< 0.5				80%	120%
Zr	1	2638417	< 5	< 5	0.0%	< 5				80%	120%

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Method Summary

CLIENT NAME: BEARING RESOURCES

AGAT WORK ORDER: 11Y521344

PROJECT NO: VM

ATTENTION TO: DAVE TUPPER

PARAMETER	AGAT S.O.P	LITERATURE REFERENCE	ANALYTICAL TECHNIQUE
Solid Analysis			
Ag	MIN-200-12020		ICP/OES
Al	MIN-200-12020		ICP/OES
As	MIN-200-12020		ICP/OES
B	MIN-200-12020		ICP/OES
Ba	MIN-200-12020		ICP/OES
Be	MIN-200-12020		ICP/OES
Bi	MIN-200-12020		ICP/OES
Ca	MIN-200-12020		ICP/OES
Cd	MIN-200-12020		ICP/OES
Ce	MIN-200-12020		ICP/OES
Co	MIN-200-12020		ICP/OES
Cr	MIN-200-12020		ICP/OES
Cu	MIN-200-12020		ICP/OES
Fe	MIN-200-12020		ICP/OES
Ga	MIN-200-12020		ICP/OES
Hg	MIN-200-12020		ICP/OES
In	MIN-200-12020		ICP/OES
K	MIN-200-12020		ICP/OES
La	MIN-200-12020		ICP/OES
Li	MIN-200-12020		ICP/OES
Mg	MIN-200-12020		ICP/OES
Mn	MIN-200-12020		ICP/OES
Mo	MIN-200-12020		ICP/OES
Na	MIN-200-12020		ICP/OES
Ni	MIN-200-12020		ICP/OES
P	MIN-200-12020		ICP/OES
Pb	MIN-200-12020		ICP/OES
Rb	MIN-200-12020		ICP/OES
S	MIN-200-12020		ICP/OES
Sb	MIN-200-12020		ICP/OES
Sc	MIN-200-12020		ICP/OES
Se	MIN-200-12020		ICP/OES
Sn	MIN-200-12020		ICP/OES
Sr	MIN-200-12020		ICP/OES
Ta	MIN-200-12020		ICP/OES
Te	MIN-200-12020		ICP/OES
Th	MIN-200-12020		ICP/OES
Ti	MIN-200-12020		ICP/OES
Tl	MIN-200-12020		ICP/OES
U	MIN-200-12020		ICP/OES
V	MIN-200-12020		ICP/OES
W	MIN-200-12020		ICP/OES
Y	MIN-200-12020		ICP/OES
Zn	MIN-200-12020		ICP/OES
Zr	MIN-200-12020		ICP/OES
Sample Login Weight	MIN-12009		BALANCE
Au	MIN-200-12019	BUGBEE, E: A Textbook of Fire Assaying	AAS

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

CLIENT NAME: BEARING RESOURCES
1280 - 625 HOWE STREET
VANCOUVER, BC V6C2T6

ATTENTION TO: DAVE TUPPER

PROJECT NO:

AGAT WORK ORDER: 11Y519583

SOLID ANALYSIS REVIEWED BY: Ron Cardinall, Certified Assayer - Director - Technical Services (Mining)

DATE REPORTED: Sep 08, 2011

PAGES (INCLUDING COVER): 56

Should you require any information regarding this analysis please contact your client services representative at (905) 501 9998, or at 1-800-856-6261

*NOTES

All samples are stored at no charge for 90 days. Please contact the lab if you require additional sample storage time.

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
E5285760	0.3	1.56	24	<5	54	<0.5	<1	0.39	<0.5	58	8.4	17.6	34.2	3.70
E5285761	<0.2	1.50	18	<5	56	<0.5	<1	0.15	<0.5	51	5.7	16.5	19.6	2.55
E5285762	<0.2	1.28	14	<5	50	<0.5	<1	0.10	<0.5	32	7.0	14.5	20.4	3.13
E5285763	<0.2	2.32	11	<5	40	<0.5	<1	0.04	<0.5	78	13.8	26.9	32.9	4.78
E5285764	<0.2	2.06	7	<5	54	0.8	<1	0.25	<0.5	47	27.9	23.2	66.7	3.79
E5285765	<0.2	1.12	17	<5	30	<0.5	<1	0.77	<0.5	26	9.4	11.4	44.1	3.44
E5285766	0.4	0.90	>10000	<5	13	<0.5	<1	2.86	<0.5	11	90.6	12.0	418	16.8
E5285767	0.3	0.80	43	<5	63	1.0	<1	1.81	<0.5	136	13.2	5.9	42.2	4.95
E5285768	<0.2	1.50	35	<5	49	0.7	<1	1.76	<0.5	37	35.1	15.5	89.6	6.25
E5285769	<0.2	1.46	16	<5	16	<0.5	<1	0.27	<0.5	42	18.0	20.0	44.0	4.32
E5285770	<0.2	1.40	71	<5	53	0.5	<1	0.41	<0.5	39	6.9	14.5	39.3	4.21
E5285771	<0.2	1.18	19	<5	44	<0.5	<1	0.93	<0.5	33	6.6	12.8	39.4	2.35
E5285772	<0.2	0.98	54	<5	43	<0.5	<1	0.03	<0.5	70	7.5	10.1	28.0	3.60
E5285773	<0.2	1.19	33	<5	35	<0.5	<1	0.07	<0.5	57	17.3	11.7	33.8	4.64
E5285774	<0.2	1.50	458	<5	41	0.5	<1	0.10	<0.5	75	21.2	19.9	36.4	4.73
E5285775	<0.2	1.73	156	<5	36	0.6	<1	0.39	<0.5	61	26.8	22.4	58.5	4.85
E5285776	<0.2	1.67	20	<5	62	0.5	<1	0.44	<0.5	52	11.3	21.2	38.3	3.72
E5285777	<0.2	1.00	216	<5	25	<0.5	<1	0.71	<0.5	56	17.1	12.0	48.2	4.56
E5285778	<0.2	0.77	39	<5	45	0.6	<1	0.76	<0.5	56	8.3	6.6	29.8	2.85
E5285779	<0.2	1.95	37	<5	58	0.6	<1	0.09	<0.5	84	17.7	21.5	31.7	4.13
E5287060	<0.2	1.28	20	<5	22	<0.5	<1	0.18	<0.5	59	10.4	17.3	37.9	3.64
E5287061	<0.2	1.33	26	<5	21	<0.5	<1	0.44	<0.5	72	20.0	21.6	49.2	4.49
E5287062	<0.2	1.29	26	<5	23	0.5	<1	0.97	<0.5	96	17.9	18.0	50.7	4.49
E5287063	<0.2	1.37	27	<5	20	0.5	<1	0.74	<0.5	87	17.8	18.8	49.3	4.50
E5287064	<0.2	1.78	27	<5	34	0.6	<1	0.24	<0.5	83	19.9	24.2	56.3	4.86
E5287065	0.2	1.41	569	<5	29	0.6	<1	0.30	<0.5	79	22.3	17.5	52.4	5.19
E5287066	<0.2	1.38	459	<5	30	0.5	<1	0.23	<0.5	76	20.4	16.9	52.8	5.12
E5287067	<0.2	0.62	47	<5	51	0.6	<1	0.63	<0.5	56	10.8	3.6	40.9	3.99
E5287068	<0.2	1.13	40	<5	39	0.6	<1	0.47	<0.5	50	9.0	9.6	31.8	3.67
E5287069	<0.2	0.96	106	<5	27	0.6	<1	0.32	<0.5	58	11.7	9.9	41.1	4.23
E5287070	<0.2	1.00	30	<5	29	0.5	<1	0.23	<0.5	54	8.8	12.5	30.0	3.64
E5287071	<0.2	1.36	19	<5	32	<0.5	<1	0.22	<0.5	40	6.7	13.1	30.6	2.92

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
E5287072	<0.2	1.57	37	<5	33	<0.5	<1	0.02	<0.5	75	15.2	17.9	27.2	4.56
E5287073	<0.2	1.32	23	<5	41	<0.5	<1	0.03	<0.5	62	5.9	16.3	34.0	3.62
E5287074	<0.2	1.41	30	<5	42	<0.5	<1	0.06	<0.5	57	8.1	18.6	32.4	4.06
E5287075	<0.2	1.46	30	<5	34	<0.5	<1	0.03	<0.5	63	9.7	16.5	22.6	4.88
E5287076	<0.2	1.46	31	<5	36	<0.5	<1	0.04	<0.5	60	7.4	17.3	34.6	4.13
E5287077	<0.2	1.62	31	<5	54	0.5	<1	0.06	<0.5	68	8.3	18.2	32.5	4.21
E5287078	<0.2	0.92	32	<5	33	0.6	<1	1.25	<0.5	64	15.0	9.4	35.5	4.69
E5287079	<0.2	1.60	26	<5	39	<0.5	<1	0.04	<0.5	58	6.2	17.9	26.6	3.62
E5287080	<0.2	1.56	23	<5	42	<0.5	<1	0.02	<0.5	71	7.5	16.6	29.9	4.07
E5287081	<0.2	1.47	19	<5	39	0.6	<1	0.15	<0.5	54	22.9	16.5	49.5	4.86
E5287082	<0.2	0.19	18	<5	11	<0.5	<1	15.2	<0.5	26	5.5	0.8	19.4	2.21
E5287083	<0.2	1.45	22	<5	51	<0.5	<1	0.12	<0.5	51	6.9	16.0	25.1	3.44
E5287084	<0.2	1.74	44	<5	44	0.6	<1	0.10	<0.5	64	21.3	17.6	42.0	4.63
E5287085	<0.2	1.43	19	<5	45	<0.5	<1	0.13	<0.5	42	6.2	15.7	30.7	3.27
E5287086	<0.2	1.66	34	<5	42	<0.5	<1	0.04	<0.5	55	9.2	17.0	22.6	3.69
E5287087	<0.2	1.54	29	<5	55	<0.5	<1	0.03	<0.5	65	5.9	17.5	34.2	3.78
E5287088	0.2	1.42	29	<5	46	<0.5	<1	0.02	<0.5	65	5.0	15.9	28.6	4.71
E5287089	<0.2	1.09	22	<5	38	<0.5	<1	0.01	<0.5	52	4.6	13.9	22.7	3.33
E5287090	<0.2	0.77	18	<5	34	0.5	<1	0.03	<0.5	56	9.8	7.4	30.6	4.20
E5287091	<0.2	1.41	19	<5	55	<0.5	<1	0.07	<0.5	47	4.8	16.1	26.0	3.07
E5287092	<0.2	1.61	22	<5	45	0.5	<1	0.08	<0.5	35	16.3	15.9	48.7	4.44
E5287093	<0.2	1.33	20	<5	49	<0.5	<1	0.06	<0.5	51	6.4	13.8	23.5	2.99
E5287094	<0.2	1.53	24	<5	57	<0.5	<1	0.18	<0.5	55	6.3	18.8	27.2	3.79
E5287095	<0.2	1.10	19	<5	27	<0.5	<1	0.04	<0.5	66	4.1	12.8	20.3	2.82
E5287096	<0.2	1.55	24	<5	43	<0.5	<1	0.03	<0.5	60	8.0	16.4	26.9	3.78
E5287097	<0.2	1.59	31	<5	61	<0.5	<1	0.06	<0.5	59	9.7	16.1	30.1	4.18
E5287098	<0.2	1.53	21	<5	52	<0.5	<1	0.05	<0.5	58	5.5	16.5	27.7	3.33
E5287099	<0.2	1.36	17	<5	39	<0.5	<1	0.12	<0.5	44	6.7	15.2	29.9	3.33
E5287100	<0.2	1.15	12	<5	34	<0.5	<1	0.12	<0.5	30	2.8	10.5	21.4	2.05
E5287101	<0.2	1.14	10	<5	31	<0.5	<1	0.05	<0.5	42	16.3	10.6	46.2	4.65
E5287102	<0.2	1.61	24	<5	50	<0.5	<1	0.03	<0.5	71	9.1	17.8	34.0	3.80
E5287103	<0.2	1.68	22	<5	44	<0.5	<1	0.02	<0.5	77	5.6	17.6	33.1	3.85

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
E5287104	<0.2	1.71	25	<5	74	<0.5	<1	0.04	<0.5	69	7.1	18.9	29.5	4.27
E5287105	<0.2	1.27	26	<5	17	<0.5	<1	0.06	<0.5	35	40.6	18.1	52.8	5.89
E5287106	<0.2	1.38	14	<5	47	<0.5	<1	0.04	<0.5	39	4.3	14.2	25.7	2.75
E5287107	<0.2	1.68	9	<5	88	<0.5	<1	0.24	<0.5	33	4.3	17.4	25.0	2.83
E5287108	<0.2	1.45	14	<5	49	<0.5	<1	0.08	<0.5	53	4.0	16.9	21.6	2.73
E5287109	<0.2	0.99	14	<5	44	<0.5	<1	0.01	<0.5	41	3.1	10.3	19.8	2.23
E5287110	<0.2	1.30	18	<5	44	<0.5	<1	0.10	<0.5	52	4.7	15.2	18.0	3.25
E5287111	<0.2	1.10	26	<5	24	<0.5	<1	0.03	<0.5	44	6.4	13.6	25.3	3.79
E5287112	<0.2	1.04	41	<5	35	<0.5	<1	0.03	<0.5	28	6.2	12.3	11.5	2.30
E5287113	<0.2	1.44	29	<5	39	<0.5	<1	0.03	<0.5	52	6.8	18.5	18.1	3.20
E5287114	<0.2	1.44	27	<5	39	<0.5	<1	0.05	<0.5	57	8.2	18.2	23.6	3.16
E5287115	<0.2	1.13	20	<5	41	<0.5	<1	0.06	<0.5	41	5.0	14.8	14.2	2.44
E5287116	<0.2	1.46	17	<5	41	<0.5	<1	0.17	<0.5	47	7.7	19.7	23.6	3.27
E5287117	<0.2	1.68	12	<5	71	<0.5	<1	0.19	<0.5	44	7.1	21.7	24.7	3.26
E5287118	<0.2	1.55	14	<5	34	<0.5	<1	0.05	<0.5	51	9.0	22.7	20.4	3.45
E5287119	<0.2	1.59	13	<5	30	<0.5	<1	0.05	<0.5	48	9.1	22.3	16.8	3.64
E5287120	<0.2	1.55	10	<5	63	<0.5	<1	0.07	<0.5	50	7.4	21.4	15.7	3.07
E5287121	0.2	0.74	11	<5	63	0.9	<1	0.31	<0.5	56	9.6	4.6	34.0	4.07
E5287122	<0.2	1.45	8	<5	45	<0.5	<1	0.27	<0.5	43	7.5	19.0	17.6	3.10
E5287123	<0.2	0.86	5	<5	28	<0.5	<1	0.22	<0.5	9	1.1	3.9	8.2	0.70
E5287124	<0.2	1.82	11	<5	79	0.5	<1	0.18	<0.5	39	5.9	19.0	23.9	3.04
E5287125	<0.2	0.63	3	<5	16	<0.5	<1	0.19	<0.5	8	0.8	2.0	6.7	0.50
E5287126	<0.2	1.56	14	<5	57	<0.5	<1	0.11	<0.5	49	6.9	17.3	17.4	3.14
E5287127	<0.2	1.68	6	<5	49	<0.5	<1	0.11	<0.5	51	6.4	20.8	19.4	2.93
E5287128	<0.2	1.52	14	<5	57	<0.5	<1	0.06	<0.5	60	6.9	19.2	17.7	2.65
E5287129	<0.2	1.75	21	<5	65	0.5	<1	0.10	<0.5	61	7.5	20.7	23.7	3.22
E5287130	<0.2	2.02	22	<5	53	0.6	<1	0.05	<0.5	61	11.4	21.5	25.6	4.18
E5287131	<0.2	1.51	108	<5	60	0.5	<1	0.09	<0.5	48	9.5	16.3	33.9	4.09
E5287132	<0.2	1.09	28	<5	16	<0.5	<1	<0.01	<0.5	60	4.0	8.5	12.1	2.58
E5287133	<0.2	1.55	34	<5	19	<0.5	<1	0.01	<0.5	50	8.9	19.4	20.6	4.94
E5287134	<0.2	1.24	179	<5	49	<0.5	<1	0.12	<0.5	51	5.5	17.1	15.0	3.18
E5287135	<0.2	0.83	127	<5	40	<0.5	<1	0.46	<0.5	27	9.0	5.3	21.7	2.86

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
E5287136	<0.2	1.51	49	<5	46	<0.5	<1	0.16	<0.5	49	15.1	17.4	24.3	4.20
E5287137	<0.2	1.48	23	<5	69	<0.5	<1	0.14	<0.5	66	4.8	15.8	27.3	3.22
E5287138	<0.2	1.44	29	<5	51	<0.5	<1	0.04	<0.5	55	7.3	15.6	25.7	3.44
E5287139	<0.2	1.49	32	<5	48	<0.5	<1	0.96	<0.5	77	10.2	15.6	36.9	3.81
E5287140	<0.2	1.27	32	<5	36	<0.5	<1	0.29	<0.5	54	6.2	12.8	24.6	3.29
E5287141	<0.2	1.53	35	<5	47	<0.5	<1	0.16	<0.5	66	6.6	16.4	23.8	3.55
E5287142	<0.2	1.59	45	<5	70	<0.5	<1	0.17	<0.5	55	6.2	15.8	33.5	3.79
E5287143	<0.2	1.48	43	<5	42	<0.5	<1	0.08	<0.5	95	6.7	16.7	28.9	3.59
E5287144	<0.2	1.50	54	<5	45	<0.5	<1	0.08	<0.5	88	8.3	17.2	34.9	4.02
E5287145	<0.2	1.40	41	<5	41	<0.5	<1	0.04	<0.5	63	6.6	15.9	26.2	3.74
E5287146	<0.2	1.25	34	<5	44	<0.5	<1	0.09	<0.5	53	6.0	14.3	23.5	3.32
E5287147	<0.2	1.05	30	<5	18	<0.5	<1	0.06	<0.5	25	20.6	9.9	37.5	3.83
E5287148	<0.2	1.16	28	<5	36	<0.5	<1	0.09	<0.5	59	8.9	13.5	23.9	4.59
E5287149	<0.2	1.04	25	<5	24	<0.5	<1	0.02	<0.5	55	5.0	12.3	29.9	3.05
E5287150	<0.2	1.06	70	<5	28	<0.5	<1	0.23	<0.5	61	10.5	11.2	32.2	3.81
E5287151	<0.2	0.58	7	<5	23	<0.5	<1	0.16	<0.5	10	1.8	2.4	7.7	0.89
E5287152	<0.2	0.75	29	<5	16	<0.5	<1	8.63	<0.5	34	9.0	8.0	36.5	2.95
E5287153	<0.2	0.96	146	<5	29	0.5	<1	0.28	<0.5	60	10.4	8.4	37.6	3.89
E5287154	<0.2	0.89	40	<5	28	0.5	<1	0.26	<0.5	66	11.6	9.2	42.0	4.31
E5287155	<0.2	0.99	34	<5	36	0.5	<1	0.38	<0.5	64	7.9	9.6	31.2	3.48
E5287156	<0.2	0.88	26	<5	15	<0.5	<1	10.1	<0.5	43	7.6	8.5	28.7	2.70
E5287157	<0.2	0.47	19	<5	11	<0.5	<1	11.2	<0.5	41	7.9	3.6	28.9	2.30
E5287310	<0.2	1.67	114	<5	31	0.6	<1	0.34	<0.5	78	25.3	20.1	65.2	6.02
E5287311	<0.2	1.81	27	<5	25	0.5	<1	0.18	<0.5	76	25.2	23.3	74.9	4.83
E5287312	<0.2	1.57	21	<5	20	0.5	<1	0.25	<0.5	40	28.0	19.1	70.5	5.86
E5287313	<0.2	1.52	18	<5	22	0.5	<1	0.38	<0.5	43	23.9	18.8	61.1	5.50
E5287314	<0.2	1.26	20	<5	19	<0.5	<1	0.57	<0.5	39	18.1	16.7	48.9	4.49
E5287315	<0.2	1.39	17	<5	34	0.5	<1	0.32	<0.5	56	11.0	16.7	36.4	3.98
E5287316	<0.2	1.33	17	<5	24	<0.5	<1	0.08	<0.5	39	22.5	16.6	81.2	5.93
E5287317	<0.2	1.04	17	<5	39	0.6	<1	1.27	<0.5	40	9.5	10.1	37.5	3.67
E5287318	<0.2	1.21	20	<5	35	0.5	<1	1.83	<0.5	38	11.1	13.5	41.0	4.18
E5287319	<0.2	1.09	19	<5	34	0.6	<1	0.71	<0.5	46	10.2	12.3	35.3	3.83

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
E5287320	<0.2	1.27	14	<5	40	0.5	<1	0.26	<0.5	67	9.5	14.6	30.8	3.68
E5287321	<0.2	1.52	13	<5	32	<0.5	<1	0.26	<0.5	14	17.2	14.3	41.2	3.96
E5287322	<0.2	0.71	17	<5	34	0.6	<1	0.47	<0.5	45	11.5	7.2	37.2	4.69
E5287323	<0.2	1.34	13	<5	32	<0.5	<1	0.08	<0.5	32	8.3	12.5	28.3	4.16
E5287324	0.2	1.29	42	<5	18	0.5	<1	0.28	<0.5	31	33.4	14.3	107	7.16
E5287325	<0.2	1.19	1100	<5	22	<0.5	<1	2.69	<0.5	33	12.4	14.3	40.6	3.88
E5287326	<0.2	1.12	20	<5	17	<0.5	<1	0.45	<0.5	40	11.1	14.5	52.0	4.75
E5287327	<0.2	1.69	76	<5	25	0.5	<1	0.41	<0.5	70	17.7	18.7	61.4	5.58
E5287328	<0.2	1.55	25	<5	43	<0.5	<1	0.42	<0.5	53	9.6	17.5	36.5	4.09
E5287329	<0.2	1.08	20	<5	47	<0.5	<1	0.25	<0.5	61	10.3	12.1	32.1	3.38
E5287330	<0.2	1.16	16	<5	33	<0.5	<1	0.12	<0.5	54	7.1	13.7	19.6	3.20
E5287331	<0.2	1.51	23	<5	40	<0.5	<1	0.10	<0.5	71	8.5	17.9	22.6	3.49
E5287332	<0.2	1.67	21	<5	55	0.6	<1	0.03	<0.5	54	8.9	18.7	23.2	3.59
E5287333	<0.2	1.33	35	<5	40	<0.5	<1	0.12	<0.5	68	8.0	15.4	26.3	3.29
E5287334	<0.2	1.56	13	<5	46	<0.5	<1	0.06	<0.5	69	6.6	18.4	20.8	3.18
E5287335	<0.2	2.04	14	<5	61	0.6	<1	0.04	<0.5	67	10.5	22.9	32.8	3.92
E5287336	<0.2	1.59	19	<5	49	0.7	<1	0.41	<0.5	72	21.6	18.2	55.1	4.30
E5287337	<0.2	1.53	13	<5	50	<0.5	<1	0.17	<0.5	52	5.9	17.4	18.1	3.25
E5287338	<0.2	1.52	27	<5	64	<0.5	<1	0.18	<0.5	47	6.8	15.9	22.2	3.27
E5287339	<0.2	1.14	29	<5	42	<0.5	<1	0.03	<0.5	47	4.6	12.3	21.7	2.92
E5287340	<0.2	1.07	22	<5	32	<0.5	<1	0.26	<0.5	65	10.1	12.0	23.7	3.21
E5287341	<0.2	0.37	5	<5	14	<0.5	<1	0.02	<0.5	17	1.0	3.0	12.7	0.68
E5287342	<0.2	1.26	35	<5	63	<0.5	<1	0.43	<0.5	49	11.0	15.1	36.1	4.45
E5287343	<0.2	1.56	21	<5	45	<0.5	<1	0.04	<0.5	67	4.5	16.3	17.8	3.71
E5287344	<0.2	1.80	27	<5	67	0.5	<1	0.28	<0.5	67	8.3	19.6	36.2	3.60
E5287345	<0.2	1.61	26	<5	56	<0.5	<1	0.28	<0.5	61	6.8	17.8	31.2	3.35
E5287346	<0.2	1.76	17	<5	66	0.5	<1	0.18	<0.5	75	7.1	20.2	33.7	4.22
E5287347	<0.2	1.50	43	<5	19	<0.5	<1	1.32	<0.5	28	19.5	17.8	53.0	4.64
E5287348	<0.2	1.50	13	<5	26	<0.5	<1	0.28	<0.5	55	16.0	17.2	41.5	3.89
E5287349	<0.2	1.44	25	<5	18	<0.5	<1	1.05	<0.5	31	12.4	16.4	46.7	4.31
E5287350	<0.2	1.60	73	<5	49	0.5	<1	1.16	<0.5	50	27.0	18.0	90.4	5.42
E5287351	<0.2	1.49	26	<5	20	<0.5	<1	0.71	<0.5	43	18.3	17.5	47.6	4.43

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
E5287352	<0.2	1.45	24	<5	19	<0.5	<1	0.38	<0.5	39	17.1	17.6	47.2	4.42
E5287353	<0.2	1.42	25	<5	18	<0.5	<1	0.46	<0.5	38	12.2	16.9	42.7	4.21
E5287354	<0.2	1.63	10	<5	43	<0.5	<1	0.48	<0.5	46	9.3	21.1	26.9	3.13
E5287355	<0.2	1.57	20	<5	40	<0.5	<1	0.36	<0.5	34	10.0	17.6	34.7	3.66
E5287356	<0.2	1.17	20	<5	24	<0.5	<1	0.27	<0.5	45	10.0	13.4	31.7	3.47
E5287357	<0.2	1.24	24	<5	26	<0.5	<1	0.50	<0.5	36	10.4	14.6	33.1	3.57
E5287358	<0.2	1.28	23	<5	21	<0.5	<1	0.64	<0.5	31	11.6	15.5	40.7	3.89
E5287359	<0.2	1.37	22	<5	24	<0.5	<1	0.38	<0.5	38	11.2	16.5	37.3	3.85
E5287360	<0.2	1.28	25	<5	22	<0.5	<1	0.56	<0.5	37	11.4	15.2	42.2	3.86
E5287361	<0.2	1.27	23	<5	23	<0.5	<1	0.58	<0.5	36	11.1	15.8	38.6	3.64
E5287362	<0.2	1.26	22	<5	18	<0.5	<1	0.53	<0.5	35	11.5	15.6	45.6	3.83
E5287363	<0.2	1.35	25	<5	26	<0.5	<1	0.64	<0.5	38	11.3	15.8	37.5	3.73
E5287364	<0.2	1.29	26	<5	22	<0.5	<1	0.66	<0.5	31	11.2	15.2	38.2	3.83
E5287365	<0.2	1.29	23	<5	18	<0.5	<1	0.31	<0.5	28	11.3	15.7	37.4	3.74
E5287366	<0.2	1.31	22	<5	19	<0.5	<1	0.73	<0.5	26	11.4	15.2	37.5	3.87
E5287367	<0.2	1.53	27	<5	62	<0.5	<1	0.37	<0.5	35	8.1	15.5	26.4	3.37
E5287368	<0.2	1.39	21	<5	19	<0.5	<1	0.97	<0.5	34	11.5	17.6	50.3	3.93
E5287369	<0.2	1.40	23	<5	18	<0.5	<1	0.46	<0.5	40	11.7	16.8	41.1	4.07
E5287370	<0.2	1.41	23	<5	18	<0.5	<1	0.90	<0.5	37	12.1	17.0	47.8	4.13
E5287371	<0.2	1.46	23	<5	19	<0.5	<1	0.45	<0.5	37	15.9	16.6	41.9	4.32
E5287372	<0.2	1.54	26	<5	34	<0.5	<1	0.19	<0.5	30	16.0	16.7	43.3	4.67
E5287373	<0.2	1.62	78	<5	64	<0.5	<1	0.19	<0.5	43	8.5	16.3	37.3	3.75
E5287374	<0.2	1.70	27	<5	52	0.6	<1	0.21	<0.5	60	11.8	17.4	44.4	4.31
E5287375	<0.2	1.69	27	<5	43	<0.5	<1	0.02	<0.5	55	8.4	17.4	30.6	4.06
E5287376	<0.2	1.75	23	<5	39	<0.5	<1	0.03	<0.5	62	8.1	18.0	35.1	4.02
E5287377	<0.2	1.77	24	<5	42	0.5	<1	0.04	<0.5	67	9.8	19.2	39.2	4.34
E5287378	<0.2	1.17	15	<5	26	<0.5	<1	0.03	<0.5	32	2.4	11.3	12.3	2.24
E5287379	<0.2	1.46	15	<5	37	<0.5	<1	0.05	<0.5	50	6.6	15.2	31.9	3.47
E5287380	<0.2	1.65	26	<5	56	<0.5	<1	0.12	<0.5	29	7.7	18.5	36.9	4.63
E5287381	<0.2	1.66	18	<5	30	<0.5	<1	0.32	<0.5	22	6.9	19.4	30.1	3.86
E5287382	<0.2	1.71	30	<5	25	<0.5	<1	0.23	<0.5	29	11.3	18.5	53.8	5.61
E5287383	<0.2	2.04	14	<5	50	0.5	<1	0.31	<0.5	24	5.6	22.6	34.9	3.83

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
E5287384	<0.2	1.62	25	<5	39	<0.5	<1	0.07	<0.5	40	6.8	16.5	35.0	4.32
E5287385	<0.2	1.68	31	<5	47	<0.5	<1	0.11	<0.5	57	9.0	18.2	42.6	4.34
E5287386	<0.2	1.78	27	<5	52	<0.5	<1	0.17	<0.5	50	7.7	19.4	45.8	4.37
E5287387	<0.2	1.73	36	<5	54	<0.5	<1	0.24	<0.5	27	17.1	18.6	49.9	4.96
E5287388	<0.2	1.70	37	<5	45	<0.5	<1	0.13	<0.5	41	16.8	18.1	47.0	4.75
E5287389	<0.2	1.49	18	<5	41	<0.5	<1	0.22	<0.5	25	6.6	20.1	25.5	3.45
E5287390	<0.2	1.07	19	<5	33	<0.5	<1	0.15	<0.5	24	4.7	10.9	19.7	2.42
E5287391	<0.2	1.57	28	<5	38	<0.5	<1	0.29	<0.5	42	11.0	17.0	44.2	3.91
E5287392	<0.2	1.46	27	<5	37	<0.5	<1	0.29	<0.5	39	11.4	15.4	39.7	4.06
E5287393	<0.2	1.50	47	<5	38	<0.5	<1	0.28	<0.5	63	17.6	17.2	51.6	4.98
E5285810	<0.2	1.47	12	<5	53	0.6	<1	0.38	<0.5	76	10.8	15.7	33.2	3.63
E5285811	<0.2	1.04	44	<5	48	0.6	<1	0.77	<0.5	56	27.8	12.1	43.1	3.82
E5285812	<0.2	1.26	15	<5	76	0.6	<1	0.24	<0.5	61	14.2	14.6	33.7	3.23
E5285813	<0.2	1.05	7	<5	23	<0.5	<1	0.04	<0.5	38	7.4	15.8	24.5	3.76
E5285814	<0.2	1.50	14	<5	47	<0.5	<1	0.19	<0.5	61	10.7	14.3	32.0	3.96
E5285815	<0.2	1.21	12	<5	36	<0.5	<1	0.07	<0.5	73	8.3	13.6	18.2	3.15
E5285816	<0.2	0.60	9	<5	91	<0.5	<1	0.20	<0.5	61	5.5	9.4	18.0	1.50
E5285817	<0.2	0.45	8	<5	61	<0.5	<1	0.81	<0.5	25	5.6	4.9	22.4	1.57
E5285818	<0.2	1.04	18	<5	48	<0.5	<1	1.08	<0.5	43	11.9	12.0	27.8	3.29
E5285819	<0.2	0.96	31	<5	27	<0.5	<1	0.02	<0.5	56	5.2	13.2	22.4	3.49
E5285820	<0.2	1.56	27	<5	69	<0.5	<1	0.29	<0.5	53	9.2	16.6	30.8	3.70
E5285821	<0.2	1.64	20	<5	57	<0.5	<1	0.14	<0.5	52	7.8	18.3	29.0	3.61
E5285822	<0.2	1.46	18	<5	34	<0.5	<1	0.16	<0.5	69	8.4	17.0	38.1	3.46
E5285823	<0.2	1.34	16	<5	33	0.5	<1	0.22	<0.5	67	10.7	14.6	27.6	3.71
E5285824	<0.2	1.57	17	<5	61	0.5	<1	0.39	<0.5	48	9.7	15.4	29.3	3.49
E5285825	<0.2	1.47	21	<5	56	0.5	<1	0.03	<0.5	70	7.3	15.9	20.2	3.79
E5285826	<0.2	1.00	25	<5	41	<0.5	<1	0.04	<0.5	63	7.4	10.3	20.1	3.47
E5285827	<0.2	1.30	29	<5	40	<0.5	<1	0.02	<0.5	75	6.9	13.3	17.9	3.79
E5285828	<0.2	1.81	17	<5	62	0.6	<1	0.05	<0.5	87	11.7	16.8	27.6	3.97
E5285829	<0.2	1.55	12	<5	66	0.6	<1	0.05	<0.5	100	8.0	15.8	28.6	3.38
E5285830	<0.2	1.67	26	<5	40	0.5	<1	0.04	<0.5	74	10.1	17.6	25.5	4.12
E5285831	<0.2	1.48	24	<5	63	0.6	<1	0.06	<0.5	80	8.4	15.8	29.7	3.37

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
E5285832	<0.2	1.11	37	<5	30	<0.5	<1	0.01	<0.5	71	6.6	13.5	18.3	4.12
E5285833	<0.2	1.61	19	<5	27	0.6	<1	0.04	<0.5	50	19.8	22.4	54.8	4.92
E5285834	<0.2	1.54	25	<5	43	<0.5	<1	0.03	<0.5	62	8.6	19.0	18.7	3.58
E5285835	<0.2	1.63	26	<5	55	0.5	<1	0.07	<0.5	73	9.6	17.8	27.4	3.52
E5285836	<0.2	1.73	12	<5	56	<0.5	<1	0.13	<0.5	66	6.3	20.3	20.3	3.30
E5285837	<0.2	1.93	12	<5	68	0.6	<1	0.08	<0.5	55	7.9	22.2	16.9	3.73
E5285838	<0.2	1.60	17	<5	58	<0.5	<1	0.06	<0.5	59	6.8	18.0	22.2	3.34
E5285839	<0.2	0.62	2	<5	16	<0.5	<1	0.27	<0.5	3	0.8	1.1	9.5	0.39
E5285840	<0.2	1.02	34	<5	34	<0.5	<1	0.03	<0.5	48	9.1	10.5	36.9	4.79
E5285841	<0.2	1.18	28	<5	43	<0.5	<1	0.06	<0.5	51	4.0	12.4	22.0	3.32
E5285842	<0.2	1.01	13	<5	21	<0.5	<1	0.09	<0.5	92	7.5	11.9	17.2	2.48
E5285843	<0.2	0.22	5	<5	10	<0.5	<1	0.01	<0.5	25	0.8	2.6	10.7	0.44
E5285844	<0.2	0.09	<1	<5	8	<0.5	<1	0.02	<0.5	8	<0.5	4.3	16.5	0.29
E5285845	<0.2	1.39	43	<5	43	<0.5	<1	0.25	<0.5	73	15.2	16.1	35.8	3.63
E5285846	<0.2	1.37	20	<5	64	<0.5	<1	0.81	<0.5	31	5.0	10.9	26.7	2.33
E5285847	<0.2	0.78	10	<5	26	<0.5	<1	0.01	<0.5	100	2.4	10.2	14.2	2.19
E5285848	<0.2	0.92	10	<5	53	<0.5	<1	0.31	<0.5	51	4.8	8.0	10.6	2.41
E5285849	<0.2	1.23	22	<5	35	0.5	<1	0.14	<0.5	84	15.7	14.1	32.5	3.91
E5285850	<0.2	0.98	23	<5	37	0.6	<1	0.19	<0.5	81	16.5	8.9	36.4	3.86
E5285851	<0.2	1.30	23	<5	44	0.6	<1	0.20	<0.5	89	19.0	12.7	36.5	4.10
E5285852	<0.2	1.12	26	<5	51	<0.5	<1	0.15	<0.5	86	10.2	11.4	29.7	3.37
E5285853	<0.2	0.96	18	<5	46	0.5	<1	0.18	<0.5	73	16.9	8.1	34.7	3.12
E5285854	<0.2	1.09	18	<5	82	<0.5	<1	0.58	<0.5	36	6.4	7.8	22.6	2.29
E5285855	<0.2	1.01	16	<5	46	<0.5	<1	0.21	<0.5	68	10.7	8.5	28.0	2.88
E5285856	<0.2	1.46	16	<5	56	<0.5	<1	0.25	<0.5	59	7.8	11.9	30.4	2.94
E5285857	<0.2	0.52	4	<5	32	<0.5	<1	0.28	<0.5	10	3.0	4.6	15.3	1.14
E5285858	<0.2	1.45	14	<5	42	0.5	<1	0.15	<0.5	70	9.8	14.9	32.7	3.14
E5285859	<0.2	1.29	28	<5	50	<0.5	<1	0.11	<0.5	50	9.3	13.8	28.0	3.46
E5285860	<0.2	1.33	22	<5	44	<0.5	<1	0.05	<0.5	66	8.9	14.9	23.2	3.14
E5285861	<0.2	1.35	31	<5	40	<0.5	<1	0.06	<0.5	79	16.9	14.9	38.3	3.67
E5285862	<0.2	1.44	20	<5	47	<0.5	<1	0.03	<0.5	57	7.6	15.8	19.2	3.39
E5285863	<0.2	1.10	18	<5	44	0.5	<1	0.13	<0.5	73	9.8	9.6	31.0	3.41

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ag	Al	As	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr	Cu	Fe
Unit:	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%
Sample Description RDL:	0.2	0.01	1	5	1	0.5	1	0.01	0.5	1	0.5	0.5	0.5	0.01
E5285864	<0.2	1.46	17	<5	47	<0.5	<1	0.04	<0.5	60	7.6	15.7	15.8	3.37
E5285865	<0.2	1.48	18	<5	39	<0.5	<1	0.03	<0.5	81	7.9	16.4	19.4	3.37
E5285866	<0.2	1.43	14	<5	45	<0.5	<1	0.18	<0.5	72	8.6	15.9	20.9	2.99
E5285867	<0.2	1.52	25	<5	38	0.7	<1	0.09	<0.5	98	18.7	14.6	39.0	3.85
E5285868	<0.2	1.50	36	<5	50	<0.5	<1	0.13	<0.5	68	9.4	16.5	30.2	3.56
E5285869	<0.2	1.55	18	<5	92	<0.5	<1	0.06	<0.5	51	4.1	16.2	26.9	2.88
E5285870	<0.2	1.59	19	<5	64	<0.5	<1	0.04	<0.5	90	4.8	17.3	23.5	3.00
E5285871	<0.2	1.64	24	<5	54	<0.5	<1	0.02	<0.5	76	8.0	18.5	32.2	3.61
E5285872	<0.2	1.39	29	<5	47	<0.5	<1	0.05	<0.5	63	7.7	15.1	26.2	3.43
E5285873	<0.2	1.63	33	<5	59	0.5	<1	0.05	<0.5	63	9.5	18.4	39.2	4.23
E5285874	<0.2	1.66	33	<5	52	0.5	<1	0.05	<0.5	73	11.3	19.3	40.1	4.11
E5285875	<0.2	1.58	27	<5	43	<0.5	<1	0.06	<0.5	85	9.7	18.5	37.4	3.80
E5285876	<0.2	1.40	29	<5	41	<0.5	<1	0.05	<0.5	78	7.9	16.8	32.3	3.50
E5285877	<0.2	1.54	20	<5	52	<0.5	<1	0.14	<0.5	50	6.8	16.7	28.8	3.25
E5285878	<0.2	1.32	22	<5	36	<0.5	<1	0.02	<0.5	56	5.2	16.0	19.8	3.15
E5285879	<0.2	1.27	22	<5	33	<0.5	<1	0.02	<0.5	54	5.7	16.3	19.2	3.11
E5285880	<0.2	1.55	22	<5	49	<0.5	<1	0.23	<0.5	57	7.3	20.1	46.1	3.27
E5285881	<0.2	0.93	13	<5	32	<0.5	<1	0.24	<0.5	32	4.1	7.4	28.4	2.23
E5285882	<0.2	1.08	18	<5	19	<0.5	<1	0.02	<0.5	49	5.8	16.7	18.1	4.23
E5285883	<0.2	1.80	23	<5	28	0.7	<1	0.03	<0.5	39	28.3	22.2	57.8	5.12
E5285884	<0.2	0.74	5	<5	29	<0.5	<1	0.11	<0.5	14	2.1	8.4	9.8	1.02
E5285885	<0.2	1.47	20	<5	41	<0.5	<1	0.11	<0.5	64	4.9	16.5	23.8	2.96
E5285886	0.6	1.30	20	<5	50	<0.5	<1	0.14	<0.5	52	6.8	13.1	31.3	2.70
E5285887	<0.2	1.47	17	<5	54	<0.5	<1	0.24	<0.5	44	6.4	16.4	37.9	2.63
E5285888	<0.2	1.44	28	<5	57	<0.5	<1	0.30	<0.5	47	8.3	15.0	33.6	3.42

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
E5285760	<5	<1	<1	0.06	29	48	0.53	432	0.9	<0.01	27.0	498	25.0	11
E5285761	<5	<1	2	0.06	24	30	0.43	248	0.9	0.02	18.7	519	11.3	14
E5285762	<5	<1	<1	0.05	15	29	0.36	551	1.4	0.01	15.5	1460	22.4	12
E5285763	<5	<1	<1	0.06	39	59	0.90	471	0.7	<0.01	31.6	359	29.5	10
E5285764	<5	<1	<1	0.05	24	52	0.81	370	0.9	<0.01	38.4	371	81.1	<10
E5285765	<5	<1	<1	0.03	13	30	0.30	496	0.9	0.02	29.3	585	31.4	<10
E5285766	<5	1	<1	0.02	5	35	0.46	2120	4.2	0.02	84.6	1350	10.2	<10
E5285767	<5	<1	<1	0.06	65	9	0.14	1240	1.7	0.02	40.2	1320	49.9	13
E5285768	<5	<1	<1	0.09	19	42	0.55	1080	1.5	<0.01	76.6	752	52.0	14
E5285769	<5	<1	<1	0.02	22	52	0.69	281	1.1	<0.01	44.4	596	28.6	<10
E5285770	<5	<1	<1	0.06	21	38	0.47	196	1.6	0.01	21.9	577	20.2	<10
E5285771	<5	<1	<1	0.05	18	34	0.44	99	0.9	0.01	23.8	541	15.7	<10
E5285772	<5	<1	<1	0.04	36	24	0.34	172	1.2	<0.01	26.6	273	16.9	<10
E5285773	<5	<1	<1	0.05	29	30	0.37	418	1.3	<0.01	37.8	397	26.0	11
E5285774	<5	<1	<1	0.04	35	47	0.53	610	1.2	<0.01	43.6	421	32.8	<10
E5285775	<5	<1	<1	0.05	32	55	0.69	812	1.3	<0.01	47.4	671	42.1	<10
E5285776	<5	<1	<1	0.07	26	44	0.58	645	0.9	<0.01	33.3	573	22.4	13
E5285777	<5	<1	<1	0.04	28	36	0.42	481	0.8	<0.01	41.6	602	29.0	<10
E5285778	<5	<1	<1	0.09	25	8	0.14	594	0.8	<0.01	23.7	248	12.2	11
E5285779	<5	<1	<1	0.08	40	50	0.58	602	0.9	<0.01	36.7	373	22.2	14
E5287060	<5	<1	<1	0.02	30	59	0.58	404	1.0	0.01	33.3	365	29.6	<10
E5287061	<5	<1	<1	0.02	35	72	0.70	473	1.4	<0.01	44.2	581	33.6	<10
E5287062	<5	<1	<1	0.03	49	65	0.64	361	0.8	<0.01	41.5	697	32.1	<10
E5287063	<5	<1	<1	0.03	43	66	0.65	348	0.8	<0.01	41.7	762	31.8	<10
E5287064	<5	<1	<1	0.04	41	71	0.75	634	1.5	<0.01	42.9	707	35.0	<10
E5287065	<5	<1	<1	0.03	39	55	0.57	869	1.0	<0.01	41.4	713	31.1	<10
E5287066	<5	<1	<1	0.03	38	54	0.53	806	1.2	<0.01	40.9	814	30.6	<10
E5287067	<5	<1	<1	0.03	27	7	0.10	419	1.5	0.02	34.9	611	27.9	<10
E5287068	<5	<1	<1	0.03	23	27	0.26	309	1.0	0.01	27.0	946	26.3	<10
E5287069	<5	<1	<1	0.03	29	29	0.28	420	0.7	<0.01	34.6	679	29.8	<10
E5287070	<5	<1	<1	0.03	27	35	0.32	360	1.0	<0.01	30.1	396	32.1	<10
E5287071	<5	<1	<1	0.03	22	34	0.32	267	1.0	0.02	21.4	461	19.3	<10

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
E5287072	<5	<1	<1	0.06	36	35	0.47	415	1.3	<0.01	30.7	307	31.1	10
E5287073	<5	<1	<1	0.05	31	32	0.37	216	0.6	<0.01	22.0	440	22.3	<10
E5287074	<5	<1	<1	0.04	29	38	0.44	258	1.2	<0.01	24.5	513	24.3	<10
E5287075	<5	<1	<1	0.05	29	38	0.38	551	0.9	<0.01	23.4	383	29.4	<10
E5287076	<5	<1	<1	0.05	30	44	0.46	271	1.0	<0.01	27.7	530	23.7	<10
E5287077	<5	<1	<1	0.07	35	46	0.48	394	0.7	<0.01	29.0	498	22.0	12
E5287078	<5	<1	<1	0.05	32	28	0.25	730	0.8	<0.01	40.7	584	32.4	10
E5287079	<5	<1	<1	0.06	29	42	0.48	247	0.8	<0.01	23.3	578	23.1	<10
E5287080	<5	<1	<1	0.06	36	43	0.45	334	1.1	<0.01	25.3	289	21.1	10
E5287081	<5	<1	<1	0.04	28	45	0.47	858	0.8	<0.01	53.5	309	45.3	<10
E5287082	<5	<1	<1	0.03	11	3	0.15	622	1.7	<0.01	13.2	721	20.4	14
E5287083	<5	<1	<1	0.06	25	40	0.42	374	<0.5	<0.01	22.0	439	19.4	<10
E5287084	<5	<1	<1	0.08	31	53	0.47	510	0.6	<0.01	48.2	403	32.0	11
E5287085	<5	<1	<1	0.05	22	47	0.47	243	<0.5	<0.01	22.2	363	14.9	<10
E5287086	<5	<1	<1	0.07	27	44	0.42	340	<0.5	<0.01	29.3	298	21.7	11
E5287087	<5	<1	<1	0.08	33	44	0.45	258	0.8	<0.01	23.8	388	18.3	13
E5287088	<5	<1	<1	0.08	33	37	0.37	208	<0.5	<0.01	21.2	256	73.7	13
E5287089	<5	<1	<1	0.06	27	23	0.25	143	<0.5	<0.01	15.8	553	17.7	13
E5287090	<5	<1	<1	0.05	26	16	0.17	1980	0.8	<0.01	31.1	411	26.2	<10
E5287091	<5	<1	<1	0.07	24	41	0.41	237	<0.5	<0.01	23.9	406	14.6	10
E5287092	<5	<1	<1	0.07	17	42	0.39	312	1.0	<0.01	38.4	429	27.6	12
E5287093	<5	<1	<1	0.06	25	34	0.39	253	<0.5	0.01	23.0	470	16.9	<10
E5287094	<5	<1	<1	0.07	28	45	0.51	292	0.8	<0.01	23.8	569	18.4	11
E5287095	<5	<1	<1	0.04	33	35	0.38	142	<0.5	<0.01	18.9	333	14.9	<10
E5287096	<5	<1	<1	0.09	30	44	0.45	357	0.7	<0.01	28.2	315	21.4	12
E5287097	<5	<1	<1	0.07	29	49	0.50	356	<0.5	<0.01	32.7	339	25.6	<10
E5287098	<5	<1	<1	0.07	29	39	0.45	212	0.5	<0.01	22.4	473	17.9	12
E5287099	<5	<1	<1	0.05	22	34	0.43	307	<0.5	<0.01	23.2	579	15.9	<10
E5287100	<5	<1	<1	0.05	15	20	0.25	102	<0.5	0.02	11.1	651	11.7	<10
E5287101	<5	<1	<1	0.04	18	31	0.39	1040	<0.5	<0.01	42.8	293	24.4	<10
E5287102	<5	<1	<1	0.09	36	45	0.53	378	<0.5	<0.01	26.8	314	19.0	12
E5287103	<5	<1	<1	0.08	39	47	0.51	212	<0.5	<0.01	26.2	267	18.7	12

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
E5287104	<5	<1	<1	0.09	35	51	0.55	270	<0.5	<0.01	25.9	245	22.3	12
E5287105	<5	<1	<1	0.02	15	29	0.51	566	1.4	<0.01	81.3	408	115	<10
E5287106	<5	<1	<1	0.05	20	38	0.42	148	<0.5	<0.01	20.8	350	13.6	<10
E5287107	<5	<1	<1	0.06	18	48	0.48	120	<0.5	<0.01	17.3	477	11.1	<10
E5287108	<5	<1	<1	0.05	27	46	0.45	123	<0.5	<0.01	21.6	299	11.4	<10
E5287109	<5	<1	<1	0.04	21	13	0.15	143	1.3	<0.01	12.3	700	14.0	<10
E5287110	<5	<1	<1	0.04	27	35	0.38	255	1.0	<0.01	16.7	484	14.7	<10
E5287111	<5	<1	<1	0.03	22	19	0.25	360	1.1	<0.01	20.3	578	22.7	<10
E5287112	<5	<1	<1	0.04	14	19	0.27	256	0.8	0.01	11.8	329	23.6	<10
E5287113	<5	<1	<1	0.05	23	34	0.46	318	<0.5	<0.01	20.0	336	12.0	10
E5287114	<5	<1	<1	0.05	27	37	0.47	349	0.7	<0.01	24.4	363	14.0	<10
E5287115	<5	<1	<1	0.04	20	25	0.34	263	0.8	<0.01	14.4	523	11.0	11
E5287116	<5	<1	<1	0.04	21	41	0.57	392	0.5	<0.01	23.4	403	10.7	<10
E5287117	<5	<1	<1	0.04	21	46	0.57	374	0.6	<0.01	22.1	495	9.9	11
E5287118	<5	<1	<1	0.04	22	40	0.61	396	<0.5	<0.01	25.4	266	11.1	<10
E5287119	<5	<1	<1	0.05	22	35	0.51	407	<0.5	<0.01	24.3	306	11.4	10
E5287120	<5	<1	1	0.05	22	33	0.48	398	0.6	<0.01	21.5	320	10.2	12
E5287121	<5	<1	<1	0.03	27	8	0.11	3160	1.2	<0.01	37.5	556	44.9	<10
E5287122	<5	<1	<1	0.05	20	35	0.52	459	<0.5	<0.01	20.6	375	9.7	11
E5287123	<5	<1	<1	0.03	5	6	0.10	83	0.6	0.04	4.6	469	4.1	<10
E5287124	<5	<1	<1	0.07	21	42	0.53	258	0.6	<0.01	22.3	511	12.5	13
E5287125	<5	<1	<1	0.02	4	2	0.06	72	<0.5	0.03	1.6	473	2.8	<10
E5287126	<5	<1	<1	0.06	24	37	0.48	361	0.6	<0.01	20.5	365	13.7	12
E5287127	<5	<1	<1	0.06	25	46	0.62	223	<0.5	<0.01	23.4	213	12.2	11
E5287128	<5	<1	<1	0.07	29	31	0.45	314	<0.5	<0.01	19.4	344	12.3	14
E5287129	<5	<1	<1	0.07	30	49	0.55	323	<0.5	<0.01	27.4	371	11.0	14
E5287130	<5	<1	<1	0.09	30	45	0.53	560	<0.5	<0.01	28.1	371	21.5	16
E5287131	<5	<1	<1	0.06	25	34	0.37	597	<0.5	<0.01	35.9	770	12.5	12
E5287132	<5	<1	<1	0.03	27	12	0.14	147	<0.5	<0.01	9.0	213	10.7	<10
E5287133	<5	<1	<1	0.03	25	39	0.35	268	1.0	<0.01	19.2	261	21.1	<10
E5287134	<5	<1	<1	0.05	26	32	0.38	280	0.7	<0.01	16.2	291	13.6	12
E5287135	<5	<1	<1	0.03	14	13	0.12	763	0.8	0.01	16.6	581	23.3	<10

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
E5287136	<5	<1	<1	0.06	25	39	0.47	576	1.0	<0.01	26.5	532	25.6	11
E5287137	<5	<1	<1	0.10	34	50	0.40	161	<0.5	<0.01	25.9	364	14.4	13
E5287138	<5	<1	<1	0.10	27	47	0.37	216	<0.5	<0.01	26.5	332	20.6	14
E5287139	<5	<1	<1	0.08	39	56	0.44	540	<0.5	<0.01	34.0	457	18.6	11
E5287140	<5	<1	<1	0.04	28	45	0.36	137	0.7	<0.01	22.9	433	19.0	<10
E5287141	<5	<1	<1	0.06	33	58	0.46	244	<0.5	<0.01	26.6	339	16.6	<10
E5287142	<5	<1	<1	0.09	29	47	0.42	339	<0.5	<0.01	25.7	626	16.6	15
E5287143	<5	<1	<1	0.06	48	59	0.48	259	0.6	<0.01	28.0	276	16.6	<10
E5287144	<5	<1	<1	0.07	45	56	0.46	321	<0.5	<0.01	33.1	400	21.9	<10
E5287145	<5	<1	<1	0.05	32	48	0.40	305	<0.5	<0.01	24.0	493	22.0	10
E5287146	<5	<1	<1	0.05	27	41	0.41	381	<0.5	<0.01	21.4	371	16.4	<10
E5287147	<5	<1	<1	0.03	13	21	0.23	1080	0.9	0.02	26.2	630	99.8	<10
E5287148	<5	<1	<1	0.03	29	29	0.29	578	0.9	<0.01	24.5	591	30.2	<10
E5287149	<5	<1	<1	0.05	28	26	0.30	187	<0.5	<0.01	17.4	486	21.0	<10
E5287150	<5	<1	<1	0.03	30	39	0.36	396	<0.5	<0.01	31.4	470	27.5	<10
E5287151	<5	<1	<1	0.02	4	5	0.07	108	<0.5	0.04	4.1	281	4.0	<10
E5287152	<5	<1	<1	0.03	17	35	0.37	210	1.5	<0.01	23.6	343	30.5	12
E5287153	<5	<1	<1	0.04	31	31	0.33	284	0.8	<0.01	30.5	387	26.0	<10
E5287154	<5	<1	<1	0.03	33	31	0.33	351	1.2	<0.01	38.2	293	27.6	<10
E5287155	<5	<1	<1	0.04	31	30	0.28	236	<0.5	<0.01	30.1	359	22.4	<10
E5287156	<5	<1	<1	0.03	21	38	0.45	282	1.4	<0.01	19.6	1090	26.1	13
E5287157	<5	<1	<1	0.03	20	17	0.25	215	1.9	<0.01	22.1	216	16.8	12
E5287310	<5	<1	<1	0.03	42	73	0.69	544	0.6	<0.01	58.8	740	41.8	<10
E5287311	<5	<1	<1	0.03	41	81	0.86	464	0.7	<0.01	51.2	469	74.5	<10
E5287312	<5	<1	<1	0.02	22	73	0.77	789	0.8	<0.01	61.4	749	40.6	<10
E5287313	<5	<1	<1	0.03	24	70	0.79	628	1.4	<0.01	54.9	469	35.3	<10
E5287314	<5	<1	<1	0.02	20	58	0.65	425	0.6	<0.01	46.2	656	29.3	<10
E5287315	<5	<1	<1	0.03	27	53	0.58	679	<0.5	<0.01	32.4	623	25.4	<10
E5287316	<5	<1	<1	0.02	20	56	0.79	321	0.6	<0.01	66.6	285	42.2	<10
E5287317	<5	<1	<1	0.03	18	34	0.49	402	<0.5	<0.01	31.5	422	25.2	<10
E5287318	<5	<1	<1	0.03	17	43	0.58	365	0.7	<0.01	38.3	533	24.3	<10
E5287319	<5	<1	<1	0.03	22	34	0.47	364	<0.5	<0.01	34.2	813	23.4	<10

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
E5287320	<5	<1	<1	0.05	32	35	0.49	453	0.5	<0.01	30.6	493	25.0	<10
E5287321	<5	<1	<1	0.02	6	49	0.57	577	<0.5	0.01	43.6	500	22.2	<10
E5287322	<5	<1	<1	0.04	21	22	0.27	930	1.1	<0.01	37.5	776	30.5	<10
E5287323	<5	<1	<1	0.03	15	38	0.43	314	0.9	<0.01	24.9	588	28.1	<10
E5287324	<5	<1	<1	0.03	16	61	0.62	605	1.3	<0.01	84.0	486	37.9	<10
E5287325	<5	<1	<1	0.04	18	48	0.50	344	0.9	<0.01	39.8	534	20.0	10
E5287326	<5	<1	<1	0.02	22	48	0.52	425	0.8	<0.01	44.6	309	32.0	<10
E5287327	<5	<1	<1	0.03	38	71	0.86	329	1.5	<0.01	50.7	676	38.9	<10
E5287328	<5	<1	<1	0.03	27	54	0.64	510	1.1	<0.01	32.1	434	29.8	<10
E5287329	<5	<1	<1	0.09	30	29	0.40	420	0.6	<0.01	29.9	402	27.2	<10
E5287330	<5	<1	<1	0.07	26	26	0.27	488	0.5	<0.01	13.1	393	22.5	13
E5287331	<5	<1	<1	0.05	35	43	0.50	382	<0.5	<0.01	27.2	460	19.4	<10
E5287332	<5	<1	<1	0.05	26	47	0.53	335	<0.5	<0.01	26.6	247	15.8	<10
E5287333	<5	<1	<1	0.05	34	38	0.45	403	<0.5	<0.01	26.6	349	16.4	<10
E5287334	<5	<1	<1	0.08	33	37	0.52	363	<0.5	<0.01	22.3	376	15.7	13
E5287335	<5	<1	<1	0.10	33	48	0.65	472	<0.5	<0.01	31.3	243	18.2	15
E5287336	<5	<1	<1	0.10	35	37	0.54	812	<0.5	<0.01	44.9	603	27.6	11
E5287337	<5	<1	2	0.06	24	40	0.46	265	<0.5	<0.01	22.8	343	12.2	13
E5287338	<5	<1	<1	0.07	23	40	0.46	310	<0.5	<0.01	23.7	235	15.0	<10
E5287339	<5	<1	<1	0.06	23	20	0.24	315	0.9	<0.01	14.7	411	17.8	12
E5287340	<5	<1	<1	0.05	30	31	0.36	418	0.9	<0.01	26.0	594	21.7	<10
E5287341	<5	<1	<1	0.02	8	4	0.06	28	<0.5	0.02	2.9	223	4.3	<10
E5287342	<5	<1	<1	0.06	22	31	0.40	791	1.3	<0.01	28.4	475	30.2	11
E5287343	<5	<1	<1	0.09	32	35	0.41	191	0.8	<0.01	15.6	323	16.0	15
E5287344	<5	<1	<1	0.16	34	47	0.55	402	0.6	<0.01	29.2	409	16.4	14
E5287345	<5	<1	<1	0.11	31	43	0.51	330	0.5	<0.01	26.2	426	14.6	12
E5287346	<5	<1	<1	0.05	38	48	0.55	290	<0.5	<0.01	30.0	199	15.7	10
E5287347	<5	<1	<1	0.02	14	65	0.72	568	<0.5	<0.01	44.7	425	26.3	<10
E5287348	<5	<1	<1	0.05	27	48	0.67	571	0.5	<0.01	35.3	420	25.7	<10
E5287349	<5	<1	<1	0.02	16	60	0.69	500	0.9	<0.01	39.0	378	22.9	<10
E5287350	<5	<1	<1	0.06	26	56	0.71	1740	0.9	<0.01	69.4	538	32.0	<10
E5287351	<5	<1	<1	0.03	22	61	0.71	560	0.6	<0.01	41.2	428	25.2	<10

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
E5287352	<5	<1	<1	0.03	20	56	0.68	558	0.6	<0.01	40.1	422	25.1	<10
E5287353	<5	<1	<1	0.03	19	56	0.66	476	<0.5	<0.01	38.5	440	23.9	<10
E5287354	<5	<1	<1	0.07	24	46	0.62	443	<0.5	0.01	24.1	488	11.4	13
E5287355	<5	<1	<1	0.04	18	49	0.59	423	<0.5	<0.01	30.6	405	18.8	<10
E5287356	<5	<1	<1	0.04	21	38	0.48	445	<0.5	<0.01	29.1	379	19.3	<10
E5287357	<5	<1	<1	0.03	18	45	0.55	506	0.6	<0.01	31.7	412	20.8	<10
E5287358	<5	<1	<1	0.03	15	49	0.60	492	<0.5	<0.01	34.6	407	22.6	<10
E5287359	<5	<1	<1	0.04	18	50	0.62	426	<0.5	<0.01	32.6	461	22.9	<10
E5287360	<5	<1	<1	0.03	18	47	0.59	480	0.8	<0.01	33.3	416	22.3	<10
E5287361	<5	<1	<1	0.03	18	48	0.58	465	<0.5	<0.01	32.8	426	22.7	<10
E5287362	<5	<1	<1	0.03	18	50	0.61	506	<0.5	<0.01	34.1	372	22.0	<10
E5287363	<5	<1	<1	0.04	19	49	0.59	479	<0.5	<0.01	32.9	460	22.9	<10
E5287364	<5	<1	<1	0.03	15	48	0.58	444	<0.5	<0.01	34.2	429	21.9	<10
E5287365	<5	<1	<1	0.02	14	49	0.58	436	<0.5	<0.01	34.1	423	22.3	<10
E5287366	<5	<1	<1	0.02	13	51	0.62	504	<0.5	<0.01	34.5	393	22.1	<10
E5287367	<5	<1	<1	0.06	18	44	0.49	376	<0.5	<0.01	24.8	431	18.4	<10
E5287368	<5	<1	<1	0.02	17	57	0.68	669	1.3	<0.01	34.6	415	21.8	<10
E5287369	<5	<1	<1	0.02	20	55	0.65	508	0.6	<0.01	36.1	414	22.1	<10
E5287370	<5	<1	<1	0.02	19	57	0.67	560	0.7	<0.01	36.9	389	23.1	<10
E5287371	<5	<1	<1	0.02	18	55	0.67	449	<0.5	<0.01	35.7	436	24.0	<10
E5287372	<5	<1	<1	0.03	15	49	0.56	613	1.1	<0.01	37.4	447	26.7	<10
E5287373	<5	<1	<1	0.08	22	45	0.49	334	0.6	<0.01	34.2	344	19.1	<10
E5287374	<5	<1	<1	0.10	31	48	0.60	509	<0.5	<0.01	38.9	447	24.2	<10
E5287375	<5	<1	<1	0.06	28	45	0.52	300	<0.5	<0.01	29.2	331	21.7	<10
E5287376	<5	<1	<1	0.05	31	51	0.58	265	<0.5	<0.01	28.9	301	20.5	<10
E5287377	<5	<1	<1	0.06	34	53	0.61	350	<0.5	<0.01	33.8	382	22.2	<10
E5287378	<5	<1	<1	0.02	16	25	0.29	84	<0.5	<0.01	10.0	338	10.4	<10
E5287379	<5	<1	<1	0.05	25	42	0.51	239	<0.5	<0.01	26.7	429	16.3	<10
E5287380	<5	<1	<1	0.06	15	46	0.53	336	0.7	<0.01	29.0	474	24.7	<10
E5287381	<5	<1	<1	0.04	11	53	0.55	344	<0.5	<0.01	28.1	643	16.0	<10
E5287382	<5	<1	<1	0.03	14	47	0.53	524	<0.5	<0.01	34.9	655	30.4	<10
E5287383	<5	<1	<1	0.05	14	54	0.63	186	<0.5	<0.01	30.0	915	13.6	10

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
E5287384	<5	<1	<1	0.05	21	38	0.44	338	<0.5	<0.01	23.1	591	18.7	12
E5287385	<5	<1	<1	0.05	30	52	0.57	376	<0.5	<0.01	32.9	287	24.0	<10
E5287386	<5	<1	<1	0.06	27	56	0.59	280	0.9	<0.01	34.2	297	21.6	<10
E5287387	<5	<1	<1	0.04	15	48	0.52	699	0.6	<0.01	36.7	576	27.7	<10
E5287388	<5	<1	<1	0.05	21	53	0.56	610	<0.5	<0.01	36.7	298	28.5	<10
E5287389	<5	<1	<1	0.04	12	47	0.55	444	0.7	<0.01	23.2	458	14.4	<10
E5287390	<5	<1	<1	0.03	13	24	0.27	359	0.6	0.01	14.5	642	12.3	<10
E5287391	<5	<1	<1	0.07	21	47	0.56	430	<0.5	<0.01	36.5	541	24.8	<10
E5287392	<5	<1	<1	0.06	20	47	0.51	485	0.7	<0.01	35.6	476	23.7	<10
E5287393	<5	<1	<1	0.05	30	47	0.46	815	1.6	<0.01	40.3	542	34.0	<10
E5285810	<5	<1	<1	0.08	34	24	0.53	767	<0.5	<0.01	27.7	498	33.4	15
E5285811	<5	<1	<1	0.06	23	16	0.31	1150	<0.5	<0.01	42.5	571	40.4	10
E5285812	<5	<1	<1	0.08	26	25	0.36	863	0.9	<0.01	26.6	744	56.4	18
E5285813	<5	<1	<1	0.04	17	22	0.32	439	<0.5	<0.01	17.8	532	24.8	12
E5285814	<5	<1	<1	0.07	27	29	0.51	808	1.1	<0.01	25.4	554	47.9	13
E5285815	<5	<1	<1	0.07	34	26	0.40	391	<0.5	<0.01	20.7	310	27.7	12
E5285816	<5	<1	<1	0.08	27	3	0.04	98	1.2	<0.01	14.1	207	10.9	17
E5285817	<5	<1	<1	0.07	10	5	0.08	744	<0.5	<0.01	9.7	647	23.1	11
E5285818	<5	<1	<1	0.05	19	20	0.34	920	0.6	<0.01	24.9	680	32.0	<10
E5285819	<5	<1	<1	0.05	27	19	0.23	271	0.7	<0.01	14.6	430	20.6	13
E5285820	<5	<1	<1	0.07	26	40	0.42	503	0.9	<0.01	23.5	480	26.0	14
E5285821	<5	<1	<1	0.06	25	46	0.55	207	<0.5	<0.01	24.8	346	21.7	12
E5285822	<5	<1	<1	0.06	33	35	0.54	167	0.6	<0.01	32.2	392	22.9	<10
E5285823	<5	<1	<1	0.05	32	34	0.44	402	0.9	<0.01	28.4	321	25.7	<10
E5285824	<5	<1	<1	0.08	23	33	0.38	607	<0.5	0.01	22.8	670	66.8	15
E5285825	<5	<1	<1	0.08	34	35	0.38	368	<0.5	<0.01	20.3	319	20.7	14
E5285826	<5	<1	<1	0.06	30	22	0.23	350	0.8	<0.01	17.7	359	28.4	14
E5285827	<5	<1	<1	0.06	37	27	0.29	251	0.6	<0.01	19.0	281	20.9	14
E5285828	<5	<1	<1	0.09	42	41	0.47	738	0.5	<0.01	29.5	353	33.0	15
E5285829	<5	<1	<1	0.08	49	35	0.45	365	<0.5	<0.01	26.1	300	24.8	15
E5285830	<5	<1	<1	0.08	37	46	0.45	421	0.6	<0.01	29.2	302	28.8	14
E5285831	<5	<1	<1	0.07	39	34	0.39	376	<0.5	<0.01	25.8	302	22.5	14

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
E5285832	<5	<1	<1	0.06	35	24	0.29	274	<0.5	<0.01	17.6	342	24.4	11
E5285833	<5	<1	<1	0.05	25	51	0.48	857	<0.5	<0.01	35.5	552	32.3	<10
E5285834	<5	<1	<1	0.05	30	41	0.48	382	<0.5	<0.01	23.3	214	14.5	12
E5285835	<5	<1	<1	0.07	35	41	0.49	406	<0.5	<0.01	26.9	338	19.2	10
E5285836	<5	<1	<1	0.07	34	47	0.57	184	<0.5	<0.01	23.5	342	13.0	12
E5285837	<5	<1	<1	0.08	27	48	0.53	310	1.1	<0.01	26.3	455	15.1	16
E5285838	<5	<1	<1	0.08	29	37	0.44	376	1.0	<0.01	21.7	416	14.4	14
E5285839	<5	<1	<1	0.02	1	<1	0.04	82	<0.5	0.05	0.9	259	2.4	<10
E5285840	<5	<1	<1	0.03	24	17	0.20	445	<0.5	<0.01	22.6	394	34.1	<10
E5285841	<5	<1	<1	0.05	26	25	0.26	130	0.6	<0.01	13.6	258	15.7	<10
E5285842	<5	<1	<1	0.04	44	29	0.35	352	<0.5	<0.01	20.0	425	13.3	<10
E5285843	<5	<1	<1	0.02	12	2	0.02	20	<0.5	0.01	1.9	158	3.2	<10
E5285844	<5	<1	<1	0.02	4	<1	<0.01	11	<0.5	0.02	1.8	90	1.7	<10
E5285845	<5	<1	<1	0.10	36	40	0.52	658	0.5	<0.01	31.7	442	20.0	<10
E5285846	<5	<1	<1	0.10	16	28	0.30	244	0.9	0.02	20.8	440	11.4	12
E5285847	<5	<1	<1	0.03	51	15	0.17	76	<0.5	<0.01	9.7	244	8.3	<10
E5285848	<5	<1	<1	0.04	24	16	0.12	294	0.5	<0.01	10.8	220	15.0	<10
E5285849	<5	<1	<1	0.06	40	33	0.44	633	1.2	<0.01	29.3	451	38.7	<10
E5285850	<5	<1	<1	0.06	38	22	0.30	859	1.6	<0.01	30.5	522	108	<10
E5285851	<5	<1	<1	0.08	42	28	0.40	835	1.0	<0.01	31.4	504	90.2	10
E5285852	<5	<1	<1	0.07	41	26	0.36	515	<0.5	<0.01	27.5	347	32.6	<10
E5285853	<5	<1	<1	0.09	34	13	0.25	558	0.9	<0.01	32.5	387	35.7	11
E5285854	<5	<1	<1	0.07	18	13	0.20	386	1.0	0.02	16.5	564	26.0	16
E5285855	<5	<1	<1	0.09	31	15	0.27	687	0.7	<0.01	24.3	413	54.4	12
E5285856	<5	<1	<1	0.09	29	21	0.37	383	<0.5	0.01	22.8	557	38.1	15
E5285857	<5	<1	<1	0.03	5	6	0.09	265	<0.5	0.03	5.7	435	8.3	<10
E5285858	<5	<1	<1	0.08	33	29	0.42	313	0.8	<0.01	28.4	460	44.5	13
E5285859	<5	<1	<1	0.06	23	26	0.35	506	<0.5	<0.01	24.7	459	25.2	13
E5285860	<5	<1	<1	0.07	30	28	0.37	539	<0.5	<0.01	23.3	500	26.9	12
E5285861	<5	<1	<1	0.06	38	29	0.42	646	<0.5	<0.01	35.6	325	32.3	<10
E5285862	<5	<1	<1	0.06	27	32	0.41	468	0.6	<0.01	20.4	563	21.3	11
E5285863	<5	<1	<1	0.07	34	21	0.28	1100	1.1	<0.01	28.5	397	196	12

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Ga	Hg	In	K	La	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Rb
Unit:	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	5	1	1	0.01	1	1	0.01	1	0.5	0.01	0.5	10	0.5	10
E5285864	<5	<1	<1	0.08	29	37	0.37	502	0.5	<0.01	18.1	264	28.2	16
E5285865	<5	<1	<1	0.06	39	37	0.44	383	0.6	<0.01	24.3	217	96.7	10
E5285866	<5	<1	<1	0.06	34	36	0.46	239	<0.5	<0.01	24.0	368	21.0	12
E5285867	<5	<1	<1	0.06	47	37	0.46	770	<0.5	<0.01	37.1	312	47.0	<10
E5285868	<5	<1	<1	0.07	34	43	0.52	516	<0.5	<0.01	27.4	398	27.9	14
E5285869	<5	<1	<1	0.11	26	36	0.33	201	0.6	0.01	21.3	497	12.6	15
E5285870	<5	<1	<1	0.08	46	45	0.43	174	<0.5	0.01	23.5	317	12.5	12
E5285871	<5	<1	<1	0.09	38	44	0.45	320	0.6	<0.01	28.5	396	20.4	12
E5285872	<5	<1	<1	0.06	30	39	0.34	339	<0.5	<0.01	25.5	433	20.2	10
E5285873	<5	<1	<1	0.08	32	46	0.43	471	<0.5	<0.01	31.3	486	29.6	13
E5285874	<5	<1	<1	0.08	36	49	0.48	480	0.6	<0.01	37.7	449	30.5	11
E5285875	<5	<1	<1	0.07	42	49	0.51	455	0.6	<0.01	35.7	389	22.3	<10
E5285876	<5	<1	<1	0.06	39	44	0.43	357	<0.5	<0.01	28.5	420	22.1	<10
E5285877	<5	<1	<1	0.06	26	40	0.41	315	<0.5	<0.01	25.0	624	17.4	10
E5285878	<5	<1	<1	0.05	29	31	0.35	258	<0.5	<0.01	19.2	521	16.7	<10
E5285879	<5	<1	<1	0.05	27	30	0.34	280	0.6	<0.01	18.6	509	17.3	<10
E5285880	<5	<1	<1	0.06	29	41	0.43	284	1.1	<0.01	34.8	523	20.4	10
E5285881	<5	<1	<1	0.03	16	14	0.15	145	<0.5	0.02	17.9	465	16.6	<10
E5285882	<5	<1	<1	0.03	25	22	0.27	316	<0.5	<0.01	18.4	572	22.3	<10
E5285883	<5	<1	<1	0.05	21	41	0.54	1310	1.2	<0.01	45.0	801	67.0	11
E5285884	<5	<1	<1	0.03	7	8	0.10	95	1.4	0.02	7.9	776	6.2	<10
E5285885	<5	<1	<1	0.07	33	42	0.47	219	<0.5	<0.01	20.9	478	14.0	12
E5285886	<5	<1	<1	0.06	27	34	0.36	352	<0.5	0.03	29.3	487	19.6	<10
E5285887	<5	<1	<1	0.05	23	47	0.47	94	0.8	<0.01	25.2	423	19.9	<10
E5285888	<5	<1	<1	0.07	24	42	0.41	230	0.6	<0.01	30.8	418	20.6	<10

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
E5285760	0.045	<1	2.1	<10	<5	30.0	<10	<10	6	<0.01	<5	<5	15.4	<1
E5285761	0.017	<1	1.5	<10	<5	21.4	<10	<10	<5	0.01	<5	<5	21.8	<1
E5285762	0.059	<1	1.3	<10	<5	10.5	<10	<10	<5	<0.01	<5	<5	17.5	<1
E5285763	0.015	<1	1.5	<10	<5	6.2	<10	<10	5	<0.01	<5	<5	22.6	<1
E5285764	0.101	<1	3.3	<10	<5	40.7	<10	<10	12	<0.01	<5	<5	19.1	<1
E5285765	0.068	1	2.4	<10	<5	59.1	<10	<10	<5	<0.01	<5	<5	12.0	<1
E5285766	0.400	<1	15.1	10	<5	172	<10	<10	<5	<0.01	<5	<5	58.0	<1
E5285767	0.095	4	5.8	13	<5	143	<10	<10	<5	<0.01	<5	<5	14.1	<1
E5285768	0.148	<1	2.0	<10	<5	88.7	<10	<10	5	<0.01	<5	<5	15.3	<1
E5285769	0.065	<1	2.1	<10	<5	19.4	<10	<10	13	<0.01	<5	<5	15.5	<1
E5285770	0.357	<1	2.1	<10	<5	31.0	<10	<10	6	<0.01	<5	<5	14.6	<1
E5285771	1.16	1	1.8	<10	<5	59.6	<10	<10	5	<0.01	<5	<5	12.1	<1
E5285772	0.008	<1	0.9	<10	<5	8.1	<10	<10	7	<0.01	<5	<5	14.0	<1
E5285773	0.023	<1	1.0	<10	<5	7.4	<10	<10	11	<0.01	<5	<5	14.6	<1
E5285774	0.014	<1	1.7	<10	<5	10.3	<10	<10	10	<0.01	<5	<5	17.6	<1
E5285775	0.060	<1	2.3	12	<5	33.3	<10	<10	11	<0.01	<5	<5	17.4	<1
E5285776	0.053	<1	2.1	<10	<5	34.4	<10	<10	6	<0.01	<5	<5	19.8	<1
E5285777	0.063	2	2.8	<10	<5	49.7	<10	<10	10	<0.01	<5	<5	12.8	<1
E5285778	0.020	2	2.7	<10	<5	60.9	<10	<10	10	<0.01	<5	<5	10.0	<1
E5285779	0.008	<1	1.9	<10	<5	8.9	<10	<10	11	<0.01	<5	<5	20.3	<1
E5287060	0.035	<1	1.8	11	<5	14.0	<10	<10	5	<0.01	<5	<5	16.2	<1
E5287061	0.089	3	4.9	<10	<5	34.6	<10	<10	13	<0.01	<5	<5	15.9	<1
E5287062	0.061	3	5.6	<10	<5	68.0	<10	<10	17	<0.01	<5	<5	14.5	<1
E5287063	0.035	3	5.3	<10	<5	47.9	<10	<10	16	<0.01	<5	<5	15.1	<1
E5287064	0.019	<1	4.3	<10	<5	23.6	<10	<10	8	0.01	<5	<5	22.6	<1
E5287065	0.019	<1	4.4	<10	<5	26.8	<10	<10	10	<0.01	<5	<5	20.0	<1
E5287066	0.015	<1	4.3	<10	<5	19.8	<10	<10	10	<0.01	<5	<5	20.0	<1
E5287067	0.047	4	3.7	12	<5	56.2	<10	<10	<5	<0.01	<5	<5	9.6	<1
E5287068	0.045	2	3.4	<10	<5	42.6	<10	<10	<5	<0.01	<5	<5	13.9	<1
E5287069	0.035	2	3.6	<10	<5	33.6	<10	<10	8	<0.01	<5	<5	14.3	<1
E5287070	0.028	2	3.0	<10	<5	21.1	<10	<10	9	<0.01	<5	<5	11.4	<1
E5287071	0.035	<1	1.2	<10	<5	22.5	<10	<10	<5	<0.01	<5	<5	15.2	<1

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
E5287072	0.016	<1	1.3	<10	<5	4.6	<10	<10	8	<0.01	<5	<5	18.6	<1
E5287073	0.018	<1	1.0	<10	<5	6.1	<10	<10	6	<0.01	<5	<5	16.6	<1
E5287074	0.036	<1	1.3	<10	<5	8.1	<10	<10	<5	<0.01	<5	<5	19.8	<1
E5287075	0.026	<1	1.3	<10	<5	5.9	<10	<10	7	<0.01	<5	<5	20.8	<1
E5287076	0.029	<1	1.3	<10	<5	6.4	<10	<10	6	<0.01	<5	<5	16.6	<1
E5287077	0.018	<1	1.5	<10	<5	11.2	<10	<10	6	<0.01	<5	<5	17.1	<1
E5287078	0.044	2	2.2	<10	<5	46.7	<10	<10	9	<0.01	<5	<5	11.9	<1
E5287079	0.029	<1	1.3	<10	<5	5.3	<10	<10	<5	<0.01	<5	<5	17.4	<1
E5287080	0.014	<1	1.2	<10	<5	4.8	<10	<10	7	<0.01	<5	<5	16.9	<1
E5287081	0.021	<1	2.3	<10	<5	12.2	<10	<10	9	<0.01	<5	<5	15.4	<1
E5287082	0.237	5	2.6	<10	13	526	<10	<10	<5	<0.01	<5	<5	4.3	<1
E5287083	0.038	<1	1.2	<10	<5	7.3	<10	<10	<5	<0.01	<5	<5	17.1	<1
E5287084	0.020	<1	1.6	<10	<5	9.3	<10	<10	7	<0.01	<5	<5	15.4	<1
E5287085	0.028	<1	1.7	<10	<5	12.0	<10	<10	<5	<0.01	<5	<5	13.0	<1
E5287086	0.022	<1	1.2	<10	<5	4.8	<10	<10	6	<0.01	<5	<5	15.1	<1
E5287087	0.019	<1	1.4	<10	<5	5.0	<10	<10	6	<0.01	<5	<5	16.1	<1
E5287088	0.021	<1	1.0	<10	<5	5.9	<10	<10	<5	<0.01	<5	<5	18.8	<1
E5287089	0.044	<1	0.9	<10	<5	4.5	<10	<10	<5	<0.01	<5	<5	18.0	<1
E5287090	0.016	<1	2.8	<10	<5	5.9	<10	<10	8	<0.01	<5	<5	9.0	<1
E5287091	0.024	<1	1.4	<10	<5	7.8	<10	<10	<5	<0.01	<5	<5	13.7	<1
E5287092	0.037	<1	1.2	<10	<5	13.8	<10	<10	5	<0.01	<5	<5	15.6	<1
E5287093	0.020	<1	1.0	<10	<5	5.7	<10	<10	<5	<0.01	<5	<5	15.8	<1
E5287094	0.032	<1	1.2	<10	<5	20.1	<10	<10	<5	<0.01	<5	<5	16.7	<1
E5287095	0.013	<1	0.9	<10	<5	4.8	<10	<10	5	<0.01	<5	<5	12.7	<1
E5287096	0.017	<1	1.1	<10	<5	5.2	<10	<10	5	<0.01	<5	<5	15.5	<1
E5287097	0.015	<1	1.2	<10	<5	8.6	<10	<10	<5	<0.01	<5	<5	14.3	<1
E5287098	0.022	<1	1.3	<10	<5	7.5	<10	<10	<5	<0.01	<5	<5	17.7	<1
E5287099	0.023	<1	1.3	<10	<5	11.9	<10	<10	<5	0.02	<5	<5	30.4	<1
E5287100	0.049	<1	0.8	<10	<5	10.0	<10	<10	<5	0.02	<5	<5	23.3	<1
E5287101	0.016	<1	1.7	<10	<5	6.4	<10	<10	8	<0.01	<5	<5	11.1	<1
E5287102	0.012	<1	1.5	<10	<5	6.2	<10	<10	7	<0.01	<5	<5	15.2	<1
E5287103	0.011	<1	1.2	<10	<5	4.1	<10	<10	7	<0.01	<5	<5	15.7	<1

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
E5287104	0.014	<1	1.1	<10	<5	7.7	<10	<10	6	<0.01	<5	<5	15.3	<1
E5287105	0.020	<1	0.8	<10	<5	5.7	<10	<10	5	<0.01	<5	<5	21.1	<1
E5287106	0.018	<1	1.1	15	<5	5.9	<10	<10	<5	<0.01	<5	<5	13.3	<1
E5287107	0.066	<1	2.1	<10	<5	18.9	<10	<10	<5	<0.01	<5	<5	13.6	<1
E5287108	0.014	<1	1.6	<10	<5	7.4	<10	<10	6	<0.01	<5	<5	14.1	<1
E5287109	0.023	<1	0.7	<10	<5	3.5	<10	<10	<5	<0.01	<5	<5	15.9	<1
E5287110	0.023	<1	1.1	<10	<5	10.6	<10	<10	<5	<0.01	<5	<5	17.2	<1
E5287111	0.031	<1	0.5	<10	<5	4.1	<10	<10	<5	<0.01	<5	<5	20.1	<1
E5287112	0.030	<1	<0.5	<10	<5	3.6	<10	<10	<5	0.01	<5	<5	20.3	<1
E5287113	0.018	<1	1.0	<10	<5	4.1	<10	<10	<5	0.02	<5	<5	21.7	<1
E5287114	0.016	<1	1.3	<10	<5	5.7	<10	<10	<5	0.02	<5	<5	20.8	<1
E5287115	0.041	<1	<0.5	<10	<5	5.6	<10	<10	<5	<0.01	<5	<5	19.5	<1
E5287116	0.039	<1	1.8	<10	<5	14.8	<10	<10	<5	0.02	<5	<5	21.5	<1
E5287117	0.054	<1	1.6	<10	<5	18.2	<10	<10	<5	0.02	<5	<5	24.1	<1
E5287118	0.014	<1	1.0	<10	<5	4.2	<10	<10	<5	0.03	<5	<5	25.2	<1
E5287119	0.018	<1	1.3	<10	<5	4.6	<10	<10	<5	0.03	<5	<5	26.5	<1
E5287120	0.025	<1	0.9	<10	<5	8.7	<10	<10	<5	0.02	<5	<5	26.3	<1
E5287121	0.024	<1	2.9	<10	<5	21.3	<10	<10	<5	<0.01	<5	<5	9.7	<1
E5287122	0.038	<1	0.9	<10	<5	15.5	<10	<10	<5	0.03	<5	<5	24.0	<1
E5287123	0.050	<1	<0.5	<10	<5	13.3	<10	<10	<5	0.02	<5	<5	8.0	<1
E5287124	0.058	<1	1.9	<10	<5	17.9	<10	<10	<5	0.01	<5	<5	19.5	<1
E5287125	0.031	<1	<0.5	<10	<5	14.4	<10	<10	<5	0.02	<5	<5	9.8	<1
E5287126	0.032	<1	1.3	<10	<5	11.1	<10	<10	<5	0.01	<5	<5	18.4	<1
E5287127	0.036	<1	1.7	<10	<5	11.7	<10	<10	7	0.02	<5	<5	21.0	<1
E5287128	0.018	<1	0.8	<10	<5	5.9	<10	<10	<5	0.02	<5	<5	22.6	<1
E5287129	0.022	<1	1.7	<10	<5	11.0	<10	<10	<5	0.02	<5	<5	22.5	<1
E5287130	0.017	<1	1.4	<10	<5	6.5	<10	<10	<5	0.01	<5	<5	21.2	<1
E5287131	0.067	<1	1.2	<10	<5	10.7	<10	<10	<5	<0.01	<5	<5	18.2	<1
E5287132	0.012	<1	1.2	<10	<5	<0.5	<10	<10	11	<0.01	<5	<5	9.0	<1
E5287133	0.021	<1	1.3	<10	<5	2.7	<10	<10	7	<0.01	<5	<5	23.8	<1
E5287134	0.028	<1	1.1	<10	<5	11.2	<10	<10	<5	0.01	<5	<5	23.1	<1
E5287135	0.090	1	1.3	<10	<5	33.1	<10	<10	<5	<0.01	<5	<5	10.0	<1

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
E5287136	0.035	<1	1.6	<10	<5	15.4	<10	<10	<5	<0.01	<5	<5	20.1	<1
E5287137	0.018	<1	2.2	<10	<5	17.9	<10	<10	<5	<0.01	<5	<5	14.0	<1
E5287138	0.022	<1	1.3	<10	<5	8.6	<10	<10	6	<0.01	<5	<5	14.8	<1
E5287139	0.021	<1	2.2	<10	<5	53.3	<10	<10	6	<0.01	<5	<5	14.3	<1
E5287140	0.041	<1	2.1	<10	<5	28.5	<10	<10	<5	<0.01	<5	<5	13.1	<1
E5287141	0.026	<1	2.4	<10	<5	17.5	<10	<10	<5	<0.01	<5	<5	14.8	<1
E5287142	0.043	<1	2.5	<10	<5	18.4	<10	<10	<5	<0.01	<5	<5	15.1	<1
E5287143	0.007	<1	1.9	<10	<5	12.0	<10	<10	7	<0.01	<5	<5	13.7	<1
E5287144	0.010	<1	2.2	<10	<5	10.6	<10	<10	7	<0.01	<5	<5	14.5	<1
E5287145	0.033	<1	1.8	<10	<5	8.1	<10	<10	5	<0.01	<5	<5	14.9	<1
E5287146	0.025	<1	1.4	<10	<5	10.1	<10	<10	<5	<0.01	<5	<5	14.4	<1
E5287147	0.040	<1	0.8	<10	<5	6.4	<10	<10	<5	<0.01	<5	<5	12.4	<1
E5287148	0.042	<1	1.4	<10	<5	7.9	<10	<10	<5	<0.01	<5	<5	18.0	<1
E5287149	0.040	<1	0.6	<10	<5	2.3	<10	<10	<5	<0.01	<5	<5	15.5	<1
E5287150	0.026	1	2.5	<10	<5	25.8	<10	<10	8	<0.01	<5	<5	13.2	<1
E5287151	0.021	<1	<0.5	<10	<5	14.4	<10	<10	<5	0.02	<5	<5	13.5	<1
E5287152	0.144	5	3.8	<10	<5	671	<10	<10	12	<0.01	<5	<5	8.3	<1
E5287153	0.029	1	2.9	<10	<5	29.9	<10	<10	8	<0.01	<5	<5	10.5	<1
E5287154	0.026	1	3.0	<10	<5	27.9	<10	<10	9	<0.01	<5	<5	10.1	<1
E5287155	0.031	1	2.5	<10	<5	41.4	<10	<10	6	<0.01	<5	<5	10.5	<1
E5287156	0.158	5	3.7	<10	<5	809	<10	<10	9	<0.01	<5	<5	8.1	<1
E5287157	0.165	6	4.4	<10	6	873	<10	<10	11	<0.01	<5	<5	5.8	<1
E5287310	0.087	<1	5.2	<10	<5	33.4	<10	<10	14	<0.01	<5	<5	17.4	<1
E5287311	0.039	<1	3.2	<10	<5	17.5	<10	<10	12	<0.01	<5	<5	17.3	<1
E5287312	0.081	<1	3.5	10	<5	26.0	<10	<10	12	<0.01	<5	<5	15.1	<1
E5287313	0.073	<1	4.1	<10	<5	32.5	<10	<10	14	<0.01	<5	<5	14.1	<1
E5287314	0.075	<1	4.3	<10	<5	37.5	<10	<10	14	<0.01	<5	<5	14.1	<1
E5287315	0.028	<1	2.9	<10	<5	24.9	<10	<10	6	<0.01	<5	<5	18.0	<1
E5287316	0.017	<1	2.0	<10	<5	6.7	<10	<10	11	<0.01	<5	<5	14.6	<1
E5287317	0.076	1	3.0	<10	<5	96.3	<10	<10	<5	<0.01	<5	<5	11.4	<1
E5287318	0.038	<1	4.3	<10	<5	148	<10	<10	10	0.01	<5	<5	16.4	<1
E5287319	0.030	1	3.5	<10	<5	51.9	<10	<10	9	<0.01	<5	<5	15.5	<1

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
E5287320	0.018	<1	2.7	<10	<5	27.9	<10	<10	9	<0.01	<5	<5	15.6	<1
E5287321	0.044	<1	1.3	<10	<5	25.5	<10	<10	<5	0.01	<5	<5	20.2	<1
E5287322	0.034	1	2.5	<10	<5	35.6	<10	<10	9	<0.01	<5	<5	10.3	<1
E5287323	0.028	<1	1.5	<10	<5	9.5	<10	<10	<5	<0.01	<5	<5	13.5	<1
E5287324	0.043	<1	3.9	<10	<5	27.4	<10	<10	16	<0.01	<5	<5	14.3	<1
E5287325	0.098	3	3.7	<10	<5	94.4	<10	<10	16	<0.01	<5	<5	12.1	<1
E5287326	0.036	<1	2.6	<10	<5	30.8	<10	<10	8	<0.01	<5	<5	12.1	<1
E5287327	0.020	<1	4.0	22	<5	46.0	<10	<10	9	<0.01	<5	<5	15.6	<1
E5287328	0.030	<1	2.0	<10	<5	36.2	<10	<10	6	<0.01	<5	<5	15.7	<1
E5287329	0.024	<1	2.4	<10	<5	17.1	<10	<10	9	<0.01	<5	<5	12.4	<1
E5287330	0.028	<1	0.9	<10	<5	8.7	<10	<10	<5	<0.01	<5	<5	18.8	<1
E5287331	0.013	<1	1.5	<10	<5	9.6	<10	<10	7	<0.01	<5	<5	17.9	<1
E5287332	0.012	<1	1.5	<10	<5	3.8	<10	<10	6	<0.01	<5	<5	18.1	<1
E5287333	0.005	<1	1.9	<10	<5	12.0	<10	<10	9	<0.01	<5	<5	15.0	<1
E5287334	0.016	<1	1.3	<10	<5	7.1	<10	<10	<5	0.02	<5	<5	19.6	<1
E5287335	0.008	<1	1.8	<10	<5	5.9	<10	<10	9	0.02	<5	<5	22.6	<1
E5287336	0.008	<1	4.5	<10	<5	25.9	<10	<10	14	0.01	<5	<5	19.1	<1
E5287337	0.022	<1	1.6	<10	<5	13.1	<10	<10	<5	<0.01	<5	<5	15.6	<1
E5287338	0.018	<1	1.6	<10	<5	13.6	<10	<10	5	<0.01	<5	<5	14.4	<1
E5287339	0.011	<1	0.9	<10	<5	3.8	<10	<10	<5	<0.01	<5	<5	19.3	<1
E5287340	0.012	<1	1.5	<10	<5	24.3	<10	<10	11	<0.01	<5	<5	11.8	<1
E5287341	0.013	<1	<0.5	<10	<5	3.5	<10	<10	<5	<0.01	<5	<5	9.1	<1
E5287342	0.038	<1	1.7	<10	<5	34.4	<10	<10	<5	<0.01	<5	<5	19.4	<1
E5287343	0.015	<1	1.1	<10	<5	5.5	<10	<10	5	<0.01	<5	<5	17.7	<1
E5287344	0.011	<1	2.4	<10	<5	26.1	<10	<10	10	<0.01	<5	<5	16.6	<1
E5287345	0.013	<1	2.1	<10	<5	23.7	<10	<10	8	<0.01	<5	<5	15.6	<1
E5287346	0.010	<1	2.0	<10	<5	13.1	<10	<10	9	<0.01	<5	<5	16.6	<1
E5287347	0.253	<1	2.7	<10	<5	77.7	<10	<10	9	<0.01	<5	<5	14.9	<1
E5287348	0.066	<1	1.8	<10	<5	22.4	<10	<10	8	<0.01	<5	<5	14.8	<1
E5287349	0.180	<1	2.3	<10	<5	62.8	<10	<10	7	<0.01	<5	<5	14.0	<1
E5287350	0.116	<1	2.4	<10	<5	76.2	<10	<10	9	<0.01	<5	<5	15.4	<1
E5287351	0.154	<1	2.4	<10	<5	47.2	<10	<10	10	<0.01	<5	<5	14.5	<1

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
E5287352	0.160	<1	2.2	<10	<5	29.9	<10	<10	9	<0.01	<5	<5	14.5	<1
E5287353	0.131	<1	2.1	<10	<5	32.2	<10	<10	8	<0.01	<5	<5	14.8	<1
E5287354	0.053	<1	2.0	<10	<5	37.6	<10	<10	<5	0.03	<5	<5	22.4	<1
E5287355	0.085	<1	2.1	<10	<5	28.1	<10	<10	<5	0.01	<5	<5	16.8	<1
E5287356	0.067	<1	1.5	<10	<5	17.8	<10	<10	6	<0.01	<5	<5	12.6	<1
E5287357	0.077	<1	1.9	<10	<5	33.9	<10	<10	8	<0.01	<5	<5	12.7	<1
E5287358	0.096	<1	2.0	<10	<5	39.6	<10	<10	7	<0.01	<5	<5	13.1	<1
E5287359	0.073	<1	2.2	<10	<5	28.4	<10	<10	7	<0.01	<5	<5	13.6	<1
E5287360	0.099	<1	1.8	<10	<5	38.6	<10	<10	7	<0.01	<5	<5	13.4	<1
E5287361	0.082	<1	2.0	<10	<5	39.4	<10	<10	8	<0.01	<5	<5	13.6	<1
E5287362	0.120	<1	1.8	<10	<5	34.8	<10	<10	6	<0.01	<5	<5	12.8	<1
E5287363	0.087	<1	2.1	<10	<5	43.2	<10	<10	7	<0.01	<5	<5	13.5	<1
E5287364	0.097	<1	2.0	<10	<5	39.6	<10	<10	7	<0.01	<5	<5	13.7	<1
E5287365	0.071	<1	2.0	<10	<5	22.4	<10	<10	8	<0.01	<5	<5	13.2	<1
E5287366	0.104	<1	1.9	<10	<5	45.1	<10	<10	6	<0.01	<5	<5	13.1	<1
E5287367	0.041	<1	1.9	<10	<5	28.7	<10	<10	6	<0.01	<5	<5	14.1	<1
E5287368	0.095	<1	2.1	<10	<5	59.6	<10	<10	8	<0.01	<5	<5	13.1	<1
E5287369	0.111	<1	2.0	<10	<5	32.4	<10	<10	8	<0.01	<5	<5	13.8	<1
E5287370	0.131	<1	2.1	<10	<5	54.3	<10	<10	8	<0.01	<5	<5	13.7	<1
E5287371	0.143	<1	2.1	<10	<5	30.1	<10	<10	7	<0.01	<5	<5	14.3	<1
E5287372	0.014	<1	2.1	<10	<5	15.1	<10	<10	6	<0.01	<5	<5	14.3	<1
E5287373	0.014	<1	1.8	<10	<5	17.9	<10	<10	<5	<0.01	<5	<5	15.3	<1
E5287374	0.007	<1	2.8	<10	<5	25.2	<10	<10	12	<0.01	<5	<5	14.7	<1
E5287375	0.010	<1	1.3	<10	<5	3.6	<10	<10	7	<0.01	<5	<5	15.8	<1
E5287376	0.006	<1	1.4	<10	<5	3.4	<10	<10	8	<0.01	<5	<5	14.8	<1
E5287377	<0.005	<1	1.5	<10	<5	6.0	<10	<10	10	<0.01	<5	<5	14.8	<1
E5287378	0.014	<1	<0.5	<10	<5	2.8	<10	<10	<5	<0.01	<5	<5	14.5	<1
E5287379	0.008	<1	1.5	<10	<5	5.5	<10	<10	<5	<0.01	<5	<5	12.7	<1
E5287380	0.020	<1	1.1	<10	<5	10.3	<10	<10	<5	<0.01	<5	<5	15.1	<1
E5287381	0.038	<1	2.1	<10	<5	23.1	<10	<10	6	<0.01	<5	<5	15.8	<1
E5287382	0.038	<1	1.6	<10	<5	15.3	<10	<10	<5	<0.01	<5	<5	16.6	<1
E5287383	0.063	<1	2.8	<10	<5	24.0	<10	<10	5	<0.01	<5	<5	17.1	<1

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
E5287384	0.046	<1	1.0	<10	<5	9.1	<10	<10	<5	<0.01	<5	<5	18.2	<1
E5287385	0.013	<1	1.7	<10	<5	10.7	<10	<10	6	<0.01	<5	<5	15.2	<1
E5287386	0.021	<1	2.2	<10	<5	13.6	<10	<10	6	<0.01	<5	<5	15.4	<1
E5287387	0.039	<1	3.1	<10	<5	17.6	<10	<10	5	<0.01	<5	<5	16.0	<1
E5287388	0.020	<1	2.0	<10	<5	12.7	<10	<10	6	<0.01	<5	<5	16.1	<1
E5287389	0.035	<1	1.3	<10	<5	16.0	<10	<10	<5	0.02	<5	<5	19.3	<1
E5287390	0.042	<1	0.6	<10	<5	10.2	<10	<10	<5	<0.01	<5	<5	15.1	<1
E5287391	0.031	<1	2.8	<10	<5	24.1	<10	<10	6	<0.01	<5	<5	15.5	<1
E5287392	0.019	<1	2.7	<10	<5	26.6	<10	<10	6	<0.01	<5	<5	13.8	<1
E5287393	0.027	<1	2.9	<10	<5	27.2	<10	<10	9	<0.01	<5	<5	16.5	<1
E5285810	0.043	<1	2.0	<10	<5	22.0	<10	<10	<5	<0.01	<5	<5	15.2	<1
E5285811	0.067	2	2.0	<10	<5	33.6	<10	<10	<5	<0.01	<5	<5	11.9	<1
E5285812	0.058	<1	1.4	<10	<5	18.7	<10	<10	<5	<0.01	<5	<5	16.6	<1
E5285813	0.046	<1	<0.5	<10	<5	5.1	<10	<10	<5	<0.01	<5	<5	18.3	<1
E5285814	0.022	<1	2.5	<10	<5	14.8	<10	<10	7	<0.01	<5	<5	30.7	<1
E5285815	0.015	<1	1.1	<10	<5	6.9	<10	<10	5	<0.01	<5	<5	17.3	<1
E5285816	0.024	<1	0.9	<10	<5	14.7	<10	<10	<5	0.01	<5	<5	39.1	<1
E5285817	0.101	2	1.4	<10	<5	41.3	<10	<10	<5	<0.01	<5	<5	7.5	<1
E5285818	0.085	2	1.6	<10	<5	43.8	<10	<10	<5	<0.01	<5	<5	11.9	<1
E5285819	0.035	<1	0.5	<10	<5	5.5	<10	<10	<5	<0.01	<5	<5	20.9	<1
E5285820	0.039	<1	1.3	<10	<5	21.5	<10	<10	<5	<0.01	<5	<5	18.2	<1
E5285821	0.026	<1	2.1	<10	<5	12.8	<10	<10	8	<0.01	<5	<5	15.9	<1
E5285822	0.016	<1	2.4	<10	<5	11.8	<10	<10	11	<0.01	<5	<5	14.8	<1
E5285823	0.023	<1	2.2	<10	<5	15.3	<10	<10	12	<0.01	<5	<5	14.2	<1
E5285824	0.084	<1	1.8	<10	<5	26.8	<10	<10	<5	<0.01	<5	<5	15.3	<1
E5285825	0.014	<1	1.3	<10	<5	6.8	<10	<10	7	<0.01	<5	<5	16.7	<1
E5285826	0.019	<1	0.9	<10	<5	5.3	<10	<10	5	<0.01	<5	<5	13.9	<1
E5285827	0.014	<1	1.0	<10	<5	4.6	<10	<10	7	<0.01	<5	<5	18.9	<1
E5285828	0.016	<1	1.5	<10	<5	7.8	<10	<10	8	<0.01	<5	<5	18.3	<1
E5285829	0.009	<1	1.5	<10	<5	7.6	<10	<10	8	<0.01	<5	<5	14.4	<1
E5285830	0.016	<1	1.2	<10	<5	7.3	<10	<10	9	<0.01	<5	<5	17.8	<1
E5285831	0.013	<1	1.7	<10	<5	7.3	<10	<10	8	<0.01	<5	<5	18.4	<1

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
E5285832	0.019	<1	0.8	<10	<5	4.9	<10	<10	7	<0.01	<5	<5	18.7	<1
E5285833	0.037	<1	1.5	<10	<5	6.3	<10	<10	7	<0.01	<5	<5	17.3	<1
E5285834	0.009	<1	1.3	11	<5	5.6	<10	<10	8	0.01	<5	<5	20.8	<1
E5285835	0.009	<1	1.2	<10	<5	9.0	<10	<10	7	<0.01	<5	<5	17.4	<1
E5285836	0.012	<1	1.5	<10	<5	17.0	<10	<10	7	<0.01	<5	<5	17.7	<1
E5285837	0.040	<1	1.9	<10	<5	11.5	<10	<10	<5	<0.01	<5	<5	22.2	<1
E5285838	0.022	<1	1.1	<10	<5	9.3	<10	<10	<5	<0.01	<5	<5	16.8	<1
E5285839	0.039	1	<0.5	<10	<5	17.4	<10	<10	<5	0.03	<5	<5	10.4	<1
E5285840	0.021	<1	0.7	<10	<5	5.6	<10	<10	<5	<0.01	<5	<5	16.4	<1
E5285841	0.013	<1	0.6	<10	<5	8.1	<10	<10	<5	<0.01	<5	<5	15.1	<1
E5285842	<0.005	<1	1.2	<10	<5	10.7	<10	<10	11	<0.01	<5	<5	11.7	<1
E5285843	0.011	<1	<0.5	<10	<5	3.5	<10	<10	<5	<0.01	<5	<5	6.8	<1
E5285844	0.010	<1	<0.5	<10	<5	5.0	<10	<10	<5	0.01	<5	<5	7.2	<1
E5285845	0.010	<1	2.3	<10	<5	26.9	<10	<10	11	<0.01	<5	<5	14.6	<1
E5285846	0.055	<1	1.5	<10	<5	58.0	<10	<10	<5	<0.01	<5	<5	14.4	<1
E5285847	<0.005	<1	0.5	<10	<5	4.6	<10	<10	6	<0.01	<5	<5	12.6	<1
E5285848	0.017	<1	1.0	<10	<5	21.1	<10	<10	7	<0.01	<5	<5	12.8	<1
E5285849	0.017	<1	1.8	<10	<5	12.3	<10	<10	8	<0.01	<5	<5	14.6	<1
E5285850	0.016	<1	2.4	<10	<5	14.6	<10	<10	12	<0.01	<5	<5	12.1	<1
E5285851	0.016	<1	2.6	<10	<5	15.2	<10	<10	11	0.01	<5	<5	21.0	<1
E5285852	0.012	<1	2.0	<10	<5	14.4	<10	<10	11	<0.01	<5	<5	13.3	<1
E5285853	0.017	<1	2.2	<10	<5	16.4	<10	<10	12	<0.01	<5	<5	10.1	<1
E5285854	0.064	2	1.6	<10	<5	34.6	<10	<10	<5	<0.01	<5	<5	11.6	<1
E5285855	0.019	<1	2.0	<10	<5	16.0	<10	<10	9	<0.01	<5	<5	12.7	<1
E5285856	0.019	<1	2.0	<10	<5	18.2	<10	<10	6	<0.01	<5	<5	16.4	<1
E5285857	0.047	<1	0.5	<10	<5	18.8	<10	<10	<5	0.02	<5	<5	20.9	<1
E5285858	0.022	<1	2.0	<10	<5	11.5	<10	<10	7	<0.01	<5	<5	14.4	<1
E5285859	0.028	<1	1.2	<10	<5	11.5	<10	<10	<5	<0.01	<5	<5	15.5	<1
E5285860	0.025	<1	1.1	<10	<5	8.3	<10	<10	<5	<0.01	<5	<5	16.9	<1
E5285861	0.010	<1	2.0	<10	<5	9.2	<10	<10	11	<0.01	<5	<5	15.1	<1
E5285862	0.030	<1	1.3	<10	<5	6.7	<10	<10	<5	<0.01	<5	<5	16.3	<1
E5285863	0.015	<1	2.9	<10	<5	11.9	<10	<10	9	<0.01	<5	<5	11.4	<1

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	S	Sb	Sc	Se	Sn	Sr	Ta	Te	Th	Ti	Tl	U	V	W
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.005	1	0.5	10	5	0.5	10	10	5	0.01	5	5	0.5	1
E5285864	0.017	<1	1.1	<10	<5	6.3	<10	<10	6	<0.01	<5	<5	18.5	<1
E5285865	0.009	<1	1.3	<10	<5	6.0	<10	<10	9	<0.01	<5	<5	16.5	<1
E5285866	0.025	<1	1.9	<10	<5	15.5	<10	<10	10	<0.01	<5	<5	13.9	<1
E5285867	0.010	<1	2.0	<10	<5	10.6	<10	<10	12	<0.01	<5	<5	14.1	<1
E5285868	0.012	<1	1.7	<10	<5	13.1	<10	<10	7	<0.01	<5	<5	15.8	<1
E5285869	0.029	<1	1.5	<10	<5	12.6	<10	<10	<5	<0.01	<5	<5	15.1	<1
E5285870	0.007	<1	1.5	<10	<5	10.7	<10	<10	<5	<0.01	<5	<5	15.4	<1
E5285871	0.017	<1	1.6	<10	<5	8.5	<10	<10	<5	<0.01	<5	<5	16.9	<1
E5285872	0.022	<1	1.3	<10	<5	8.0	<10	<10	<5	<0.01	<5	<5	15.2	<1
E5285873	0.031	<1	1.5	13	<5	9.8	<10	<10	<5	<0.01	<5	<5	16.5	<1
E5285874	0.019	<1	1.5	<10	<5	8.4	<10	<10	6	<0.01	<5	<5	17.8	<1
E5285875	0.010	<1	1.5	<10	<5	10.5	<10	<10	8	<0.01	<5	<5	16.7	<1
E5285876	0.009	<1	1.6	<10	<5	7.7	<10	<10	8	<0.01	<5	<5	16.0	<1
E5285877	0.023	<1	1.6	<10	<5	15.6	<10	<10	<5	0.01	<5	<5	20.6	<1
E5285878	0.028	<1	0.9	<10	<5	5.7	<10	<10	<5	<0.01	<5	<5	19.1	<1
E5285879	0.027	<1	0.9	<10	<5	5.6	<10	<10	<5	<0.01	<5	<5	18.7	<1
E5285880	0.023	<1	1.9	<10	<5	20.7	<10	<10	<5	<0.01	<5	<5	18.3	<1
E5285881	0.032	<1	1.3	<10	<5	17.3	<10	<10	<5	<0.01	<5	<5	11.9	<1
E5285882	0.026	<1	0.7	<10	<5	4.2	<10	<10	<5	<0.01	<5	<5	19.1	<1
E5285883	0.033	<1	1.4	<10	<5	5.3	<10	<10	10	<0.01	<5	<5	20.4	<1
E5285884	0.045	<1	<0.5	<10	<5	10.9	<10	<10	<5	<0.01	<5	<5	11.5	<1
E5285885	0.016	<1	1.1	<10	<5	16.8	<10	<10	5	<0.01	<5	<5	14.0	<1
E5285886	0.018	<1	1.6	<10	<5	16.2	<10	<10	<5	<0.01	<5	<5	13.0	4
E5285887	0.042	<1	2.2	<10	<5	28.2	<10	<10	7	<0.01	<5	<5	14.2	<1
E5285888	0.046	<1	2.3	<10	<5	29.3	<10	<10	6	<0.01	<5	<5	13.9	<1

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Y	Zn	Zr	As-OL
Unit:	ppm	ppm	ppm	%
Sample Description RDL:	1	0.5	5	0.01
E5285760	9	110	<5	
E5285761	5	67.3	<5	
E5285762	4	70.7	<5	
E5285763	5	110	<5	
E5285764	12	161	6	
E5285765	12	78.8	<5	
E5285766	15	152	<5	1.19
E5285767	50	107	<5	
E5285768	10	109	<5	
E5285769	7	127	<5	
E5285770	10	117	<5	
E5285771	7	92.1	<5	
E5285772	3	99.3	<5	
E5285773	3	104	<5	
E5285774	7	84.2	<5	
E5285775	8	140	<5	
E5285776	8	118	<5	
E5285777	11	126	<5	
E5285778	8	76.4	<5	
E5285779	6	87.2	<5	
E5287060	7	96.6	<5	
E5287061	11	127	12	
E5287062	14	128	12	
E5287063	14	133	10	
E5287064	16	145	<5	
E5287065	16	123	<5	
E5287066	16	133	<5	
E5287067	21	133	<5	
E5287068	19	98.3	<5	
E5287069	19	131	<5	
E5287070	14	81.7	<5	
E5287071	5	73.4	<5	

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Y	Zn	Zr	As-OL
Unit:	ppm	ppm	ppm	%
Sample Description RDL:	1	0.5	5	0.01
E5287072	4	91.9	<5	
E5287073	4	75.5	<5	
E5287074	6	93.2	<5	
E5287075	4	73.9	<5	
E5287076	4	86.6	<5	
E5287077	6	89.9	<5	
E5287078	12	80.9	<5	
E5287079	4	82.5	<5	
E5287080	4	73.2	<5	
E5287081	10	115	<5	
E5287082	11	39.0	<5	
E5287083	4	72.9	<5	
E5287084	5	95.5	<5	
E5287085	6	73.3	<5	
E5287086	3	82.8	<5	
E5287087	4	78.1	<5	
E5287088	3	117	<5	
E5287089	2	60.2	<5	
E5287090	12	86.9	<5	
E5287091	6	70.1	<5	
E5287092	3	123	<5	
E5287093	3	67.0	<5	
E5287094	3	75.2	<5	
E5287095	3	59.3	<5	
E5287096	3	83.6	<5	
E5287097	4	89.2	<5	
E5287098	4	72.3	<5	
E5287099	5	88.6	<5	
E5287100	4	49.5	<5	
E5287101	11	152	<5	
E5287102	6	84.3	<5	
E5287103	5	76.8	<5	

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Y	Zn	Zr	As-OL
Unit:	ppm	ppm	ppm	%
Sample Description RDL:	1	0.5	5	0.01
E5287104	3	81.3	<5	
E5287105	3	83.7	<5	
E5287106	4	62.5	<5	
E5287107	7	86.3	<5	
E5287108	6	79.4	<5	
E5287109	2	45.9	<5	
E5287110	4	64.6	<5	
E5287111	2	66.9	<5	
E5287112	2	48.2	<5	
E5287113	4	67.3	<5	
E5287114	6	71.6	<5	
E5287115	3	51.1	<5	
E5287116	8	79.1	<5	
E5287117	7	84.8	<5	
E5287118	4	79.2	<5	
E5287119	4	73.8	<5	
E5287120	4	66.1	<5	
E5287121	24	101	<5	
E5287122	4	65.4	<5	
E5287123	3	20.1	<5	
E5287124	9	90.0	<5	
E5287125	2	8.7	<5	
E5287126	5	77.2	<5	
E5287127	5	62.8	<5	
E5287128	4	57.5	<5	
E5287129	7	83.7	<5	
E5287130	4	83.9	<5	
E5287131	6	67.0	<5	
E5287132	2	23.0	<5	
E5287133	3	63.3	<5	
E5287134	3	56.1	<5	
E5287135	8	47.3	<5	

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Y	Zn	Zr	As-OL
Unit:	ppm	ppm	ppm	%
Sample Description RDL:	1	0.5	5	0.01
E5287136	6	85.8	<5	
E5287137	8	79.9	<5	
E5287138	3	68.3	<5	
E5287139	9	96.6	<5	
E5287140	10	86.7	<5	
E5287141	10	99.2	<5	
E5287142	11	94.7	<5	
E5287143	8	88.8	<5	
E5287144	10	99.9	<5	
E5287145	7	79.6	<5	
E5287146	5	72.9	<5	
E5287147	3	75.1	<5	
E5287148	5	96.7	<5	
E5287149	3	56.3	<5	
E5287150	12	96.8	<5	
E5287151	2	11.2	<5	
E5287152	11	64.4	8	
E5287153	12	116	<5	
E5287154	17	115	<5	
E5287155	14	93.9	<5	
E5287156	15	54.8	6	
E5287157	11	69.1	13	
E5287310	13	143	14	
E5287311	10	140	6	
E5287312	11	149	8	
E5287313	12	138	12	
E5287314	12	126	13	
E5287315	14	101	<5	
E5287316	11	152	<5	
E5287317	25	104	<5	
E5287318	18	115	<5	
E5287319	16	118	<5	

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Y	Zn	Zr	As-OL
Unit:	ppm	ppm	ppm	%
Sample Description RDL:	1	0.5	5	0.01
E5287320	13	104	<5	
E5287321	6	87.8	<5	
E5287322	17	127	<5	
E5287323	8	87.3	<5	
E5287324	11	160	8	
E5287325	7	105	8	
E5287326	11	122	<5	
E5287327	14	136	6	
E5287328	9	101	<5	
E5287329	9	103	<5	
E5287330	3	67.2	<5	
E5287331	7	75.8	<5	
E5287332	5	73.7	<5	
E5287333	7	75.0	<5	
E5287334	5	71.0	<5	
E5287335	5	79.1	<5	
E5287336	10	104	12	
E5287337	6	68.9	<5	
E5287338	5	63.4	<5	
E5287339	3	55.9	<5	
E5287340	6	62.7	<5	
E5287341	<1	13.9	<5	
E5287342	5	100	<5	
E5287343	3	56.7	<5	
E5287344	8	83.0	<5	
E5287345	8	81.3	<5	
E5287346	6	74.5	<5	
E5287347	8	99.9	<5	
E5287348	9	103	<5	
E5287349	8	90.0	<5	
E5287350	11	137	<5	
E5287351	8	98.3	<5	

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Y	Zn	Zr	As-OL
Unit:	ppm	ppm	ppm	%
Sample Description RDL:	1	0.5	5	0.01
E5287352	8	96.5	<5	
E5287353	8	92.8	<5	
E5287354	9	86.7	<5	
E5287355	8	87.3	<5	
E5287356	6	88.0	<5	
E5287357	8	89.3	<5	
E5287358	8	88.4	<5	
E5287359	8	92.7	<5	
E5287360	7	87.5	<5	
E5287361	8	92.2	<5	
E5287362	7	88.9	<5	
E5287363	8	93.4	<5	
E5287364	8	89.7	<5	
E5287365	8	90.4	<5	
E5287366	7	84.9	<5	
E5287367	7	85.5	<5	
E5287368	7	90.8	<5	
E5287369	8	91.6	<5	
E5287370	8	95.4	<5	
E5287371	8	94.1	<5	
E5287372	10	101	<5	
E5287373	9	82.1	<5	
E5287374	10	100	<5	
E5287375	4	84.9	<5	
E5287376	5	81.8	<5	
E5287377	6	98.7	<5	
E5287378	2	39.0	<5	
E5287379	7	81.7	<5	
E5287380	4	103	<5	
E5287381	7	119	<5	
E5287382	9	98.8	<5	
E5287383	14	131	<5	

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Y	Zn	Zr	As-OL
Unit:	ppm	ppm	ppm	%
Sample Description RDL:	1	0.5	5	0.01
E5287384	4	109	<5	
E5287385	6	100	<5	
E5287386	8	112	<5	
E5287387	19	125	<5	
E5287388	9	112	<5	
E5287389	3	88.6	<5	
E5287390	3	57.9	<5	
E5287391	12	107	<5	
E5287392	10	110	<5	
E5287393	12	109	<5	
E5285810	15	95.6	<5	
E5285811	15	59.8	<5	
E5285812	7	336	<5	
E5285813	3	304	<5	
E5285814	10	213	<5	
E5285815	4	65.4	<5	
E5285816	3	38.4	<5	
E5285817	7	55.9	<5	
E5285818	12	79.5	<5	
E5285819	3	59.4	<5	
E5285820	7	84.8	<5	
E5285821	9	246	<5	
E5285822	11	111	<5	
E5285823	10	59.5	<5	
E5285824	12	102	<5	
E5285825	5	59.9	<5	
E5285826	3	59.3	<5	
E5285827	3	60.8	<5	
E5285828	5	80.1	<5	
E5285829	8	83.8	<5	
E5285830	4	74.6	<5	
E5285831	9	76.2	<5	

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Y	Zn	Zr	As-OL
Unit:	ppm	ppm	ppm	%
Sample Description RDL:	1	0.5	5	0.01
E5285832	3	66.6	<5	
E5285833	5	282	<5	
E5285834	4	74.0	<5	
E5285835	5	72.2	<5	
E5285836	5	68.5	<5	
E5285837	10	107	<5	
E5285838	5	70.5	<5	
E5285839	1	10.9	<5	
E5285840	4	69.7	<5	
E5285841	3	53.1	<5	
E5285842	6	53.1	<5	
E5285843	<1	11.5	<5	
E5285844	<1	11.8	<5	
E5285845	9	89.9	<5	
E5285846	7	66.3	<5	
E5285847	3	32.0	<5	
E5285848	4	68.9	<5	
E5285849	9	95.9	<5	
E5285850	11	110	<5	
E5285851	13	106	<5	
E5285852	10	82.3	<5	
E5285853	10	84.7	<5	
E5285854	8	77.7	<5	
E5285855	11	83.8	<5	
E5285856	11	87.5	<5	
E5285857	2	29.0	<5	
E5285858	12	75.7	<5	
E5285859	5	72.5	<5	
E5285860	6	68.7	<5	
E5285861	13	80.8	<5	
E5285862	4	63.8	<5	
E5285863	18	95.0	<5	

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583
PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Aqua Regia Digest - Metals Package, ICP-OES finish (201073)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Y	Zn	Zr	As-OL
Unit:	ppm	ppm	ppm	%
Sample Description RDL:	1	0.5	5	0.01
E5285864	5	67.5	<5	
E5285865	6	71.0	<5	
E5285866	9	75.2	<5	
E5285867	13	122	<5	
E5285868	8	89.7	<5	
E5285869	5	67.3	<5	
E5285870	6	70.5	<5	
E5285871	6	80.7	<5	
E5285872	5	73.4	<5	
E5285873	6	105	<5	
E5285874	6	101	<5	
E5285875	7	88.6	<5	
E5285876	6	84.9	<5	
E5285877	7	106	<5	
E5285878	4	69.4	<5	
E5285879	4	66.6	<5	
E5285880	9	98.0	<5	
E5285881	8	58.4	<5	
E5285882	2	72.7	<5	
E5285883	4	123	<5	
E5285884	2	24.9	<5	
E5285885	4	83.0	<5	
E5285886	8	5310	<5	
E5285887	9	96.9	<5	
E5285888	10	95.1	<5	

Comments: RDL - Reported Detection Limit

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
E5285760	0.35	0.013
E5285761	0.58	0.003
E5285762	0.41	0.002
E5285763	0.52	0.006
E5285764	3.27	0.002
E5285765	0.45	0.019
E5285766	0.38	0.139
E5285767	0.37	0.030
E5285768	0.38	<0.002
E5285769	2.50	0.009
E5285770	1.12	0.007
E5285771	1.41	0.013
E5285772	0.60	0.010
E5285773	0.63	0.012
E5285774	0.35	0.075
E5285775	1.69	0.019
E5285776	0.80	0.006
E5285777	0.49	0.015
E5285778	0.52	0.004
E5285779	0.67	0.014
E5287060	0.63	0.002
E5287061	0.69	0.019
E5287062	0.69	0.029
E5287063	0.68	0.017
E5287064	0.77	0.011
E5287065	0.67	0.077
E5287066	0.58	0.044
E5287067	0.58	0.064
E5287068	0.58	0.011
E5287069	0.64	0.015
E5287070	0.61	0.021
E5287071	0.59	0.003

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
E5287072	0.64	0.025
E5287073	0.56	0.004
E5287074	0.64	0.005
E5287075	0.58	<0.002
E5287076	0.59	0.010
E5287077	0.59	0.006
E5287078	0.59	0.005
E5287079	0.60	0.004
E5287080	0.62	0.008
E5287081	0.62	0.008
E5287082	0.63	0.004
E5287083	0.55	0.006
E5287084	0.58	0.005
E5287085	0.63	0.005
E5287086	0.62	0.006
E5287087	0.65	0.017
E5287088	0.60	0.004
E5287089	0.57	0.004
E5287090	0.61	0.011
E5287091	0.68	0.009
E5287092	0.55	0.007
E5287093	0.59	0.011
E5287094	0.64	<0.002
E5287095	0.77	0.005
E5287096	0.59	0.004
E5287097	0.62	0.009
E5287098	0.63	0.016
E5287099	0.68	0.003
E5287100	0.61	0.003
E5287101	0.61	0.005
E5287102	0.64	0.007
E5287103	0.63	0.006

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
E5287104	0.59	0.005
E5287105	0.53	0.005
E5287106	0.68	0.019
E5287107	0.58	0.006
E5287108	0.75	0.006
E5287109	0.60	0.004
E5287110	0.65	0.002
E5287111	0.64	0.015
E5287112	0.64	0.004
E5287113	0.80	0.007
E5287114	0.69	0.016
E5287115	0.69	0.008
E5287116	0.70	0.009
E5287117	0.70	0.005
E5287118	0.70	0.021
E5287119	0.70	0.006
E5287120	0.71	0.005
E5287121	0.65	<0.002
E5287122	0.66	0.004
E5287123	0.49	0.009
E5287124	0.61	0.011
E5287125	0.59	0.003
E5287126	0.63	0.004
E5287127	0.68	0.005
E5287128	0.75	0.004
E5287129	0.81	0.003
E5287130	0.75	0.004
E5287131	0.59	0.071
E5287132	0.61	0.006
E5287133	0.66	0.007
E5287134	0.68	0.003
E5287135	0.57	0.011

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
E5287136	0.64	0.004
E5287137	0.65	0.008
E5287138	0.64	0.008
E5287139	0.76	0.011
E5287140	0.68	0.012
E5287141	0.71	0.008
E5287142	0.70	0.008
E5287143	0.67	0.017
E5287144	0.69	0.013
E5287145	0.64	0.014
E5287146	0.75	0.008
E5287147	0.61	0.005
E5287148	0.65	0.006
E5287149	0.66	0.005
E5287150	0.67	0.015
E5287151	0.53	0.003
E5287152	0.61	0.021
E5287153	0.53	0.039
E5287154	0.58	0.013
E5287155	0.55	0.013
E5287156	0.63	0.018
E5287157	0.57	0.025
E5287310	0.71	0.025
E5287311	0.69	0.008
E5287312	0.68	0.009
E5287313	0.71	0.010
E5287314	0.81	0.006
E5287315	0.67	0.006
E5287316	0.66	0.005
E5287317	0.56	0.012
E5287318	0.67	0.021
E5287319	0.68	0.016

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
E5287320	0.68	0.021
E5287321	0.59	0.005
E5287322	0.70	0.013
E5287323	0.63	0.015
E5287324	0.71	0.016
E5287325	0.68	0.010
E5287326	0.63	0.008
E5287327	0.65	0.011
E5287328	0.69	0.007
E5287329	0.70	0.005
E5287330	0.60	<0.002
E5287331	0.78	0.008
E5287332	0.79	0.010
E5287333	0.82	0.012
E5287334	0.79	0.005
E5287335	0.72	0.006
E5287336	0.90	0.010
E5287337	0.62	0.004
E5287338	0.65	0.020
E5287339	0.64	0.005
E5287340	0.67	0.011
E5287341	0.65	0.008
E5287342	0.64	0.006
E5287343	0.64	0.004
E5287344	0.70	0.008
E5287345	0.71	0.002
E5287346	0.61	0.003
E5287347	0.82	0.008
E5287348	0.93	0.003
E5287349	0.88	0.008
E5287350	0.89	0.008
E5287351	0.91	0.007

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
E5287352	0.96	0.009
E5287353	0.81	0.007
E5287354	0.69	0.003
E5287355	0.80	0.008
E5287356	0.68	0.005
E5287357	0.64	0.009
E5287358	0.62	0.003
E5287359	0.57	0.005
E5287360	0.88	0.004
E5287361	0.64	0.011
E5287362	0.57	0.008
E5287363	0.54	0.006
E5287364	0.73	0.006
E5287365	0.61	0.006
E5287366	0.65	0.007
E5287367	0.52	0.032
E5287368	0.81	0.006
E5287369	0.56	0.007
E5287370	0.65	0.007
E5287371	0.57	0.011
E5287372	0.78	0.006
E5287373	0.76	0.006
E5287374	0.81	0.010
E5287375	0.70	0.005
E5287376	0.76	<0.002
E5287377	0.80	0.008
E5287378	0.65	0.005
E5287379	0.72	0.008
E5287380	0.69	<0.002
E5287381	0.70	<0.002
E5287382	0.67	0.005
E5287383	0.72	0.005

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
E5287384	0.61	0.005
E5287385	0.80	0.005
E5287386	0.79	0.012
E5287387	0.69	0.008
E5287388	0.64	0.005
E5287389	0.62	0.007
E5287390	0.67	0.005
E5287391	0.91	0.010
E5287392	0.90	0.009
E5287393	0.79	0.013
E5285810	0.51	0.005
E5285811	0.50	0.017
E5285812	0.50	0.003
E5285813	0.56	0.004
E5285814	0.58	0.019
E5285815	0.57	0.013
E5285816	0.49	0.006
E5285817	0.47	0.007
E5285818	0.48	0.004
E5285819	0.57	0.003
E5285820	0.56	0.003
E5285821	0.61	0.004
E5285822	0.56	0.005
E5285823	0.60	0.006
E5285824	0.48	0.006
E5285825	0.58	0.005
E5285826	0.58	0.003
E5285827	0.54	0.005
E5285828	0.55	0.005
E5285829	0.57	0.006
E5285830	0.54	0.013
E5285831	0.59	0.007

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
E5285832	0.57	0.005
E5285833	0.54	0.006
E5285834	0.56	0.018
E5285835	0.57	0.008
E5285836	0.63	0.005
E5285837	0.57	0.007
E5285838	0.52	0.004
E5285839	0.43	<0.002
E5285840	0.45	0.018
E5285841	0.47	0.003
E5285842	0.61	0.003
E5285843	0.54	<0.002
E5285844	0.41	0.006
E5285845	0.58	0.038
E5285846	0.50	0.004
E5285847	0.49	<0.002
E5285848	0.55	<0.002
E5285849	0.49	0.002
E5285850	0.67	0.004
E5285851	0.54	0.007
E5285852	0.67	0.006
E5285853	0.65	0.006
E5285854	0.48	0.005
E5285855	0.56	0.008
E5285856	0.64	0.003
E5285857	0.50	<0.002
E5285858	0.60	0.003
E5285859	0.65	0.003
E5285860	0.62	0.007
E5285861	0.62	0.006
E5285862	0.66	<0.002
E5285863	0.70	0.011

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 11Y519583

PROJECT NO:

CLIENT NAME: BEARING RESOURCES

ATTENTION TO: DAVE TUPPER

Fire Assay - Trace Au, AAS finish (202051)

DATE SAMPLED: Aug 16, 2011 | DATE RECEIVED: Aug 16, 2011 | DATE REPORTED: Sep 02, 2011 | SAMPLE TYPE: Soil

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.01	0.002
E5285864	0.65	<0.002
E5285865	0.62	0.006
E5285866	0.70	0.005
E5285867	0.64	0.011
E5285868	0.64	0.006
E5285869	0.60	0.003
E5285870	0.57	0.005
E5285871	0.56	0.011
E5285872	0.55	0.006
E5285873	0.58	0.006
E5285874	0.56	0.007
E5285875	0.52	0.015
E5285876	0.59	0.009
E5285877	0.64	0.005
E5285878	0.55	0.003
E5285879	0.58	0.008
E5285880	0.58	0.007
E5285881	0.49	0.004
E5285882	0.50	<0.002
E5285883	0.60	0.003
E5285884	0.50	<0.002
E5285885	0.75	0.006
E5285886	0.67	0.006
E5285887	0.69	0.005
E5285888	0.57	0.003

Comments: RDL - Reported Detection Limit

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y519583
PROJECT NO:
ATTENTION TO: DAVE TUPPER

Solid Analysis

RPT Date:		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits	
										Lower	Upper
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	2621122	0.006	0.005	18.2%	0.003	0.0736	0.0849	86%	80%	120%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	2621143	0.011	0.011	0.0%	< 0.002	0.0789	0.0849	93%	80%	120%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	2621276	0.008	0.008	0.0%	< 0.002	0.199	0.203	98%	80%	120%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	2621167	0.0045	0.0050	10.5%	0.003	0.398	0.417	95%	80%	120%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	2621351	0.018	0.017	5.7%	< 0.002	0.885	0.922	96%	80%	120%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	2621191	0.0038	0.0029	26.9%	< 0.002	0.0822	0.0849	97%	80%	120%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	2621388	0.005	0.005	0.0%	< 0.002	0.205	0.203	101%	80%	120%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	2621231	0.021	0.023	9.1%	< 0.002				80%	120%
Fire Assay - Trace Au, AAS finish (202051)											
Au	1	2621238	0.008	0.008	0.0%	< 0.002				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2621167	0.2	0.2	0.0%	< 0.2	37	35	106%	80%	120%
Al	1	2621119	1.56	1.48	5.3%	< 0.01	0.381	0.359	106%	80%	120%
As	1	2621167	29	28	3.5%	< 1				80%	120%
B	1	2621167	< 5	< 5	0.0%	29				80%	120%
Ba	1	2621119	54	52	3.8%	< 1				80%	120%
Be	1	2621167	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	2621167	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2621119	0.39	0.38	2.6%	< 0.01	0.642	0.635	101%	80%	120%
Cd	1	2621167	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2621167	65	62	4.7%	< 1				80%	120%
Co	1	2621167	5.03	4.93	2.0%	< 0.5	5.8	5.0	116%	80%	120%
Cr	1	2621119	17.6	17.0	3.5%	< 0.5				80%	120%
Cu	1	2621119	34.2	34.4	0.6%	< 0.5	4977	5000	100%	80%	120%
Fe	1	2621119	3.70	3.57	3.6%	< 0.01	1.26	1.31	96%	80%	120%
Ga	1	2621167	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2621167	< 1	< 1	0.0%	< 1	1.6	1.3	122%	80%	120%
In	1	2621167	< 1	< 1	0.0%	< 1				80%	120%
K	1	2621119	0.06	0.05	18.2%	< 0.01	0.18	0.18	100%	80%	120%
La	1	2621167	33	32	3.1%	< 1				80%	120%
Li	1	2621167	37	37	0.0%	< 1				80%	120%

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y519583
PROJECT NO:
ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date:		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits	
										Lower	Upper
Mg	1	2621119	0.53	0.52	1.9%	< 0.01	0.108	0.098	110%	80%	120%
Mn	1	2621119	432	431	0.2%	< 1				80%	120%
Mo	1	2621119	0.9	1.0	10.5%	< 0.5	317	280	113%	80%	120%
Na	1	2621119	< 0.01	< 0.01	0.0%	< 0.01	0.034	0.038	89%	80%	120%
Ni	1	2621167	21.2	20.9	1.4%	< 0.5	7	7	101%	80%	120%
P	1	2621119	498	474	4.9%	< 10				80%	120%
Pb	1	2621119	25.0	25.1	0.4%	< 0.5				80%	120%
Rb	1	2621167	13	13	0.0%	< 10				80%	120%
S	1	2621119	0.045	0.045	0.0%	< 0.005	0.674	0.621	108%	80%	120%
Sb	1	2621167	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2621167	0.99	0.94	5.2%	< 0.5				80%	120%
Se	1	2621167	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2621167	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2621119	30.0	30.3	1.0%	< 0.5				80%	120%
Ta	1	2621167	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2621167	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2621167	< 5	< 5	0.0%	< 5				80%	120%
Ti	1	2621119	< 0.01	< 0.01	0.0%	< 0.01	0.011	0.011	96%	80%	120%
Tl	1	2621167	< 5	< 5	0.0%	< 5				80%	120%
U	1	2621167	< 5	< 5	0.0%	< 5				80%	120%
V	1	2621119	15.4	15.1	2.0%	< 0.5				80%	120%
W	1	2621167	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2621167	3	3	0.0%	< 1				80%	120%
Zn	1	2621119	110	105	4.7%	< 0.5				80%	120%
Zr	1	2621167	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2621191	< 0.2	< 0.2	0.0%	< 0.2	38	35	107%	80%	120%
Al	1	2621143	1.78	1.76	1.1%	< 0.01	0.423	0.359	118%	80%	120%
As	1	2621191	41	43	4.8%	< 1				80%	120%
B	1	2621191	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2621143	34	32	6.1%	< 1				80%	120%
Be	1	2621191	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	2621191	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2621143	0.245	0.246	0.4%	< 0.01	0.609	0.635	96%	80%	120%
Cd	1	2621191	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2621191	28	28	0.0%	< 1				80%	120%
Co	1	2621191	6.2	6.0	3.3%	< 0.5	5.5	5.0	109%	80%	120%
Cr	1	2621143	24.2	25.1	3.7%	< 0.5				80%	120%
Cu	1	2621143	56.3	57.8	2.6%	< 0.5	5258	5000	105%	80%	120%
Fe	1	2621143	4.86	4.89	0.6%	< 0.01	1.29	1.31	99%	80%	120%
Ga	1	2621191	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2621191	< 1	< 1	0.0%	< 1	1.3	1.3	100%	80%	120%
In	1	2621191	< 1	< 1	0.0%	< 1				80%	120%
K	1	2621143	0.04	0.04	0.0%	< 0.01	0.2	0.18	111%	80%	120%
La	1	2621191	14	14	0.0%	< 1				80%	120%

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y519583
PROJECT NO:
ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date:		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits	
										Lower	Upper
Li	1	2621191	19	20	5.1%	< 1				80%	120%
Mg	1	2621143	0.75	0.76	1.3%	< 0.01	0.102	0.098	104%	80%	120%
Mn	1	2621143	634	645	1.7%	< 1				80%	120%
Mo	1	2621350	< 0.5	< 0.5	0.0%	< 0.5	288	280	103%	80%	120%
Na	1	2621143	< 0.01	< 0.01	0.0%	< 0.01	0.033	0.038	88%	80%	120%
Ni	1	2621191	11.8	12.4	5.0%	< 0.5	9	7	124%	80%	120%
P	1	2621143	707	715	1.1%	< 10				80%	120%
Pb	1	2621143	35.0	35.6	1.7%	< 0.5	37	30	122%	80%	120%
Rb	1	2621191	< 10	< 10	0.0%	< 10				80%	120%
S	1	2621143	0.019	0.019	0.0%	< 0.005	0.646	0.621	104%	80%	120%
Sb	1	2621191	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2621191	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Se	1	2621191	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2621191	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2621143	23.6	23.5	0.4%	< 0.5				80%	120%
Ta	1	2621191	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2621191	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2621191	< 5	< 5	0.0%	< 5				80%	120%
Ti	1	2621143	0.01	0.01	0.0%	< 0.01	0.013	0.011	115%	80%	120%
Tl	1	2621191	< 5	< 5	0.0%	< 5				80%	120%
U	1	2621191	< 5	< 5	0.0%	< 5				80%	120%
V	1	2621143	22.6	22.4	0.9%	< 0.5				80%	120%
W	1	2621191	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2621191	2	2	0.0%	< 1				80%	120%
Zn	1	2621143	145	148	2.0%	< 0.5				80%	120%
Zr	1	2621191	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2621212	< 0.2	< 0.2	0.0%	< 0.2				80%	120%
Al	1	2621212	1.55	1.30	17.5%	< 0.01				80%	120%
As	1	2621212	34	30	12.5%	< 1				80%	120%
B	1	2621212	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2621212	19	17	11.1%	< 1				80%	120%
Be	1	2621212	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	2621212	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2621212	0.01	0.01	0.0%	< 0.01				80%	120%
Cd	1	2621212	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2621212	50	45	10.5%	< 1				80%	120%
Co	1	2621212	8.88	7.51	16.7%	< 0.5				80%	120%
Cr	1	2621212	19.4	16.8	14.4%	< 0.5				80%	120%
Cu	1	2621212	20.6	17.5	16.3%	< 0.5				80%	120%
Fe	1	2621212	4.94	4.07	19.3%	< 0.01				80%	120%
Ga	1	2621212	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2621212	< 1	< 1	0.0%	< 1				80%	120%
In	1	2621212	< 1	< 1	0.0%	< 1				80%	120%

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y519583
PROJECT NO:
ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date:		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
K	1	2621212	0.03	0.03	0.0%	< 0.01				80%	120%
La	1	2621212	25	22	12.8%	< 1				80%	120%
Li	1	2621212	39	31	22.9%	< 1				80%	120%
Mg	1	2621212	0.35	0.29	18.8%	< 0.01				80%	120%
Mn	1	2621212	268	227	16.6%	< 1				80%	120%
Mo	1	2621363	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Na	1	2621212	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Ni	1	2621212	19.2	16.0	18.2%	< 0.5				80%	120%
P	1	2621212	261	221	16.6%	< 10				80%	120%
Pb	1	2621212	21.1	24.8	16.1%	< 0.5				80%	120%
Rb	1	2621212	< 10	< 10	0.0%	< 10				80%	120%
S	1	2621212	0.0207	0.0173	17.9%	< 0.005				80%	120%
Sb	1	2621212	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2621212	1.30	1.14	13.1%	< 0.5				80%	120%
Se	1	2621212	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2621212	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2621363	14.4	13.4	7.2%	< 0.5				80%	120%
Ta	1	2621212	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2621212	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2621212	7	6	15.4%	< 5				80%	120%
Ti	1	2621212	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Tl	1	2621212	< 5	< 5	0.0%	< 5				80%	120%
U	1	2621212	< 5	< 5	0.0%	< 5				80%	120%
V	1	2621212	23.8	20.6	14.4%	< 0.5				80%	120%
W	1	2621212	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2621212	3	3	0.0%	< 1				80%	120%
Zn	1	2621212	63.3	54.7	14.6%	< 0.5				80%	120%
Zr	1	2621212	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2621238	< 0.2	< 0.2	0.0%	< 0.2				80%	120%
Al	1	2621238	1.81	1.69	6.9%	< 0.01				80%	120%
As	1	2621238	27	26	3.8%	< 1				80%	120%
B	1	2621238	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2621238	25	23	8.3%	< 1				80%	120%
Be	1	2621238	0.5	0.5	0.0%	< 0.5				80%	120%
Bi	1	2621238	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2621238	0.18	0.17	5.7%	< 0.01				80%	120%
Cd	1	2621238	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2621238	76	76	0.0%	< 1				80%	120%
Co	1	2621238	25.2	24.2	4.0%	< 0.5				80%	120%
Cr	1	2621238	23.3	22.2	4.8%	< 0.5				80%	120%
Cu	1	2621238	74.9	69.4	7.6%	< 0.5				80%	120%
Fe	1	2621238	4.83	4.54	6.2%	< 0.01				80%	120%
Ga	1	2621238	< 5	< 5	0.0%	< 5				80%	120%

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y519583
PROJECT NO:
ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date:		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Hg	1	2621238	< 1	< 1	0.0%	< 1				80%	120%
In	1	2621238	< 1	< 1	0.0%	< 1				80%	120%
K	1	2621238	0.03	0.03	0.0%	< 0.01				80%	120%
La	1	2621238	41	41	0.0%	< 1				80%	120%
Li	1	2621238	81	76	6.4%	< 1				80%	120%
Mg	1	2621238	0.855	0.796	7.1%	< 0.01				80%	120%
Mn	1	2621238	464	434	6.7%	< 1				80%	120%
Mo	1	2621388	< 0.5	0.6		< 0.5				80%	120%
Na	1	2621238	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Ni	1	2621238	51.2	48.6	5.2%	< 0.5				80%	120%
P	1	2621238	469	451	3.9%	< 10				80%	120%
Pb	1	2621388	17.4	16.9	2.9%	< 0.5				80%	120%
Rb	1	2621238	< 10	< 10	0.0%	< 10				80%	120%
S	1	2621238	0.039	0.037	5.3%	< 0.005				80%	120%
Sb	1	2621238	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2621238	3.16	3.09	2.2%	< 0.5				80%	120%
Se	1	2621238	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2621238	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2621238	17.5	17.8	1.7%	< 0.5				80%	120%
Ta	1	2621238	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2621238	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2621238	12	12	0.0%	< 5				80%	120%
Ti	1	2621238	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Tl	1	2621238	< 5	< 5	0.0%	< 5				80%	120%
U	1	2621238	< 5	< 5	0.0%	< 5				80%	120%
V	1	2621238	17.3	15.6	10.3%	< 0.5				80%	120%
W	1	2621238	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2621238	10	9	10.5%	< 1				80%	120%
Zn	1	2621238	140	135	3.6%	< 0.5				80%	120%
Zr	1	2621238	6	7	15.4%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2621250	< 0.2	< 0.2	0.0%	< 0.2				80%	120%
Al	1	2621250	1.34	1.34	0.0%	< 0.01				80%	120%
As	1	2621250	13	15	14.3%	< 1				80%	120%
B	1	2621250	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2621250	32	32	0.0%	< 1				80%	120%
Be	1	2621250	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	2621250	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2621250	0.08	0.08	0.0%	< 0.01				80%	120%
Cd	1	2621250	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2621250	32	34	6.1%	< 1				80%	120%
Co	1	2621250	8.33	8.47	1.7%	< 0.5				80%	120%
Cr	1	2621250	12.5	12.8	2.4%	< 0.5				80%	120%
Cu	1	2621250	28.3	29.1	2.8%	< 0.5				80%	120%
Fe	1	2621250	4.16	4.21	1.2%	< 0.01				80%	120%

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y519583
PROJECT NO:
ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date:		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Ga	1	2621250	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2621250	< 1	< 1	0.0%	< 1				80%	120%
In	1	2621250	< 1	< 1	0.0%	< 1				80%	120%
K	1	2621250	0.03	0.03	0.0%	< 0.01				80%	120%
La	1	2621250	15	15	0.0%	< 1				80%	120%
Li	1	2621250	38	39	2.6%	< 1				80%	120%
Mg	1	2621250	0.430	0.436	1.4%	< 0.01				80%	120%
Mn	1	2621250	314	321	2.2%	< 1				80%	120%
Mo	1	2621250	0.86	0.67	24.8%	< 0.5				80%	120%
Na	1	2621250	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Ni	1	2621250	24.9	25.1	0.8%	< 0.5				80%	120%
P	1	2621250	588	586	0.3%	< 10				80%	120%
Pb	1	2621250	28.1	28.6	1.8%	< 0.5				80%	120%
Rb	1	2621250	< 10	< 10	0.0%	< 10				80%	120%
S	1	2621250	0.028	0.028	0.0%	< 0.005				80%	120%
Sb	1	2621250	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2621250	1.5	1.5	0.0%	< 0.5				80%	120%
Se	1	2621250	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2621250	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2621250	9.5	9.7	2.1%	< 0.5				80%	120%
Ta	1	2621250	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2621250	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2621250	< 5	< 5	0.0%	< 5				80%	120%
Ti	1	2621250	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Tl	1	2621250	< 5	< 5	0.0%	< 5				80%	120%
U	1	2621250	< 5	< 5	0.0%	< 5				80%	120%
V	1	2621250	13.5	14.3	5.8%	< 0.5				80%	120%
W	1	2621250	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2621250	8	9	11.8%	< 1				80%	120%
Zn	1	2621250	87.3	89.2	2.2%	< 0.5				80%	120%
Zr	1	2621250	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2621263	< 0.2	< 0.2	0.0%	< 0.2				80%	120%
Al	1	2621263	1.59	1.59	0.0%	< 0.01				80%	120%
As	1	2621263	19	19	0.0%	< 1				80%	120%
B	1	2621263	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2621263	49	49	0.0%	< 1				80%	120%
Be	1	2621263	0.66	0.65	1.5%	< 0.5				80%	120%
Bi	1	2621263	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2621263	0.412	0.415	0.7%	< 0.01				80%	120%
Cd	1	2621263	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2621263	72	69	4.3%	< 1				80%	120%
Co	1	2621263	21.6	21.1	2.3%	< 0.5				80%	120%
Cr	1	2621263	18.2	17.9	1.7%	< 0.5				80%	120%

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y519583
PROJECT NO:
ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date:		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Cu	1	2621263	55.1	54.4	1.3%	< 0.5				80%	120%
Fe	1	2621263	4.30	4.30	0.0%	< 0.01				80%	120%
Ga	1	2621263	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2621263	< 1	< 1	0.0%	< 1				80%	120%
In	1	2621263	< 1	< 1	0.0%	< 1				80%	120%
K	1	2621263	0.098	0.095	3.1%	< 0.01				80%	120%
La	1	2621263	35	33	5.9%	< 1				80%	120%
Li	1	2621263	37	39	5.3%	< 1				80%	120%
Mg	1	2621263	0.54	0.54	0.0%	< 0.01				80%	120%
Mn	1	2621263	812	813	0.1%	< 1				80%	120%
Mo	1	2621263	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Na	1	2621263	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Ni	1	2621263	44.9	44.1	1.8%	< 0.5				80%	120%
P	1	2621263	603	582	3.5%	< 10				80%	120%
Pb	1	2621263	27.6	26.9	2.6%	< 0.5				80%	120%
Rb	1	2621263	11	11	0.0%	< 10				80%	120%
S	1	2621263	0.0080	0.0086	7.2%	< 0.005				80%	120%
Sb	1	2621263	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2621263	4.49	4.21	6.4%	< 0.5				80%	120%
Se	1	2621263	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2621263	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2621263	25.9	27.7	6.7%	< 0.5				80%	120%
Ta	1	2621263	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2621263	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2621263	14	14	0.0%	< 5				80%	120%
Ti	1	2621263	0.01	0.01	0.0%	< 0.01				80%	120%
Tl	1	2621263	< 5	< 5	0.0%	< 5				80%	120%
U	1	2621263	< 5	< 5	0.0%	< 5				80%	120%
V	1	2621263	19.1	18.7	2.1%	< 0.5				80%	120%
W	1	2621263	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2621263	10	9	10.5%	< 1				80%	120%
Zn	1	2621263	104	101	2.9%	< 0.5				80%	120%
Zr	1	2621263	12	11	8.7%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2621288	< 0.2	< 0.2	0.0%	< 0.2				80%	120%
Al	1	2621288	1.27	1.32	3.9%	< 0.01				80%	120%
As	1	2621288	23	23	0.0%	< 1				80%	120%
B	1	2621288	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2621288	23	23	0.0%	< 1				80%	120%
Be	1	2621288	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	2621288	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2621288	0.58	0.58	0.0%	< 0.01				80%	120%
Cd	1	2621288	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Ce	1	2621288	36	39	8.0%	< 1				80%	120%

Results relate only to the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES
AGAT WORK ORDER: 11Y519583
PROJECT NO:
ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date:		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Co	1	2621288	11.1	10.6	4.6%	< 0.5				80%	120%
Cr	1	2621288	15.8	15.3	3.2%	< 0.5				80%	120%
Cu	1	2621288	38.6	37.2	3.7%	< 0.5				80%	120%
Fe	1	2621288	3.64	3.70	1.6%	< 0.01				80%	120%
Ga	1	2621288	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2621288	< 1	< 1	0.0%	< 1				80%	120%
In	1	2621288	< 1	< 1	0.0%	< 1				80%	120%
K	1	2621288	0.035	0.037	5.6%	< 0.01				80%	120%
La	1	2621288	18	20	10.5%	< 1				80%	120%
Li	1	2621288	48	48	0.0%	< 1				80%	120%
Mg	1	2621288	0.58	0.58	0.0%	< 0.01				80%	120%
Mn	1	2621288	465	454	2.4%	< 1				80%	120%
Mo	1	2621288	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Na	1	2621288	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Ni	1	2621288	32.8	31.8	3.1%	< 0.5				80%	120%
P	1	2621288	426	407	4.6%	< 10				80%	120%
Pb	1	2621288	22.7	22.0	3.1%	< 0.5				80%	120%
Rb	1	2621288	< 10	< 10	0.0%	< 10				80%	120%
S	1	2621288	0.082	0.082	0.0%	< 0.005				80%	120%
Sb	1	2621288	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2621288	2.0	1.9	5.1%	< 0.5				80%	120%
Se	1	2621288	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2621288	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2621288	39.4	38.3	2.8%	< 0.5				80%	120%
Ta	1	2621288	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2621288	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2621288	8	7	13.3%	< 5				80%	120%
Ti	1	2621288	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Tl	1	2621288	< 5	< 5	0.0%	< 5				80%	120%
U	1	2621288	< 5	< 5	0.0%	< 5				80%	120%
V	1	2621288	13.6	12.8	6.1%	< 0.5				80%	120%
W	1	2621288	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2621288	8	8	0.0%	< 1				80%	120%
Zn	1	2621288	92.2	86.8	6.0%	< 0.5				80%	120%
Zr	1	2621288	< 5	< 5	0.0%	< 5				80%	120%
Aqua Regia Digest - Metals Package, ICP-OES finish (201073)											
Ag	1	2621313	< 0.2	< 0.2	0.0%	< 0.2				80%	120%
Al	1	2621313	1.78	1.78	0.0%	< 0.01				80%	120%
As	1	2621313	27	28	3.6%	< 1				80%	120%
B	1	2621313	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	2621313	52	53	1.9%	< 1				80%	120%
Be	1	2621313	< 0.5	< 0.5	0.0%	< 0.5				80%	120%
Bi	1	2621313	< 1	< 1	0.0%	< 1				80%	120%
Ca	1	2621313	0.17	0.17	0.0%	< 0.01				80%	120%
Cd	1	2621313	< 0.5	< 0.5	0.0%	< 0.5				80%	120%

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BEARING RESOURCES

AGAT WORK ORDER: 11Y519583

PROJECT NO:

ATTENTION TO: DAVE TUPPER

Solid Analysis (Continued)

RPT Date:		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Ce	1	2621313	50	51	2.0%	< 1				80%	120%
Co	1	2621313	7.73	7.76	0.4%	< 0.5				80%	120%
Cr	1	2621313	19.4	19.3	0.5%	< 0.5				80%	120%
Cu	1	2621313	45.8	45.4	0.9%	< 0.5				80%	120%
Fe	1	2621313	4.37	4.42	1.1%	< 0.01				80%	120%
Ga	1	2621313	< 5	< 5	0.0%	< 5				80%	120%
Hg	1	2621313	< 1	< 1	0.0%	< 1				80%	120%
In	1	2621313	< 1	< 1	0.0%	< 1				80%	120%
K	1	2621313	0.06	0.06	0.0%	< 0.01				80%	120%
La	1	2621313	27	27	0.0%	< 1				80%	120%
Li	1	2621313	56	56	0.0%	< 1				80%	120%
Mg	1	2621313	0.59	0.60	1.7%	< 0.01				80%	120%
Mn	1	2621313	280	282	0.7%	< 1				80%	120%
Mo	1	2621313	0.9	< 0.5		< 0.5				80%	120%
Na	1	2621313	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Ni	1	2621313	34.2	34.6	1.2%	< 0.5				80%	120%
P	1	2621313	297	296	0.3%	< 10				80%	120%
Pb	1	2621313	21.6	22.2	2.7%	< 0.5				80%	120%
Rb	1	2621313	< 10	< 10	0.0%	< 10				80%	120%
S	1	2621313	0.0210	0.0216	2.8%	< 0.005				80%	120%
Sb	1	2621313	< 1	< 1	0.0%	< 1				80%	120%
Sc	1	2621313	2.2	2.2	0.0%	< 0.5				80%	120%
Se	1	2621313	< 10	< 10	0.0%	< 10				80%	120%
Sn	1	2621313	< 5	< 5	0.0%	< 5				80%	120%
Sr	1	2621313	13.6	14.6	7.1%	< 0.5				80%	120%
Ta	1	2621313	< 10	< 10	0.0%	< 10				80%	120%
Te	1	2621313	< 10	< 10	0.0%	< 10				80%	120%
Th	1	2621313	6	5	18.2%	< 5				80%	120%
Ti	1	2621313	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Tl	1	2621313	< 5	< 5	0.0%	< 5				80%	120%
U	1	2621313	< 5	< 5	0.0%	< 5				80%	120%
V	1	2621313	15.4	15.4	0.0%	< 0.5				80%	120%
W	1	2621313	< 1	< 1	0.0%	< 1				80%	120%
Y	1	2621313	8	8	0.0%	< 1				80%	120%
Zn	1	2621313	112	109	2.7%	< 0.5				80%	120%
Zr	1	2621313	< 5	< 5	0.0%	< 5				80%	120%

Certified By: Ron Cardinall

Results relate only to the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Method Summary

CLIENT NAME: BEARING RESOURCES

AGAT WORK ORDER: 11Y519583

PROJECT NO:

ATTENTION TO: DAVE TUPPER

PARAMETER	AGAT S.O.P	LITERATURE REFERENCE	ANALYTICAL TECHNIQUE
Solid Analysis			
Ag	MIN-200-12020		ICP/OES
Al	MIN-200-12020		ICP/OES
As	MIN-200-12020		ICP/OES
B	MIN-200-12020		ICP/OES
Ba	MIN-200-12020		ICP/OES
Be	MIN-200-12020		ICP/OES
Bi	MIN-200-12020		ICP/OES
Ca	MIN-200-12020		ICP/OES
Cd	MIN-200-12020		ICP/OES
Ce	MIN-200-12020		ICP/OES
Co	MIN-200-12020		ICP/OES
Cr	MIN-200-12020		ICP/OES
Cu	MIN-200-12020		ICP/OES
Fe	MIN-200-12020		ICP/OES
Ga	MIN-200-12020		ICP/OES
Hg	MIN-200-12020		ICP/OES
In	MIN-200-12020		ICP/OES
K	MIN-200-12020		ICP/OES
La	MIN-200-12020		ICP/OES
Li	MIN-200-12020		ICP/OES
Mg	MIN-200-12020		ICP/OES
Mn	MIN-200-12020		ICP/OES
Mo	MIN-200-12020		ICP/OES
Na	MIN-200-12020		ICP/OES
Ni	MIN-200-12020		ICP/OES
P	MIN-200-12020		ICP/OES
Pb	MIN-200-12020		ICP/OES
Rb	MIN-200-12020		ICP/OES
S	MIN-200-12020		ICP/OES
Sb	MIN-200-12020		ICP/OES
Sc	MIN-200-12020		ICP/OES
Se	MIN-200-12020		ICP/OES
Sn	MIN-200-12020		ICP/OES
Sr	MIN-200-12020		ICP/OES
Ta	MIN-200-12020		ICP/OES
Te	MIN-200-12020		ICP/OES
Th	MIN-200-12020		ICP/OES
Ti	MIN-200-12020		ICP/OES
Tl	MIN-200-12020		ICP/OES
U	MIN-200-12020		ICP/OES
V	MIN-200-12020		ICP/OES
W	MIN-200-12020		ICP/OES
Y	MIN-200-12020		ICP/OES
Zn	MIN-200-12020		ICP/OES
Zr	MIN-200-12020		ICP/OES
As-OL			AA
Sample Login Weight	MIN-12009		BALANCE
Au	MIN-200-12019	BUGBEE, E: A Textbook of Fire Assaying	AAS

Results relate only to the items tested