REPORT ON THE STEN NW PROSPECT
2011 PROSPECTING PROGRAM
MAYO MINING DISTRICT
YUKON, CANADA
(05 Aug 2011 – 19-Oct-2011)
Property Coords: [NAD83; UTM 8] E 61600 / N 7122000

NTS Map STEN NW

Claim worked	Grant Number	NTS Map	Claim Holder (100%)
NAD 159	YD93859	Mayo	Goldspike Exploration Inc.- 100%
NAD 161	YD93861	Mayo	Goldspike Exploration Inc.- 100%
NAD 163	YD93863	Mayo	Goldspike Exploration Inc.- 100%
NAD 167	YD93867	Mayo	Goldspike Exploration Inc.- 100%
NAD 168	YD93868	Mayo	Goldspike Exploration Inc.- 100%
NAD 189	YD93889	Mayo	Goldspike Exploration Inc.- 100%
NAD 190	YD93890	Mayo	Goldspike Exploration Inc.- 100%
NAD 191	YD93891	Mayo	Goldspike Exploration Inc.- 100%
NAD 192	YD93892	Mayo	Goldspike Exploration Inc.- 100%
NAD 194	YD93894	Mayo	Goldspike Exploration Inc.- 100%
NAD 197	YD93897	Mayo	Goldspike Exploration Inc.- 100%
NAD 198	YD93898	Mayo	Goldspike Exploration Inc.- 100%
NAD 202	YD63812	Mayo	Goldspike Exploration Inc.- 100%
NAD 55	YD93755	Mayo	Goldspike Exploration Inc.- 100%
NAD 8	YD93708	Mayo	Goldspike Exploration Inc.- 100%
NAD 12	YD93712	Mayo	Goldspike Exploration Inc.- 100%
NAD 13	YD93713	Mayo	Goldspike Exploration Inc.- 100%
NAD 15	YD93715	Mayo	Goldspike Exploration Inc.- 100%
NAD 124	YD93824	Mayo	Goldspike Exploration Inc.- 100%
NAD 125	YD93825	Mayo	Goldspike Exploration Inc.- 100%
NAD 128	YD93828	Mayo	Goldspike Exploration Inc.- 100%
NAD 135	YD93835	Mayo	Goldspike Exploration Inc.- 100%
NAD 136	YD93836	Mayo	Goldspike Exploration Inc.- 100%
NAD 139	YD93839	Mayo	Goldspike Exploration Inc.- 100%
NAD 140	YD93840	Mayo	Goldspike Exploration Inc.- 100%
NAD 141	YD93841	Mayo	Goldspike Exploration Inc.- 100%
NAD 142	YD93842	Mayo	Goldspike Exploration Inc.- 100%

NAD 143	YD93843	Mayo	Goldspike Exploration Inc.- 100%
NAD 147	YD93847	Mayo	Goldspike Exploration Inc.- 100%
NAD 170	YD93870	Mayo	Goldspike Exploration Inc.- 100%
NAD 171	YD93871	Mayo	Goldspike Exploration Inc.- 100%
NAD 173	YD93873	Mayo	Goldspike Exploration Inc.- 100%
NAD 176	YD93876	Mayo	Goldspike Exploration Inc.- 100%
NAD 21	YD93721	Mayo	Goldspike Exploration Inc.- 100%
NAD 18	YD93718	Mayo	Goldspike Exploration Inc.- 100%
NAD 19	YD93719	Mayo	Goldspike Exploration Inc.- 100%
NAD 20	YD93720	Mayo	Goldspike Exploration Inc.- 100%
NAD 30	YD93730	Mayo	Goldspike Exploration Inc.- 100%
NAD 31	YD93731	Mayo	Goldspike Exploration Inc.- 100%
NAD 32	YD93732	Mayo	Goldspike Exploration Inc.- 100%
NAD 35	YD93735	Mayo	Goldspike Exploration Inc.- 100%
NAD 38	YD93738	Mayo	Goldspike Exploration Inc.- 100%
NAD 40	YD93740	Mayo	Goldspike Exploration Inc.- 100%
NAD 47	YD93747	Mayo	Goldspike Exploration Inc.- 100%
NAD 50	YD93750	Mayo	Goldspike Exploration Inc.- 100%
NAD 63	YD93763	Mayo	Goldspike Exploration Inc.- 100%
NAD 70	YD93770	Mayo	Goldspike Exploration Inc.- 100%
NAD 71	YD93771	Mayo	Goldspike Exploration Inc.- 100%
NAD 72	YD93772	Mayo	Goldspike Exploration Inc.- 100%
NAD 73	YD93773	Mayo	Goldspike Exploration Inc.- 100%
NAD 74	YD93774	Mayo	Goldspike Exploration Inc.- 100%
NAD 75	YD93775	Mayo	Goldspike Exploration Inc.- 100%
NAD 76	YD93776	Mayo	Goldspike Exploration Inc.- 100%
NAD 99	YD93799	Mayo	Goldspike Exploration Inc.- 100%
NAD 103	YD93803	Mayo	Goldspike Exploration Inc.- 100%
NAD 104	YD93804	Mayo	Goldspike Exploration Inc.- 100%
NAD 105	YD93805	Mayo	Goldspike Exploration Inc.- 100%
NAD 108	YD93808	Mayo	Goldspike Exploration Inc.- 100%
NAD 109	YD93809	Mayo	Goldspike Exploration Inc.- 100%
NAD 111	YD93811	Mayo	Goldspike Exploration Inc.- 100%
NAD 112	YD93812	Mayo	Goldspike Exploration Inc.- 100%
NAD 115	YD93815	Mayo	Goldspike Exploration Inc.- 100%
NAD 117	YD93817	Mayo	Goldspike Exploration Inc.- 100%
NAD 118	YD93818	Mayo	Goldspike Exploration Inc.- 100%
NAD 120	YD93820	Mayo	Goldspike Exploration Inc.- 100%

NAD 146	YD93846	Mayo	Goldspike Exploration Inc.- 100%
NAD 65	YD93765	Mayo	Goldspike Exploration Inc.- 100%
NAD 98	YD93798	Mayo	Goldspike Exploration Inc.- 100%
NAD 5	YD93705	Mayo	Goldspike Exploration Inc.- 100%
NAD 56	YD93756	Mayo	Goldspike Exploration Inc.- 100%
NAD 51	YD93751	Mayo	Goldspike Exploration Inc.- 100%
NAD 134	YD93834	Mayo	Goldspike Exploration Inc.- 100%
NAD 7	YD93707	Mayo	Goldspike Exploration Inc.- 100%
NAD 200	YD93900	Mayo	Goldspike Exploration Inc.- 100%
NAD 169	YD93869	Mayo	Goldspike Exploration Inc.- 100%
NAD 162	YD93862	Mayo	Goldspike Exploration Inc.- 100%
NAD 172	YD93872	Mayo	Goldspike Exploration Inc.- 100%
NAD 201	YD63811	Mayo	Goldspike Exploration Inc.- 100%
NAD 59	YD93759	Mayo	Goldspike Exploration Inc.- 100%
NAD 110	YD93810	Mayo	Goldspike Exploration Inc.- 100%
NAD 195	YD93895	Mayo	Goldspike Exploration Inc.- 100%
NAD 11	YD93711	Mayo	Goldspike Exploration Inc.- 100%
NAD 203	YD63813	Mayo	Goldspike Exploration Inc.- 100%
NAD 106	YD93806	Mayo	Goldspike Exploration Inc.- 100%
NAD 131	YD93831	Mayo	Goldspike Exploration Inc.- 100%
NAD 54	YD93754	Mayo	Goldspike Exploration Inc.- 100%
NAD 36	YD93736	Mayo	Goldspike Exploration Inc.- 100%
NAD 199	YD93899	Mayo	Goldspike Exploration Inc.- 100%
NAD 80	YD93780	Mayo	Goldspike Exploration Inc.- 100%
NAD 126	YD93826	Mayo	Goldspike Exploration Inc.- 100%
NAD 66	YD93766	Mayo	Goldspike Exploration Inc.- 100%
NAD 102	YD93802	Mayo	Goldspike Exploration Inc.- 100%
NAD 193	YD93893	Mayo	Goldspike Exploration Inc.- 100%
NAD 183	YD93883	Mayo	Goldspike Exploration Inc.- 100%
NAD 164	YD93864	Mayo	Goldspike Exploration Inc.- 100%
NAD 48	YD93748	Mayo	Goldspike Exploration Inc.- 100%
NAD 33	YD93733	Mayo	Goldspike Exploration Inc.- 100%
NAD 39	YD93739	Mayo	Goldspike Exploration Inc.- 100%
NAD 10	YD93710	Mayo	Goldspike Exploration Inc.- 100%
NAD 97	YD93797	Mayo	Goldspike Exploration Inc.- 100%
NAD 44	YD93744	Mayo	Goldspike Exploration Inc.- 100%
NAD 77	YD93777	Mayo	Goldspike Exploration Inc.- 100%
NAD 119	YD93819	Mayo	Goldspike Exploration Inc.- 100%

NAD 130	YD93830	Mayo	Goldspike Exploration Inc.- 100%
NAD 46	YD93746	Mayo	Goldspike Exploration Inc.- 100%
NAD 45	YD93745	Mayo	Goldspike Exploration Inc.- 100%
NAD 204	YD63814	Mayo	Goldspike Exploration Inc.- 100%
NAD 127	YD93827	Mayo	Goldspike Exploration Inc.- 100%
NAD 37	YD93737	Mayo	Goldspike Exploration Inc.- 100%
NAD 101	YD93801	Mayo	Goldspike Exploration Inc.- 100%
NAD 16	YD93716	Mayo	Goldspike Exploration Inc.- 100%
NAD 116	YD93816	Mayo	Goldspike Exploration Inc.- 100%
NAD 174	YD93874	Mayo	Goldspike Exploration Inc.- 100%
NAD 196	YD93896	Mayo	Goldspike Exploration Inc.- 100%
NAD 100	YD93800	Mayo	Goldspike Exploration Inc.- 100%
NAD 175	YD93875	Mayo	Goldspike Exploration Inc.- 100%
NAD 78	YD93778	Mayo	Goldspike Exploration Inc.- 100%

Prepared on behalf of:
GOLDSTRIKE RESOURCES LTD.
1300-111 West Georgia Street, BC V6E 4M3

By: FREDEDIC TURENNE B.Sc. P Geo No. 970
3921 AVENUE LAVAL MONTREAL QC CANADA H2W 2H9

TABLE OF CONTENTS

1. INTRODUCTION AND SUMMARY.....7
2. PROPERTY DESCRIPTION AND LOCAIZATION 8
3. ACCESSIBILITY, CLIMATE AND PHYSIOGRAPHY.....17
4. PROPERTY HISTORY 19
5. REGIONAL GEOLGY AND STRUCTURE 20
6. PROPERTY GEOLOGY 26
7. MINERALIZATION 32
8. CONCLUSION.....42
9. RECOMMENDATIONS 43
10. REFERENCES 43
11. STATEMENT OF QUALIFICATION OF AUTHOR 44

TABLES

TABLE 1: STEN NW prospect claim group data.....10
TABLE 2: Sample descriptions and results.....49

FIGURES

Figure 1: Sten NW prospect localization map 9
Figure 2: Sten NW Prospect claim group 16
Figure 3: Rock float in the bottom of Sten NW property 17
Figure 4: North west valley of Sten NW property 18
Figure 5 : North central valley of Sten NW property 19
Figure 6: Geology of the Sten NW Prospect 21
Figure 7: Stratigraphy, structure and Regional Formation.....23
Figure 8: Regional Antiform, South-west view of Sten NW property 24
Figure 9: Folded sheared contact South-West view of Sten NW 25
Figure 10: Greenish-blue fine to coarse grained meta-siltstone sandstone 26
Figure 11: Sten NW outcrop greenish shale/schist with chlorite alteration.....27
Figure 12: Tombstone Strain on Sten NW property.....28
Figure 13: West view from Sten NW property 29
Figure 14: Narchilla Formation on Sten NW property (south-west zone) 30
Figure 15: North central valley of Sten NW.....31
Figure 16: South-west valley of Sten NW.....34

Figure 17: float sample no. 1229262, 35.9 ppb Au……..35
Figure 18: Narchilla Formation outcrops……35
Figure 19: Bottom valley of Sten NW (North-east zone)……36
Figure 20: Sample 1229129; Greenish siltstone-slate, silicified with pyritic layers……37
Figure 21: Sample 1229131; Greenish volcanic phyllite……...37
Figure 22: Sample 122329; oxidized shear contact……..38
Figure 23: South East view of the Gossan……39
Figure 24: Pebble conglomerate and stockwerks……..40
Figure 25: Ferruginous brecciated decalcified conglomerate ……40

APPENDICES

APPENDIX IA: Sample Result on Sten NW property (north west zone) ……...45
APPENDIX IB: Sample Result on Sten NW property (north east-zone) ……..46
APPENDIX IC: Sample Result on Sten NW property (south-west zone)……...47
APPENDIX ID: Sample Result on Sten NW property (south-east zone)……..48

APPENDIX II : Sample results and geochemistry

APPENDIX III : Analytical Methods and Certificates of Analysis

APPENDIX IV : Certificate[s] of Work

1. INTRODUCTION AND SUMMARY

The gold exploration project was conducted on Sten NW, located in the Nadeleen Valley about 330 km east of Dawson city in Yukon, Canada. The Sten NW property covers a total of 204 claims. All claims are 100% owned by Goldspike Exploration Inc. and held under an option agreement by Goldstrike Resources Ltd.

From August 05 to August 19 2011, a team of 2-3 prospectors, 3 soil samplers, a pilot, a cook and a geologist explored and sampled the property. The crew was transported by helicopter from the Goldstrike Resources Exploration camp based on the Rackla airstrip.

This property is, geologically-speaking, Glacial Valleys covered with rock floats and outcrops. There is not a vast quantity of soil in the bottom of the valley, but a lot of outcrops and floats have been sampled. We specifically observed different rock types: pebble conglomerates, grits/sandstones, phyllites, shales, siltstones and limestone Gossan.
The Massive Gossan is observed in the north-east zone of Sten NW property.

Unfortunately, no significant gold assays were assayed despite of the fact that stockwerks system, limonitic brecciated limestone and anomalic arsenic have been identified. The gold mineralization may have been leached with strong weathering and decalcification.

The best soil samples are located in the north-east part of Sten NW property, over 400 meters, samples number 1231874-1231881, 16.1 to 35.1 ppb Au. Other geochemical gold trends in soil can be identifies on the north-east property.

There is an arsenic signature on few samples, which is not always associated with gold mineralization.

2. PROPERTY DESCRIPTION AND LOCALIZATION

The Sten NW prospect is situated within the Mayo Mining District. The claims Group is situated about 330 km east of Dawson city and 170 km north-east of Mayo city in the Nadeleen range. All claims are in good standing. Prospection and sampling has been done on the NTS map sheet: 106 C02, UTM zone 8, Nad 83.

The nearest populated area is the village of Mayo. This is also where the closest airport is located. The property area is accessible by airplane, helicopter, winter roads and horse paths.

Sten NW prospect localization is shown on figure 1 below.

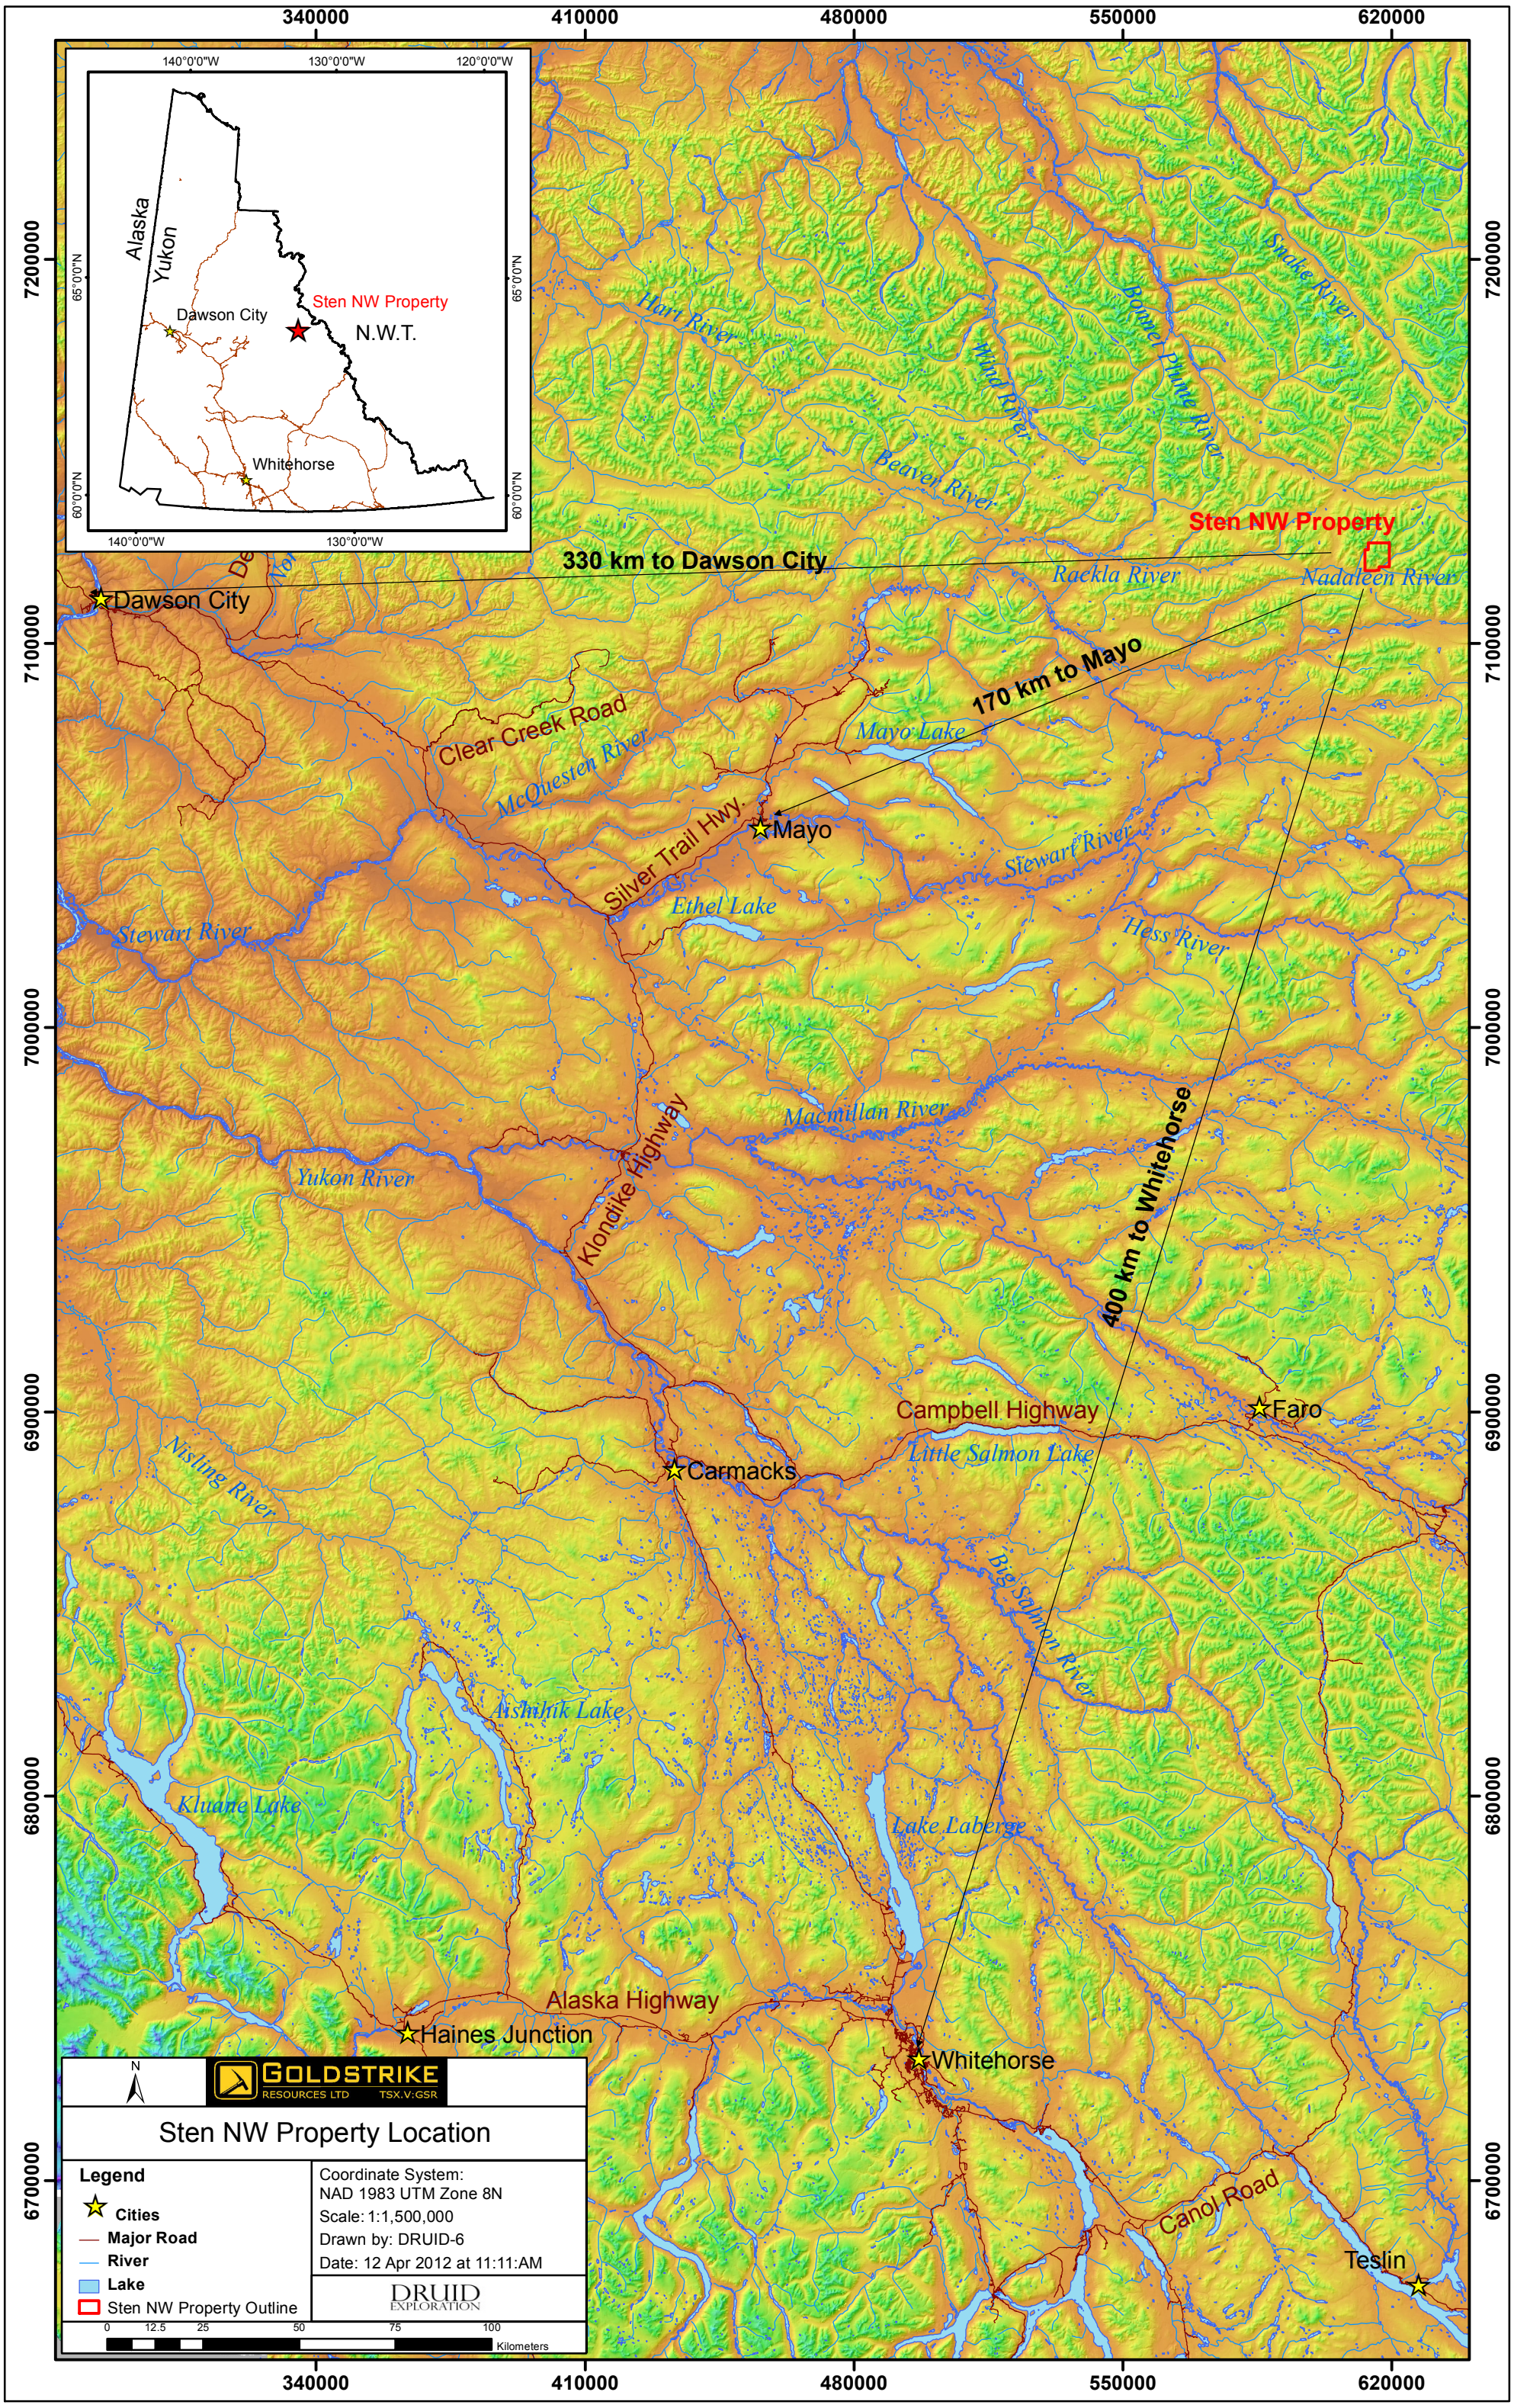
340000
410000
480000
550000
620000
7200000
7100000
7000000
6900000
6800000
6700000
140°0'0"W
130°0'0"W
120°0'0"W
65°0'0"N
60°0'0"N
Alaska
Yukon
Dawson City
Sten NW Property
N.W.T.
Whitehorse
Hart River
Wind River
Beaver River
Bonnet Plume River
Snake River
330 km to Dawson City
Sten NW Property
Dawson City
Raekla River
Nadaleen River
170 km to Mayo
Clear Creek Road
McQuesten River
Mayo Lake
Mayo
Silver Trail Hwy.
Stewart River
Ethel Lake
Hess River
Klondike Highway
Macmillan River
Yukon River
400 km to Whitehorse
Campbell Highway
Faro
Little Salmon Lake
Carmacks
Nisling River
Big Salmon River
Aishihik Lake
Kluane Lake
Lake Laberge
Alaska Highway
Haines Junction
Whitehorse
Canol Road
Teslin
N
GOLDSTRIKE
RESOURCES LTD
TSX.V:GSR
Sten NW Property Location
Legend
Cities
Major Road
River
Lake
Sten NW Property Outline
Coordinate System:
NAD 1983 UTM Zone 8N
Scale: 1:1,500,000
Drawn by: DRUID-6
Date: 12 Apr 2012 at 11:11:AM
DRUID
EXPLORATION
0
12.5
25
50
75
100
Kilometers

Description of mining claims block

The Sten NW Prospect consists of 204 Mining Claims located in the Mayo Mining District, Yukon Territory, Canada. The claims were staked by (Goldstrike Resources ltd.) The claim data is shown below in Table 1.

TABLE 1: STEN NW prospect claim group data

CLAIM_LABEL	GRANT_NUMBER	REG	STAKING_DATE	RECORDED_DATE	EXPIRY_DATE	TENURE_STA	NTS	COMPANY
NAD 154	YD93854	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 155	YD93855	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 156	YD93856	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 157	YD93857	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 159	YD93859	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 161	YD93861	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 163	YD93863	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 165	YD93865	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 166	YD93866	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 167	YD93867	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 168	YD93868	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 185	YD93885	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 186	YD93886	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 187	YD93887	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 189	YD93889	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 190	YD93890	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 191	YD93891	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 192	YD93892	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 194	YD93894	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 197	YD93897	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 198	YD93898	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 202	YD63812	Q	2010-10-25	2010-11-04	2016-11-04	Pending	106C02	Goldspike Exploration Inc.
NAD 55	YD93755	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 57	YD93757	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 60	YD93760	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 61	YD93761	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 3	YD93703	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 4	YD93704	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 8	YD93708	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.

NAD 9	YD93709	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 12	YD93712	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 13	YD93713	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 14	YD93714	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 15	YD93715	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 124	YD93824	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 125	YD93825	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 128	YD93828	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 129	YD93829	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 132	YD93832	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 133	YD93833	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 135	YD93835	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 136	YD93836	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 139	YD93839	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 140	YD93840	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 141	YD93841	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 142	YD93842	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 143	YD93843	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 145	YD93845	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 147	YD93847	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 148	YD93848	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 149	YD93849	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 151	YD93851	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 170	YD93870	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 171	YD93871	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 173	YD93873	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 176	YD93876	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 177	YD93877	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 178	YD93878	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 179	YD93879	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 180	YD93880	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 181	YD93881	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 21	YD93721	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 23	YD93723	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 18	YD93718	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 19	YD93719	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 20	YD93720	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 27	YD93727	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 29	YD93729	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 30	YD93730	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 31	YD93731	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.

NAD 32	YD93732	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 34	YD93734	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 35	YD93735	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 38	YD93738	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 40	YD93740	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 41	YD93741	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 43	YD93743	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 47	YD93747	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 50	YD93750	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 53	YD93753	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 63	YD93763	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 70	YD93770	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 71	YD93771	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 72	YD93772	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 73	YD93773	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 74	YD93774	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 75	YD93775	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 76	YD93776	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 79	YD93779	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 81	YD93781	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 85	YD93785	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 88	YD93788	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 89	YD93789	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 90	YD93790	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 91	YD93791	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 92	YD93792	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 95	YD93795	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 96	YD93796	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 99	YD93799	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 103	YD93803	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 104	YD93804	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 105	YD93805	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 107	YD93807	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 108	YD93808	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 109	YD93809	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 111	YD93811	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 112	YD93812	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 113	YD93813	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 115	YD93815	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 117	YD93817	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 118	YD93818	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.

NAD 120	YD93820	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 121	YD93821	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 122	YD93822	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 146	YD93846	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 93	YD93793	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 65	YD93765	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 98	YD93798	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 5	YD93705	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 87	YD93787	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 56	YD93756	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 51	YD93751	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 24	YD93724	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 134	YD93834	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 94	YD93794	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 7	YD93707	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 200	YD93900	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 169	YD93869	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 184	YD93884	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 162	YD93862	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 25	YD93725	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 52	YD93752	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 172	YD93872	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 158	YD93858	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 201	YD63811	Q	2010-10-25	2010-11-04	2016-11-04	Pending	106C02	Goldspike Exploration Inc.
NAD 86	YD93786	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 59	YD93759	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 110	YD93810	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 195	YD93895	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 11	YD93711	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 203	YD63813	Q	2010-10-25	2010-11-04	2016-11-04	Pending	106C02	Goldspike Exploration Inc.
NAD 106	YD93806	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 58	YD93758	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 114	YD93814	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 22	YD93722	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 188	YD93888	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 150	YD93850	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 82	YD93782	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 131	YD93831	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 54	YD93754	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 36	YD93736	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 199	YD93899	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.

NAD 84	YD93784	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 80	YD93780	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 126	YD93826	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 68	YD93768	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 6	YD93706	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 66	YD93766	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 64	YD93764	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 102	YD93802	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 193	YD93893	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 183	YD93883	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 152	YD93852	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 164	YD93864	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 48	YD93748	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 62	YD93762	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 33	YD93733	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 39	YD93739	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 10	YD93710	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 97	YD93797	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 44	YD93744	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 77	YD93777	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 28	YD93728	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 26	YD93726	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 119	YD93819	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 42	YD93742	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 49	YD93749	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 130	YD93830	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 17	YD93717	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 153	YD93853	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 138	YD93838	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 1	YD93701	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 46	YD93746	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 45	YD93745	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 83	YD93783	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 204	YD63814	Q	2010-10-25	2010-11-04	2016-11-04	Pending	106C02	Goldspike Exploration Inc.
NAD 127	YD93827	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 182	YD93882	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 37	YD93737	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 123	YD93823	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 101	YD93801	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 16	YD93716	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 116	YD93816	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.

NAD 174	YD93874	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 196	YD93896	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 144	YD93844	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 100	YD93800	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 137	YD93837	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 69	YD93769	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 175	YD93875	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 78	YD93778	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 2	YD93702	Q	2010-10-30	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 67	YD93767	Q	2010-10-28	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.
NAD 160	YD93860	Q	2010-10-25	2010-11-04	2016-11-04	Active	106C02	Goldspike Exploration Inc.

During the field exploration campaign in August 2011 on Sten NW property, 117 claims on a total of 204 claims have been worked. See Figure 2 below.

608000 610000 612000 614000 616000 618000 620000 622000 624000 626000

7128000 7126000 7124000 7122000 7120000 7118000

2011 Field Activities

- Rock Samples (205)
- Soil Samples (495)
- Silt Samples (17)
- Prospector Tracks
- Claims Worked (117)
- Sten NW Claims (204)
- Surrounding Quartz Claims

Nadaleen Range

Wernecke Mountains
Selwyn Mountains

Nadaleen River

NAD 55 YD93755 NAD 56 YD93756 NAD 87 YD93787 NAD 88 YD93788 NAD 119 YD93819 NAD 120 YD93820 NAD 148 YD93848 NAD 147 YD93847 NAD 175 YD93875 NAD 176 YD93876 NAD 203 YD63813 NAD 204 YD63814
NAD 54 YD93754 NAD 53 YD93753 NAD 86 YD93786 NAD 85 YD93785 NAD 118 YD93818 NAD 117 YD93817 NAD 145 YD93845 NAD 146 YD93846 NAD 174 YD93874 NAD 173 YD93873 NAD 202 YD63812 NAD 201 YD63811
NAD 51 YD93751 NAD 52 YD93752 NAD 83 YD93783 NAD 84 YD93784 NAD 115 YD93815 NAD 116 YD93816 NAD 144 YD93844 NAD 143 YD93843 NAD 171 YD93871 NAD 172 YD93872 NAD 199 YD93899 NAD 200 YD93900
NAD 50 YD93750 NAD 49 YD93749 NAD 82 YD93782 NAD 81 YD93781 NAD 114 YD93814 NAD 113 YD93813 NAD 141 YD93841 NAD 142 YD93842 NAD 170 YD93870 NAD 169 YD93869 NAD 198 YD93898 NAD 197 YD93897
NAD 23 YD93723 NAD 24 YD93724 NAD 47 YD93747 NAD 48 YD93748 NAD 79 YD93779 NAD 80 YD93780 NAD 111 YD93811 NAD 112 YD93812 NAD 140 YD93840 NAD 139 YD93839 NAD 167 YD93867 NAD 168 YD93868 NAD 195 YD93895 NAD 196 YD93896
NAD 22 YD93722 NAD 21 YD93721 NAD 46 YD93746 NAD 45 YD93745 NAD 78 YD93778 NAD 77 YD93777 NAD 110 YD93810 NAD 109 YD93809 NAD 137 YD93837 NAD 138 YD93838 NAD 166 YD93866 NAD 165 YD93865 NAD 194 YD93894 NAD 193 YD93893
NAD 19 YD93719 NAD 20 YD93720 NAD 43 YD93743 NAD 44 YD93744 NAD 75 YD93775 NAD 76 YD93776 NAD 107 YD93807 NAD 108 YD93808 NAD 136 YD93836 NAD 135 YD93835 NAD 163 YD93863 NAD 164 YD93864 NAD 191 YD93891 NAD 192 YD93892
NAD 18 YD93718 NAD 17 YD93717 NAD 42 YD93742 NAD 41 YD93741 NAD 74 YD93774 NAD 73 YD93773 NAD 106 YD93806 NAD 105 YD93805 NAD 133 YD93833 NAD 134 YD93834 NAD 162 YD93862 NAD 161 YD93861 NAD 190 YD93890 NAD 189 YD93889
NAD 15 YD93715 NAD 16 YD93716 NAD 39 YD93739 NAD 40 YD93740 NAD 71 YD93771 NAD 72 YD93772 NAD 103 YD93803 NAD 104 YD93804 NAD 132 YD93832 NAD 131 YD93831 NAD 159 YD93859 NAD 160 YD93860 NAD 187 YD93887 NAD 188 YD93888
NAD 14 YD93714 NAD 13 YD93713 NAD 38 YD93738 NAD 37 YD93737 NAD 70 YD93770 NAD 69 YD93769 NAD 102 YD93802 NAD 101 YD93801 NAD 129 YD93829 NAD 130 YD93830 NAD 158 YD93858 NAD 157 YD93857 NAD 186 YD93886 NAD 185 YD93885
NAD 11 YD93711 NAD 12 YD93712 NAD 35 YD93735 NAD 36 YD93736 NAD 67 YD93767 NAD 68 YD93768 NAD 99 YD93799 NAD 100 YD93800 NAD 128 YD93828 NAD 127 YD93827 NAD 155 YD93855 NAD 156 YD93856 NAD 183 YD93883 NAD 184 YD93884
NAD 10 YD93710 NAD 9 YD93709 NAD 34 YD93734 NAD 33 YD93733 NAD 66 YD93766 NAD 65 YD93765 NAD 98 YD93798 NAD 97 YD93797 NAD 125 YD93825 NAD 126 YD93826 NAD 154 YD93854 NAD 153 YD93853 NAD 181 YD93881 NAD 182 YD93882
NAD 7 YD93707 NAD 8 YD93708 NAD 31 YD93731 NAD 32 YD93732 NAD 63 YD93763 NAD 64 YD93764 NAD 95 YD93795 NAD 96 YD93796 NAD 124 YD93824 NAD 123 YD93823 NAD 151 YD93851 NAD 152 YD93852 NAD 179 YD93879 NAD 180 YD93880
NAD 5 YD93705 NAD 6 YD93706 NAD 30 YD93730 NAD 29 YD93729 NAD 62 YD93762 NAD 61 YD93761 NAD 93 YD93793 NAD 94 YD93794 NAD 121 YD93821 NAD 122 YD93822 NAD 149 YD93849 NAD 150 YD93850 NAD 177 YD93877 NAD 178 YD93878
NAD 3 YD93703 NAD 4 YD93704 NAD 27 YD93727 NAD 28 YD93728 NAD 59 YD93759 NAD 60 YD93760 NAD 91 YD93791 NAD 92 YD93792
NAD 1 YD93701 NAD 2 YD93702 NAD 25 YD93725 NAD 26 YD93726 NAD 57 YD93757 NAD 58 YD93758 NAD 89 YD93789 NAD 90 YD93790

T 2830 T 2873 T 2874 T 2917 T 2918
T 2828 T 2871 T 2872 T 2915 T 2916
T 2826 T 2869 T 2870 T 2913 T 2914
T 2824 T 2867 T 2868 T 2911 T 2912
T 2822 T 2865 T 2866 T 2909 T 2910 T 2957 T 2956 T 1071 T 1070 T 1029 T 1028 T 987 T 986 T 945 T 944 T 903 T 902 T 861 T 860 T 823 T 822 T 785 T 784
T 2820 T 2863 T 2864 T 2907 T 2908 T 2955 T 2954 T 1069 T 1068 T 1027 T 1026 T 985 T 984 T 943 T 942 T 901 T 900 T 859 T 858 T 821 T 820 T 783 T 782 EN 11 EN 12 EN 133 EN 135 EN 137 EN 139 EN 141 EN 143 EN 145 EN 14
T 2818 T 2861 T 2862 T 2905 T 2906 T 2953 T 2952 T 1067 T 1066 T 1025 T 1024 T 983 T 982 T 941 T 940 T 899 T 898 T 857 T 856 T 819 T 818 T 781 T 780 EN 9 EN 10 EN 134 EN 136 EN 138 EN 140 EN 142 EN 144 EN 146 EN 14
T 2816 T 2859 T 2860 T 2903 T 2904 T 2951 T 2950 T 1065 T 1064 T 1023 T 1022 T 981 T 980 T 939 T 938 T 897 T 896 T 855 T 854 T 817 T 816 T 779 T 778 EN 7 EN 8 EN 73 EN 75 EN 77 EN 79 EN 81 EN 83 EN 85 EN 8
T 2814 T 2857 T 2858 T 2901 T 2902 T 2949 T 2948 T 1063 T 1062 T 1021 T 1020 T 979 T 978 T 937 T 936 T 895 T 894 T 853 T 852 T 815 T 814 T 777 T 776 EN 5 EN 6 EN 74 EN 76 EN 78 EN 80 EN 82 EN 84 EN 86 EN 8
T 2812 T 2855 T 2856 T 2899 T 2900 T 2947 T 2946 T 1061 T 1060 T 1019 T 1018 T 977 T 976 T 935 T 934 T 893 T 892 T 851 T 850 T 813 T 812 T 775 T 774 EN 3 EN 4 EN 13 EN 15 EN 17 EN 19 EN 21 EN 23 EN 25 EN 2
Jam 19 Jam 21 Jam 23 T 2897
Jam 18
EN 32 EN 34 EN 36 EN 38 EN 40 EN 42 EN 44 EN 46 EN 48 EN 50

N

GOLDSTRIKE RESOURCES LTD TSX.V:GSR

Sten NW Claims and Samples

Legend

- Toponym
- Contour (100 ft)
- Index Contour (1000 ft)
- River
- Lake
- Wetland
- Sten NW Claim Outline

Coordinate System:
NAD 1983 UTM Zone 8N
Scale: 1:50,000
NTS Map Sheets: 106C03-6
Drawn by: DRUID-6
Date: 13 Apr 2012 at 06:32:PM

DRUID EXPLORATION

0 0.25 0.5 1 1.5 2 2.5 Kilometers

3. ACCESSIBILITY, CLIMATE, AND PHYSIOGRAPHY

The easiest way to access the Sten NW (NAD) property is by airplane from Mayo to Rackla airstrip camp on the East Rackla River, "Rackla City", approximately 27 km west of the Sten NW property. Helicopter transportation is required to reach the prospect.

A lateritic saprolithic profile is observed where the soil has been preserved in between glacial and warming eras at the top of some ridges.

In late Cenozoic, after a period of geologic al stability, the region was slowly but continually uplifted up to the Quaternary time period (2 million years ago). Drainage systems carved extensive valley systems while the plateau region of central Yukon was being gently elevated (millimetres per thousands of years) and rapidly uplifted in the western Yukon (metres per thousands of years).
T. Fuller and L. Jackson Quaternary Geology of the Yukon Territory
(www.geology.gov.yk.ca)

The topography of Sten NW starts form 6300 m and drops drastically into the steep and sharp ridge and carved glacial valley with creeks draining from all sides. The substratum is made of sub-arctic lichen, vegetation, regolith, rock floats. See figure 3.

Figure 3. Rock Float in the bottom of the valley, West view from south-west zone, sten NW property.

The property explored is situated on a permafrost zone and subalpine uplift plateau. In August, the temperature drops below 0 degree at night with an average temperature of 10 degrees Celsius and days are mostly rainy and foggy. In this central east region of Yukon the sun rises at 4 am and sets around 11 pm. It is a harsh environment consisting of steep cliffs with rock slide hazard; grizzlies have been seen in the valley. See figures 4 and 5.

Figure 4. North West valley of Sten NW property. UTM zone 8 (E 615000 N 7123500)

Figure 5 North central valley of Sten NW property. UTM zone 8 (E 617500 N 7125000).

4. PROPERTY HISTORY

106C02
MAYO MINING DISTRICT

This block of 204 claims ties on to the north boundary of ATAC's Sten/Osiris property
11 km NW of the STEN discovery and 132 km ENE of Keno Hill.

The ATAC main geochemical trend runs approximately 5 km south of the Sten NW claim block.
The Sten NW claim block cover a mountain ridge with anomalous gold in creeks draining from all sides.

This area has recently caught the attention of the industry, based on ATAC's recent
discoveries of widespread Carlin-style mineralization in sediments.

The Rau and Osiris discoveries are located on the edge of the Mackenzie Platform,
where Paleozoic carbonates and clastics overlie Early, Middle and Late Proterozoic rocks
that were explored for base metals and uranium in the 1970. (Trevor Bremner, P Geo 2011)

5. REGIONAL GEOLOGY AND STRUCTURE

The Hyland Group, the Gull Lake formation and the Road River Group underlay the area of the claims prospected and sampled during the 2011 gold exploration campaign.

Precambrian, Cambrian and Ordovician units have been identified. Carbonated, coarse to fine grained, massive to centimeter thick sedimentary rock and phyllitic rock can be found in the area.

The regional geology of the upper Hyland River valley area is poorly understood. The Rock distribution is dominated by Neoproterozoic to Lower Cambrian clastic strata with lesser Paleozoic clastic and carbonate strata rock formation. Murphy, Donald C, 1997

The region is largely underlain by Neoproterozoic to lowest Cambrian Hyland Group clastic sedimentary rocks which are divisible in coarse-clastic, quartz-rich grits, conglomerates and quartzites of the dominantly Neoproterozoic Yusezyu Formation, and overlying maroon and green argillites, grey shales and lesser grits and sandstone, of the dominantly Lower Cambrian Narchilla Formation. See figure 6 below.

600000 605000 610000 615000 620000 625000 630000 635000

7135000 7130000 7125000 7120000 7115000

mPPFl
muPPFu
Nadaleen Range
PCH
CDR
Selwyn Mountains
Wernecke Mountains
Nadaleen River

Regional Geology

Upper Cambrian to Lower Devonian

Road River-Richardson Group

CDR Ancestral North America: dolostone; shale/limestone/conglo

Upper Proterozoic to Lower Cambrian

Pinguicula/Fifteen Mile (Lower)

mPPFl Ancestral North America: shale/siltstone/limestone/dolostone/chert

Highland Group

PCH Ancestral North America: shale/siltstone/sandstone/limestone

PCH Ancestral North America: volcanic/breccia/tuff/agglomerate

Upper Proterozoic

Highland Group

PCH Ancestral North America: limestone

Middle to Upper Proterozoic

Pinguicula/Fifteen Mile (Upper)

muPPFu Ancestral North America: limestone/dolostone

Fault Type

Fault, defined, movement undefined

Fault, assumed, normal/reverse

Fault, approximate, normal/reverse

Fault, approximate, thrust, upright

N

GOLDSTRIKE RESOURCES LTD TSX.V:GSR

Sten NW Regional Geology

Legend

Toponym

Index Contour (1000 ft)

River

Lake

Wetland

Sten NW Claim Outline

Coordinate System:
NAD 1983 UTM Zone 8N
Scale: 1:100,000
NTS Map Sheets: 106C03-6
Drawn by: DRUID-6
Date: 13 Apr 2012 at 02:00:PM

DRUID EXPLORATION

0 0.5 1 2 3 4 5 Kilometers

Regional Formation

- Yusezyu Formation is locally dominated by finer grained lithology, but is characterized by the coarser grained rock units. Thin discontinuous limestone horizons occur near the contact between the Yusezyu and Narchilla Formations as observed in the Sten NW property.

- Narchilla and Vampire Formation strata are locally overlain by the orange-brown weathering recessive shale of the Lower to Middle Cambrian.

- Gull Lake Formation limestone-conglomerate and limestone may be equivalent to off-shelf Lower Cambrian Sekwi carbonate Formation.

- Rabbitkettle Formation limestone is overlain by undifferentiated Road River Group strata.

- The Tombstone strain is related to igneous intrusion and low grade metamorphism / green schist with chlorite alteration. See figure 7.

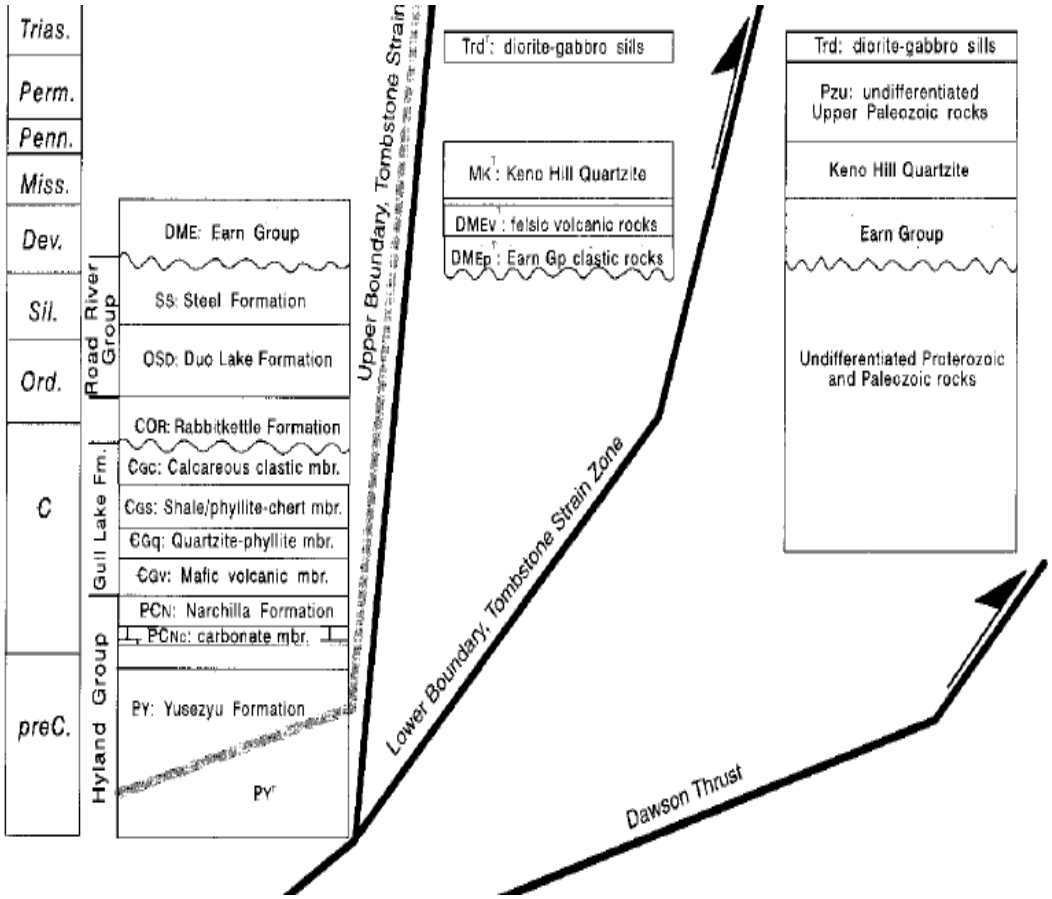

Figure 7. Stratigraphy of regional structure, Group and Formation of Precambrian to Mississippian era, found in the area of Rackla and Sten NW properties. (Geoscience Maps 1996)

Structural Geology

Non-igneous rocks have a weak to moderate northwest-trending, shallow to moderate steep-dipping fabric. The fabric is defined by phyllitic partings with mica development on foliation surfaces. The intensity of phyllite development is highest proximal to Hyland plutonic suite intrusions and has slaty cleavage distal to the plutonic suite.

The fabric developed as a consequence to deformation that transposed bedding through a series of northeast-verging overturned folds that are locally cut by thrust faults.

Quartz-rich beds of conglomerate, grit and quartzite are mostly undeformed. But margins are mostly modified by minor faults. Smaller units are rolled among more ductile argillaceous host rocks (Gordey and Anderson 1993).

Geological mapping indicates that Yusezyu Formation strata are characterized by grits, conglomerates and phyllite. The Yusezyu Formation is overlain by the Narchilla Formation, argillites and shales. Regional anticlinorium and faults are recognized. See figure 8 below.

Figure 8. Regional Antiform and faults, South-west view of Sten NW property (central/ west zone).

Northeast-trending faults and folds

The youngest structural elements are northeast-trending faults. These faults are easily recognized by observing the north-trending ridges. North-trending structures show an apparent dextral offset (Gordey and Anderson 1993).

Numerous of small North and Northwest-trending faults cut deformed Hyland group strata, particularly the Little Owls anticline rocks. North-trending geochemical anomalies and North-trending lineations are observed. The fabric developed as a consequence of the deformation that transposed bedding through a series of northeast-overturned folds that are locally cut by thrust faults. See figure 9.

Figure 9. Folded sheared contact, south-west view of Sten NW (north-east zone).

6. PROPERTY GEOLOGY

Two distinguished rock units of the Hyland Group and a green schist metamorphic rock unit can be identified on the Sten NW property.

The Yusezyu Formation at the bottom is composed of deformed gritty coarse grained metaclastic, pebbly conglomerate and Chloritic phyllite with pyrite. The Yusezyu Formation is composed of foliated to medium grained green-grey Phyllite with laminations of grey-brownish metasiltstone. Subfeldspathic medium to coarse grained metasandstone, pebbly metasandstone and grit were also observed on Sten NW. Quartz grains and granules are common and characteristic of the coarser clastic Formation of the Hyland Group.

The Narchilla Formation above is composed of green, maroon and reddish phyllite units with fine sandstone and siltstone laminae. See figure 10.

The Tombstone strain deformation is observed in the South-West zone, North-West zone and North-East zone of Sten NW property. Dark green metavolcanic /Chloritic phyllite were observed on the property.

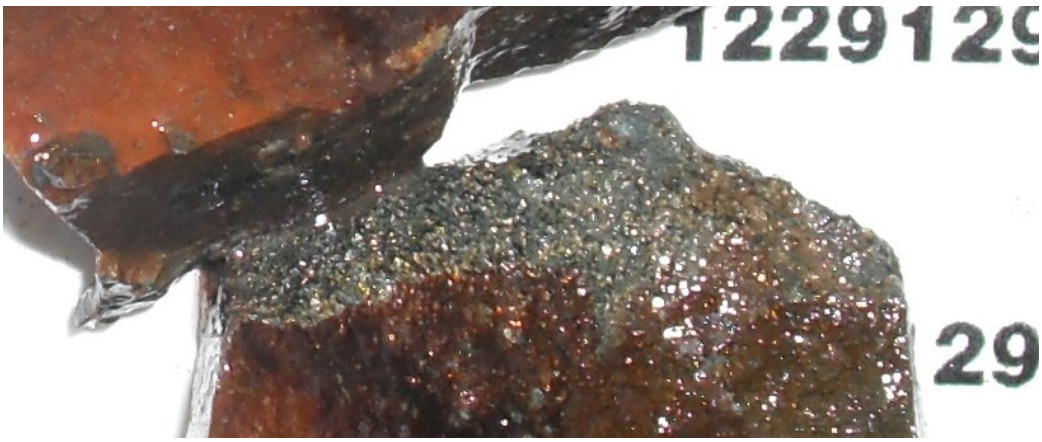

Figure 10. Greenish-blue fine to coarse grained metasiltstone sandstone bedding with pyritic mineralization of the Precambrian Yusezyu Formation.

Coarser clastic rocks are better exposed than other rock types. Pebble conglomerates made up of pebbles of white quartz and chalky feldspar from the Yusezyu Formation (Cecile, 1997), are also found in the South-East zone of Sten NW property and at the Gossan site.

The Yusezyu Formation within the Tombstone Strain Zone as foliated and lineated quartzo-feldspathic, arenite and greenish-blue phyllite with chlorite alteration and with pyrite mineralisation. See figures 11 and 12.

Figure 11. Sten NW outcrop greenish shale/schist with chlorite alteration and qtz-carbonated veins N 042 dip 48.

Figure 12. Tombstone Strain / foliation observed on Sten NW property (South-West zone)

Narchilla Formation on Sten NW

Metasandstone, green-grey phyllite, purple and maroon phyllite, pebbly metasandstone and metaconglomerate, and sandy limestone and limestone breccia, see figure 13.

Figure 13. West view from the Sten NW property South-West zone.

The Narchilla Formation was subdivided into grey-black shale, siltstone, quartzite and minor gritty quartzite and limestone, made up of maroon and green argillite. See figure 14 and 15.

Figure 14. Sten NW property (South-West zone), Narchilla Formation, siltstone with light green to olive green fine sandstone and siltstone laminae.

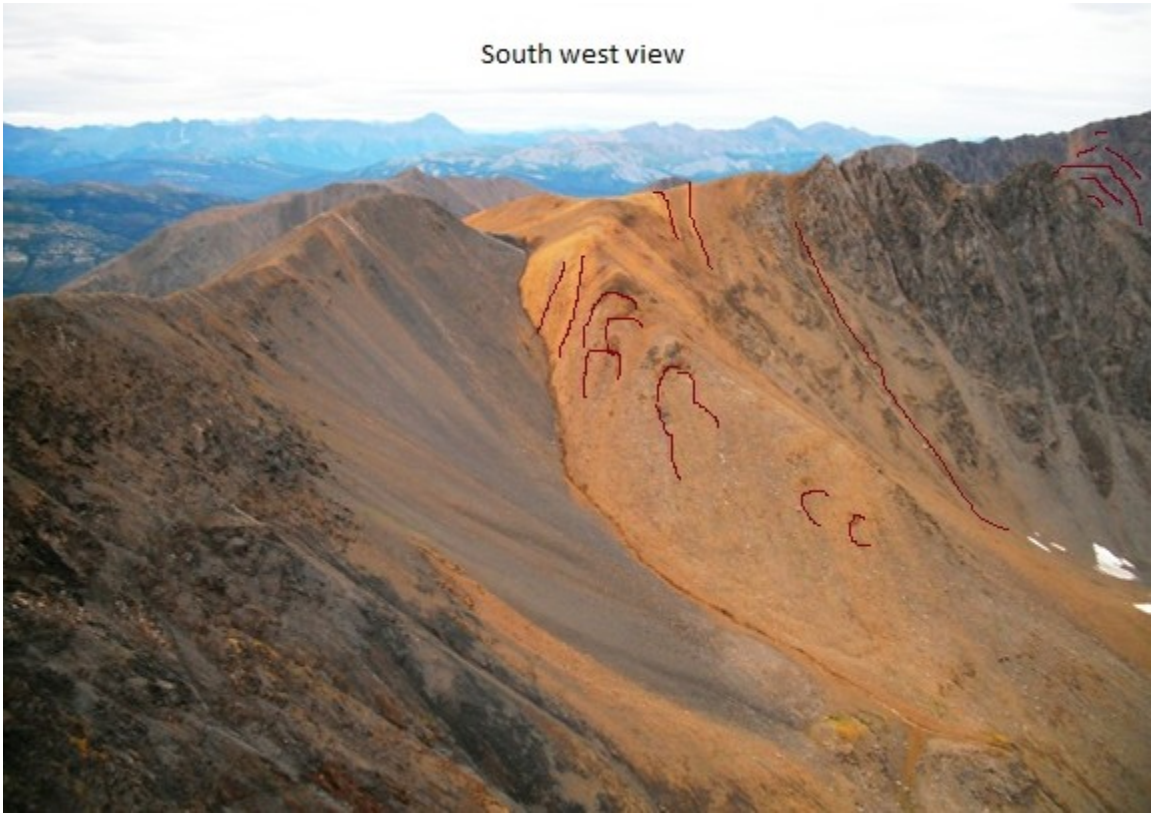

Figure 15. North central valley of Sten NW (north-east zone) property, south west view of limonitic Gossan with quartz carbonated limestone and conglomeratic limestone and silicified stockwerks, veining system in shear contact and folding with grey shale siltstone contact.

The Gossan observed could well be the Narchilla or the Vampire Formation.

7. MINERALIZATION AND RESULTS

STEN Property

Soil sample results on Sten property

During the gold field exploration project in 2011, 523 soil samples, 17 silt samples and 204 rock samples have been sampled on Sten NW property. Surrounded by Circle glacier valley and steep ridges, rocky grounds, regolithic to lateritic soil fabric, the Sten NW property has few mineralized soil samples that assayed more gold than the rocks samples, see figures (16-17-18-19).

The best soil samples are located in the north-east part of Sten NW property and gold anomalies can be found over 400 meters. The best gold assays are from 30 to 60 ppb Au.

Gold assay results on silt samples are pending.

Sten NW property north-west zone

Appendix I A. Sample result on Sten property / North-west zone july 2011 survey

The list of samples below represents sequences of samples with more than 10 ppb gold in soil.

1231849-1231858, 10 samples, 10.2 to 20.9 ppb Au, average of 15.02 ppb Au
1231838-1231844, 9 samples, 11.6 to 30.1 ppb Au, average of 20 ppb Au
1231874-1231881, 8 samples, 16.1 to 35.1 ppb Au, average of 25.6 ppb Au

Sten NW property north-east zone

Appendix I B. Sample result on Sten NW property / north-east zone July 2011 survey.

The list of samples below represents sequences of samples with more than 10 ppb gold in soil.

1230407-1230410, 4 samples, 15.6 to 21.7 ppb, average 18.7 ppb Au
1230414-1230416, 3 samples, 29.8 to 59.4 ppb Au, average of 29.8 ppb Au
1230348-1230357, 10 samples, 11.2 to 47.7 ppb Au, average of 28.7 ppb Au.
123374-1230378, 5 samples, 14.1 to 48.3 ppb, average of 27.38 ppb Au.
1230382-1230386, 4 samples, 10.2 to 17.9 ppb, average of 13 ppb Au

Most of significant gold assay results are located in the north east and the north-west zone of Sten NW property, where mineralized floats and outcrops have been observed.

Sten NW property south-west zone

No significant gold trend

Appendix I C. Sample result on Sten property / south-west zone July 2011 survey.

Sten NW property south-east zone

No significant gold trend

Appendix I D. Sample result on Sten NW property / south-east zone July 2011 survey.

Rocks samples on Sten property

During the gold exploration project, 204 rocks samples have been taken on Sten property and only 5 rock samples assayed 9.7 ppb gold or more, see figure (20,21,22). The two highest gold assays on rock samples are from float samples collected in the south western valley of Sten property, the sample no. 1229262 has 35.9 ppb and the sample 1229263 has 20.9 ppb Au. The source of these samples is probably just uphill.

Figure 16. South–west valley of Sten NW property, float sample assay 35.9 ppb Au, 1.6 ppm Ag, 60.1 ppb As, 213 ppb Pb, 115.6 Cu. UTM zone 8 E 614734 N 7122391.

Figure 17. Float sample no. 1229262, Tarnish Dark grey wacke/ phyllite with fine grained pyrite, chalcopyrite and arsenopyrite, 35.9 ppb Au, 1.6 ppm Ag, 60.1 ppb As, 213 ppb Pb, 115.6 Cu. UTM zone 8 E 614734 N 7122391.

Figure 18. Narchilla Formation outcrops samples no. 1229263. Tarnish grey, massive sulfides in between silicified siltstone- limestone and a coarse grained sandstone with pyrite and chalcopyrite. Assay: 20.9 ppb Au , 88.9 ppb As, 1524 ppb Mn, 15% Fe, 292.5 ppb Pb, cu 161.4 ppm, UTM zone 8 E 614739 N 7122373

The sample 1229218 is a rusty shale with 5 % of disseminated fine grained pyrite collected in the South-West valley of Sten Property, assay: 12.8 ppb Au, 112.5 ppm Pb, 52.9 ppm Ni, 33.8 ppm Co, 7.08 % Fe.
UTM zone 8 E 613557 N 7122224

Figure 19. Bottom of the valley on Sten NW (North-east zone) where silicified dark green phyllite/felsic volcanic along with pyrite mineralization and chlorite alteration were observed.

Located at the bottom of the Sten NW (north-east zone), this valley has characteristic dark green fine grained volcanic rocks, fine grained to coarse grained pyrite mineralization and massive sulfides in fold hinge dipping of 74 degree to the west. Few mineralized samples assayed 4 to 9.7 ppb gold, See mineralized samples below figures 20, 21,22.

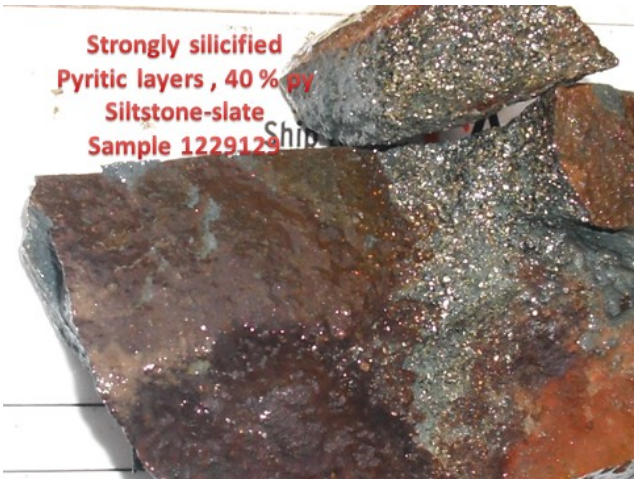

Figure 20. Sample 1229129; Greenish siltstone-slate, silicified with pyritic layers, assay: 120.9 ppm Cu, 20.9 ppm Pb, 103 ppm Zn, 79.6 ppm Ni, 28.3 ppm Co, 285 ppm Mn, 10.43 % Fe, 2.89 % Al, 10.7 ppm As, 4.8 ppb Au. UTM zone 8 E 617333 N 7124517.

Figure 21. Sample 1229131; Greenish volcanic phyllite, silicified with qtz-carbonate vns, pyrite, chalcopyrite and iron oxide Assay: 151.2 ppm Cu, 26.8 ppm Pb, 54 ppm Zn, 50.2 ppm Ni, 28.4 ppm Co, 413 ppm Mn, 6.85 % Fe, 9.4 ppm As, 1,78 % Fe, 9.7 ppb Au. UTM 8 E 617378 N 7124439 .

The sample 1229173 has been collected in the same valley and assayed 13.1 ppb Au , 101.7 ppm Cu, 71.1 ppm Pb, and 8.06 % Fe. It is greenish shale with carbonated qtz-vns with iron oxide alteration. UTM zone 8 E 61765 N 7125133

North-East valley of Sten Property

The North East valley of Sten property appeared promising with wide Gossan and strongly weathered limonitic limestone and conglomerate/breccia, stockwerks, vugs and shear contact, see figures 22 and 23.

.

Figure 22. Sample 122329; oxidized shear contact between shale and pebble conglomerate sandstone, Clay alteration + leached, red brown zone (from silicified, limonitic to pebble conglomerate). assays 3.6 ppb Au, As 80.1 ppb, cu 217 ppm, 9.07 % ppm, 1115 ppm Mn and 0.98 Al. UTM 8N E619017 N7125256.

GOSSAN on Sten NW (north-east zone south west view)

Figure 23. South East view of Gossan situated in the north east valley of Sten NW property
UTM 8N N 618580 E 712428.

The picture above was taken from the bottom of the North-East valley of Sten NW property. A helicopter is perched on top of a weathered silicified limestone / siltstone with coarse conglomerate with rounded and brecciated fragments. Orange and purple iron oxide/limonitic alteration with open space, decalcification, vugs stockwerks and micro veinlets have been observed and sample on this huge Gossan.

An overturned anticlinal folded with South-West-north east foliation/fold axe with strongly weather limestone have been observe on the field.

Different weathered conglomerates, breccia and carbonated units can be found at the sheared contact in between black siltstone and orange brown folded clastic limestone units. See figures (24, 25).

Figure 24. Pebble conglomerate with silicified polygenic rounded centimetric clasts, and orange-brown limonitic matrix, strongly silicified conglomerate with stockwerks. UTM zone 8 E 618581 N 7124124.

Figure 25. Ferruginous brecciated decalcified conglomerate with purple orange alteration, open space, vugs, iron oxide mineralization/limonite. Assay: assays 153.7 ppm Cu, 86 ppm Zn, 55.8 ppm Ni, 25.3 ppm Co, 23.68 % Fe, 42.3 ppm As, 0.4 ppb Au. UTM 8N E 618865 N 7124093.

Base metal mineralization and local gold mineralization occurs in silicified conglomerate and green schist phyllite which is associated with pyrite and minor chlorite. Also, massive sulfide pockets are trapped in metric tilt fold.

Limestone-Carbonated rocks are associated with manganese and barite but not always with gold. Arsenic occurs with clay alteration and limonite.

Intense decalcification and weathering have possibly leached the gold mineralization particularly at the Gossan site.

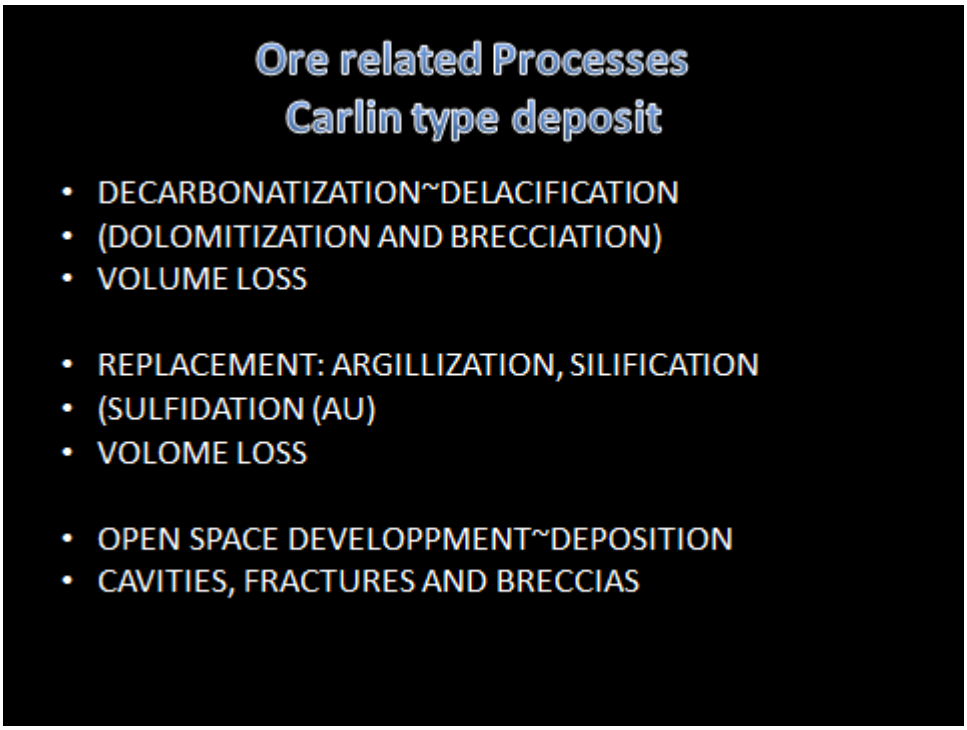

8.CONCLUSION

- Sten NW property is situated on Precambrian to Cambrian, Hyland Group rock Formation.

- The Narchilla Formation (siltstone-limestone) and Yusezyu Formation (pyritic phyllite and conglomerate).

- The best soil samples on Sten NW property are in between 30 to 60 ppb Au. They are located in the north-west zone and the North-East zone. The anomalies can be traced over a stretch of 400 meters long.

- Sten NW property has also mineralization and phyllitic fabric development with pyrite mineralization.

- Pyrite mineralization occurs in silicified sandstone/wacke and conglomerate at a low grade to green schist metamorphism phyllite with minor chlorite.

- The major limonitic/ferruginous orange Gossan, made of decalcified clastic limestone/ breccia, stockwerks, qtz-vns, anomalous arsenic, saprolithic fabric and tilt antiform, was observed at the sheared contact on Sten North-East zone.

- The mineralization system appears to be a Mississippi Valley and a Carlin Type.

- The Sten NW seems to have a SE-NE trending pyritic mineralization in bedrock.

9. RECOMMENDATIONS

- A reconnaissance drilling program is recommended to confirm or note the mineralization under the strongly weathered and altered surface of major limonitic Gossan and the black shale unit contact underground to meet the Chloritic formation seen down the valley.

- Black shale should also be sampled at the contact with the Gossan; it can be a source of heavy minerals and base metal mineralization.

- Unconformity contact should be assayed for uranium. Structural mapping should be done if mineralization is found in a particular strata rock type.

10. REFERENCE

Albert H. Hofstra, Joel S. Leventhal, David J. Grimes, and William D. Heran. SEDIMENT-HOSTED AU DEPOSITS (MODEL 26a; Berger, 1986)

Murphy, Donald C, 1997. Geology of the McQuestcn River Region, Northern McQuesten: md Mayo Map Areas, Yukon Territory (115P/14, 15, 16; 105M/l3, 14). Exploration and Geological Services Division, Yukon, Indian and Northern Affairs Canada, Bulletin 6, 122 p.

T. Fuller and L. Jackson Quaternary Geology of the Yukon Territory
(www.geology.gov.yk.ca)

Bremner, T., 2011.

11. CERTIFICATE OF QUALIFICATION

I, Frederic Turenne of,
Montréal, Québec, Canada
H2W 2H9
(514) 298-4418

1) I am a graduate of the University of Quebec in Montreal in geological sciences and environment

2) I have practiced my profession continuously for 08 years since my graduation in 2004

3) I am a practicing professional geologist under the Geologist Order of Quebec, OGQ; Member number 970.

4) The information presented herein is based on literature research, project supervision and review of results on the Sten NW exploration campaign 2011.

5) I am the author of this report on Sten NW property located in the Mayo mining district, Yukon. This report is based on my personal examination on the ground from august 4 to august 7, 2011 and on referenced sources.



Frédéric Turenne, P. Geo.
April 22, 2011

Sample result on Sten property / North-west zone
July 2011 survey

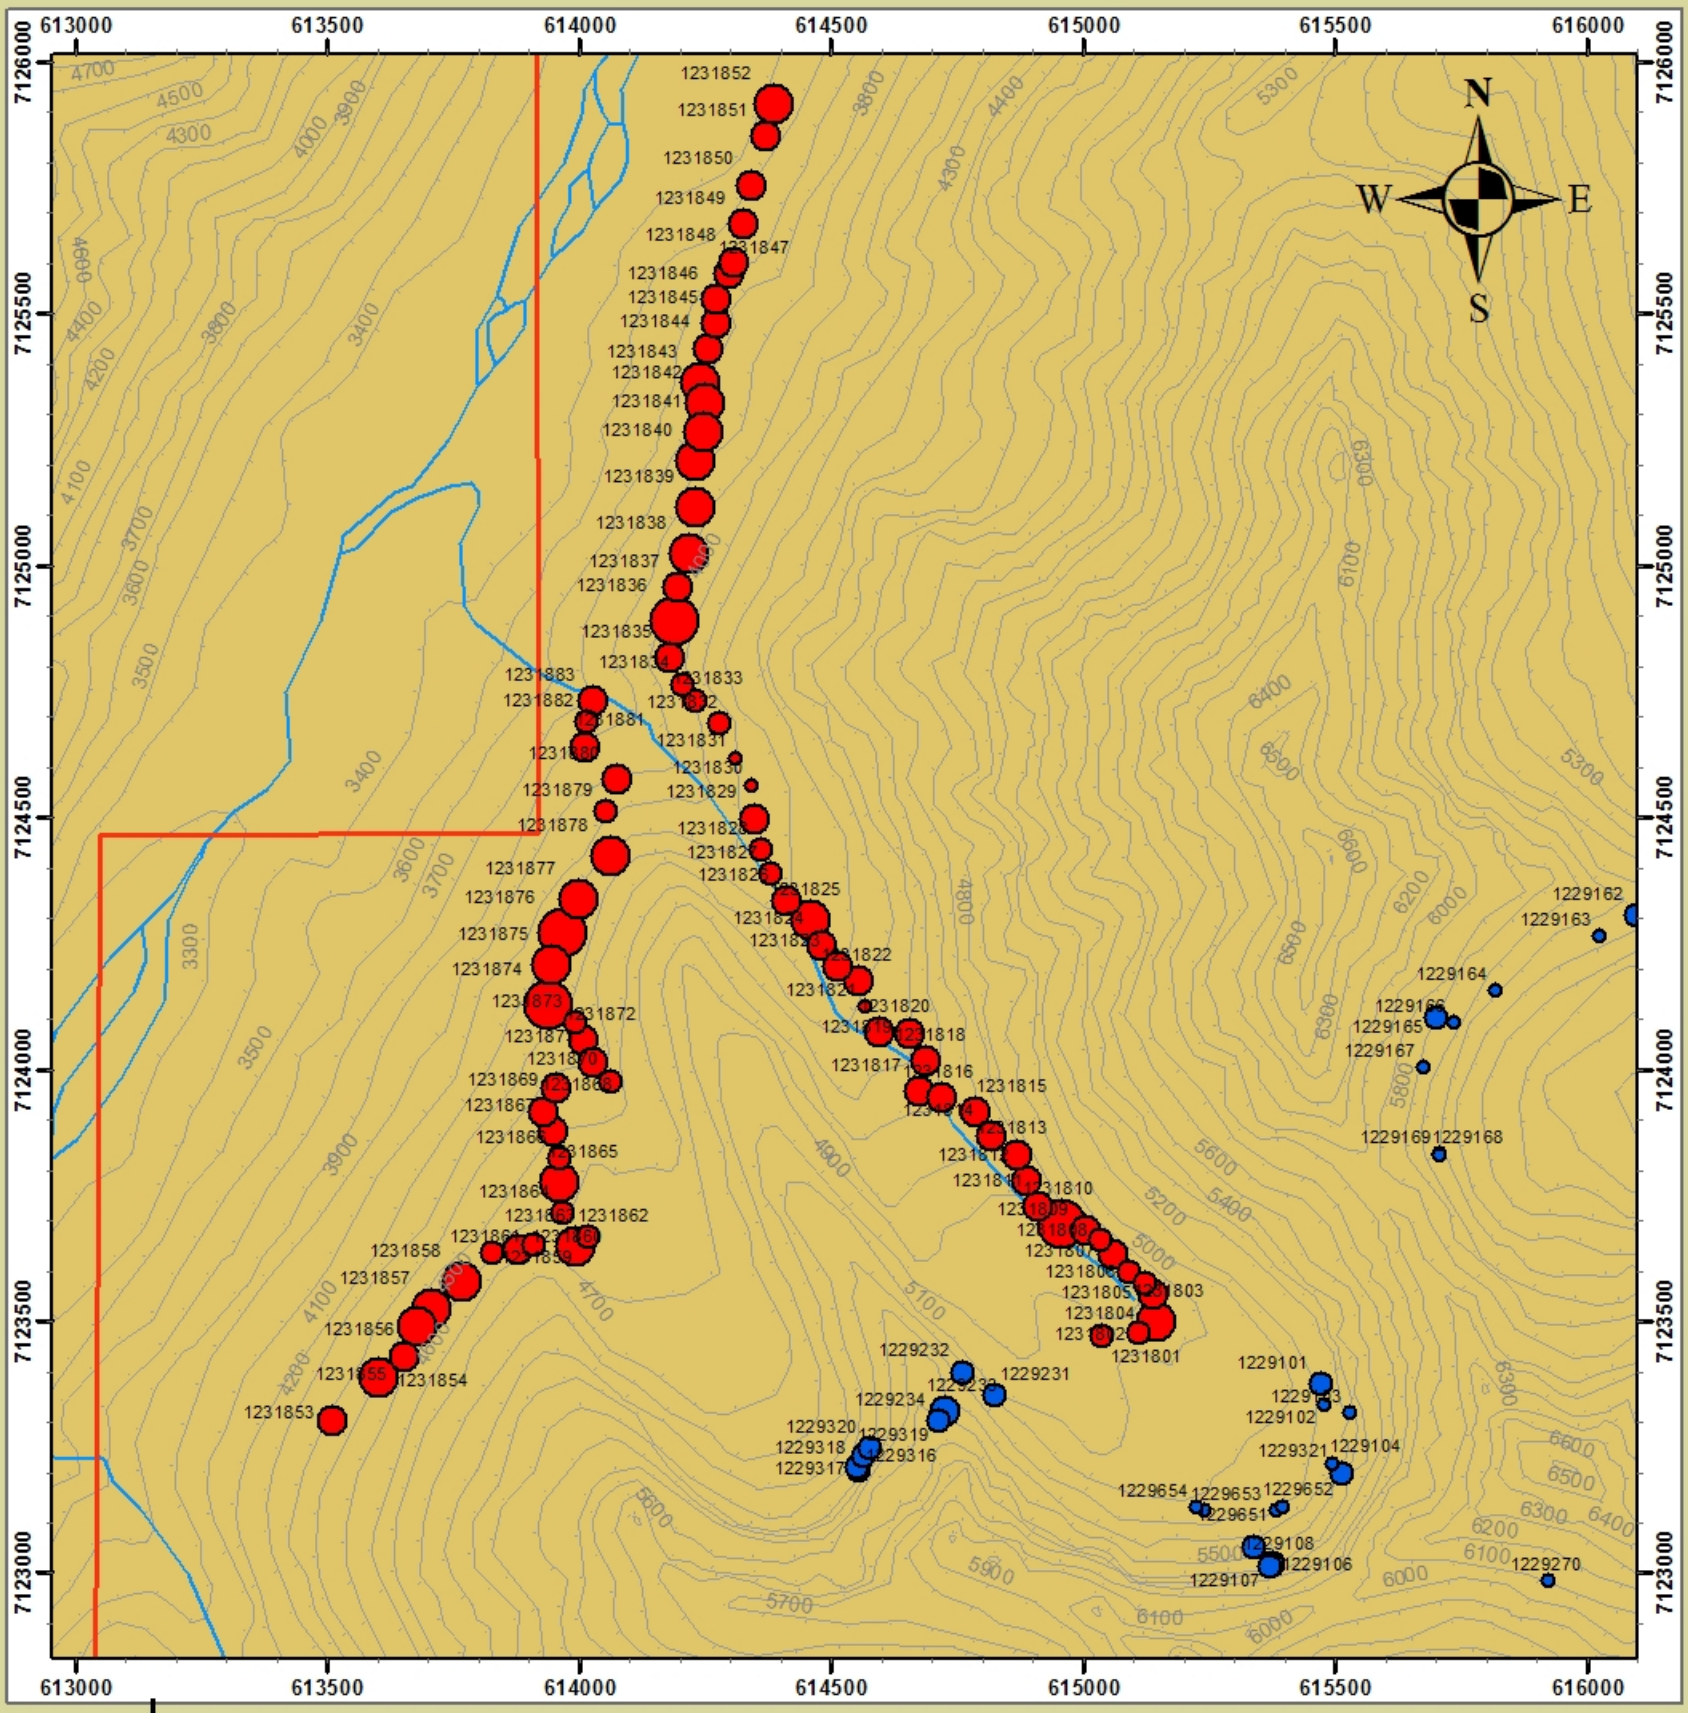

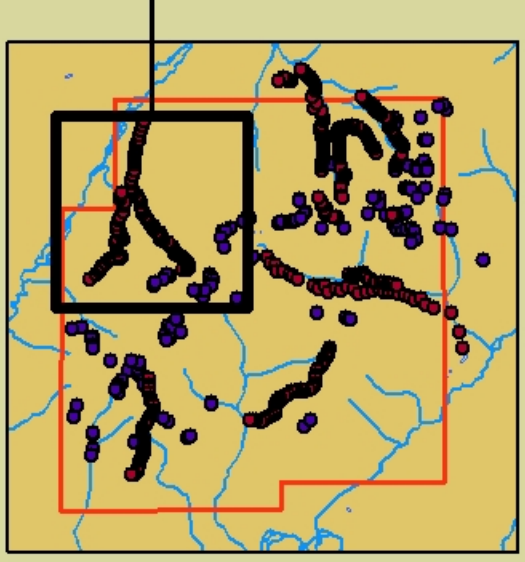

0 250 500 1 000 1 500 2 000 Meters

Reference system: NAD 83
Projection : UTM Zone 8N

Legend

sample_sten_soil ppb		sample_sten_rock ppb		
	0 - 0,4		0- 0,4	sten_nw_boundry
	0,4- 5		0,4 - 5	river
	5 - 15		5 - 10	elevation
	15 - 30		10 - 20	lake
	30 - 60		20 - 40	**Bedrock**
				clastic/limestone

Source:
BNDT
Yukon Geological Survey
Fred Survey Company

Production:
JS and friends

Sample result on Sten property / north-east zone
July 2011 survey

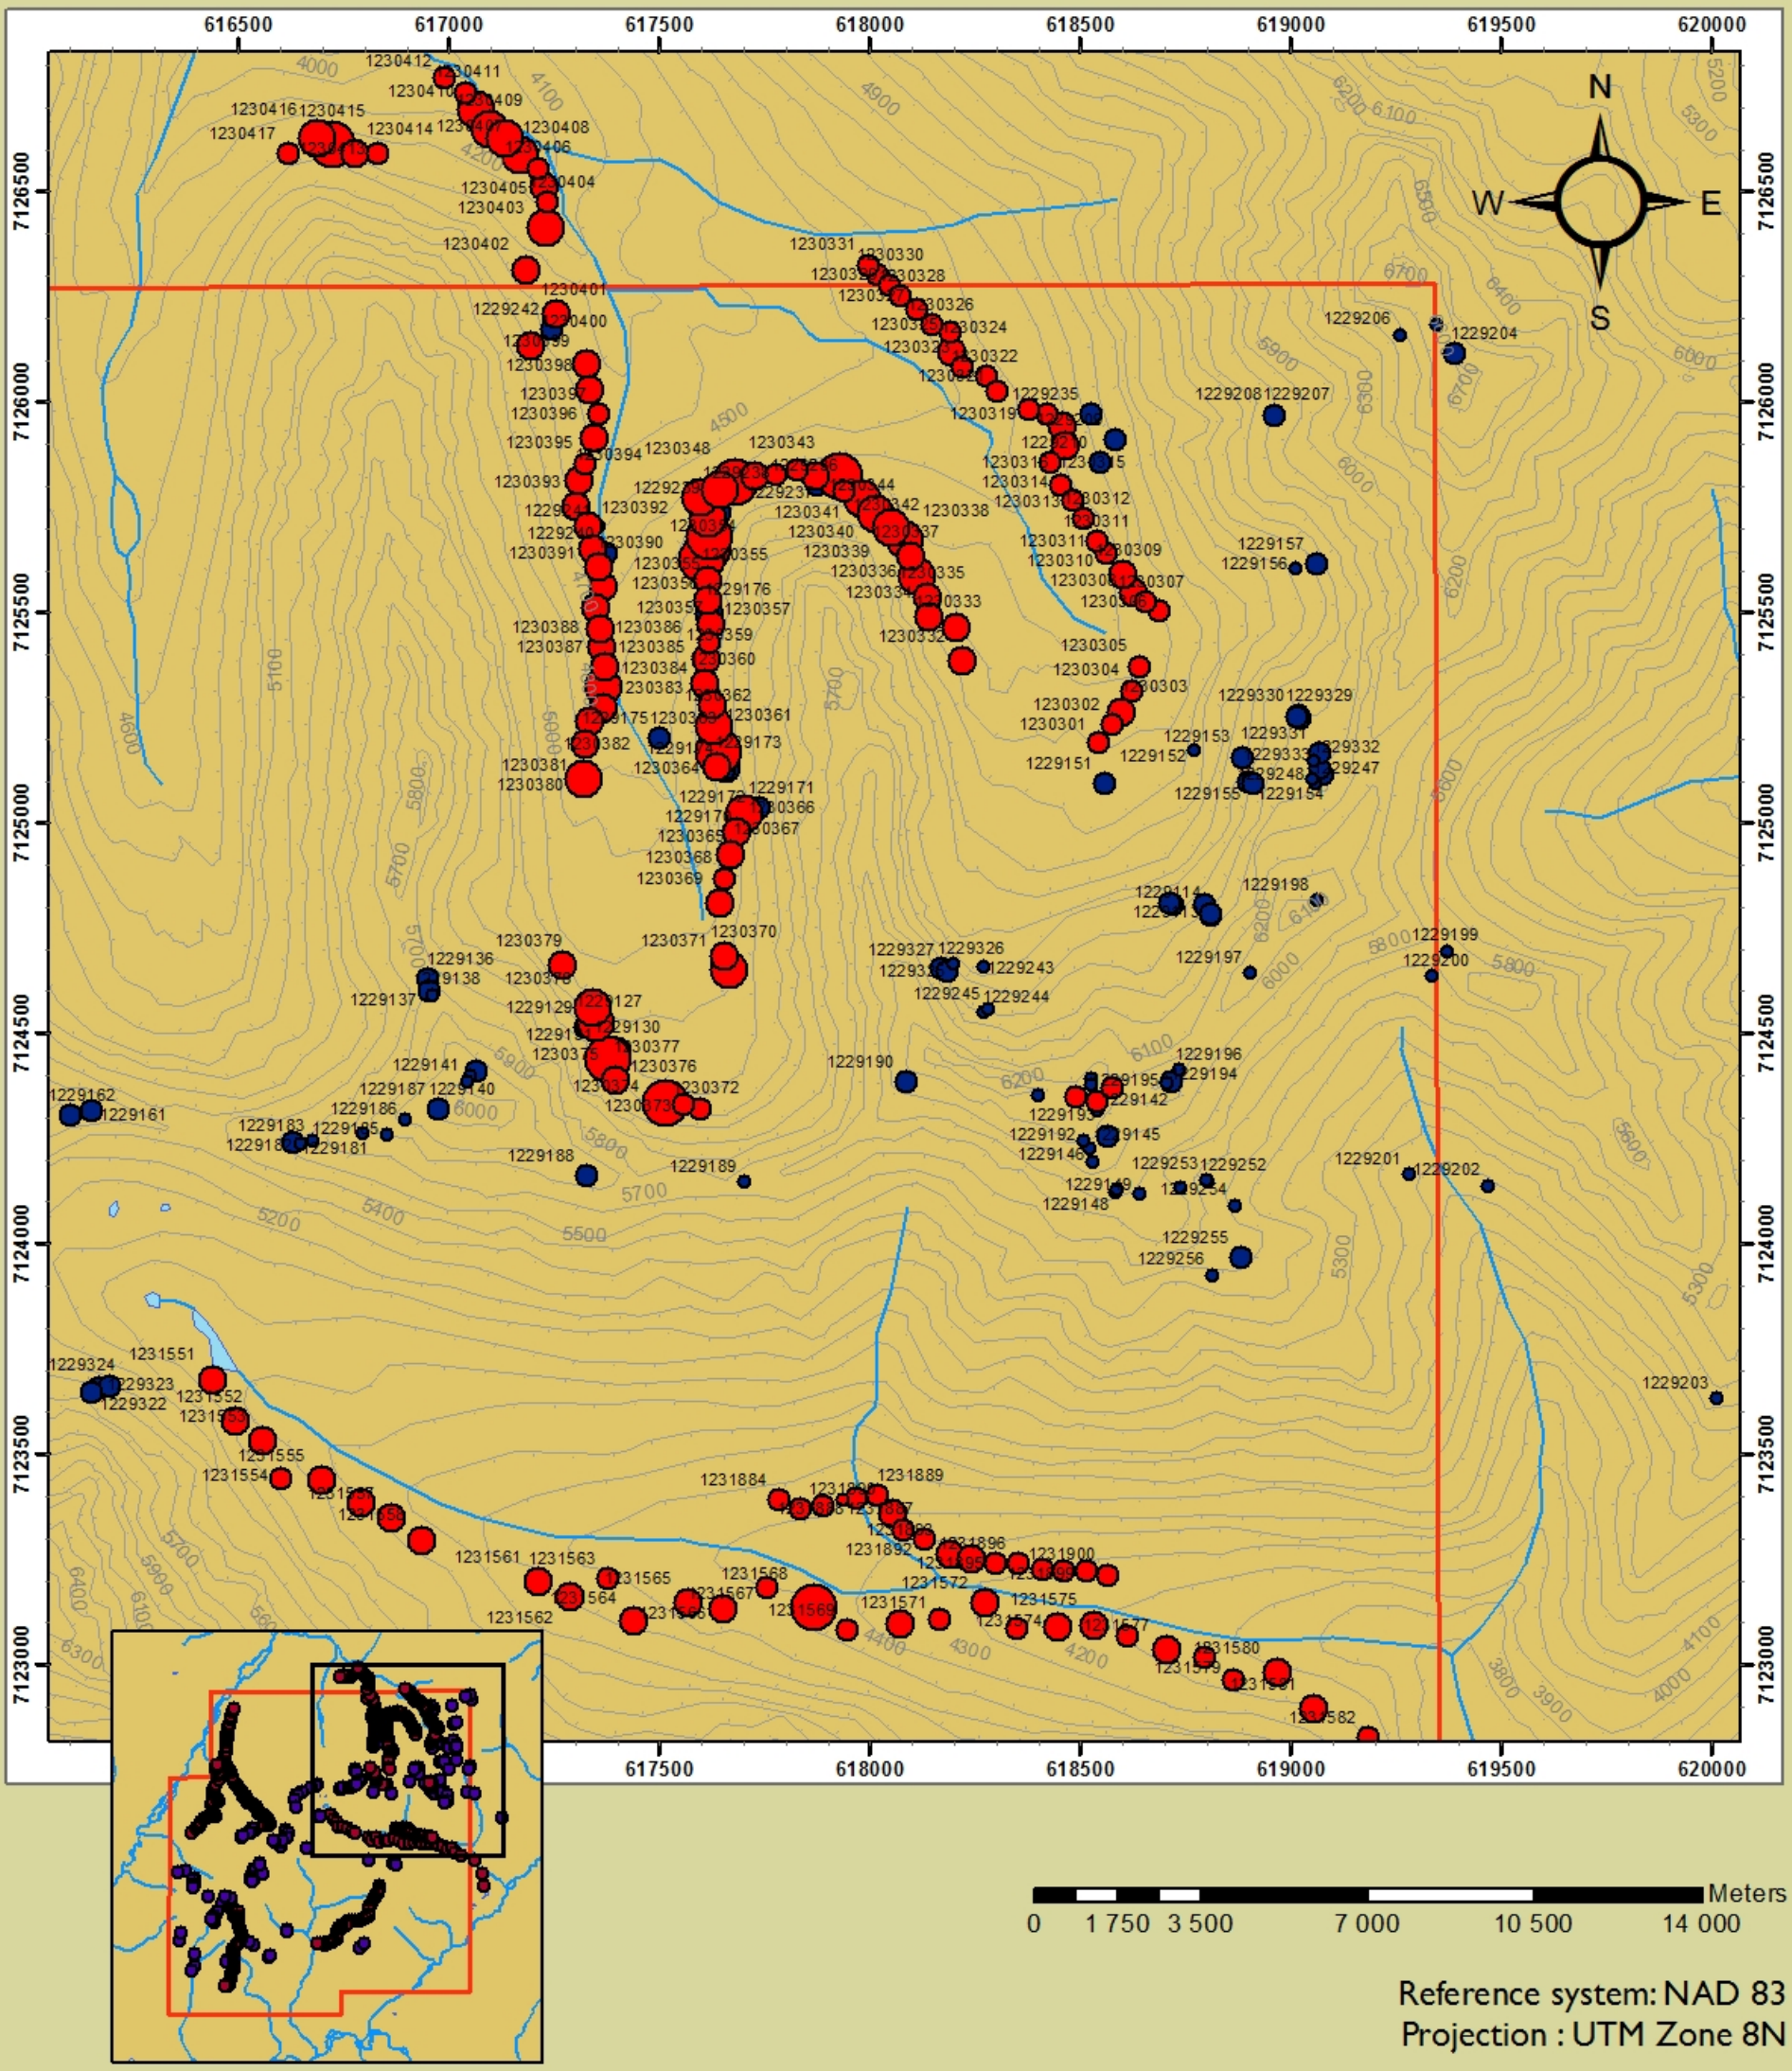

Reference system: NAD 83
Projection : UTM Zone 8N

Legend

sample_sten_soil
ppb
- 0 - 0,4
- 0,4- 5
- 5 - 15
- 15 - 30
- 30 - 60

sample_sten_rock
ppb
- 0- 0,4
- 0,4 - 5
- 5 - 15
- 15 - 30
- 30 - 60

- sten_nw_boundry
- river
- elevation
- lake

Bedrock
- clastic/limestone

Source:
BNDT
Yukon Geological Survey
Fred Survey Company

Production:
JS and friends

Sample result on Sten property / south-east zone
July 2011 survey

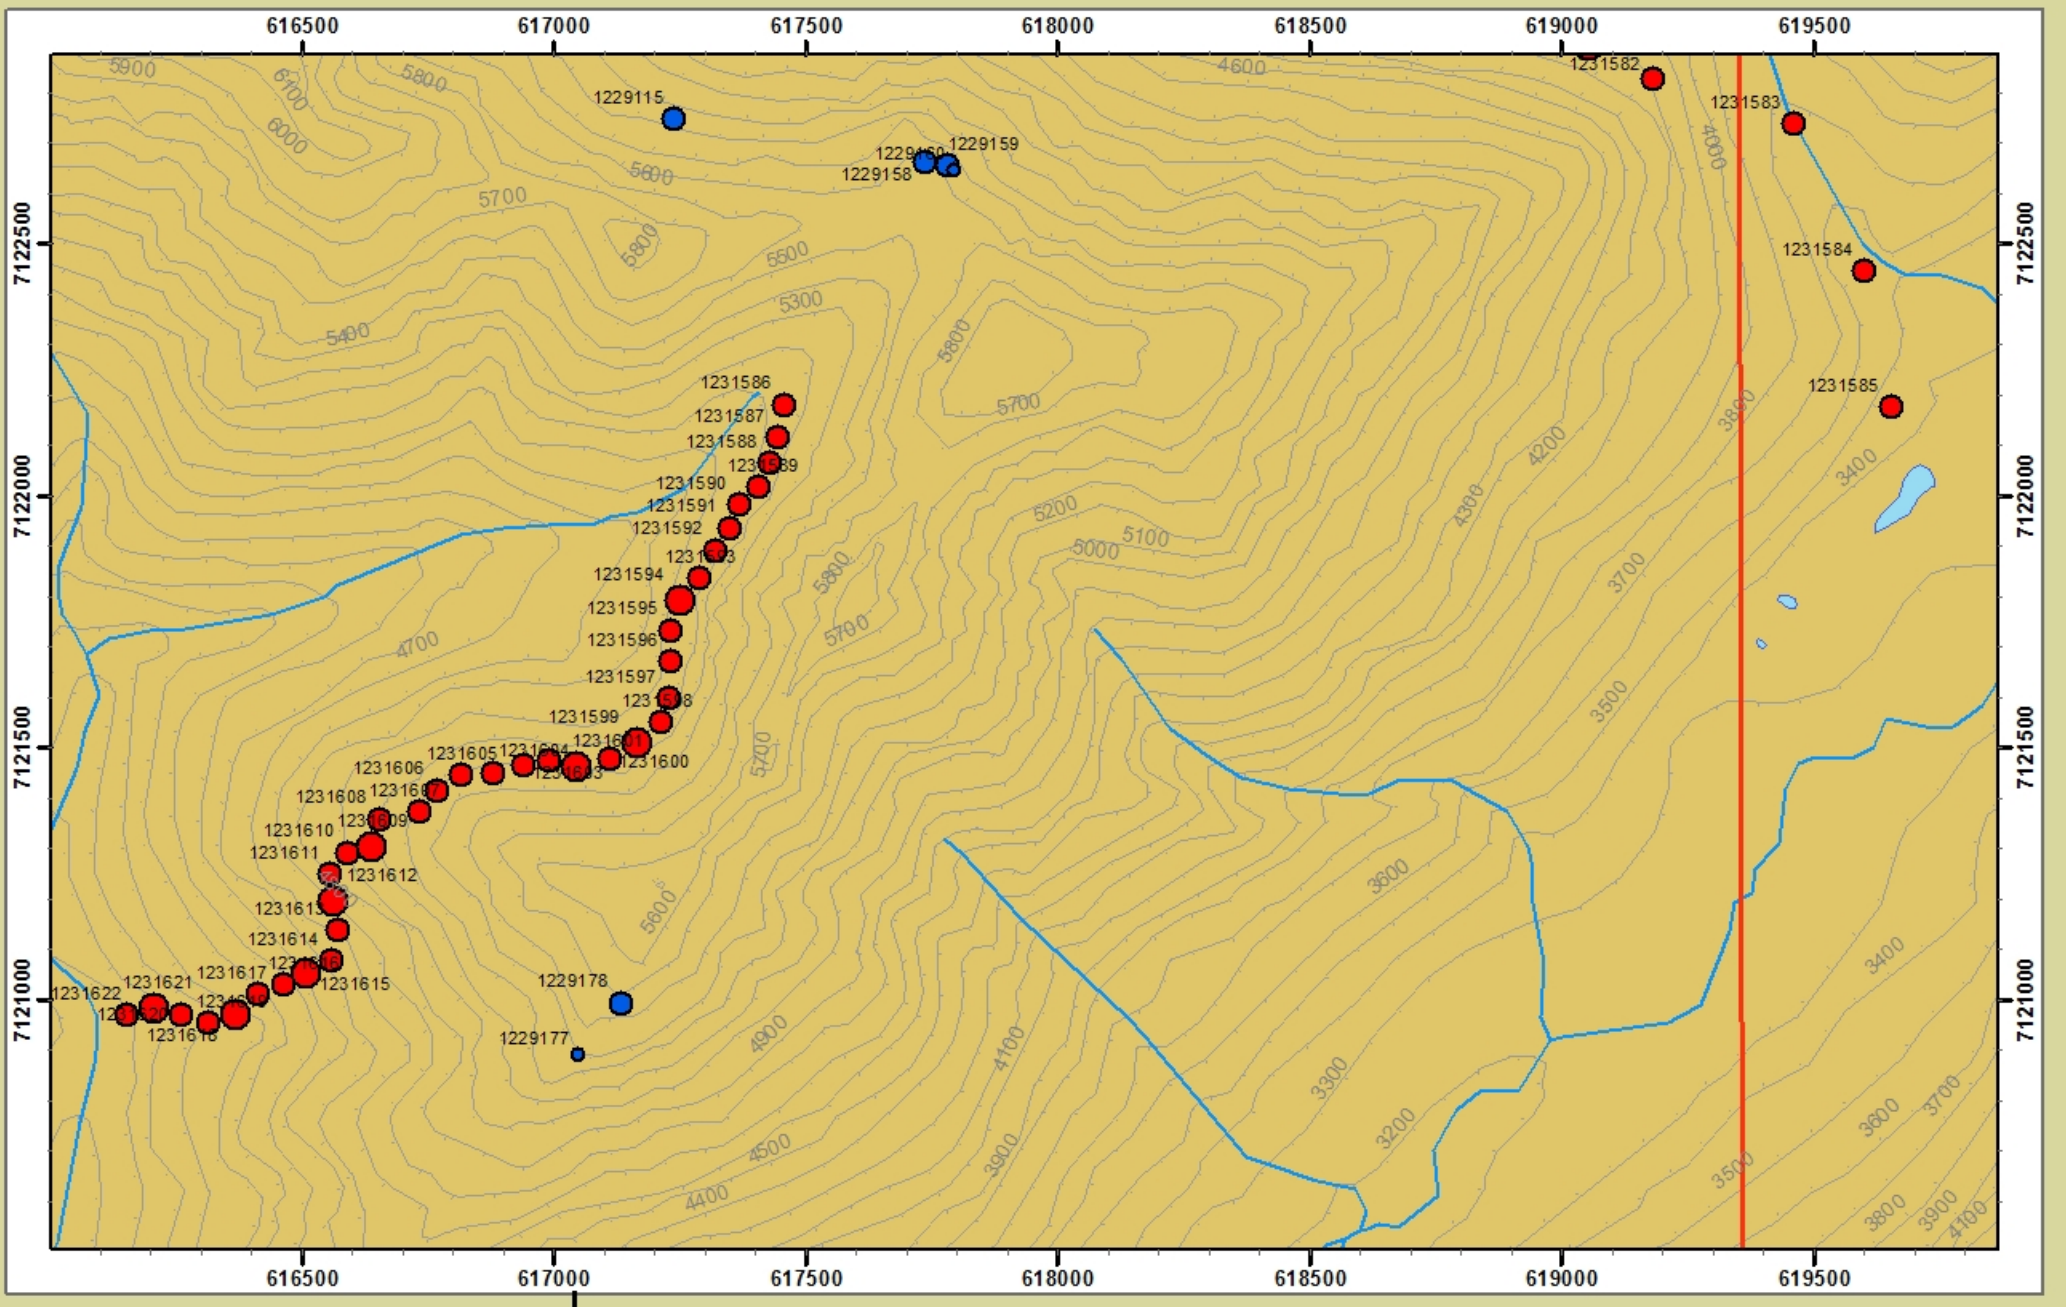

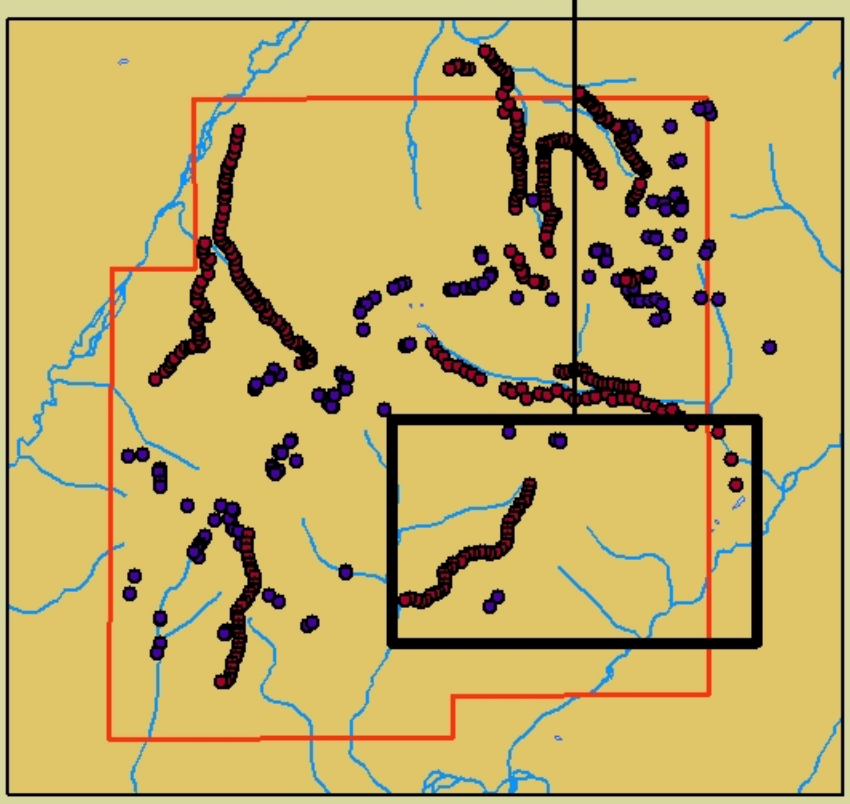

Meters
0 250 500 1 000 1 500 2 000

Reference system: NAD 83
Projection : UTM Zone 8N

Legend

sample_sten_soil

ppb

- 0 - 0,4
- 0,4 - 5
- 5 - 15
- 15 - 30
- 30 - 60

sample_sten_rock

ppb

- 0,000000 - 0,400000
- 0,400001 - 5,000000
- 5,000001 - 10,000000
- 10,000001 - 20,000000
- 20,000001 - 40,000000

- sten_nw_boundry
- river
- elevation
- lake

Bedrock

- clastic/limestone

Source:
BNDT
Yukon Geological Survey
Fred Survey Company

Production:
JS and friends

Sample result on Sten property / south-west zone
July 2011 survey

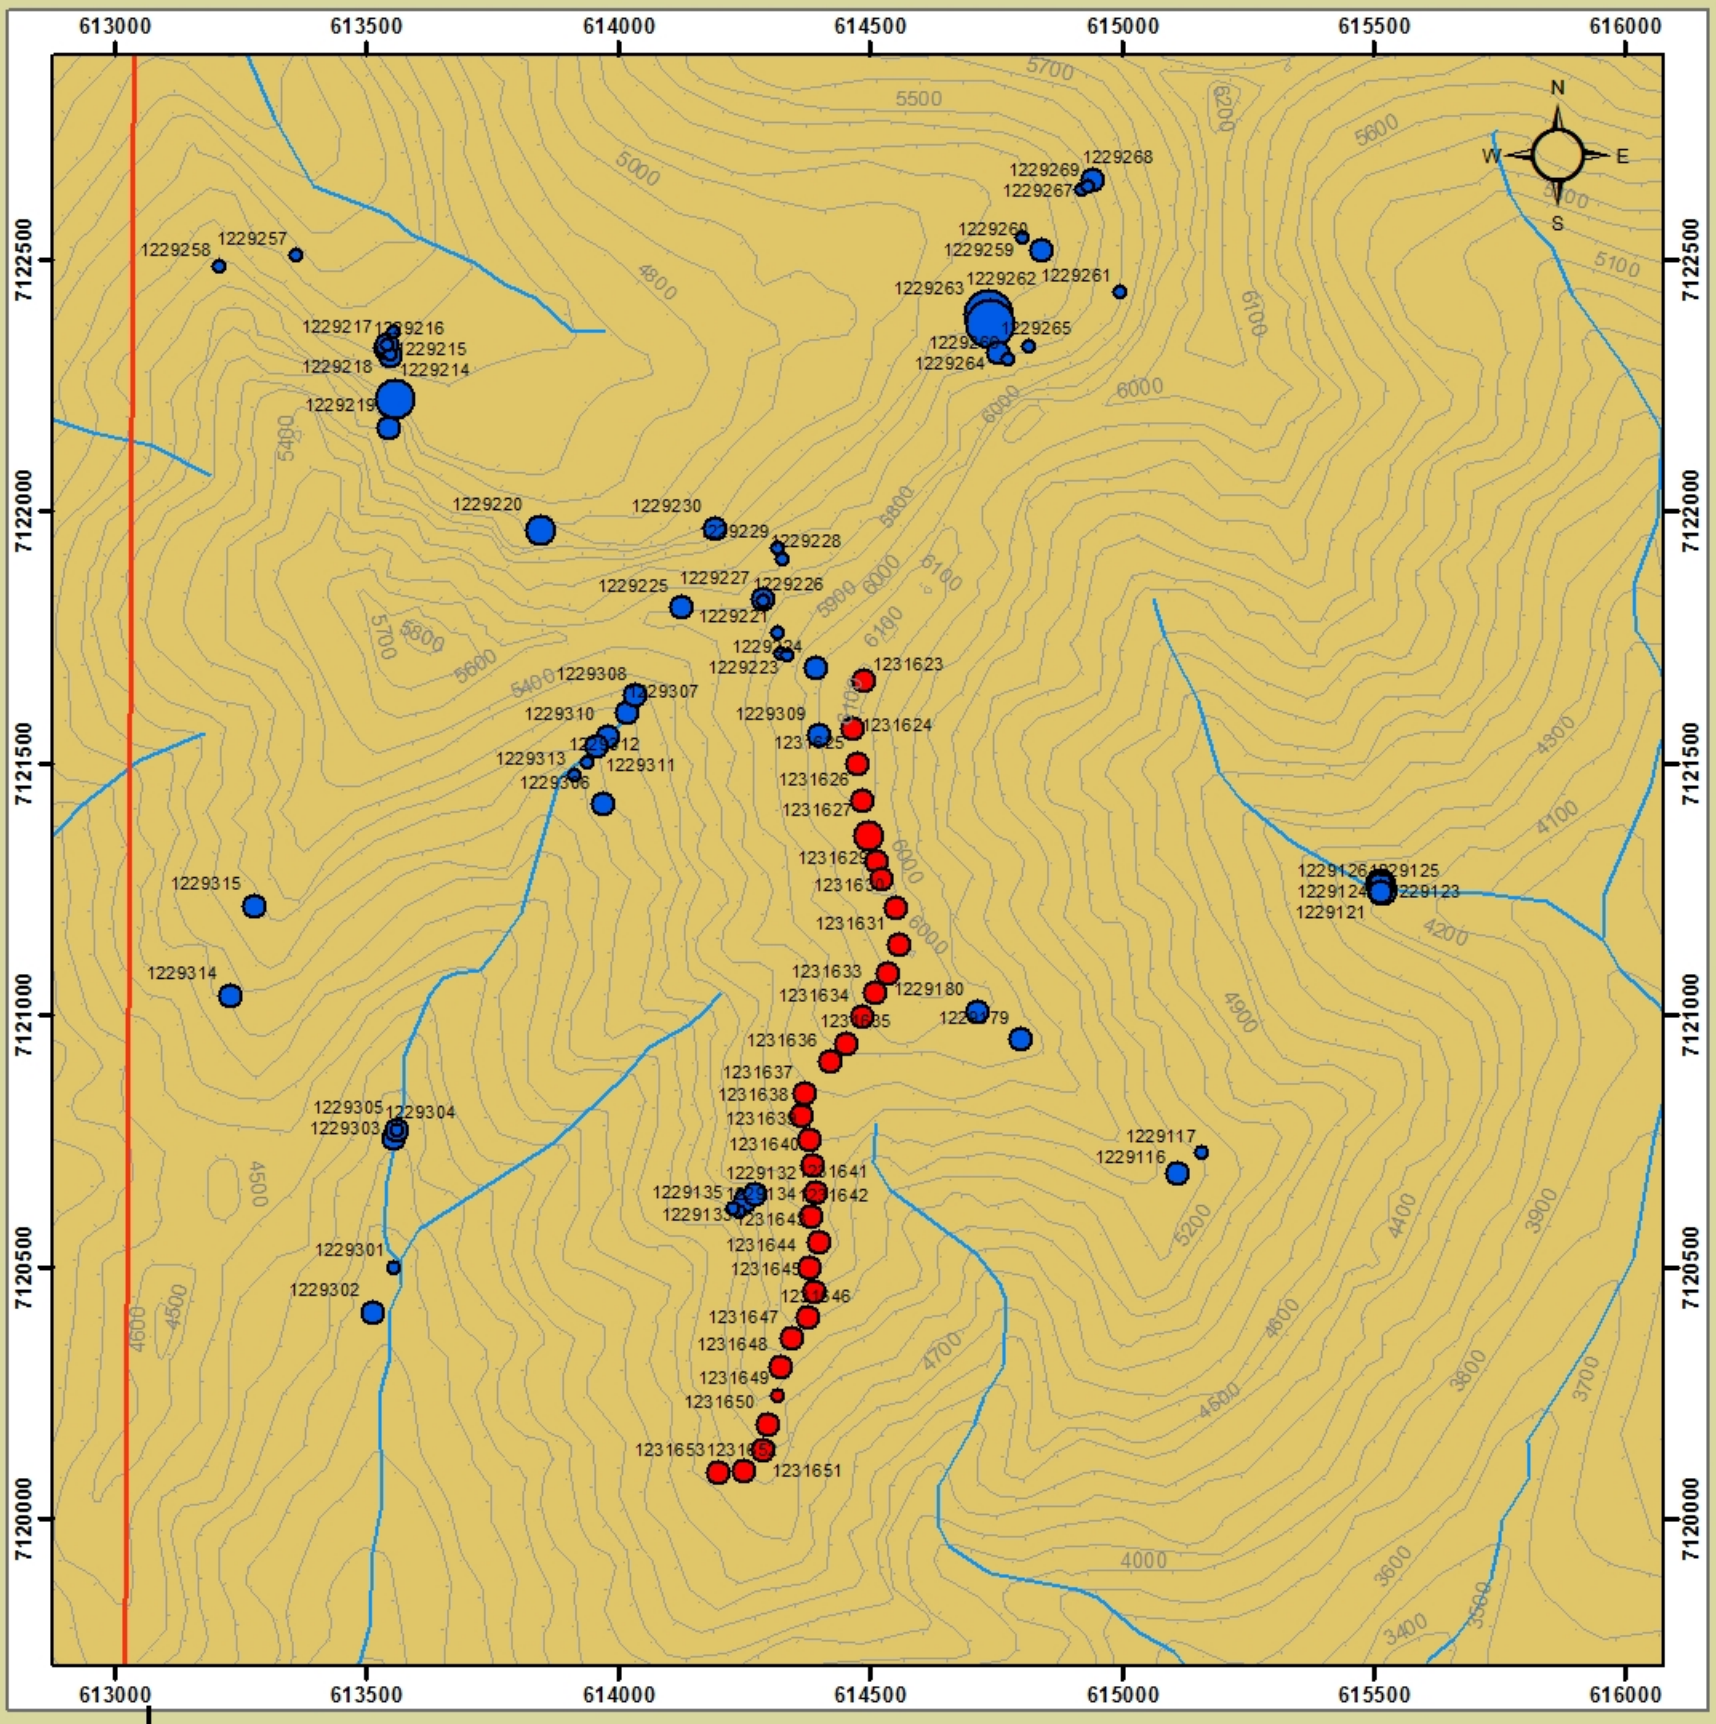

Reference system: NAD 83
Projection : UTM Zone 8N

Legend

sample_sten_soil
ppb
- 0 - 0,4
- 0,4- 5
- 5 - 15
- 15 - 30
- 30- 60

sample_sten_rock
ppb
- 0- 0,4
- 0,4 - 5
- 5 - 10
- 10 - 20
- 20 - 40

- sten_nw_boundry
- river
- elevation
- lake

RX_SUBCLAS
- clastic/limestone

Source:
BNDT
Yukon Geological Survey
Fred Survey Company

Production:
JS and friends

612000 614000 616000 618000 620000 622000

7126000 7124000 7122000 7120000

Nadaleen Range

2011 Rock Samples

Sample Type
- unkown
- float
- subcrop
- outcrop

Rock Type
- unidentified
- limestone
- siltstone
- sandstone
- felsic unit
- gabbro
- quartz-feldspar porphyry
- breccia
- conglomerate
- shale
- quartzite
- schist

Mineralization
- none visible
- arsenopyrite (ap)
- chalcopyrite (cp)
- chalcopyrite, sulphide (cp, s)
- chalcopyrite, bornite (cp, bo)
- pyrite (py)
- pyrite, arsenopyrite (py, ap)
- pyrite, chalcopyrite (py, cp)
- pyrite, sulphide (py, s)
- realgar, orpiment (re, or)
- sulphide (s)

N

GOLDSTRIKE RESOURCES LTD TSX.V:GSR

Sten NW Property Geology

Legend
- Toponym
- Contour (100 ft)
- Index Contour (1000 ft)
- River
- Lake
- Wetland
- Sten NW Claim Outline

Coordinate System:
NAD 1983 UTM Zone 8N
Scale: 1:30,000
NTS Map Sheets: 106C03-6
Drawn by: DRUID-6
Date: 19 Apr 2012 at 03:00:PM

DRUID EXPLORATION

0 0.2 0.4 0.8 1.2 1.6 2 Kilometers

612000 614000 616000 618000 620000 622000

7126000 7124000 7122000 7120000

Nadaleen Range

Nadaleen River

2011 Rock Samples

Sample Type

- unkown
- float
- subcrop
- outcrop

Rock Type

- unidentified
- limestone
- siltstone
- sandstone
- felsic unit
- gabbro
- quartz-feldspar porphyry
- breccia
- conglomerate
- shale
- quartzite
- schist

N

GOLDSTRIKE RESOURCES LTD TSX.V:GSR

Sten NW Property Geology

Legend

- Toponym
- Contour (100 ft)
- Index Contour (1000 ft)
- River
- Lake
- Wetland
- Sten NW Claim Outline

Coordinate System:
NAD 1983 UTM Zone 8N
Scale: 1:30,000
NTS Map Sheets: 106C03-6
Drawn by: DRUID-6
Date: 19 Apr 2012 at 02:02:PM

DRUID EXPLORATION

0 0.2 0.4 0.8 1.2 1.6 2 Kilometers

APPENDIX II

Sample results and geochemistry

				1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
Sten NW soil assays	NTS 106C02 NAD 83 zone 8			Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
				PPM	PPM	PPM	PPM	PPM	PPM	PPM	PPM	%	PPM	PPB	PPM	PPM	PPM	PPM	PPM	PPM	%	%	PPM	PPM	%	PPM	%	PPM	%	%	%	PPM	PPM	PPM	PPM	%	PPM	PPM	PPM
Sample number	East	North		0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
			sample type	Mo_ppm	Cu_ppm	Pb_ppm	Zn_ppm	Ag_ppm	Ni_ppm	Co_ppm	Mn_ppm	Fe_pct	As_ppm	Au_ppb	Th_ppm	Sr_ppm	Cd_ppm	Sb_ppm	Bi_ppm	V_ppm	Ca_pct	P_pct	La_ppm	Cr_ppm	Mg_pct	Ba_ppm	Ti_pct	B_ppm	Al_pct	Na_pct	K_pct	W_ppm	Hg_ppm	Sc_ppm	Tl_ppm	S_pct	Ga_ppm	Se_ppm	Te_ppm
1230230	618334.57	7126010.18																																				
1230301	618541.55	7125192.14	soil	2	77	34.4	103	0.1	35.9	26.9	1591	5.88	30.2	2	1.7	8	0.3	0.8	0.3	30	0.12	0.102	8	22	0.51	64	0.004	4	1.49	0.005	0.09	<0.1	0.24	5.3	0.2	<0.05	4	1.1	<0.2
1230302	618574.11	7125235.25	soil	2.6	109	50	129	0.2	47.1	44	3111	8.77	28.6	2.4	3.3	12	0.5	0.8	0.4	30	0.13	0.104	10	22	0.61	66	0.004	4	1.54	0.005	0.08	<0.1	0.37	8.7	0.3	<0.05	4	1.4	0.2
1230303	618593.97	7125266.47	soil	4.8	173.6	54	147	0.3	69.6	59.9	2032	9.07	50.9	5.1	4.6	18	0.7	1.1	0.5	40	0.13	0.073	15	26	0.74	85	0.002	4	1.79	0.007	0.1	<0.1	0.7	11.2	0.4	<0.05	5	2	0.3
1230304	618619.21	7125316.79	soil	3.3	170	38.4	104	0.3	48.3	49.6	2135	6.97	31.5	5	3.7	15	0.6	0.9	0.4	46	0.3	0.085	19	23	0.9	76	0.003	4	1.49	0.004	0.08	<0.1	0.28	10.7	0.2	0.07	5	1.3	<0.2
1230305	618637.32	7125374.50	soil	3.4	200.7	30	99	0.2	48.1	47.7	1508	6.46	32.4	4.9	3.4	24	0.6	0.7	0.3	65	1.06	0.069	16	30	1.66	61	0.002	4	1.99	0.003	0.08	<0.1	0.2	10	0.1	0.06	7	1	0.2
1230306	618685.72	7125507.55	soil	1.1	172.1	22.1	103	0.1	42.4	47.1	1683	6.53	33	4.8	1.7	7	0.5	0.8	0.3	100	0.08	0.135	18	44	1.38	68	0.007	3	2.92	0.003	0.08	<0.1	0.07	6.8	0.1	<0.05	9	1	<0.2
1230307	618654.39	7125527.69	soil	0.9	143.4	34	105	<0.1	42.3	55.2	1933	6.81	39.8	2.9	2.6	4	0.4	0.7	0.3	88	0.04	0.118	22	40	1.36	67	0.004	3	3.19	0.003	0.09	<0.1	0.02	6.4	0.1	<0.05	10	0.7	0.4
1230308	618623.30	7125549.42	soil	0.8	209.3	27	111	0.2	48.2	41.3	2817	9.12	14.7	12.5	2	34	0.5	0.3	0.2	141	0.52	0.101	18	48	1.13	138	0.003	3	2.24	0.004	0.09	<0.1	0.09	17.9	<0.1	<0.05	8	0.8	<0.2
1230309	618599.91	7125590.87	soil	0.7	192.4	16.7	93	0.2	48.6	33.6	1147	7.05	9.7	9.6	1.9	21	0.3	0.3	0.2	112	0.28	0.087	15	52	2.41	289	0.004	2	3.45	0.003	0.08	<0.1	0.06	11	<0.1	<0.05	11	0.8	<0.2
1230310	618559.52	7125642.24	soil	1	130.7	20.7	86	0.1	31.4	29.1	1574	5.64	9.5	4.2	0.4	15	0.5	0.4	0.2	93	0.33	0.272	10	44	1.42	70	0.005	2	2.89	0.005	0.07	<0.1	0.04	3.4	<0.1	0.06	9	0.7	<0.2
1230311	618537.02	7125672.42	soil	2.1	157.4	25.5	99	<0.1	43.7	53.3	1577	6.08	20	4.6	2.4	7	0.4	0.5	0.3	73	0.12	0.084	21	36	1.46	95	0.005	3	2.64	0.003	0.09	<0.1	0.07	7	0.1	<0.05	8	0.5	<0.2
1230311	618537.02	7125672.42	soil	1.5	183.5	21	93	<0.1	47.4	48.8	1463	6.52	17.8	4.1	1.6	8	0.3	0.4	0.2	92	0.19	0.108	16	43	1.92	93	0.005	3	3.2	0.004	0.09	<0.1	0.04	6.4	<0.1	<0.05	10	0.5	<0.2
1230312	618506.56	7125725.12	soil	1.2	133.4	21.7	93	0.2	40	36.3	1239	5.68	18.6	2.8	3.2	9	0.4	0.5	0.2	69	0.29	0.062	20	34	1.56	66	0.003	4	2.19	0.003	0.09	<0.1	0.07	9.4	<0.1	<0.05	7	0.7	<0.2
1230313	618481.97	7125769.44	soil	1.3	121	20.2	82	0.1	36	33.2	1289	5.11	16	4	2.9	10	0.3	0.5	0.2	60	0.43	0.063	18	31	1.42	57	0.003	3	1.94	0.003	0.09	<0.1	0.08	7.2	<0.1	<0.05	6	0.6	0.2
1230314	618451.41	7125806.33	soil	1.2	145.9	22.9	96	0.2	42.8	44.5	1433	6.01	20.5	4.2	3.7	10	0.4	0.4	0.3	76	0.37	0.067	20	38	1.76	68	0.003	3	2.32	0.003	0.09	<0.1	0.08	9.2	<0.1	<0.05	8	0.6	<0.2
1230315	618426.47	7125859.68	soil	1.5	138.5	24.2	92	0.2	40.2	45.7	1801	5.5	17.7	4.2	3.4	12	0.6	0.5	0.2	70	0.32	0.072	21	34	1.51	75	0.004	3	2.1	0.004	0.09	<0.1	0.06	9.5	<0.1	<0.05	7	0.8	<0.2
1230316	618461.42	7125898.67	soil	1.5	112.3	21	82	0.1	34.2	33.9	1263	4.88	16.3	5.3	2.4	16	0.3	0.5	0.2	62	0.62	0.078	15	31	1.35	67	0.003	3	1.95	0.004	0.1	<0.1	0.06	8.1	<0.1	<0.05	6	1.1	<0.2
1230317	618454.43	7125945.82	soil	1.1	114.1	19	83	0.2	31.7	22.9	599	4.95	16.2	5.4	2.8	11	0.3	0.5	0.2	62	0.42	0.067	17	31	1.41	57	0.002	4	2.13	0.003	0.1	<0.1	0.06	8.2	<0.1	<0.05	7	<0.5	<0.2
1230318	618419.02	7125972.27	soil	1	100.2	18.7	79	0.1	30.9	29.2	960	4.81	14.6	3.5	2.3	16	0.2	0.4	0.2	61	0.59	0.059	16	29	1.38	88	0.002	3	2.01	0.003	0.08	<0.1	0.07	7.5	<0.1	<0.05	6	0.6	<0.2
1230319	618377.08	7125983.74	soil	0.9	104.9	18.9	84	<0.1	32.9	27.1	919	4.88	14.3	1.2	2.2	15	0.3	0.4	0.2	64	0.51	0.056	15	30	1.35	94	0.002	3	1.97	0.003	0.07	<0.1	0.06	7.2	<0.1	<0.05	6	<0.5	<0.2
1230321	618301.72	7126028.84	soil	1.2	61.4	19.8	84	<0.1	22.5	13.1	360	3.89	13.2	1.4	2.6	8	0.2	0.4	0.2	38	0.3	0.055	16	21	0.97	63	0.002	3	1.56	0.002	0.09	<0.1	0.04	6	<0.1	<0.05	4	0.7	<0.2
1230322	618277.04	7126062.48	soil	2.5	141.6	22.5	96	0.1	45.9	46.6	1286	6.01	14.5	3.6	2	12	0.4	0.4	0.3	104	0.29	0.073	19	46	1.9	138	0.005	2	3	0.004	0.08	<0.1	0.05	9.9	<0.1	<0.05	10	0.5	<0.2
1230323	618216.99	7126085.38	soil	0.9	97.4	13.4	92	<0.1	37.5	20.4	655	4.8	11.3	2.2	1.8	15	0.2	0.5	0.2	82	0.32	0.07	15	41	1.27	178	0.01	3	2.74	0.004	0.09	0.1	0.03	5.3	0.1	<0.05	8	<0.5	<0.2
1230324	618193.68	7126122.09	soil	1	114.7	13.8	93	0.2	35.8	19.9	606	4.75	24.3	6.8	2	21	0.1	0.5	0.2	81	0.35	0.073	17	44	1.28	233	0.009	2	2.55	0.005	0.08	0.1	0.1	6.9	0.1	<0.05	8	0.9	<0.2
1230325	618189.84	7126166.66	soil	0.7	118.5	12.7	82	<0.1	40	28.8	836	5.92	8.8	3.2	1.7	3	0.4	0.3	0.2	85	0.05	0.084	15	40	1.48	66	0.003	2	2.85	0.002	0.07	<0.1	0.05	4.3	<0.1	<0.05	9	0.7	0.2
1230326	618144.43	7126186.10	soil	1	49.7	10.5	66	<0.1	27.2	13.6	399	3.78	10.4	1.1	0.8	15	0.2	0.4	0.2	64	0.34	0.056	12	32	0.89	135	0.005	2	2.11	0.005	0.06	0.1	0.04	2.6	0.1	<0.05	7	<0.5	<0.2
1230327	618110.62	7126222.36	soil	0.5	119.2	14.5	78	<0.1	47.4	34.2	829	6.1	8.3	2.6	2.4	2	0.1	0.2	0.2	85	0.04	0.043	17	43	1.84	74	0.002	2	3.28	0.002	0.07	<0.1	0.06	5.6	<0.1	<0.05	9	0.5	<0.2
1230328	618071.38	7126254.09	soil	1.1	92.8	17.4	73	0.1	35.8	25.7	906	5.72	12.2	1.3	1.3	4	0.2	0.4	0.2	74	0.08	0.17	13	34	1.22	59	0.004	3	2.46	0.003	0.07	<0.1	0.05	3.5	<0.1	<0.05	8	0.8	<0.2
1230329	618044.42	7126278.26	soil	1.2	41.3	11.1	79	<0.1	25.1	11.9	444	3.2	10.3	2.1	1	7	0.2	0.5	0.2	49	0.09	0.059	12	29	0.55	111	0.011	2	1.74	0.004	0.06	0.2	0.04	2.2	0.1	<0.05	5	<0.5	<0.2
1230330	618015.54	7126304.88	soil	1.2	80.3	14.6	78	<0.1	36.1	23.8	734	4.79	12.9	3.1	1.8	6	0.2	0.5	0.2	64	0.09	0.062	16	33	0.96	80	0.008	2	2.13	0.003	0.08	<0.1	0.06	4	0.1	<0.05	7	0.6	<0.2
1230331	617992.97	7126327.84	soil	1.3	28.8	11.8	57	<0.1	18.3	14.8	572	3.24	9.1	2.2	2.5	6	0.3	0.4	0.2	55	0.07	0.041	14	26	0.51	85	0.012	2	1.59	0.003	0.06	0.2	0.04	2.8	0.1	<0.05	6	0.5	<0.2
1230332	618218.58	7125386.90	soil	1.3	223.3	34.9	85	0.2	52.6	88.5	1897	6.07	18.3	9.3	3	49	0.5	0.3	0.3	62	0.21	0.065	24	33	1.77	217	0.003	3	2.5	0.003	0.08	<0.1	0.04	7	0.1	<0.05	8	0.8	<0.2
1230333	618203.15	7125468.10	soil	2.1	176.5	34.8	89	0.2	51.5	63.4	1425	5.93	27.8	7.7	3.6	10	0.5	0.5	0.3	46	0.21	0.059	26	28	1.06	100	0.001	3	1.86	0.002	0.1	<0.1	0.05	6.6	0.1	<0.05	6	0.6	0.2
1230334	618139.31	7125493.05	soil	2.4	167.9	34.8	81	0.2	50.6	74.2	1776	5.67	24.6	5.5	3.2	8	0.4	0.4	0.3	39	0.19	0.056	17	24	1.08	94	0.002	2	1.78	0.002	0.08	<0.1	0.02	5.6	0.1	<0.05	6	0.8	<0.2
1230335	618135.69	7125538.26	soil	0.6	265.7	19.2	88	0.1	54	69.4	1905	6.72	3	13.3	1.9	9	0.3	0.1	0.2	96	0.22	0.055	16	52	2.72	331	0.004	2	3.24	0.002	0.05	<0.1	0.04	9.7	<0.1	<0.05	11	<0.5	<0.2
1230336	618111.46	7125589.41	soil	0.7	309.6	21.3	91	0.2	59.3	94.9	2206	7.04	7.4	21.7	2	10	0.5	0.3	0.2	88	0.2	0.064	19	43	2.4	318	0.004	2	3.15	0.002	0.07	<0.1	0.09	10.8	<0.1	<0.05	10	0.6	0.2
1230337	618094.13	7125634.38	soil	0.6	278.1	22.3	91	0.1	53.3	71.2	1703	6.6	6.7	14.4	2.1	10	0.4	0.2	0.2	74	0.28	0.067	18	41	2.11	279	0.003	2	2.74	0.002	0.07	<0.1	0.06	9.2	<0.1	<0.05	8	0.6	0.2
1230338	618082.03	7125674.53	soil	1.2	402.5	25.3	96	0.2	55.9	72.9	2900	7.03	9.6	23.1	1.4	11	0.8	0.3	0.2	90	0.21	0.09	16	45	2.32	483	0.005	1	3.22	0.004	0.07	<0.1	0.07	14	0.1	<0.05	10	<0.5	<0.2
1230339	618048.66	7125704.48	soil	0.8	368.6	23.9	94	0.2	44.8	46.3	2614	6.12	9.8	18.3	1.1	15	0.8	0.3	0.2	83	0.42	0.121	17	42	1.97	379	0.005	2	2.98	0.004	0.07	<0.1	0.08	12	0.1	0.07	9	0.9	0.3
1230340	618012.88	7125735.87	soil	0.7	466.6	40.1	91	0.3	47.8	90	5523	7.24	62.2	18.5	1	17	2	0.4	0.2	99	0.39	0.109	21	43	2.04	180	0.005	2	3.27	0.004	0.07	<0.1	0.12	19.6	0.1	<0.05	10	1.1	0.2
1230341	617980.29	7125772.20	soil	0.7	302.8	32.2	88	0.2	54	93.3	2242	7.1	28.2	19.4	2.2	8	0.7	0.4	0.2	91	0.21	0.065	19	42	2.44	130	0.004	2	3.26	0.003	0.06	<0.1	0.05	11.6	<0.1	<0.05	11	1.4	0.3
1230342	617938.01	7125791.97	soil	1.3	39.5	24.6	63	<0.1	17.5	14.2	782	2.76	20.1	2.5	4.9	57	0.2	0.9	0.3	10	7.33	0.048	11	10	2.1	28	0.003	7	0.84	0.005	0.07	<0.1	0.05	4.5	<0.1	<0.05	2	<0.5	<0.2
1230343	617928.03	7125826.38	soil	1.4	336.8	39.7	87	0.3	42.9	108.6	3006	6.33	26.2	43.1	2.9	21	0.6	0.8	0.4	75	0.52	0.077	18	36	1.85	139	0.003	4	2.57	0.007	0.06	<0.1	0.06	15.5	<0.1	0.06	8	1	0.3
1230344	617869.53	7125826.29	soil	1.5	125.3	26.3	77	0.1	31.9	44.6	1255	4.2	24.3	7.4	3.1	10	0.3	0.5	0.2	36	1.37	0.053	12	21	1.75	105	0.001	2	1.65	0.002	0.05	<0.1	0.04	5	<0.1	<0.05	5	0.7	<0.2
1230345	617824.78	7125839.53	soil	2.4	110.9	34.4	71	0.1	33.5	56.6	1226	4.04	25.5	3.6	4.3	14	0.3	0.7	0.3	31	1.9	0.06	15	20	1.82	61	0.001	3	1.54	0.003	0.07	<0.1	0.03	4.9	0.1	<0.05	4	<0.5	<0.2
1230346	617775.53	7125831.42	soil	1.9	112.4	28.2	74	0.1	32.2	49.5	1195	4.11	27.5	4.7	3.9	19	0.3	0.7	0.2	32	2.79	0.057	14	19	2.03	74	0.001	4	1.47	0.003	0.07	<0.1	0.03	5.1	<0.1	<0.05	4	<0.5	<0.2
1230347	617723.20	7125828.23	soil	1.1	95.7	20.1	62	<0.1	27.1	44	1179	3.68	13.3	5.9	3.1	29	0.2	0.4	0.2	30	3.91	0.049	10	18	2.03	103	0.001	3	1.43	0.002	0.05	<0.1	0.04	4.4	<0.1	<0.05	4	<0.5	<0.2
1230348	617677.39	7125812.54	soil	3.4	313.4	56.8	87	0.5	86.4	168.4	3671	6.27	20.6	58	4.4	26	0.5	0.6	0.3	40	0.26	0.08	22	24	1.19	303	0.002	2	2	0.005	0.09	<0.1	0.47	7.8	0.2	<0.05	6	0.8	<0.2
1230349	617643.59	7125794.50	soil	1.7	145.6	29.3	78	0.2	36.2	63	1595	4.37	15.6	15.2	3	7	0.4	0.5	0.3	40	0.3	0.063	16	24	1.43	172	0.002	2	1.88	0.002	0.07	<0.1	0.06	5.7	<0.1	<0.05	5	0.7	<0.2
1230350	617593.88	7125776.52	soil	1	219.5	22.6	83	0.2	44.4	47.3	1528	6	11.2	16.8	2.2	8	0.5	0.3	0.2	76	0.24	0.062	16	39	2.04	164	0.004	2	2.86	0.003	0.06	<0.1	0.09	8.4	<0.1	<0.05	9	0.7	<0.2
1230351	617611.47	7125726.00	soil	0.7	313.2	19.8	89	0.2	51	60.8	2080	6.26	6.2	29.3	1.6	11	0.5	0.2	0.2	83	0.4	0.071	15	43	2.58	312	0.006	2	3.21	0.003	0.08	<0.1	0.1	11.2	<0.1	<0.05	10	0.8	<0.2
1230352	617618.24	7125683.82	soil	0.6	455.7	35.7	94	0.3	53	71.1	3774	7.65	6	39.5	1.5	9	0.9	0.2	0.2	86	0.27	0.084	19	44	2.71	477	0.005	1	3.51	0.003	0.07	<0.1	0.09	18.2	<0.1	<0.05	10	1	<0.2
1230353	617612.73	7125653.26	soil	0.7	394	29.7	88	0.3	51.4	106.6	3933	7	8.3	47.7	1.5	9	0.9	0.3	0.2	90	0.24	0.094	22	45	2.45	380	0.003	1	3.51	0.003	0.07	<0.1	0.13	20.1	0.1	<0.05	10	0.7	0.2
1230354	617600.43	7125672.37	soil	0.8	347	22.7	88	0.4	49.2	83.9	2823	6.62	8.4	41.1	1.5	10	0.6	0.3	0.2	93	0.29	0.09	18	47	2.5	318	0.004	<1	3.36	0.004	0.07	<0.1	0.14	17.1	0.1	<0.05	10	0.9	0.3
1230355	617611.77	7125579.82	soil	0.6	297.9	18.5	94	0.2	49.9	59.2	2595	6.34	6.6	14.5	1.8	8	0.4	0.3	0.2	92	0.16	0.107	17	45	2.42	492	0.004	1	3.29	0.004	0.06	<0.1	0.1	14.2	<0.1	<0.05	10	0.8	<0.2
1230356	617611.43	7125532.80	soil	0.8	244.8	19.5	82	0.1	56.5	77.1	1554	5.7	7.2	11.2	1.3	9	0.4	0.3	0.2	66	0.26	0.101	14	38	1.85	227	0.005	1	2.83	0.005	0.08	<0.1	0.06	7.7	<0.1	<0.05	8	0.9	<0.2
1230357	617620.71	7125474.70	soil	1.2	253.4	26	81	0.2	38.9	39.1	1813	4.97	9.3	14	1	14	0.8	0.3	0.2	61	0.44	0.119	16	34	1.35	328	0.005	1	2.4	0.005	0.07	<0.1	0.09	7.7	<0.1	0.05	7	1.7	<0.2
1230358	617616.64	7125428.99	soil	0.7	210.4	14.7	74	<0.1	37.1	26	1181	5.15	6.2	4.9	1	7	0.3	0.3	0.2	86	0.17	0.101	12	39	1.8	178	0.005	<1	2.79	0.004	0.05	<0.1	0.06	9.2	<0.1	<0.05	8	0.6	<0.2
1230359	617611.04	7125389.97	soil	0.7	238.7	16.8	85	0.1	45.1	40.9	1502	5.92	5.2	11.8	1.6	6	0.4	0.3	0.2	92	0.12	0.076	15	45	2.34	150	0.005	<1	3.16	0.004	0.06	<0.1	0.05	11.3	<0.1	<0.05	9	0.7	<0.2
1230360	617607.75	7125332.37	soil	0.8	229.1	19.8	92	0.1	45.4	39	1974	5.93	6	11.2	1.7	7	0.5	0.3	0.2	96	0.13	0.086	15	46	2.17	258	0.009	1	3.04	0.005	0.06	<0.1	0.05	11.5	<0.1	<0.05	10	0.8	0.3
1230361	617622.68	7125282.38	soil	2	192.3	25.7	78	0.1	47.7	48.2	1505	5.78	7.4	9.8	2.2	8	0.3	<0.1	0.2	68	0.23	0.088	15	37	1.47	275	0.004	2	2.56	0.003	0.09	<0.1	0.06	6.1	<0.1	<0.05	8	0.6	<0.2
1230362	617628.55	7125234.37	soil	1	371	15.7	62	0.3	33.4	30	922	3.85	7.7	18.7	0.9	37	0.2	0.5	0.2	50	1.42	0.106	14	30	1.06	285	0.005	4	1.89	0.006	0.06	<0.1	0.13	6.9	<0.1	0.1	5	1.6	<0.2
1230363	617636.72	7125172.89	soil	0.7	362.6	27.9	91	0.3	53	56.1	2355	6.82	8.7	32.6	2.1	15	0.4	0.3	0.2	116	0.39	0.077	16	60	2.41	277	0.007	2	3.23	0.004	0.07	<0.1	0.1	19.6	<0.1	<0.05	11	<0.5	0.2
1230364	617633.34	7125134.37	soil	0.9	200.8	30.8	80	0.2	48.6	66.8	2329	6.39	10.3	9.1	1.7	10	0.4	0.4	0.2	91	0.19	0.139	14	46	1.62	272	0.006	1	2.88	0.004	0.07	<0.1	0.09	8.5	<0.1	0.06	9	0.7	<0.2
1230365	617700.79	7125024.82	soil	0.9	295	20.1	111	0.2	72	65.9	2075	9.08	7.7	23.6	3.3	27	0.3	0.1	0.2	135	0.21	0.063	23	43	1.02	263	0.006	2	1.36	0.003	0.08	<0.1	0.04	15.7	<0.1	<0.05	5	<0.5	<0.2
1230366	617683.09	7124979.22	soil	2	168.2	32	84	0.2	49.9	41.8	1479	5.86	17.8	12	1.6	109	0.4	0.7	0.2	73	0.45	0.114	16	41	1.35	137	0.011	4	2.51	0.007	0.07	<0.1	0.13	7.9	<0.1	<0.05	8	1	<0.2
1230367	617665.43	7124928.25	soil	1.9	164.6	20.9	79	0.2	44.6	39.3	1213	5.8	15.3	6	2.4	13	0.2	0.5	0.2	82	0.23	0.066	19	42	1.48	205	0.011	3	2.47	0.004

| | | |

| | | |

| | | |

DRUID EXPLORATION

Property:	STEN
Project Geologist:	Frederic Turenne
GPS Datum & Zone:	UTM NAD83 Zone 8N
Lab:	ACME Labs

Date	Rock Sampler	ID (notes)	Lab Tag Number	UTM Easting	UTM Northing	Elevation	Description	Photo	Date Shipped	Shipping Number	Lab_ID	Certificate	Method	WGHT	3B	1DX	1DX	1DX	1DX
													Analyte	Wgt	Au	Mo	Cu	Pb	Zn
													Unit	KG	PPB	PPM	PPM	PPM	PPM
													MDL	0.01	2	0.1	0.1	0.1	1
													Method	Wt_kg	Au1_ppb	Mo_ppm	Cu_ppm	Pb_ppm	Zn_ppm
5-Aug-11	Frederic Turenne	float	1229101	615471.84	7123375.53	1593	boulder ,silicified rusty limestone-siltstone, yellowish, brecciated texture and vugs	x	13-Sep-11	None Given	1229101	WHI11001338	3B & 1DX	0.77	4	0.1	41.6	16.2	52
5-Aug-11	Frederic Turenne	float	1229102	615478.64	7123333.66	1601	boulder, sandstone, yellowish, disseminated sulphide (Cpy) with greenish tint	x	13-Sep-11	None Given	1229102	WHI11001338	3B & 1DX	0.65	34	0.2	65.3	4.6	56
5-Aug-11	Frederic Turenne	outcrop	1229103	615529.07	7123318.97	1627	outcrop, polygenetic conglomerate, silicified with iron oxide alteration, N182 dip 80	16	13-Sep-11	None Given	1229103	WHI11001338	3B & 1DX	0.8	41	4.5	16.6	11.4	31
5-Aug-11	Frederic Turenne	float	1229104	615494.17	7123218.75	1602	boulder , sandstone, yellowish-brown, vugs, silicified, py	x	13-Sep-11	None Given	1229104	WHI11001338	3B & 1DX	0.23	5	0.3	8.5	21.8	81
5-Aug-11	Frederic Turenne	float	1229105	615337.48	7123053.68	1624	boulder, sandstone-siltstone, yellowish, vugs and qtz-calcite	x	13-Sep-11	None Given	1229105	WHI11001338	3B & 1DX	0.24	3	0.4	55	13.4	65
5-Aug-11	Frederic Turenne	outcrop	1229106	615376.39	7123020.36	1665	outcrop, siltstone-shale, yellowish-brown to greenish, limonite alteration, qtz-carbonate veins and vugs, N245 dip 88, 1.3 m.	15	13-Sep-11	None Given	1229106	WHI11001338	3B & 1DX	1.48	<2	0.6	66.1	14	58
5-Aug-11	Frederic Turenne	outcrop	1229107	615376.91	7123017.92	1663	outcrop, siltstone-shale, yellowish brown to greenish, limonite alteration, qtz-carbonate veins and vugs	15	13-Sep-11	None Given	1229107	WHI11001338	3B & 1DX	0.45	2	0.5	63.9	15.8	61
5-Aug-11	Frederic Turenne	outcrop	1229108	615371.61	7123015.57	1661	outcrop, siltstone-shale, yellowish-brown to greenish, limonite alteration, qtz-carbonate veins and vugs	15	13-Sep-11	None Given	1229108	WHI11001338	3B & 1DX	1.12	6	0.6	47.2	14.9	70
7-Aug-11	Frederic Turenne	float	1229109	618712.00	7124810.54	1701	boulder, siltstone, grey, pyrite, chalcopyrite, qtz-veins	52	13-Sep-11	None Given	1229109	WHI11001338	3B & 1DX	0.25	<2	0.5	203	4.2	199
7-Aug-11	Frederic Turenne	outcrop	1229110	618719.00	7124808.41	1697	outcrop, siltstone-shale, greenish, py, arsenopyrite, veins, strong orange yellow limonite alteration, N252 dip 88		13-Sep-11	None Given	1229110	WHI11001338	3B & 1DX	0.35	2	0.8	206.5	8	190
7-Aug-11	Frederic Turenne	outcrop	1229111	618795.00	7124809.53	1731	quartz-vein 252 N, limonite alteration, yellowish color		13-Sep-11	None Given	1229111	WHI11001338	3B & 1DX	0.39	<2	0.3	46.5	2	15
7-Aug-11	Frederic Turenne	outcrop	1229112	618795.00	7124809.53	1749	Shale with strong purple-orange-yellow, hematite, limonite, vugs, qtz-calcite veinlets		13-Sep-11	None Given	1229112	WHI11001338	3B & 1DX	0.78	14	2.2	146.7	36.9	63
7-Aug-11	Frederic Turenne	outcrop	1229113	618808.00	7124783.69	1746	Outcrop, in a shear Zone, gauge, Rusted shale yellowish purple-orange in contact with a sandstone-conglomerate, strong hematization. vugs. N60 dip 80.		13-Sep-11	None Given	1229113	WHI11001338	3B & 1DX	0.61	8	6.7	114.3	53.3	66
7-Aug-11	Frederic Turenne	outcrop	1229114	618809.00	7124787.72	1743	outcrop, shale-wacke, yellowish purple-orange, clastic conglomerate. layer about 2 m wide along the shear zone with		13-Sep-11	None Given	1229114	WHI11001338	3B & 1DX	0.62	<2	0.9	162.4	9.6	72
8-Aug-11	Frederic Turenne	float	1229115	617237.88	7122748.11	1607	boulder-outcrop sheared grey siltstone with strong iron oxide alteration, limonite, pyrite print, qtz-calcite veinlets		13-Sep-11	None Given	1229115	WHI11001338	3B & 1DX	0.34	6	3.1	37	40.7	38
8-Aug-11	Frederic Turenne	outcrop	1229116	615108.85	7120687.16	1640	outcrop, silicified, greenish-grey shale, qtz-calcite veins, strong iron oxide-limonite alteration, vugs		13-Sep-11	None Given	1229116	WHI11001338	3B & 1DX	0.84	3	0.2	52.2	76.1	100
8-Aug-11	Frederic Turenne	outcrop	1229117	615158.63	7120727.46	1627	outcrop, silicified shale-siltstone with strong iron oxide-limonite		13-Sep-11	None Given	1229117	WHI11001338	3B & 1DX	0.67	<2	1.1	48.8	99.9	78
8-Aug-11	Frederic Turenne	outcrop	1229118	615514.12	7121258.54	1303	outcrop, yellowish to reddish-orange, siltstone-shale, qtz-calcite		13-Sep-11	None Given	1229118	WHI11001338	3B & 1DX	0.8	<2	1.2	45.6	41.9	116
8-Aug-11	Frederic Turenne	outcrop	1229119	615513.44	7121261.72	1300	outcrop, yellowish-orange siltstone-shale		13-Sep-11	None Given	1229119	WHI11001338	3B & 1DX	0.75	4	0.5	71	13.9	81
8-Aug-11	Frederic Turenne	outcrop	1229120	615512.84	7121260.17	1297	outcrop, yellowish-orange siltstone-shale, qtz-calcite veinlets		13-Sep-11	None Given	1229120	WHI11001338	3B & 1DX	0.72	3	0.9	48.7	22.3	96
8-Aug-11	Frederic Turenne	outcrop	1229121	615517.86	7121247.09	1296	outcrop, yellowish-orange siltstone-shale brecciated		13-Sep-11	None Given	1229121	WHI11001338	3B & 1DX	0.58	8	0.5	48.1	18.5	71
8-Aug-11	Frederic Turenne	outcrop	1229122	615514.12	7121248.32	1292	outcrop, yellowish-orange siltstone-shale, qtz-calcite veinlets		13-Sep-11	None Given	1229122	WHI11001338	3B & 1DX	0.43	<2	0.3	55.2	18.1	66
8-Aug-11	Frederic Turenne	outcrop	1229123	615511.80	7121244.93	1291	outcrop, yellowish-orange siltstone-shale, qtz-calcite veinlets,		13-Sep-11	None Given	1229123	WHI11001338	3B & 1DX	0.46	<2	0.7	155.6	10.2	121
8-Aug-11	Frederic Turenne	subcrop	1229124				greenish shale with minor pyrite		13-Sep-11	None Given	1229124	WHI11001338	3B & 1DX	0.63	<2	0.1	69.2	7.4	87
8-Aug-11	Frederic Turenne	subcrop	1229125				shale with veinlets and minor pyrite		13-Sep-11	None Given	1229125	WHI11001338	3B & 1DX	0.5	<2	<0.1	253.6	29.2	93
8-Aug-11	Frederic Turenne	subcrop	1229126				greenish shale and pyrite		13-Sep-11	None Given	1229126	WHI11001338	3B & 1DX	0.41	<2	0.1	244	5.9	99
9-Aug-11	Frederic Turenne	float	1229127	617351.23	7124530.23	1557	boulder, outcrop up hill, brecciated grey shale with strong iron oxide through the open space, heavy density rock		15-Aug-11	STEN-NW	1229127	WHI11001318	3B & 1DX	0.44	4	0.5	139.4	15.5	80
9-Aug-11	Frederic Turenne	outcrop	1229128	617330.45	7124516.16	1566	outcrop, pervasive mineralization in a greenish siltstone, py 30 %. cov 5%. hinge axe dip 58 to N244		15-Aug-11	STEN-NW	1229128	WHI11001318	3B & 1DX	0.69	2	4.4	66.9	93.9	31
9-Aug-11	Frederic Turenne	outcrop	1229129	617323.21	7124516.44	1571	outcrop, greenish siltstone, pyrite 35-40 %, iron oxide		15-Aug-11	STEN-NW	1229129	WHI11001318	3B & 1DX	0.22	5	2.2	120.9	20.9	103
9-Aug-11	Frederic Turenne	float	1229130	617396.19	7124460.19	1591	boulder, outcrop up hill, greenish with centimetre fine grained bedding sandy layer with centimetre automorphic with gold		15-Aug-11	STEN-NW	1229130	WHI11001318	3B & 1DX	1.08	5	<0.1	151.2	26.8	54
9-Aug-11	Frederic Turenne	outcrop	1229131	617378.59	7124439.42	1608	Greenish outcrop silicified, felsic unit fold with veins		15-Aug-11	STEN-NW	1229131	WHI11001318	3B & 1DX	0.58	8	0.3	96.1	62.8	106
10-Aug-11	Frederic Turenne	outcrop	1229132	614270.71	7120643.97		weathered carbonated siltstone veinlets, qtz-calcite, iron oxide		15-Aug-11	STEN-NW	1229132	WHI11001318	3B & 1DX	0.66	<2	0.3	80	7	59
10-Aug-11	Frederic Turenne	outcrop	1229133	614253.36	7120631.66	1585	rusted siltstone, strong orange iron oxide alteration, brecciated		15-Aug-11	STEN-NW	1229133	WHI11001318	3B & 1DX	0.56	3	0.3	86.6	14.2	79
10-Aug-11	Frederic Turenne	outcrop	1229134	614240.00	7120611.15	1569	outcrop, polygenetic fragments, sub-rounded 2-5 cm stratified,		15-Aug-11	STEN-NW	1229134	WHI11001318	3B & 1DX	0.6	<2	0.5	9.1	3.6	28
10-Aug-11	Frederic Turenne	outcrop	1229135	614225.33	7120615.33	1566	contact, conglomerate and coarse grind sandstone to		15-Aug-11	STEN-NW	1229135	WHI11001318	3B & 1DX	0.4	<2	0.3	29.8	28	52
11-Aug-11	Frederic Turenne	outcrop	1229136	616946.99	7124632.21	1733	Dark greenish shale-green schist with chlorite,		15-Aug-11	STEN-NW	1229136	WHI11001318	3B & 1DX	0.84	<2	0.5	33.7	8.7	25
11-Aug-11	Frederic Turenne	outcrop	1229137	616951.28	7124601.29	1742	de-calcified limestone-carbonated siltstone, centimetre qtz		15-Aug-11	STEN-NW	1229137	WHI11001318	3B & 1DX	0.54	<2	0.2	35.8	6.4	37
11-Aug-11	Frederic Turenne	outcrop	1229138	616957.46	7124592.86	1742	greenish shale with centimetre porphyritic qtz veins with iron		15-Aug-11	STEN-NW	1229138	WHI11001318	3B & 1DX	0.47	4	0.1	92.3	13.6	49
11-Aug-11	Frederic Turenne	outcrop	1229139	617064.42	7124413.26	1802	pale green shale-siltstone, iron oxide alteration		15-Aug-11	STEN-NW	1229139	WHI11001318	3B & 1DX	0.59	5	0.5	115.2	9.3	74
11-Aug-11	Frederic Turenne	outcrop	1229140	617047.53	7124402.48	1821	rusted and silicified fine grained sandstone with purple to dark		15-Aug-11	STEN-NW	1229140	WHI11001318	3B & 1DX	0.53	2	8.3	25.6	58.7	21
11-Aug-11	Frederic Turenne	outcrop	1229141	617041.01	7124388.72	1829	grey siltstone-slate, iron oxide alteration, yellowish alteration		15-Aug-11	STEN-NW	1229141	WHI11001318	3B & 1DX	0.59	<2	1	18	16.2	48
11-Aug-11	Frederic Turenne	outcrop	1229142	618536.26	7124317.63	1867	brecciated rusty siltstone, strong iron oxide alteration veins and		15-Aug-11	STEN-NW	1229142	WHI11001318	3B & 1DX	0.57	<2	1.2	25.9	0.8	31
11-Aug-11	Frederic Turenne	outcrop	1229143	618522.45	7124395.97	1867	pink-red to yellow siltstone, strongly weathered, orpiment and		15-Aug-11	STEN-NW	1229143	WHI11001318	3B & 1DX	0.7	41	0.5	8.8	1	18
11-Aug-11	Frederic Turenne	outcrop	1229144	618524.31	7124378.20	1870	silicified yellowish brown de-carbonated limestone, stockworks		15-Aug-11	STEN-NW	1229144	WHI11001318	3B & 1DX	0.51	<2	0.1	3.9	0.5	12
12-Aug-11	Frederic Turenne	float	1229145	618520.51	7124226.99	1868	conglomerate with rounded centimetre fragment, brownish		15-Aug-11	STEN-NW	1229145	WHI11001318	3B & 1DX	0.7	10	0.1	8.3	7.1	11
12-Aug-11	Frederic Turenne	subcrop	1229146	618527.78	7124195.64	1852	purple-orange conglomerate with iron oxide alteration		15-Aug-11	STEN-NW	1229146	WHI11001318	3B & 1DX	0.49	<2	0.7	154	2.9	72
12-Aug-11	Frederic Turenne	outcrop	1229147	618581.20	7124124.77	1815	silicified decalcified carbonated siltstone with stockwork veinlets and veins, iron oxide alteration		15-Aug-11	STEN-NW	1229147	WHI11001318	3B & 1DX	0.46	<2	<0.1	3.3	0.2	9
12-Aug-11	Frederic Turenne	subcrop	1229148	618584.15	7124130.09	1818	purple-orange iron oxide alteration on fractured siltstone-sandstone, iron oxide alteration, hematite,		15-Aug-11	STEN-NW	1229148	WHI11001318	3B & 1DX	0.64	13	3.2	189.8	64	76
12-Aug-11	Frederic Turenne		1229149	618639.97	7124121.95	1807	quarts-feldspar porphyritic, in a stockwork system, with vugs		15-Aug-11	STEN-NW	1229149	WHI11001318	3B & 1DX	0.41	<2	0.8	4.5	0.9	23
12-Aug-11	Frederic Turenne	outcrop	1229150	618736.97	7124134.40	1760	silicified fine grained sandstone-siltstone in contact with shale		15-Aug-11	STEN-NW	1229150	WHI11001318	3B & 1DX	0.53	<2	0.3	29.3	1.5	58

7-Aug-11	Ruth Bjorkman	float	1229151	618554.48	7125094.86	1533	boulder, light grey fine grained siltstone with orange alteration on fractures. minor blebby medium grained py, and grey steely		13-Sep-11	None Given	1229151	WHI11001338	3B & 1DX	0.25	3	0.4	25.8	5.9	133
7-Aug-11	Ruth Bjorkman	float	1229152	618768.27	7125175.32	1547	boulder, light bleached surface with dark purple sulphide burns, fine grained dark grey siltstone, min yellow alteration on fresh break. 2% sulphide mainly disseminated py, from chute		13-Sep-11	None Given	1229152	WHI11001338	3B & 1DX	0.85	<2	18.6	19	16.6	32
7-Aug-11	Ruth Bjorkman	outcrop	1229153	618883.04	7125158.31	1689	outcrop, grey fine grained shale contacting a conglomerate unit, alteration is orange and concentrated on the contact, quartz veinlets stockworked through the outcrop, min fine grained		13-Sep-11	None Given	1229153	WHI11001338	3B & 1DX	1.12	7	0.3	73.5	11.2	64
7-Aug-11	Ruth Bjorkman	outcrop	1229154	618898.06	7125100.25	1713	outcrop, dark grey-blue fine grained vuggy shale, min fine grained py rims the vugs, red-orange alteration		13-Sep-11	None Given	1229154	WHI11001338	3B & 1DX	1.03	9	0.8	69.9	41.5	46
7-Aug-11	Ruth Bjorkman	subcrop	1229155	618908.68	7125096.66	1724	loose beside outcrop, red orange fine-medium grained siltstone alteration zone approximately 1 m wide, with quartz veinlets, unidentified yellow mineral in quartz veinlet. (looks like au but		13-Sep-11	None Given	1229155	WHI11001338	3B & 1DX	0.65	<2	0.2	9.1	4.7	16
7-Aug-11	Ruth Bjorkman	outcrop	1229156	619010.89	7125605.48	1660	outcrop, 2m wide alteration zone, fine-medium grained silt/sandstone. silicified, quartz veinlets/quartz blebs+ calcite.		13-Sep-11	None Given	1229156	WHI11001338	3B & 1DX	0.65	<2	0.2	9.1	3.4	32
7-Aug-11	Ruth Bjorkman	outcrop	1229157	619061.43	7125617.56	1706	outcrop, fine grained orange siltstone, 1.5m shear zone, shale capping, grey-yellow on break, 1% disseminated py, orange		13-Sep-11	None Given	1229157	WHI11001338	3B & 1DX	0.48	18	0.5	156.3	51.4	62
8-Aug-11	Ruth Bjorkman	float	1229158	617736.72	7122662.74	1671	boulder near peak, angular, yellow-orange fine grained siltstone. calcite veins with blebs of quartz inclusions. orange	100-0011	13-Sep-11	None Given	1229158	WHI11001338	3B & 1DX	0.78	<2	<0.1	23.1	6.1	58
9-Aug-11	Ruth Bjorkman	outcrop	1229159	617780.00	7122657.00	1665	outcrop, orange-grey mudstone/siltstone underlain by flakey shale. veinlets calcite+ qtz. schistose shear zone. altered orange-	100-0012	13-Sep-11	None Given	1229159	WHI11001338	3B & 1DX	0.95	<2	0.2	92	7.9	60
8-Aug-11	Ruth Bjorkman	outcrop	1229160	617793.01	7122646.86	1660	outcrop, dark grey shale, calcite veins, min stringy sulphide,	100-0013	13-Sep-11	None Given	1229160	WHI11001338	3B & 1DX	0.51	5	0.4	126.7	17.8	80
8-Aug-11	Ruth Bjorkman	outcrop	1229161	616148.52	7124319.49	1704	outcrop, gossan, orange-red fine grained siltstone, 1m alteration zone. underlain by fine grained flakey shale. 2%	100-0014	13-Sep-11	None Given	1229161	WHI11001338	3B & 1DX	0.58	4	0.8	77.5	20	161
8-Aug-11	Ruth Bjorkman	outcrop	1229162	616098.34	7124306.84	1709	outcrop, soft grey fine grained mud/siltstone, shale capping, somewhat N-S strike, suspected folding, 2% very fine grained,	100-0015	13-Sep-11	None Given	1229162	WHI11001338	3B & 1DX	0.38	<2	0.2	144.1	5.2	96
8-Aug-11	Ruth Bjorkman	float	1229163	616025.59	7124266.19	1711	boulder angular from uphill qtz vein too dangerous to reach,	100-0016	13-Sep-11	None Given	1229163	WHI11001338	3B & 1DX	0.47	<2	0.3	45.2	2.3	7
8-Aug-11	Ruth Bjorkman	outcrop	1229164	615818.39	7124156.68	1725	outcrop, yellowish tinge to grey-brown sandstone, 4m wide shear zone schistose. calcite veining through outcrop with	100-0017	13-Sep-11	None Given	1229164	WHI11001338	3B & 1DX	0.81	<2	0.2	13.2	7	28
8-Aug-11	Ruth Bjorkman	float	1229165	615701.51	7124103.25	1776	boulder, medium grained yellow-grey sandstone, calcite veining, 1% fine grained disseminated py though, carb	100-0021	13-Sep-11	None Given	1229165	WHI11001338	3B & 1DX	0.55	<2	0.4	8.6	2.5	20
8-Aug-11	Ruth Bjorkman	outcrop	1229166	615735.95	7124094.91	1772	outcrop, late quartz and calcite vein contacting each other cutting through siltstone and shale. min py fine grained. yellow	100-0018	13-Sep-11	None Given	1229166	WHI11001338	3B & 1DX	1.27	<2	0.1	21.5	1.8	13
8-Aug-11	Ruth Bjorkman	float	1229167	615674.72	7124005.32	1761	boulder angular, fine grained grey siltstone with calcite+ qtz veinlets. min-1% cpy in qtz veinlets+ min py. deep red/purple	100-0022	13-Sep-11	None Given	1229167	WHI11001338	3B & 1DX	0.85	<2	0.4	146.1	7.2	80
8-Aug-11	Ruth Bjorkman	subcrop	1229168	615705.87	7123833.05	1726	loose beside outcrop, quartz-calcite in greenish chlorite altered	100-0019	13-Sep-11	None Given	1229168	WHI11001338	3B & 1DX	0.46	<2	0.2	40.3	5	28
8-Aug-11	Ruth Bjorkman	subcrop	1229169	615706.44	7123831.89	1725	loose beside outcrop, quartz-carb in fine grained siltstone, orange alteration in siltstone. chert layer in siltstone	100-0020	13-Sep-11	None Given	1229169	WHI11001338	3B & 1DX	0.96	<2	0.1	5.2	6.2	10
9-Aug-11	Ruth Bjorkman	float	1229170	617688.89	7125031.28	1547	qtz chalco veins carbonate alteration orange yellowish with		15-Aug-11	STEN-NW	1229170	WHI11001318	3B & 1DX	0.99	<2	<0.1	12.1	6	26
9-Aug-11	Ruth Bjorkman	float	1229171	617736.32	7125036.89	1571	greenish fine grained sulphide shale beside 5 % disseminated		15-Aug-11	STEN-NW	1229171	WHI11001318	3B & 1DX	0.56	6	0.2	121.8	24.2	51
9-Aug-11	Ruth Bjorkman	float	1229172	617721.89	7125024.85	1579	green soft shale with calcite, sulphides at the contact zone		15-Aug-11	STEN-NW	1229172	WHI11001318	3B & 1DX	0.69	<2	0.2	152.8	5	67
9-Aug-11	Ruth Bjorkman	outcrop	1229173	617654.87	7125133.41	1516	green shale with carbonate qtz veins, orange alteration		15-Aug-11	STEN-NW	1229173	WHI11001318	3B & 1DX	0.55	8	0.5	101.7	71.1	96
9-Aug-11	Ruth Bjorkman	subcrop	1229174	617654.59	7125129.96	1490	fine grained siltstone, grey 2 % concentrated disseminated pyrite. orange alteration with carbonate veinlets		15-Aug-11	STEN-NW	1229174	WHI11001318	3B & 1DX	0.69	<2	38.6	23.4	28	10
9-Aug-11	Ruth Bjorkman	outcrop	1229175	617497.51	7125204.16	1474	shale with orange brown alteration and 10% pyrite, calcite		15-Aug-11	STEN-NW	1229175	WHI11001318	3B & 1DX	0.62	4	137.7	44.3	72.9	48
9-Aug-11	Ruth Bjorkman	float	1229176	617615.61	7125499.45	1510	green shale fine grained, pyrite, yellowish orange alteration		15-Aug-11	STEN-NW	1229176	WHI11001318	3B & 1DX	0.73	4	0.8	41.4	14	56
10-Aug-11	Ruth Bjorkman	float	1229177	617046.79	7120888.83	1611	pebble sandstone conglomerate, minor sulphide, orange and		15-Aug-11	STEN-NW	1229177	WHI11001318	3B & 1DX	0.49	<2	0.3	103.4	6.6	85
10-Aug-11	Ruth Bjorkman	float	1229178	617132.68	7120993.37	1670	qtz veins with calcite, hematite alteration, orange and		15-Aug-11	STEN-NW	1229178	WHI11001318	3B & 1DX	0.84	<2	0.1	6.1	0.9	5
10-Aug-11	Ruth Bjorkman	outcrop	1229179	614800.13	7120953.28	1760	calcite + qtz veinlets, stockworks, shear zone, sulphide in fine		15-Aug-11	STEN-NW	1229179	WHI11001318	3B & 1DX	0.66	4	0.2	132.7	6.2	108
10-Aug-11	Ruth Bjorkman	outcrop	1229180	614711.40	7121007.73	1773	grey fine grained shale with 3 % disseminated pyrite		15-Aug-11	STEN-NW	1229180	WHI11001318	3B & 1DX	0.7	3	0.1	97.5	3.1	62
11-Aug-11	Ruth Bjorkman	outcrop	1229181	616627.06	7124241.33	1727	green fine grained shale with qtz and calcite, brownish		15-Aug-11	STEN-NW	1229181	WHI11001318	3B & 1DX	0.67	3	0.1	66.2	4.7	39
11-Aug-11	Ruth Bjorkman	outcrop	1229182	616645.66	7124240.54	1728	siltstone-shale-contact with minor orange alteration, 1 % pyrite		15-Aug-11	STEN-NW	1229182	WHI11001318	3B & 1DX	0.59	<2	0.1	94	4.6	69
11-Aug-11	Ruth Bjorkman	outcrop	1229183	616674.31	7124247.16	1738	qtz-carbonate fine grained shale, chlorite and orange alteration		15-Aug-11	STEN-NW	1229183	WHI11001318	3B & 1DX	0.64	<2	<0.1	65.5	11.3	13
11-Aug-11	Ruth Bjorkman	outcrop	1229184	616794.50	7124266.27	1766	shear zone in a siltstone with vugs with red-orange alteration and a grey matrix. the zone is 2-5 m wide and schistose		15-Aug-11	STEN-NW	1229184	WHI11001318	3B & 1DX	0.57	<2	0.9	27.8	34.4	56
11-Aug-11	Ruth Bjorkman	float	1229185	616849.85	7124261.26	1793	qtz-calcite veinlets in green fine grained shale with minor cpy		15-Aug-11	STEN-NW	1229185	WHI11001318	3B & 1DX	0.61	<2	<0.1	97.2	4.6	57
11-Aug-11	Ruth Bjorkman	outcrop	1229186	616893.75	7124297.94	1810	qtz-calcite veins cutting shear zone, green fine grained shale, shear zone 3 m wide. qtz veins 30 cm		15-Aug-11	STEN-NW	1229186	WHI11001318	3B & 1DX	0.71	<2	<0.1	6.3	1.5	5
11-Aug-11	Ruth Bjorkman	outcrop	1229187	616973.17	7124322.34	1849	fine grained grey, green shale with brown rusty alteration, greenish brown siltstone altered orange-brown qtz and calcite		15-Aug-11	STEN-NW	1229187	WHI11001318	3B & 1DX	0.44	2	0.1	121.3	7.9	75
11-Aug-11	Ruth Bjorkman	outcrop	1229188	617324.02	7124164.35	1804	veinlets with minor very fine grained pyrite		15-Aug-11	STEN-NW	1229188	WHI11001318	3B & 1DX	1.17	<2	0.1	56.6	3.1	35
11-Aug-11	Ruth Bjorkman	float	1229189	617698.00	7124149.40	1779	qtz-calcite carbonate, coarse grained with brown alteration		15-Aug-11	STEN-NW	1229189	WHI11001318	3B & 1DX	0.59	<2	0.5	13.8	9.3	16
11-Aug-11	Ruth Bjorkman	outcrop	1229190	618084.98	7124387.20	1842	grey fine grained siltstone, 2% fine grained disseminated pyrite, reddish-orange yellow alteration		15-Aug-11	STEN-NW	1229190	WHI11001318	3B & 1DX	0.59	<2	<0.1	121.3	8.7	93
11-Aug-11	Ruth Bjorkman	float	1229191	618398.21	7124356.19	1886	silicified medium grained sandstone-siltstone, light green with siltstone fine grained, greenish-grey, 2 % very fine grained disseminated pyrite, sulphide, orange yellow		15-Aug-11	STEN-NW	1229191	WHI11001318	3B & 1DX	0.78	<2	0.3	4.5	0.6	16
11-Aug-11	Ruth Bjorkman	outcrop	1229192	618505.79	7124246.81	1870			15-Aug-11	STEN-NW	1229192	WHI11001318	3B & 1DX	0.68	<2	<0.1	70.1	3.7	36
11-Aug-11	Ruth Bjorkman	outcrop	1229193	618562.03	7124258.79	1858	greenish-grey, fine grained shale, 1 % disseminated fine grained sulphide. iron oxide alteration. brownish orange		15-Aug-11	STEN-NW	1229193	WHI11001318	3B & 1DX	0.5	<2	0.4	73.3	2.8	60
12-Aug-11	Ruth Bjorkman	outcrop	1229194	618703.53	7124383.35	1885	rusty orange conglomerate breccia, fine to coarse grained qtz veins in altered shear zone carbonate and chlorite		15-Aug-11	STEN-NW	1229194	WHI11001318	3B & 1DX	0.77	<2	0.3	13.5	12	14
12-Aug-11	Ruth Bjorkman	outcrop	1229195	618715.58	7124387.51	1884	alteration and minor hematite alteration in sandstone host		15-Aug-11	STEN-NW	1229195	WHI11001318	3B & 1DX	0.74	<2	0.1	3.8	5.6	16
12-Aug-11	Ruth Bjorkman	outcrop	1229196	618733.77	7124414.21	1870	very soft chlorite schist, dark green, qtz-carbonate centimetre		15-Aug-11	STEN-NW	1229196	WHI11001318	3B & 1DX	0.56	<2	0.4	68.1	22.7	122
12-Aug-11	Ruth Bjorkman	outcrop	1229197	618902.07	7124644.89	1874	qtz flooded siltstone-sandstone, dark grey with green brown-		15-Aug-11	STEN-NW	1229197	WHI11001318	3B & 1DX	0.48	<2	0.2	30.1	14.3	52
12-Aug-11	Ruth Bjorkman	outcrop	1229198	619059.37	7124819.46	1901	qtz vein in rusty sandstone-quartzite, carbonate alteration in		15-Aug-11	STEN-NW	1229198	WHI11001318	3B & 1DX	0.8	<2	0.1	4.4	4.8	25
12-Aug-11	Ruth Bjorkman	outcrop	1229199	619369.33	7124698.07	1757	qtz-carbonate, calcite veinlets, stockwork		15-Aug-11	STEN-NW	1229199	WHI11001318	3B & 1DX	0.81	<2	0.4	2.9	0.4	12
12-Aug-11	Ruth Bjorkman	float	1229200	619334.75	7124637.71	1734	fine grained dark shale with sulphide burns in alteration zone,		15-Aug-11	STEN-NW	1229200	WHI11001318	3B & 1DX	0.44	<2	0.2	45.5	14.1	75

12-Aug-11	Ruth Bjorkman	outcrop	1229201	619278.69	7124166.45	1553	qtz-carbonate, reddish-orange stockwork	15-Aug-11	STEN-NW	1229201	WHI11001318	3B & 1DX	1.01	<2	0.6	44.9	2.9	29
12-Aug-11	Ruth Bjorkman	outcrop	1229202	619465.91	7124139.77	1529	qtz-carbonate sandstone trace sulphide orange red alteration	15-Aug-11	STEN-NW	1229202	WHI11001318	3B & 1DX	0.87	<2	0.2	2.9	0.5	6
12-Aug-11	Ruth Bjorkman	outcrop	1229203	620009.13	7123635.05	1537	qtz veins in schistose alteration zone, chlorite, with orange an	15-Aug-11	STEN-NW	1229203	WHI11001318	3B & 1DX	0.54	<2	0.5	1.9	0.6	9
13-Aug-11	Ruth Bjorkman	float	1229204	619387.13	7126117.71	2038	fine grained soft siltstone, chlorite alteration with 3 % disseminated py, spotty rusty, gossanous alteration	15-Aug-11	STEN-NW	1229204	WHI11001287	3B & 1DX	0.38	21	1.2	66	33.1	84
13-Aug-11	Ruth Bjorkman	outcrop	1229205	619344.20	7126187.14	2014	pebble conglomerate with qtz flooding and veining, orange	15-Aug-11	STEN-NW	1229205	WHI11001287	3B & 1DX	0.63	<2	0.1	45.8	5.5	48
13-Aug-11	Ruth Bjorkman	subcrop	1229206	619256.10	7126162.87	1962	qtz veins in green chlorite schist silicified with minor sulphides	15-Aug-11	STEN-NW	1229206	WHI11001287	3B & 1DX	0.43	<2	0.2	59.5	4.6	41
13-Aug-11	Ruth Bjorkman	outcrop	1229207	618958.82	7125972.05	1766	chloritic shale sheared with 1 % sulphides, qtz flooding	15-Aug-11	STEN-NW	1229207	WHI11001287	3B & 1DX	0.49	3	<0.1	315.1	5.5	94
13-Aug-11	Ruth Bjorkman	outcrop	1229208	618958.90	7125971.50	1768	green shale with quartz veins and stockwork 30 cm wide with	15-Aug-11	STEN-NW	1229208	WHI11001287	3B & 1DX	0.66	<2	<0.1	89.3	4.7	76
13-Aug-11	Ruth Bjorkman	float	1229209	618579.84	7125912.85	1541	green shale with fine grained with chlorite qtz eyes, 1 % py	15-Aug-11	STEN-NW	1229209	WHI11001287	3B & 1DX	0.75	3	<0.1	174.7	8.5	102
13-Aug-11	Ruth Bjorkman	subcrop	1229210	618545.48	7125858.42	1484	chlorite rich green schist min py up to 1 % qtz-calcite veinlets	15-Aug-11	STEN-NW	1229210	WHI11001287	3B & 1DX	0.46	<2	0.2	165	8.3	74
14-Aug-11	Ruth Bjorkman	float	1229211	613553.75	7122357.99	1372	qtz-carbonate veinlets with minor py	15-Aug-11	STEN-NW	1229211	WHI11001287	3B & 1DX	0.8	<2	0.2	47.7	29.8	66
14-Aug-11	Ruth Bjorkman	float	1229212	613553.17	7122357.35	1403	pebble conglomerate 3 % sulphides with orange weathered	15-Aug-11	STEN-NW	1229212	WHI11001287	3B & 1DX	0.47	<2	5.7	8.7	7	33
14-Aug-11	Ruth Bjorkman	outcrop	1229213	613545.94	7122312.63	1419	bed of conglomerate grading to sandstone with 1% sulphides	15-Aug-11	STEN-NW	1229213	WHI11001287	3B & 1DX	0.45	<2	0.6	6.6	6.7	20
14-Aug-11	Ruth Bjorkman	outcrop	1229214	613546.36	7122308.42	1418	sandstone and siltstone minor 2 % sulphide disseminated	15-Aug-11	STEN-NW	1229214	WHI11001287	3B & 1DX	0.56	3	2.7	44.3	37.7	32
14-Aug-11	Ruth Bjorkman	outcrop	1229215	613540.65	7122332.61	1471	cobble-pebble sulphide burns 1 % blebby sulphide	15-Aug-11	STEN-NW	1229215	WHI11001287	3B & 1DX	0.45	<2	0.3	7.9	9.4	18
14-Aug-11	Ruth Bjorkman	outcrop	1229216	613541.38	7122331.51	1467	sandstone contact with cobble-pebble conglomerate unit 4 %	15-Aug-11	STEN-NW	1229216	WHI11001287	3B & 1DX	0.47	<2	1	17.5	7.4	22
14-Aug-11	Ruth Bjorkman	outcrop	1229217	613536.44	7122325.34	1421	green schist-chlorite 1 % blebby sulphide py-cpy and sandstone with qtz veinlets and stockwork	15-Aug-11	STEN-NW	1229217	WHI11001287	3B & 1DX	0.48	3	<0.1	104.9	5.7	75
14-Aug-11	Ruth Bjorkman	float	1229218	613557.21	7122224.71	1430	rusty, 5 % disseminated fine grained py	15-Aug-11	STEN-NW	1229218	WHI11001287	3B & 1DX	0.79	14	1.8	66.3	112.5	78
14-Aug-11	Ruth Bjorkman	outcrop	1229219	613545.33	7122167.51	1487	rusty shale, 2 % py disseminated qtz-calcite veins	15-Aug-11	STEN-NW	1229219	WHI11001287	3B & 1DX	0.54	4	0.2	106	7.9	61
14-Aug-11	Ruth Bjorkman	outcrop	1229220	613844.96	7121962.61	1452	rusty shale, qtz veinlets with py	15-Aug-11	STEN-NW	1229220	WHI11001287	3B & 1DX	0.36	7	0.6	209.5	16.2	69
15-Aug-11	Ruth Bjorkman	outcrop	1229221	614316.48	7121758.72	1755	qtz-carbonate silicified, very rusty	15-Aug-11	STEN-NW	1229221	WHI11001287	3B & 1DX	0.4	<2	0.1	41.8	14.4	95
15-Aug-11	Ruth Bjorkman	float	1229222	614321.38	7121718.38	1769	qtz carbonate siltstone, breccia, 1 % py	15-Aug-11	STEN-NW	1229222	WHI11001287	3B & 1DX	0.62	<2	0.9	6.3	7.2	31
15-Aug-11	Ruth Bjorkman	outcrop	1229223	614335.42	7121715.27	1781	pebble conglomerate dark green 1 % py	15-Aug-11	STEN-NW	1229223	WHI11001287	3B & 1DX	0.62	2	2.6	16.9	12.1	44
15-Aug-11	Ruth Bjorkman	outcrop	1229224	614390.47	7121689.96	1819	dark shale blue, fine grained, carbonate-qtz veinlets with minor	15-Aug-11	STEN-NW	1229224	WHI11001287	3B & 1DX	0.49	6	0.1	121.7	10.1	74
15-Aug-11	Ruth Bjorkman	outcrop	1229225	614125.12	7121811.06	1703	rusty gossan with minor py, disseminated fined grained calcite-	15-Aug-11	STEN-NW	1229225	WHI11001287	3B & 1DX	0.59	3	0.2	90.2	5.4	55
15-Aug-11	Ruth Bjorkman	subcrop	1229226	614287.66	7121822.46	1717	rusty orange brownish siltstone-conglomerate with 1 % fine grained disseminated py with possible arsenopyrite	15-Aug-11	STEN-NW	1229226	WHI11001287	3B & 1DX	0.67	<2	0.4	21.3	13.2	43
15-Aug-11	Ruth Bjorkman	outcrop	1229227	614287.90	7121826.79	1717	breccia greenish with chlorite alteration and angular clasts and	15-Aug-11	STEN-NW	1229227	WHI11001287	3B & 1DX	0.41	5	0.4	84.6	12.4	127
15-Aug-11	Ruth Bjorkman	outcrop	1229228	614325.09	7121906.62	1715	qtz in green schist with mm py, sulphides, rusty brown	15-Aug-11	STEN-NW	1229228	WHI11001287	3B & 1DX	0.71	<2	0.4	82.8	6.2	32
15-Aug-11	Ruth Bjorkman	outcrop	1229229	614315.23	7121928.39	1703	silicified gossan	15-Aug-11	STEN-NW	1229229	WHI11001287	3B & 1DX	0.38	<2	0.3	41.9	5.5	49
15-Aug-11	Ruth Bjorkman	outcrop	1229230	614192.57	7121967.48	1607	purple shale going into conglomerate breccia with min cpy and	15-Aug-11	STEN-NW	1229230	WHI11001287	3B & 1DX	0.71	4	0.4	107	16.9	82
15-Aug-11	Ruth Bjorkman	subcrop	1229231	614823.59	7123354.10	1513	green mafic fine grained strongly silicified (gabbro) chlorite,	15-Aug-11	STEN-NW	1229231	WHI11001287	3B & 1DX	0.64	<2	1.9	38.1	3.8	132
15-Aug-11	Ruth Bjorkman	float	1229232	614759.23	7123400.00	1631	qtz veins and greenish with 2 % sulphide	15-Aug-11	STEN-NW	1229232	WHI11001287	3B & 1DX	0.81	3	0.2	140.9	8.9	82
15-Aug-11	Ruth Bjorkman	outcrop	1229233	614726.05	7123320.89	1614	fine grained, cpy and py 1%	15-Aug-11	STEN-NW	1229233	WHI11001287	3B & 1DX	0.52	8	0.7	71.8	12.5	68
15-Aug-11	Ruth Bjorkman	outcrop	1229234	614711.77	7123303.32	1613	medium grained qtz-siltstone with 3-5 % py	15-Aug-11	STEN-NW	1229234	WHI11001287	3B & 1DX	0.37	<2	0.9	10.2	5.1	10
16-Aug-11	Ruth Bjorkman	outcrop	1229235	618522.60	7125972.24	1516	grey-green rock with mm py and qtz-calcite veinlets +	15-Aug-11	STEN-NW	1229235	WHI11001287	3B & 1DX	0.64	<2	<0.1	140.3	5.1	88
16-Aug-11	Ruth Bjorkman	outcrop	1229236	617873.46	7125804.46	1466	shear zone, qtz-carbonate veins + stockwork, schistose	15-Aug-11	STEN-NW	1229236	WHI11001287	3B & 1DX	0.83	3	<0.1	75.9	4.9	47
16-Aug-11	Ruth Bjorkman	outcrop	1229237	617675.48	7125814.88	1424	qtz-calcite veins 3 meters wide in green schistose shale with	15-Aug-11	STEN-NW	1229237	WHI11001287	3B & 1DX	0.88	<2	0.2	6.1	2	7
16-Aug-11	Ruth Bjorkman	float	1229238	617623.46	7125786.45	1450	dark green with min cpy and bornite fractured	15-Aug-11	STEN-NW	1229238	WHI11001287	3B & 1DX	0.29	6	0.1	223.9	11.8	107
16-Aug-11	Ruth Bjorkman	outcrop	1229239	617635.57	7125740.11	1474	very rusty shale with millimetre sulphide	15-Aug-11	STEN-NW	1229239	WHI11001287	3B & 1DX	0.57	5	0.4	108.1	25.7	173
16-Aug-11	Ruth Bjorkman	outcrop	1229240	617372.55	7125643.60	1377	stockworks system with millimetre py	15-Aug-11	STEN-NW	1229240	WHI11001287	3B & 1DX	0.82	4	0.1	178	7.8	96
16-Aug-11	Ruth Bjorkman	outcrop	1229241	617355.79	7125708.01	1375	green fine grained qtz-carbonate stockwork with minor py	15-Aug-11	STEN-NW	1229241	WHI11001287	3B & 1DX	0.48	<2	<0.1	104.9	8.2	55
16-Aug-11	Ruth Bjorkman	float	1229242	617240.86	7126175.79	1350	fine grained green chlorite rich and massive sulphide, beside	15-Aug-11	STEN-NW	1229242	WHI11001287	3B & 1DX	0.64	3	<0.1	145.6	47.6	56
17-Aug-11	Ruth Bjorkman	float	1229243	618269.00	7124659.03	1666	siltstone pebble conglomerate with 5% fine grained	15-Aug-11	STEN-NW	1229243	WHI11001287	3B & 1DX	0.8	3	0.6	31.6	22.4	44
17-Aug-11	Ruth Bjorkman	outcrop	1229244	618268.00	7124551.62	1700	40% sulphide (py) in gossan fine grained decalcified limestone-	15-Aug-11	STEN-NW	1229244	WHI11001287	3B & 1DX	0.33	10	0.7	75	31.9	60
17-Aug-11	Ruth Bjorkman	float	1229245	618280.00	7124558.36	1713	fine grained grey shale sulphide lens, py	15-Aug-11	STEN-NW	1229245	WHI11001287	3B & 1DX	0.37	11	3.9	197	34.1	109
17-Aug-11	Ruth Bjorkman	float	1229246	619052.00	7125149.76	1749	qtz veinlets cross-cutting in fine grained grey-blue	15-Aug-11	STEN-NW	1229246	WHI11001287	3B & 1DX	0.42	<2	1.4	77	3.2	53
17-Aug-11	Ruth Bjorkman	float	1229247	619058.00	7125095.84	1765	qtz and stockwork in a greenish with min sulphide to cpy and	15-Aug-11	STEN-NW	1229247	WHI11001287	3B & 1DX	0.63	3	<0.1	43.1	4.6	50
17-Aug-11	Ruth Bjorkman	float	1229248	619050.00	7125107.48	1757	rusty siltstone with 5% sulphide in conglomeratic bed	15-Aug-11	STEN-NW	1229248	WHI11001287	3B & 1DX	0.58	<2	<0.1	73.9	2.7	43
12-Aug-11	Frederic Turenne	outcrop	1229251	618799.66	7124150.80	1728	conglomeratic unit silicified, with round clasts, open space,	15-Aug-11	STEN-NW	1229251	WHI11001318	3B & 1DX	0.31	<2	<0.1	2.6	0.3	12
12-Aug-11	Frederic Turenne	outcrop	1229252	618799.65	7124151.26	1728	Weathered de-carbonated argillization veinlets, sulphidation	15-Aug-11	STEN-NW	1229252	WHI11001318	3B & 1DX	0.49	9	1.7	72.3	52.3	97
12-Aug-11	Frederic Turenne	outcrop	1229253	618796.45	7124153.79	1735	rusted conglomerate in decimetre layers, strongly weathered,	15-Aug-11	STEN-NW	1229253	WHI11001318	3B & 1DX	0.41	<2	0.7	164.9	9.4	79
12-Aug-11	Frederic Turenne	outcrop	1229254	618865.42	7124093.42	1716	purple orange brecciated conglomerate fractured, sulphidation epithermal . with fractures and breccias and cavities	15-Aug-11	STEN-NW	1229254	WHI11001318	3B & 1DX	0.77	<2	0.7	153.7	4.7	86
12-Aug-11	Frederic Turenne	outcrop	1229255	618880.80	7123967.94	1731	weathered reddish yellow to pale reddish pink, siltstone matrix with micro veinlets. realgar and orpiment color	15-Aug-11	STEN-NW	1229255	WHI11001318	3B & 1DX	0.19	4	0.7	40.6	6.2	25
12-Aug-11	Frederic Turenne	float	1229256	618810.61	7123927.26	1705	strongly silicified fine grained sandstone (quartzite) pervasive	15-Aug-11	STEN-NW	1229256	WHI11001318	3B & 1DX	0.52	<2	0.1	2.7	0.2	2
14-Aug-11	Frederic Turenne	float	1229257	613360.13	7122509.01	1312	sandy coarse grained sandstone in contact with felsic-mafic to green schist metamorphic stage, chloritization at the contact	15-Aug-11	STEN-NW	1229257	WHI11001287	3B & 1DX	0.25	<2	16.5	14.1	12.2	18
14-Aug-11	Frederic Turenne	outcrop	1229258	613208.76	7122486.69	1414	rusted fine to medium grained, silicified + qtz veinlets with	15-Aug-11	STEN-NW	1229258	WHI11001287	3B & 1DX	0.4	<2	0.2	24.7	5.1	59
14-Aug-11	Frederic Turenne	subcrop	1229259	614802.57	7122543.96	1599	silicified sandstone, micro pyrite orange alteration from iron	15-Aug-11	STEN-NW	1229259	WHI11001287	3B & 1DX	0.41	5	10.4	27.9	13.1	26
14-Aug-11	Frederic Turenne	subcrop	1229260	614840.81	7122518.33	1595	mineralized greenish mafic schist rock, silicified with micro pyrite, 10-20% py, qtz veins and veinlets iron oxide alteration	15-Aug-11	STEN-NW	1229260	WHI11001287	3B & 1DX	0.55	8	0.3	122.9	22.3	86
14-Aug-11	Frederic Turenne	outcrop	1229261	614995.73	7122435.43	1693	massive sulphide dark-grey, silicified with micro pyrite, sample in a antiform shape, purple alteration.	15-Aug-11	STEN-NW	1229261	WHI11001287	3B & 1DX	0.38	10	0.9	102.2	60.2	54
15-Aug-11	Frederic Turenne	float	1229262	614734.43	7122391.57	1631	massive , fine grained micro pyrite white tarnish grey massive sulphide in a coarse grained to fine grain sandstone silicified	15-Aug-11	STEN-NW	1229262	WHI11001287	3B & 1DX	0.66	84	3.6	115.6	213.1	33
15-Aug-11	Frederic Turenne	subcrop	1229263	614739.72	7122373.01	1632	massive sulphide layer in between silicified limestone and a coarse grained sandstone with pyrite and chalcopyrite in a	15-Aug-11	STEN-NW	1229263	WHI11001287	3B & 1DX	0.54	54	8.3	161.4	292.5	33
15-Aug-11	Frederic Turenne	outcrop	1229264	614755.47	7122314.89	1670	de-carbonated limestone, grey, fine grained, silicified, sinusoidal qtz-carbonate with calcite in 2 cm wide,	15-Aug-11	STEN-NW	1229264	WHI11001287	3B & 1DX	0.51	4	0.2	124.8	13.1	130
15-Aug-11	Frederic Turenne	outcrop	1229265	614815.06	7122329.00	1681	silicified greenish grey de-carbonated limestone in contact with qtz veins and veinlets, micro pyrite in mm veinlets, py 20 %	15-Aug-11	STEN-NW	1229265	WHI11001287	3B & 1DX	0.33	4	0.1	58.9	42.9	67
15-Aug-11	Frederic Turenne	outcrop	1229266	614771.84	7122302.81	1681	silicified limestone with fine grained grey with automorphic py	15-Aug-11	STEN-NW	1229266	WHI11001287	3B & 1DX	0.49	12	0.6	146.2	39.8	52
15-Aug-11	Frederic Turenne	outcrop	1229267	614920.12	7122639.32	1675	silicified polygenetic conglomerate, coarse grained matrix 15 % sulphide (py, cpy) strike N88 and dip84 degree, unit in contact	15-Aug-11	STEN-NW	1229267	WHI11001287	3B & 1DX	0.69	4	13	108.3	44.8	48

15-Aug-11	Frederic Turenne	outcrop	1229268	614941.75	7122659.58	1697	massif sulphide, greyish color, fine grained silicified sandstone and greenish slate-shale strike N68 dip of 88	15-Aug-11	STEN-NW	1229268	WHI11001287	3B & 1DX	1.12	6	13	37.6	15.5	36
15-Aug-11	Frederic Turenne	outcrop	1229269	614932.63	7122644.73	1685	silicified coarse grained sandstone, halo of pyrite, py 10-20%	15-Aug-11	STEN-NW	1229269	WHI11001287	3B & 1DX	0.87	9	7.4	66	47	39
16-Aug-11	Frederic Turenne	outcrop	1229270	615923.40	7122984.69	1864	stockworks system with decimetre veins Qtz, strongly	15-Aug-11	STEN-NW	1229270	WHI11001287	3B & 1DX	0.76	<2	1.1	8.2	13.1	51
16-Aug-11	Tom Morgan		1229301	613552.7011	7120499.808	1225	silicified carbonate, breccia, disseminated sulphide	15-Aug-11	STEN-NW	1229301	WHI11001287	3B & 1DX	2.01	<2	0.3	56.7	3.7	33
16-Aug-11	Tom Morgan		1229302	613511.9407	7120411.147	1207	boulder, from up stream, breccia and disseminated sulphide,	15-Aug-11	STEN-NW	1229302	WHI11001287	3B & 1DX	0.48	2	0.2	65.9	5.3	42
16-Aug-11	Tom Morgan		1229303	613553.6006	7120755.918	1276	silicified carbonate, fractured sulphide (grey + chalcopyrite)	15-Aug-11	STEN-NW	1229303	WHI11001287	3B & 1DX	1.14	4	0.2	109.6	8.9	62
16-Aug-11	Tom Morgan		1229304	613558.6142	7120772.826	1276	silicified pebble conglomerate, blebs + disseminations of	15-Aug-11	STEN-NW	1229304	WHI11001287	3B & 1DX	1.85	<2	3.1	13.5	9.2	87
14-Aug-11	Tom Morgan		1229305				conglomerate in disseminated py	15-Aug-11	STEN-NW	1229305	WHI11001287	3B & 1DX	0.9	<2	0.3	34.4	11.9	63
16-Aug-11	Tom Morgan		1229306	613968.2882	7121419.558	1562	pyritic carbonate	15-Aug-11	STEN-NW	1229306	WHI11001287	3B & 1DX	1.83	<2	<0.1	116.1	5.3	52
16-Aug-11	Tom Morgan		1229307	614016.7711	7121600.172	1601	conglomerate (pebbles) silicified with stockwork , veins and	15-Aug-11	STEN-NW	1229307	WHI11001287	3B & 1DX	1.51	4	0.5	9.8	17.1	35
16-Aug-11	Tom Morgan		1229308	614033.3603	7121636.307	1619	silicified conglomerate pebbles and minor disseminated	15-Aug-11	STEN-NW	1229308	WHI11001287	3B & 1DX	1.44	3	2.1	14	9.9	42
16-Aug-11	Tom Morgan		1229309	614399.203	7121555.532	873	silicified conglomerate and pyrite, stockwork veining	15-Aug-11	STEN-NW	1229309	WHI11001287	3B & 1DX	1.8	<2	1.2	12.2	8.2	37
16-Aug-11	Tom Morgan		1229310	613979.2048	7121554.361	1575	silicified conglomerate and pyrite and stockwork, veining	15-Aug-11	STEN-NW	1229310	WHI11001287	3B & 1DX	0.83	3	2.2	13.1	7.3	18
16-Aug-11	Tom Morgan		1229311	613955.9421	7121533.554	1563	silicified conglomerate with pyrite and stockwork veining	15-Aug-11	STEN-NW	1229311	WHI11001287	3B & 1DX	1.7	<2	11.3	9.5	7.2	17
16-Aug-11	Tom Morgan		1229312	613938.7264	7121503.855	1550	silicified conglomerate with pyrite and stockwork veining	15-Aug-11	STEN-NW	1229312	WHI11001287	3B & 1DX	1.39	<2	1.1	10.2	6.7	27
16-Aug-11	Tom Morgan		1229313	613913.3895	7121476.53	1539	silicified dark pebbly conglomerate and disseminated pyrite	15-Aug-11	STEN-NW	1229313	WHI11001287	3B & 1DX	1.53	<2	4.8	13.7	8.3	27
16-Aug-11	Tom Morgan		1229314	613230.3801	7121039.539	1492	carbonate cemented pebble conglomerate with stockwork veining , py 1 mm to 10 mm wide, bedding strike N 249	15-Aug-11	STEN-NW	1229314	WHI11001287	3B & 1DX	0.9	<2	1.3	14.5	6.7	42
16-Aug-11	Tom Morgan		1229315	613277.4062	7121217.579	1569	limonitic sandstone-gritstone	15-Aug-11	STEN-NW	1229315	WHI11001287	3B & 1DX	1.99	4	0.4	149.5	13	110
16-Aug-11	Tom Morgan		1229316	614550.6489	7123209.81	1532	brecciated, stockwork conglomerate with chlorite and micro py,	15-Aug-11	STEN-NW	1229316	WHI11001287	3B & 1DX	1.92	<2	0.4	12.2	4.4	33
16-Aug-11	Tom Morgan		1229317	614553.5377	7123210.085	1546	silicified gritstone with disseminated sulphide	15-Aug-11	STEN-NW	1229317	WHI11001287	3B & 1DX	1.89	<2	0.5	40.1	7.5	91
16-Aug-11	Tom Morgan		1229318	614552.8561	7123206.293	1561	pyritic silicified sandstone	15-Aug-11	STEN-NW	1229318	WHI11001287	3B & 1DX	1.17	9	0.9	102.9	51.9	108
16-Aug-11	Tom Morgan		1229319	614563.7265	7123234.274	1555	Brecciated , stockworked pebble conglomerate with chlorite	15-Aug-11	STEN-NW	1229319	WHI11001287	3B & 1DX	1.89	<2	0.3	2.9	2.8	23
16-Aug-11	Tom Morgan		1229320	614575.4513	7123247.797	1555	Qtz veins and conglomerate with chlorite, breccia textures and	15-Aug-11	STEN-NW	1229320	WHI11001287	3B & 1DX	1.86	<2	0.2	13	7	38
16-Aug-11	Tom Morgan		1229321	615512.3095	7123199.55	1662	silicified conglomerate with hematitic clasts, py and stockwork	15-Aug-11	STEN-NW	1229321	WHI11001287	3B & 1DX	1.78	6	1	20.7	16.4	14
16-Aug-11	Tom Morgan		1229322	616148.923	7123648.797	1662	silicified sandstone, shale and disseminated py	15-Aug-11	STEN-NW	1229322	WHI11001287	3B & 1DX	1.7	3	2	52.7	57.2	51
16-Aug-11	Tom Morgan		1229323	616166.6219	7123661.616	1646	pyritic silicified rusty quartzite to sheared shale and minor	15-Aug-11	STEN-NW	1229323	WHI11001287	3B & 1DX	1.76	5	2.2	34.3	15.8	61
16-Aug-11	Tom Morgan		1229324	616192.4214	7123665.065	1634	stockworks shale with minor pyrite	15-Aug-11	STEN-NW	1229324	WHI11001287	3B & 1DX	2.23	<2	0.2	58.1	5.7	50
17-Aug-11	Tom Morgan		1229325	618197.78	7124666.18	1695	silicified siltstone and quartz, carbonate veining, stockwork, orange brown weathering, pyrite blebs and disseminated	15-Aug-11	STEN-NW	1229325	WHI11001287	3B & 1DX	1.33	<2	2.4	5.4	6	18
17-Aug-11	Tom Morgan		1229326	618165.85	7124656.88	1711	shale - sandstone contact with yellow red staining + disseminated sulphide, some arsenopyrite presume	15-Aug-11	STEN-NW	1229326	WHI11001287	3B & 1DX	2.07	18	1	89.7	74.7	81
17-Aug-11	Tom Morgan		1229327	618182.86	7124650.68	1712	Gritstone + pebble conglomerate, silicified and disseminated pyrite, orange weathering carbonate veining	15-Aug-11	STEN-NW	1229327	WHI11001287	3B & 1DX	2.07	<2	1.3	15.3	7.2	26
17-Aug-11	Tom Morgan		1229328	619021.27	7125249.40	1737	silicified pebble conglomerate-sandstone	15-Aug-11	STEN-NW	1229328	WHI11001287	3B & 1DX	2.31	2	0.1	114	7.1	78
17-Aug-11	Tom Morgan		1229329	619017.57	7125256.35	1735	oxidized shear contact between shale + pebble conglomerate-sandstone, Clay alteration + leached, red brown zone (from	15-Aug-11	STEN-NW	1229329	WHI11001287	3B & 1DX	1.39	6	1.6	217	12.2	112
17-Aug-11	Tom Morgan		1229330	619011.92	7125255.24	1739	siliceous shale with fine pyrite at the wall rock of oxidized zone	15-Aug-11	STEN-NW	1229330	WHI11001287	3B & 1DX	2.6	5	0.2	156.4	9	87
17-Aug-11	Tom Morgan		1229331	619067.87	7125166.20	1749	Oxidised quartz vuggy limonitic with minor grey sulphide float.	15-Aug-11	STEN-NW	1229331	WHI11001287	3B & 1DX	1.87	<2	0.3	64.7	4	44
17-Aug-11	Tom Morgan		1229332	619065.78	7125133.21	1757	Quartz veins limonitic vugs fine grained greyish sulphide,	15-Aug-11	STEN-NW	1229332	WHI11001287	3B & 1DX	2.42	<2	0.2	102.2	2.3	44
17-Aug-11	Tom Morgan		1229333	619075.32	7125115.91	1763	stockworks silicified shale with pyrite	15-Aug-11	STEN-NW	1229333	WHI11001287	3B & 1DX	3.32	<2	<0.1	86.4	5.4	66
16-Aug-11	Andrew Blampin	float	1229651	615383.83	7123124.15	1581	silicified breccia with minor py and hematite	15-Aug-11	STEN-NW	1229651	WHI11001287	3B & 1DX	1.34	<2	1.4	7.6	5.8	49
16-Aug-11	Andrew Blampin	float	1229652	615396.21	7123133.07	1583	silicified conglomerate	15-Aug-11	STEN-NW	1229652	WHI11001287	3B & 1DX	0.8	2	0.1	8.2	3.5	31
16-Aug-11	Andrew Blampin	float	1229653	615240.93	7123125.94	1553	conglomerate, py and sulphide	15-Aug-11	STEN-NW	1229653	WHI11001287	3B & 1DX	2.56	6	3.8	11.6	12.8	30
16-Aug-11	Andrew Blampin	float	1229654	615224.82	7123131.97	1576	conglomerate silicified and pyrite	15-Aug-11	STEN-NW	1229654	WHI11001287	3B & 1DX	2.2	<2	3.8	10.4	4.5	25
8-Aug-11	Andrew Blampin	float	1230355	617611.77	7125579.82	1471	boulder, greenish-blue shale with millimetre pyrite	15-Aug-11	STEN-NW									
8-Aug-11	Andrew Blampin	float	1230356	617611.43	7125532.80	1474	boulder, greenish-blue shale with millimetre pyrite	15-Aug-11	STEN-NW									
8-Aug-11	Andrew Blampin	float	1230357	617620.71	7125474.70	1505	boulder, greenish-blue shale with millimetre pyrite	15-Aug-11	STEN-NW									

1DX Ag PPM	1DX Ni PPM	1DX Co PPM	1DX Mn PPM	1DX Fe %	1DX As PPM	1DX Au PPB	1DX Th PPM	1DX Sr PPM	1DX Cd PPM	1DX Sb PPM	1DX Bi PPM	1DX V PPM	1DX Ca %	1DX P %	1DX La PPM	1DX Cr PPM	1DX Mg %	1DX Ba PPM	1DX Ti %	1DX B PPM	1DX Al %	1DX Na %	1DX K %	1DX W PPM	1DX Hg PPM	1DX Tl PPM	1DX S %	1DX Sc PPM	1DX Se PPM	1DX Ga PPM	1DX Te PPM
0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.05	0.1	0.5	1	0.2
Ag_ppm	Ni_ppm	Co_ppm	Mn_ppm	Fe_pct	As_ppm	Au_ppb	Th_ppm	Sr_ppm	Cd_ppm	Sb_ppm	Bi_ppm	V_ppm	Ca_pct	P_pct	La_ppm	Cr_ppm	Mg_pct	Ba_ppm	Ti_pct	B_ppm	Al_pct	Na_pct	K_pct	W_ppm	Hg_ppm	Tl_ppm	S_pct	Sc_ppm	Se_ppm	Ga_ppm	Te_ppm
<0.1	26.5	11.8	2135	3.34	10.9	1.5	0.3	158	6.3	1.2	<0.1	40	15.07	0.011	7	8	4.74	331	0.001	<20	0.28	0.031	0.05	<0.1	0.06	<0.1	<0.05	6.6	<0.5	1	<0.2
<0.1	29.4	16.5	928	4.38	26.5	<0.5	0.4	779	0.2	0.7	<0.1	167	12.46	0.015	3	45	4.5	59	0.005	<20	0.36	0.023	0.03	<0.1	0.12	<0.1	<0.05	8.8	<0.5	1	<0.2
<0.1	8.6	5.6	1646	1.85	2.9	<0.5	1.4	98	0.5	0.1	<0.1	7	11.15	0.027	3	5	3.38	487	0.001	<20	0.4	0.013	0.19	<0.1	0.12	<0.1	0.23	2.9	<0.5	1	<0.2
<0.1	32.8	15.8	2310	4.98	17.2	<0.5	0.2	550	1.2	0.3	<0.1	87	17.64	0.002	7	8	5.73	131	<0.001	<20	0.16	0.025	0.02	<0.1	<0.01	<0.1	0.09	6.7	0.6	<1	<0.2
<0.1	25.9	21.2	2835	5.69	7.8	2.1	0.4	295	0.7	0.2	<0.1	90	19.04	0.017	4	36	0.82	192	0.002	<20	0.87	0.011	0.04	<0.1	0.09	<0.1	<0.05	10.1	<0.5	2	<0.2
<0.1	25.4	15.7	1707	4.14	2.4	4.1	0.9	302	0.8	<0.1	0.1	69	14.37	0.029	8	16	1.61	2734	0.002	<20	0.65	0.007	0.16	<0.1	0.05	<0.1	0.07	9.1	0.6	2	<0.2
<0.1	27.6	20.5	1248	4.89	8	2.6	0.7	318	0.5	0.2	<0.1	61	20.21	0.027	5	16	1.18	110	0.001	<20	0.44	0.002	0.11	<0.1	0.61	<0.1	<0.05	4.9	1.5	1	<0.2
<0.1	32.7	16.9	1169	5.28	8.1	1.7	0.4	338	0.4	0.2	<0.1	76	23.49	0.016	4	14	1.68	77	0.001	<20	0.46	0.006	0.09	<0.1	0.4	<0.1	<0.05	5	0.7	2	<0.2
<0.1	81.1	25.7	300	13.68	7	0.6	0.4	43	0.4	<0.1	<0.1	273	1.23	0.058	3	128	3.71	34	0.007	<20	6.05	0.004	0.09	<0.1	0.03	<0.1	0.94	14.6	1.1	19	<0.2
<0.1	82	40.2	597	13.9	9	2.4	0.4	78	0.7	<0.1	0.1	252	2.06	0.049	2	109	2.92	43	0.007	<20	4.88	0.012	0.05	<0.1	0.05	<0.1	2.96	19.5	3.3	16	<0.2
<0.1	13.2	10.1	212	1.08	2.1	2	0.3	5	0.1	0.2	<0.1	5	0.06	0.003	2	4	0.07	7	<0.001	<20	0.16	0.003	0.03	<0.1	0.02	<0.1	<0.05	1	<0.5	<1	<0.2
0.2	49	31.5	142	16.04	41	1.5	2.2	12	0.2	0.4	0.3	36	0.1	0.039	11	13	0.16	32	<0.001	<20	0.57	0.005	0.22	<0.1	1.29	0.3	0.06	4.5	2.4	4	<0.2
0.3	27.9	10.7	207	20.7	93.9	0.9	1.7	39	0.1	0.5	0.3	39	0.08	0.069	8	11	0.1	44	<0.001	<20	0.63	0.015	0.25	<0.1	2.21	0.6	0.11	2.5	6.3	2	0.2
<0.1	21.8	14.7	98	14.93	16.2	0.5	3.3	27	<0.1	<0.1	0.3	59	0.16	0.061	10	31	0.33	43	0.002	<20	0.95	0.011	0.25	<0.1	0.32	0.1	0.1	4.6	<0.5	8	0.2
0.2	11.7	8.1	1822	6.22	13.8	3.1	1.3	244	1	0.5	<0.1	13	18.23	0.009	8	7	1.67	54	<0.001	<20	0.27	0.005	0.1	<0.1	0.14	<0.1	0.06	6.8	1.5	<1	<0.2
<0.1	24.5	10.4	1231	5.4	27.6	2.3	0.5	176	8	0.9	<0.1	64	15.2	0.007	3	14	5.88	71	0.001	<20	0.34	0.021	0.08	<0.1	0.03	<0.1	<0.05	6	<0.5	1	<0.2
<0.1	26.8	11.9	699	4.56	49.2	<0.5	1.3	576	5.8	0.4	<0.1	87	13.08	0.039	7	21	4.51	60	<0.001	<20	0.79	0.041	0.16	<0.1	0.1	<0.1	<0.05	8.1	<0.5	2	<0.2
<0.1	43.6	23.9	1940	7.01	1.9	3.9	0.7	174	0.6	0.1	<0.1	64	21.4	0.021	5	12	1.33	310	0.004	<20	0.47	0.004	0.1	<0.1	0.1	<0.1	<0.05	4.1	<0.5	2	<0.2
<0.1	40.9	20.8	556	4.91	1.2	5.4	2.3	98	0.1	<0.1	0.2	77	9.62	0.039	16	19	1.04	55	0.002	<20	0.72	0.002	0.26	<0.1	0.11	<0.1	<0.05	6.1	<0.5	2	0.2
<0.1	41.2	18.9	1302	5.91	0.9	2.1	0.7	184	0.3	<0.1	<0.1	93	21.25	0.021	3	16	1.04	3161	0.002	<20	0.41	0.003	0.09	<0.1	0.05	<0.1	0.07	5	<0.5	1	<0.2
<0.1	29.1	19.8	1178	4.49	1.6	5.9	1.4	105	0.3	<0.1	0.1	61	12.98	0.036	7	14	1.79	1306	0.002	<20	0.47	0.005	0.19	<0.1	0.13	<0.1	<0.05	4.8	<0.5	2	<0.2
<0.1	25.5	23.6	1064	4.04	1.6	2.9	1.6	97	0.3	<0.1	0.2	54	8.94	0.034	9	16	2.42	230	0.003	<20	0.43	0.005	0.17	<0.1	0.1	<0.1	<0.05	4.8	<0.5	1	<0.2
<0.1	65.3	34.9	1166	8.43	14.3	2.1	0.9	45	0.3	1.7	0.1	162	7.91	0.047	5	45	0.91	74	<0.001	<20	0.9	0.002	0.12	<0.1	0.15	<0.1	0.48	16.1	1.4	2	<0.2
<0.1	46.1	15.6	219	5.32	<0.5	3.8	3.7	10	<0.1	<0.1	0.3	46	0.11	0.047	27	30	1.64	140	0.015	<20	2.45	0.002	0.32	<0.1	0.04	<0.1	<0.05	3.4	<0.5	7	<0.2
0.1	52.5	35.6	479	6.04	<0.5	3.2	2.7	18	0.3	<0.1	0.3	72	0.89	0.063	20	40	2.19	81	0.014	<20	3	0.003	0.32	<0.1	0.03	<0.1	<0.05	5.6	<0.5	9	<0.2
0.1	62.3	36.5	602	7.15	0.7	4.7	1.8	30	0.2	<0.1	0.2	98	1.34	0.068	15	54	3.29	288	0.011	<20	3.95	0.004	0.22	<0.1	0.06	<0.1	0.08	7.4	<0.5	12	0.2
<0.1	44.1	27.3	494	5.51	7.1	4.1	1.7	67	0.5	0.3	0.3	42	4.74	0.04	7	25	1.11	73	0.005	<20	1.6	0.004	0.2	<0.1	0.11	<0.1	0.18	6	<0.5	4	<0.2
0.3	13.4	7.9	1035	10.19	36.9	1.8	1.9	37	0.2	1.4	0.2	<2	4.53	0.02	1	5	1.05	29	0.001	<20	0.36	0.005	0.11	<0.1	0.56	0.1	8.8	2.6	1.7	1	<0.2
0.1	79.6	28.3	285	10.43	10.7	4.8	0.9	4	0.3	0.3	0.2	64	0.1	0.035	3	41	1.91	35	0.004	<20	2.89	0.009	0.17	<0.1	0.27	<0.1	4.45	3.3	2.2	9	<0.2
<0.1	45.3	28.4	1775	6.4	<0.5	5.9	0.7	163	1	<0.1	0.2	56	7.24	0.045	3	39	2.17	26	0.005	<20	2.4	0.014	0.12	<0.1	0.03	<0.1	2.43	8.2	7.9	7	<0.2
0.2	50.2	26.6	413	6.85	9.4	9.7	0.7	36	0.4	0.5	0.2	42	1.26	0.02	2	37	1.87	134	0.003	<20	2.36	0.006	0.18	<0.1	0.55	0.1	2.73	2.8	1.1	7	<0.2
<0.1	31.1	14.6	981	5.19	39.2	1.4	1	75	0.5	0.3	0.1	60	7.78	0.019	6	23	3.06	172	<0.001	<20	0.39	0.017	0.1	<0.1	0.04	<0.1	0.05	8.4	<0.5	2	<0.2
<0.1	47.3	24.8	432	5.08	43.6	2.1	3.1	15	0.3	0.1	0.3	52	2.1	0.041	15	28	0.83	287	0.001	<20	1.2	0.008	0.2	<0.1	0.05	<0.1	0.2	6.8	0.8	4	<0.2
<0.1	7.1	3.2	1957	3.04	4.5	<0.5	1	126	0.1	0.2	<0.1	22	12.31	0.01	4	3	4.45	29	<0.001	<20	0.13	0.018	0.06	<0.1	0.02	<0.1	<0.05	4.5	<0.5	<1	<0.2
<0.1	17.5	14.3	715	3.1	23.5	<0.5	1.5	56	0.9	0.9	0.1	22	6.39	0.023	5	9	2.82	28	<0.001	<20	0.3	0.006	0.13	<0.1	0.26	<0.1	0.17	4.4	<0.5	<1	<0.2
<0.1	15.6	11	2719	1.89	0.6	1.3	0.5	315	0.8	<0.1	0.1	15	22.9	0.021	14	10	0.83	2795	0.002	<20	0.94	0.003	0.09	<0.1	0.02	<0.1	0.12	4.3	<0.5	3	<0.2
<0.1	16.3	8.9	575	2.46	11.7	0.5	0.7	50	0.3	<0.1	<0.1	58	4.01	0.015	5	24	0.57	162	0.001	<20	0.43	0.004	0.04	<0.1	0.02	<0.1	<0.05	5.6	<0.5	<1	<0.2
<0.1	22.8	14.5	1696	5.04	<0.5	<0.5	0.9	536	0.5	<0.1	<0.1	49	16.61	0.03	5	19	1.64	74	0.005	<20	1.44	0.003	0.1	<0.1	0.01	<0.1	<0.05	7.8	<0.5	4	<0.2
<0.1	41.8	27.6	1706	7.86	17.1	2.7	1	46	0.7	0.1	0.1	94	9.46	0.037	15	35	1.85	34	0.002	<20	2.73	0.005	0.07	<0.1	0.01	<0.1	<0.05	11.3	<0.5	8	<0.2
0.2	14.9	7.5	516	3.89	32	<0.5	1.5	117	<0.1	1.4	0.1	3	10.93	0.011	2	4	0.65	85	<0.001	<20	0.36	0.005	0.1	<0.1	0.07	<0.1	2.3	1.9	1	1	<0.2
<0.1	10.5	8.8	664	2.35	5.5	<0.5	3.3	76	<0.1	0.3	0.2	7	8.47	0.032	5	8	2.71	27	<0.001	<20	0.74	0.005	0.17	<0.1	0.01	<0.1	0.26	3.6	<0.5	2	<0.2
<0.1	26	15.8	1747	4.15	9.5	<0.5	0.6	209	0.6	<0.1	<0.1	6	16.93	0.049	2	2	2.42	18	<0.001	<20	0.15	0.008	0.04	<0.1	0.04	<0.1	0.07	2.7	<0.5	<1	<0.2
<0.1	5.4	4	1317	3.59	2.2	<0.5	0.7	388	0.2	<0.1	<0.1	6	16.08	0.011	3	3	6.94	13	<0.001	<20	0.11	0.008	0.06	<0.1	<0.01	<0.1	<0.05	2.3	<0.5	<1	<0.2
<0.1	4.1	3.2	434	1.36	1	<0.5	<0.1	58	0.2	<0.1	<0.1	<2	14.35	0.002	1	<1	8.63	6	<0.001	<20	0.03	0.006	<0.01	<0.1	<0.01	<0.1	0.22	0.9	1	<1	<0.2
<0.1	5.4	3.5	565	1.16	1.4	<0.5	1.2	106	<0.1	<0.1	0.1	2	12.49	0.007	3	2	6.2	16	<0.001	<20	0.12	0.014	0.06	<0.1	0.01	<0.1	<0.05	1	<0.5	<1	<0.2
<0.1	40.6	23.6	161	6.33	13.1	<0.5	2.1	7	0.2	0.1	0.1	49	0.59	0.041	12	29	0.93	24	0.002	<20	1.33	0.01	0.14	<0.1	0.11	0.1	<0.05	6.3	<0.5	4	<0.2
<0.1	3.8	3.1	863	2.38	1	<0.5	0.4	187	<0.1	<0.1	<0.1	10	15.77	0.008	2	4	8.17	5	0.001	<20	0.06	0.011	0.02	<0.1	<0.01	<0.1	<0.05	1.8	<0.5	<1	<0.2
0.2	38.1	9.4	189	26.67	136.1	<0.5	2.2	13	0.2	0.4	0.2	29	0.1	0.045	7	19	0.08	30	<0.001	<20	0.76	0.008	0.16	<0.1	1.25	0.2	0.1	4.2	10.2	3	0.8
<0.1	15.4	12.1	1660	2.4	8.9	<0.5	0.5	61	0.8	<0.1	<0.1	8	17.32	0.059	3	2	0.61	48	<0.001	<20	0.15	0.007	0.03	<0.1	0.03	0.1	<0.05	2.5	<0.5	<1	<0.2
<0.1	39.1	20.9	544	2.27	5.6	<0.5	2.6	9	0.8	<0.1	0.1	15	0.44	0.028	13	10	0.36	22	<0.001	<20	0.8	0.008	0.13	<0.1	0.09	0.2	<0.05	3.9	<0.5	2	<0.2

<0.1	70.9	24.6	251	11.33	2.1	1	0.4	23	<0.1	<0.1	<0.1	182	0.78	0.153	11	63	2.4	15	0.007	<20	4.17	0.017	0.07	<0.1	0.02	<0.1	2.11	8.9	1.4	12	<0.2
<0.1	10.2	6.9	941	2.72	14.6	<0.5	2.1	403	0.1	0.4	<0.1	8	9.24	0.018	1	6	1.4	48	0.001	<20	0.61	0.011	0.19	<0.1	0.09	<0.1	1.69	2.3	<0.5	1	<0.2
<0.1	40.5	37.1	1208	4.72	12.7	0.8	1.4	120	0.3	0.1	0.2	58	8.35	0.036	4	31	2.57	34	0.003	<20	2	0.015	0.18	<0.1	0.13	<0.1	1.07	7.8	1	6	<0.2
0.2	43.9	31.9	400	4.64	48.6	0.9	2	21	0.2	0.7	0.4	37	1.72	0.037	6	23	1.38	49	0.002	<20	1.4	0.015	0.28	<0.1	0.41	0.1	1.61	4	1.2	4	<0.2
<0.1	5.6	4	977	1.54	3.6	0.8	1.8	5	<0.1	0.2	<0.1	10	0.03	0.012	5	4	0.03	18	0.001	<20	0.14	0.023	0.03	<0.1	0.02	<0.1	<0.05	2.3	<0.5	<1	<0.2
<0.1	11.1	1.8	1804	2.22	1.4	<0.5	<0.1	133	0.3	<0.1	<0.1	26	13.21	0.01	7	2	4.36	14	<0.001	<20	0.18	0.041	0.02	<0.1	0.01	<0.1	<0.05	5.6	<0.5	<1	<0.2
0.2	56.1	42.5	389	5.06	40.3	4.1	1.8	21	0.2	1.1	0.3	65	1.29	0.044	7	24	0.88	75	0.001	<20	0.7	0.006	0.19	<0.1	0.33	<0.1	0.83	7.3	1.6	2	0.3
<0.1	28	7.8	808	5.34	38.6	1.6	0.5	328	0.2	0.4	<0.1	55	17.93	0.004	3	10	6.68	34	<0.001	<20	0.2	0.035	0.03	<0.1	<0.01	<0.1	<0.05	4.5	<0.5	<1	<0.2
<0.1	36.8	20.9	1803	5.5	35.5	1.2	1.2	170	0.3	0.2	0.1	85	9.67	0.031	8	34	3.68	32	0.002	<20	1.17	0.011	0.09	<0.1	0.02	<0.1	<0.05	14.6	<0.5	3	<0.2
0.1	60.3	40.9	1095	6.27	25.8	<0.5	1.3	60	0.4	0.3	0.1	145	4.35	0.043	7	57	2.96	28	0.004	<20	2.96	0.012	0.15	<0.1	0.13	<0.1	0.32	15.2	0.6	10	<0.2
0.1	36.6	17.2	217	11.31	41.7	2.3	1.1	1	0.2	1	0.2	128	0.07	0.019	4	64	2.81	17	0.006	<20	4.49	0.009	0.1	<0.1	0.22	<0.1	1.15	6.9	<0.5	14	<0.2
<0.1	43.9	23.4	1283	6.91	14.1	1.2	1.2	91	0.2	0.1	0.2	117	6.66	0.053	8	55	2.28	28	0.005	<20	3.02	0.012	0.11	<0.1	0.03	<0.1	0.11	12.7	<0.5	10	<0.2
<0.1	1.4	0.4	141	0.73	3.6	<0.5	<0.1	3	<0.1	0.3	<0.1	3	0.71	0.001	<1	2	0.04	18	<0.001	<20	0.04	0.003	<0.01	<0.1	0.38	<0.1	<0.05	0.3	<0.5	<1	<0.2
<0.1	6.2	4.4	808	1.39	7.1	<0.5	1.9	411	<0.1	0.3	<0.1	4	17.65	0.016	6	3	0.3	29	<0.001	<20	0.3	0.003	0.11	<0.1	0.26	<0.1	<0.05	2.8	<0.5	<1	<0.2
<0.1	4.3	3.1	1293	1.03	2.3	0.6	1.5	656	0.1	<0.1	<0.1	2	15.06	0.01	3	3	1.55	19	<0.001	<20	0.22	0.005	0.08	<0.1	0.01	<0.1	<0.05	2.4	<0.5	<1	<0.2
<0.1	6	3.9	1919	1.11	0.6	<0.5	0.1	682	0.9	<0.1	<0.1	15	18.22	0.009	3	4	0.36	8	<0.001	<20	0.37	0.003	0.01	<0.1	<0.01	<0.1	<0.05	5.7	<0.5	1	<0.2
<0.1	45.9	28.4	1557	5.93	14.9	<0.5	1.2	131	0.2	0.2	0.2	98	8	0.044	8	46	2.32	84	0.004	<20	2.93	0.013	0.15	<0.1	0.05	<0.1	0.28	12.2	0.6	10	<0.2
<0.1	12.5	8.2	565	2.18	1.1	<0.5	0.3	95	0.3	<0.1	<0.1	27	3.53	0.011	3	11	0.85	31	0.002	<20	0.81	0.003	0.04	<0.1	0.05	<0.1	<0.05	3.7	<0.5	3	<0.2
<0.1	2.9	3.9	1685	2.3	1	<0.5	<0.1	252	0.8	0.2	<0.1	7	13.26	0.001	4	1	2.43	74	<0.001	<20	0.04	0.005	<0.01	<0.1	0.07	<0.1	<0.05	3.4	<0.5	<1	<0.2
<0.1	7.2	10.7	1491	3.23	2.6	<0.5	<0.1	396	0.3	<0.1	<0.1	19	10.66	0.001	6	1	3.79	3961	<0.001	<20	0.04	0.006	<0.01	<0.1	0.01	<0.1	0.08	3.3	<0.5	<1	<0.2
<0.1	53.5	35.6	1606	7.17	2.5	4.5	0.5	131	0.4	0.1	0.2	62	5.53	0.036	2	48	2.16	34	0.003	<20	2.24	0.014	0.11	<0.1	0.07	<0.1	2.96	9.7	3.2	7	<0.2
<0.1	44.3	26.1	1262	5.46	2.1	<0.5	1.2	180	0.4	<0.1	<0.1	101	7.17	0.051	9	44	2.72	64	0.004	<20	3.3	0.007	0.12	<0.1	<0.01	<0.1	<0.05	9.5	<0.5	10	<0.2
0.2	35.1	12.5	266	8.06	26.3	13.1	2.7	5	0.1	0.6	0.4	71	0.06	0.049	19	49	1.71	68	0.003	<20	2.68	0.013	0.32	<0.1	0.45	<0.1	0.17	5.5	1.2	8	0.3
0.1	10.4	6.6	1679	2.53	8	0.8	1.7	113	0.7	0.4	0.2	3	7.39	0.02	2	3	0.89	87	<0.001	<20	0.22	0.008	0.15	<0.1	0.19	<0.1	1.42	2.5	<0.5	<1	<0.2
0.2	15	7.7	850	7.37	22	3.2	1.6	12	0.9	1.3	0.2	10	1.22	0.022	1	13	0.81	38	0.001	<20	0.72	0.006	0.15	<0.1	0.8	0.2	3.76	2.7	1	2	<0.2
<0.1	33.4	19.2	401	3.61	3.4	5.7	2.1	57	0.3	0.2	0.4	18	1.81	0.043	4	14	0.73	118	0.002	<20	1.59	0.01	0.37	<0.1	0.06	<0.1	1.16	2	2	4	0.2
<0.1	48.9	23.2	1296	6.51	6.7	<0.5	1.4	76	0.2	0.1	0.2	183	5.12	0.046	9	69	2.77	33	0.005	<20	3.42	0.02	0.1	<0.1	0.02	<0.1	0.07	14.1	<0.5	11	<0.2
<0.1	3.1	1.9	314	0.58	1.4	1.5	0.2	66	<0.1	<0.1	<0.1	9	1.6	0.004	1	7	0.12	11	<0.001	<20	0.16	0.007	<0.01	<0.1	0.02	<0.1	<0.05	1	<0.5	<1	<0.2
<0.1	53.3	30.5	851	7.37	14.1	3.5	1.5	85	0.7	0.2	0.2	145	3.18	0.052	13	60	2.9	151	0.003	<20	4.14	0.011	0.13	<0.1	0.03	<0.1	0.06	13.1	<0.5	13	<0.2
<0.1	30	15.3	1875	4.47	3.3	2.1	0.6	172	0.1	0.1	<0.1	153	6.85	0.031	6	86	2.22	14	0.004	<20	2.12	0.038	0.03	<0.1	0.01	<0.1	0.16	17.8	<0.5	8	<0.2
<0.1	23.1	10.7	2849	3.11	1.4	0.9	0.4	322	0.8	<0.1	<0.1	52	20.53	0.025	12	23	1.5	256	0.006	<20	1.85	0.01	0.09	<0.1	0.03	<0.1	<0.05	6.9	<0.5	6	<0.2
<0.1	44	22.2	1270	4.94	<0.5	<0.5	1	72	0.4	<0.1	0.1	94	5.38	0.032	6	84	2.57	90	0.01	<20	2.59	0.033	0.08	<0.1	0.03	<0.1	<0.05	11	<0.5	9	<0.2
<0.1	6.9	3.4	2892	1.16	0.6	<0.5	0.2	913	1.5	<0.1	<0.1	8	25.34	0.006	5	6	0.48	1165	<0.001	<20	0.4	0.002	0.04	<0.1	0.02	<0.1	0.12	2.6	<0.5	1	<0.2
0.1	20.7	11.6	645	3.13	16.6	<0.5	4.1	48	<0.1	0.7	0.3	10	5.58	0.031	6	10	2.26	73	<0.001	<20	0.93	0.007	0.21	<0.1	0.1	<0.1	0.18	3.7	<0.5	3	<0.2
<0.1	34.9	23.7	1071	4.48	2.9	<0.5	0.6	320	0.4	<0.1	0.1	125	8.04	0.04	4	50	1.91	165	0.004	<20	2.52	0.022	0.06	<0.1	0.02	<0.1	0.19	10.7	<0.5	9	<0.2
<0.1	3	1.3	2401	0.72	1	<0.5	0.1	1116	1.1	<0.1	<0.1	6	26.93	0.004	7	2	0.24	16	<0.001	<20	0.19	0.002	0.02	<0.1	<0.01	<0.1	<0.05	5.8	<0.5	<1	<0.2
<0.1	43.2	24.4	820	5.53	5.5	1.1	1.6	78	0.3	<0.1	0.2	124	4.07	0.042	10	64	2.36	35	0.005	<20	3.13	0.035	0.14	<0.1	0.02	<0.1	0.08	11.1	<0.5	10	<0.2
<0.1	21.6	13.9	1935	3.29	6.5	0.6	0.6	544	0.3	<0.1	<0.1	72	16.65	0.023	7	29	1.06	31	0.002	<20	1.52	0.011	0.06	<0.1	0.02	<0.1	<0.05	8.9	<0.5	5	<0.2
<0.1	2.7	1.3	1677	0.77	0.8	<0.5	0.3	1096	0.3	<0.1	<0.1	8	17.32	0.012	5	5	0.2	16	0.001	<20	0.2	0.006	0.02	<0.1	<0.01	<0.1	<0.05	2.4	<0.5	<1	<0.2
<0.1	58	35	1119	6.96	1.9	2.4	1.2	98	0.2	<0.1	0.2	192	4.68	0.044	7	80	3.19	29	0.005	<20	3.73	0.027	0.1	<0.1	0.02	<0.1	0.11	16.5	0.6	13	<0.2
<0.1	4.5	1	70	1.58	0.7	<0.5	1.1	10	<0.1	<0.1	<0.1	14	0.13	0.007	13	4	0.29	7	0.002	<20	0.53	0.006	0.02	<0.1	0.01	<0.1	<0.05	0.8	<0.5	2	<0.2
<0.1	21.8	11.5	1515	4.16	3.3	<0.5	1.2	159	<0.1	<0.1	0.1	36	9.05	0.03	5	16	3.98	36	0.003	<20	0.73	0.017	0.17	<0.1	0.03	<0.1	0.05	9.9	<0.5	2	<0.2
<0.1	35	16.6	1207	4.67	5.8	0.9	2.1	185	0.3	<0.1	0.3	33	7.23	0.042	8	17	3.46	48	0.002	<20	1.03	0.015	0.23	<0.1	0.06	<0.1	0.07	10.8	<0.5	3	<0.2
<0.1	3.9	4	100	4.49	5.8	<0.5	2.6	15	<0.1	0.3	0.1	22	0.07	0.014	5	11	0.05	21	0.002	<20	0.26	0.013	0.07	<0.1	0.02	<0.1	0.08	1.4	<0.5	2	<0.2
<0.1	5.1	1.8	92	1.03	1.9	0.6	1.1	4	<0.1	<0.1	<0.1	12	0.04	0.008	3	6	0.13	5	<0.001	<20	0.27	0.013	0.03	<0.1	0.01	<0.1	<0.05	0.6	<0.5	<1	<0.2
<0.1	50.5	24.7	162	6.52	11.6	<0.5	7	17	<0.1	0.2	0.5	32	0.12	0.022	15	36	1.04	57	0.001	<20	2.85	0.004	0.27	<0.1	0.04	<0.1	<0.05	6	<0.5	7	<0.2
<0.1	26.2	15	1041	4.25	6.6	<0.5	3.3	19	<0.1	0.1	0.1	30	2.21	0.023	9	26	0.78	31	0.002	<20	1.52	0.009	0.15	<0.1	0.02	<0.1	<0.05	3.9	<0.5	4	<0.2
<0.1	5.7	2.7	348	0.98	7	<0.5	1	8	0.1	0.1	<0.1	2	0.43	0.006	3	2	0.03	18	<0.001	<20	0.09	0.015	0.03	<0.1	0.07	<0.1	<0.05	0.9	<0.5	<1	<0.2
<0.1	3.5	2	791	1.81	1.7	<0.5	0.5	241	<0.1	<0.1	<0.1	4	7.32	0.007	1	3	3.72	5	<0.001	<20	0.07	0.013	0.02	<0.1	0.01	<0.1	<0.05	1.4	<0.5	<1	<0.2
<0.1	30	13.2	558	3.98	3	<0.5	4.3	67	<0.1	<0.1	0.2	30	1.42	0.041	8	29	1.5	36	0.002	<20	1.84	0.008	0.21	<0.1	0.06	<0.1	0.13	5.2	<0.5	5	<0.2

<0.1	12	9	660	2.38	13.6	<0.5	0.5	112	0.2	0.3	<0.1	16	4.15	0.015	4	10	0.72	23	0.001	<20	0.43	0.007	0.08	<0.1	0.05	<0.1	<0.05	4.2	<0.5	1	<0.2
<0.1	2.6	1.5	198	0.92	2.6	<0.5	0.3	15	<0.1	<0.1	<0.1	3	1.4	0.006	<1	3	0.13	11	<0.001	<20	0.05	0.003	<0.01	<0.1	<0.01	<0.1	<0.05	0.8	<0.5	<1	<0.2
<0.1	2.4	1.3	609	1.14	3.2	<0.5	0.3	6	<0.1	0.1	<0.1	<2	0.04	0.012	2	3	0.01	8	<0.001	<20	0.05	0.005	0.02	<0.1	0.02	<0.1	<0.05	0.8	<0.5	<1	<0.2
0.2	28.2	14.8	198	6.93	24.4	1.7	1	34	0.2	0.7	0.2	87	0.37	0.024	4	44	1.62	22	0.004	<20	2.68	0.002	0.09	<0.1	0.59	<0.1	1	4.3	1.7	8	<0.2
<0.1	21.1	8.3	746	5.39	32.7	<0.5	0.4	401	0.2	0.4	<0.1	84	15.08	0.005	2	13	6.03	16	<0.001	<20	0.23	0.031	0.04	2.7	0.07	<0.1	<0.05	4.8	<0.5	<1	<0.2
<0.1	22.3	10.8	1408	3.23	3.2	<0.5	0.4	673	0.2	<0.1	<0.1	59	13.7	0.019	3	24	1.48	25	0.002	<20	1.81	0.003	0.04	<0.1	0.03	<0.1	<0.05	5.9	<0.5	5	<0.2
<0.1	63.6	39.7	531	6.4	7.6	2.1	1.7	40	0.2	<0.1	0.2	144	1.69	0.04	9	98	2.94	19	0.004	<20	3.59	0.005	0.1	<0.1	0.11	<0.1	0.07	8.9	<0.5	13	<0.2
<0.1	43	28.2	953	5.35	6.1	1.2	1.2	53	0.2	<0.1	0.1	106	3.17	0.044	8	53	2.44	20	0.003	<20	2.97	0.009	0.09	<0.1	0.09	<0.1	<0.05	9.5	<0.5	10	<0.2
<0.1	58.9	31.8	313	6.88	1.7	3.9	1.2	13	0.1	<0.1	0.1	85	0.57	0.068	8	47	3.21	47	0.004	<20	3.81	<0.001	0.17	<0.1	0.07	<0.1	0.17	6.1	<0.5	11	<0.2
<0.1	46.4	25.2	1534	5.37	1.3	4.6	0.9	146	0.5	<0.1	0.2	90	7.63	0.048	7	45	2.76	468	0.004	<20	3.3	0.015	0.16	<0.1	0.12	<0.1	0.17	7.6	<0.5	10	<0.2
<0.1	19.2	9.4	716	3.23	3.7	<0.5	1.2	190	0.4	<0.1	0.2	33	7.29	0.018	3	19	1.8	63	0.002	<20	1.71	0.007	0.1	<0.1	0.01	<0.1	0.2	3.8	<0.5	5	<0.2
<0.1	8.2	6.2	1953	1.31	8.1	<0.5	1.5	164	0.3	0.3	0.1	5	12.91	0.018	2	4	3.51	26	<0.001	<20	0.2	0.01	0.08	<0.1	0.03	<0.1	0.47	2.4	<0.5	<1	<0.2
<0.1	5.8	6.6	2071	1.21	3.8	<0.5	1.3	125	0.6	<0.1	<0.1	4	14.17	0.018	2	4	3.74	89	<0.001	<20	0.2	0.01	0.07	<0.1	0.02	<0.1	0.23	1.9	<0.5	<1	<0.2
0.1	23.2	9.5	1275	3.51	12.8	3.6	1.3	79	0.7	0.4	0.2	16	6.71	0.022	2	11	1.58	27	<0.001	<20	0.74	0.011	0.1	<0.1	0.2	<0.1	1.01	4	0.8	2	<0.2
<0.1	9.9	10.2	825	1.33	4.7	2	1.1	135	0.4	0.1	<0.1	9	12.85	0.011	2	3	1.84	30	<0.001	<20	0.3	0.009	0.06	<0.1	0.04	<0.1	0.3	1.7	0.6	<1	<0.2
<0.1	10	11	1502	1.34	5	<0.5	1.1	114	0.6	0.1	0.1	6	11.76	0.025	2	4	2.39	25	<0.001	<20	0.22	0.008	0.06	<0.1	0.03	<0.1	0.36	2.7	<0.5	<1	<0.2
<0.1	48.8	16.3	752	4.83	1.1	2.6	0.6	116	0.4	<0.1	0.1	68	5.27	0.03	3	41	2.05	430	0.003	<20	2.55	0.019	0.15	<0.1	0.04	<0.1	0.13	5.9	<0.5	7	<0.2
0.3	52.9	33.8	143	7.08	5	12.8	2.2	7	0.4	0.1	0.9	38	0.21	0.027	5	20	1.45	47	0.002	<20	2.29	0.009	0.21	<0.1	0.1	<0.1	2.8	2.8	10.3	7	0.4
<0.1	37.1	21.8	1878	4.71	0.9	2.4	0.9	124	0.5	<0.1	0.1	78	9.59	0.037	10	32	2.29	59	0.003	<20	2.69	0.02	0.1	<0.1	0.05	<0.1	0.12	9.2	<0.5	8	<0.2
<0.1	52.1	32.7	911	4	15.3	6.1	1.2	71	0.2	0.2	0.3	71	5.3	0.038	5	39	1.29	42	0.002	<20	1.87	0.019	0.22	<0.1	0.13	<0.1	1.09	11.4	1	6	<0.2
<0.1	18.2	6.3	1467	5.49	18.6	<0.5	0.6	167	1.4	3.2	0.1	36	8.22	0.002	5	9	1.99	2046	<0.001	<20	0.24	0.011	0.09	<0.1	0.21	<0.1	0.11	6.1	<0.5	<1	<0.2
<0.1	4.7	3.4	1219	1.9	7.1	<0.5	0.9	91	0.6	0.3	<0.1	4	7.38	0.013	3	2	2.4	48	<0.001	<20	0.11	0.008	0.07	<0.1	0.33	<0.1	0.07	2.1	<0.5	<1	<0.2
<0.1	8.9	5.9	1394	1.99	14.4	<0.5	1.8	141	0.1	0.3	0.1	7	9.89	0.026	3	4	3.62	59	<0.001	<20	0.19	0.01	0.12	<0.1	0.05	0.1	0.48	2.9	<0.5	<1	<0.2
<0.1	43.8	27.7	1481	5.62	28.4	0.7	1.1	202	0.3	0.6	0.1	112	6.88	0.043	5	40	2.08	56	0.001	<20	2.12	0.011	0.09	<0.1	0.02	<0.1	0.13	12.4	0.9	8	<0.2
<0.1	32.8	19.1	2175	4.08	8.5	0.6	0.8	179	0.3	<0.1	0.1	85	12.08	0.033	8	37	1.71	32	0.002	<20	2.03	0.015	0.09	<0.1	0.02	<0.1	0.13	9.8	<0.5	7	<0.2
<0.1	10.3	6.3	1067	1.96	14.5	<0.5	2	117	0.1	0.2	0.1	7	8.46	0.029	3	4	3.39	28	<0.001	<20	0.28	0.009	0.11	<0.1	0.05	<0.1	0.24	3.4	<0.5	<1	<0.2
<0.1	47.4	32.3	399	5.9	47	1	2.8	30	2.2	<0.1	0.4	56	2.48	0.041	6	32	2.94	36	0.002	<20	3.05	0.01	0.19	<0.1	0.04	<0.1	0.24	5.4	0.9	9	0.3
<0.1	15.9	9.8	2579	3.47	7.3	<0.5	0.3	407	1.3	0.1	<0.1	34	19.17	0.017	3	12	1.71	29	0.001	<20	1.04	0.007	0.09	<0.1	0.01	<0.1	<0.05	9.2	<0.5	3	<0.2
<0.1	22.3	10.4	1874	5.91	14.2	<0.5	0.9	216	0.4	0.1	<0.1	47	16.01	0.013	5	12	3.77	40	0.001	<20	0.32	0.021	0.08	<0.1	<0.01	<0.1	<0.05	6.3	<0.5	1	<0.2
<0.1	39.4	21.3	268	4.09	1	2.4	6	28	0.1	<0.1	0.4	28	0.63	0.053	32	22	1.39	378	0.007	<20	2.03	0.011	0.28	<0.1	0.05	<0.1	0.1	3.3	<0.5	5	<0.2
<0.1	29.2	40.6	493	8.76	3.8	0.6	5	79	<0.1	<0.1	<0.1	215	1.83	0.555	56	17	2.87	30	0.012	<20	4.38	0.059	0.14	<0.1	0.05	<0.1	0.24	5.9	<0.5	15	<0.2
<0.1	40.8	21.5	1793	5.82	8.2	2.3	0.5	116	0.6	0.2	0.2	73	5.91	0.037	3	35	3.23	167	0.003	<20	2.62	0.021	0.15	<0.1	0.4	<0.1	0.41	9.1	0.9	8	<0.2
<0.1	43.5	28.1	1190	5.6	4.1	7.4	0.6	65	0.4	0.1	0.2	91	5.2	0.052	5	47	2.21	42	0.004	<20	2.94	0.04	0.14	<0.1	0.23	<0.1	0.95	7.7	1.4	9	<0.2
<0.1	6	3.7	2205	1.13	3.9	0.9	0.9	186	1.6	0.1	<0.1	4	14.76	0.021	2	3	0.97	16	<0.001	<20	0.2	0.007	0.07	<0.1	0.19	<0.1	0.4	2.3	0.6	<1	<0.2
<0.1	41.5	28.1	1117	6.08	11.3	1.7	1	88	0.2	0.2	0.2	159	6.28	0.048	6	52	2.83	25	0.005	<20	3.49	0.019	0.08	<0.1	0.04	<0.1	0.19	12.2	<0.5	12	<0.2
<0.1	27	21	3146	3.16	0.8	1.1	0.5	490	0.6	<0.1	<0.1	61	11.8	0.027	4	21	1.63	879	0.003	<20	1.94	0.008	0.07	<0.1	0.02	<0.1	0.11	5.5	<0.5	6	<0.2
<0.1	3.8	3.8	1371	1.07	1.1	6.5	<0.1	201	0.8	<0.1	<0.1	6	10.52	0.005	3	5	0.36	33	<0.001	<20	0.14	0.009	0.01	<0.1	<0.01	<0.1	<0.05	2.9	0.6	<1	<0.2
0.1	53.4	33.7	684	6.82	1.6	4.3	1.5	51	0.3	<0.1	0.2	105	2.47	0.066	8	50	3.21	125	0.004	<20	3.99	0.007	0.15	<0.1	0.03	<0.1	0.11	7.6	0.6	13	<0.2
0.1	49.8	20.3	345	10.47	10.7	5.7	1.1	7	0.5	0.2	0.2	83	0.07	0.036	4	50	2.59	120	0.005	<20	4.41	0.008	0.14	<0.1	0.26	<0.1	0.94	3.9	1.6	13	<0.2
<0.1	57.4	34.9	934	6.73	2.3	2.2	1.4	41	0.4	<0.1	0.2	117	2.19	0.061	11	56	3.16	123	0.009	<20	3.93	0.03	0.16	<0.1	0.04	<0.1	0.08	8.1	1	13	<0.2
<0.1	32.2	19.8	1798	4.06	<0.5	<0.5	0.7	230	0.5	<0.1	<0.1	76	13.38	0.032	8	42	1.93	870	0.005	<20	2.25	0.018	0.08	<0.1	0.01	<0.1	<0.05	8.8	0.6	8	<0.2
<0.1	56.3	29.6	1875	8.64	<0.5	1.6	0.7	204	0.8	<0.1	0.4	62	11.41	0.041	6	26	1.6	53	0.004	<20	2.2	0.013	0.2	<0.1	0.05	<0.1	5.86	6.6	16.2	7	<0.2
0.2	30.3	8.6	760	3.99	5.3	<0.5	1.3	115	0.2	0.4	0.1	9	6.23	0.014	2	<1	1.89	25	<0.001	<20	0.62	0.007	0.12	<0.1	0.41	0.1	2.51	3.2	1.3	2	<0.2
0.2	54.3	30.5	381	6.43	9.6	<0.5	2.8	20	0.5	0.5	0.5	28	1.27	0.054	5	23	1.19	67	0.002	<20	1.41	0.008	0.24	<0.1	0.47	0.1	2.21	4.3	4.1	5	0.5
0.3	168.8	178.9	450	14.06	13.2	<0.5	1.2	28	0.7	0.3	0.4	78	1.52	0.057	3	45	2.07	29	0.003	<20	2.9	0.01	0.13	<0.1	0.34	<0.1	7.64	6.3	11	9	0.6
<0.1	27.2	17.6	1289	4.28	13.5	<0.5	0.9	166	0.3	0.1	0.2	70	5.03	0.037	4	34	2.09	33	0.002	<20	1.47	0.021	0.09	<0.1	0.27	<0.1	<0.05	10.8	1	6	<0.2
<0.1	18.7	10.9	460	3.08	8.1	<0.5	0.7	261	0.2	0.1	<0.1	61	3.44	0.023	4	21	1	12	0.002	<20	1.47	0.014	0.05	<0.1	0.17	<0.1	<0.05	5.6	0.5	6	<0.2
<0.1	28.9	15.2	1491	4.31	24.3	<0.5	0.4	63	0.4	0.1	<0.1	80	3.57	0.022	3	52	1.13	52	0.004	<20	0.74	0.02	0.05	<0.1	0.05	<0.1	0.18	9.8	0.5	3	<0.2
<0.1	1.8	2.9	715	0.95	2.3	<0.5	0.1	34	<0.1	<0.1	<0.1	<2	16.19	0.004	<1	<1	9.44	5	<0.001	<20	0.03	0.008	0.01	<0.1	0.01	<0.1	0.17	0.5	<0.5	<1	<0.2
0.3	71.1	23.1	928	8.7	55.4	<0.5	3.6	6	1.1	0.5	0.3	14	0.1	0.036	7	13	0.52	57	0.001	<20	1.21	0.003	0.18	<0.1	0.95	0.3	0.69	8	2.7	3	0.3
<0.1	35.4	14.1	172	12.42	52.4	<0.5	5.4	6	0.2	<0.1	0.4	43	0.16	0.077	18	34	0.4	38	0.001	<20	1.3	0.002	0.19	<0.1	0.19	0.1	<0.05	6.8	0.6	6	<0.2
<0.1	55.8	25.3	246	23.66	42.3	<0.5	1.6	2	<0.1	<0.1	<0.1	11	0.01	0.022	5	7	0.03	15	<0.001	<20	0.45	0.006	0.08	<0.1	0.14	0.1	0.05	2.2	2.5	1	<0.2
<0.1	19.7	13.4	2598	8.69	10.3	1.6	1.2	47	0.2	0.2	<0.1	6	16.69	0.017	3	4	0.86	38	<0.001	<20	0.27	0.004	0.12	<0.1	1.23	0.9	<0.05	4	0.6	<1	<0.2
<0.1	1.6	0.4	47	0.46	<0.5	<0.5	0.4	<1	<0.1	<0.1	<0.1	<2	0.02	0.002	4	2	<0.01	3	<0.001	<20	0.03	0.003	0.01	<0.1	<0.01	<0.1	<0.05	0.2	<0.5	<1	<0.2
<0.1	10.6	4.9	1738	2.21	9.3	<0.5	1	140	0.4	0.2	<0.1	6	13.33	0.022	2	4	3.36	46	<0.001	<20	0.2	0.013	0.07	<0.1	0.1	<0.1	1.15	2.4	0.9	<1	<0.2
<0.1	24.5	7	2168	5	4.7	<0.5	0.3	133	0.8	0.3	<0.1	92	11.31	0.008	3	9	3.99	32	<0.001	<20	0.23	0.015	0.03	<0.1	0.03	<0.1	<0.05	8.5	1.1	1	<0.2
<0.1	22.8	11	1785	6.59	25.1	<0.5	0.9	80	0.9	0.3	<0.1	4	6.26	0.015	1	3	2.8	13	<0.001	<20	0.11	0.009	0.06	<0.1	0.07	<0.1	5.35	2	4.5	<1	<0.2
<0.1	66.1	38.7	571	8.69	5.9	1.5	0.7	48	0.3	0.2	0.2	102	1.85	0.056	3	50	2.38	26	0.003	<20	3.04	0.037	0.18	<0.1	0.04	<0.1	4.18	7.4	8.2	11	0.2
0.2	17.1	9.4	998	11.36	142.3	<0.5	1.8	47	0.2	4.8	0.2	9	5.44	0.022	1	11	2.35	12	<0.001	<20	0.79	0.008	0.09	<0.1	1.65	0.7	9.4	3.3	1.6	2	<0.2
1.6	42	16.2	1468	10.24	60.1	35.9	1.7	44	1.5	1.8	0.2	11	3.96	0.022	1	8	1.94	24	<0.001	<20	0.72	0.011	0.11	<0.1	1.28	0.2	8.06	2.7	5.1	2	<0.2
2.2	15.7	6.2	1524	15.24	88.9	20.9	1.6	51	1.8	2.2	0.1	3	4.01	0.016	1	7	1.56	15	<0.001	<20	0.6	0.011	0.09	<0.1	1.42	0.3	>10.00	2.3	7.5	2	<0.2
<0.1	44.2	24.5	1338	5.81	25.8	0.9	0.8	137	4.8	0.3	0.1	91	7.63	0.043	6	38	2.59	22	0.002	<20	2.68	0.019	0.13	<0.1	0.12	<0.1	0.18	10.1	1.2	9	<0.2
0.1	40.6	36.1	1500	6.33	41.3	<0.5	0.7	48	0.3	<0.1	0.7	86	3.91	0.04	2	47	3.02	15	0.003	<20	2.43	0.031	0.11	<0.1	0.03	<0.1	1.54	10.8	6.6	9	0.3
0.2	60.2	21.1	150	4.64	64.1	<0.5	1.7	6	0.5	0.8	0.3	59	0.21	0.037	5	46	1.04	22	0.002	<20	1.54	0.034	0.16	<0.1	0.12	<0.1	1.97	4	1.8	5	<0.2
0.1	32.7	14.5	1645	8.31	28	<0.5	1.1	100	2	0.4	0.2	8	7.35	0.026	1	4	2.78	40	<0.001	<20	0.57	0.015	0.11	<0.1	0.31	0.1	6.33	3.2	1.9	2	<0.2

<0.1	23.2	18.4	841	7.72	15.6	2	2.2	101	1.2	0.2	0.4	13	4.17	0.039	1	10	1.12	33	0.001	<20	0.71	0.013	0.14	<0.1	0.15	0.1	3.86	2.9	3.5	3	0.3
0.1	44.2	34.3	1505	8.5	36.2	<0.5	1.1	107	1.5	0.3	0.5	13	6.79	0.021	1	7	2.64	21	<0.001	<20	0.67	0.012	0.08	<0.1	0.14	0.3	7.19	3.2	7.5	2	0.4
<0.1	15.1	3.9	1673	3.05	29.7	<0.5	0.6	63	1	0.5	<0.1	9	16.41	0.004	4	3	0.22	57	<0.001	<20	0.11	0.002	0.05	<0.1	0.02	0.2	<0.05	1.7	0.6	<1	<0.2
<0.1	18.1	9.3	2014	2.81	5.4	<0.5	0.4	1115	0.2	<0.1	<0.1	50	17.09	0.02	5	21	1.05	36	0.002	<20	1.36	0.005	0.05	<0.1	<0.01	<0.1	0.09	7.4	<0.5	4	<0.2
<0.1	23.5	14	2101	3.53	8.9	1.4	0.5	1248	0.3	<0.1	0.1	80	16.31	0.029	6	28	1.37	34	0.002	<20	1.81	0.007	0.04	<0.1	0.02	<0.1	0.1	9.5	0.6	6	<0.2
<0.1	37.9	24.4	1737	5.18	11.2	1.2	0.7	257	0.2	0.1	0.1	129	9.5	0.038	4	48	2.19	36	0.003	<20	2.62	0.01	0.05	<0.1	0.02	<0.1	0.16	12	0.7	9	<0.2
<0.1	5.7	5.5	1833	1.79	5.6	<0.5	1.3	280	0.2	0.2	<0.1	5	12.75	0.031	3	3	3.4	20	<0.001	<20	0.12	0.014	0.06	<0.1	0.02	<0.1	1	2.2	<0.5	<1	<0.2
<0.1	23.7	15	1079	4.14	10.8	0.6	1.3	123	0.3	0.2	0.1	52	7.69	0.02	3	16	3.85	182	0.002	<20	1.5	0.011	0.1	<0.1	0.02	<0.1	0.55	6	0.8	5	<0.2
<0.1	28.9	20.3	2123	3.82	2.5	1.8	0.5	272	0.3	<0.1	<0.1	173	8.43	0.025	5	106	1.84	54	0.008	<20	1.91	0.018	0.03	<0.1	0.01	<0.1	0.28	14.1	0.7	6	<0.2
<0.1	9.3	5.6	1430	2.29	12.9	1.6	1.7	147	0.3	0.3	<0.1	13	7.54	0.028	2	7	3.57	27	0.001	<20	0.68	0.011	0.09	<0.1	0.03	<0.1	0.28	2.5	<0.5	2	<0.2
<0.1	9	6.2	935	2.14	17.4	0.7	1.8	104	<0.1	0.3	0.1	9	7.78	0.029	2	7	4.02	26	<0.001	<20	0.34	0.013	0.11	<0.1	0.05	<0.1	0.35	3.4	<0.5	1	<0.2
<0.1	6.8	5.1	1204	1.94	10	0.9	1.6	236	0.1	0.2	<0.1	9	9.82	0.031	2	7	3.58	41	0.001	<20	0.4	0.01	0.1	<0.1	0.01	<0.1	0.2	2.4	<0.5	1	<0.2
<0.1	6.9	5.6	1316	1.65	11.4	0.7	1.3	139	<0.1	0.2	<0.1	5	9.58	0.019	2	4	3.34	22	<0.001	<20	0.15	0.011	0.07	<0.1	0.02	<0.1	0.46	2.4	<0.5	<1	<0.2
<0.1	7.9	7.7	1321	2.28	15	0.7	1.2	213	<0.1	0.1	<0.1	9	9.27	0.026	2	4	3.08	20	<0.001	<20	0.17	0.011	0.09	<0.1	0.04	<0.1	1.07	2.6	<0.5	<1	<0.2
<0.1	6.7	4.6	1267	2	9.3	<0.5	1.4	154	<0.1	0.1	<0.1	8	9.22	0.034	2	5	3.65	28	<0.001	<20	0.18	0.011	0.09	<0.1	0.03	<0.1	0.29	2.7	<0.5	<1	<0.2
<0.1	6.9	5	1583	2.38	7.3	<0.5	1.3	184	0.1	0.2	<0.1	7	9.39	0.027	2	5	3.24	31	<0.001	<20	0.23	0.013	0.09	<0.1	0.03	<0.1	1.04	2.6	<0.5	<1	<0.2
<0.1	8.1	6.2	962	1.78	7.8	0.9	2	68	0.2	0.2	0.1	7	6.36	0.023	3	6	3.8	23	<0.001	<20	0.31	0.01	0.1	<0.1	0.02	<0.1	0.19	2.7	<0.5	<1	<0.2
<0.1	52.3	32	1188	6.84	16.5	2.2	2.5	5	0.7	0.5	0.2	128	0.06	0.052	17	55	0.12	72	0.002	<20	0.7	0.002	0.09	<0.1	0.03	<0.1	<0.05	15.6	1.4	2	<0.2
<0.1	5.3	4.2	1055	2.03	3.5	0.7	1.1	124	<0.1	0.2	0.1	9	8.19	0.033	2	9	3.03	8	0.001	<20	0.59	0.007	0.04	<0.1	0.02	<0.1	0.07	2.3	<0.5	2	<0.2
<0.1	13.8	9.9	720	4.45	14.5	1.4	1.5	66	0.3	0.3	0.2	35	5.27	0.034	2	21	3.43	40	0.003	<20	1.96	0.003	0.07	<0.1	0.06	<0.1	0.54	3.9	<0.5	5	<0.2
0.2	47	23.9	199	11.22	85	2.1	2.3	6	0.2	2.1	0.3	56	0.13	0.03	3	23	1.72	65	0.002	<20	2.46	<0.001	0.13	<0.1	0.52	0.2	3.1	4.3	0.9	8	<0.2
<0.1	3.7	3.2	1058	1.56	3.1	0.6	1	339	0.2	<0.1	<0.1	7	13.1	0.024	3	5	2.24	19	<0.001	<20	0.31	0.006	0.03	<0.1	0.01	<0.1	0.07	2	<0.5	1	<0.2
<0.1	5.8	5.6	1168	2.24	5.1	0.5	1.2	280	0.1	0.2	0.1	12	13	0.031	2	8	2.75	19	0.001	<20	0.77	0.005	0.03	<0.1	0.03	<0.1	0.18	2.3	<0.5	2	<0.2
<0.1	9.4	14.3	1825	1.74	4.6	4.1	0.8	283	0.7	0.2	0.1	9	11.67	0.021	2	5	2.2	132	<0.001	<20	0.25	0.009	0.05	<0.1	0.04	<0.1	0.46	2.3	0.8	<1	<0.2
0.2	13.6	7.9	665	6.04	40	0.9	1.9	45	0.2	2.9	0.2	9	4.89	0.016	2	9	1.35	20	0.001	<20	0.61	0.01	0.12	<0.1	0.4	0.2	4.76	3	0.6	2	<0.2
<0.1	19.5	9.9	1229	3.57	37.4	1.2	2	80	0.4	1.3	0.3	12	6.64	0.025	3	10	1.35	19	0.001	<20	0.65	0.011	0.12	<0.1	0.25	0.3	1.82	3.3	0.8	2	<0.2
<0.1	19.7	13.9	1109	3.17	38.5	1.1	0.8	248	0.3	0.4	0.2	50	12.43	0.02	4	20	1.39	20	<0.001	<20	0.83	0.009	0.09	<0.1	0.06	<0.1	0.2	6.8	<0.5	3	<0.2
<0.1	6.3	3.6	1709	2.99	1.8	<0.5	1	170	0.1	0.1	<0.1	5	11.7	0.01	2	3	6.36	20	<0.001	<20	0.17	0.013	0.07	<0.1	0.01	<0.1	0.24	1.9	<0.5	<1	<0.2
0.3	90.1	85.8	1050	5.54	14.4	2.2	2.4	42	0.5	1.3	0.3	43	3.37	0.034	4	21	2.53	53	0.002	<20	1.63	0.008	0.22	<0.1	0.18	<0.1	1.03	6.5	1.5	5	<0.2
<0.1	7.1	6.1	1289	2.04	3.6	0.9	2	119	<0.1	0.2	0.1	5	8	0.017	2	4	3.89	24	<0.001	<20	0.16	0.01	0.11	<0.1	0.03	<0.1	0.33	2.7	<0.5	<1	<0.2
<0.1	51.4	25.4	1550	5.84	19.9	2.4	0.9	102	0.3	0.1	0.1	211	4.38	0.033	6	100	2.76	36	0.01	<20	3.25	0.01	0.04	<0.1	0.04	<0.1	0.09	14.5	0.6	11	<0.2
<0.1	66.8	44.3	1115	9.07	80.1	3.6	3.1	47	0.4	0.3	0.2	157	0.18	0.056	21	47	0.33	109	0.002	<20	0.98	0.005	0.11	<0.1	0.15	<0.1	<0.05	14.9	0.6	3	<0.2
<0.1	54.7	36.8	1099	6.97	35.8	2	1.5	150	0.3	0.2	0.2	137	3.59	0.044	9	47	2.83	42	0.002	<20	1.48	0.021	0.09	<0.1	0.13	<0.1	0.18	12.7	0.6	5	<0.2
<0.1	21	13.5	611	3.29	72.6	0.8	0.7	99	0.7	0.2	<0.1	20	1.5	0.048	4	10	0.3	102	0.001	<20	0.48	0.02	0.04	<0.1	0.12	<0.1	<0.05	12.6	0.9	1	<0.2
<0.1	17.9	8.6	385	2.78	9.3	0.9	0.4	70	0.3	0.1	<0.1	37	1.32	0.017	3	11	0.67	12	0.001	<20	0.91	0.006	0.03	<0.1	0.08	<0.1	<0.05	4.1	0.6	3	<0.2
<0.1	32.7	17.2	1226	4.71	14.1	1.2	0.5	197	0.2	0.2	<0.1	83	4.1	0.024	3	65	2.6	15	0.003	<20	1.57	0.023	0.05	<0.1	0.23	<0.1	0.2	11	0.8	5	<0.2
<0.1	4.6	3.9	1358	2.25	3	<0.5	1.3	109	0.1	<0.1	<0.1	11	9.5	0.039	3	7	3.75	27	<0.001	<20	0.26	0.012	0.09	<0.1	0.08	<0.1	0.28	2.7	<0.5	1	<0.2
<0.1	8.9	4.7	1642	1.34	0.8	<0.5	0.8	253	0.2	<0.1	<0.1	4	14.42	0.03	2	5	2.72	856	<0.001	<20	0.34	0.008	0.08	<0.1	0.03	<0.1	0.21	1.9	<0.5	1	<0.2
<0.1	7.3	4.4	1705	1.88	8.3	<0.5	1.3	130	0.4	0.3	<0.1	7	10.45	0.026	2	6	4.03	21	<0.001	<20	0.42	0.012	0.08	<0.1	0.05	<0.1	0.47	2.4	0.7	1	<0.2
<0.1	5.1	4.3	1896	1.16	4.5	<0.5	0.9	159	0.3	0.1	<0.1	4	12.01	0.02	2	4	2.23	29	<0.001	<20	0.25	0.006	0.05	<0.1	0.02	<0.1	0.32	1.8	<0.5	<1	<0.2

APPENDIX III

Analytical Methods

Soils, tills and sediments samples are dried at 60°C to minimize loss of volatile elements such as mercury). Soils, tills and sediments are screened to -180 microns (-80 mesh ASTM). For rock samples, 1 kilogram of sample is crushed to 80% passing 10 mesh. A 250 gram split is then pulverize to 85% passing 200 mesh.

Soil samples preparation

Dry at 60C WHI
SS80 212 Dry at 60C sieve 100g to -80 mesh WHI
1DX2 212 1:1:1 Aqua Regia digestion ICP-MS analysis 15

Rock sample assay preparation
Summary:
Crush, split and pulverize 250 g rock to 200 mesh WHI
3B 46 Fire assay fusion Au by ICP-ES 30 Completed VAN
1DX 46 1:1:1 Aqua Regia digestion ICP-MS analysis

Analysis

Sample splits of 0.15 grams are leached in hot (95°C) aqua regia followed by ICP-MS analysis for the 36 elements shown in the table below. Any sample with a gold content 500ppb is then analyzed for Au by fire assay technique.
The 36 elements in the 1DX2 analytical suite

Element	Lower Limit	Upper Limit
Ag*	0.1 ppm	100 ppm
Al*	0.01 %	10 %
As	0.5 ppm	10000 ppm
Au*	0.5 ppb	100 ppm
B*	† 20 ppm	2000 ppm
Ba*	1 ppm	10000 ppm
Bi	0.1 ppm	2000 ppm
Ca*	0.01 %	40 %
Cd	0.1 ppm	2000 ppm
Co	0.1 ppm	2000 ppm
Cr*	1 ppm	10000 ppm
Cu	0.1 ppm	10000 ppm
Fe*	0.01 %	40 %
Ga*	1 ppm	1000 ppm
Hg‡	0.01 ppm	50 ppm
K*	0.01 %	10 %
La*	1 ppm	10000 ppm
Mg*	0.01 %	30 %

Mn*	1 ppm	10000 ppm
Mo	0.1 ppm	2000 ppm
Na*	0.001 %	5 %
Ni	0.1 ppm	10000 ppm
P*	0.001 %	5 %
Pb	0.1 ppm	10000 ppm
S*	0.05 %	10 %
Sb	0.1 ppm	2000 ppm
Sc	0.1 ppm	100 ppm
Se	0.5 ppm	100 ppm
Sr*	1 ppm	10000 ppm
Te	0.2 ppm	1000 ppm
Th*	0.1 ppm	2000 ppm
Ti*	0.001 %	5 %
Tl‡	0.1 ppm	1000 ppm
V*	2 ppm	10000 ppm
W*	0.1 ppm	100 ppm
Zn	1 ppm	10000 ppm

*Solubility of some elements will be limited by mineral species present. †Detec□on limit = 1 ppm for 15g / 30g analysis.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada

www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Submitted By: Email Distribution List
Receiving Lab: Canada-Whitehorse
Received: August 12, 2011
Report Date: October 05, 2011
Page: 1 of 12

CERTIFICATE OF ANALYSIS WHI11001138.1

CLIENT JOB INFORMATION

Project: STEN NW
Shipment ID:
P.O. Number
Number of Samples: 323

SAMPLE DISPOSAL

RTRN-PLP Return
RTRN-RJT Return

Acme does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Method Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
Dry at 60C	319	Dry at 60C			WHI
SS80	319	Dry at 60C sieve 100g to -80 mesh			WHI
RJSV	319	Saving all or part of Soil Reject			WHI
1DX2	318	1:1:1 Aqua Regia digestion ICP-MS analysis	15	Completed	VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources (Petro One Energy Corp)
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3
Canada

CC:

BRITISH COLUMBIA CERTIFIED ASSAYER
CLARENCE LEONG
GENERAL MANAGER

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Acme assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

		Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
		Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
		Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
		MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
1230301	Soil		2.0	77.0	34.4	103	0.1	35.9	26.9	1591	5.88	30.2	2.0	1.7	8	0.3	0.8	0.3	30	0.12	0.102	8
1230302	Soil		2.6	109.0	50.0	129	0.2	47.1	44.0	3111	8.77	28.6	2.4	3.3	12	0.5	0.8	0.4	30	0.13	0.104	10
1230303	Soil		4.8	173.6	54.0	147	0.3	69.6	59.9	2032	9.07	50.9	5.1	4.6	18	0.7	1.1	0.5	40	0.13	0.073	15
1230304	Soil		3.3	170.0	38.4	104	0.3	48.3	49.6	2135	6.97	31.5	5.0	3.7	15	0.6	0.9	0.4	46	0.30	0.085	19
1230305	Soil		3.4	200.7	30.0	99	0.2	48.1	47.7	1508	6.46	32.4	4.9	3.4	24	0.6	0.7	0.3	65	1.06	0.069	16
1230306	Soil		1.1	172.1	22.1	103	0.1	42.4	47.1	1683	6.53	33.0	4.8	1.7	7	0.5	0.8	0.3	100	0.08	0.135	18
1230307	Soil		0.9	143.4	34.0	105	<0.1	42.3	55.2	1933	6.81	39.8	2.9	2.6	4	0.4	0.7	0.3	88	0.04	0.118	22
1230308	Soil		0.8	209.3	27.0	111	0.2	48.2	41.3	2817	9.12	14.7	12.5	2.0	34	0.5	0.3	0.2	141	0.52	0.101	18
1230309	Soil		0.7	192.4	16.7	93	0.2	48.6	33.6	1147	7.05	9.7	9.6	1.9	21	0.3	0.3	0.2	112	0.28	0.087	15
1230310	Soil		1.0	130.7	20.7	86	0.1	31.4	29.1	1574	5.64	9.5	4.2	0.4	15	0.5	0.4	0.2	93	0.33	0.272	10
1230311	Soil		2.1	157.4	25.5	99	<0.1	43.7	53.3	1577	6.08	20.0	4.6	2.4	7	0.4	0.5	0.3	73	0.12	0.084	21
1230312	Soil		1.5	183.5	21.0	93	<0.1	47.4	48.8	1463	6.52	17.8	4.1	1.6	8	0.3	0.4	0.2	92	0.19	0.108	16
1230313	Soil		1.2	133.4	21.7	93	0.2	40.0	36.3	1239	5.68	18.6	2.8	3.2	9	0.4	0.5	0.2	69	0.29	0.062	20
1230314	Soil		1.3	121.0	20.2	82	0.1	36.0	33.2	1289	5.11	16.0	4.0	2.9	10	0.3	0.5	0.2	60	0.43	0.063	18
1230315	Soil		1.2	145.9	22.9	96	0.2	42.8	44.5	1433	6.01	20.5	4.2	3.7	10	0.4	0.4	0.3	76	0.37	0.067	20
1230316	Soil		1.5	138.5	24.2	92	0.2	40.2	45.7	1801	5.50	17.7	4.2	3.4	12	0.6	0.5	0.2	70	0.32	0.072	21
1230317	Soil		1.5	112.3	21.0	82	0.1	34.2	33.9	1263	4.88	16.3	5.3	2.4	16	0.3	0.5	0.2	62	0.62	0.078	15
1230318	Soil		1.1	114.1	19.0	83	0.2	31.7	22.9	599	4.95	16.2	5.4	2.8	11	0.3	0.5	0.2	62	0.42	0.067	17
1230319	Soil		1.0	100.2	18.7	79	0.1	30.9	29.2	960	4.81	14.6	3.5	2.3	16	0.2	0.4	0.2	61	0.59	0.059	16
1230320	Soil		0.9	104.9	18.9	84	<0.1	32.9	27.1	919	4.88	14.3	1.2	2.2	15	0.3	0.4	0.2	64	0.51	0.056	15
1230321	Soil		1.2	61.4	19.8	84	<0.1	22.5	13.1	360	3.89	13.2	1.4	2.6	8	0.2	0.4	0.2	38	0.30	0.055	16
1230322	Soil		2.5	141.6	22.5	96	0.1	45.9	46.6	1286	6.01	14.5	3.6	2.0	12	0.4	0.4	0.3	104	0.29	0.073	19
1230323	Soil		0.9	97.4	13.4	92	<0.1	37.5	20.4	655	4.80	11.3	2.2	1.8	15	0.2	0.5	0.2	82	0.32	0.070	15
1230324	Soil		1.0	114.7	13.8	93	0.2	35.8	19.9	606	4.75	24.3	6.8	2.0	21	0.1	0.5	0.2	81	0.35	0.073	17
1230325	Soil		0.7	118.5	12.7	82	<0.1	40.0	28.8	836	5.92	8.8	3.2	1.7	3	0.4	0.3	0.2	85	0.05	0.084	15
1230326	Soil		1.0	49.7	10.5	66	<0.1	27.2	13.6	399	3.78	10.4	1.1	0.8	15	0.2	0.4	0.2	64	0.34	0.056	12
1230327	Soil		0.5	119.2	14.5	78	<0.1	47.4	34.2	829	6.10	8.3	2.6	2.4	2	0.1	0.2	0.2	85	0.04	0.043	17
1230328	Soil		1.1	92.8	17.4	73	0.1	35.8	25.7	906	5.72	12.2	1.3	1.3	4	0.2	0.4	0.2	74	0.08	0.170	13
1230329	Soil		1.2	41.3	11.1	79	<0.1	25.1	11.9	444	3.20	10.3	2.1	1.0	7	0.2	0.5	0.2	49	0.09	0.059	12
1230330	Soil		1.2	80.3	14.6	78	<0.1	36.1	23.8	734	4.79	12.9	3.1	1.8	6	0.2	0.5	0.2	64	0.09	0.062	16

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

		Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
		Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
		Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
		MDL	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1230301	Soil		22	0.51	64	0.004	4	1.49	0.005	0.09	<0.1	0.24	5.3	0.2	<0.05	4	1.1	<0.2
1230302	Soil		22	0.61	66	0.004	4	1.54	0.005	0.08	<0.1	0.37	8.7	0.3	<0.05	4	1.4	0.2
1230303	Soil		26	0.74	85	0.002	4	1.79	0.007	0.10	<0.1	0.70	11.2	0.4	<0.05	5	2.0	0.3
1230304	Soil		23	0.90	76	0.003	4	1.49	0.004	0.08	<0.1	0.28	10.7	0.2	0.07	5	1.3	<0.2
1230305	Soil		30	1.66	61	0.002	4	1.99	0.003	0.08	<0.1	0.20	10.0	0.1	0.06	7	1.0	0.2
1230306	Soil		44	1.38	68	0.007	3	2.92	0.003	0.08	<0.1	0.07	6.8	0.1	<0.05	9	1.0	<0.2
1230307	Soil		40	1.36	67	0.004	3	3.19	0.003	0.09	<0.1	0.02	6.4	0.1	<0.05	10	0.7	0.4
1230308	Soil		48	1.13	138	0.003	3	2.24	0.004	0.09	<0.1	0.09	17.9	<0.1	<0.05	8	0.8	<0.2
1230309	Soil		52	2.41	289	0.004	2	3.45	0.003	0.08	<0.1	0.06	11.0	<0.1	<0.05	11	0.8	<0.2
1230310	Soil		44	1.42	70	0.005	2	2.89	0.005	0.07	<0.1	0.04	3.4	<0.1	0.06	9	0.7	<0.2
1230311	Soil		36	1.46	95	0.005	3	2.64	0.003	0.09	<0.1	0.07	7.0	0.1	<0.05	8	<0.5	<0.2
1230312	Soil		43	1.92	93	0.005	3	3.20	0.004	0.09	<0.1	0.04	6.4	<0.1	<0.05	10	<0.5	<0.2
1230313	Soil		34	1.56	66	0.003	4	2.19	0.003	0.09	<0.1	0.07	9.4	<0.1	<0.05	7	0.7	<0.2
1230314	Soil		31	1.42	57	0.003	3	1.94	0.003	0.09	<0.1	0.08	7.2	<0.1	<0.05	6	0.6	0.2
1230315	Soil		38	1.76	68	0.003	3	2.32	0.003	0.09	<0.1	0.08	9.2	<0.1	<0.05	8	0.6	<0.2
1230316	Soil		34	1.51	75	0.004	3	2.10	0.004	0.09	<0.1	0.06	9.5	<0.1	<0.05	7	0.8	<0.2
1230317	Soil		31	1.35	67	0.003	3	1.95	0.004	0.10	<0.1	0.06	8.1	<0.1	<0.05	6	1.1	<0.2
1230318	Soil		31	1.41	57	0.002	4	2.13	0.003	0.10	<0.1	0.06	8.2	<0.1	<0.05	7	<0.5	<0.2
1230319	Soil		29	1.38	88	0.002	3	2.01	0.003	0.08	<0.1	0.07	7.5	<0.1	<0.05	6	0.6	<0.2
1230320	Soil		30	1.35	94	0.002	3	1.97	0.003	0.07	<0.1	0.06	7.2	<0.1	<0.05	6	<0.5	<0.2
1230321	Soil		21	0.97	63	0.002	3	1.56	0.002	0.09	<0.1	0.04	6.0	<0.1	<0.05	4	0.7	<0.2
1230322	Soil		46	1.90	138	0.005	2	3.00	0.004	0.08	<0.1	0.05	9.9	<0.1	<0.05	10	0.5	<0.2
1230323	Soil		41	1.27	178	0.010	3	2.74	0.004	0.09	0.1	0.03	5.3	0.1	<0.05	8	<0.5	<0.2
1230324	Soil		44	1.28	233	0.009	2	2.55	0.005	0.08	0.1	0.10	6.9	0.1	<0.05	8	0.9	<0.2
1230325	Soil		40	1.48	66	0.003	2	2.85	0.002	0.07	<0.1	0.05	4.3	<0.1	<0.05	9	0.7	0.2
1230326	Soil		32	0.89	135	0.005	2	2.11	0.005	0.06	0.1	0.04	2.6	0.1	<0.05	7	<0.5	<0.2
1230327	Soil		43	1.84	74	0.002	2	3.28	0.002	0.07	<0.1	0.06	5.6	<0.1	<0.05	9	0.5	<0.2
1230328	Soil		34	1.22	59	0.004	3	2.46	0.003	0.07	<0.1	0.05	3.5	<0.1	<0.05	8	0.8	<0.2
1230329	Soil		29	0.55	111	0.011	2	1.74	0.004	0.06	0.2	0.04	2.2	0.1	<0.05	5	<0.5	<0.2
1230330	Soil		33	0.96	80	0.008	2	2.13	0.003	0.08	<0.1	0.06	4.0	0.1	<0.05	7	0.6	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

	Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
1230331	Soil	1.3	28.8	11.8	57	<0.1	18.3	14.8	572	3.24	9.1	2.2	2.5	6	0.3	0.4	0.2	55	0.07	0.041	14
1230332	Soil	1.3	223.3	34.9	85	0.2	52.6	88.5	1897	6.07	18.3	9.3	3.0	49	0.5	0.3	0.3	62	0.21	0.065	24
1230333	Soil	2.1	176.5	34.8	89	0.2	51.5	63.4	1425	5.93	27.8	7.7	3.6	10	0.5	0.5	0.3	46	0.21	0.059	26
1230334	Soil	2.4	167.9	34.8	81	0.2	50.6	74.2	1776	5.67	24.6	5.5	3.2	8	0.4	0.4	0.3	39	0.19	0.056	17
1230335	Soil	0.6	265.7	19.2	88	0.1	54.0	69.4	1905	6.72	3.0	13.3	1.9	9	0.3	0.1	0.2	96	0.22	0.055	16
1230336	Soil	0.7	309.6	21.3	91	0.2	59.3	94.9	2206	7.04	7.4	21.7	2.0	10	0.5	0.3	0.2	88	0.20	0.064	19
1230337	Soil	0.6	278.1	22.3	91	0.1	53.3	71.2	1703	6.60	6.7	14.4	2.1	10	0.4	0.2	0.2	74	0.28	0.067	18
1230338	Soil	1.2	402.5	25.3	96	0.2	55.9	72.9	2900	7.03	9.6	23.1	1.4	11	0.8	0.3	0.2	90	0.21	0.090	16
1230339	Soil	0.8	368.6	23.9	94	0.2	44.8	46.3	2614	6.12	9.8	18.3	1.1	15	0.8	0.3	0.2	83	0.42	0.121	17
1230340	Soil	0.7	466.6	40.1	91	0.3	47.8	90.0	5523	7.24	62.2	18.5	1.0	17	2.0	0.4	0.2	99	0.39	0.109	21
1230341	Soil	0.7	302.8	32.2	88	0.2	54.0	93.3	2242	7.10	28.2	19.4	2.2	8	0.7	0.4	0.2	91	0.21	0.065	19
1230342	Soil	1.3	39.5	24.6	63	<0.1	17.5	14.2	782	2.76	20.1	2.5	4.9	57	0.2	0.9	0.3	10	7.33	0.048	11
1230343	Soil	1.4	336.8	39.7	87	0.3	42.9	108.6	3006	6.33	26.2	43.1	2.9	21	0.6	0.8	0.4	75	0.52	0.077	18
1230344	Soil	1.5	125.3	26.3	77	0.1	31.9	44.6	1255	4.20	24.3	7.4	3.1	10	0.3	0.5	0.2	36	1.37	0.053	12
1230345	Soil	2.4	110.9	34.4	71	0.1	33.5	56.6	1226	4.04	25.5	3.6	4.3	14	0.3	0.7	0.3	31	1.90	0.060	15
1230346	Soil	1.9	112.4	28.2	74	0.1	32.2	49.5	1195	4.11	27.5	4.7	3.9	19	0.3	0.7	0.2	32	2.79	0.057	14
1230347	Soil	1.1	95.7	20.1	62	<0.1	27.1	44.0	1179	3.68	13.3	5.9	3.1	29	0.2	0.4	0.2	30	3.91	0.049	10
1230348	Soil	3.4	313.4	56.8	87	0.5	86.4	168.4	3671	6.27	20.6	58.0	4.4	26	0.5	0.6	0.3	40	0.26	0.080	22
1230349	Soil	1.7	145.6	29.3	78	0.2	36.2	63.0	1595	4.37	15.6	15.2	3.0	7	0.4	0.5	0.3	40	0.30	0.063	16
1230350	Soil	1.0	219.5	22.6	83	0.2	44.4	47.3	1528	6.00	11.2	16.8	2.2	8	0.5	0.3	0.2	76	0.24	0.062	16
1230351	Soil	0.7	313.2	19.8	89	0.2	51.0	60.8	2080	6.26	6.2	29.3	1.6	11	0.5	0.2	0.2	83	0.40	0.071	15
1230352	Soil	0.6	455.7	35.7	94	0.3	53.0	71.1	3774	7.65	6.0	39.5	1.5	9	0.9	0.2	0.2	86	0.27	0.084	19
1230353	Soil	0.7	394.0	29.7	88	0.3	51.4	106.6	3933	7.00	8.3	47.7	1.5	9	0.9	0.3	0.2	90	0.24	0.094	22
1230354	Soil	0.8	347.0	22.7	88	0.4	49.2	83.9	2823	6.62	8.4	41.1	1.5	10	0.6	0.3	0.2	93	0.29	0.090	18
1230355	Soil	0.6	297.9	18.5	94	0.2	49.9	59.2	2595	6.34	6.6	14.5	1.3	8	0.4	0.3	0.2	92	0.16	0.107	17
1230356	Soil	0.8	244.8	19.5	82	0.1	56.5	77.1	1554	5.70	7.2	11.2	1.3	9	0.4	0.3	0.2	66	0.26	0.101	14
1230357	Soil	1.2	253.4	26.0	81	0.2	38.9	39.1	1813	4.97	9.3	14.0	1.0	14	0.8	0.3	0.2	61	0.44	0.119	16
1230358	Soil	0.7	210.4	14.7	74	<0.1	37.1	26.0	1181	5.15	6.2	4.9	1.0	7	0.3	0.3	0.2	86	0.17	0.101	12
1230359	Soil	0.7	238.7	16.8	85	0.1	45.1	40.9	1502	5.92	5.2	11.8	1.6	6	0.4	0.3	0.2	92	0.12	0.076	15
1230360	Soil	0.8	229.1	19.8	92	0.1	45.4	39.0	1974	5.93	6.0	11.2	1.7	7	0.5	0.3	0.2	96	0.13	0.086	15

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

	Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1230331	Soil	26	0.51	85	0.012	2	1.59	0.003	0.06	0.2	0.04	2.8	0.1	<0.05	6	0.5	<0.2
1230332	Soil	33	1.77	217	0.003	3	2.50	0.003	0.08	<0.1	0.04	7.0	0.1	<0.05	8	0.8	<0.2
1230333	Soil	28	1.06	100	0.001	3	1.86	0.002	0.10	<0.1	0.05	6.6	0.1	<0.05	6	0.6	0.2
1230334	Soil	24	1.08	94	0.002	2	1.78	0.002	0.08	<0.1	0.02	5.6	0.1	<0.05	6	0.8	<0.2
1230335	Soil	52	2.72	331	0.004	2	3.24	0.002	0.05	<0.1	0.04	9.7	<0.1	<0.05	11	<0.5	<0.2
1230336	Soil	43	2.40	318	0.004	2	3.15	0.002	0.07	<0.1	0.09	10.8	<0.1	<0.05	10	0.6	0.2
1230337	Soil	41	2.11	279	0.003	2	2.74	0.002	0.07	<0.1	0.06	9.2	<0.1	<0.05	8	0.6	0.2
1230338	Soil	45	2.32	483	0.005	1	3.22	0.004	0.07	<0.1	0.07	14.0	0.1	<0.05	10	<0.5	<0.2
1230339	Soil	42	1.97	379	0.005	2	2.98	0.004	0.07	<0.1	0.08	12.0	0.1	0.07	9	0.9	0.3
1230340	Soil	43	2.04	180	0.005	2	3.27	0.004	0.07	<0.1	0.12	19.6	0.1	<0.05	10	1.1	0.2
1230341	Soil	42	2.44	130	0.004	2	3.26	0.003	0.06	<0.1	0.05	11.6	<0.1	<0.05	11	1.4	0.3
1230342	Soil	10	2.10	28	0.003	7	0.84	0.005	0.07	<0.1	0.05	4.5	<0.1	<0.05	2	<0.5	<0.2
1230343	Soil	36	1.85	139	0.003	4	2.57	0.007	0.06	<0.1	0.06	15.5	<0.1	0.06	8	1.0	0.3
1230344	Soil	21	1.75	105	0.001	2	1.65	0.002	0.05	<0.1	0.04	5.0	<0.1	<0.05	5	0.7	<0.2
1230345	Soil	20	1.82	61	0.001	3	1.54	0.003	0.07	<0.1	0.03	4.9	0.1	<0.05	4	<0.5	<0.2
1230346	Soil	19	2.03	74	0.001	4	1.47	0.003	0.07	<0.1	0.03	5.1	<0.1	<0.05	4	<0.5	<0.2
1230347	Soil	18	2.03	103	0.001	3	1.43	0.002	0.05	<0.1	0.04	4.4	<0.1	<0.05	4	<0.5	<0.2
1230348	Soil	24	1.19	303	0.002	2	2.00	0.005	0.09	<0.1	0.47	7.8	0.2	<0.05	6	0.8	<0.2
1230349	Soil	24	1.43	172	0.002	2	1.88	0.002	0.07	<0.1	0.06	5.7	<0.1	<0.05	5	0.7	<0.2
1230350	Soil	39	2.04	164	0.004	2	2.86	0.003	0.06	<0.1	0.09	8.4	<0.1	<0.05	9	0.7	<0.2
1230351	Soil	43	2.58	312	0.006	2	3.21	0.003	0.08	<0.1	0.10	11.2	<0.1	<0.05	10	0.8	<0.2
1230352	Soil	44	2.71	477	0.005	1	3.51	0.003	0.07	<0.1	0.09	18.2	<0.1	<0.05	10	1.0	<0.2
1230353	Soil	45	2.45	380	0.003	1	3.51	0.003	0.07	<0.1	0.13	20.1	0.1	<0.05	10	0.7	0.2
1230354	Soil	47	2.50	318	0.004	<1	3.36	0.004	0.07	<0.1	0.14	17.1	0.1	<0.05	10	0.9	0.3
1230355	Soil	45	2.42	492	0.004	1	3.29	0.004	0.06	<0.1	0.10	14.2	<0.1	<0.05	10	0.8	<0.2
1230356	Soil	38	1.85	227	0.005	1	2.83	0.005	0.08	<0.1	0.06	7.7	<0.1	<0.05	8	0.9	<0.2
1230357	Soil	34	1.35	328	0.005	1	2.40	0.005	0.07	<0.1	0.09	7.7	<0.1	0.05	7	1.7	<0.2
1230358	Soil	39	1.80	178	0.005	<1	2.79	0.004	0.05	<0.1	0.06	9.2	<0.1	<0.05	8	0.6	<0.2
1230359	Soil	45	2.34	150	0.005	<1	3.16	0.004	0.06	<0.1	0.05	11.3	<0.1	<0.05	9	0.7	<0.2
1230360	Soil	46	2.17	258	0.009	1	3.04	0.005	0.06	<0.1	0.05	11.5	<0.1	<0.05	10	0.8	0.3

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

		Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
		Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
		Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
		MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
1230361	Soil		2.0	192.3	25.7	78	0.1	47.7	48.2	1505	5.78	7.4	9.8	2.2	8	0.3	<0.1	0.2	68	0.23	0.088	15
1230362	Soil		1.0	371.0	15.7	62	0.3	33.4	30.0	922	3.85	7.7	18.7	0.9	37	0.2	0.5	0.2	50	1.42	0.106	14
1230363	Soil		0.7	362.6	27.9	91	0.3	53.0	56.1	2355	6.82	8.7	32.6	2.1	15	0.4	0.3	0.2	116	0.39	0.077	16
1230364	Soil		0.9	200.8	30.8	80	0.2	48.6	66.8	2329	6.39	10.3	9.1	1.7	10	0.4	0.4	0.2	91	0.19	0.139	14
1230365	Soil		0.9	295.0	20.1	111	0.2	72.0	65.9	2075	9.08	7.7	23.6	3.3	27	0.3	0.1	0.2	135	0.21	0.063	23
1230366	Soil		2.0	168.2	32.0	84	0.2	49.9	41.8	1479	5.86	17.8	12.0	1.6	109	0.4	0.7	0.2	73	0.45	0.114	16
1230367	Soil		1.9	164.6	20.9	79	0.2	44.6	39.3	1213	5.80	15.3	6.0	2.4	13	0.2	0.5	0.2	82	0.23	0.066	19
1230368	Soil		1.4	148.0	20.4	77	0.1	42.5	41.3	1408	5.74	17.7	3.2	1.5	18	0.2	0.5	0.1	93	0.42	0.124	16
1230369	Soil		1.8	210.6	21.5	87	0.2	48.9	47.1	1614	6.48	27.0	7.7	2.2	15	0.3	0.6	0.1	104	0.32	0.089	19
1230370	Soil		1.8	164.8	23.9	89	0.2	39.2	26.6	1169	4.77	13.3	7.9	1.6	17	0.4	0.6	0.2	71	0.35	0.114	16
1230371	Soil		1.9	292.1	29.8	161	0.3	84.8	62.9	5025	14.32	33.0	19.2	2.3	16	1.2	0.6	0.2	249	0.31	0.071	19
1230372	Soil		1.4	255.3	26.4	96	0.2	71.4	163.2	3808	8.03	14.3	4.3	3.0	14	0.7	0.5	0.2	116	0.23	0.067	21
1230373	Soil		0.6	264.4	19.7	101	0.1	63.5	110.5	3086	8.31	12.2	3.7	2.2	16	0.5	0.3	0.2	169	0.27	0.066	19
1230374	Soil		0.8	332.2	33.4	100	0.2	59.6	108.9	3761	8.45	21.5	32.4	2.4	14	0.4	0.3	0.2	134	0.26	0.070	18
1230375	Soil		13.9	426.1	63.9	98	0.2	91.2	138.3	2002	7.30	33.3	14.1	4.0	10	0.8	1.8	0.3	27	0.16	0.064	14
1230376	Soil		2.2	548.4	55.8	106	0.4	136.3	130.8	6450	8.19	16.9	48.3	1.8	19	1.6	0.6	0.2	89	0.24	0.112	23
1230377	Soil		35.9	668.0	91.0	111	0.4	143.9	204.3	3846	7.29	18.8	21.4	3.6	8	1.8	1.2	0.3	32	0.20	0.089	21
1230378	Soil		41.8	625.3	158.8	105	0.6	151.6	179.1	5136	13.16	42.2	20.6	3.7	6	1.5	2.0	0.3	37	0.06	0.070	11
1230379	Soil		1.0	221.3	22.9	85	<0.1	41.4	39.6	1286	5.42	20.4	5.4	3.5	12	0.4	0.7	0.2	59	0.27	0.055	18
1230380	Soil		1.0	335.2	27.9	93	0.2	48.9	69.4	2024	6.42	15.6	17.7	3.1	10	0.6	0.5	0.3	76	0.28	0.067	20
1230381	Soil		1.4	264.0	25.5	94	0.1	56.3	64.4	1728	5.95	8.7	8.9	2.0	15	0.7	0.5	0.3	81	0.41	0.085	18
1230382	Soil		1.5	213.2	22.2	91	0.1	53.2	58.5	1659	6.04	8.5	10.7	2.5	10	0.6	0.5	0.3	87	0.21	0.064	18
1230383	Soil		1.1	274.2	30.1	97	0.2	45.3	39.6	837	5.89	18.4	14.2	3.3	32	0.5	0.5	0.3	79	0.41	0.071	18
1230384	Soil		1.9	302.7	27.9	115	0.4	52.3	46.2	1459	7.36	32.5	17.9	3.7	20	0.5	0.8	0.3	89	0.39	0.087	17
1230385	Soil		1.8	222.7	24.9	113	0.2	55.9	67.6	1855	5.76	18.7	10.2	5.5	24	0.9	0.9	0.4	83	0.41	0.077	21
1230386	Soil		1.7	253.0	18.3	89	0.1	45.5	34.2	958	5.96	13.1	12.0	2.7	17	0.3	0.5	0.3	87	0.20	0.077	16
1230387	Soil		0.6	172.0	10.0	75	<0.1	44.1	25.3	570	5.70	3.3	6.0	2.0	15	0.3	0.3	0.3	87	0.19	0.061	15
1230388	Soil		1.3	166.0	17.4	76	<0.1	28.7	18.8	1018	4.00	9.1	7.4	1.0	87	0.4	0.7	0.3	68	0.54	0.135	13
1230389	Soil		2.3	167.8	24.4	89	0.2	42.1	35.3	1112	5.08	12.5	9.3	2.4	35	0.6	0.6	0.4	65	0.32	0.076	18
1230390	Soil		0.3	254.6	12.9	90	<0.1	58.1	41.6	1317	6.88	2.5	5.4	2.6	6	0.5	0.3	0.3	105	0.19	0.069	20

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

		Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
		Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
		Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
		MDL	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1230361	Soil		37	1.47	275	0.004	2	2.56	0.003	0.09	<0.1	0.06	6.1	<0.1	<0.05	8	0.6	<0.2
1230362	Soil		30	1.06	285	0.005	4	1.89	0.006	0.06	<0.1	0.13	6.9	<0.1	0.10	5	1.6	<0.2
1230363	Soil		60	2.41	277	0.007	2	3.23	0.004	0.07	<0.1	0.10	19.6	<0.1	<0.05	11	<0.5	0.2
1230364	Soil		46	1.62	272	0.006	1	2.88	0.004	0.07	<0.1	0.09	8.5	<0.1	0.06	9	0.7	<0.2
1230365	Soil		43	1.02	263	0.006	2	1.36	0.003	0.08	<0.1	0.04	15.7	<0.1	<0.05	5	<0.5	<0.2
1230366	Soil		41	1.35	137	0.011	4	2.51	0.007	0.07	<0.1	0.13	7.9	<0.1	<0.05	8	1.0	<0.2
1230367	Soil		42	1.48	205	0.011	3	2.47	0.004	0.06	<0.1	0.06	8.9	<0.1	<0.05	8	<0.5	<0.2
1230368	Soil		44	1.54	169	0.008	1	2.85	0.004	0.06	<0.1	0.03	8.5	<0.1	<0.05	8	<0.5	<0.2
1230369	Soil		49	1.69	124	0.007	3	2.83	0.005	0.07	<0.1	0.05	13.8	<0.1	<0.05	9	<0.5	<0.2
1230370	Soil		40	1.13	171	0.016	2	2.31	0.006	0.07	<0.1	0.07	7.1	<0.1	<0.05	7	0.8	<0.2
1230371	Soil		55	0.70	272	0.006	3	1.40	0.004	0.07	<0.1	0.28	27.0	0.2	<0.05	5	1.2	<0.2
1230372	Soil		54	2.43	134	0.004	3	3.33	0.004	0.07	<0.1	0.06	14.3	0.3	<0.05	11	0.6	0.2
1230373	Soil		70	2.93	117	0.006	2	3.83	0.005	0.05	<0.1	0.04	18.3	0.1	<0.05	14	0.6	0.3
1230374	Soil		67	2.77	294	0.005	3	3.43	0.004	0.07	<0.1	0.05	21.9	<0.1	<0.05	11	0.7	<0.2
1230375	Soil		21	0.96	107	0.002	2	1.78	0.009	0.09	<0.1	0.20	5.6	0.3	0.14	5	1.2	0.2
1230376	Soil		51	1.88	506	0.006	3	3.47	0.004	0.08	<0.1	0.22	19.6	0.3	<0.05	10	1.4	0.2
1230377	Soil		22	0.84	291	0.003	3	2.14	0.005	0.10	<0.1	0.16	10.9	0.3	0.11	4	1.6	<0.2
1230378	Soil		25	0.79	213	0.002	2	2.08	0.003	0.07	<0.1	0.55	13.9	0.4	0.26	5	2.0	<0.2
1230379	Soil		31	1.41	232	0.007	2	1.87	0.003	0.07	<0.1	0.04	7.8	<0.1	<0.05	6	<0.5	<0.2
1230380	Soil		42	1.75	202	0.007	3	2.33	0.003	0.08	<0.1	0.08	12.9	<0.1	<0.05	8	<0.5	<0.2
1230381	Soil		45	1.70	305	0.010	4	2.64	0.005	0.08	<0.1	0.08	9.9	<0.1	<0.05	9	<0.5	<0.2
1230382	Soil		44	1.81	205	0.010	2	2.64	0.004	0.07	<0.1	0.07	8.9	<0.1	<0.05	9	<0.5	<0.2
1230383	Soil		45	1.76	205	0.008	4	2.71	0.006	0.09	<0.1	0.11	14.7	0.1	<0.05	8	1.0	<0.2
1230384	Soil		52	1.92	279	0.004	4	3.13	0.005	0.14	<0.1	0.18	16.3	0.1	<0.05	9	1.1	<0.2
1230385	Soil		46	1.64	247	0.042	3	2.57	0.011	0.13	0.1	0.10	10.4	0.2	<0.05	8	<0.5	0.3
1230386	Soil		48	1.68	261	0.008	3	3.07	0.005	0.09	<0.1	0.07	9.2	0.1	<0.05	9	0.6	<0.2
1230387	Soil		46	2.02	102	0.005	3	2.95	0.004	0.06	<0.1	0.05	7.4	<0.1	<0.05	9	<0.5	<0.2
1230388	Soil		35	0.94	330	0.012	2	2.13	0.007	0.05	<0.1	0.05	5.4	<0.1	0.06	7	1.0	<0.2
1230389	Soil		38	1.47	226	0.012	3	2.32	0.005	0.07	<0.1	0.09	7.6	<0.1	<0.05	7	<0.5	<0.2
1230390	Soil		52	2.64	131	0.009	3	3.28	0.004	0.09	<0.1	0.08	9.3	<0.1	<0.05	11	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

		Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
		Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
		Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
		MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
1230391	Soil		1.5	150.3	20.9	85	<0.1	45.2	42.0	1204	5.70	6.0	7.8	2.8	9	0.5	0.6	0.4	69	0.22	0.061	19
1230392	Soil		1.2	162.6	21.1	94	0.1	50.5	46.5	1332	6.47	5.0	9.3	2.8	9	0.6	0.5	0.4	78	0.21	0.060	18
1230393	Soil		0.9	283.8	19.6	69	0.4	33.2	15.5	562	3.95	51.7	11.9	1.0	66	0.6	0.8	0.3	49	0.96	0.113	14
1230394	Soil		0.8	152.1	11.8	79	0.2	39.1	19.7	404	4.67	5.9	9.4	1.6	39	0.4	0.5	0.4	68	0.40	0.070	16
1230395	Soil		1.0	98.0	11.3	80	<0.1	33.9	15.8	368	4.08	6.9	3.2	1.6	15	0.4	0.6	0.4	65	0.22	0.058	13
1230396	Soil		0.7	146.9	15.2	79	0.1	47.0	31.9	1004	5.35	8.1	11.5	2.7	16	0.6	0.5	0.4	81	0.23	0.026	18
1230397	Soil		0.6	142.3	12.5	96	<0.1	48.5	28.4	812	6.38	4.5	3.4	2.4	4	0.3	0.3	0.3	105	0.07	0.076	15
1230398	Soil		1.5	130.6	20.4	107	<0.1	40.6	24.0	652	4.82	12.3	5.4	2.4	17	0.5	0.8	0.3	73	0.28	0.071	16
1230399	Soil		1.1	175.5	18.4	91	<0.1	45.7	30.7	974	5.59	6.0	9.2	2.6	9	0.4	0.4	0.3	82	0.18	0.079	17
1230400	Soil		5.0	178.6	35.5	82	0.2	45.2	48.4	1334	5.29	17.6	9.7	4.9	11	0.3	0.7	0.4	48	0.62	0.068	14
1230401	Soil		1.2	164.8	24.4	91	0.1	40.3	30.0	944	5.35	27.2	8.3	3.7	16	0.2	0.8	0.3	57	0.60	0.061	18
1230402	Soil		1.5	170.6	27.4	86	0.2	43.4	34.6	1102	5.58	29.1	9.3	3.8	12	0.2	0.7	0.3	54	0.44	0.058	19
1230403	Soil		0.8	233.5	23.7	93	0.2	54.0	48.3	1898	6.64	19.0	18.9	3.4	10	0.4	0.5	0.3	78	0.21	0.083	20
1230404	Soil		1.2	96.0	22.6	82	<0.1	38.5	41.0	956	6.00	8.5	2.7	2.3	8	0.6	0.6	0.3	83	0.21	0.063	14
1230405	Soil		0.5	177.6	15.1	82	0.1	47.4	33.8	1143	5.97	4.7	9.1	3.3	8	0.3	0.3	0.3	83	0.22	0.076	21
1230406	Soil		0.9	71.1	15.0	89	<0.1	41.4	24.0	526	6.06	9.6	2.4	2.5	12	0.1	0.3	0.3	82	0.24	0.069	15
1230407	Soil		1.0	400.2	17.8	108	0.3	45.0	27.9	730	5.69	18.9	21.7	1.4	121	0.4	0.5	0.3	83	1.02	0.098	15
1230408	Soil		0.7	301.2	15.1	93	0.2	44.2	31.6	982	5.60	17.5	15.6	1.1	31	0.2	0.4	0.3	83	1.13	0.113	13
1230409	Soil		1.8	175.7	26.5	81	0.2	40.5	42.1	1313	5.02	29.6	17.1	1.2	34	0.3	1.0	0.2	56	1.18	0.095	10
1230410	Soil		2.1	199.8	36.0	111	0.2	55.5	54.6	1431	6.80	42.9	20.4	3.5	18	0.3	0.9	0.3	69	0.70	0.061	15
1230411	Soil		1.0	171.3	18.5	82	<0.1	44.4	35.3	1115	5.74	9.6	4.6	2.6	10	0.2	0.5	0.3	75	0.27	0.069	16
1230412	Soil		0.8	93.4	16.7	82	<0.1	36.5	29.3	1002	5.11	9.6	3.5	1.9	14	0.3	0.4	0.3	72	0.66	0.078	13
1230413	Soil		1.8	119.5	35.8	105	0.2	44.7	42.7	1405	5.56	38.2	3.9	4.4	19	0.4	1.5	0.4	37	2.32	0.070	16
1230414	Soil		2.7	159.0	29.6	94	0.2	49.9	48.7	1081	6.45	20.9	11.1	3.3	13	0.2	1.0	0.3	63	0.91	0.067	18
1230415	Soil		1.0	299.2	34.9	95	0.3	55.8	84.7	2401	6.67	6.8	59.4	3.6	12	0.6	0.4	0.4	66	0.40	0.081	20
1230416	Soil		1.5	250.5	23.8	102	0.2	56.5	68.6	1852	7.10	7.5	18.9	3.3	9	0.4	0.4	0.3	84	0.26	0.074	20
1230417	Soil		0.5	150.3	45.6	86	0.1	44.6	35.2	628	5.19	3.2	4.3	5.9	8	0.2	0.2	0.3	39	0.17	0.094	45
1230418	Soil		4.1	93.8	20.8	72	0.1	49.4	25.5	728	6.12	29.2	1.1	3.6	113	0.3	0.8	0.4	14	2.77	0.064	7
1230419	Soil		2.9	73.6	31.5	42	0.2	16.8	6.6	160	8.20	30.8	5.0	3.0	93	0.1	1.1	0.4	24	0.33	0.037	8
1230420	Soil		2.7	147.1	31.1	63	0.1	38.8	16.5	209	8.82	24.6	0.7	4.7	81	0.2	0.9	0.5	31	0.09	0.041	9

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

		Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
		Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
		Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
		MDL	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1230391	Soil		39	1.71	180	0.010	3	2.57	0.004	0.07	<0.1	0.08	7.0	<0.1	<0.05	8	<0.5	<0.2
1230392	Soil		44	1.95	180	0.008	2	2.88	0.004	0.06	<0.1	0.08	7.8	<0.1	<0.05	9	<0.5	<0.2
1230393	Soil		36	1.14	109	0.009	6	2.05	0.007	0.06	<0.1	0.23	7.0	<0.1	0.10	5	2.1	<0.2
1230394	Soil		41	1.55	261	0.007	2	2.47	0.004	0.05	<0.1	0.12	7.8	<0.1	<0.05	7	<0.5	<0.2
1230395	Soil		35	1.22	148	0.011	2	2.35	0.004	0.05	0.1	0.04	3.6	<0.1	<0.05	7	<0.5	<0.2
1230396	Soil		46	2.00	205	0.012	3	2.80	0.005	0.07	<0.1	0.09	7.6	<0.1	<0.05	8	<0.5	<0.2
1230397	Soil		54	2.17	114	0.008	2	3.75	0.003	0.07	<0.1	0.06	6.7	<0.1	<0.05	11	<0.5	<0.2
1230398	Soil		40	1.22	201	0.016	2	2.68	0.007	0.07	0.1	0.03	4.7	0.1	<0.05	8	0.6	<0.2
1230399	Soil		45	1.77	156	0.010	2	3.11	0.004	0.07	<0.1	0.06	5.8	<0.1	<0.05	10	<0.5	<0.2
1230400	Soil		26	1.78	151	0.007	3	2.03	0.003	0.08	<0.1	0.08	6.0	<0.1	0.14	6	<0.5	<0.2
1230401	Soil		32	1.57	266	0.003	4	2.34	0.004	0.08	<0.1	0.08	7.5	<0.1	<0.05	7	0.7	<0.2
1230402	Soil		30	1.65	134	0.004	3	2.39	0.004	0.08	<0.1	0.05	7.7	<0.1	<0.05	7	0.7	<0.2
1230403	Soil		43	1.99	261	0.005	4	3.13	0.004	0.08	<0.1	0.07	9.9	<0.1	<0.05	9	0.8	<0.2
1230404	Soil		43	1.57	110	0.006	3	2.55	0.006	0.07	<0.1	0.05	5.5	<0.1	<0.05	9	<0.5	<0.2
1230405	Soil		44	2.10	91	0.011	2	2.88	0.005	0.06	<0.1	0.09	8.0	<0.1	<0.05	9	<0.5	0.2
1230406	Soil		42	1.71	155	0.004	3	2.73	0.003	0.07	<0.1	0.03	5.9	<0.1	<0.05	9	<0.5	<0.2
1230407	Soil		48	1.88	399	0.006	6	2.86	0.005	0.11	<0.1	0.24	14.9	<0.1	0.07	9	1.2	<0.2
1230408	Soil		52	1.83	347	0.006	4	2.94	0.005	0.10	<0.1	0.22	12.8	<0.1	0.08	9	1.7	<0.2
1230409	Soil		33	1.61	268	0.003	4	2.40	0.004	0.09	<0.1	0.11	5.7	<0.1	0.10	7	2.0	<0.2
1230410	Soil		42	2.16	232	0.003	3	3.06	0.003	0.12	<0.1	0.13	10.1	0.1	<0.05	9	1.4	<0.2
1230411	Soil		39	1.75	122	0.004	3	2.60	0.004	0.07	<0.1	0.08	8.0	<0.1	<0.05	8	0.6	<0.2
1230412	Soil		36	1.53	140	0.005	3	2.41	0.004	0.07	<0.1	0.04	7.3	<0.1	<0.05	7	0.6	<0.2
1230413	Soil		22	2.18	82	0.004	5	1.66	0.005	0.08	<0.1	0.05	7.4	0.1	0.12	5	0.9	<0.2
1230414	Soil		36	1.98	77	0.006	5	2.50	0.004	0.08	<0.1	0.04	8.1	<0.1	0.06	7	0.8	<0.2
1230415	Soil		40	2.02	680	0.006	3	3.02	0.004	0.10	<0.1	0.16	13.6	0.1	0.06	9	0.9	0.3
1230416	Soil		47	2.19	175	0.006	3	3.33	0.003	0.10	<0.1	0.12	12.4	<0.1	<0.05	10	0.8	<0.2
1230417	Soil		29	1.60	85	0.009	2	2.43	0.003	0.07	<0.1	0.03	2.8	<0.1	<0.05	7	<0.5	0.4
1230418	Soil		8	0.75	47	0.002	6	0.44	0.015	0.13	<0.1	1.17	7.7	0.4	0.25	1	1.3	<0.2
1230419	Soil		13	0.23	69	0.002	6	0.55	0.018	0.21	<0.1	2.19	5.7	0.7	0.42	3	1.9	0.2
1230420	Soil		25	0.33	68	0.002	4	1.20	0.007	0.16	<0.1	2.39	7.6	0.7	0.23	4	2.0	0.3

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

	Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
1231551	Soil	2.0	97.8	33.6	75	0.2	34.1	28.3	1212	4.53	29.2	5.2	5.7	9	0.4	1.2	0.4	28	0.62	0.055	17
1231552	Soil	3.3	120.7	21.8	86	0.2	32.5	27.5	1760	4.17	9.7	6.8	0.9	46	0.7	0.6	0.3	62	0.98	0.130	15
1231553	Soil	2.2	159.2	27.9	111	0.2	54.5	48.6	3140	6.91	34.4	6.3	1.5	22	0.8	0.8	0.3	108	0.59	0.147	21
1231554	Soil	2.2	149.9	37.3	91	0.2	50.8	50.8	1412	6.74	29.2	4.3	5.1	10	0.5	1.2	0.4	52	0.22	0.068	23
1231555	Soil	1.7	156.3	40.7	92	0.2	45.9	44.8	1767	6.67	27.3	7.2	4.2	10	0.5	1.1	0.4	53	0.23	0.072	23
1231556	Soil	1.6	170.2	32.5	94	0.2	51.5	44.3	1162	6.56	37.0	9.7	3.4	12	0.4	1.0	0.3	75	0.42	0.057	19
1231557	Soil	1.9	132.7	31.4	91	0.2	51.1	38.2	1478	6.45	25.8	5.3	3.7	14	0.4	1.0	0.3	52	1.35	0.057	10
1231558	Soil	1.6	193.2	27.4	98	0.1	55.0	61.2	1380	7.11	19.2	7.5	3.1	15	0.4	0.6	0.3	93	0.45	0.080	21
1231559	Soil	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.
1231560	Soil	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.
1231561	Soil	2.6	199.0	41.4	107	0.4	53.4	52.2	1737	7.12	44.5	10.0	4.1	19	0.5	1.2	0.4	70	0.44	0.069	21
1231562	Soil	2.1	127.1	36.0	110	0.3	51.0	37.7	1200	6.84	34.6	5.3	5.3	11	0.4	1.2	0.4	40	0.24	0.059	26
1231563	Soil	1.5	91.6	26.9	84	0.2	38.3	29.8	875	5.40	25.7	4.0	3.2	19	0.3	0.8	0.3	36	0.39	0.049	17
1231564	Soil	2.0	178.6	47.5	106	0.4	52.7	60.7	1953	6.95	37.3	9.5	4.5	15	0.6	1.2	0.4	55	0.42	0.067	20
1231565	Soil	0.9	95.6	19.8	76	0.2	31.9	21.3	600	4.37	17.4	6.7	1.4	46	0.3	0.6	0.3	44	0.76	0.083	10
1231566	Soil	1.0	230.3	20.1	81	0.2	40.8	40.4	1139	4.71	19.5	13.9	2.9	25	0.3	0.8	0.3	60	0.28	0.062	15
1231567	Soil	0.6	165.5	16.5	80	<0.1	48.3	38.5	912	5.52	21.8	3.9	2.7	46	0.4	1.2	0.3	70	3.75	0.050	13
1231568	Soil	1.1	323.9	50.8	105	0.2	54.9	78.6	3407	7.90	38.8	31.3	2.4	11	0.7	1.8	0.3	105	0.29	0.058	17
1231569	Soil	1.1	59.6	14.5	64	<0.1	25.5	15.1	556	3.87	10.7	2.7	0.4	18	0.2	0.7	0.3	64	0.56	0.097	10
1231570	Soil	1.5	158.1	31.5	79	0.3	38.8	31.0	947	5.53	34.3	11.4	1.3	39	0.3	1.3	0.2	74	0.86	0.095	12
1231571	Soil	1.5	75.7	21.8	68	<0.1	30.0	19.4	631	4.63	26.6	3.3	1.7	15	0.3	1.0	0.3	52	0.49	0.090	12
1231572	Soil	1.0	101.9	15.3	87	<0.1	37.2	20.5	401	4.85	16.7	5.4	2.2	17	0.3	0.6	0.3	61	0.36	0.080	16
1231573	Soil	0.9	75.4	14.0	70	<0.1	29.9	21.0	722	4.30	13.4	2.7	1.2	6	0.2	0.7	0.2	57	0.11	0.088	12
1231574	Soil	1.1	117.4	31.9	73	0.3	32.8	38.8	1244	4.47	33.2	11.3	1.8	42	0.3	1.0	0.3	56	0.78	0.102	12
1231575	Soil	1.5	164.7	27.0	99	0.3	39.5	37.1	1162	5.17	28.5	9.1	2.0	30	0.5	1.0	0.3	64	0.52	0.089	16
1231576	Soil	1.0	88.0	14.8	93	0.1	36.9	22.7	999	4.70	11.3	3.3	1.5	18	0.4	0.6	0.3	72	0.51	0.111	14
1231577	Soil	1.3	149.2	26.6	74	0.2	34.9	40.6	1584	4.82	32.7	10.4	1.5	20	0.3	0.9	0.3	77	0.38	0.124	17
1231578	Soil	0.9	75.0	14.9	77	<0.1	36.5	25.3	933	5.28	11.3	2.5	1.9	14	0.2	0.5	0.3	74	0.24	0.050	14
1231579	Soil	1.1	59.5	13.7	63	<0.1	27.3	16.1	478	4.07	10.1	2.0	1.8	10	0.3	0.7	0.3	59	0.17	0.084	13
1231580	Soil	1.2	161.4	19.6	85	<0.1	52.2	40.2	975	4.91	18.1	6.2	3.4	13	0.3	0.8	0.3	68	0.22	0.051	18

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

	Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1231551	Soil	18	1.14	80	0.003	4	1.34	0.003	0.08	<0.1	0.08	6.1	<0.1	0.09	4	<0.5	<0.2
1231552	Soil	37	1.05	245	0.014	4	2.14	0.007	0.07	<0.1	0.12	5.2	0.1	0.12	6	2.9	0.3
1231553	Soil	56	1.68	145	0.011	5	3.18	0.006	0.09	<0.1	0.08	13.6	0.1	0.09	10	1.1	<0.2
1231554	Soil	27	1.18	64	0.005	4	1.92	0.006	0.09	<0.1	0.13	8.4	0.2	0.10	6	1.2	<0.2
1231555	Soil	27	0.97	147	0.006	4	1.69	0.005	0.09	<0.1	0.12	11.1	0.2	<0.05	5	0.9	0.2
1231556	Soil	38	1.48	128	0.004	4	2.16	0.004	0.09	<0.1	0.13	10.4	0.2	<0.05	7	1.0	<0.2
1231557	Soil	34	1.52	110	0.007	3	1.50	0.004	0.09	<0.1	0.15	8.8	0.1	0.60	5	1.3	<0.2
1231558	Soil	43	1.84	208	0.004	6	2.87	0.004	0.09	<0.1	0.05	10.2	<0.1	<0.05	9	0.6	<0.2
1231559	Soil	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.
1231560	Soil	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.	L.N.R.
1231561	Soil	34	1.20	213	0.003	3	2.39	0.004	0.11	<0.1	0.14	13.5	0.2	<0.05	7	1.0	<0.2
1231562	Soil	25	0.80	52	0.003	5	1.54	0.006	0.10	<0.1	0.21	8.5	0.3	<0.05	4	0.9	<0.2
1231563	Soil	24	0.73	97	0.002	5	1.53	0.005	0.10	<0.1	0.15	6.8	0.2	0.05	4	1.8	<0.2
1231564	Soil	30	1.18	181	0.003	3	2.08	0.006	0.09	<0.1	0.32	11.4	0.4	<0.05	6	0.8	<0.2
1231565	Soil	29	1.13	303	0.002	5	1.90	0.008	0.09	<0.1	0.12	6.4	0.2	0.10	6	2.5	<0.2
1231566	Soil	34	1.39	156	0.012	2	2.06	0.006	0.06	<0.1	0.09	7.9	0.1	<0.05	6	<0.5	<0.2
1231567	Soil	34	1.83	80	0.006	4	2.14	0.004	0.12	<0.1	0.11	8.3	<0.1	<0.05	7	<0.5	<0.2
1231568	Soil	49	2.25	258	0.002	1	2.98	0.003	0.08	<0.1	0.19	18.3	0.1	<0.05	10	0.8	<0.2
1231569	Soil	28	0.80	304	0.007	<1	1.83	0.006	0.05	<0.1	0.03	1.7	0.1	<0.05	7	<0.5	<0.2
1231570	Soil	38	1.25	278	0.002	2	2.03	0.005	0.08	<0.1	0.20	9.2	0.1	<0.05	7	1.1	<0.2
1231571	Soil	28	1.05	127	0.002	<1	1.84	0.004	0.06	<0.1	0.05	5.6	0.1	<0.05	6	<0.5	<0.2
1231572	Soil	34	1.39	161	0.002	2	2.34	0.004	0.07	<0.1	0.10	8.0	0.1	<0.05	7	0.6	<0.2
1231573	Soil	30	1.09	65	0.005	1	1.88	0.004	0.06	<0.1	0.04	3.3	<0.1	<0.05	6	<0.5	<0.2
1231574	Soil	30	1.09	261	0.003	3	2.00	0.006	0.08	<0.1	0.15	9.2	0.2	0.06	6	1.0	<0.2
1231575	Soil	38	1.36	256	0.004	2	2.26	0.007	0.08	<0.1	0.16	9.3	0.1	<0.05	7	1.2	<0.2
1231576	Soil	40	1.38	297	0.010	<1	2.47	0.007	0.08	<0.1	0.05	5.3	0.1	<0.05	8	0.5	<0.2
1231577	Soil	38	1.16	258	0.010	2	2.45	0.008	0.06	<0.1	0.08	9.4	0.1	<0.05	8	0.6	<0.2
1231578	Soil	37	1.55	124	0.007	<1	2.27	0.004	0.05	<0.1	0.04	4.4	<0.1	<0.05	8	<0.5	<0.2
1231579	Soil	30	0.95	78	0.012	<1	1.91	0.005	0.05	0.1	0.02	2.9	0.2	<0.05	6	<0.5	<0.2
1231580	Soil	37	1.42	120	0.012	1	2.52	0.005	0.07	<0.1	0.07	5.9	0.1	<0.05	7	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

		Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
		Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
		Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
		MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
1231581	Soil		1.1	135.3	19.2	82	0.2	36.4	26.0	689	4.30	17.4	8.0	3.0	21	0.4	0.8	0.2	65	0.36	0.087	18
1231582	Soil		1.4	95.0	23.0	83	<0.1	46.5	39.5	609	4.60	18.6	3.1	3.1	9	0.5	0.9	0.3	60	0.09	0.046	13
1231583	Soil		1.6	119.7	15.9	75	0.1	37.3	25.1	646	4.89	23.4	4.6	2.1	45	0.3	0.6	0.2	51	0.63	0.080	13
1231584	Soil		0.9	62.1	19.7	72	0.1	30.8	21.4	979	4.30	16.6	1.4	2.9	40	0.1	0.4	0.3	36	0.65	0.089	12
1231585	Soil		0.6	51.4	13.9	70	<0.1	26.3	15.3	419	4.89	12.5	0.6	4.1	4	0.2	0.4	0.3	44	0.02	0.038	20
1231586	Soil		1.8	69.8	34.8	97	0.2	33.7	25.2	844	4.35	67.7	2.3	4.4	6	1.2	1.9	0.3	21	0.14	0.046	20
1231587	Soil		1.9	77.0	34.0	94	0.2	33.2	26.5	851	4.17	65.0	2.8	3.1	9	1.0	1.8	0.3	22	0.33	0.058	16
1231588	Soil		1.8	96.1	32.6	84	0.2	34.2	43.8	1427	4.71	54.9	2.6	3.0	12	0.5	1.6	0.3	38	0.31	0.075	18
1231589	Soil		1.0	219.6	30.7	95	0.3	52.7	68.8	3345	5.96	59.2	4.4	2.3	22	0.8	0.9	0.2	90	0.41	0.121	26
1231590	Soil		1.0	174.1	23.4	92	0.2	49.3	73.3	2845	5.87	37.0	2.8	2.6	13	0.6	0.6	0.2	120	0.18	0.091	23
1231591	Soil		0.9	216.6	21.8	109	0.2	56.7	70.6	3025	6.30	65.7	3.5	3.0	21	1.1	0.7	0.3	104	0.41	0.071	25
1231592	Soil		0.8	244.9	29.2	101	0.3	56.3	66.6	3027	5.79	77.7	4.1	2.7	22	0.9	0.7	0.3	80	0.54	0.084	28
1231593	Soil		0.7	236.7	19.1	100	0.1	57.3	65.9	2553	6.78	41.5	3.8	2.3	22	1.1	0.5	0.2	118	0.64	0.068	21
1231594	Soil		1.2	343.5	28.2	82	0.2	41.8	54.1	3395	5.47	44.1	5.1	1.0	44	1.0	1.3	0.2	91	0.93	0.180	22
1231595	Soil		1.1	178.6	47.8	100	0.2	50.5	71.1	2893	6.12	49.8	3.2	2.8	15	1.6	1.6	0.2	102	0.37	0.075	24
1231596	Soil		1.1	156.3	26.3	73	0.2	39.8	61.6	2739	4.70	24.8	3.3	1.2	27	1.1	0.9	0.2	71	1.03	0.140	16
1231597	Soil		1.2	108.1	20.0	76	0.2	31.3	38.1	1923	4.27	17.5	2.7	1.0	34	0.5	0.8	0.2	64	0.97	0.154	18
1231598	Soil		2.5	104.7	54.7	103	0.2	53.3	43.2	1333	6.01	61.6	4.6	3.7	9	1.5	2.3	0.3	38	0.21	0.056	23
1231599	Soil		2.6	106.2	45.9	97	0.4	43.5	32.8	1164	6.43	24.4	10.6	3.2	9	0.5	1.6	0.4	27	0.22	0.073	18
1231600	Soil		1.8	68.6	32.4	97	0.2	32.2	21.1	670	6.08	32.7	4.4	3.0	10	0.8	1.6	0.3	30	0.18	0.090	14
1231601	Soil		1.9	79.3	32.5	94	0.3	38.5	27.5	1224	6.15	43.2	6.0	3.0	9	0.4	0.9	0.3	26	0.20	0.079	16
1231602	Soil		2.8	80.2	35.1	93	0.3	41.2	31.9	1918	5.41	20.9	4.1	2.8	10	0.6	0.8	0.3	30	0.23	0.094	17
1231603	Soil		1.1	86.0	27.6	82	0.3	39.5	36.6	1488	4.81	24.1	3.4	2.5	10	0.6	0.7	0.3	40	0.20	0.098	18
1231604	Soil		1.3	105.8	19.9	85	0.2	39.2	43.3	1942	5.05	25.3	2.8	2.2	13	0.4	0.6	0.2	71	0.22	0.109	19
1231605	Soil		1.2	106.8	24.1	82	0.1	35.8	52.9	2957	5.58	17.0	3.8	1.2	8	0.7	0.8	0.3	94	0.13	0.151	17
1231606	Soil		1.6	73.2	16.3	68	<0.1	25.6	25.3	1277	3.99	13.4	5.0	0.5	8	0.5	0.8	0.3	74	0.12	0.162	12
1231607	Soil		1.1	65.9	15.2	76	<0.1	26.5	21.2	1034	4.52	9.7	2.6	0.5	8	0.5	0.5	0.3	96	0.12	0.128	11
1231608	Soil		1.1	72.9	12.5	69	<0.1	29.7	17.0	565	4.03	16.3	4.0	0.8	7	0.2	1.1	0.2	75	0.07	0.073	13
1231609	Soil		1.3	195.5	49.1	210	0.4	74.2	52.8	4515	14.05	82.1	7.6	1.0	14	5.0	2.3	0.2	275	0.83	0.083	16
1231610	Soil		1.5	118.4	33.8	97	0.2	42.9	47.3	1282	5.49	48.7	3.8	1.6	6	1.4	1.9	0.3	63	0.04	0.084	22

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

	Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1231581	Soil	36	1.16	155	0.021	2	2.03	0.008	0.07	0.1	0.09	7.2	0.1	<0.05	6	0.5	<0.2
1231582	Soil	39	0.93	117	0.018	2	2.78	0.007	0.07	0.1	0.05	4.2	0.2	<0.05	6	<0.5	<0.2
1231583	Soil	29	1.04	113	0.004	2	1.71	0.006	0.07	<0.1	0.24	7.1	0.1	0.07	6	0.8	<0.2
1231584	Soil	30	0.83	87	0.002	2	2.18	0.006	0.10	<0.1	0.08	4.9	0.1	0.06	6	<0.5	<0.2
1231585	Soil	29	0.80	43	0.003	1	1.95	0.003	0.06	<0.1	0.02	3.0	<0.1	<0.05	6	<0.5	<0.2
1231586	Soil	14	0.48	45	0.002	2	0.83	0.003	0.09	<0.1	0.11	4.7	0.1	<0.05	3	<0.5	<0.2
1231587	Soil	15	0.47	56	0.002	2	0.86	0.005	0.09	<0.1	0.10	4.8	0.1	<0.05	3	0.5	<0.2
1231588	Soil	21	0.73	71	0.003	2	1.33	0.006	0.09	<0.1	0.08	8.3	0.2	<0.05	4	0.5	<0.2
1231589	Soil	43	1.58	156	0.008	2	2.53	0.007	0.08	<0.1	0.07	18.4	0.3	<0.05	8	1.1	<0.2
1231590	Soil	54	2.03	104	0.013	2	2.96	0.013	0.07	<0.1	0.06	17.0	0.2	<0.05	10	0.7	<0.2
1231591	Soil	48	1.97	118	0.005	2	2.75	0.005	0.07	<0.1	0.05	14.7	0.2	<0.05	10	0.7	<0.2
1231592	Soil	43	1.65	201	0.003	3	2.60	0.006	0.09	<0.1	0.05	14.0	0.2	<0.05	9	1.0	0.2
1231593	Soil	56	2.68	126	0.003	4	3.39	0.006	0.06	<0.1	0.03	12.7	0.1	<0.05	12	0.7	<0.2
1231594	Soil	42	1.68	237	0.008	6	2.68	0.010	0.08	<0.1	0.06	12.8	0.2	0.10	8	1.5	<0.2
1231595	Soil	47	1.76	122	0.007	2	2.43	0.007	0.07	<0.1	0.07	17.5	0.2	<0.05	8	0.7	<0.2
1231596	Soil	36	1.44	112	0.007	4	2.17	0.008	0.12	<0.1	0.07	10.5	0.2	0.09	7	0.7	<0.2
1231597	Soil	34	0.82	127	0.010	4	1.93	0.009	0.08	<0.1	0.08	8.4	0.2	0.10	7	1.1	<0.2
1231598	Soil	24	0.69	85	0.002	3	1.27	0.006	0.09	<0.1	0.14	7.2	0.4	<0.05	4	0.7	<0.2
1231599	Soil	21	0.65	73	0.004	2	1.40	0.004	0.08	<0.1	0.30	7.6	0.4	<0.05	4	0.9	<0.2
1231600	Soil	20	0.51	87	0.003	2	1.31	0.015	0.09	<0.1	0.35	5.8	0.5	0.10	4	0.7	<0.2
1231601	Soil	18	0.58	65	0.003	5	1.41	0.011	0.09	<0.1	0.15	7.9	0.4	0.10	4	0.8	<0.2
1231602	Soil	22	0.65	81	0.004	6	1.42	0.006	0.09	<0.1	0.14	7.4	0.3	0.07	4	<0.5	<0.2
1231603	Soil	26	0.71	93	0.008	4	1.65	0.005	0.08	<0.1	0.08	7.7	0.2	<0.05	5	0.5	<0.2
1231604	Soil	34	1.03	105	0.013	3	2.08	0.007	0.08	<0.1	0.05	12.6	0.1	<0.05	7	<0.5	<0.2
1231605	Soil	42	1.41	127	0.011	4	2.73	0.008	0.07	<0.1	0.07	8.9	0.1	0.05	8	1.0	<0.2
1231606	Soil	31	0.73	95	0.008	3	1.81	0.005	0.06	<0.1	0.08	3.3	0.1	0.06	6	0.5	<0.2
1231607	Soil	39	0.91	94	0.009	2	2.29	0.005	0.06	<0.1	0.03	3.1	<0.1	0.06	8	0.6	<0.2
1231608	Soil	33	0.84	83	0.009	3	1.99	0.004	0.05	0.1	0.03	4.2	0.1	<0.05	6	0.6	<0.2
1231609	Soil	49	0.64	214	0.005	4	1.04	0.004	0.05	<0.1	0.27	33.0	0.3	<0.05	4	1.8	<0.2
1231610	Soil	26	0.46	65	0.005	3	1.32	0.003	0.10	<0.1	0.05	5.6	0.1	<0.05	5	0.7	0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

	Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
1231611	Soil	0.9	88.0	18.8	82	<0.1	41.3	25.5	641	6.43	47.6	3.0	2.6	9	0.3	0.6	0.4	31	0.05	0.023	19
1231612	Soil	0.9	169.6	30.6	78	0.2	32.1	27.7	2082	5.54	17.5	11.2	1.6	16	0.6	0.5	0.3	96	0.39	0.108	14
1231613	Soil	1.1	63.8	19.3	78	<0.1	21.5	22.4	2101	4.86	9.1	1.7	1.0	15	0.5	0.5	0.2	87	0.39	0.070	10
1231614	Soil	1.0	119.7	18.1	66	0.1	27.5	33.0	1822	5.22	7.8	3.6	0.5	25	0.5	0.4	0.2	78	0.60	0.118	10
1231615	Soil	0.9	110.8	19.3	77	0.3	34.7	23.0	2137	3.77	8.5	7.1	2.9	13	0.6	0.6	0.2	58	0.23	0.060	16
1231616	Soil	1.4	129.6	26.5	68	0.2	32.9	35.1	1635	3.68	14.6	4.2	2.0	8	0.4	0.6	0.2	53	0.14	0.072	12
1231617	Soil	0.7	109.0	19.4	61	<0.1	29.9	28.6	1071	3.95	6.6	4.6	0.8	8	0.2	0.4	0.2	52	0.14	0.075	11
1231618	Soil	1.2	95.0	16.6	89	0.2	34.7	24.0	937	4.45	13.5	6.4	1.8	16	0.5	0.5	0.2	58	0.34	0.074	15
1231619	Soil	0.7	65.3	11.8	65	<0.1	25.6	18.3	625	2.89	7.6	3.4	1.9	11	0.2	0.4	0.2	45	0.19	0.067	13
1231620	Soil	1.1	79.0	15.9	87	0.1	29.7	17.9	624	3.70	11.5	3.6	1.6	13	0.5	0.5	0.2	50	0.24	0.078	14
1231621	Soil	0.9	154.3	21.9	78	0.2	38.5	34.8	1457	4.65	10.7	8.5	3.0	10	0.5	0.5	0.2	60	0.22	0.070	18
1231622	Soil	0.9	102.7	21.0	77	0.1	35.1	32.6	1514	3.95	10.1	3.7	1.9	10	0.6	0.5	0.2	50	0.19	0.078	16
1231623	Soil	1.5	87.6	45.3	137	<0.1	38.5	30.4	617	4.11	32.9	2.0	3.3	5	1.8	1.5	0.3	32	0.02	0.051	20
1231624	Soil	1.2	73.3	17.9	84	<0.1	29.3	48.5	2076	3.86	14.2	1.5	0.9	9	0.6	0.6	0.2	64	0.19	0.103	12
1231625	Soil	1.1	45.0	10.9	70	<0.1	23.9	12.3	459	2.72	16.1	1.1	1.2	10	0.2	0.6	0.2	47	0.13	0.064	12
1231626	Soil	1.1	48.1	11.3	64	<0.1	22.2	14.6	852	3.51	8.0	2.7	0.5	11	0.2	0.6	0.2	72	0.21	0.073	9
1231627	Soil	1.0	59.7	20.5	73	0.1	28.2	17.0	435	3.60	26.2	6.6	2.8	14	0.5	0.7	0.2	43	0.21	0.081	16
1231628	Soil	0.7	150.0	23.8	96	<0.1	50.2	32.6	2472	5.83	52.3	4.2	4.3	10	0.9	0.3	0.3	62	0.20	0.053	26
1231629	Soil	1.3	42.4	14.5	74	<0.1	28.0	14.9	831	3.24	13.6	3.3	1.4	11	0.2	0.8	0.2	48	0.15	0.068	13
1231630	Soil	1.0	71.6	17.6	75	0.1	25.1	24.2	1155	4.38	18.8	4.0	0.5	5	0.6	0.5	0.2	82	0.07	0.152	9
1231631	Soil	1.3	84.6	22.8	73	<0.1	28.3	48.7	2766	4.22	17.4	4.3	0.6	14	0.9	0.6	0.2	79	0.35	0.159	11
1231632	Soil	0.6	168.3	465.0	279	0.3	33.5	31.4	1961	7.58	80.4	2.7	1.4	26	10.7	8.3	0.2	58	0.76	0.024	8
1231633	Soil	5.1	48.4	41.4	97	0.1	26.0	15.9	1479	4.27	43.8	0.7	1.5	7	0.9	1.5	0.3	33	0.15	0.081	14
1231634	Soil	1.4	78.9	22.0	71	0.2	27.1	31.9	1792	3.78	23.1	1.5	1.1	14	0.7	0.7	0.2	58	0.32	0.093	12
1231635	Soil	2.4	57.9	15.3	73	<0.1	28.5	15.8	842	4.01	35.1	2.2	1.8	8	0.3	0.9	0.2	47	0.11	0.053	14
1231636	Soil	1.1	59.0	14.4	91	<0.1	25.2	25.0	1713	4.34	7.8	1.6	0.7	11	0.5	0.5	0.3	85	0.24	0.137	10
1231637	Soil	7.7	52.8	18.4	93	0.2	25.2	14.6	1698	5.67	18.6	4.5	1.7	18	0.6	1.1	0.3	34	0.38	0.077	15
1231638	Soil	1.3	74.4	11.5	68	<0.1	22.8	16.7	721	3.89	13.6	1.5	0.3	7	0.2	0.6	0.3	68	0.08	0.111	12
1231639	Soil	1.0	82.6	15.7	84	<0.1	35.8	24.9	1001	4.94	21.1	4.6	0.9	15	0.3	0.7	0.3	67	0.32	0.116	11
1231640	Soil	1.3	44.1	11.1	64	<0.1	24.9	15.7	547	2.96	11.1	2.7	1.4	10	0.2	0.9	0.2	56	0.12	0.043	10

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

	Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1231611	Soil	17	0.09	76	<0.001	3	0.62	0.001	0.08	<0.1	0.03	5.8	0.1	<0.05	1	4.0	0.3
1231612	Soil	38	1.23	516	0.010	2	2.41	0.005	0.07	<0.1	0.04	15.6	<0.1	<0.05	8	0.6	<0.2
1231613	Soil	30	0.73	385	0.012	2	1.71	0.005	0.07	0.1	0.03	6.4	<0.1	<0.05	7	<0.5	<0.2
1231614	Soil	34	0.91	174	0.007	4	1.93	0.005	0.06	<0.1	0.06	4.3	<0.1	0.06	7	1.2	<0.2
1231615	Soil	31	0.99	420	0.013	2	1.97	0.006	0.07	0.1	0.03	9.1	<0.1	<0.05	6	<0.5	<0.2
1231616	Soil	31	0.90	150	0.009	2	1.99	0.005	0.08	0.1	0.08	6.0	0.1	<0.05	5	0.6	<0.2
1231617	Soil	27	0.92	117	0.009	2	1.73	0.004	0.08	<0.1	0.03	2.9	<0.1	<0.05	5	<0.5	<0.2
1231618	Soil	33	1.10	185	0.011	3	1.85	0.006	0.07	0.1	0.08	6.4	<0.1	<0.05	5	<0.5	<0.2
1231619	Soil	25	0.75	140	0.014	2	1.43	0.005	0.05	0.1	0.06	3.7	<0.1	<0.05	4	<0.5	<0.2
1231620	Soil	28	0.86	137	0.010	2	1.56	0.006	0.06	0.2	0.06	5.0	<0.1	<0.05	5	<0.5	<0.2
1231621	Soil	31	1.38	149	0.010	2	1.99	0.004	0.07	<0.1	0.11	9.3	<0.1	<0.05	6	<0.5	<0.2
1231622	Soil	29	1.05	127	0.008	2	1.82	0.004	0.08	<0.1	0.05	5.7	<0.1	<0.05	6	0.5	<0.2
1231623	Soil	19	0.15	38	0.003	6	0.64	0.004	0.11	<0.1	0.08	6.3	0.1	<0.05	2	0.9	<0.2
1231624	Soil	31	0.73	169	0.009	3	1.85	0.006	0.07	<0.1	0.07	4.7	0.2	<0.05	6	0.6	<0.2
1231625	Soil	25	0.55	122	0.014	2	1.41	0.005	0.04	0.1	0.03	4.2	0.1	<0.05	5	<0.5	<0.2
1231626	Soil	27	0.58	122	0.009	2	1.58	0.004	0.04	0.1	0.02	2.9	0.1	<0.05	6	<0.5	<0.2
1231627	Soil	23	0.54	83	0.020	1	1.23	0.004	0.05	0.1	0.03	4.5	<0.1	<0.05	4	0.6	<0.2
1231628	Soil	41	1.25	264	<0.001	4	2.94	0.004	0.10	<0.1	0.02	8.8	0.2	<0.05	9	0.5	0.2
1231629	Soil	26	0.60	176	0.012	3	1.54	0.005	0.05	0.1	0.02	3.7	0.1	<0.05	4	0.8	<0.2
1231630	Soil	35	0.84	84	0.005	2	2.11	0.004	0.04	<0.1	0.05	2.6	0.1	0.07	7	<0.5	<0.2
1231631	Soil	33	0.92	177	0.008	3	2.08	0.006	0.06	0.1	0.10	5.9	0.1	0.07	7	<0.5	<0.2
1231632	Soil	15	0.52	823	0.002	3	0.57	0.006	0.07	<0.1	0.25	13.8	0.1	<0.05	2	0.5	<0.2
1231633	Soil	16	0.24	177	0.003	4	0.97	0.003	0.08	<0.1	0.18	5.2	0.2	<0.05	3	0.6	<0.2
1231634	Soil	27	0.75	147	0.007	2	1.74	0.004	0.05	<0.1	0.04	7.8	0.1	<0.05	5	<0.5	<0.2
1231635	Soil	24	0.37	121	0.006	2	1.10	0.003	0.07	<0.1	0.03	8.1	0.1	<0.05	3	0.6	<0.2
1231636	Soil	34	0.77	215	0.009	3	1.88	0.005	0.09	<0.1	0.04	4.6	<0.1	0.07	8	0.9	<0.2
1231637	Soil	19	0.44	209	0.009	2	1.16	0.005	0.05	<0.1	0.09	5.9	0.2	0.06	3	1.0	<0.2
1231638	Soil	33	0.43	101	0.006	2	1.64	0.004	0.06	<0.1	0.04	1.9	0.1	<0.05	6	1.0	<0.2
1231639	Soil	37	0.77	132	0.010	3	1.90	0.006	0.05	<0.1	0.03	4.4	<0.1	<0.05	6	0.6	<0.2
1231640	Soil	24	0.45	110	0.019	<1	1.41	0.008	0.04	0.2	0.03	2.8	0.1	<0.05	5	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy Co**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

Method		1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
Analyte		Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
Unit		ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
MDL		0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
1231641	Soil	1.4	38.8	13.9	62	<0.1	17.6	13.9	928	3.59	10.4	0.8	0.3	14	0.2	0.7	0.3	69	0.27	0.103	10
1231642	Soil	1.0	60.5	13.8	84	<0.1	32.7	15.4	489	3.35	11.1	3.9	2.6	12	0.3	0.9	0.3	49	0.15	0.053	15
1231643	Soil	1.2	40.9	10.9	82	<0.1	25.8	12.5	417	2.65	12.9	2.1	2.4	17	0.2	0.7	0.2	45	0.23	0.072	17
1231644	Soil	6.4	66.4	20.2	96	<0.1	42.1	18.9	828	6.33	26.2	1.8	3.5	8	0.3	0.9	0.3	26	0.07	0.047	10
1231645	Soil	1.8	54.0	24.2	74	0.1	26.4	21.4	1179	3.84	21.8	1.3	0.9	31	0.3	0.7	0.3	39	0.74	0.111	8
1231646	Soil	1.2	75.3	18.6	73	0.2	24.4	18.7	956	3.16	19.1	1.8	0.7	30	0.6	0.6	0.3	37	1.04	0.136	9
1231647	Soil	1.2	86.5	36.0	81	0.2	32.2	41.6	1656	3.95	35.0	2.2	2.0	20	0.5	0.9	0.3	39	0.64	0.128	14
1231648	Soil	1.0	105.5	30.0	97	0.2	35.1	52.0	2488	4.54	15.6	3.3	2.4	19	0.6	0.8	0.3	59	0.50	0.131	16
1231649	Soil	2.1	52.4	31.2	85	<0.1	27.2	21.2	1126	4.71	21.5	<0.5	1.5	6	0.3	1.1	0.4	24	0.12	0.087	9
1231650	Soil	0.8	121.5	26.5	117	0.1	42.3	59.8	2005	5.94	6.4	3.9	1.5	12	1.4	0.4	0.3	77	0.21	0.178	13
1231651	Soil	1.3	37.6	19.0	77	<0.1	18.9	10.8	622	3.40	14.9	1.8	0.2	7	0.8	0.9	0.3	54	0.06	0.059	10
1231652	Soil	1.3	97.3	28.6	100	0.1	28.6	79.7	3647	4.15	15.7	0.9	0.9	22	0.8	0.6	0.3	64	0.63	0.200	12
1231653	Soil	5.0	56.0	35.5	72	0.2	31.8	17.6	1407	6.02	23.3	2.4	2.9	17	0.2	1.3	0.3	13	1.86	0.036	6
1231801	Soil	1.6	54.0	18.9	62	0.1	20.7	12.8	482	4.36	7.4	1.7	0.6	8	0.2	0.6	0.3	70	0.14	0.102	8
1231802	Soil	1.3	131.5	18.4	84	<0.1	36.2	30.9	1217	6.27	7.7	1.3	1.3	7	0.4	0.5	0.3	94	0.12	0.099	11
1231803	Soil	0.7	521.9	33.2	101	0.2	55.1	103.2	5927	7.65	12.0	25.9	1.7	19	1.7	0.3	0.3	107	0.31	0.099	24
1231804	Soil	1.2	164.6	25.7	78	0.2	35.8	33.1	1293	4.63	32.6	7.3	2.8	13	0.5	1.4	0.3	51	0.31	0.077	17
1231805	Soil	1.5	119.7	28.8	80	0.1	34.5	27.9	1251	4.56	38.7	3.4	3.0	11	0.3	1.8	0.3	37	0.29	0.091	13
1231806	Soil	1.5	142.1	25.3	78	0.2	34.9	39.9	1757	4.50	31.1	4.3	2.1	13	0.4	1.3	0.3	48	0.34	0.112	15
1231807	Soil	1.0	189.0	18.0	86	<0.1	44.7	38.2	1418	5.44	12.8	5.4	1.6	11	0.3	0.6	0.2	75	0.20	0.094	12
1231808	Soil	1.7	120.3	22.6	68	0.1	35.7	22.0	887	4.30	10.8	4.6	2.0	14	0.3	0.8	0.3	45	0.35	0.068	13
1231809	Soil	1.0	171.5	18.9	80	0.1	40.0	36.7	1817	5.14	7.6	9.5	1.8	15	0.5	0.7	0.2	69	0.28	0.101	15
1231810	Soil	1.9	175.1	98.2	74	0.6	45.1	47.3	2374	6.95	9.2	33.7	1.9	18	0.5	0.9	0.3	61	0.22	0.106	14
1231811	Soil	1.5	145.7	23.7	73	<0.1	34.9	28.1	978	4.50	10.6	7.3	1.7	21	0.4	0.6	0.3	61	0.42	0.102	14
1231812	Soil	1.8	136.6	26.0	82	0.1	41.4	34.1	1200	4.84	10.5	6.2	2.7	14	0.4	0.7	0.3	54	0.41	0.068	16
1231813	Soil	1.8	137.2	47.5	77	0.2	35.9	46.9	2206	4.47	26.1	5.4	1.8	18	0.7	1.0	0.4	40	0.45	0.134	15
1231814	Soil	1.3	204.7	24.2	84	0.2	38.2	35.2	1874	4.77	11.1	12.7	1.6	26	0.6	0.8	0.3	61	0.39	0.098	16
1231815	Soil	1.2	273.9	26.4	91	0.2	39.3	49.7	4535	4.90	8.0	11.3	0.8	35	1.2	0.5	0.2	84	0.81	0.139	18
1231816	Soil	1.5	188.5	31.3	86	0.1	38.9	33.2	1492	4.60	10.7	5.4	2.2	21	0.7	0.8	0.3	54	0.35	0.091	15
1231817	Soil	1.9	256.1	25.6	93	0.2	53.2	50.9	1981	6.07	22.0	11.3	2.7	16	0.6	0.7	0.3	79	0.47	0.069	13

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

	Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1231641	Soil	25	0.36	197	0.010	2	1.55	0.005	0.04	<0.1	0.03	1.7	0.1	0.09	6	0.6	<0.2
1231642	Soil	31	0.64	108	0.027	1	1.73	0.007	0.05	0.2	0.03	4.6	<0.1	<0.05	5	0.9	<0.2
1231643	Soil	27	0.53	157	0.027	2	1.40	0.008	0.05	0.2	0.03	4.4	<0.1	<0.05	4	0.6	<0.2
1231644	Soil	17	0.40	110	0.011	3	1.18	0.005	0.06	<0.1	0.25	8.9	0.9	<0.05	3	1.0	<0.2
1231645	Soil	22	0.45	189	0.008	4	1.18	0.007	0.07	<0.1	0.05	3.2	0.1	0.10	4	1.0	<0.2
1231646	Soil	21	0.48	168	0.007	2	1.25	0.005	0.06	<0.1	0.05	4.0	<0.1	0.09	4	0.8	<0.2
1231647	Soil	24	0.57	131	0.011	4	1.50	0.006	0.09	<0.1	0.05	7.8	0.1	0.09	4	1.2	<0.2
1231648	Soil	30	0.69	193	0.014	4	1.77	0.007	0.10	<0.1	0.08	12.6	0.2	0.06	6	0.7	<0.2
1231649	Soil	17	0.39	106	0.003	3	1.18	0.003	0.07	<0.1	0.06	4.4	0.2	<0.05	3	0.5	<0.2
1231650	Soil	44	0.97	100	0.009	6	2.57	0.006	0.09	<0.1	0.08	7.3	<0.1	0.07	8	1.3	<0.2
1231651	Soil	25	0.25	87	0.013	<1	1.28	0.004	0.04	0.1	0.02	1.1	0.1	<0.05	5	0.8	<0.2
1231652	Soil	29	0.68	222	0.018	5	1.80	0.008	0.10	<0.1	0.06	9.9	0.2	0.12	6	1.2	<0.2
1231653	Soil	7	1.01	43	<0.001	4	0.43	0.003	0.06	<0.1	0.21	8.2	0.2	0.05	1	0.8	<0.2
1231801	Soil	29	0.78	72	0.008	2	1.68	0.006	0.05	<0.1	0.10	3.1	0.1	0.15	8	0.6	<0.2
1231802	Soil	41	1.38	92	0.004	2	2.64	0.004	0.05	<0.1	0.07	5.5	0.1	0.09	10	0.7	<0.2
1231803	Soil	44	1.92	560	0.006	3	2.96	0.004	0.05	<0.1	0.19	24.3	0.1	<0.05	10	1.1	<0.2
1231804	Soil	25	1.11	153	0.009	2	1.77	0.005	0.06	<0.1	0.13	8.2	<0.1	<0.05	6	0.7	<0.2
1231805	Soil	20	0.80	106	0.002	2	1.54	0.004	0.08	<0.1	0.12	7.4	0.1	<0.05	4	1.0	<0.2
1231806	Soil	25	0.90	93	0.005	3	1.73	0.007	0.07	<0.1	0.12	8.3	0.1	0.05	5	1.0	<0.2
1231807	Soil	37	1.50	108	0.013	1	2.49	0.005	0.05	<0.1	0.05	6.9	<0.1	<0.05	8	0.6	<0.2
1231808	Soil	24	1.04	94	0.007	2	1.74	0.005	0.05	<0.1	0.07	5.2	<0.1	<0.05	5	0.8	<0.2
1231809	Soil	35	1.31	176	0.012	2	2.47	0.006	0.06	<0.1	0.10	7.8	<0.1	<0.05	7	0.7	<0.2
1231810	Soil	31	1.04	328	0.009	1	2.01	0.006	0.07	<0.1	1.04	8.9	0.3	<0.05	7	1.7	<0.2
1231811	Soil	31	1.12	202	0.007	3	2.12	0.007	0.06	<0.1	0.08	8.3	0.1	<0.05	7	0.9	<0.2
1231812	Soil	29	1.28	115	0.007	4	2.06	0.005	0.07	<0.1	0.09	6.7	0.1	0.05	6	0.6	<0.2
1231813	Soil	28	0.84	122	0.009	4	1.98	0.006	0.10	<0.1	0.08	6.4	0.1	0.15	6	1.4	<0.2
1231814	Soil	32	1.19	318	0.010	3	2.21	0.007	0.07	<0.1	0.11	7.8	<0.1	0.09	7	0.9	<0.2
1231815	Soil	41	1.53	581	0.011	4	2.60	0.007	0.06	<0.1	0.10	12.3	<0.1	0.10	8	1.0	<0.2
1231816	Soil	28	1.21	288	0.011	2	1.98	0.007	0.06	<0.1	0.12	7.9	<0.1	<0.05	6	0.9	<0.2
1231817	Soil	42	2.17	198	0.007	3	2.56	0.006	0.05	<0.1	0.12	10.8	<0.1	0.08	9	1.1	0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

		Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
		Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
		Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
		MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
1231818	Soil		1.4	132.9	25.8	80	0.2	37.0	28.4	986	4.62	15.5	8.1	2.2	17	0.4	0.8	0.3	44	0.49	0.085	14
1231819	Soil		2.0	114.8	33.5	80	0.2	44.1	33.7	1004	4.96	24.2	5.3	3.6	9	0.4	1.0	0.4	40	0.28	0.067	17
1231820	Soil		2.2	173.5	31.6	79	0.2	41.8	31.2	990	4.93	16.5	8.4	1.9	15	0.7	0.8	0.3	44	0.69	0.112	14
1231821	Soil		I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.
1231822	Soil		2.3	138.7	26.6	95	0.1	49.1	39.3	1328	6.24	24.3	6.5	2.8	10	0.6	0.8	0.3	57	0.37	0.085	17
1231823	Soil		2.4	148.3	32.6	88	0.2	47.6	37.2	1252	6.08	20.9	6.2	2.7	8	0.5	0.8	0.3	52	0.26	0.070	18
1231824	Soil		2.0	125.9	26.9	84	0.2	43.2	33.5	1144	5.94	27.1	6.7	2.6	13	0.4	0.9	0.3	53	0.30	0.072	17
1231825	Soil		1.8	233.9	31.5	93	0.3	46.6	46.1	2782	6.16	17.2	20.7	1.8	34	0.7	0.6	0.3	71	0.66	0.108	17
1231826	Soil		1.5	174.1	24.0	71	0.2	35.2	35.3	1331	4.89	13.4	11.2	1.1	62	0.5	0.6	0.2	54	1.38	0.091	10
1231827	Soil		0.9	129.4	13.3	78	0.1	37.9	26.6	939	5.46	7.5	5.0	2.0	4	0.3	0.4	0.2	75	0.08	0.090	19
1231828	Soil		1.4	72.1	14.0	82	0.1	27.4	19.3	907	3.94	8.4	4.0	1.6	9	0.3	0.5	0.2	62	0.15	0.073	14
1231829	Soil		2.5	97.8	28.4	90	<0.1	42.9	40.1	1247	6.47	19.2	5.1	3.0	11	0.4	0.8	0.3	58	0.31	0.053	18
1231830	Soil		I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.
1231831	Soil		I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.
1231832	Soil		1.0	105.0	13.8	80	<0.1	35.8	33.1	1049	5.30	7.0	3.6	1.7	17	0.5	0.4	0.2	84	0.50	0.062	12
1231833	Soil		1.7	68.3	15.5	80	0.1	33.1	28.8	777	5.71	5.6	2.4	2.5	9	0.2	0.4	0.2	88	0.13	0.032	14
1231834	Soil		1.7	62.0	14.3	64	<0.1	22.0	22.0	700	4.54	7.1	2.0	2.1	6	0.3	0.5	0.2	83	0.08	0.039	13
1231835	Soil		1.3	90.2	14.3	66	0.1	29.1	33.6	1306	4.46	8.0	7.5	1.4	20	0.2	0.4	0.2	71	0.70	0.097	10
1231836	Soil		0.9	194.1	21.9	92	0.3	46.5	49.1	2056	6.11	6.8	30.1	2.5	14	0.6	0.4	0.2	81	0.45	0.072	19
1231837	Soil		1.1	88.3	13.8	78	<0.1	32.2	37.7	930	5.22	6.3	11.6	1.5	13	0.3	0.3	0.2	74	0.33	0.072	11
1231838	Soil		1.0	150.0	13.6	85	0.2	37.4	31.2	928	4.77	6.5	21.9	1.8	21	0.3	0.4	0.2	67	0.72	0.085	13
1231839	Soil		0.8	150.2	15.7	88	0.2	41.6	38.8	1317	5.75	5.7	21.7	1.8	22	0.2	0.3	0.2	82	0.72	0.083	13
1231840	Soil		0.9	155.0	17.3	80	0.2	34.3	38.0	1198	4.68	6.4	21.5	1.7	22	0.3	0.3	0.2	72	0.64	0.096	14
1231841	Soil		0.4	123.3	10.2	80	0.2	36.9	31.0	799	4.37	2.9	15.3	1.2	27	0.3	0.2	0.2	67	1.13	0.071	10
1231842	Soil		0.6	137.9	13.5	93	0.2	46.6	33.5	1079	5.51	4.7	17.8	2.1	18	0.3	0.2	0.2	77	0.56	0.051	15
1231843	Soil		0.9	202.1	23.7	92	0.2	54.5	47.9	3217	6.88	2.8	26.9	1.8	12	0.7	0.2	0.2	101	0.29	0.060	18
1231844	Soil		2.3	169.9	33.4	95	0.2	50.7	59.3	1796	6.81	19.6	13.5	2.6	16	0.5	0.8	0.3	68	0.46	0.072	18
1231845	Soil		2.6	146.5	36.8	100	0.3	50.7	54.4	1414	7.00	21.2	9.8	3.8	17	0.4	0.9	0.3	64	0.44	0.072	20
1231846	Soil		2.6	127.9	36.5	96	0.2	45.2	56.5	1620	6.68	19.7	8.0	3.4	18	0.5	0.9	0.3	59	0.56	0.056	17
1231847	Soil		1.8	114.9	25.1	85	0.2	44.5	34.5	679	5.59	13.9	5.7	3.1	11	0.3	0.8	0.3	54	0.43	0.046	17

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

	Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1231818	Soil	26	1.07	169	0.005	4	1.97	0.006	0.06	<0.1	0.14	6.8	<0.1	0.06	5	1.0	<0.2
1231819	Soil	27	1.19	95	0.003	3	1.79	0.004	0.08	<0.1	0.10	5.7	<0.1	0.07	5	0.8	<0.2
1231820	Soil	29	1.27	150	0.006	5	1.96	0.007	0.10	<0.1	0.11	7.3	<0.1	0.09	6	1.4	<0.2
1231821	Soil	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.
1231822	Soil	34	1.64	143	0.004	5	2.40	0.006	0.10	<0.1	0.08	8.1	0.1	0.08	7	<0.5	<0.2
1231823	Soil	35	1.48	122	0.004	5	2.21	0.007	0.07	<0.1	0.13	7.1	0.1	0.06	7	0.7	0.2
1231824	Soil	30	1.35	138	0.003	4	2.16	0.006	0.08	<0.1	0.10	7.6	0.1	<0.05	7	0.7	<0.2
1231825	Soil	38	1.81	374	0.006	4	2.92	0.007	0.07	<0.1	0.16	13.1	0.1	0.07	9	2.1	0.2
1231826	Soil	31	1.36	284	0.002	7	2.22	0.006	0.10	<0.1	0.08	7.1	0.1	0.07	7	1.5	<0.2
1231827	Soil	38	1.69	110	0.007	3	2.98	0.005	0.08	<0.1	0.08	6.8	<0.1	<0.05	9	<0.5	<0.2
1231828	Soil	31	0.95	121	0.016	3	2.05	0.005	0.06	0.1	0.04	3.8	0.1	<0.05	7	<0.5	<0.2
1231829	Soil	34	1.39	75	0.002	4	2.26	0.006	0.08	<0.1	0.07	7.2	0.1	<0.05	7	0.7	<0.2
1231830	Soil	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.
1231831	Soil	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.	I.S.
1231832	Soil	41	1.49	296	0.006	3	3.02	0.010	0.10	<0.1	0.06	7.5	0.1	<0.05	10	<0.5	<0.2
1231833	Soil	42	1.48	177	0.008	2	3.03	0.007	0.10	<0.1	0.03	5.9	0.1	<0.05	10	<0.5	<0.2
1231834	Soil	32	0.69	127	0.011	2	2.48	0.005	0.05	0.1	0.04	3.9	0.1	<0.05	9	0.8	<0.2
1231835	Soil	35	1.18	430	0.007	2	2.35	0.007	0.07	<0.1	0.03	6.2	0.1	0.06	8	0.5	<0.2
1231836	Soil	44	2.08	362	0.009	3	3.14	0.009	0.08	<0.1	0.12	12.9	<0.1	<0.05	10	0.9	<0.2
1231837	Soil	40	1.27	261	0.007	2	2.66	0.006	0.08	<0.1	0.04	6.6	0.1	<0.05	9	1.6	<0.2
1231838	Soil	37	1.53	383	0.006	3	2.70	0.006	0.07	<0.1	0.10	10.3	<0.1	<0.05	8	0.8	<0.2
1231839	Soil	44	1.87	397	0.005	3	3.07	0.007	0.08	<0.1	0.15	12.2	<0.1	<0.05	9	0.6	<0.2
1231840	Soil	38	1.45	461	0.007	3	2.73	0.007	0.06	<0.1	0.12	11.5	0.1	<0.05	8	0.6	<0.2
1231841	Soil	38	1.71	434	0.004	3	2.70	0.006	0.06	<0.1	0.12	8.4	<0.1	<0.05	8	0.7	<0.2
1231842	Soil	45	2.05	327	0.004	2	3.11	0.005	0.06	<0.1	0.09	10.0	<0.1	<0.05	9	0.6	<0.2
1231843	Soil	54	3.06	398	0.007	3	3.85	0.006	0.06	<0.1	0.08	15.1	<0.1	<0.05	11	<0.5	0.2
1231844	Soil	37	1.61	213	0.003	4	2.81	0.008	0.08	<0.1	0.10	11.8	0.1	<0.05	8	1.3	0.3
1231845	Soil	36	1.63	105	0.003	6	2.67	0.008	0.10	<0.1	0.13	10.8	0.2	<0.05	8	1.3	<0.2
1231846	Soil	33	1.41	106	0.002	6	2.40	0.006	0.09	<0.1	0.13	10.0	0.2	<0.05	7	0.6	<0.2
1231847	Soil	32	1.38	66	0.003	5	2.08	0.005	0.07	0.1	0.07	8.4	<0.1	0.06	6	0.9	0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

	Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
1231848	Soil	1.7	108.9	23.6	79	0.2	44.7	36.4	1423	5.75	12.5	5.4	2.5	15	0.3	0.6	0.3	62	0.43	0.057	16
1231849	Soil	0.6	159.5	15.8	83	0.1	36.8	23.4	1244	4.58	3.0	11.3	1.0	30	0.5	0.2	0.2	53	1.42	0.083	11
1231850	Soil	1.1	137.9	15.2	79	0.1	33.2	27.2	1696	4.39	3.2	10.2	1.0	37	0.6	0.2	0.2	60	1.46	0.089	11
1231851	Soil	0.8	177.7	12.2	75	0.2	36.9	27.7	975	4.53	2.5	14.5	1.1	31	0.3	0.2	0.2	61	1.22	0.089	12
1231852	Soil	1.5	137.9	14.0	76	0.2	39.3	29.5	1056	5.07	4.4	16.7	1.4	19	0.3	0.2	0.2	66	0.76	0.068	13
1231853	Soil	1.5	169.7	26.2	85	0.2	30.8	32.8	3602	5.49	16.5	10.1	1.2	25	1.9	0.7	0.2	73	0.94	0.092	15
1231854	Soil	1.7	193.2	35.3	100	0.4	34.1	41.5	2982	5.93	33.2	20.8	1.5	22	0.8	1.3	0.2	74	0.61	0.136	18
1231855	Soil	1.4	114.5	26.1	91	<0.1	35.2	30.4	1398	5.23	30.2	6.9	1.7	16	0.4	0.7	0.2	58	0.45	0.129	14
1231856	Soil	1.4	248.4	29.7	130	0.4	51.1	56.1	2968	8.41	54.1	18.3	1.6	23	1.4	2.8	0.2	105	0.54	0.083	17
1231857	Soil	1.9	197.6	28.3	89	0.2	34.8	26.0	2063	5.32	17.3	22.6	2.1	15	0.6	0.8	0.2	82	0.27	0.089	16
1231858	Soil	1.4	208.9	23.2	81	0.3	34.2	28.9	2774	5.00	15.0	18.8	1.7	23	0.6	0.9	0.3	73	0.62	0.098	18
1231859	Soil	1.5	81.4	22.1	67	0.2	25.6	22.1	1628	4.12	52.1	3.5	1.0	19	0.4	0.9	0.2	33	1.03	0.087	7
1231860	Soil	1.6	123.6	30.4	78	0.1	31.1	39.8	2785	4.75	37.6	7.6	1.8	11	0.7	0.9	0.3	57	0.25	0.107	15
1231861	Soil	1.8	65.9	41.2	78	0.2	32.1	22.2	1265	5.46	62.4	3.0	2.7	12	0.4	1.7	0.3	22	0.47	0.078	8
1231862	Soil	1.6	218.4	25.9	71	0.2	32.2	44.2	3765	5.22	13.2	16.1	1.1	28	0.6	0.9	0.2	61	0.59	0.141	16
1231863	Soil	1.5	172.1	22.9	79	<0.1	40.5	47.0	2100	5.77	9.1	3.2	1.4	10	0.3	0.3	0.2	68	0.27	0.099	10
1231864	Soil	1.4	70.1	15.9	55	<0.1	23.4	17.5	749	3.90	11.9	1.0	1.6	12	0.1	0.4	0.3	58	0.26	0.042	13
1231865	Soil	1.5	255.7	20.8	68	0.2	28.3	24.5	1071	4.21	13.5	17.2	1.1	19	0.1	0.7	0.2	56	0.51	0.127	13
1231866	Soil	1.5	72.8	16.3	53	<0.1	18.2	13.5	673	3.05	13.5	2.6	1.4	15	0.2	0.6	0.3	53	0.38	0.056	10
1231867	Soil	1.5	186.0	19.8	79	0.3	32.2	24.3	1246	4.33	14.5	15.0	1.8	25	0.4	0.7	0.2	49	0.73	0.079	13
1231868	Soil	1.4	182.3	21.4	77	0.2	28.8	22.9	969	4.15	13.5	11.0	1.6	20	0.1	0.6	0.2	50	0.56	0.090	13
1231869	Soil	1.6	254.1	29.4	95	0.1	46.0	60.7	2373	6.84	24.1	9.3	3.2	8	0.4	0.6	0.3	86	0.20	0.061	18
1231870	Soil	1.6	126.8	21.7	64	<0.1	31.5	38.1	2137	4.16	15.9	1.5	1.3	11	0.5	0.6	0.2	57	0.29	0.100	13
1231871	Soil	2.0	220.1	36.2	80	0.2	47.6	49.1	4215	6.33	31.7	5.6	2.8	31	1.4	1.4	0.3	47	0.39	0.085	18
1231872	Soil	1.3	134.1	22.7	61	0.2	24.9	28.7	1444	4.27	9.5	6.9	1.1	30	0.4	0.4	0.2	49	0.66	0.117	12
1231873	Soil	1.2	83.2	16.4	43	0.1	17.9	11.1	612	2.50	5.0	4.1	0.3	12	0.3	0.2	0.3	32	0.31	0.149	7
1231874	Soil	1.9	168.2	14.9	77	0.2	33.6	18.3	568	4.64	9.4	35.1	2.1	14	0.1	0.4	0.2	66	0.38	0.086	15
1231875	Soil	1.2	108.8	19.9	100	0.1	35.8	31.7	726	5.31	9.8	16.1	3.2	8	0.4	0.4	0.3	78	0.13	0.039	11
1231876	Soil	2.0	198.8	24.4	76	0.3	30.5	23.0	1234	4.28	9.2	33.3	1.7	19	0.3	0.4	0.3	61	0.62	0.109	16
1231877	Soil	1.1	131.5	18.9	79	0.2	35.1	30.3	1465	4.52	10.2	25.3	2.0	16	0.3	0.5	0.3	64	0.37	0.070	13

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

	Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1231848	Soil	36	1.56	266	0.002	5	2.42	0.007	0.07	<0.1	0.05	8.8	<0.1	<0.05	7	0.6	<0.2
1231849	Soil	34	1.66	220	0.004	4	2.31	0.007	0.05	<0.1	0.13	8.5	<0.1	0.09	7	0.6	<0.2
1231850	Soil	34	1.51	352	0.005	3	2.45	0.007	0.06	<0.1	0.10	8.5	<0.1	0.05	7	1.0	<0.2
1231851	Soil	37	1.58	283	0.005	3	2.50	0.005	0.06	<0.1	0.14	8.1	<0.1	<0.05	7	1.3	<0.2
1231852	Soil	36	1.70	225	0.005	3	2.58	0.006	0.06	0.2	0.10	8.4	<0.1	<0.05	8	1.1	<0.2
1231853	Soil	34	1.02	416	0.012	4	2.33	0.008	0.07	0.1	0.17	11.6	0.1	0.06	7	1.6	<0.2
1231854	Soil	36	0.92	336	0.015	4	2.27	0.008	0.09	0.1	0.19	13.0	0.2	0.06	7	1.4	<0.2
1231855	Soil	33	0.95	186	0.010	3	2.16	0.007	0.08	0.1	0.10	8.1	0.2	0.05	6	0.6	<0.2
1231856	Soil	38	0.93	281	0.006	5	1.85	0.007	0.08	<0.1	0.36	18.6	0.1	<0.05	6	1.8	<0.2
1231857	Soil	38	1.09	465	0.014	3	2.43	0.007	0.08	0.1	0.15	12.9	0.1	<0.05	7	0.8	<0.2
1231858	Soil	36	1.13	426	0.012	4	2.23	0.007	0.05	<0.1	0.21	15.1	<0.1	0.07	7	2.4	<0.2
1231859	Soil	20	0.70	115	0.008	5	1.33	0.007	0.04	<0.1	0.16	5.5	0.1	0.12	4	1.7	<0.2
1231860	Soil	33	0.83	139	0.013	3	2.11	0.005	0.05	0.1	0.07	10.2	0.1	<0.05	6	1.7	<0.2
1231861	Soil	20	0.86	80	0.006	4	1.44	0.005	0.07	<0.1	0.38	6.2	0.2	0.07	4	2.2	<0.2
1231862	Soil	32	1.04	500	0.009	3	2.35	0.007	0.05	<0.1	0.58	10.5	0.1	0.07	7	3.4	<0.2
1231863	Soil	36	1.73	175	0.004	5	2.74	0.006	0.06	<0.1	0.07	9.3	0.1	<0.05	8	1.0	<0.2
1231864	Soil	26	0.82	184	0.012	3	1.76	0.004	0.04	0.1	0.06	2.5	<0.1	<0.05	6	1.7	<0.2
1231865	Soil	29	1.08	363	0.007	2	2.23	0.005	0.05	<0.1	0.31	7.7	0.1	0.05	7	3.5	<0.2
1231866	Soil	23	0.56	247	0.015	2	1.54	0.004	0.05	0.2	0.07	3.3	0.1	<0.05	6	1.5	<0.2
1231867	Soil	29	1.05	270	0.010	4	1.87	0.007	0.06	<0.1	0.17	8.2	0.1	<0.05	5	1.9	<0.2
1231868	Soil	28	0.99	286	0.007	3	2.03	0.007	0.06	<0.1	0.12	8.0	0.1	<0.05	6	1.9	<0.2
1231869	Soil	42	1.95	210	0.002	3	3.37	0.005	0.09	<0.1	0.08	13.6	0.2	<0.05	10	1.1	<0.2
1231870	Soil	28	1.16	150	0.008	3	1.83	0.007	0.08	<0.1	0.10	6.9	0.1	<0.05	6	2.2	<0.2
1231871	Soil	31	1.49	1106	0.002	4	2.46	0.006	0.06	<0.1	0.12	10.9	0.2	0.06	7	1.6	<0.2
1231872	Soil	27	0.81	245	0.009	3	2.02	0.006	0.06	<0.1	0.10	6.9	<0.1	0.07	6	2.7	<0.2
1231873	Soil	20	0.53	278	0.006	1	1.57	0.008	0.06	<0.1	0.06	1.3	<0.1	0.09	5	1.6	<0.2
1231874	Soil	40	1.26	301	0.009	3	2.67	0.005	0.07	<0.1	0.18	9.1	<0.1	<0.05	8	2.3	<0.2
1231875	Soil	42	1.31	253	0.007	1	3.22	0.006	0.07	<0.1	0.05	6.1	0.1	<0.05	9	1.6	<0.2
1231876	Soil	36	1.16	360	0.010	2	2.59	0.006	0.06	<0.1	0.19	9.8	0.1	0.07	7	2.3	<0.2
1231877	Soil	39	1.38	420	0.012	3	2.66	0.005	0.08	<0.1	0.08	8.1	0.1	<0.05	8	1.8	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

	Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
1231878	Soil	3.8	149.8	24.0	86	0.2	36.3	30.1	1784	5.46	11.0	18.2	2.7	11	0.3	0.5	0.3	79	0.24	0.067	19
1231879	Soil	1.9	41.9	14.8	53	<0.1	18.1	13.0	455	3.57	8.4	1.6	2.5	8	0.3	0.6	0.3	70	0.16	0.036	12
1231880	Soil	1.8	149.8	16.6	79	0.3	37.2	29.1	1002	4.67	7.8	11.2	1.9	18	0.3	0.4	0.2	57	0.71	0.082	12
1231881	Soil	2.0	118.4	16.1	96	0.2	39.7	27.3	832	4.77	11.7	10.1	2.5	19	0.3	0.5	0.3	67	0.60	0.061	12
1231882	Soil	1.6	107.0	18.6	70	<0.1	34.5	27.7	774	4.83	11.7	2.7	2.7	9	0.3	0.5	0.3	69	0.17	0.047	12
1231883	Soil	1.2	160.1	19.0	83	0.1	44.8	33.1	1096	5.12	11.6	8.0	2.5	51	0.5	0.5	0.2	61	0.55	0.072	15
1231884	Soil	0.7	111.3	10.2	91	<0.1	46.0	22.6	578	5.75	4.5	2.6	2.1	11	0.3	0.3	0.2	85	0.33	0.091	15
1231885	Soil	0.5	112.9	12.8	87	<0.1	48.6	29.6	812	5.81	4.5	4.2	2.2	9	0.2	0.3	0.2	84	0.25	0.066	15
1231886	Soil	0.4	147.1	15.0	89	<0.1	52.1	38.5	1115	6.15	4.6	3.7	2.8	4	0.3	0.3	0.2	82	0.11	0.068	18
1231887	Soil	1.2	49.3	15.1	63	<0.1	25.1	14.3	623	5.15	10.9	<0.5	0.6	5	0.2	0.6	0.3	57	0.06	0.110	10
1231888	Soil	1.9	99.4	20.0	91	0.1	46.1	28.8	1040	6.18	20.7	2.6	3.1	14	0.6	0.6	0.3	44	0.21	0.059	19
1231889	Soil	1.2	36.9	15.2	88	<0.1	25.1	13.1	614	4.52	13.6	1.2	0.6	8	0.5	0.8	0.3	50	0.14	0.053	10
1231890	Soil	1.1	100.9	13.7	82	0.1	29.3	22.3	744	4.58	10.6	10.0	0.7	13	0.3	0.5	0.2	59	0.26	0.090	11
1231891	Soil	0.7	85.7	12.3	87	<0.1	37.5	21.3	698	5.01	8.0	1.9	1.2	7	0.3	0.4	0.2	69	0.13	0.083	14
1231892	Soil	1.1	74.1	12.2	85	<0.1	38.4	20.6	580	4.91	8.6	1.9	1.8	17	0.3	0.4	0.3	72	0.35	0.071	13
1231893	Soil	1.6	156.6	12.3	89	0.2	45.8	27.7	866	5.22	9.9	9.3	2.7	15	0.3	0.3	0.2	70	0.31	0.073	18
1231894	Soil	1.5	169.2	9.8	91	0.2	48.5	29.7	939	5.29	8.2	8.4	2.2	15	0.4	0.3	0.2	74	0.33	0.051	18
1231895	Soil	2.3	97.1	17.0	89	0.1	48.8	26.0	966	6.72	30.0	4.0	1.6	11	0.4	0.5	0.3	48	0.28	0.091	15
1231896	Soil	1.7	103.5	18.4	92	0.2	47.6	31.8	1216	6.18	28.7	3.6	2.2	13	0.5	0.5	0.3	52	0.26	0.075	18
1231897	Soil	1.0	62.7	12.9	81	<0.1	35.8	21.2	540	5.57	9.5	1.3	1.5	4	0.5	0.4	0.2	75	0.06	0.055	15
1231898	Soil	1.3	63.5	14.2	81	<0.1	28.7	20.1	738	4.85	10.1	2.0	0.6	7	0.6	0.5	0.2	65	0.11	0.066	14
1231899	Soil	1.0	55.6	13.3	73	<0.1	33.4	16.5	513	4.43	12.4	1.4	1.2	7	0.2	0.5	0.2	62	0.15	0.050	14
1231900	Soil	1.3	77.1	18.9	96	<0.1	33.8	17.5	761	4.55	10.2	3.9	1.3	6	0.7	0.6	0.3	72	0.05	0.099	15

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

CERTIFICATE OF ANALYSIS WHI11001138.1

	Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
1231878	Soil	42	1.51	396	0.007	2	3.04	0.006	0.09	<0.1	0.10	12.4	0.1	<0.05	9	1.5	0.2
1231879	Soil	24	0.50	162	0.014	2	1.71	0.004	0.05	0.2	0.04	2.7	0.1	<0.05	7	0.8	<0.2
1231880	Soil	35	1.44	236	0.007	4	2.39	0.006	0.07	<0.1	0.18	8.9	<0.1	0.07	7	1.1	<0.2
1231881	Soil	39	1.41	306	0.007	3	2.64	0.006	0.07	<0.1	0.08	7.6	0.1	0.06	8	1.4	<0.2
1231882	Soil	34	1.11	125	0.007	3	2.54	0.005	0.06	0.1	0.06	4.7	0.1	<0.05	8	1.3	<0.2
1231883	Soil	35	1.73	159	0.011	4	2.47	0.006	0.07	<0.1	0.12	7.7	<0.1	<0.05	7	1.3	<0.2
1231884	Soil	47	1.92	192	0.004	2	3.34	0.004	0.10	<0.1	0.04	7.8	<0.1	<0.05	9	1.0	<0.2
1231885	Soil	44	2.10	173	0.004	2	3.34	0.005	0.07	<0.1	0.06	7.2	<0.1	<0.05	9	0.9	<0.2
1231886	Soil	42	2.15	84	0.006	2	3.32	0.005	0.09	<0.1	0.05	6.5	<0.1	<0.05	9	1.0	0.2
1231887	Soil	33	0.72	77	0.008	2	2.35	0.004	0.06	<0.1	0.04	1.8	<0.1	0.07	7	1.5	<0.2
1231888	Soil	25	0.89	74	0.010	4	1.67	0.013	0.07	<0.1	0.19	7.5	0.2	<0.05	5	1.5	0.2
1231889	Soil	32	0.57	66	0.022	2	1.68	0.005	0.07	<0.1	0.05	1.9	0.1	<0.05	6	1.2	<0.2
1231890	Soil	33	0.97	120	0.009	2	2.40	0.005	0.06	<0.1	0.06	3.2	<0.1	0.06	7	1.2	<0.2
1231891	Soil	38	1.22	102	0.012	4	2.49	0.004	0.08	<0.1	0.04	3.5	<0.1	<0.05	8	1.0	<0.2
1231892	Soil	37	1.34	138	0.007	3	2.44	0.006	0.07	<0.1	0.04	4.4	<0.1	<0.05	8	1.1	<0.2
1231893	Soil	41	1.79	139	0.010	4	2.66	0.005	0.09	<0.1	0.14	9.8	<0.1	<0.05	9	1.5	<0.2
1231894	Soil	43	1.90	204	0.011	5	2.92	0.005	0.13	<0.1	0.12	10.9	<0.1	<0.05	8	<0.5	<0.2
1231895	Soil	27	0.78	86	0.002	4	1.81	0.006	0.09	<0.1	0.14	6.1	0.2	<0.05	5	<0.5	0.3
1231896	Soil	27	0.95	104	0.007	3	1.83	0.008	0.09	<0.1	0.16	8.5	0.2	<0.05	5	<0.5	<0.2
1231897	Soil	38	1.19	70	0.006	2	2.83	0.003	0.08	<0.1	0.05	3.9	0.1	<0.05	8	<0.5	<0.2
1231898	Soil	32	0.85	72	0.008	2	2.13	0.003	0.08	<0.1	0.03	2.6	<0.1	<0.05	8	<0.5	<0.2
1231899	Soil	34	0.96	119	0.008	1	2.11	0.004	0.07	<0.1	0.02	3.4	<0.1	<0.05	6	<0.5	<0.2
1231900	Soil	44	1.19	72	0.008	3	2.36	0.005	0.07	<0.1	0.04	3.0	<0.1	<0.05	7	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

QUALITY CONTROL REPORT WHI11001138.1

	Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
	Analyte	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca	P	La
	Unit	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%	%	ppm
	MDL	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01	0.001	1
Pulp Duplicates																					
1230313	Soil	1.2	133.4	21.7	93	0.2	40.0	36.3	1239	5.68	18.6	2.8	3.2	9	0.4	0.5	0.2	69	0.29	0.062	20
REP 1230313	QC	1.3	134.2	22.0	93	0.2	40.3	35.6	1201	5.47	18.7	4.4	3.3	9	0.3	0.5	0.3	69	0.29	0.064	20
1230335	Soil	0.6	265.7	19.2	88	0.1	54.0	69.4	1905	6.72	3.0	13.3	1.9	9	0.3	0.1	0.2	96	0.22	0.055	16
REP 1230335	QC	0.7	272.5	19.6	91	0.2	55.4	71.9	1852	6.69	3.0	13.5	2.0	10	0.4	0.1	0.2	100	0.22	0.058	17
1230360	Soil	0.8	229.1	19.8	92	0.1	45.4	39.0	1974	5.93	6.0	11.2	1.7	7	0.5	0.3	0.2	96	0.13	0.086	15
REP 1230360	QC	0.8	237.2	20.4	93	0.1	45.3	40.9	2046	6.12	5.9	12.7	1.7	7	0.5	0.3	0.2	98	0.14	0.093	15
1230363	Soil	0.7	362.6	27.9	91	0.3	53.0	56.1	2355	6.82	8.7	32.6	2.1	15	0.4	0.3	0.2	116	0.39	0.077	16
REP 1230363	QC	0.6	353.7	26.9	87	0.2	50.9	55.2	2373	6.85	8.5	32.0	2.2	15	0.4	0.2	0.1	109	0.36	0.076	16
1230380	Soil	1.0	335.2	27.9	93	0.2	48.9	69.4	2024	6.42	15.6	17.7	3.1	10	0.6	0.5	0.3	76	0.28	0.067	20
REP 1230380	QC	0.9	347.7	29.7	97	0.2	50.5	72.1	2062	6.70	16.2	17.0	3.2	10	0.7	0.5	0.3	73	0.29	0.069	19
1230410	Soil	2.1	199.8	36.0	111	0.2	55.5	54.6	1431	6.80	42.9	20.4	3.5	18	0.3	0.9	0.3	69	0.70	0.061	15
REP 1230410	QC	2.0	190.9	34.9	110	0.2	53.8	54.5	1459	6.90	42.0	21.2	3.5	19	0.4	1.0	0.3	68	0.68	0.058	15
1231558	Soil	1.6	193.2	27.4	98	0.1	55.0	61.2	1380	7.11	19.2	7.5	3.1	15	0.4	0.6	0.3	93	0.45	0.080	21
REP 1231558	QC	1.8	189.9	25.9	96	0.1	54.1	59.4	1361	7.00	18.5	11.7	2.9	15	0.4	0.6	0.3	92	0.42	0.078	21
1231567	Soil	0.6	165.5	16.5	80	<0.1	48.3	38.5	912	5.52	21.8	3.9	2.7	46	0.4	1.2	0.3	70	3.75	0.050	13
REP 1231567	QC	0.6	160.6	15.9	79	<0.1	46.0	36.9	885	5.33	20.7	3.3	2.5	45	0.4	1.1	0.3	70	3.60	0.049	11
1231594	Soil	1.2	343.5	28.2	82	0.2	41.8	54.1	3395	5.47	44.1	5.1	1.0	44	1.0	1.3	0.2	91	0.93	0.180	22
REP 1231594	QC	1.2	348.6	28.8	85	0.2	43.7	53.4	3463	5.50	44.5	4.2	1.0	45	1.0	1.4	0.2	92	0.90	0.179	22
1231610	Soil	1.5	118.4	33.8	97	0.2	42.9	47.3	1282	5.49	48.7	3.8	1.6	6	1.4	1.9	0.3	63	0.04	0.084	22
REP 1231610	QC	1.6	121.0	34.1	99	0.2	44.3	48.6	1264	5.55	49.4	3.4	1.7	6	1.3	1.9	0.3	61	0.04	0.077	22
1231634	Soil	1.4	78.9	22.0	71	0.2	27.1	31.9	1792	3.78	23.1	1.5	1.1	14	0.7	0.7	0.2	58	0.32	0.093	12
REP 1231634	QC	1.4	80.3	21.6	72	0.2	29.0	34.2	1900	4.06	23.8	3.2	1.1	15	0.6	0.7	0.2	62	0.35	0.098	13
1231647	Soil	1.2	86.5	36.0	81	0.2	32.2	41.6	1656	3.95	35.0	2.2	2.0	20	0.5	0.9	0.3	39	0.64	0.128	14
REP 1231647	QC	1.3	85.0	35.3	82	0.2	31.9	40.0	1618	3.98	34.7	0.8	2.0	19	0.6	0.9	0.3	40	0.61	0.128	14
1231810	Soil	1.9	175.1	98.2	74	0.6	45.1	47.3	2374	6.95	9.2	33.7	1.9	18	0.5	0.9	0.3	61	0.22	0.106	14
REP 1231810	QC	1.8	173.7	100.5	77	0.5	47.7	48.0	2392	7.28	9.4	40.6	2.1	18	0.5	0.9	0.3	61	0.22	0.111	15
1231827	Soil	0.9	129.4	13.3	78	0.1	37.9	26.6	939	5.46	7.5	5.0	2.0	4	0.3	0.4	0.2	75	0.08	0.090	19
REP 1231827	QC	0.9	132.1	13.2	77	0.1	38.2	26.0	921	5.38	7.5	6.0	2.0	5	0.3	0.4	0.2	74	0.07	0.087	18

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

QUALITY CONTROL REPORT WHI11001138.1

	Method	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15	1DX15
	Analyte	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Sc	Tl	S	Ga	Se	Te
	Unit	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm
	MDL	1	0.01	1	0.001	1	0.01	0.001	0.01	0.1	0.01	0.1	0.1	0.05	1	0.5	0.2
Pulp Duplicates																	
1230313	Soil	34	1.56	66	0.003	4	2.19	0.003	0.09	<0.1	0.07	9.4	<0.1	<0.05	7	0.7	<0.2
REP 1230313	QC	34	1.51	65	0.003	3	2.29	0.003	0.09	<0.1	0.08	9.1	<0.1	<0.05	7	1.0	<0.2
1230335	Soil	52	2.72	331	0.004	2	3.24	0.002	0.05	<0.1	0.04	9.7	<0.1	<0.05	11	<0.5	<0.2
REP 1230335	QC	53	2.89	323	0.004	1	3.29	0.003	0.06	<0.1	0.04	10.3	<0.1	<0.05	11	<0.5	<0.2
1230360	Soil	46	2.17	258	0.009	1	3.04	0.005	0.06	<0.1	0.05	11.5	<0.1	<0.05	10	0.8	0.3
REP 1230360	QC	48	2.24	262	0.006	1	3.21	0.005	0.06	<0.1	0.06	12.3	<0.1	<0.05	10	0.7	<0.2
1230363	Soil	60	2.41	277	0.007	2	3.23	0.004	0.07	<0.1	0.10	19.6	<0.1	<0.05	11	<0.5	0.2
REP 1230363	QC	58	2.37	266	0.006	2	3.08	0.004	0.06	<0.1	0.09	18.8	<0.1	<0.05	10	<0.5	<0.2
1230380	Soil	42	1.75	202	0.007	3	2.33	0.003	0.08	<0.1	0.08	12.9	<0.1	<0.05	8	<0.5	<0.2
REP 1230380	QC	41	1.79	203	0.007	2	2.40	0.004	0.07	<0.1	0.07	12.7	<0.1	<0.05	8	0.8	<0.2
1230410	Soil	42	2.16	232	0.003	3	3.06	0.003	0.12	<0.1	0.13	10.1	0.1	<0.05	9	1.4	<0.2
REP 1230410	QC	41	2.07	232	0.003	5	2.86	0.003	0.10	<0.1	0.12	9.8	0.1	<0.05	9	1.3	<0.2
1231558	Soil	43	1.84	208	0.004	6	2.87	0.004	0.09	<0.1	0.05	10.2	<0.1	<0.05	9	0.6	<0.2
REP 1231558	QC	42	1.81	204	0.004	5	2.78	0.005	0.08	<0.1	0.04	10.1	<0.1	<0.05	8	0.8	0.2
1231567	Soil	34	1.83	80	0.006	4	2.14	0.004	0.12	<0.1	0.11	8.3	<0.1	<0.05	7	<0.5	<0.2
REP 1231567	QC	33	1.69	74	0.008	4	2.03	0.004	0.12	<0.1	0.09	8.1	<0.1	<0.05	7	<0.5	<0.2
1231594	Soil	42	1.68	237	0.008	6	2.68	0.010	0.08	<0.1	0.06	12.8	0.2	0.10	8	1.5	<0.2
REP 1231594	QC	43	1.78	230	0.008	6	2.75	0.009	0.07	<0.1	0.06	13.0	0.2	0.09	9	1.6	0.2
1231610	Soil	26	0.46	65	0.005	3	1.32	0.003	0.10	<0.1	0.05	5.6	0.1	<0.05	5	0.7	0.2
REP 1231610	QC	27	0.44	65	0.004	4	1.22	0.003	0.09	<0.1	0.04	5.7	0.1	<0.05	4	0.8	0.2
1231634	Soil	27	0.75	147	0.007	2	1.74	0.004	0.05	<0.1	0.04	7.8	0.1	<0.05	5	<0.5	<0.2
REP 1231634	QC	27	0.78	155	0.009	2	1.86	0.004	0.06	<0.1	0.04	8.1	0.1	0.07	6	0.7	<0.2
1231647	Soil	24	0.57	131	0.011	4	1.50	0.006	0.09	<0.1	0.05	7.8	0.1	0.09	4	1.2	<0.2
REP 1231647	QC	23	0.52	129	0.011	5	1.45	0.006	0.09	<0.1	0.04	8.1	0.1	0.08	4	0.8	<0.2
1231810	Soil	31	1.04	328	0.009	1	2.01	0.006	0.07	<0.1	1.04	8.9	0.3	<0.05	7	1.7	<0.2
REP 1231810	QC	32	1.06	347	0.011	2	2.18	0.006	0.07	<0.1	1.01	9.4	0.3	<0.05	7	1.9	<0.2
1231827	Soil	38	1.69	110	0.007	3	2.98	0.005	0.08	<0.1	0.08	6.8	<0.1	<0.05	9	<0.5	<0.2
REP 1231827	QC	37	1.66	110	0.006	2	2.95	0.004	0.07	<0.1	0.09	6.6	<0.1	<0.05	9	0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

QUALITY CONTROL REPORT WHI11001138.1

		1DX15 Mo ppm 0.1	1DX15 Cu ppm 0.1	1DX15 Pb ppm 0.1	1DX15 Zn ppm 1	1DX15 Ag ppm 0.1	1DX15 Ni ppm 0.1	1DX15 Co ppm 0.1	1DX15 Mn ppm 1	1DX15 Fe % 0.01	1DX15 As ppm 0.5	1DX15 Au ppb 0.5	1DX15 Th ppm 0.1	1DX15 Sr ppm 1	1DX15 Cd ppm 0.1	1DX15 Sb ppm 0.1	1DX15 Bi ppm 0.1	1DX15 V ppm 2	1DX15 Ca % 0.01	1DX15 P % 0.001	1DX15 La ppm 1
1231842	Soil	0.6	137.9	13.5	93	0.2	46.6	33.5	1079	5.51	4.7	17.8	2.1	18	0.3	0.2	0.2	77	0.56	0.051	15
REP 1231842	QC	0.7	141.0	13.4	94	0.2	47.0	32.6	1054	5.40	4.3	17.4	2.0	18	0.3	0.2	0.2	80	0.55	0.050	14
1231865	Soil	1.5	255.7	20.8	68	0.2	28.3	24.5	1071	4.21	13.5	17.2	1.1	19	0.1	0.7	0.2	56	0.51	0.127	13
REP 1231865	QC	1.4	250.7	19.5	67	0.2	27.0	24.1	1025	4.19	13.2	16.7	1.1	19	0.1	0.7	0.2	54	0.49	0.123	13
1231887	Soil	1.2	49.3	15.1	63	<0.1	25.1	14.3	623	5.15	10.9	<0.5	0.6	5	0.2	0.6	0.3	57	0.06	0.110	10
REP 1231887	QC	1.1	50.4	15.1	62	<0.1	25.3	15.3	648	5.25	11.6	2.3	0.5	5	0.2	0.5	0.3	58	0.06	0.107	10
1231895	Soil	2.3	97.1	17.0	89	0.1	48.8	26.0	966	6.72	30.0	4.0	1.6	11	0.4	0.5	0.3	48	0.28	0.091	15
REP 1231895	QC	2.0	98.0	16.5	91	0.1	47.7	26.1	924	6.48	30.2	2.5	1.6	11	0.5	0.5	0.2	46	0.26	0.090	16
Reference Materials																					
STD DS8	Standard	12.7	105.4	114.7	305	1.7	36.5	7.2	577	2.44	23.6	102.3	5.8	64	2.2	5.4	5.9	42	0.67	0.079	15
STD DS8	Standard	14.4	116.1	125.7	330	1.9	40.3	8.0	640	2.53	26.0	114.5	7.7	74	2.2	6.7	7.2	46	0.75	0.080	17
STD DS8	Standard	11.8	101.0	115.3	273	1.7	34.0	6.9	560	2.26	23.0	110.0	5.8	57	2.1	5.0	5.8	39	0.61	0.073	13
STD DS8	Standard	13.8	109.3	116.2	310	1.9	37.3	7.4	624	2.46	26.2	111.0	5.3	60	2.5	5.1	5.7	43	0.65	0.080	13
STD DS8	Standard	11.6	102.2	118.7	292	1.6	34.9	6.7	555	2.19	23.8	110.7	6.4	65	2.2	5.4	6.8	38	0.60	0.074	12
STD DS8	Standard	12.9	113.4	117.8	306	1.8	38.8	7.7	598	2.48	24.1	113.4	6.3	60	2.4	5.4	6.4	41	0.66	0.077	15
STD DS8	Standard	12.3	96.6	111.0	299	1.7	33.4	6.8	542	2.26	23.1	104.9	5.6	54	2.2	4.8	5.7	37	0.62	0.075	13
STD DS8	Standard	11.9	105.3	118.5	317	1.8	37.0	7.4	633	2.52	24.9	112.6	5.5	54	2.3	4.6	5.6	42	0.71	0.082	14
STD DS8	Standard	12.1	100.7	109.3	303	1.8	35.0	7.0	588	2.33	23.2	104.9	5.1	50	2.2	4.3	5.2	39	0.67	0.079	14
STD DS8	Standard	13.0	107.5	112.4	310	1.8	36.8	7.4	612	2.43	25.3	103.7	5.2	56	2.3	4.3	5.4	40	0.67	0.078	15
STD DS8	Standard	12.6	121.5	130.1	330	1.8	36.9	7.4	594	2.45	26.0	121.7	6.8	75	2.6	6.8	7.7	40	0.68	0.083	15
STD DS8	Standard	14.0	122.6	135.4	319	1.9	40.0	8.0	635	2.54	25.4	105.9	7.5	66	2.4	5.8	7.2	44	0.74	0.079	17
STD DS8 Expected		13.44	110	123	312	1.69	38.1	7.5	615	2.46	26	107	6.89	67.7	2.38	5.7	6.67	41.1	0.7	0.08	14.6
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	0.02	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	0.02	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy Co**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

QUALITY CONTROL REPORT WHI11001138.1

		1DX15 Cr ppm 1	1DX15 Mg % 0.01	1DX15 Ba ppm 1	1DX15 Ti % 0.001	1DX15 B ppm 1	1DX15 Al % 0.01	1DX15 Na % 0.001	1DX15 K % 0.01	1DX15 W ppm 0.1	1DX15 Hg ppm 0.01	1DX15 Sc ppm 0.1	1DX15 Tl ppm 0.1	1DX15 S % 0.05	1DX15 Ga ppm 1	1DX15 Se ppm 0.5	1DX15 Te ppm 0.2
1231842	Soil	45	2.05	327	0.004	2	3.11	0.005	0.06	<0.1	0.09	10.0	<0.1	<0.05	9	0.6	<0.2
REP 1231842	QC	46	2.10	328	0.004	2	3.21	0.006	0.07	<0.1	0.09	9.8	<0.1	<0.05	9	1.0	<0.2
1231865	Soil	29	1.08	363	0.007	2	2.23	0.005	0.05	<0.1	0.31	7.7	0.1	0.05	7	3.5	<0.2
REP 1231865	QC	30	1.02	347	0.006	4	2.20	0.006	0.05	<0.1	0.32	7.8	0.1	0.05	7	3.3	<0.2
1231887	Soil	33	0.72	77	0.008	2	2.35	0.004	0.06	<0.1	0.04	1.8	<0.1	0.07	7	1.5	<0.2
REP 1231887	QC	34	0.75	82	0.008	1	2.37	0.004	0.06	<0.1	0.05	2.0	0.1	0.06	7	1.2	<0.2
1231895	Soil	27	0.78	86	0.002	4	1.81	0.006	0.09	<0.1	0.14	6.1	0.2	<0.05	5	<0.5	0.3
REP 1231895	QC	26	0.80	88	0.003	3	1.79	0.007	0.08	<0.1	0.16	5.9	0.2	<0.05	5	0.6	0.2
Reference Materials																	
STD DS8	Standard	113	0.60	268	0.113	2	0.84	0.089	0.40	2.9	0.18	2.0	5.3	0.17	5	5.0	4.8
STD DS8	Standard	124	0.65	290	0.133	4	0.97	0.098	0.44	3.3	0.20	2.4	5.3	0.17	5	5.9	5.2
STD DS8	Standard	105	0.56	244	0.097	3	0.86	0.086	0.38	2.6	0.17	2.0	5.1	0.11	4	6.5	4.4
STD DS8	Standard	115	0.63	277	0.105	2	0.94	0.093	0.40	3.1	0.20	2.4	5.5	0.15	5	5.3	5.3
STD DS8	Standard	106	0.52	239	0.113	3	0.79	0.070	0.37	2.7	0.20	1.7	5.0	0.16	4	4.3	4.2
STD DS8	Standard	115	0.58	274	0.110	3	0.86	0.080	0.38	3.0	0.20	2.0	5.3	0.14	4	5.0	5.1
STD DS8	Standard	106	0.57	266	0.088	3	0.86	0.080	0.37	2.9	0.19	2.1	5.0	0.12	4	4.8	5.0
STD DS8	Standard	115	0.59	283	0.091	2	0.86	0.086	0.42	3.2	0.20	2.5	5.7	0.13	5	5.2	5.4
STD DS8	Standard	107	0.57	260	0.080	2	0.85	0.085	0.41	2.8	0.20	2.3	5.3	0.17	4	5.1	5.2
STD DS8	Standard	110	0.61	276	0.083	3	0.93	0.104	0.42	3.1	0.22	3.2	5.4	0.14	5	4.1	4.8
STD DS8	Standard	113	0.61	272	0.128	3	0.89	0.092	0.42	3.2	0.22	2.6	5.4	0.15	5	5.5	4.8
STD DS8	Standard	124	0.64	275	0.121	3	0.94	0.088	0.43	2.9	0.19	2.4	5.4	0.18	5	5.3	5.1
STD DS8 Expected		115	0.6045	279	0.113	2.6	0.93	0.0883	0.41	3	0.192	2.3	5.4	0.1679	4.7	5.23	5
BLK	Blank	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

QUALITY CONTROL REPORT WHI11001138.1

		1DX15 Mo ppm 0.1	1DX15 Cu ppm 0.1	1DX15 Pb ppm 0.1	1DX15 Zn ppm 1	1DX15 Ag ppm 0.1	1DX15 Ni ppm 0.1	1DX15 Co ppm 0.1	1DX15 Mn ppm 1	1DX15 Fe % 0.01	1DX15 As ppm 0.5	1DX15 Au ppb 0.5	1DX15 Th ppm 0.1	1DX15 Sr ppm 1	1DX15 Cd ppm 0.1	1DX15 Sb ppm 0.1	1DX15 Bi ppm 0.1	1DX15 V ppm 2	1DX15 Ca % 0.01	1DX15 P % 0.001	1DX15 La ppm 1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1
BLK	Blank	<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01	<0.001	<1

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 05, 2011

QUALITY CONTROL REPORT WHI11001138.1

		1DX15 Cr ppm 1	1DX15 Mg % 0.01	1DX15 Ba ppm 1	1DX15 Ti % 0.001	1DX15 B ppm 1	1DX15 Al % 0.01	1DX15 Na % 0.001	1DX15 K % 0.01	1DX15 W ppm 0.1	1DX15 Hg ppm 0.01	1DX15 Sc ppm 0.1	1DX15 Tl ppm 0.1	1DX15 S % 0.05	1DX15 Ga ppm 1	1DX15 Se ppm 0.5	1DX15 Te ppm 0.2
BLK	Blank	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2
BLK	Blank	<1	<0.01	<1	<0.001	<1	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.1	<0.05	<1	<0.5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada

www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Submitted By: Email Distribution List
Receiving Lab: Canada-Whitehorse
Received: August 24, 2011
Report Date: October 02, 2011
Page: 1 of 5

CERTIFICATE OF ANALYSIS WHI11001287.1

CLIENT JOB INFORMATION

Project: STEN NW
Shipment ID: STEN NW
P.O. Number
Number of Samples: 96

SAMPLE DISPOSAL

RTRN-PLP Return
RTRN-RJT Return

Acme does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Method Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
R200-250	96	Crush, split and pulverize 250 g rock to 200 mesh			WHI
3B	96	Fire assay fusion Au by ICP-ES	30	Completed	VAN
1DX	96	1:1:1 Aqua Regia digestion ICP-MS analysis	0.5	Completed	VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources (Petro One Energy Corp)
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3
Canada

CC:

BRITISH COLUMBIA CERTIFIED ASSAYER
CLARENCE LEONG
GENERAL MANAGER

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Acme assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 02, 2011

CERTIFICATE OF ANALYSIS WHI11001287.1

	Method	WGHT	3B	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1229204	Rock	0.38	21	1.2	66.0	33.1	84	0.2	28.2	14.8	198	6.93	24.4	1.7	1.0	34	0.2	0.7	0.2	87	0.37
1229205	Rock	0.63	<2	0.1	45.8	5.5	48	<0.1	21.1	8.3	746	5.39	32.7	<0.5	0.4	401	0.2	0.4	<0.1	84	15.08
1229206	Rock	0.43	<2	0.2	59.5	4.6	41	<0.1	22.3	10.8	1408	3.23	3.2	<0.5	0.4	673	0.2	<0.1	<0.1	59	13.70
1229207	Rock	0.49	3	<0.1	315.1	5.5	94	<0.1	63.6	39.7	531	6.40	7.6	2.1	1.7	40	0.2	<0.1	0.2	144	1.69
1229208	Rock	0.66	<2	<0.1	89.3	4.7	76	<0.1	43.0	28.2	953	5.35	6.1	1.2	1.2	53	0.2	<0.1	0.1	106	3.17
1229209	Rock	0.75	3	<0.1	174.7	8.5	102	<0.1	58.9	31.8	313	6.88	1.7	3.9	1.2	13	0.1	<0.1	0.1	85	0.57
1229210	Rock	0.46	<2	0.2	165.0	8.3	74	<0.1	46.4	25.2	1534	5.37	1.3	4.6	0.9	146	0.5	<0.1	0.2	90	7.63
1229211	Rock	0.80	<2	0.2	47.7	29.8	66	<0.1	19.2	9.4	716	3.23	3.7	<0.5	1.2	190	0.4	<0.1	0.2	33	7.29
1229212	Rock	0.47	<2	5.7	8.7	7.0	33	<0.1	8.2	6.2	1953	1.31	8.1	<0.5	1.5	164	0.3	0.3	0.1	5	12.91
1229213	Rock	0.45	<2	0.6	6.6	6.7	20	<0.1	5.8	6.6	2071	1.21	3.8	<0.5	1.3	125	0.6	<0.1	<0.1	4	14.17
1229214	Rock	0.56	3	2.7	44.3	37.7	32	0.1	23.2	9.5	1275	3.51	12.8	3.6	1.3	79	0.7	0.4	0.2	16	6.71
1229215	Rock	0.45	<2	0.3	7.9	9.4	18	<0.1	9.9	10.2	825	1.33	4.7	2.0	1.1	135	0.4	0.1	<0.1	9	12.85
1229216	Rock	0.47	<2	1.0	17.5	7.4	22	<0.1	10.0	11.0	1502	1.34	5.0	<0.5	1.1	114	0.6	0.1	0.1	6	11.76
1229217	Rock	0.48	3	<0.1	104.9	5.7	75	<0.1	48.8	16.3	752	4.83	1.1	2.6	0.6	116	0.4	<0.1	0.1	68	5.27
1229218	Rock	0.79	14	1.8	66.3	112.5	78	0.3	52.9	33.8	143	7.08	5.0	12.8	2.2	7	0.4	0.1	0.9	38	0.21
1229219	Rock	0.54	4	0.2	106.0	7.9	61	<0.1	37.1	21.8	1878	4.71	0.9	2.4	0.9	124	0.5	<0.1	0.1	78	9.59
1229220	Rock	0.36	7	0.6	209.5	16.2	69	<0.1	52.1	32.7	911	4.00	15.3	6.1	1.2	71	0.2	0.2	0.3	71	5.30
1229221	Rock	0.40	<2	0.1	41.8	14.4	95	<0.1	18.2	6.3	1467	5.49	18.6	<0.5	0.6	167	1.4	3.2	0.1	36	8.22
1229222	Rock	0.62	<2	0.9	6.3	7.2	31	<0.1	4.7	3.4	1219	1.90	7.1	<0.5	0.9	91	0.6	0.3	<0.1	4	7.38
1229223	Rock	0.62	2	2.6	16.9	12.1	44	<0.1	8.9	5.9	1394	1.99	14.4	<0.5	1.8	141	0.1	0.3	0.1	7	9.89
1229224	Rock	0.49	6	0.1	121.7	10.1	74	<0.1	43.8	27.7	1481	5.62	28.4	0.7	1.1	202	0.3	0.6	0.1	112	6.88
1229225	Rock	0.59	3	0.2	90.2	5.4	55	<0.1	32.8	19.1	2175	4.08	8.5	0.6	0.8	179	0.3	<0.1	0.1	85	12.08
1229226	Rock	0.67	<2	0.4	21.3	13.2	43	<0.1	10.3	6.3	1067	1.96	14.5	<0.5	2.0	117	0.1	0.2	0.1	7	8.46
1229227	Rock	0.41	5	0.4	84.6	12.4	127	<0.1	47.4	32.3	399	5.90	47.0	1.0	2.8	30	2.2	<0.1	0.4	56	2.48
1229228	Rock	0.71	<2	0.4	82.8	6.2	32	<0.1	15.9	9.8	2579	3.47	7.3	<0.5	0.3	407	1.3	0.1	<0.1	34	19.17
1229229	Rock	0.38	<2	0.3	41.9	5.5	49	<0.1	22.3	10.4	1874	5.91	14.2	<0.5	0.9	216	0.4	0.1	<0.1	47	16.01
1229230	Rock	0.71	4	0.4	107.0	16.9	82	<0.1	39.4	21.3	268	4.09	1.0	2.4	6.0	28	0.1	<0.1	0.4	28	0.63
1229231	Rock	0.64	<2	1.9	38.1	3.8	132	<0.1	29.2	40.6	493	8.76	3.8	0.6	5.0	79	<0.1	<0.1	<0.1	215	1.83
1229232	Rock	0.81	3	0.2	140.9	8.9	82	<0.1	40.8	21.5	1793	5.82	8.2	2.3	0.5	116	0.6	0.2	0.2	73	5.91
1229233	Rock	0.52	8	0.7	71.8	12.5	68	<0.1	43.5	28.1	1190	5.60	4.1	7.4	0.6	65	0.4	0.1	0.2	91	5.20

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 02, 2011

CERTIFICATE OF ANALYSIS WHI11001287.1

		Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
		Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Tl	S	Sc	Se	Ga	Te
		Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
		MDL	0.001	1	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.05	0.1	0.5	1	0.2
1229204	Rock		0.024	4	44	1.62	22	0.004	<20	2.68	0.002	0.09	<0.1	0.59	<0.1	1.00	4.3	1.7	8	<0.2
1229205	Rock		0.005	2	13	6.03	16	<0.001	<20	0.23	0.031	0.04	2.7	0.07	<0.1	<0.05	4.8	<0.5	<1	<0.2
1229206	Rock		0.019	3	24	1.48	25	0.002	<20	1.81	0.003	0.04	<0.1	0.03	<0.1	<0.05	5.9	<0.5	5	<0.2
1229207	Rock		0.040	9	98	2.94	19	0.004	<20	3.59	0.005	0.10	<0.1	0.11	<0.1	0.07	8.9	<0.5	13	<0.2
1229208	Rock		0.044	8	53	2.44	20	0.003	<20	2.97	0.009	0.09	<0.1	0.09	<0.1	<0.05	9.5	<0.5	10	<0.2
1229209	Rock		0.068	8	47	3.21	47	0.004	<20	3.81	<0.001	0.17	<0.1	0.07	<0.1	0.17	6.1	<0.5	11	<0.2
1229210	Rock		0.048	7	45	2.76	468	0.004	<20	3.30	0.015	0.16	<0.1	0.12	<0.1	0.17	7.6	<0.5	10	<0.2
1229211	Rock		0.018	3	19	1.80	63	0.002	<20	1.71	0.007	0.10	<0.1	0.01	<0.1	0.20	3.8	<0.5	5	<0.2
1229212	Rock		0.018	2	4	3.51	26	<0.001	<20	0.20	0.010	0.08	<0.1	0.03	<0.1	0.47	2.4	<0.5	<1	<0.2
1229213	Rock		0.018	2	4	3.74	89	<0.001	<20	0.20	0.010	0.07	<0.1	0.02	<0.1	0.23	1.9	<0.5	<1	<0.2
1229214	Rock		0.022	2	11	1.58	27	<0.001	<20	0.74	0.011	0.10	<0.1	0.20	<0.1	1.01	4.0	0.8	2	<0.2
1229215	Rock		0.011	2	3	1.84	30	<0.001	<20	0.30	0.009	0.06	<0.1	0.04	<0.1	0.30	1.7	0.6	<1	<0.2
1229216	Rock		0.025	2	4	2.39	25	<0.001	<20	0.22	0.008	0.06	<0.1	0.03	<0.1	0.36	2.7	<0.5	<1	<0.2
1229217	Rock		0.030	3	41	2.05	430	0.003	<20	2.55	0.019	0.15	<0.1	0.04	<0.1	0.13	5.9	<0.5	7	<0.2
1229218	Rock		0.027	5	20	1.45	47	0.002	<20	2.29	0.009	0.21	<0.1	0.10	<0.1	2.80	2.8	10.3	7	0.4
1229219	Rock		0.037	10	32	2.29	59	0.003	<20	2.69	0.020	0.10	<0.1	0.05	<0.1	0.12	9.2	<0.5	8	<0.2
1229220	Rock		0.038	5	39	1.29	42	0.002	<20	1.87	0.019	0.22	<0.1	0.13	<0.1	1.09	11.4	1.0	6	<0.2
1229221	Rock		0.002	5	9	1.99	2046	<0.001	<20	0.24	0.011	0.09	<0.1	0.21	<0.1	0.11	6.1	<0.5	<1	<0.2
1229222	Rock		0.013	3	2	2.40	48	<0.001	<20	0.11	0.008	0.07	<0.1	0.33	<0.1	0.07	2.1	<0.5	<1	<0.2
1229223	Rock		0.026	3	4	3.62	59	<0.001	<20	0.19	0.010	0.12	<0.1	0.05	0.1	0.48	2.9	<0.5	<1	<0.2
1229224	Rock		0.043	5	40	2.08	56	0.001	<20	2.12	0.011	0.09	<0.1	0.02	<0.1	0.13	12.4	0.9	8	<0.2
1229225	Rock		0.033	8	37	1.71	32	0.002	<20	2.03	0.015	0.09	<0.1	0.02	<0.1	0.13	9.8	<0.5	7	<0.2
1229226	Rock		0.029	3	4	3.39	28	<0.001	<20	0.28	0.009	0.11	<0.1	0.05	<0.1	0.24	3.4	<0.5	<1	<0.2
1229227	Rock		0.041	6	32	2.94	36	0.002	<20	3.05	0.010	0.19	<0.1	0.04	<0.1	0.24	5.4	0.9	9	0.3
1229228	Rock		0.017	3	12	1.71	29	0.001	<20	1.04	0.007	0.09	<0.1	0.01	<0.1	<0.05	9.2	<0.5	3	<0.2
1229229	Rock		0.013	5	12	3.77	40	0.001	<20	0.32	0.021	0.08	<0.1	<0.01	<0.1	<0.05	6.3	<0.5	1	<0.2
1229230	Rock		0.053	32	22	1.39	378	0.007	<20	2.03	0.011	0.28	<0.1	0.05	<0.1	0.10	3.3	<0.5	5	<0.2
1229231	Rock		0.555	56	17	2.87	30	0.012	<20	4.38	0.059	0.14	<0.1	0.05	<0.1	0.24	5.9	<0.5	15	<0.2
1229232	Rock		0.037	3	35	3.23	167	0.003	<20	2.62	0.021	0.15	<0.1	0.40	<0.1	0.41	9.1	0.9	8	<0.2
1229233	Rock		0.052	5	47	2.21	42	0.004	<20	2.94	0.040	0.14	<0.1	0.23	<0.1	0.95	7.7	1.4	9	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 02, 2011

CERTIFICATE OF ANALYSIS WHI11001287.1

	Method	WGHT	3B	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1229234	Rock	0.37	<2	0.9	10.2	5.1	10	<0.1	6.0	3.7	2205	1.13	3.9	0.9	0.9	186	1.6	0.1	<0.1	4	14.76
1229235	Rock	0.64	<2	<0.1	140.3	5.1	88	<0.1	41.5	28.1	1117	6.08	11.3	1.7	1.0	88	0.2	0.2	0.2	159	6.28
1229236	Rock	0.83	3	<0.1	75.9	4.9	47	<0.1	27.0	21.0	3146	3.16	0.8	1.1	0.5	490	0.6	<0.1	<0.1	61	11.80
1229237	Rock	0.88	<2	0.2	6.1	2.0	7	<0.1	3.8	3.8	1371	1.07	1.1	6.5	<0.1	201	0.8	<0.1	<0.1	6	10.52
1229238	Rock	0.29	6	0.1	223.9	11.8	107	0.1	53.4	33.7	684	6.82	1.6	4.3	1.5	51	0.3	<0.1	0.2	105	2.47
1229239	Rock	0.57	5	0.4	108.1	25.7	173	0.1	49.8	20.3	345	10.47	10.7	5.7	1.1	7	0.5	0.2	0.2	83	0.07
1229240	Rock	0.82	4	0.1	178.0	7.8	96	<0.1	57.4	34.9	934	6.73	2.3	2.2	1.4	41	0.4	<0.1	0.2	117	2.19
1229241	Rock	0.48	<2	<0.1	104.9	8.2	55	<0.1	32.2	19.8	1798	4.06	<0.5	<0.5	0.7	230	0.5	<0.1	<0.1	76	13.38
1229242	Rock	0.64	3	<0.1	145.6	47.6	56	<0.1	56.3	29.6	1875	8.64	<0.5	1.6	0.7	204	0.8	<0.1	0.4	62	11.41
1229243	Rock	0.80	3	0.6	31.6	22.4	44	0.2	30.3	8.6	760	3.99	5.3	<0.5	1.3	115	0.2	0.4	0.1	9	6.23
1229244	Rock	0.33	10	0.7	75.0	31.9	60	0.2	54.3	30.5	381	6.43	9.6	<0.5	2.8	20	0.5	0.5	0.5	28	1.27
1229245	Rock	0.37	11	3.9	197.0	34.1	109	0.3	168.8	178.9	450	14.06	13.2	<0.5	1.2	28	0.7	0.3	0.4	78	1.52
1229246	Rock	0.42	<2	1.4	77.0	3.2	53	<0.1	27.2	17.6	1289	4.28	13.5	<0.5	0.9	166	0.3	0.1	0.2	70	5.03
1229247	Rock	0.63	3	<0.1	43.1	4.6	50	<0.1	18.7	10.9	460	3.08	8.1	<0.5	0.7	261	0.2	0.1	<0.1	61	3.44
1229248	Rock	0.58	<2	<0.1	73.9	2.7	43	<0.1	28.9	15.2	1491	4.31	24.3	<0.5	0.4	63	0.4	0.1	<0.1	80	3.57
1229257	Rock	0.25	<2	16.5	14.1	12.2	18	<0.1	10.6	4.9	1738	2.21	9.3	<0.5	1.0	140	0.4	0.2	<0.1	6	13.33
1229258	Rock	0.40	<2	0.2	24.7	5.1	59	<0.1	24.5	7.0	2168	5.00	4.7	<0.5	0.3	133	0.8	0.3	<0.1	92	11.31
1229259	Rock	0.41	5	10.4	27.9	13.1	26	<0.1	22.8	11.0	1785	6.59	25.1	<0.5	0.9	80	0.9	0.3	<0.1	4	6.26
1229260	Rock	0.55	8	0.3	122.9	22.3	86	<0.1	66.1	38.7	571	8.69	5.9	1.5	0.7	48	0.3	0.2	0.2	102	1.85
1229261	Rock	0.38	10	0.9	102.2	60.2	54	0.2	17.1	9.4	998	11.36	142.3	<0.5	1.8	47	0.2	4.8	0.2	9	5.44
1229262	Rock	0.66	84	3.6	115.6	213.1	33	1.6	42.0	16.2	1468	10.24	60.1	35.9	1.7	44	1.5	1.8	0.2	11	3.96
1229263	Rock	0.54	54	8.3	161.4	292.5	33	2.2	15.7	6.2	1524	15.24	88.9	20.9	1.6	51	1.8	2.2	0.1	3	4.01
1229264	Rock	0.51	4	0.2	124.8	13.1	130	<0.1	44.2	24.5	1338	5.81	25.8	0.9	0.8	137	4.8	0.3	0.1	91	7.63
1229265	Rock	0.33	4	0.1	58.9	42.9	67	0.1	40.6	36.1	1500	6.33	41.3	<0.5	0.7	48	0.3	<0.1	0.7	86	3.91
1229266	Rock	0.49	12	0.6	146.2	39.8	52	0.2	60.2	21.1	150	4.64	64.1	<0.5	1.7	6	0.5	0.8	0.3	59	0.21
1229267	Rock	0.69	4	13.0	108.3	44.8	48	0.1	32.7	14.5	1645	8.31	28.0	<0.5	1.1	100	2.0	0.4	0.2	8	7.35
1229268	Rock	1.12	6	13.0	37.6	15.5	36	<0.1	23.2	18.4	841	7.72	15.6	2.0	2.2	101	1.2	0.2	0.4	13	4.17
1229269	Rock	0.87	9	7.4	66.0	47.0	39	0.1	44.2	34.3	1505	8.50	36.2	<0.5	1.1	107	1.5	0.3	0.5	13	6.79
1229270	Rock	0.76	<2	1.1	8.2	13.1	51	<0.1	15.1	3.9	1673	3.05	29.7	<0.5	0.6	63	1.0	0.5	<0.1	9	16.41
1229651	Rock	1.34	<2	1.4	7.6	5.8	49	<0.1	4.6	3.9	1358	2.25	3.0	<0.5	1.3	109	0.1	<0.1	<0.1	11	9.50

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 02, 2011

CERTIFICATE OF ANALYSIS WHI11001287.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Tl	S	Sc	Se	Ga	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.05	0.1	0.5	1	0.2
1229234	Rock	0.021	2	3	0.97	16	<0.001	<20	0.20	0.007	0.07	<0.1	0.19	<0.1	0.40	2.3	0.6	<1	<0.2
1229235	Rock	0.048	6	52	2.83	25	0.005	<20	3.49	0.019	0.08	<0.1	0.04	<0.1	0.19	12.2	<0.5	12	<0.2
1229236	Rock	0.027	4	21	1.63	879	0.003	<20	1.94	0.008	0.07	<0.1	0.02	<0.1	0.11	5.5	<0.5	6	<0.2
1229237	Rock	0.005	3	5	0.36	33	<0.001	<20	0.14	0.009	0.01	<0.1	<0.01	<0.1	<0.05	2.9	0.6	<1	<0.2
1229238	Rock	0.066	8	50	3.21	125	0.004	<20	3.99	0.007	0.15	<0.1	0.03	<0.1	0.11	7.6	0.6	13	<0.2
1229239	Rock	0.036	4	50	2.59	120	0.005	<20	4.41	0.008	0.14	<0.1	0.26	<0.1	0.94	3.9	1.6	13	<0.2
1229240	Rock	0.061	11	56	3.16	123	0.009	<20	3.93	0.030	0.16	<0.1	0.04	<0.1	0.08	8.1	1.0	13	<0.2
1229241	Rock	0.032	8	42	1.93	870	0.005	<20	2.25	0.018	0.08	<0.1	0.01	<0.1	<0.05	8.8	0.6	8	<0.2
1229242	Rock	0.041	6	26	1.60	53	0.004	<20	2.20	0.013	0.20	<0.1	0.05	<0.1	5.86	6.6	16.2	7	<0.2
1229243	Rock	0.014	2	<1	1.89	25	<0.001	<20	0.62	0.007	0.12	<0.1	0.41	0.1	2.51	3.2	1.3	2	<0.2
1229244	Rock	0.054	5	23	1.19	67	0.002	<20	1.41	0.008	0.24	<0.1	0.47	0.1	2.21	4.3	4.1	5	0.5
1229245	Rock	0.057	3	45	2.07	29	0.003	<20	2.90	0.010	0.13	<0.1	0.34	<0.1	7.64	6.3	11.0	9	0.6
1229246	Rock	0.037	4	34	2.09	33	0.002	<20	1.47	0.021	0.09	<0.1	0.27	<0.1	<0.05	10.8	1.0	6	<0.2
1229247	Rock	0.023	4	21	1.00	12	0.002	<20	1.47	0.014	0.05	<0.1	0.17	<0.1	<0.05	5.6	0.5	6	<0.2
1229248	Rock	0.022	3	52	1.13	52	0.004	<20	0.74	0.020	0.05	<0.1	0.05	<0.1	0.18	9.8	0.5	3	<0.2
1229257	Rock	0.022	2	4	3.36	46	<0.001	<20	0.20	0.013	0.07	<0.1	0.10	<0.1	1.15	2.4	0.9	<1	<0.2
1229258	Rock	0.008	3	9	3.99	32	<0.001	<20	0.23	0.015	0.03	<0.1	0.03	<0.1	<0.05	8.5	1.1	1	<0.2
1229259	Rock	0.015	1	3	2.80	13	<0.001	<20	0.11	0.009	0.06	<0.1	0.07	<0.1	5.35	2.0	4.5	<1	<0.2
1229260	Rock	0.056	3	50	2.38	26	0.003	<20	3.04	0.037	0.18	<0.1	0.04	<0.1	4.18	7.4	8.2	11	0.2
1229261	Rock	0.022	1	11	2.35	12	<0.001	<20	0.79	0.008	0.09	<0.1	1.65	0.7	9.40	3.3	1.6	2	<0.2
1229262	Rock	0.022	1	8	1.94	24	<0.001	<20	0.72	0.011	0.11	<0.1	1.28	0.2	8.06	2.7	5.1	2	<0.2
1229263	Rock	0.016	1	7	1.56	15	<0.001	<20	0.60	0.011	0.09	<0.1	1.42	0.3	>10	2.3	7.5	2	<0.2
1229264	Rock	0.043	6	38	2.59	22	0.002	<20	2.68	0.019	0.13	<0.1	0.12	<0.1	0.18	10.1	1.2	9	<0.2
1229265	Rock	0.040	2	47	3.02	15	0.003	<20	2.43	0.031	0.11	<0.1	0.03	<0.1	1.54	10.8	6.6	9	0.3
1229266	Rock	0.037	5	46	1.04	22	0.002	<20	1.54	0.034	0.16	<0.1	0.12	<0.1	1.97	4.0	1.8	5	<0.2
1229267	Rock	0.026	1	4	2.78	40	<0.001	<20	0.57	0.015	0.11	<0.1	0.31	0.1	6.33	3.2	1.9	2	<0.2
1229268	Rock	0.039	1	10	1.12	33	0.001	<20	0.71	0.013	0.14	<0.1	0.15	0.1	3.86	2.9	3.5	3	0.3
1229269	Rock	0.021	1	7	2.64	21	<0.001	<20	0.67	0.012	0.08	<0.1	0.14	0.3	7.19	3.2	7.5	2	0.4
1229270	Rock	0.004	4	3	0.22	57	<0.001	<20	0.11	0.002	0.05	<0.1	0.02	0.2	<0.05	1.7	0.6	<1	<0.2
1229651	Rock	0.039	3	7	3.75	27	<0.001	<20	0.26	0.012	0.09	<0.1	0.08	<0.1	0.28	2.7	<0.5	1	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 02, 2011

CERTIFICATE OF ANALYSIS WHI11001287.1

Method		WGHT	3B	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1229652	Rock	0.80	2	0.1	8.2	3.5	31	<0.1	8.9	4.7	1642	1.34	0.8	<0.5	0.8	253	0.2	<0.1	<0.1	4	14.42
1229653	Rock	2.56	6	3.8	11.6	12.8	30	<0.1	7.3	4.4	1705	1.88	8.3	<0.5	1.3	130	0.4	0.3	<0.1	7	10.45
1229654	Rock	2.20	<2	3.8	10.4	4.5	25	<0.1	5.1	4.3	1896	1.16	4.5	<0.5	0.9	159	0.3	0.1	<0.1	4	12.01
1229316	Rock	1.92	<2	0.4	12.2	4.4	33	<0.1	5.3	4.2	1055	2.03	3.5	0.7	1.1	124	<0.1	0.2	0.1	9	8.19
1229317	Rock	1.89	<2	0.5	40.1	7.5	91	<0.1	13.8	9.9	720	4.45	14.5	1.4	1.5	66	0.3	0.3	0.2	35	5.27
1229318	Rock	1.17	9	0.9	102.9	51.9	108	0.2	47.0	23.9	199	11.22	85.0	2.1	2.3	6	0.2	2.1	0.3	56	0.13
1229319	Rock	1.89	<2	0.3	2.9	2.8	23	<0.1	3.7	3.2	1058	1.56	3.1	0.6	1.0	339	0.2	<0.1	<0.1	7	13.10
1229320	Rock	1.86	<2	0.2	13.0	7.0	38	<0.1	5.8	5.6	1168	2.24	5.1	0.5	1.2	280	0.1	0.2	0.1	12	13.00
1229321	Rock	1.78	6	1.0	20.7	16.4	14	<0.1	9.4	14.3	1825	1.74	4.6	4.1	0.8	283	0.7	0.2	0.1	9	11.67
1229322	Rock	1.70	3	2.0	52.7	57.2	51	0.2	13.6	7.9	665	6.04	40.0	0.9	1.9	45	0.2	2.9	0.2	9	4.89
1229323	Rock	1.76	5	2.2	34.3	15.8	61	<0.1	19.5	9.9	1229	3.57	37.4	1.2	2.0	80	0.4	1.3	0.3	12	6.64
1229324	Rock	2.23	<2	0.2	58.1	5.7	50	<0.1	19.7	13.9	1109	3.17	38.5	1.1	0.8	248	0.3	0.4	0.2	50	12.43
1229301	Rock	2.01	<2	0.3	56.7	3.7	33	<0.1	18.1	9.3	2014	2.81	5.4	<0.5	0.4	1115	0.2	<0.1	<0.1	50	17.09
1229302	Rock	0.48	2	0.2	65.9	5.3	42	<0.1	23.5	14.0	2101	3.53	8.9	1.4	0.5	1248	0.3	<0.1	0.1	80	16.31
1229303	Rock	1.14	4	0.2	109.6	8.9	62	<0.1	37.9	24.4	1737	5.18	11.2	1.2	0.7	257	0.2	0.1	0.1	129	9.50
1229304	Rock	1.85	<2	3.1	13.5	9.2	87	<0.1	5.7	5.5	1833	1.79	5.6	<0.5	1.3	280	0.2	0.2	<0.1	5	12.75
1229305	Rock	0.90	<2	0.3	34.4	11.9	63	<0.1	23.7	15.0	1079	4.14	10.8	0.6	1.3	123	0.3	0.2	0.1	52	7.69
1229306	Rock	1.83	<2	<0.1	116.1	5.3	52	<0.1	28.9	20.3	2123	3.82	2.5	1.8	0.5	272	0.3	<0.1	<0.1	173	8.43
1229307	Rock	1.51	4	0.5	9.8	17.1	35	<0.1	9.3	5.6	1430	2.29	12.9	1.6	1.7	147	0.3	0.3	<0.1	13	7.54
1229308	Rock	1.44	3	2.1	14.0	9.9	42	<0.1	9.0	6.2	935	2.14	17.4	0.7	1.8	104	<0.1	0.3	0.1	9	7.78
1229309	Rock	1.80	<2	1.2	12.2	8.2	37	<0.1	6.8	5.1	1204	1.94	10.0	0.9	1.6	236	0.1	0.2	<0.1	9	9.82
1229310	Rock	0.83	3	2.2	13.1	7.3	18	<0.1	6.9	5.6	1316	1.65	11.4	0.7	1.3	139	<0.1	0.2	<0.1	5	9.58
1229311	Rock	1.70	<2	11.3	9.5	7.2	17	<0.1	7.9	7.7	1321	2.28	15.0	0.7	1.2	213	<0.1	0.1	<0.1	9	9.27
1229312	Rock	1.39	<2	1.1	10.2	6.7	27	<0.1	6.7	4.6	1267	2.00	9.3	<0.5	1.4	154	<0.1	0.1	<0.1	8	9.22
1229313	Rock	1.53	<2	4.8	13.7	8.3	27	<0.1	6.9	5.0	1583	2.38	7.3	<0.5	1.3	184	0.1	0.2	<0.1	7	9.39
1229314	Rock	0.90	<2	1.3	14.5	6.7	42	<0.1	8.1	6.2	962	1.78	7.8	0.9	2.0	68	0.2	0.2	0.1	7	6.36
1229315	Rock	1.99	4	0.4	149.5	13.0	110	<0.1	52.3	32.0	1188	6.84	16.5	2.2	2.5	5	0.7	0.5	0.2	128	0.06
1229325	Rock	1.33	<2	2.4	5.4	6.0	18	<0.1	6.3	3.6	1709	2.99	1.8	<0.5	1.0	170	0.1	0.1	<0.1	5	11.70
1229326	Rock	2.07	18	1.0	89.7	74.7	81	0.3	90.1	85.8	1050	5.54	14.4	2.2	2.4	42	0.5	1.3	0.3	43	3.37
1229327	Rock	2.07	<2	1.3	15.3	7.2	26	<0.1	7.1	6.1	1289	2.04	3.6	0.9	2.0	119	<0.1	0.2	0.1	5	8.00

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 02, 2011

CERTIFICATE OF ANALYSIS WHI11001287.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Tl	S	Sc	Se	Ga	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.05	0.1	0.5	1	0.2
1229652	Rock	0.030	2	5	2.72	856	<0.001	<20	0.34	0.008	0.08	<0.1	0.03	<0.1	0.21	1.9	<0.5	1	<0.2
1229653	Rock	0.026	2	6	4.03	21	<0.001	<20	0.42	0.012	0.08	<0.1	0.05	<0.1	0.47	2.4	0.7	1	<0.2
1229654	Rock	0.020	2	4	2.23	29	<0.001	<20	0.25	0.006	0.05	<0.1	0.02	<0.1	0.32	1.8	<0.5	<1	<0.2
1229316	Rock	0.033	2	9	3.03	8	0.001	<20	0.59	0.007	0.04	<0.1	0.02	<0.1	0.07	2.3	<0.5	2	<0.2
1229317	Rock	0.034	2	21	3.43	40	0.003	<20	1.96	0.003	0.07	<0.1	0.06	<0.1	0.54	3.9	<0.5	5	<0.2
1229318	Rock	0.030	3	23	1.72	65	0.002	<20	2.46	<0.001	0.13	<0.1	0.52	0.2	3.10	4.3	0.9	8	<0.2
1229319	Rock	0.024	3	5	2.24	19	<0.001	<20	0.31	0.006	0.03	<0.1	0.01	<0.1	0.07	2.0	<0.5	1	<0.2
1229320	Rock	0.031	2	8	2.75	19	0.001	<20	0.77	0.005	0.03	<0.1	0.03	<0.1	0.18	2.3	<0.5	2	<0.2
1229321	Rock	0.021	2	5	2.20	132	<0.001	<20	0.25	0.009	0.05	<0.1	0.04	<0.1	0.46	2.3	0.8	<1	<0.2
1229322	Rock	0.016	2	9	1.35	20	0.001	<20	0.61	0.010	0.12	<0.1	0.40	0.2	4.76	3.0	0.6	2	<0.2
1229323	Rock	0.025	3	10	1.35	19	0.001	<20	0.65	0.011	0.12	<0.1	0.25	0.3	1.82	3.3	0.8	2	<0.2
1229324	Rock	0.020	4	20	1.39	20	<0.001	<20	0.83	0.009	0.09	<0.1	0.06	<0.1	0.20	6.8	<0.5	3	<0.2
1229301	Rock	0.020	5	21	1.05	36	0.002	<20	1.36	0.005	0.05	<0.1	<0.01	<0.1	0.09	7.4	<0.5	4	<0.2
1229302	Rock	0.029	6	28	1.37	34	0.002	<20	1.81	0.007	0.04	<0.1	0.02	<0.1	0.10	9.5	0.6	6	<0.2
1229303	Rock	0.038	4	48	2.19	36	0.003	<20	2.62	0.010	0.05	<0.1	0.02	<0.1	0.16	12.0	0.7	9	<0.2
1229304	Rock	0.031	3	3	3.40	20	<0.001	<20	0.12	0.014	0.06	<0.1	0.02	<0.1	1.00	2.2	<0.5	<1	<0.2
1229305	Rock	0.020	3	16	3.85	182	0.002	<20	1.50	0.011	0.10	<0.1	0.02	<0.1	0.55	6.0	0.8	5	<0.2
1229306	Rock	0.025	5	106	1.84	54	0.008	<20	1.91	0.018	0.03	<0.1	0.01	<0.1	0.28	14.1	0.7	6	<0.2
1229307	Rock	0.028	2	7	3.57	27	0.001	<20	0.68	0.011	0.09	<0.1	0.03	<0.1	0.28	2.5	<0.5	2	<0.2
1229308	Rock	0.029	2	7	4.02	26	<0.001	<20	0.34	0.013	0.11	<0.1	0.05	<0.1	0.35	3.4	<0.5	1	<0.2
1229309	Rock	0.031	2	7	3.58	41	0.001	<20	0.40	0.010	0.10	<0.1	0.01	<0.1	0.20	2.4	<0.5	1	<0.2
1229310	Rock	0.019	2	4	3.34	22	<0.001	<20	0.15	0.011	0.07	<0.1	0.02	<0.1	0.46	2.4	<0.5	<1	<0.2
1229311	Rock	0.026	2	4	3.08	20	<0.001	<20	0.17	0.011	0.09	<0.1	0.04	<0.1	1.07	2.6	<0.5	<1	<0.2
1229312	Rock	0.034	2	5	3.65	28	<0.001	<20	0.18	0.011	0.09	<0.1	0.03	<0.1	0.29	2.7	<0.5	<1	<0.2
1229313	Rock	0.027	2	5	3.24	31	<0.001	<20	0.23	0.013	0.09	<0.1	0.03	<0.1	1.04	2.6	<0.5	<1	<0.2
1229314	Rock	0.023	3	6	3.80	23	<0.001	<20	0.31	0.010	0.10	<0.1	0.02	<0.1	0.19	2.7	<0.5	<1	<0.2
1229315	Rock	0.052	17	55	0.12	72	0.002	<20	0.70	0.002	0.09	<0.1	0.03	<0.1	<0.05	15.6	1.4	2	<0.2
1229325	Rock	0.010	2	3	6.36	20	<0.001	<20	0.17	0.013	0.07	<0.1	0.01	<0.1	0.24	1.9	<0.5	<1	<0.2
1229326	Rock	0.034	4	21	2.53	53	0.002	<20	1.63	0.008	0.22	<0.1	0.18	<0.1	1.03	6.5	1.5	5	<0.2
1229327	Rock	0.017	2	4	3.89	24	<0.001	<20	0.16	0.010	0.11	<0.1	0.03	<0.1	0.33	2.7	<0.5	<1	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 02, 2011

CERTIFICATE OF ANALYSIS WHI11001287.1

Method		WGHT	3B	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1229328	Rock	2.31	2	0.1	114.0	7.1	78	<0.1	51.4	25.4	1550	5.84	19.9	2.4	0.9	102	0.3	0.1	0.1	211	4.38
1229329	Rock	1.39	6	1.6	217.0	12.2	112	<0.1	66.8	44.3	1115	9.07	80.1	3.6	3.1	47	0.4	0.3	0.2	157	0.18
1229330	Rock	2.60	5	0.2	156.4	9.0	87	<0.1	54.7	36.8	1099	6.97	35.8	2.0	1.5	150	0.3	0.2	0.2	137	3.59
1229331	Rock	1.87	<2	0.3	64.7	4.0	44	<0.1	21.0	13.5	611	3.29	72.6	0.8	0.7	99	0.7	0.2	<0.1	20	1.50
1229332	Rock	2.42	<2	0.2	102.2	2.3	44	<0.1	17.9	8.6	385	2.78	9.3	0.9	0.4	70	0.3	0.1	<0.1	37	1.32
1229333	Rock	3.32	<2	<0.1	86.4	5.4	66	<0.1	32.7	17.2	1226	4.71	14.1	1.2	0.5	197	0.2	0.2	<0.1	83	4.10

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 02, 2011

CERTIFICATE OF ANALYSIS WHI11001287.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Tl	S	Sc	Se	Ga	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.05	0.1	0.5	1	0.2
1229328	Rock	0.033	6	100	2.76	36	0.010	<20	3.25	0.010	0.04	<0.1	0.04	<0.1	0.09	14.5	0.6	11	<0.2
1229329	Rock	0.056	21	47	0.33	109	0.002	<20	0.98	0.005	0.11	<0.1	0.15	<0.1	<0.05	14.9	0.6	3	<0.2
1229330	Rock	0.044	9	47	2.83	42	0.002	<20	1.48	0.021	0.09	<0.1	0.13	<0.1	0.18	12.7	0.6	5	<0.2
1229331	Rock	0.048	4	10	0.30	102	0.001	<20	0.48	0.020	0.04	<0.1	0.12	<0.1	<0.05	12.6	0.9	1	<0.2
1229332	Rock	0.017	3	11	0.67	12	0.001	<20	0.91	0.006	0.03	<0.1	0.08	<0.1	<0.05	4.1	0.6	3	<0.2
1229333	Rock	0.024	3	65	2.60	15	0.003	<20	1.57	0.023	0.05	<0.1	0.23	<0.1	0.20	11.0	0.8	5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 02, 2011

QUALITY CONTROL REPORT WHI11001287.1

	Method	WGHT	3B	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
Pulp Duplicates																					
1229208	Rock	0.66	<2	<0.1	89.3	4.7	76	<0.1	43.0	28.2	953	5.35	6.1	1.2	1.2	53	0.2	<0.1	0.1	106	3.17
REP 1229208	QC			<0.1	90.8	4.7	74	<0.1	42.1	28.7	965	5.41	6.2	1.4	1.2	51	0.2	<0.1	0.1	109	3.20
1229216	Rock	0.47	<2	1.0	17.5	7.4	22	<0.1	10.0	11.0	1502	1.34	5.0	<0.5	1.1	114	0.6	0.1	0.1	6	11.76
REP 1229216	QC		2																		
1229218	Rock	0.79	14	1.8	66.3	112.5	78	0.3	52.9	33.8	143	7.08	5.0	12.8	2.2	7	0.4	0.1	0.9	38	0.21
REP 1229218	QC		15																		
1229221	Rock	0.40	<2	0.1	41.8	14.4	95	<0.1	18.2	6.3	1467	5.49	18.6	<0.5	0.6	167	1.4	3.2	0.1	36	8.22
REP 1229221	QC			0.1	44.3	15.2	101	<0.1	18.4	6.7	1505	5.70	19.4	<0.5	0.7	173	1.6	3.2	0.1	36	8.49
1229320	Rock	1.86	<2	0.2	13.0	7.0	38	<0.1	5.8	5.6	1168	2.24	5.1	0.5	1.2	280	0.1	0.2	0.1	12	13.00
REP 1229320	QC		<2																		
1229323	Rock	1.76	5	2.2	34.3	15.8	61	<0.1	19.5	9.9	1229	3.57	37.4	1.2	2.0	80	0.4	1.3	0.3	12	6.64
REP 1229323	QC			2.3	33.6	16.7	60	<0.1	19.2	10.1	1252	3.62	38.1	2.8	2.1	80	0.3	1.1	0.2	13	6.72
Core Reject Duplicates																					
1229235	Rock	0.64	<2	<0.1	140.3	5.1	88	<0.1	41.5	28.1	1117	6.08	11.3	1.7	1.0	88	0.2	0.2	0.2	159	6.28
DUP 1229235	QC		<2	0.1	132.2	4.9	89	<0.1	42.3	26.9	1181	5.98	10.5	1.8	0.8	100	0.2	0.1	0.1	156	7.06
1229319	Rock	1.89	<2	0.3	2.9	2.8	23	<0.1	3.7	3.2	1058	1.56	3.1	0.6	1.0	339	0.2	<0.1	<0.1	7	13.10
DUP 1229319	QC		<2	0.3	3.0	3.0	25	<0.1	3.8	3.3	1020	1.54	3.1	0.8	0.9	365	0.1	<0.1	<0.1	7	14.09
Reference Materials																					
STD DS8	Standard			13.7	104.9	128.0	318	1.6	35.9	7.1	609	2.44	24.0	94.0	6.9	69	2.2	5.3	7.4	41	0.68
STD DS8	Standard			13.4	108.8	124.4	324	1.7	38.9	7.5	632	2.55	26.0	95.4	6.9	72	2.3	4.0	6.5	40	0.71
STD DS8	Standard			13.1	106.1	119.7	282	2.0	36.9	7.4	550	2.33	20.7	116.7	6.1	55	2.0	4.2	5.5	38	0.64
STD DS8	Standard			13.2	112.2	127.9	318	1.9	39.7	7.6	623	2.53	24.5	381.7	7.1	73	2.5	4.6	7.2	43	0.70
STD OREAS45CA	Standard			0.9	517.2	23.2	64	0.3	253.5	91.7	953	16.19	4.0	46.4	8.5	19	<0.1	0.1	0.2	210	0.43
STD OREAS45CA	Standard			0.7	490.4	19.6	62	0.3	227.5	86.9	868	15.74	3.4	33.3	6.6	14	0.1	<0.1	0.2	186	0.40
STD OREAS45CA	Standard			0.8	448.6	18.2	55	0.2	213.1	83.8	811	13.99	3.1	34.3	6.2	11	<0.1	<0.1	0.1	201	0.39
STD OREAS45CA	Standard			0.8	500.2	21.7	57	0.3	235.5	88.1	904	15.12	3.3	39.4	8.0	18	0.1	<0.1	0.2	207	0.41
STD OXC88	Standard		139																		
STD OXC88	Standard		199																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 02, 2011

QUALITY CONTROL REPORT WHI11001287.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Tl	S	Sc	Se	Ga	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.05	0.1	0.5	1	0.2
Pulp Duplicates																			
1229208	Rock	0.044	8	53	2.44	20	0.003	<20	2.97	0.009	0.09	<0.1	0.09	<0.1	<0.05	9.5	<0.5	10	<0.2
REP 1229208	QC	0.045	7	52	2.41	19	0.004	<20	2.94	0.009	0.09	<0.1	0.09	<0.1	<0.05	9.4	<0.5	10	<0.2
1229216	Rock	0.025	2	4	2.39	25	<0.001	<20	0.22	0.008	0.06	<0.1	0.03	<0.1	0.36	2.7	<0.5	<1	<0.2
REP 1229216	QC																		
1229218	Rock	0.027	5	20	1.45	47	0.002	<20	2.29	0.009	0.21	<0.1	0.10	<0.1	2.80	2.8	10.3	7	0.4
REP 1229218	QC																		
1229221	Rock	0.002	5	9	1.99	2046	<0.001	<20	0.24	0.011	0.09	<0.1	0.21	<0.1	0.11	6.1	<0.5	<1	<0.2
REP 1229221	QC	0.002	5	9	2.05	2024	<0.001	<20	0.25	0.011	0.09	<0.1	0.20	<0.1	0.11	6.3	<0.5	<1	<0.2
1229320	Rock	0.031	2	8	2.75	19	0.001	<20	0.77	0.005	0.03	<0.1	0.03	<0.1	0.18	2.3	<0.5	2	<0.2
REP 1229320	QC																		
1229323	Rock	0.025	3	10	1.35	19	0.001	<20	0.65	0.011	0.12	<0.1	0.25	0.3	1.82	3.3	0.8	2	<0.2
REP 1229323	QC	0.025	3	11	1.37	20	0.001	<20	0.68	0.011	0.12	<0.1	0.28	0.2	1.84	3.2	0.6	2	<0.2
Core Reject Duplicates																			
1229235	Rock	0.048	6	52	2.83	25	0.005	<20	3.49	0.019	0.08	<0.1	0.04	<0.1	0.19	12.2	<0.5	12	<0.2
DUP 1229235	QC	0.045	5	50	2.83	27	0.005	<20	3.48	0.018	0.06	<0.1	0.04	<0.1	0.19	12.1	<0.5	11	<0.2
1229319	Rock	0.024	3	5	2.24	19	<0.001	<20	0.31	0.006	0.03	<0.1	0.01	<0.1	0.07	2.0	<0.5	1	<0.2
DUP 1229319	QC	0.021	3	6	2.07	23	<0.001	<20	0.32	0.005	0.03	<0.1	<0.01	<0.1	0.08	1.9	<0.5	1	<0.2
Reference Materials																			
STD DS8	Standard	0.077	13	112	0.61	284	0.117	<20	0.88	0.081	0.41	2.4	0.21	5.3	0.16	2.0	5.4	5	4.8
STD DS8	Standard	0.080	15	113	0.61	312	0.116	<20	0.93	0.096	0.42	3.1	0.21	5.6	0.16	2.1	6.5	5	4.9
STD DS8	Standard	0.071	13	109	0.57	261	0.105	<20	0.85	0.076	0.38	2.4	0.18	5.2	0.15	1.9	4.6	4	4.3
STD DS8	Standard	0.078	15	117	0.62	296	0.119	<20	0.91	0.095	0.42	2.8	0.21	5.5	0.17	2.2	5.1	4	4.8
STD OREAS45CA	Standard	0.039	19	647	0.17	175	0.153	<20	3.80	0.010	0.07	<0.1	0.03	<0.1	<0.05	37.9	0.6	19	<0.2
STD OREAS45CA	Standard	0.035	16	623	0.13	170	0.125	<20	3.69	0.014	0.08	<0.1	0.03	<0.1	<0.05	32.9	1.4	19	<0.2
STD OREAS45CA	Standard	0.036	14	641	0.13	139	0.117	<20	3.24	0.004	0.07	<0.1	0.03	0.1	<0.05	33.1	<0.5	16	<0.2
STD OREAS45CA	Standard	0.033	17	628	0.15	167	0.137	<20	3.56	0.012	0.08	<0.1	0.02	<0.1	<0.05	35.9	<0.5	18	<0.2
STD OXC88	Standard																		
STD OXC88	Standard																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 02, 2011

QUALITY CONTROL REPORT WHI11001287.1

		WGHT Wgt kg 0.01	3B Au ppb 2	1DX Mo ppm 0.1	1DX Cu ppm 0.1	1DX Pb ppm 0.1	1DX Zn ppm 1	1DX Ag ppm 0.1	1DX Ni ppm 0.1	1DX Co ppm 0.1	1DX Mn ppm 1	1DX Fe % 0.01	1DX As ppm 0.5	1DX Au ppb 0.5	1DX Th ppm 0.1	1DX Sr ppm 1	1DX Cd ppm 0.1	1DX Sb ppm 0.1	1DX Bi ppm 0.1	1DX V ppm 2	1DX Ca % 0.01
STD OXC88	Standard		202																		
STD OXC88	Standard		205																		
STD OXH82	Standard		1363																		
STD OXH82	Standard		1325																		
STD OXH82	Standard		1367																		
STD OXH82	Standard		1346																		
STD OXC88 Expected			203																		
STD OXH82 Expected			1278																		
STD DS8 Expected				13.44	110	123	312	1.69	38.1	7.5	615	2.46	26	107	6.89	67.7	2.38	4.8	6.67	41.1	0.7
STD OREAS45CA Expected				1	494	20	60	0.275	240	92	943	15.69	3.8	43	7	15	0.1	0.13	0.19	215	0.4265
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
Prep Wash																					
G1	Prep Blank		10	<0.1	2.1	2.9	43	<0.1	2.3	3.5	467	1.68	4.0	0.6	4.3	44	<0.1	<0.1	<0.1	31	0.40
G1	Prep Blank		3	<0.1	1.8	2.4	42	<0.1	2.0	3.5	495	1.71	0.6	<0.5	4.7	43	<0.1	<0.1	<0.1	32	0.38

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 02, 2011

QUALITY CONTROL REPORT WHI11001287.1

		1DX P % 0.001	1DX La ppm 1	1DX Cr ppm 1	1DX Mg % 0.01	1DX Ba ppm 1	1DX Ti % 0.001	1DX B ppm 20	1DX Al % 0.01	1DX Na % 0.001	1DX K % 0.01	1DX W ppm 0.1	1DX Hg ppm 0.01	1DX Tl ppm 0.1	1DX S % 0.05	1DX Sc ppm 0.1	1DX Se ppm 0.5	1DX Ga ppm 1	1DX Te ppm 0.2
STD OXC88	Standard																		
STD OXC88	Standard																		
STD OXH82	Standard																		
STD OXH82	Standard																		
STD OXH82	Standard																		
STD OXH82	Standard																		
STD OXC88 Expected																			
STD OXH82 Expected																			
STD DS8 Expected		0.08	14.6	115	0.6045	279	0.113	2.6	0.93	0.0883	0.41	3	0.192	5.4	0.1679	2.3	5.23	4.7	5
STD OREAS45CA Expected		0.0385	15.9	709	0.1358	164	0.128		3.592	0.0075	0.0717		0.03	0.07	0.021	39.7	0.5	18.4	
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.05	<0.1	<0.5	<1	<0.2
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.05	<0.1	<0.5	<1	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.05	<0.1	<0.5	<1	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.05	<0.1	<0.5	<1	<0.2
Prep Wash																			
G1	Prep Blank	0.074	9	6	0.45	144	0.105	<20	0.74	0.053	0.41	<0.1	<0.01	0.3	<0.05	1.8	<0.5	4	<0.2
G1	Prep Blank	0.074	11	6	0.46	142	0.106	<20	0.76	0.061	0.42	<0.1	<0.01	0.3	<0.05	1.7	<0.5	4	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada

www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Submitted By: Email Distribution List
Receiving Lab: Canada-Whitehorse
Received: August 17, 2011
Report Date: October 04, 2011
Page: 1 of 4

CERTIFICATE OF ANALYSIS WHI11001318.1

CLIENT JOB INFORMATION

Project: STEN NW
Shipment ID: STEN NW-2
P.O. Number
Number of Samples: 64

SAMPLE DISPOSAL

DISP-PLP Dispose of Pulp After 90 days
DISP-RJT Dispose of Reject After 90 days

Acme does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Method Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
R200-250	64	Crush, split and pulverize 250 g rock to 200 mesh			WHI
3B	64	Fire assay fusion Au by ICP-ES	30	Completed	VAN
1DX	64	1:1:1 Aqua Regia digestion ICP-MS analysis	0.5	Completed	VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources (Petro One Energy Corp)
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3
Canada

CC:

BRITISH COLUMBIA CERTIFIED ASSAYER
CLARENCE LEONG
GENERAL MANAGER

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Acme assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 04, 2011

CERTIFICATE OF ANALYSIS WHI11001318.1

	Method	WGHT	3B	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1229127	Rock	0.44	4	0.5	139.4	15.5	80	<0.1	44.1	27.3	494	5.51	7.1	4.1	1.7	67	0.5	0.3	0.3	42	4.74
1229128	Rock	0.69	2	4.4	66.9	93.9	31	0.3	13.4	7.9	1035	10.19	36.9	1.8	1.9	37	0.2	1.4	0.2	<2	4.53
1229129	Rock	0.22	5	2.2	120.9	20.9	103	0.1	79.6	28.3	285	10.43	10.7	4.8	0.9	4	0.3	0.3	0.2	64	0.10
1229130	Rock	1.08	5	<0.1	151.2	26.8	54	<0.1	45.3	28.4	1775	6.40	<0.5	5.9	0.7	163	1.0	<0.1	0.2	56	7.24
1229131	Rock	0.58	8	0.3	96.1	62.8	106	0.2	50.2	26.6	413	6.85	9.4	9.7	0.7	36	0.4	0.5	0.2	42	1.26
1229132	Rock	0.66	<2	0.3	80.0	7.0	59	<0.1	31.1	14.6	981	5.19	39.2	1.4	1.0	75	0.5	0.3	0.1	60	7.78
1229133	Rock	0.56	3	0.3	86.6	14.2	79	<0.1	47.3	24.8	432	5.08	43.6	2.1	3.1	15	0.3	0.1	0.3	52	2.10
1229134	Rock	0.60	<2	0.5	9.1	3.6	28	<0.1	7.1	3.2	1957	3.04	4.5	<0.5	1.0	126	0.1	0.2	<0.1	22	12.31
1229135	Rock	0.40	<2	0.3	29.8	28.0	52	<0.1	17.5	14.3	715	3.10	23.5	<0.5	1.5	56	0.9	0.9	0.1	22	6.39
1229136	Rock	0.84	<2	0.5	33.7	8.7	25	<0.1	15.6	11.0	2719	1.89	0.6	1.3	0.5	315	0.8	<0.1	0.1	15	22.90
1229137	Rock	0.54	<2	0.2	35.8	6.4	37	<0.1	16.3	8.9	575	2.46	11.7	0.5	0.7	50	0.3	<0.1	<0.1	58	4.01
1229138	Rock	0.47	4	0.1	92.3	13.6	49	<0.1	22.8	14.5	1696	5.04	<0.5	<0.5	0.9	536	0.5	<0.1	<0.1	49	16.61
1229139	Rock	0.59	5	0.5	115.2	9.3	74	<0.1	41.8	27.6	1706	7.86	17.1	2.7	1.0	46	0.7	0.1	0.1	94	9.46
1229140	Rock	0.53	2	8.3	25.6	58.7	21	0.2	14.9	7.5	516	3.89	32.0	<0.5	1.5	117	<0.1	1.4	0.1	3	10.93
1229141	Rock	0.59	<2	1.0	18.0	16.2	48	<0.1	10.5	8.8	664	2.35	5.5	<0.5	3.3	76	<0.1	0.3	0.2	7	8.47
1229142	Rock	0.57	<2	1.2	25.9	0.8	31	<0.1	26.0	15.8	1747	4.15	9.5	<0.5	0.6	209	0.6	<0.1	<0.1	6	16.93
1229143	Rock	0.70	41	0.5	8.8	1.0	18	<0.1	5.4	4.0	1317	3.59	2.2	<0.5	0.7	388	0.2	<0.1	<0.1	6	16.08
1229144	Rock	0.51	<2	0.1	3.9	0.5	12	<0.1	4.1	3.2	434	1.36	1.0	<0.5	<0.1	58	0.2	<0.1	<0.1	<2	14.35
1229145	Rock	0.70	10	0.1	8.3	7.1	11	<0.1	5.4	3.5	565	1.16	1.4	<0.5	1.2	106	<0.1	<0.1	0.1	2	12.49
1229146	Rock	0.49	<2	0.7	154.0	2.9	72	<0.1	40.6	23.6	161	6.33	13.1	<0.5	2.1	7	0.2	0.1	0.1	49	0.59
1229147	Rock	0.46	<2	<0.1	3.3	0.2	9	<0.1	3.8	3.1	863	2.38	1.0	<0.5	0.4	187	<0.1	<0.1	<0.1	10	15.77
1229148	Rock	0.64	13	3.2	189.8	64.0	76	0.2	38.1	9.4	189	26.67	136.1	<0.5	2.2	13	0.2	0.4	0.2	29	0.10
1229149	Rock	0.41	<2	0.8	4.5	0.9	23	<0.1	15.4	12.1	1660	2.40	8.9	<0.5	0.5	61	0.8	<0.1	<0.1	8	17.32
1229150	Rock	0.53	<2	0.3	29.3	1.5	58	<0.1	39.1	20.9	544	2.27	5.6	<0.5	2.6	9	0.8	<0.1	0.1	15	0.44
1229251	Rock	0.31	<2	<0.1	2.6	0.3	12	<0.1	1.8	2.9	715	0.95	2.3	<0.5	0.1	34	<0.1	<0.1	<0.1	<2	16.19
1229252	Rock	0.49	9	1.7	72.3	52.3	97	0.3	71.1	23.1	928	8.70	55.4	<0.5	3.6	6	1.1	0.5	0.3	14	0.10
1229253	Rock	0.41	<2	0.7	164.9	9.4	79	<0.1	35.4	14.1	172	12.42	52.4	<0.5	5.4	6	0.2	<0.1	0.4	43	0.16
1229254	Rock	0.77	<2	0.7	153.7	4.7	86	<0.1	55.8	25.3	246	23.66	42.3	<0.5	1.6	2	<0.1	<0.1	<0.1	11	0.01
1229255	Rock	0.19	4	0.7	40.6	6.2	25	<0.1	19.7	13.4	2598	8.69	10.3	1.6	1.2	47	0.2	0.2	<0.1	6	16.69
1229256	Rock	0.52	<2	0.1	2.7	0.2	2	<0.1	1.6	0.4	47	0.46	<0.5	<0.5	0.4	<1	<0.1	<0.1	<0.1	<2	0.02

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 04, 2011

CERTIFICATE OF ANALYSIS WHI11001318.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Tl	S	Sc	Se	Ga	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.05	0.1	0.5	1	0.2
1229127	Rock	0.040	7	25	1.11	73	0.005	<20	1.60	0.004	0.20	<0.1	0.11	<0.1	0.18	6.0	<0.5	4	<0.2
1229128	Rock	0.020	1	5	1.05	29	0.001	<20	0.36	0.005	0.11	<0.1	0.56	0.1	8.80	2.6	1.7	1	<0.2
1229129	Rock	0.035	3	41	1.91	35	0.004	<20	2.89	0.009	0.17	<0.1	0.27	<0.1	4.45	3.3	2.2	9	<0.2
1229130	Rock	0.045	3	39	2.17	26	0.005	<20	2.40	0.014	0.12	<0.1	0.03	<0.1	2.43	8.2	7.9	7	<0.2
1229131	Rock	0.020	2	37	1.87	134	0.003	<20	2.36	0.006	0.18	<0.1	0.55	0.1	2.73	2.8	1.1	7	<0.2
1229132	Rock	0.019	6	23	3.06	172	<0.001	<20	0.39	0.017	0.10	<0.1	0.04	<0.1	0.05	8.4	<0.5	2	<0.2
1229133	Rock	0.041	15	28	0.83	287	0.001	<20	1.20	0.008	0.20	<0.1	0.05	<0.1	0.20	6.8	0.8	4	<0.2
1229134	Rock	0.010	4	3	4.45	29	<0.001	<20	0.13	0.018	0.06	<0.1	0.02	<0.1	<0.05	4.5	<0.5	<1	<0.2
1229135	Rock	0.023	5	9	2.82	28	<0.001	<20	0.30	0.006	0.13	<0.1	0.26	<0.1	0.17	4.4	<0.5	<1	<0.2
1229136	Rock	0.021	14	10	0.83	2795	0.002	<20	0.94	0.003	0.09	<0.1	0.02	<0.1	0.12	4.3	<0.5	3	<0.2
1229137	Rock	0.015	5	24	0.57	162	0.001	<20	0.43	0.004	0.04	<0.1	0.02	<0.1	<0.05	5.6	<0.5	<1	<0.2
1229138	Rock	0.030	5	19	1.64	74	0.005	<20	1.44	0.003	0.10	<0.1	0.01	<0.1	<0.05	7.8	<0.5	4	<0.2
1229139	Rock	0.037	15	35	1.85	34	0.002	<20	2.73	0.005	0.07	<0.1	0.01	<0.1	<0.05	11.3	<0.5	8	<0.2
1229140	Rock	0.011	2	4	0.65	85	<0.001	<20	0.36	0.005	0.10	<0.1	0.07	<0.1	2.30	1.9	1.0	1	<0.2
1229141	Rock	0.032	5	8	2.71	27	<0.001	<20	0.74	0.005	0.17	<0.1	0.01	<0.1	0.26	3.6	<0.5	2	<0.2
1229142	Rock	0.049	2	2	2.42	18	<0.001	<20	0.15	0.008	0.04	<0.1	0.04	<0.1	0.07	2.7	<0.5	<1	<0.2
1229143	Rock	0.011	3	3	6.94	13	<0.001	<20	0.11	0.008	0.06	<0.1	<0.01	<0.1	<0.05	2.3	<0.5	<1	<0.2
1229144	Rock	0.002	1	<1	8.63	6	<0.001	<20	0.03	0.006	<0.01	<0.1	<0.01	<0.1	0.22	0.9	1.0	<1	<0.2
1229145	Rock	0.007	3	2	6.20	16	<0.001	<20	0.12	0.014	0.06	<0.1	0.01	<0.1	<0.05	1.0	<0.5	<1	<0.2
1229146	Rock	0.041	12	29	0.93	24	0.002	<20	1.33	0.010	0.14	<0.1	0.11	0.1	<0.05	6.3	<0.5	4	<0.2
1229147	Rock	0.008	2	4	8.17	5	0.001	<20	0.06	0.011	0.02	<0.1	<0.01	<0.1	<0.05	1.8	<0.5	<1	<0.2
1229148	Rock	0.045	7	19	0.08	30	<0.001	<20	0.76	0.008	0.16	<0.1	1.25	0.2	0.10	4.2	10.2	3	0.8
1229149	Rock	0.059	3	2	0.61	48	<0.001	<20	0.15	0.007	0.03	<0.1	0.03	0.1	<0.05	2.5	<0.5	<1	<0.2
1229150	Rock	0.028	13	10	0.36	22	<0.001	<20	0.80	0.008	0.13	<0.1	0.09	0.2	<0.05	3.9	<0.5	2	<0.2
1229251	Rock	0.004	<1	<1	9.44	5	<0.001	<20	0.03	0.008	0.01	<0.1	0.01	<0.1	0.17	0.5	<0.5	<1	<0.2
1229252	Rock	0.036	7	13	0.52	57	0.001	<20	1.21	0.003	0.18	<0.1	0.95	0.3	0.69	8.0	2.7	3	0.3
1229253	Rock	0.077	18	34	0.40	38	0.001	<20	1.30	0.002	0.19	<0.1	0.19	0.1	<0.05	6.8	0.6	6	<0.2
1229254	Rock	0.022	5	7	0.03	15	<0.001	<20	0.45	0.006	0.08	<0.1	0.14	0.1	0.05	2.2	2.5	1	<0.2
1229255	Rock	0.017	3	4	0.86	38	<0.001	<20	0.27	0.004	0.12	<0.1	1.23	0.9	<0.05	4.0	0.6	<1	<0.2
1229256	Rock	0.002	4	2	<0.01	3	<0.001	<20	0.03	0.003	0.01	<0.1	<0.01	<0.1	<0.05	0.2	<0.5	<1	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 04, 2011

CERTIFICATE OF ANALYSIS WHI11001318.1

	Method	WGHT	3B	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1229170	Rock	0.99	<2	<0.1	12.1	6.0	26	<0.1	7.2	10.7	1491	3.23	2.6	<0.5	<0.1	396	0.3	<0.1	<0.1	19	10.66
1229171	Rock	0.56	6	0.2	121.8	24.2	51	<0.1	53.5	35.6	1606	7.17	2.5	4.5	0.5	131	0.4	0.1	0.2	62	5.53
1229172	Rock	0.69	<2	0.2	152.8	5.0	67	<0.1	44.3	26.1	1262	5.46	2.1	<0.5	1.2	180	0.4	<0.1	<0.1	101	7.17
1229173	Rock	0.55	8	0.5	101.7	71.1	96	0.2	35.1	12.5	266	8.06	26.3	13.1	2.7	5	0.1	0.6	0.4	71	0.06
1229174	Rock	0.69	<2	38.6	23.4	28.0	10	0.1	10.4	6.6	1679	2.53	8.0	0.8	1.7	113	0.7	0.4	0.2	3	7.39
1229175	Rock	0.62	4	137.7	44.3	72.9	48	0.2	15.0	7.7	850	7.37	22.0	3.2	1.6	12	0.9	1.3	0.2	10	1.22
1229176	Rock	0.73	4	0.8	41.4	14.0	56	<0.1	33.4	19.2	401	3.61	3.4	5.7	2.1	57	0.3	0.2	0.4	18	1.81
1229177	Rock	0.49	<2	0.3	103.4	6.6	85	<0.1	48.9	23.2	1296	6.51	6.7	<0.5	1.4	76	0.2	0.1	0.2	183	5.12
1229178	Rock	0.84	<2	0.1	6.1	0.9	5	<0.1	3.1	1.9	314	0.58	1.4	1.5	0.2	66	<0.1	<0.1	<0.1	9	1.60
1229179	Rock	0.66	4	0.2	132.7	6.2	108	<0.1	53.3	30.5	851	7.37	14.1	3.5	1.5	85	0.7	0.2	0.2	145	3.18
1229180	Rock	0.70	3	0.1	97.5	3.1	62	<0.1	30.0	15.3	1875	4.47	3.3	2.1	0.6	172	0.1	0.1	<0.1	153	6.85
1229181	Rock	0.67	3	0.1	66.2	4.7	39	<0.1	23.1	10.7	2849	3.11	1.4	0.9	0.4	322	0.8	<0.1	<0.1	52	20.53
1229182	Rock	0.59	<2	0.1	94.0	4.6	69	<0.1	44.0	22.2	1270	4.94	<0.5	<0.5	1.0	72	0.4	<0.1	0.1	94	5.38
1229183	Rock	0.64	<2	<0.1	65.5	11.3	13	<0.1	6.9	3.4	2892	1.16	0.6	<0.5	0.2	913	1.5	<0.1	<0.1	8	25.34
1229184	Rock	0.57	<2	0.9	27.8	34.4	56	0.1	20.7	11.6	645	3.13	16.6	<0.5	4.1	48	<0.1	0.7	0.3	10	5.58
1229185	Rock	0.61	<2	<0.1	97.2	4.6	57	<0.1	34.9	23.7	1071	4.48	2.9	<0.5	0.6	320	0.4	<0.1	0.1	125	8.04
1229186	Rock	0.71	<2	<0.1	6.3	1.5	5	<0.1	3.0	1.3	2401	0.72	1.0	<0.5	0.1	1116	1.1	<0.1	<0.1	6	26.93
1229187	Rock	0.44	2	0.1	121.3	7.9	75	<0.1	43.2	24.4	820	5.53	5.5	1.1	1.6	78	0.3	<0.1	0.2	124	4.07
1229188	Rock	1.17	<2	0.1	56.6	3.1	35	<0.1	21.6	13.9	1935	3.29	6.5	0.6	0.6	544	0.3	<0.1	<0.1	72	16.65
1229189	Rock	0.59	<2	0.5	13.8	9.3	16	<0.1	2.7	1.3	1677	0.77	0.8	<0.5	0.3	1096	0.3	<0.1	<0.1	8	17.32
1229190	Rock	0.59	<2	<0.1	121.3	8.7	93	<0.1	58.0	35.0	1119	6.96	1.9	2.4	1.2	98	0.2	<0.1	0.2	192	4.68
1229191	Rock	0.78	<2	0.3	4.5	0.6	16	<0.1	4.5	1.0	70	1.58	0.7	<0.5	1.1	10	<0.1	<0.1	<0.1	14	0.13
1229192	Rock	0.68	<2	<0.1	70.1	3.7	36	<0.1	21.8	11.5	1515	4.16	3.3	<0.5	1.2	159	<0.1	<0.1	0.1	36	9.05
1229193	Rock	0.50	<2	0.4	73.3	2.8	60	<0.1	35.0	16.6	1207	4.67	5.8	0.9	2.1	185	0.3	<0.1	0.3	33	7.23
1229194	Rock	0.77	<2	0.3	13.5	12.0	14	<0.1	3.9	4.0	100	4.49	5.8	<0.5	2.6	15	<0.1	0.3	0.1	22	0.07
1229195	Rock	0.74	<2	0.1	3.8	5.6	16	<0.1	5.1	1.8	92	1.03	1.9	0.6	1.1	4	<0.1	<0.1	<0.1	12	0.04
1229196	Rock	0.56	<2	0.4	68.1	22.7	122	<0.1	50.5	24.7	162	6.52	11.6	<0.5	7.0	17	<0.1	0.2	0.5	32	0.12
1229197	Rock	0.48	<2	0.2	30.1	14.3	52	<0.1	26.2	15.0	1041	4.25	6.6	<0.5	3.3	19	<0.1	0.1	0.1	30	2.21
1229198	Rock	0.80	<2	0.1	4.4	4.8	25	<0.1	5.7	2.7	348	0.98	7.0	<0.5	1.0	8	0.1	0.1	<0.1	2	0.43
1229199	Rock	0.81	<2	0.4	2.9	0.4	12	<0.1	3.5	2.0	791	1.81	1.7	<0.5	0.5	241	<0.1	<0.1	<0.1	4	7.32

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 04, 2011

CERTIFICATE OF ANALYSIS WHI11001318.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Tl	S	Sc	Se	Ga	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.05	0.1	0.5	1	0.2
1229170	Rock	0.001	6	1	3.79	3961	<0.001	<20	0.04	0.006	<0.01	<0.1	0.01	<0.1	0.08	3.3	<0.5	<1	<0.2
1229171	Rock	0.036	2	48	2.16	34	0.003	<20	2.24	0.014	0.11	<0.1	0.07	<0.1	2.96	9.7	3.2	7	<0.2
1229172	Rock	0.051	9	44	2.72	64	0.004	<20	3.30	0.007	0.12	<0.1	<0.01	<0.1	<0.05	9.5	<0.5	10	<0.2
1229173	Rock	0.049	19	49	1.71	68	0.003	<20	2.68	0.013	0.32	<0.1	0.45	<0.1	0.17	5.5	1.2	8	0.3
1229174	Rock	0.020	2	3	0.89	87	<0.001	<20	0.22	0.008	0.15	<0.1	0.19	<0.1	1.42	2.5	<0.5	<1	<0.2
1229175	Rock	0.022	1	13	0.81	38	0.001	<20	0.72	0.006	0.15	<0.1	0.80	0.2	3.76	2.7	1.0	2	<0.2
1229176	Rock	0.043	4	14	0.73	118	0.002	<20	1.59	0.010	0.37	<0.1	0.06	<0.1	1.16	2.0	2.0	4	0.2
1229177	Rock	0.046	9	69	2.77	33	0.005	<20	3.42	0.020	0.10	<0.1	0.02	<0.1	0.07	14.1	<0.5	11	<0.2
1229178	Rock	0.004	1	7	0.12	11	<0.001	<20	0.16	0.007	<0.01	<0.1	0.02	<0.1	<0.05	1.0	<0.5	<1	<0.2
1229179	Rock	0.052	13	60	2.90	151	0.003	<20	4.14	0.011	0.13	<0.1	0.03	<0.1	0.06	13.1	<0.5	13	<0.2
1229180	Rock	0.031	6	86	2.22	14	0.004	<20	2.12	0.038	0.03	<0.1	0.01	<0.1	0.16	17.8	<0.5	8	<0.2
1229181	Rock	0.025	12	23	1.50	256	0.006	<20	1.85	0.010	0.09	<0.1	0.03	<0.1	<0.05	6.9	<0.5	6	<0.2
1229182	Rock	0.032	6	84	2.57	90	0.010	<20	2.59	0.033	0.08	<0.1	0.03	<0.1	<0.05	11.0	<0.5	9	<0.2
1229183	Rock	0.006	5	6	0.48	1165	<0.001	<20	0.40	0.002	0.04	<0.1	0.02	<0.1	0.12	2.6	<0.5	1	<0.2
1229184	Rock	0.031	6	10	2.26	73	<0.001	<20	0.93	0.007	0.21	<0.1	0.10	<0.1	0.18	3.7	<0.5	3	<0.2
1229185	Rock	0.040	4	50	1.91	165	0.004	<20	2.52	0.022	0.06	<0.1	0.02	<0.1	0.19	10.7	<0.5	9	<0.2
1229186	Rock	0.004	7	2	0.24	16	<0.001	<20	0.19	0.002	0.02	<0.1	<0.01	<0.1	<0.05	5.8	<0.5	<1	<0.2
1229187	Rock	0.042	10	64	2.36	35	0.005	<20	3.13	0.035	0.14	<0.1	0.02	<0.1	0.08	11.1	<0.5	10	<0.2
1229188	Rock	0.023	7	29	1.06	31	0.002	<20	1.52	0.011	0.06	<0.1	0.02	<0.1	<0.05	8.9	<0.5	5	<0.2
1229189	Rock	0.012	5	5	0.20	16	0.001	<20	0.20	0.006	0.02	<0.1	<0.01	<0.1	<0.05	2.4	<0.5	<1	<0.2
1229190	Rock	0.044	7	80	3.19	29	0.005	<20	3.73	0.027	0.10	<0.1	0.02	<0.1	0.11	16.5	0.6	13	<0.2
1229191	Rock	0.007	13	4	0.29	7	0.002	<20	0.53	0.006	0.02	<0.1	0.01	<0.1	<0.05	0.8	<0.5	2	<0.2
1229192	Rock	0.030	5	16	3.98	36	0.003	<20	0.73	0.017	0.17	<0.1	0.03	<0.1	0.05	9.9	<0.5	2	<0.2
1229193	Rock	0.042	8	17	3.46	48	0.002	<20	1.03	0.015	0.23	<0.1	0.06	<0.1	0.07	10.8	<0.5	3	<0.2
1229194	Rock	0.014	5	11	0.05	21	0.002	<20	0.26	0.013	0.07	<0.1	0.02	<0.1	0.08	1.4	<0.5	2	<0.2
1229195	Rock	0.008	3	6	0.13	5	<0.001	<20	0.27	0.013	0.03	<0.1	0.01	<0.1	<0.05	0.6	<0.5	<1	<0.2
1229196	Rock	0.022	15	36	1.04	57	0.001	<20	2.85	0.004	0.27	<0.1	0.04	<0.1	<0.05	6.0	<0.5	7	<0.2
1229197	Rock	0.023	9	26	0.78	31	0.002	<20	1.52	0.009	0.15	<0.1	0.02	<0.1	<0.05	3.9	<0.5	4	<0.2
1229198	Rock	0.006	3	2	0.03	18	<0.001	<20	0.09	0.015	0.03	<0.1	0.07	<0.1	<0.05	0.9	<0.5	<1	<0.2
1229199	Rock	0.007	1	3	3.72	5	<0.001	<20	0.07	0.013	0.02	<0.1	0.01	<0.1	<0.05	1.4	<0.5	<1	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 04, 2011

CERTIFICATE OF ANALYSIS WHI11001318.1

Method		WGHT	3B	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1229200	Rock	0.44	<2	0.2	45.5	14.1	75	<0.1	30.0	13.2	558	3.98	3.0	<0.5	4.3	67	<0.1	<0.1	0.2	30	1.42
1229201	Rock	1.01	<2	0.6	44.9	2.9	29	<0.1	12.0	9.0	660	2.38	13.6	<0.5	0.5	112	0.2	0.3	<0.1	16	4.15
1229202	Rock	0.87	<2	0.2	2.9	0.5	6	<0.1	2.6	1.5	198	0.92	2.6	<0.5	0.3	15	<0.1	<0.1	<0.1	3	1.40
1229203	Rock	0.54	<2	0.5	1.9	0.6	9	<0.1	2.4	1.3	609	1.14	3.2	<0.5	0.3	6	<0.1	0.1	<0.1	<2	0.04

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 04, 2011

CERTIFICATE OF ANALYSIS WHI11001318.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Tl	S	Sc	Se	Ga	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.05	0.1	0.5	1	0.2
1229200	Rock	0.041	8	29	1.50	36	0.002	<20	1.84	0.008	0.21	<0.1	0.06	<0.1	0.13	5.2	<0.5	5	<0.2
1229201	Rock	0.015	4	10	0.72	23	0.001	<20	0.43	0.007	0.08	<0.1	0.05	<0.1	<0.05	4.2	<0.5	1	<0.2
1229202	Rock	0.006	<1	3	0.13	11	<0.001	<20	0.05	0.003	<0.01	<0.1	<0.01	<0.1	<0.05	0.8	<0.5	<1	<0.2
1229203	Rock	0.012	2	3	0.01	8	<0.001	<20	0.05	0.005	0.02	<0.1	0.02	<0.1	<0.05	0.8	<0.5	<1	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 04, 2011

QUALITY CONTROL REPORT WHI11001318.1

	Method	WGHT	3B	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
	Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
	MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
Pulp Duplicates																					
1229132	Rock	0.66	<2	0.3	80.0	7.0	59	<0.1	31.1	14.6	981	5.19	39.2	1.4	1.0	75	0.5	0.3	0.1	60	7.78
REP 1229132	QC			0.3	78.2	7.1	59	<0.1	30.3	14.3	987	5.20	39.5	1.3	1.1	76	0.4	0.3	0.1	60	7.77
1229144	Rock	0.51	<2	0.1	3.9	0.5	12	<0.1	4.1	3.2	434	1.36	1.0	<0.5	<0.1	58	0.2	<0.1	<0.1	<2	14.35
REP 1229144	QC		<2																		
1229177	Rock	0.49	<2	0.3	103.4	6.6	85	<0.1	48.9	23.2	1296	6.51	6.7	<0.5	1.4	76	0.2	0.1	0.2	183	5.12
REP 1229177	QC			0.3	102.2	6.3	87	<0.1	48.2	23.2	1320	6.57	6.9	<0.5	1.5	75	0.1	<0.1	0.2	183	5.18
1229201	Rock	1.01	<2	0.6	44.9	2.9	29	<0.1	12.0	9.0	660	2.38	13.6	<0.5	0.5	112	0.2	0.3	<0.1	16	4.15
REP 1229201	QC		<2																		
Core Reject Duplicates																					
1229133	Rock	0.56	3	0.3	86.6	14.2	79	<0.1	47.3	24.8	432	5.08	43.6	2.1	3.1	15	0.3	0.1	0.3	52	2.10
DUP 1229133	QC		5	0.3	87.1	14.0	80	<0.1	48.4	25.8	446	5.16	44.9	1.8	3.0	16	0.3	0.1	0.3	53	2.15
1229181	Rock	0.67	3	0.1	66.2	4.7	39	<0.1	23.1	10.7	2849	3.11	1.4	0.9	0.4	322	0.8	<0.1	<0.1	52	20.53
DUP 1229181	QC		<2	<0.1	66.5	4.5	38	<0.1	24.6	10.5	2769	3.05	1.2	1.9	0.4	312	0.8	<0.1	<0.1	51	19.98
Reference Materials																					
STD DS8	Standard			13.6	107.1	125.0	313	1.8	38.9	7.2	608	2.47	23.5	90.7	6.8	67	2.3	5.0	7.6	42	0.67
STD DS8	Standard			12.9	113.8	123.3	308	1.7	39.4	8.0	608	2.52	24.9	103.4	6.0	61	2.2	4.3	6.4	41	0.68
STD OREAS45CA	Standard			0.9	509.2	21.5	61	0.3	238.8	90.4	935	15.62	4.0	38.1	6.8	17	<0.1	<0.1	0.2	206	0.44
STD OREAS45CA	Standard			0.8	514.8	18.4	56	0.3	241.1	89.5	897	15.39	3.9	40.5	6.5	11	<0.1	<0.1	0.2	199	0.41
STD OXC88	Standard		200																		
STD OXC88	Standard		204																		
STD OXC88	Standard		195																		
STD OXC88	Standard		196																		
STD OXC88	Standard		205																		
STD OXC88	Standard		210																		
STD OXH82	Standard		1358																		
STD OXH82	Standard		1333																		
STD OXH82	Standard		1310																		
STD OXH82	Standard		1304																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 04, 2011

QUALITY CONTROL REPORT WHI11001318.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Tl	S	Sc	Se	Ga	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.05	0.1	0.5	1	0.2
Pulp Duplicates																			
1229132	Rock	0.019	6	23	3.06	172	<0.001	<20	0.39	0.017	0.10	<0.1	0.04	<0.1	0.05	8.4	<0.5	2	<0.2
REP 1229132	QC	0.020	7	23	3.06	172	0.001	<20	0.40	0.017	0.11	<0.1	0.04	<0.1	<0.05	8.3	0.6	2	<0.2
1229144	Rock	0.002	1	<1	8.63	6	<0.001	<20	0.03	0.006	<0.01	<0.1	<0.01	<0.1	0.22	0.9	1.0	<1	<0.2
REP 1229144	QC																		
1229177	Rock	0.046	9	69	2.77	33	0.005	<20	3.42	0.020	0.10	<0.1	0.02	<0.1	0.07	14.1	<0.5	11	<0.2
REP 1229177	QC	0.047	10	70	2.80	33	0.005	<20	3.44	0.021	0.10	<0.1	0.02	<0.1	0.07	14.2	0.5	12	<0.2
1229201	Rock	0.015	4	10	0.72	23	0.001	<20	0.43	0.007	0.08	<0.1	0.05	<0.1	<0.05	4.2	<0.5	1	<0.2
REP 1229201	QC																		
Core Reject Duplicates																			
1229133	Rock	0.041	15	28	0.83	287	0.001	<20	1.20	0.008	0.20	<0.1	0.05	<0.1	0.20	6.8	0.8	4	<0.2
DUP 1229133	QC	0.042	16	29	0.85	291	0.001	<20	1.23	0.007	0.21	<0.1	0.06	<0.1	0.20	7.1	0.8	4	0.3
1229181	Rock	0.025	12	23	1.50	256	0.006	<20	1.85	0.010	0.09	<0.1	0.03	<0.1	<0.05	6.9	<0.5	6	<0.2
DUP 1229181	QC	0.025	12	22	1.48	259	0.002	<20	1.82	0.011	0.09	<0.1	0.03	<0.1	<0.05	6.5	<0.5	6	<0.2
Reference Materials																			
STD DS8	Standard	0.075	15	114	0.60	295	0.115	<20	0.92	0.097	0.42	2.5	0.22	5.2	0.17	2.2	5.6	5	5.2
STD DS8	Standard	0.079	13	119	0.62	295	0.111	<20	0.89	0.086	0.41	2.7	0.20	5.4	0.17	2.0	5.2	5	4.8
STD OREAS45CA	Standard	0.038	17	662	0.15	173	0.137	<20	3.66	0.013	0.08	<0.1	0.03	<0.1	<0.05	40.1	1.1	19	<0.2
STD OREAS45CA	Standard	0.036	16	709	0.14	160	0.133	<20	3.75	0.013	0.08	<0.1	0.03	<0.1	<0.05	36.3	<0.5	18	<0.2
STD OXC88	Standard																		
STD OXC88	Standard																		
STD OXC88	Standard																		
STD OXC88	Standard																		
STD OXC88	Standard																		
STD OXC88	Standard																		
STD OXH82	Standard																		
STD OXH82	Standard																		
STD OXH82	Standard																		
STD OXH82	Standard																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 04, 2011

QUALITY CONTROL REPORT WHI11001318.1

		WGHT Wgt kg 0.01	3B Au ppb 2	1DX Mo ppm 0.1	1DX Cu ppm 0.1	1DX Pb ppm 0.1	1DX Zn ppm 1	1DX Ag ppm 0.1	1DX Ni ppm 0.1	1DX Co ppm 0.1	1DX Mn ppm 1	1DX Fe % 0.01	1DX As ppm 0.5	1DX Au ppb 0.5	1DX Th ppm 0.1	1DX Sr ppm 1	1DX Cd ppm 0.1	1DX Sb ppm 0.1	1DX Bi ppm 0.1	1DX V ppm 2	1DX Ca % 0.01
STD OXH82	Standard		1337																		
STD OXH82	Standard		1336																		
STD OXC88 Expected			203																		
STD OXH82 Expected			1278																		
STD DS8 Expected				13.44	110	123	312	1.69	38.1	7.5	615	2.46	26	107	6.89	67.7	2.38	4.8	6.67	41.1	0.7
STD OREAS45CA Expected				1	494	20	60	0.275	240	92	943	15.69	3.8	43	7	15	0.1	0.13	0.19	215	0.4265
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
Prep Wash																					
G1	Prep Blank		<2	<0.1	2.2	2.8	45	<0.1	2.1	3.8	576	1.92	<0.5	1.1	5.3	56	<0.1	<0.1	<0.1	34	0.46
G1	Prep Blank		3	0.2	2.5	2.9	46	<0.1	3.1	4.1	571	1.98	<0.5	1.5	5.8	64	<0.1	<0.1	<0.1	38	0.51

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: STEN NW
Report Date: October 04, 2011

QUALITY CONTROL REPORT WHI11001318.1

		1DX P % 0.001	1DX La ppm 1	1DX Cr ppm 1	1DX Mg % 0.01	1DX Ba ppm 1	1DX Ti % 0.001	1DX B ppm 20	1DX Al % 0.01	1DX Na % 0.001	1DX K % 0.01	1DX W ppm 0.1	1DX Hg ppm 0.01	1DX Tl ppm 0.1	1DX S % 0.05	1DX Sc ppm 0.1	1DX Se ppm 0.5	1DX Ga ppm 1	1DX Te ppm 0.2
STD OXH82	Standard																		
STD OXH82	Standard																		
STD OXC88 Expected																			
STD OXH82 Expected																			
STD DS8 Expected		0.08	14.6	115	0.6045	279	0.113	2.6	0.93	0.0883	0.41	3	0.192	5.4	0.1679	2.3	5.23	4.7	5
STD OREAS45CA Expected		0.0385	15.9	709	0.1358	164	0.128		3.592	0.0075	0.0717		0.03	0.07	0.021	39.7	0.5	18.4	
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.05	<0.1	<0.5	<1	<0.2
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.05	<0.1	<0.5	<1	<0.2
Prep Wash																			
G1	Prep Blank	0.078	11	4	0.49	164	0.115	<20	0.84	0.070	0.44	<0.1	<0.01	0.3	<0.05	1.9	<0.5	5	<0.2
G1	Prep Blank	0.080	14	6	0.52	176	0.130	<20	0.94	0.096	0.48	<0.1	<0.01	0.3	<0.05	2.3	<0.5	5	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada

www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Submitted By: Email Distribution List
Receiving Lab: Canada-Whitehorse
Received: August 15, 2011
Report Date: October 09, 2011
Page: 1 of 3

CERTIFICATE OF ANALYSIS WHI11001338.1

CLIENT JOB INFORMATION

Project: None_Given
Shipment ID:
P.O. Number
Number of Samples: 46

SAMPLE DISPOSAL

DISP-PLP Dispose of Pulp After 90 days
DISP-RJT Dispose of Reject After 90 days

Acme does not accept responsibility for samples left at the laboratory after 90 days without prior written instructions for sample storage or return.

SAMPLE PREPARATION AND ANALYTICAL PROCEDURES

Method Code	Number of Samples	Code Description	Test Wgt (g)	Report Status	Lab
R200-250	46	Crush, split and pulverize 250 g rock to 200 mesh			WHI
3B	46	Fire assay fusion Au by ICP-ES	30	Completed	VAN
1DX	46	1:1:1 Aqua Regia digestion ICP-MS analysis	0.5	Completed	VAN

ADDITIONAL COMMENTS

Invoice To: Goldstrike Resources (Petro One Energy Corp)
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3
Canada

CC:

BRITISH COLUMBIA CERTIFIED ASSAYER
CLARENCE LEONG
GENERAL MANAGER

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.
All results are considered the confidential property of the client. Acme assumes the liabilities for actual cost of analysis only. Results apply to samples as submitted.
"*" asterisk indicates that an analytical result could not be provided due to unusually high levels of interference from other elements.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: None_Given
Report Date: October 09, 2011

CERTIFICATE OF ANALYSIS WHI11001338.1

Method		WGHT	3B	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1229001	Rock	0.94	3	0.8	8.1	15.3	230	0.1	42.0	6.0	385	1.22	319.1	<0.5	0.4	60	7.4	2.0	<0.1	25	33.67
1229101	Rock	0.77	4	0.1	41.6	16.2	52	<0.1	26.5	11.8	2135	3.34	10.9	1.5	0.3	158	6.3	1.2	<0.1	40	15.07
1229102	Rock	0.65	34	0.2	65.3	4.6	56	<0.1	29.4	16.5	928	4.38	26.5	<0.5	0.4	779	0.2	0.7	<0.1	167	12.46
1229103	Rock	0.80	41	4.5	16.6	11.4	31	<0.1	8.6	5.6	1646	1.85	2.9	<0.5	1.4	98	0.5	0.1	<0.1	7	11.15
1229104	Rock	0.23	5	0.3	8.5	21.8	81	<0.1	32.8	15.8	2310	4.98	17.2	<0.5	0.2	550	1.2	0.3	<0.1	87	17.64
1229105	Rock	0.24	3	0.4	55.0	13.4	65	<0.1	25.9	21.2	2835	5.69	7.8	2.1	0.4	295	0.7	0.2	<0.1	90	19.04
1229106	Rock	1.48	<2	0.6	66.1	14.0	58	<0.1	25.4	15.7	1707	4.14	2.4	4.1	0.9	302	0.8	<0.1	0.1	69	14.37
1229107	Rock	0.45	2	0.5	63.9	15.8	61	<0.1	27.6	20.5	1248	4.89	8.0	2.6	0.7	318	0.5	0.2	<0.1	61	20.21
1229108	Rock	1.12	6	0.6	47.2	14.9	70	<0.1	32.7	16.9	1169	5.28	8.1	1.7	0.4	338	0.4	0.2	<0.1	76	23.49
1229109	Rock	0.25	<2	0.5	203.0	4.2	199	<0.1	81.1	25.7	300	13.68	7.0	0.6	0.4	43	0.4	<0.1	<0.1	273	1.23
1229110	Rock	0.35	2	0.8	206.5	8.0	190	<0.1	82.0	40.2	597	13.90	9.0	2.4	0.4	78	0.7	<0.1	0.1	252	2.06
1229111	Rock	0.39	<2	0.3	46.5	2.0	15	<0.1	13.2	10.1	212	1.08	2.1	2.0	0.3	5	0.1	0.2	<0.1	5	0.06
1229112	Rock	0.78	14	2.2	146.7	36.9	63	0.2	49.0	31.5	142	16.04	41.0	1.5	2.2	12	0.2	0.4	0.3	36	0.10
1229113	Rock	0.61	8	6.7	114.3	53.3	66	0.3	27.9	10.7	207	20.70	93.9	0.9	1.7	39	0.1	0.5	0.3	39	0.08
1229114	Rock	0.62	<2	0.9	162.4	9.6	72	<0.1	21.8	14.7	98	14.93	16.2	0.5	3.3	27	<0.1	<0.1	0.3	59	0.16
1229115	Rock	0.34	6	3.1	37.0	40.7	38	0.2	11.7	8.1	1822	6.22	13.8	3.1	1.3	244	1.0	0.5	<0.1	13	18.23
1229116	Rock	0.84	3	0.2	52.2	76.1	100	<0.1	24.5	10.4	1231	5.40	27.6	2.3	0.5	176	8.0	0.9	<0.1	64	15.20
1229117	Rock	0.67	<2	1.1	48.8	99.9	78	<0.1	26.8	11.9	699	4.56	49.2	<0.5	1.3	576	5.8	0.4	<0.1	87	13.08
1229118	Rock	0.80	<2	1.2	45.6	41.9	116	<0.1	43.6	23.9	1940	7.01	1.9	3.9	0.7	174	0.6	0.1	<0.1	64	21.40
1229119	Rock	0.75	4	0.5	71.0	13.9	81	<0.1	40.9	20.8	556	4.91	1.2	5.4	2.3	98	0.1	<0.1	0.2	77	9.62
1229120	Rock	0.72	3	0.9	48.7	22.3	96	<0.1	41.2	18.9	1302	5.91	0.9	2.1	0.7	184	0.3	<0.1	<0.1	93	21.25
1229121	Rock	0.58	8	0.5	48.1	18.5	71	<0.1	29.1	19.8	1178	4.49	1.6	5.9	1.4	105	0.3	<0.1	0.1	61	12.98
1229122	Rock	0.43	<2	0.3	55.2	18.1	66	<0.1	25.5	23.6	1064	4.04	1.6	2.9	1.6	97	0.3	<0.1	0.2	54	8.94
1229123	Rock	0.46	<2	0.7	155.6	10.2	121	<0.1	65.3	34.9	1166	8.43	14.3	2.1	0.9	45	0.3	1.7	0.1	162	7.91
1229124	Rock	0.63	<2	0.1	69.2	7.4	87	<0.1	46.1	15.6	219	5.32	<0.5	3.8	3.7	10	<0.1	<0.1	0.3	46	0.11
1229125	Rock	0.50	<2	<0.1	253.6	29.2	93	0.1	52.5	35.6	479	6.04	<0.5	3.2	2.7	18	0.3	<0.1	0.3	72	0.89
1229126	Rock	0.41	<2	0.1	244.0	5.9	99	0.1	62.3	36.5	602	7.15	0.7	4.7	1.8	30	0.2	<0.1	0.2	98	1.34
1229151	Rock	0.25	3	0.4	25.8	5.9	133	<0.1	70.9	24.6	251	11.33	2.1	1.0	0.4	23	<0.1	<0.1	<0.1	182	0.78
1229152	Rock	0.85	<2	18.6	19.0	16.6	32	<0.1	10.2	6.9	941	2.72	14.6	<0.5	2.1	403	0.1	0.4	<0.1	8	9.24
1229153	Rock	1.12	7	0.3	73.5	11.2	64	<0.1	40.5	37.1	1208	4.72	12.7	0.8	1.4	120	0.3	0.1	0.2	58	8.35

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: None_Given
Report Date: October 09, 2011

CERTIFICATE OF ANALYSIS WHI11001338.1

	Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
	Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Tl	S	Sc	Se	Ga	Te
	Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
	MDL	0.001	1	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.05	0.1	0.5	1	0.2
1229001	Rock	0.024	5	8	1.78	4071	0.002	<20	0.18	0.003	0.03	<0.1	0.25	0.6	0.11	1.5	<0.5	<1	<0.2
1229101	Rock	0.011	7	8	4.74	331	0.001	<20	0.28	0.031	0.05	<0.1	0.06	<0.1	<0.05	6.6	<0.5	1	<0.2
1229102	Rock	0.015	3	45	4.50	59	0.005	<20	0.36	0.023	0.03	<0.1	0.12	<0.1	<0.05	8.8	<0.5	1	<0.2
1229103	Rock	0.027	3	5	3.38	487	0.001	<20	0.40	0.013	0.19	<0.1	0.12	<0.1	0.23	2.9	<0.5	1	<0.2
1229104	Rock	0.002	7	8	5.73	131	<0.001	<20	0.16	0.025	0.02	<0.1	<0.01	<0.1	0.09	6.7	0.6	<1	<0.2
1229105	Rock	0.017	4	36	0.82	192	0.002	<20	0.87	0.011	0.04	<0.1	0.09	<0.1	<0.05	10.1	<0.5	2	<0.2
1229106	Rock	0.029	8	16	1.61	2734	0.002	<20	0.65	0.007	0.16	<0.1	0.05	<0.1	0.07	9.1	0.6	2	<0.2
1229107	Rock	0.027	5	16	1.18	110	0.001	<20	0.44	0.002	0.11	<0.1	0.61	<0.1	<0.05	4.9	1.5	1	<0.2
1229108	Rock	0.016	4	14	1.68	77	0.001	<20	0.46	0.006	0.09	<0.1	0.40	<0.1	<0.05	5.0	0.7	2	<0.2
1229109	Rock	0.058	3	128	3.71	34	0.007	<20	6.05	0.004	0.09	<0.1	0.03	<0.1	0.94	14.6	1.1	19	<0.2
1229110	Rock	0.049	2	109	2.92	43	0.007	<20	4.88	0.012	0.05	<0.1	0.05	<0.1	2.96	19.5	3.3	16	<0.2
1229111	Rock	0.003	2	4	0.07	7	<0.001	<20	0.16	0.003	0.03	<0.1	0.02	<0.1	<0.05	1.0	<0.5	<1	<0.2
1229112	Rock	0.039	11	13	0.16	32	<0.001	<20	0.57	0.005	0.22	<0.1	1.29	0.3	0.06	4.5	2.4	4	<0.2
1229113	Rock	0.069	8	11	0.10	44	<0.001	<20	0.63	0.015	0.25	<0.1	2.21	0.6	0.11	2.5	6.3	2	0.2
1229114	Rock	0.061	10	31	0.33	43	0.002	<20	0.95	0.011	0.25	<0.1	0.32	0.1	0.10	4.6	<0.5	8	0.2
1229115	Rock	0.009	8	7	1.67	54	<0.001	<20	0.27	0.005	0.10	<0.1	0.14	<0.1	0.06	6.8	1.5	<1	<0.2
1229116	Rock	0.007	3	14	5.88	71	0.001	<20	0.34	0.021	0.08	<0.1	0.03	<0.1	<0.05	6.0	<0.5	1	<0.2
1229117	Rock	0.039	7	21	4.51	60	<0.001	<20	0.79	0.041	0.16	<0.1	0.10	<0.1	<0.05	8.1	<0.5	2	<0.2
1229118	Rock	0.021	5	12	1.33	310	0.004	<20	0.47	0.004	0.10	<0.1	0.10	<0.1	<0.05	4.1	<0.5	2	<0.2
1229119	Rock	0.039	16	19	1.04	55	0.002	<20	0.72	0.002	0.26	<0.1	0.11	<0.1	<0.05	6.1	<0.5	2	0.2
1229120	Rock	0.021	3	16	1.04	3161	0.002	<20	0.41	0.003	0.09	<0.1	0.05	<0.1	0.07	5.0	<0.5	1	<0.2
1229121	Rock	0.036	7	14	1.79	1306	0.002	<20	0.47	0.005	0.19	<0.1	0.13	<0.1	<0.05	4.8	<0.5	2	<0.2
1229122	Rock	0.034	9	16	2.42	230	0.003	<20	0.43	0.005	0.17	<0.1	0.10	<0.1	<0.05	4.8	<0.5	1	<0.2
1229123	Rock	0.047	5	45	0.91	74	<0.001	<20	0.90	0.002	0.12	<0.1	0.15	<0.1	0.48	16.1	1.4	2	<0.2
1229124	Rock	0.047	27	30	1.64	140	0.015	<20	2.45	0.002	0.32	<0.1	0.04	<0.1	<0.05	3.4	<0.5	7	<0.2
1229125	Rock	0.063	20	40	2.19	81	0.014	<20	3.00	0.003	0.32	<0.1	0.03	<0.1	<0.05	5.6	<0.5	9	<0.2
1229126	Rock	0.068	15	54	3.29	288	0.011	<20	3.95	0.004	0.22	<0.1	0.06	<0.1	0.08	7.4	<0.5	12	0.2
1229151	Rock	0.153	11	63	2.40	15	0.007	<20	4.17	0.017	0.07	<0.1	0.02	<0.1	2.11	8.9	1.4	12	<0.2
1229152	Rock	0.018	1	6	1.40	48	0.001	<20	0.61	0.011	0.19	<0.1	0.09	<0.1	1.69	2.3	<0.5	1	<0.2
1229153	Rock	0.036	4	31	2.57	34	0.003	<20	2.00	0.015	0.18	<0.1	0.13	<0.1	1.07	7.8	1.0	6	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: None_Given
Report Date: October 09, 2011

CERTIFICATE OF ANALYSIS WHI11001338.1

Method		WGHT	3B	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
Unit		kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
MDL		0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
1229154	Rock	1.03	9	0.8	69.9	41.5	46	0.2	43.9	31.9	400	4.64	48.6	0.9	2.0	21	0.2	0.7	0.4	37	1.72
1229155	Rock	0.65	<2	0.2	9.1	4.7	16	<0.1	5.6	4.0	977	1.54	3.6	0.8	1.8	5	<0.1	0.2	<0.1	10	0.03
1229156	Rock	0.65	<2	0.2	9.1	3.4	32	<0.1	11.1	1.8	1804	2.22	1.4	<0.5	<0.1	133	0.3	<0.1	<0.1	26	13.21
1229157	Rock	0.48	18	0.5	156.3	51.4	62	0.2	56.1	42.5	389	5.06	40.3	4.1	1.8	21	0.2	1.1	0.3	65	1.29
1229158	Rock	0.78	<2	<0.1	23.1	6.1	58	<0.1	28.0	7.8	808	5.34	38.6	1.6	0.5	328	0.2	0.4	<0.1	55	17.93
1229159	Rock	0.95	<2	0.2	92.0	7.9	60	<0.1	36.8	20.9	1803	5.50	35.5	1.2	1.2	170	0.3	0.2	0.1	85	9.67
1229160	Rock	0.51	5	0.4	126.7	17.8	80	0.1	60.3	40.9	1095	6.27	25.8	<0.5	1.3	60	0.4	0.3	0.1	145	4.35
1229161	Rock	0.58	4	0.8	77.5	20.0	161	0.1	36.6	17.2	217	11.31	41.7	2.3	1.1	1	0.2	1.0	0.2	128	0.07
1229162	Rock	0.38	<2	0.2	144.1	5.2	96	<0.1	43.9	23.4	1283	6.91	14.1	1.2	1.2	91	0.2	0.1	0.2	117	6.66
1229163	Rock	0.47	<2	0.3	45.2	2.3	7	<0.1	1.4	0.4	141	0.73	3.6	<0.5	<0.1	3	<0.1	0.3	<0.1	3	0.71
1229164	Rock	0.81	<2	0.2	13.2	7.0	28	<0.1	6.2	4.4	808	1.39	7.1	<0.5	1.9	411	<0.1	0.3	<0.1	4	17.65
1229165	Rock	0.55	<2	0.4	8.6	2.5	20	<0.1	4.3	3.1	1293	1.03	2.3	0.6	1.5	656	0.1	<0.1	<0.1	2	15.06
1229166	Rock	1.27	<2	0.1	21.5	1.8	13	<0.1	6.0	3.9	1919	1.11	0.6	<0.5	0.1	682	0.9	<0.1	<0.1	15	18.22
1229167	Rock	0.85	<2	0.4	146.1	7.2	80	<0.1	45.9	28.4	1557	5.93	14.9	<0.5	1.2	131	0.2	0.2	0.2	98	8.00
1229168	Rock	0.46	<2	0.2	40.3	5.0	28	<0.1	12.5	8.2	565	2.18	1.1	<0.5	0.3	95	0.3	<0.1	<0.1	27	3.53
1229169	Rock	0.96	<2	0.1	5.2	6.2	10	<0.1	2.9	3.9	1685	2.30	1.0	<0.5	<0.1	252	0.8	0.2	<0.1	7	13.26

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: None_Given
Report Date: October 09, 2011

CERTIFICATE OF ANALYSIS WHI11001338.1

Method		1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
Analyte		P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Tl	S	Sc	Se	Ga	Te
Unit		%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
MDL		0.001	1	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.05	0.1	0.5	1	0.2
1229154	Rock	0.037	6	23	1.38	49	0.002	<20	1.40	0.015	0.28	<0.1	0.41	0.1	1.61	4.0	1.2	4	<0.2
1229155	Rock	0.012	5	4	0.03	18	0.001	<20	0.14	0.023	0.03	<0.1	0.02	<0.1	<0.05	2.3	<0.5	<1	<0.2
1229156	Rock	0.010	7	2	4.36	14	<0.001	<20	0.18	0.041	0.02	<0.1	0.01	<0.1	<0.05	5.6	<0.5	<1	<0.2
1229157	Rock	0.044	7	24	0.88	75	0.001	<20	0.70	0.006	0.19	<0.1	0.33	<0.1	0.83	7.3	1.6	2	0.3
1229158	Rock	0.004	3	10	6.68	34	<0.001	<20	0.20	0.035	0.03	<0.1	<0.01	<0.1	<0.05	4.5	<0.5	<1	<0.2
1229159	Rock	0.031	8	34	3.68	32	0.002	<20	1.17	0.011	0.09	<0.1	0.02	<0.1	<0.05	14.6	<0.5	3	<0.2
1229160	Rock	0.043	7	57	2.96	28	0.004	<20	2.96	0.012	0.15	<0.1	0.13	<0.1	0.32	15.2	0.6	10	<0.2
1229161	Rock	0.019	4	64	2.81	17	0.006	<20	4.49	0.009	0.10	<0.1	0.22	<0.1	1.15	6.9	<0.5	14	<0.2
1229162	Rock	0.053	8	55	2.28	28	0.005	<20	3.02	0.012	0.11	<0.1	0.03	<0.1	0.11	12.7	<0.5	10	<0.2
1229163	Rock	0.001	<1	2	0.04	18	<0.001	<20	0.04	0.003	<0.01	<0.1	0.38	<0.1	<0.05	0.3	<0.5	<1	<0.2
1229164	Rock	0.016	6	3	0.30	29	<0.001	<20	0.30	0.003	0.11	<0.1	0.26	<0.1	<0.05	2.8	<0.5	<1	<0.2
1229165	Rock	0.010	3	3	1.55	19	<0.001	<20	0.22	0.005	0.08	<0.1	0.01	<0.1	<0.05	2.4	<0.5	<1	<0.2
1229166	Rock	0.009	3	4	0.36	8	<0.001	<20	0.37	0.003	0.01	<0.1	<0.01	<0.1	<0.05	5.7	<0.5	1	<0.2
1229167	Rock	0.044	8	46	2.32	84	0.004	<20	2.93	0.013	0.15	<0.1	0.05	<0.1	0.28	12.2	0.6	10	<0.2
1229168	Rock	0.011	3	11	0.85	31	0.002	<20	0.81	0.003	0.04	<0.1	0.05	<0.1	<0.05	3.7	<0.5	3	<0.2
1229169	Rock	0.001	4	1	2.43	74	<0.001	<20	0.04	0.005	<0.01	<0.1	0.07	<0.1	<0.05	3.4	<0.5	<1	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: None_Given
Report Date: October 09, 2011

QUALITY CONTROL REPORT WHI11001338.1

		Method	WGHT	3B	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
		Analyte	Wgt	Au	Mo	Cu	Pb	Zn	Ag	Ni	Co	Mn	Fe	As	Au	Th	Sr	Cd	Sb	Bi	V	Ca
		Unit	kg	ppb	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppb	ppm	ppm	ppm	ppm	ppm	ppm	%
		MDL	0.01	2	0.1	0.1	0.1	1	0.1	0.1	0.1	1	0.01	0.5	0.5	0.1	1	0.1	0.1	0.1	2	0.01
Pulp Duplicates																						
REP G1	QC			<2																		
1229124	Rock		0.63	<2	0.1	69.2	7.4	87	<0.1	46.1	15.6	219	5.32	<0.5	3.8	3.7	10	<0.1	<0.1	0.3	46	0.11
REP 1229124	QC				0.2	69.2	7.2	85	<0.1	46.6	15.9	226	5.31	<0.5	3.9	3.5	10	<0.1	<0.1	0.3	46	0.12
1229158	Rock		0.78	<2	<0.1	23.1	6.1	58	<0.1	28.0	7.8	808	5.34	38.6	1.6	0.5	328	0.2	0.4	<0.1	55	17.93
REP 1229158	QC				<0.1	23.3	6.3	59	<0.1	28.5	7.9	822	5.47	37.8	1.3	0.5	328	0.2	0.4	<0.1	55	18.04
Core Reject Duplicates																						
1229101	Rock		0.77	4	0.1	41.6	16.2	52	<0.1	26.5	11.8	2135	3.34	10.9	1.5	0.3	158	6.3	1.2	<0.1	40	15.07
DUP 1229101	QC			<2	<0.1	42.3	18.7	52	<0.1	26.4	12.4	2163	3.42	11.1	1.1	0.3	167	7.1	1.2	<0.1	42	15.22
1229160	Rock		0.51	5	0.4	126.7	17.8	80	0.1	60.3	40.9	1095	6.27	25.8	<0.5	1.3	60	0.4	0.3	0.1	145	4.35
DUP 1229160	QC			5	0.4	127.9	18.1	80	0.1	61.0	41.7	1085	6.35	25.7	1.2	1.3	61	0.2	0.3	0.1	145	4.36
Reference Materials																						
STD DS8	Standard				13.4	110.7	125.2	330	2.1	38.5	7.9	583	2.41	25.1	94.0	7.7	69	3.0	5.3	7.3	39	0.64
STD DS8	Standard				12.9	111.3	121.0	313	1.7	38.1	7.4	612	2.48	23.7	99.6	5.9	66	2.3	4.2	5.9	41	0.72
STD OREAS45CA	Standard				1.0	485.8	23.5	58	0.4	245.6	87.0	893	14.83	4.0	47.7	8.1	16	0.1	0.1	0.2	198	0.44
STD OREAS45CA	Standard				0.8	510.4	19.2	66	0.3	244.7	88.7	914	15.98	3.6	40.1	6.2	17	<0.1	<0.1	0.2	215	0.41
STD OXC88	Standard			193																		
STD OXC88	Standard			218																		
STD OXC88	Standard			198																		
STD OXH82	Standard			1257																		
STD OXH82	Standard			1280																		
STD OXH82	Standard			1254																		
STD OXC88 Expected				203																		
STD OXH82 Expected				1278																		
STD DS8 Expected					13.44	110	123	312	1.69	38.1	7.5	615	2.46	26	107	6.89	67.7	2.38	4.8	6.67	41.1	0.7
STD OREAS45CA Expected					1	494	20	60	0.275	240	92	943	15.69	3.8	43	7	15	0.1	0.13	0.19	215	0.4265
BLK	Blank			<2																		
BLK	Blank			<2																		
BLK	Blank				<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: None_Given
Report Date: October 09, 2011

QUALITY CONTROL REPORT WHI11001338.1

		Method	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX	1DX
		Analyte	P	La	Cr	Mg	Ba	Ti	B	Al	Na	K	W	Hg	Tl	S	Sc	Se	Ga	Te
		Unit	%	ppm	ppm	%	ppm	%	ppm	%	%	%	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
		MDL	0.001	1	1	0.01	1	0.001	20	0.01	0.001	0.01	0.1	0.01	0.1	0.05	0.1	0.5	1	0.2
Pulp Duplicates																				
REP G1	QC																			
1229124	Rock		0.047	27	30	1.64	140	0.015	<20	2.45	0.002	0.32	<0.1	0.04	<0.1	<0.05	3.4	<0.5	7	<0.2
REP 1229124	QC		0.045	26	30	1.67	140	0.014	<20	2.48	0.002	0.32	<0.1	0.04	<0.1	<0.05	3.4	<0.5	7	0.2
1229158	Rock		0.004	3	10	6.68	34	<0.001	<20	0.20	0.035	0.03	<0.1	<0.01	<0.1	<0.05	4.5	<0.5	<1	<0.2
REP 1229158	QC		0.004	3	10	6.67	34	<0.001	<20	0.20	0.036	0.03	<0.1	<0.01	<0.1	<0.05	4.8	<0.5	<1	<0.2
Core Reject Duplicates																				
1229101	Rock		0.011	7	8	4.74	331	0.001	<20	0.28	0.031	0.05	<0.1	0.06	<0.1	<0.05	6.6	<0.5	1	<0.2
DUP 1229101	QC		0.012	8	8	4.76	325	0.001	<20	0.31	0.033	0.05	<0.1	0.08	<0.1	<0.05	6.6	<0.5	1	<0.2
1229160	Rock		0.043	7	57	2.96	28	0.004	<20	2.96	0.012	0.15	<0.1	0.13	<0.1	0.32	15.2	0.6	10	<0.2
DUP 1229160	QC		0.042	6	57	2.93	27	0.003	<20	2.86	0.010	0.13	<0.1	0.13	<0.1	0.33	15.2	0.6	10	<0.2
Reference Materials																				
STD DS8	Standard		0.078	14	112	0.61	299	0.118	<20	0.90	0.082	0.41	2.8	0.30	5.2	0.16	2.1	5.9	4	4.9
STD DS8	Standard		0.077	15	118	0.61	287	0.113	<20	0.92	0.087	0.41	2.5	0.18	5.2	0.16	2.0	4.2	5	5.0
STD OREAS45CA	Standard		0.039	17	632	0.16	171	0.142	<20	3.61	0.009	0.07	<0.1	0.05	0.2	<0.05	39.6	0.7	17	<0.2
STD OREAS45CA	Standard		0.037	16	709	0.16	160	0.121	<20	3.84	0.006	0.08	<0.1	0.03	<0.1	<0.05	38.8	0.6	19	<0.2
STD OXC88	Standard																			
STD OXC88	Standard																			
STD OXC88	Standard																			
STD OXH82	Standard																			
STD OXH82	Standard																			
STD OXH82	Standard																			
STD OXC88 Expected																				
STD OXH82 Expected																				
STD DS8 Expected			0.08	14.6	115	0.6045	279	0.113	2.6	0.93	0.0883	0.41	3	0.192	5.4	0.1679	2.3	5.23	4.7	5
STD OREAS45CA Expected			0.0385	15.9	709	0.1358	164	0.128		3.592	0.0075	0.0717		0.03	0.07	0.021	39.7	0.5	18.4	
BLK	Blank																			
BLK	Blank																			
BLK	Blank		<0.001	<1	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.05	<0.1	<0.5	<1	<0.2

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: None_Given
Report Date: October 09, 2011

QUALITY CONTROL REPORT WHI11001338.1

		WGHT Wgt kg 0.01	3B Au ppb 2	1DX Mo ppm 0.1	1DX Cu ppm 0.1	1DX Pb ppm 0.1	1DX Zn ppm 1	1DX Ag ppm 0.1	1DX Ni ppm 0.1	1DX Co ppm 0.1	1DX Mn ppm 1	1DX Fe % 0.01	1DX As ppm 0.5	1DX Au ppb 0.5	1DX Th ppm 0.1	1DX Sr ppm 1	1DX Cd ppm 0.1	1DX Sb ppm 0.1	1DX Bi ppm 0.1	1DX V ppm 2	1DX Ca % 0.01
BLK	Blank		<2																		
BLK	Blank		<2																		
BLK	Blank			<0.1	<0.1	<0.1	<1	<0.1	<0.1	<0.1	<1	<0.01	<0.5	<0.5	<0.1	<1	<0.1	<0.1	<0.1	<2	<0.01
Prep Wash																					
G1	Prep Blank			0.3	3.2	4.4	51	<0.1	3.4	4.0	599	2.09	1.9	1.5	5.2	77	<0.1	0.4	<0.1	38	0.57
G1	Prep Blank		6	<0.1	2.0	4.0	49	<0.1	2.4	4.0	579	1.97	1.2	1.4	5.3	66	<0.1	<0.1	<0.1	37	0.58
G1	Prep Blank		<2																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

Acme Analytical Laboratories (Vancouver) Ltd.
1020 Cordova St. East Vancouver BC V6A 4A3 Canada
Phone (604) 253-3158 Fax (604) 253-1716
www.acmelab.com

Client: **Goldstrike Resources (Petro One Energy C**
1300 - 111 West Georgia Street
Vancouver BC V6E 4M3 Canada

Project: None_Given
Report Date: October 09, 2011

QUALITY CONTROL REPORT WHI11001338.1

		1DX P % 0.001	1DX La ppm 1	1DX Cr ppm 1	1DX Mg % 0.01	1DX Ba ppm 1	1DX Ti % 0.001	1DX B ppm 20	1DX Al % 0.01	1DX Na % 0.001	1DX K % 0.01	1DX W ppm 0.1	1DX Hg ppm 0.01	1DX Tl ppm 0.1	1DX S % 0.05	1DX Sc ppm 0.1	1DX Se ppm 0.5	1DX Ga ppm 1	1DX Te ppm 0.2
BLK	Blank																		
BLK	Blank																		
BLK	Blank	<0.001	<1	<1	<0.01	<1	<0.001	<20	<0.01	<0.001	<0.01	<0.1	<0.01	<0.1	<0.05	<0.1	<0.5	<1	<0.2
Prep Wash																			
G1	Prep Blank	0.078	15	6	0.52	173	0.140	<20	1.05	0.114	0.48	0.1	<0.01	0.3	<0.05	2.2	<0.5	5	<0.2
G1	Prep Blank	0.074	14	5	0.54	170	0.135	<20	0.94	0.092	0.46	<0.1	<0.01	0.3	<0.05	2.0	<0.5	5	<0.2
G1	Prep Blank																		

This report supersedes all previous preliminary and final reports with this file number dated prior to the date on this certificate. Signature indicates final approval; preliminary reports are unsigned and should be used for reference only.

APPENDIX IV

Certificate[s]

FROM THE LABORATORY COMPAGNY

Acme Analytical Laboratories (Vancouver) Ltd

See PDF files attached

Yukon
Energy, Mines and Resources

QUARTZ MINING ACT FORM 4 SECTION 56

APPLICATION FOR A CERTIFICATE OF WORK

Version française

Office Date Stamp

I, Daithi Mac Gearailt ,

of Box 1485 Dawson City, YT - Y0B 1G0

Phone 867-993-5202

make oath and say that:

1. I am the owner, or agent of the owner, of the mineral claim(s) to which reference is made herein.

2. I have done, or caused to be done, work, on the following mineral claim(s): (Here list claims on which work was actually done by number and name)

Please See Attached List

situated at Nadaleen River Claim sheet No. 106C02

in the Mayo Mining District, to the value of at least $110,645.75 dollars,

since the 5th day of August 20 11 ,

to represent the following mineral claims under the authority of Grouping Certificate No. _____.
(Here list claims to be renewed in numerical order, by grant number and claim name, showing renewal period requested).

NAD 1 (YD93701) to NAD 200 (YD93900)

NAD 201 (YD63811) to NAD 204 (YD63814)

Please renew all claims for 5 years

3. The following is a detailed statement of such work: (Set out full particulars of the work done indicating dates work commenced and ended in the twelve months in which such work is required to be done as shown by Section 56).

A soil and rock sampling program was conducted on behalf of Goldstrike Resources Ltd on Rackla property between the

5th and the 17th of August 2011.

The claims were recorded on the 4/11/2010 and expire on the 4/11/2011

Sworn before me at Dawson, Y.T. this 16 day of NOV. 20 11 .

B Roberts
Notary Public

Daithi Mac Gearailt
Owner or Authorized Agent

Access to Information and Protection of Privacy Act

The personal information requested on this form is collected under the authority of and used for the purpose of administering the *Quartz Mining Act*. Questions about the collection and use of this information can be directed to the Mining Recorders Office, Mineral Resources, Department of Energy, Mines and Resources, Yukon Government, Box 2703, Whitehorse, Yukon Territory, Y1A 2C6 (867) 667-3190

YG(5049Q) F2 04/2003

List of costs.

EXPLORATION COSTS ASSOCIATED WITH THE STEN PROPERTY (NAD CLAIMS) BETWEEN Aug-5th and Aug17th - 2011		MAYO (STEN-NAD-1 to 204)	
ITEM	**COST/ UNIT**	**UNIT AMOUNT**	**TOTAL**
A-Star with fuel	$ 1,950.00	21.05	$ 41,047.50
Fixed wing transport (Great River Air)	$ 16,918.73	1	$ 16,918.73
ROCK ASSAY	$ 28.88	204	$ 5,891.52
SOIL ASSAY	$ 18.00	523	$ 9,414.00
Geologist - (F,T)	$ 500.00	12	$ 6,000.00
3 x Soil Samplers = 300 /day each	$ 900.00	11	$ 9,900.00
cook	$ 350.00	11	$ 3,850.00
Prospector 1 x 350 / day	$ 350.00	11	$ 3,850.00
Hotel and Accomodation /$ 129.00 / Night (Pilot and Geologist-Dawson)	$ 258.00	3	$ 774.00
Camp Rental	$ 1,000.00	11	$ 11,000.00
Report preperation	$ 2,000.00	1	$ 2,000.00
		TOTAL	**$ 110,645.75**

Dustin MacGearailt.
Nov - 16 - 2011

Claims worked
1 of 4

CLAIM_LABE	GRANT_NUMB
NAD 5	YD93705
NAD 7	YD93707
NAD 8	YD93708
NAD 10	YD93710
NAD 11	YD93711
NAD 12	YD93712
NAD 13	YD93713
NAD 15	YD93715
NAD 16	YD93716
NAD 18	YD93718
NAD 19	YD93719
NAD 20	YD93720
NAD 21	YD93721
NAD 30	YD93730
NAD 31	YD93731
NAD 32	YD93732
NAD 33	YD93733
NAD 35	YD93735
NAD 36	YD93736
NAD 37	YD93737
NAD 38	YD93738
NAD 39	YD93739
NAD 40	YD93740
NAD 44	YD93744
NAD 45	YD93745
NAD 46	YD93746
NAD 47	YD93747
NAD 48	YD93748
NAD 50	YD93750
NAD 51	YD93751
NAD 54	YD93754
NAD 55	YD93755
NAD 56	YD93756
NAD 59	YD93759

NAD 63	YD93763
NAD 65	YD93765
NAD 66	YD93766
NAD 70	YD93770
NAD 71	YD93771
NAD 73	YD93773
NAD 75	YD93775
NAD 76	YD93776
NAD 77	YD93777
NAD 78	YD93778
NAD 80	YD93780
NAD 97	YD93797
NAD 98	YD93798
NAD 99	YD93799
NAD 100	YD93800
NAD 101	YD93801
NAD 102	YD93802
NAD 104	YD93804
NAD 105	YD93805
NAD 106	YD93806
NAD 108	YD93808
NAD 109	YD93809
NAD 111	YD93811
NAD 112	YD93812
NAD 115	YD93815
NAD 116	YD93816
NAD 117	YD93817
NAD 118	YD93818
NAD 119	YD93819
NAD 120	YD93820
NAD 125	YD93825
NAD 126	YD93826
NAD 127	YD93827
NAD 128	YD93828

NAD 130	YD93830
NAD 134	YD93834
NAD 135	YD93835
NAD 136	YD93836
NAD 139	YD93839
NAD 140	YD93840
NAD 141	YD93841
NAD 142	YD93842
NAD 143	YD93843
NAD 146	YD93846
NAD 147	YD93847
NAD 159	YD93859
NAD 161	YD93861
NAD 162	YD93862
NAD 163	YD93863
NAD 164	YD93864
NAD 167	YD93867
NAD 168	YD93868
NAD 169	YD93869
NAD 170	YD93870
NAD 171	YD93871
NAD 173	YD93873
NAD 174	YD93874
NAD 175	YD93875
NAD 176	YD93876
NAD 183	YD93883
NAD 189	YD93889
NAD 190	YD93890
NAD 191	YD93891
NAD 192	YD93892
NAD 194	YD93894
NAD 195	YD93895
NAD 196	YD93896
NAD 197	YD93897
NAD 199	YD93899
NAD 200	YD93900

NAD 201	YD63811
NAD 202	YD63812
NAD 203	YD63813
NAD 204	YD63814

MAP of Work.

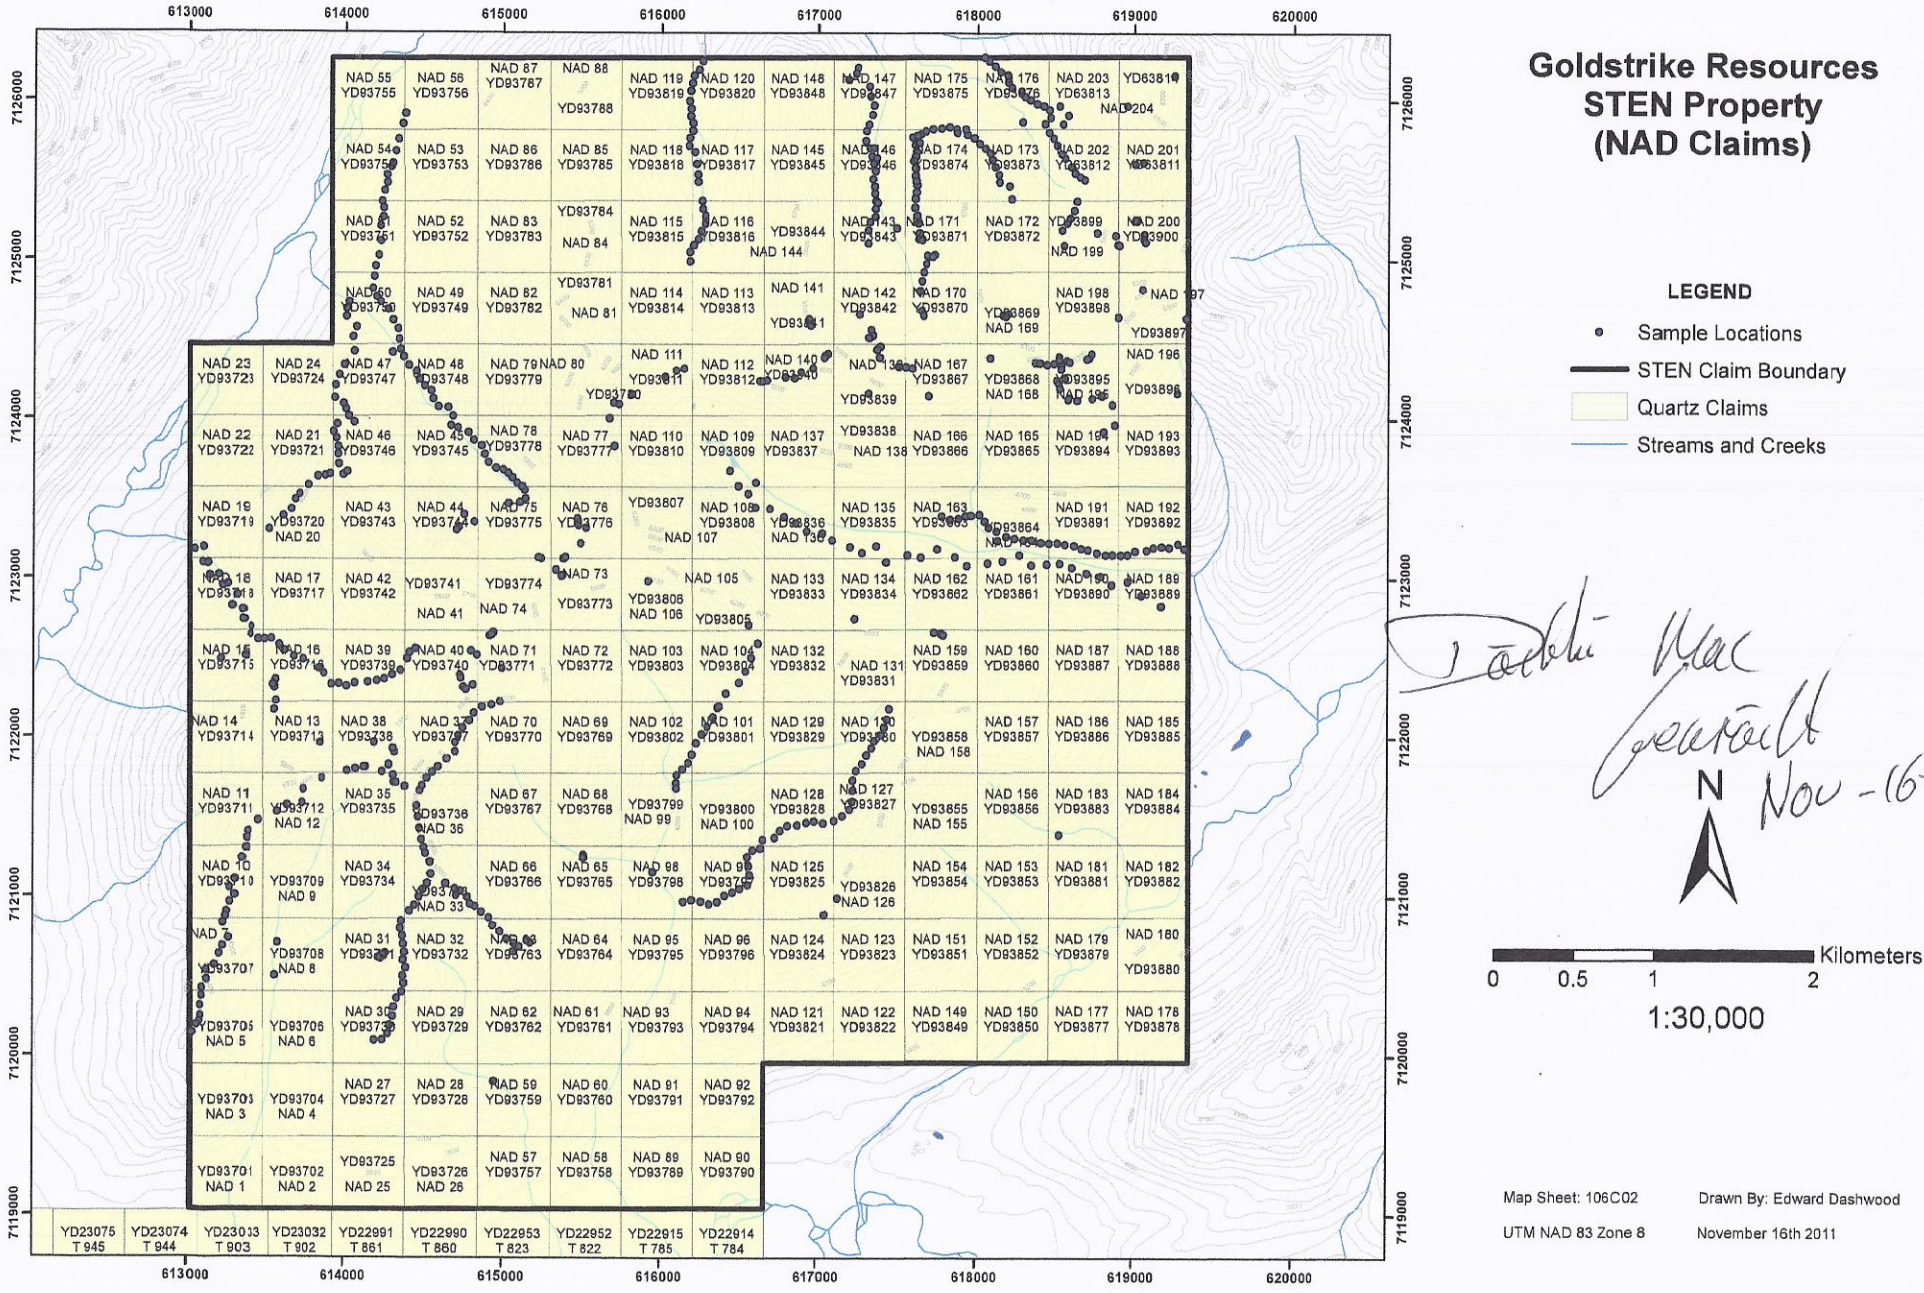

Nov-16-2011