ASSESSMENT REPORT ON **JUNE 2012** FIELD WORK ON PART OF THE POL 1-153 QUARTZ MINERAL CLAIM GROUP (CERT; HM02855)

Mayo Mining District Yukon Territory Canada

Map sheet 106D/06

Under Application for Work Credits on

POL 1-3 YD16811-13, POL 4-30 YD113954-80, POL 31-40 YD16791-YD16800, POL 41-153 YD113981-YD114093.

Coordinates central area: 64° 25' 10.9" N, 135° 03' 21.5" W

UTM: 8V 4 97 303E, 71 43 785N, NAD 83

For

Blind Creek Resources Ltd

Floor 1500, 675 West Hastings Street, Vancouver, V6B 1N2, CANADA

Tel: 1-604-669-6463, Fax 1-604-669-3041



BY

Nicholas Clive Aspinall, P.Eng

3A Diamond Way, Whitehorse, Yukon Territory, Y1A 6G4

Tel: 867-456-4334, Cell: 867-335-2662

E-mail: ncaspinall@gmail.com

Field work: 5th June to 13th June 2012

Date Report 25th September 2012

Summary

The objective of staking the Pol 1-153, claim Group in 2010 was to acquire mineral claims within the newly named Carlin Gold Trend, now as then still in its theoretical infancy, after the 2009 discoveries by ATAC Resources Ltd in the vicinity of Kathleen Lakes, map sheets 106D/07 and 106D/08

A total of 22 silt out of 25 silt samples collected during June 2011 show elevated zinc analytical returns. These elevated returns do not show corresponding elevated lead or silver values, therefore the elevated zinc values, at that time, were considered due to scavenging by vegetative swampy matter.

Nevertheless, in June 2012 a five-person field team returned to the area and collected 194 auger and soil samples along four-east west traverse lines, with sample spacing at 100 metre intervals.

One isolated gold analytical return, with attendant silver, arsenic and lead; in the northern and central sector of the Pol claim group suggests indications of polymetalic mineralization beneath the overburden. In addition, two other samples returned anomalous zinc.

It is recommended the continuation of this geochemical soil survey in 2013 season, following a budget of almost $50,000.00.

Table of Contents

Summary	2
Introduction and Terms of Reference	4
Reliance on Other Experts	4
Property Description ands Location	4
Accessibility, Climate, Local Resources, Infrastructure and Physiography	5
History	5
Geological Setting	5
Project Geology	6
Mineral Deposit Type	6
Mineralization	7
2012 Exploration	7
Drilling	8
Sample Method and Approach	8
Sample Preparation, Analysis and Security	9
Data Verification	9
Adjacent Properties	9
Mineral Processing and Metallurgical Testing	9
Mineral Resource and Mineral Reserve Estimates	9
Other Relevant Data	9
Interpretation and conclusions	9
Recommendations	9
References	11

Tables

Table 1	4
Table 2	6
Table 3	10

Appendices 13

Figures
Analytical Data
Quartz Claim Data
Certificate and Consent of Author

Introduction and Terms of Reference

June 2012 field work and this assessment report on the Pol Claim Group, Mayo Mining District, Central Yukon, Canada is commissioned by Mr. Frank Callaghan, President and CEO of Blind Creek Resources Ltd, (referred henceforth as BCR or the Company) with offices at 1500th floor, 675 West Hastings Street, Vancouver, V6B 1N2, British Columbia, Canada.

The objective of staking the Pol 1-153 claim Group in 2010 was to acquire mineral claims within the newly named Carlin Gold Trend, now as then still in its theoretical infancy, after 2009 discoveries by ATAC Resources Ltd in the vicinity of Kathleen Lakes, map sheets 106D/07 and 106D/08, Figures 1 &2.

The Company carried out assessment work in 2011. Despite poor results of work that year, work was continued on the property in 2012. This report describes this work.

Reliance on Other Experts

The following experts assisted in the completion of assessment work and this report.

- Mr. Frank Callaghan of the Company, for providing necessary funding
- Melissa Halpenny, & Quinn Dekking, both of St Johns Newfoundland, Cody Broda of Nanaimo B.C, and Roger Gallagher of Atlin B.C, who very ably assisted with fieldwork, logistics and data compilations.
- Trans-north Helicopters
- Agat Laboratories, 5623 McAdam Road, Mississauga, Ontario, L4Z 1N9 for 2012 analytical support, including Agat's sample preparation laboratory in Whitehorse, YT.
- Anke Woodworth of Terracad GIS Systems Ltd, 3rd floor, 675 West Hastings, Street, Vancouver, V6B 1N2, British Columbia, Canada.
- The Services of the Mayo Mining Recorders Office, Mayo, Yukon.
- George and Tina at Bedrock Hotel and RV Park of providing accommodation support
- Various geological assessment reports, and Geological Survey of Canada and the Yukon Geological Survey as itemized in the appendices.
-

Property Description and Location

The Pol 1-53 quartz claims are located 78 kilometres NE of Mayo, Yukon. Coordinates central to the area are: 64° 25' 10.9" N, 135° 03' 21.5" WUTM: 8V 4 97 303E, 71 43 785N, NAD 83, Figures 2 &3.

The Pol-Claims are tabulated below. Provided the District Mining Recorder in Mayo approves 2012 assessment work and this report, the Pol claims will remain in good standing to 18th June 2014. The 2012 assessment work costs are estimated at $30,600.00, detailed in the appendices section of this report.

Table 1

Blind Creek Resources Ltd Pol1-53 Quartz Claims, Mayo Mining District, Yukon

Claim ID	Grant #	Recorded	Work 2012	Good to*	# Quartz Claims	Hectares	Acres
POL1-3	YD168110-13	18/10/2010	Nil	18/10/2014	3	60.57	149.61
POL4-30	YD113954-80	18/10/2010	Part	18/10/2014	27	545.13	1,346.47
POL31-40	YD16791-800	18/10/2010	Nil	18/10/2014	10	201.90	498.69
POL41-153	YD113981-4093	18/10/2010	Part	18/10/2014	113	2,281.47	5,635.23
Total					**153**	**3,089.07**	**7,630.00**

*Dependent on Mayo Mining Recorder's approvals of 2012 assessment work and this report.

The claims are located in a valley area drained by Police Creek, and located immediately west of Carpenter Creek. The Claim Group lies within map sheet 106D/06 and lies within the traditional territories of the Na-Cho Nyak Dunn, (NND) First Nations.

Accessibility, Climate, Local Resources, Infrastructure and Physiography
The claims are accessible by helicopter, Figure 3.

The mountains of this ecoregion act as a second major barrier to air masses off the Gulf of Alaska inland. The barrier generates a wet belt, especially along the southern slopes. Mean annual temperatures are near -6° C. Mean January temperatures are near – 25° C and in July near 8° C . The area straddles a continuous permafrost zone.

Local resources consist of scattered strands of boreal forest in valley bottoms along the southern fringes of the region. The mountainous regions consist primarily of alpine tundra. Larger wild-life consists of grizzly bear, wolverine and Dall sheep, indicating a healthy mammal ecosystem.

Physiography of the area is mountainous featuring steep mountain slopes. With the higher peaks in the 5500 foot range. Police Creek drains the centre of the property[1].

History
There is no recorded geological work or prospecting within the claim area. Adjacent claims are currently held by ATAC Resources Ltd and Monster Mining Ltd, both being Vancouver junior mining companies.

During June 2011 a five man sampling crew collected 25 silt samples, 22 of which show elevated zinc analytical returns. These elevated returns do not show corresponding elevated lead or silver values, therefore the elevated zinc values, were originally considered due to scavenging by vegetative swampy matter.

Geological Setting

[1] Parc Technical Bulletin 04-01

Glacial evidence is widespread and is mainly related to the Reid, (ca.200 Ka) and the McConnell, (ca. 23 Ka) glacial periods.

Sedimentary rocks within the Mackenzie Mountain region in which the property lies range from Early Proterozoic to Middle Jurassic, a 1.6 billion year sedimentary record exposed in only a few places in Canada. Sandstone, siltstone and a prominently weathered orange-brown, thinly bedded dolomite, older than 1.750 Ma, constitute the Wernecke Supergroup, (citation: Delaney, 1981).

Succeeding units, including dark coloured shale, thick and thin-bedded dolomite and sandstone comprise the overlying Fifteen-mile (citation: Thompson, 1995) and Pinguicula (Citation: Thorkelson and Wallace, 1985) Formations in the western half of the region, and Mackenzie Mountain Supergroup east of the Snake River.

From 750 to about 600 Ma maroon shale, sandstone and conglomerate reflect widespread rifting, (citation. Mustard and Roots, 1997) and glaciation, (citation: Eisbacher, 1981)[2].

Project Geology

The project area lies within the Cordilleran Foreland Fold and Thrust Belt, (citation: Gabrielse and Yorath, 1991). Resistant carbonate protrudes as steep and rugged ridges, clearly defining mountain scale folds, while recessive siltstone, shale and major faults underlie intervening valleys. Table 2 outlines rock formations within the Claim Group and adjacent areas.

Table 2

Rock Formations Within The Pol 1-153 Claim Group and Immediate Surrounding Region.[3]						
Eon/Symbol	Era	Period	Epoch/Stage	Age/Ma	Rock Type	
Phanerozoic CSM6	Paleozoic	Silurian Ordovician	Ludlovian? Tremadocian?	419 495	volcanic argillite	tuff
Phanerozoic CDB1	Paleozoic	Silurian Ordovician U/L Cambrian	Ludlovian? Nemakit- Daldynian?	419 531	Dolostone Dolostone Dolostone Dolostone	Note: Yukon Carlin Trend
Phanerozoic CSM6	Paleozoic	L. Cambrian	Daldynian?	543.9	Dolostone	?????????
U. Proterozoic PCH	Helikian	Stenian Ectasion		543.9 1000	clasticss Shale	Limestone siltstone
M.Proterozoic MPH2	Helikian	Stenian Ectasion		1000	Volcanic Gabbro	Diorite sills

[2] ibid
[3] YTG Mapmaker and after Grant, 2001.

				1600	Dikes
L. Proterozoic IPG	Helikian	Stenian Ectasion		1000 1600	Mudstone Shale Siltstone

The project areas is primarily covered by swamp and low valley terrain. There are no known outcrops are in the work area.

Mineral Deposit Type

No known mineral deposit type or mineral showing is known on the Property, but within the region are recorded Ocelot replacement Pb-Zn-Ag type prospects, Blende Pb-Zn-Ag type deposits, Cu-Pb-Ag vein type prospects, and possibly Carlin Type gold prospects.

Mineralization

No rock outcrops, let alone mineralized outcrops have been found on the Property to date.

2012 Exploration,

From 5th June to 14th June 2012 a five-man crew set-up a fly camp, cut a heli-pad and collected 194 auger and soil samples and 7 panned concentrate samples on the Property, Figures 4-10.

The location of the camp and heli-pad is in the vicinity of: 64 ° 26' 10.6" North, 134 ° 59' 59.3" West.

The soil samples were collected using an auger tool and geo-tool. A list in the appendices waypoints, soil data, sample depth, date collected, and analytical returns.

Seven panned concentrate samples were collected from a north-south flowing creek. Six of these samples consisted of panning bank moss matt debris to test for flood gold; one sample was collected from creek gravels. Due to fast spring creek flow other gravel samples were un-obtainable.

All crewmembers had hand-held radios for communication with other members, in addition to the helicopter servicing the camp. Three satellite phones were available on-site.

Four West-East sample traverse lines were collected, Samples were collected at 100 metre intervals and line traverses were 200 metres apart.
Interesting returns are as follows:

Gold: Figure 5 shows locations of two sample returns higher than <0.01 ppm Au, the highest at 1.03 ppm Au, and the second at 0.01 ppm Au.

Silver: Figure 6 shows one anomalous silver sample at 5.47 ppm Ag, and this sample corresponds to the 1.03 Au sample above.

Arsenic : Figure 7 shows two sample returns greater than 15 ppm As. One sample return is 64.3 ppm As and corresponds to the 1.03 ppm Au and 5.47 ppm Ag above, and one arsenic sample return is 15.7 ppm As and located in the same general area.

Copper: Figure 8 shows 36-sample returns grater than 45 ppm Cu, but none of these samples are considered anomalous in copper. No copper returns correspond to the high gold (1.03 ppm Au) and silver 5.47 ppm Ag) above.

Lead: Figure 9 shows one anomalous lead sample returning 247 ppm Pb to correspond with the sample gold return of 1.03 ppm Au, 5.47 ppm Ag, and 64.3 ppm As.

Zinc: Figure 10 shows two anomalous zinc samples but these sample returns to not correspond with the single gold-silver and arsenic return; zinc shows a weak correspondence to lead returns elsewhere in the surveyed area, in some cases.

Panned Concentrate Creek Samples: Gold: Figure 11. No visible gold or analytical gold was detected in the 7 samples tested.

Drilling
No diamond drilling was carried out in 2012, and no records show drilling was ever carried out on the property.

Sample Method and Approach
Soil samples were augur samples as well as samples obtained from holes dug with geo-tool.
Details of samples collected including sample type and depth are listed in the appendices. Figures 3 and four show quartz claim units where samples were collected, and Figure 4 shows respective sample numbers.

Sample locations were located using Garmin map 76CSX GPS units. Locations were then directly downloaded onto OZI EXPLORER using digital Yukon quartz claim maps to harmonize with OZI EXPLORER using "tiff" software.

Sample Preparation, Analysis and Security
After the sampling program, all samples were packed and driven under company vehicle and supervision to Whitehorse, Yukon Territory, and deposited with the senior technician at the Agat Sample Preparation Laboratory. Until delivered to the laboratory, samples were kept under the writer's custody.

At the Agat Preparation laboratory in Whitehorse, samples are catalogued, drying, crushing, pulverizing or screening of the samples.

Pan concentrate samples were initially analyzed by gold analyses, followed by gravimetric finish, (Agat method 202064) using a 30 gram sample, to give a range 0.05-1000 ppm Au.

The problem with pan concentrates in this case they were not panned down to 30 grams, but to a range of weights ranging from 90 grams to 620 grams, Re-Table 3. Consequently the entire sample

was not analyzed. Consequently, even though minute flakes of gold were visually seen in 4-panned samples, only one sample detected gold under these analyses. The analytical procedure was repeated a second time, with same result.

The silt and rock samples were analyzed by Agat method 201074, which entailed aqua regia digest, followed by inducted coupled plasma-optical emission spectroscopy, (ICP-OES).

Data Verification
Samples were analyzed by a Canadian Industry recognized analytical laboratory, and the author is satisfied work was done accurately.

Adjacent Properties
There are 6 prospects of interest close by. These are:

1. Elliot Ridge, (Cu, Pb-vein)
2. Carpenter, (Pb-Mississippi)
3. Grey Copper Hill, (Ag, Pb-vein)
4. Silver Hill, (Pb-Mississippi)
5. White Hill, (Pb, Zn, Cu-vein)
6. McKay Hill, (Pb-vein)

Mineral Processing and Metallurgical Testing
During 2012 there was no metallurgical work done on material from the work area

Mineral Resource and Mineral Reserve Estimates
The 2012 work area does not include a mineral reserve estimate.

Other Relevant Data
To the best of my knowledge there are no recognized mineral showings or relevant data within the work area other than those already mentioned in this report.

Interpretation and conclusions
No out crops were found on the Property. All soil samples were collected in overburden

A weak to moderate Au-Ag-As-Pb single location anomaly was detected.

This anomaly features a gold return of 1.03 ppm Au. An anomalous silver sample at 5.47 ppm Ag corresponds to this gold return, as does an arsenic return of 64.3 ppm and 247 ppm Pb return, providing indications of polymetalic mineralization beneath the overburden.

In addition, two other samples from the Property returned anomalous zinc.

Seven panned concentrates from a major creek on the Property showed no visible or analytical gold.

Recommendations

Due to the current interest for Carlin type gold in this region. It is recommended additional soil sampling in selected areas be carried out during the 2013 season within the Pol 1-153 Claim Group. Detail soil sampling should also be made around the anomalous Au-Ag-As-Pb anomaly. A tentative budget is provided in Table 3.

Table 3

Working Budget for the Pol Claims, Central Yukon, 2013		$
Geologist 1,	10 days at $500 per day	5,000.00
Geologist 2	10 days at $400 per day	4,000.00
Two field Assistants	10 days at $480 per day	4,800.00
Meals and accommodation	3 man at $180 per da/10 days	1,800.00
Mobilization, demobilization	Ex-Atlin, B.C.	2,000.00
3 vehicles	$100 per day/10 days	3,000.00
Helicopter	$1800 per charter. 6 charters	10,800.00
Analyses	200 samples at $30	6,000.00
Report	10 days at $500 per day	5,000.00
Maps and figures		3,000.00
Sub-total		45,400.00
Company management at 10%		4,540.00
Total		49,940.00

Clive Aspinall, P.Eng
Geologist

25th September 2012

PROFESSIONAL ENGINEER
PROVINCE OF BRITISH COLUMBIA
N. C. ASPINALL

References

Aspin all, NC (2012). ASSESSMENT REPORT ON JUNE 2011 FIELD WORK ON THE POLE-153 QUARTZ MINERAL CLAIM GROUP, Mayo Mining District Yukon Territory Canada Map sheet 106D/06 POL1-3 YD16811-13, POL4-30 YD113954-80, POL 31-40 YD16791-YD16800, POL41-153 YD113981-YD114093.Coordinates central area: 64° 25' 10.9" N, 135° 03' 21.5" W UTM: 8V 4 97 303E, 71 43 785N, NAD 83 For Blind Creek Resources Ltd Floor 1500, 675 West Hastings Street, Vancouver, V6B 1N2, CANADA.Tel: 1-604-669-6463, Fax 1-604-669-3041

Boyle, R.W., (1965). Geology, Geochemistry and Origin of the Lead-Zinc-Silver Deposits of the Keno hill-Galena hill Area, Yukon Territory, (with short descriptions of the tin, tungsten and gold deposits). Bulletin 111. Geological Survey of Canada, Department of Mines and Technical Surveys.

Bostock, H.S., (1957). Yukon Territory, Selected Field Reports of the Geological Survey of Canada 1898-1933. Department of Mines and Technical Surveys. Geological Survey of Canada Memoir 284.

Green, L.H., (1971). Geology of Mayo Lake, Scougle Creek and McQuesten Lake Map-Areas, Yukon Territory, Geological Survey of Canada. Department of Energy, Mines and Resources, Memoir 357.

Price, Barry, J., (2010, amended edition) Technical Report, Blende Project, Beaver River Area, Nash Creek Map Area 106D 07Latitude: 64° 24' 39" N/Longitude: 134° 40' 21" W For: Blind Creek Resources Ltd, 1500 - 675 West Hastings Street, Vancouver, British Columbia, V6B 1N2, Canada

Smith, C.A.S., Meikle, J.C., AND Roots, C.F., (2004). Ecoregions of the Yukon Territory, Biophysical Properties of the Yukon Landscapes,Yukon Ecoregions Working Group, PARC Technical Bulletin 04-01

Van Tassel, Robert. (1966). Geological and Geochemical Report on the VU Mineral Claims, Allen Creek, (Sheet No.9 /105M14 and 105M15) Lat 63 57N. Long 135.00W

Van Tassel, Robert. (1965). Geological and Geochemical Report on the T Mineral Claims, North Fork Granite Creek, (sheet 105M14) Lat: 63 12 N Long 135 00 W.

Silveritz, George., (1980) Assessment Report Soil Geochemistry of the Silver Hawk Claims, 106D/6 135 16 W 64 26 N, Mayo M.D. A/R 090649

Silveritz, George. (1979) Geology of the the Silver Hawk Claims, 106D/6 135 16 W 64 26 N, Mayo M.D. A/R 090568

Yukon minfiles, Nash Creek files.

Figures

Figure 1: Carlin Gold Project. Project Location in Yukon.

Figure 2: Carlin Gold Project. Blind Creek Resources Claims in Central Yukon

Figure 3: Carlin Gold Project. Police Creek Claims.

Figure 4: Carlin Gold Project. Police Creek Sample Locations

Figure 5: Carlin Gold Project. 2012 Sample Values. Gold (ppm)

Figure 6: Carlin Gold Project. 2012 Sample Values. Silver (ppm)

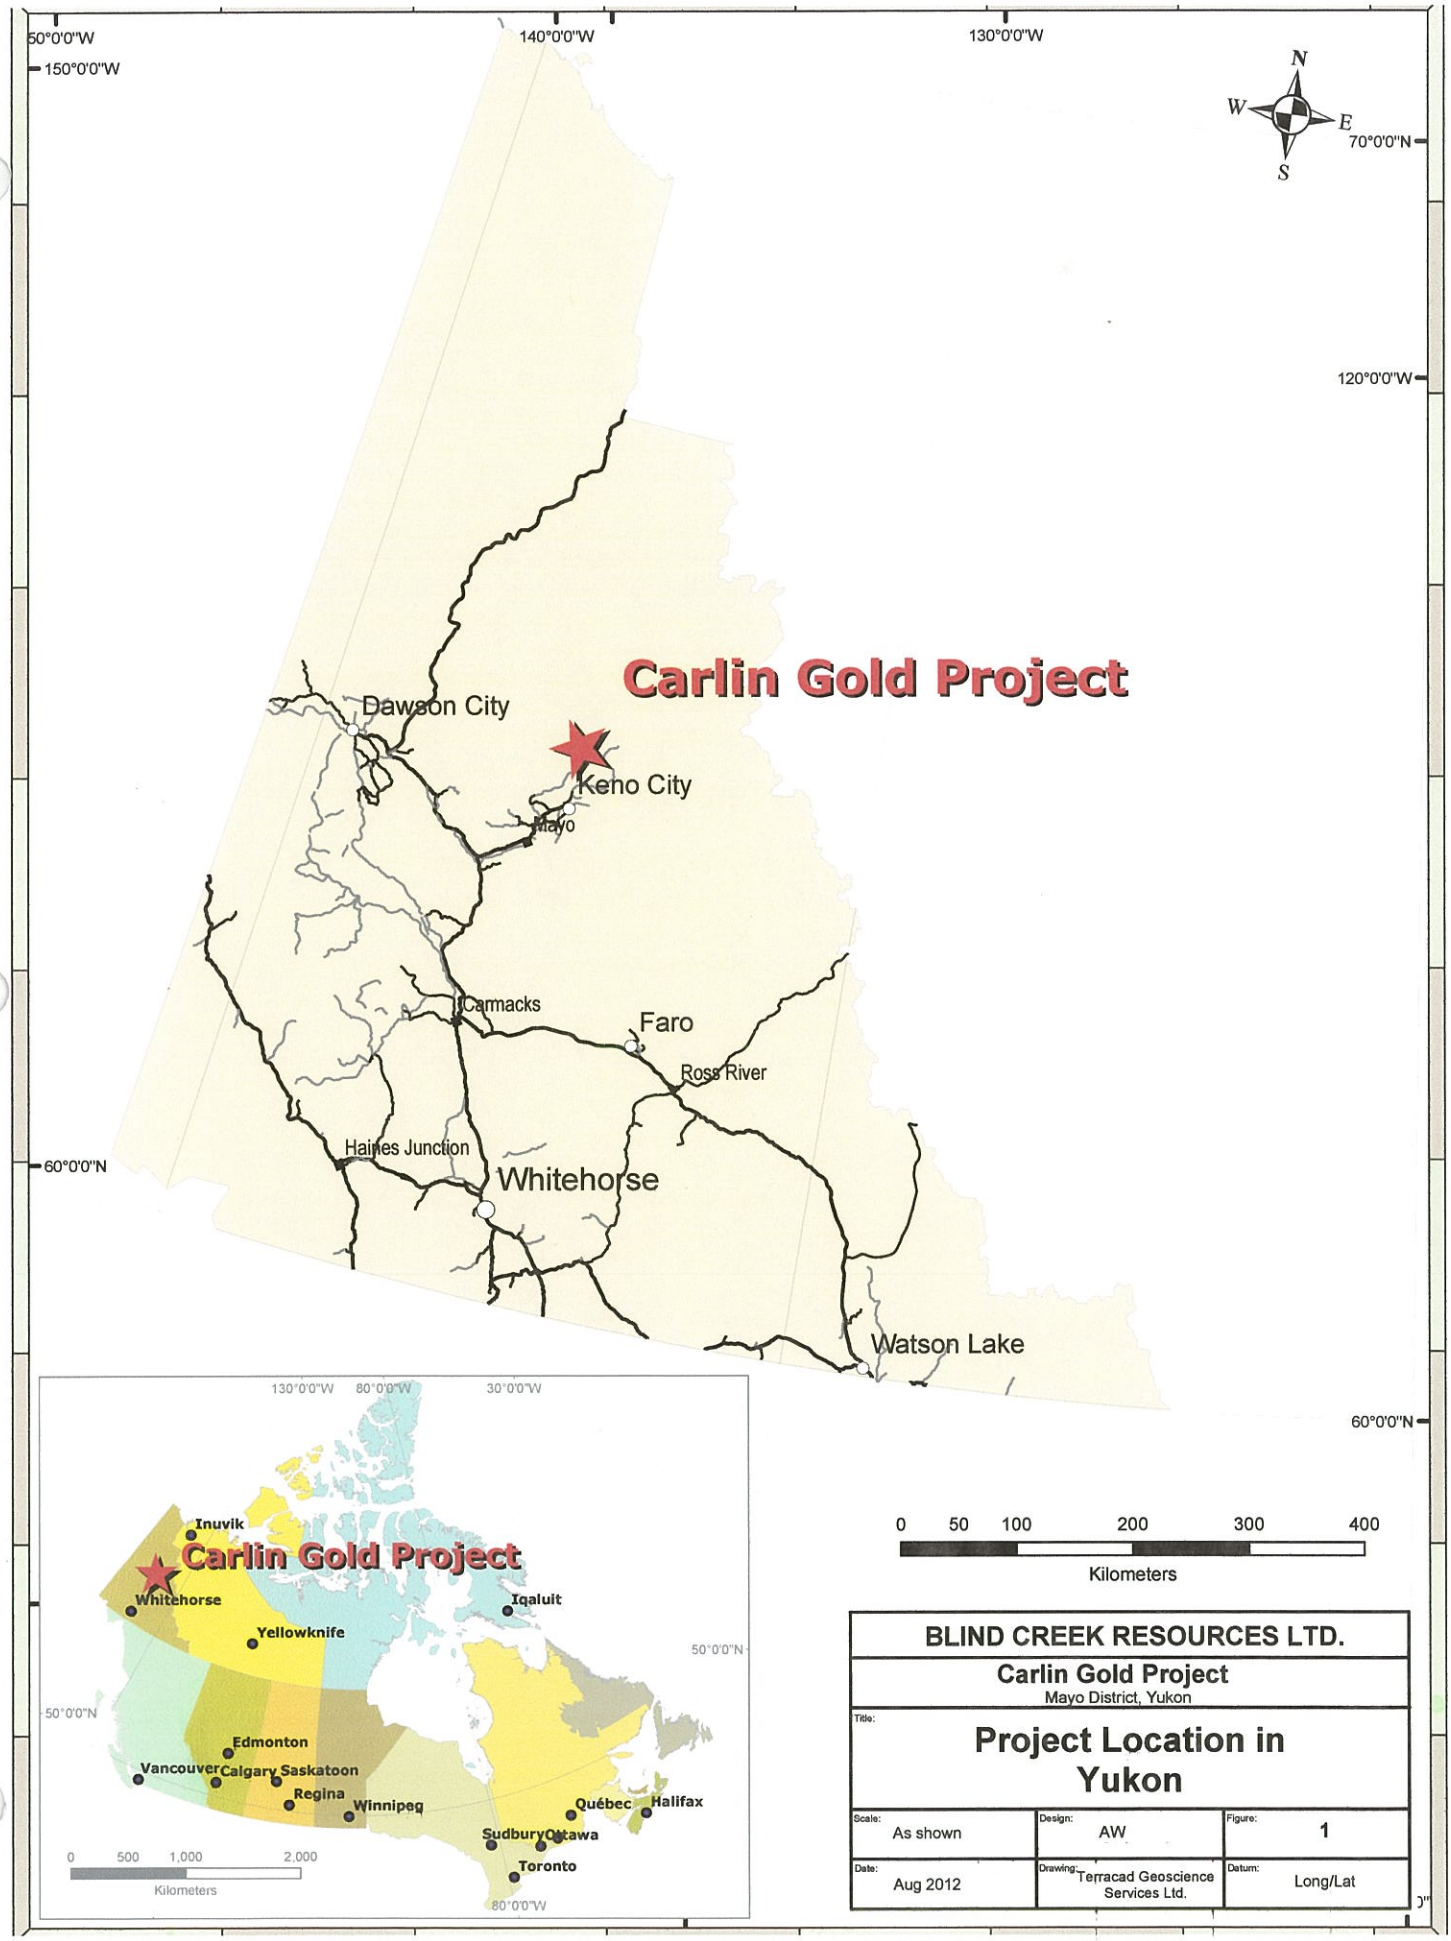
Figure 7: Carlin Gold Project. 2012 Sample Values. Arsenic (ppm)

Figure 8: Carlin Gold Project. 2012 Sample Values. Copper (ppm)

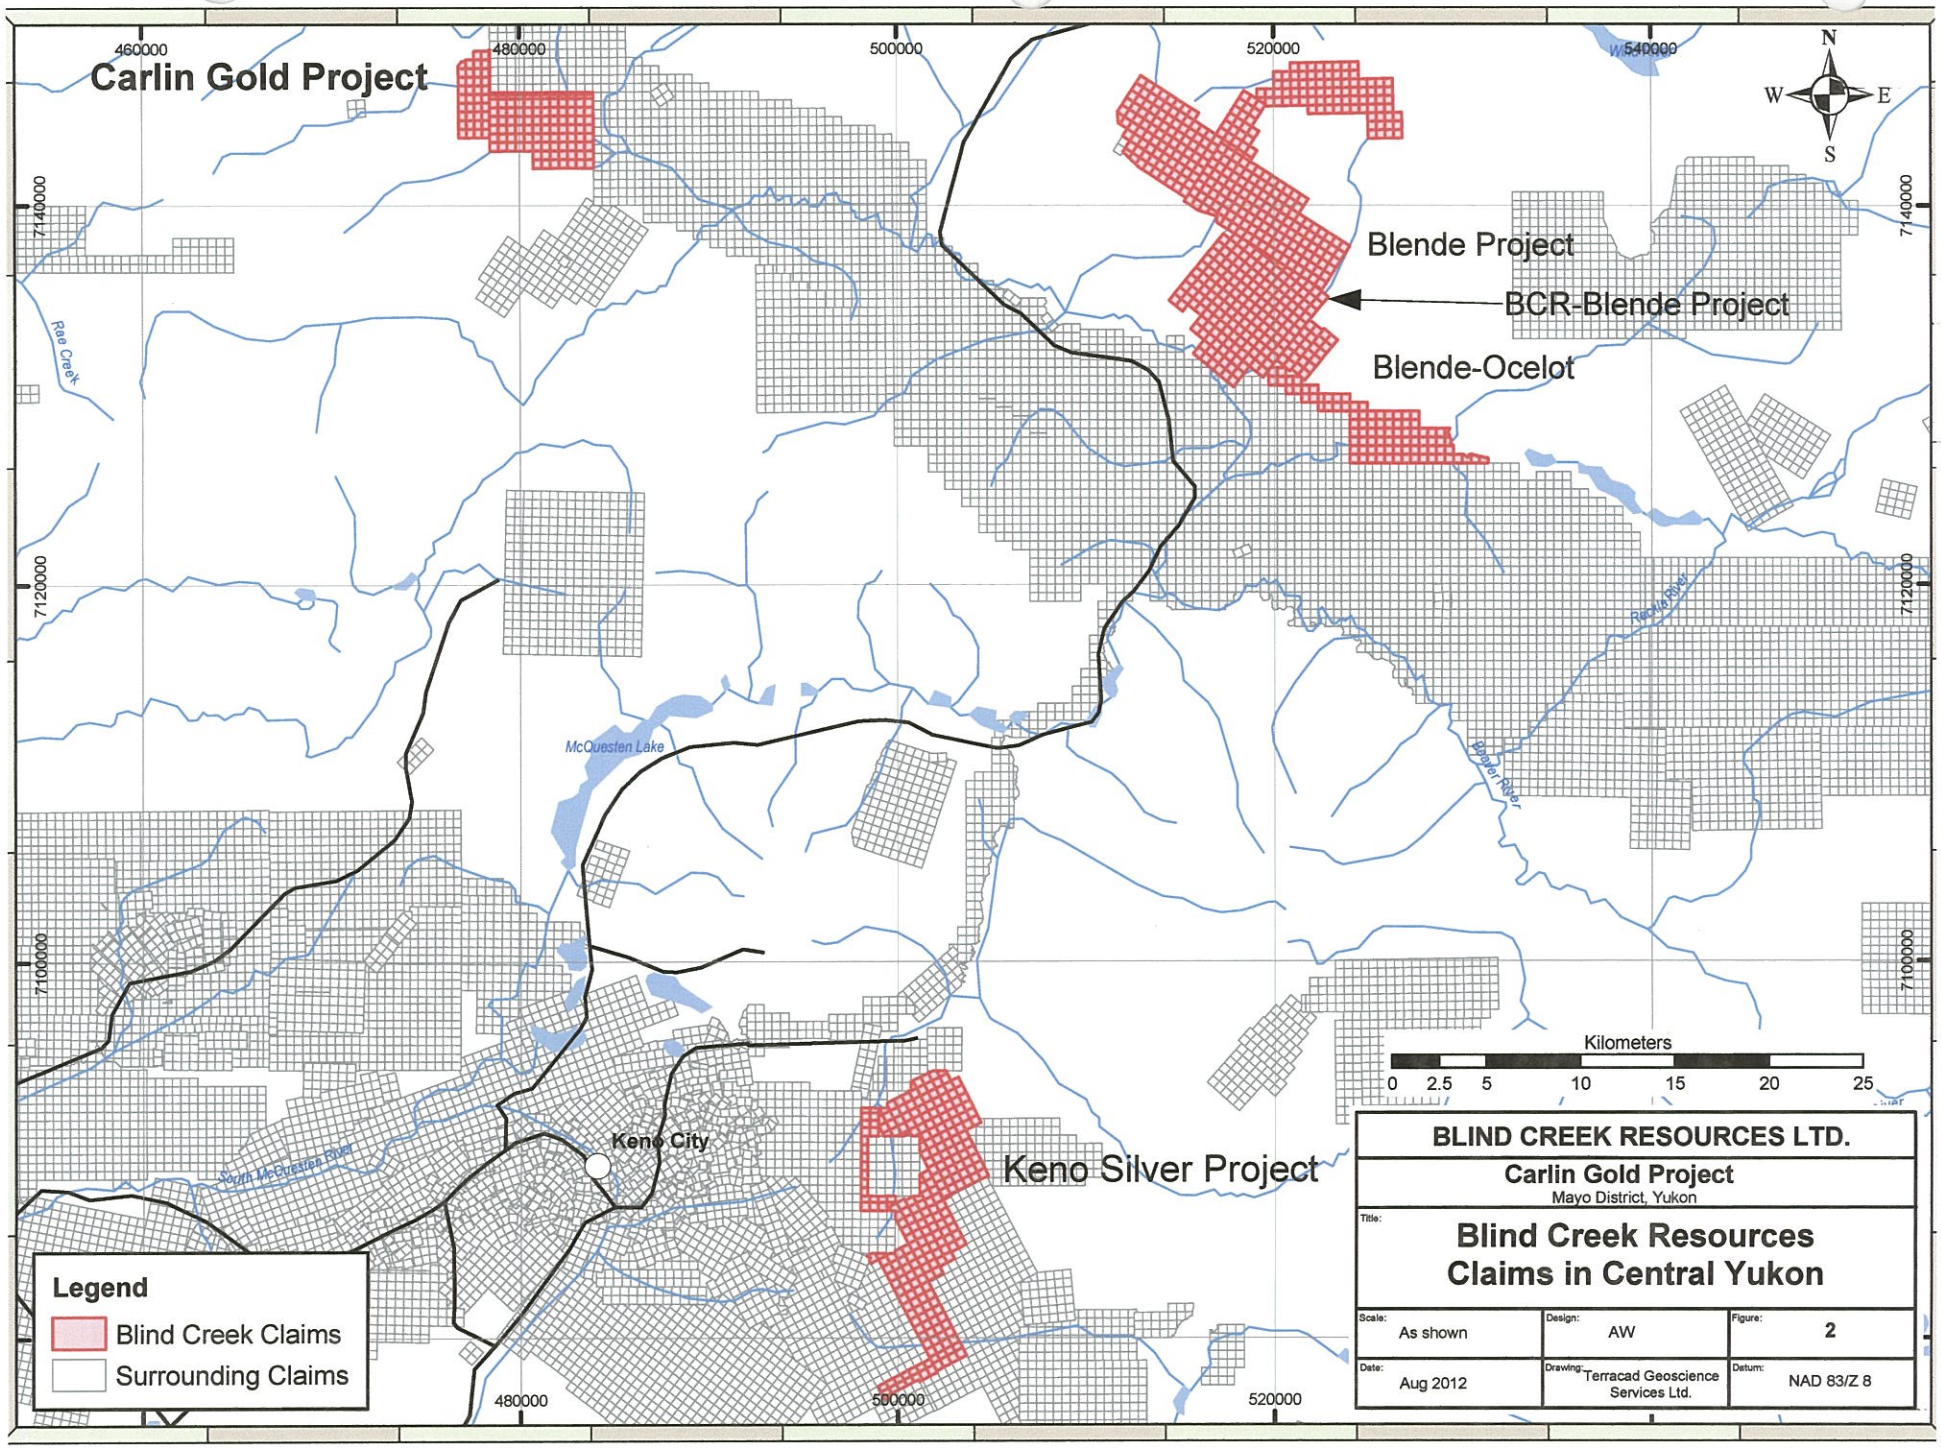
Figure 9: Carlin Gold Project. 2012 Values. Lead (ppm)

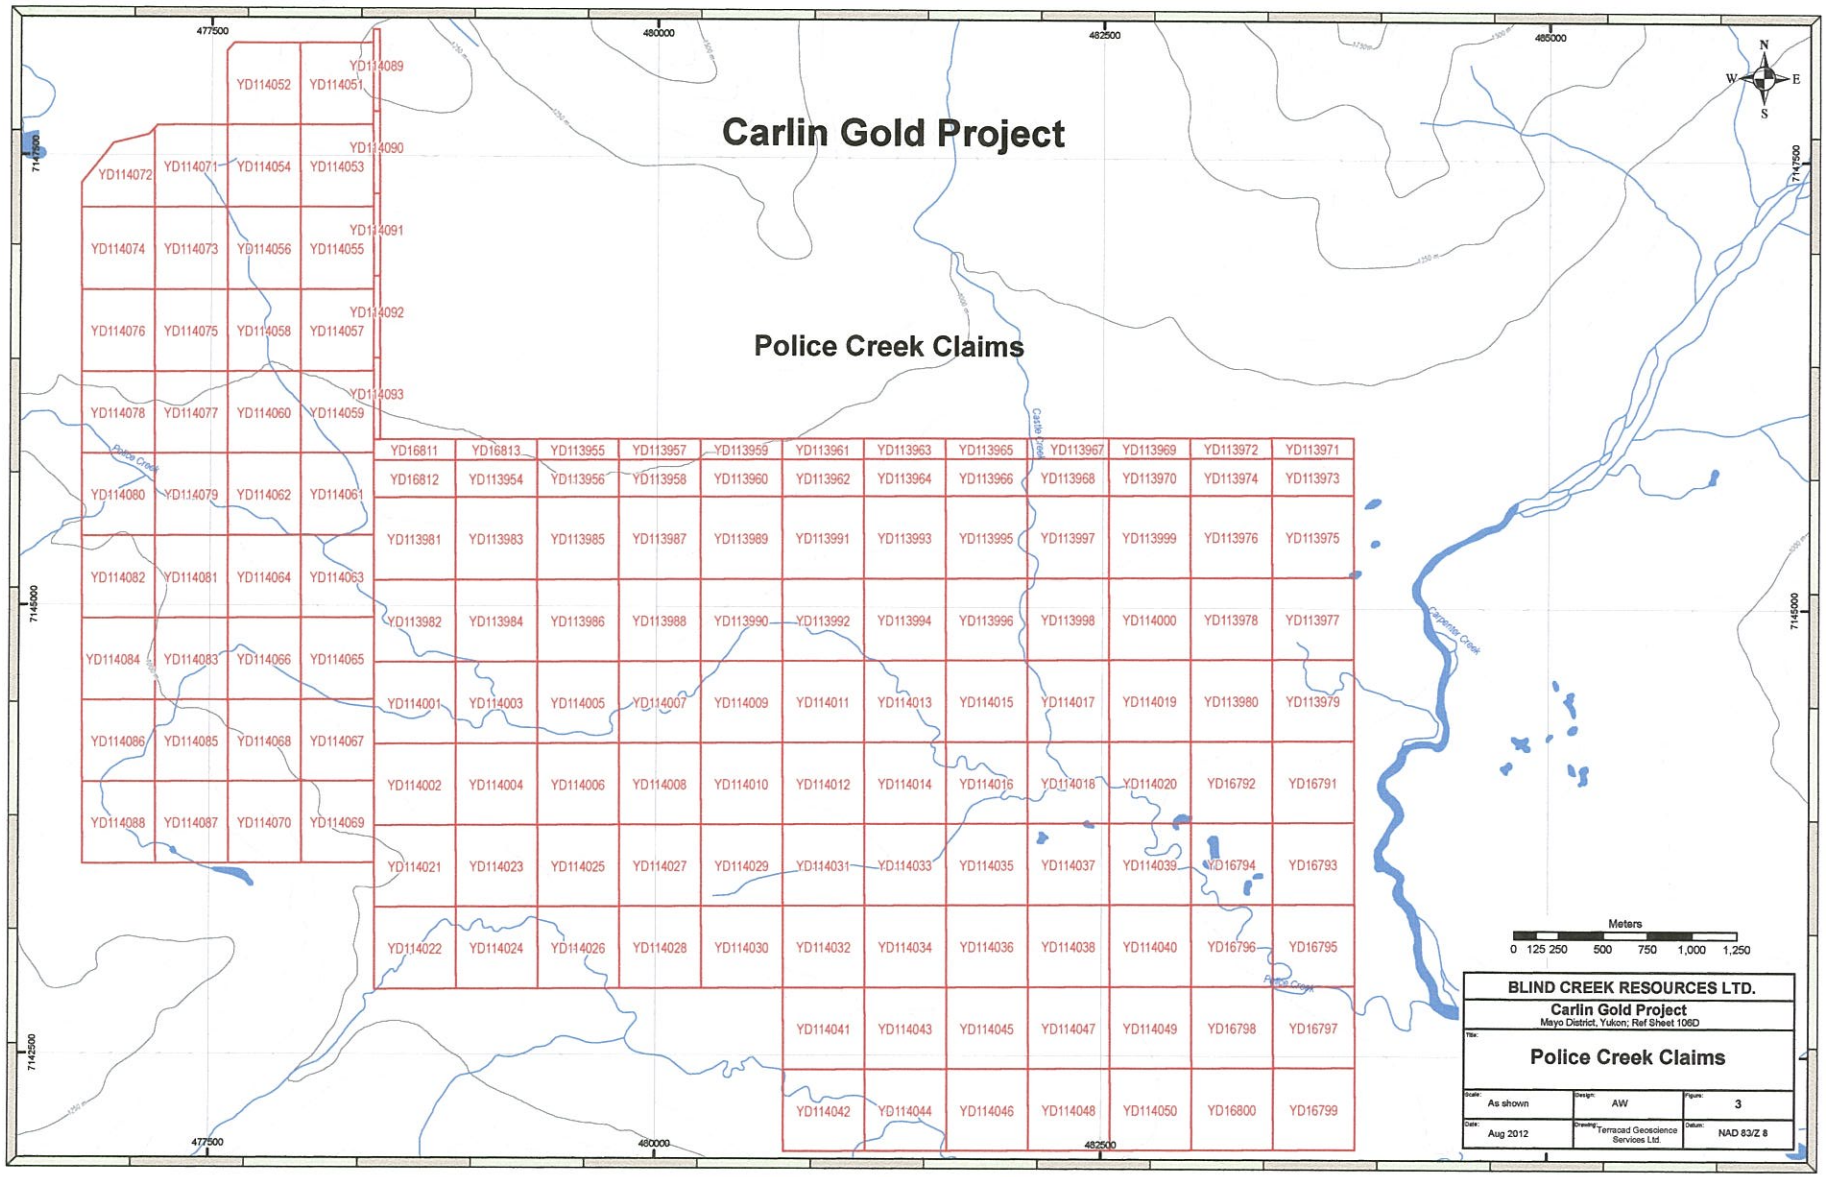
Figure 10: Carlin Gold Project. 2012 Sample Values. Zinc (ppm)

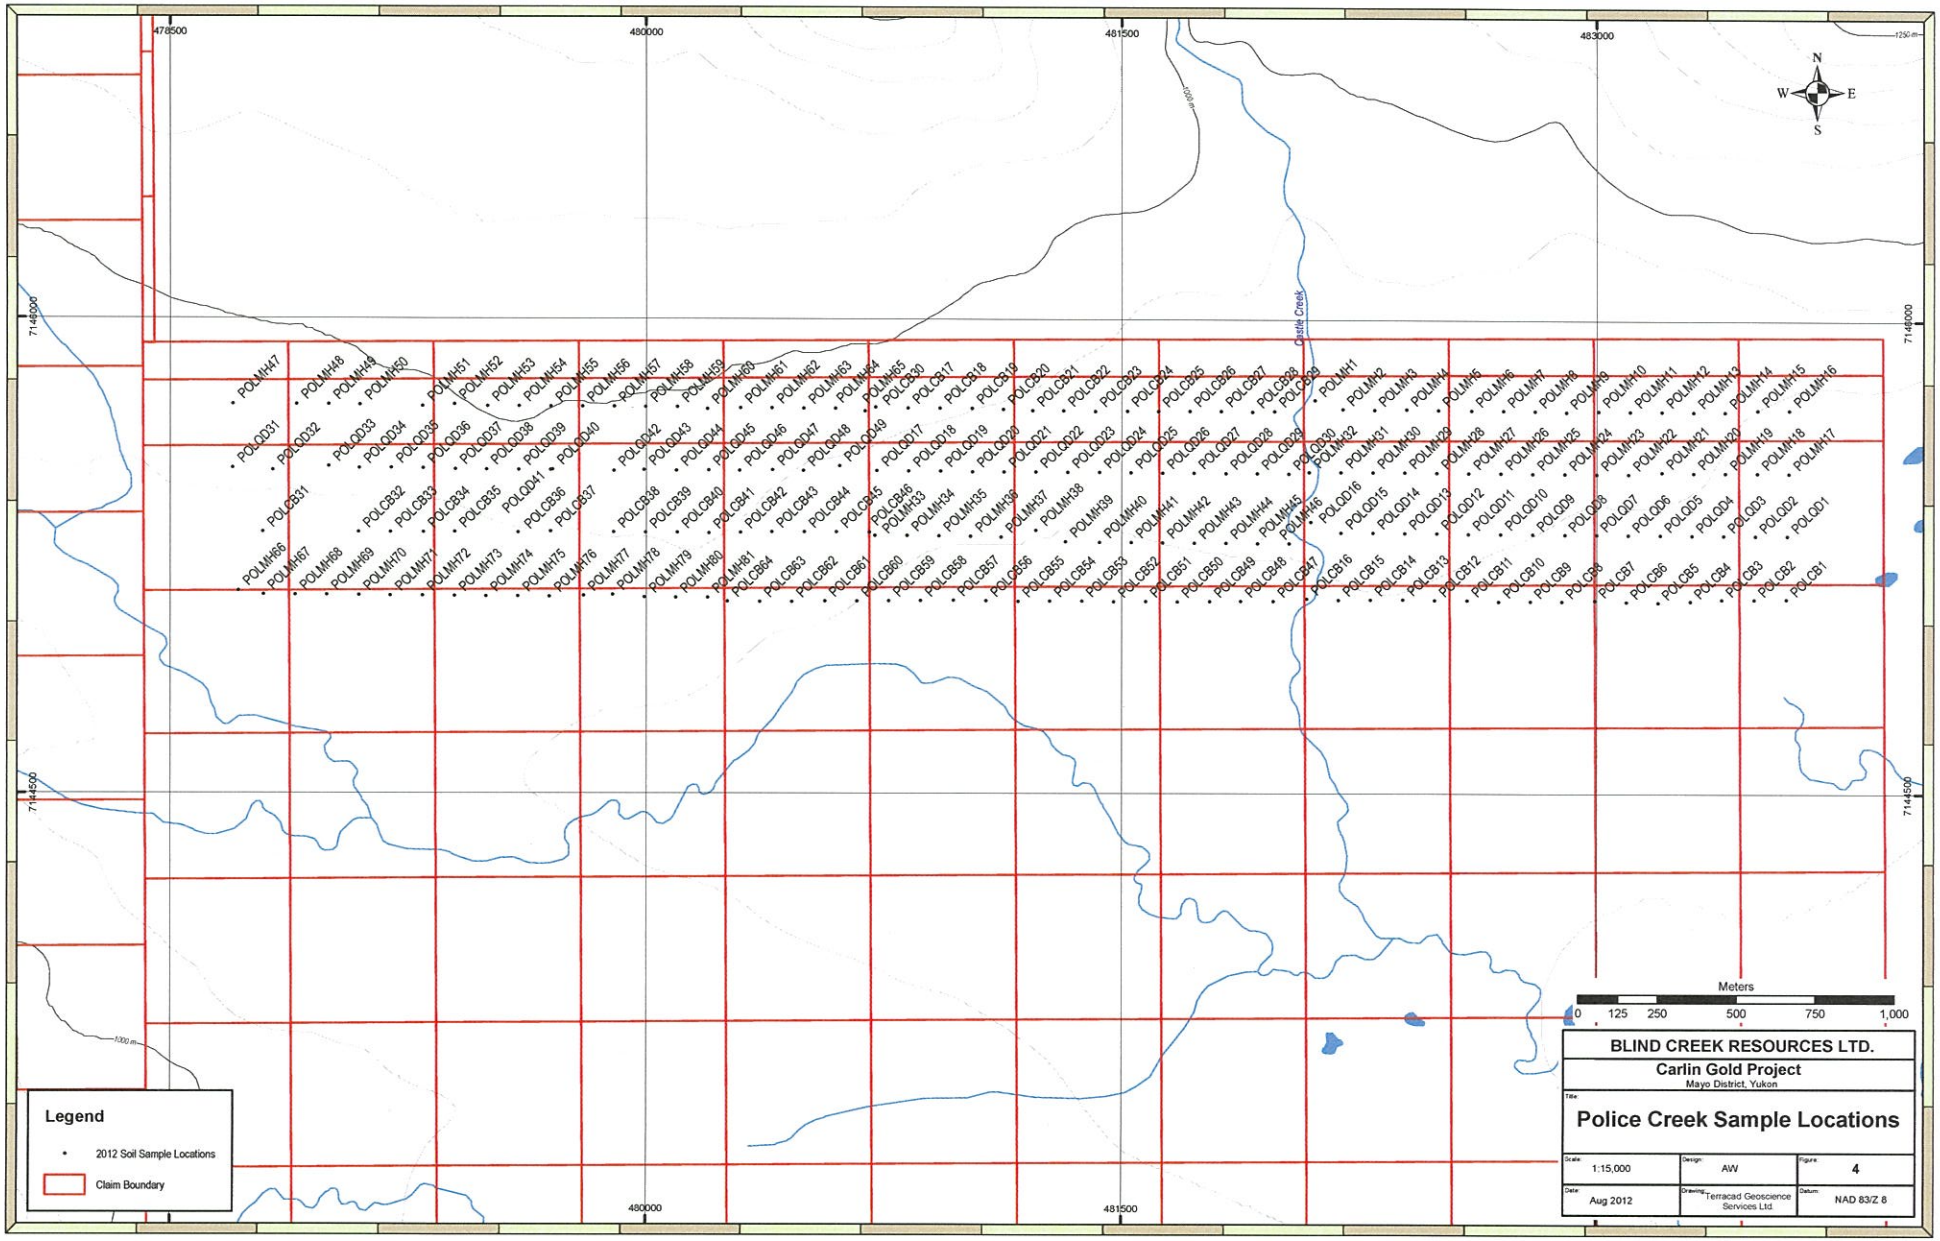
Figure 11: Carlin Gold Project. Police Creek Pan Concentrates.

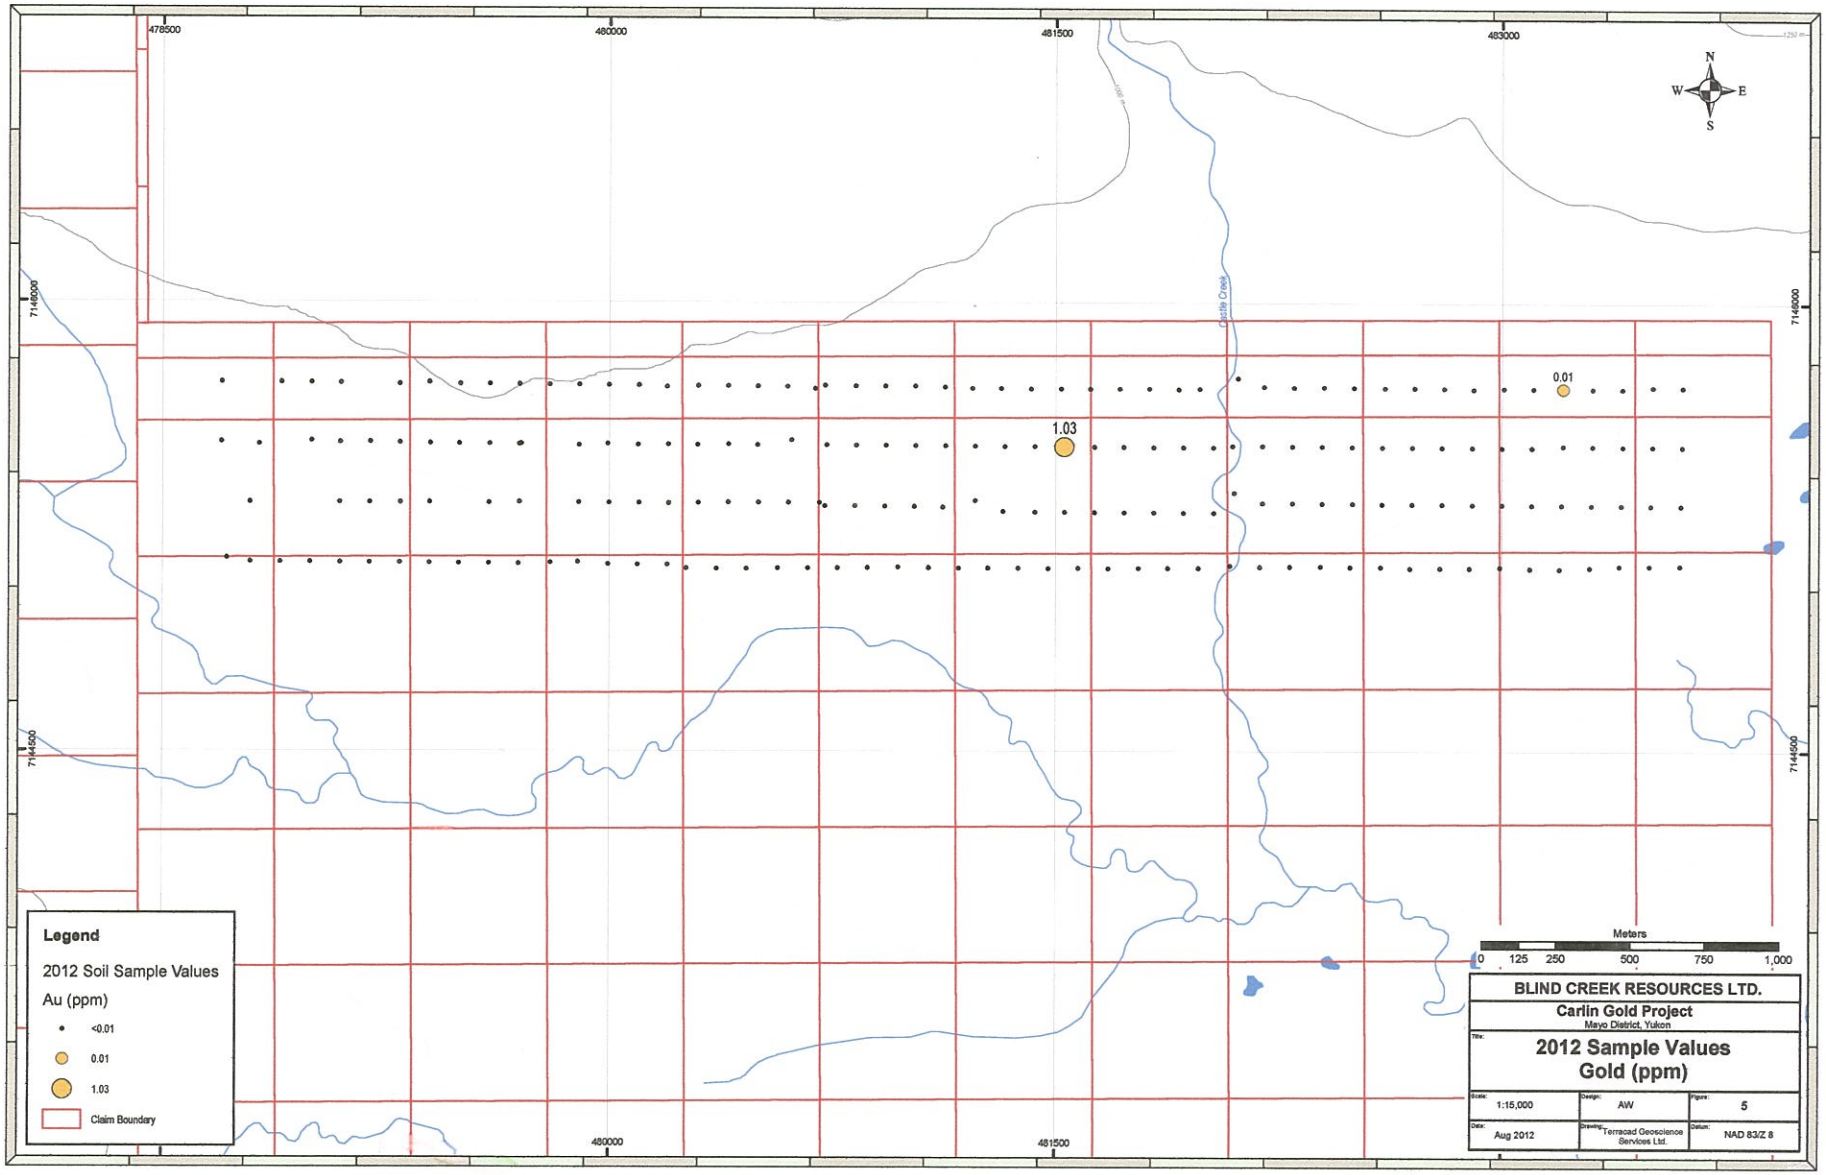


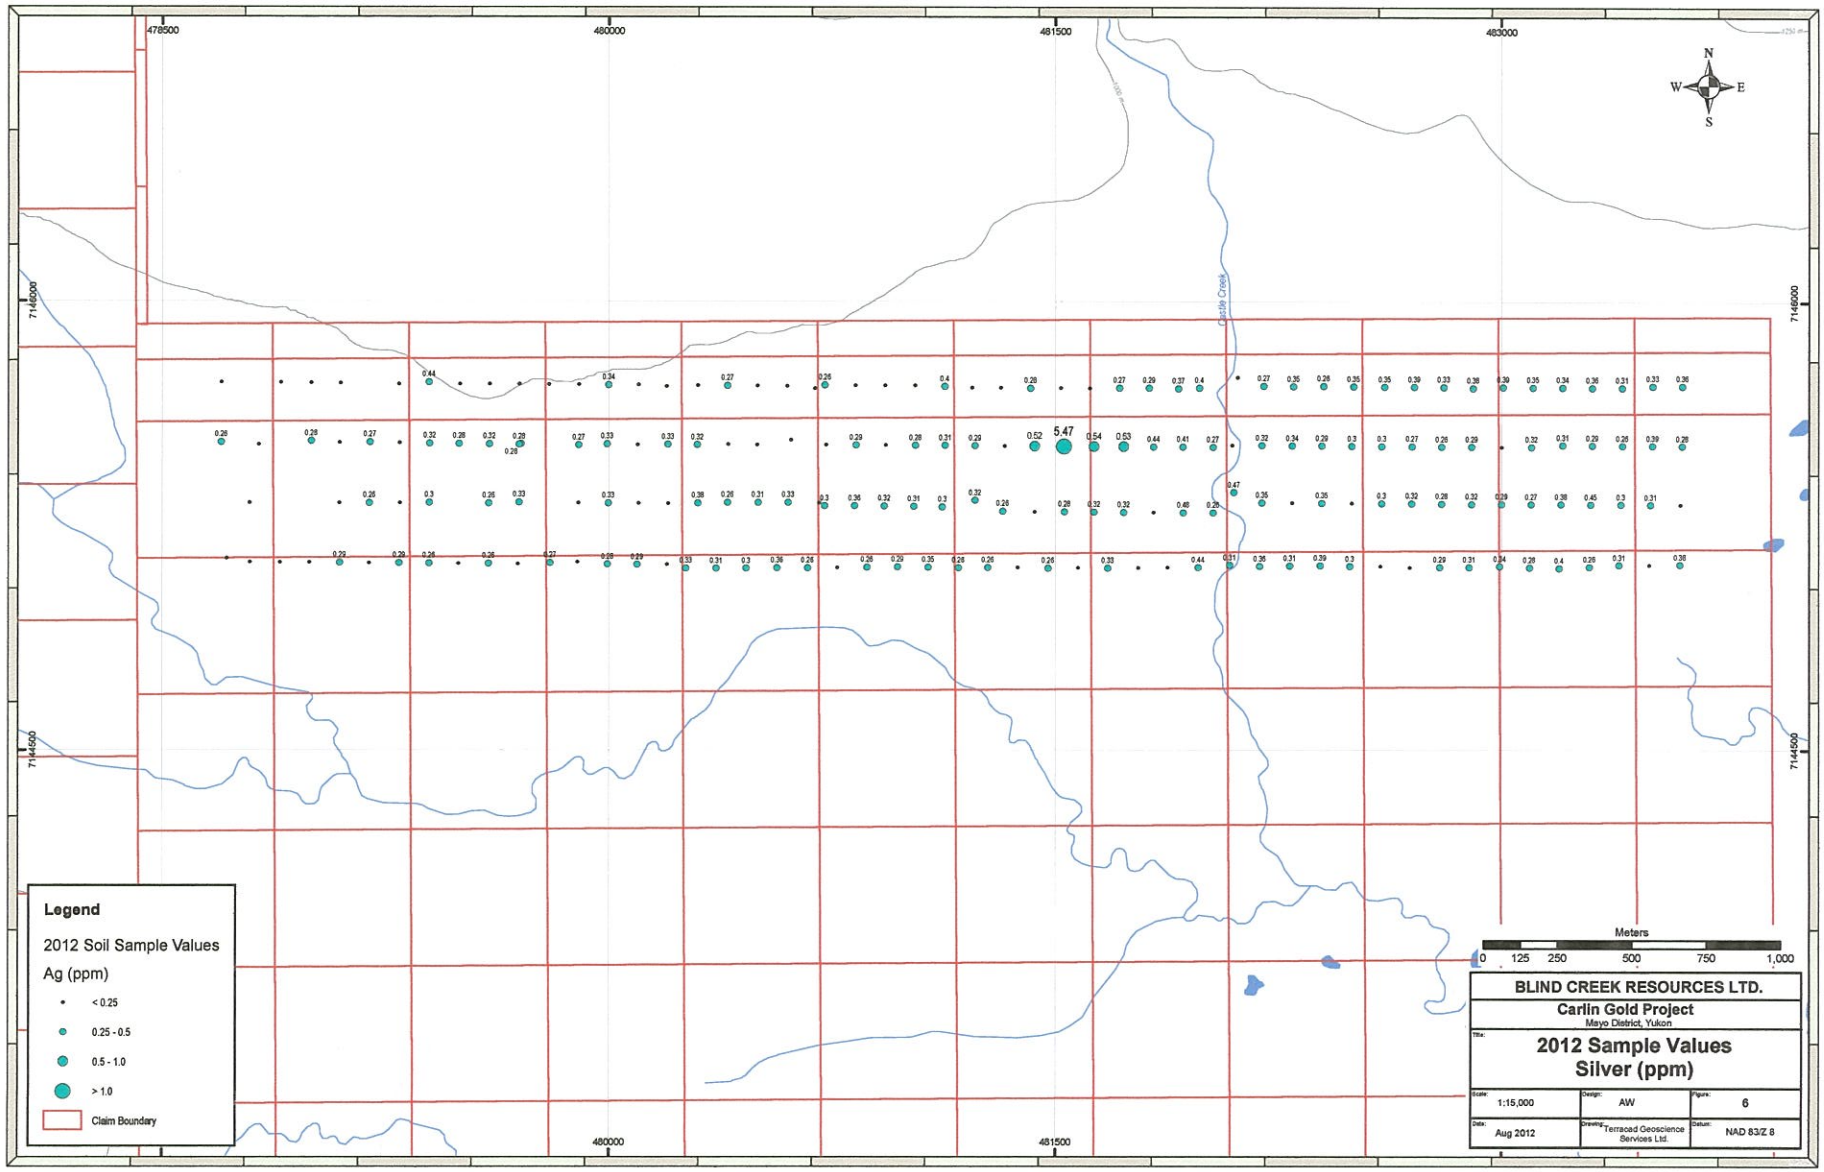
BLIND CREEK RESOURCES LTD.		
Carlin Gold Project Mayo District, Yukon		
Title: **Project Location in Yukon**		
Scale: As shown	Design: AW	Figure: 1
Date: Aug 2012	Drawing: Terracad Geoscience Services Ltd.	Datum: Long/Lat

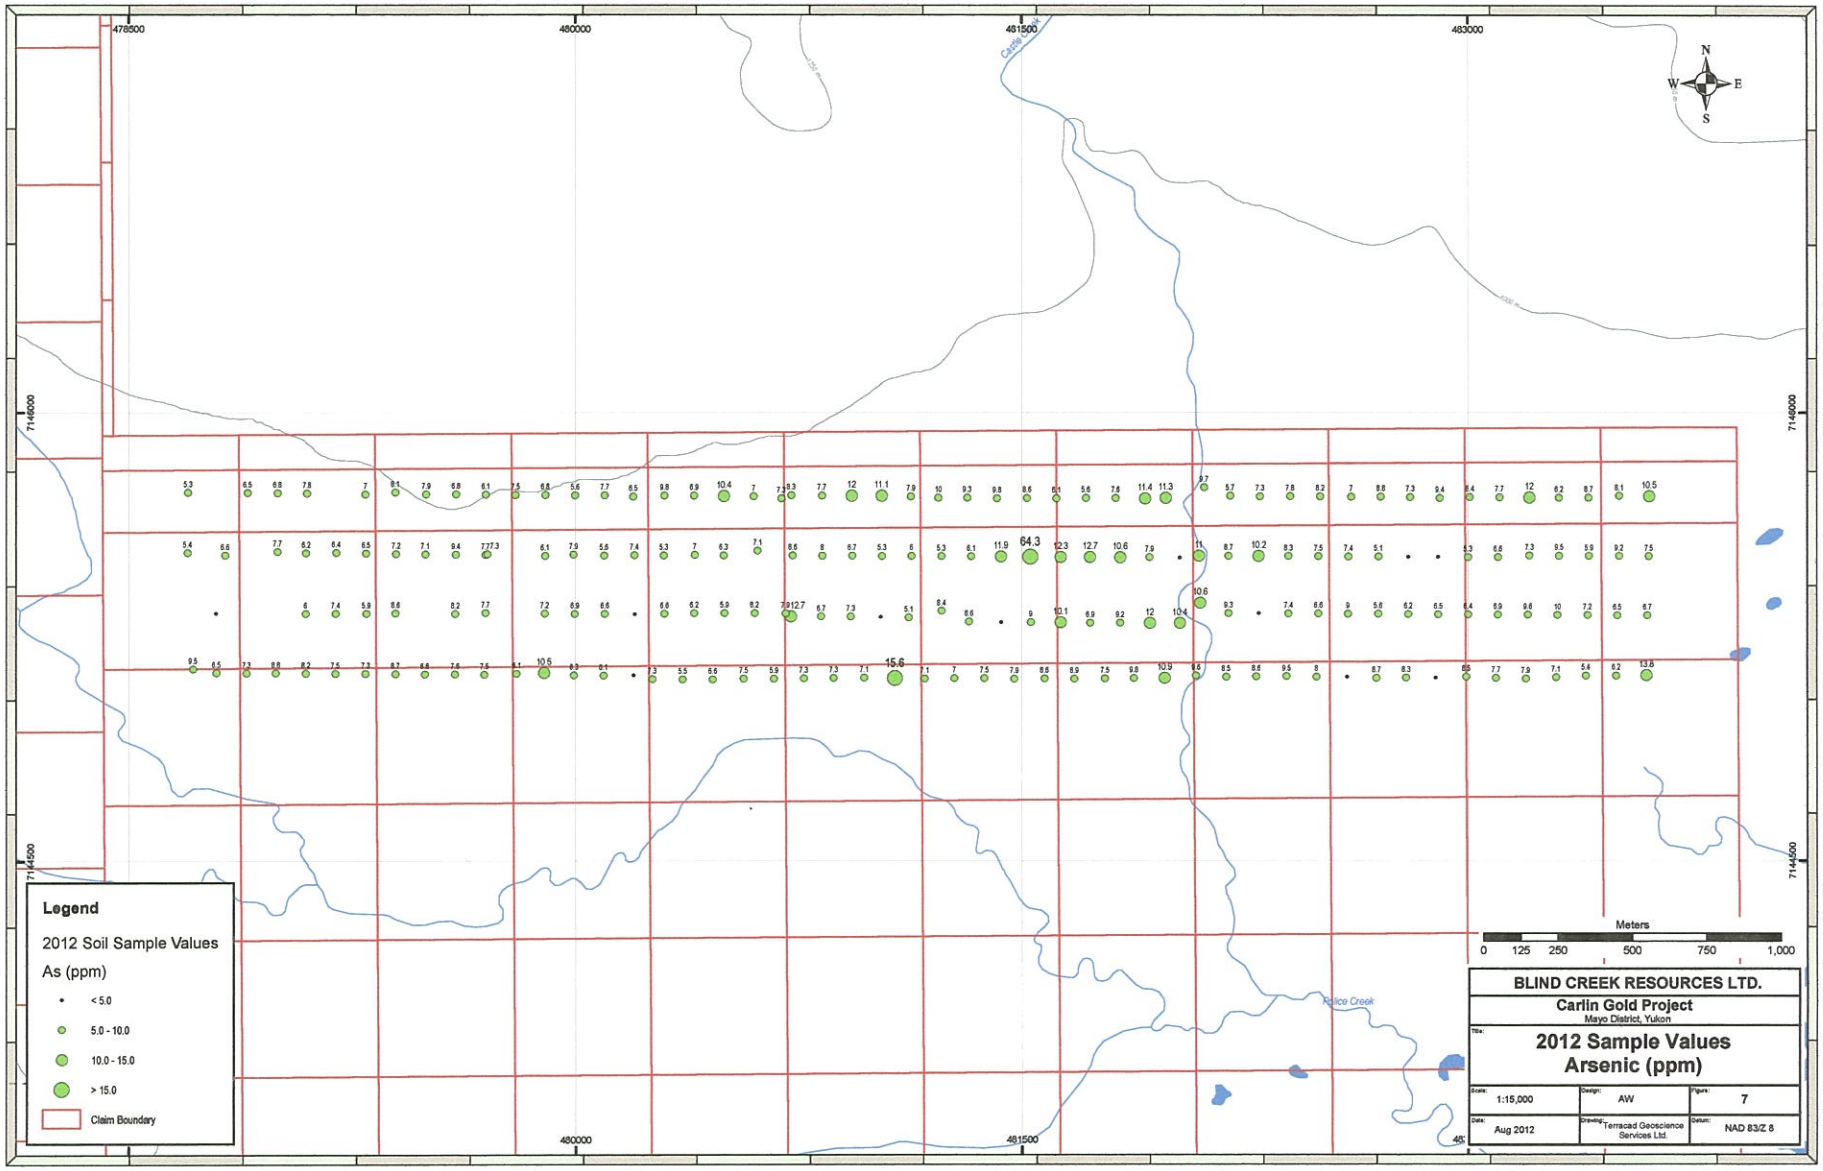

Carlin Gold Project
Blende Project
BCR-Blende Project
Blende-Ocelot
Keno Silver Project
Keno City
McQuesten Lake
Rae Creek
Clear Creek
Beaver River
South McQuesten River
460000
480000
500000
520000
540000
7140000
7120000
7100000
N
W
E
S
Kilometers
0 2.5 5 10 15 20 25
Legend
Blind Creek Claims
Surrounding Claims
BLIND CREEK RESOURCES LTD.
Carlin Gold Project
Mayo District, Yukon
Title:
Blind Creek Resources
Claims in Central Yukon
Scale: As shown
Design: AW
Figure: 2
Date: Aug 2012
Drawing: Terracad Geoscience Services Ltd.
Datum: NAD 83/Z 8

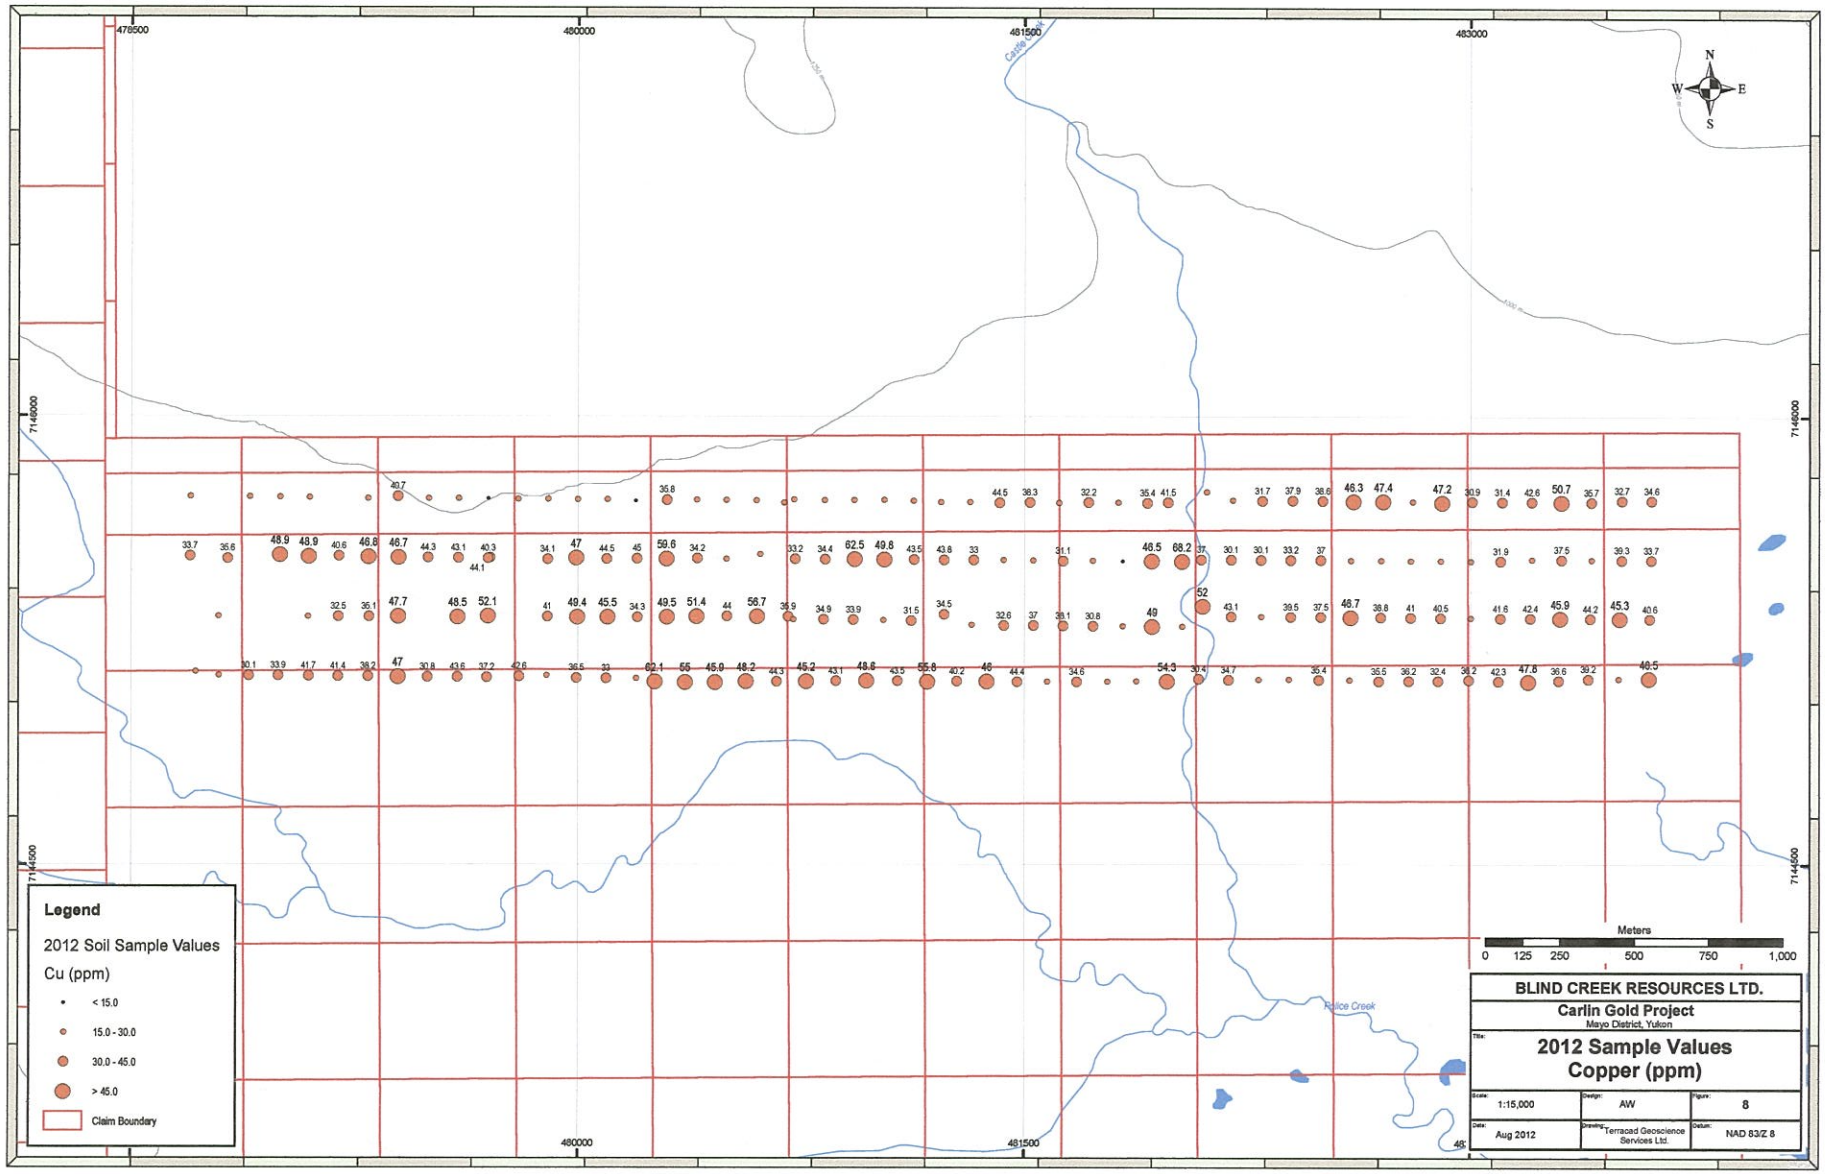

Carlin Gold Project
Police Creek Claims
477500
480000
482500
485000
7147500
7145000
7142500
N
W
E
S
Castle Creek
Carpenter Creek
Police Creek
Meters
0 125 250 500 750 1,000 1,250
BLIND CREEK RESOURCES LTD.
Carlin Gold Project
Mayo District, Yukon; Ref Sheet 106D
Police Creek Claims
Scale: As shown
Design: AW
Figure: 3
Date: Aug 2012
Drawing: Terracad Geoscience Services Ltd.
Datum: NAD 83/Z 8

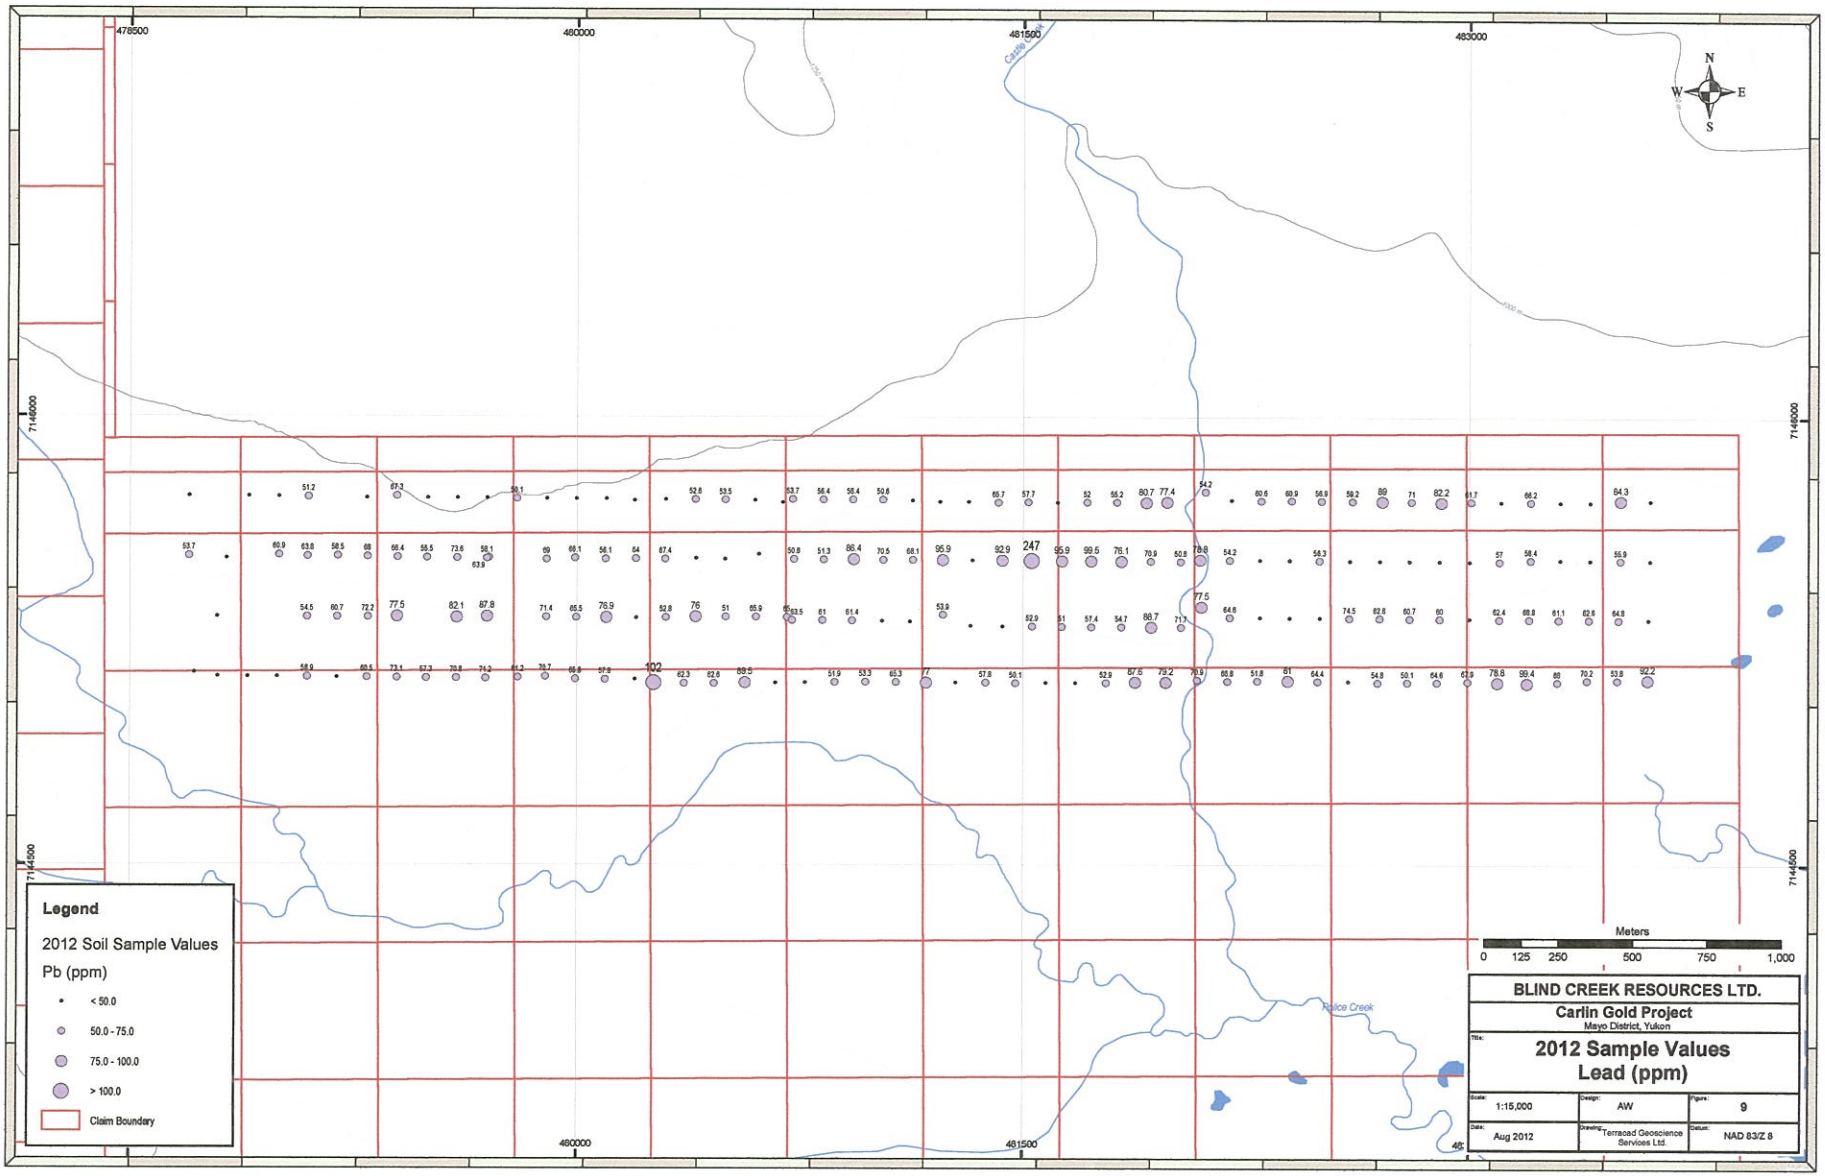

478500
480000
481500
483000
7148000
7144500
Castle Creek
N
W
E
S
Legend
2012 Soil Sample Locations
Claim Boundary
Meters
0 125 250 500 750 1,000
BLIND CREEK RESOURCES LTD.
Carlin Gold Project
Mayo District, Yukon
Police Creek Sample Locations
Scale: 1:15,000
Design: AW
Figure: 4
Date: Aug 2012
Drawing: Terracad Geoscience Services Ltd
Datum: NAD 83/Z 8

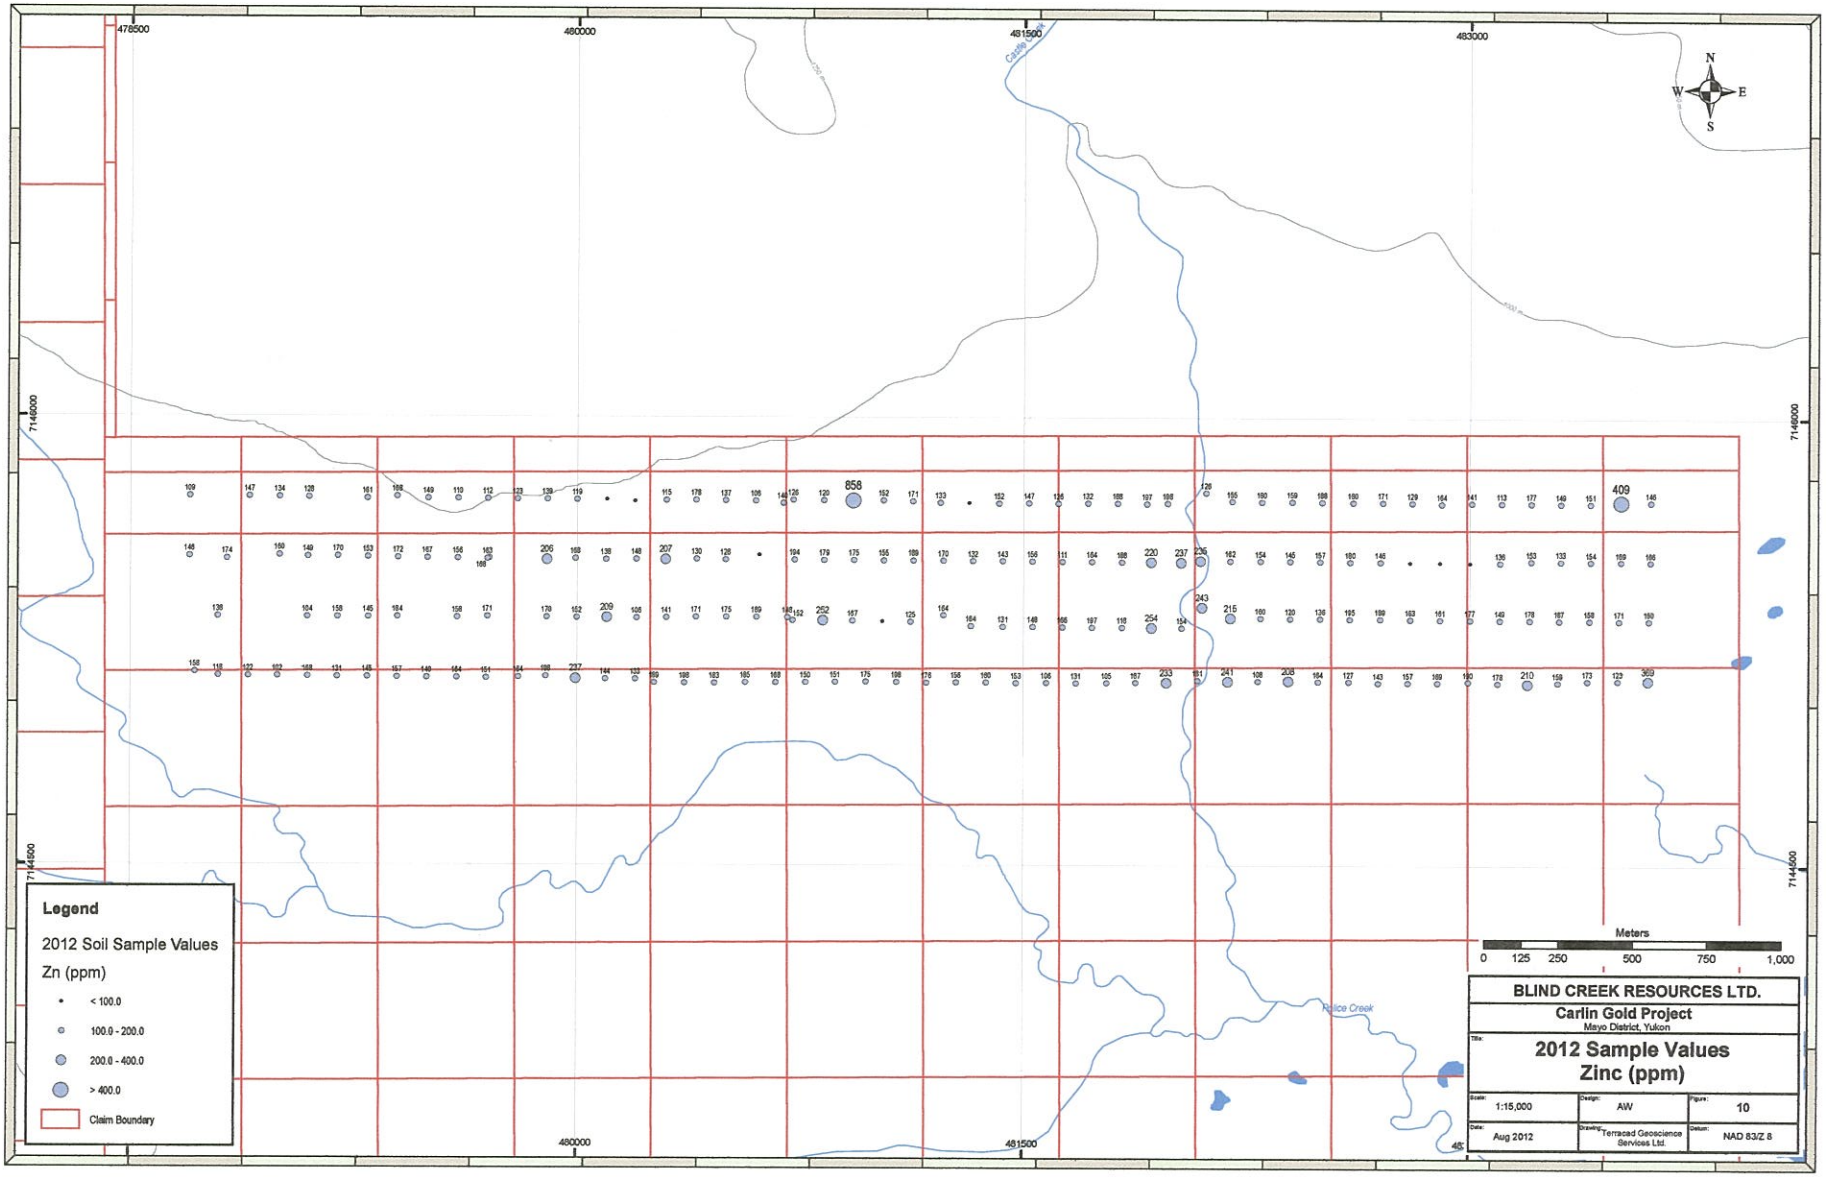

478500
480000
481500
483000
7146000
7144500
Castle Creek
0.01
1.03
N
W
E
S
Legend
2012 Soil Sample Values
Au (ppm)
<0.01
0.01
1.03
Claim Boundary
Meters
0 125 250 500 750 1,000
BLIND CREEK RESOURCES LTD.
Carlin Gold Project
Mayo District, Yukon
2012 Sample Values
Gold (ppm)
Scale: 1:15,000
Design: AW
Figure: 5
Date: Aug 2012
Drawing: Terracad Geoscience Services Ltd.
Datum: NAD 83/Z 8

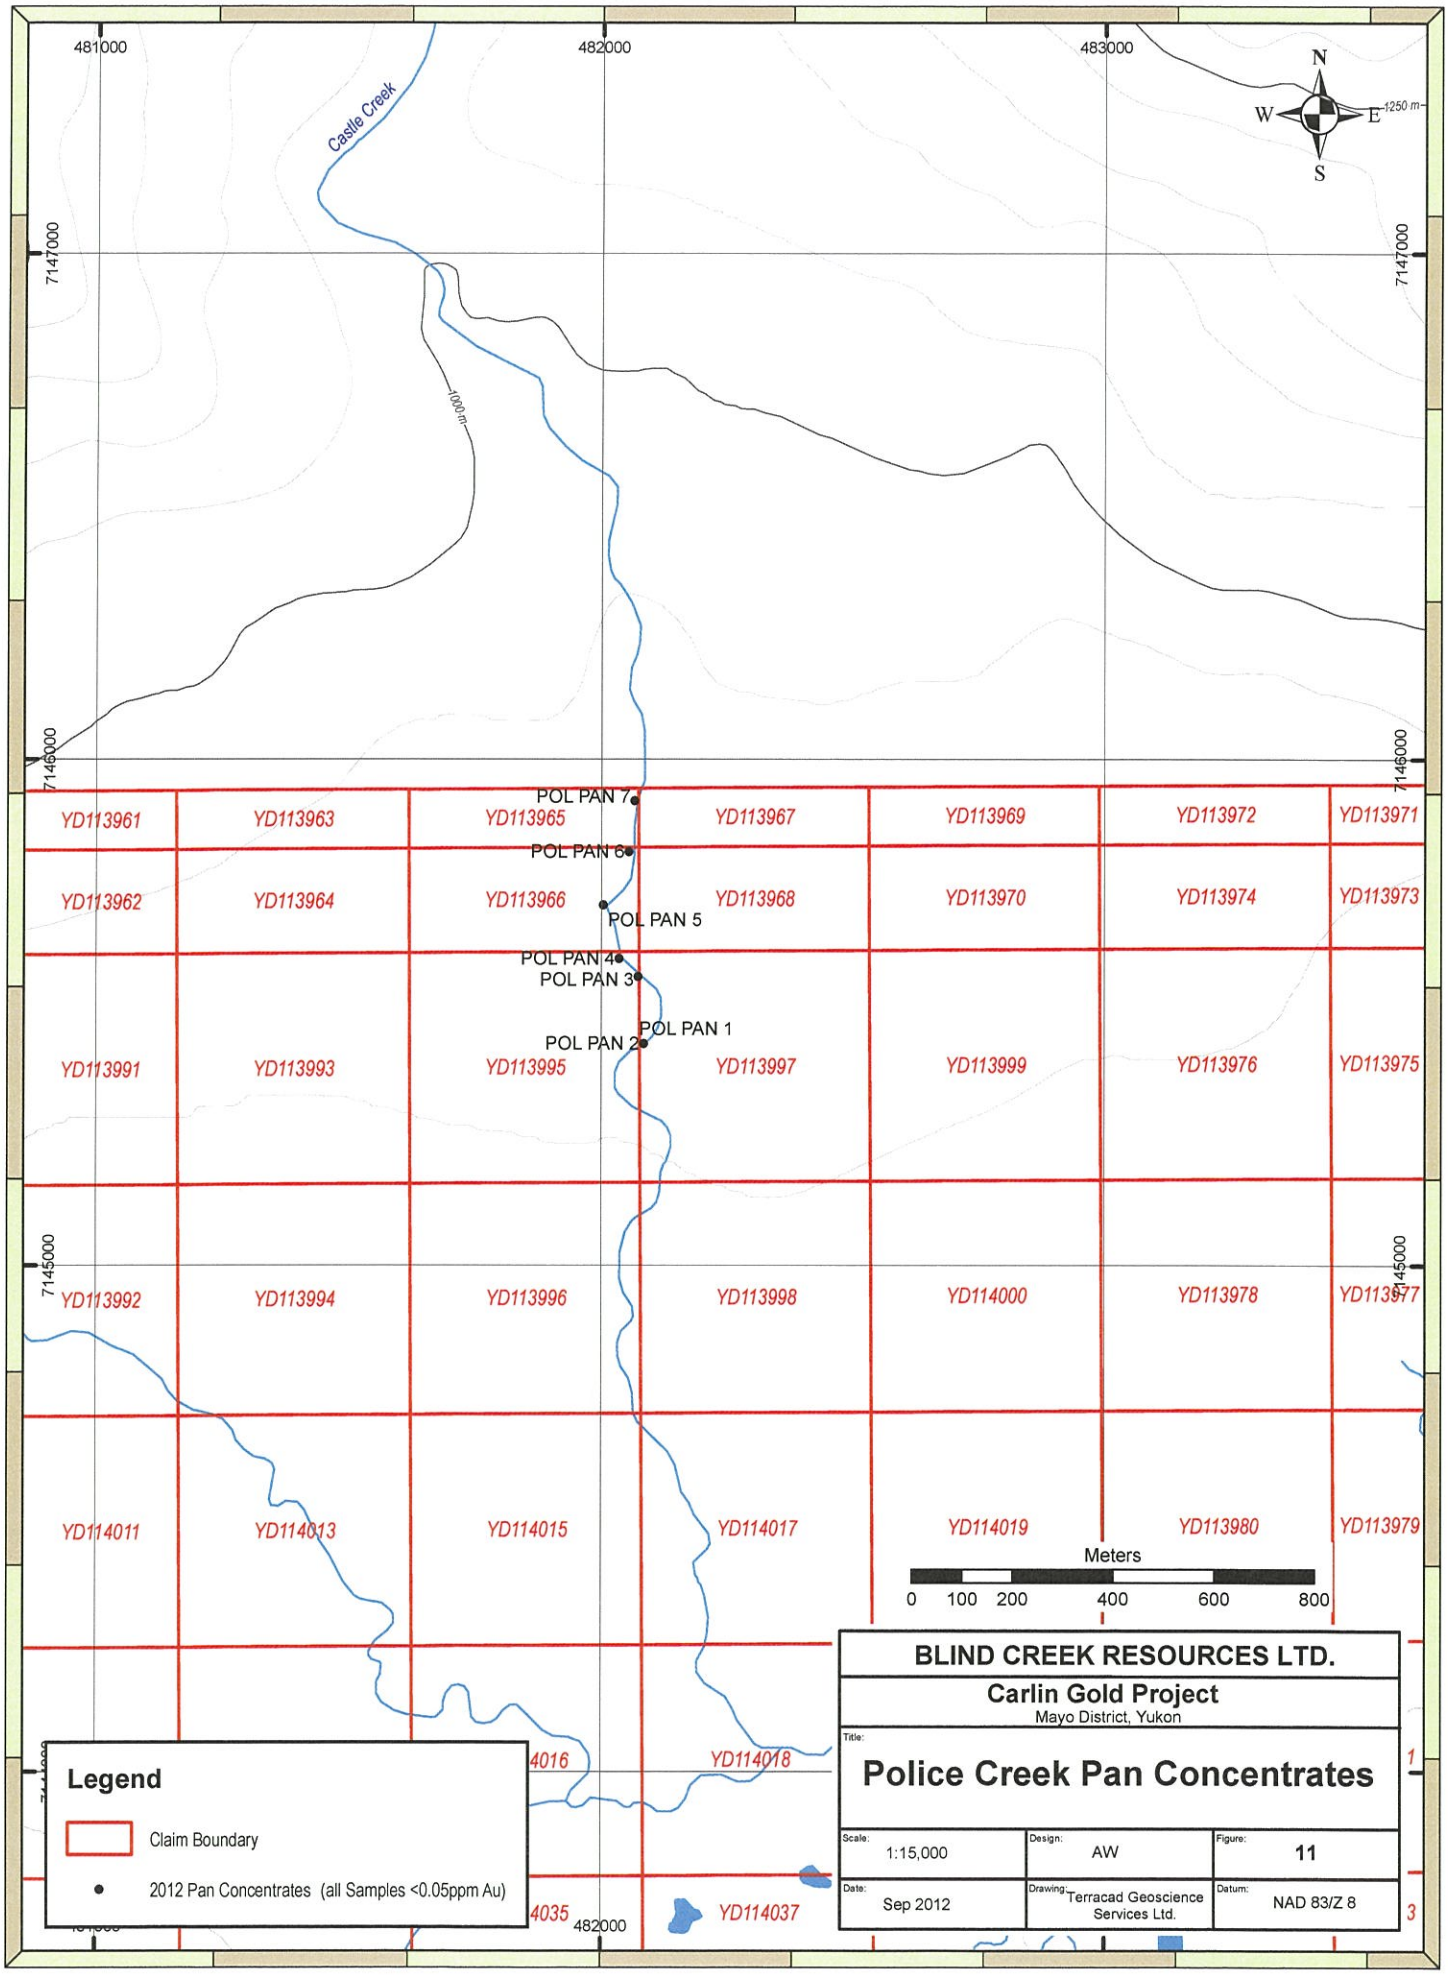

478500
480000
481500
483000
7146000
7144500
Cassie Creek
N
W
E
S
5.47
Legend
2012 Soil Sample Values
Ag (ppm)
< 0.25
0.25 - 0.5
0.5 - 1.0
> 1.0
Claim Boundary
Meters
0 125 250 500 750 1,000
BLIND CREEK RESOURCES LTD.
Carlin Gold Project
Mayo District, Yukon
2012 Sample Values
Silver (ppm)
Scale: 1:15,000
Design: AW
Figure: 6
Date: Aug 2012
Drawing: Terracad Geoscience Services Ltd.
Datum: NAD 83/Z 8


476500
480000
481500
483000
7146000
7144500
N
W
E
S
Castle Creek
Police Creek
Legend
2012 Soil Sample Values
As (ppm)
< 5.0
5.0 - 10.0
10.0 - 15.0
> 15.0
Claim Boundary
Meters
0 125 250 500 750 1,000
BLIND CREEK RESOURCES LTD.
Carlin Gold Project
Mayo District, Yukon
2012 Sample Values
Arsenic (ppm)
Scale: 1:15,000
Design: AW
Figure: 7
Date: Aug 2012
Drawing: Terracad Geoscience Services Ltd.
Datum: NAD 83/Z 8


476500
480000
481500
483000
7146000
7145500
Castle River
Police Creek
N
W
E
S
Legend
2012 Soil Sample Values
Cu (ppm)
< 15.0
15.0 - 30.0
30.0 - 45.0
> 45.0
Claim Boundary
Meters
0 125 250 500 750 1,000
BLIND CREEK RESOURCES LTD.
Carlin Gold Project
Mayo District, Yukon
2012 Sample Values
Copper (ppm)
1:15,000
AW
8
Aug 2012
Terracad Geoscience Services Ltd.
NAD 83/Z 8


478500
480000
481500
483000
7146000
7144500
Castle Creek
Police Creek
N
W
E
S
Legend
2012 Soil Sample Values
Pb (ppm)
< 50.0
50.0 - 75.0
75.0 - 100.0
> 100.0
Claim Boundary
Meters
0 125 250 500 750 1,000
BLIND CREEK RESOURCES LTD.
Carlin Gold Project
Mayo District, Yukon
2012 Sample Values
Lead (ppm)
1:15,000
AW
9
Aug 2012
Terracad Geoscience Services Ltd.
NAD 83/Z 8


478500
480000
481500
483000
7146000
7144500
N
W
E
S
Legend
2012 Soil Sample Values
Zn (ppm)
< 100.0
100.0 - 200.0
200.0 - 400.0
> 400.0
Claim Boundary
Meters
0 125 250 500 750 1,000
BLIND CREEK RESOURCES LTD.
Carlin Gold Project
Mayo District, Yukon
2012 Sample Values
Zinc (ppm)
1:15,000
AW
10
Aug 2012
Terracad Geoscience Services Ltd.
NAD 83/Z 8


481000
482000
483000
7147000
7146000
7145000
Castle Creek
1000 m
1250 m
N
W
E
S
POL PAN 7
POL PAN 6
POL PAN 5
POL PAN 4
POL PAN 3
POL PAN 2
POL PAN 1
YD113961
YD113963
YD113965
YD113967
YD113969
YD113972
YD113971
YD113962
YD113964
YD113966
YD113968
YD113970
YD113974
YD113973
YD113991
YD113993
YD113995
YD113997
YD113999
YD113976
YD113975
YD113992
YD113994
YD113996
YD113998
YD114000
YD113978
YD113977
YD114011
YD114013
YD114015
YD114017
YD114019
YD113980
YD113979
YD114016
YD114018
YD114035
YD114037
Meters
0 100 200 400 600 800
Legend
Claim Boundary
2012 Pan Concentrates (all Samples <0.05ppm Au)
BLIND CREEK RESOURCES LTD.
Carlin Gold Project
Mayo District, Yukon
Title:
Police Creek Pan Concentrates
Scale: 1:15,000
Design: AW
Figure: 11
Date: Sep 2012
Drawing: Terracad Geoscience Services Ltd.
Datum: NAD 83/Z 8

Blind Creek Resources Ltd.
Police Creek, June of 2012

Soil and pan concentrate sample list

Soils	Sample name	UTM Easting	UTM Northing	Description	Depth	Sample type and description	Au ppm	Ag ppm	As ppm	Cu ppm	Pb ppm	Zn ppm
							0.01	0.01	0.1	0.1	0.1	0.5
1	POLMH1	482112	7145748	grey-rusty clay	15cm	0.23	<0.01	0.23	9.70	26.10	54.20	126.00
2	POLMH2	482200	7145720	grey clay	15cm	0.27	<0.01	0.27	5.70	23.50	47.20	155.00
3	POLMH3	482300	7145718	grey clay	30cm	0.35	<0.01	0.35	7.30	31.70	60.60	180.00
4	POLMH4	482401	7145719	grey-brown clay	10cm	0.26	<0.01	0.26	7.80	37.90	60.90	159.00
5	POLMH5	482502	7145718	grey silty-clay	45cm	0.35	<0.01	0.35	8.20	38.60	56.90	188.00
6	POLMH6	482606	7145717	grey clay	1m	0.35	<0.01	0.35	7.00	46.30	59.20	160.00
7	POLMH7	482706	7145717	brownish-grey clay	1m	0.39	<0.01	0.39	8.80	47.40	89.00	171.00
8	POLMH8	482805	7145716	brownish-grey clay	45cm	0.33	<0.01	0.33	7.30	25.10	71.00	129.00
9	POLMH9	482904	7145713	brown clay	60cm	0.38	<0.01	0.38	9.40	47.20	82.20	164.00
10	POLMH10	483005	7145716	grey clay with minor gravels	15cm	0.39	<0.01	0.39	8.40	30.90	61.70	141.00
11	POLMH11	483105	7145715	dark brown and grey clay	30cm	0.35	<0.01	0.35	7.70	31.40	39.90	113.00
12	POLMH12	483205	7145715	grey clay	20cm	0.34	0.01	0.34	12.00	42.60	66.20	177.00
13	POLMH13	483305	7145714	dark brown with nodules of grey clay	30cm	0.36	<0.01	0.36	6.20	50.70	42.80	149.00
14	POLMH14	483405	7145714	grey clay	15cm	0.31	<0.01	0.31	8.70	35.70	50.00	151.00
15	POLMH15	483508	7145720	frozen brownish-grey clay	30cm	0.33	<0.01	0.33	8.10	32.70	84.30	409.00
16	POLMH16	483608	7145719	brown silty-clay	30cm	0.36	<0.01	0.36	10.50	34.60	49.60	146.00
17	POLMH17	483607	7145519	frozen grey clay	30cm	0.28	<0.01	0.28	7.50	33.70	42.20	166.00
18	POLMH18	483507	7145520	grey clay	30cm	0.39	<0.01	0.39	9.20	39.30	55.90	169.00
19	POLMH19	483406	7145520	frozen dark brown clay	30cm	0.26	<0.01	0.26	5.90	30.00	28.00	154.00
20	POLMH20	483305	7145521	grey clay/silt	30cm	0.29	<0.01	0.29	9.50	37.50	44.60	133.00
21	POLMH21	483205	7145522	grey silty-clay	20cm	0.31	<0.01	0.31	7.30	29.90	58.40	153.00
22	POLMH22	483100	7145516	frozen grey silt/clay	15cm	0.32	<0.01	0.32	6.60	31.90	57.00	136.00
23	POLMH23	482999	7145516	frozen grey clay	15cm	0.15	<0.01	0.15	5.30	23.00	47.90	91.30
24	POLMH24	482899	7145517	dark brown soil	30cm	0.29	<0.01	0.29	1.60	20.30	6.70	47.40
25	POLMH25	482798	7145517	dark brown soil	30cm	0.26	<0.01	0.26	3.60	23.60	13.90	63.20
26	POLMH26	482698	7145518	dark brown and grey clay and soil	20cm	0.27	<0.01	0.27	5.10	22.20	23.10	146.00
27	POLMH27	482597	7145518	grey silty clay	45cm	0.30	<0.01	0.3	7.40	29.70	49.60	180.00
28	POLMH28	482496	7145519	light grey clay/silt	10cm	0.30	<0.01	0.3	7.50	37.00	56.30	157.00
29	POLMH29	482395	7145520	frozen light grey silty clay	15cm	0.29	<0.01	0.29	8.30	33.20	44.60	145.00
30	POLMH30	482295	7145520	light greenish-grey clay	45cm	0.34	<0.01	0.34	10.20	30.10	43.70	154.00
31	POLMH31	482194	7145521	light grey silty clay with minor gravels		0.32	<0.01	0.32	8.70	30.10	54.20	162.00
32	POLMH32	482094	7145521	light grey silty clay	45cm	0.24	<0.01	0.24	11.00	37.00	78.80	235.00
33	POLMH33	480723	7145319	light to dark brown clay and soil	30cm	0.30	<0.01	0.3	12.70	26.80	63.50	152.00
34	POLMH34	480824	7145319	light to dark brown soil	20cm	0.36	<0.01	0.36	6.70	34.90	61.00	252.00
35	POLMH35	480924	7145318	grey clay/silt	30cm	0.32	<0.01	0.32	7.30	33.90	61.40	167.00
36	POLMH36	481024	7145317	frozen dark brown soil	20cm	0.31	<0.01	0.31	4.70	18.50	35.00	55.80
37	POLMH37	481119	7145315	dark grey clay/soil	20cm	0.30	<0.01	0.3	5.10	31.50	41.90	125.00
38	POLMH38	481229	7145337	light grey clay	30cm	0.32	<0.01	0.32	8.40	34.50	53.90	164.00

39	POLMH39	481322	7145301	grey silty-clay	60cm	0.26	<0.01	0.26	8.60	26.10	45.20	164.00
40	POLMH40	481429	7145299	grey silty-clay	40cm	0.24	<0.01	0.24	4.60	32.60	49.30	131.00
41	POLMH41	481529	7145299	light greyish-green sity clay	15cm	0.28	<0.01	0.28	9.00	37.00	52.90	148.00
42	POLMH42	481629	7145298	light grey-green soil	15cm	0.32	<0.01	0.32	10.10	38.10	51.00	166.00
43	POLMH43	481729	7145297	frozen grey silty-clay	30cm	0.32	<0.01	0.32	6.90	30.80	57.40	197.00
44	POLMH44	481829	7145297	light brown silty clay	20cm	0.22	<0.01	0.22	9.20	23.70	54.70	118.00
45	POLMH45	481929	7145296	light brown clay	20cm	0.48	<0.01	0.48	12.00	49.00	88.70	254.00
46	POLMH46	482030	7145296	light brown clay/silt	20cm	0.26	<0.01	0.26	10.40	25.70	71.70	154.00
47	POLMH47	478698	7145732	frozen light to dark brown soil/clay	60cm	0.17	<0.01	0.17	5.30	20.10	30.20	109.00
48	POLMH48	478898	7145731	grey silt with minor organics	60cm	0.19	<0.01	0.19	6.50	23.10	39.50	147.00
49	POLMH49	478999	7145730	light grey silt	40cm	0.25	<0.01	0.25	6.80	28.80	39.20	134.00
50	POLMH50	479098	7145729	grey silty-clay	30cm	0.23	<0.01	0.23	7.80	28.80	51.20	128.00
51	POLMH51	479294	7145726	grey silty-clay	30cm	0.15	<0.01	0.15	7.00	23.30	36.40	161.00
52	POLMH52	479394	7145732	light grey-green silty clay	40cm	0.44	<0.01	0.44	8.10	40.70	67.30	168.00
53	POLMH53	479498	7145726	grey silty-clay	30cm	0.14	<0.01	0.14	7.90	25.10	49.50	149.00
54	POLMH54	479598	7145726	light brown silty-clay	30cm	0.18	<0.01	0.18	6.80	17.80	34.10	110.00
55	POLMH55	479698	7145725	light brown silty clay with minor grave	15cm	0.14	<0.01	0.14	6.10	11.20	33.80	112.00
56	POLMH56	479798	7145724	frozen grey clay	60cm	0.22	<0.01	0.22	7.50	25.60	50.10	123.00
57	POLMH57	479898	7145724	frozen grey clay	60cm	0.13	<0.01	0.13	6.80	16.80	39.20	139.00
58	POLMH58	479998	7145723	dark brown soil	30cm	0.34	<0.01	0.34	5.60	25.40	29.40	119.00
59	POLMH59	480098	7145723	light brown sandy clay	15cm	0.09	<0.01	0.09	7.70	18.30	28.40	87.40
60	POLMH60	480193	7145718	light brown sandy clay	15cm	0.14	<0.01	0.14	6.50	7.90	32.50	70.70
61	POLMH61	480298	7145721	light brown clay and silt with minor pe	20cm	0.24	<0.01	0.24	9.80	35.80	46.50	115.00
62	POLMH62	480398	7145721	light grey sand, minor pebbles	30cm	0.27	<0.01	0.27	6.90	22.20	52.60	178.00
63	POLMH63	480498	7145720	light brown sand to small pebbles wit	20cm	0.18	<0.01	0.18	10.40	24.60	53.50	137.00
64	POLMH64	480598	7145719	light brown silty clay	30cm	0.23	<0.01	0.23	7.00	18.90	35.80	106.00
65	POLMH65	480691	7145712	light brown silty clay	30cm	0.24	<0.01	0.24	7.30	27.30	47.60	140.00
66	POLMH66	478715	7145144	light grey silty clay	20cm	0.24	<0.01	0.24	9.50	24.20	49.20	158.00
67	POLMH67	478793	7145131	grey clay	20cm	0.23	<0.01	0.23	6.50	21.30	46.70	118.00
68	POLMH68	478894	7145130	grey clay	20cm	0.23	<0.01	0.23	7.30	30.10	45.20	122.00
69	POLMH69	478993	7145130	light brown silty clay	20cm	0.22	<0.01	0.22	8.80	33.90	40.30	102.00
70	POLMH70	479094	7145129	light brown clay	30cm	0.29	<0.01	0.29	8.20	41.70	58.90	168.00
71	POLMH71	479193	7145128	dark brown clay	40cm	0.25	<0.01	0.25	7.50	41.40	44.00	131.00
72	POLMH72	479294	7145128	light to dark brown clay	40cm	0.29	<0.01	0.29	7.30	38.20	60.50	145.00
73	POLMH73	479394	7145127	light brown silty clay	30cm	0.26	<0.01	0.26	8.70	47.00	73.10	157.00
74	POLMH74	479493	7145126	grey silt with minor pebbles	30cm	0.24	<0.01	0.24	6.60	30.80	57.30	140.00
75	POLMH75	479594	7145126	dark grey clay	40cm	0.26	<0.01	0.26	7.60	43.60	70.80	164.00
76	POLMH76	479693	7145125	light brown silty clay	40cm	0.25	<0.01	0.25	7.50	37.20	71.20	151.00
77	POLMH77	479801	7145128	dark brown silt	40cm	0.27	<0.01	0.27	6.10	42.60	61.20	164.00
78	POLMH78	479893	7145131	frozen grey clay/silt	60cm	0.25	<0.01	0.25	10.50	27.80	70.70	198.00
79	POLMH79	479994	7145123	grey frozen clay	40cm	0.28	<0.01	0.28	6.30	36.50	65.80	237.00
80	POLMH80	480093	7145122	light brown silt	20cm	0.29	<0.01	0.29	6.10	33.00	57.80	144.00
81	POLMH81	480194	7145122	grey silt	20cm	0.20	<0.01	0.2	4.30	27.50	45.40	133.00
82	POLCB1	483599	7145121	grey silt/clay	30cm	0.38	<0.01	0.38	13.80	46.50	92.20	369.00
83	POLCB2	483497	7145120	grey silt	1.2m	0.25	<0.01	0.25	6.20	20.00	53.80	123.00
84	POLCB3	483395	7145120	grey clay	40cm	0.31	<0.01	0.31	5.40	39.20	70.20	173.00

85	POLCB4	483295	7145114	grey clay	60cm	0.26	<0.01	0.26	7.10	36.60	68.00	159.00
86	POLCB5	483193	7145110	brown silt	50cm	0.40	<0.01	0.4	7.90	47.80	99.40	210.00
87	POLCB6	483093	7145112	grey clay/silt	60cm	0.28	<0.01	0.28	7.70	42.30	78.80	178.00
88	POLCB7	482993	7145116	grey clay/silt	40cm	0.34	<0.01	0.34	8.50	36.20	67.90	190.00
89	POLCB8	482890	7145113	grey clay	15cm	0.31	<0.01	0.31	4.90	32.40	64.60	169.00
90	POLCB9	482791	7145113	grey clay	60cm	0.29	<0.01	0.29	8.30	36.20	50.10	157.00
91	POLCB10	482691	7145112	grey clay	70cm	0.25	<0.01	0.25	8.70	35.50	54.80	143.00
92	POLCB11	482592	7145116	grey clay	30cm	0.17	<0.01	0.17	3.40	15.10	35.80	127.00
93	POLCB12	482489	7145116	grey clay	30cm	0.30	<0.01	0.3	8.00	35.40	64.40	164.00
94	POLCB13	482389	7145118	grey clay	30cm	0.39	<0.01	0.39	9.50	24.30	81.00	208.00
95	POLCB14	482287	7145117	brownish grey silt/clay	40cm	0.31	<0.01	0.31	8.60	26.40	51.80	108.00
96	POLCB15	482186	7145116	grey clay	60cm	0.36	<0.01	0.36	8.50	34.70	66.80	241.00
97	POLCB16	482085	7145120	sandy silt	25cm	0.31	<0.01	0.31	9.60	30.40	70.90	181.00
98	POLCB17	480827	7145721	brownish-grey clay/silt	30cm	0.25	<0.01	0.25	7.70	27.10	56.40	120.00
99	POLCB18	480927	7145721	brown silt/clay	25cm	0.10	<0.01	0.1	12.00	18.10	58.40	858.00
100	POLCB19	481028	7145721	brown clay	25cm	0.11	<0.01	0.11	11.10	23.30	50.60	152.00
101	POLCB20	481127	7145718	brownish grey silt	35cm	0.40	<0.01	0.4	7.90	25.20	41.80	171.00
102	POLCB21	481219	7145714	brown grey silt/clay	60cm	0.13	<0.01	0.13	10.00	17.80	43.90	133.00
103	POLCB22	481316	7145714	brown grey silt/clay	30cm	0.13	<0.01	0.13	9.30	17.70	46.70	99.40
104	POLCB23	481416	7145712	grey/brown clay/silt	80cm	0.28	<0.01	0.28	9.80	44.50	65.70	152.00
105	POLCB24	481517	7145713	grey clay	45cm	0.22	<0.01	0.22	8.60	38.30	57.70	147.00
106	POLCB25	481615	7145712	dark grey	40cm	0.21	<0.01	0.21	6.10	19.90	42.90	126.00
107	POLCB26	481714	7145713	grey clay/silt	35cm	0.27	<0.01	0.27	5.60	32.20	52.00	132.00
108	POLCB27	481814	7145713	light brown clay	50cm	0.29	<0.01	0.29	7.60	19.00	55.20	188.00
109	POLCB28	481913	7145711	grey clay	60cm	0.37	<0.01	0.37	11.40	35.40	80.70	197.00
110	POLCB29	481983	7145713	grey sandy silt	80cm	0.40	<0.01	0.4	11.30	41.50	77.40	198.00
111	POLCB30	480724	7145723	brown grey	40cm	0.26	<0.01	0.26	8.30	28.40	53.70	126.00
112	POLCB31	478792	7145330	silt	35cm	0.19	<0.01	0.19	4.70	19.80	43.60	138.00
113	POLCB32	479093	7145329	grey brown clay	30cm	0.19	<0.01	0.19	6.00	21.20	54.50	104.00
114	POLCB33	479194	7145329	grey brown clay	30cm	0.26	<0.01	0.26	7.40	32.50	60.70	158.00
115	POLCB34	479297	7145329	grey silt	45cm	0.25	<0.01	0.25	5.90	35.10	72.20	145.00
116	POLCB35	479395	7145330	grey clay	60cm	0.30	<0.01	0.3	8.60	47.70	77.50	184.00
117	POLCB36	479595	7145328	brown/grey clay	40cm	0.26	<0.01	0.26	8.20	48.50	82.10	158.00
118	POLCB37	479697	7145331	grey brown clay	45cm	0.33	<0.01	0.33	7.70	52.10	87.80	171.00
119	POLCB38	479896	7145329	brown grey silt	35cm	0.25	<0.01	0.25	7.20	41.00	71.40	170.00
120	POLCB39	479997	7145328	grey brown silt	32cm	0.33	<0.01	0.33	6.90	49.40	65.50	152.00
121	POLCB40	480098	7145328	brown grey clay	35cm	0.12	<0.01	0.12	6.60	45.50	76.90	209.00
122	POLCB41	480198	7145327	grey silt	30cm	0.20	<0.01	0.2	4.00	34.30	44.10	106.00
123	POLCB42	480298	7145328	grey brown clay	25cm	0.38	<0.01	0.38	6.60	49.50	52.80	141.00
124	POLCB43	480398	7145330	grey brown silt	38cm	0.26	<0.01	0.26	6.20	51.40	76.00	171.00
125	POLCB44	480500	7145330	grey silt/clay	45cm	0.31	<0.01	0.31	5.90	44.00	51.00	175.00
126	POLCB45	480601	7145330	grey clay	25cm	0.33	<0.01	0.33	8.20	56.70	65.90	189.00
127	POLCB46	480705	7145329	brown sandy silt	30cm	0.12	<0.01	0.12	7.90	35.90	65.00	148.00
128	POLCB47	481979	7145112	brown grey clay	63cm	0.44	<0.01	0.44	10.90	54.30	79.20	233.00
129	POLCB48	481876	7145112	brown pebble/gravel	34cm	0.21	<0.01	0.21	9.80	28.20	87.60	187.00
130	POLCB49	481778	7145111	brown clay silt	25cm	0.12	<0.01	0.12	7.50	23.00	52.90	105.00

131	POLCB50	481675	7145110	brown clay	35cm	0.33	<0.01	0.33	8.90	34.60	39.50	131.00
132	POLCB51	481575	7145111	brown clay/silt	35cm	0.11	<0.01	0.11	8.60	17.40	27.50	106.00
133	POLCB52	481474	7145110	brown clay	35cm	0.26	<0.01	0.26	7.90	44.40	50.10	153.00
134	POLCB53	481373	7145112	grey silty clay	40cm	0.25	<0.01	0.25	7.50	46.00	57.80	160.00
135	POLCB54	481272	7145112	grey silt	48cm	0.26	<0.01	0.26	7.00	40.20	45.90	156.00
136	POLCB55	481173	7145111	grey silty-clay	50cm	0.26	<0.01	0.26	7.10	55.80	77.00	176.00
137	POLCB56	481072	7145113	brown silt	40cm	0.35	<0.01	0.35	15.60	43.50	65.30	198.00
138	POLCB57	480969	7145114	grey clay	25cm	0.29	<0.01	0.29	7.10	48.60	53.30	175.00
139	POLCB58	480866	7145113	grey clay	25cm	0.26	<0.01	0.26	7.30	43.10	51.90	151.00
140	POLCB59	480766	7145112	grey clay	18cm	0.21	<0.01	0.21	7.30	45.20	48.60	150.00
141	POLCB60	480666	7145111	grey silty-clay	35cm	0.26	<0.01	0.26	5.90	44.30	42.60	168.00
142	POLCB61	480564	7145111	grey sandy silt/clay	55cm	0.36	<0.01	0.36	7.50	48.20	89.50	185.00
143	POLCB62	480460	7145109	grey clay	18cm	0.30	<0.01	0.3	6.60	45.90	62.60	183.00
144	POLCB63	480359	7145109	grey clay	40cm	0.31	<0.01	0.31	5.50	55.00	62.30	198.00
145	POLCB64	480257	7145110	grey clay	25cm	0.33	<0.01	0.33	7.30	62.10	102.00	189.00
146	POLQD1	483602	7145322	grey clay/silt	30cm	0.24	<0.01	0.24	6.70	40.60	43.40	150.00
147	POLQD2	483501	7145322	grey/brown clay	40cm	0.31	<0.01	0.31	6.50	45.30	64.80	171.00
148	POLQD3	483401	7145323	light grey clay	10cm	0.30	<0.01	0.3	7.20	44.20	62.60	158.00
149	POLQD4	483300	7145323	grey clay	20cm	0.45	<0.01	0.45	10.00	45.90	61.10	187.00
150	POLQD5	483200	7145324	grey clay	30cm	0.38	<0.01	0.38	9.60	42.40	68.80	178.00
151	POLQD6	483099	7145324	grey clay	20cm	0.27	<0.01	0.27	6.90	41.60	62.40	149.00
152	POLQD7	482999	7145325	grey silty-clay	30cm	0.29	<0.01	0.29	6.40	28.70	49.80	177.00
153	POLQD8	482899	7145325	light grey clay	40cm	0.32	<0.01	0.32	6.50	40.50	60.00	161.00
154	POLQD9	482798	7145326	light grey silty-clay	50cm	0.28	<0.01	0.28	6.20	41.00	60.70	163.00
155	POLQD10	482697	7145327	grey clay	1m	0.32	<0.01	0.32	5.60	38.80	62.80	189.00
156	POLQD11	482596	7145327	light grey silty-clay	20cm	0.30	<0.01	0.3	9.00	46.70	74.50	195.00
157	POLQD12	482496	7145328	grey clay	20cm	0.24	<0.01	0.24	6.60	37.50	29.00	136.00
158	POLQD13	482395	7145328	grey clay	20cm	0.35	<0.01	0.35	7.40	39.50	37.50	120.00
159	POLQD14	482295	7145329	grey clay	30cm	0.22	<0.01	0.22	3.20	25.20	35.70	160.00
160	POLQD15	482194	7145329	grey and minor rusty silty clay	40cm	0.35	<0.01	0.35	9.30	43.10	64.60	215.00
161	POLQD16	482099	7145364	grey clay	40cm	0.47	<0.01	0.47	10.60	52.00	77.50	243.00
162	POLQD17	480729	7145523	grey silty-clay	10cm	0.25	<0.01	0.25	8.60	33.20	50.80	194.00
163	POLQD18	480829	7145522	grey clay	15cm	0.29	<0.01	0.29	8.00	34.40	51.30	179.00
164	POLQD19	480929	7145522	light grey clay	20cm	0.24	<0.01	0.24	6.70	62.50	86.40	175.00
165	POLQD20	481029	7145521	grey and rusty silty-clay	20cm	0.28	<0.01	0.28	5.30	49.80	70.50	155.00
166	POLQD21	481129	7145521	grey clay	15cm	0.31	<0.01	0.31	6.00	43.50	68.10	189.00
167	POLQD22	481229	7145520	grey clay	20cm	0.29	<0.01	0.29	5.30	43.80	95.90	170.00
168	POLQD23	481329	7145519	grey clay	50cm	0.24	<0.01	0.24	6.10	33.00	39.30	132.00
169	POLQD24	481429	7145519	grey silty-clay	60cm	0.52	<0.01	0.52	11.90	28.80	92.90	143.00
170	POLQD25	481528	7145518	grey clay	20cm	5.47	1.03	5.47	64.30	25.40	247.00	156.00
171	POLQD26	481629	7145517	light grey and minor brown clay	20cm	0.54	<0.01	0.54	12.30	31.10	95.90	111.00
172	POLQD27	481728	7145517	grey clay and sand	40cm	0.53	<0.01	0.53	12.70	28.30	99.50	164.00
173	POLQD28	481829	7145516	light to dark brown clay	10cm	0.44	<0.01	0.44	10.60	13.60	76.10	188.00
174	POLQD29	481928	7145516	grey clay and sand	20cm	0.41	<0.01	0.41	7.90	46.50	70.90	220.00
175	POLQD30	482029	7145515	light brown clay	20cm	0.27	<0.01	0.27	4.10	68.20	50.80	237.00
176	POLQD31	478697	7145532	frozen grey/brown clay/soil	10cm	0.26	<0.01	0.26	5.40	33.70	53.70	146.00

177	POLQD32	478823	7145524	grey clay and sand	20cm	0.25	<0.01	0.25	6.60	35.60	47.20	174.00
178	POLQD33	478999	7145536	grey clay	20cm	0.28	<0.01	0.28	7.70	48.90	60.90	160.00
179	POLQD34	479095	7145531	grey clay and sand	20cm	0.21	<0.01	0.21	6.20	48.90	63.80	149.00
180	POLQD35	479196	7145532	frozen grey clay and sand	20cm	0.27	<0.01	0.27	6.40	40.60	58.50	170.00
181	POLQD36	479296	7145530	grey clay	1m	0.24	<0.01	0.24	6.50	46.80	68.00	153.00
182	POLQD37	479397	7145528	brown clay	60cm	0.32	<0.01	0.32	7.20	46.70	66.40	172.00
183	POLQD38	479495	7145527	brown clay	40cm	0.28	<0.01	0.28	7.10	44.30	55.50	167.00
184	POLQD39	479597	7145526	light brown clay	40cm	0.32	<0.01	0.32	9.40	43.10	73.60	156.00
185	POLQD40	479703	7145527	light brown clay	20cm	0.28	<0.01	0.28	7.30	44.10	63.90	168.00
186	POLQD41	479697	7145525	brown clay	20cm	0.28	<0.01	0.28	7.70	40.30	58.10	163.00
187	POLQD42	479897	7145522	frozen grey clay	20cm	0.27	<0.01	0.27	6.10	34.10	69.00	206.00
188	POLQD43	479993	7145526	brown clay	20cm	0.33	<0.01	0.33	7.90	47.00	66.10	168.00
189	POLQD44	480095	7145523	light brown clay	20cm	0.24	<0.01	0.24	5.60	44.50	56.10	138.00
190	POLQD45	480197	7145524	light brown clay	60cm	0.33	<0.01	0.33	7.40	45.00	64.00	148.00
191	POLQD46	480296	7145523	light grey clay	30cm	0.32	<0.01	0.32	5.30	59.60	67.40	207.00
192	POLQD47	480400	7145525	light brown/grey clay	20cm	0.24	<0.01	0.24	7.00	34.20	48.40	130.00
193	POLQD48	480497	7145523	frozen brown clay	20cm	0.21	<0.01	0.21	6.30	25.80	36.40	128.00
194	POLQD49	480611	7145539	brown clay	20cm	0.15	<0.01	0.15	7.10	21.40	40.20	95.20
									7.80	9.80	21.50	68.90

				Au ppm 0.05
an Concentrates				
POL PAN 1	482084	7145439	moss	2kg	<0.05
POL PAN 2	482084	7145439	gravels	5kg	<0.05
POL PAN 3	482073	7145571	moss	2kg	<0.05
POL PAN 4	482035	7145607	moss	2kg	<0.05
POL PAN 5	482003	7145713	moss	2kg	<0.05
POL PAN 6	482054	7145818	moss	2kg	<0.05
POL PAN 7	482065	7145918	moss	2kg	<0.05

Analytical Data

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

CLIENT NAME: BLIND CREEK RESOURCES
15 FLOOR, 675 WEST HASTINGS STREET
VANCOUVER, BC V6B1N2
(604) 669-6463

ATTENTION TO: CLIVE ASPINALL

PROJECT NO:

AGAT WORK ORDER: 12Y614349

SOLID ANALYSIS REVIEWED BY: Kevin Motomura, ICP Supervisor

DATE REPORTED: Jul 12, 2012

PAGES (INCLUDING COVER): 39

Should you require any information regarding this analysis please contact your client services representative at (905) 501-9998

NOTES

All samples are stored at no charge for 90 days. Please contact the lab if you require additional sample storage time.

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Sample Login Weight	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr
Unit:	kg	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description / RDL:	0.01	0.01	0.01	0.1	0.01	5	1	0.05	0.01	0.01	0.01	0.01	0.1	0.5
POLMH1	0.24	0.23	1.73	9.7	<0.01	<5	220	0.47	0.21	0.52	0.20	35.5	13.1	39.0
POLMH2	0.27	0.27	1.36	5.7	<0.01	<5	204	0.36	0.14	2.05	0.46	35.1	13.6	44.3
POLMH3	0.38	0.35	1.59	7.3	<0.01	<5	294	0.50	0.21	2.54	0.63	34.0	15.0	49.1
POLMH4	0.64	0.26	1.38	7.8	<0.01	<5	162	0.43	0.16	9.26	0.71	36.4	14.8	38.2
POLMH5	0.59	0.35	1.46	8.2	<0.01	<5	186	0.47	0.18	6.13	0.79	39.2	16.1	44.3
POLMH6	0.36	0.35	1.35	7.0	<0.01	5	257	0.46	0.19	3.70	1.12	26.2	14.3	45.6
POLMH7	0.49	0.39	1.52	8.8	<0.01	<5	184	0.50	0.19	5.09	0.75	35.8	17.5	44.8
POLMH8	0.24	0.33	1.60	7.3	<0.01	<5	221	0.44	0.20	1.15	0.40	30.9	12.5	39.2
POLMH9	0.26	0.38	1.70	9.4	<0.01	<5	225	0.52	0.19	2.87	0.64	34.6	18.1	46.1
POLMH10	0.22	0.39	1.71	8.4	<0.01	<5	197	0.53	0.19	3.30	0.56	36.1	15.5	47.5
POLMH11	0.18	0.35	1.40	7.7	<0.01	<5	209	0.42	0.19	2.12	0.81	24.0	11.1	34.4
POLMH12	0.31	0.34	2.39	12.0	0.01	<5	296	0.70	0.26	1.73	0.50	53.3	20.0	61.3
POLMH13	0.16	0.36	1.34	6.2	<0.01	<5	248	0.47	0.20	2.77	0.97	26.9	13.6	36.0
POLMH14	0.53	0.31	1.52	8.7	<0.01	<5	199	0.48	0.22	4.81	0.66	40.6	15.8	43.7
POLMH15	0.17	0.33	1.35	8.1	<0.01	<5	193	0.36	0.18	1.40	1.66	33.4	15.1	35.3
POLMH16	0.25	0.36	1.81	10.5	<0.01	<5	270	0.56	0.25	1.40	0.37	38.4	15.7	45.5
POLMH17	0.11	0.28	1.64	7.5	<0.01	<5	245	0.48	0.19	4.06	0.79	26.9	17.6	47.0
POLMH18	0.40	0.39	1.56	9.2	<0.01	<5	191	0.57	0.23	3.49	0.71	42.7	16.8	49.7
POLMH19	0.16	0.26	1.22	5.9	<0.01	<5	207	0.40	0.14	2.65	0.66	18.0	10.2	32.1
POLMH20	0.55	0.29	1.50	9.5	<0.01	<5	232	0.48	0.19	5.00	0.59	38.4	14.8	39.7
POLMH21	0.13	0.31	1.71	7.3	<0.01	<5	278	0.57	0.20	1.82	0.54	33.9	15.3	48.5
POLMH22	0.16	0.32	1.53	6.6	<0.01	<5	196	0.50	0.16	3.28	0.57	36.2	15.3	47.0
POLMH23	0.16	0.15	1.01	5.3	<0.01	<5	194	0.37	0.12	1.18	1.34	22.1	14.7	28.7
POLMH24	0.17	0.29	0.41	1.6	<0.01	<5	176	0.18	0.04	4.17	1.63	5.98	4.2	5.0
POLMH25	0.15	0.26	0.52	3.6	<0.01	<5	152	0.24	0.06	3.45	0.80	8.55	4.5	12.5
POLMH26	0.27	0.27	1.14	5.1	<0.01	<5	151	0.32	0.12	2.39	0.85	13.9	8.5	29.4
POLMH27	0.40	0.30	1.35	7.4	<0.01	<5	256	0.48	0.18	1.89	0.58	26.7	14.0	38.7
POLMH28	0.68	0.30	1.28	7.5	<0.01	<5	170	0.43	0.16	8.40	0.65	30.9	14.9	38.9
POLMH29	0.33	0.29	1.44	8.3	<0.01	<5	179	0.48	0.18	4.17	0.52	37.5	14.4	43.0
POLMH30	0.32	0.34	1.31	10.2	<0.01	<5	344	0.43	0.17	3.43	0.94	30.6	18.8	37.6
POLMH31	0.28	0.32	1.57	8.7	<0.01	<5	269	0.50	0.18	1.91	0.77	41.0	15.2	45.5

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Sample Login Weight	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr
Unit:	kg	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description / RDL:	0.01	0.01	0.01	0.1	0.01	5	1	0.05	0.01	0.01	0.01	0.01	0.1	0.5
POLMH32	0.20	0.24	1.65	11.0	<0.01	<5	170	0.49	0.17	1.01	1.91	36.1	15.7	55.6
POLMH33	0.16	0.30	1.32	12.7	<0.01	<5	183	0.37	0.14	1.58	1.54	26.9	12.3	36.9
POLMH34	0.15	0.36	1.29	6.7	<0.01	<5	201	0.37	0.13	3.06	2.08	20.4	11.5	33.5
POLMH35	0.18	0.32	1.44	7.3	<0.01	<5	179	0.44	0.16	1.92	0.89	35.0	13.7	42.9
POLMH36	0.16	0.31	1.05	4.7	<0.01	<5	133	0.26	0.15	0.18	0.59	22.2	4.9	67.8
POLMH37	0.16	0.30	1.12	5.1	<0.01	<5	157	0.38	0.14	2.35	0.58	31.0	10.9	41.0
POLMH38	0.36	0.32	1.43	8.4	<0.01	<5	191	0.44	0.17	3.22	0.69	37.9	13.8	49.9
POLMH39	0.18	0.26	1.34	8.6	<0.01	<5	175	0.43	0.17	0.79	1.34	39.6	13.5	41.3
POLMH40	0.49	0.24	1.29	4.6	<0.01	<5	179	0.45	0.15	4.30	0.57	35.0	13.1	39.6
POLMH41	0.30	0.28	1.45	9.0	<0.01	<5	236	0.52	0.18	3.52	0.59	35.4	15.1	44.0
POLMH42	0.56	0.32	1.58	10.1	<0.01	<5	244	0.51	0.19	2.55	0.76	35.8	15.2	42.7
POLMH43	0.20	0.32	1.48	6.9	<0.01	<5	224	0.48	0.17	1.40	0.70	31.6	14.0	45.1
POLMH44	0.44	0.22	1.65	9.2	<0.01	<5	131	0.50	0.15	0.38	0.21	35.1	10.4	37.7
POLMH45	0.29	0.48	1.70	12.0	<0.01	<5	272	0.56	0.18	1.09	1.24	34.2	17.5	54.4
POLMH46	0.27	0.26	1.95	10.4	<0.01	<5	162	0.56	0.17	0.44	0.43	42.3	14.1	46.5
POLMH47	0.14	0.17	1.16	5.3	<0.01	<5	184	0.31	0.11	1.71	0.52	23.3	8.8	27.5
POLMH48	0.27	0.19	1.14	6.5	<0.01	<5	134	0.36	0.12	1.26	0.61	34.6	10.9	33.1
POLMH49	0.24	0.25	1.36	6.8	<0.01	<5	188	0.42	0.14	0.87	0.56	29.3	11.4	36.8
POLMH50	0.30	0.23	1.50	7.8	<0.01	<5	166	0.44	0.16	0.69	0.46	41.8	13.8	39.4
POLMH51	0.13	0.15	1.38	7.0	<0.01	<5	163	0.37	0.16	0.82	0.58	19.2	11.7	35.2
POLMH52	0.28	0.44	1.96	8.1	<0.01	<5	176	0.58	0.19	1.39	1.39	41.4	17.1	52.0
POLMH53	0.35	0.14	1.81	7.9	<0.01	<5	154	0.45	0.17	0.69	0.89	38.3	13.6	47.6
POLMH54	0.46	0.18	2.08	6.8	<0.01	<5	212	0.45	0.18	0.49	0.42	38.7	10.4	43.6
POLMH55	0.43	0.14	1.76	6.1	<0.01	<5	145	0.20	0.20	0.26	0.58	32.6	9.0	43.2
POLMH56	0.16	0.22	1.54	7.5	<0.01	<5	169	0.47	0.15	0.84	0.60	39.4	12.9	39.6
POLMH57	0.16	0.13	1.38	6.8	<0.01	<5	163	0.25	0.17	0.67	1.09	22.4	12.2	34.2
POLMH58	0.25	0.34	1.38	5.6	<0.01	<5	196	0.42	0.15	1.12	1.68	23.8	9.4	28.2
POLMH59	0.52	0.09	1.60	7.7	<0.01	<5	158	0.41	0.16	0.31	0.16	36.0	9.4	37.6
POLMH60	0.44	0.14	1.94	6.5	<0.01	<5	210	0.31	0.20	0.26	0.17	38.2	7.7	35.3
POLMH61	0.53	0.24	1.66	9.8	<0.01	<5	212	0.52	0.18	0.81	0.29	46.5	13.4	41.5
POLMH62	0.33	0.27	1.72	6.9	<0.01	<5	196	0.43	0.16	0.93	1.31	39.3	14.3	46.3

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Sample Login Weight	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr
Unit:	kg	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description / RDL:	0.01	0.01	0.01	0.1	0.01	5	1	0.05	0.01	0.01	0.01	0.01	0.1	0.5
POLMH63	0.49	0.18	2.53	10.4	<0.01	<5	230	0.60	0.23	0.34	0.31	43.9	13.3	52.8
POLMH64	0.38	0.23	1.50	7.0	<0.01	<5	176	0.39	0.14	0.54	0.90	33.7	9.5	35.1
POLMH65	0.34	0.24	1.98	7.3	<0.01	<5	309	0.55	0.19	0.57	0.75	35.6	12.3	42.4
POLMH66	0.33	0.24	1.59	9.5	<0.01	<5	321	0.44	0.17	0.84	0.51	37.3	15.7	51.7
POLMH67	0.31	0.23	1.32	6.5	<0.01	<5	188	0.45	0.15	0.74	0.36	42.4	12.2	36.1
POLMH68	0.24	0.23	1.37	7.3	<0.01	<5	180	0.45	0.15	1.31	0.55	38.3	13.0	37.6
POLMH69	0.51	0.22	1.43	8.8	<0.01	<5	162	0.51	0.17	3.16	0.37	41.5	13.4	36.0
POLMH70	0.34	0.29	1.88	8.2	<0.01	<5	246	0.53	0.21	1.44	0.58	42.7	16.6	49.4
POLMH71	0.23	0.25	1.51	7.5	<0.01	<5	306	0.50	0.18	1.61	0.51	27.0	15.1	40.2
POLMH72	0.35	0.29	1.55	7.3	<0.01	<5	199	0.50	0.20	1.47	0.66	31.5	15.4	46.2
POLMH73	0.58	0.26	1.63	8.7	<0.01	<5	155	0.50	0.20	5.26	0.66	38.1	17.9	48.4
POLMH74	0.34	0.24	1.33	6.6	<0.01	<5	277	0.44	0.15	2.37	0.71	25.3	13.9	42.5
POLMH75	0.72	0.26	1.62	7.6	<0.01	<5	187	0.59	0.17	5.52	0.65	37.1	16.1	48.3
POLMH76	0.39	0.25	1.55	7.5	<0.01	<5	156	0.52	0.17	3.92	0.64	30.8	16.6	46.4
POLMH77	0.21	0.27	1.47	6.1	<0.01	<5	280	0.52	0.15	1.64	0.69	26.7	14.4	52.8
POLMH78	0.32	0.25	1.62	10.5	<0.01	<5	200	0.51	0.15	1.16	0.84	33.3	18.6	48.7
POLMH79	0.29	0.28	1.64	6.3	<0.01	<5	164	0.53	0.16	1.18	1.47	29.5	16.1	52.0
POLMH80	0.39	0.29	1.36	6.1	<0.01	<5	167	0.47	0.15	2.26	0.63	23.2	13.4	40.4
POLMH81	0.26	0.20	1.16	4.3	<0.01	<5	141	0.34	0.13	2.18	0.49	11.2	9.5	31.0
POLCB1	0.32	0.38	1.67	13.8	<0.01	<5	204	0.55	0.21	2.55	1.27	35.4	16.8	44.8
POLCB2	0.33	0.25	1.01	6.2	<0.01	<5	147	0.40	0.11	6.53	0.41	23.6	12.1	39.9
POLCB3	0.42	0.31	1.71	5.4	<0.01	<5	147	0.57	0.16	6.36	0.54	30.1	16.3	53.9
POLCB4	0.40	0.26	1.52	7.1	<0.01	<5	161	0.57	0.16	6.94	0.63	34.2	16.1	44.5
POLCB5	0.15	0.40	1.61	7.9	<0.01	7	251	0.61	0.16	4.18	1.12	28.7	21.0	52.3
POLCB6	0.39	0.28	1.61	7.7	<0.01	<5	144	0.54	0.14	7.04	0.69	33.1	17.8	48.8
POLCB7	0.11	0.34	1.70	8.5	<0.01	<5	215	0.62	0.20	1.49	0.65	35.9	17.0	49.8
POLCB8	0.22	0.31	1.42	4.9	<0.01	<5	249	0.54	0.19	3.71	0.65	30.5	14.5	48.1
POLCB9	0.45	0.29	1.44	8.3	<0.01	<5	209	0.55	0.17	7.90	0.69	31.2	14.9	43.3
POLCB10	0.25	0.25	1.41	8.7	<0.01	<5	213	0.49	0.18	5.45	0.65	33.2	14.9	38.9
POLCB11	0.41	0.17	1.11	3.4	<0.01	<5	77	0.38	0.11	6.09	0.12	31.2	11.3	31.3
POLCB12	0.32	0.30	1.67	8.0	<0.01	<5	183	0.59	0.18	4.41	0.71	36.5	15.5	49.1

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Sample Login Weight	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr
Unit:	kg	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.01	0.01	0.01	0.1	0.01	5	1	0.05	0.01	0.01	0.01	0.01	0.1	0.5
POLCB13	0.23	0.39	2.00	9.5	<0.01	<5	215	0.64	0.21	1.68	0.54	42.0	18.8	60.6
POLCB14	0.43	0.31	1.50	8.6	<0.01	<5	140	0.50	0.16	0.80	0.42	36.0	11.2	34.2
POLCB15	0.26	0.36	1.54	8.5	<0.01	<5	267	0.52	0.17	1.02	0.61	28.1	14.7	59.3
POLCB16	0.21	0.31	1.07	9.6	<0.01	<5	100	0.42	0.12	5.37	1.25	26.2	14.2	46.1
POLCB17	0.20	0.25	1.67	7.7	<0.01	<5	282	0.74	0.21	0.94	1.32	34.2	17.5	36.7
POLCB18	0.37	0.10	2.00	12.0	<0.01	<5	189	0.70	0.24	0.30	0.26	40.8	14.0	40.5
POLCB19	0.34	0.11	2.41	11.1	<0.01	<5	248	0.61	0.24	0.51	0.34	43.3	15.4	52.1
POLCB20	0.18	0.40	1.69	7.9	<0.01	<5	247	0.58	0.19	1.16	2.08	33.8	12.9	36.0
POLCB21	0.25	0.13	1.87	10.0	<0.01	<5	187	0.54	0.24	0.39	0.74	36.0	14.3	41.5
POLCB22	0.21	0.13	1.91	9.3	<0.01	<5	228	0.52	0.21	0.41	0.32	36.5	22.1	39.4
POLCB23	0.42	0.28	1.51	9.8	<0.01	<5	132	0.57	0.17	5.39	0.51	32.9	15.9	42.2
POLCB24	0.68	0.22	1.34	8.6	<0.01	<5	166	0.49	0.16	7.63	0.71	28.7	15.4	38.5
POLCB25	0.27	0.21	1.25	6.1	<0.01	<5	239	0.47	0.14	4.11	0.33	26.8	12.1	38.0
POLCB26	0.46	0.27	1.41	5.6	<0.01	<5	157	0.53	0.16	5.43	0.55	37.7	12.6	40.4
POLCB27	0.27	0.29	1.51	7.6	<0.01	<5	181	0.44	0.15	0.61	0.54	31.2	10.8	41.9
POLCB28	0.20	0.37	1.57	11.4	<0.01	<5	220	0.53	0.17	0.66	0.68	34.4	15.2	51.2
POLCB29	0.50	0.40	1.43	11.3	<0.01	<5	190	0.50	0.15	2.45	0.82	31.5	14.8	46.9
POLCB30	0.19	0.26	1.91	8.3	<0.01	<5	257	0.69	0.19	0.75	0.62	31.9	14.2	41.5
POLCB31	0.38	0.19	1.31	4.7	<0.01	<5	156	0.39	0.14	0.71	0.47	28.1	11.3	35.2
POLCB32	0.17	0.19	1.42	6.0	<0.01	<5	229	0.43	0.17	1.16	0.29	28.5	12.7	39.6
POLCB33	0.17	0.26	1.72	7.4	<0.01	<5	245	0.52	0.18	0.77	0.58	39.4	15.5	47.4
POLCB34	0.46	0.25	1.52	5.9	<0.01	<5	211	0.47	0.16	4.06	0.59	32.5	16.2	51.4
POLCB35	0.24	0.30	1.79	8.6	<0.01	<5	224	0.62	0.19	2.04	0.77	39.6	18.6	58.5
POLCB36	0.33	0.26	1.61	8.2	<0.01	<5	130	0.55	0.16	4.92	0.70	32.1	17.9	45.9
POLCB37	0.32	0.33	1.63	7.7	<0.01	<5	145	0.62	0.16	2.55	0.78	23.0	17.3	48.9
POLCB38	0.28	0.25	1.68	7.2	<0.01	<5	150	0.63	0.17	2.65	0.52	32.9	16.7	51.2
POLCB39	0.33	0.33	2.13	6.9	<0.01	<5	184	0.32	0.16	3.67	0.45	41.6	14.5	57.8
POLCB40	0.29	0.12	2.42	6.6	<0.01	<5	252	0.41	0.20	0.62	0.21	48.1	16.5	68.8
POLCB41	0.20	0.20	1.49	4.0	<0.01	<5	150	0.18	0.12	4.13	0.34	28.1	10.7	39.4
POLCB42	0.52	0.38	1.72	6.6	<0.01	<5	204	0.27	0.15	5.03	0.39	36.8	12.4	47.7
POLCB43	0.24	0.26	1.79	6.2	<0.01	<5	144	0.23	0.17	3.45	0.52	35.1	14.2	51.5

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349
PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Sample Login Weight	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr
Unit:	kg	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.01	0.01	0.01	0.1	0.01	5	1	0.05	0.01	0.01	0.01	0.01	0.1	0.5
POLCB44	0.46	0.31	1.59	5.9	<0.01	<5	171	0.21	0.14	2.89	0.74	31.0	12.1	49.6
POLCB45	0.52	0.33	2.09	8.2	<0.01	<5	272	0.33	0.17	3.60	0.76	42.6	16.0	60.7
POLCB46	0.31	0.12	2.02	7.9	<0.01	<5	154	0.28	0.16	0.59	0.34	43.1	13.8	57.5
POLCB47	0.37	0.44	1.72	10.9	<0.01	<5	220	0.28	0.16	3.12	1.08	39.1	13.5	62.4
POLCB48	0.30	0.21	2.29	9.8	<0.01	<5	216	0.33	0.19	0.41	0.71	36.4	12.2	46.2
POLCB49	0.29	0.12	1.85	7.5	<0.01	<5	176	0.24	0.15	0.31	0.11	32.9	9.3	37.9
POLCB50	0.32	0.33	2.10	8.9	<0.01	<5	369	0.36	0.19	0.66	0.20	37.5	12.7	48.2
POLCB51	0.23	0.11	2.09	8.6	<0.01	<5	277	0.33	0.18	0.65	0.22	40.6	10.1	41.1
POLCB52	0.49	0.26	1.64	7.9	<0.01	<5	235	0.25	0.16	5.92	0.56	33.4	12.5	42.2
POLCB53	0.48	0.25	1.59	7.5	<0.01	<5	200	0.25	0.16	7.89	0.60	33.0	13.1	43.3
POLCB54	0.83	0.26	1.57	7.0	<0.01	<5	225	0.26	0.15	7.00	0.54	35.4	11.3	43.7
POLCB55	0.78	0.26	1.63	7.1	<0.01	<5	187	0.23	0.16	8.65	0.70	34.1	14.8	44.5
POLCB56	0.31	0.35	1.91	15.6	<0.01	<5	388	0.31	0.19	1.38	0.78	38.2	17.8	61.5
POLCB57	0.32	0.29	1.94	7.1	<0.01	<5	282	0.28	0.21	0.95	0.42	35.5	13.4	53.8
POLCB58	0.33	0.26	1.59	7.3	<0.01	<5	189	0.27	0.15	6.50	0.59	35.6	12.3	44.6
POLCB59	0.50	0.21	1.51	7.3	<0.01	<5	174	0.25	0.16	7.13	0.58	32.9	12.3	41.8
POLCB60	0.40	0.26	1.78	5.9	<0.01	<5	230	0.24	0.11	2.93	0.36	24.4	10.0	51.7
POLCB61	0.35	0.36	1.79	7.5	<0.01	<5	183	0.32	0.18	6.49	0.67	38.7	16.3	57.6
POLCB62	0.43	0.30	1.94	6.6	<0.01	<5	251	0.27	0.15	3.52	0.53	36.7	13.4	62.3
POLCB63	0.47	0.31	2.02	5.5	<0.01	<5	232	0.28	0.14	2.77	0.42	30.6	12.1	61.8
POLCB64	0.47	0.33	1.89	7.3	<0.01	<5	149	0.31	0.19	6.40	0.67	39.1	17.1	54.0
POLQD1	0.47	0.24	1.51	6.7	<0.01	<5	218	0.22	0.18	6.74	0.62	27.9	11.9	41.5
POLQD2	0.34	0.31	1.81	6.5	<0.01	<5	247	0.30	0.18	5.89	0.70	38.0	14.2	50.7
POLQD3	0.45	0.30	1.62	7.2	<0.01	<5	178	0.25	0.15	7.54	0.56	32.0	13.9	45.8
POLQD4	0.32	0.45	2.41	10.0	<0.01	<5	394	0.42	0.22	1.25	0.32	41.3	14.7	64.2
POLQD5	0.31	0.38	2.16	9.6	<0.01	<5	314	0.46	0.20	1.52	0.41	40.5	16.0	57.2
POLQD6	0.37	0.27	1.60	6.9	<0.01	<5	187	0.26	0.16	6.08	0.44	30.1	13.2	43.9
POLQD7	0.25	0.29	1.60	6.4	<0.01	<5	221	0.28	0.14	1.76	0.45	29.5	12.5	45.1
POLQD8	0.58	0.32	1.65	6.5	<0.01	<5	203	0.29	0.17	6.12	0.48	37.6	13.2	47.9
POLQD9	0.25	0.28	1.53	6.2	<0.01	<5	193	0.26	0.15	6.69	0.54	34.0	13.3	43.6
POLQD10	0.32	0.32	1.70	5.6	<0.01	<5	238	0.27	0.15	3.12	0.60	32.1	12.3	47.2

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Sample Login Weight	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr
Unit:	kg	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description / RDL:	0.01	0.01	0.01	0.1	0.01	5	1	0.05	0.01	0.01	0.01	0.01	0.1	0.5
POLQD11	0.55	0.30	1.85	9.0	<0.01	<5	196	0.32	0.20	4.33	0.61	38.7	15.6	50.7
POLQD12	0.37	0.24	1.60	6.6	<0.01	<5	261	0.26	0.15	1.41	0.36	27.7	9.9	40.4
POLQD13	0.36	0.35	1.82	7.4	<0.01	<5	300	0.36	0.16	1.27	0.24	28.6	11.1	47.1
POLQD14	0.60	0.22	1.02	3.2	<0.01	<5	116	0.18	0.10	7.86	0.28	25.3	9.1	33.1
POLQD15	0.62	0.35	1.72	9.3	<0.01	<5	319	0.27	0.18	0.87	0.79	35.6	13.7	55.1
POLQD16	0.19	0.47	1.27	10.6	<0.01	<5	174	0.22	0.13	5.82	1.35	25.0	12.4	50.8
POLQD17	0.14	0.25	1.80	8.6	<0.01	<5	215	0.31	0.18	0.84	1.07	32.2	11.9	43.9
POLQD18	0.29	0.29	1.70	8.0	<0.01	<5	202	0.30	0.16	0.86	0.83	36.8	12.0	45.4
POLQD19	0.67	0.24	1.56	6.7	<0.01	<5	137	0.20	0.14	8.50	0.70	24.4	14.9	41.7
POLQD20	0.56	0.28	1.52	5.3	<0.01	<5	137	0.21	0.13	5.96	0.72	33.1	13.5	39.3
POLQD21	0.21	0.31	1.50	6.0	<0.01	<5	164	0.27	0.15	3.47	0.50	27.2	11.6	42.9
POLQD22	0.50	0.29	1.35	5.3	<0.01	<5	125	0.22	0.13	6.38	0.77	32.4	12.8	37.3
POLQD23	0.48	0.24	1.16	6.1	<0.01	<5	156	0.25	0.14	6.51	0.69	25.9	10.9	37.5
POLQD24	0.62	0.52	1.18	11.9	<0.01	<5	167	0.24	0.15	6.01	0.89	31.4	13.6	40.0
POLQD25	0.20	5.47	1.44	64.3	1.03	<5	274	0.08	16.3	1.46	0.97	12.5	6.0	44.2
POLQD26	0.38	0.54	1.70	12.3	<0.01	<5	238	0.24	0.17	0.81	0.94	28.2	13.9	38.8
POLQD27	0.54	0.53	1.35	12.7	<0.01	<5	200	0.30	0.17	3.59	0.92	35.9	14.8	40.9
POLQD28	0.47	0.44	2.08	10.6	<0.01	<5	151	0.28	0.15	0.43	0.45	36.0	12.5	34.5
POLQD29	0.32	0.41	1.64	7.9	<0.01	<5	200	0.29	0.16	0.75	0.21	32.1	7.3	55.8
POLQD30	0.33	0.27	1.56	4.1	<0.01	<5	196	0.22	0.13	2.37	0.52	31.6	11.1	56.7
POLQD31	0.22	0.26	1.59	5.4	<0.01	<5	240	0.22	0.12	1.60	0.49	29.0	11.0	38.7
POLQD32	0.24	0.25	1.50	6.6	<0.01	<5	227	0.24	0.15	1.53	0.65	31.0	11.5	39.4
POLQD33	0.34	0.28	1.81	7.7	<0.01	<5	222	0.28	0.17	1.82	0.37	35.9	13.3	52.2
POLQD34	0.64	0.21	1.43	6.2	<0.01	<5	138	0.21	0.13	8.05	0.57	29.3	13.6	40.9
POLQD35	0.14	0.27	1.59	6.4	<0.01	<5	261	0.28	0.15	2.47	0.50	29.4	12.6	51.7
POLQD36	0.59	0.24	1.59	6.5	<0.01	<5	185	0.22	0.15	5.55	0.60	31.7	13.8	46.5
POLQD37	0.27	0.32	1.79	7.2	<0.01	<5	204	0.38	0.18	1.48	0.58	27.9	15.1	51.2
POLQD38	0.26	0.28	1.79	7.1	<0.01	<5	210	0.40	0.17	1.63	1.00	25.7	14.0	46.5
POLQD39	0.37	0.32	2.19	9.4	<0.01	<5	204	0.41	0.19	0.82	0.31	48.4	15.9	58.6
POLQD40	0.31	0.28	1.85	7.3	<0.01	<5	180	0.30	0.17	2.58	0.78	38.5	15.0	53.3
POLQD41	0.34	0.28	1.80	7.7	<0.01	<5	169	0.29	0.17	1.58	0.50	37.4	13.0	53.5

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Sample Login Weight	Ag	Al	As	Au	B	Ba	Be	Bi	Ca	Cd	Ce	Co	Cr
Unit:	kg	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm
Sample Description RDL:	0.01	0.01	0.01	0.1	0.01	5	1	0.05	0.01	0.01	0.01	0.01	0.1	0.5
POLQD42	0.25	0.27	1.77	6.1	<0.01	<5	192	0.29	0.17	0.88	0.83	36.3	13.0	51.6
POLQD43	0.49	0.33	2.02	7.9	<0.01	<5	170	0.38	0.18	0.82	0.37	41.5	15.1	60.1
POLQD44	0.55	0.24	1.47	5.6	<0.01	<5	96	0.25	0.11	4.72	0.50	31.6	12.3	41.9
POLQD45	0.49	0.33	1.70	7.4	<0.01	<5	170	0.30	0.16	3.13	0.62	31.4	14.2	45.9
POLQD46	0.27	0.32	1.85	5.3	<0.01	<5	155	0.30	0.16	2.07	1.56	27.2	14.4	54.2
POLQD47	0.34	0.24	1.74	7.0	<0.01	<5	223	0.35	0.18	1.23	0.64	34.6	12.9	44.8
POLQD48	0.29	0.21	1.49	6.3	<0.01	<5	184	0.25	0.14	1.04	0.54	32.6	10.1	36.9
POLQD49	0.46	0.15	2.10	7.1	<0.01	<5	203	0.29	0.17	0.58	0.25	35.8	9.8	40.8
SOIL 1	0.33	0.14	1.75	7.8	<0.01	<5	119	0.15	0.21	0.14	0.15	28.5	4.9	28.5

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 **DATE RECEIVED: Jun 27, 2012** **DATE REPORTED: Jul 12, 2012** **SAMPLE TYPE: Soil**

Analyte:	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
Unit:	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
Sample Description RDL:	0.05	0.1	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.1	0.1	0.01	1	0.05
POLMH1	1.04	26.1	3.07	5.45	<0.05	0.02	0.10	0.031	0.06	18.0	12.9	0.83	612	2.18
POLMH2	0.63	23.5	2.68	4.50	<0.05	0.07	0.10	0.028	0.09	17.6	11.2	1.73	649	1.38
POLMH3	0.68	31.7	3.20	5.14	<0.05	0.10	0.11	0.033	0.10	17.1	14.8	1.86	475	1.46
POLMH4	0.87	37.9	2.88	4.33	<0.05	0.12	0.11	0.029	0.14	18.0	13.3	4.59	1130	1.73
POLMH5	0.91	38.6	3.03	4.81	<0.05	0.15	0.10	0.032	0.13	19.4	14.6	4.00	1000	4.61
POLMH6	0.51	46.3	2.57	4.46	<0.05	0.11	0.12	0.029	0.09	13.2	13.5	2.54	592	2.29
POLMH7	0.77	47.4	3.18	4.89	<0.05	0.10	0.11	0.035	0.11	17.7	15.6	3.34	1070	2.38
POLMH8	0.88	25.1	2.74	5.18	<0.05	0.04	0.11	0.032	0.08	15.6	13.3	0.93	762	1.04
POLMH9	0.92	47.2	3.35	5.36	<0.05	0.07	0.11	0.035	0.11	17.3	14.6	2.20	1020	1.44
POLMH10	0.78	30.9	3.35	5.37	<0.05	0.06	0.10	0.034	0.12	17.9	13.9	2.53	1060	1.43
POLMH11	0.63	31.4	2.55	4.43	<0.05	0.05	0.13	0.027	0.07	12.6	10.0	0.97	520	0.92
POLMH12	1.56	42.6	4.07	7.57	0.06	0.07	0.12	0.040	0.20	27.5	19.6	1.96	1060	1.72
POLMH13	0.57	50.7	2.55	4.31	<0.05	0.06	0.14	0.030	0.08	14.2	9.0	1.19	1040	0.67
POLMH14	0.88	35.7	3.06	5.00	<0.05	0.08	0.12	0.032	0.13	20.3	14.1	3.23	1030	1.29
POLMH15	0.68	32.7	2.78	4.56	<0.05	0.05	0.13	0.031	0.09	16.7	11.5	1.37	776	2.57
POLMH16	1.07	34.6	3.34	5.75	<0.05	0.07	0.14	0.035	0.11	20.2	14.2	1.21	742	1.35
POLMH17	0.71	33.7	3.47	5.47	<0.05	0.08	0.13	0.034	0.16	13.5	13.5	2.40	1220	2.06
POLMH18	1.01	39.3	3.15	5.53	<0.05	0.09	0.13	0.035	0.16	21.6	17.1	2.61	684	1.65
POLMH19	0.62	30.0	2.23	3.82	<0.05	0.07	0.10	0.023	0.09	9.3	10.1	0.97	449	1.46
POLMH20	0.91	37.5	2.94	4.90	<0.05	0.08	0.10	0.029	0.11	19.3	15.8	3.04	598	1.42
POLMH21	0.72	29.9	2.92	5.55	<0.05	0.07	0.10	0.032	0.10	17.0	15.6	1.44	418	1.01
POLMH22	0.65	31.9	2.78	5.07	<0.05	0.11	0.09	0.028	0.09	17.8	15.3	2.66	499	0.90
POLMH23	0.51	23.0	2.02	3.91	<0.05	0.05	0.11	0.023	0.07	10.8	8.7	0.74	2450	2.01
POLMH24	0.19	20.3	0.36	0.96	<0.05	0.04	0.10	0.007	0.02	3.3	0.8	0.49	358	0.62
POLMH25	0.36	23.6	0.81	1.60	<0.05	0.05	0.10	0.011	0.03	4.6	2.9	0.52	179	1.00
POLMH26	0.62	22.2	1.90	3.61	<0.05	0.08	0.09	0.022	0.09	7.3	11.1	0.91	325	1.60
POLMH27	0.64	29.7	2.46	4.80	<0.05	0.08	0.10	0.029	0.09	13.6	15.8	0.96	672	2.27
POLMH28	0.79	37.0	2.71	4.16	<0.05	0.12	0.10	0.028	0.12	15.3	14.4	4.32	1020	1.92
POLMH29	0.82	33.2	2.73	4.77	<0.05	0.11	0.10	0.029	0.11	18.8	14.9	3.02	546	1.75
POLMH30	0.69	30.1	2.82	4.42	<0.05	0.08	0.11	0.026	0.10	15.0	14.7	2.20	2800	2.49
POLMH31	0.89	30.1	3.26	5.29	<0.05	0.05	0.10	0.031	0.13	20.5	15.1	1.57	1180	1.66
POLMH32	0.95	37.0	2.92	5.43	<0.05	0.05	0.09	0.035	0.12	18.0	15.9	1.48	611	4.10

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 **DATE RECEIVED: Jun 27, 2012** **DATE REPORTED: Jul 12, 2012** **SAMPLE TYPE: Soil**

Analyte:	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
Unit:	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
Sample Description RDL:	0.05	0.1	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.1	0.1	0.01	1	0.05
POLMH33	0.69	26.8	3.24	4.41	<0.05	0.05	0.10	0.027	0.06	13.3	10.3	0.85	604	1.40
POLMH34	0.58	34.9	2.50	3.77	<0.05	0.05	0.11	0.025	0.06	10.3	10.7	1.44	417	0.80
POLMH35	0.64	33.9	2.26	4.56	<0.05	0.09	0.11	0.027	0.08	17.4	14.2	1.54	308	0.92
POLMH36	0.59	18.5	1.99	3.75	<0.05	0.04	0.13	0.021	0.04	11.4	5.2	0.28	<1	5.93
POLMH37	0.59	31.5	2.02	3.76	<0.05	0.12	0.09	0.023	0.08	15.3	11.5	1.64	214	1.46
POLMH38	0.81	34.5	2.59	4.67	<0.05	0.15	0.09	0.028	0.12	18.9	14.5	2.34	368	2.52
POLMH39	0.84	26.1	2.66	4.75	<0.05	0.08	0.10	0.028	0.11	19.6	13.2	0.83	436	3.21
POLMH40	0.78	32.6	2.06	4.28	<0.05	0.14	0.08	0.027	0.11	17.5	13.7	2.82	354	1.07
POLMH41	0.82	37.0	2.83	4.96	<0.05	0.09	0.10	0.029	0.11	17.6	15.8	2.46	599	2.45
POLMH42	0.89	38.1	3.02	5.07	<0.05	0.08	0.09	0.029	0.12	18.0	15.8	1.98	636	1.44
POLMH43	0.91	30.8	2.71	4.77	<0.05	0.05	0.10	0.030	0.11	16.1	15.4	1.25	511	2.17
POLMH44	0.89	23.7	2.83	4.86	<0.05	0.03	0.08	0.030	0.06	18.6	14.0	0.99	377	1.73
POLMH45	1.05	49.0	3.07	5.70	<0.05	0.04	0.09	0.034	0.07	17.5	16.2	1.40	1030	4.32
POLMH46	1.29	25.7	3.05	6.14	<0.05	0.04	0.08	0.033	0.09	20.9	16.7	1.02	486	3.51
POLMH47	0.52	20.1	2.04	3.35	<0.05	0.05	0.08	0.019	0.07	12.0	8.7	0.79	405	0.83
POLMH48	0.60	23.1	2.26	3.95	<0.05	0.06	0.08	0.023	0.08	17.5	10.4	0.91	491	1.07
POLMH49	0.59	28.8	2.53	4.30	<0.05	0.05	0.08	0.025	0.07	14.8	11.4	0.81	597	1.42
POLMH50	0.79	28.8	2.84	4.92	<0.05	0.04	0.14	0.027	0.10	20.7	13.6	0.97	666	1.43
POLMH51	0.45	23.3	2.54	4.45	<0.05	0.04	0.10	0.027	0.06	10.1	11.7	0.86	478	1.10
POLMH52	0.90	40.7	3.51	5.93	<0.05	0.07	0.12	0.034	0.11	21.4	17.9	1.54	1010	1.33
POLMH53	1.09	25.1	2.98	6.06	<0.05	0.04	0.08	0.033	0.10	18.8	16.0	1.00	635	1.38
POLMH54	1.36	17.8	2.89	6.82	<0.05	<0.02	0.08	0.033	0.10	19.5	16.0	0.86	418	1.29
POLMH55	1.48	11.2	2.68	7.68	<0.05	0.03	0.06	0.028	0.09	16.5	14.6	0.78	326	2.28
POLMH56	0.88	25.6	2.78	5.04	<0.05	0.04	0.10	0.027	0.10	19.8	13.3	0.95	711	1.37
POLMH57	0.70	16.8	2.60	4.60	<0.05	0.03	0.08	0.026	0.06	11.5	11.3	0.78	615	1.29
POLMH58	0.75	25.4	2.17	4.36	<0.05	0.03	0.08	0.026	0.05	12.5	10.3	0.63	523	1.37
POLMH59	0.99	18.3	2.66	5.10	0.05	0.02	0.06	0.026	0.06	17.8	13.1	0.77	282	1.13
POLMH60	1.78	7.9	2.50	7.45	<0.05	<0.02	0.08	0.028	0.08	19.1	16.0	0.60	277	1.29
POLMH61	0.92	35.8	3.11	5.34	0.05	0.03	0.09	0.031	0.11	23.9	14.0	1.01	553	1.20
POLMH62	1.07	22.2	3.14	5.61	<0.05	0.04	0.07	0.030	0.10	19.4	14.5	1.08	1000	1.21
POLMH63	1.61	24.6	3.50	7.82	<0.05	0.03	0.07	0.042	0.09	20.7	20.3	1.00	451	1.60
POLMH64	0.87	18.9	2.72	4.84	<0.05	0.03	0.07	0.027	0.07	17.2	12.8	0.85	398	1.21

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
Unit:	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
Sample Description RDL:	0.05	0.1	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.1	0.1	0.01	1	0.05
POLMH65	1.00	27.3	2.95	6.25	<0.05	0.02	0.08	0.034	0.06	18.0	14.7	0.92	765	1.42
POLMH66	0.77	24.2	3.08	5.24	<0.05	0.06	0.10	0.030	0.11	18.6	16.8	1.06	772	1.66
POLMH67	0.70	21.3	2.44	4.45	<0.05	0.06	0.08	0.025	0.09	21.1	13.0	0.83	529	1.13
POLMH68	0.82	30.1	2.50	4.55	<0.05	0.07	0.07	0.026	0.10	19.1	14.1	1.19	591	1.04
POLMH69	0.86	33.9	2.69	4.74	<0.05	0.05	0.08	0.026	0.12	21.4	14.3	2.51	618	1.45
POLMH70	0.93	41.7	3.29	5.97	0.05	0.07	0.09	0.035	0.12	21.4	18.4	1.64	587	1.07
POLMH71	0.77	41.4	2.70	4.64	<0.05	0.06	0.08	0.029	0.09	14.0	14.7	0.92	1240	1.18
POLMH72	0.77	38.2	2.94	4.94	<0.05	0.08	0.10	0.030	0.08	16.5	14.5	1.21	1050	1.19
POLMH73	0.93	47.0	3.13	5.34	<0.05	0.15	0.10	0.031	0.11	18.8	18.7	3.60	1040	1.50
POLMH74	0.38	30.8	2.62	4.27	<0.05	0.08	0.10	0.026	0.06	12.5	14.5	1.84	549	0.75
POLMH75	0.90	43.6	2.94	5.25	<0.05	0.09	0.10	0.031	0.13	18.4	18.4	3.32	1000	1.43
POLMH76	0.60	37.2	2.95	5.08	<0.05	0.10	0.07	0.031	0.08	15.0	19.0	2.98	1010	1.39
POLMH77	0.60	42.6	2.63	4.83	<0.05	0.07	0.07	0.029	0.09	13.6	17.0	1.24	1130	0.89
POLMH78	0.61	27.8	4.10	5.04	<0.05	0.07	0.06	0.029	0.09	16.6	17.2	1.30	1840	1.27
POLMH79	0.76	36.5	2.89	5.50	<0.05	0.06	0.09	0.031	0.10	15.0	17.8	1.16	694	1.31
POLMH80	0.69	33.0	2.38	4.41	<0.05	0.07	0.07	0.028	0.08	11.8	15.8	1.63	674	1.28
POLMH81	0.59	27.5	1.86	3.74	<0.05	0.06	0.06	0.023	0.06	5.8	11.9	0.85	426	1.06
POLCB1	0.88	46.5	2.91	5.39	<0.05	0.07	0.08	0.034	0.12	17.7	19.5	2.35	596	2.43
POLCB2	1.77	20.0	2.12	3.45	<0.05	0.08	0.05	0.021	0.09	11.5	11.1	4.38	440	2.47
POLCB3	0.76	39.2	3.07	5.41	<0.05	0.13	0.07	0.032	0.14	15.0	19.6	4.82	606	2.57
POLCB4	0.82	36.6	2.87	5.06	<0.05	0.09	0.08	0.031	0.16	17.1	16.9	4.55	1020	2.39
POLCB5	0.75	47.8	3.34	5.59	<0.05	0.11	0.09	0.035	0.15	14.3	18.1	3.15	1210	2.48
POLCB6	0.85	42.3	3.07	5.21	<0.05	0.12	0.09	0.032	0.16	16.5	17.2	4.77	1060	3.36
POLCB7	0.92	36.2	3.44	5.62	<0.05	0.10	0.09	0.033	0.12	18.0	20.0	1.45	500	1.37
POLCB8	1.36	32.4	2.40	4.90	<0.05	0.09	0.09	0.030	0.11	15.0	17.2	2.50	361	1.07
POLCB9	1.21	36.2	2.90	4.83	<0.05	0.19	0.08	0.029	0.13	16.1	18.7	4.00	599	2.32
POLCB10	1.09	35.5	2.63	4.59	<0.05	0.16	0.08	0.028	0.13	16.5	16.5	3.43	1020	3.06
POLCB11	1.60	15.1	1.86	3.66	<0.05	0.05	0.07	0.024	0.06	15.6	14.0	4.35	257	0.87
POLCB12	1.24	35.4	3.01	5.38	<0.05	0.07	0.09	0.033	0.14	18.3	18.4	3.07	550	1.88
POLCB13	1.37	24.3	3.60	6.47	<0.05	0.06	0.11	0.040	0.16	20.1	21.9	1.74	650	2.59
POLCB14	0.77	26.4	2.82	4.73	<0.05	0.04	0.07	0.031	0.06	18.7	14.2	1.10	524	1.69
POLCB15	1.79	34.7	2.73	5.21	<0.05	0.06	0.10	0.034	0.09	14.3	17.9	1.30	367	3.35

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
Unit:	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
Sample Description RDL:	0.05	0.1	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.1	0.1	0.01	1	0.05
POLCB16	0.53	30.4	2.32	3.77	<0.05	0.05	0.07	0.025	0.06	12.8	13.2	3.93	1110	4.56
POLCB17	0.92	27.1	2.87	6.04	<0.05	0.04	0.08	0.037	0.05	16.3	13.2	0.66	1550	1.67
POLCB18	1.35	18.1	3.16	6.44	0.05	<0.02	0.06	0.034	0.06	21.0	17.2	0.81	482	1.49
POLCB19	1.59	23.3	3.77	7.67	<0.05	<0.02	0.04	0.040	0.11	19.6	20.8	1.03	1080	1.70
POLCB20	1.01	25.2	2.77	5.13	<0.05	0.03	0.07	0.030	0.08	17.5	13.4	0.85	737	1.21
POLCB21	1.63	17.8	3.29	6.53	<0.05	<0.02	0.05	0.034	0.09	17.2	17.8	0.84	676	1.81
POLCB22	1.38	17.7	3.06	6.54	<0.05	<0.02	0.05	0.033	0.08	17.1	16.6	0.77	1150	1.77
POLCB23	0.68	44.5	3.21	4.73	<0.05	0.06	0.09	0.031	0.11	17.3	15.8	3.81	1070	2.37
POLCB24	0.66	38.3	2.88	4.22	<0.05	0.13	0.08	0.029	0.11	14.1	16.1	4.28	1070	2.49
POLCB25	1.38	19.9	2.35	3.97	<0.05	0.06	0.07	0.026	0.08	13.5	16.9	2.76	465	2.10
POLCB26	0.85	32.2	2.54	4.58	<0.05	0.07	0.08	0.029	0.13	18.6	17.8	3.63	374	1.83
POLCB27	0.91	19.0	2.61	4.87	<0.05	0.04	0.07	0.030	0.09	15.8	16.5	1.05	401	2.89
POLCB28	0.94	35.4	2.91	5.18	<0.05	0.04	0.08	0.032	0.08	17.1	16.5	1.14	1020	3.30
POLCB29	0.71	41.5	2.79	4.71	<0.05	0.05	0.08	0.029	0.07	16.2	15.5	2.28	719	3.90
POLCB30	1.30	28.4	3.05	6.28	<0.05	0.03	0.07	0.036	0.07	16.3	17.7	0.92	1010	1.66
POLCB31	0.54	19.8	2.21	4.31	<0.05	0.06	0.06	0.025	0.05	13.8	14.1	0.85	350	0.59
POLCB32	0.52	21.2	2.62	4.58	<0.05	0.05	0.08	0.028	0.06	14.3	14.0	0.88	600	0.72
POLCB33	0.73	32.5	3.17	5.49	<0.05	0.06	0.08	0.032	0.11	19.7	18.5	1.14	595	0.85
POLCB34	0.62	35.1	2.92	4.90	<0.05	0.09	0.08	0.029	0.11	16.1	17.7	3.11	475	0.80
POLCB35	0.79	47.7	3.67	5.59	<0.05	0.08	0.09	0.033	0.11	20.0	20.2	1.92	1050	1.09
POLCB36	0.79	48.5	3.05	5.14	<0.05	0.09	0.06	0.029	0.10	15.9	19.5	3.79	1020	1.54
POLCB37	0.66	52.1	2.90	5.07	<0.05	0.09	0.06	0.033	0.09	11.6	19.7	2.21	1070	1.01
POLCB38	0.72	41.0	3.11	5.55	<0.05	0.07	0.05	0.032	0.11	16.6	21.6	2.38	690	1.27
POLCB39	0.85	49.4	3.63	9.37	0.08	0.06	0.05	0.025	0.17	21.2	9.8	3.08	1050	1.51
POLCB40	1.00	45.5	4.15	12.6	0.14	0.04	0.05	0.031	0.16	26.1	11.2	1.45	1650	1.75
POLCB41	0.35	34.3	2.76	5.02	0.13	<0.02	0.03	0.019	0.07	14.3	5.3	3.13	826	0.62
POLCB42	0.76	49.5	3.09	9.24	0.06	0.07	0.05	0.023	0.14	18.4	8.9	3.57	773	1.19
POLCB43	0.62	51.4	3.37	7.66	0.12	0.10	0.05	0.024	0.12	17.8	8.3	3.02	1160	1.25
POLCB44	0.44	44.0	3.09	8.00	0.12	0.05	0.05	0.022	0.10	15.9	6.9	2.43	818	1.56
POLCB45	0.93	56.7	3.61	11.8	0.09	0.10	0.06	0.027	0.19	21.2	9.7	2.99	1040	2.58
POLCB46	0.71	35.9	3.81	8.88	0.13	0.05	0.02	0.027	0.11	18.7	9.0	1.28	961	2.03
POLCB47	0.98	54.3	3.19	9.52	0.10	0.05	0.05	0.024	0.14	20.0	8.6	2.88	967	4.66

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
Unit:	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
Sample Description / RDL:	0.05	0.1	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.1	0.1	0.01	1	0.05
POLCB48	0.91	28.2	3.73	11.2	0.12	0.02	0.04	0.035	0.08	15.4	9.4	1.09	1300	4.29
POLCB49	0.85	23.0	2.82	9.38	0.11	<0.02	0.02	0.022	0.06	16.4	7.5	0.82	400	2.09
POLCB50	1.03	34.6	3.28	15.6	0.09	0.02	0.06	0.024	0.11	19.9	9.3	0.95	868	1.36
POLCB51	1.19	17.4	3.08	13.5	0.10	0.02	0.02	0.023	0.11	19.1	9.2	0.80	533	1.24
POLCB52	0.75	44.4	3.01	9.36	0.08	0.07	0.08	0.022	0.15	17.0	7.5	3.45	844	1.41
POLCB53	0.84	46.0	2.98	8.67	0.05	0.14	0.05	0.022	0.19	16.8	7.7	4.06	932	2.25
POLCB54	0.80	40.2	2.93	9.07	<0.05	0.10	0.04	0.022	0.16	17.9	7.6	4.10	942	2.27
POLCB55	0.85	55.8	3.05	8.22	<0.05	0.19	0.04	0.024	0.17	17.1	8.0	4.60	1130	2.09
POLCB56	0.88	43.5	4.45	14.9	0.11	0.05	0.06	0.027	0.17	19.1	9.4	1.32	2810	4.58
POLCB57	0.54	48.6	3.35	12.3	0.14	0.05	0.06	0.026	0.12	18.1	8.5	1.41	932	1.60
POLCB58	0.77	43.1	2.93	8.39	<0.05	0.10	0.05	0.022	0.18	17.9	7.5	3.90	937	1.94
POLCB59	0.75	45.2	2.94	7.65	0.05	0.13	0.05	0.022	0.17	16.5	6.9	4.15	1040	1.55
POLCB60	0.68	44.3	3.11	7.90	<0.05	0.08	0.04	0.018	0.16	12.9	6.6	2.33	844	1.27
POLCB61	0.85	48.2	3.20	10.3	<0.05	0.12	0.05	0.028	0.16	19.5	10.9	4.43	840	1.94
POLCB62	0.78	45.9	3.45	10.9	0.09	0.10	0.05	0.026	0.17	18.7	9.8	3.05	721	1.33
POLCB63	0.72	55.0	3.56	9.06	<0.05	0.12	0.04	0.022	0.16	15.4	8.9	2.49	761	1.10
POLCB64	0.84	62.1	3.37	9.21	<0.05	0.14	0.05	0.029	0.15	19.8	11.1	4.15	1030	1.80
POLQD1	0.49	40.6	2.94	8.57	0.10	0.03	0.05	0.021	0.13	14.1	6.3	3.79	826	1.30
POLQD2	0.79	45.3	3.08	10.4	0.05	0.10	0.05	0.025	0.20	19.0	8.4	3.65	720	1.37
POLQD3	0.70	44.2	3.12	7.99	0.05	0.08	0.04	0.024	0.17	16.1	7.1	4.33	900	1.53
POLQD4	1.26	45.9	3.83	16.2	0.11	0.06	0.07	0.030	0.20	21.9	10.9	1.52	743	1.41
POLQD5	1.02	42.4	3.81	13.8	<0.05	0.12	0.07	0.029	0.15	20.6	11.0	1.62	979	1.54
POLQD6	0.51	41.6	3.00	8.27	0.07	0.08	0.05	0.023	0.13	15.5	7.0	4.27	920	1.36
POLQD7	0.68	28.7	3.18	9.41	<0.05	0.09	0.05	0.021	0.12	14.6	7.9	1.37	896	1.60
POLQD8	1.13	40.5	3.02	9.02	<0.05	0.08	0.05	0.025	0.17	19.1	8.0	4.10	815	2.61
POLQD9	0.73	41.0	2.84	8.44	<0.05	0.08	0.04	0.023	0.17	17.2	7.6	3.70	958	1.53
POLQD10	0.78	38.8	3.12	9.20	<0.05	0.10	0.04	0.022	0.14	16.0	8.0	2.19	683	1.41
POLQD11	0.87	46.7	3.54	9.38	0.06	0.08	0.04	0.028	0.18	19.4	9.1	3.41	1080	2.04
POLQD12	0.58	37.5	2.97	9.33	0.06	0.07	0.05	0.018	0.10	14.4	6.9	1.04	953	1.22
POLQD13	0.70	39.5	3.18	11.4	<0.05	0.07	0.07	0.021	0.11	15.0	8.3	1.04	697	1.14
POLQD14	1.76	25.2	1.95	3.72	<0.05	0.08	0.04	0.015	0.08	12.5	4.9	5.14	372	2.21
POLQD15	0.63	43.1	3.65	12.2	0.12	0.06	0.07	0.026	0.12	18.0	7.5	1.23	544	2.33

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES


ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
Unit:	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
Sample Description RDL:	0.05	0.1	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.1	0.1	0.01	1	0.05
POLQD16	0.56	52.0	2.67	5.05	<0.05	0.07	0.06	0.021	0.09	12.8	6.5	3.81	1070	5.46
POLQD17	0.82	33.2	3.35	10.1	0.08	0.04	0.05	0.024	0.11	16.0	8.2	1.01	857	1.34
POLQD18	0.64	34.4	3.33	9.48	0.09	0.05	0.04	0.024	0.11	19.3	7.7	1.06	864	1.31
POLQD19	0.51	62.5	3.09	5.02	<0.05	0.12	0.04	0.023	0.13	12.0	8.2	4.60	1150	2.19
POLQD20	0.58	49.8	2.76	5.11	<0.05	0.09	0.04	0.021	0.12	16.8	8.1	4.18	940	2.19
POLQD21	0.48	43.5	3.02	7.75	0.06	0.08	0.06	0.025	0.12	14.2	7.6	2.48	650	1.99
POLQD22	0.55	43.8	2.60	4.63	<0.05	0.08	0.04	0.022	0.11	16.1	7.4	4.16	1050	1.97
POLQD23	0.60	33.0	2.59	9.80	0.06	0.07	0.05	0.019	0.09	13.0	7.5	4.34	806	1.14
POLQD24	0.74	28.8	2.67	8.21	0.10	0.05	0.07	0.025	0.10	16.4	7.2	4.04	786	3.82
POLQD25	0.43	25.4	2.70	7.35	0.07	0.10	2.48	0.113	0.10	6.1	1.2	1.08	688	495
POLQD26	0.65	31.1	2.95	8.01	0.08	0.07	0.08	0.025	0.10	14.8	7.2	0.92	481	4.47
POLQD27	0.90	28.3	2.49	9.01	0.07	0.06	0.08	0.026	0.10	18.4	8.5	2.62	408	4.12
POLQD28	0.73	13.6	2.80	9.56	0.08	0.06	0.05	0.024	0.04	18.5	9.0	0.69	412	3.96
POLQD29	0.90	46.5	3.29	9.28	0.08	<0.02	0.03	0.025	0.08	15.6	9.6	1.37	753	3.50
POLQD30	0.55	68.2	3.16	8.13	0.06	0.08	0.04	0.020	0.09	15.9	7.7	2.38	1010	1.21
POLQD31	0.42	33.7	2.73	4.59	<0.05	0.10	0.03	0.019	0.10	14.7	6.7	1.02	1130	1.50
POLQD32	0.55	35.6	2.81	9.56	0.07	0.06	0.04	0.021	0.09	16.0	7.3	1.13	780	1.26
POLQD33	0.65	48.9	3.42	9.73	0.08	0.07	0.05	0.024	0.11	18.1	8.9	1.91	1020	1.37
POLQD34	0.60	48.9	2.86	4.83	<0.05	0.15	0.03	0.020	0.13	14.3	7.6	4.47	978	1.58
POLQD35	0.55	40.6	3.09	10.3	<0.05	0.10	0.04	0.023	0.12	15.4	8.5	1.34	721	1.26
POLQD36	0.54	46.8	3.10	7.91	0.07	0.08	0.04	0.022	0.13	15.9	7.9	3.88	1060	1.70
POLQD37	0.69	46.7	3.39	9.79	<0.05	0.11	0.06	0.024	0.09	15.0	9.8	1.28	1060	1.37
POLQD38	0.78	44.3	3.21	10.1	<0.05	0.10	0.05	0.024	0.09	13.4	10.2	1.20	1040	1.34
POLQD39	0.95	43.1	3.92	10.6	0.10	0.05	0.05	0.028	0.16	25.1	10.6	1.41	1260	1.56
POLQD40	0.66	44.1	3.54	8.71	0.08	0.08	0.05	0.023	0.12	19.3	9.8	2.31	1060	1.49
POLQD41	0.59	40.3	3.49	8.67	0.08	0.07	0.05	0.025	0.11	18.7	8.9	1.69	906	1.28
POLQD42	0.65	34.1	3.34	9.32	0.08	0.07	0.05	0.024	0.10	18.2	8.5	1.16	764	1.18
POLQD43	0.73	47.0	3.87	9.35	0.09	0.06	0.05	0.027	0.13	22.9	10.8	1.51	976	1.43
POLQD44	0.53	44.5	2.86	4.45	<0.05	0.09	0.04	0.023	0.08	16.5	7.6	3.58	706	1.27
POLQD45	0.51	45.0	3.24	7.92	0.07	0.06	0.05	0.024	0.09	16.5	7.7	2.58	1180	1.39
POLQD46	0.56	59.6	3.37	7.92	0.09	0.07	0.06	0.027	0.12	14.3	8.3	1.77	1020	1.42
POLQD47	0.76	34.2	3.07	10.4	0.06	0.07	0.06	0.023	0.10	17.2	8.5	0.95	1110	1.45

Certified By:



Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES


ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Cs	Cu	Fe	Ga	Ge	Hf	Hg	In	K	La	Li	Mg	Mn	Mo
Unit:	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	%	ppm	ppm
Sample Description / RDL:	0.05	0.1	0.01	0.05	0.05	0.02	0.01	0.005	0.01	0.1	0.1	0.01	1	0.05
POLQD48	0.66	25.8	2.62	8.95	0.07	0.04	0.04	0.019	0.09	16.6	7.0	0.84	753	1.13
POLQD49	0.92	21.4	3.04	11.0	0.06	0.02	0.04	0.023	0.08	17.1	9.7	0.90	469	1.38
SOIL 1	0.86	9.8	2.62	8.34	0.10	0.04	0.03	0.019	0.04	14.2	7.2	0.36	209	2.75

Certified By:



Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349
PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description RDL:	0.01	0.05	0.2	10	0.1	0.1	0.001	0.005	0.05	0.1	0.2	0.2	0.2	0.01
POLMH1	0.01	1.87	24.8	692	54.2	9.4	<0.001	0.023	0.66	4.8	0.3	0.3	20.0	<0.01
POLMH2	0.01	4.12	29.0	961	47.2	7.9	0.001	0.043	0.50	4.8	0.7	<0.2	32.3	<0.01
POLMH3	0.01	3.57	32.2	991	60.6	7.9	0.003	0.094	0.61	5.5	1.7	0.2	44.1	<0.01
POLMH4	0.01	2.07	30.0	881	60.9	8.8	<0.001	0.012	0.90	5.4	0.4	<0.2	82.3	<0.01
POLMH5	0.01	2.62	31.7	933	56.9	9.0	<0.001	0.017	0.86	6.0	0.5	0.2	55.8	<0.01
POLMH6	0.01	2.48	34.9	959	59.2	6.4	0.005	0.119	0.79	4.9	7.4	<0.2	52.3	<0.01
POLMH7	0.01	2.80	33.1	915	89.0	8.8	<0.001	0.018	1.06	6.0	0.5	<0.2	47.0	<0.01
POLMH8	0.01	2.39	24.5	739	71.0	9.0	<0.001	0.059	0.64	4.4	0.8	0.2	26.7	<0.01
POLMH9	0.01	3.72	33.1	877	82.2	9.9	<0.001	0.052	1.01	5.4	0.7	0.2	32.5	<0.01
POLMH10	0.01	4.21	31.6	643	61.7	10.0	<0.001	0.045	0.79	5.4	0.4	0.2	31.2	<0.01
POLMH11	0.01	2.48	27.8	688	39.9	7.6	<0.001	0.079	0.68	3.2	0.5	<0.2	28.7	<0.01
POLMH12	0.02	3.66	48.8	719	66.2	15.3	<0.001	0.016	1.06	7.5	0.5	0.5	34.7	<0.01
POLMH13	0.01	2.54	32.0	1100	42.8	6.5	<0.001	0.088	0.90	3.0	0.6	<0.2	36.0	<0.01
POLMH14	0.01	3.07	33.7	953	50.0	9.4	<0.001	0.016	0.85	5.6	0.4	0.2	44.4	<0.01
POLMH15	0.01	2.49	42.7	704	84.3	8.8	0.002	0.050	0.97	4.5	0.6	<0.2	28.9	<0.01
POLMH16	0.01	3.01	36.8	806	49.6	10.5	<0.001	0.041	0.91	5.2	0.5	0.3	28.5	<0.01
POLMH17	0.01	2.59	39.0	962	42.2	9.4	0.004	0.092	0.55	5.4	1.2	<0.2	63.1	<0.01
POLMH18	0.01	4.40	39.4	1070	55.9	10.9	<0.001	0.032	0.93	6.3	0.6	0.3	39.8	<0.01
POLMH19	0.02	2.53	24.8	1020	28.0	6.6	<0.001	0.137	0.71	3.0	0.5	<0.2	37.3	<0.01
POLMH20	0.01	1.88	32.5	903	44.6	9.2	<0.001	0.009	0.82	5.5	0.3	0.3	52.1	<0.01
POLMH21	0.01	4.07	32.5	1040	58.4	8.0	<0.001	0.062	0.77	5.1	1.1	0.3	33.3	<0.01
POLMH22	0.01	4.50	31.0	904	57.0	7.6	<0.001	0.024	0.67	5.6	0.5	0.2	32.2	<0.01
POLMH23	0.01	2.19	23.1	885	47.9	6.2	0.002	0.108	0.64	3.2	0.6	0.2	26.3	<0.01
POLMH24	0.02	0.38	8.3	1000	6.7	1.4	<0.001	0.186	0.40	0.4	1.2	0.4	45.1	0.01
POLMH25	0.01	1.01	9.4	1180	13.9	3.0	<0.001	0.208	0.60	0.9	0.6	0.5	47.4	0.01
POLMH26	0.01	2.00	19.7	1050	23.1	9.0	<0.001	0.180	0.66	3.0	0.6	<0.2	35.1	<0.01
POLMH27	0.01	2.89	27.9	1030	49.6	9.0	0.002	0.123	0.69	4.2	2.0	<0.2	42.6	<0.01
POLMH28	0.01	2.13	30.9	888	56.3	7.9	<0.001	0.012	0.84	5.2	0.4	<0.2	75.6	<0.01
POLMH29	0.02	2.39	33.8	1050	44.6	8.7	<0.001	0.011	0.78	5.4	0.3	0.2	41.9	<0.01
POLMH30	0.02	2.64	31.9	1120	43.7	8.2	0.002	0.071	0.78	4.6	0.8	<0.2	48.4	<0.01
POLMH31	0.01	3.79	31.8	988	54.2	10.6	0.001	0.040	0.67	5.9	0.8	0.3	41.7	<0.01
POLMH32	0.01	2.64	40.3	803	78.8	11.0	<0.001	0.034	1.29	5.7	0.6	0.3	23.2	<0.01

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 **DATE RECEIVED: Jun 27, 2012** **DATE REPORTED: Jul 12, 2012** **SAMPLE TYPE: Soil**

Analyte:	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description RDL:	0.01	0.05	0.2	10	0.1	0.1	0.001	0.005	0.05	0.1	0.2	0.2	0.2	0.01
POLMH33	0.01	2.79	23.4	653	63.5	7.8	<0.001	0.081	0.71	4.2	0.4	<0.2	25.6	<0.01
POLMH34	0.01	1.84	24.9	849	61.0	7.1	0.001	0.137	0.55	3.6	0.4	<0.2	38.2	<0.01
POLMH35	0.01	4.06	29.8	932	61.4	7.7	0.003	0.059	0.61	5.5	1.0	<0.2	32.8	<0.01
POLMH36	<0.01	1.98	13.9	717	35.0	4.9	0.002	0.103	0.40	3.3	10.8	<0.2	14.4	<0.01
POLMH37	0.02	3.85	24.2	871	41.9	6.2	0.008	0.135	0.57	4.6	2.8	<0.2	35.9	<0.01
POLMH38	0.02	4.21	30.1	973	53.9	9.4	0.002	0.056	0.55	5.7	2.0	0.2	46.7	<0.01
POLMH39	0.02	3.96	28.6	1070	45.2	10.1	0.003	0.073	0.66	5.4	3.0	0.3	32.6	<0.01
POLMH40	0.01	4.49	27.0	914	49.3	8.7	0.005	0.065	0.54	5.3	1.2	0.2	51.6	<0.01
POLMH41	0.02	3.26	32.7	876	52.9	8.5	<0.001	0.024	0.84	5.8	0.6	0.3	44.4	<0.01
POLMH42	0.02	2.68	38.3	1020	51.0	9.3	<0.001	0.016	0.91	5.4	0.3	0.2	36.3	<0.01
POLMH43	0.01	2.81	31.7	850	57.4	11.1	<0.001	0.067	0.65	5.1	0.8	<0.2	39.7	<0.01
POLMH44	<0.01	2.01	29.4	541	54.7	8.1	<0.001	0.013	0.91	5.0	0.3	0.2	14.5	<0.01
POLMH45	0.01	1.78	43.1	852	88.7	10.2	<0.001	0.026	1.42	5.4	0.5	0.2	22.3	<0.01
POLMH46	0.01	3.17	30.2	468	71.7	12.2	<0.001	0.015	1.06	5.6	0.3	0.4	18.5	<0.01
POLMH47	0.02	2.29	19.5	802	30.2	7.1	<0.001	0.067	0.53	3.2	0.3	<0.2	26.5	<0.01
POLMH48	0.01	3.52	23.1	945	39.5	9.2	<0.001	0.047	0.61	4.3	0.4	<0.2	27.3	<0.01
POLMH49	0.01	2.04	25.7	903	39.2	8.4	<0.001	0.046	0.61	4.1	0.3	<0.2	20.8	<0.01
POLMH50	0.01	3.20	28.9	881	51.2	9.7	<0.001	0.023	0.76	5.4	0.4	0.2	22.4	<0.01
POLMH51	0.01	1.20	24.8	735	36.4	7.5	<0.001	0.050	0.53	3.4	<0.2	<0.2	18.0	<0.01
POLMH52	0.01	3.45	38.9	965	67.3	11.0	<0.001	0.038	0.98	6.3	0.5	0.3	22.8	<0.01
POLMH53	0.01	3.28	29.2	734	49.5	12.6	<0.001	0.031	0.70	5.7	0.3	0.3	20.5	<0.01
POLMH54	<0.01	2.71	23.7	511	34.1	15.7	<0.001	0.016	0.55	5.5	0.3	0.5	18.6	<0.01
POLMH55	<0.01	3.44	20.3	242	33.8	21.4	<0.001	0.010	0.69	4.4	<0.2	0.6	12.7	<0.01
POLMH56	0.01	3.34	27.6	886	50.1	10.9	<0.001	0.037	0.67	5.0	0.4	0.2	23.0	<0.01
POLMH57	0.01	1.61	21.0	681	39.2	11.2	<0.001	0.038	0.48	3.4	<0.2	<0.2	17.4	<0.01
POLMH58	0.01	1.09	19.7	937	29.4	8.4	<0.001	0.060	0.41	2.6	0.4	<0.2	23.1	<0.01
POLMH59	<0.01	2.14	25.2	564	28.4	8.9	<0.001	0.008	0.41	4.3	<0.2	0.3	17.3	<0.01
POLMH60	<0.01	3.11	15.7	250	32.5	17.3	<0.001	0.009	0.30	4.3	<0.2	0.6	17.6	<0.01
POLMH61	0.02	2.98	32.6	853	46.5	10.7	<0.001	0.015	0.81	5.9	0.5	0.3	27.9	<0.01
POLMH62	0.01	3.79	26.7	870	52.6	15.0	<0.001	0.035	0.60	5.5	0.3	0.4	25.5	<0.01
POLMH63	<0.01	3.53	30.6	348	53.5	15.4	<0.001	0.015	0.83	6.7	0.2	0.6	15.4	<0.01
POLMH64	0.01	2.78	23.0	705	35.8	9.4	<0.001	0.022	0.56	4.6	0.3	0.3	20.6	<0.01

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349
PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 **DATE RECEIVED: Jun 27, 2012** **DATE REPORTED: Jul 12, 2012** **SAMPLE TYPE: Soil**

Analyte:	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description RDL:	0.01	0.05	0.2	10	0.1	0.1	0.001	0.005	0.05	0.1	0.2	0.2	0.2	0.01
POLMH65	<0.01	1.95	28.2	716	47.6	8.8	<0.001	0.028	0.59	4.5	0.4	0.3	19.4	<0.01
POLMH66	0.02	3.40	32.0	984	49.2	10.6	0.004	0.050	0.49	5.2	1.1	0.2	33.4	<0.01
POLMH67	0.01	4.17	25.4	1010	46.7	9.1	<0.001	0.021	0.56	4.9	0.5	0.2	27.8	<0.01
POLMH68	0.02	3.87	28.2	932	45.2	9.6	<0.001	0.018	0.76	5.5	0.5	0.2	28.0	<0.01
POLMH69	0.01	2.71	29.8	953	40.3	9.6	<0.001	0.011	0.93	5.5	0.4	0.2	37.2	<0.01
POLMH70	0.02	2.71	35.8	934	58.9	11.4	<0.001	0.015	0.91	6.8	0.5	0.3	27.8	<0.01
POLMH71	0.02	1.95	30.3	1070	44.0	9.1	0.001	0.089	0.72	4.6	1.1	<0.2	31.4	<0.01
POLMH72	<0.01	2.25	33.5	963	60.5	8.6	<0.001	0.050	0.77	5.2	0.8	<0.2	24.0	<0.01
POLMH73	0.01	1.90	36.8	877	73.1	9.2	<0.001	0.012	0.99	6.4	0.4	<0.2	43.7	<0.01
POLMH74	0.01	2.20	27.5	839	57.3	5.3	0.003	0.057	0.59	4.7	1.8	<0.2	29.9	<0.01
POLMH75	0.01	4.12	33.0	841	70.8	10.6	<0.001	0.026	0.97	6.2	0.6	0.2	52.9	<0.01
POLMH76	0.01	3.05	33.5	911	71.2	7.2	<0.001	0.029	0.80	5.8	0.4	<0.2	32.7	<0.01
POLMH77	0.02	2.95	33.7	970	61.2	8.1	0.002	0.092	0.73	5.2	1.7	<0.2	32.6	<0.01
POLMH78	0.01	3.24	32.6	856	70.7	8.8	<0.001	0.037	0.69	5.8	0.5	<0.2	22.1	<0.01
POLMH79	0.01	2.92	34.4	893	65.8	13.3	<0.001	0.056	0.76	5.3	0.7	<0.2	25.1	<0.01
POLMH80	0.01	2.29	27.7	768	57.8	8.7	<0.001	0.055	0.71	4.2	0.7	<0.2	29.9	<0.01
POLMH81	<0.01	1.07	17.8	689	45.4	6.3	<0.001	0.112	0.63	2.1	1.2	<0.2	34.2	<0.01
POLCB1	0.01	3.03	43.8	934	92.2	10.6	0.001	0.036	1.19	6.1	1.0	<0.2	42.2	<0.01
POLCB2	0.01	5.46	20.1	766	53.8	6.9	0.009	0.139	0.32	4.4	1.5	<0.2	51.8	<0.01
POLCB3	0.01	4.24	33.4	962	70.2	9.4	<0.001	0.027	0.74	6.6	0.5	<0.2	50.9	<0.01
POLCB4	0.01	4.17	31.0	885	68.0	10.4	<0.001	0.018	0.83	6.2	0.4	0.2	59.7	<0.01
POLCB5	0.01	5.48	36.4	879	99.4	9.5	0.003	0.098	0.92	7.1	1.0	<0.2	68.9	<0.01
POLCB6	0.01	2.46	33.3	836	78.8	10.7	<0.001	0.011	0.91	6.9	0.3	0.2	58.8	<0.01
POLCB7	0.02	5.03	35.9	983	67.9	10.8	0.003	0.078	0.74	6.4	0.7	0.3	37.2	<0.01
POLCB8	0.01	4.31	31.2	948	64.6	10.7	0.002	0.079	0.43	5.4	1.2	<0.2	61.9	<0.01
POLCB9	0.01	1.78	32.0	850	50.1	10.0	<0.001	0.008	0.87	5.4	0.4	0.2	77.6	<0.01
POLCB10	0.02	1.60	30.9	859	54.8	9.4	0.001	0.019	0.92	5.3	0.5	0.2	54.5	<0.01
POLCB11	<0.01	2.38	26.6	822	35.8	5.3	<0.001	0.010	0.16	4.3	0.4	<0.2	39.1	<0.01
POLCB12	0.01	3.73	33.2	739	64.4	11.3	<0.001	0.017	0.87	6.4	0.7	0.3	46.2	<0.01
POLCB13	0.01	4.56	35.7	558	81.0	14.0	<0.001	0.041	0.69	7.4	0.9	0.3	31.5	<0.01
POLCB14	0.01	2.76	25.5	733	51.8	8.4	<0.001	0.013	1.00	5.5	0.4	0.3	18.8	<0.01
POLCB15	0.01	2.29	39.9	865	66.8	11.4	0.003	0.061	0.93	5.2	1.4	<0.2	41.2	<0.01

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349
PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description RDL:	0.01	0.05	0.2	10	0.1	0.1	0.001	0.005	0.05	0.1	0.2	0.2	0.2	0.01
POLCB16	<0.01	2.70	34.6	1030	70.9	5.9	<0.001	0.031	1.30	4.6	0.4	<0.2	32.9	<0.01
POLCB17	0.01	1.30	23.9	1040	56.4	8.9	<0.001	0.049	0.55	4.0	0.5	0.3	23.6	<0.01
POLCB18	<0.01	1.50	27.7	299	58.4	12.0	<0.001	0.010	0.69	5.5	0.5	0.4	15.6	<0.01
POLCB19	0.01	2.50	31.8	442	50.6	14.0	<0.001	0.014	0.70	5.6	0.3	0.6	21.3	<0.01
POLCB20	0.01	2.21	26.8	809	41.8	13.2	<0.001	0.037	0.55	4.0	0.4	0.3	25.6	<0.01
POLCB21	<0.01	2.43	24.3	468	43.9	16.6	<0.001	0.014	0.58	4.6	0.2	0.4	17.2	<0.01
POLCB22	0.01	1.66	23.4	661	46.7	12.1	<0.001	0.020	0.55	4.7	0.3	0.4	21.8	<0.01
POLCB23	0.01	2.57	32.9	929	65.7	8.4	<0.001	0.013	1.09	6.4	0.3	<0.2	42.7	<0.01
POLCB24	0.01	1.08	31.4	920	57.7	7.3	<0.001	0.007	0.96	5.5	0.3	<0.2	65.9	<0.01
POLCB25	0.01	2.43	23.5	897	42.9	9.2	0.005	0.063	0.40	4.6	0.8	<0.2	43.3	<0.01
POLCB26	0.02	4.11	26.7	905	52.0	10.5	<0.001	0.021	0.78	6.1	0.8	0.2	48.9	<0.01
POLCB27	0.01	2.10	26.1	762	55.2	12.5	<0.001	0.038	0.71	4.6	0.4	0.2	23.1	<0.01
POLCB28	0.01	1.93	38.0	1050	80.7	8.3	<0.001	0.027	1.16	5.1	0.5	0.2	22.8	<0.01
POLCB29	0.01	2.29	37.1	869	77.4	7.5	<0.001	0.021	1.35	5.3	0.5	<0.2	24.4	<0.01
POLCB30	0.01	1.86	24.9	969	53.7	12.0	<0.001	0.039	0.65	5.1	0.4	0.4	22.9	<0.01
POLCB31	0.01	2.00	25.5	870	43.6	6.4	<0.001	0.037	0.59	4.4	0.3	<0.2	21.4	<0.01
POLCB32	0.01	2.25	23.8	725	54.5	7.6	<0.001	0.044	0.49	4.4	1.2	<0.2	25.8	<0.01
POLCB33	0.01	3.17	31.5	909	60.7	9.6	<0.001	0.029	0.76	6.2	0.7	0.2	24.4	<0.01
POLCB34	0.01	3.69	31.2	780	72.2	8.7	<0.001	0.033	0.64	6.0	0.9	<0.2	33.3	<0.01
POLCB35	0.01	3.57	40.2	862	77.5	10.0	<0.001	0.028	0.87	6.8	0.9	0.2	26.9	<0.01
POLCB36	0.01	2.86	33.7	842	82.1	8.5	<0.001	0.018	1.03	6.6	0.4	<0.2	36.7	<0.01
POLCB37	<0.01	1.77	34.2	841	87.8	8.5	<0.001	0.037	0.77	5.6	0.7	<0.2	25.5	<0.01
POLCB38	<0.01	3.50	34.0	846	71.4	10.0	<0.001	0.035	0.91	6.3	0.4	<0.2	29.8	<0.01
POLCB39	0.02	2.75	36.6	975	65.5	12.2	<0.001	0.054	0.84	5.9	0.6	0.5	33.0	<0.01
POLCB40	0.01	2.01	41.4	767	76.9	15.1	<0.001	0.024	0.75	6.4	0.7	0.5	17.3	<0.01
POLCB41	0.01	0.23	27.2	556	44.1	5.9	<0.001	0.053	0.53	3.2	0.3	0.3	28.7	<0.01
POLCB42	0.02	1.26	32.6	914	52.8	9.8	<0.001	0.053	0.94	5.4	0.4	0.5	42.5	<0.01
POLCB43	0.01	1.50	37.4	847	76.0	8.3	<0.001	0.045	0.96	5.0	0.4	0.4	26.9	<0.01
POLCB44	0.01	1.54	36.3	907	51.0	7.5	<0.001	0.044	0.97	4.4	0.4	0.3	27.7	<0.01
POLCB45	0.02	2.26	44.2	969	65.9	13.0	<0.001	0.045	1.31	6.2	0.5	0.6	37.3	<0.01
POLCB46	0.01	2.54	36.1	533	65.0	10.1	<0.001	0.022	0.95	5.3	0.4	0.6	17.6	<0.01
POLCB47	0.02	1.74	44.9	1050	79.2	11.4	<0.001	0.043	1.58	5.5	0.5	0.5	30.4	<0.01

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349
PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description RDL:	0.01	0.05	0.2	10	0.1	0.1	0.001	0.005	0.05	0.1	0.2	0.2	0.2	0.01
POLCB48	0.01	1.26	33.4	601	87.6	10.7	<0.001	0.031	1.18	4.7	0.4	0.5	11.4	<0.01
POLCB49	0.01	1.41	25.0	535	52.9	7.8	<0.001	0.017	0.63	3.5	0.2	0.5	13.5	<0.01
POLCB50	0.02	1.91	35.4	819	39.5	11.6	<0.001	0.022	0.72	5.0	0.4	0.6	24.6	<0.01
POLCB51	0.02	2.36	26.6	456	27.5	12.3	<0.001	0.021	0.52	4.1	0.3	0.7	21.7	<0.01
POLCB52	0.02	1.10	33.3	919	50.1	9.5	<0.001	0.067	0.87	4.6	0.4	0.4	57.7	<0.01
POLCB53	0.02	1.20	33.1	949	57.8	11.1	<0.001	0.091	0.96	5.0	0.6	0.4	74.5	<0.01
POLCB54	0.02	1.97	29.8	1030	45.9	10.3	<0.001	0.081	0.82	5.0	0.5	0.5	66.6	<0.01
POLCB55	0.01	1.30	33.0	901	77.0	10.6	0.001	0.098	0.95	5.5	0.7	0.4	69.6	<0.01
POLCB56	0.02	3.18	42.0	1250	65.3	11.9	0.010	0.093	0.80	5.2	2.4	0.5	43.3	<0.01
POLCB57	0.02	0.81	40.6	998	53.3	7.5	<0.001	0.022	0.93	5.1	0.4	0.4	27.3	<0.01
POLCB58	0.02	2.74	32.1	977	51.9	10.6	0.001	0.080	0.90	4.9	0.7	0.5	63.5	<0.01
POLCB59	0.02	1.18	33.1	960	48.6	10.0	<0.001	0.076	0.89	4.6	0.5	0.4	63.1	<0.01
POLCB60	0.02	2.56	34.2	973	42.6	9.1	<0.001	0.059	0.69	4.1	0.7	0.4	37.1	<0.01
POLCB61	0.01	3.66	36.2	976	89.5	11.9	0.001	0.088	1.10	6.4	0.8	0.5	56.5	<0.01
POLCB62	0.01	3.07	38.5	968	62.6	11.0	<0.001	0.056	0.88	5.2	0.8	0.5	35.3	<0.01
POLCB63	0.02	3.26	40.3	982	62.3	9.2	<0.001	0.056	0.92	4.9	0.8	0.4	31.1	<0.01
POLCB64	0.01	2.16	37.2	876	102	11.3	<0.001	0.072	1.29	6.6	0.6	0.5	54.2	<0.01
POLQD1	0.02	0.51	33.8	768	43.4	7.3	<0.001	0.077	0.78	3.0	0.4	0.3	62.3	<0.01
POLQD2	0.02	6.19	35.4	999	64.8	12.1	<0.001	0.100	0.95	5.4	0.8	0.5	59.1	<0.01
POLQD3	0.02	2.99	33.8	952	62.6	9.5	<0.001	0.092	0.94	4.7	0.5	0.4	74.0	<0.01
POLQD4	0.02	3.35	45.0	826	61.1	15.6	<0.001	0.039	0.87	5.7	0.6	0.7	31.4	<0.01
POLQD5	0.02	5.21	43.5	990	68.8	12.0	<0.001	0.047	0.96	6.0	0.6	0.6	29.1	<0.01
POLQD6	0.01	2.66	33.1	1030	62.4	8.3	<0.001	0.079	0.89	4.5	0.5	0.4	46.6	<0.01
POLQD7	0.02	4.29	29.4	997	49.8	9.4	<0.001	0.084	0.59	4.0	0.8	0.5	32.9	<0.01
POLQD8	0.02	3.40	31.2	999	60.0	12.1	<0.001	0.083	0.85	5.3	0.7	0.5	53.3	<0.01
POLQD9	0.02	3.47	31.8	941	60.7	10.4	<0.001	0.085	0.93	5.1	0.6	0.5	60.4	<0.01
POLQD10	0.02	5.54	32.2	855	62.8	10.7	0.002	0.105	0.81	4.8	1.0	0.5	42.0	<0.01
POLQD11	0.02	2.67	39.4	938	74.5	11.7	<0.001	0.060	1.13	5.6	0.6	0.5	39.9	<0.01
POLQD12	0.02	1.94	31.4	855	29.0	7.6	<0.001	0.057	0.62	3.5	0.6	0.4	29.2	<0.01
POLQD13	0.02	2.03	34.6	837	37.5	9.1	<0.001	0.059	0.69	3.7	0.7	0.4	26.9	<0.01
POLQD14	0.01	3.17	28.6	906	35.7	5.2	0.004	0.149	0.44	2.9	1.6	0.3	51.1	<0.01
POLQD15	0.01	2.21	36.5	1100	64.6	9.6	<0.001	0.039	0.95	4.6	0.6	0.4	28.5	<0.01

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349
PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description RDL:	0.01	0.05	0.2	10	0.1	0.1	0.001	0.005	0.05	0.1	0.2	0.2	0.2	0.01
POLQD16	0.01	1.87	40.6	1010	77.5	7.4	0.001	0.093	1.50	4.0	0.7	0.3	45.3	<0.01
POLQD17	0.02	1.93	30.1	934	50.8	11.8	<0.001	0.052	0.73	4.4	0.4	0.5	21.7	<0.01
POLQD18	0.01	2.47	32.3	960	51.3	10.4	<0.001	0.037	0.80	4.4	0.5	0.5	22.3	<0.01
POLQD19	0.01	0.81	32.3	850	86.4	7.5	<0.001	0.094	1.05	5.3	0.4	0.3	55.2	<0.01
POLQD20	0.01	2.40	29.5	827	70.5	8.1	<0.001	0.072	1.03	5.5	0.5	0.4	39.3	<0.01
POLQD21	0.01	2.84	30.9	873	68.1	8.3	0.001	0.103	0.80	4.8	0.9	0.4	41.2	<0.01
POLQD22	0.01	3.05	27.7	803	95.9	7.7	<0.001	0.089	0.91	5.1	0.6	0.4	45.9	<0.01
POLQD23	0.01	1.88	24.1	892	39.3	8.4	<0.001	0.090	0.69	3.8	0.6	0.4	49.2	<0.01
POLQD24	0.01	1.11	25.1	996	92.9	7.3	<0.001	0.090	1.67	4.6	0.5	0.3	52.3	<0.01
POLQD25	0.01	0.21	28.4	763	247	3.1	0.057	0.085	6.58	0.6	0.6	10.2	44.6	<0.01
POLQD26	0.02	0.93	29.4	886	95.9	6.2	<0.001	0.020	1.74	4.4	0.6	0.3	24.7	<0.01
POLQD27	0.01	1.58	26.7	1010	99.5	8.5	<0.001	0.091	1.79	5.2	0.6	0.4	41.9	<0.01
POLQD28	<0.01	2.01	21.4	472	76.1	8.1	<0.001	0.026	1.31	4.7	0.5	0.4	9.3	<0.01
POLQD29	0.01	1.57	39.4	1010	70.9	8.0	<0.001	0.030	0.76	3.3	0.2	0.6	19.5	<0.01
POLQD30	0.01	3.16	47.1	1050	50.8	9.6	0.004	0.037	0.48	4.1	0.8	0.5	25.4	<0.01
POLQD31	0.02	3.76	29.7	1140	53.7	7.2	0.002	0.096	0.53	4.2	0.8	0.4	28.3	<0.01
POLQD32	0.02	2.10	28.5	997	47.2	8.6	<0.001	0.066	0.77	4.0	0.6	0.4	26.9	<0.01
POLQD33	0.01	2.02	36.5	863	60.9	9.0	<0.001	0.036	0.89	5.1	0.5	0.4	22.9	<0.01
POLQD34	0.01	1.32	31.0	908	63.8	8.0	<0.001	0.089	0.92	4.7	0.4	0.4	64.1	<0.01
POLQD35	0.01	2.79	31.2	690	58.5	10.3	<0.001	0.079	0.84	4.7	0.9	0.4	29.8	<0.01
POLQD36	0.01	1.54	32.3	876	68.0	7.9	<0.001	0.070	0.93	4.9	0.5	0.4	42.0	<0.01
POLQD37	<0.01	1.49	34.8	1010	66.4	9.6	<0.001	0.066	0.97	3.8	0.6	0.3	20.7	<0.01
POLQD38	0.01	1.39	33.3	924	55.5	10.1	<0.001	0.080	0.88	3.6	0.6	0.3	21.6	<0.01
POLQD39	0.01	2.53	41.1	735	73.6	12.1	<0.001	0.024	1.10	6.4	0.5	0.6	21.3	<0.01
POLQD40	0.01	2.67	38.5	886	63.9	9.0	<0.001	0.045	0.99	5.4	0.4	0.5	24.6	<0.01
POLQD41	0.01	2.51	35.6	780	58.1	9.3	<0.001	0.041	0.94	5.1	0.4	0.5	20.3	<0.01
POLQD42	<0.01	2.45	31.6	1020	69.0	11.3	<0.001	0.044	0.72	4.8	0.5	0.4	18.1	<0.01
POLQD43	0.01	2.48	40.8	663	66.1	9.6	<0.001	0.023	1.04	6.3	0.5	0.5	16.7	<0.01
POLQD44	<0.01	3.07	30.2	964	56.1	6.6	<0.001	0.060	0.94	5.5	0.4	0.4	28.8	<0.01
POLQD45	0.01	1.50	35.8	873	64.0	7.8	<0.001	0.050	0.92	4.6	0.5	0.4	24.8	<0.01
POLQD46	0.01	1.66	41.9	940	67.4	8.3	<0.001	0.068	1.19	4.2	0.5	0.3	21.2	<0.01
POLQD47	0.01	2.38	29.1	1210	48.4	10.5	<0.001	0.070	0.65	4.3	0.7	0.5	24.8	<0.01

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349
PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Na	Nb	Ni	P	Pb	Rb	Re	S	Sb	Sc	Se	Sn	Sr	Ta
Unit:	%	ppm	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description / RDL:	0.01	0.05	0.2	10	0.1	0.1	0.001	0.005	0.05	0.1	0.2	0.2	0.2	0.01
POLQD48	0.01	2.41	24.7	1030	36.4	10.1	<0.001	0.050	0.55	4.0	0.4	0.5	24.3	<0.01
POLQD49	0.01	2.71	24.5	375	40.2	9.2	<0.001	0.014	0.55	4.2	0.3	0.7	15.6	<0.01
SOIL 1	<0.01	1.50	13.2	210	21.5	7.6	<0.001	0.008	0.49	1.8	<0.2	0.8	8.5	<0.01

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349
PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Te	Th	Ti	Tl	U	V	W	Y	Zn	Zr
Unit:	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description RDL:	0.01	0.1	0.005	0.01	0.05	0.5	0.05	0.05	0.5	0.5
POLMH1	3.23	2.9	0.071	0.14	1.69	66.8	0.21	8.42	126	0.8
POLMH2	3.28	3.2	0.133	0.10	1.34	57.3	0.14	8.64	155	2.6
POLMH3	4.81	3.2	0.095	0.12	1.94	55.4	0.12	10.1	180	3.7
POLMH4	2.89	4.0	0.147	0.15	0.88	56.2	0.15	9.17	159	6.0
POLMH5	3.17	4.7	0.154	0.15	0.87	61.7	0.19	10.4	188	7.1
POLMH6	4.20	2.6	0.066	0.11	1.97	48.0	0.11	9.99	160	4.2
POLMH7	3.12	4.0	0.113	0.13	0.74	62.4	0.20	10.7	171	3.8
POLMH8	3.47	1.8	0.065	0.15	3.13	55.6	0.10	8.31	129	1.4
POLMH9	3.64	2.4	0.119	0.15	1.80	66.1	0.15	10.1	164	2.5
POLMH10	3.08	2.3	0.123	0.13	0.90	66.0	0.17	9.66	141	2.1
POLMH11	3.37	1.1	0.054	0.10	1.74	46.2	0.09	7.55	113	1.8
POLMH12	4.94	5.6	0.162	0.22	0.91	83.6	0.20	13.2	177	3.4
POLMH13	4.23	1.0	0.049	0.10	1.79	41.9	0.08	10.3	149	2.1
POLMH14	3.50	4.5	0.121	0.14	0.66	58.3	0.16	10.4	151	3.4
POLMH15	3.31	2.8	0.084	0.26	1.25	59.1	0.13	8.30	409	1.7
POLMH16	4.40	2.9	0.083	0.16	1.03	58.8	0.16	11.0	146	2.3
POLMH17	4.21	2.3	0.090	0.16	1.20	62.7	0.11	8.72	166	3.1
POLMH18	3.45	4.3	0.128	0.17	0.77	64.0	0.30	11.3	169	3.7
POLMH19	2.98	1.0	0.058	0.11	2.34	38.0	0.12	5.80	154	2.7
POLMH20	3.95	4.8	0.113	0.14	0.69	55.0	0.19	10.2	133	3.8
POLMH21	4.35	2.9	0.104	0.12	2.18	58.6	0.15	9.74	153	2.8
POLMH22	3.22	4.1	0.141	0.10	0.76	61.1	0.19	10.0	136	4.6
POLMH23	3.35	1.0	0.052	0.11	2.66	40.0	0.09	6.79	91.3	1.7
POLMH24	2.52	0.1	0.011	0.04	2.28	5.3	<0.05	3.45	47.4	1.7
POLMH25	2.21	0.2	0.024	0.06	2.11	13.8	<0.05	3.63	63.2	1.9
POLMH26	2.27	0.8	0.045	0.11	0.82	35.6	0.09	4.33	146	2.8
POLMH27	4.35	1.5	0.068	0.11	3.45	49.2	0.17	8.05	180	2.6
POLMH28	3.00	3.8	0.120	0.14	0.81	53.7	0.14	8.93	157	5.8
POLMH29	2.92	4.9	0.121	0.14	0.77	56.2	0.18	9.99	145	5.3
POLMH30	5.55	3.3	0.082	0.12	1.78	50.4	0.17	8.80	154	3.2
POLMH31	4.40	4.2	0.133	0.13	1.02	65.4	0.14	10.5	162	2.4
POLMH32	2.65	3.1	0.099	0.22	1.48	114	0.17	8.99	235	2.0

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Te	Th	Ti	Tl	U	V	W	Y	Zn	Zr
Unit:	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description RDL:	0.01	0.1	0.005	0.01	0.05	0.5	0.05	0.05	0.5	0.5
POLMH33	2.98	1.4	0.076	0.10	1.23	62.9	0.11	7.47	152	1.6
POLMH34	2.92	1.1	0.052	0.10	2.94	41.6	0.10	7.96	252	1.9
POLMH35	2.89	3.9	0.115	0.11	4.77	55.0	0.14	9.72	167	3.8
POLMH36	2.07	1.3	0.048	0.10	51.0	34.0	0.14	5.38	55.8	1.5
POLMH37	2.44	3.8	0.100	0.10	6.80	46.1	0.19	8.70	125	4.8
POLMH38	3.17	4.8	0.125	0.13	1.63	59.6	0.14	9.97	164	6.5
POLMH39	2.77	4.7	0.113	0.14	10.3	58.7	0.18	9.96	164	3.9
POLMH40	2.93	4.5	0.130	0.14	2.01	54.0	0.15	9.90	131	6.3
POLMH41	3.99	4.3	0.108	0.13	0.85	57.1	0.20	9.82	148	3.9
POLMH42	3.74	4.6	0.103	0.14	0.80	56.0	0.20	10.0	166	3.6
POLMH43	3.48	2.6	0.087	0.17	3.12	62.5	0.12	9.46	197	1.9
POLMH44	2.00	3.6	0.101	0.15	1.14	68.9	0.20	9.28	118	1.0
POLMH45	4.31	2.5	0.066	0.21	1.89	104	0.19	11.2	254	1.5
POLMH46	2.43	4.6	0.118	0.23	1.71	94.3	0.22	8.09	154	2.1
POLMH47	2.65	1.5	0.071	0.08	0.67	40.2	0.10	6.17	109	1.8
POLMH48	2.15	2.7	0.115	0.09	0.70	53.2	0.15	8.26	147	2.1
POLMH49	2.73	1.8	0.068	0.09	0.71	54.6	0.14	8.29	134	1.5
POLMH50	2.54	3.6	0.131	0.12	0.77	64.9	0.16	10.1	128	1.5
POLMH51	2.51	1.3	0.032	0.10	0.51	48.3	0.11	5.81	161	1.4
POLMH52	2.78	3.2	0.120	0.14	0.92	72.2	0.15	11.6	168	2.4
POLMH53	2.39	2.7	0.125	0.15	0.75	76.8	0.19	7.34	149	1.2
POLMH54	3.20	2.8	0.117	0.17	0.96	75.4	0.17	7.10	110	0.6
POLMH55	2.22	2.9	0.121	0.21	0.51	97.0	0.17	3.32	112	1.3
POLMH56	2.56	2.4	0.126	0.12	1.05	63.5	0.18	9.95	123	1.3
POLMH57	2.45	1.3	0.053	0.10	0.64	52.8	0.12	4.39	139	1.0
POLMH58	3.10	0.7	0.032	0.09	1.35	40.3	0.18	7.97	119	1.0
POLMH59	2.39	4.1	0.100	0.14	0.67	57.4	0.19	6.66	87.4	1.2
POLMH60	3.16	3.7	0.123	0.22	0.69	75.4	0.24	4.28	70.7	0.6
POLMH61	3.16	4.2	0.132	0.14	0.85	64.5	0.19	11.6	115	1.3
POLMH62	2.97	2.2	0.164	0.14	0.96	75.0	0.18	8.14	178	1.2
POLMH63	3.49	4.1	0.133	0.21	0.97	86.3	0.23	8.67	137	1.2
POLMH64	2.59	2.4	0.115	0.11	0.89	58.0	0.20	7.91	106	1.0

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Te	Th	Ti	Tl	U	V	W	Y	Zn	Zr
Unit:	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description RDL:	0.01	0.1	0.005	0.01	0.05	0.5	0.05	0.05	0.5	0.5
POLMH65	4.55	1.4	0.060	0.14	1.14	66.7	0.17	9.25	140	0.7
POLMH66	5.06	3.8	0.104	0.12	1.04	59.8	0.12	9.16	158	2.1
POLMH67	2.93	4.2	0.139	0.10	0.92	57.4	0.17	9.37	118	2.2
POLMH68	2.81	4.4	0.127	0.12	0.68	56.9	0.17	9.89	122	3.1
POLMH69	2.70	4.9	0.136	0.13	0.74	57.7	0.17	10.7	102	3.0
POLMH70	3.85	5.3	0.119	0.15	0.87	69.9	0.18	11.1	168	3.3
POLMH71	4.96	2.0	0.052	0.13	1.59	50.7	0.10	8.80	131	2.2
POLMH72	3.24	2.5	0.067	0.12	1.54	58.2	0.14	10.2	145	2.9
POLMH73	2.83	4.9	0.109	0.15	0.68	64.7	0.15	10.3	157	7.1
POLMH74	4.29	2.9	0.063	0.07	1.09	49.9	0.10	8.41	140	3.0
POLMH75	3.16	4.1	0.132	0.14	0.96	66.7	0.14	10.1	164	4.0
POLMH76	2.46	3.7	0.097	0.11	0.96	60.9	0.17	9.22	151	4.0
POLMH77	4.20	2.4	0.079	0.11	1.28	61.3	0.13	8.46	164	2.6
POLMH78	3.01	3.2	0.112	0.10	0.79	64.1	0.11	9.28	198	2.4
POLMH79	2.68	2.2	0.081	0.13	1.99	64.3	0.11	8.84	237	2.3
POLMH80	2.62	1.2	0.065	0.11	1.41	52.5	0.11	8.06	144	2.6
POLMH81	2.12	0.4	0.028	0.10	2.94	38.2	<0.05	4.60	133	2.0
POLCB1	3.23	4.6	0.102	0.20	1.18	65.7	0.17	10.9	369	3.3
POLCB2	2.29	2.3	0.143	0.24	3.07	48.6	0.12	8.21	123	3.5
POLCB3	2.37	3.4	0.154	0.15	0.84	68.3	0.14	10.0	173	5.2
POLCB4	2.69	3.6	0.166	0.16	0.85	64.7	0.15	10.3	159	4.1
POLCB5	3.95	2.7	0.143	0.17	3.07	70.4	0.11	9.89	210	4.4
POLCB6	2.40	3.8	0.183	0.16	0.77	73.2	0.16	9.86	178	6.2
POLCB7	3.31	4.3	0.141	0.16	1.13	65.5	0.15	10.5	190	4.2
POLCB8	4.09	3.2	0.105	0.22	2.65	51.5	0.11	9.42	169	3.8
POLCB9	3.60	4.4	0.124	0.18	0.99	53.1	0.15	9.79	157	9.1
POLCB10	3.39	4.8	0.117	0.17	0.91	53.4	0.21	9.91	143	8.0
POLCB11	1.25	3.4	0.119	0.20	0.88	37.5	0.16	9.42	127	2.2
POLCB12	2.91	4.4	0.145	0.18	1.62	66.7	0.17	10.6	164	3.6
POLCB13	3.33	3.7	0.159	0.22	2.04	80.1	0.20	10.2	208	2.4
POLCB14	2.05	3.7	0.130	0.11	0.80	64.7	0.19	10.1	108	1.3
POLCB15	4.09	2.9	0.070	0.39	6.31	73.7	0.11	9.57	241	2.3

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Te	Th	Ti	Tl	U	V	W	Y	Zn	Zr
Unit:	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description RDL:	0.01	0.1	0.005	0.01	0.05	0.5	0.05	0.05	0.5	0.5
POLCB16	1.59	2.5	0.099	0.15	1.04	73.7	0.15	9.53	181	2.3
POLCB17	4.48	1.0	0.035	0.11	1.31	57.3	0.25	10.3	120	0.9
POLCB18	2.95	4.2	0.046	0.19	1.11	65.3	0.26	10.3	858	0.7
POLCB19	3.70	3.7	0.107	0.21	0.86	87.7	0.24	6.02	152	0.5
POLCB20	3.71	1.2	0.070	0.13	1.10	54.9	0.17	9.68	171	0.8
POLCB21	2.91	3.0	0.082	0.15	0.93	67.9	0.23	5.61	133	0.5
POLCB22	3.32	2.0	0.073	0.19	0.94	68.1	0.26	6.10	99.4	<0.5
POLCB23	2.12	3.9	0.130	0.14	0.78	64.7	0.18	11.7	152	3.0
POLCB24	2.61	4.1	0.116	0.13	0.86	54.0	0.15	9.47	147	6.7
POLCB25	3.62	2.4	0.078	0.36	2.98	44.5	0.11	9.11	126	2.0
POLCB26	2.39	4.4	0.157	0.15	1.04	61.0	0.16	11.0	132	3.5
POLCB27	2.56	2.3	0.081	0.17	2.38	75.6	0.25	8.11	188	1.2
POLCB28	3.26	3.1	0.079	0.19	1.32	97.1	0.15	10.3	197	1.4
POLCB29	2.91	3.1	0.096	0.15	1.76	85.8	0.22	10.7	198	1.8
POLCB30	3.88	1.5	0.064	0.15	1.23	69.2	0.18	9.06	126	0.8
POLCB31	2.32	3.0	0.064	0.10	0.75	47.2	0.13	8.07	138	2.0
POLCB32	3.46	2.3	0.062	0.11	2.13	54.0	0.13	8.08	104	1.6
POLCB33	3.64	4.6	0.117	0.13	0.93	64.0	0.12	10.4	158	2.7
POLCB34	3.33	4.0	0.120	0.12	0.78	60.4	0.10	9.85	145	4.1
POLCB35	3.16	4.7	0.140	0.13	1.05	74.8	0.14	11.6	184	3.6
POLCB36	2.16	3.9	0.115	0.14	0.81	66.2	0.14	10.1	158	3.7
POLCB37	2.23	1.3	0.061	0.12	0.90	62.6	0.09	9.96	171	3.0
POLCB38	2.40	3.4	0.113	0.13	0.75	66.9	0.14	9.56	170	2.7
POLCB39	0.03	4.2	0.192	0.14	0.71	93.5	0.18	11.7	152	2.3
POLCB40	0.04	4.3	0.147	0.15	2.39	98.5	0.15	14.5	209	1.4
POLCB41	0.01	3.6	0.057	0.08	0.48	65.4	<0.05	8.27	106	0.8
POLCB42	0.03	4.8	0.152	0.12	0.60	78.9	0.18	9.69	141	3.7
POLCB43	0.03	4.4	0.128	0.11	0.56	79.3	0.16	9.39	171	4.0
POLCB44	0.03	3.5	0.113	0.10	0.66	76.3	0.16	9.26	175	2.0
POLCB45	0.04	5.3	0.183	0.15	0.71	103	0.20	11.2	189	4.3
POLCB46	0.03	3.5	0.187	0.11	0.80	94.6	0.20	8.34	148	1.6
POLCB47	0.04	4.2	0.151	0.22	1.10	130	0.19	11.8	233	2.1

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349
PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Te	Th	Ti	Tl	U	V	W	Y	Zn	Zr
Unit:	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description RDL:	0.01	0.1	0.005	0.01	0.05	0.5	0.05	0.05	0.5	0.5
POLCB48	0.04	2.5	0.072	0.20	1.27	111	0.19	9.34	187	0.6
POLCB49	0.03	3.0	0.075	0.16	1.14	80.8	0.24	5.13	105	<0.5
POLCB50	0.04	3.0	0.099	0.14	0.81	79.4	0.24	9.08	131	0.5
POLCB51	0.03	3.8	0.114	0.16	0.80	79.9	0.35	5.78	106	0.7
POLCB52	0.03	4.4	0.134	0.13	0.66	71.9	0.18	9.27	153	3.2
POLCB53	0.03	4.5	0.155	0.15	0.95	72.9	0.18	9.28	160	6.1
POLCB54	0.02	4.4	0.164	0.13	0.90	71.7	0.23	9.54	156	4.6
POLCB55	0.03	4.1	0.163	0.15	1.05	79.5	0.16	9.13	176	9.6
POLCB56	0.05	3.6	0.139	0.16	5.95	87.1	0.19	9.71	198	1.8
POLCB57	0.03	5.0	0.099	0.11	0.76	76.3	0.17	10.1	175	2.7
POLCB58	0.03	4.2	0.172	0.14	1.17	74.1	0.21	9.27	151	4.3
POLCB59	0.03	4.3	0.150	0.14	0.65	69.9	0.17	9.09	150	6.2
POLCB60	0.03	2.0	0.141	0.11	0.78	78.6	0.13	7.01	168	2.2
POLCB61	0.03	4.4	0.169	0.16	1.06	87.9	0.17	11.0	185	4.6
POLCB62	0.04	4.4	0.162	0.14	0.83	87.7	0.15	9.52	183	3.9
POLCB63	0.03	3.2	0.171	0.11	0.74	92.1	0.16	8.24	198	3.9
POLCB64	0.04	5.1	0.160	0.15	0.81	85.9	0.18	11.1	189	5.7
POLQD1	0.02	3.8	0.075	0.11	0.60	61.0	0.07	8.62	150	1.9
POLQD2	0.03	4.0	0.193	0.15	0.85	82.7	0.19	10.5	171	3.8
POLQD3	0.03	3.4	0.182	0.14	0.74	75.8	0.19	9.20	158	3.3
POLQD4	0.04	4.0	0.150	0.17	0.79	90.8	0.19	11.6	187	1.9
POLQD5	0.04	3.3	0.158	0.15	0.77	88.6	0.22	11.7	178	3.3
POLQD6	0.03	3.4	0.140	0.12	0.67	71.0	0.17	9.40	149	3.0
POLQD7	0.03	2.1	0.131	0.10	2.01	69.9	0.16	8.13	177	2.4
POLQD8	0.03	4.2	0.176	0.15	1.14	77.4	0.18	10.6	161	3.1
POLQD9	0.02	3.8	0.172	0.13	0.78	71.9	0.19	9.13	163	2.9
POLQD10	0.03	2.8	0.179	0.12	1.40	77.9	0.17	8.97	189	3.0
POLQD11	0.03	4.5	0.164	0.16	0.87	82.3	0.20	10.7	195	3.4
POLQD12	0.03	2.1	0.088	0.09	1.23	61.8	0.19	8.39	136	1.9
POLQD13	0.03	1.6	0.086	0.08	1.41	67.8	0.17	8.60	120	1.8
POLQD14	0.02	2.8	0.138	0.33	3.50	58.2	0.19	7.85	160	2.8
POLQD15	0.03	3.7	0.111	0.13	2.31	84.8	0.17	10.2	215	1.8

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349
PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Te	Th	Ti	Tl	U	V	W	Y	Zn	Zr
Unit:	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description RDL:	0.01	0.1	0.005	0.01	0.05	0.5	0.05	0.05	0.5	0.5
POLQD16	0.03	2.4	0.099	0.19	1.07	97.7	0.16	9.89	243	2.3
POLQD17	0.04	2.0	0.093	0.13	0.71	72.7	0.20	8.38	194	1.1
POLQD18	0.04	2.4	0.128	0.10	0.87	73.9	0.18	9.95	179	1.3
POLQD19	0.03	3.3	0.108	0.11	0.66	75.8	0.15	8.25	175	4.0
POLQD20	0.02	3.6	0.163	0.11	0.72	78.2	0.15	9.49	155	3.2
POLQD21	0.03	2.3	0.116	0.11	3.02	69.5	0.16	9.26	189	2.3
POLQD22	0.03	3.3	0.162	0.11	0.75	72.1	0.16	9.30	170	2.7
POLQD23	0.04	1.7	0.156	0.11	0.97	64.9	0.14	6.95	132	1.7
POLQD24	0.04	3.2	0.141	0.20	0.89	65.0	0.15	11.8	143	1.7
POLQD25	8.69	1.0	0.086	0.05	0.92	58.2	7.13	3.45	156	2.2
POLQD26	0.05	2.9	0.119	0.18	0.88	68.8	0.20	11.8	111	2.2
POLQD27	0.05	3.6	0.137	0.23	1.00	66.3	0.19	12.6	164	1.9
POLQD28	0.05	3.3	0.074	0.16	1.54	85.0	0.23	10.0	188	1.8
POLQD29	0.04	1.9	0.120	0.18	1.19	107	0.27	5.26	220	<0.5
POLQD30	0.03	3.0	0.108	0.11	1.51	117	0.19	8.74	237	2.3
POLQD31	0.02	3.0	0.078	0.08	0.93	60.3	0.17	8.70	146	3.2
POLQD32	0.03	2.2	0.098	0.09	1.03	66.2	0.14	8.50	174	1.6
POLQD33	0.04	3.7	0.117	0.12	0.59	80.8	0.17	10.3	160	2.1
POLQD34	0.02	3.8	0.140	0.11	0.62	68.9	0.17	8.59	149	5.8
POLQD35	0.03	2.4	0.114	0.10	0.95	67.6	0.18	8.56	170	2.8
POLQD36	0.02	3.9	0.139	0.11	0.64	72.8	0.16	9.14	153	3.1
POLQD37	0.05	1.4	0.057	0.11	0.98	71.5	0.13	9.88	172	2.7
POLQD38	0.04	1.0	0.055	0.10	0.72	67.0	0.12	9.28	167	2.6
POLQD39	0.04	4.5	0.169	0.15	0.88	91.7	0.19	12.3	156	1.6
POLQD40	0.03	4.4	0.149	0.11	0.67	79.6	0.17	9.21	168	2.7
POLQD41	0.04	3.4	0.125	0.10	0.56	78.5	0.19	9.55	163	2.0
POLQD42	0.04	2.4	0.117	0.10	0.94	76.4	0.15	8.97	206	1.6
POLQD43	0.04	4.1	0.153	0.12	0.59	88.4	0.18	12.3	168	2.1
POLQD44	0.03	3.2	0.160	0.08	0.61	72.9	0.14	9.88	138	2.9
POLQD45	0.03	2.6	0.076	0.08	0.65	68.7	0.18	10.8	148	1.6
POLQD46	0.04	2.0	0.071	0.11	0.84	70.2	0.11	9.76	207	2.1
POLQD47	0.04	2.1	0.096	0.12	1.22	69.7	0.21	9.65	130	1.9

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614349
PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL

Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 12, 2012** | **SAMPLE TYPE: Soil**

Analyte:	Te	Th	Ti	Tl	U	V	W	Y	Zn	Zr
Unit:	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm
Sample Description RDL:	0.01	0.1	0.005	0.01	0.05	0.5	0.05	0.05	0.5	0.5
POLQD48	0.03	2.0	0.115	0.10	0.74	64.6	0.19	7.59	128	1.1
POLQD49	0.03	3.1	0.137	0.14	0.63	83.6	0.31	5.53	95.2	0.8
SOIL 1	0.05	3.8	0.060	0.14	0.54	72.3	0.27	1.98	68.9	1.6

Comments: RDL - Reported Detection Limit

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BLIND CREEK RESOURCES

AGAT WORK ORDER: 12Y614349

PROJECT NO:

ATTENTION TO: CLIVE ASPINALL

Solid Analysis

RPT Date: Jul 12, 2012		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)											
Ag	1	3463386	0.31	0.33	6.3%	0.01				80%	120%
Al	1	3463262	1.73	1.60	7.8%	< 0.01				80%	120%
As	1	3463386	5.94	6.38	7.1%	0.2				80%	120%
Au	1	3463386	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
B	1	3463386	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	3463262	220	203	8.0%	< 1				80%	120%
Be	1	3463386	0.213	0.283	28.2%	< 0.05				80%	120%
Bi	1	3463386	0.14	0.14	0.0%	0.02				80%	120%
Ca	1	3463262	0.519	0.475	8.9%	< 0.01				80%	120%
Cd	1	3463386	0.74	0.76	2.7%	< 0.01				80%	120%
Ce	1	3463386	31.0	35.9	14.6%	< 0.01				80%	120%
Co	1	3463386	12.1	13.5	10.9%	< 0.1	6	5.0	120%	80%	120%
Cr	1	3463262	39.0	36.6	6.3%	< 0.5				80%	120%
Cs	1	3463386	0.44	0.45	2.2%	< 0.05				80%	120%
Cu	1	3463262	26.1	23.1	12.2%	< 0.1	4131	3800	108%	80%	120%
Fe	1	3463262	3.07	2.83	8.1%	< 0.01				80%	120%
Ga	1	3463386	8.00	9.57	17.9%	< 0.05				80%	120%
Ge	1	3463386	0.115	0.096	18.0%	< 0.05				80%	120%
Hf	1	3463386	0.052	0.055	5.6%	< 0.02				80%	120%
Hg	1	3463386	0.048	0.040	18.2%	< 0.01				80%	120%
In	1	3463386	0.0217	0.0246	12.5%	< 0.005				80%	120%
K	1	3463262	0.06	0.06	0.0%	< 0.01				80%	120%
La	1	3463386	15.9	18.1	12.9%	< 0.1				80%	120%
Li	1	3463386	6.90	8.39	19.5%	< 0.1				80%	120%
Mg	1	3463262	0.829	0.763	8.3%	< 0.01				80%	120%
Mn	1	3463262	612	575	6.2%	< 1				80%	120%
Mo	1	3463386	1.56	1.70	8.6%	< 0.05				80%	120%
Na	1	3463386	0.013	0.017	26.7%	< 0.01				80%	120%
Nb	1	3463386	1.54	2.19		< 0.05				80%	120%
Ni	1	3463262	24.8	23.1	7.1%	< 0.2				80%	120%
P	1	3463262	692	636	8.4%	< 10	587	600	98%	80%	120%
Pb	1	3463386	51.0	51.9	1.7%	< 0.1				80%	120%
Rb	1	3463386	7.5	9.4		< 0.1				80%	120%
Re	1	3463386	< 0.001	< 0.001	0.0%	< 0.001				80%	120%
S	1	3463262	0.0226	0.0212	6.4%	< 0.005				80%	120%
Sb	1	3463386	0.973	1.05	7.6%	< 0.05				80%	120%
Sc	1	3463386	4.43	5.65	24.2%	< 0.1				80%	120%
Se	1	3463386	0.4	0.5	22.2%	< 0.2				80%	120%
Sn	1	3463386	0.3	0.5		< 0.2	7.8	7.1	110%	80%	120%
Sr	1	3463262	20.0	18.6	7.3%	< 0.2				80%	120%
Ta	1	3463386	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Te	1	3463386	0.03	0.03	0.0%	< 0.01				80%	120%
Th	1	3463386	3.5	4.1	15.8%	< 0.1				80%	120%
Ti	1	3463262	0.0707	0.0640	9.9%	< 0.005				80%	120%

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BLIND CREEK RESOURCES

AGAT WORK ORDER: 12Y614349

PROJECT NO:

ATTENTION TO: CLIVE ASPINALL

Solid Analysis (Continued)

RPT Date: Jul 12, 2012		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Tl	1	3463386	0.10	0.12	18.2%	< 0.01				80%	120%
U	1	3463386	0.665	0.758	13.1%	< 0.05				80%	120%
V	1	3463262	66.8	62.9	6.0%	< 0.5				80%	120%
W	1	3463386	0.164	0.177	7.6%	< 0.05				80%	120%
Y	1	3463386	9.26	10.8	15.4%	< 0.05				80%	120%
Zn	1	3463262	126	122	3.2%	6.3				80%	120%
Zr	1	3463386	2.0	2.2	9.5%	< 0.5				80%	120%
Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)											
Ag	1	3463411	0.38	0.38	0.0%	0.02				80%	120%
Al	1	3463288	1.35	1.37	1.5%	< 0.01				80%	120%
As	1	3463411	9.6	9.1	5.3%	< 0.1				80%	120%
Au	1	3463411	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
B	1	3463411	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	3463288	256	271	5.7%	< 1				80%	120%
Be	1	3463411	0.462	0.507	9.3%	< 0.05	0.4	0.4	88%	80%	120%
Bi	1	3463411	0.20	0.20	0.0%	0.03				80%	120%
Ca	1	3463288	1.89	1.97	4.1%	< 0.01				80%	120%
Cd	1	3463411	0.409	0.418	2.2%	< 0.01				80%	120%
Ce	1	3463411	40.5	43.9	8.1%	0.02				80%	120%
Co	1	3463411	16.0	15.9	0.6%	< 0.1				80%	120%
Cr	1	3463288	38.7	36.7	5.3%	< 0.5				80%	120%
Cs	1	3463411	1.02	1.20	16.2%	< 0.05				80%	120%
Cu	1	3463288	29.7	28.7	3.4%	< 0.1	4072	3800	107%	80%	120%
Fe	1	3463288	2.46	2.62	6.3%	< 0.01				80%	120%
Ga	1	3463411	13.8	14.5	4.9%	< 0.05				80%	120%
Ge	1	3463411	< 0.05	< 0.05	0.0%	< 0.05				80%	120%
Hf	1	3463411	0.116	0.101	13.8%	< 0.02				80%	120%
Hg	1	3463411	0.067	0.061	9.4%	< 0.01	1.4	1.3	108%	80%	120%
In	1	3463411	0.029	0.029	0.0%	< 0.005				80%	120%
K	1	3463288	0.085	0.072	16.6%	< 0.01				80%	120%
La	1	3463411	20.6	22.8	10.1%	< 0.1				80%	120%
Li	1	3463411	11.0	11.9	7.9%	< 0.1				80%	120%
Mg	1	3463288	0.962	1.01	4.9%	< 0.01				80%	120%
Mn	1	3463288	672	690	2.6%	< 1				80%	120%
Mo	1	3463411	1.54	1.53	0.7%	< 0.05				80%	120%
Na	1	3463288	0.01	0.01	0.0%	< 0.01				80%	120%
Nb	1	3463411	5.21	5.67	8.5%	< 0.05				80%	120%
Ni	1	3463288	27.9	27.6	1.1%	< 0.2				80%	120%
P	1	3463288	1030	1030	0.0%	< 10	568	600	95%	80%	120%
Pb	1	3463411	68.8	68.6	0.3%	0.2				80%	120%
Rb	1	3463411	12.0	13.6	12.5%	< 0.1	11	13	83%	80%	120%
Re	1	3463411	< 0.001	< 0.001	0.0%	< 0.001				80%	120%
S	1	3463288	0.123	0.127	3.2%	< 0.005				80%	120%

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BLIND CREEK RESOURCES

AGAT WORK ORDER: 12Y614349

PROJECT NO:

ATTENTION TO: CLIVE ASPINALL

Solid Analysis (Continued)

RPT Date: Jul 12, 2012		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Sb	1	3463411	0.96	0.99	3.1%	< 0.05				80%	120%
Sc	1	3463411	6.0	6.5	8.0%	< 0.1				80%	120%
Se	1	3463411	0.65	0.70	7.4%	< 0.2				80%	120%
Sn	1	3463411	0.6	0.6	0.0%	< 0.2				80%	120%
Sr	1	3463288	42.6	40.1	6.0%	< 0.2				80%	120%
Ta	1	3463411	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Te	1	3463411	0.04	0.04	0.0%	< 0.01				80%	120%
Th	1	3463411	3.33	3.52	5.5%	< 0.1				80%	120%
Ti	1	3463288	0.0678	0.0529	24.7%	< 0.005				80%	120%
Tl	1	3463411	0.151	0.166	9.5%	< 0.01				80%	120%
U	1	3463411	0.77	0.79	2.6%	< 0.05				80%	120%
V	1	3463288	49.2	44.5	10.0%	< 0.5				80%	120%
W	1	3463411	0.225	0.251	10.9%	< 0.05				80%	120%
Y	1	3463411	11.7	11.9	1.7%	< 0.05				80%	120%
Zn	1	3463288	180	180	0.0%	< 0.5				80%	120%
Zr	1	3463411	3.3	2.9	12.9%	< 0.5				80%	120%
Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)											
Ag	1	3463428	0.292	0.302	3.4%	< 0.01				80%	120%
Al	1	3463311	1.50	1.46	2.7%	< 0.01				80%	120%
As	1	3463428	5.34	5.48	2.6%	< 0.1				80%	120%
Au	1	3463428	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
B	1	3463428	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	3463311	166	161	3.1%	< 1				80%	120%
Be	1	3463428	0.220	0.212	3.7%	< 0.05	0.3	0.4	84%	80%	120%
Bi	1	3463428	0.13	0.13	0.0%	< 0.01				80%	120%
Ca	1	3463311	0.69	0.67	2.9%	< 0.01				80%	120%
Cd	1	3463428	0.77	0.78	1.3%	< 0.01				80%	120%
Ce	1	3463428	32.4	31.0	4.4%	< 0.01				80%	120%
Co	1	3463428	12.8	13.1	2.3%	< 0.1				80%	120%
Cr	1	3463311	39.4	38.7	1.8%	< 0.5				80%	120%
Cs	1	3463428	0.55	0.54	1.8%	< 0.05				80%	120%
Cu	1	3463311	28.8	28.9	0.3%	< 0.1	3968	3800	104%	80%	120%
Fe	1	3463311	2.84	2.80	1.4%	< 0.01				80%	120%
Ga	1	3463428	4.63	4.66	0.6%	< 0.05				80%	120%
Ge	1	3463428	< 0.05	< 0.05	0.0%	< 0.05				80%	120%
Hf	1	3463428	0.08	0.08	0.0%	< 0.02				80%	120%
Hg	1	3463428	0.04	0.04	0.0%	< 0.01				80%	120%
In	1	3463428	0.0218	0.0215	1.4%	< 0.005				80%	120%
K	1	3463311	0.096	0.087	9.8%	< 0.01				80%	120%
La	1	3463428	16.1	15.5	3.8%	< 0.1				80%	120%
Li	1	3463428	7.44	7.46	0.3%	< 0.1				80%	120%
Mg	1	3463311	0.969	0.964	0.5%	< 0.01				80%	120%
Mn	1	3463311	666	664	0.3%	< 1				80%	120%
Mo	1	3463428	1.97	2.02	2.5%	< 0.05				80%	120%

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BLIND CREEK RESOURCES

AGAT WORK ORDER: 12Y614349

PROJECT NO:

ATTENTION TO: CLIVE ASPINALL

Solid Analysis (Continued)

RPT Date: Jul 12, 2012		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits	
										Lower	Upper
Na	1	3463311	0.01	0.01	0.0%	< 0.01				80%	120%
Nb	1	3463428	3.05	2.89	5.4%	< 0.05				80%	120%
Ni	1	3463311	28.9	28.9	0.0%	< 0.2				80%	120%
P	1	3463311	881	863	2.1%	< 10	550	600	92%	80%	120%
Pb	1	3463428	95.9	98.8	3.0%	< 0.1				80%	120%
Rb	1	3463428	7.68	7.63	0.7%	< 0.1	10	13	80%	80%	120%
Re	1	3463428	< 0.001	< 0.001	0.0%	< 0.001				80%	120%
S	1	3463311	0.023	0.023	0.0%	< 0.005				80%	120%
Sb	1	3463428	0.91	0.91	0.0%	< 0.05				80%	120%
Sc	1	3463428	5.05	5.01	0.8%	< 0.1				80%	120%
Se	1	3463428	0.6	0.6	0.0%	< 0.2				80%	120%
Sn	1	3463428	0.4	0.4	0.0%	< 0.2	8.3	7.1	118%	80%	120%
Sr	1	3463311	22.4	21.5	4.1%	< 0.2				80%	120%
Ta	1	3463428	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Te	1	3463428	0.03	0.03	0.0%	< 0.01				80%	120%
Th	1	3463428	3.25	3.17	2.5%	< 0.1				80%	120%
Ti	1	3463311	0.131	0.122	7.1%	< 0.005				80%	120%
Tl	1	3463428	0.106	0.104	1.9%	< 0.01				80%	120%
U	1	3463428	0.745	0.739	0.8%	< 0.05				80%	120%
V	1	3463311	64.9	63.2	2.7%	< 0.5				80%	120%
W	1	3463428	0.16	0.16	0.0%	< 0.05				80%	120%
Y	1	3463428	9.30	9.42	1.3%	< 0.05				80%	120%
Zn	1	3463311	128	128	0.0%	< 0.5				80%	120%
Zr	1	3463428	2.7	2.7	0.0%	< 0.5				80%	120%
Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)											
Ag	1	3463436	0.271	0.231	15.9%	< 0.01				80%	120%
Al	1	3463336	1.62	1.60	1.2%	< 0.01				80%	120%
As	1	3463436	4.1	6.1		< 0.1				80%	120%
Au	1	3463436	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
B	1	3463436	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	3463336	187	183	2.2%	< 1				80%	120%
Be	1	3463436	0.22	0.27	20.4%	< 0.05	0.3	0.4	84%	80%	120%
Bi	1	3463436	0.133	0.163	20.3%	< 0.01				80%	120%
Ca	1	3463336	5.52	5.42	1.8%	< 0.01				80%	120%
Cd	1	3463436	0.52	0.35		< 0.01				80%	120%
Ce	1	3463436	31.6	39.6	22.5%	< 0.01				80%	120%
Co	1	3463436	11.1	9.54	15.1%	< 0.1	5.8	5.0	116%	80%	120%
Cr	1	3463336	48.3	46.6	3.6%	< 0.5				80%	120%
Cs	1	3463436	0.55	0.68		< 0.05				80%	120%
Cu	1	3463336	43.6	42.9	1.6%	< 0.1	4003	3800	105%	80%	120%
Fe	1	3463336	2.94	2.95	0.3%	< 0.01				80%	120%
Ga	1	3463436	8.13	9.8	18.6%	< 0.05				80%	120%
Ge	1	3463436	0.06	0.07	15.4%	< 0.05				80%	120%
Hf	1	3463436	0.08	0.06		< 0.02				80%	120%

Results relate only to the items tested and to all the items tested

AGAT Laboratories
5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BLIND CREEK RESOURCES

AGAT WORK ORDER: 12Y614349

PROJECT NO:

ATTENTION TO: CLIVE ASPINALL

Solid Analysis (Continued)

RPT Date: Jul 12, 2012		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits Lower	Acceptable Limits Upper
Hg	1	3463436	0.044	0.053	18.6%	< 0.01				80%	120%
In	1	3463436	0.020	0.021	4.9%	< 0.005				80%	120%
K	1	3463336	0.13	0.12	8.0%	< 0.01				80%	120%
La	1	3463436	15.9	21.1	28.1%	< 0.1				80%	120%
Li	1	3463436	7.71	8.07	4.6%	< 0.1				80%	120%
Mg	1	3463336	3.32	3.34	0.6%	< 0.01				80%	120%
Mn	1	3463336	1000	992	0.8%	< 1				80%	120%
Mo	1	3463436	1.21	1.12	7.7%	< 0.05				80%	120%
Na	1	3463336	0.01	0.01	0.0%	< 0.01				80%	120%
Nb	1	3463436	3.16	2.63	18.3%	< 0.05				80%	120%
Ni	1	3463336	33.0	32.1	2.8%	< 0.2				80%	120%
P	1	3463336	841	838	0.4%	< 10	575	600	96%	80%	120%
Pb	1	3463436	50.8	41.3	20.6%	< 0.1				80%	120%
Rb	1	3463436	9.61	9.80	2.0%	< 0.1	11	13	83%	80%	120%
Re	1	3463436	0.004	< 0.001		< 0.001				80%	120%
S	1	3463336	0.0256	0.0248	3.2%	< 0.005				80%	120%
Sb	1	3463436	0.48	0.57	17.1%	< 0.05				80%	120%
Sc	1	3463436	4.1	4.7	13.6%	< 0.1				80%	120%
Se	1	3463436	0.8	0.6		< 0.2				80%	120%
Sn	1	3463436	0.5	0.5	0.0%	< 0.2	8.3	7.1	117%	80%	120%
Sr	1	3463336	52.9	52.3	1.1%	< 0.2				80%	120%
Ta	1	3463436	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Te	1	3463436	0.03	0.03	0.0%	< 0.01				80%	120%
Th	1	3463436	3.00	3.47	14.5%	< 0.1	1.1	1.4	82%	80%	120%
Ti	1	3463336	0.132	0.120	9.5%	< 0.005				80%	120%
Tl	1	3463436	0.11	0.11	0.0%	< 0.01				80%	120%
U	1	3463436	1.51	1.19		< 0.05				80%	120%
V	1	3463336	66.7	63.6	4.8%	< 0.5				80%	120%
W	1	3463436	0.195	0.224	13.8%	< 0.05				80%	120%
Y	1	3463436	8.74	10.1	14.4%	< 0.05				80%	120%
Zn	1	3463336	164	163	0.6%	< 0.5				80%	120%
Zr	1	3463436	2.3	1.6		< 0.5				80%	120%
Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)											
Ag	1	3463361	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Al	1	3463361	2.41	2.10	13.7%	< 0.01				80%	120%
As	1	3463361	11.1	10.9	1.8%	< 0.1				80%	120%
Au	1	3463361	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
B	1	3463361	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	3463361	248	225	9.7%	< 1				80%	120%
Be	1	3463361	0.609	0.563	7.8%	< 0.05	0.3	0.4	80%	80%	120%
Bi	1	3463361	0.242	0.269	10.6%	< 0.01	0.15	0.18	83%	80%	120%
Ca	1	3463361	0.51	0.45	12.5%	< 0.01				80%	120%
Cd	1	3463361	0.34	0.33	3.0%	< 0.01				80%	120%

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BLIND CREEK RESOURCES

AGAT WORK ORDER: 12Y614349

PROJECT NO:

ATTENTION TO: CLIVE ASPINALL

Solid Analysis (Continued)

RPT Date: Jul 12, 2012		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits	
										Lower	Upper
Ce	1	3463361	43.3	34.2	23.5%	< 0.01				80%	120%
Co	1	3463361	15.4	14.7	4.7%	< 0.1				80%	120%
Cr	1	3463361	52.1	44.0	16.9%	< 0.5				80%	120%
Cs	1	3463361	1.59	1.35	16.3%	< 0.05				80%	120%
Cu	1	3463361	23.3	19.8	16.2%	< 0.1	3987	3800	104%	80%	120%
Fe	1	3463361	3.77	3.63	3.8%	< 0.01				80%	120%
Ga	1	3463361	7.67	6.63	14.5%	< 0.05				80%	120%
Ge	1	3463361	< 0.05	< 0.05	0.0%	< 0.05				80%	120%
Hf	1	3463361	< 0.02	< 0.02	0.0%	< 0.02				80%	120%
Hg	1	3463361	0.04	0.04	0.0%	< 0.01				80%	120%
In	1	3463361	0.0395	0.0348	12.7%	< 0.005				80%	120%
K	1	3463361	0.11	0.07		< 0.01				80%	120%
La	1	3463361	19.6	17.2	13.0%	< 0.1				80%	120%
Li	1	3463361	20.8	18.0	14.4%	< 0.1				80%	120%
Mg	1	3463361	1.03	0.984	4.6%	< 0.01				80%	120%
Mn	1	3463361	1080	970	10.7%	< 1				80%	120%
Mo	1	3463361	1.70	1.61	5.4%	< 0.05	360	380	94%	80%	120%
Na	1	3463361	0.01	0.01	0.0%	< 0.01				80%	120%
Nb	1	3463361	2.50	2.16	14.6%	< 0.05				80%	120%
Ni	1	3463361	31.8	27.6	14.1%	< 0.2				80%	120%
P	1	3463361	442	375	16.4%	< 10	550	600	92%	80%	120%
Pb	1	3463361	43.7	40.3	8.1%	< 0.1				80%	120%
Rb	1	3463361	28.9	24.2	17.7%	< 0.1				80%	120%
Re	1	3463361	< 0.001	< 0.001	0.0%	< 0.001				80%	120%
S	1	3463361	0.014	0.013	7.4%	< 0.005				80%	120%
Sb	1	3463361	0.70	0.68	2.9%	< 0.05				80%	120%
Sc	1	3463361	5.60	4.64	18.8%	< 0.1				80%	120%
Se	1	3463361	0.26	0.21	21.3%	< 0.2	0.9	0.8	112%	80%	120%
Sn	1	3463361	< 0.2	< 0.2	0.0%	< 0.2	8	7.1	112%	80%	120%
Sr	1	3463361	21.3	18.7	13.0%	< 0.2				80%	120%
Ta	1	3463361	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Te	1	3463361	3.70	3.27	12.3%	< 0.01				80%	120%
Th	1	3463361	3.66	3.13	15.6%	< 0.1				80%	120%
Ti	1	3463361	0.107	0.085		< 0.005				80%	120%
Tl	1	3463361	0.209	0.184	12.7%	< 0.01				80%	120%
U	1	3463361	0.857	0.743	14.3%	< 0.05				80%	120%
V	1	3463361	87.7	72.0	19.7%	< 0.5				80%	120%
W	1	3463361	0.24	0.21	13.3%	< 0.05				80%	120%
Y	1	3463361	6.02	4.98	18.9%	< 0.05				80%	120%
Zn	1	3463361	152	136	11.1%	< 0.5				80%	120%
Zr	1	3463361	0.5	0.5	0.0%	< 0.5				80%	120%
Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)											
Ag	1	3463380	0.25	0.24	4.1%	< 0.01				80%	120%
Al	1	3463380	1.68	1.54	8.7%	< 0.01				80%	120%

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BLIND CREEK RESOURCES

AGAT WORK ORDER: 12Y614349

PROJECT NO:

ATTENTION TO: CLIVE ASPINALL

Solid Analysis (Continued)

RPT Date: Jul 12, 2012		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits	
										Lower	Upper
As	1	3463380	7.15	7.02	1.8%	< 0.1				80%	120%
Au	1	3463380	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
B	1	3463380	< 5	< 5	0.0%	< 5				80%	120%
Ba	1	3463380	150	137	9.1%	< 1				80%	120%
Be	1	3463380	0.63	0.56	11.8%	< 0.05				80%	120%
Bi	1	3463380	0.17	0.17	0.0%	< 0.01				80%	120%
Ca	1	3463380	2.65	2.58	2.7%	< 0.01				80%	120%
Cd	1	3463380	0.52	0.52	0.0%	< 0.01				80%	120%
Ce	1	3463380	32.9	28.7	13.6%	< 0.01				80%	120%
Co	1	3463380	16.7	16.1	3.7%	< 0.1				80%	120%
Cr	1	3463380	51.2	47.8	6.9%	< 0.5				80%	120%
Cs	1	3463380	0.72	0.60	18.2%	< 0.05				80%	120%
Cu	1	3463380	41.0	40.5	1.2%	< 0.1	3884	3800	102%	80%	120%
Fe	1	3463380	3.11	2.99	3.9%	< 0.01				80%	120%
Ga	1	3463380	5.55	4.88	12.8%	< 0.05				80%	120%
Ge	1	3463380	< 0.05	< 0.05	0.0%	< 0.05				80%	120%
Hf	1	3463380	0.07	0.07	0.0%	< 0.02				80%	120%
Hg	1	3463380	0.055	0.061	10.3%	< 0.01				80%	120%
In	1	3463380	0.032	0.030	6.5%	< 0.005				80%	120%
K	1	3463380	0.11	0.08		< 0.01				80%	120%
La	1	3463380	16.6	14.6	12.8%	< 0.1				80%	120%
Li	1	3463380	21.6	18.1	17.6%	< 0.1				80%	120%
Mg	1	3463380	2.38	2.30	3.4%	< 0.01				80%	120%
Mn	1	3463380	690	677	1.9%	< 1				80%	120%
Mo	1	3463380	1.27	1.19	6.5%	< 0.05	351	380	92%	80%	120%
Na	1	3463380	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Nb	1	3463380	3.50	2.81		< 0.05				80%	120%
Ni	1	3463380	34.0	32.6	4.2%	< 0.2				80%	120%
P	1	3463380	846	849	0.4%	< 10	538	600	90%	80%	120%
Pb	1	3463380	71.4	70.7	1.0%	< 0.1				80%	120%
Rb	1	3463380	22.9	19.8	14.5%	< 0.1	10	13	80%	80%	120%
Re	1	3463380	< 0.001	< 0.001	0.0%	< 0.001				80%	120%
S	1	3463380	0.035	0.034	2.9%	< 0.005				80%	120%
Sb	1	3463380	0.91	0.87	4.5%	< 0.05				80%	120%
Sc	1	3463380	6.30	5.24	18.4%	< 0.1				80%	120%
Se	1	3463380	0.42	0.38	10.0%	< 0.2				80%	120%
Sn	1	3463380	< 0.2	< 0.2	0.0%	< 0.2	7.9	7.1	111%	80%	120%
Sr	1	3463380	29.8	26.8	10.6%	< 0.2				80%	120%
Ta	1	3463380	< 0.01	< 0.01	0.0%	< 0.01				80%	120%
Te	1	3463380	2.40	2.19	9.2%	< 0.01				80%	120%
Th	1	3463380	3.37	3.03	10.6%	< 0.1				80%	120%
Ti	1	3463380	0.113	0.067		< 0.005				80%	120%
Tl	1	3463380	0.126	0.097	26.0%	< 0.01				80%	120%
U	1	3463380	0.75	0.67	11.3%	< 0.05				80%	120%

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BLIND CREEK RESOURCES **AGAT WORK ORDER: 12Y614349**

PROJECT NO: **ATTENTION TO: CLIVE ASPINALL**

Solid Analysis (Continued)

RPT Date: Jul 12, 2012		REPLICATE				Method Blank	REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD		Result Value	Expect Value	Recovery	Acceptable Limits	
										Lower	Upper
V	1	3463380	66.9	57.0	16.0%	< 0.5				80%	120%
W	1	3463380	< 0.05	< 0.05	0.0%	< 0.05				80%	120%
Y	1	3463380	9.56	8.66	9.9%	< 0.05				80%	120%
Zn	1	3463380	170	166	2.4%	< 0.5				80%	120%
Zr	1	3463380	2.7	2.7	0.0%	< 0.5				80%	120%
Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)											
Be	1					< 0.05	0.3	0.4	85%	80%	120%
Cu	1					< 0.1	4007	3800	105%	80%	120%
Mo	1					< 0.05	359	380	94%	80%	120%
P	1					< 10	568	600	95%	80%	120%
Rb	1					< 0.1	11	13	82%	80%	120%
Se	1					< 0.2	0.7	0.8	82%	80%	120%
Sn	1					< 0.2	8.4	7.1	118%	80%	120%
Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)											
Cu	1					< 0.1	3960	3800	104%	80%	120%
Mo	1					< 0.05	349	380	91%	80%	120%
P	1					< 10	578	600	96%	80%	120%
Sn	1					< 0.2	6.8	7.1	96%	80%	120%
Sr	1					< 0.2				80%	120%
Aqua Regia Digest - Metals Package, ICP/ICP-MS finish (201074)											
Cu	1					< 0.1	3994	3800	105%	80%	120%
Mo	1					< 0.05	351	380	92%	80%	120%
P	1					< 10	573	600	95%	80%	120%
Sn	1					< 0.2	8.3	7.1	116%	80%	120%

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Method Summary

CLIENT NAME: BLIND CREEK RESOURCES **AGAT WORK ORDER: 12Y614349**

PROJECT NO: **ATTENTION TO: CLIVE ASPINALL**

PARAMETER	AGAT S.O.P	LITERATURE REFERENCE	ANALYTICAL TECHNIQUE
Solid Analysis			
Sample Login Weight	MIN-12009		BALANCE
Ag	MIN-200-12017		ICP-MS
Al	MIN-200-12017		ICP/OES
As	MIN-200-12017		ICP-MS
Au	MIN-200-12017		ICP-MS
B	MIN-200-12017		ICP/OES
Ba	MIN-200-12017		ICP-MS
Be	MIN-200-12017		ICP-MS
Bi	MIN-200-12017		ICP-MS
Ca	MIN-200-12017		ICP/OES
Cd	MIN-200-12017		ICP-MS
Ce	MIN-200-12017		ICP-MS
Co	MIN-200-12017		ICP-MS
Cr	MIN-200-12017		ICP/OES
Cs	MIN-200-12017		ICP-MS
Cu	MIN-200-12017		ICP-MS
Fe	MIN-200-12017		ICP/OES
Ga	MIN-200-12017		ICP-MS
Ge	MIN-200-12017		ICP-MS
Hf	MIN-200-12017		ICP-MS
Hg	MIN-200-12017		ICP-MS
In	MIN-200-12017		ICP-MS
K	MIN-200-12017		ICP/OES
La	MIN-200-12017		ICP-MS
Li	MIN-200-12017		ICP-MS
Mg	MIN-200-12017		ICP/OES
Mn	MIN-200-12017		ICP/OES
Mo	MIN-200-12017		ICP-MS
Na	MIN-200-12017		ICP/OES
Nb	MIN-200-12017		ICP-MS
Ni	MIN-200-12017		ICP-MS
P	MIN-200-12017		ICP/OES
Pb	MIN-200-12017		ICP-MS
Rb	MIN-200-12017		ICP-MS
Re	MIN-200-12017		ICP-MS
S	MIN-200-12017		ICP/OES
Sb	MIN-200-12017		ICP-MS
Sc	MIN-200-12017		ICP-MS
Se	MIN-200-12017		ICP-MS
Sn	MIN-200-12017		ICP-MS
Sr	MIN-200-12017		ICP-MS
Ta	MIN-200-12017		ICP-MS
Te	MIN-200-12017		ICP-MS
Th	MIN-200-12017		ICP-MS
Ti	MIN-200-12017		ICP/OES
Tl	MIN-200-12017		ICP-MS
U	MIN-200-12017		ICP-MS
V	MIN-200-12017		ICP/OES
W	MIN-200-12017		ICP-MS

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Method Summary

CLIENT NAME: BLIND CREEK RESOURCES

AGAT WORK ORDER: 12Y614349

PROJECT NO:

ATTENTION TO: CLIVE ASPINALL

PARAMETER	AGAT S.O.P	LITERATURE REFERENCE	ANALYTICAL TECHNIQUE
Y	MIN-200-12017		ICP-MS
Zn	MIN-200-12017		ICP-MS
Zr	MIN-200-12017		ICP-MS

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

CLIENT NAME: BLIND CREEK RESOURCES
15 FLOOR, 675 WEST HASTINGS STREET
VANCOUVER, BC V6B1N2
(604) 669-6463

ATTENTION TO: CLIVE ASPINALL

PROJECT NO:

AGAT WORK ORDER: 12Y614365

SOLID ANALYSIS REVIEWED BY: Kevin Motomura, ICP Supervisor

DATE REPORTED: Jul 09, 2012

PAGES (INCLUDING COVER): 4

Should you require any information regarding this analysis please contact your client services representative at (905) 501-9998

NOTES

All samples are stored at no charge for 90 days. Please contact the lab if you require additional sample storage time.

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Certificate of Analysis

AGAT WORK ORDER: 12Y614365

PROJECT NO:

CLIENT NAME: BLIND CREEK RESOURCES

ATTENTION TO: CLIVE ASPINALL


Fire Assay - Au Ore Grade, Gravimetric finish (202064)

DATE SAMPLED: Jun 27, 2012 | **DATE RECEIVED: Jun 27, 2012** | **DATE REPORTED: Jul 09, 2012** | **SAMPLE TYPE: Concentrate**

Analyte:	Sample Login Weight	Au
Unit:	kg	ppm
Sample Description RDL:	0.001	0.05
POLPAN1	0.257	<0.05
POLPAN2	0.220	<0.05
POLPAN3	0.322	<0.05
POLPAN4	0.196	<0.05
POLPAN5	0.231	<0.05
POLPAN6	0.169	<0.05
POLPAN7	0.111	<0.05

Comments: RDL - Reported Detection Limit

Certified By:



Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Quality Assurance

CLIENT NAME: BLIND CREEK RESOURCES

AGAT WORK ORDER: 12Y614365

PROJECT NO:

ATTENTION TO: CLIVE ASPINALL

Solid Analysis

RPT Date: Jul 09, 2012		REPLICATE					REFERENCE MATERIAL				
PARAMETER	Batch	Sample Id	Original	Rep #1	RPD	Method Blank	Result Value	Expect Value	Recovery	Acceptable Limits	
										Lower	Upper
Fire Assay - Au Ore Grade, Gravimetric finish (202064)											
Au	1					< 0.05	8.02	7.4	108%	80%	120%
Fire Assay - Au Ore Grade, Gravimetric finish (202064)											
Au	1					< 0.05	15.04	14.82	101%	80%	120%

Certified By:

Results relate only to the items tested and to all the items tested

AGAT Laboratories

5623 McADAM ROAD
MISSISSAUGA, ONTARIO
CANADA L4Z 1N9
TEL (905)501-9998
FAX (905)501-0589
http://www.agatlabs.com

Method Summary

CLIENT NAME: BLIND CREEK RESOURCES

AGAT WORK ORDER: 12Y614365

PROJECT NO:

ATTENTION TO: CLIVE ASPINALL

PARAMETER	AGAT S.O.P	LITERATURE REFERENCE	ANALYTICAL TECHNIQUE
Solid Analysis			
Sample Login Weight	MIN-12009		BALANCE
Au			GRAVIMETRIC

Results relate only to the items tested and to all the items tested

Quartz Claim Data

Yukon
Energy, Mines and Resources

QUARTZ MINING ACT FORM 4 SECTION 56

APPLICATION FOR A CERTIFICATE OF WORK



I, NICHOLAS CLIVE ASPINALL ,

of 3A DIAMOND WAY, WHITEHORSE, YUKON, Y1A 6G4

Phone 867-456-4334

Client I.D. Number: _____

make oath and say that:

1. I am the owner, or agent of the owner, of the mineral claim(s) to which reference is made herein.

2. I have done, or caused to be done, work, on the following mineral claim(s): (Here list claims on which work was actually done by number and name)

POL 2 (YD16812), POL 4 (YD113954), POL 6(YD113956), POL 8(YD113958), POL 10(YD113960), POL 12 (YD113962), POL 14-16(YD113964-YD113966), POL 18 (YD113968), POL 20 (YD113970), POL 23-28 (YD113973-78), POL 41-60 (YD113981-114000)

situated at POLICE CREEK Claim sheet No. 106D/06

in the MAYO Mining District, to the value of at least $36,596.00 dollars,

since the 5TH day of JUNE 20 12 ,

to represent the following mineral claims under the authority of Grouping Certificate No. #M02858.
(Here list claims to be renewed in numerical order, by grant number and claim name, showing renewal period requested).

POL 1-3 GRANT NOs YD16811-YD16813, POL 4-30 GRANT NOs YD113954-YD113980, POL 31-40 GRANT NOs YD16791-YD16800, POL 41-153 GRANT NOs YD113981-YD114093; 153 quartz claims: Renewal requested 2 years.

3. The following is a detailed statement of such work: (Set out full particulars of the work done indicating dates work commenced and ended in the twelve months in which such work is required to be done as shown by Section 56).

Work: Start June 5th 2012, End June 13th 2012

1) AUGER SILT/SOIL SAMPLING

2) HEAVY PAN CONCENTRATES SAMPLING

Sworn before me at _____ this _____ day of _____ 20 ____ .

_____ Notary Public

_____ Owner or Authorized Agent

Access to Information and Protection of Privacy Act

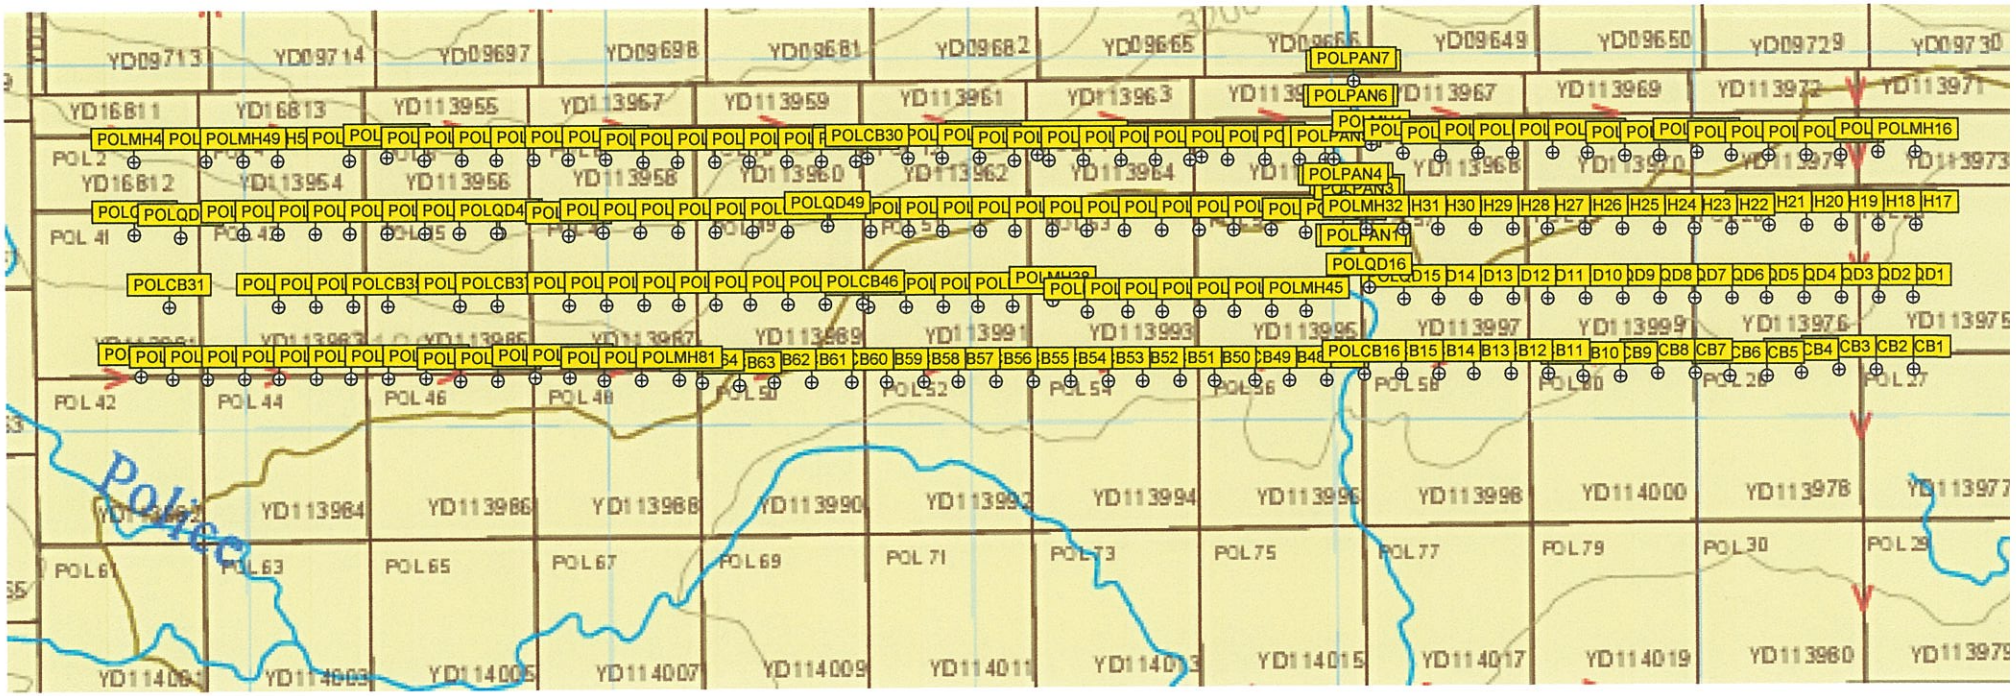
BLIND CREEK RESOURCES LTD: REF NOTICE TO GROUP APPLICATION 11 AUGUST 2011
STATEMENT OF WORK; ASSESSMENT WORK; POL QUARTZ CLAIMS, MAP SHEET 106D/06
POL-1-3 (YD16811YD16813), POL 4-30 (YD113954-YD113980) POL 31-40 (YD16791-16800)
POL41-153 (YD113981-YD114093) WORK DONE 5TH JUNE-13 JUNE 2012.

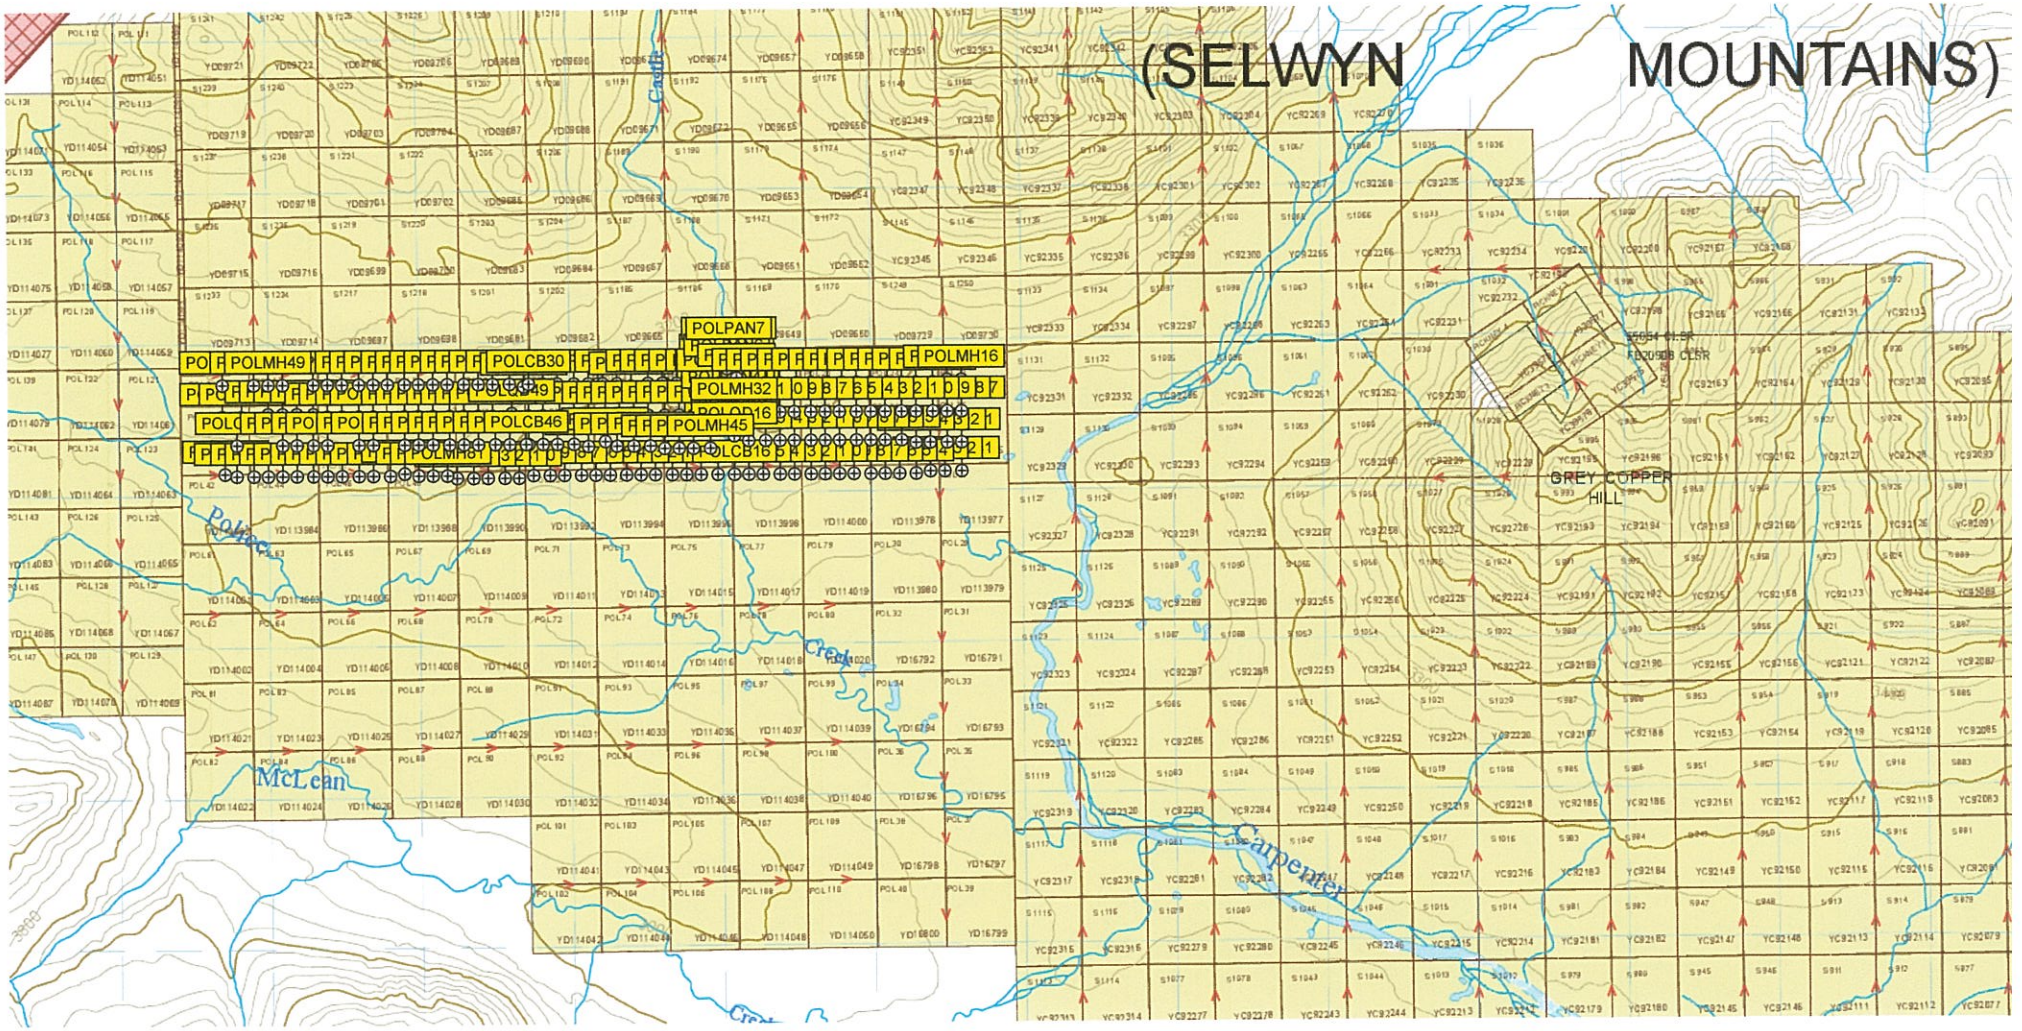
Helicopter support:		Date		hours	$$$	$$$$$$$$$$
A-Star		5th june 2012		2.3	4,400.00	
Jet Ranger		6th june 2012		1.1	2,104.00	
Jet Ranger		11th June 2012		0.9	1,149.00	
Jet Ranger		13th June 2012		2	$ 2,554.00	**$ 10,207.00**
cost: Jet Ranger	$1100 per hour					
Cost Fuel	$177 per hour					
Cost: A-star	1650 per hour					
Cost Fuel	$263 per hour					
Camp plus heli pad						
		Prospector	1 day	8	300.00	
		Field Assistant 1	1 day	8	240.00	
Pan concentrate survey		Geologist 2	1 days	8	400.00	
		Field assistant 2	1 days	8	200.00	
Auger soil sampling sampling		Geologist 2	8.5 day	68	3,400.00	
		prospector 1	8.5. day	68	2,550.00	
		Field Assistant 1	8.5 days	68	2,040.00	
		Field Assistant 2	8.5 days	68	1,700.00	
						$ 9,690.00
On site Geological supervisor		Geologist 1	9.5 days	76	**4,750.00**	**$ 4,750.00**
Accommodation/meals		48 man days at $160	per day		**7,680.00**	**$ 7,680.00**
Vehicles		3 vehicles at $100 each each per day/ 3 days			**900.00**	**$ 900.00**
Analyses	195 Auger soil samples	$26 each			**5,070.00**	**$ 5,070.00**
	07 Pan con samples	$26each			**182.00**	**$ 182.00**
	01 rock Sample	$26			**26.00**	**$ 26.00**
Report					5000	**$ 5,000.00**
sub-Total						**$ 33,298.00**
10% head office costs						**$ 3,298.00**
Grand Total						**$ 36,596.00**

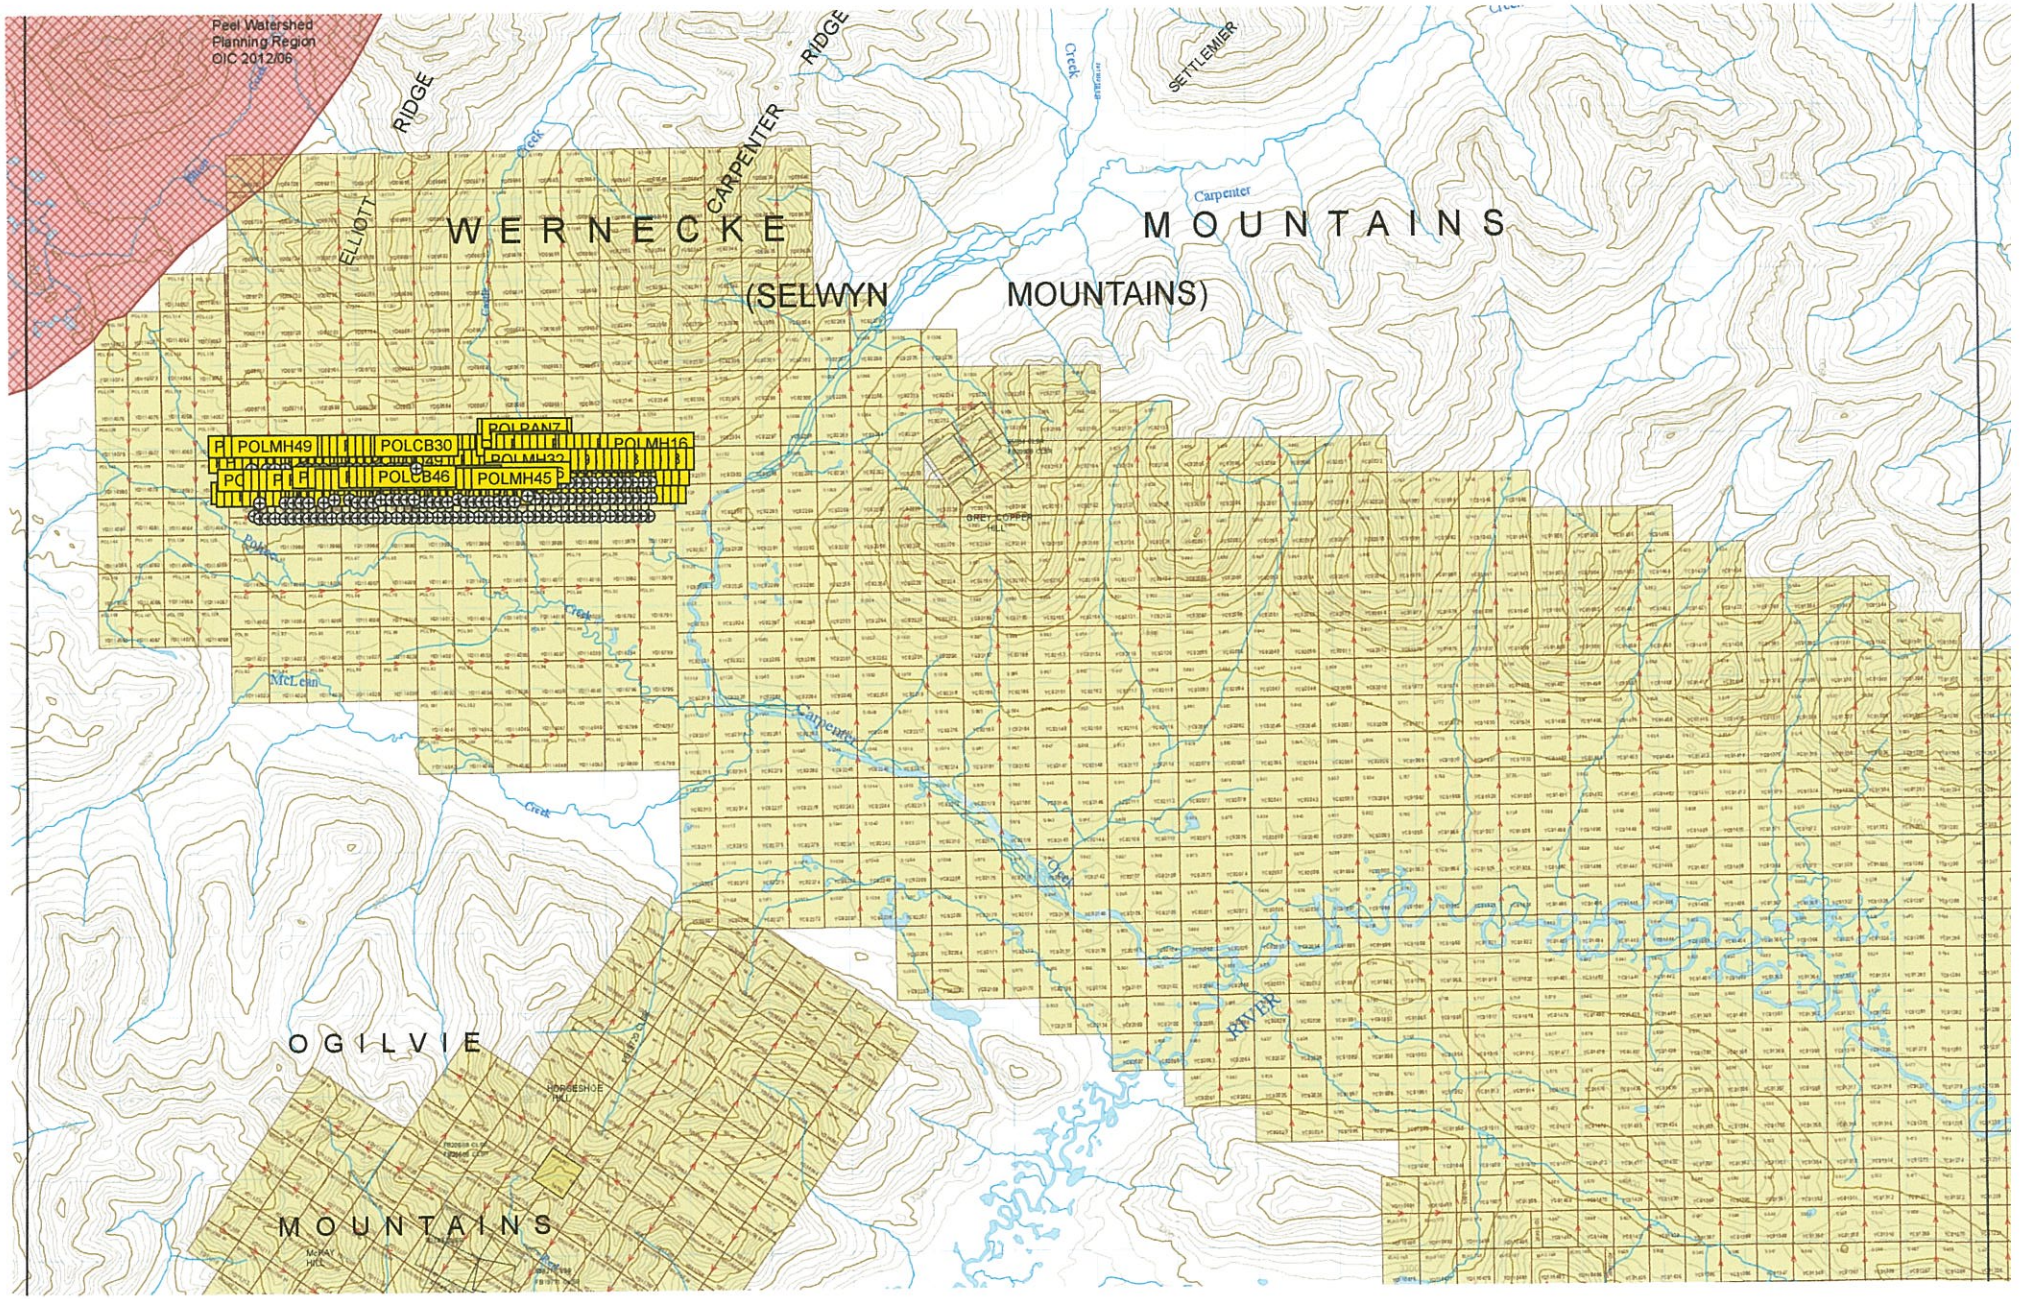
POL 1-153 quartz mining claims 15,300 per year
2 years **$ 30,600.00**

Request 2 years per claim Credits

Signed Print Name NCAspinall Date 15th June 2012


POLPAN7
POLPAN6
POLPAN4
POLPAN3
POLPAN1
POLMH32
POLMH16
POLQD49
POLQD16
POLCB31
POLCB30
POLCB46
POLMH45
POLMH81
POLCB16
Police


(SELWYN MOUNTAINS)
POLPAN7
POLMH49
POLCB30
POLMH16
POLMH32
POLCB49
POLCB16
POLCB46
POLMH45
POLMH61
GREY COPPER HILL
McLean
Carpenter


Peel Watershed
Planning Region
©IC 2012/06
RIDGE
CARPENTER
RIDGE
SETTLEMIER
Creek
WERNECKE
(SELWYN
MOUNTAINS)
MOUNTAINS
Carpenter
ELLIOTT
POLMH49
POLCB30
POLCB46
POLMH45
POLMH16
McLean
Creek
Carpenter
Creek
OGILVIE
MOUNTAINS
RIVER

Yukon
Energy, Mines and Resources

Claim Status Report

28 September 2012

	Claim Name and Nbr.	Grant No.	Expiry Date	Registered Owner	% Owned	NTS #'s	
	B 1 - 76	YE41201 - YE41276	2016/06/27	Blind Creek Resources Ltd.	100.00	106D08, 106D07	
P	B 77	YE41277	2016/06/27	Blind Creek Resources Ltd.	100.00	106D08	
	B 78	YE41278	2016/06/27	Blind Creek Resources Ltd.	100.00	106D08	
P	B 79	YE41279	2016/06/27	Blind Creek Resources Ltd.	100.00	106D08	
	B 80 - 84	YE41280 - YE41284	2016/06/27	Blind Creek Resources Ltd.	100.00	106D08	
P	B 85	YE41285	2016/06/27	Blind Creek Resources Ltd.	100.00	106D08	
	B 86	YE41286	2016/06/27	Blind Creek Resources Ltd.	100.00	106D08	
P	B 87 - 88	YE41287 - YE41288	2016/06/27	Blind Creek Resources Ltd.	100.00	106D08	
	BCR 1 - 2	YC97801 - YC97802	2015/09/20	Blind Creek Resources Ltd.	100.00	106D07	
	BCR 5 - 24	YD71105 - YD71124	2015/09/20	Blind Creek Resources Ltd.	100.00	106D07	
	BCR 33 - 54	YD71133 - YD71154	2015/09/20	Blind Creek Resources Ltd.	100.00	106D07	
	BCR 67 - 92	YD71167 - YD71192	2015/09/20	Blind Creek Resources Ltd.	100.00	106D07	
	BCR 99 - 102	YD71199 - YD71202	2015/09/20	Blind Creek Resources Ltd.	100.00	106D07	
	BCR 103 - 104	YD71103 - YD71104	2015/09/20	Blind Creek Resources Ltd.	100.00	106D07	
	BCR 105 - 126	YD71205 - YD71226	2015/09/20	Blind Creek Resources Ltd.	100.00	106D07	
	BCR 129 - 156	YD71229 - YD71256	2015/09/20	Blind Creek Resources Ltd.	100.00	106D07	
	BCR 159 - 202	YD71259 - YD71302	2015/09/20	Blind Creek Resources Ltd.	100.00	106D07	
	BCR 203 - 204	YD71203 - YD71204	2015/09/20	Blind Creek Resources Ltd.	100.00	105D07	
	H 1 - 15	YE37501 - YE37515	2017/03/15	Blind Creek Resources Ltd.	100.00	105M15	
	H 16 - 100	YE37216 - YE37300	2017/03/15	Blind Creek Resources Ltd.	100.00	105M15, 105M14	
	LJ 1 - 54	YD114101 - YD114154	2015/10/18	Blind Creek Resources Ltd.	100.00	106D07	
	LJ 55 - 58	YD16855 - YD16858	2015/10/18	Blind Creek Resources Ltd.	100.00	106D07	
	LJ 59 - 86	YD16759 - YD16786	2015/10/18	Blind Creek Resources Ltd.	100.00	106D08	
	M 1 - 22	YE37401 - YE37422	2017/06/09	Blind Creek Resources Ltd.	100.00	105M14, 105M15	
	M 41 - 44	YE41541 - YE41544	2017/06/17	Blind Creek Resources Ltd.	100.00	105M14	
	M 53 - 72	YE41553 - YE41572	2017/06/17	Blind Creek Resources Ltd.	100.00	105M14, 105M15	
	M 75 - 88	YE41575 - YE41588	2017/06/17	Blind Creek Resources Ltd.	100.00	105M15, 105M14	
	M Fr. 45 - 51	YE41545 - YE41551	2017/06/17	Blind Creek Resources Ltd.	100.00	105M14	F
	Max 1 - 64	YC50636 - YC50699	2020/08/23	Blind Creek Resources Ltd.	100.00	106D07	
	Max 66 - 77	YC50700 - YC50711	2020/08/23	Blind Creek Resources Ltd.	100.00	106D07	
	Max 78 - 85	YC50712 - YC50719	2016/08/23	Blind Creek Resources Ltd.	100.00	106D07	
	Max 86 - 91	YC50720 - YC50725	2020/08/23	Blind Creek Resources Ltd.	100.00	106D07	
	Max 92 - 99	YC50726 - YC50733	2016/08/23	Blind Creek Resources Ltd.	100.00	106D07	
	Max 100 - 105	YC50734 - YC50739	2020/08/23	Blind Creek Resources Ltd.	100.00	106D07	
	Max 106 - 113	YC50740 - YC50747	2016/08/23	Blind Creek Resources Ltd.	100.00	106D07	
	Max 114 - 153	YC50748 - YC50787	2020/08/23	Blind Creek Resources Ltd.	100.00	106D07	

Total claims selected : 1053

eft column indicator legend:
R - Indicates the claim is on one or more pending renewal(s).
P - Indicates the claim is pending.

Right column indicator legend:
L - Indicates the Quartz Lease.
F - Indicates Full Quartz fraction (25+ acres)
P - Indicates Partial Quartz fraction (<25 acres)
D - Indicates Placer Discovery
C - Indicates Placer Codiscovery
B - Indicates Placer Fraction

Yukon
Energy, Mines and Resources

Claim Status Report

28 September 2012

Claim Name and Nbr.	Grant No.	Expiry Date	Registered Owner	% Owned	NTS #'s	
Max 154 - 161	YC54978 - YC54985	2016/12/08	Blind Creek Resources Ltd.	100.00	106D07	
Mix 1 - 16	YC09985 - YC10000	2020/03/28	Blind Creek Resources Ltd.	100.00	106D07	
P POL 1 - 3 ✓	YD16811 - YD16813	2014/10/18	Blind Creek Resources Ltd.	100.00	106D06	
POL 4 - 30 ✓	YD113954 - YD113980	2014/10/18	Blind Creek Resources Ltd.	100.00	106D06	
P POL 31 - 40 ✓	YD16791 - YD16800	2014/10/18	Blind Creek Resources Ltd.	100.00	106D06	
POL 41 - 153 ✓	YD113981 - YD114093	2014/10/18	Blind Creek Resources Ltd.	100.00	106D06	
Trax 1 - 28	YC39822 - YC39849	2019/09/21	Blind Creek Resources Ltd.	100.00	106D07	
Trix 1 - 46	YC11723 - YC11768	2020/04/21	Blind Creek Resources Ltd.	100.00	106D07	
Trix 47 - 56	YC32293 - YC32302	2022/09/21	Blind Creek Resources Ltd.	100.00	106D07	
W 1 - 22	YE37301 - YE37322	2017/03/21	Blind Creek Resources Ltd.	100.00	105M15	
W 25 - 26	YD10625 - YD10626	2017/03/21	Blind Creek Resources Ltd.	100.00	105M15	
W 27 - 100	YE37327 - YE37400	2017/03/21	Blind Creek Resources Ltd.	100.00	105M15, 105M14	
WW 59 - 60	YD16859 - YD16860	2017/03/21	Blind Creek Resources Ltd.	100.00	105M15	
X 15 - 40	YD16815 - YD16840	2016/06/27	Blind Creek Resources Ltd.	100.00	106D07, 106D08	
X Fr. 95	YC97795	2017/06/06	Blind Creek Resources Ltd.	100.00	105M15	P

Criteria(s) used for search:

CLAIM DISTRICT: 1000003 CLAIM STATUS: ACTIVE & PENDING OWNER(S): BLIND CREEK RESOURCES LTD.
REGULATION TYPE: QUARTZ

Total claims selected : 1053

Left column indicator legend:
- R - Indicates the claim is on one or more pending renewal(s).
- P - Indicates the claim is pending.

Right column indicator legend:
- L - Indicates the Quartz Lease.
- F - Indicates Full Quartz fraction (25+ acres)
- P - Indicates Partial Quartz fraction (<25 acres)
- D - Indicates Placer Discovery
- C - Indicates Placer Codiscovery
- B - Indicates Placer Fraction

Certificate of Authorship

I, Nicholas Clive ASPINALL, P.Eng of Pillman Hill, the community of Atlin British Columbia, and 3A Diamond Way, Whitehorse, Yukon do hereby certify that:

I am an independent consulting geologist with offices at the above addresses

I am a graduate of McGill University, Montreal, Quebec, with B.Sc degree in Geology (1964), and a Masters degree (1987) from the Camborne School of Mines, Cornwall, England, in Mining Geology.

I am registered member in good standing of the Associations of Professional Engineers and Geoscientists in the province of British Columbia.

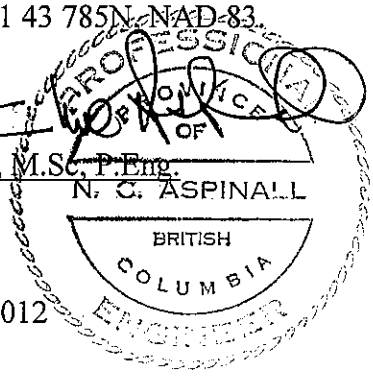
I have practiced mineral exploration for 47 years since graduation from McGill University. I am familiar with the geology of the Atlin area since 1966 and have an office based in Atlin from 1968.

I have no direct material interest in Blind Creek Resources Ltd mineral tenures, but own 5000 shares of Blind Creek Resources Ltd.

I am the author of Report. ASSESSMENT REPORT ON **JUNE 2012** FIELD WORK ON PART OF THE POL1-153 QUARTZ MINERAL CLAIM GROUP (CERT; HM02855)
Mayo Mining District Yukon Territory Canada, Map sheet 106D/06 Under Application for Work Credits on POL1-3 YD16811-13, POL4-30 YD113954-80, POL 31-40 YD16791-YD16800, POL41-153 YD113981-YD114093.Coordinates central area: 64° 25' 10.9" N, 135° 03' 21.5" UTM: 8V 4 97 303E, 71 43 785N. NAD-83.

Originally Signed by

N. CLIVE ASPINALL, M.Sc, P.Eng.
Geologist



Dated 25th September 2012