

MAP NO.: ASSESSMENT REPORT X  
105 G 8 PROSPECTUS  
CONFIDENTIAL X  
OPEN FILE

DOCUMENT NO: 092877  
MINING DISTRICT: WATSON LAKE  
TYPE OF WORK: Prospecting  
Geochemistry, geophysics

REPORT FILED UNDER: James S. Dodge

DATE PERFORMED: July 20-Aug 12, 1990

DATE FILED: Sept 28, 1990

LOCATION: LAT.: 61°17'N

AREA: Finlayson Lake

LONG.: 130°26'W

VALUE \$: 4 500

CLAIM NAME & NO.: SLEEPER 1-14  
LADY LEE 7

WORK DONE BY: James S. Dodge

WORK DONE FOR: Dodgex Limited

DATE TO GOOD STANDING:

REMARKS: This area was originally staked for nephrite. The author of the report discovered malachite stained biotite schist float while packing nephrite down to a small lake for removal by float plane. Examination of the area led to the discovery of a stratiform volcanic massive sulphide occurrence. Also discovered nearby is an arsenical gold bearing breccia zone within quartz healed phyllonites believed to be in the Nisutlin allochthon. Chip samples from the massive sulphides contain up to 1.41% Cu, 1.65% Zn, 0.48% Pb and 0.55 opt Ag. Values of up to 1220 ppb Au and 2270 ppm As were obtained in chip samples from the breccia zone.




RESULTS OF PRELIMINARY EXPLORATION  
SLEEPER 1 - 14 & LADY LEE 7 CLAIMS

CLAIM SHEET 105-G-08  
61°17'N 130°26'W

JAMES S. DODGE, P.ENG.  
20 JULY - 12 AUGUST 1990

**092877**

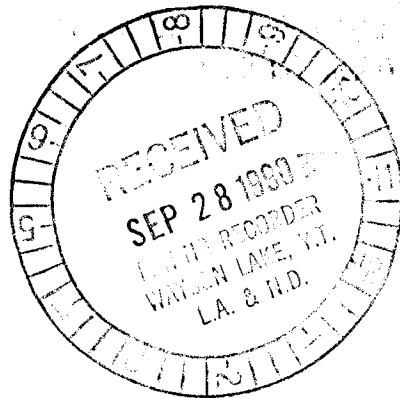

This report has been examined by  
the Geological Evaluation Unit  
under Section 53 (4) Yukon Quartz  
Mining Act and is allowed as  
representation work in the amount  
of \$ 4,500.

*for* *Dennis J. O'Leary*  
Regional Manager, Exploration and  
Geological Services for Commissioner  
of Yukon Territory.



Painstaking prospecting on SLEEPER #6 claim unearthed this 20 kilogram (44 pound) chunk of copper-zinc-lead-silver stratiform sulfide float with initially only 20 cm<sup>2</sup> (4 square inches) exposed but which led to discovery of its bedrock parent covered by thick turf in upper left corner of photograph.

## TABLE OF CONTENTS

	<u>Page</u>
ABSTRACT	1
INTRODUCTION	2
CLAIM OWNERSHIP	2
LOCATION AND ACCESS	3
HISTORY	4
SCOPE OF 1990 EXPLORATION PROGRAM	5
EXPLORATION MODEL	6
POLYMETALLIC SULFIDES	6
PROSPECTING	8
GEOPHYSICAL SURVEY	9
GEOCHEMICAL SOIL SAMPLING	10
OUTCROP CORE SAMPLING	11
EPIGENETIC GOLD/ARSENIC	12
CONCLUSIONS	13
RECOMMENDATIONS	14
REFERENCES	15
STATEMENT OF QUALIFICATIONS	16
VALUE OF 1990 EXPLORATION PROGRAM	(Attached)

## ILLUSTRATIONS

		<u>Following Page</u>
Property Location - Yukon	Map I	3
Claim Sheet 105-G-08	Map II	3
Baseline Survey/Sample Sites	Map III	Pocket
VLF-EM Contours	Map IV	Pocket
Assay Values at Sample Sites	Map V	Pocket
Petrographic Report		Appendix A
Assay Reports	Figures 1 & 2	Appendix B
VLF Field Notes	Figures 3-6	Appendix C
VLF Profiles	Figures 7-10	Appendix D
Photo I	Polymetallic Float	Frontispiece
Photo II	Airphoto - Claim Boundaries	3
Photo III	Northwest Sector - Money Klippe	4
Photo IV	Panorama View - Geologic Section	7
Photo V	Airphoto - Geologic Plan	7
Photo VI (A/B)	Photomicrographs - Polymetallic Sulfides	7
Photo VII	Equipment Used in VLF-EM Survey	10
Photo VIII	Equipment Used in Soil Sampling	10
Photo IX	JKS-10 Sampler Core Drill	11

## ABSTRACT

A new polymetallic stratiform volcanogenic sulfide deposit, and a nearby arsenical gold-bearing breccia zone, have been found on the SLEEPER and LADY LEE claims in the metavolcanics of the Nisutlin allochthon near the headwaters of Money Creek (105-G-08), south-eastern Yukon.

As evidenced by float and sparse outcrops largely below timberline, the gently inclined sulfide horizon extends over 1300 meters (4250 feet) in length and may be 3 meters (10 feet) or more thick. Rock chip samples of float contain up to 1.41% copper, 1.65% zinc, 0.48% lead and 0.55 oz/t silver. Concentrations of base metals are now known to occur in two sectors; one 75 meters (245 feet), the other 150 meters (490 feet) long.

Host for sulfide mineralization is a quartz-biotite-garnet schist probably a metavolcanic rock of intermediate composition. The sulfide horizon is underlain by crenulated, thinly foliated, pyritic quartz-muscovite schist, and overlain by pyritic, coarsely foliated, quartz-muscovite schist and lesser amphibolites.

Although the 1990 two-weeks program of detailed prospecting and rock chip sampling of float and bedrock, together with one short diamond core drill outcrop sampling, was followed by only limited familiarization VLF-EM and soil sampling surveys, there are strong indications of a polymetallic sulfide deposit of major dimensions.

Arsenical gold occurs in phyllonitic bedrock within quartz-healed breccia structures (800 m) in the Nisutlin allochthon and also in float apparently derived from the vicinity of the thrust fault zone between the Anvil and Nisutlin terranes. Values of up to 1220 ppb gold, 2270 ppm arsenic, and 50 ppm antimony were obtained in a suite of 13 rock chip samples. The anomalous gold area lies over 300 meters (1000 feet) northeast of the known base metal occurrences and, in contrast, may be genetically related to Tertiary bimodal volcanics nearby.

The gold potential was only confirmed by assays received after the field work was concluded. The geological setting and anomalously high gold and arsenic values point to the need for a detailed exploration program.

## INTRODUCTION

This report describes the prospecting, geological mapping, and results from familiarization geochemical soil sampling and an electromagnetic survey on the 14 SLEEPER quartz claims and the contiguous LADY LEE #7 quartz claim during 14 days of field work and 2 days of report preparation during 20 July and 24 September, 1990. The claims were staked by James S. Dodge while prospecting under the Yukon's Prospectors' Assistance Program in 1989. There is no field evidence that the property had been staked previously.

## CLAIMS OWNERSHIP

<u>Claim Name</u>	<u>Grant Number</u>	<u>Located By</u>	<u>Claim Sheet</u>	<u>Date of Record</u>
LADY LEE #7	YB16458	James Dodge	105-G-08	18 September 1989
SLEEPER #1	YB16459	James Dodge	105-G-08	18 September 1989
SLEEPER #2	YB16460	James Dodge	105-G-08	18 September 1989
SLEEPER #3	YB16461	James Dodge	105-G-08	18 September 1989
SLEEPER #4	YB16462	James Dodge	105-G-08	18 September 1989
SLEEPER #5	YB16463	James Dodge	105-G-08	18 September 1989
SLEEPER #6	YB16464	James Dodge	105-G-08	18 September 1989
SLEEPER #7	YB16465	James Dodge	105-G-08	18 September 1989
SLEEPER #8	YB16466	James Dodge	105-G-08	18 September 1989
SLEEPER #9	YB16467	James Dodge	105-G-08	18 September 1989
SLEEPER #10	YB16468	James Dodge	105-G-08	18 September 1989
SLEEPER #11	YB16469	James Dodge	105-G-08	18 September 1989
SLEEPER #12	YB16470	James Dodge	105-G-08	18 September 1989
SLEEPER #13	YB16471	James Dodge	105-G-08	18 September 1989
SLEEPER #14	YB16472	James Dodge	105-G-08	18 September 1989

On 20 December 1989, 100% interest in each of the 14 SLEEPER claims and the LADY LEE #7 claim was transferred by Mr. Dodge to Dodgex Ltd., a Yukon private corporation wholly owned by Mr. Dodge, under Quartz Regulation Document No. RW06877. Application to Group these 15 quartz claims is supplemented by copies of the Application for Certificate of Work attached to this report being transmitted to the Mining Recorder for Watson Lake Mining District as proof of assessment work on the claims.

## CLAIMS LOCATION AND ACCESS


The SLEEPER claims and LADY LEE #7 claim are located in southeastern Yukon (Map I) on claim sheet 105-G-08 (Map II) near the headwaters of Money Creek, a southeast flowing tributary of Finlayson River. The claims are approximately 23 kilometers (14 miles) southwest of Wolverine Lake, the north end of which is reportedly accessible by 15 kilometers (9 miles) of tote road from the Campbell Highway. Center of the claim group is approximately 61°17'N latitude and 130°26'W longitude.


The claims lie along the northeastern flank of the Pelly Mountains in terrain ranging in altitude from 1380 meters (4525 feet) at the valley lake and up to 1780 meters (5840 feet) along the ridge crest covered by SLEEPER 1-4 claims. Roughly one-half the claim area lies above timberline (Photo II).

Access to the claims is by short-takeoff float plane at the cleaver-shaped lake on the broad drainage divide between Money Creek and an unnamed stream flowing west to the north end of Fyre Lake some 10 kilometers (6 miles) distant. The SLEEPER lake is at an altitude of 1380 meters (4525 feet) and is roughly 800 meters (2625 feet) long with shallow (1 meter=3+ feet) near the southwest end. There are no trees at either end of the lake to obstruct plane takeoffs, nevertheless, use of either a Beaver, Otter, or similar performance aircraft is prudent. Watson Lake Flying Service has provided excellent charter service to the lake over the past three years.


Map I

SLEEPER and  
LADY LEE Claims

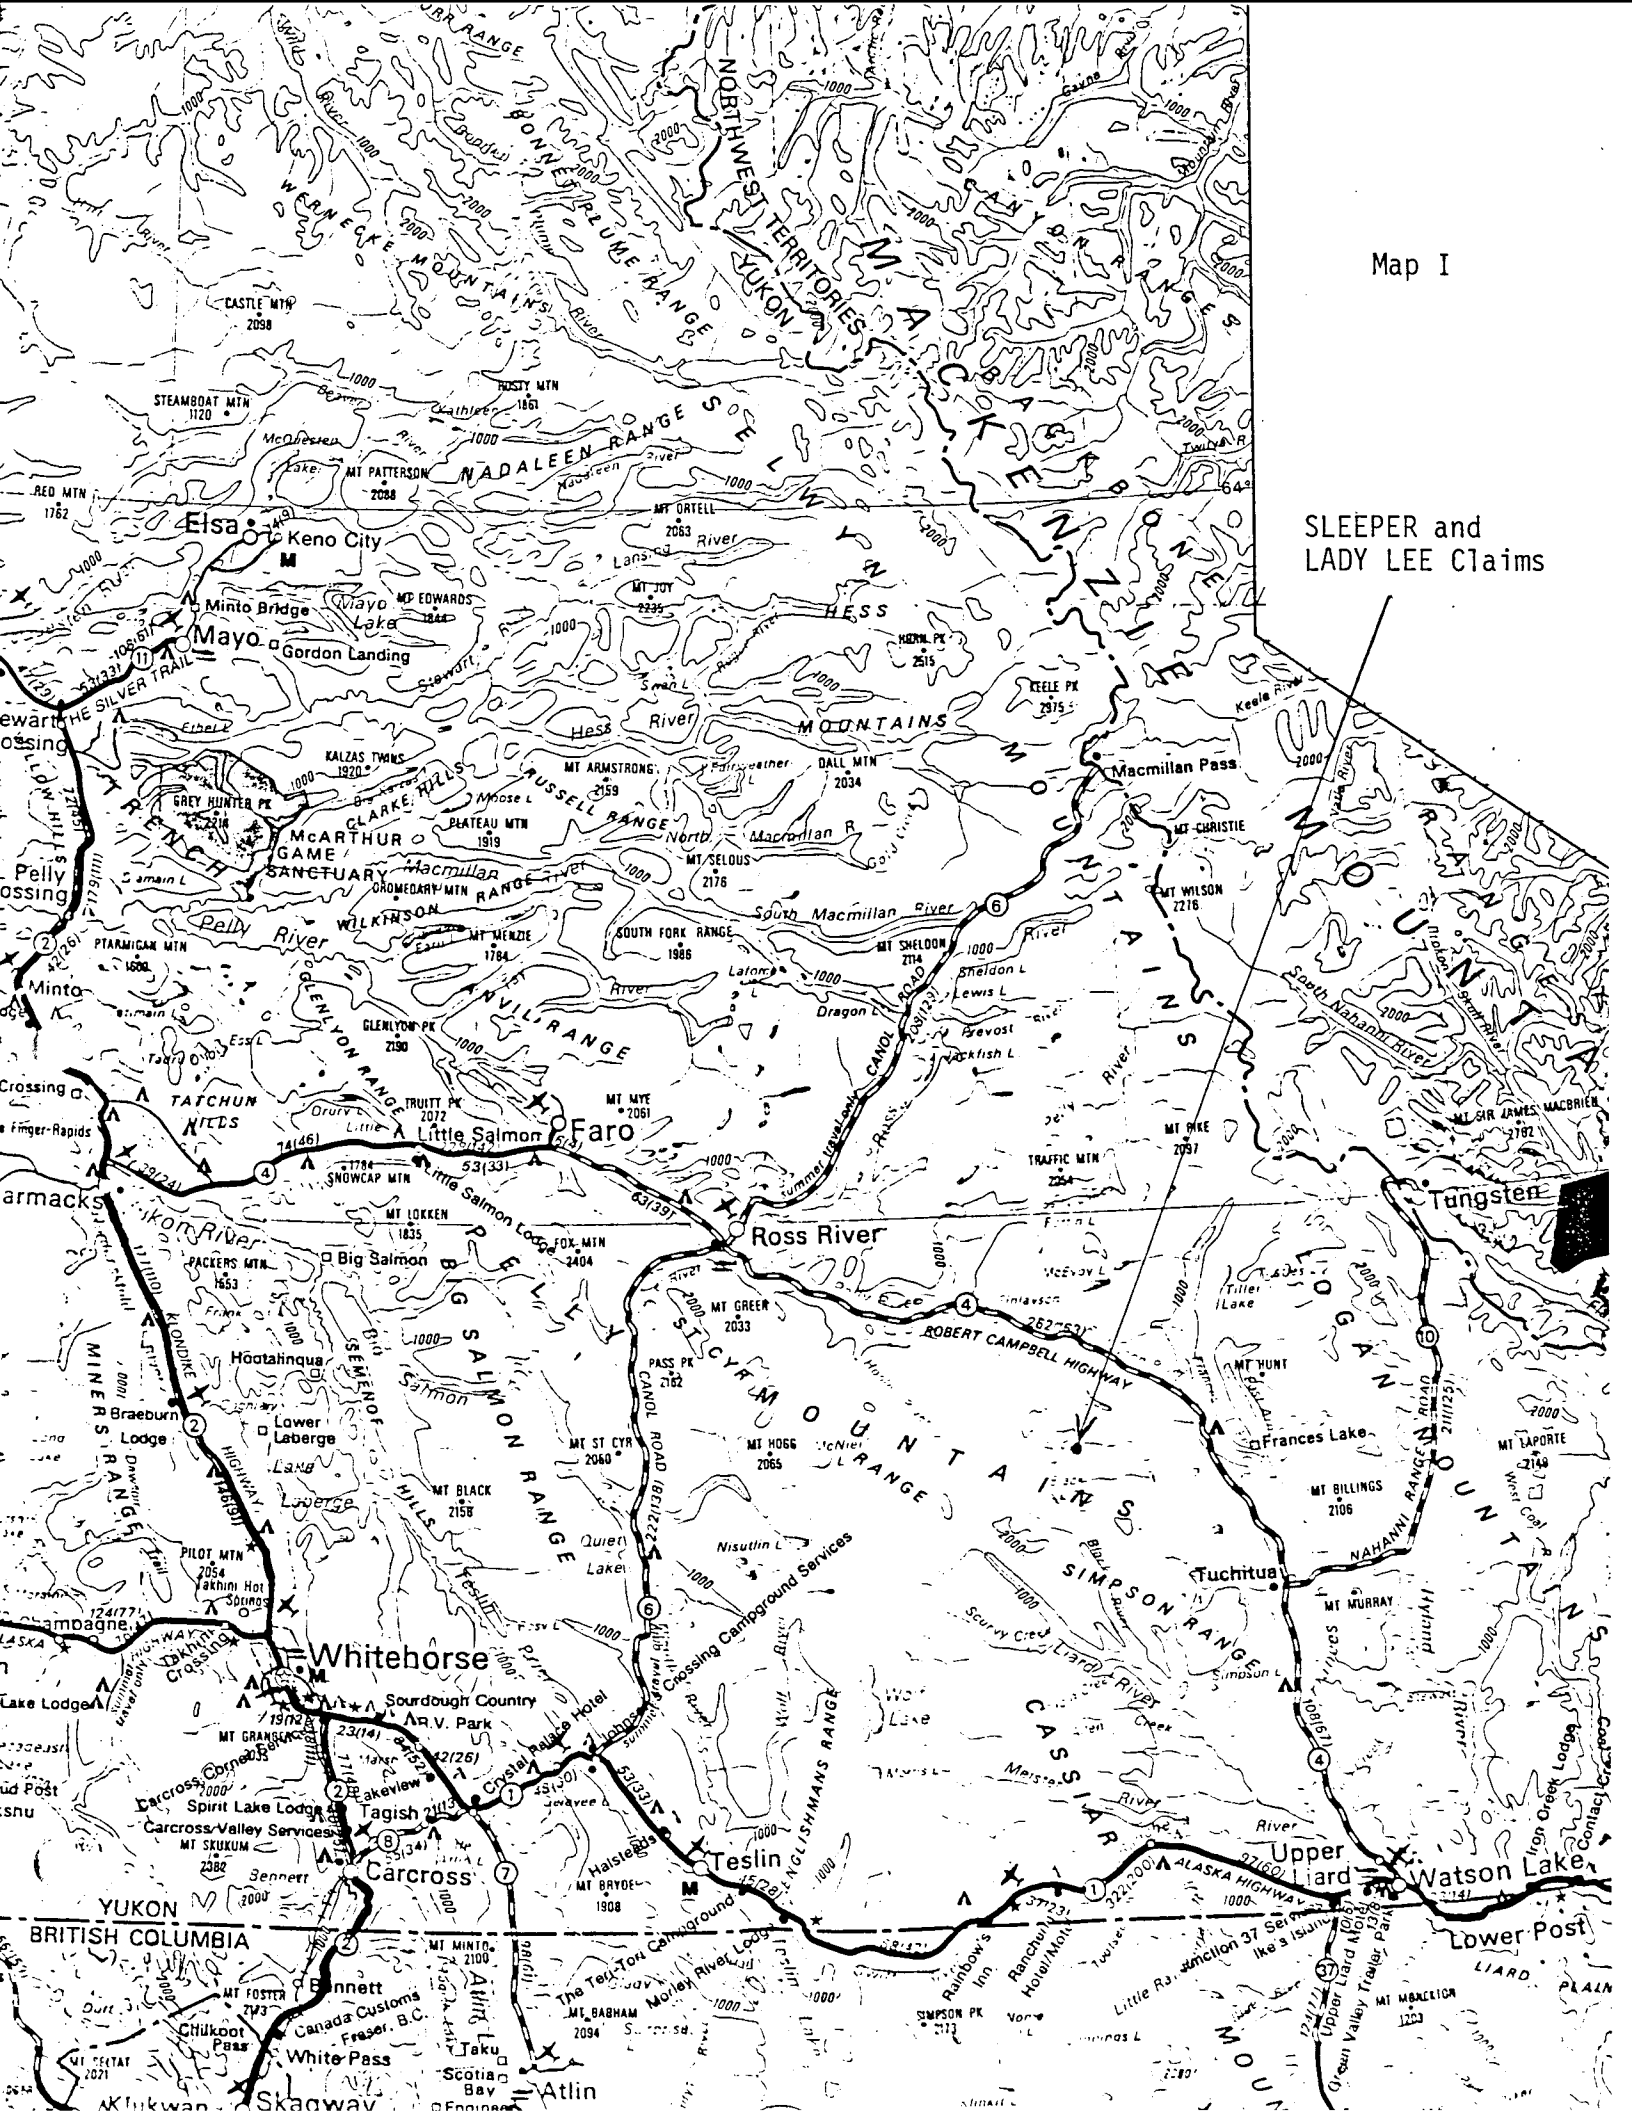

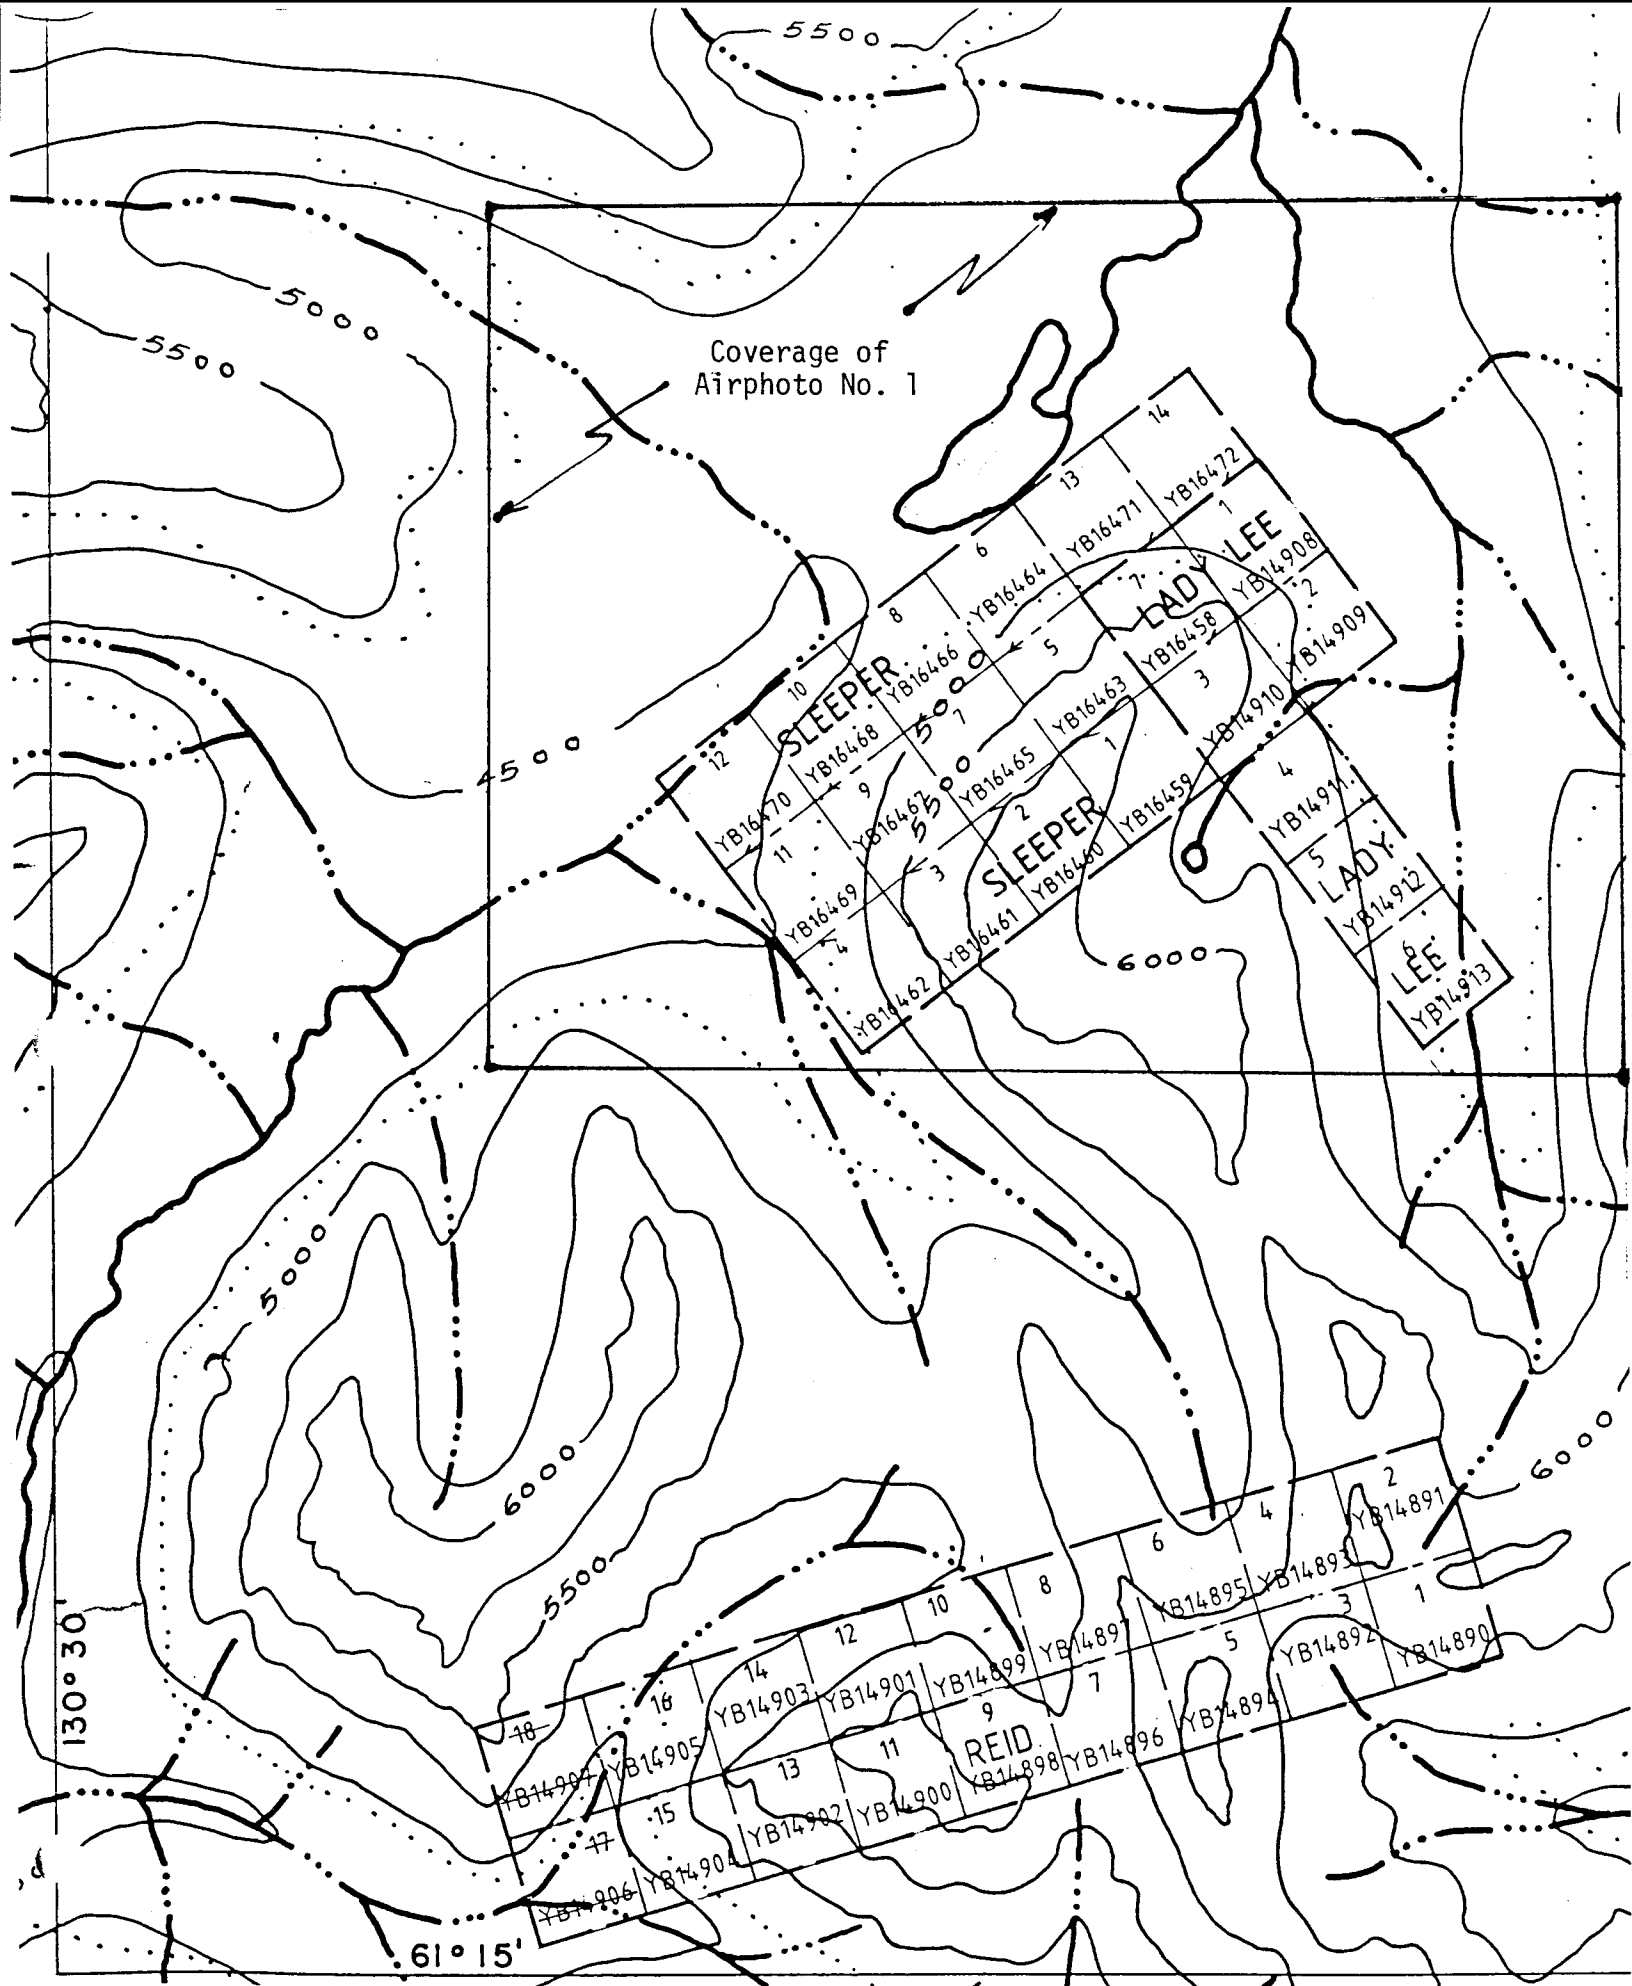

105-G-08



MAP II



AIRPHOTO II

A 25289-114

## HISTORY

The area was chosen in 1988 to prospect the ultramafic rocks of the Money Klippe (Photo III) and surrounding terrane (Finlayson Sheet 105-G) in a continuing search for nephrite (jade) in southern Yukon. The discovery of nephrite led to the staking of the six LADY LEE 1-6 claims in 1988 covering two serpentinite bodies in the basal part of the Anvil allochthon.

During 1989, over 300 kilograms (660 pounds) of in-situ carving grade nephrite were hand picked and backpacked down to the nearby lake and airlifted to Watson Lake. Departure from the area, when snow squalls frequented the region in September, was postponed upon the discovery of one piece of malachite-stained biotite schist float containing fine grained sulfides. Shortly afterwards the discovery of additional mineralized boulders led to the staking of the 14 SLEEPER claims and LADY LEE #7 claim, forming a block contiguous with the LADY LEE 1-6 claims, to cover the possible stratiform sulfide horizon that was indicated.

An Agreement with the Yukon Government (ED90-1/90008) was entered into by James S. Dodge on 27 June, 1990 under the Yukon Mining Incentives Program to assist in financing the preliminary exploration program for the claims. This report provides the results of that program for the Yukon government as well.

Published geological work in the area includes the Finlayson map sheet 105-G by Templeman-Kluit (1977) followed by published geologic investigations by Templeman-Kluit (1979), Morin (1981), and Erdmer (1981).



PHOTO III

View southwesterly of the northwest sector of Money Klippe (distant left half of photo). Far lake is used by float planes; camp on southeast shore. SLEEPER claims extend from camp up-slope to southeast and over sharp ridge and partly into cirque. LADY LEE claims extend southeasterly across floor of cirque.

Green line marks base of volcanics and top of Anvil allochthon. Blue line marks thrust zone between sole of Anvil allochthon and underlying Nisutlin allochthon.

Granodiorite stock forms mountain mass far right distance.

## SCOPE OF 1990 EXPLORATION PROGRAM

The preliminary exploration program on the SLEEPER group of claims during 1990 focused on enlarging the data base on the stratiform sulfide occurrences with respect to lateral extent, thickness, polymetallic grade, and genetic model. The goal was to obtain results sufficiently encouraging to a major mining company which could be interested in further exploration for a massive sulfide deposit on the SLEEPER claims and possibly on all peripheral claims added on.

Within the parameters of a limited budget (50% from Dodge and 50% from Yukon government) James Dodge was to carry out a 14-day solo field program which stressed detailed prospecting largely below timberline on the evident outcrop trend of the sulfide horizon on which the claims had been staked in 1989.

On the premise that promising results would be obtained in prospecting, preparations had been made to lay out a survey baseline, to have VLF-EM equipment and soil sampling tools available for familiarization surveys on several crosslines to the baseline to test the efficacy of these methods for future detailed exploration.

A Boyles JKS-10 GSC sampler core drill was on hand to be used to sample any well-mineralized bedrock exposure of polymetallic sulfides.

## EXPLORATION MODEL

Exploration models differ for polymetallic Cu-Zn-Pb-Ag stratiform volcanogenic sulfide mineralization and for epithermal gold mineralization on the SLEEPER and LADY LEE claims. The conformable disseminated to massive sulfides are all a part of a single (?) stratiform accumulation which formed at or near submarine hydrothermal vents. In contrast, the gold occurrence is hosted by a quartz-healed breccia zone and is of evident epithermal origin possibly genetically related to Tertiary igneous activity nearby.

## Polymetallic Sulfides

Host for the sulfides is quartz-biotite-garnet schist containing sericite and relict feldspars with minor chlorite. A petrographic description of transparent and opaque minerals in polished thin section of a sulfide sample from Line 1+58E (15N) by Vancouver Petrographics Ltd. of Vancouver (Appendix) summarizes as follows:

"This is a strongly metamorphosed rock from the mid- to upper greenschist facies (garnet-biotite). It probably was originally a volcanic, possibly tuffaceous with about 20% each of feldspar and mafic phenocrysts/shards, and probably of intermediate composition."

The gently inclined foliation of the sulfide horizon is conformably underlain by pre-ore hydrothermally altered, flaser textured, pyritic quartz-sericite (muscovite) schist which suggests a proximal deposit. That this represents a stringer zone is uncertain, owing to the deformation occurring during emplacement of the Nisutlin allochthon. Likewise, a possible synvolcanic heat source for the sulfide-rich hydrothermal solutions, is not evident. Both the granodiorite stock and the bimodal basalt-rhyolite assemblages of volcanic and subvolcanic igneous rocks nearby tilt and intrude the Nisutlin metavolcanics. Thus, there are not considered likely sources of the Stratiform sulfides on the SLEEPER claims.

The structural setting of the sulfide horizon is noteworthy. The deposit occurs near the northern tip of the Money Klippe as described by Erdmer (1981)(Photo III). Host for the SLEEPER sulfide horizon is the Nisutlin allochthon of sheared and cataclastic rocks presumed to have originated within or near the present Teslin Suture Zone (Templeman-Kluit, 1979)(Photos IV,V).

The Teslin transverse fault zone (perhaps the extension of an oceanic transform fault on the subducting plate) is postulated to have controlled an island-arc spreading basin with its dominant felsic submarine volcanism. As Sangster (1972) and Franklin (1981) pointed out, massive volcanogenic sulfide deposits tend to be aligned parallel to linear zones of weakness serving as conduits for rising sulfide-bearing solutions discharging at or near the pre-ore ocean floor which in turn, under the influence of the fissure zone, may have become an elongated trough.

The Fyre Lake massive pyrite-chalcopyrite deposit (Morin, 1981), located 12 km (7 miles) to the south-southwest, whose distinct north-northwest elongation within the Nisutlin terrane, evokes support for the premise that massive sulfide occurrences such as on the SLEEPER claims, will likely be elongated parallel to the Teslin Geosuture Zone as well.

It follows then that the trend of massive sulfide outcrops and float on the SLEEPER property, along which the 45° AZ baseline was laid out, may be exposing roughly the cross-section of the south-southeasterly trending deposit of undetermined extent.

A brief review of the literature found similar geologic settings to the SLEEPER occurrences in the Khayyam and Stumble-On deposits on Prince of Wales Island, Alaska (Barrie and Kyle, 1988) and at the Stekenjokk-Levi mine in Sweden (Zachrisson, 1984). Further, even though no sulfate minerals were identified in the petrographic study of a sulfide sample from the felsic to intermediate composition metavolcanics on the SLEEPER, the Kuroko-type setting is suggested from the comparable criteria used by Neathery and Hollister (1984) in their summary of massive sulfide exploration models.

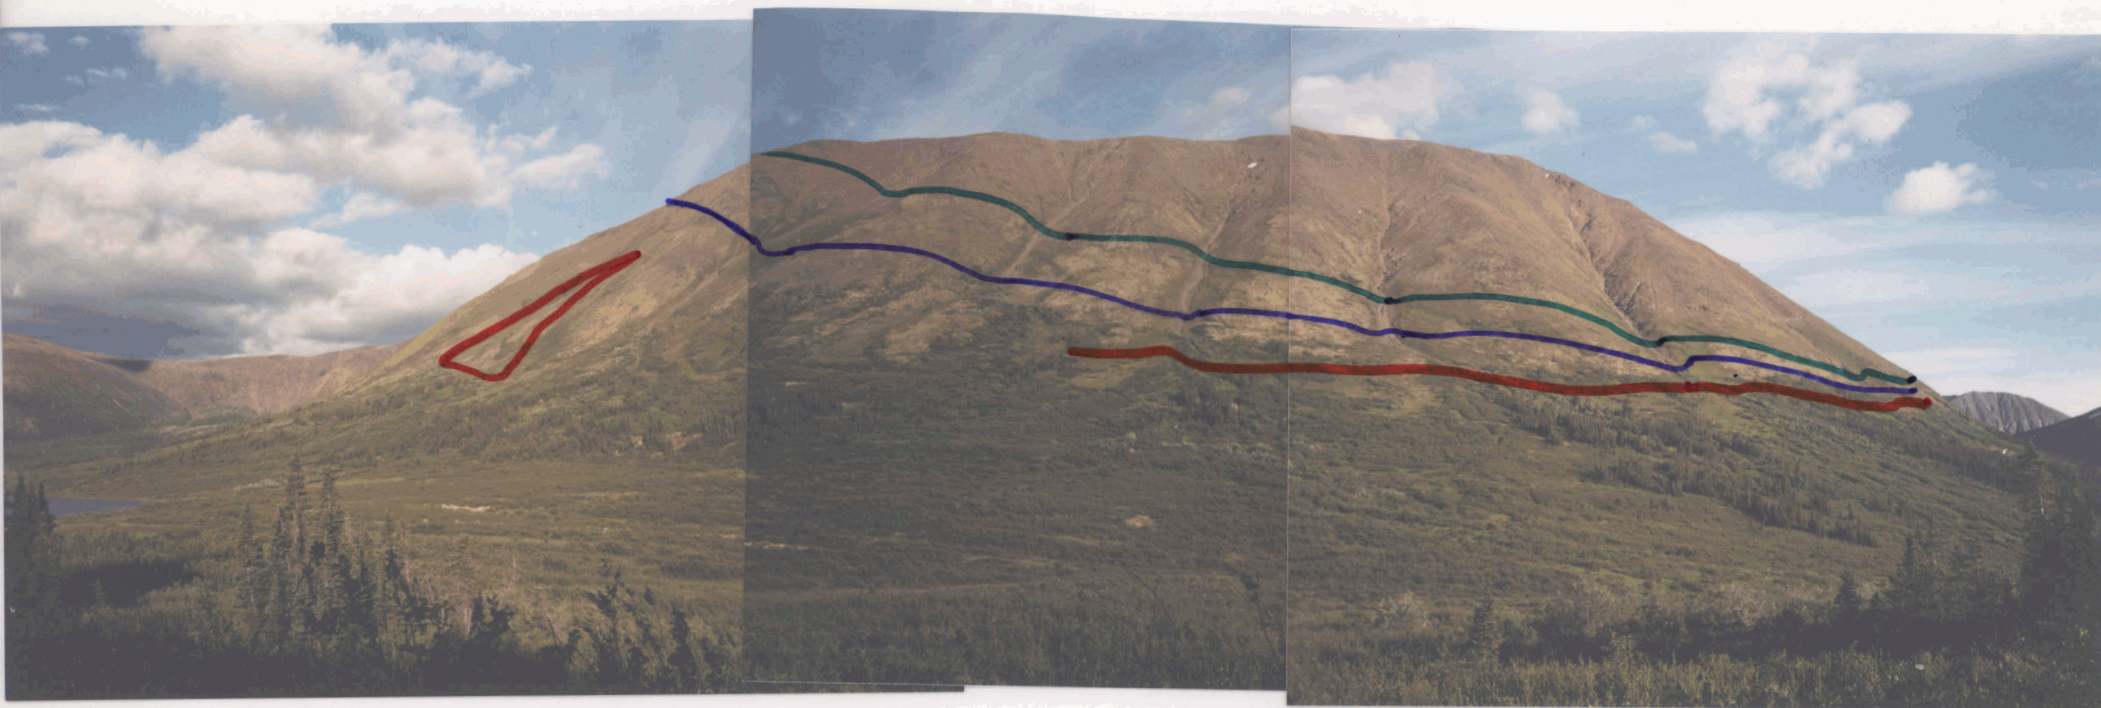


PHOTO No. IV


Panoramic view of SLEEPER claims area looking southeasterly. Western end of the access lake (1380 m) is at far left edge of photo,

Crest of mountain (1780 m) comprises bimodal basalt-rhyolite Tertiary volcanic flows and tuff with several rhyolite para-sill intrusives. Green line marks base of volcanics and top of Anvil allochthon amphibolites, the latter being slightly recessive weathering. The blue line marks thrust plane between sole of Anvil allochthon and top of the felsic metavolcanics of Nisutlin allochthon. The red line approximates trend of volcanogenic sulfide stratiform horizon.

The oval-shaped red patch outlines site of anomalous gold/arsenic mineralization in bedrock breccia and talus float.

PHOTO III

Airphoto enlargement of core area of SLEEPER and LADY LEE claims. Green line marks base of bimodal basalt-rhyolite volcanics and contact with eroded underlying amphibolites and serpentinite bodies of Anvil allochthon. Blue line marks approximate zone of thrust faulting between sole of Anvil allochthon and underlying meta-volcanics of Nisutlin allochthon. Red identifies trend of volcanogenic sulfides with dots for sites where float or bedrock have been found. Red also outlines known area of anomalous gold and arsenic in an epigenetic setting (lower left).

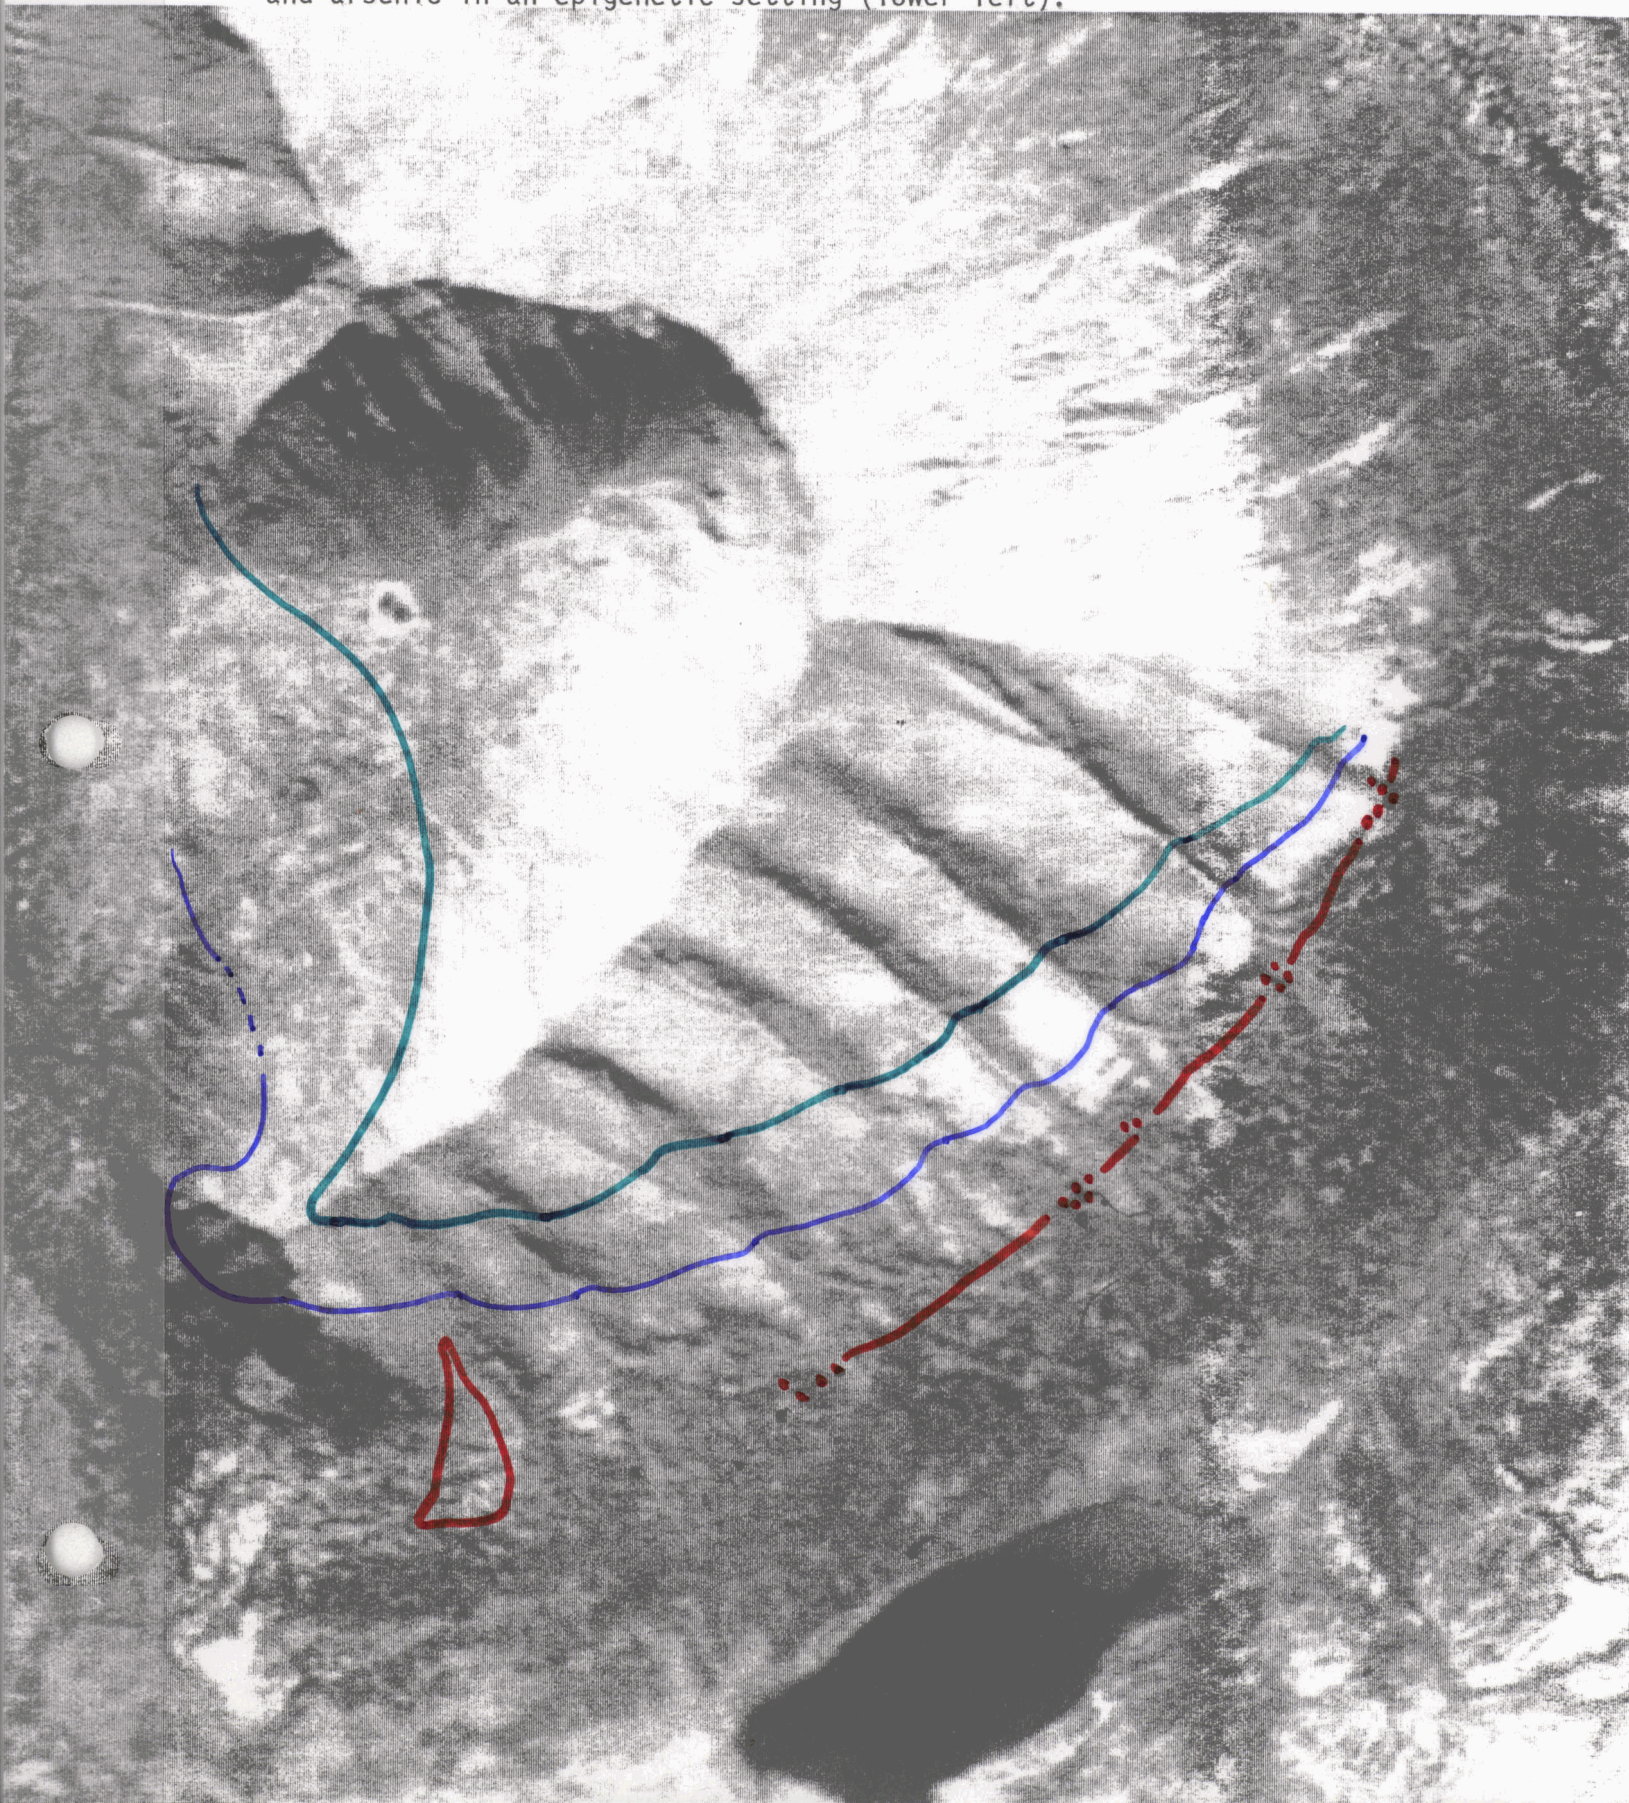

## PROSPECTING

Prospecting "systemmatique", after the model of the French Atomic Energy Commission, was carried on during the initial five days in the Program. Having obtained a general indication of the trend of the sulfide outcrops from the end-1989 field season, the prospecting area was divided into east and west sectors with the separation arbitrarily at a pyritic bedrock outcrop approximately 600 meters (1970 feet) east of the original discovery area in a steep gully.

Using a Griffin light weight, long handled grub-pick, traverses were slowly made for roughly 50 meters (165 feet) both up and down slope from the apparent 'trend' on lateral lines estimated to be no more than 5-6 meters (16-20 feet) apart. This spacing would permit spotting even small exposures of suspect sulfide float or bedrock between lines.

At the outset it became apparent that prospecting would be ineffective in rather broad areas where Recent fans of scree and boulders were present (Photo II, IV and Map III). The slide rock and debris derived from serpentinite and amphibolite of the Anvil allochthon and also blocky Tertiary volcanic material, from outcrops high on the mountain slope, in places covered the potential outcrops of the stratiform sulfides to a thickness of over 5 meters (16 feet).

Detailed prospecting paid off with the sighting of a 20 cm<sup>2</sup> exposure of a piece of weakly limonitic foliated float (1+58E 17N). Unearthed, this proved to be a 20 kg (44 pound) chunk containing visible polymetallic sulfides in schist; however, it showed no evidence of being far removed from its bedrock parent (Frontispiece). Well hidden by thick turf, the bedrock was located only 2 meters (6½ feet) up slope. Spurred on by this success, further float discoveries were made in this vicinity and also in an area 400 meters (1300 feet) farther to the east.

At the end of five days of prospecting, sufficient sulfide indications had been obtained to determine an appropriate location for a baseline from which locations of float and bedrock could be mapped. The VLF-EM and soil sample familiarization survey crosslines could also then be laid out. Using a brunton compass, a baseline at 45° AZ was established by means of topoline and lath markers at each 100-meter (328-foot) interval. The baseline extends 700 meters (2295 feet) east and 600 meters (1970 feet) west. Owing to many large boulders of magnetic serpentinite in the 1+58E to 2+50E interval, it was subsequently shown that compass deviations occurred and the baseline is kinked. In the best employment of time, only occasional line cutting was carried out along the baseline.

## GEOPHYSICAL SURVEY

A Very Low Frequency electromagnetic (VLF-EM) familiarization survey was conducted over the two main areas in which significant Cu-Zn-Pb-Ag sulfide mineralization in float and bedrock had been located (Photo IV).

Crosslines were turned off the Baseline at right angles in southeasterly and northwesterly directions. With a view to facilitating subsequent soil sampling along those lines, the crossline sites took advantage of open areas where possible in order to reduce the amount of line cutting in thick brush.

Stations on each line were spaced at 15-meter (49-foot) intervals and identified with marked and flagged lath. The length of each crossline varied depending upon the relative positions of sulfide float or bedrock with respect to the Baseline.

Field data from dip angle readings on a Sabre VLF-EM unit were filtered according to the Fraser technique (Fraser, 1969) (Figures 3-6) and plotted as contours (Map IV). The contours reaffirm the stratiform sense of sulfide mineralization as being essentially parallel to the surface trend of polymetallic sulfides and to the strike of the three outcrop areas. Superpositioning of locations of sulfide bedrock (Lines 0+17W and 1+58E) and float (Lines 5+30E and 6+00E) onto the VLF profiles (Figures 7-10) may indicate that the gently southeasterly inclined sulfide horizon, where highest base metal values are now known, extends southeasterly.

It is to be noted, however, that pervasive disseminated fine-grained pyrite within the gently (10-20°) inclined foliated thick (40 meters=130 feet) sequence of meta-chert or stufite overlying the polymetallic sulfide unit may be considered a broad conductor which could influence the interpretation of the VLF survey.

Unlike the Besshi-type of massive sulfides, e.g. Fyre Lake, which have detectable magnetic signatures, random field checks on the SLEEPER base metal sulfides and their host rocks failed to identify any magnetically anomalous samples. The efficacy of a magnetometer survey is questioned, inasmuch as highly magnetic serpentinite bodies occur near the base of the Anvil allochthon and, more importantly, their erosional boulders are common constituents in the broad scree fans which the eastern half of the Baseline crosses.

## GEOCHEMICAL SOIL SAMPLING

A familiarization soil sampling survey was conducted along the four crosslines used during the earlier VLF-EM survey. The objective was to test for the presence of anomalous concentrations of base metals in soil both up- and down-slope at 15-meter (49 feet) intervals from sites where well-mineralized float or bedrock had been identified by detailed prospecting (Map V).

Soil sampling sites were hand dug with grub hoe and shovel. Underlying a thick grass sod was thin volcanic ash layer, a thick zone of dark brown to black humus soil, and then a characteristic light brown to tan sandy loam down to subcrop rock chips. Samples were taken from the upper 8-10 cm (3-4 inches) of the sandy loam.

Typically, the soil profile from top to bottom comprised 15 cm (6 inches) of sod; 5-7 cm (2-3 inches) of Recent off-white volcanic ash; 25-30 cm (10-12 inches) of dark brown to black loamy humus, and from 25-40 cm (10-16 inches) of light brown to tan sandy loam bottoming in rock chips of subcrop zone.

Samples averaged about 350 grams (12 ounces) each in weight and were placed in marked draft geochemical sample bags. Although only slightly damp at most sites, samples were hung up at camp and air dried before delivery to Bondar-Clegg in Whitehorse for geochemical determinations.

The assay report from Bondar-Clegg (Figure 1) on the 21 soil samples gave values for copper, lead, zinc, silver, molybdenum, arsenic, antimony and mercury in parts per million, and for gold in parts per billion.

The limited extent of soil sampling in this familiarization survey makes it impractical to employ any statistical methods in the interpretation of results. Nevertheless, a cursory study of the data leads to several observations which may be pertinent in planning future expanded geochemical soil surveys, namely:

- a) On the 15-meter sample site spacing, anomalously high values in base metals are confined to a single or perhaps two adjacent sample sites on each crossline. That the dispersion of metal ions is not greater on the 10<sup>0</sup>-15<sup>0</sup> slopes may be explained by the generally low iron sulfide content of the sulfide horizon resulting in only weak lowering of the pH in weathering solutions and, thereby, relatively little liberation of metals from subcrops.
- b) All 5 soil samples on Line 6+00E and two rock chip samples of float to the east have distinctly high arsenic values, a geochemical signature common to many Kuroko-type deposits. It is uncertain as to the proper interpretation of the low, but anomalous, antimony values.
- c) As a cost-saving comment: there appears no need to include gold in the general massive sulfide base metal "package" of elemental geochemical determinations called for in future soil sampling along this Kuroko-type setting - in contrast to the Besshi-type massive sulfide deposits, e.g. Fyre Lake.



PHOTO VII

Equipment used in ground electromagnetic survey:  
Sabre VLF-EM unit, brunton compass, 100-meter tape,  
lath, flagging, brunton compass, axe, topline.



PHOTO VIII

Equipment used in geochemical soil sampling. Griffin  
grub-pick, 100-meter tape, kraft bags, flagging, gloves.

## OUTCROP CORE SAMPLING

Although it was anticipated that there would be a paucity of bedrock exposures of the polymetallic sulfide horizon below timberline, the JKS-10 GSC sampler core drill had been brought in to augment chip sampling of outcrops where found.

The JKS-10 core drill (Photo IX) is a light weight one-man gasoline driven drill with a coring capacity to a nominal depth of 3 meters (10 feet). Low fuel and water consumption make this an ideal field-use sampling tool. The I.R.W. series diamond bit delivers core with a nominal diameter of 25.1 mm (0.99 inches).

The bedrock outcrop discovered at Station 15N on Line 1+58E, which contained visible chalcopyrite and sphalerite, was selected as the ideal site to use the core drill for sampling. Drilling recovered sulfide-bearing core representing at least 90% of the length of the hole to a depth of 1.28 meters (4.2 feet). At this depth circulation of drilling water was lost and coring was continued only to a total hole depth of 1.46 meters (4.8 feet) in hydrothermally bleached pyritic quartz-muscovite schist; here core recovery was reduced to 60%-70% of the hole length. Because of the small diameter of core, splitting and assaying have been postponed pending evidence of serious interest by a major company in optioning the property.

Hand trenching nearby revealed base metal sulfide-bearing subcrop and float in soil up-slope from the drill site, indicating that the total thickness of the polymetallic sulfide horizon is conservatively not less than 2 meters (6.6 feet) at this site.



PHOTO X

JKS-10 sampler core drill at the 0.5-meter (1.6-foot) depth during coring of the outcrop of horizontal stratiform base metal sulfides. The site is Line 0+58E(15N) near the common end line between claims SLEEPER 6 & 8. Core lies on plastic tray in foreground.

Chartreuse colored pressure tank supplies water during drilling. Black hose leads to gasoline drum in shade far right.

View is northerly toward access lake in distance.

## Epigenetic Gold/Arsenic

Prospecting on SLEEPER #13 claim identified a pyritic quartz-healed phyllonite breccia zone outcropping on a low knoll at timberline. The exposure is approximately 300 meters (1000 feet) northeast of the end of the baseline over the stratiform sulfide occurrences, and is at least 40 meters (130 feet) long and 20 meters (65 feet) wide (Photo No. IV and V).

Samples in this area exhibited typical epithermal deposition characteristics and, because of the proximity of the suite of bimodal basalt-rhyolite volcanics less than 500 meters (1600 feet) to the southeast, they were natural candidates to host gold mineralization. Accordingly, from the breccia zone and from the steep scree slope above on LADY LEE #1 and #7 claims, numerous samples of open-space-filling pyritic quartz were collected from sites as high on the mountain as the projected thrust fault zone between the Nisutlin and Anvil allochthons.

Geochemical rock chip assays of 13 samples by Chemex Labs of North Vancouver (Figure 2) revealed anomalously high gold and arsenic values; the latter a common 'pathfinder' element for gold in the epithermal environment. The highest values were in a float sample from near the base of the scree slope in which 1220 ppb (parts per billion)(0.035 oz/t) and 2270 ppm (parts per million) arsenic were reported. Two samples (#420757 and #420758) from breccia outcrops yielded anomalous but low (80 ppb) gold values, yet their arsenic content was highly anomalous (>400 ppm).

The geologic setting and arsenical gold anomaly sets this area apart genetically and physically from the known extent of the volcanogenic polymetallic sulfide horizon; it represents a distinct exploration target with a probable Tertiary epigenetic hydrothermal model.

## CONCLUSIONS

Rock chip sampling of boulder float and outcrops confirms the presence of important concentrations of Cu-Zn-Pb-Ag in two segments totalling 225 meters (740 feet) within the known 1300 meter (4265 feet) long sulfide horizon of disseminated sulfides in the Nisutlin allochthon. Scree fans mask possible outcrops over one-half of the total extent of the sulfide band. Outside the scree fans, geochemical soil sampling can be useful in close proximity to the subcrop of the sulfide horizon.

Very low frequency electro-magnetic (VLF-EM) geophysical familiarization survey results may indicate that the gently inclined polymetallic sulfide horizon extends southeasterly,

The dominant felsic metavolcanic suite, and intensely hydrothermally altered schist immediately underlying the polymetallic sulfide zones, together with anomalously high arsenic values, indicate a Kuroko-type volcanogenic setting. Assuming a district-wide tendency for fissure controlled NNW/SSE elongation of tabular massive sulfides in the Nisutlin allochthon parallel to the Teslin geosuture (e.g. Fyre Lake pyrite-copper deposit), there is a reasonable probability that the base metal mineralization on the SLEEPER claims extends in a SSE direction.

Anomalous gold and arsenic values in rock chip grab samples from a bedrock quartz-healed breccia zone and in float nearby are indicative of epithermal gold mineralization near the northeast end of the claims.

The 1990 program confirmed the presence of important stratiform volcanogenic Cu-Zn-Pb-Ag concentrations and, nearby, the site of highly anomalous gold-arsenic values; both warrant subsequent advanced exploration efforts.

## RECOMMENDATIONS

- A. Polymetallic volcanogenic sulfide horizon
1. Extend the baseline both east and west; realign where required.
  2. Expand the VLF-EM survey with supplemental lines off the baseline.
  3. Soil sample at all EM stations in vicinity of trend of sulfide horizon.
  4. Stake additional claims where deemed prudent.
  5. Select appropriate sites for fences of vertical core drilling to test possible south-southeast elongation of polymetallic concentrations.
  6. Conduct Phase I of core drilling.
- B. Gold-Arsenic geochemical anomaly
1. Map geology of quartz-healed breccia area, while expanding prospecting of the area.
  2. Soil and bedrock geochemical sampling.
  3. Establish baseline and conduct VLF-EM survey.
  4. Determine if core drilling warranted,

## REFERENCES

- Barrie, C.T. and Kyle, R.J. 1988. Geology, geochemistry, and tectonic setting of the Khayyam and Stumble-On massive sulfide deposits, Prince of Wales Island, Alaska: *Econ. Geol.* v. 83, p. 182-196.
- Erdmer, P. 1981. Comparative studies of cataclastic allochthonous rocks in McQuesten, Laberge and Finlayson Lake map areas: In *Yukon geol. and explor. 1979-1980*, DIAND, Whitehorse, Yukon Territory, p. 60-64.
- Franklin, J.M. et al 1981. Volcanic-associated massive sulfide deposits: *Econ. Geol.* 75th Annv. v., p. 485-627.
- Fraser, D.C. 1969. Contouring of VLF-EM data: *Geophysics*, v. 34, p. 958-967.
- Morin, J.A. 1981. Volcanogenic iron and base metal occurrences in Klondike schist: In *Yukon geol. and explor. 1979-1980*, DIAND, Whitehorse, Yukon Territory, p. 91-97.
- Neathery, T.L. and Hollister, V.F. 1984. Volcanogenic sulfide deposits in southernmost Appalachians: *Econ. Geol.*, v. 79, p. 1540-1560.
- Sangster, D.R. 1972. Precambrian volcanogenic massive sulphide deposits in Canada: A review: *Geol. Surv. Canada*, Paper 72-22.
- Templeman-Kluit, D.J. 1979. Transported cataclasite, ophiolite and granodiorite in Yukon: Evidence of arc-continent collision: *Geol. Surv. Canada*, Paper 79-14.
- Zachrisson, E. 1984. Lateral metal zonation and stringer zone development, reflecting fissure-controlled exhalations at the Stekenjokk-Levi strata-bound sulfide deposit, Central Scandinavian Caledonides: *Econ. Geol.*, v. 79, p. 1643-1659.

STATEMENT OF QUALIFICATIONS

I, James S. Dodge, of 14 MacDonald Road, Whitehorse, Yukon submit the following information which establishes some of my qualifications bearing on the necessary level of competence required to carry out the field work and preparation of this report qualifying for assessment work credit on the SLEEPER 1 to 14 claims and the LADY LEE 7 claim.

Education

Missouri School of Mines, B.S. Mining Engineering, 1941  
Princeton University, Field Geology, 1940  
Stanford University, M.S. Economic Geology, 1951  
Albert Ludwigs Universitaet (Germany), Economic Geology, 1952

Experience


Active in mineral industry since 1941 (including Army engineers) in North and South America, Asia and Africa as prospector, company geologist, mining engineer, mine operator, and consultant in ferrous and non-ferrous metals and in industrial minerals. Among the many organizations with which I have been associated as an employee or consultant:

Anaconda, Esso, Mitsui, USAEC, Ventures, DIAND, SCAP-Japan, Atlas, Glidden, Spartan/Nuspar, Hirst-Chichagof, Floyd Odlum, Yukon Barite and numerous small mining ventures.

Field experience includes familiarization tours of five of the Japanese Kuroko polymetallic volcanogenic sulfide mines and the massive sulfide deposit of the Besshi mine. Examined massive and disseminated volcanogenic copper-zinc deposits on Prince of Wales Island, Alaska and worked in the Mount Shasta, California district.


Professional Affiliations

Registered Professional Engineer (No. 311) by Association of Professional Engineers of the Yukon Territory  
Fellow of the Society of Economic Geologists  
Member of American Institute of Mining Engineers.





*James S. Dodge*  
James S. Dodge, P.Eng.

APPENDIX A

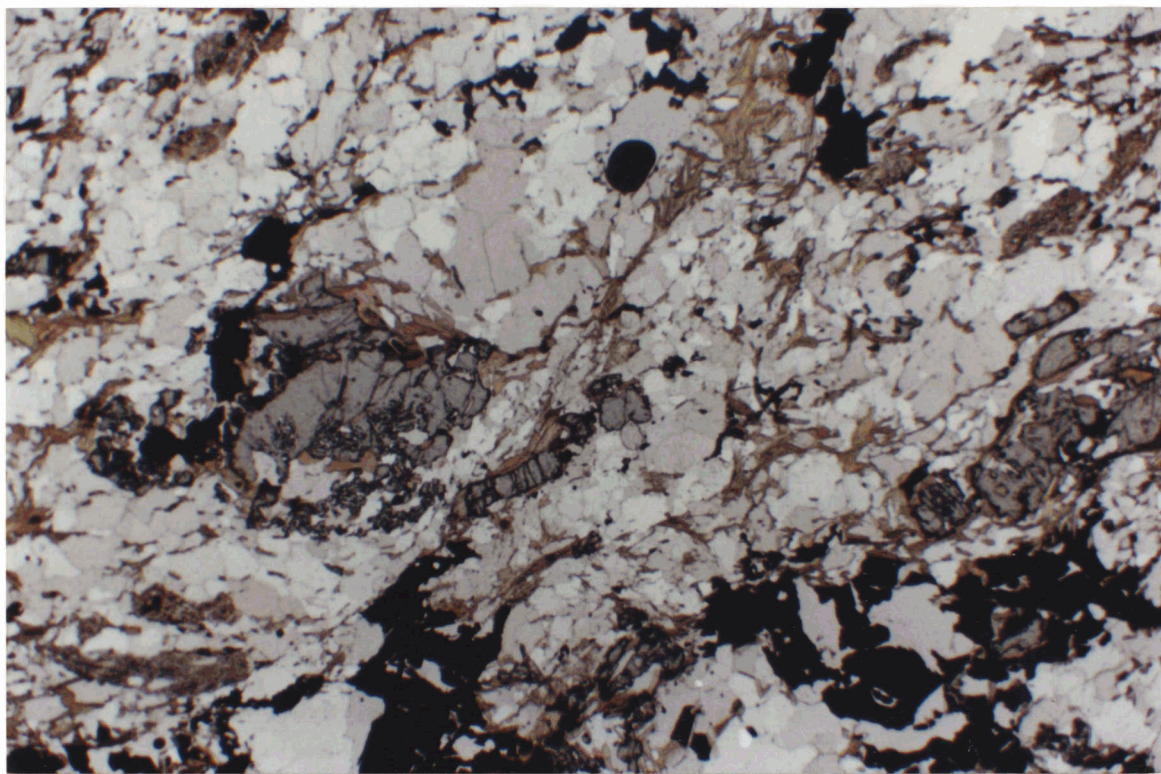



Sample A: Thin section views (above: plane polarized, and below: crossed polars, transmitted light) showing pale green garnet porphyroblasts in quartz-biotite matrix. Opaques are sulfides (see next page). Field of view is 3 mm wide.

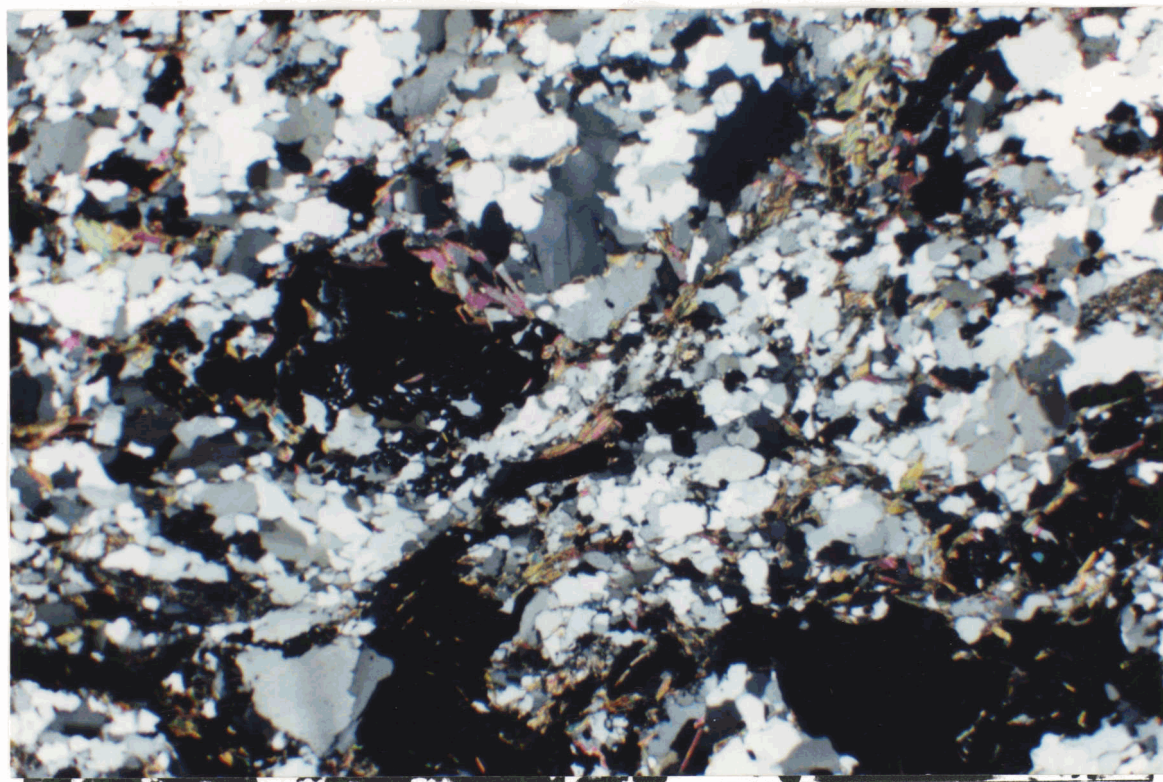

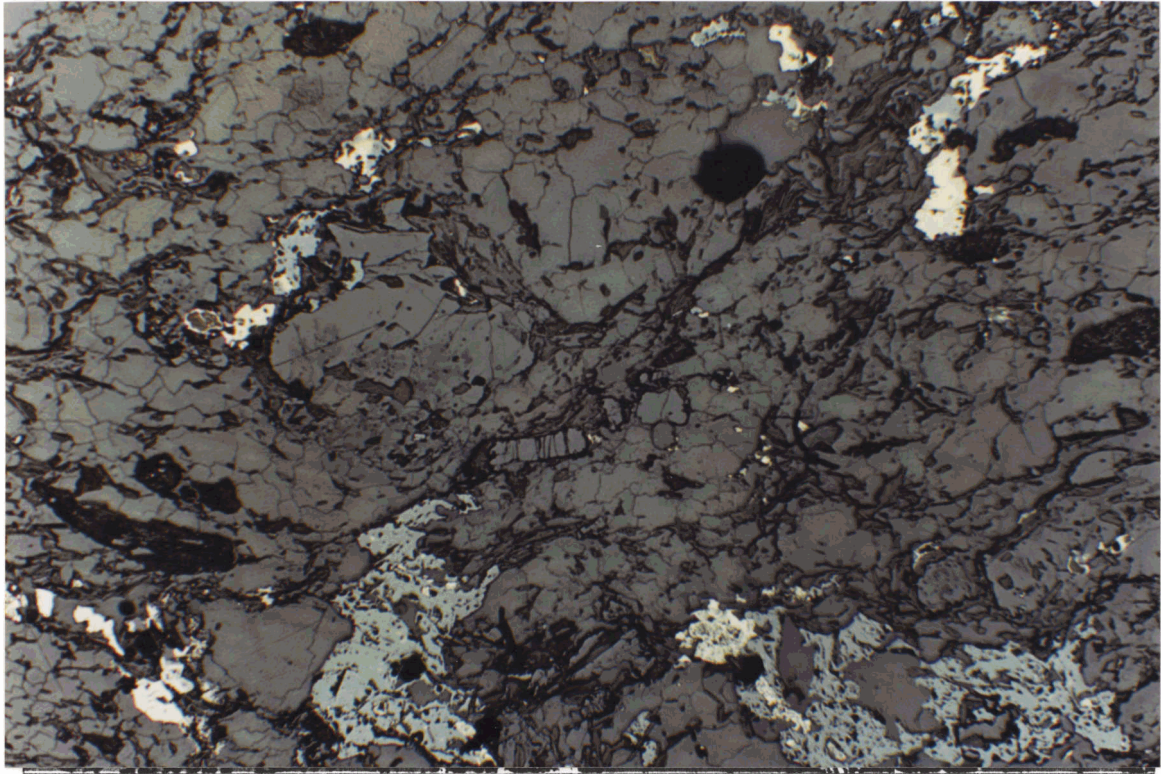

Sample A: Reflected light views (plane polarized) showing sphalerite (light grey) pyrite (white) and chalcopyrite (creamy) grains. Same field of view as previous (above, 3 mm wide) and enlarged (below, 1.3 mm wide) showing composite sphalerite-chalcopyrite-minor covellite grains and pyrite after pyrrhotite (dark grey high relief grains are garnet).

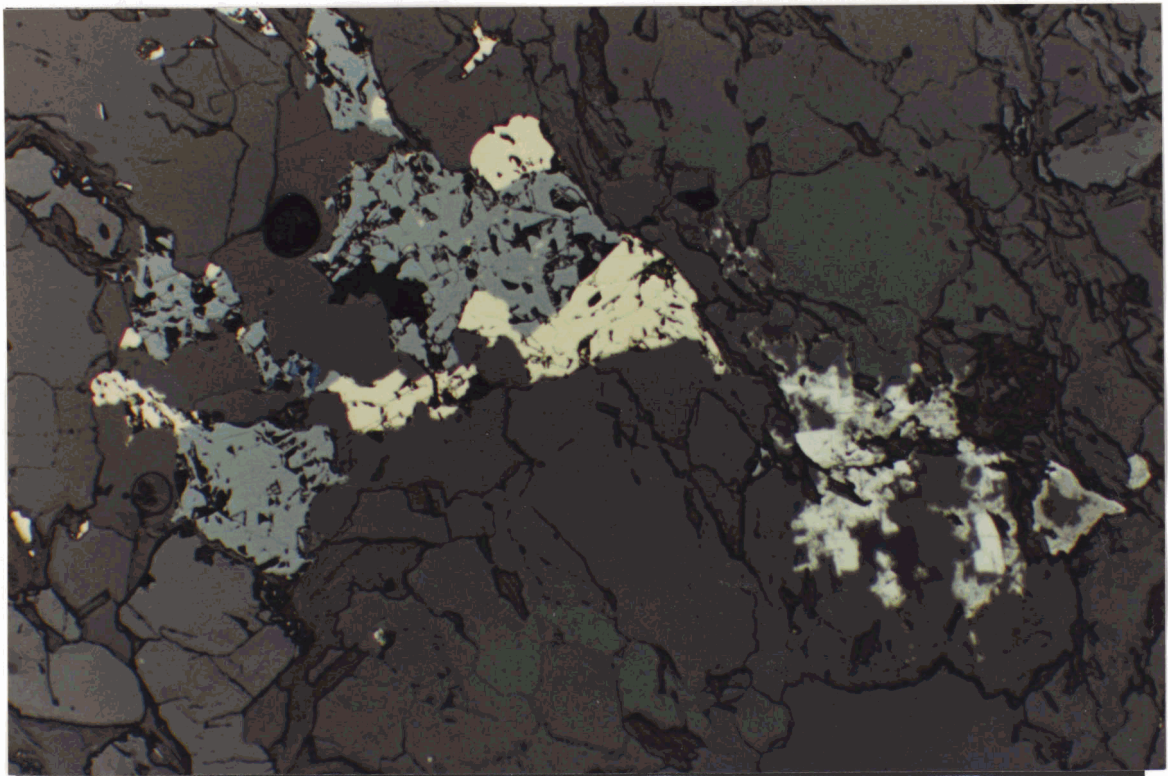



# Vancouver Petrographics Ltd.

JAMES VINNELL, Manager  
 JOHN G. PAYNE, Ph.D. Geologist  
 CRAIG LEITCH, Ph.D. Geologist  
 JEFF HARRIS, Ph.D. Geologist  
 KEN E. NORTHCOTE, Ph.D. Geologist

PO. BOX 39  
 8080 GLOVER ROAD,  
 FORT LANGLEY, B.C.  
 V0X 1J0  
 PHONE (604) 888-1323  
 FAX. (604) 888-3642

## PETROGRAPHIC REPORT ON TWO ROCK SPECIMENS FROM YUKON

Report for: James S. Dodge, P. Eng.  
 14 MacDonald Road  
 Whitehorse  
 Yukon  
 Y1A 4L2.

Invoice CL-12-90  
 Job #360,64

Sept. 11, 1990

### A: SULFIDE-RICH QUARTZ-BIOTITE-GARNET SCHIST CONTAINING RELICT FELDSPARS, WITH RETROGRADE SERICITE-CHLORITE

Described as from a dynamically metamorphosed stratiform volcanogenic polymetallic sulfide deposit in the allochthonous Nisutlin terrane. Dark grey-green rock with strong limonite staining and phyllitic sheen, characterized by white relict feldspar shards, abundant biotite, and common sulfide. It does not react to cold dilute HCl, and is not magnetic. In polished thin section, the modal mineralogy is approximately as follows:

Quartz	40%
Green ("hydro-") biotite	20%
Sericite (muscovite)	10%
Relict plagioclase	5%
K-feldspar	5%
Chlorite	5%
Garnet (green)	5%
(clear)	1%
Fyrite (after pyrrhotite)	3%
Sphalerite	3%
Chalcopyrite	2%
Apatite	1%

This rock is composed principally of granular quartz, with irregular thin laminae that are richer in biotite, and scattered garnet prophyroblasts. There are scattered clots, 1-3 mm in diameter, of relict (sericitized) feldspar and chloritized former mafics that may have been phenocrysts or shards in a volcanic or tuffaceous rock.

Quartz forms anhedral grains of up to 0.5 mm diameter. Most grains show signs of mild strain (undulose extinction) but they are annealed rather than fractured. Biotite has greenish brown pleochroism, and forms euhedral flakes up to 0.3 mm long. Garnet forms subhedral to euhedral grains up to 2 mm diameter; there are both pale green (most abundant) and colourless varieties side by side (not actually touching). The garnets enclose both sulfides and other silicates, suggesting they grew around the sulfides.

Most of the relict feldspars appear to be plagioclase in thin section, but the etched and stained slab suggests the presence of K-feldspar (yellow stain). Except in rare cases, the plagioclase is strongly altered to fine-grained sericite (muscovite) flakes of 0.01 to 0.03 mm diameter. One grain displays reverse compositional zoning, ranging from about ?labradorite at the rim to andesine at the core. The former ?mafic grains are now completely pseudomorphed by fine-grained chlorite and biotite. Most of these former phenocrysts have been crushed and disaggregated by the metamorphism.

This is a strongly metamorphosed rock from the mid- to upper greenschist facies (garnet-biotite). It probably was originally a volcanic, possibly tuffaceous with about 20% each of feldspar and mafic phenocrysts/shards, and probably of intermediate composition.

Although by no means a massive sulfide, this rock contains interesting amounts of base-metal (Cu and Zn) sulfides. Sphalerite forms ragged, anhedral grains up to 0.5 mm across, and chalcopyrite is a little less abundant, forming subhedral grains up to 1 mm long. Pyrite is the most abundant sulfide, forming subhedral grains up to 0.5 mm in diameter, but at least half of it has apparently formed by replacement of pyrrhotite (typical "bird's-eye" texture), probably during retrograde or weathering conditions. The sulfides are generally interstitial to the silicates, and are associated with the most biotitic layers.

APPENDIX B



### SLEEPER CLAIMS (105-G-08)

REPORT: V90-36204.0


DATE PRINTED: 28-ADG-90

PROJECT: NONE GIVEN

PAGE 1

SAMPLE NUMBER	ELEMENT UNITS	Au 30g PFB	Ag PPM	Cu PPM	Pb PPM	Zn PPM	Mo PPM	As PPM	Sb PPM	Hg PPM	Line-Station
S1 76251		<5	0.4	46	105	363	4	24.0	1.3	0.038	6+00E(45S)
S1 76252		<5	0.3	332	221	1693	5	9.5	0.6	0.069	6+00E(30S)
S1 76253		<5	<0.2	30	26	325	4	14.0	0.5	0.057	6+00E(15S)
S1 76254		<5	<0.2	34	24	201	3	26.0	1.2	0.050	6+00E(BL)
S1 76255		<5	<0.2	95	27	342	4	18.0	1.6	0.090	6+00E(15N)
S1 76256		<5	<0.2	144	47	401	7	4.9	0.6	0.062	5+30E(60S)
S1 76257		<5	<0.2	80	73	720	5	6.8	0.5	0.060	5+30E(45S)
S1 76258		<5	<0.2	124	<2	243	3	1.7	<0.2	0.051	5+30E(30S)
S1 76259		<5	<0.2	29	6	265	2	3.1	1.0	0.072	5+30E(15S)
S1 76260		<5	<0.2	76	17	463	4	8.6	1.1	0.062	5+30E(BL)
S1 76261		<5	<0.2	25	19	191	3	7.2	0.8	0.064	5+30E(15N)
S1 76262		<5	<0.2	43	17	157	3	6.3	0.8	0.045	1+58E(30S)
S1 76263		<5	<0.2	204	24	461	6	7.4	1.2	0.050	1+58E(15S)
S1 76264		<5	<0.2	121	27	261	3	5.4	0.8	0.073	1+58E(BL)
S1 76265		<5	<0.2	292	67	2017	3	3.2	0.5	0.031	1+58E(15N)
S1 76266		<5	<0.2	41	41	365	3	4.1	0.6	0.019	1+58E(30N)
S1 76267		<5	<0.2	68	58	492	4	2.2	0.6	0.076	1+58E(45N)
S1 76268		24	8.4	1266	4804	1720	5	2.7	<0.2	0.076	1+75E(10N)
S1 76269		<5	0.4	613	689	5288	6	10.0	2.1	0.046	1+75E(10N)
S1 76270		16	<0.2	40	28	260	5	5.6	<0.2	<0.010	0+17W(45N)
S1 76271		<5	<0.2	67	18	225	4	10.0	0.8	0.022	0+17W(30N)
R2 76272		<5	<0.2	682	4	91	8	9.3	<0.2	<0.010	6+85E(55S) Float
R2 76273		<5	<0.2	56	20	50	4	19.0	0.8	0.022	1+58E(45N) Subcrop
R2 76274		8	0.3	110	46	301	9	14.0	7.7	0.035	6+45E(BL) Float
R2 76275		24	7.2	1706	4495	2286	10	3.4	5.2	0.194	5+30E(30S) Float
R2 76276		36	5.5	4350	2148	5702	5	3.2	<0.2	0.135	5+30E(30S) Float
R2 76277		23	4.1	2402	2383	6142	4	2.5	<0.2	0.086	1+58E(17N) Float
R2 76278		29	3.1	2962	1311	10894	3	2.5	<0.2	0.185	1+58E(15N) Bedrock
R2 76279		24	5.2	2985	3244	12697	4	<1.0	<0.2	0.098	1+58E(15N) Bedrock
R2 76280		27	18.5	14141	3169	16458	4	2.5	<0.2	0.288	6+00E(30S) Float
R2 76281		39	10.9	5103	2237	7976	5	1.8	<0.2	0.232	1+75E(10N) Subcrop
R2 76282		17	4.6	1157	3026	11396	5	1.5	<0.2	0.077	1+08E(45N) Float

Figure 1.



# Chemex Labs Ltd.

Analytical Chemists \* Geochemists \* Registered Assayers  
212 Brooksbank Ave., North Vancouver  
British Columbia, Canada V7J 2C1  
PHONE: 604-984-0221

To: DODGE, JAMES S.

14 MACDONALD RD.  
WHITEHORSE, YUKON  
Y1A 4L2

Page Number : 1  
Total Pages : 1  
Invoice Date: 21-AUG-90  
Invoice No. : 1-9021085  
P.O. Number :

Project : LADY LEE #7 and #13 (105-G-08)  
Comments:

## CERTIFICATE OF ANALYSIS A9021085

SAMPLE DESCRIPTION	PREP CODE	Au ppb FA+AA	Ag ppm Aqua R	As ppm	Hg ppb	Sb ppm					
420751 H	205 294	1220	0.3	2270	40	50.0	Scree float				
420752 H	205 294	170	1.1	112	150	26.0	Scree float				
420753 H	205 294	220	2.0	326	160	23.0	Scree float				
420754 H	205 294	110	0.8	176	90	11.8	Scree float				
420755 H	205 294	55	1.3	280	40	3.2	Scree float				
420756 H	205 294	185	1.3	112	160	15.8	Scree float				
420757 H	205 294	80	0.7	482	50	3.8	Bedrock breccia				
420758 H	205 294	85	0.6	412	30	3.4	Bedrock breccia				
420759 H	205 294	15	0.5	50	20	1.0	Scree float				
420760 H	205 294	200	0.8	416	100	19.2	Scree float				
420761 H	205 294	45	0.4	214	80	9.6	Scree float				
420762 H	205 294	< 5	< 0.2	5	30	0.8	Bedrock rhyolite	in amphibolite (t.L.#2)			
420763 H	205 294	50	0.3	302	50	24.0	Scree float				

Figure 2.

CERTIFICATION:

*Hart Bechler*

Figure 2.

APPENDIX C

# VLF-EM

PROPERTY: SLEEPER      TRANSMITTER: SEATTLE      PAGE:  
 OPERATOR: J.S DODGE      INSTRUMENT: SABRE      DATE: 01-08-90

LINE	STATION	ALTITUDE	NULL	FILTER	NOTES
0+17W	1+05N	4670	+2	-2	
	90 N	4690	+2	-6	
	75 N	4695	+4	-8	
	60 N	4700	+6	-9	
	45 N	4705	+8	-10	
	30 N	4710	+11	-8	
	15 N	4720	+13	-4	
	BL 0/0	4730	+14	-1	SULFIDE OUTCROPS
	15 S	4760	+14	+1	
	30 S	4780	+14	+3	
	45 S	4800	+13	+5	
	60 S	4820	+12	+6	
	75 S	4840	+10	+3	
	90 S	4860	+9	0	
	1+05 S	4880	+10		

Figure 3.



VLF-EM

PROPERTY: SLEEPER TRANSMITTER: SEATTLE PAGE:  
 OPERATOR: J.S. DODGE INSTRUMENT: SABRE DATE: 07-28-90

LINE	STATION	ALTITUDE	NULL	FILTER	NOTES
5+30E	1+05N	4650	+1	-2	
	90N	4670	+2	-7	
	75N	4685	+2	-15	
	60N	4720	+8	-11	
	45N	4730	+11	-2	
	30N	4750	+10	-2	
	15N	4760	+11	-4	
	BL 0/0	4765	+12	-3	
	15S	4770	+13	-3	
	30S	4790	+13	-3	
	45S	4805	+15	+5	SULFIDE FLOAT
	60S	4815	+14	+13	
	75S	4840	+9	+9	
	90S	4860	+7	+2	
	1+05S	4870	+7	0	
	1+20S	4880	+7		

Figure 5.



APPENDIX D

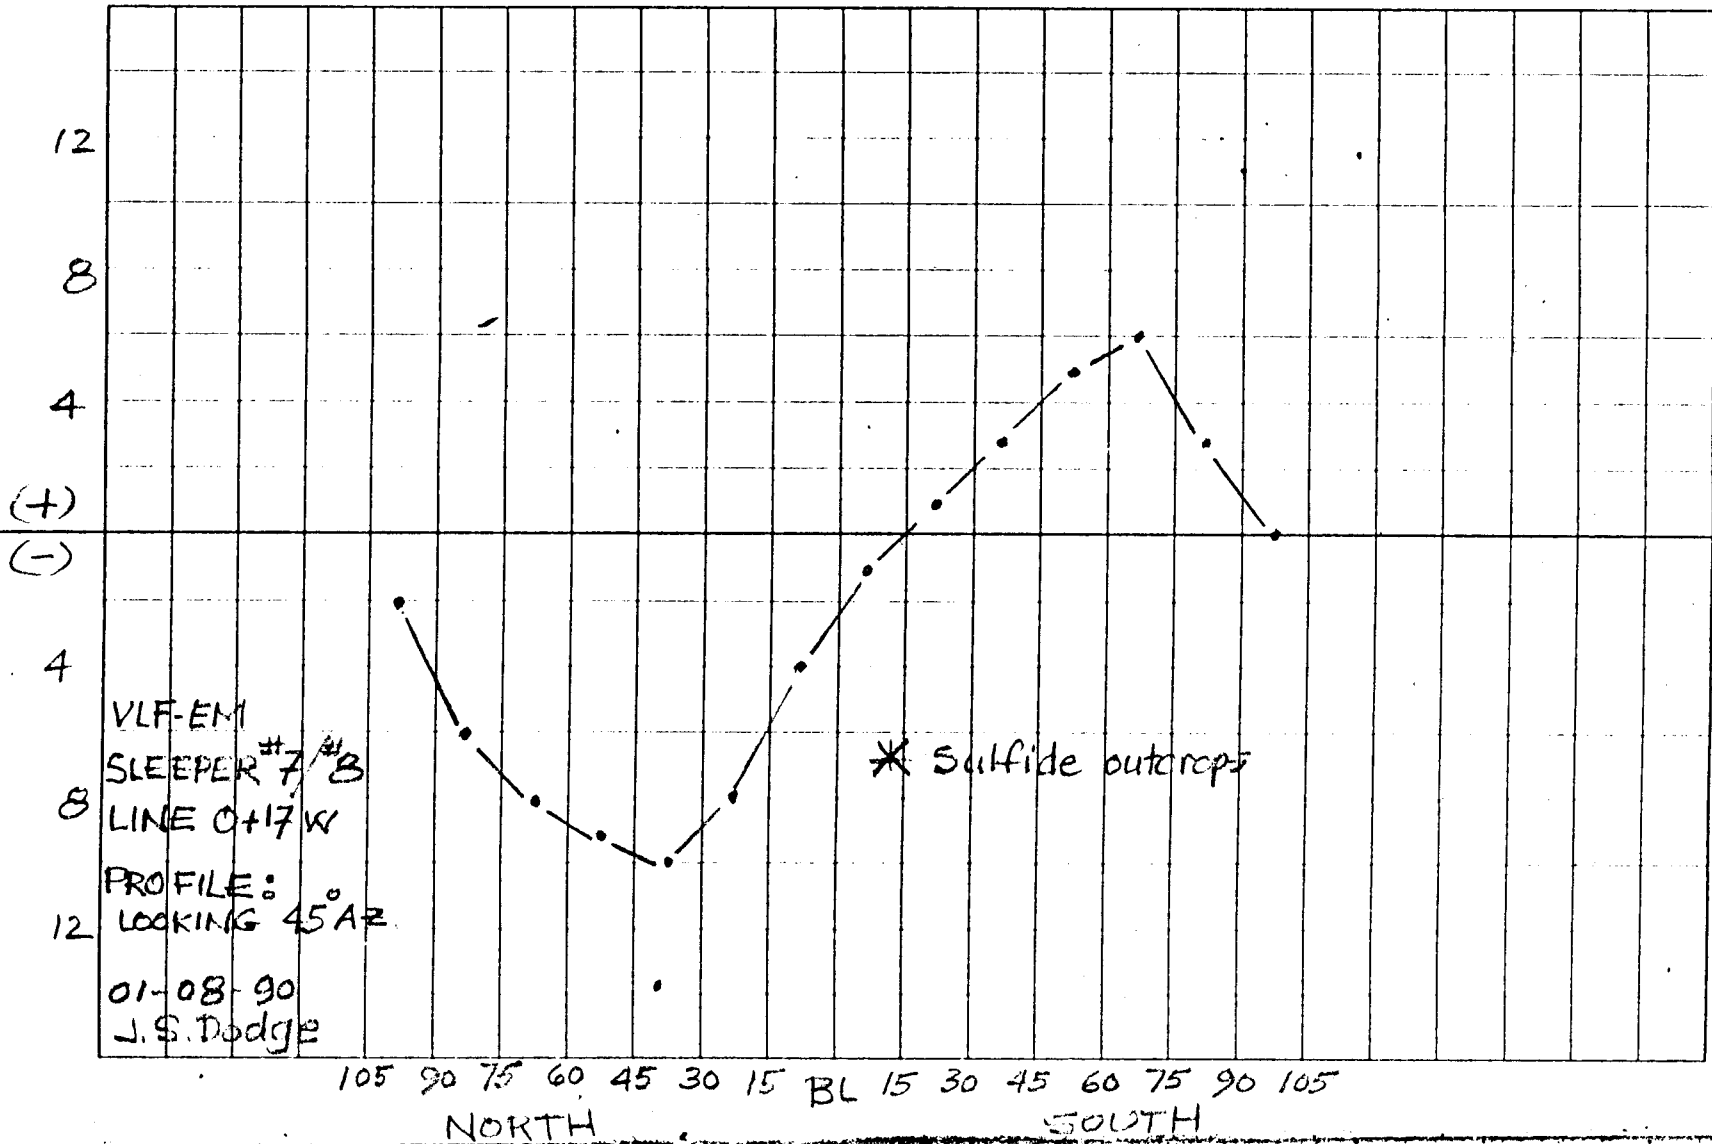


Figure 7.

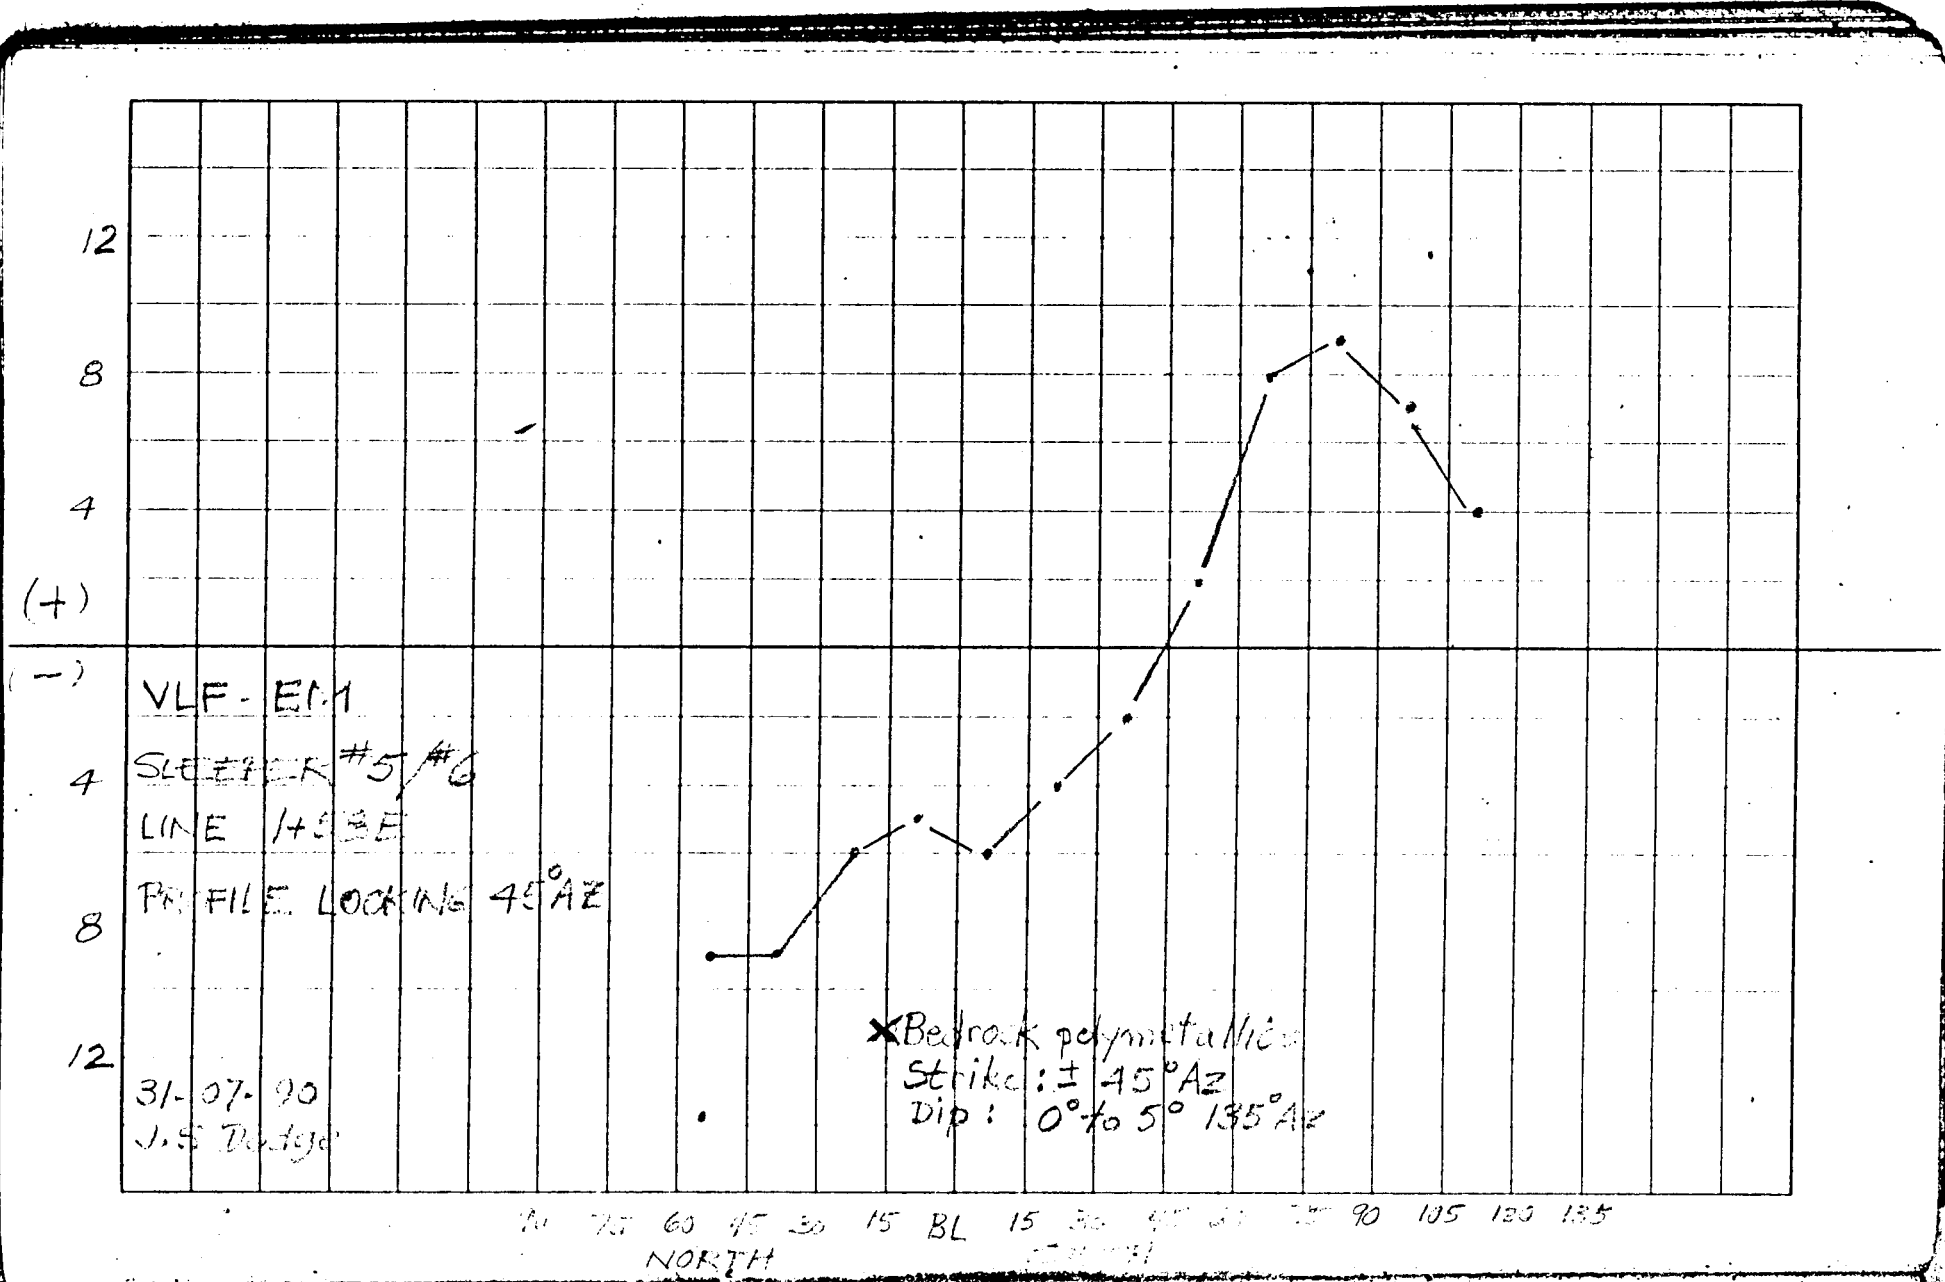


Figure 8.

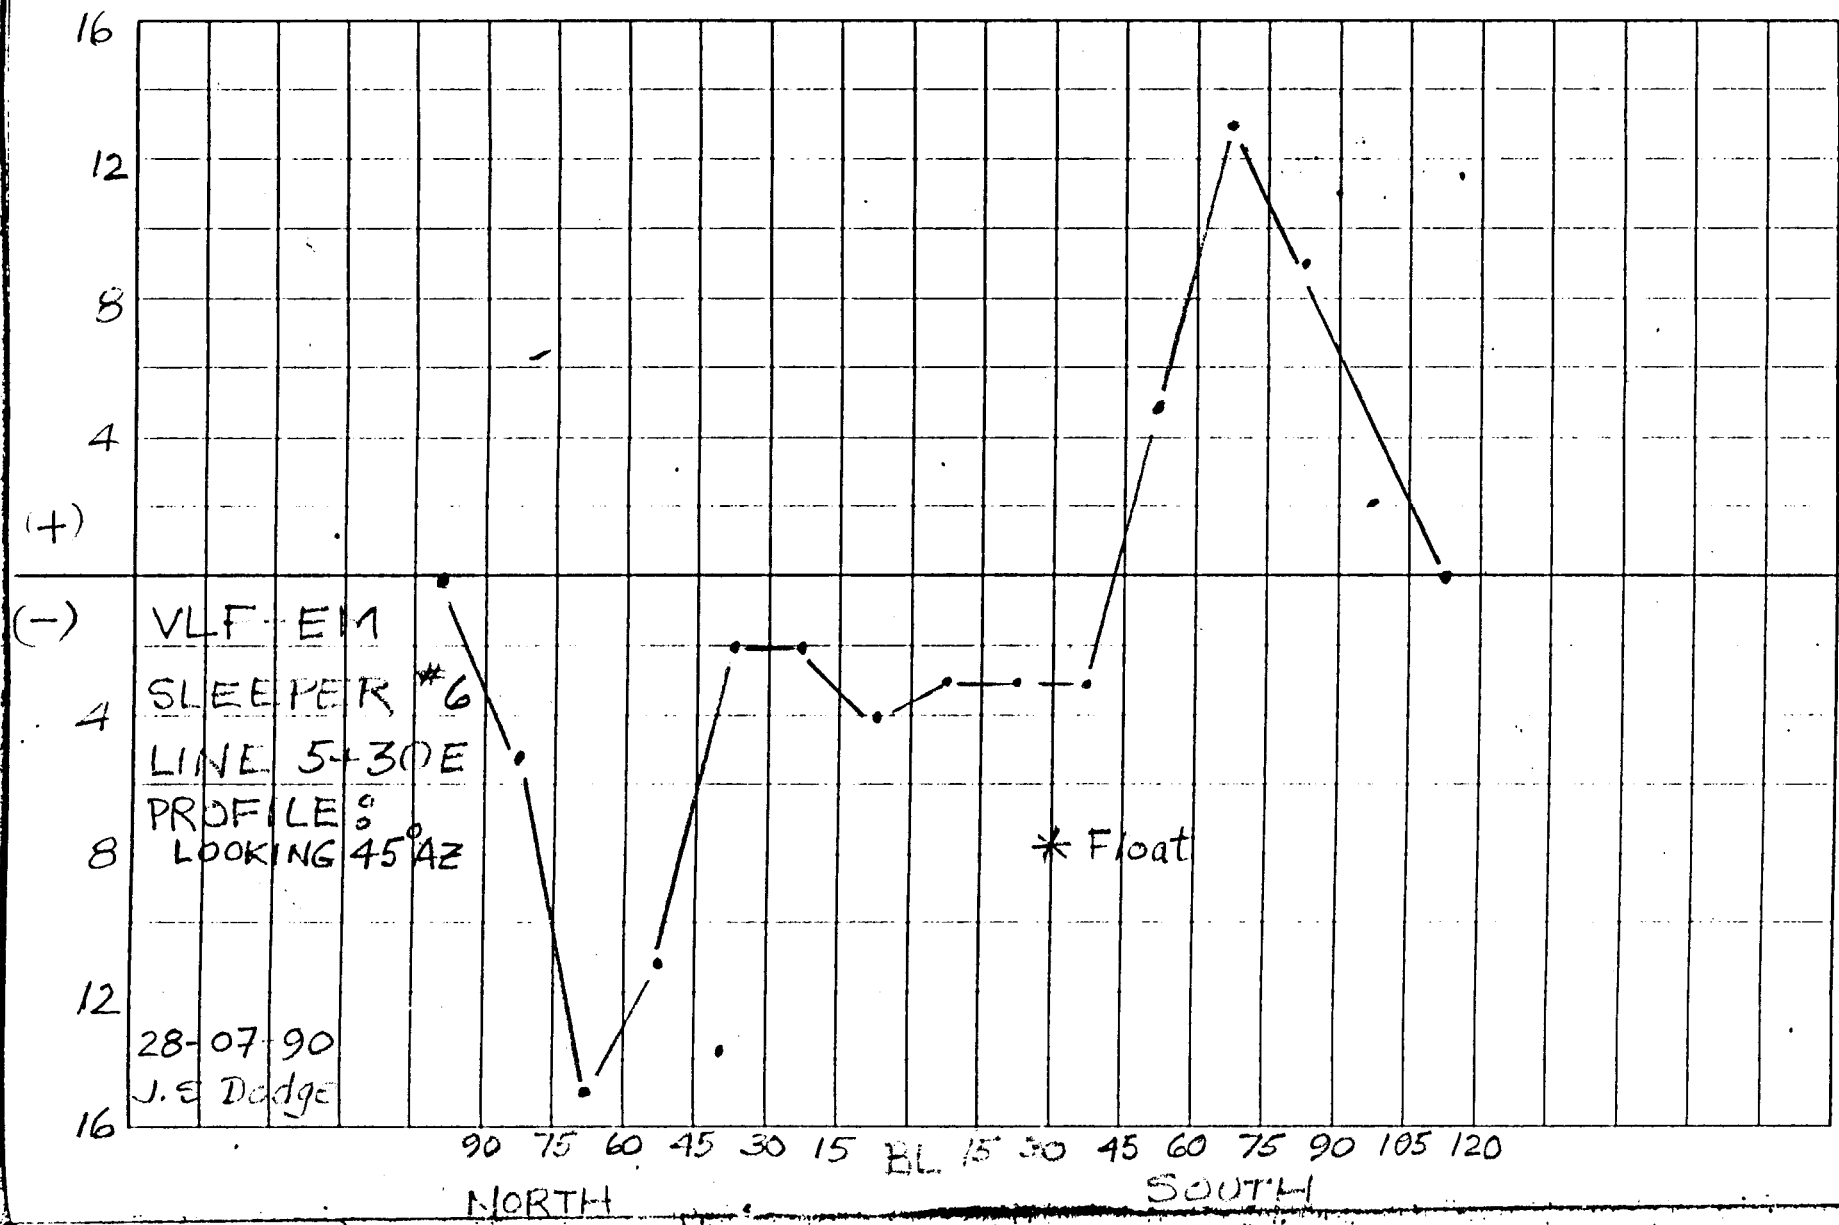


Figure 9.


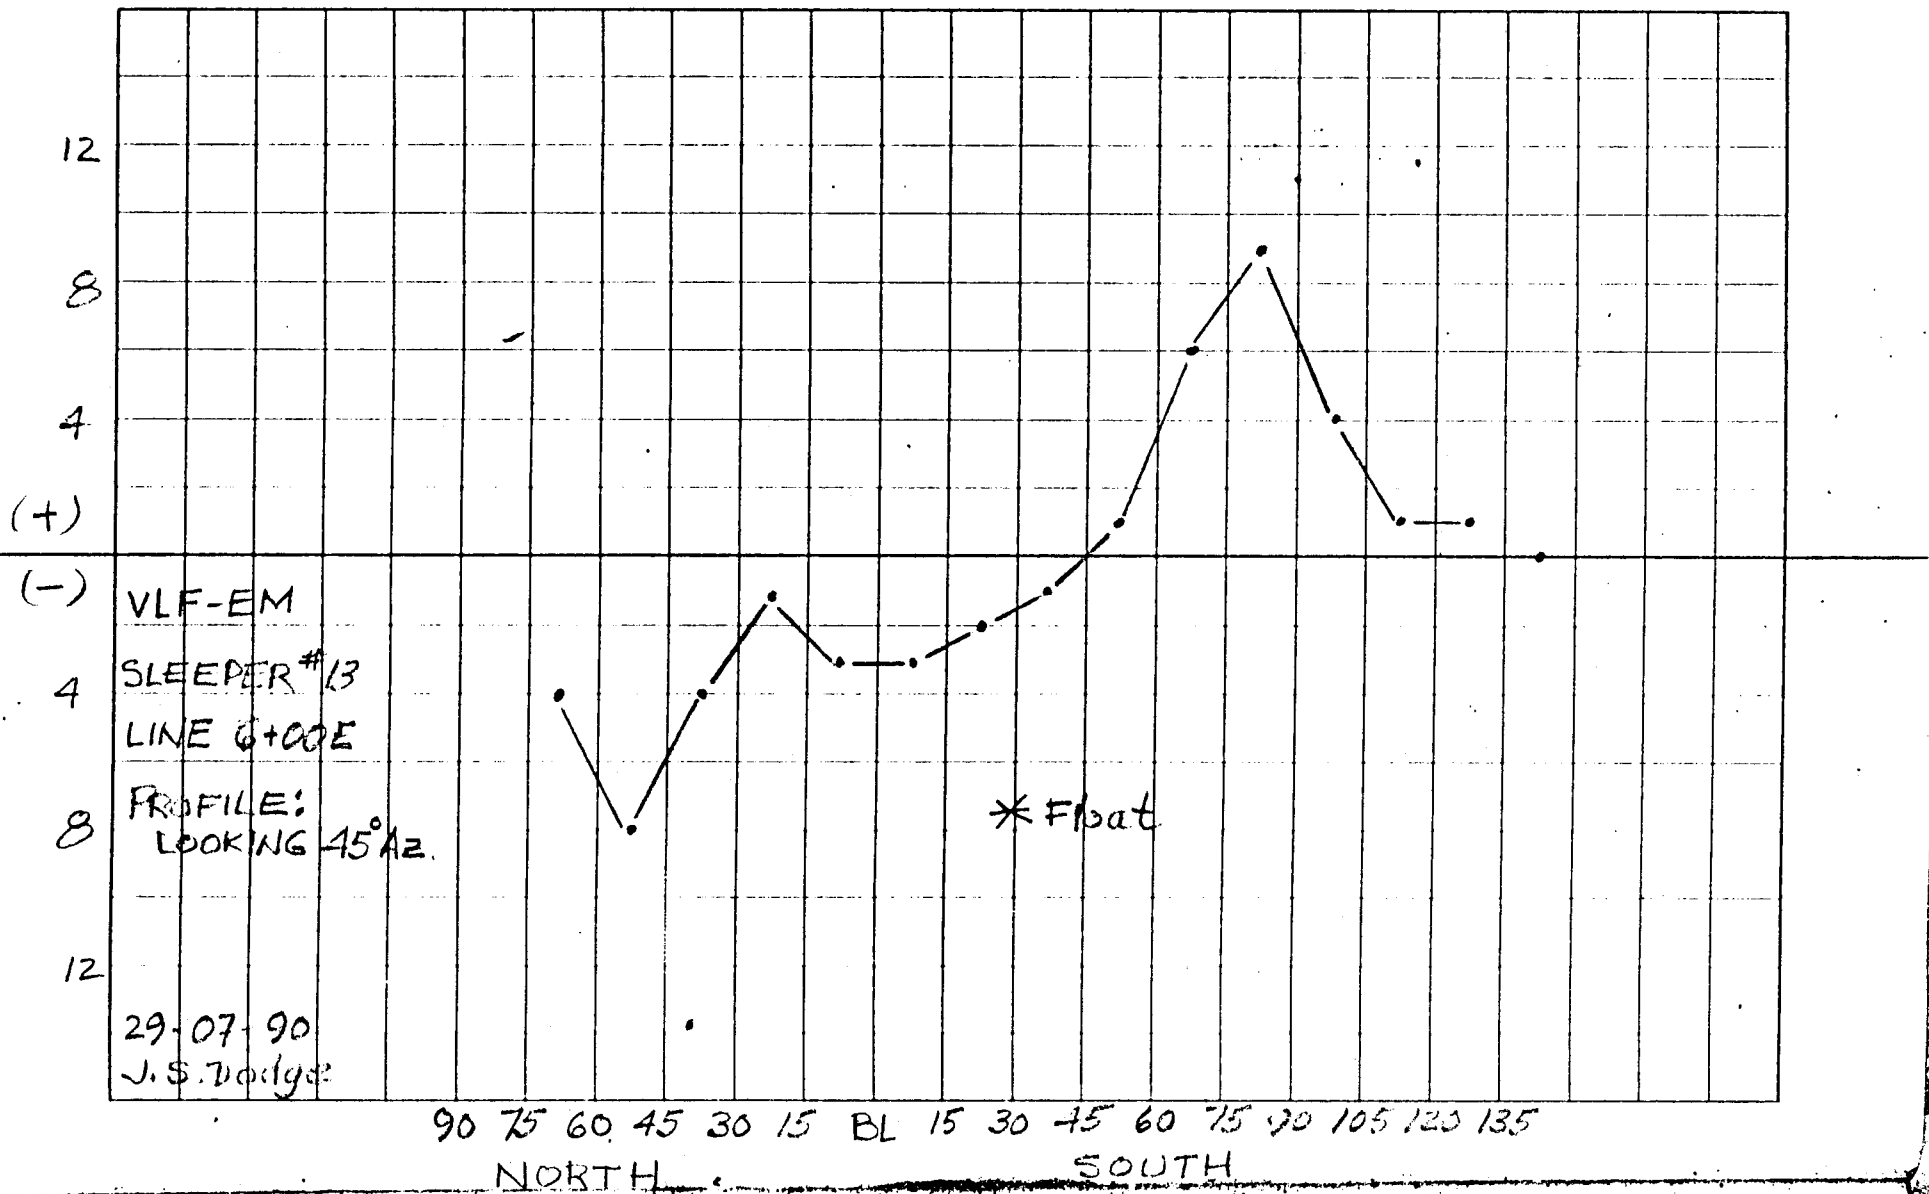


Figure 10.

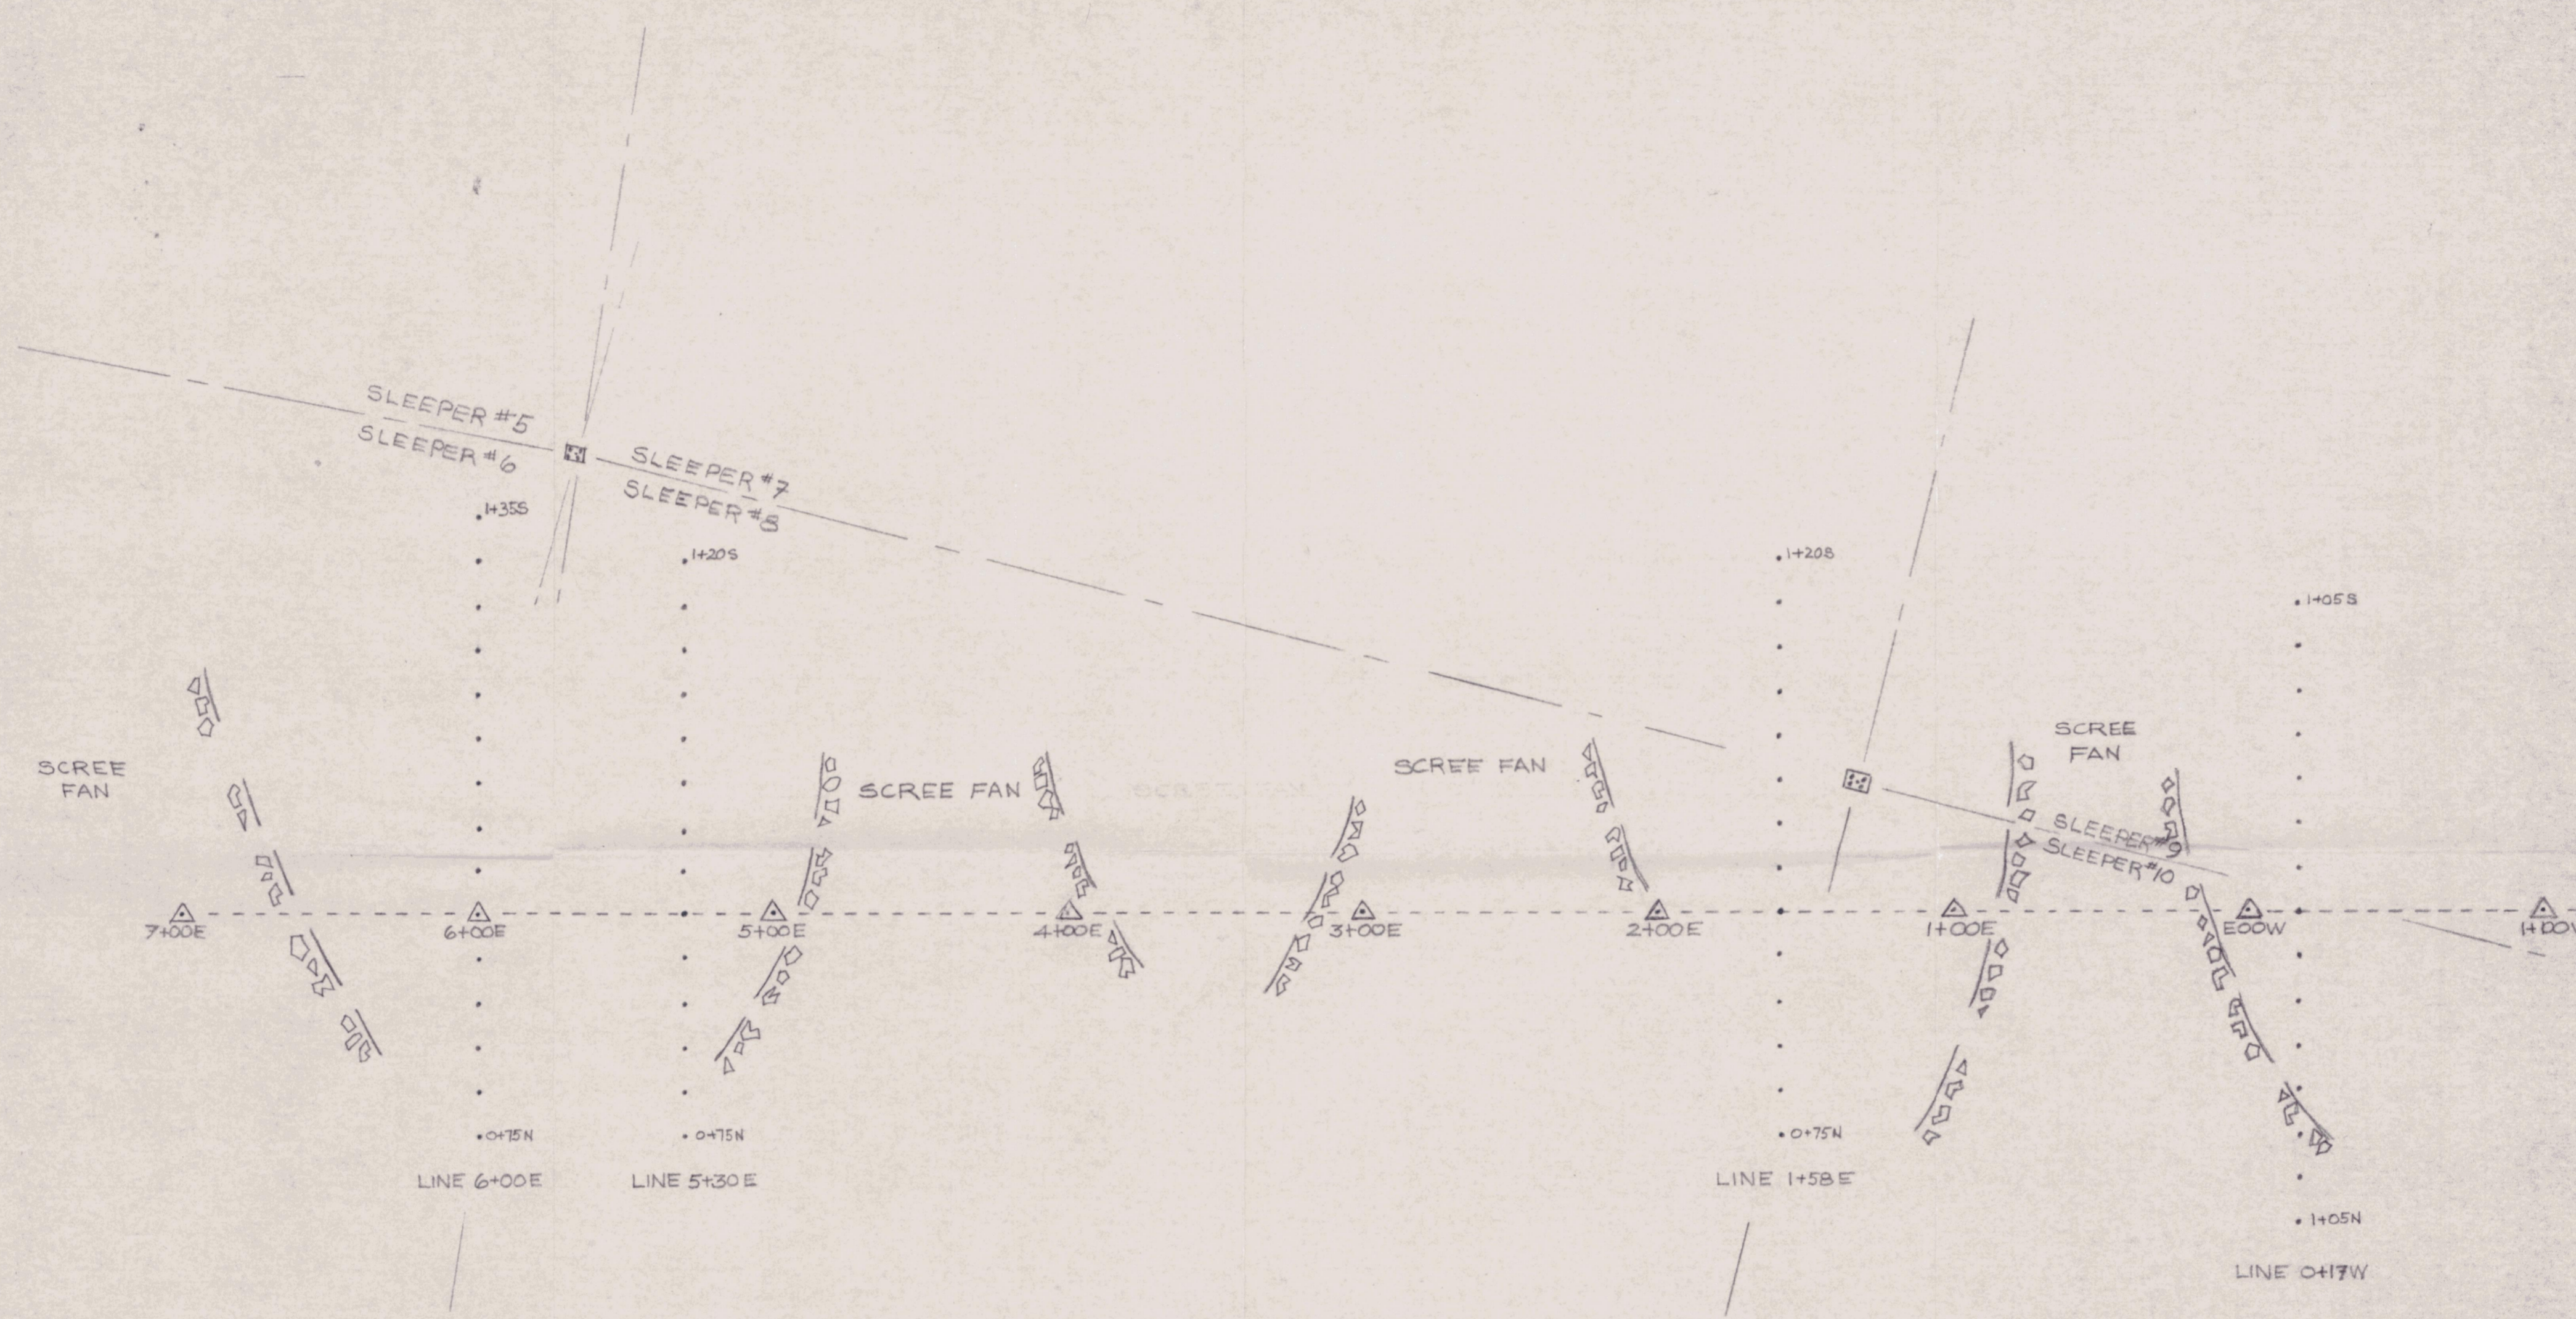

MAP III  
 SLEEPER CLAIMS  
 MAP SHEET 105-G-08

SCALE: 0 25 50 75 100 METERS  
 0 100 200 300 FEET

--- BASE LINE 45°AZ

△ 100-METER INTERVALS **092877**

□ CLAIM POSTS

• STATIONS AT 15 METER INTERVALS


NORTH\*

\* CONFORMS MORE CLOSELY WITH AIRPHOTO ORIENTATION IN REPORT THAT ENABLES VIEWER AN EFFORTLESS SENSE OF GROUND RELIEF BY LOOKING SOUTH (INTO SHADOWS)

MAP#105G-08 Doc#092877


SEPTEMBER 1990 J.S.DODGE

227

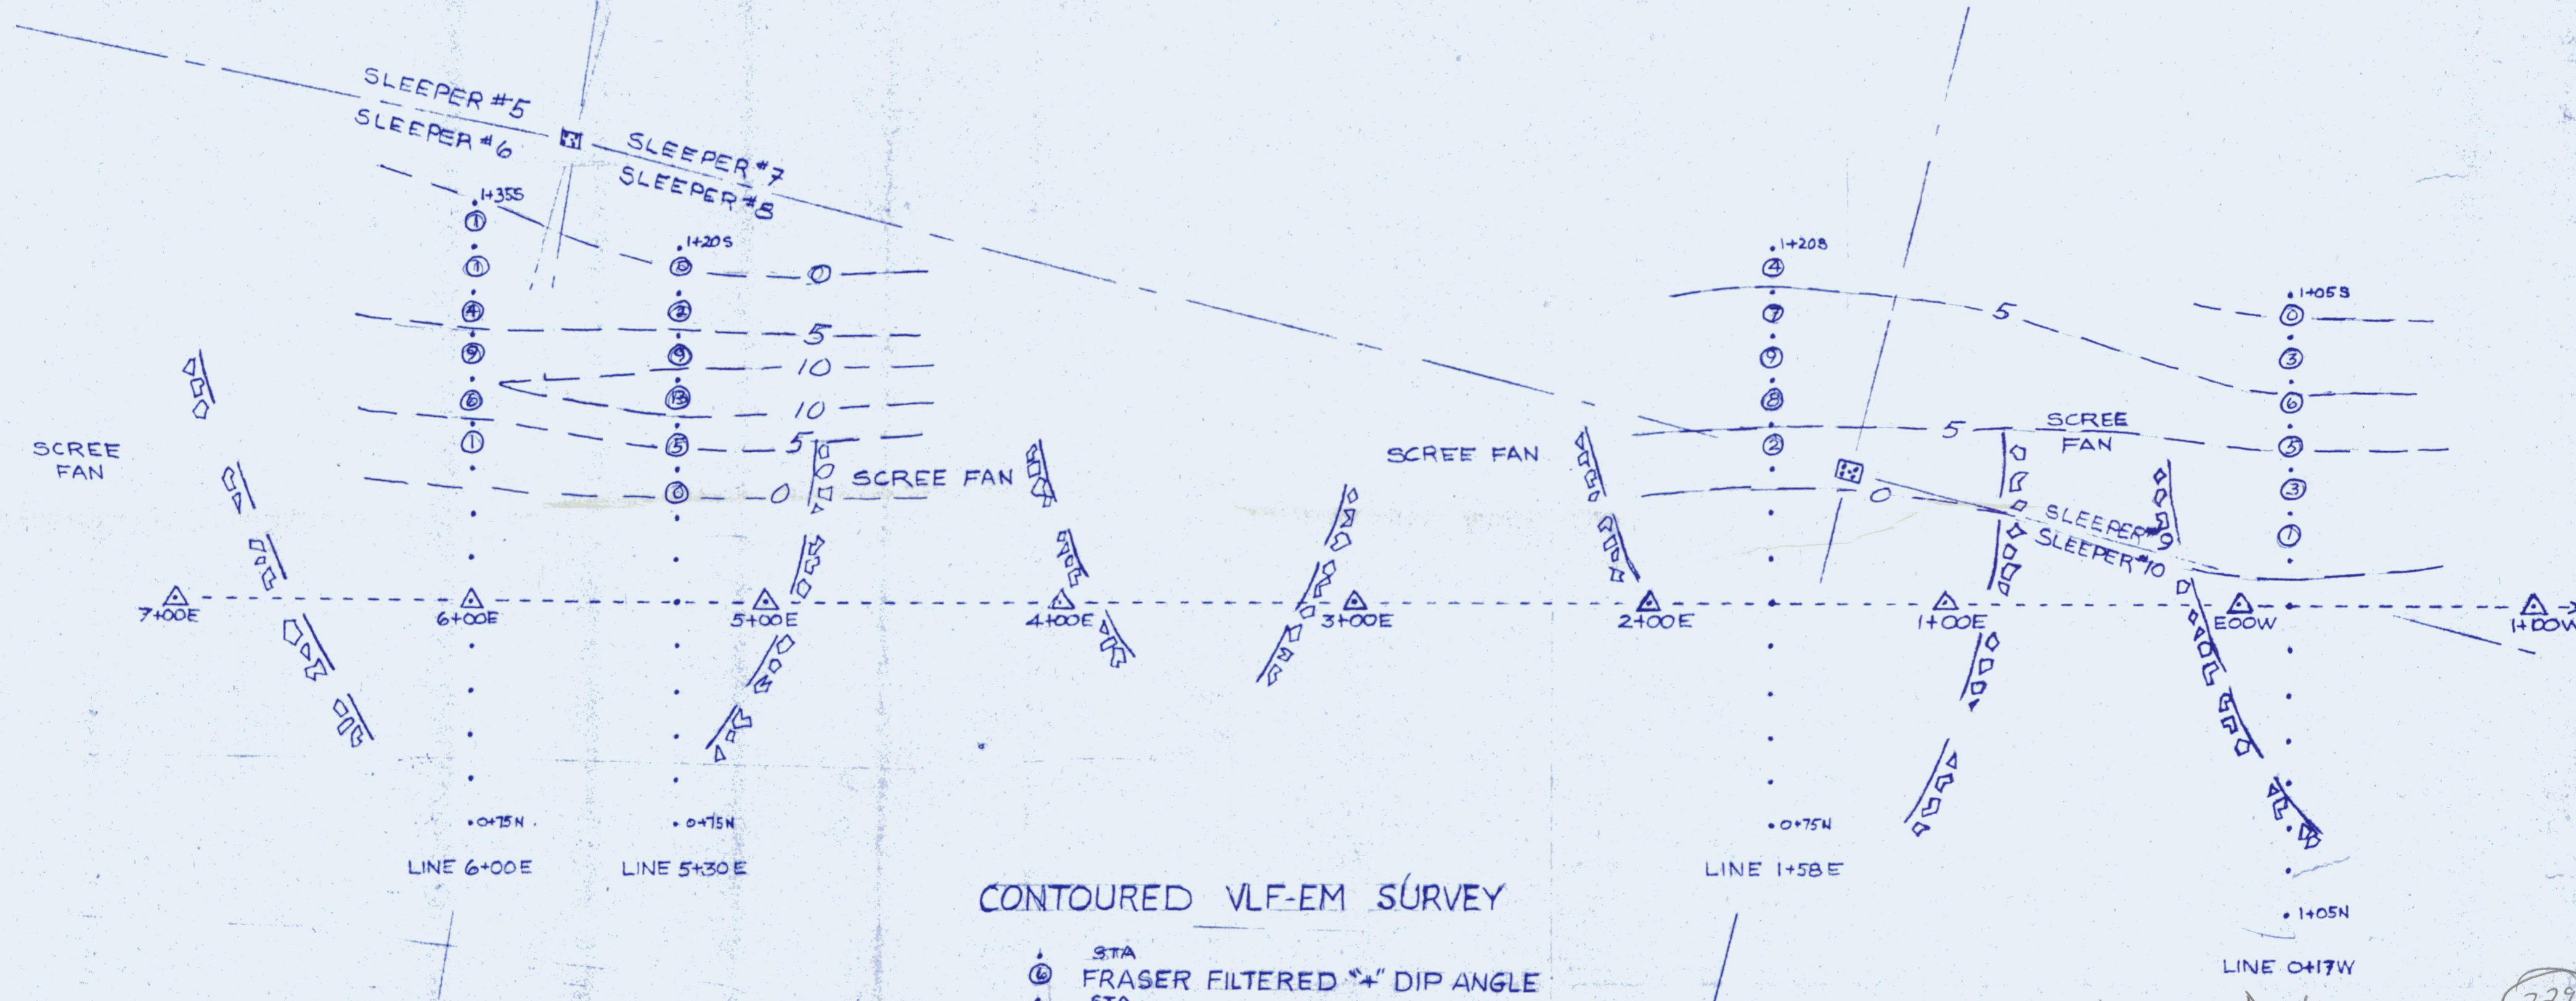


CONTOURED VLF-EM SURVEY

STA  
 ○ FRASER FILTERED "4" DIP ANGLE  
 STA  
 -5- CONTOUR +5 DIP ANGLE



\* CONFORMS MORE CLOSELY WITH AIRPHOTO ORIENTATION IN REPORT THAT ENABLES VIEWER AN EFFORTLESS SENSE OF GROUND RELIEF BY LOOKING SOUTH (INTO SHADOWS)


MAP # 105-G-08 Doc # 092877 (229)  
 MAP IV  
**SLEEPER CLAIMS**  
 MAP SHEET 105-G-08  
 SCALE: 0 25 50 75 100 METERS  
 0 100 200 300 FEET  
 --- BASE LINE 45°AZ  
 △ 100-METER INTERVALS  
 □ CLAIM POSTS  
 • STATIONS AT 15 METER INTERVALS  
 092877  
 SEPTEMBER 1990 J.S.DODGE

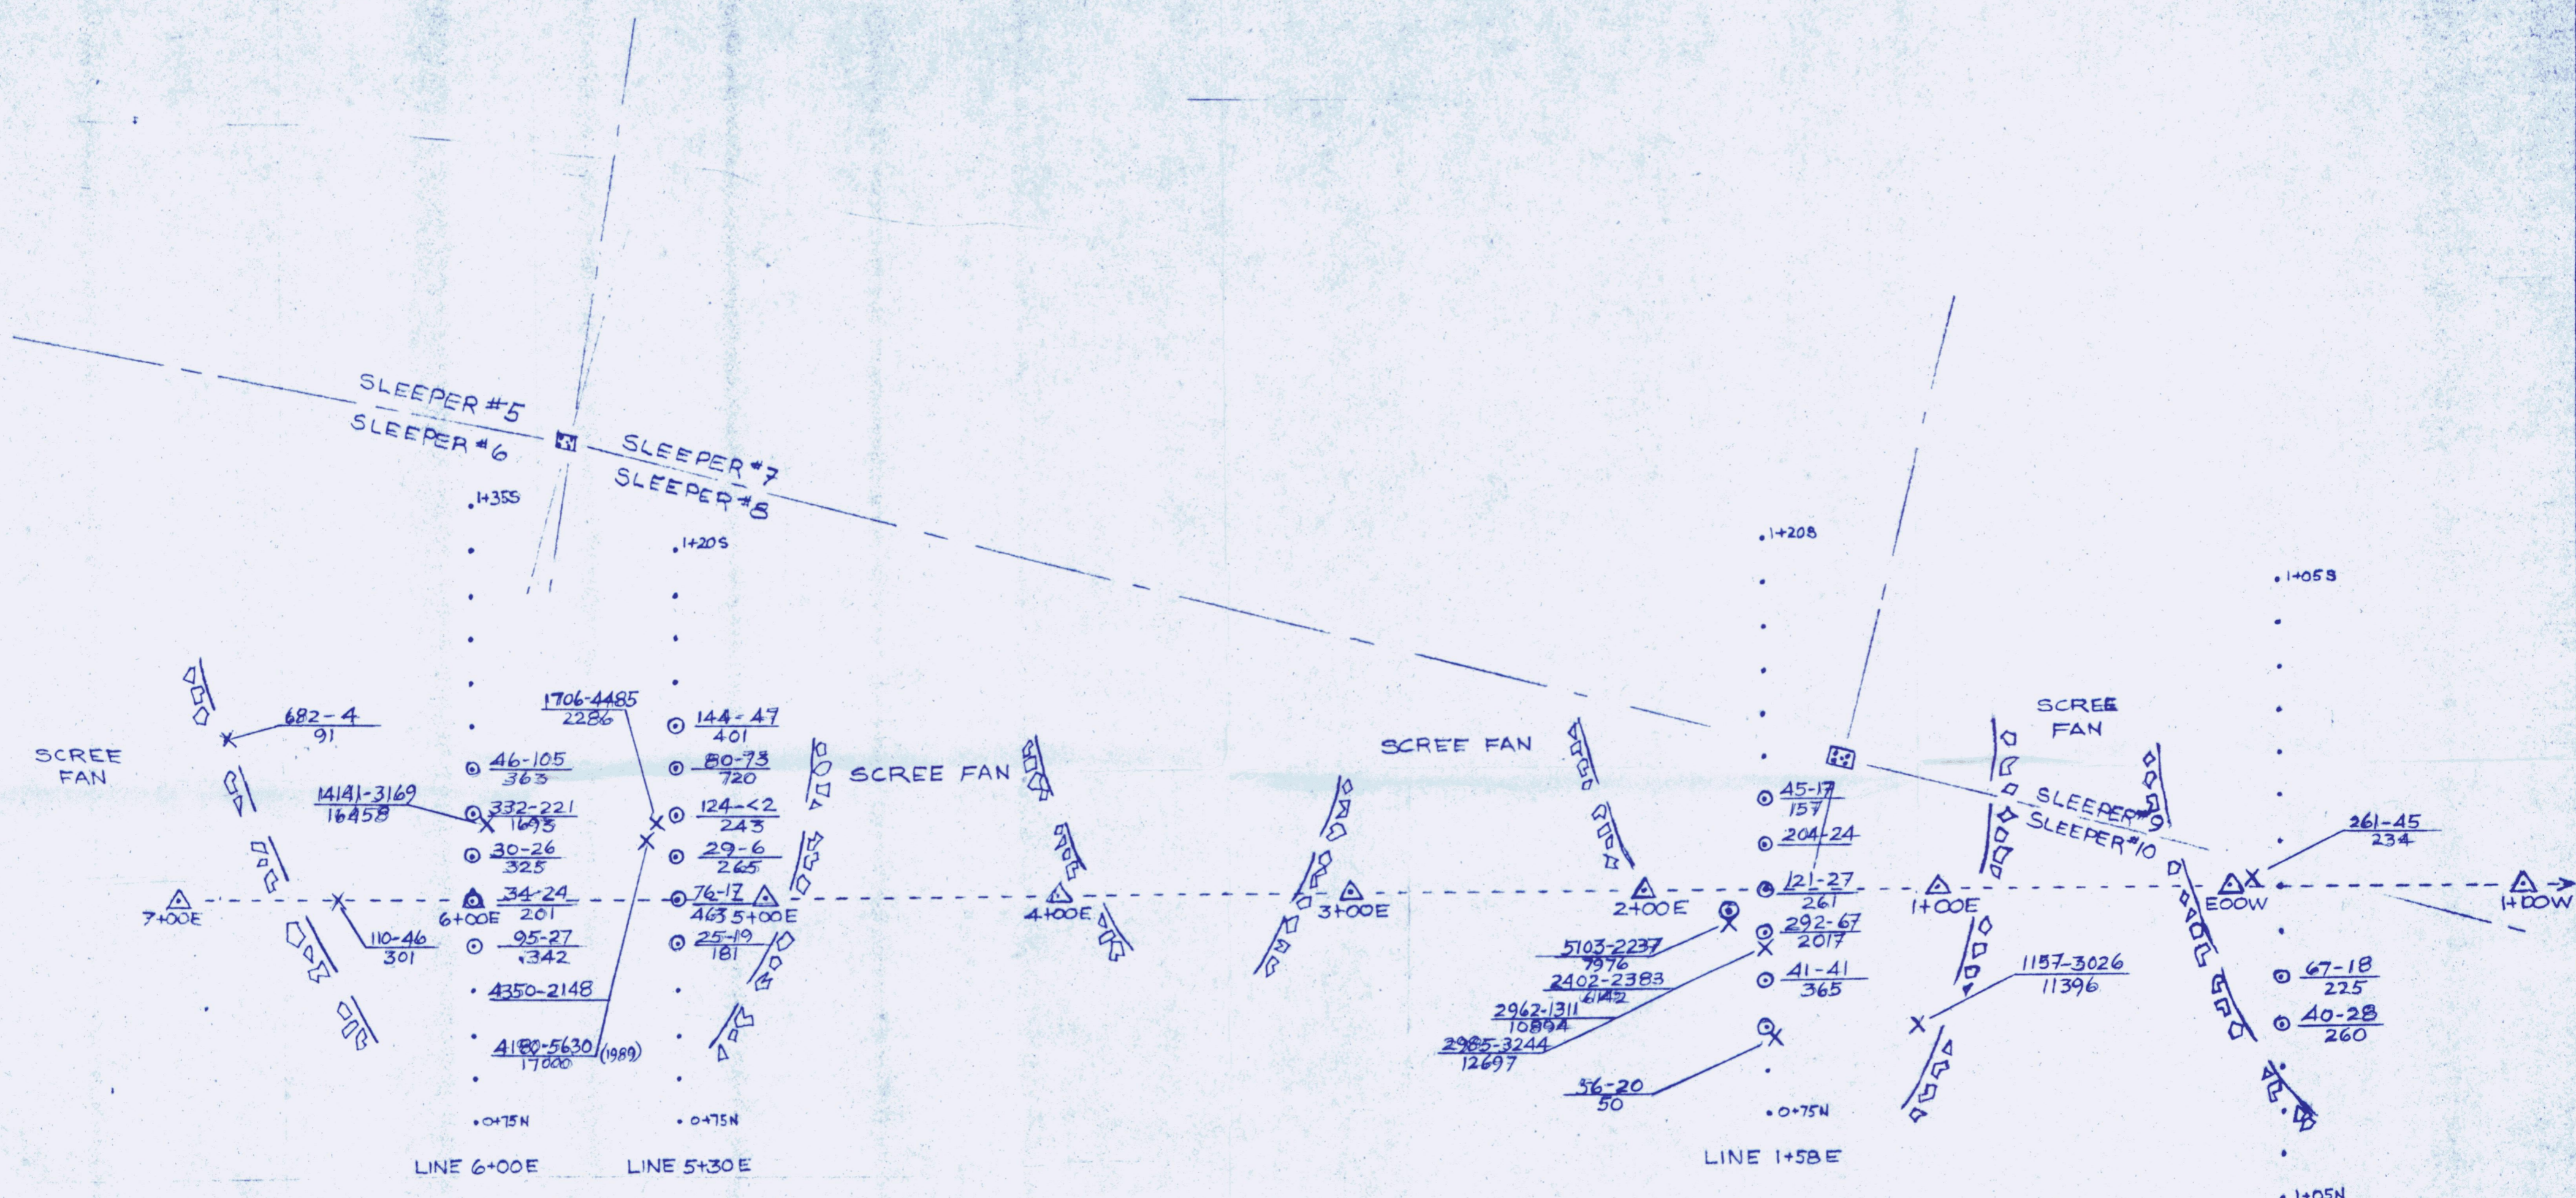

GEOCHEMICAL ASSAYS

SOIL ○ 292-67 / 2017 = COPPER-LEAD / ZINC ppm

ROCK CHIP X 5103-2237 / 7976 = COPPER-LEAD / ZINC ppm



\* CONFORMS MORE CLOSELY WITH AIRPHOTO ORIENTATION IN REPORT THAT ENABLES VIEWER AN EFFORTLESS SENSE OF GROUND RELIEF BY LOOKING SOUTH (INTO SHADOWS)

MAP # 105-G-08 Doc # 092877 (228)

MAP V

**SLEEPER CLAIMS**

MAP SHEET 105-G-08

SCALE: 1" = 100 METERS / 300 FEET

--- BASE LINE 45° AZ

△ 100-METER INTERVALS

□ CLAIM POSTS

• STATIONS AT 15 METER INTERVALS

092877

092877


VALUE OF 1990 EXPLORATION WORK  
SLEEPER 1-14 and LADY LEE 7 CLAIMS

Aircraft Charter with Watson Lake Flying Services	\$1,220.00
VLF-EM Sabre geophysical instrument Rental 1 month	515.00
JKS-10 Sampler Core Drill Rental 1 month	600.00
Assays	
Bondar-Clegg Soil/Rock Chip geochemical determinations	640.35
Vancouver Petrographics sulfide descriptions portion	150.00
Camp Supplies/food/fuel	
14 field days - 1 person - @ \$17/day	238.00
Consulting Fee	
14 field days (not counting travel time); 2 office days in report preparation: 16 days @ \$300/day	4,800.00
TOTAL EXPENDITURES . . . . .	\$ 8,155.35 **

\*\* Receipts attached



*James S. Dodge*  
James S. Dodge, P.Eng. Yukon

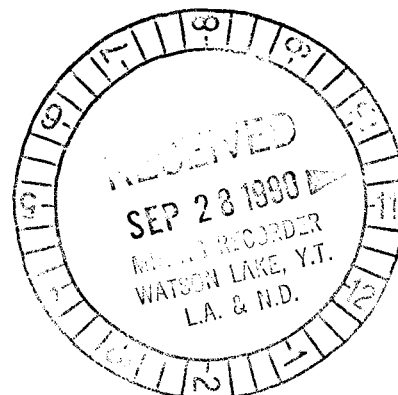

# Watson Lake Flying Services Ltd.

Phones 536-2231 — 536-7462

## CHARTER AND CONTRACT TICKET

Date July 20 19 90 A/C Type DHC-2 CF IBP  
 Pilot Bill Base QH  
 Charge to Jim Dodge or Cash  
 Address ..... phone .....

Charge to Project.....

For Passage From QH To: Lt. FIRE  
 To: QH To: Lt. FIRE  
 To: QH To: .....  
 To: ..... To: .....

Fare: 200 Mile/Hr. @ \$ 2.48 \$ .....

Fuel 200 Mile/Hr. @ \$ .57 \$ .....

Total Fare & Fuel Mile/Hr. \$ 3.05 \$ 610.00

Cargo Jim + gear \$ .....

*out on 13 Aug* → \$ 610.00


\$ 1220.00

Total Charge \$ 610.00

This ticket is expressly subject to the conditions printed on the reverse side of ticket and which are hereby accepted.

Authorized by .....

No 4122

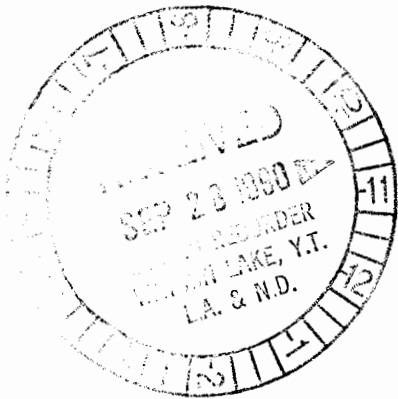

DUPLICATE OF CHEQUE

*Whitehorse* 12 Aug. 90  
 Watson Lake Flying Services  
 One-thousand two-hundred twenty and  $\frac{4}{10}$

BAL. FOR'D	1220 <sup>00</sup> —
THIS CHEQUE	
PAVANCE	
DEPOSIT	
BAL. FOR'D	

CANADIAN IMPERIAL BANK OF COMMERCE  
 WHITEHORSE, YUKON

**SLEEPER Co.**

*[Signature]*

NOT NEGOTIABLE



**H. COYNE & SONS LTD.**  
 14 MacDonald Road  
 Whitehorse, Yukon Y1A 4L2

# INVOICE

No 3618


Phone: 633-3677  
 Fax: 633-3641

INVOICE DATE September 26, 1990	SALESMAN
SHIP TO	

TO James S. Dodge, P. Eng.  
 14 MacDonald Road  
 Whitehorse, Yukon Y1A 4L2

YOUR ORDER NO.	DATE SHIPPED	SHIPPED VIA	F.O.B. POINT	TERMS	QUANTITY	DESCRIPTION	UNIT PRICE	TOTAL
					1	Rental of JKS-10 sampler core drill complete with Pressure tanks, drill rod, IRW cones, diamond bits. One month 15 July - 15 August		<u>\$600.00</u>

*Thank You*

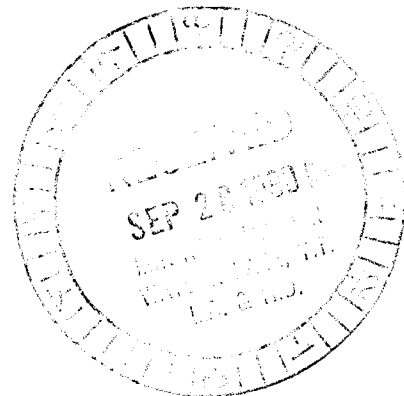

# T. HASEK ASSOCIATES LTD.

704 — 850 West Hastings Street  
Vancouver, British Columbia  
Canada V6C 1E1

Tel: (604) 684-1107  
Fax: (604) 681-7480

**Jim Dodge**  
14 MacDonald Road  
Whitehorse, Yukon  
Y1A 4L2

July 15, 1990

**Invoice: 074**

Re: Rental of Sabre VLF-EM Receiver s/n 101


Rental Period: July 15 - August 14, 1990  
one month @ \$500.00

Insurance @ \$0.50/day  
Total

\$500.00  
15.00  
**\*515.00**

*See wire transfer  
from CIBC*

- N.B.**
1. Rentals are payable in advance.
  2. 1.5% per month interest on overdue accounts.
  3. B.C. Sales Tax exempt as unit in Yukon.

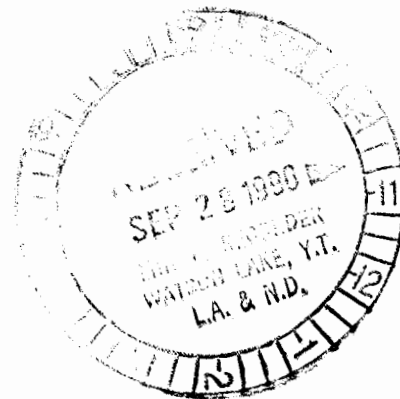

MR. JAMES S. DODGE  
c/o BONDAR-CLEGG & CO.  
136 INDUSTRIAL ROAD  
WHITEHORSE, Y.T.  
Y1A 2V1

Invoice : V074495, Page 1

Date : 28-AUG-90

Report No: V90-36204.0

Project : NONE GIVEN


Reference:

32 Analyses of GOLD + 8 PACKAGE at \$17.75 \$ 568.00 \$ 568.00  
Arsenic  
Antimony  
Silver  
Copper  
Mercury  
Molybdenum  
Lead  
Zinc  
Gold 30 grams

Sample Preparation


21 Samples of DRY, SIEVE -80 at \$ 1.35 \$ 28.35  
11 Samples of CRUSH, PULVERIZE -150 at \$ 4.00 \$ 44.00  
Subtotal \$ 72.35 \$ 72.35

Invoice Total: \$ 640.35 Cdn

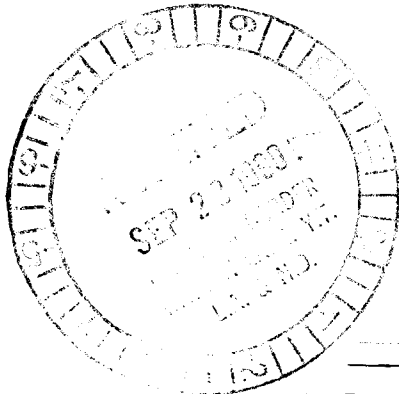

*Paid by cheque #277  
Aug 30, 1990  
J.H.*

2550B

	BLUELINE	DATE <u>Aug 30</u> 19 <u>90</u>
RECEIVED FROM REÇU DE	<u>JAMES DODGE</u>	
	<u>six hundred &amp; forty</u>	<u>35</u> DOLLARS <small>100</small>
FOR POUR		
FROM DE	<u>cheque # 277</u>	TO A <u>for V90-36204.0</u>
	<u>\$ 640.35</u>	BY PAR <u>J. H. Herbert</u>



# Vancouver Petrographics Ltd.

8080 Glover Road, P.O. Box 39  
FORT LANGLEY, B.C. VOX 1J0

# INVOICE

No 338

(604) 888-1323 Fax (604) 888-3642

SALESPERSON	DATE OF INVOICE
	Sep 21, 90
SHIP TO	
Attn; James A Dodge	

TO:  
 James A Dodge  
 14 MacDonald Road  
 Whitehorse, Yukon  
 Y1A 4L2

ACCOUNT NO.	DATE SHIPPED	SHIPPED VIA	COL P.P.	F.O.B. POINT	TERMS	YOUR ORDER NUMBER
	Sept	Mail	x	Ft. Langley	Net 30 days	J Dodge
QUANTITY	DESCRIPTION				UNIT PRICE	AMOUNT
1	thin section				8.00	8.00
1	pol thin section				20.00	20.00
2	off cuts				0.75	1.50
2	k spar stains				1.50	3.00
	Report by C leitch					195.00
	reflected light exam					10.00
	Photos					80.00
	Postage					6.55

*CHEQUE REC'D*

*- 200.00*

*Thank You*

TOTAL *bal 12405*  
~~324.05~~

